

Product specification

Quick Reference Date


	Antenna module on the system board	
Frequenc Range	2402 ~ 2480MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	0.8	
Directivity (dBi)	1 (all direction antenna) 6 0.2	
Efficiency (dB)	%	
Gain (dBi)	1.68	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Manufacturer:Shenzhen Distar Technology Co., Ltd.

Address:Building 205, Sanyu Industrial Park, Xinwei Fourth Industrial Zone, Xinzhuang Community, Ma Tian Street, Guangming District, Shenzhen, China

Antenna Layout & module on the system board

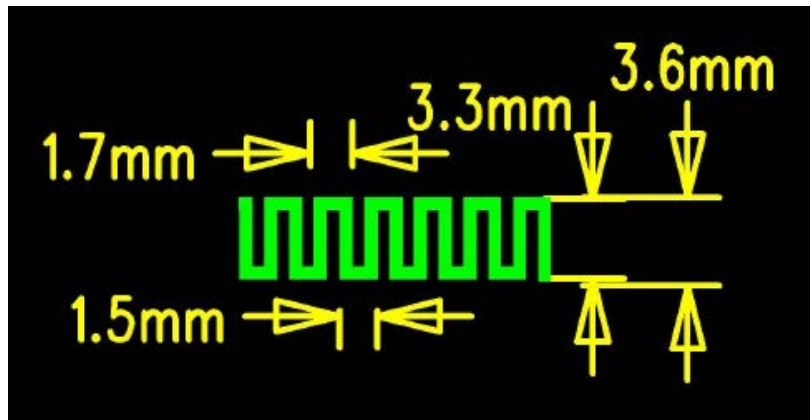

Antenna Gain

Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	6 0.2 %

Return Loss




The Environment of Antenna Radiation Pattern




XY-plane

Far-field Power Distribution(H+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dBi; Plot AvgGain(H+V)= -0.48dBi @2.44000 GHz

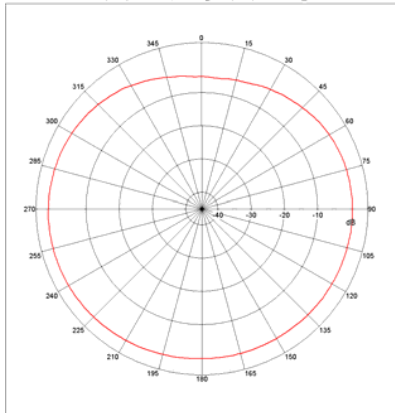

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.08 dBi; Plot AvgGain(H+V)= -3.83dBi @2.44000 GHz

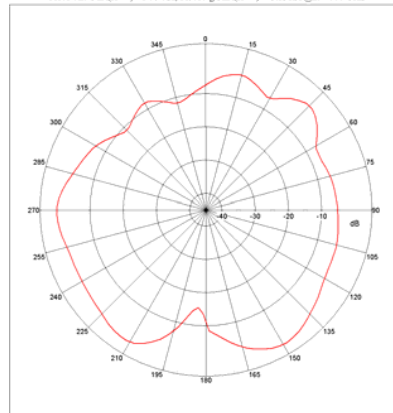

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.44000 GHz

