

成品尺寸: 85x110mm

材质: 128G双铜, 正反面单色印刷, 折页

正面



## Table of Contents

- |                                     |    |
|-------------------------------------|----|
| 1. Package Contents                 | 02 |
| 2. Product Overview                 | 02 |
| 3. Basic Operation                  | 03 |
| 4. Playback Control                 | 03 |
| 5. TWS Connection and Call Function | 04 |
| 6. Power and Charging               | 05 |
| 7. Indicator Light                  | 05 |
| 8. Product Specification            | 06 |
| 9. FAQs                             | 07 |

Thank you for purchasing your new GEARit SoundPuck. This user manual will help provide you with all the information needed to get started. Please read this manual carefully before using the product and reference it for later use.


Enjoy your new product.

Live it. Experience it. GEARit.

## 1. Package Contents



## 2. Product Overview

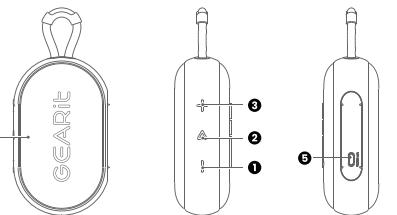

- 1 — Short press 1 time: Decrease Volume  
Long press 2s: Previous Track
- 2 ▶ Long press 2s: Power on/power off  
Short press 1 time: Play/Pause/Pick up/Hang up Call  
Short press 2 times: Protect call privacy/Reject incoming calls/TWS connect/TWS disconnect  
Short press 3 times: Bluetooth disconnect
- 3 + Short press 1 time: Increase Volume  
Long press 2s: Next Track
- 4 ⚡ Indicator Light
- 5 🔋 USB-C charging port

-02-



## 3. Basic Operation

### Power ON/OFF

Long press "▶" for 2 seconds to power on.  
Long press again to power off.

### Bluetooth Mode

After power on, the speaker is on Bluetooth mode and automatically enters Bluetooth pairing status. The indicator light flashes blue. Turn on the Bluetooth device and searching for "GEARit SoundPuck" and click to connect. You will hear a voice prompt once it is connected, and the blue indicator light will stay lit. Now you can start to play your music. Short press "▶" button for 3 times to disconnect Bluetooth.

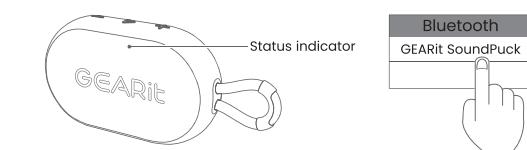

## 4. Playback Control

On Bluetooth mode playback status, short press the "▶" button to pause the music, short press again to resume the playback status.

### Volume Control

Short press the "+" button to increase the volume. Each press increases the volume by one level. A tone is heard when the volume has been set to maximum. Short press the "—" button to turn the volume down, each press decreases the volume by one level.

### Previous/Next Track Control


Long press "+" to the next track, Long press "—" to the last track.

-03-

## 5. TWS Connection and Call Function

### TWS Connection


This speaker supports TWS connection function. When powered on and no active Bluetooth connection, short press "▶" button of both SoundPuck speakers to turn on TWS pairing. There will be a voice prompt after successful pairing. The secondary model's blue LED stays lit and the master model's blue LED is flashing.

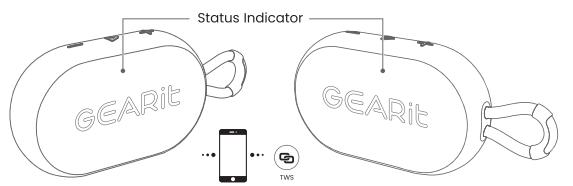

### Call Function

When there is an incoming call, the speaker will enter hands-free mode automatically under Bluetooth connected status. Short press "▶" button to answer the call and short press it again to hang up. Short press "▶" button 2 times to reject the call.

During a call, short press "▶" button 2 times to transfer the call from the speaker to phone which can protect your privacy.

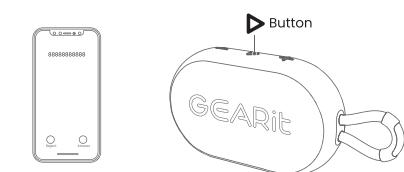

-04-


## 6. Power and Charging

### Power Saving

If no devices are connected within 10 minutes, the speaker will turn off automatically for power-saving.


### Charging and Power Supply

- When you hear the low battery prompt tone, please charge the speaker as soon as possible.
- Connect the USB-C cable to the charge port on the speaker.
- Connect the other end of the charge cable to a power adapter (not included).
- When charging, the red charging indicator light will illuminate.
- The indicator light will turn off when fully charged.

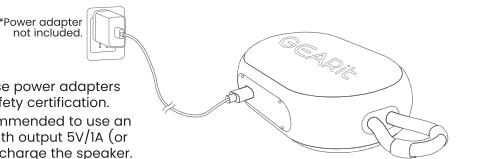

- Note:  
• Do not use power adapters without safety certification.  
• It is recommended to use an adapter with output 5V/1A (or above) to charge the speaker.

## 7. Indicator Light

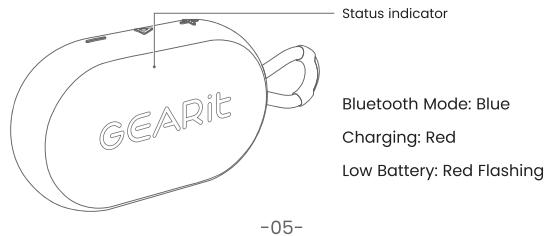

## 8. Product Specification

| Model             | GI-SPKR-BT-PUCK-BK |
|-------------------|--------------------|
| Bluetooth Version | 5.3                |
| Battery Capacity  | 3.7V/1500mAh       |
| Playback Time     | 10-12H(50% volume) |
| Talking Time      | 10-12H             |
| Charging Time     | 2-3H               |
| Charging Current  | 5V=0.8A            |
| Speaker Unit      | 6W                 |
| Product Size      | 73 x 122 x 45 mm   |
| Product Weight    | 206.5g±50          |

### Notes:

- Please read this manual carefully before use.
- Please fully charge the product before first use.
- Please use a certified adapter that has passed national safety certification.
- If you do not use the product for a long time, be sure to charge it once within a month to maintain its performance.
- Do not use this product in an extremely cold or hot environment, beyond the range of 41°-95°F/5°-35°C. The product may stop automatically to protect the internal circuit when outside this range.
- When charging the product in a high temperature environment, it may automatically stop charging to protect the battery.
- Storage environment temperature: 23°-95°F/-5°-35°C RH<70% (recommended 77°F/25°C±5%).

-06-

## 9. FAQs

Q: What kind of charger should be used for the speaker?

A: All common USB 5V chargers can be used, while we suggest 5V/1A or above 1A.

Q: What if there is noise or interrupted audio during playing?

A: The speaker can be normally used within 10m under no obstruction environment.

If it is beyond 10m or with obstruction, there might be noise or interrupted audio.

Q: Why does the speaker power off automatically after power on without any operation?

A: When there is no bluetooth pairing in 10 minutes, the speaker will shut down automatically to reduce power consumption.

Q: Why does the speaker not connect to a previously paired device?

A: First, remove the speaker's paired name from the device's Bluetooth list and then restart pairing.

Q: The speaker cannot be started up in a normal situation?

A: Please connect the speaker to a charger and retry after a few minutes or try to long press power button 10-20s to reset.

### Important safety instructions:

- Do not disassemble or repair this speaker personally, otherwise it may cause product damage or personal injury.
- Do not use it in dusty, humid, dry, and high-temperature environments.
- Do not place this product near a heat source, or a place with direct sunlight, a lot of dust, or mechanical vibration.
- In order to reduce the risk of fire, please do not cover this product with newspapers, tablecloths, curtains etc., during use.
- If the product has a waterproof feature, please do not exceed the nominal parameter range when using it.
- When the product is damaged, such as the charging cord or plug is damaged, liquid enters, objects fall onto the device, unable to operate normally, or falls, it must be repaired.
- When the product is fully charged, disconnect it from the charger.
- The maximum ambient temperature should not exceed 40°C.

### GEARit LIMITED WARRANTY

#### Warranty Coverage:

We stand behind our products with confidence, offering warranties designed to give you peace of mind and a worry-free experience. Our commitment covers most GEARit products with specific warranty periods based on product type such as cables, cases, wall chargers, and more. Either way, you're protected from defects in materials and workmanship.

#### \* Speakers (Bluetooth Products): 24 Months

#### 30-Day Money-Back Guarantee:

You may return undamaged products within 30 days for a full refund. Products must include all accessories and original packaging. Shipping costs for non-quality-related returns are the responsibility of the buyer.

#### Replacement Warranty:

If a defect arises within the warranty period, GEARit will repair, replace, or issue a credit for the product. Repaired or replacement products are covered for 90 days or the remainder of the original warranty, whichever is longer.

#### Need Assistance?

For more information or to file a warranty claim, please visit GEARit's Warranty Support.

(<https://www.gearit.com/pages/warranty-information>)

(866) 686-1800

support@gearit.com

Mon - Fri: 9:00 AM - 5:30 PM (PST)

[www.gearit.com](http://www.gearit.com)

-07-

### FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

**WARNING:** This product can expose you to chemicals known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

-08-