


<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11a Mode 5825MHz Antenna 1		
<b>Remark:</b>	Only show the worst case.		

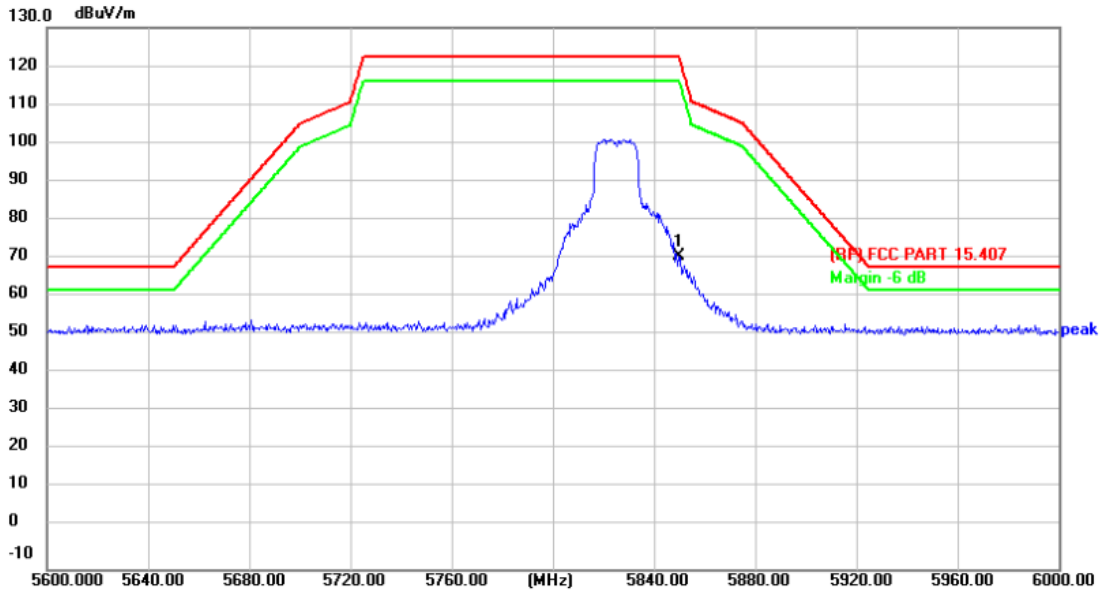


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	69.61	1.42	71.03	122.30	-51.27	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5180MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

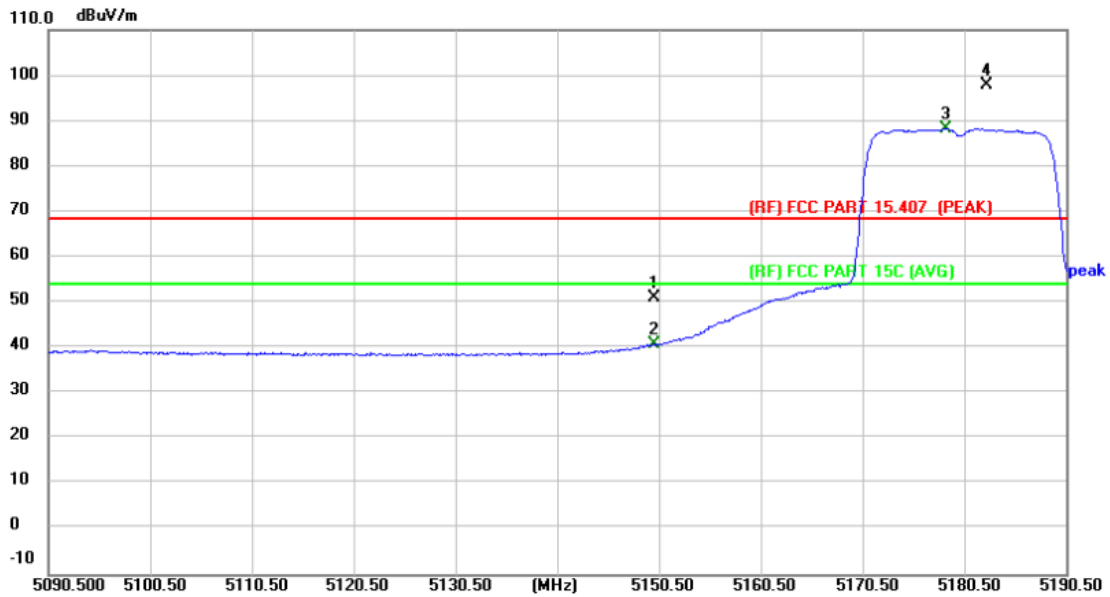

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	50.31	0.87	51.18	68.30	-17.12	peak
2	5150.000	39.89	0.87	40.76	54.00	-13.24	AVG
3 *	5178.700	87.38	0.93	88.31	Fundamental Frequency		AVG
4 X	5182.700	96.89	0.94	97.83	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180MHz Antenna 1+2		
Remark:	Only show the worst case.		

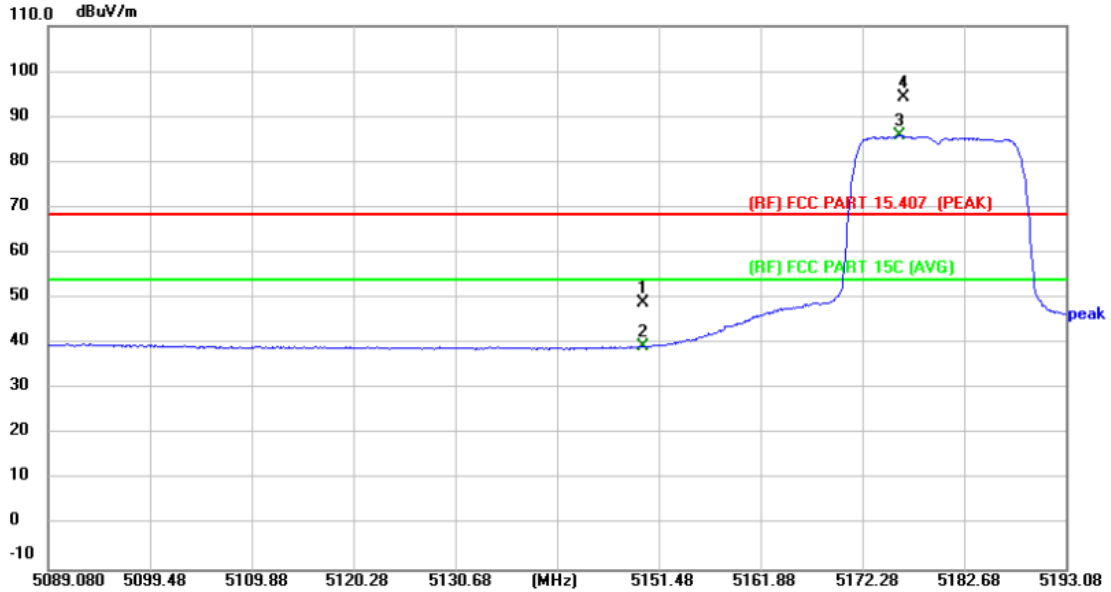


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	48.14	0.87	49.01	68.30	-19.29	peak
2	5150.000	38.47	0.87	39.34	54.00	-14.66	AVG
3 *	5176.024	84.84	0.92	85.76	Fundamental Frequency		AVG
4 X	5176.440	93.47	0.92	94.39	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5320MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

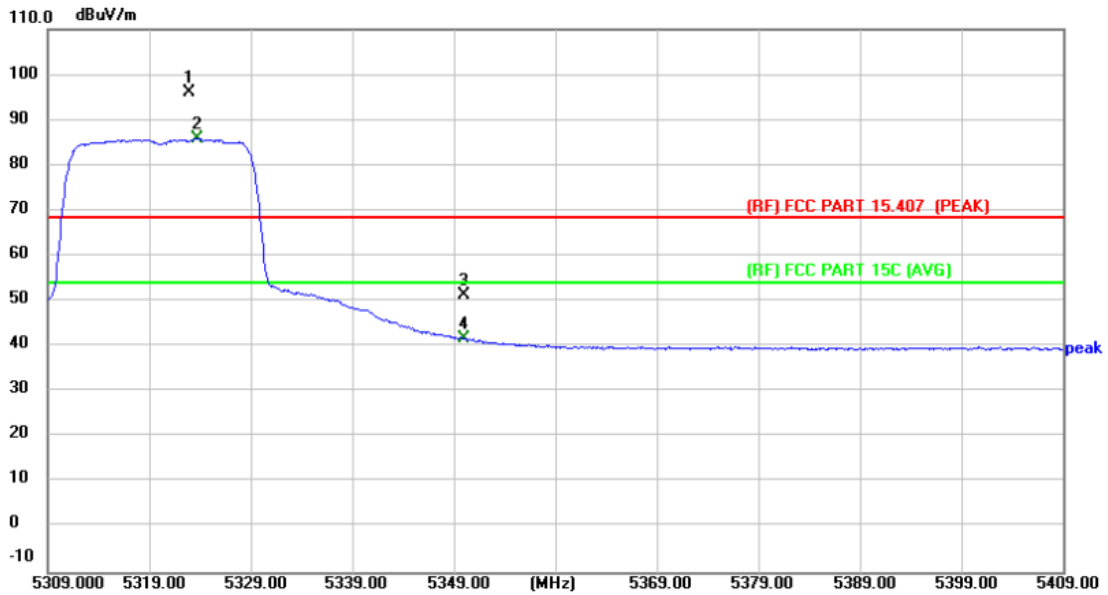

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5322.900	94.97	1.08	96.05	Fundamental Frequency		peak
2 *	5323.700	84.74	1.09	85.83			AVG
3	5350.000	50.13	1.19	51.32	68.30	-16.98	peak
4	5350.000	40.46	1.19	41.65	54.00	-12.35	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5320MHz Antenna 1+2		
Remark:	Only show the worst case.		

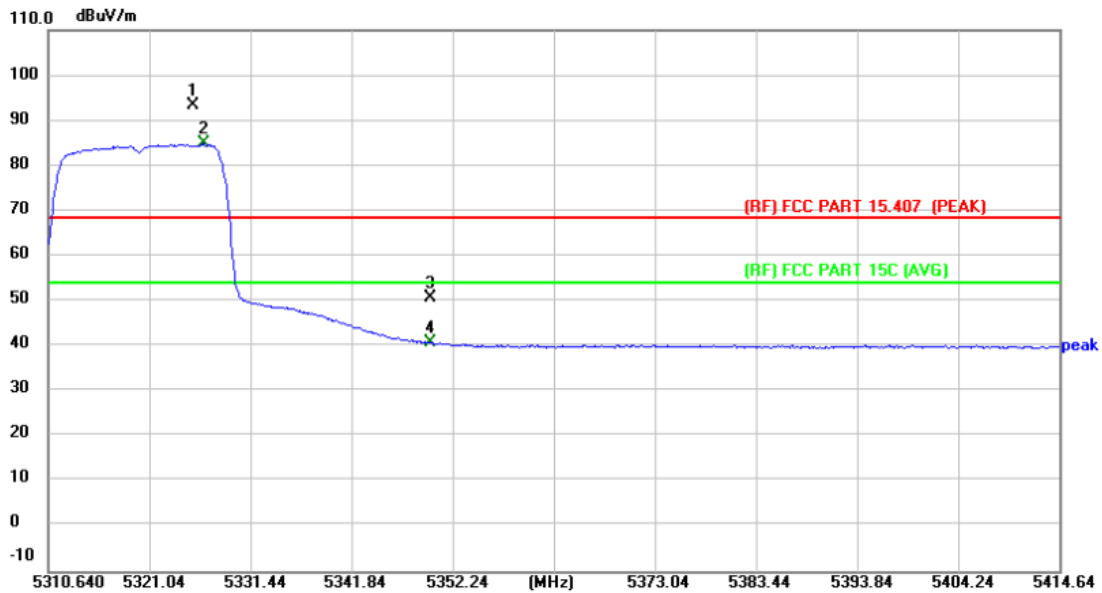


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5325.512	92.41	1.08	93.49	Fundamental Frequency		peak
2 *	5326.656	83.77	1.09	84.86	Fundamental Frequency		AVG
3	5350.000	49.63	1.19	50.82	68.30	-17.48	peak
4	5350.000	39.76	1.19	40.95	54.00	-13.05	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500MHz Antenna 1+2		
Remark:	Only show the worst case.		

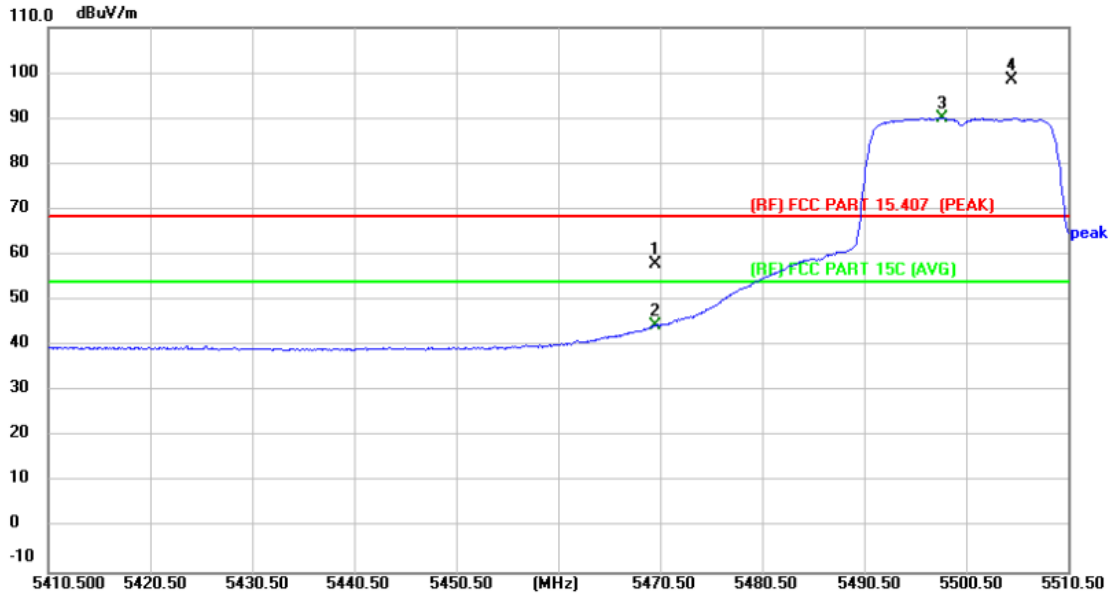

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	56.21	1.64	57.85	68.30	-10.45	peak
2	5470.000	42.82	1.64	44.46	54.00	-9.54	AVG
3 *	5498.100	88.38	1.73	90.11	Fundamental Frequency		AVG
4 X	5505.000	96.85	1.72	98.57	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500MHz Antenna 1+2		
Remark:	Only show the worst case.		

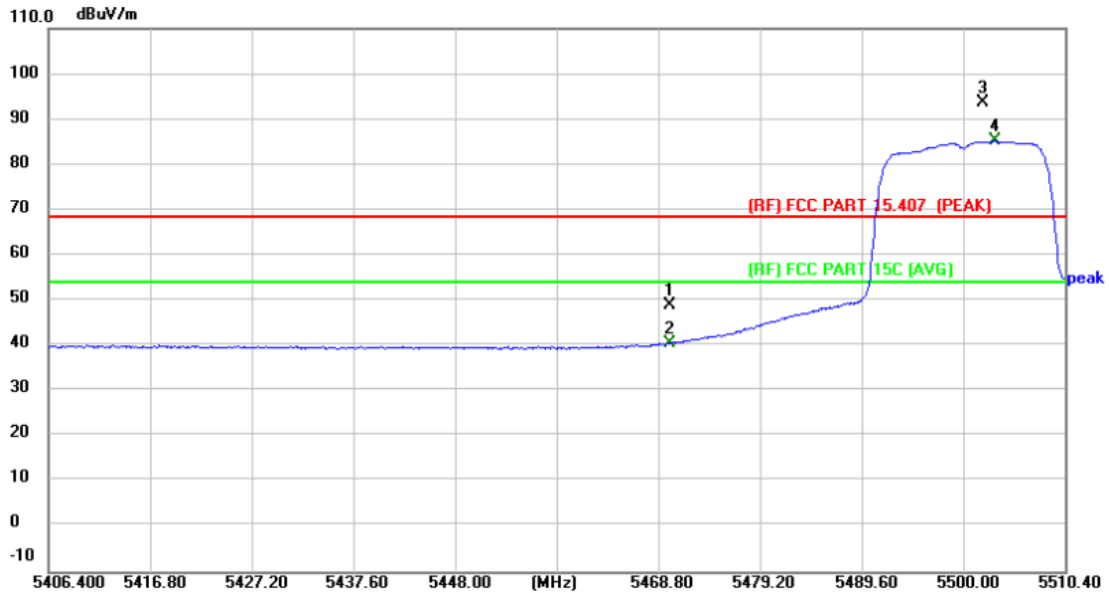


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	47.35	1.64	48.99	68.30	-19.31	peak
2	5470.000	38.84	1.64	40.48	54.00	-13.52	AVG
3 X	5501.976	92.06	1.73	93.79	Fundamental Frequency		peak
4 *	5503.224	83.52	1.73	85.25	Fundamental Frequency		AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5700MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

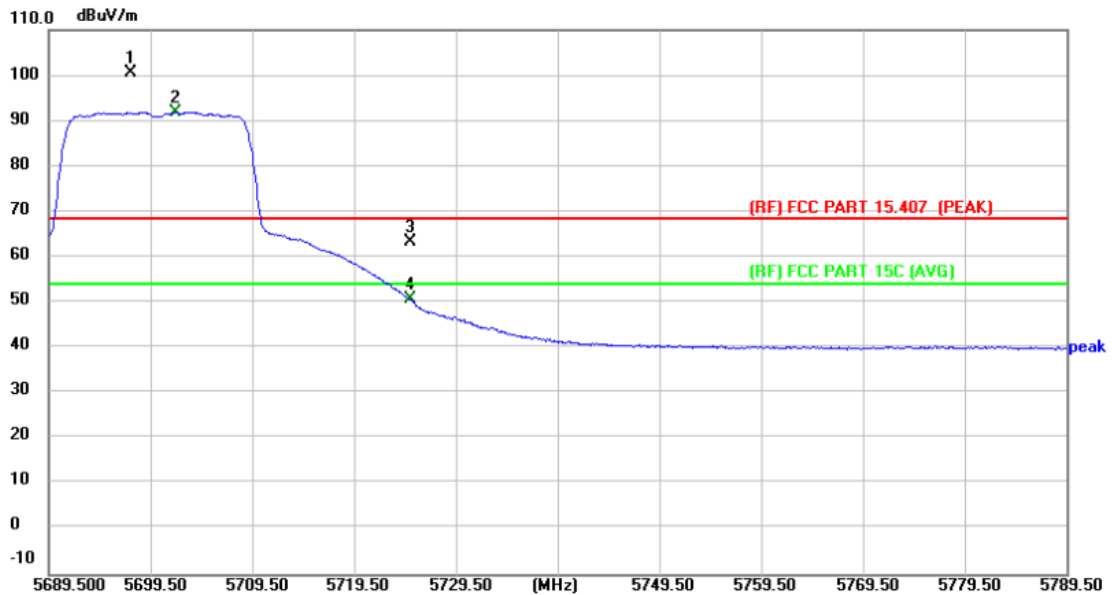

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5697.600	98.79	1.66	100.45	Fundamental Frequency		peak
2 *	5701.900	90.24	1.66	91.90	Fundamental Frequency		AVG
3	5725.000	61.77	1.60	63.37	68.30	-4.93	peak
4	5725.000	49.13	1.60	50.73	54.00	-3.27	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5700MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

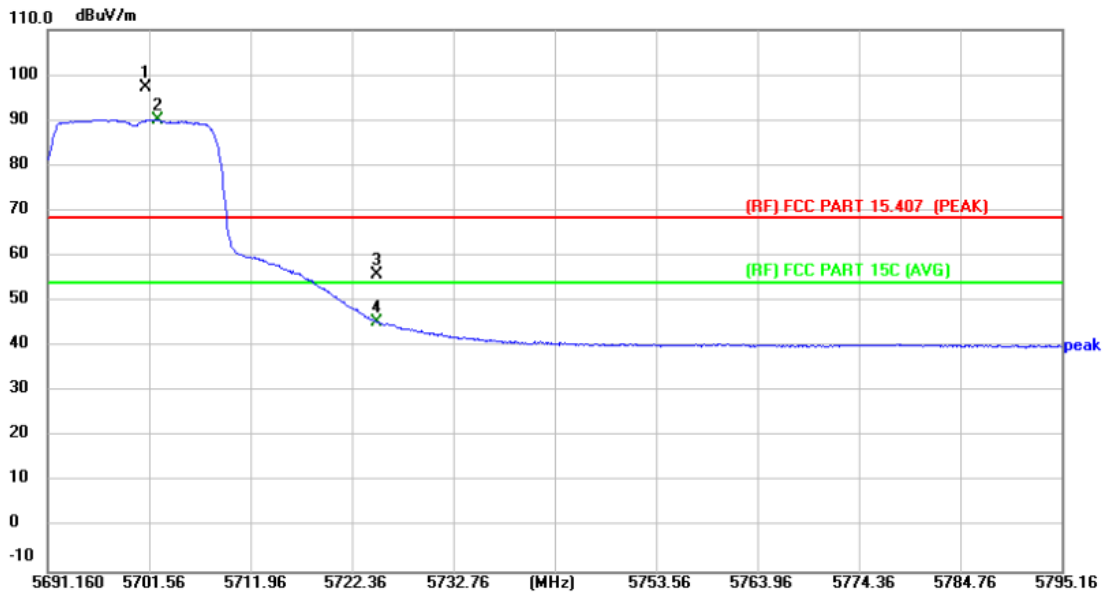


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5701.248	95.54	1.66	97.20	Fundamental Frequency		peak
2 *	5702.392	88.47	1.66	90.13	Fundamental Frequency		AVG
3	5725.000	54.36	1.60	55.96	68.30	-12.34	peak
4	5725.000	43.70	1.60	45.30	54.00	-8.70	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz Antenna 1+2		
Remark:	Only show the worst case.		

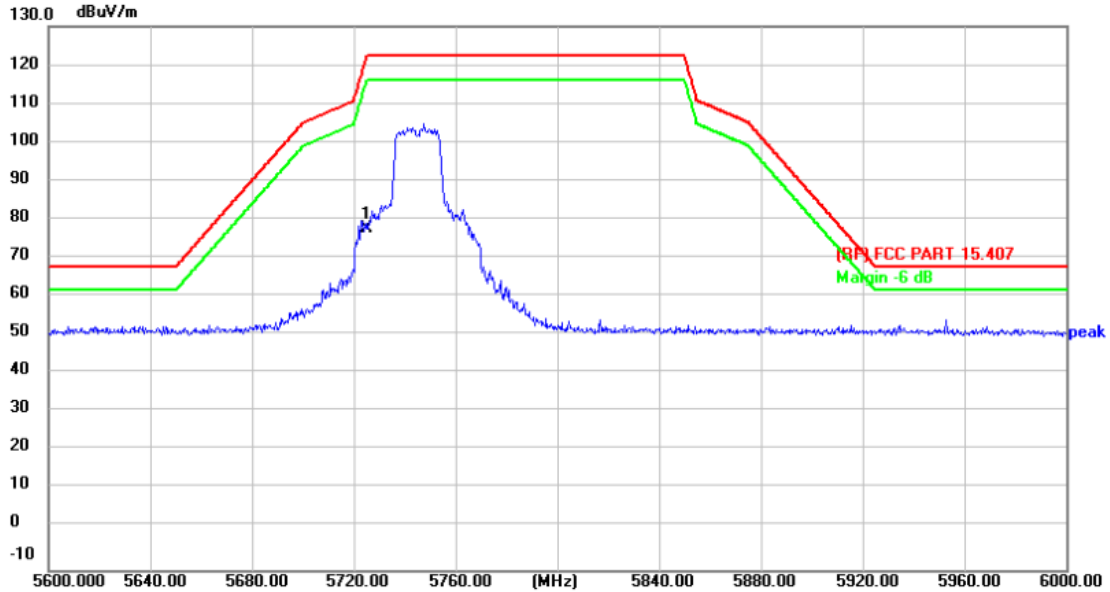

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	76.53	1.60	78.13	122.30	-44.17	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz Antenna 1+2		
Remark:	Only show the worst case.		

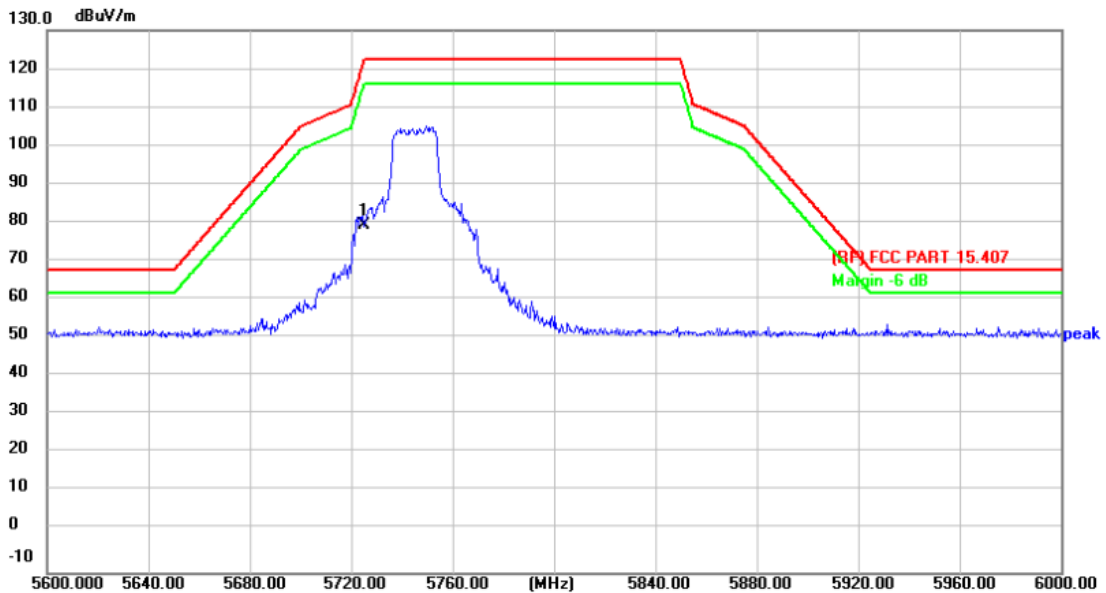


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	78.16	1.60	79.76	122.30	-42.54	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT20) Mode 5825MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

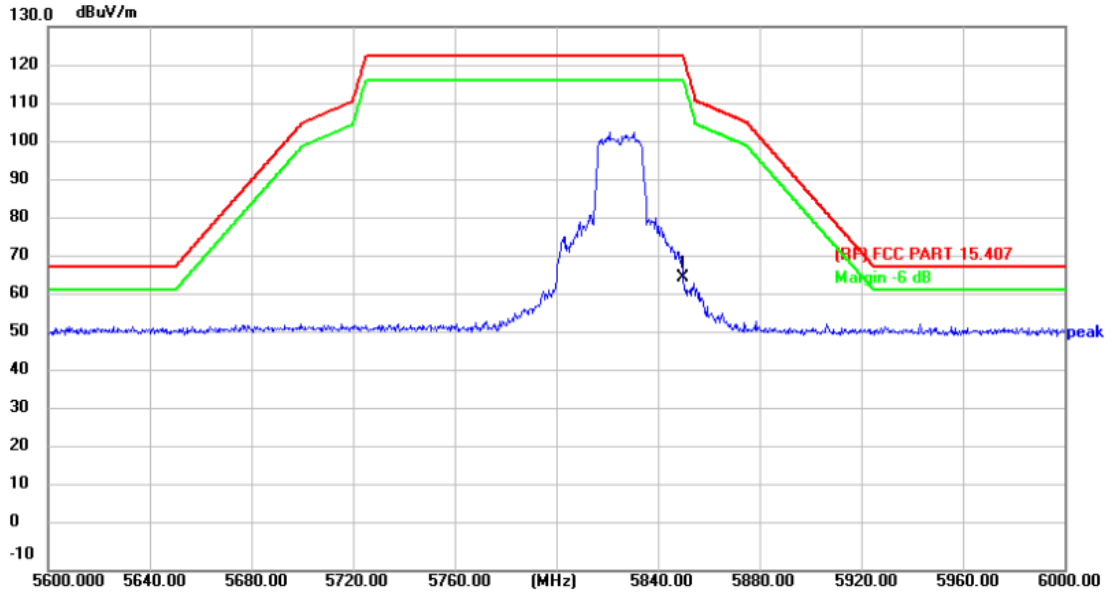

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	64.12	1.42	65.54	122.30	-56.76	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz Antenna 1+2		
Remark:	Only show the worst case.		

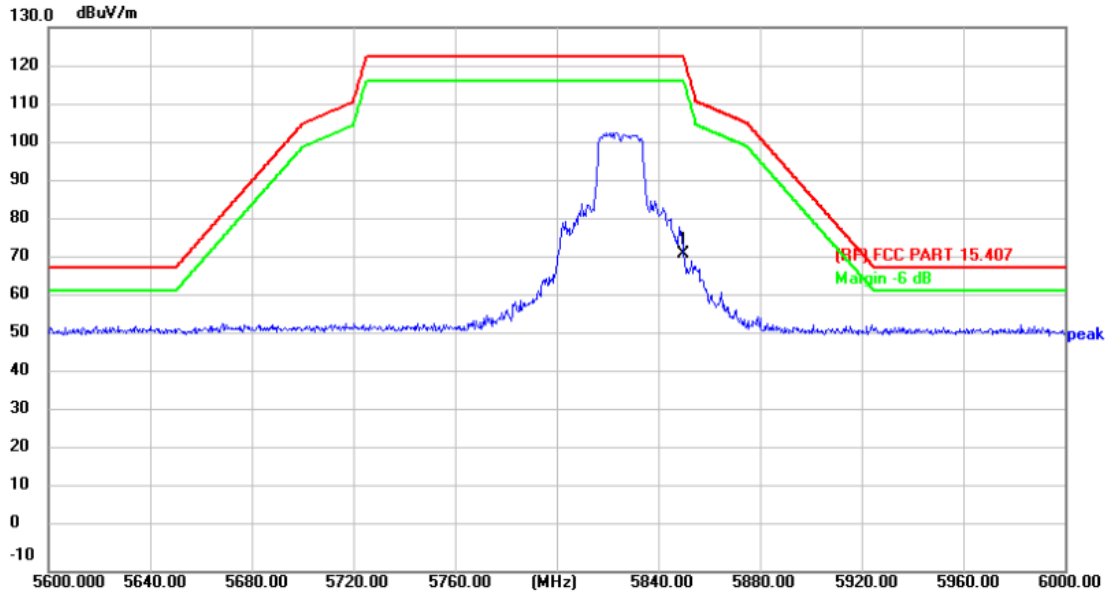


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	70.35	1.42	71.77	122.30	-50.53	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5180MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

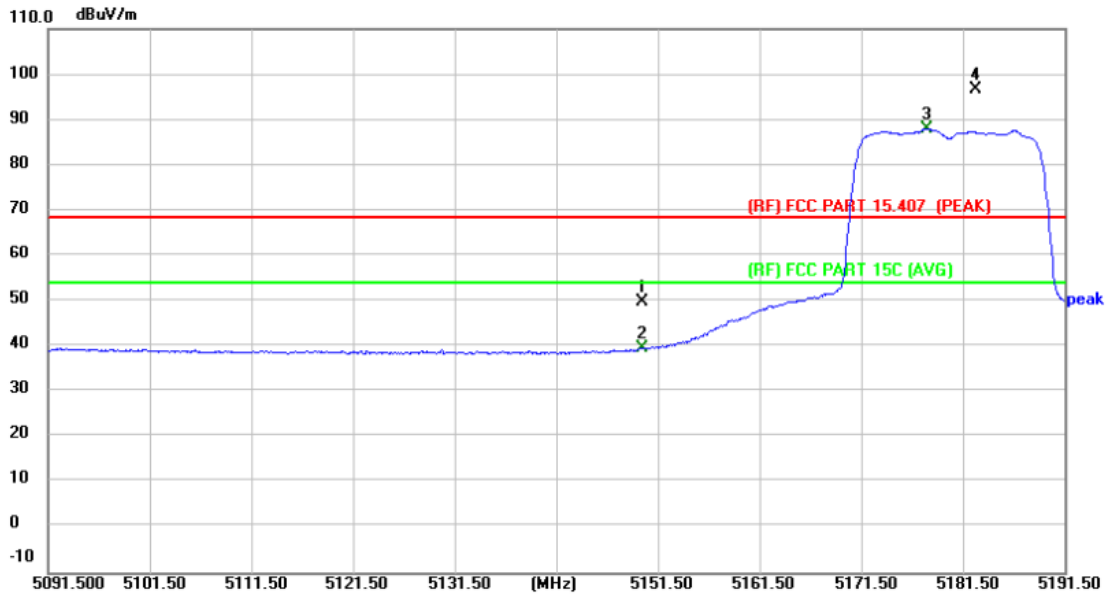

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	48.92	0.87	49.79	68.30	-18.51	peak
2	5150.000	38.67	0.87	39.54	54.00	-14.46	AVG
3 *	5178.000	87.06	0.93	87.99	Fundamental Frequency		AVG
4 X	5182.800	95.58	0.94	96.52	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(VHT20) Mode 5180MHz Antenna 1+2		
Remark:	Only show the worst case.		

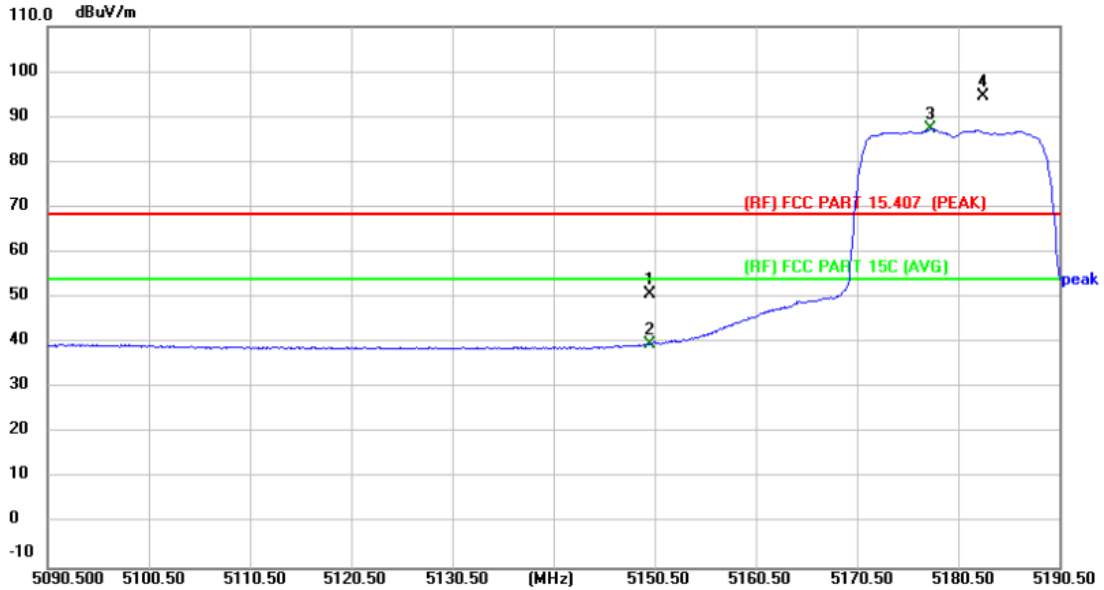


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.81	0.87	50.68	68.30	-17.62	peak
2	5150.000	38.71	0.87	39.58	54.00	-14.42	AVG
3 *	5177.800	86.42	0.93	87.35	Fundamental Frequency		AVG
4 X	5183.000	93.65	0.94	94.59	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT20) Mode 5320MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

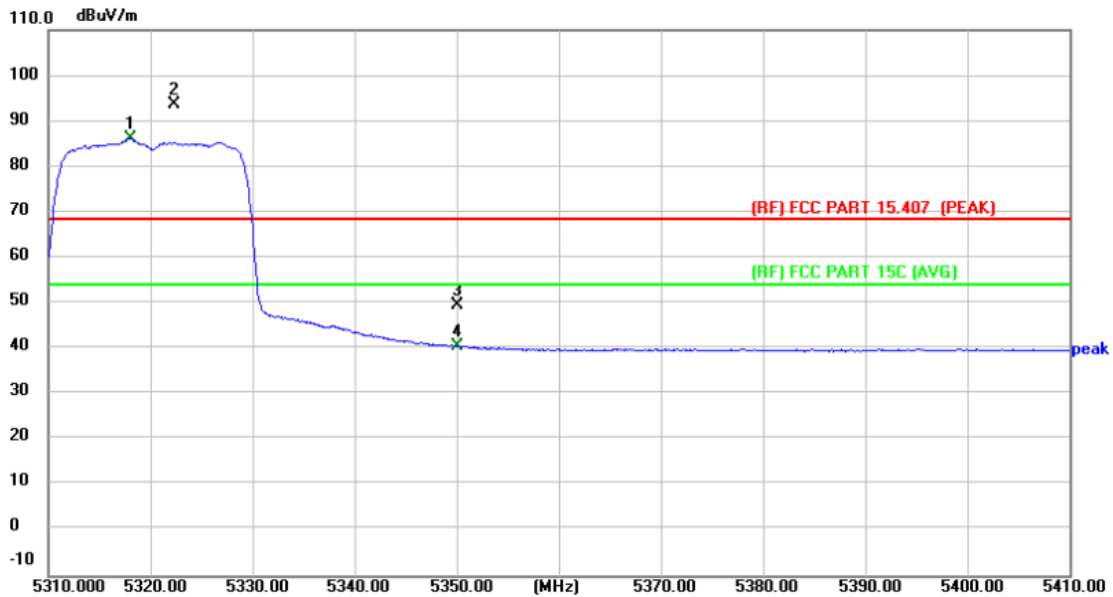

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5318.000	85.24	1.05	86.29	Fundamental Frequency		AVG
2 X	5322.300	92.70	1.07	93.77			peak
3	5350.000	48.40	1.19	49.59	68.30	-18.71	peak
4	5350.000	39.29	1.19	40.48	54.00	-13.52	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(VHT20) Mode 5320MHz Antenna 1+2		
Remark:	Only show the worst case.		

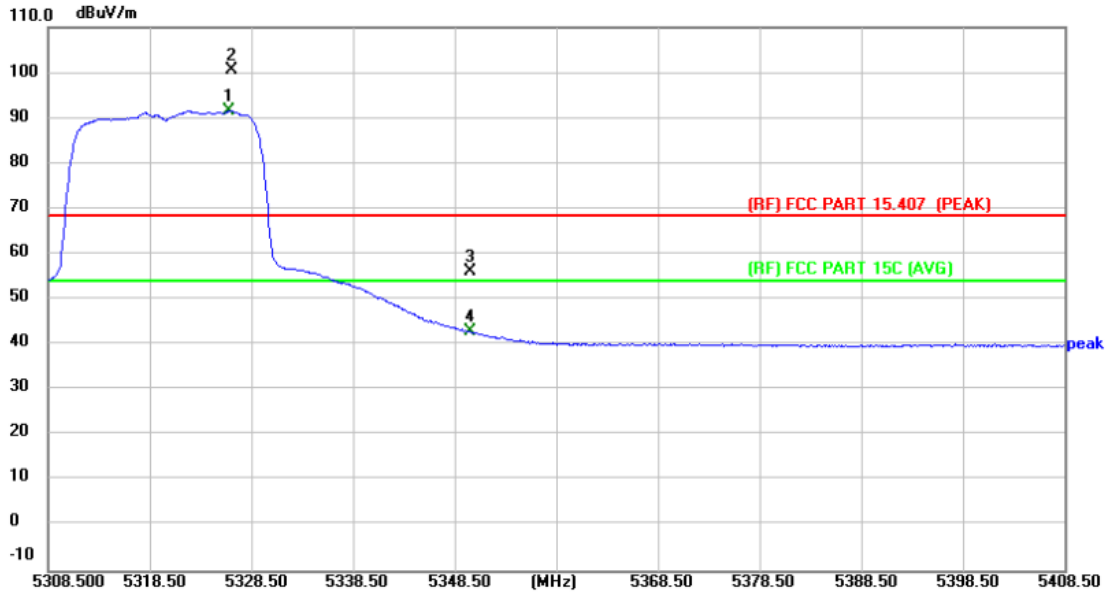


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5326.300	90.51	1.09	91.60	Fundamental Frequency		AVG
2 X	5326.600	99.41	1.09	100.50			peak
3	5350.000	54.91	1.19	56.10	68.30	-12.20	peak
4	5350.000	41.76	1.19	42.95	54.00	-11.05	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX ac(VHT20) Mode 5500MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

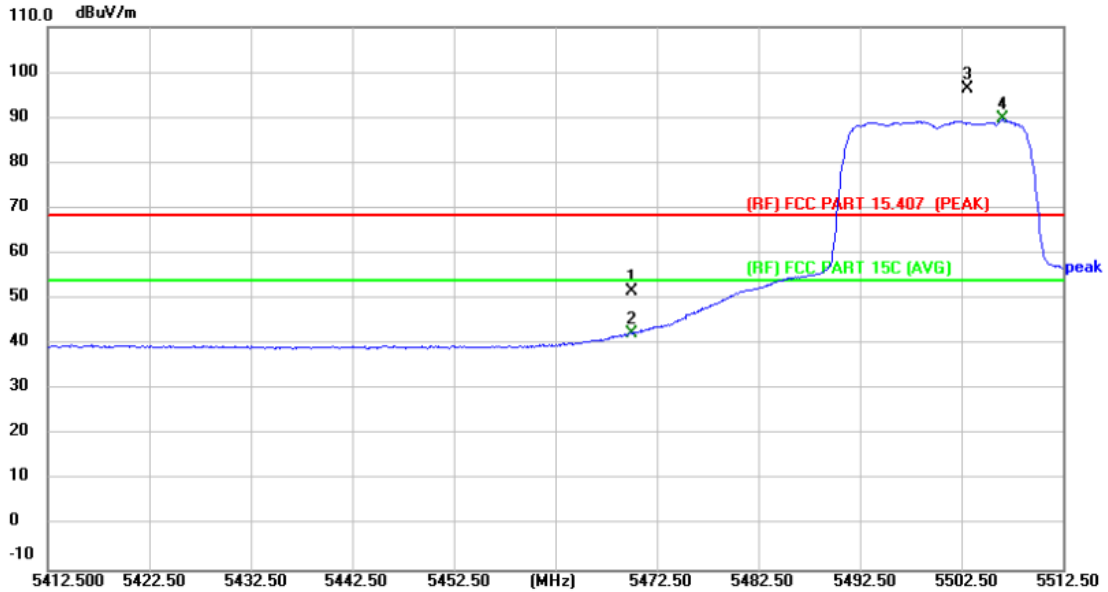

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	50.01	1.64	51.65	68.30	-16.65	peak
2	5470.000	40.81	1.64	42.45	54.00	-11.55	AVG
3 X	5503.100	94.58	1.73	96.31	Fundamental Frequency		peak
4 *	5506.600	87.91	1.72	89.63	Fundamental Frequency		AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX ac(VHT20) Mode 5500MHz Antenna 1+2		
Remark:	Only show the worst case.		

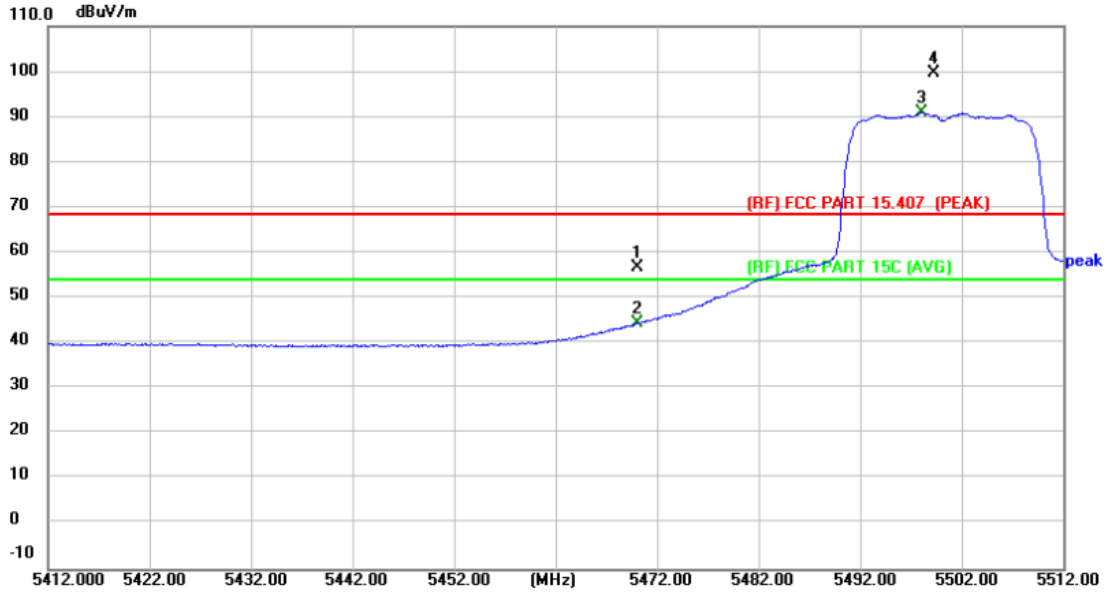


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	55.11	1.64	56.75	68.30	-11.55	peak
2	5470.000	42.75	1.64	44.39	54.00	-9.61	AVG
3 *	5498.000	89.23	1.73	90.96	Fundamental Frequency		AVG
4 X	5499.200	97.97	1.73	99.70	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX ac(VHT20) Mode 5700MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

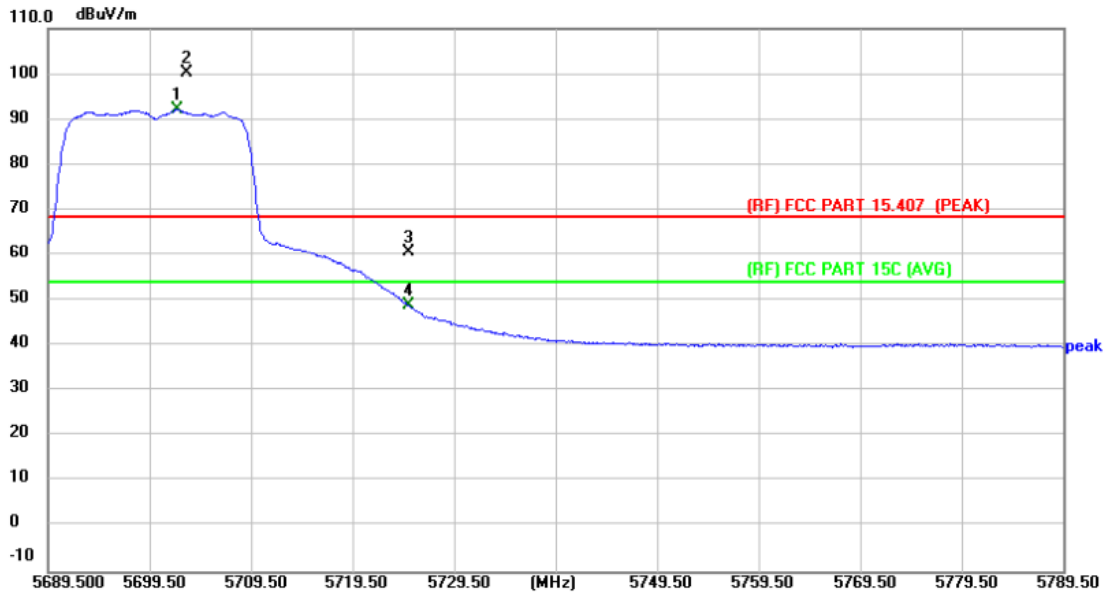

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5702.200	90.42	1.66	92.08	Fundamental Frequency		AVG
2 X	5703.100	98.56	1.66	100.22			Fundamental Frequency
3	5725.000	59.03	1.60	60.63	68.30	-7.67	peak
4	5725.000	47.26	1.60	48.86	54.00	-5.14	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX ac(VHT20) Mode 5700MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

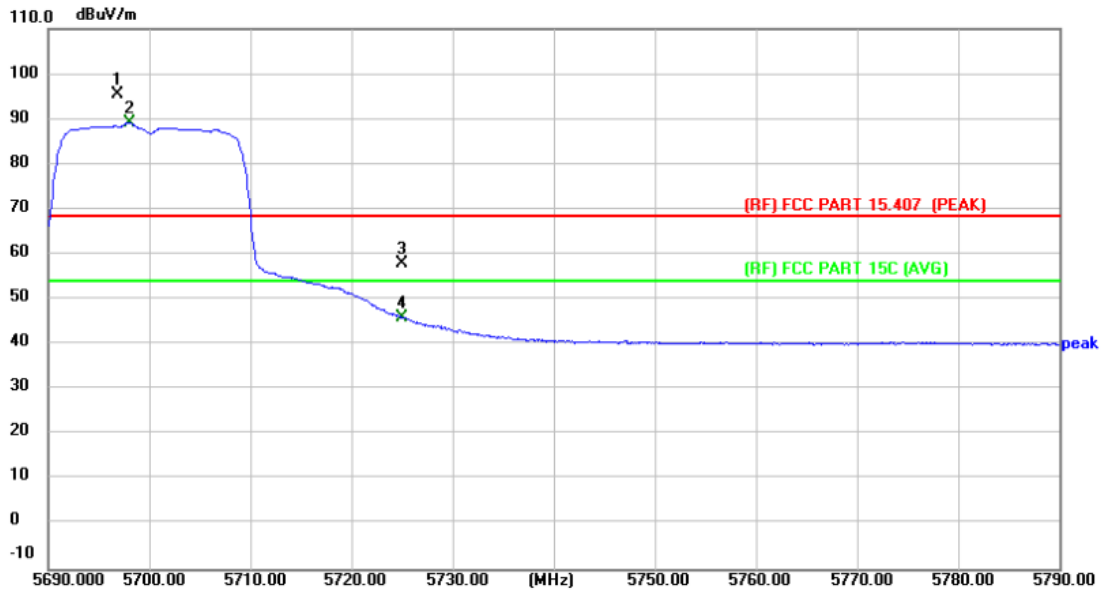


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5696.800	93.74	1.65	95.39	Fundamental Frequency		peak
2 *	5698.000	87.52	1.66	89.18			AVG
3	5725.000	56.21	1.60	57.81	68.30	-10.49	peak
4	5725.000	44.32	1.60	45.92	54.00	-8.08	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX ac(VHT20) Mode 5745MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

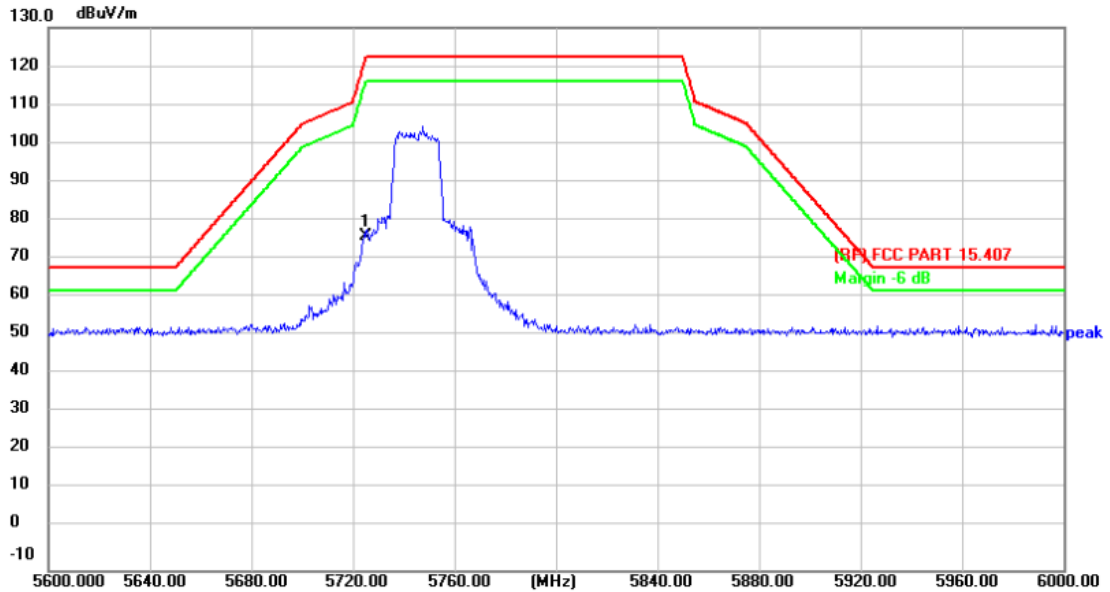

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	74.73	1.60	76.33	122.30	-45.97	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX ac(VHT20) Mode 5745MHz Antenna 1+2		
Remark:	Only show the worst case.		

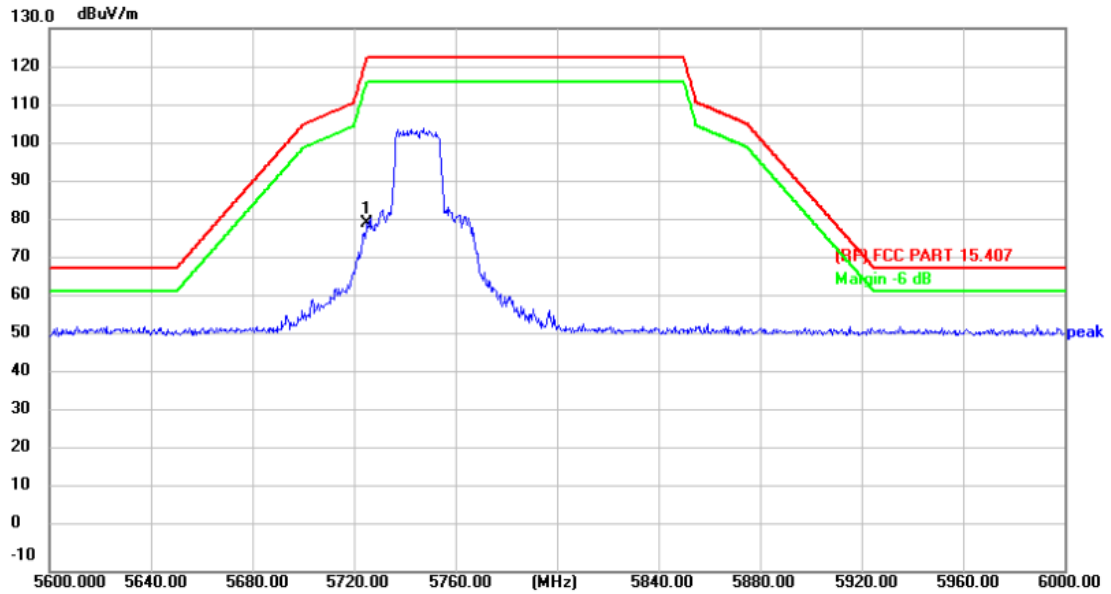


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	78.12	1.60	79.72	122.30	-42.58	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX ac(VHT20) Mode 5825MHz Antenna 1+2		
Remark:	Only show the worst case.		

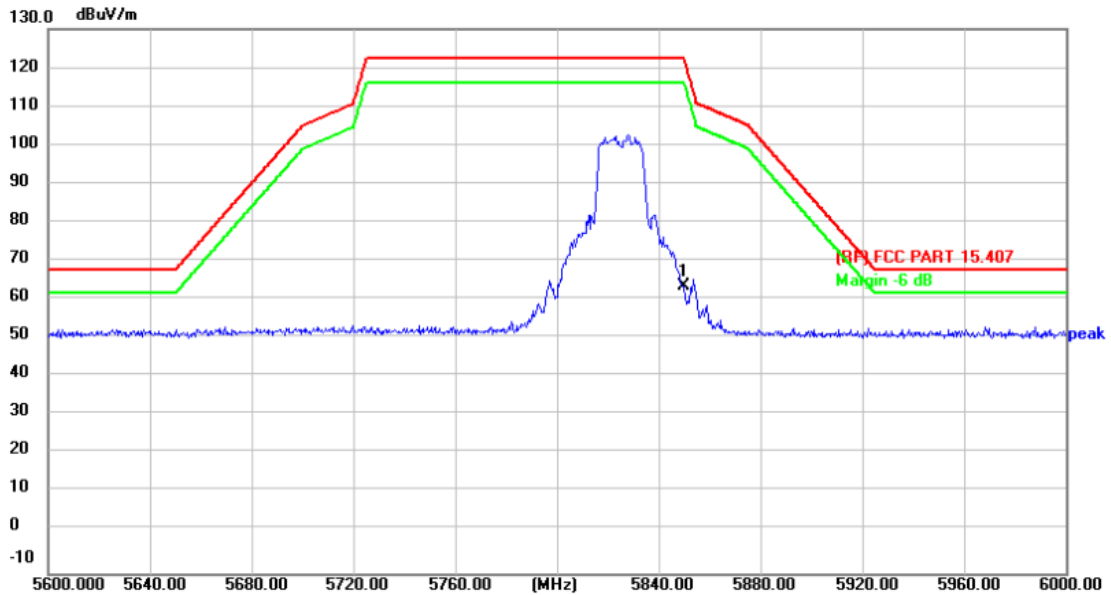

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	62.74	1.42	64.16	122.30	-58.14	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX ac(VHT20) Mode 5825MHz Antenna 1+2		
Remark:	Only show the worst case.		

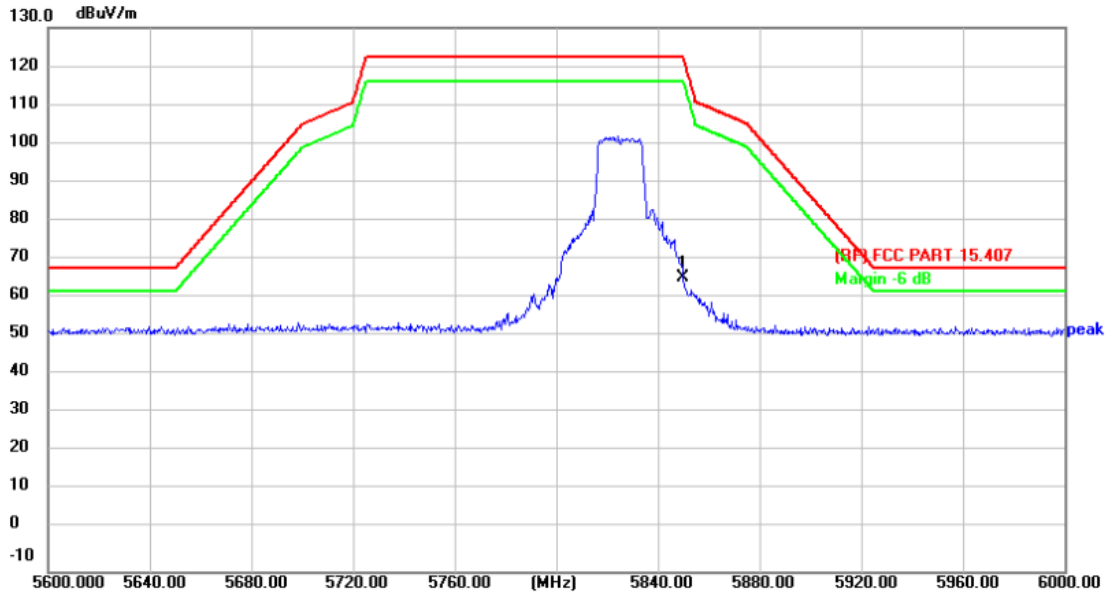


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	64.38	1.42	65.80	122.30	-56.50	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5190MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

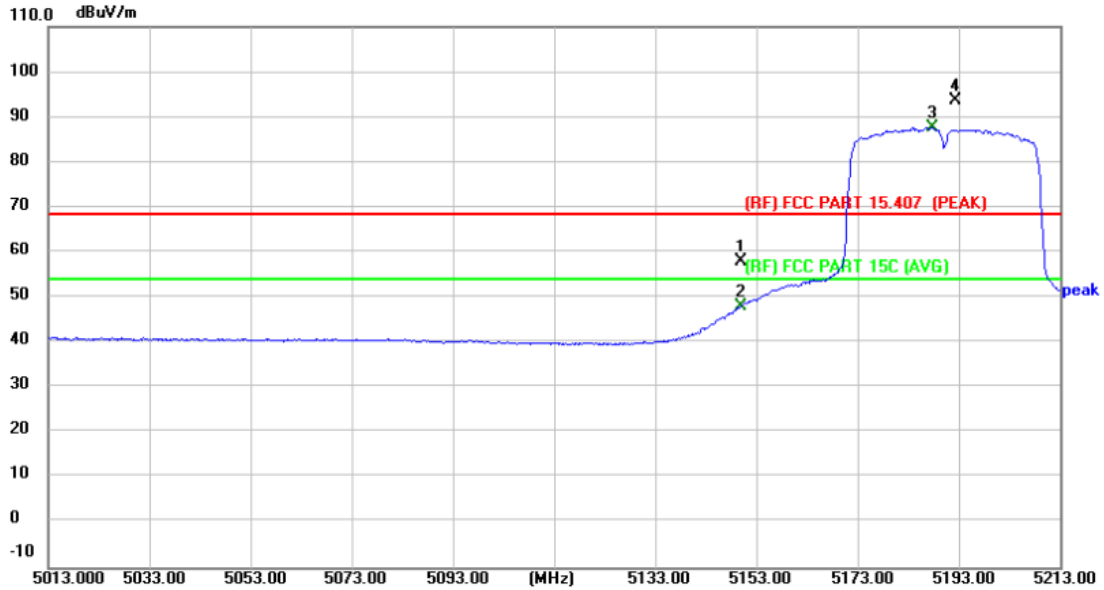

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	57.18	0.87	58.05	68.30	-10.25	peak
2	5150.000	47.21	0.87	48.08	54.00	-5.92	AVG
3 *	5187.800	86.75	0.94	87.69	Fundamental Frequency		AVG
4 X	5192.400	92.65	0.96	93.61	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190MHz Antenna 1+2		
Remark:	Only show the worst case.		

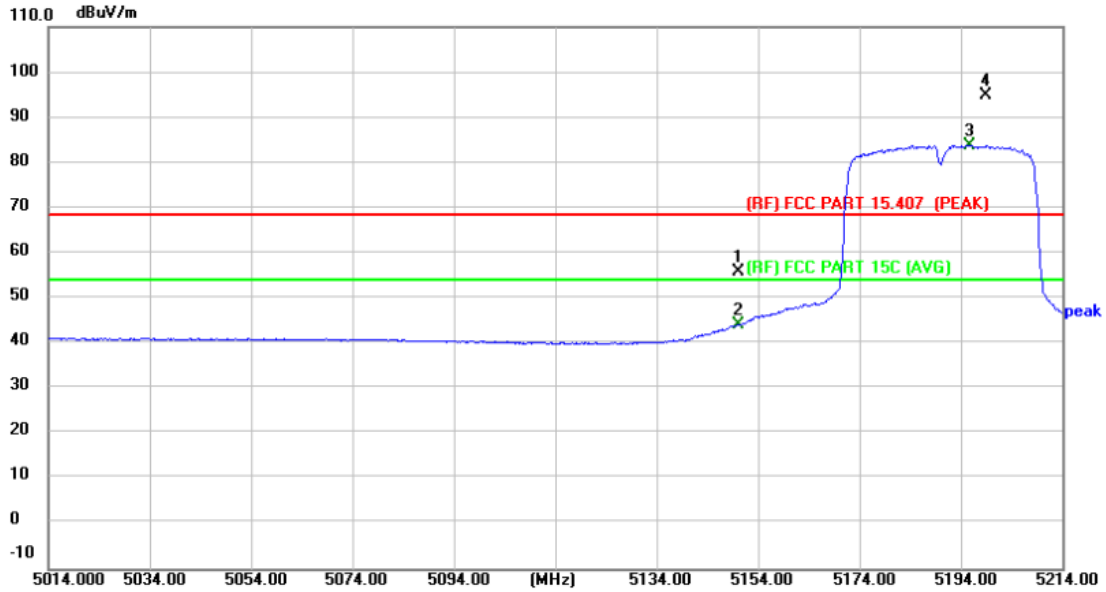


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	54.97	0.87	55.84	68.30	-12.46	peak
2	5150.000	43.14	0.87	44.01	54.00	-9.99	AVG
3 *	5195.800	82.93	0.96	83.89	Fundamental Frequency		AVG
4 X	5198.800	93.81	0.97	94.78	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5310MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

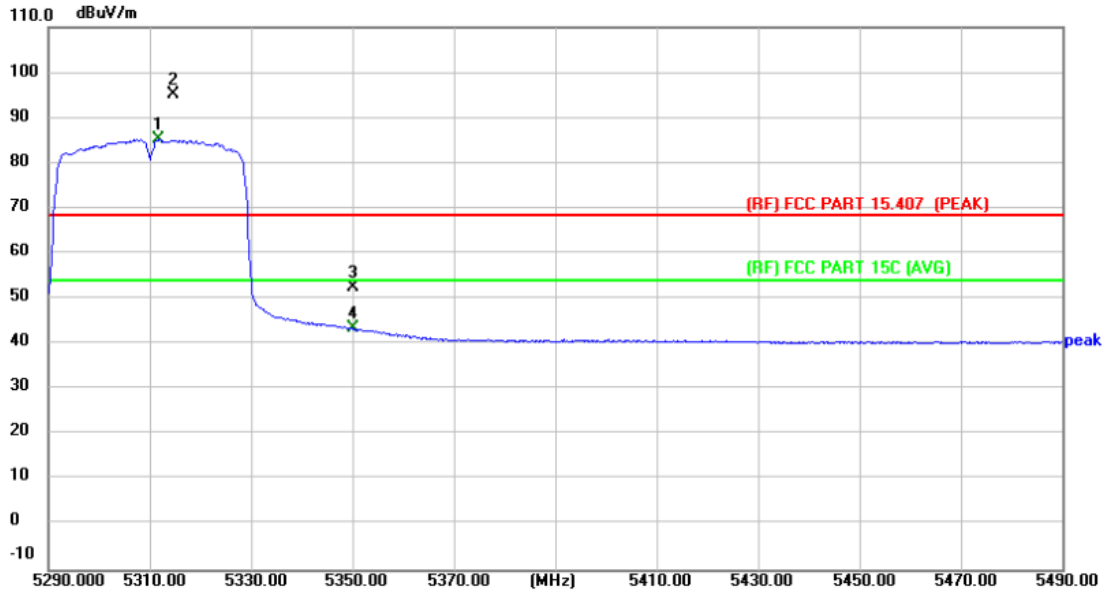

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5311.800	84.12	1.03	85.15	Fundamental Frequency		AVG
2 X	5314.600	94.17	1.04	95.21	Fundamental Frequency		peak
3	5350.000	51.29	1.19	52.48	68.30	-15.82	peak
4	5350.000	42.29	1.19	43.48	54.00	-10.52	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5310MHz Antenna 1+2		
Remark:	Only show the worst case.		

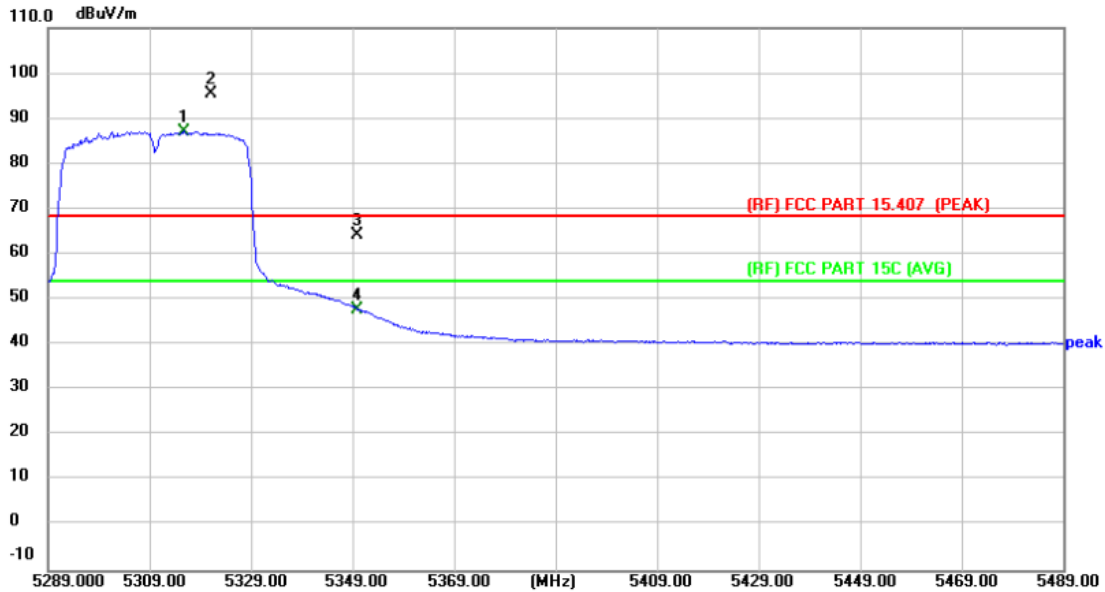


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5315.800	86.15	1.05	87.20	Fundamental Frequency		AVG
2 X	5321.200	94.35	1.07	95.42			peak
3	5350.000	62.99	1.19	64.18	68.30	-4.12	peak
4	5350.000	46.63	1.19	47.82	54.00	-6.18	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz Antenna 1+2		
Remark:	Only show the worst case.		

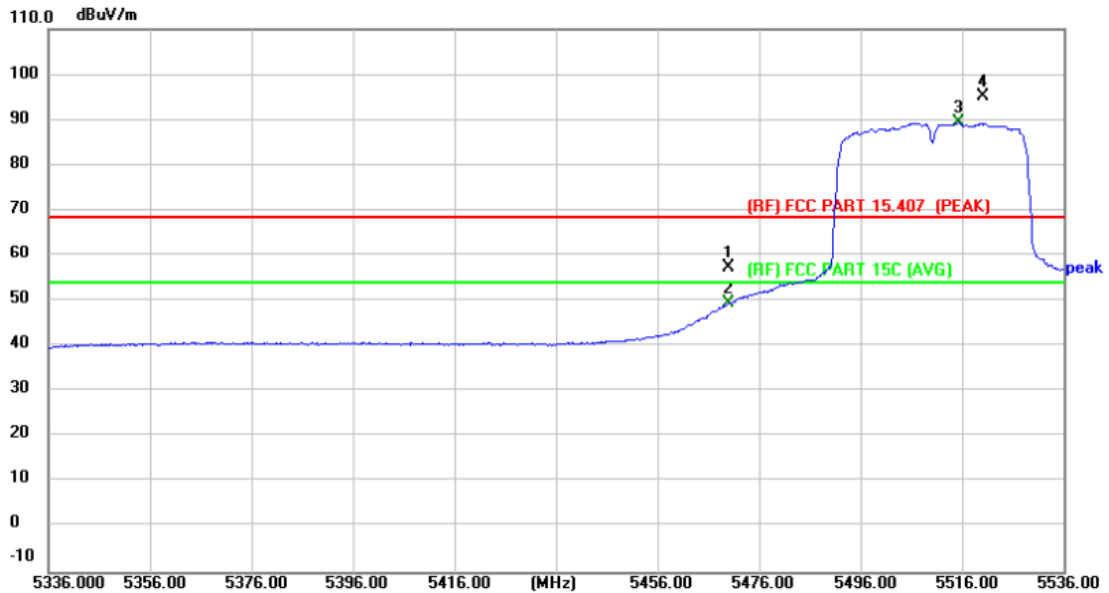

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	55.66	1.64	57.30	68.30	-11.00	peak
2	5470.000	47.98	1.64	49.62	54.00	-4.38	AVG
3 *	5515.400	87.62	1.70	89.32	Fundamental Frequency		AVG
4 X	5520.000	93.55	1.70	95.25	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz Antenna 1+2		
Remark:	Only show the worst case.		

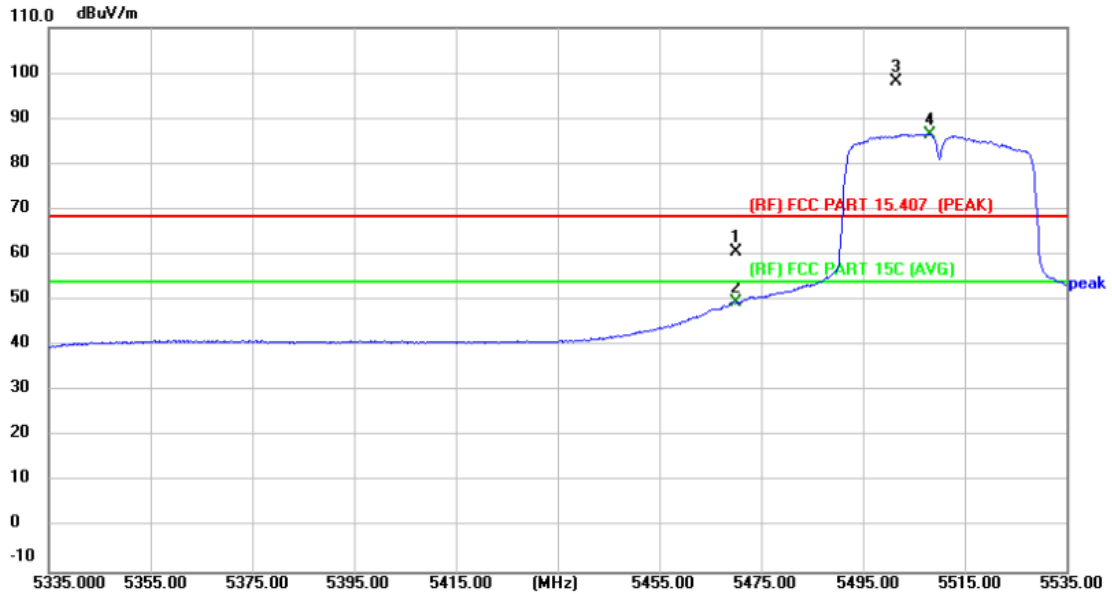


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	59.00	1.64	60.64	68.30	-7.66	peak
2	5470.000	47.79	1.64	49.43	54.00	-4.57	AVG
3 X	5501.400	96.51	1.73	98.24	Fundamental Frequency		peak
4 *	5508.200	84.83	1.72	86.55	Fundamental Frequency		AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11n(HT40) Mode 5670MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

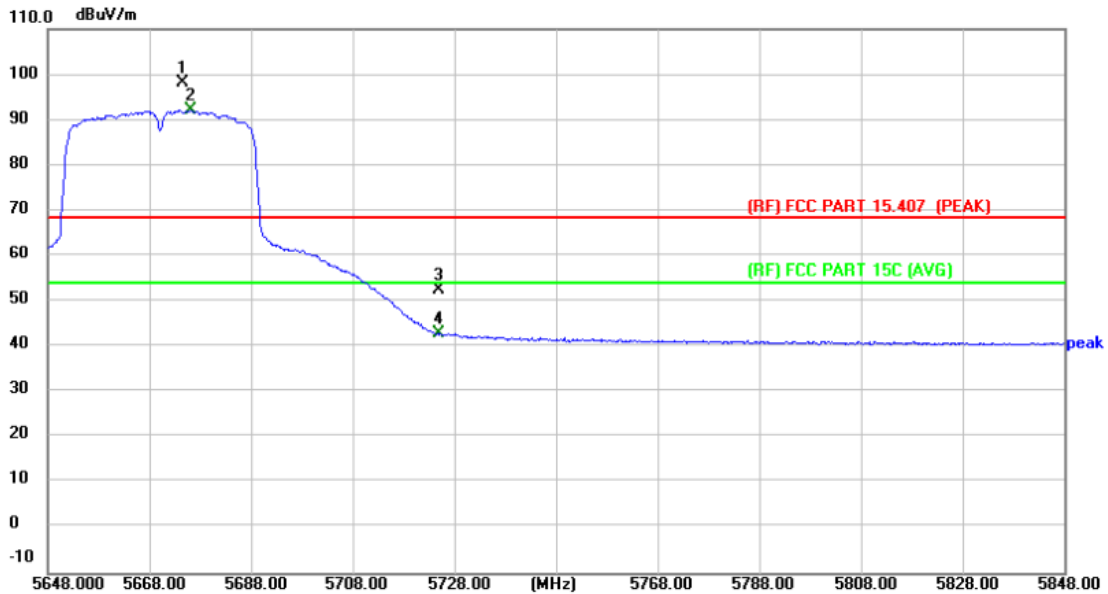

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5674.400	96.56	1.65	98.21	Fundamental Frequency		peak
2 *	5676.000	90.54	1.64	92.18	Fundamental Frequency		AVG
3	5725.000	50.93	1.60	52.53	68.30	-15.77	peak
4	5725.000	41.35	1.60	42.95	54.00	-11.05	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670MHz Antenna 1+2		
Remark:	Only show the worst case.		

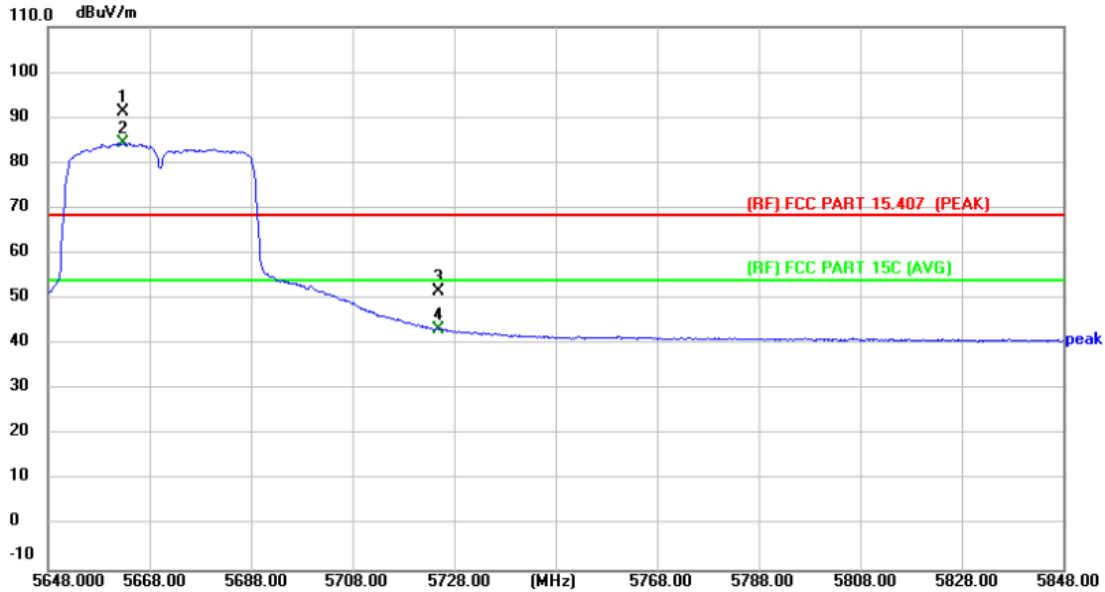


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5662.800	89.61	1.64	91.25	Fundamental Frequency		peak
2 *	5662.800	82.63	1.64	84.27	Fundamental Frequency		AVG
3	5725.000	49.97	1.60	51.57	68.30	-16.73	peak
4	5725.000	41.75	1.60	43.35	54.00	-10.65	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755MHz Antenna 1+2		
Remark:	Only show the worst case.		

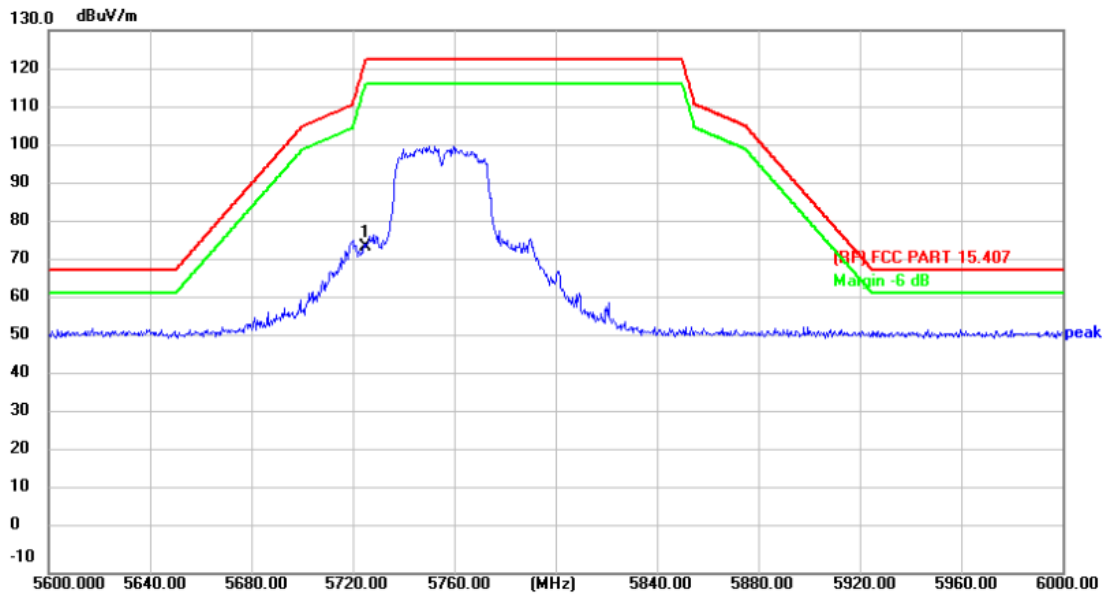

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	72.57	1.60	74.17	122.30	-48.13	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755MHz Antenna 1+2		
Remark:	Only show the worst case.		

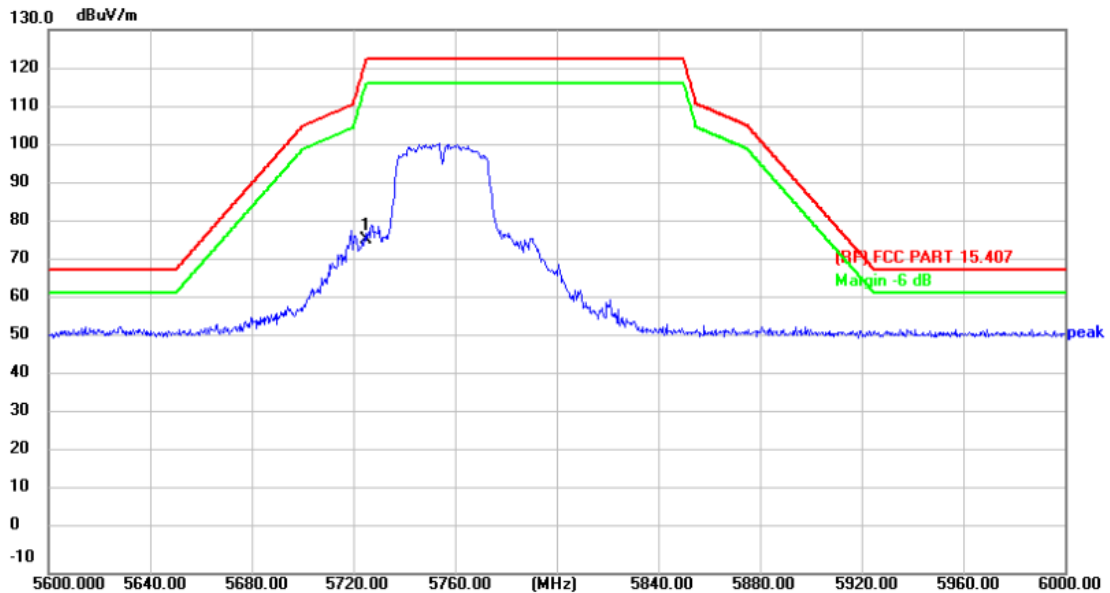


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	74.32	1.60	75.92	122.30	-46.38	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795MHz Antenna 1+2		
Remark:	Only show the worst case.		

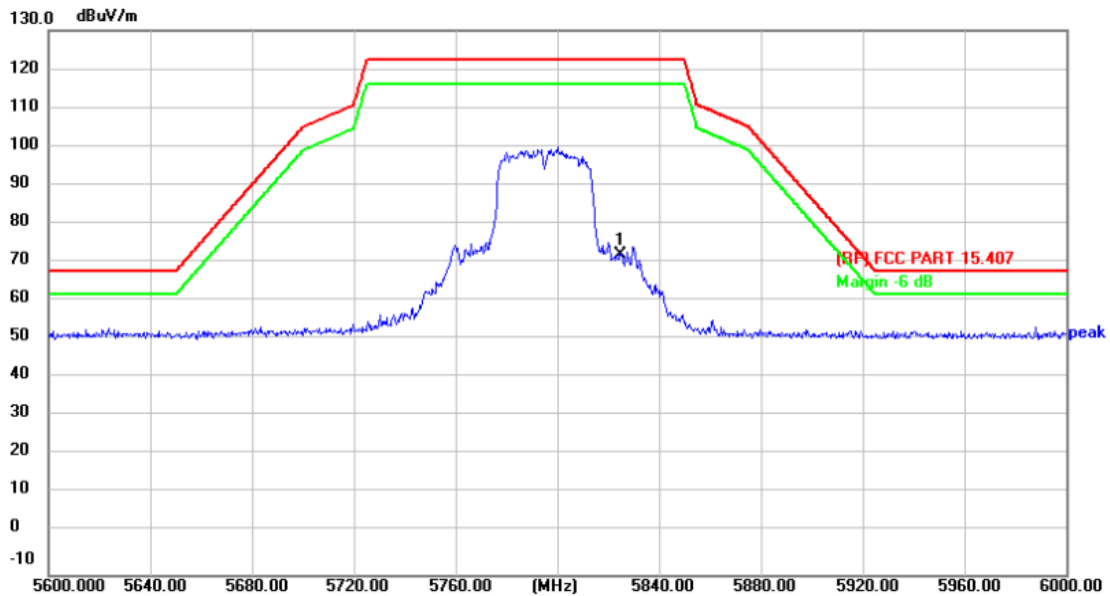

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5825.000	70.94	1.42	72.36	122.30	-49.94	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795MHz Antenna 1+2		
Remark:	Only show the worst case.		

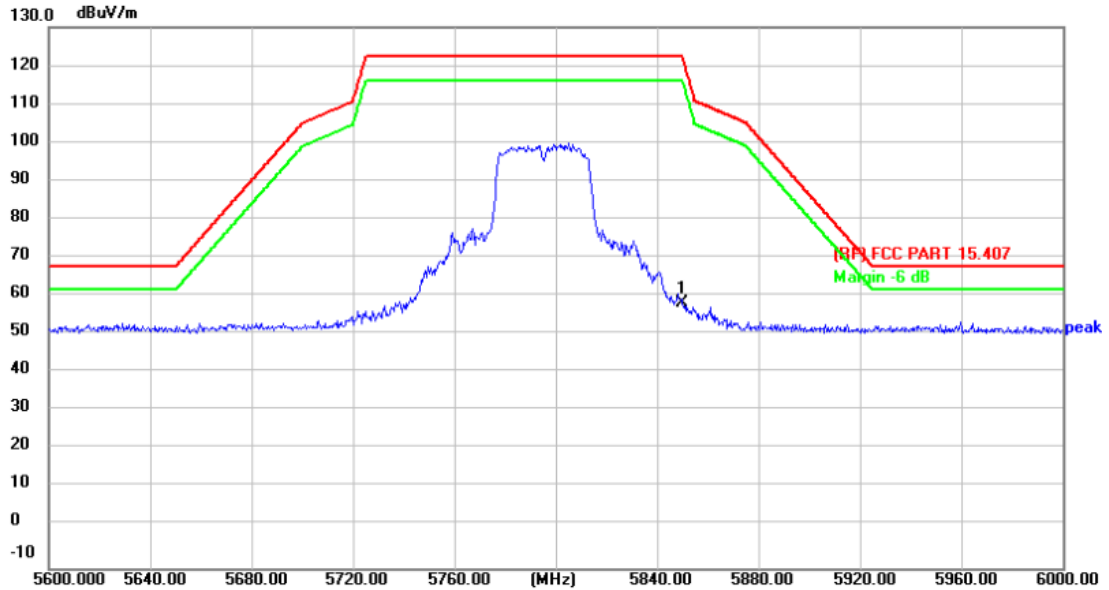


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	57.30	1.42	58.72	122.30	-63.58	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1°C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5190MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

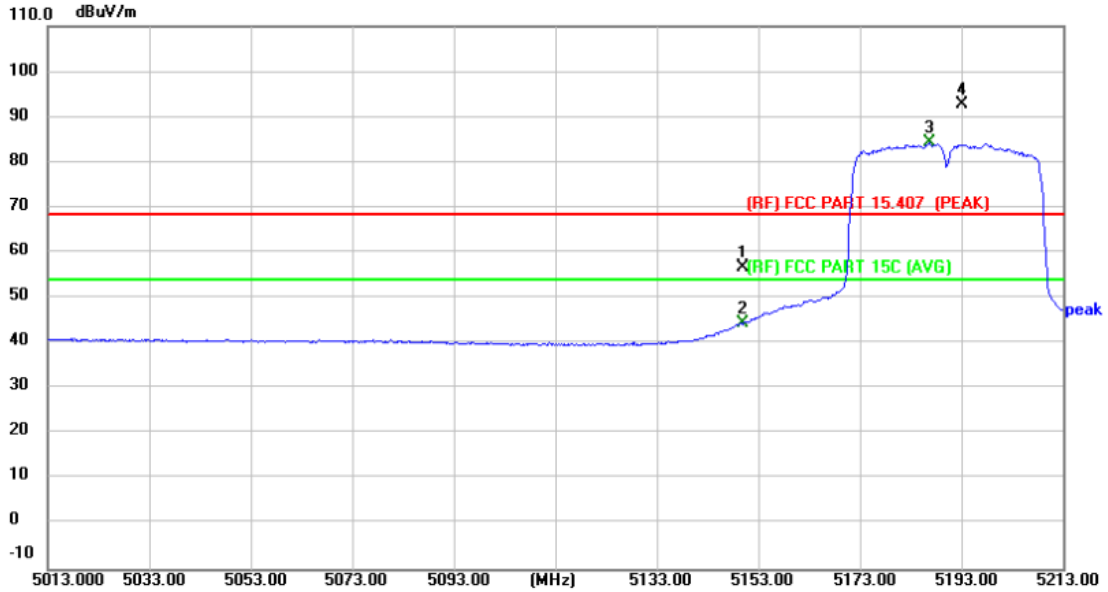

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	55.74	0.87	56.61	68.30	-11.69	peak
2	5150.000	43.59	0.87	44.46	54.00	-9.54	AVG
3 *	5186.800	83.29	0.94	84.23	Fundamental Frequency		AVG
4 X	5193.000	91.75	0.96	92.71	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz Antenna 1+2		
Remark:	Only show the worst case.		

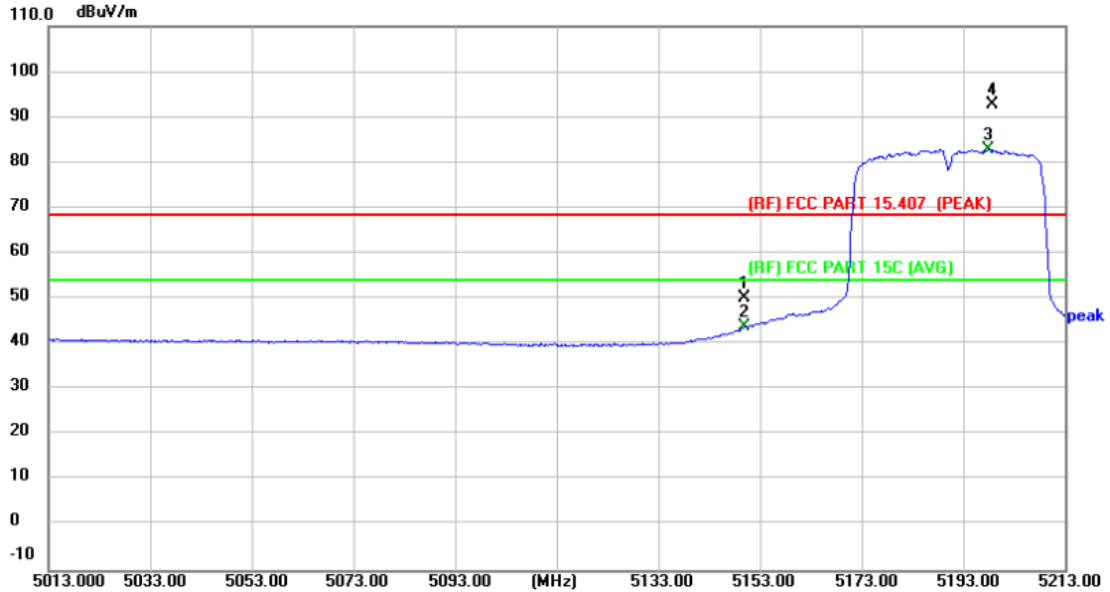


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	49.34	0.87	50.21	68.30	-18.09	peak
2	5150.000	42.88	0.87	43.75	54.00	-10.25	AVG
3 *	5197.800	81.93	0.96	82.89	Fundamental Frequency		AVG
4 X	5198.600	91.88	0.97	92.85	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5310MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

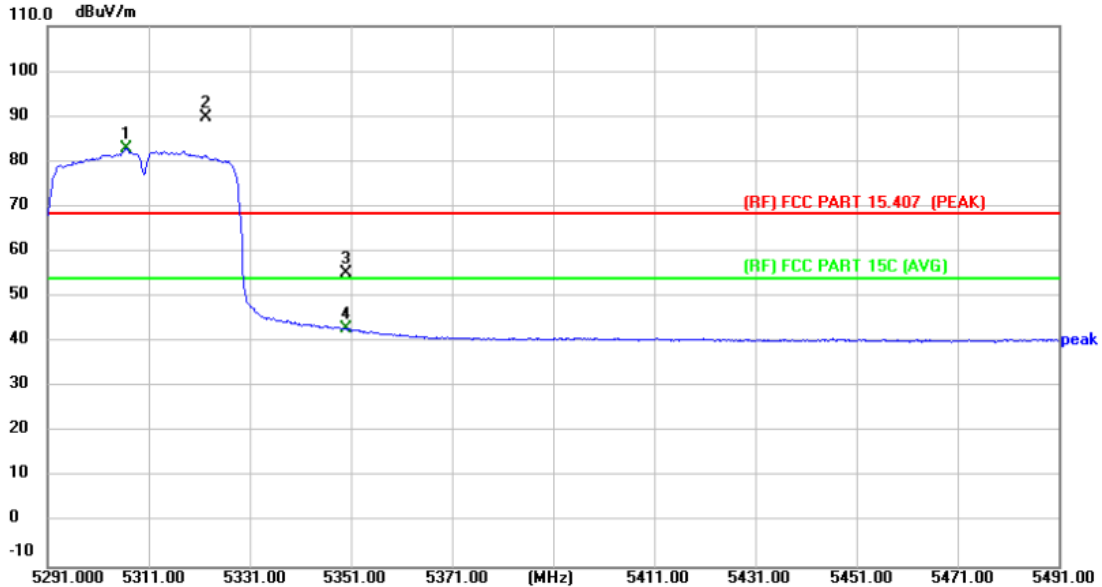

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5306.600	81.86	1.01	82.87	Fundamental Frequency		AVG
2 X	5322.200	88.60	1.07	89.67	Fundamental Frequency		peak
3	5350.000	53.99	1.19	55.18	68.30	-13.12	peak
4	5350.000	41.71	1.19	42.90	54.00	-11.10	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz Antenna 1+2		
Remark:	Only show the worst case.		

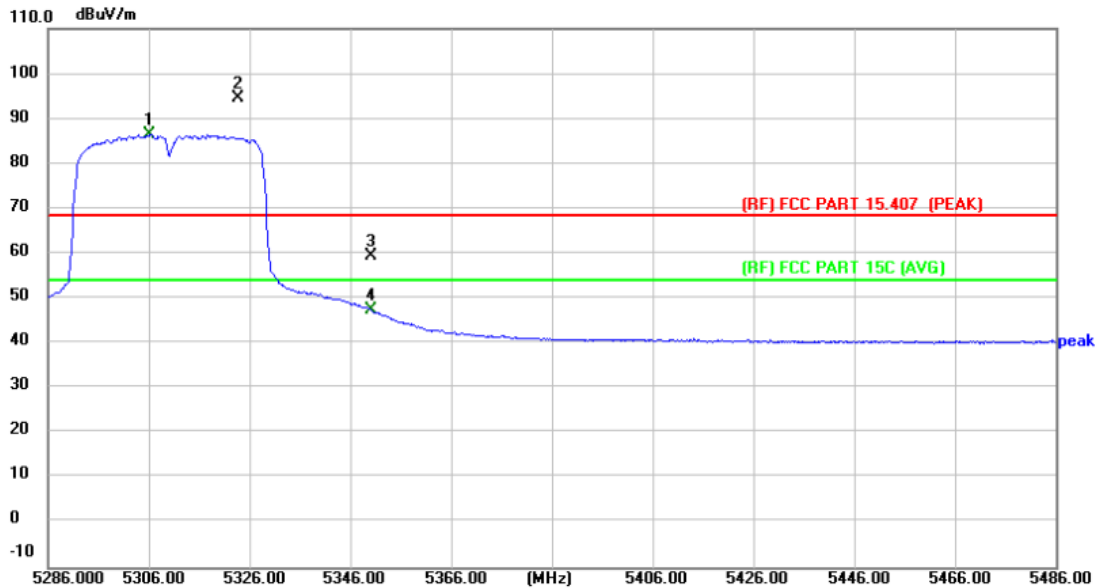


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5306.200	85.58	1.00	86.58	Fundamental Frequency		AVG
2 X	5323.800	93.34	1.09	94.43			peak
3	5350.000	58.38	1.19	59.57	68.30	-8.73	peak
4	5350.000	46.36	1.19	47.55	54.00	-6.45	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz Antenna 1+2		
Remark:	Only show the worst case.		

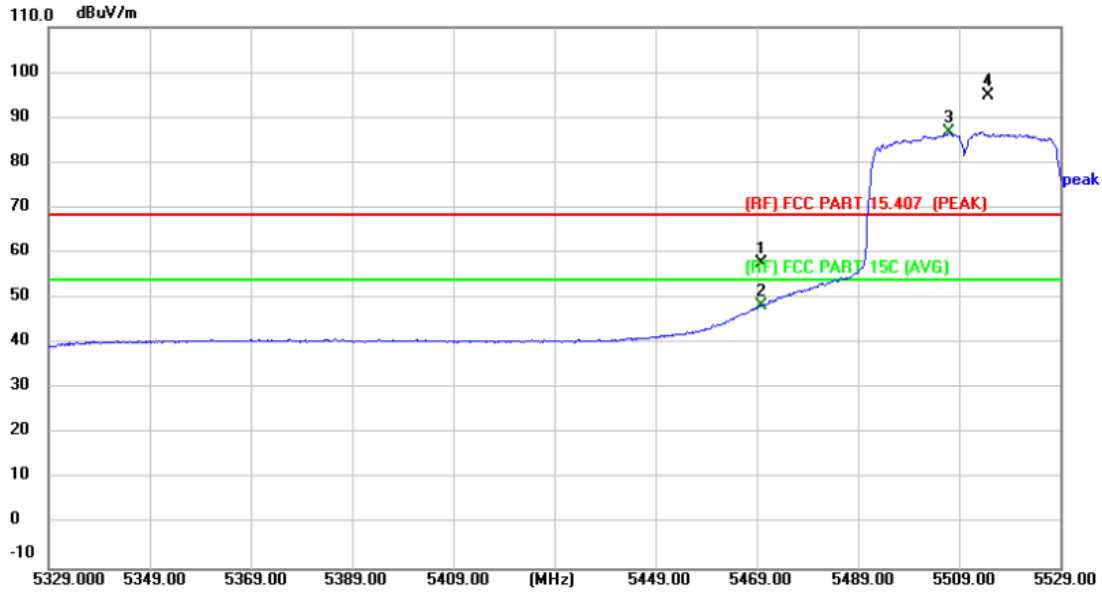

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	56.05	1.64	57.69	68.30	-10.61	peak
2	5470.000	46.79	1.64	48.43	54.00	-5.57	AVG
3 *	5507.000	85.08	1.72	86.80	Fundamental Frequency		AVG
4 X	5514.800	93.25	1.71	94.96	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz Antenna 1+2		
Remark:	Only show the worst case.		

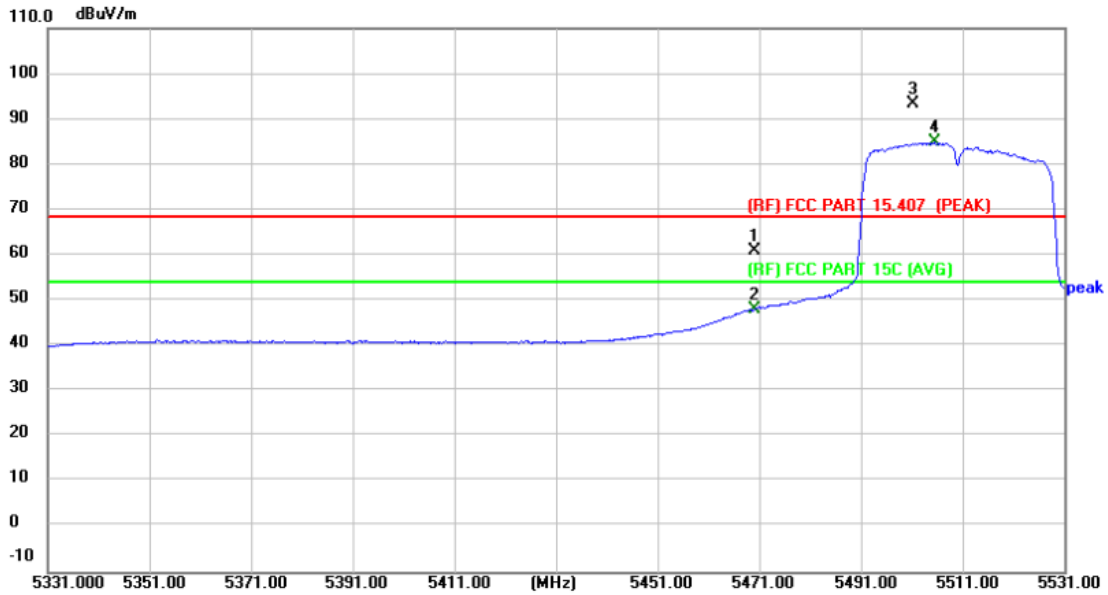


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	59.41	1.64	61.05	68.30	-7.25	peak
2	5470.000	46.33	1.64	47.97	54.00	-6.03	AVG
3 X	5501.200	91.61	1.73	93.34	Fundamental Frequency		peak
4 *	5505.400	83.12	1.72	84.84	Fundamental Frequency		AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5670MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

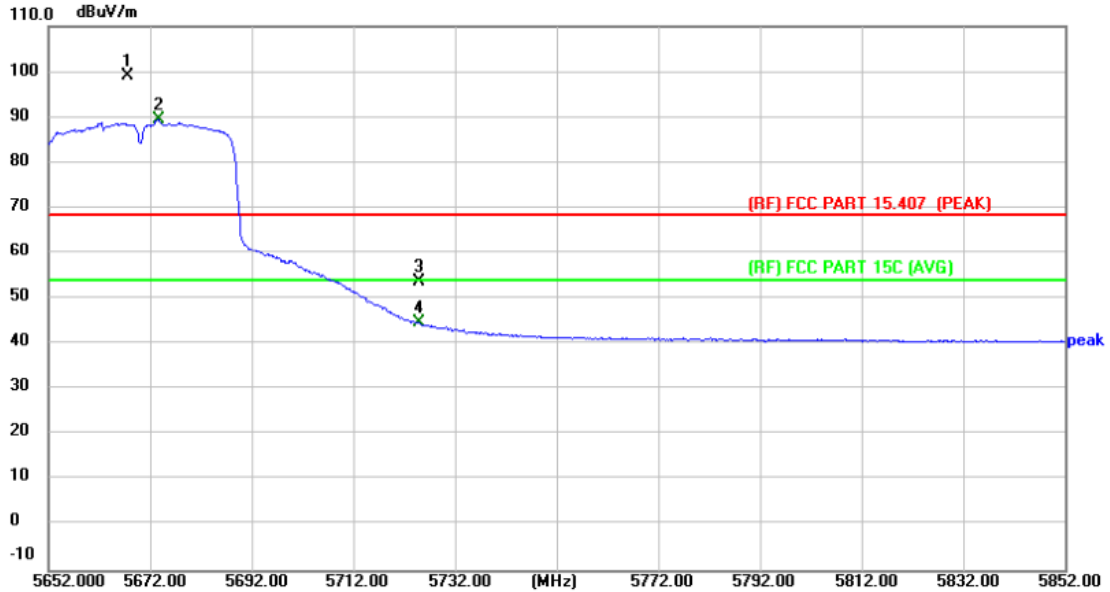

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5667.600	97.32	1.64	98.96	Fundamental Frequency		peak
2 *	5673.600	87.85	1.65	89.50	Fundamental Frequency		AVG
3	5725.000	52.09	1.60	53.69	68.30	-14.61	peak
4	5725.000	43.15	1.60	44.75	54.00	-9.25	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz Antenna 1+2		
Remark:	Only show the worst case.		

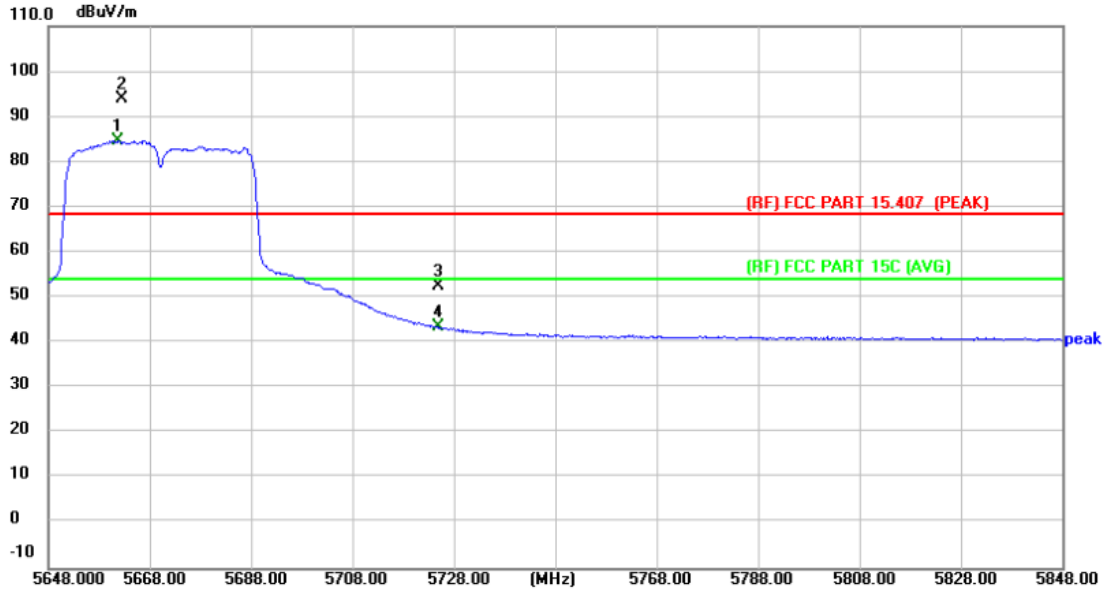


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5661.800	83.06	1.64	84.70	Fundamental Frequency		AVG
2 X	5662.600	92.34	1.64	93.98			peak
3	5725.000	51.00	1.60	52.60	68.30	-15.70	peak
4	5725.000	41.85	1.60	43.45	54.00	-10.55	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT40) Mode 5755MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

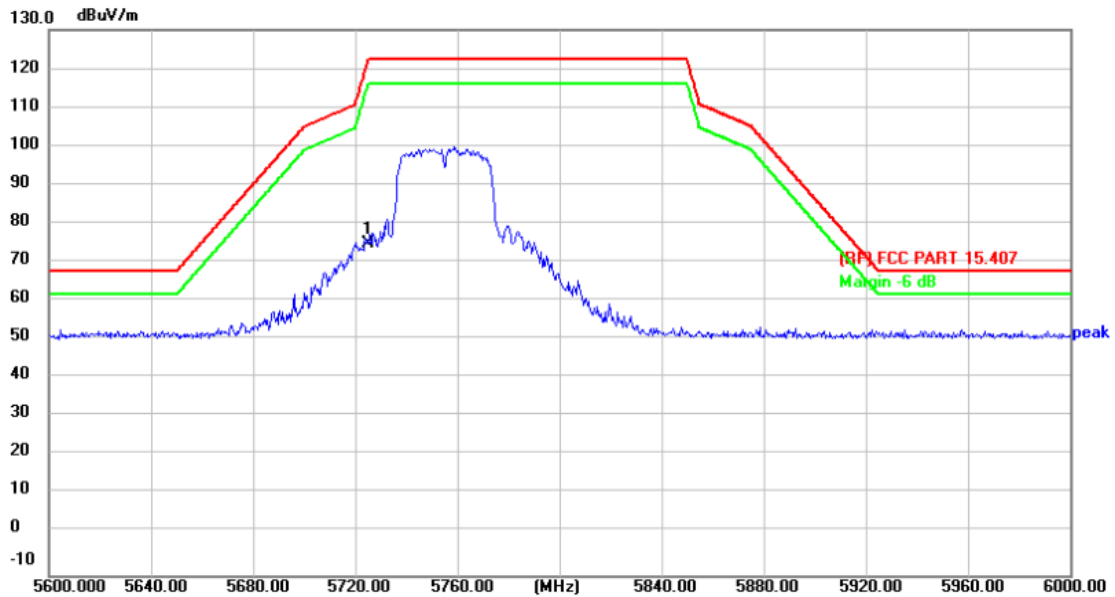

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	73.48	1.60	75.08	122.30	-47.22	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz Antenna 1+2		
Remark:	Only show the worst case.		

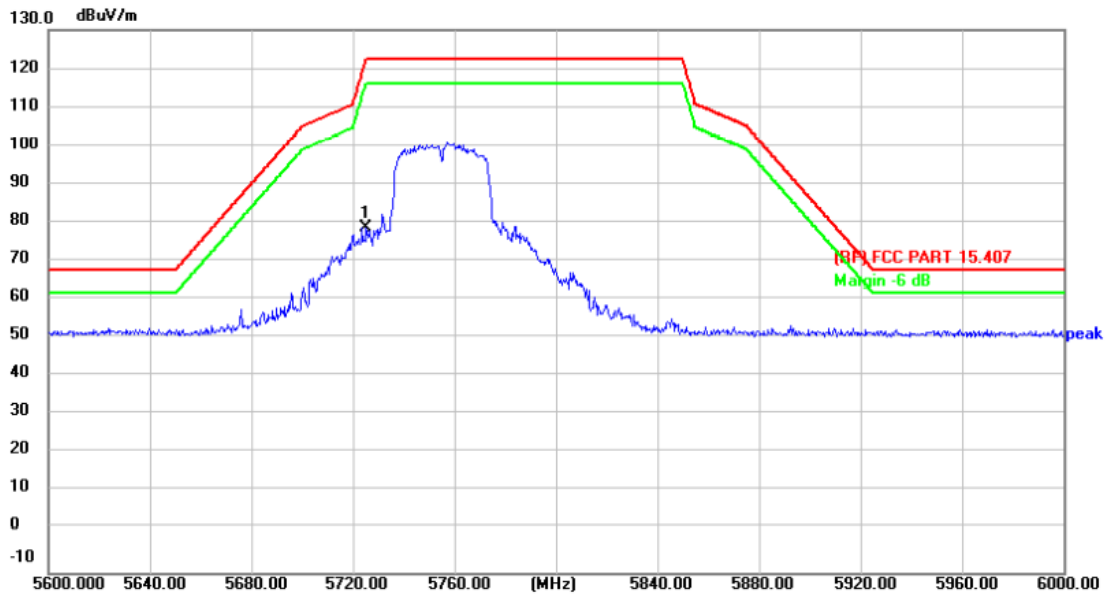


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	77.42	1.60	79.02	122.30	-43.28	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz Antenna 1+2		
Remark:	Only show the worst case.		

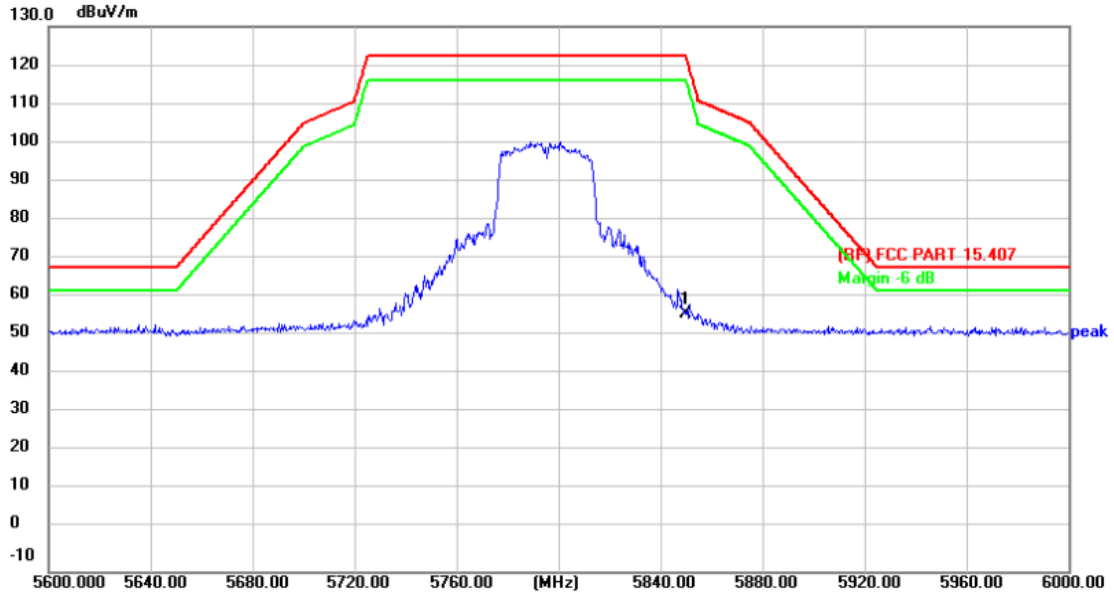

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	54.76	1.42	56.18	122.30	-66.12	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz Antenna 1+2		
Remark:	Only show the worst case.		

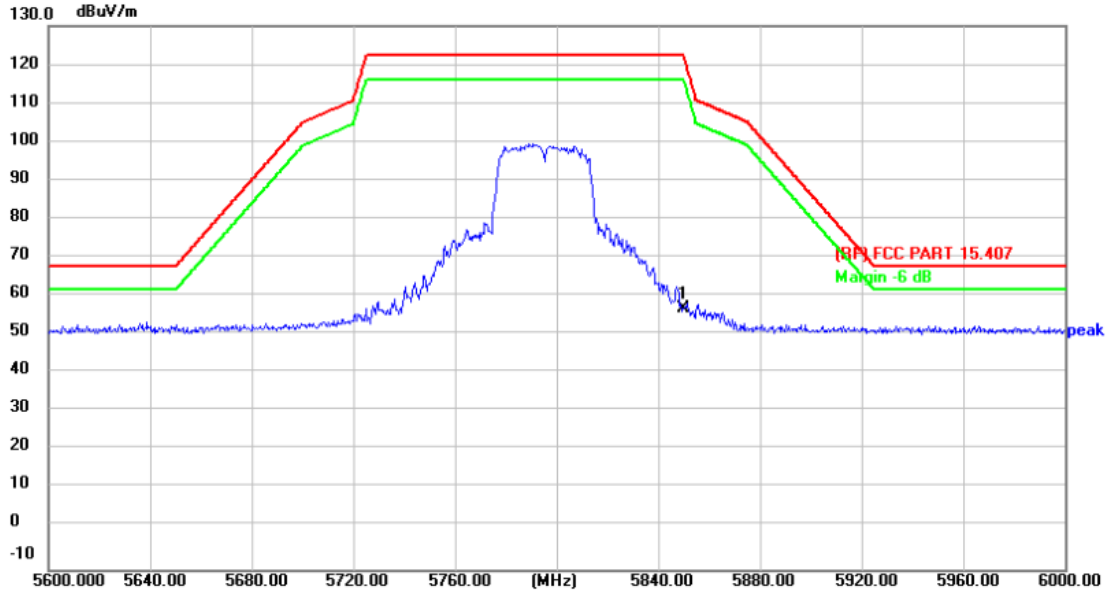


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	55.85	1.42	57.27	122.30	-65.03	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5210MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

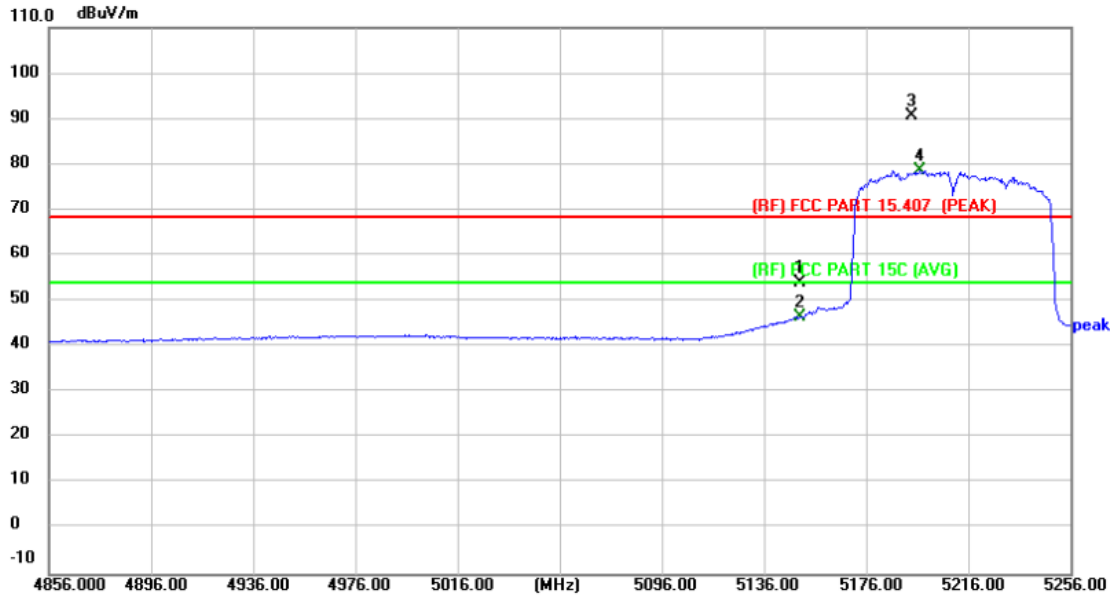

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	53.07	0.87	53.94	68.30	-14.36	peak
2	5150.000	45.79	0.87	46.66	54.00	-7.34	AVG
3 X	5193.600	89.56	0.96	90.52	Fundamental Frequency		peak
4 *	5197.200	77.75	0.96	78.71	Fundamental Frequency		AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz Antenna 1+2		
Remark:	Only show the worst case.		

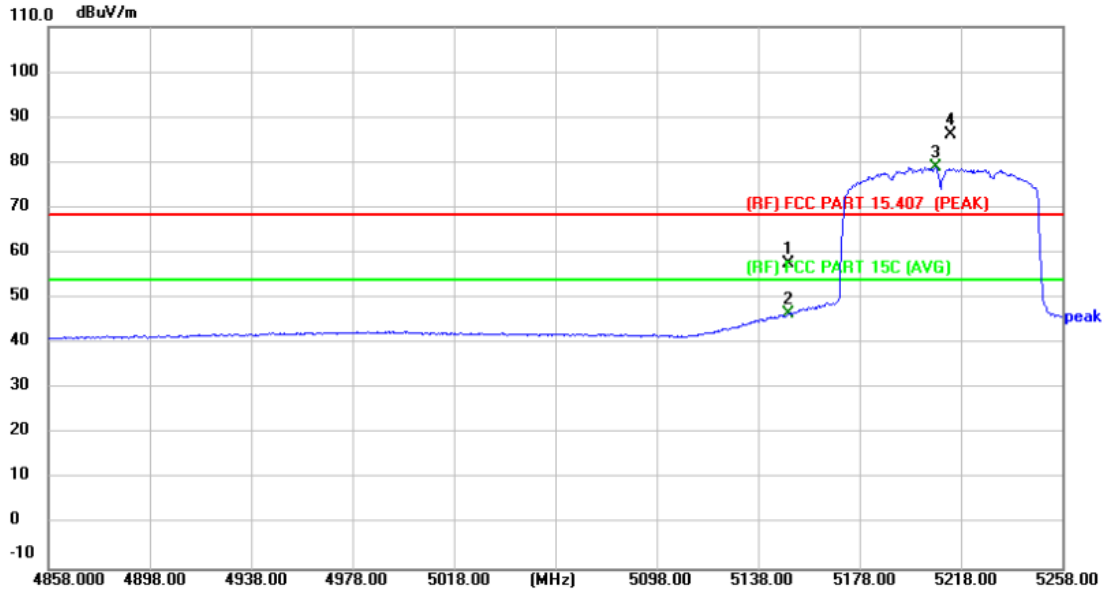


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	56.91	0.87	57.78	68.30	-10.52	peak
2	5150.000	45.56	0.87	46.43	54.00	-7.57	AVG
3 *	5208.000	77.99	0.97	78.96	Fundamental Frequency		AVG
4 X	5214.000	85.11	0.97	86.08	Fundamental Frequency		peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

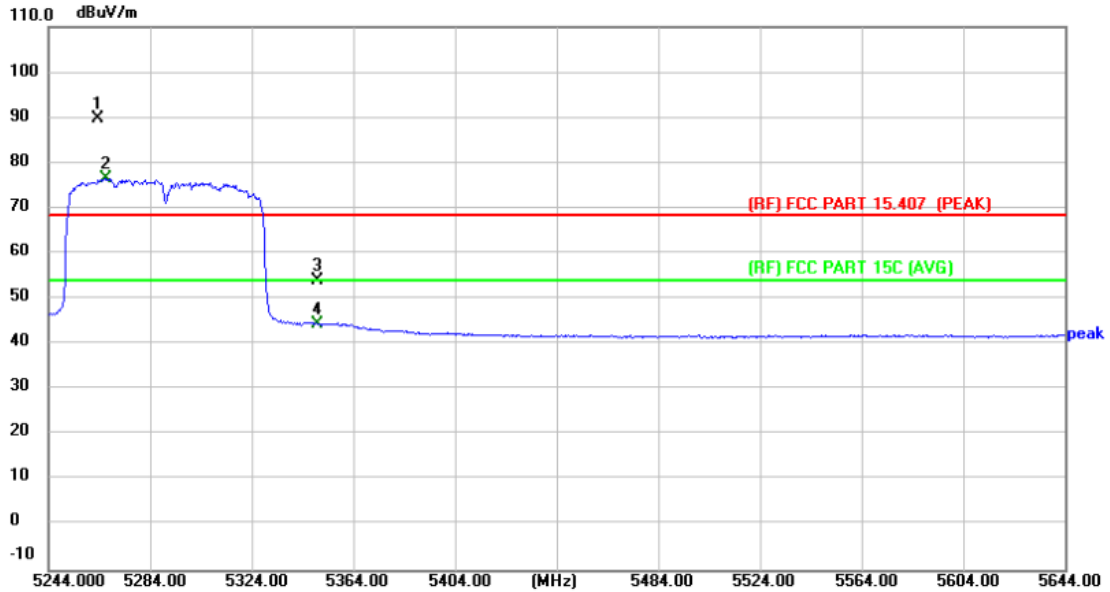

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 X	5263.200	88.89	0.98	89.87	Fundamental Frequency		peak
2 *	5266.800	75.68	0.97	76.65			AVG
3	5350.000	52.83	1.19	54.02	68.30	-14.28	peak
4	5350.000	43.19	1.19	44.38	54.00	-9.62	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5290MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

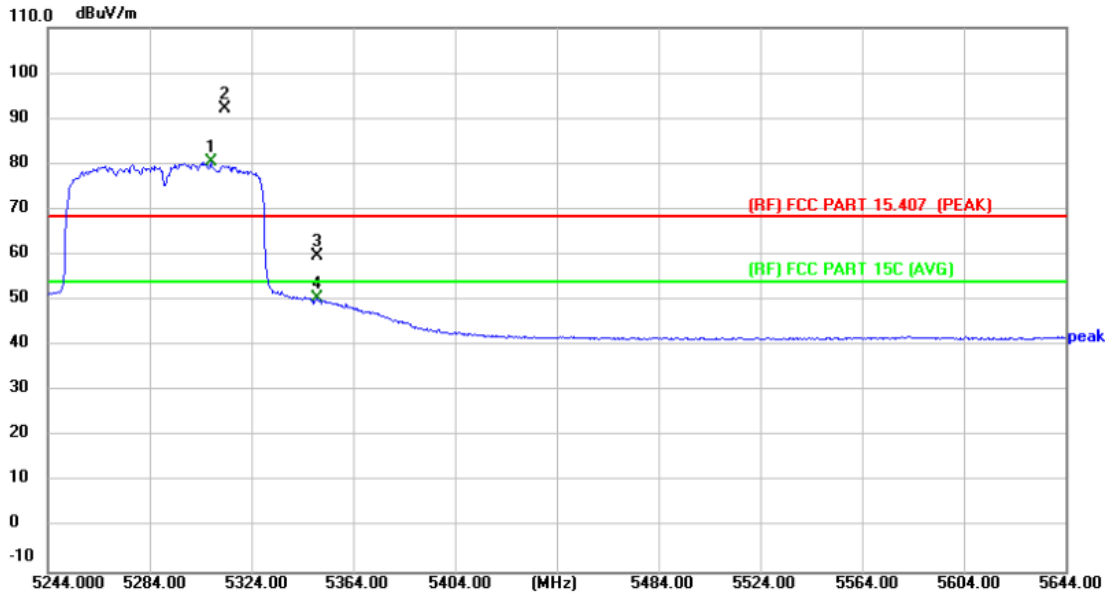


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5308.000	79.50	1.01	80.51	Fundamental Frequency		AVG
2 X	5313.600	91.14	1.04	92.18			peak
3	5350.000	58.53	1.19	59.72	68.30	-8.58	peak
4	5350.000	49.17	1.19	50.36	54.00	-3.64	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz Antenna 1+2		
Remark:	Only show the worst case.		

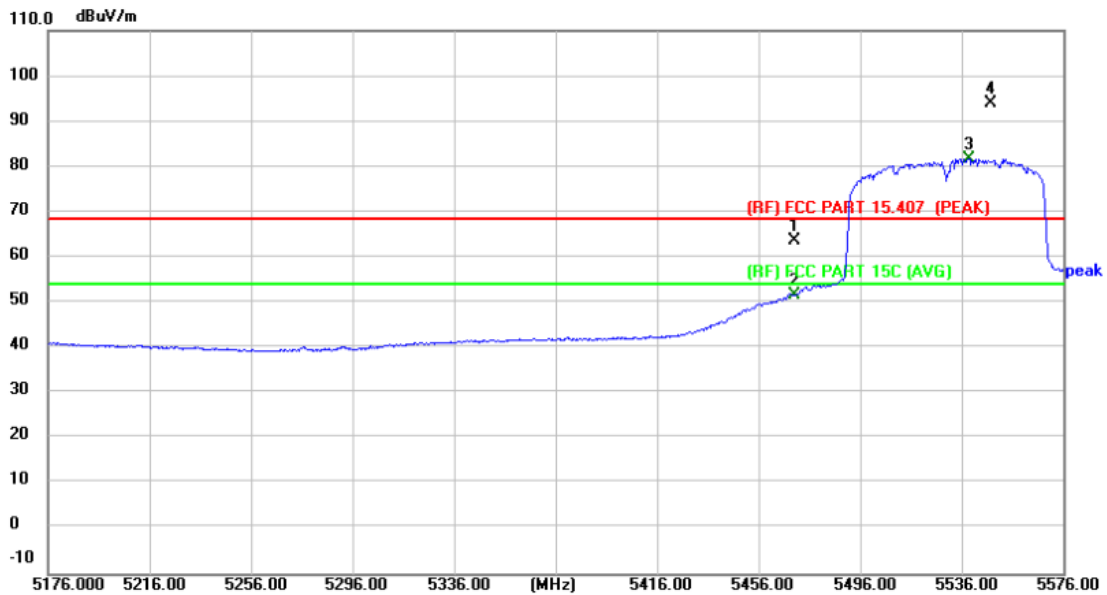

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	62.12	1.64	63.76	68.30	-4.54	peak
2	5470.000	49.90	1.64	51.54	54.00	-2.46	AVG
3 *	5538.800	80.02	1.67	81.69	Fundamental Frequency		AVG
4 X	5547.600	92.31	1.66	93.97	Fundamental Frequency		peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz Antenna 1+2		
Remark:	Only show the worst case.		

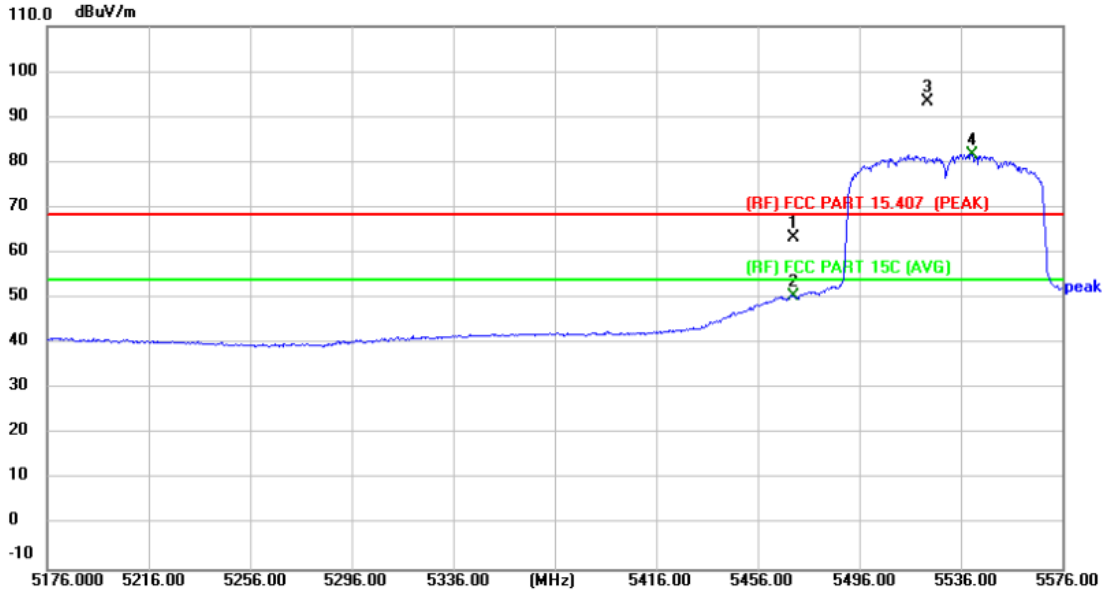


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	61.81	1.64	63.45	68.30	-4.85	peak
2	5470.000	48.79	1.64	50.43	54.00	-3.57	AVG
3 X	5522.800	91.63	1.70	93.33	Fundamental Frequency		peak
4 *	5540.400	80.13	1.67	81.80	Fundamental Frequency		AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5610MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

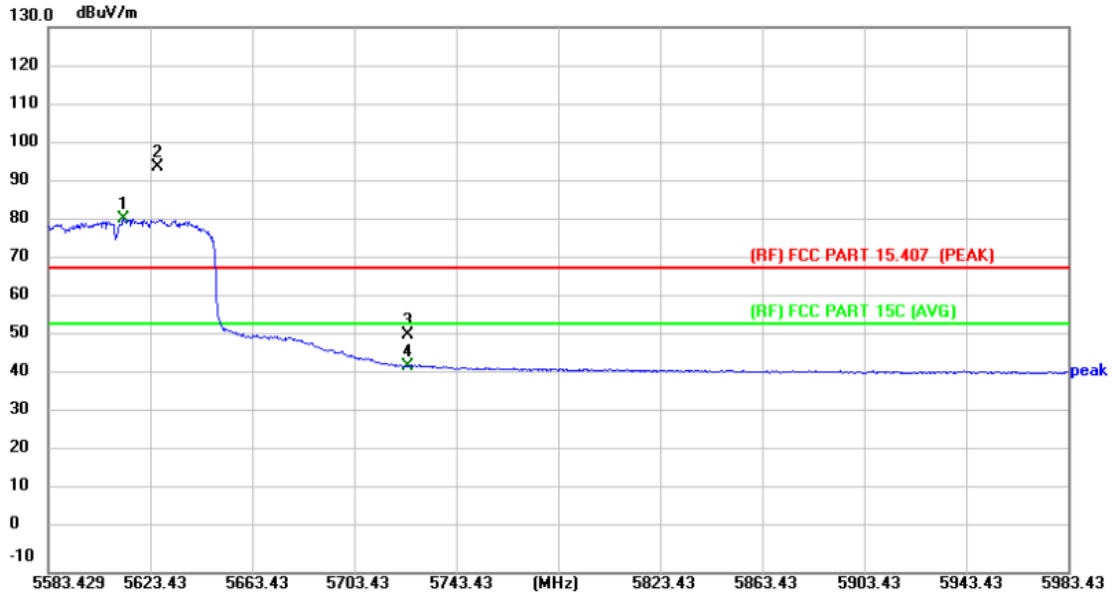

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5613.029	79.24	1.61	80.85	Fundamental Frequency		AVG
2 X	5626.229	92.49	1.61	94.10			Fundamental Frequency
3	5725.000	49.63	1.60	51.23	68.30	-17.07	peak
4	5725.000	41.50	1.60	43.10	54.00	-10.90	AVG


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1°C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz Antenna 1+2		
Remark:	Only show the worst case.		

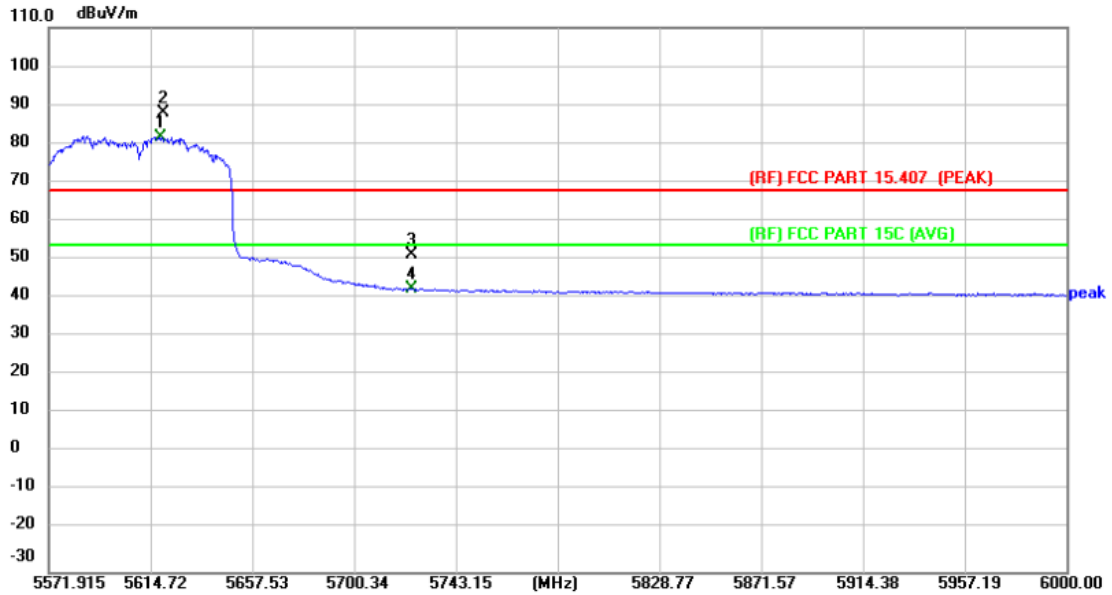


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5619.432	80.28	1.61	81.89	Fundamental Frequency		AVG
2 X	5619.861	86.64	1.61	88.25			Fundamental Frequency
3	5725.000	50.19	1.60	51.79	68.30	-16.51	peak
4	5725.000	41.24	1.60	42.84	54.00	-11.16	AVG

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



<b>Temperature:</b>	24.1 °C	<b>Relative Humidity:</b>	54%
<b>Test Voltage:</b>	DC 5V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 802.11ac(VHT80) Mode 5775MHz Antenna 1+2		
<b>Remark:</b>	Only show the worst case.		

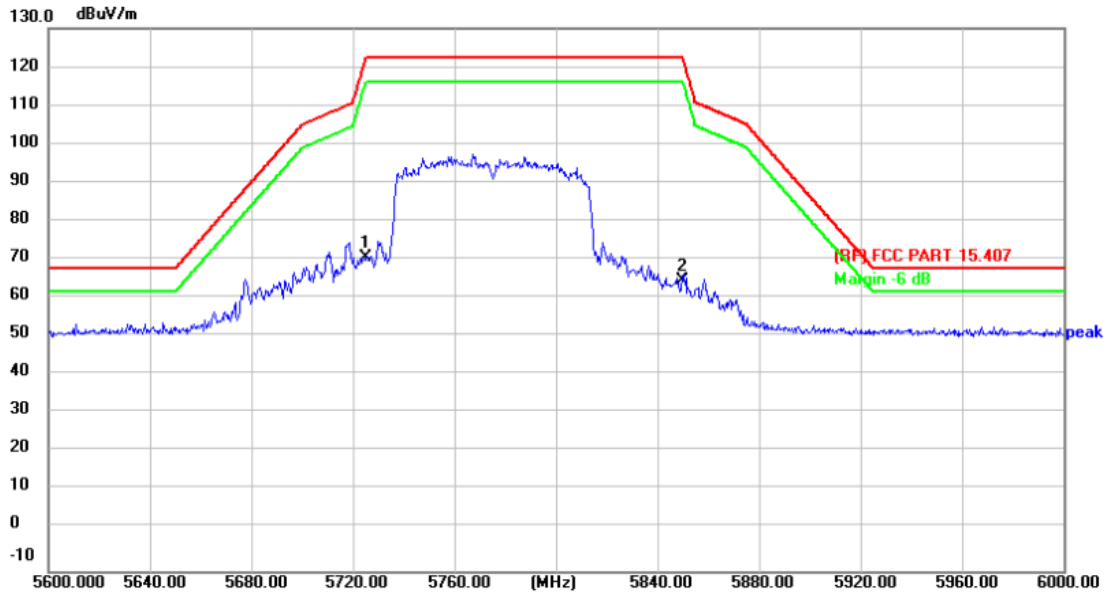

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	69.49	1.60	71.09	122.30	-51.21	peak
2	5850.000	63.50	1.42	64.92	122.30	-57.38	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)





Temperature:	24.1 °C	Relative Humidity:	54%
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz Antenna 1+2		
Remark:	Only show the worst case.		

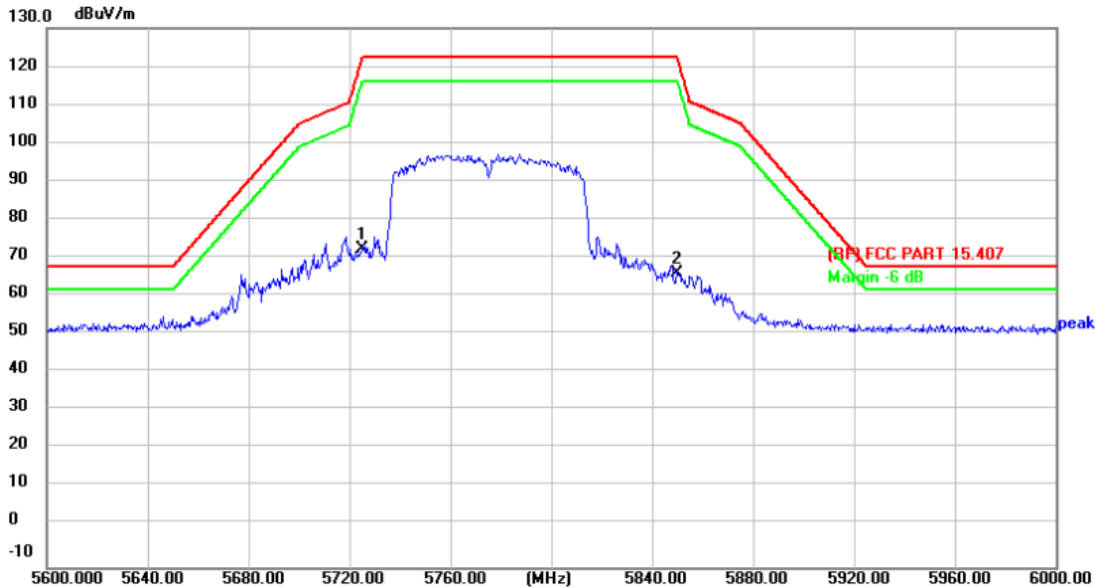

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	71.04	1.60	72.64	122.30	-49.66	peak
2	5850.000	64.99	1.42	66.41	122.30	-55.89	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

-----END OF REPORT-----

