



Product Name	NURO-CU-BLE-TW-V1				
Picture					
Performance					
Input1 Voltage (V)	DC25V~60V				
Input1 Current (A)	Max :1.3A				
Input1 Power (W)	60W				
Input2 Voltage (V)	12VDC				
Input2 Current (A)	Max: 0.045				
Input2 Power (W)	Max: 0.5				
Output Voltage (V)	DC25V~60V				
Output Current (A)	Max :1.3A				
Output Power (W)	60W				
Output Signal	0~10V				
PIR	No				
Photozell	No				
Microwave	No				
Ultrasonic	No				
Threshold on/ off	Yes				
Daylight Davesting	No				
Operating Temperature	-30°C~55°C				
Storage Temperature	-30°C~85°C				
Waterproof	Dry / Damp location				
Bluetooth Version	4.2/5.0				
Radio Frequency	2.4GHz±75Mhz				
Bluetooth transmit	75M (Max)				
Detection Range	32-80ft (Max)				
Mount Height	20-40ft (Max)				
Diameter (in. / mm)	50.3mm				
Length (in. / mm)	33.0mm				
Width (in. / mm)	26.3mm				
Surge (>500V)	N/A				
Ringwave(2.5KV)	N/A				
Warranty	5 years				
Housing Material	Plastic				
Wiring length input	250±10mm				
Wiring length output	400±10mm				
Used in outdoor fixture or not	Indoor				

Wiring diagram

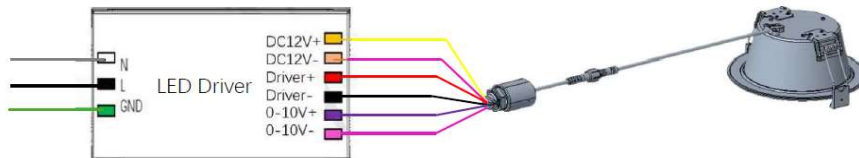

Dimension

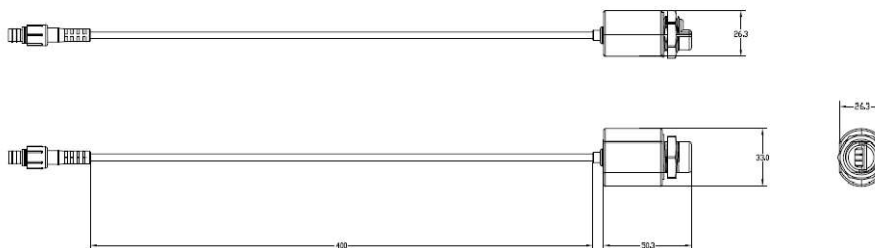

CAUTION

PLEASE READ INSTRUCTIONS BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCE.

Electrical products can cause death or injury, or damage to property. If any doubt about the installation or use of this product, consult a competent electrician.

· Account for small parts and destroy packing material, as these may be hazardous to children.

NOTICE: Minimum 90° supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location.

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

FCC Statement:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

The distance between user and products should be no less than 20cm