


User Manual

WIRELESS 2-IN-1 ADAPTER

AD-BA200




Quick Guide



Power On/Off

Slide the switch to **TX** or **RX** or **OFF**.

* Auto shutdown if no connection in 10mins.




Enter Pairing Status / Disconnect

Hold **OK** to enter pairing status.

1. To repair when connecting to the last connected devices.
2. To pair the second device.
3. To disconnect all the connected devices.

What's included



AD-BA200



Type-C Charging Cable




3.5mm Female to 2 RCA Male Cable

Specification


Bluetooth Profile	A2DP / HFP / AVRCP
Bluetooth Specification	Bluetooth 5.3
Audio Codec	TX: aptX™ / SBC RX: aptX™ / SBC / AAC
Working Range	15M
Battery Capacity	260mAh
Charging Power	6V DC
Working Hours	12H
Charging Time	1.5H
Weight	28.3g

Product Diagram

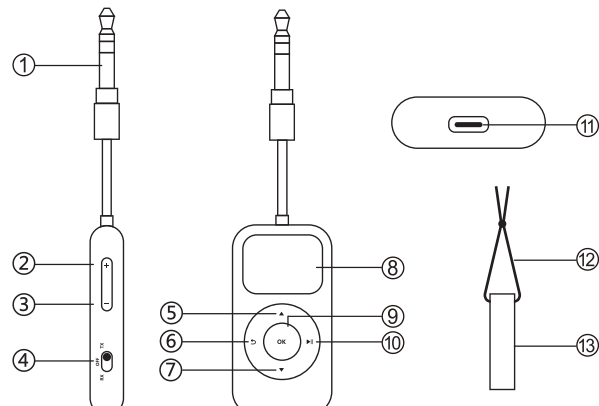

- ① 3.5mm Audio Jack
- ② Volume Up/Previous Track
- ③ Volume Down/Next Track
- ④ Slide Switch
- ⑤ Up Button
- ⑥ Back Button
- ⑦ Down Button
- ⑧ LCD Screen
- ⑨ Confirm/Pairing Button
- ⑩ Play/Pause Button
- ⑪ Type-C Charging Port
- ⑫ Leash String
- ⑬ Twist Cap

Transmitter (TX) Mode

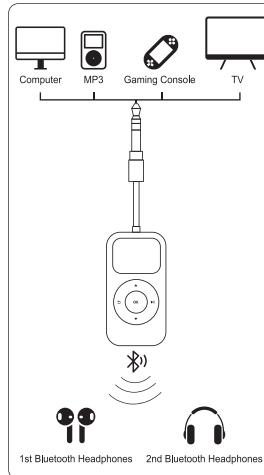

STEP 1: Connect Your Device

Unscrew the twist cap, plug the 3.5mm connector on AD-BA200 into your device via audio output interface.

*TV: 3.5mm connector + RCA connector.

STEP 2: Power On


Slide the switch to **TX** mode and enter pairing status.



*AD-BA200 will connect the last connected devices first if there is a pairing history, then enter pairing mode if connection fails.

STEP 3: Connect To The 1st Headphones

The pairing list is displayed according to the signal strength. Press **▲** or **▼** to select your device, then press **OK** to confirm connection.



If your device is not in the list, try placing your device close to AD-BA200 and press **↻** to search again.



STEP 4: Connect To The 2nd Headphones

Hold **OK** to enter pairing mode and connect the second device by following the same steps in **STEP 3** as you did with the first device.




STEP 5: Repair / Disconnect

Hold **OK** to repair when connecting to the last connected devices or disconnect all the connected devices.



*If you only want to disconnect one of your devices when you have already connected two devices, try to disconnect from that device or shutdown that device.

Receiver (RX) Mode

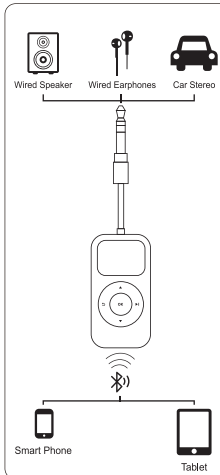

STEP 1: Connect Your Device

Unscrew the twist cap, plug the 3.5mm connector on AD-BA200 into your device.

*Wired Speaker: 3.5mm connector + RCA connector.

STEP 2: Power On


Slide the switch to **RX** mode and enter pairing status.



*AD-BA200 will connect the last connected devices first if there is a pairing history, then enter pairing mode if connection fails.

STEP 3: Connect To Your Device

Find "AD-BA200" on your device's Bluetooth search result and select it to connect.



STEP 4: Disconnect

Hold **OK** to disconnect the connected device and enter pairing status.



General Operation

Previous / Next Track


Press **▲** or **▼** to switch audio track.

*TX Mode Only.



Play / Pause

Press **▶||** to control play or pause.



Volume Up / Down

Press **+** or **-** to control volume.



Clear Pairing History

Hold **+** and **-** for 5s at the same time to clear the pairing history.



FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radiation Exposure Statement
The device has been evaluated to meet general RF exposure requirement in portable exposure condition without restriction.

Manufacturer

Shenzhen hanke Technology Co., Ltd
Address: Meipeng SKY311, Zhongxing Road, Longgang District, Shenzhen, Guangdong, China



Made in China

Warranty and Service

This product is covered with Aisidra product and labor warranty for 12 months from the date of its original purchase.

Any question welcome to contact us:

support@aisidra.com

Extend 2 years warranty:

www.warranty-hub.com

尺寸145*80mm

157G双铜，单色印刷，双面，风琴折页