



H Records

It records who comes and goes, and when for 24/7 access logs, get all records about the door unlock/lock anytime and anywhere.

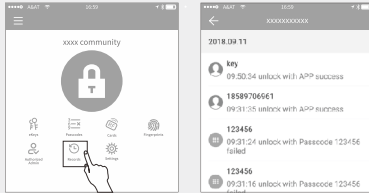


I Setting

In the system settings, it includes touch unlock switch, group management, gateway management, security settings, reminder, transfer smart lock and so on.



a User management


The user name and phone number can be seen in the user list. Click the customer you want to view to get the door lock information.

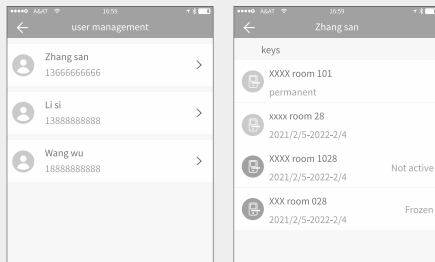

<24>

b Key groups management


In the case of a large number of keys, you can use group management module.



c Transfer admin rights


The administrator can transfer the lock to other users or to the apartment (Room Master user). Only the account that manages the lock has the right to transfer the lock. After inputting the account, you will receive a verification code. Filling in the correct number, you will transfer successfully.

⋯ The account of the apartment transfer receive must be the administrator account.

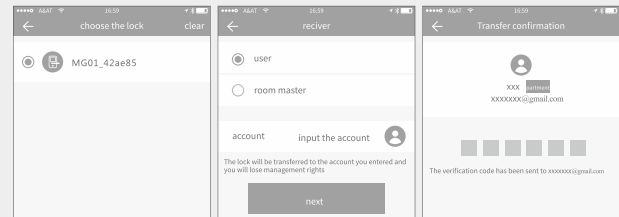

d Lock recycling station


If the lock is damaged and cannot be deleted, the lock can be deleted by moving it into the recycling station.



<25>

Auto re-lock mode

Auto re-lock mode can be set up in app. (5s, 10s, 15s, 30s, 60s, Custom.) When the lock be unlocked via app, passcode or RFID card, it will re-lock automatically in the reset time.

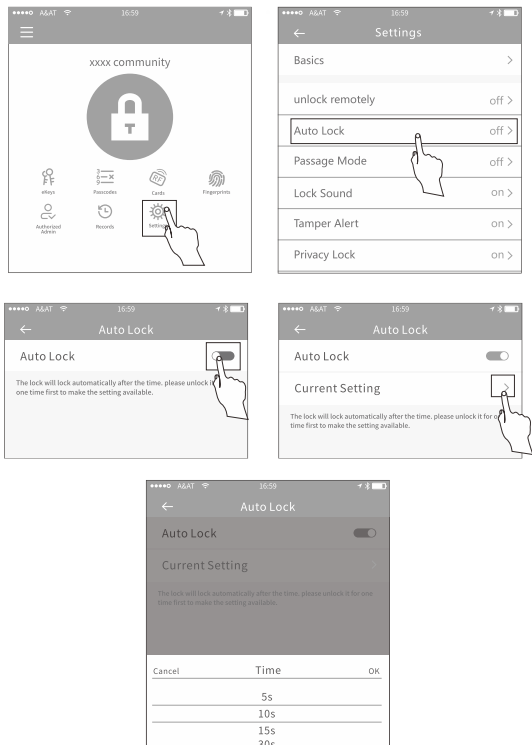

<26>

Gateway management

(Gateway needs to be purchased separately.)

The smart lock is directly connected via Bluetooth, that is why it is not attacked by the network. The gateway is a bridge between smart locks and home WIFI networks. Through the gateway, the user can remotely view and calibrate the lock clock, read the unlock record. Meanwhile, it can remotely delete and modify the password.




Gateways are added via an app before they can be used. Here are the steps:
(1) Open the TTLOCK app;
(2) Touch the "≡" icon on the top left of the screen;
(3) Select [Gateway];
(4) Select the "G2";
(5) Plug in the Gateway and power it on;
(6) While the light is flashing alternately in red and blue, press "+" sign;
(7) Add Gateway;
(8) Select the network and input your WiFi password.

⚠ Notice: If the above process times out, please power off and try again.

<27>

Low power

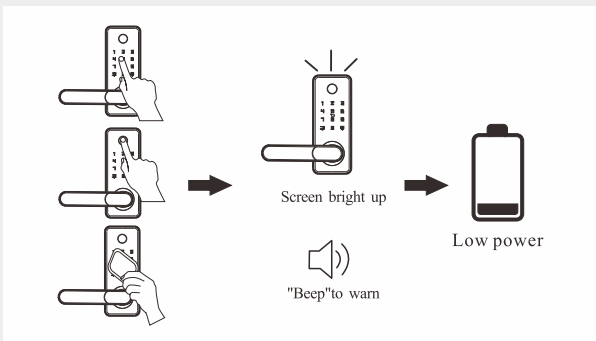


When the smart lock is opening, the screen will brighten up and “beep” to warn that the battery is low power.

Factory default setting

Settings	Factory Default
Master Code	123456
Auto Lock	Disabled
Silent Mode	Disabled
Wrong Code Entry Limit	5 times
Shutdown Time	5 mins


Emergency power

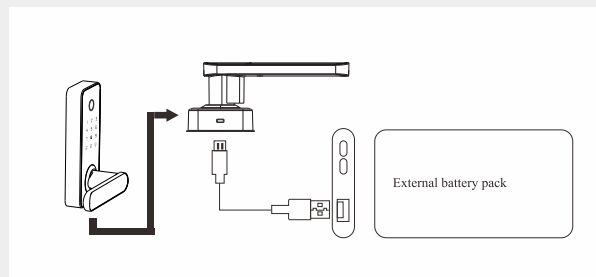


If the lock is low power and unable to operate, there is a micro USB power socket at the bottom of lock for power supply.

Restore factory settings

Restore on app



Select
“Settings”
in the app




Select “Delete”
and insert user
login password

Restore on lock

1. Press and hold the reset button.
2. Keep holding the reset button for 6 seconds, until you hear the sound of beep.

Note: This operation IC wired and battery need to be installed.

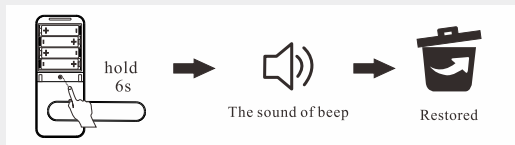

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This device should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

Troubleshooting

The turnpiece cannot rotate or operate the lock.

Remove and re-install the lock, making sure that the turnpiece is in right position.

The lock cannot be locked or unlocked by the keypad.

Make sure that the codes are not disabled. If needed, restore the lock's default settings.

The keypad doesn't respond when touched (no lights are visible and no beeping is heard).

Make sure the cables are properly connected, and make sure the batteries are new and installed correctly.

I forgot my Master Codes.

Perform a reset in order to erase all passcodes. Once the reset is complete, all passcodes will be erased and the Master code will return to the default value (123456).

The lock cannot connect app via bluetooth.

Please make sure the bluetooth is on. The app is ready to search the lock. If needed, restore the lock's default setting.

Multiple attempts unlock the door also failed to open.

Use the key to open the lock and change the battery. If needed, please contact customer service.

GEONFINO

Dear customer,

Greetings!

Thank you very much for your purchasing! We are so honored to have you as our customer, and we have great confidence to provide you with premium products and friendly service.

About GEONFINO

As an innovative and high technology corporation, GEONFINO is dedicated to R&D, designing, producing and marketing of Smart lock products. Our top-guns in the Smart lock field have constantly developed a series of products with features like fashion, human care, energy efficiency, and environment protection. And we highly value concepts of “People Oriented, Practical and Innovative.” a professional seller in the smart lock field will always be a nice company to your life!

Warranty

GEONFINO not only provides a 1-year warranty for all our products but also offers high-level after-sales service. Please kindly contact us immediately and we will supply a replacement or refund if you encounter any of the followings:

- 1.Receiving defective items;
- 2.Lacking of packaging
- 3.Parts are broken in transit;
- 4.Item stops working within warranty;
- 5.Wrong order.

Importance

Valuable customers, if you like our products and service, your positive feedback and reviews will be inspiring comments on our work. If you're dissatisfied with what you get, before writing negative feedback, please contact us, we will try our best to solve the issue to your satisfaction. Thanks for your vote of confidence again! Wish you a very happy life!

Best regards!

Customer Service E-mail: geonfino@afterservice.vip

Scan here to contact us
[24Hrs Online]



<https://geonfino.afterservice.vip>