

**FCC Part 22 Test Report  
Part 22H Subpart E****Report Reference No.** ..... : HK2411207047-7E**FCC ID.** ..... : 2A4FR-LS4G-6-G

Compiled by

( position+printedname+signature) .. : Testing Engineer Len Liao

Supervised by

(position+printedname+signature) ... : Technical Manager Sliver Wan

Approved by

(position+printedname+signature) ... : Authorized Signatory Jason Zhou

**Date of issue** ..... : Dec. 23, 2024**Testing Laboratory Name** ..... : **Shenzhen HUAK Testing Technology Co., Ltd.**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,  
Address ..... : Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,  
China**Applicant's name** ..... : **IGEN TECH CO.,Ltd.**Address ..... : Block F4, No. 200, Linghu Avenue, Wuxi, Jiangsu, P. R. China  
225400**Test specification** ..... :Standard ..... : **FCC CFR Title 47 Part 2, Part 22H**

TRF Originator ..... : Shenzhen HUAK Testing Technology Co., Ltd.

**Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** ..... : Stick Logger(4G)

Trade Mark ..... : N/A

**Manufacturer** ..... : **IGEN TECH CO.,Ltd.**

Model/Type reference ..... : LS4G-6-G

Series Models ..... : LS4G-6, LS4G-6-D, LS4G-6-C, LS4G-6K-D

Modulation Type ..... : QPSK,16QAM

Rating ..... : DC 5~12V 4W

Hardware version ..... : V2.0

Software version ..... : V2.0

Result ..... : **PASS**



## TEST REPORT

Test Report No. :	HK2411207047-7E	Dec. 23, 2024
		Date of issue

Equipment under Test : Stick Logger(4G)  
Model /Type : LS4G-6-G  
Series Models : LS4G-6, LS4G-6-D, LS4G-6-C, LS4G-6K-D  
**Applicant** : IGEN TECH CO.,Ltd.  
Address : Block F4, No. 200, Linghu Avenue, Wuxi, Jiangsu, P. R. China 225400  
**Manufacturer** : IGEN TECH CO.,Ltd.  
Address : Block F4, No. 200, Linghu Avenue, Wuxi, Jiangsu, P. R. China 225400

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



## Contents

<b>1</b>	<b><u>Test Standards</u></b>	<b>5</b>
<b>2</b>	<b><u>Summary</u></b>	<b>6</b>
<b>2.1</b>	<b>General Remarks</b>	<b>6</b>
<b>2.2</b>	<b>Product Description</b>	<b>6</b>
<b>2.3</b>	<b>Equipment under Test</b>	<b>6</b>
<b>2.4</b>	<b>Normal Accessory Setting</b>	<b>6</b>
<b>2.5</b>	<b>EUT Configuration</b>	<b>6</b>
<b>2.6</b>	<b>Related Submittal(s) / Grant (s)</b>	<b>7</b>
<b>2.7</b>	<b>Modifications</b>	<b>7</b>
<b>2.8</b>	<b>General Test Conditions/Configurations</b>	<b>7</b>
<b>3</b>	<b><u>Test Environment</u></b>	<b>8</b>
<b>3.1</b>	<b>Information of the Test Laboratory</b>	<b>8</b>
<b>3.2</b>	<b>Environmental Conditions</b>	<b>8</b>
<b>3.3</b>	<b>Test Description</b>	<b>8</b>
<b>3.4</b>	<b>Equipments Used During The Test</b>	<b>9</b>
<b>4</b>	<b><u>Test Conditions and Results</u></b>	<b>10</b>
<b>4.1</b>	<b>Output Power</b>	<b>10</b>
<b>4.2</b>	<b>Peak-to-Average Ratio (PAR)</b>	<b>15</b>
<b>4.3</b>	<b>Occupied Bandwidth and Emission Bandwidth</b>	<b>19</b>
<b>4.4</b>	<b>Band Edge Compliance</b>	<b>23</b>
<b>4.5</b>	<b>Spurious Emission on Antenna Port</b>	<b>27</b>
<b>4.6</b>	<b>Radiated Spurious Emission</b>	<b>40</b>
<b>4.7</b>	<b>Frequency Stability</b>	<b>45</b>
<b>5</b>	<b><u>Test Setup Photos of the EUT</u></b>	<b>47</b>
<b>6</b>	<b><u>External and Internal photos of the EUT</u></b>	<b>48</b>

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**\*\* Modified History \*\***

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Dec. 23, 2024	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 1 Test Standards

The tests were performed according to following standards:

FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

FCC Part 22 Subpart H: PRIVATE LAND MOBILE RADIO SERVICES.

ANSI/TIA-603-E-2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

FCC KDB 971168D01 v03r01 Power Meas License Digital Systems.



## 2 Summary

### 2.1 General Remarks

Date of receipt of test sample	:	Nov. 20, 2024
Testing commenced on	:	Nov. 20, 2024
Testing concluded on	:	Dec. 23, 2024

### 2.2 Product Description

Name of EUT:	Stick Logger(4G)
Model/Type reference:	LS4G-6-G
Series Models:	LS4G-6, LS4G-6-D, LS4G-6-C, LS4G-6K-D
Power supply:	DC 5~12V 4W
Modulation Type:	QPSK,16QAM
Antenna Type:	External Antenna
Antenna Gain:	2dBi
Operation Frequency Band:	LTE BAND 19
Operation frequency:	LTE BAND 19:830~845MHz
LTE Release:	R8
Extreme temp. Tolerance:	-30°C to +50°C
Extreme vol. Limits:	4.25VDC to 5.75VDC (nominal: 5VDC)

### 2.3 Equipment under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V/ 60 Hz	<input type="radio"/> 115V/60Hz	
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC	
		<input checked="" type="radio"/> Other (specified in blank below)		

DC 5~12V 4W

### 2.4 Normal Accessory Setting

Fully charged battery was used during the test.

### 2.5 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended filing to comply with FCC Part 22H, Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.

## 2.8 General Test Conditions/Configurations

### 2.10.1 Test Environment

EnvironmentParameter	SelectedValuesDuringTests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	4.25V
	VN	5V
	VH	5.75V

NOTE: VL=lower extreme test voltage VN=nominal voltage

VH=upper extreme test voltage TN=normal temperature



### 3 Test Environment

#### 3.1 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.  
FCC Designation Number is CN1229.  
Canada IC CAB identifier is CN0045.  
CNAS Registration Number is L9589.

#### 3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

#### 3.3 Test Description

##### Band 19 (830~845 MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913(a)(2)	FCC: ERP ≤ 7W.	Pass
Peak-Average Ratio	§24.232(d)	FCC:Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	§2.1051, §22.917	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to Thefrequency block.	Pass
Spurious Emission at AntennaTerminals	§2.1051, §22.917	≤ -13dBm/1MHz, from9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §22.355,	FCC:within authorized frequency block.	Pass

NOTE 1:For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.



### 3.4 Equipments Used During The Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2024/02/20	2025/02/19
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC051845S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6d Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



## 4 Test Conditions and Results


### 4.1 Output Power

#### 4.1.1 Conducted Output Power

##### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

##### TEST CONFIGURATION

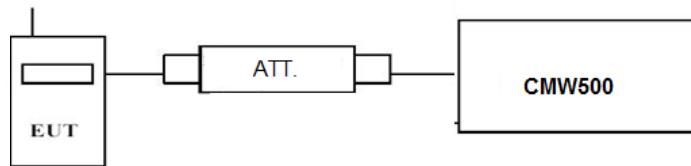

##### TEST PROCEDURE

###### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

##### TEST RESULTS

###### compliance \*

###### *Remark:*

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19;*

TX Channel Bandwidth	Frequency (MHz)	LTE FDD Band 19	
		RB Size/Offset	Average Power [dBm]
5 MHz	832.5	QPSK	QPSK
		1 RB low	20.81
		1 RB high	20.71
		50% RB mid	20.98
	837.5	100% RB	20.84
		1 RB low	20.99
		1 RB high	20.87
		50% RB mid	20.80
	842.5	100% RB	20.73
		1 RB low	21.01
		1 RB high	20.96
		50% RB mid	21.01
10 MHz	835.0	100% RB	20.89
		1 RB low	20.87
		1 RB high	20.87
		50% RB mid	21.13
	837.5	100% RB	21.18
		1 RB low	21.01
		1 RB high	21.32
		50% RB mid	21.23

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



	840.0	1 RB low	20.80	21.22
		1 RB high	20.87	20.94
		50% RB mid	21.18	20.83
		100% RB	21.16	20.87
15 MHz	837.5	1 RB low	20.85	21.16
		1 RB high	21.39	21.23
		50% RB mid	21.33	21.22
		100% RB	21.01	21.30

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




#### 4.1.2. Radiated Output Power

##### LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H. 913(a)(2) specifies, "Mobile/portable stations are limited to 7 watts ERP.

##### TEST CONFIGURATION

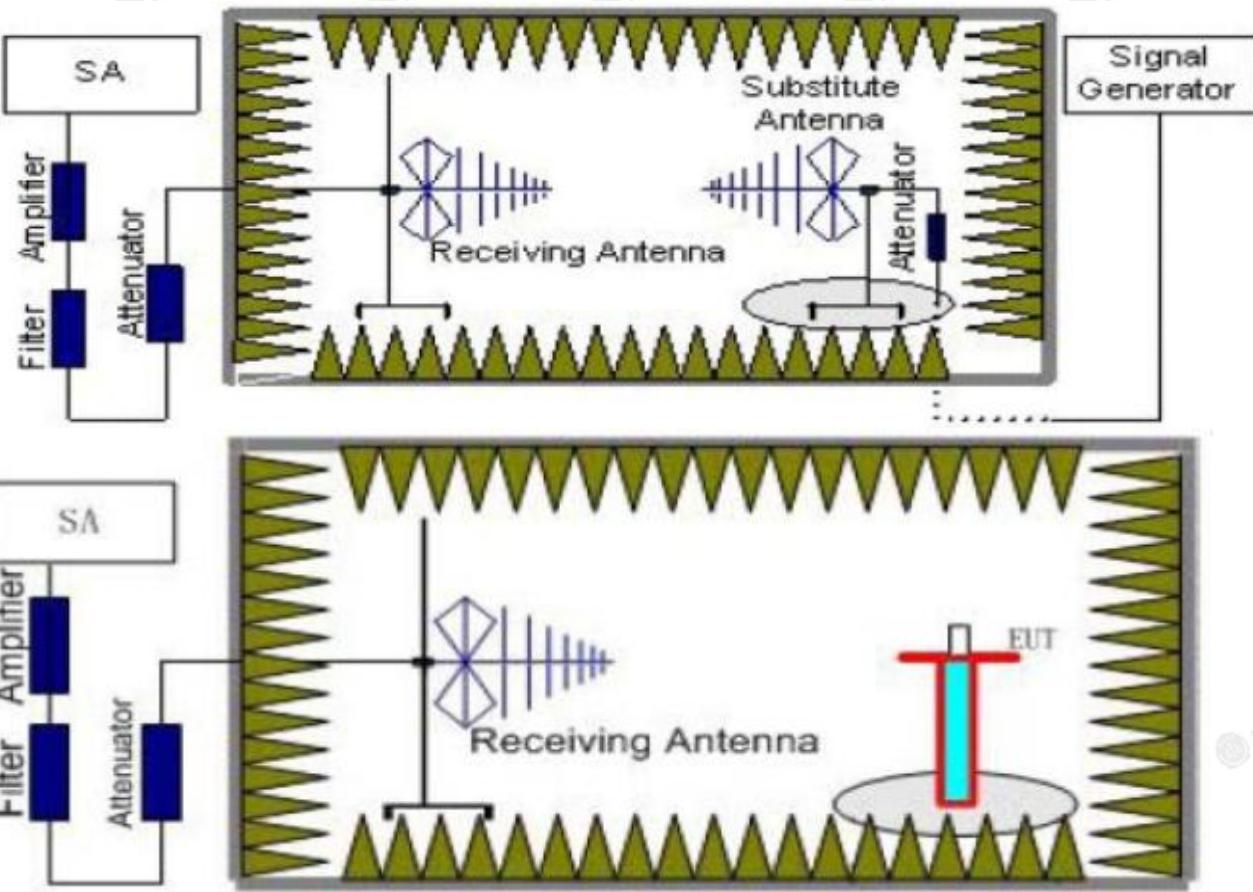

##### TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>



5. reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:  $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .

## TEST RESULTS

### Radiated Measurement:

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19; recorded worst case for each Channel Bandwidth of LTE FDD Band 19.
2.  $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. Margin = Limit - ERP
4. We measured both Horizontal and Vertical direction, recorded worst case direction.

#### LTE FDD Band 19\_Channel Bandwidth 5MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
832.5	-18.36	2.42	8.45	36.82	24.49	22.34	38.45	16.11	V
837.5	-17.72	3.46	8.45	36.82	24.09	21.94	38.45	16.51	V
842.5	-18.17	2.53	8.36	36.82	24.48	22.33	38.45	16.12	V

#### LTE FDD Band 19\_Channel Bandwidth 10MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
835.0	-18.35	2.42	8.45	36.82	24.5	22.35	38.45	16.1	V
837.5	-16.86	3.46	8.45	36.82	24.95	22.8	38.45	15.65	V
840.0	-18.61	2.53	8.36	36.82	24.04	21.89	38.45	16.56	V

#### LTE FDD Band 19\_Channel Bandwidth 15MHz\_QPSK

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
837.5	-17.1	3.46	8.45	36.82	24.71	22.56	38.45	15.89	V

#### LTE FDD Band 19\_Channel Bandwidth 5MHz\_16QAM

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
832.5	-18.1	2.42	8.45	36.82	24.75	22.6	38.45	15.85	V
837.5	-17.9	3.46	8.45	36.82	23.91	21.76	38.45	16.69	V
842.5	-18.67	2.53	8.36	36.82	23.98	21.83	38.45	16.62	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## LTE FDD Band 19\_Channel Bandwidth 10MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
835.0	-18.11	2.42	8.45	36.82	24.74	22.59	38.45	15.86	V
837.5	-16.78	3.46	8.45	36.82	25.03	22.88	38.45	15.57	V
840.0	-18.16	2.53	8.36	36.82	24.49	22.34	38.45	16.11	V

## LTE FDD Band 19\_Channel Bandwidth 15MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Ag</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
837.5	-16.62	3.46	8.45	36.82	25.19	23.04	38.45	15.41	V




## 4.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

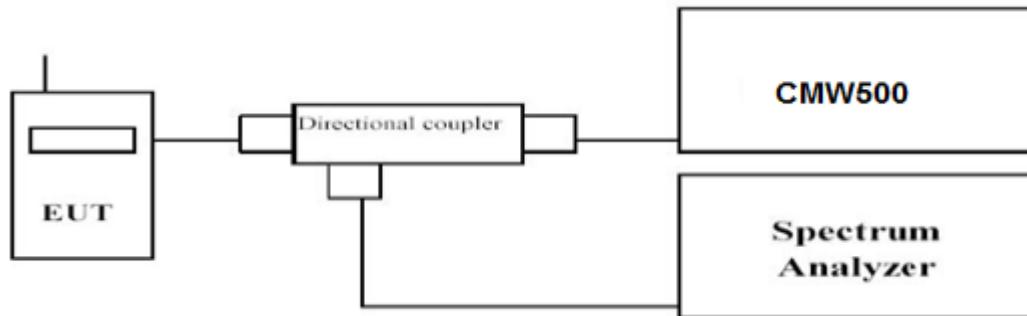

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms;
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.


### TEST RESULTS

#### *Remark:*


1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19; recorded worst case for each Channel Bandwidth of LTE FDD Band 19.

LTE FDD Band 19				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
5 MHz	832.5	1RB#0	8.03	9.50
	837.5		9.12	9.86
	842.5		9.63	9.79
10 MHz	835.0	1RB#0	7.74	7.86
	837.5		10.03	10.35
	840.0		9.51	10.75
15 MHz	837.5	1RB#0	8.66	9.68


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

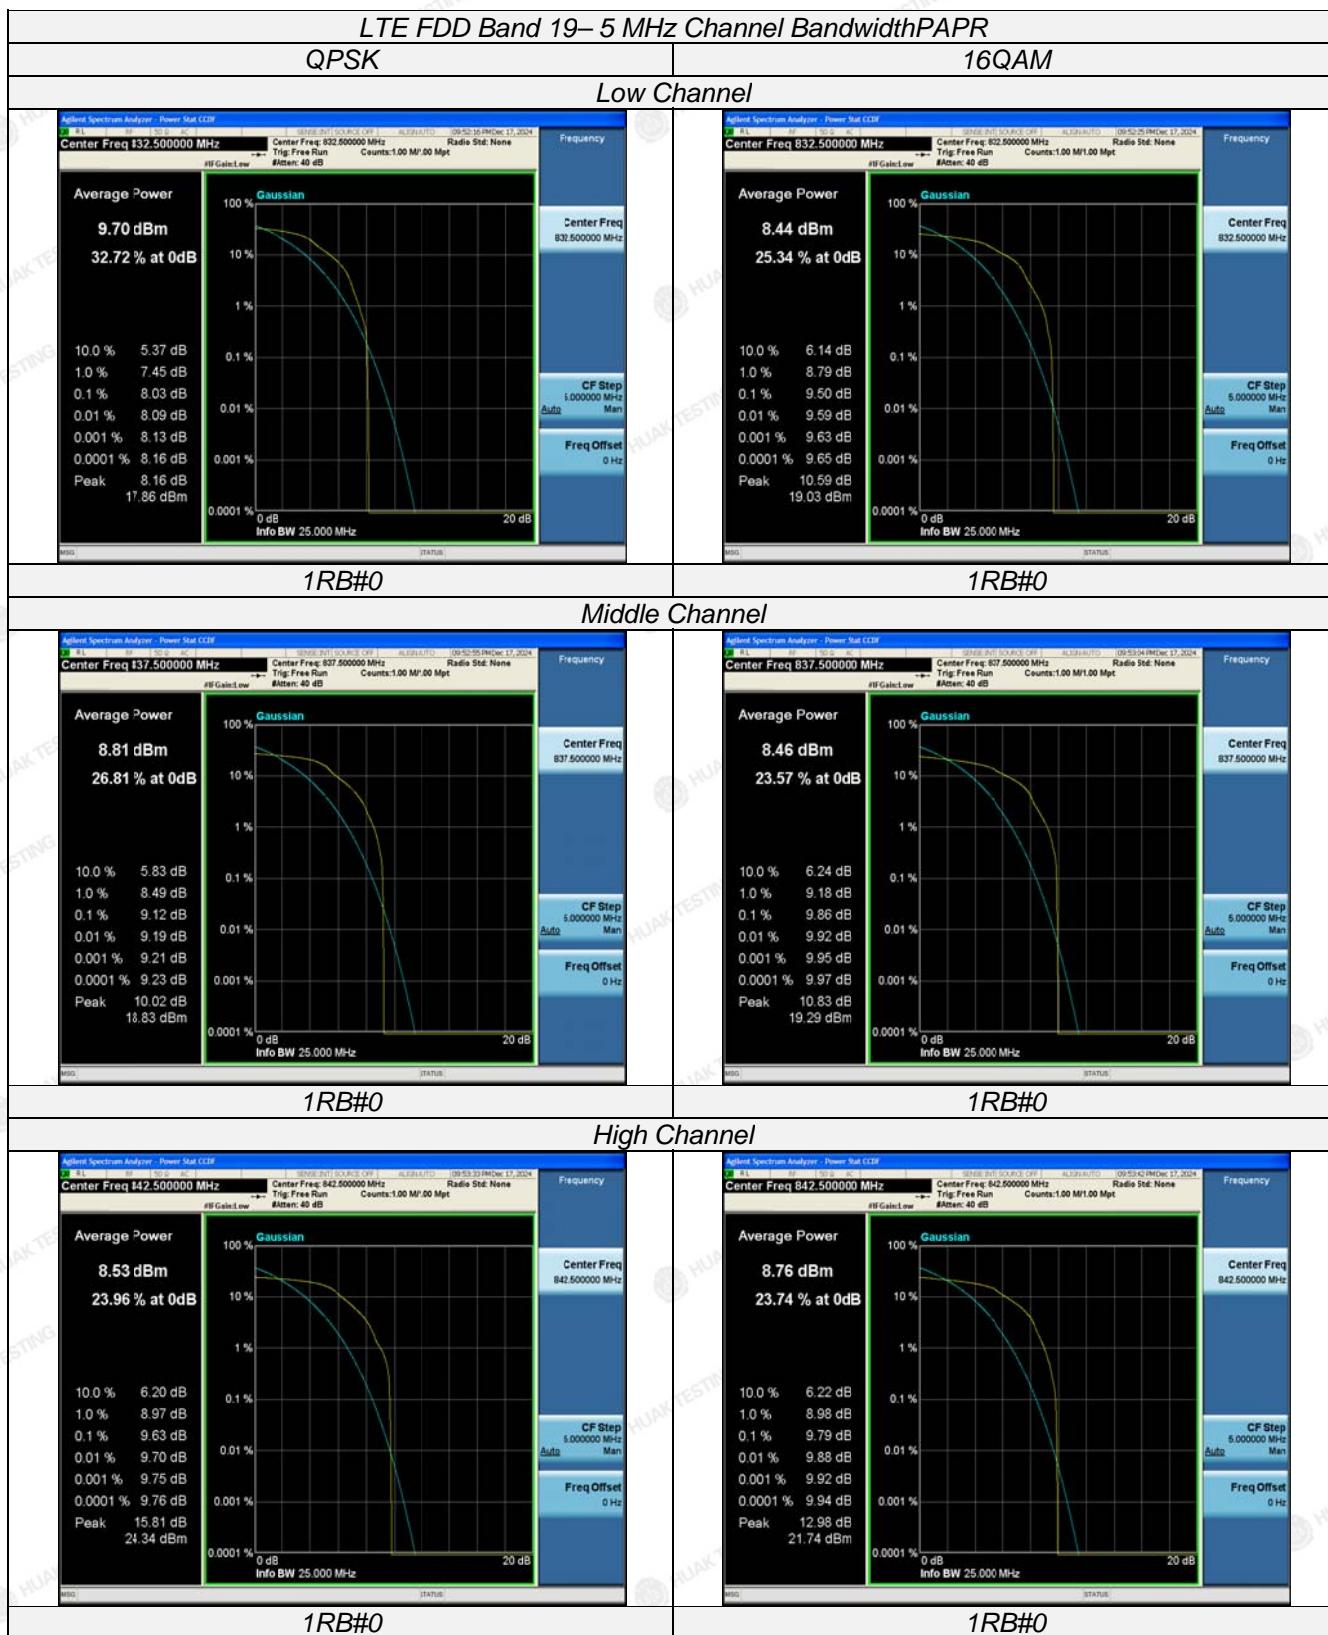

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

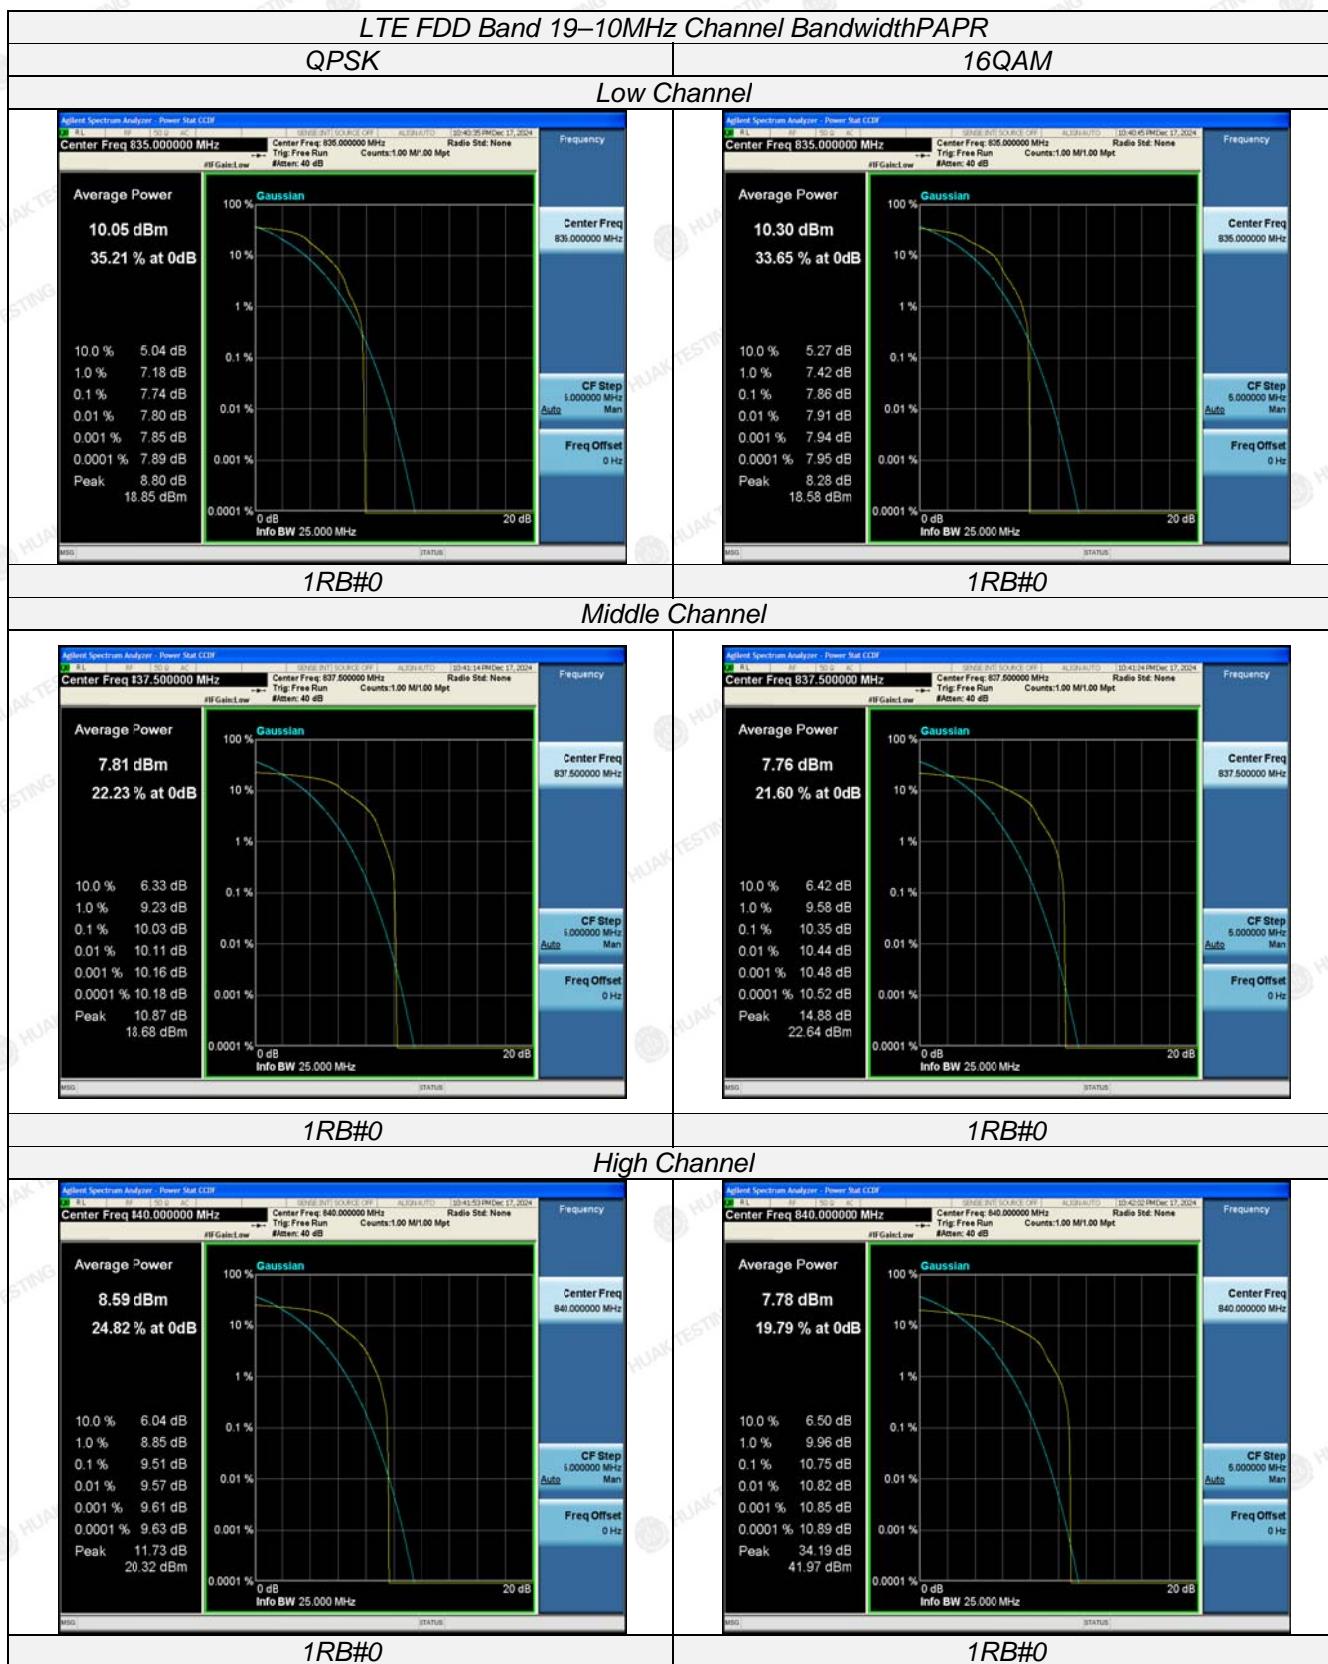

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

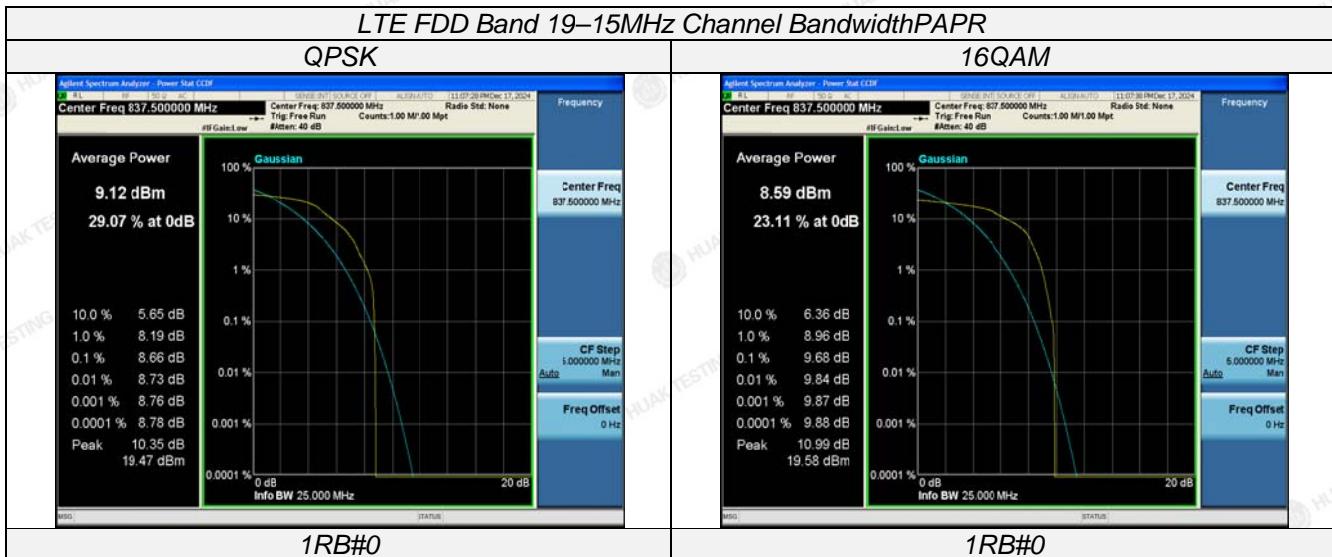

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




### 4.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

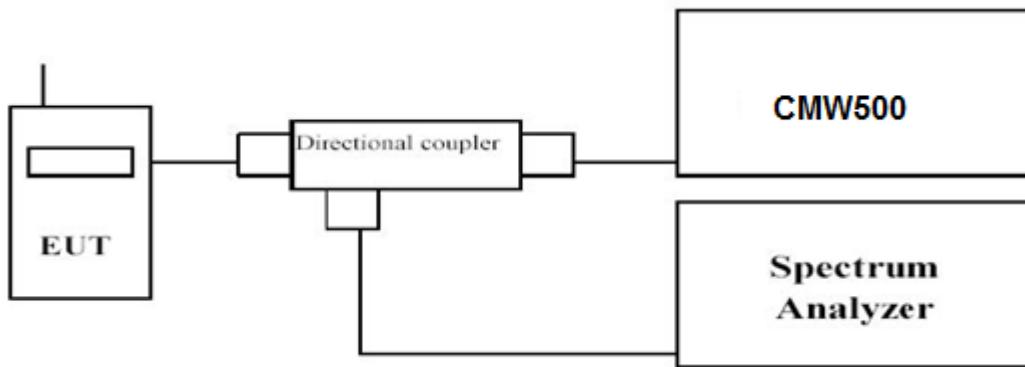

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW,  $VBW \geq 3$  times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


#### TEST RESULTS

##### *Remark:*


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19; recorded worst case for each Channel Bandwidth of LTE FDD Band 19.

LTE FDD Band 19						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	6RB#0	832.5	1.307	1.291	1.0901	1.0891
		837.5	1.314	1.306	1.1046	1.1017
		842.5	1.296	1.298	1.0988	1.1011
10 MHz	6RB#0	835.0	1.288	1.292	1.1007	1.1034
		837.5	1.322	1.317	1.0958	1.0989
		840.0	1.284	1.305	1.1018	1.1042
15 MHz	6RB#0	837.5	1.306	1.297	1.1124	1.1062


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

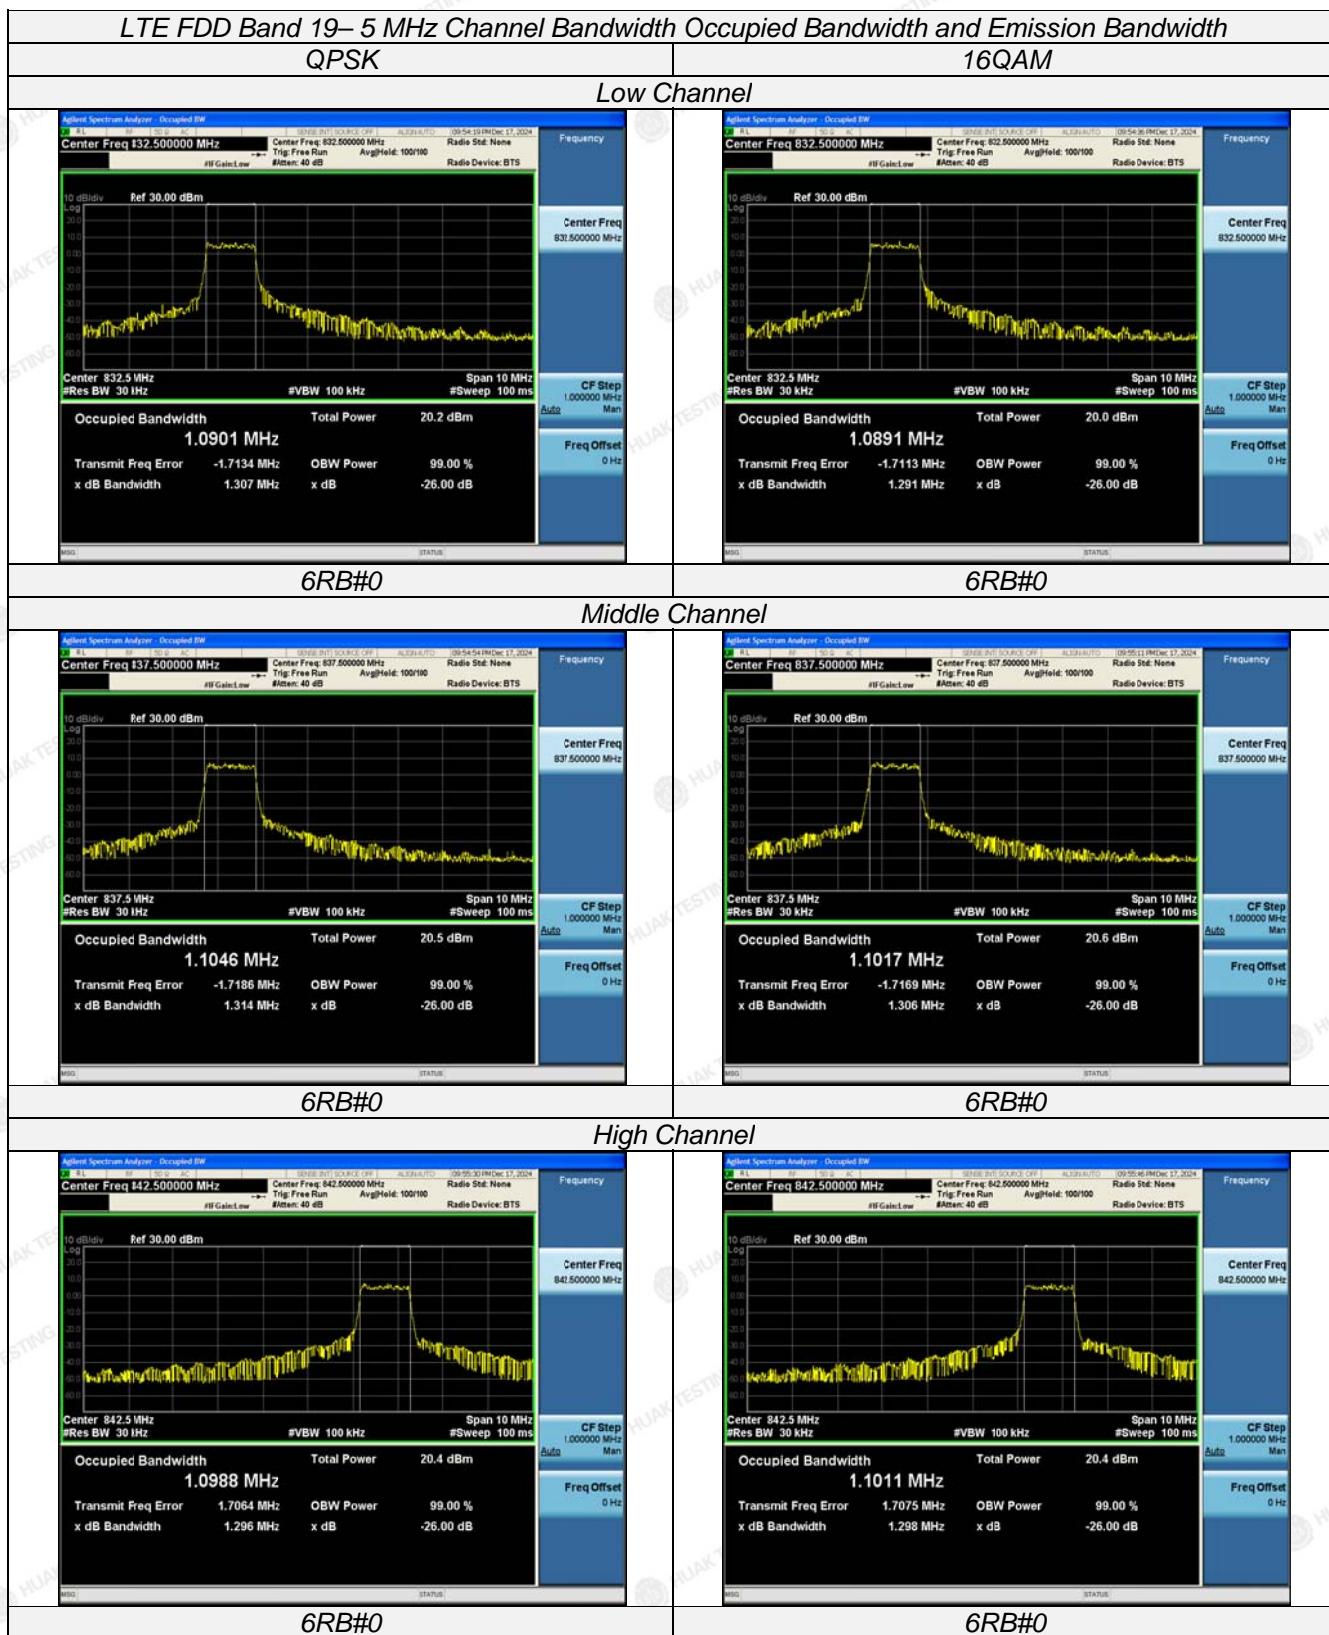

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

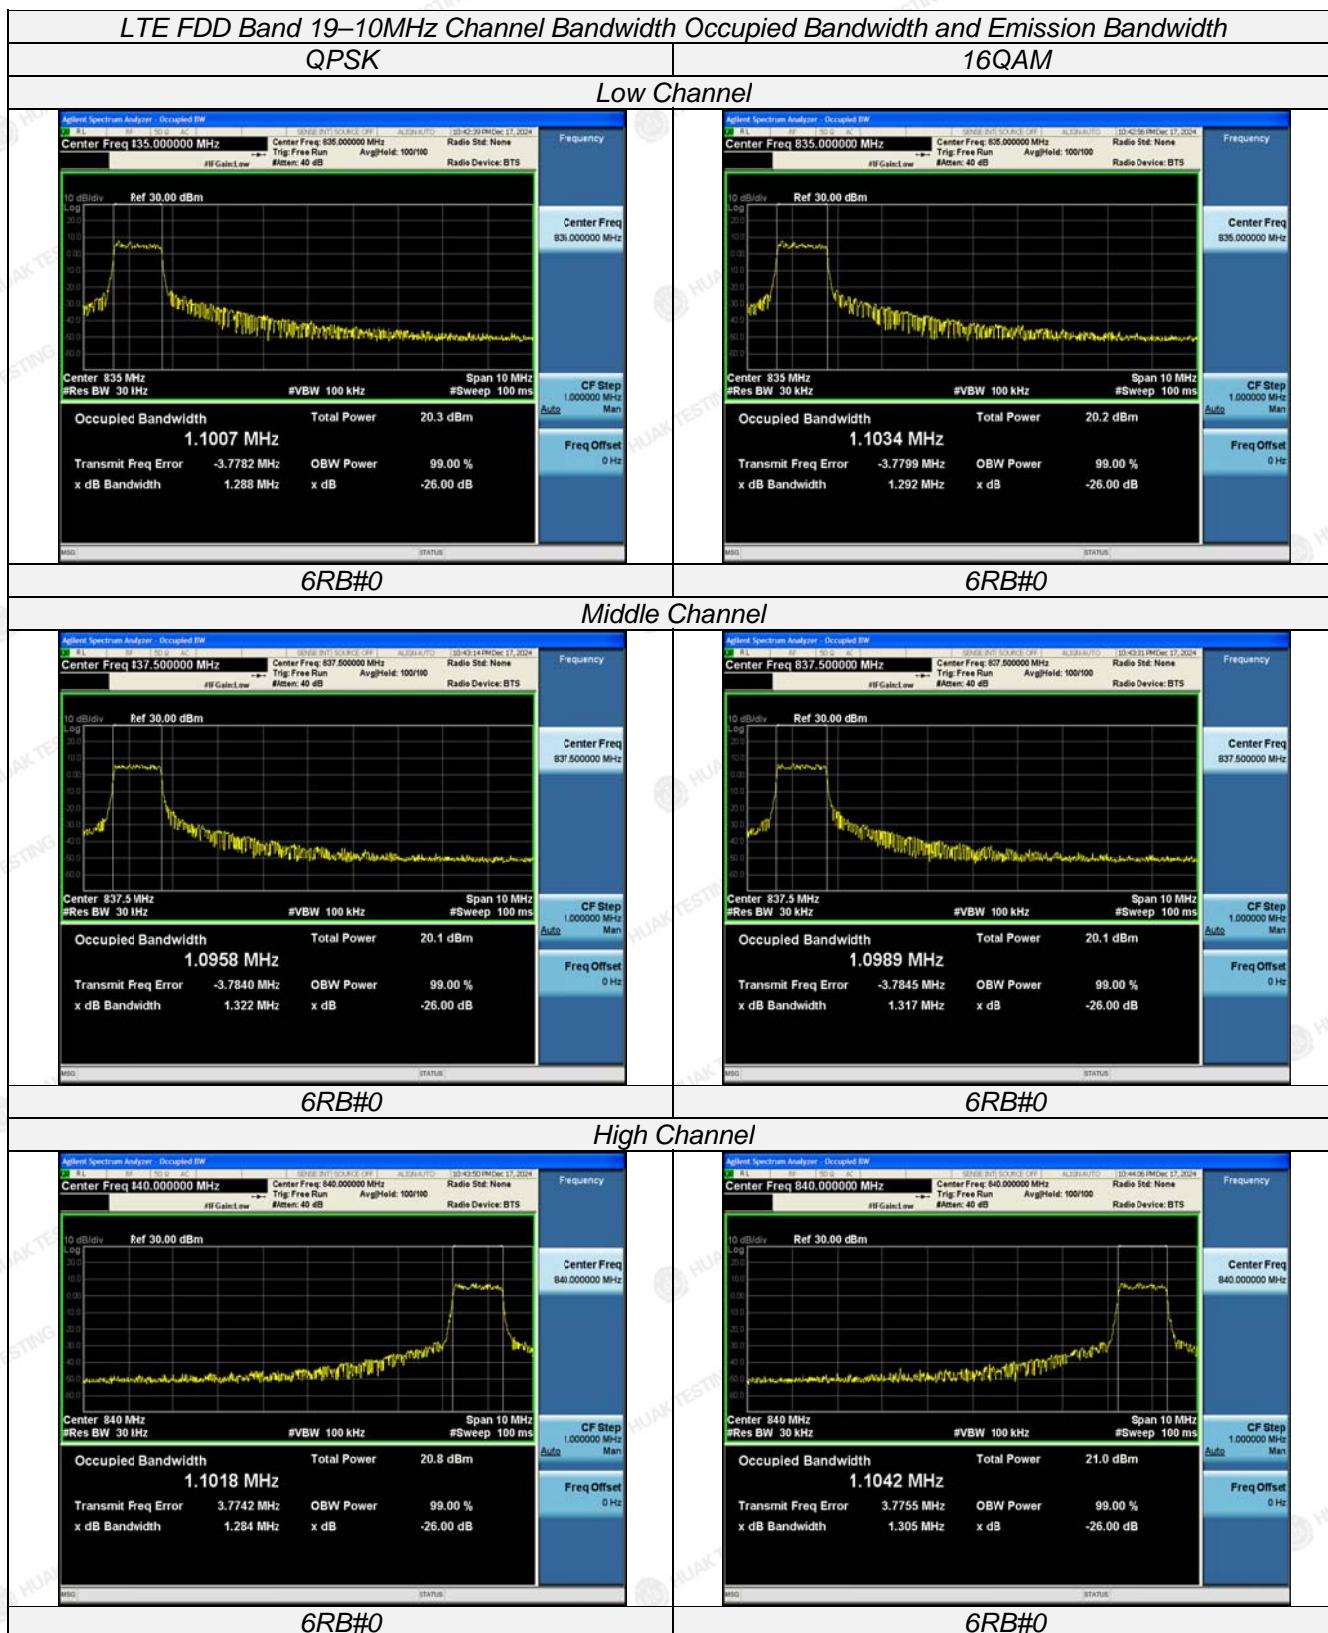

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

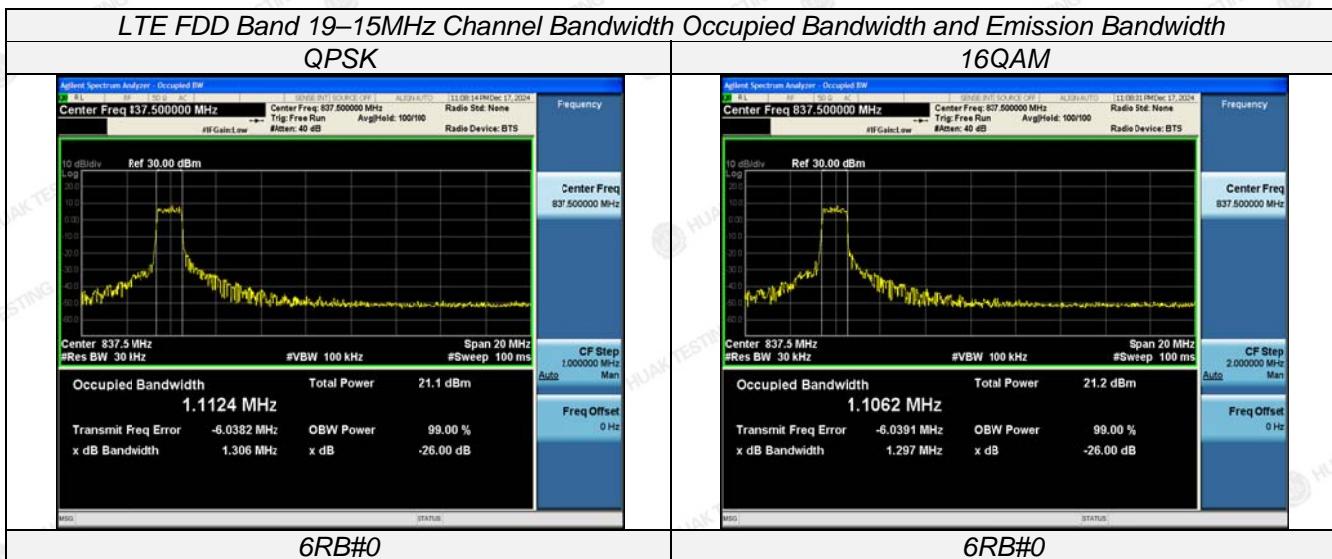

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




## 4.4 Band Edge Compliance

### LIMIT

Per FCC §22.917 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

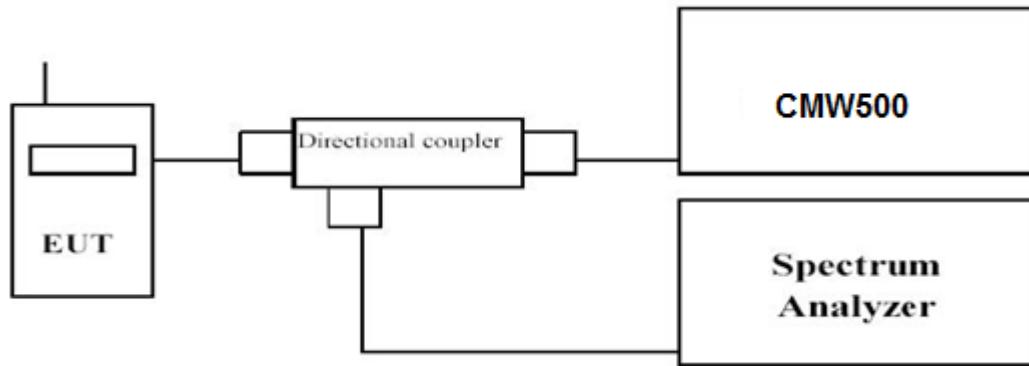


### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.

### TEST RESULTS

#### *Remark:*


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19; recorded worst case for each Channel Bandwidth of LTE FDD Band 19.

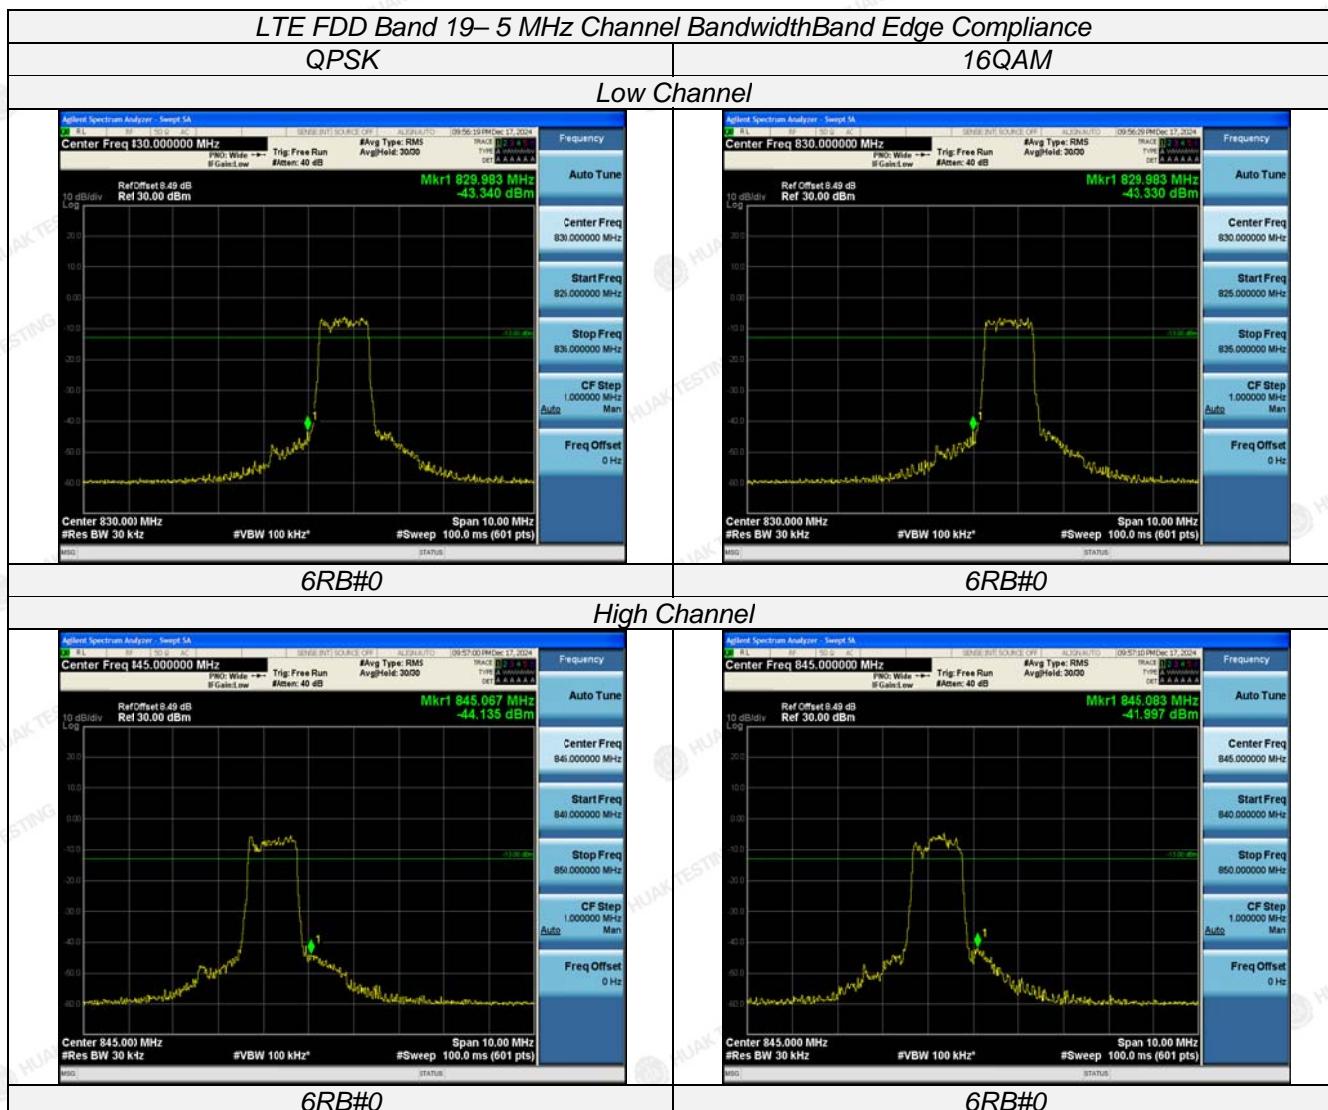

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

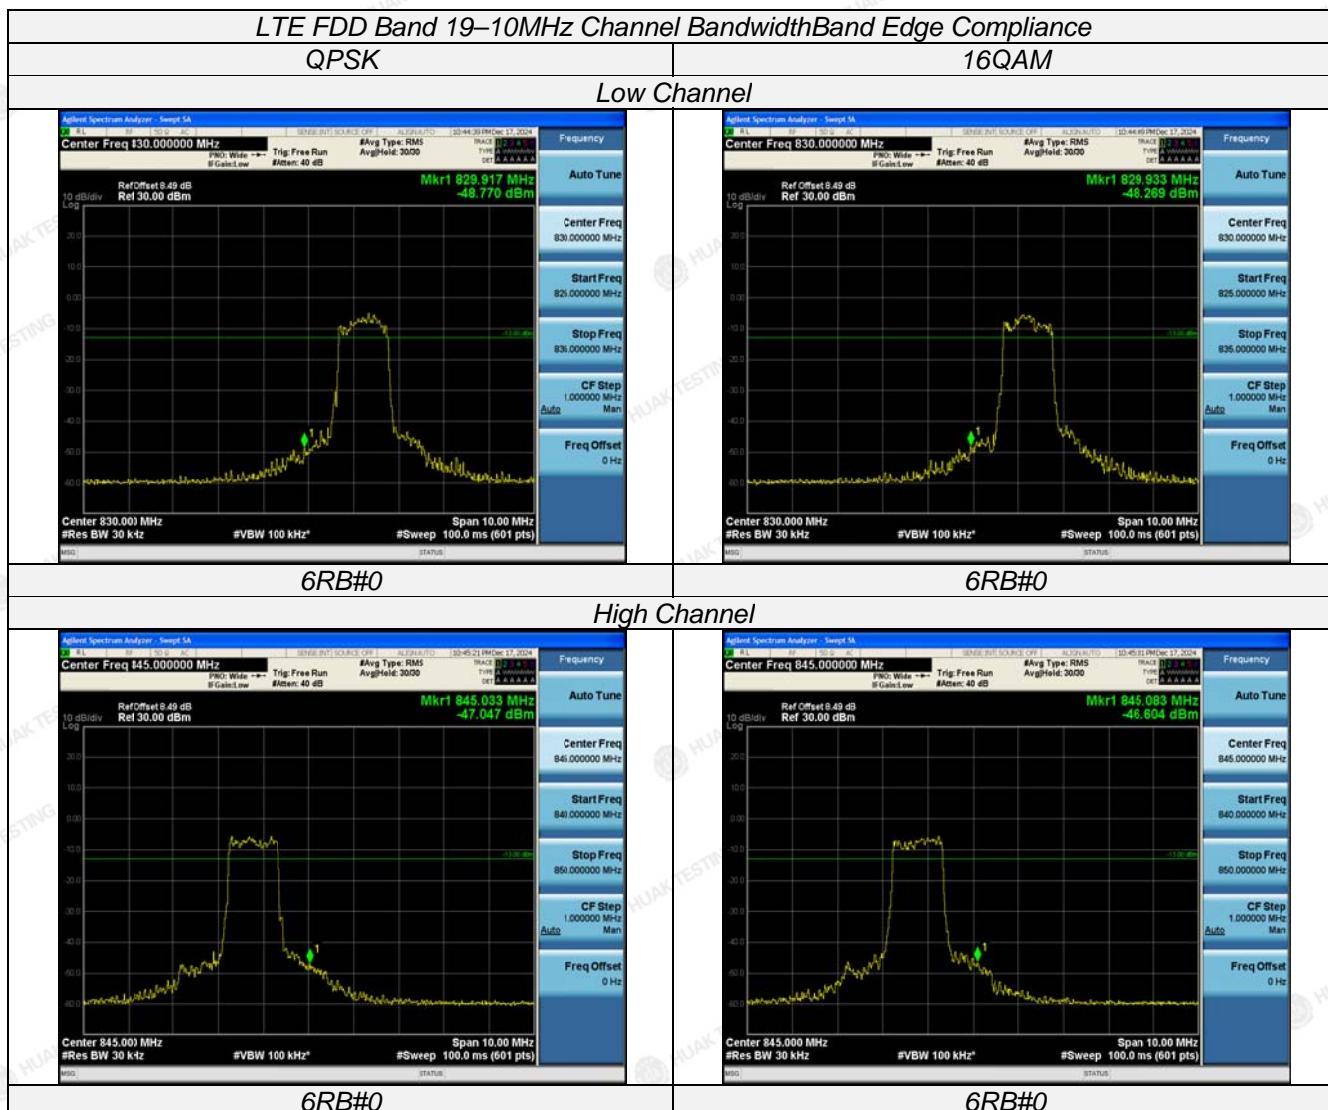

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

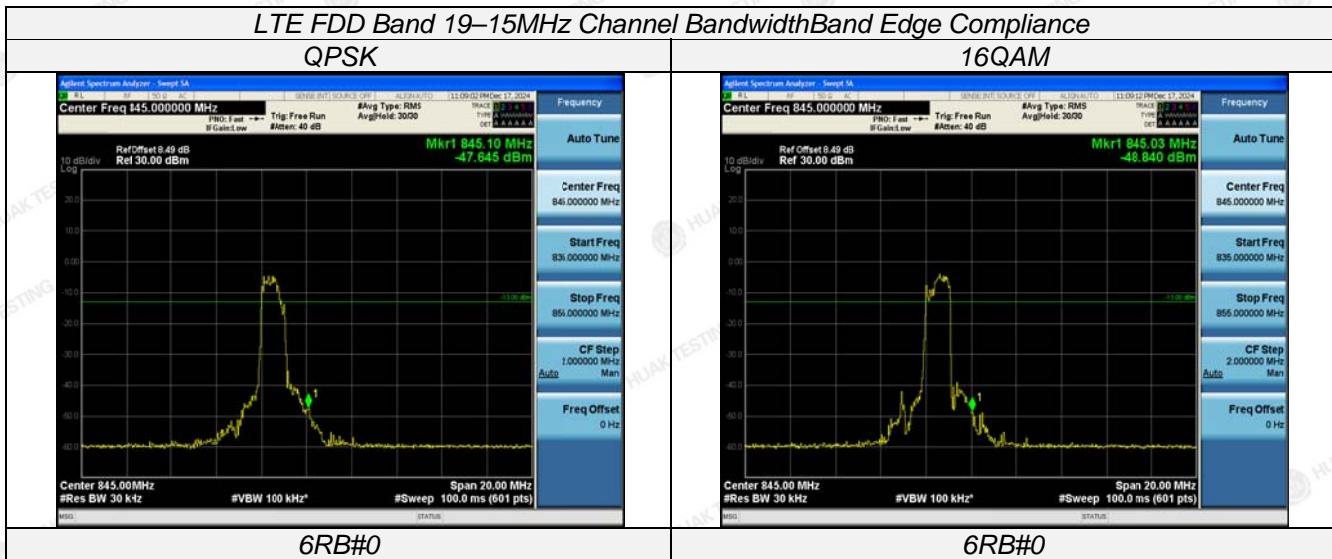

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




## 4.5 Spurious Emission on Antenna Port

### LIMIT

Per FCC §22.917, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

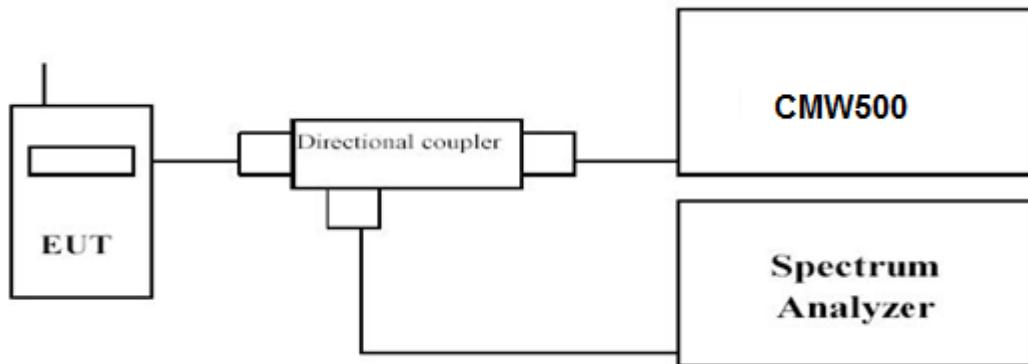

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.


- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10<sup>th</sup> harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 19	0.01~20	1 MHz	3 MHz	Auto


### TEST RESULTS

#### *Remark:*


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 19.

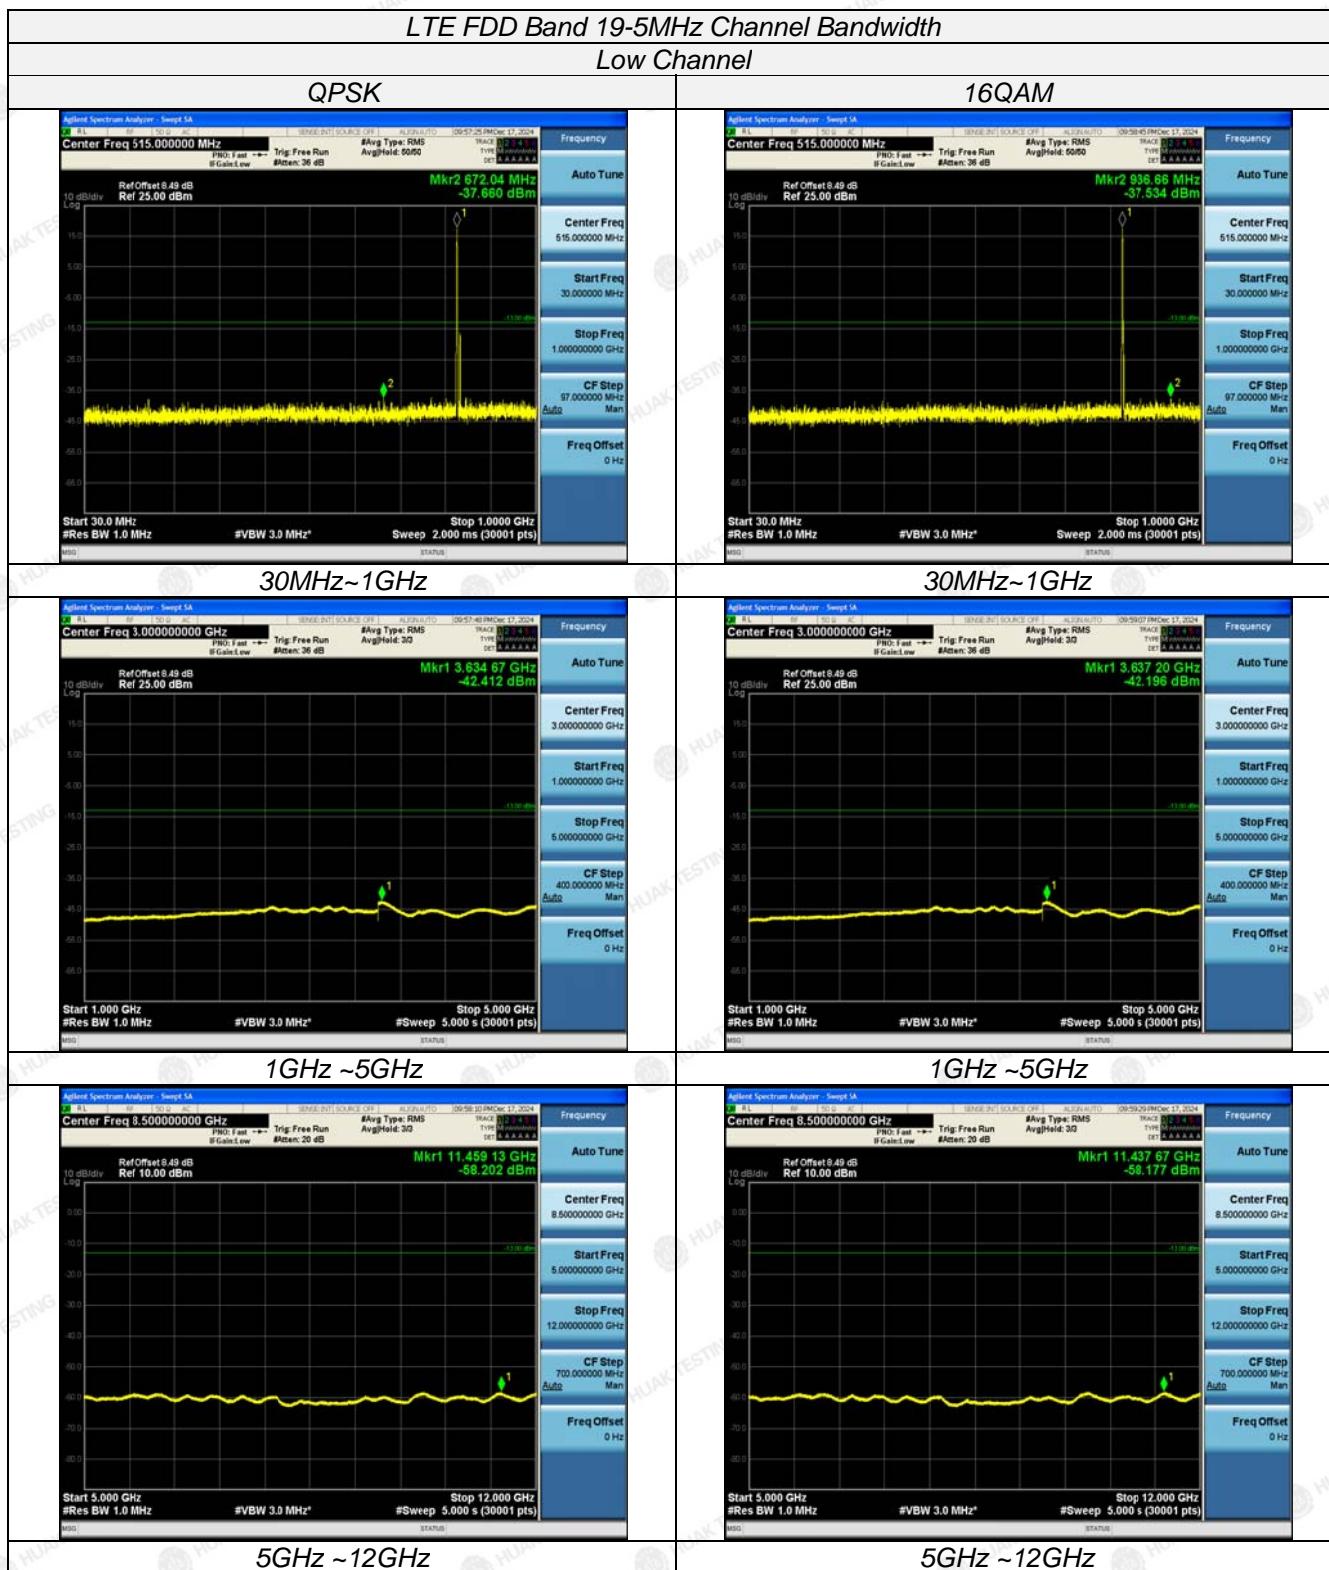


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

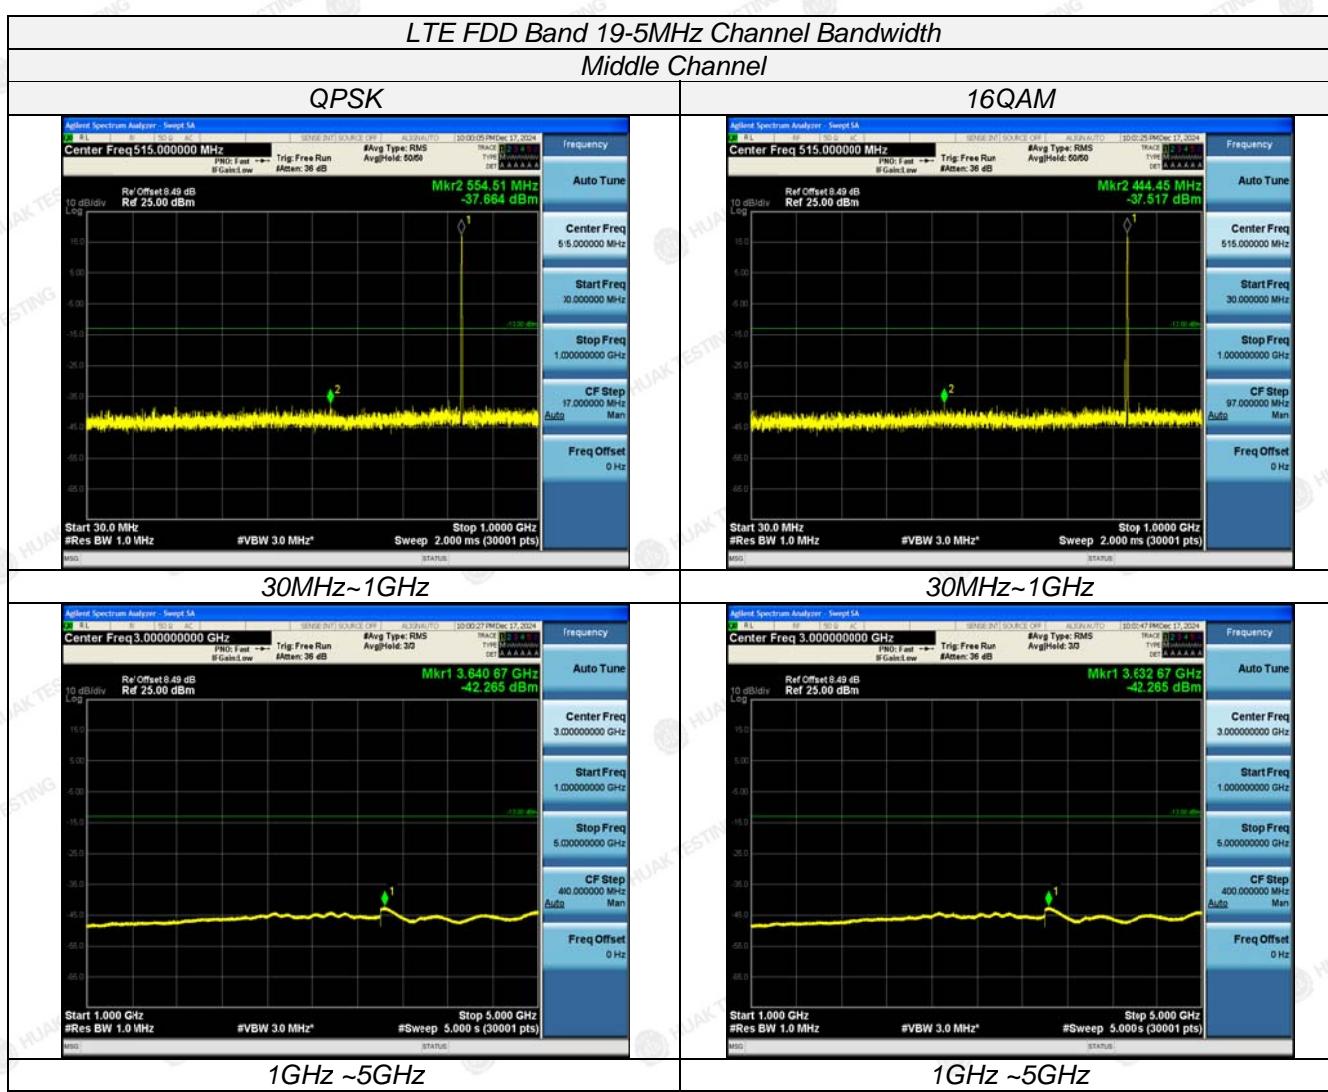


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

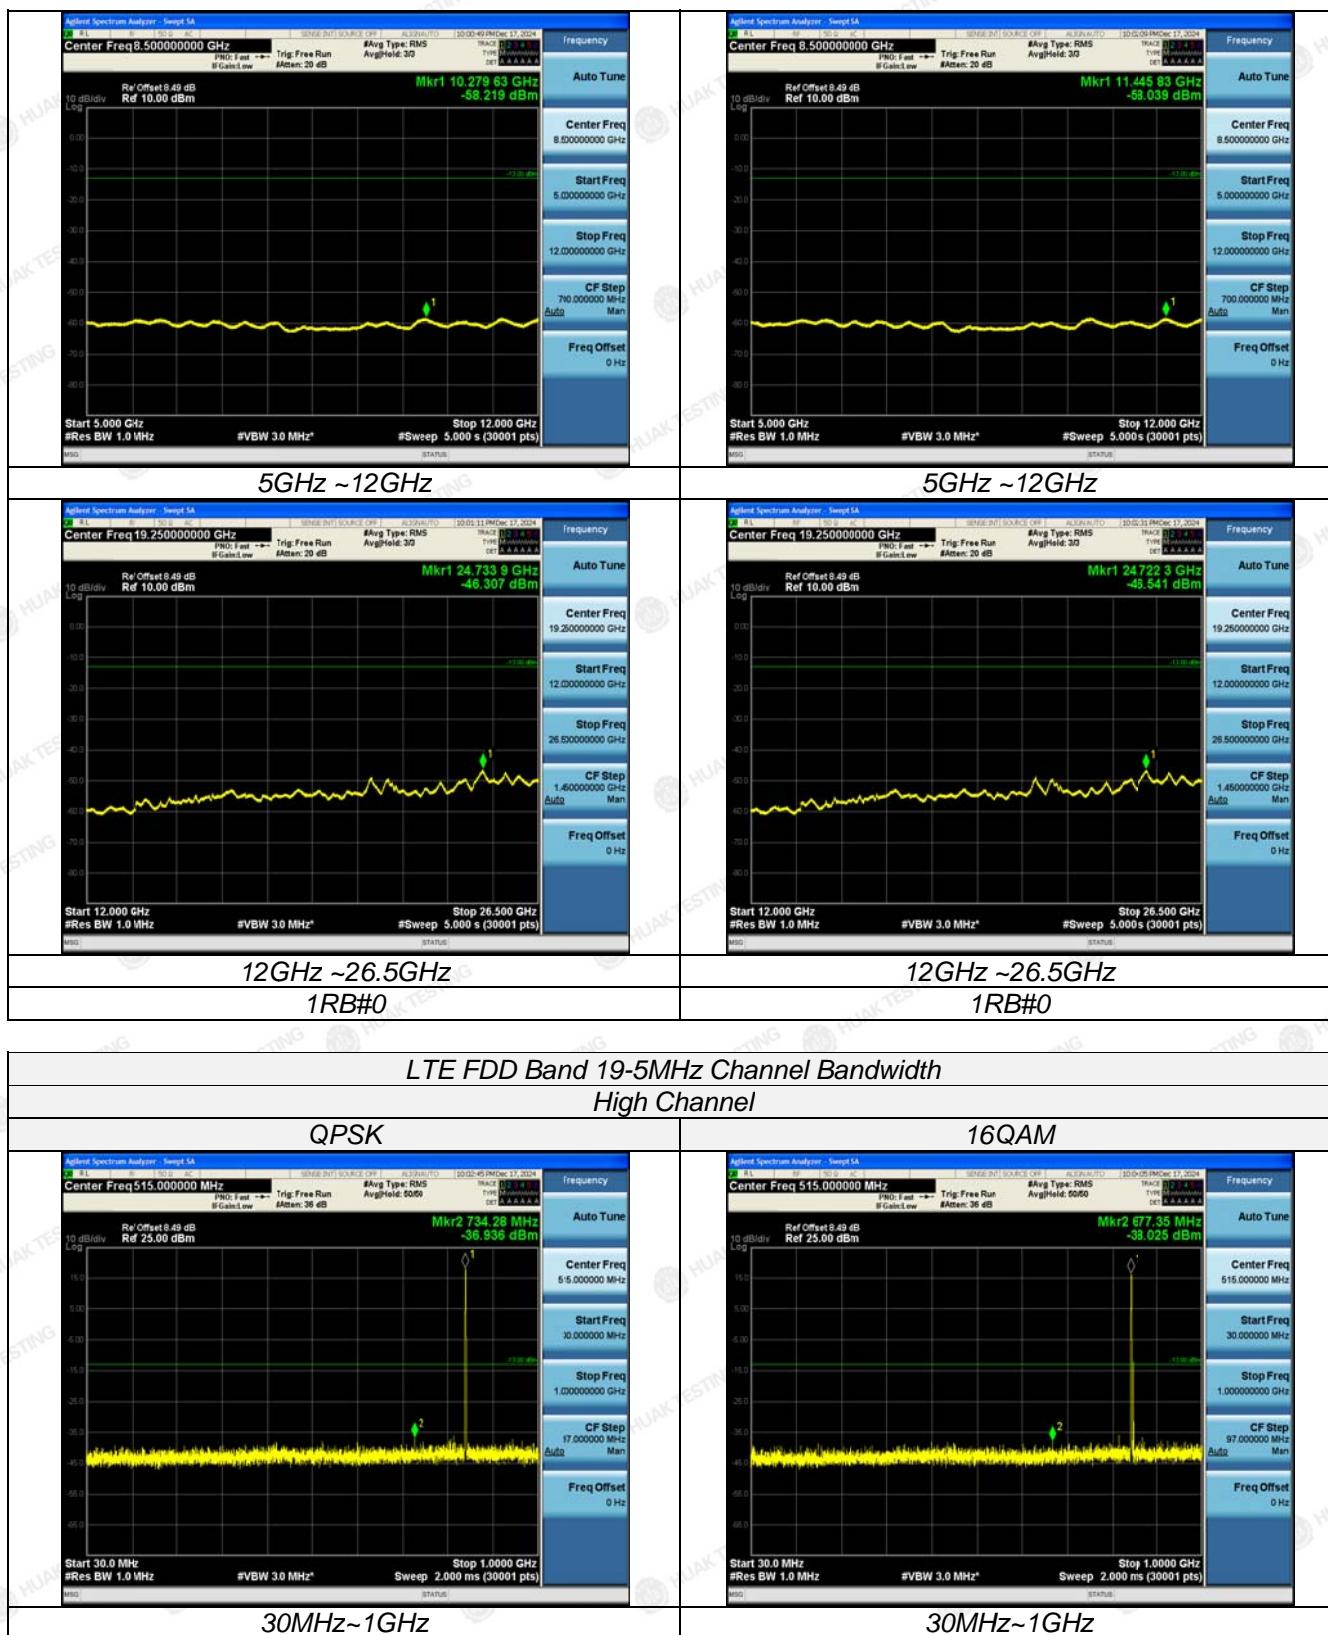

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

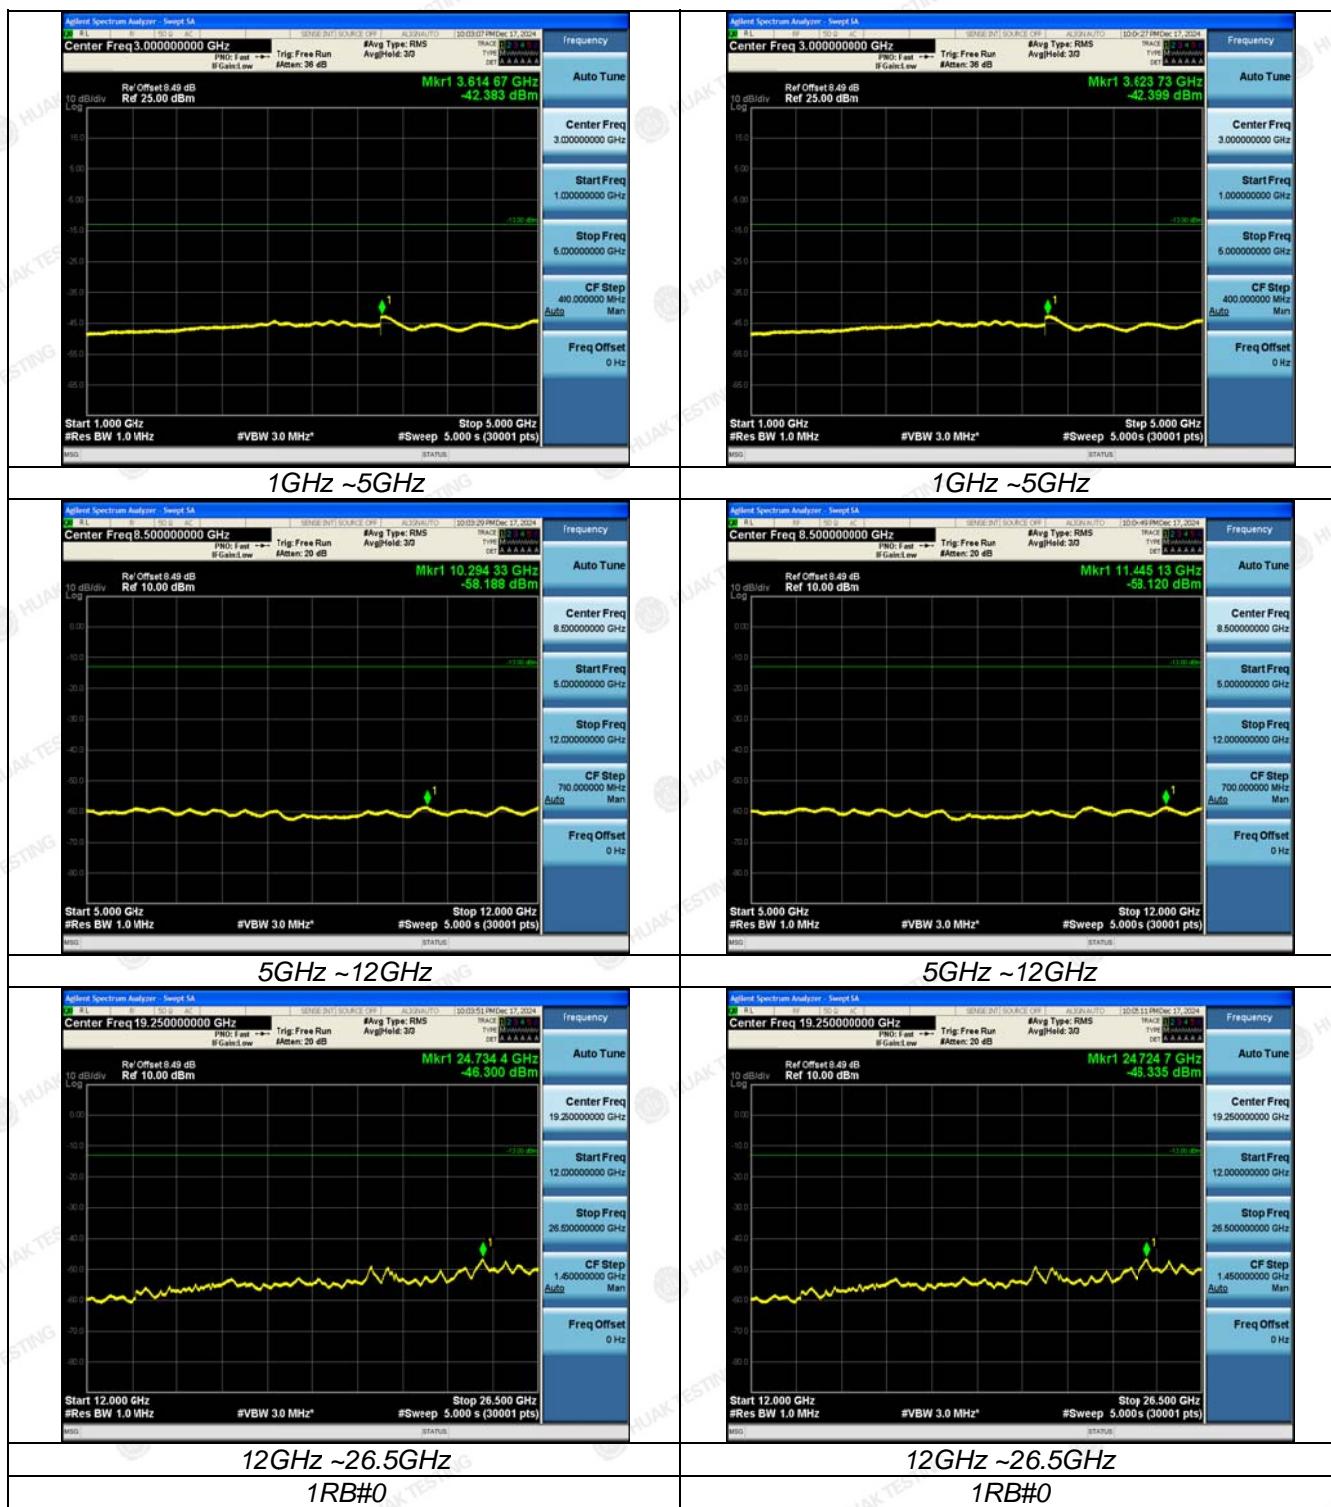

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

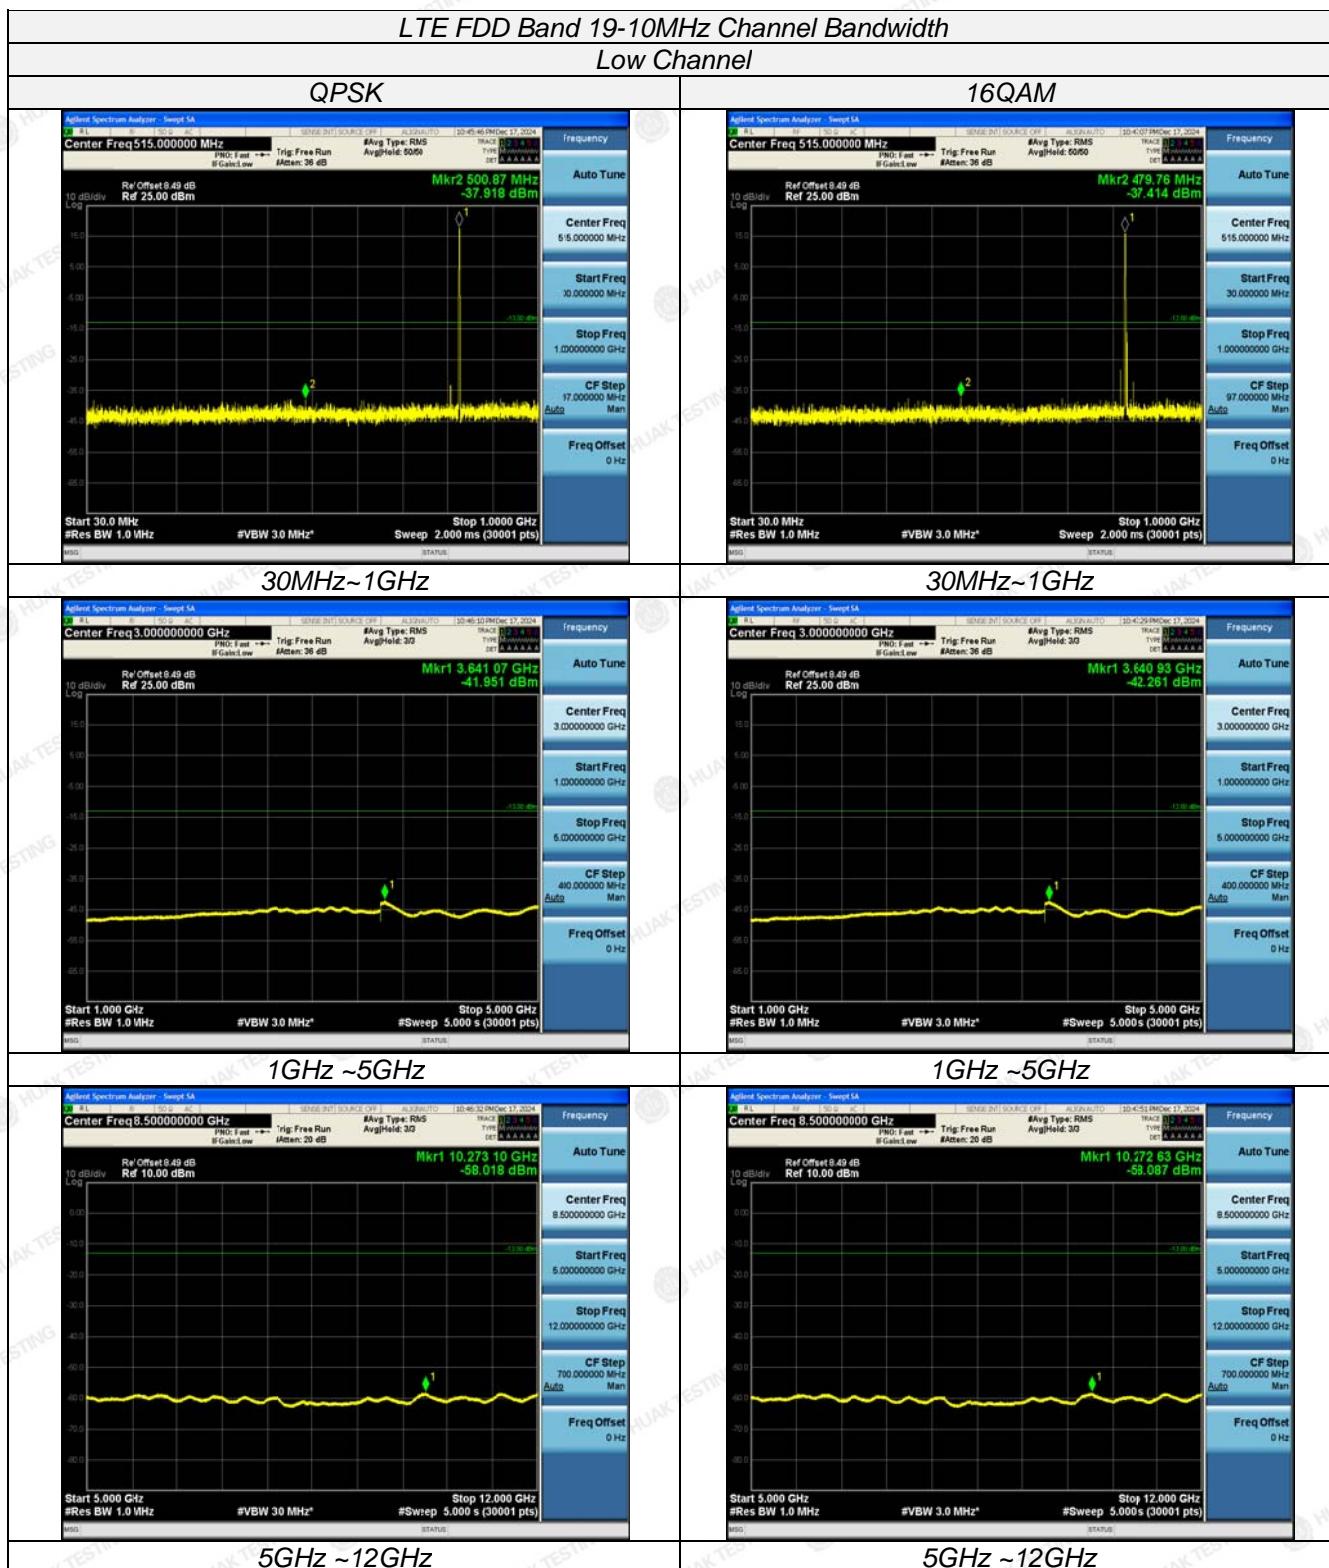


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

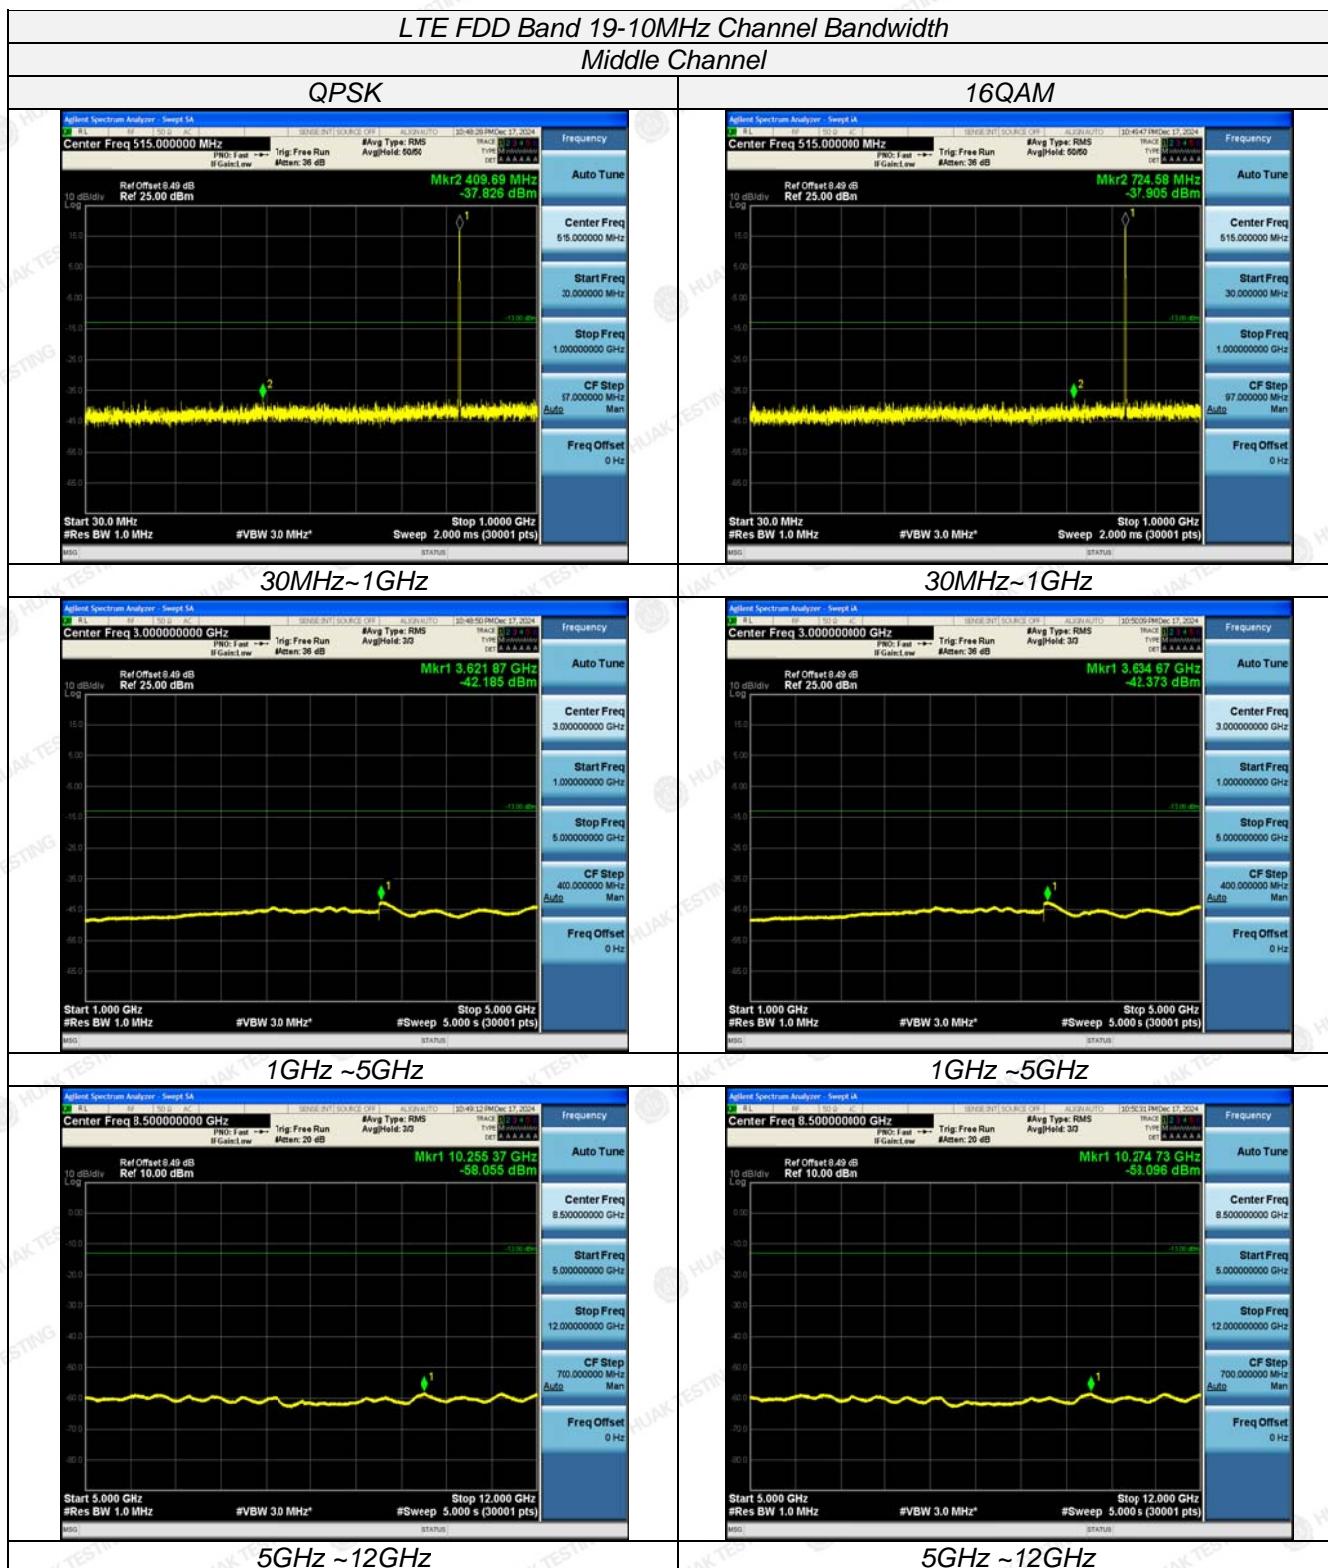


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

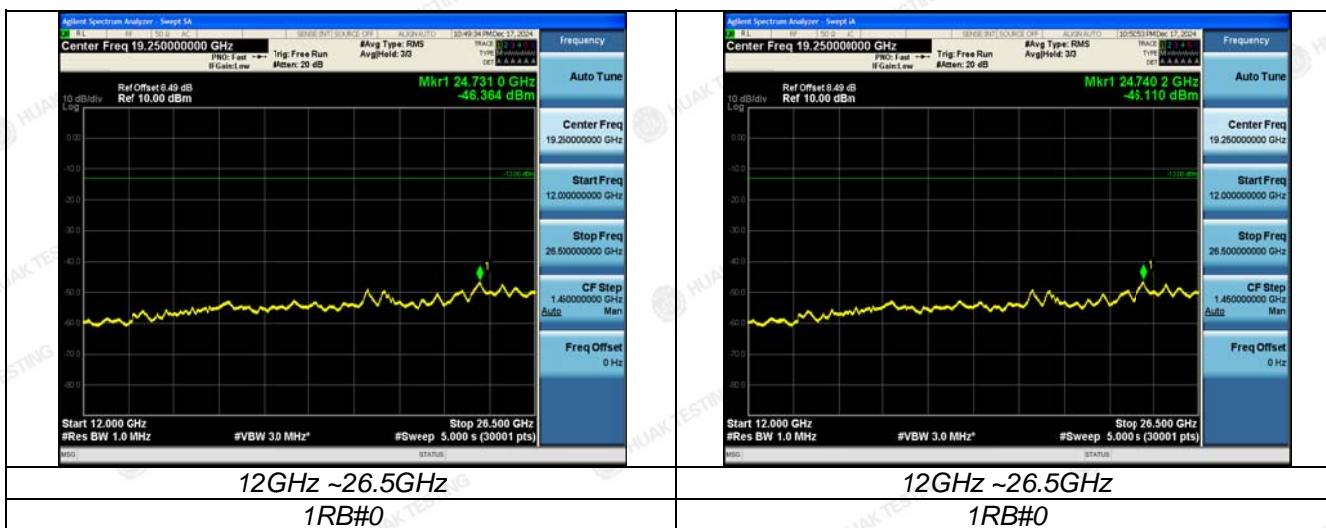

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

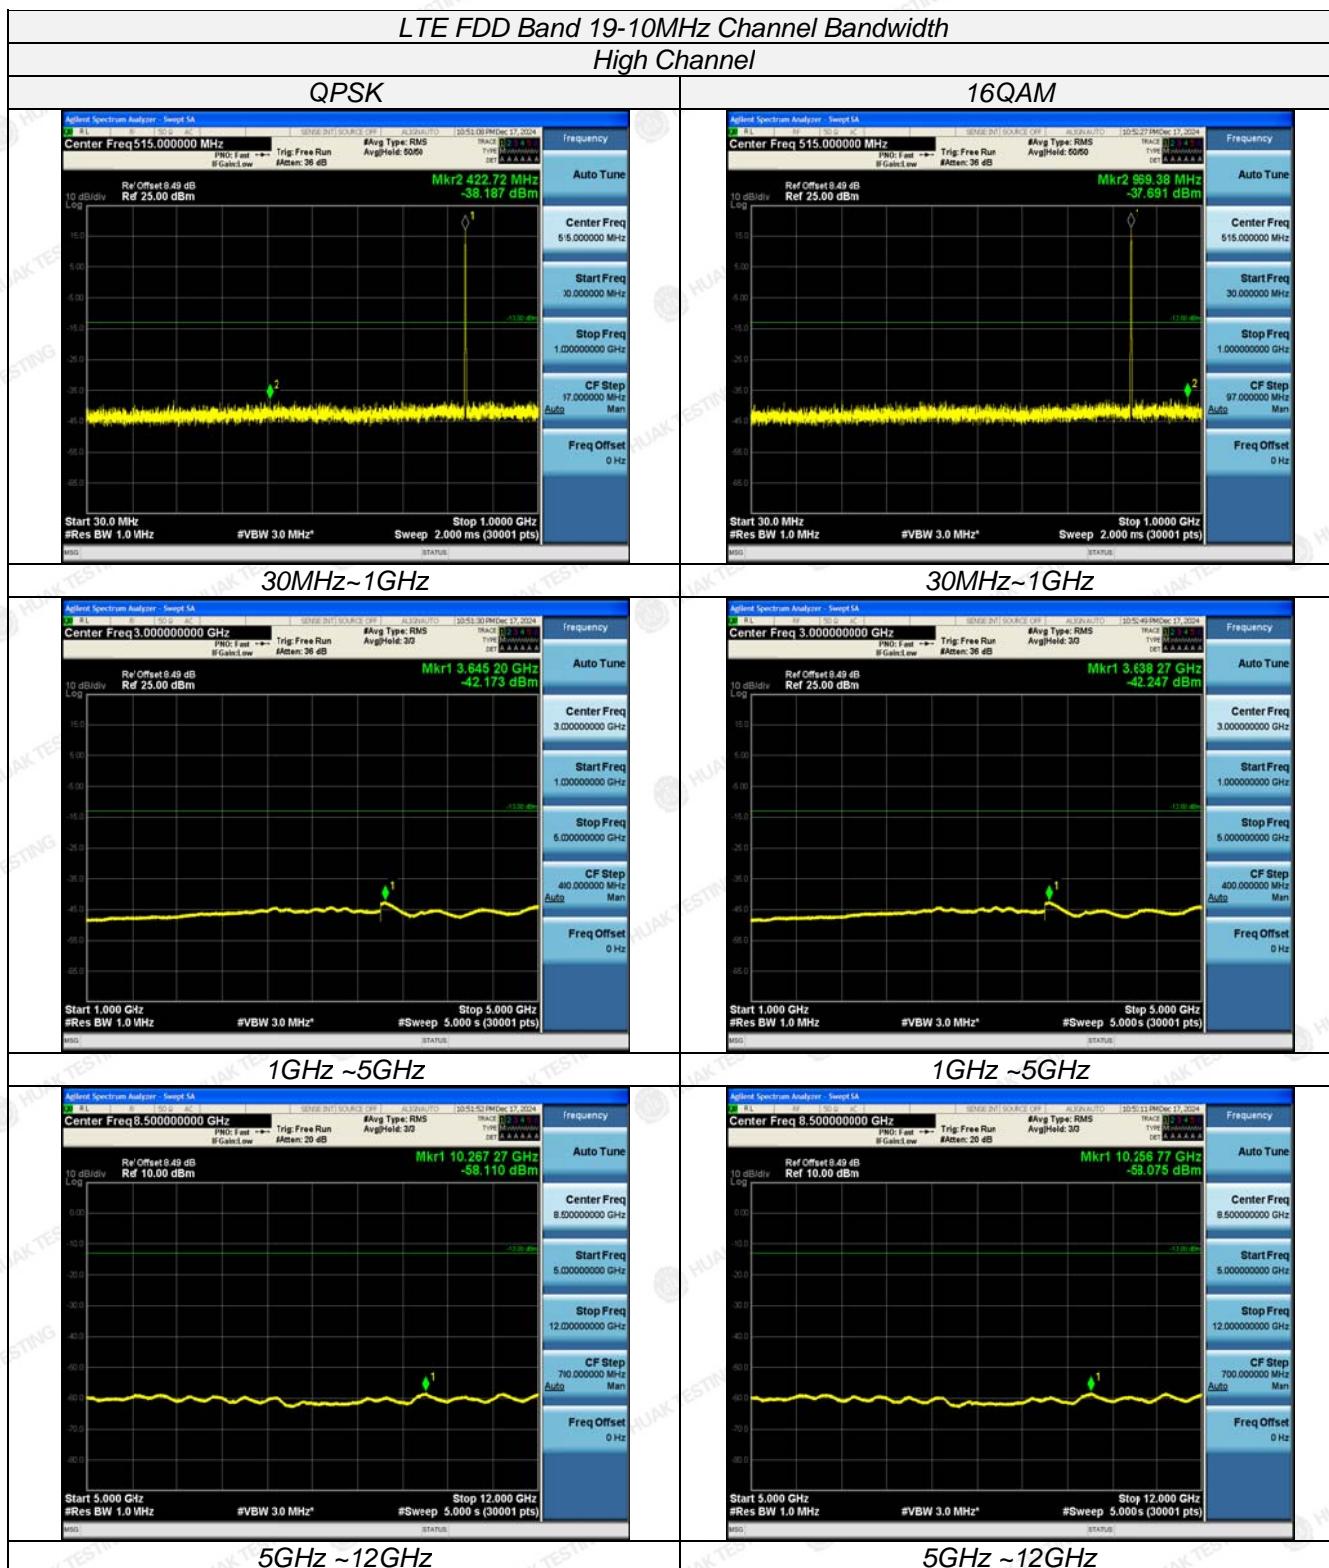


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

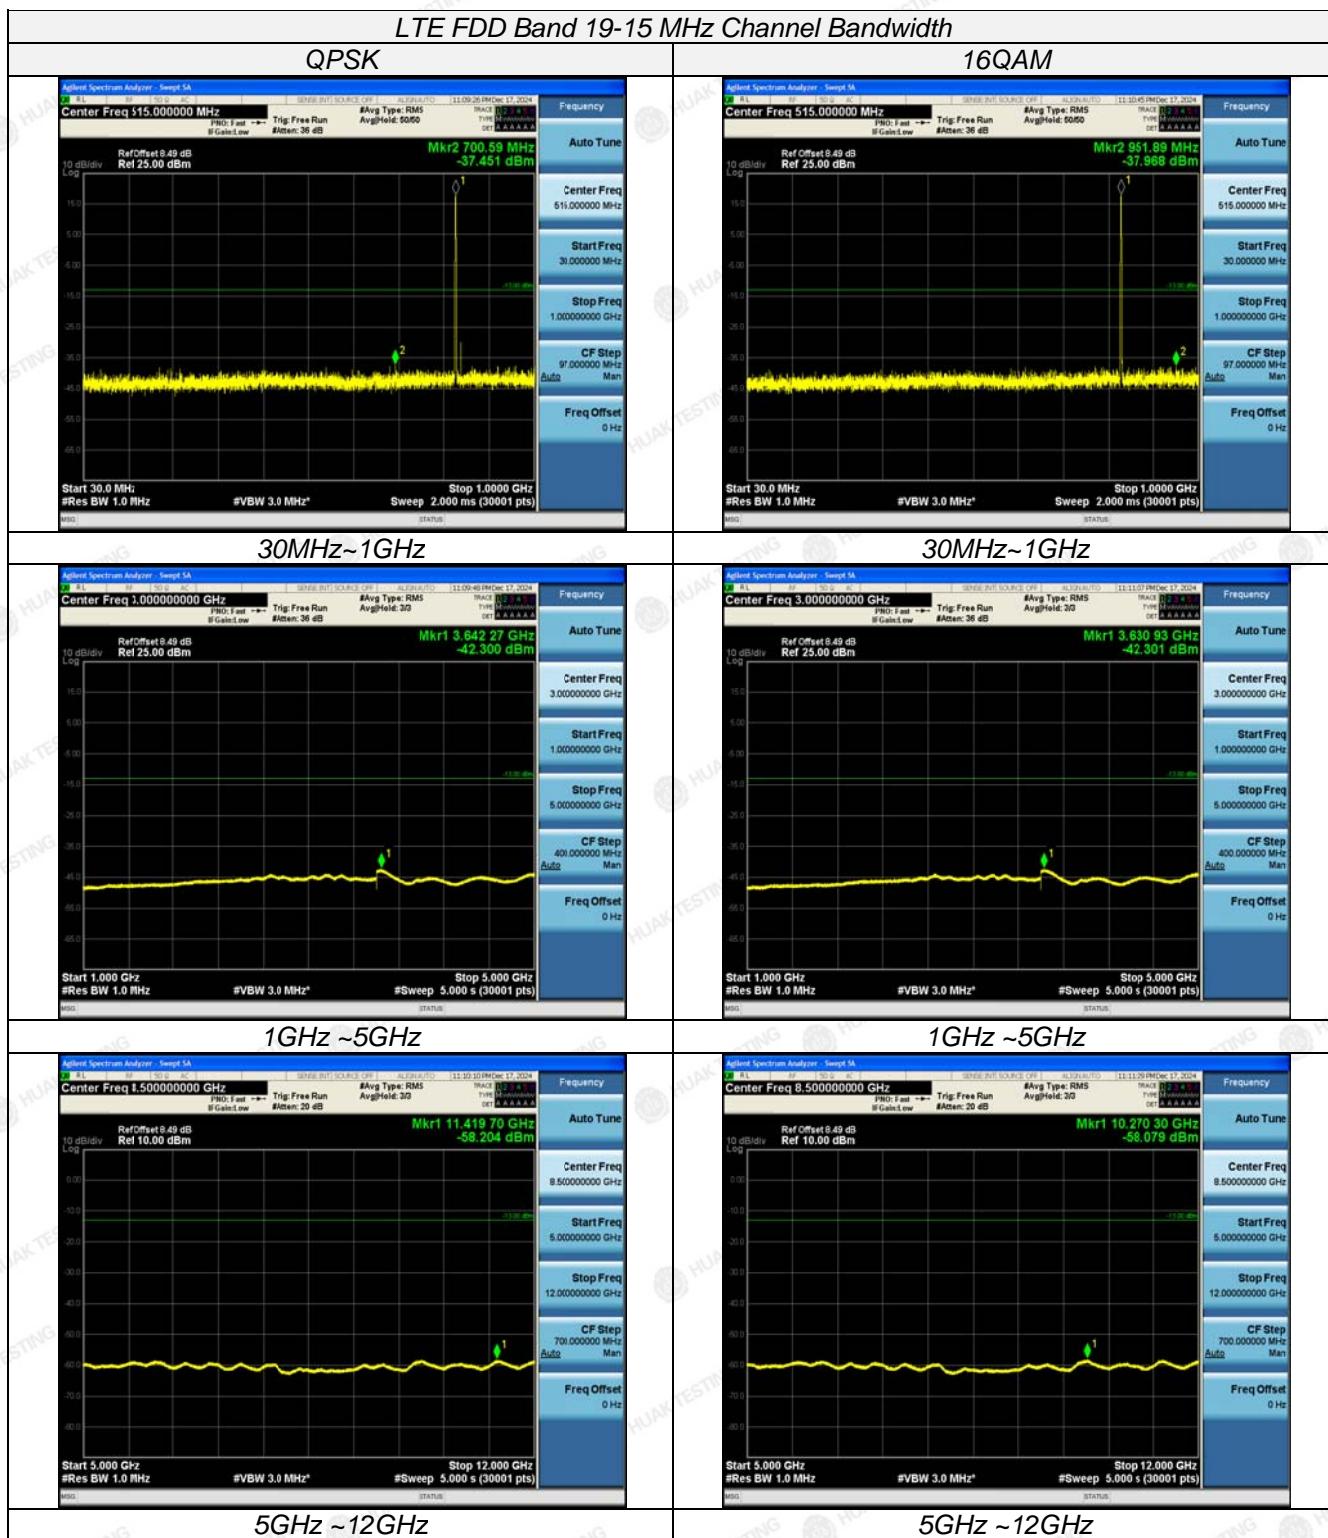

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

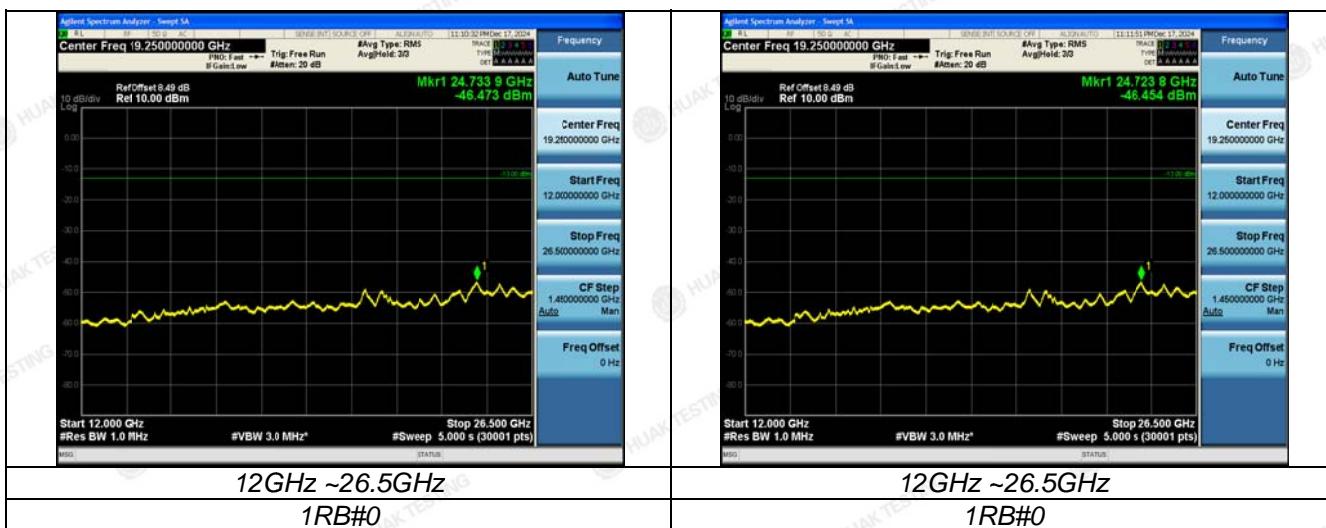

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




## 4.6 Radiated Spurious Emission

### TEST APPLICABLE

Per FCC §22.917, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

### TEST CONFIGURATION

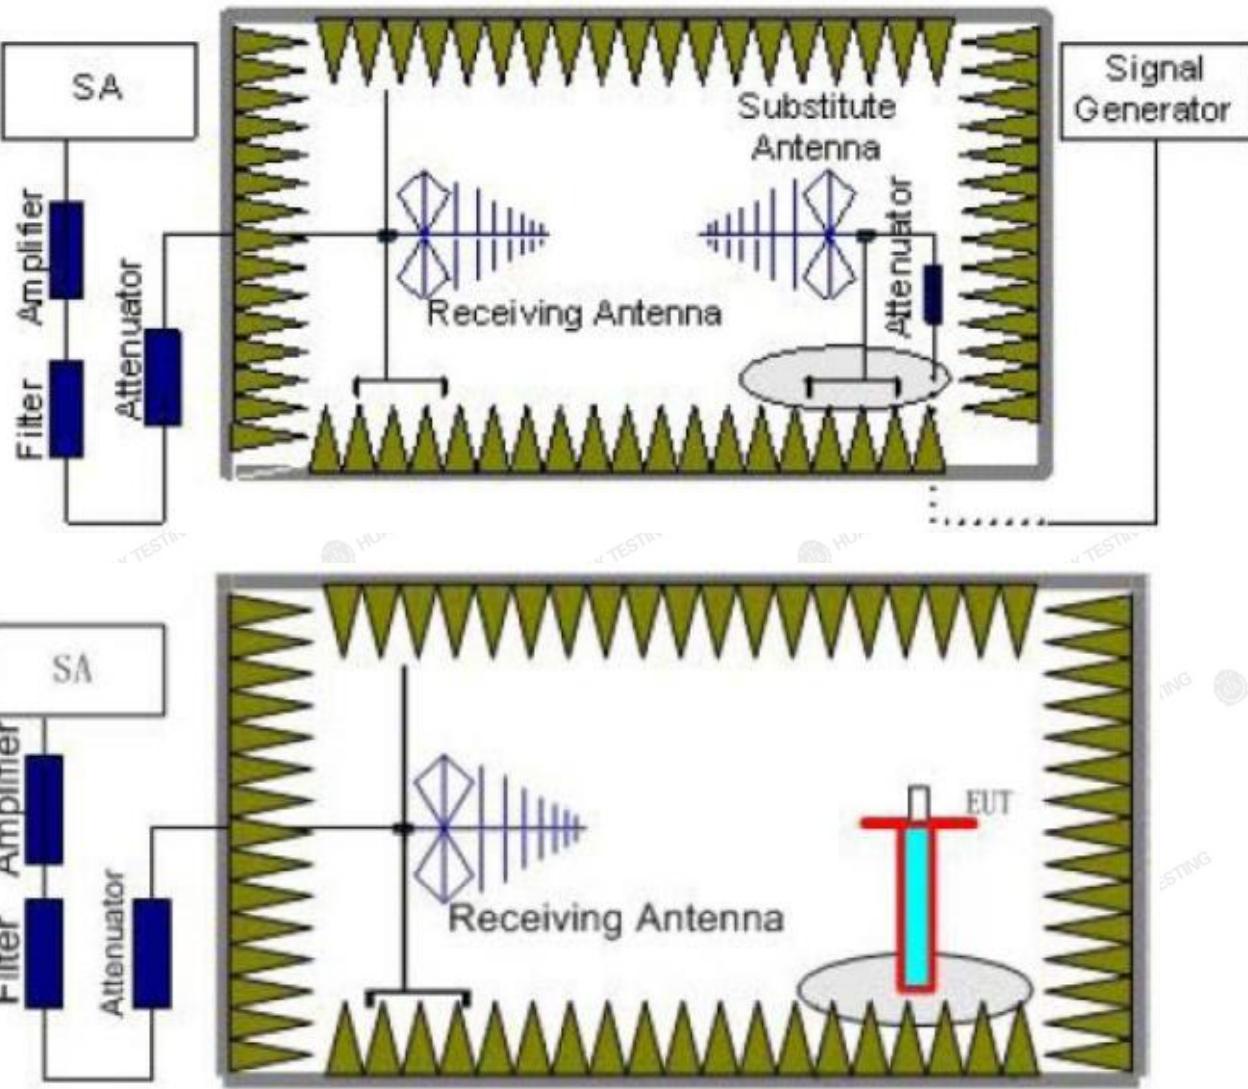

### TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>



3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as  $(P_r)$ .
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power  $(P_{Mea})$  is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded  $(P_r)$ . The power of signal source  $(P_{Mea})$  is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss  $(P_{cl})$ , the Substitution Antenna Gain  $(G_a)$  and the Amplifier Gain  $(P_{Ag})$  should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE BAND 19	0.03~1	100KHz	300KHz	10
	1~20	1 MHz	3 MHz	2

### **TEST LIMITS**

According to 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE BAND 19	Low	30MHz -20GHz	PASS
	Middle	30MHz -20GHz	PASS
	High	30MHz -20GHz	PASS

### **Radiated Measurement:**

#### **Remark:**

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE BAND 19; recorded worst case for each Channel Bandwidth of LTE BAND 19.
2.  $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + G_a(\text{dBi})$
3. Not recorded other points as values lower than limits.
4. Margin = Limit - EIRP



## LTE FDD Band 19\_Channel Bandwidth 5MHz\_QPSK\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1665.0	-42.96	3.00	3.00	9.58	-36.38	-13.00	23.38	H
2497.5	-43.29	3.03	3.00	10.72	-35.6	-13.00	22.6	H
1665.0	-42.75	3.00	3.00	9.68	-36.07	-13.00	23.07	V
2497.5	-41.45	3.03	3.00	10.72	-33.76	-13.00	20.76	V

## LTE FDD Band 19\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1675.0	-42.76	3.00	3.00	9.58	-36.18	-13.00	23.18	H
2512.5	-42.7	3.03	3.00	10.72	-35.01	-13.00	22.01	H
1675.0	-43.44	3.00	3.00	9.68	-36.76	-13.00	23.76	V
2512.5	-41.15	3.03	3.00	10.72	-33.46	-13.00	20.46	V

## LTE FDD Band 19\_Channel Bandwidth 5MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1685.0	-42.06	3.00	3.00	9.58	-35.48	-13.00	22.48	H
2527.5	-42.67	3.03	3.00	10.72	-34.98	-13.00	21.98	H
1685.0	-43.05	3.00	3.00	9.68	-36.37	-13.00	23.37	V
2527.5	-41.66	3.03	3.00	10.72	-33.97	-13.00	20.97	V

## LTE FDD Band 19\_Channel Bandwidth 10MHz\_QPSK\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1670.0	-42.74	3.00	3.00	9.58	-36.16	-13.00	23.16	H
2505.0	-43.55	3.03	3.00	10.72	-35.86	-13.00	22.86	H
1670.0	-43.32	3.00	3.00	9.68	-36.64	-13.00	23.64	V
2505.0	-41.69	3.03	3.00	10.72	-34	-13.00	21	V

## LTE FDD Band 19\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1675.0	-42.37	3.00	3.00	9.58	-35.79	-13.00	22.79	H
2512.5	-42.91	3.03	3.00	10.72	-35.22	-13.00	22.22	H
1675.0	-43.46	3.00	3.00	9.68	-36.78	-13.00	23.78	V
2512.5	-42.06	3.03	3.00	10.72	-34.37	-13.00	21.37	V

## LTE FDD Band 19\_Channel Bandwidth 10MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1680.0	-42.92	3.00	3.00	9.58	-36.34	-13.00	23.34	H
2520.0	-42.69	3.03	3.00	10.72	-35	-13.00	22	H
1680.0	-42.34	3.00	3.00	9.68	-35.66	-13.00	22.66	V
2520.0	-41.63	3.03	3.00	10.72	-33.94	-13.00	20.94	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>



## LTE FDD Band 19\_Channel Bandwidth 15MHz\_QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1675.0	-42.36	3.00	3.00	9.58	-35.78	-13.00	22.78	H
2512.5	-43.09	3.03	3.00	10.72	-35.4	-13.00	22.4	H
1675.0	-42.64	3.00	3.00	9.68	-35.96	-13.00	22.96	V
2512.5	-41.81	3.03	3.00	10.72	-34.12	-13.00	21.12	V

## LTE FDD Band 19\_Channel Bandwidth 5MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1665.0	-42.76	3.00	3.00	9.58	-36.18	-13.00	23.18	H
2497.5	-42.38	3.03	3.00	10.72	-34.69	-13.00	21.69	H
1665.0	-43.05	3.00	3.00	9.68	-36.37	-13.00	23.37	V
2497.5	-42.08	3.03	3.00	10.72	-34.39	-13.00	21.39	V

## LTE FDD Band 19\_Channel Bandwidth 5MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1675.0	-42.24	3.00	3.00	9.58	-35.66	-13.00	22.66	H
2512.5	-43.27	3.03	3.00	10.72	-35.58	-13.00	22.58	H
1675.0	-42.59	3.00	3.00	9.68	-35.91	-13.00	22.91	V
2512.5	-42.16	3.03	3.00	10.72	-34.47	-13.00	21.47	V

## LTE FDD Band 19\_Channel Bandwidth 5MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1685.0	-43	3.00	3.00	9.58	-36.42	-13.00	23.42	H
2527.5	-43.21	3.03	3.00	10.72	-35.52	-13.00	22.52	H
1685.0	-43.27	3.00	3.00	9.68	-36.59	-13.00	23.59	V
2527.5	-41.73	3.03	3.00	10.72	-34.04	-13.00	21.04	V

## LTE FDD Band 19\_Channel Bandwidth 10MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1670.0	-43.01	3.00	3.00	9.58	-36.43	-13.00	23.43	H
2505.0	-43.15	3.03	3.00	10.72	-35.46	-13.00	22.46	H
1670.0	-43.12	3.00	3.00	9.68	-36.44	-13.00	23.44	V
2505.0	-42.08	3.03	3.00	10.72	-34.39	-13.00	21.39	V

## LTE FDD Band 19\_Channel Bandwidth 10MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1675.0	-42.07	3.00	3.00	9.58	-35.49	-13.00	22.49	H
2512.5	-43.14	3.03	3.00	10.72	-35.45	-13.00	22.45	H
1675.0	-42.62	3.00	3.00	9.68	-35.94	-13.00	22.94	V
2512.5	-41.82	3.03	3.00	10.72	-34.13	-13.00	21.13	V



## LTE FDD Band 19\_Channel Bandwidth 10MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1680.0	-43.14	3.00	3.00	9.58	-36.56	-13.00	23.56	H
2520.0	-42.7	3.03	3.00	10.72	-35.01	-13.00	22.01	H
1680.0	-43.37	3.00	3.00	9.68	-36.69	-13.00	23.69	V
2520.0	-41.17	3.03	3.00	10.72	-33.48	-13.00	20.48	V

## LTE FDD Band 19\_Channel Bandwidth 15MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1675.0	-42.79	3.00	3.00	9.58	-36.21	-13.00	23.21	H
2512.5	-42.98	3.03	3.00	10.72	-35.29	-13.00	22.29	H
1675.0	-42.71	3.00	3.00	9.68	-36.03	-13.00	23.03	V
2512.5	-41.16	3.03	3.00	10.72	-33.47	-13.00	20.47	V




## 4.7 Frequency Stability

### LIMIT

According to §22.355, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

### TEST CONFIGURATION

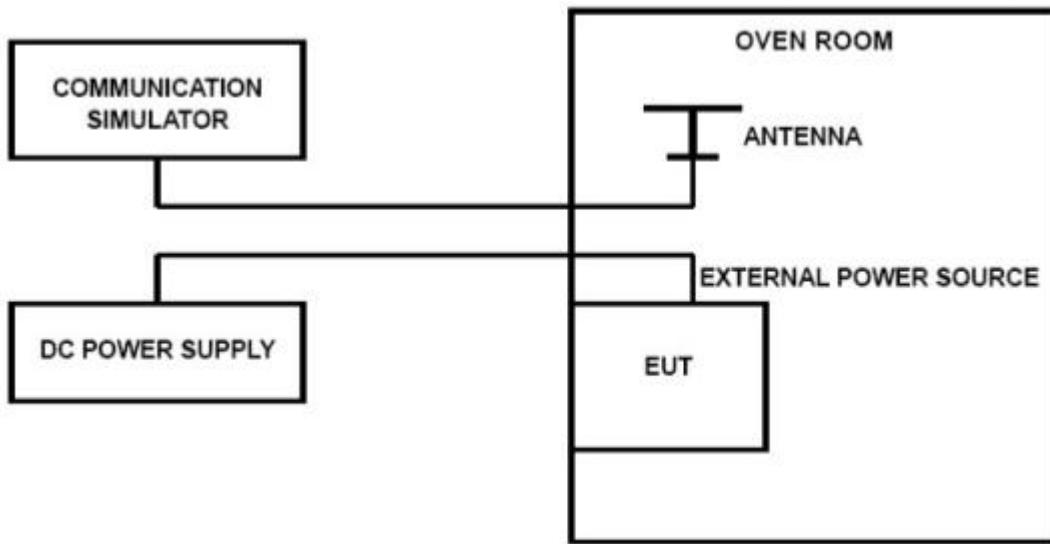

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

#### **Frequency Stability Under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 19, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

**TEST RESULTS****Remark:**

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 19; recorded worst case.

LTE Band 19, 5MHz bandwidth, QPSK (worst case of all bandwidths)



LTE FDD Band 19					
DC Power(V)	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	20	-9.11	-0.010975	±2.50	PASS
5	20	-9.68	-0.011661	±2.50	PASS
5.75	20	-9.77	-0.011770	±2.50	PASS
5	-30	-9.21	-0.011095	±2.50	PASS
5	-20	-9.18	-0.011059	±2.50	PASS
5	-10	-9.07	-0.010926	±2.50	PASS
5	0	-5.78	-0.006885	±2.50	PASS
5	10	-5.58	-0.006647	±2.50	PASS
5	20	-6.72	-0.008005	±2.50	PASS
5	30	-6.18	-0.007335	±2.50	PASS
5	40	-8.44	-0.010018	±2.50	PASS
5	50	-7.58	-0.008997	±2.50	PASS

LTE Band 19, 5MHz bandwidth, 16QAM (worst case of all bandwidths)

LTE FDD Band 19					
DC Power(V)	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	20	-14.19	-0.017094	±2.50	PASS
5	20	-13.45	-0.016203	±2.50	PASS
5.75	20	-12.46	-0.015010	±2.50	PASS
5	-30	-11.56	-0.013926	±2.50	PASS
5	-20	-13.99	-0.016853	±2.50	PASS
5	-10	-15.49	-0.018451	±2.50	PASS
5	0	-17.18	-0.020465	±2.50	PASS
5	10	-15.19	-0.018094	±2.50	PASS
5	20	-12.67	-0.015092	±2.50	PASS
5	30	-11.43	-0.013615	±2.50	PASS
5	40	-12.85	-0.015307	±2.50	PASS
5	50	-6.47	-0.007658	±2.50	PASS



## 5 Test Setup Photos of the EUT

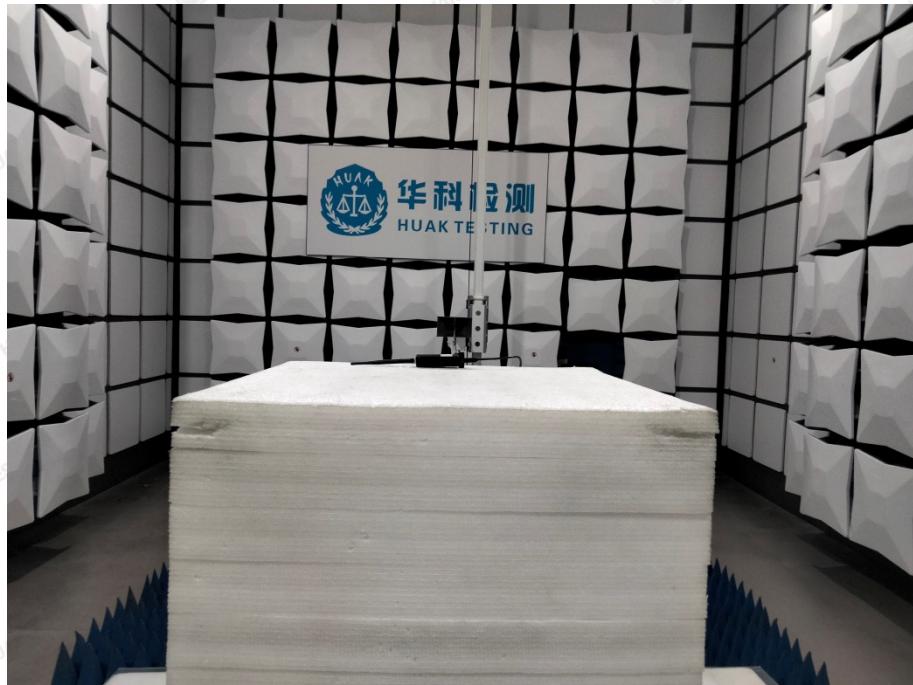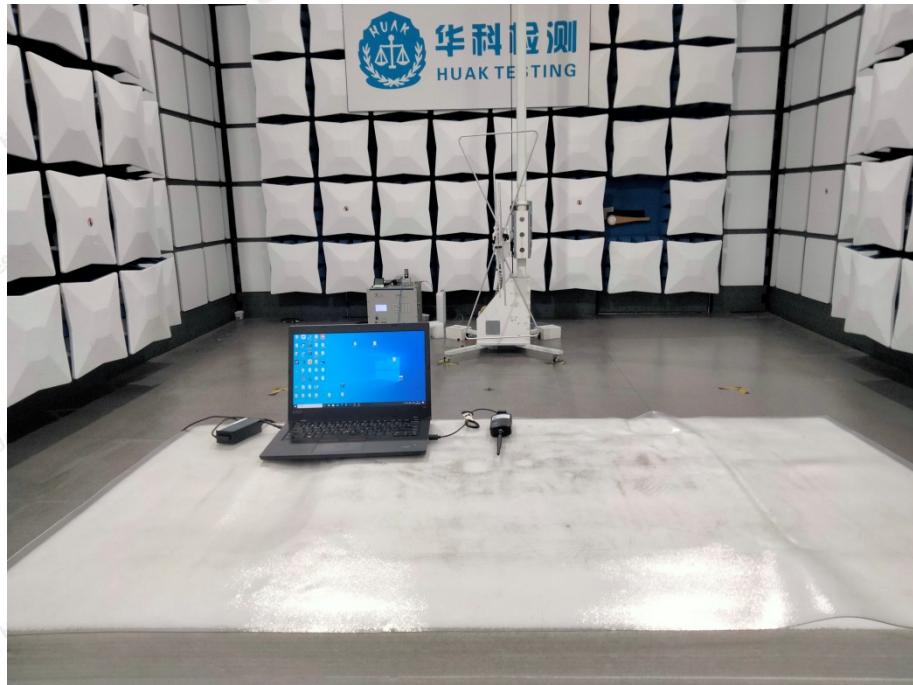

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## **6 External and Internal photos of the EUT**

Reference to the report :ANNEX A of external photos and ANNEX B of internal photos.

.....**End of Report.....**