

TEST REPORT

Product Name: Portable Bonding Video Streaming Encoder
FCC ID: 2A8LX-30XYZ-ABC
Trademark: 


Model Number: 30501-001, 30501-002, 30501-003, 30501-010, 30501-011, 30501-012, 30601-000, 30601-001, 30601-002, 30601-003, 30601-010, 30601-011, 30601-012, 30601-020, 30601-021, 30601-030, 30501-500, 30601-500, 30501-600, 30601-600
Prepared For: Zowietek Electronics, Ltd.
Address: 2218 HuNan Road, West Wing 1701, Pudong Shanghai 201204, China
Manufacturer: Zowietek Electronics, Ltd.
Address: 2218 HuNan Road, West Wing 1701, Pudong Shanghai 201204, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinh Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Aug. 03, 2022
Sample tested Date: Aug. 03, 2022 to Aug. 25, 2022
Issue Date: Aug. 25, 2022
Report No.: CTB220825032RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

Chen ZhengArron LiuBin He Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER	56
9.1 Block Diagram Of Test Setup	56
9.2 Limit	56
9.3 Test procedure	56
9.4 Test Result	57
10. 6DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58
10.4 Test Result	59
11. POWER SPECTRAL DENSITY	69
11.1 Block Diagram Of Test Setup	69
11.2 Limit	69
11.3 Test procedure	69
11.4 Test Result	70
12. ANTENNA REQUIREMENT	79
13. EUT PHOTOGRAPHS	80
14. EUT TEST SETUP PHOTOGRAPHS	81

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220825032RFX	Aug. 25, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	30501-001, 30501-002, 30501-003, 30501-010, 30501-011, 30501-012, 30601-000, 30601-001, 30601-002, 30601-003, 30601-010, 30601-011, 30601-012, 30601-020, 30601-021, 30601-030, 30501-500, 30601-500, 30501-600, 30601-600
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: 30501-001
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 9.85dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: External antenna
Antenna Gain:	WiFi (2.4G) : 5.3dBi
Ratings:	110-240V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Notebook	DELL	Inspiron 5507	N/A	AC

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.2dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,
Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,
So the directional gain for PSD is 4.01dBi

2) For power measurements,
The Array gain=0 dB for NANT≤4,
So the directional gain for Power measurements is 1dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinxhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22


22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100- NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100- NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100- SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

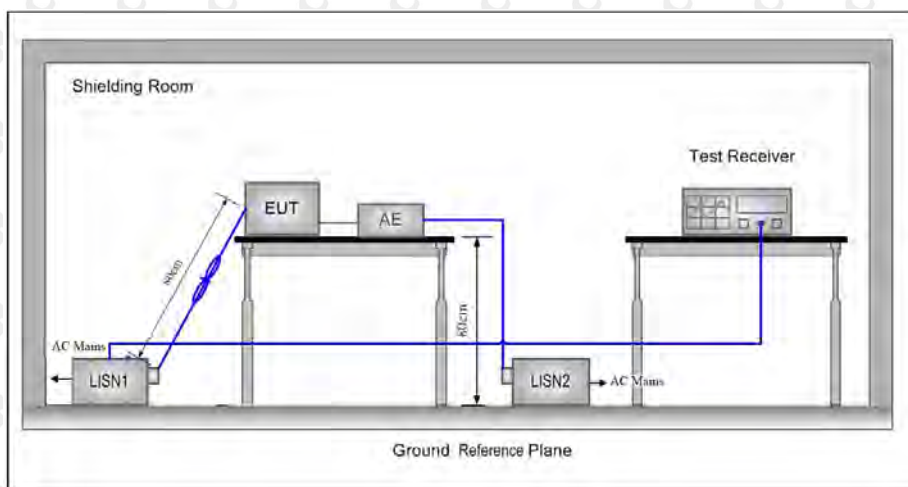

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

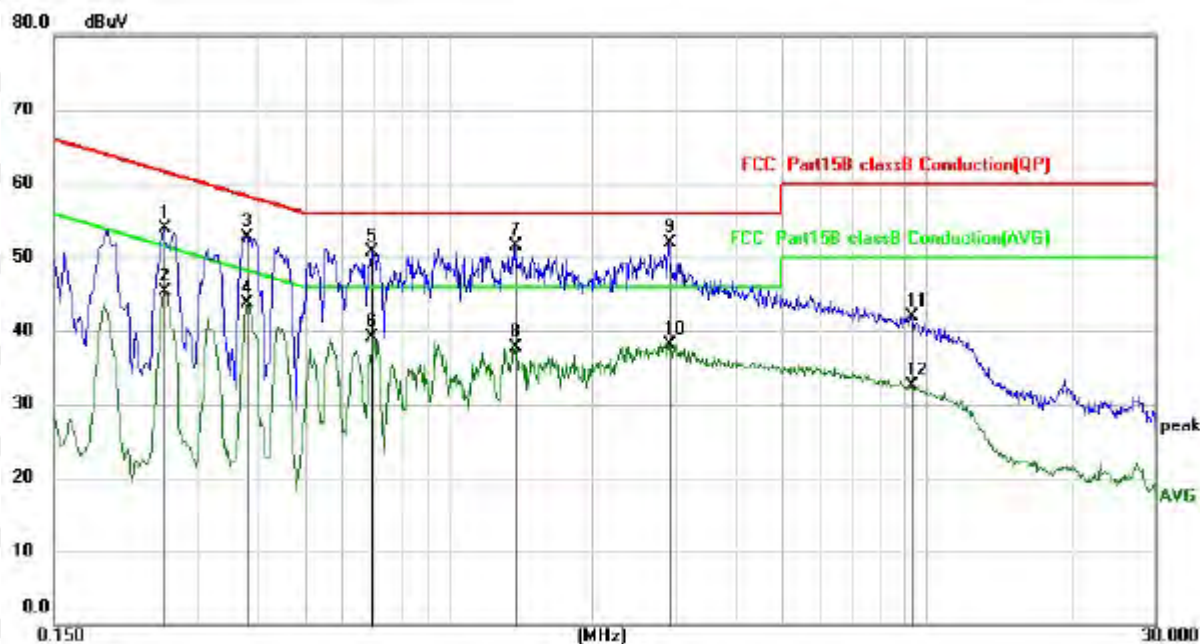

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2540	43.20	10.66	53.86	61.63	-7.77	QP
2		0.2540	34.61	10.66	45.27	51.63	-6.36	AVG
3		0.3780	42.18	10.59	52.77	58.32	-5.55	QP
4		0.3780	33.15	10.59	43.74	48.32	-4.58	AVG
5		0.6900	40.24	10.56	50.80	56.00	-5.20	QP
6		0.6900	28.52	10.56	39.08	46.00	-6.92	AVG
7		1.3740	40.82	10.62	51.44	56.00	-4.56	QP
8		1.3740	27.11	10.62	37.73	46.00	-8.27	AVG
9	*	2.8860	41.23	10.63	51.86	56.00	-4.14	QP
10		2.8860	27.53	10.63	38.16	46.00	-7.84	AVG
11		9.2538	31.07	10.79	41.86	60.00	-18.14	QP
12		9.2538	21.78	10.79	32.57	50.00	-17.43	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

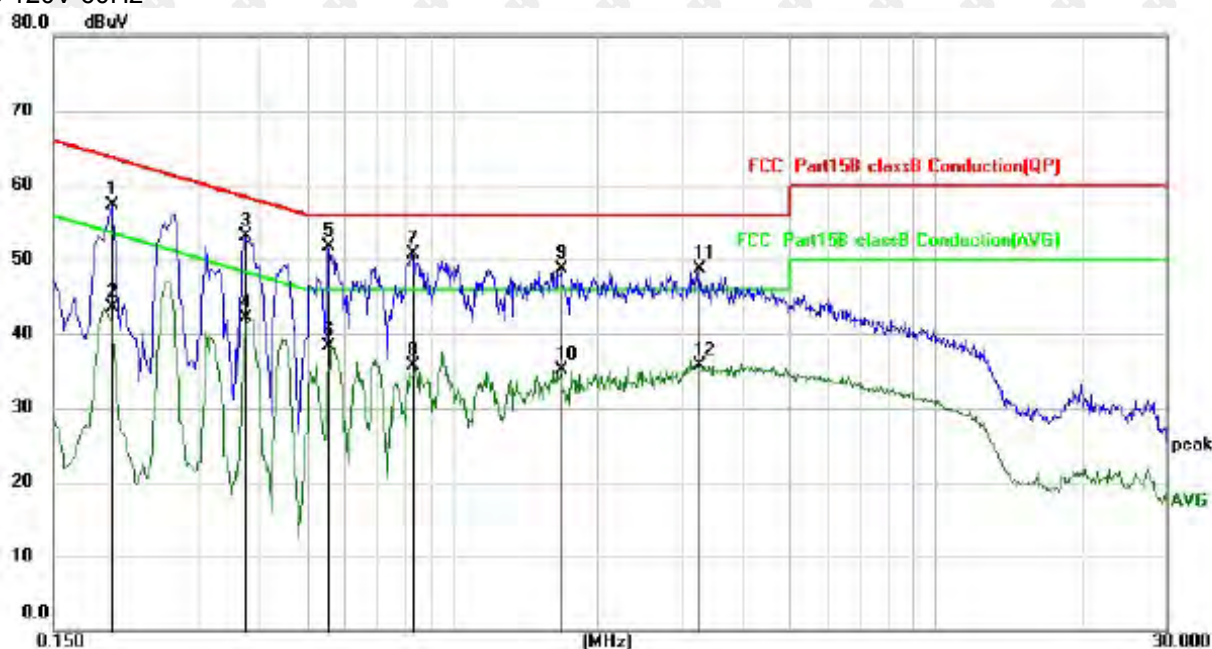

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1980	46.61	10.69	57.30	63.69	-6.39	QP
2		0.1980	32.83	10.69	43.52	53.69	-10.17	AVG
3		0.3738	42.52	10.59	53.11	58.42	-5.31	QP
4		0.3738	31.56	10.59	42.15	48.42	-6.27	AVG
5	*	0.5540	41.12	10.53	51.65	56.00	-4.35	QP
6		0.5540	27.73	10.53	38.26	46.00	-7.74	AVG
7		0.8300	40.05	10.59	50.64	56.00	-5.36	QP
8		0.8300	25.04	10.59	35.63	46.00	-10.37	AVG
9		1.6819	38.11	10.62	48.73	56.00	-7.27	QP
10		1.6819	24.39	10.62	35.01	46.00	-10.99	AVG
11		3.2500	37.99	10.64	48.63	56.00	-7.37	QP
12		3.2500	25.14	10.64	35.78	46.00	-10.22	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

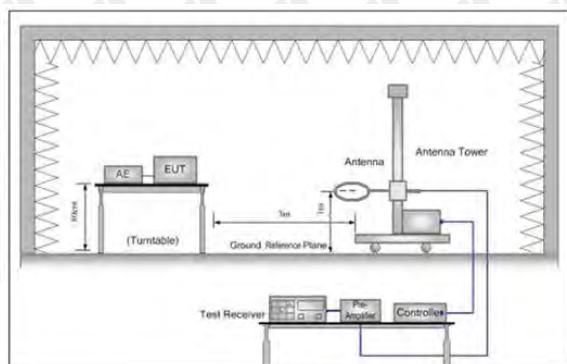


Figure 1. Below 30MHz



Figure 2. 30MHz to 1GHz

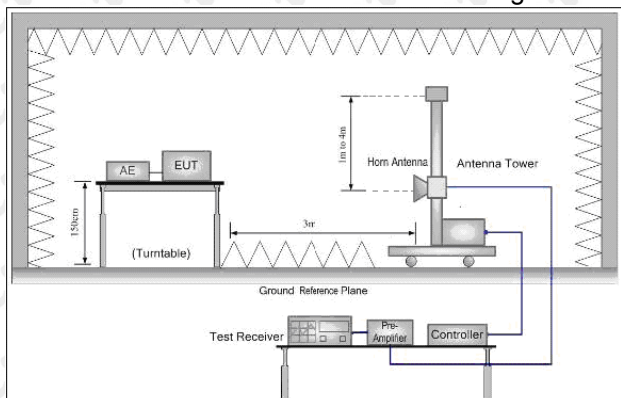


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		96.2672	35.73	-9.05	26.68	43.50	-16.82	QP
2		147.9214	36.77	-5.49	31.28	43.50	-12.22	QP
3	*	248.1165	48.56	-5.72	42.84	46.00	-3.16	QP
4		446.4140	37.54	-0.57	36.97	46.00	-9.03	QP
5	!	742.2586	37.41	4.84	42.25	46.00	-3.75	QP
6	!	892.2908	35.69	6.20	41.89	46.00	-4.11	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1	!	43.7352	41.92	-5.41	36.51	40.00	-3.49	QP
2	!	136.6993	44.89	-5.67	39.22	43.50	-4.28	QP
3		248.1165	45.60	-5.72	39.88	46.00	-6.12	QP
4		446.4141	38.62	-0.57	38.05	46.00	-7.95	QP
5	!	570.6100	39.76	2.02	41.78	46.00	-4.22	QP
6	*	742.2586	38.06	4.84	42.90	46.00	-3.10	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.08	-3.64	60.44	74	-13.56	peak
4824	48.82	-3.64	45.18	54	-8.82	AVG
7236	59.22	-0.95	58.27	74	-15.73	peak
7236	44.42	-0.95	43.47	54	-10.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.18	-3.64	61.54	74	-12.46	peak
4824	48.85	-3.64	45.21	54	-8.79	AVG
7236	58.27	-0.95	57.32	74	-16.68	peak
7236	44.15	-0.95	43.20	54	-10.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.78	-3.51	61.27	74	-12.73	peak
4874	50.41	-3.51	46.90	54	-7.10	AVG
7311	59.02	-0.82	58.20	74	-15.80	peak
7311	45.64	-0.82	44.82	54	-9.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.26	-3.51	59.75	74	-14.25	peak
4874	46.78	-3.51	43.27	54	-10.73	AVG
7311	59.03	-0.82	58.21	74	-15.79	peak
7311	42.36	-0.82	41.54	54	-12.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.44	-3.43	59.01	74	-14.99	peak
4924	46.40	-3.43	42.97	54	-11.03	AVG
7386	59.92	-0.75	59.17	74	-14.83	peak
7386	43.41	-0.75	42.66	54	-11.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.42	-3.43	59.99	74	-14.01	peak
4924	48.42	-3.43	44.99	54	-9.01	AVG
7386	57.26	-0.75	56.51	74	-17.49	peak
7386	41.35	-0.75	40.60	54	-13.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.43	-3.64	60.79	74	-13.21	peak
4824	48.94	-3.64	45.30	54	-8.70	AVG
7236	57.07	-0.95	56.12	74	-17.88	peak
7236	46.46	-0.95	45.51	54	-8.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.09	-3.64	58.45	74	-15.55	peak
4824	47.92	-3.64	44.28	54	-9.72	AVG
7236	60.45	-0.95	59.50	74	-14.50	peak
7236	43.63	-0.95	42.68	54	-11.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.13	-3.51	59.62	74	-14.38	peak
4874	48.62	-3.51	45.11	54	-8.89	AVG
7311	58.64	-0.82	57.82	74	-16.18	peak
7311	45.13	-0.82	44.31	54	-9.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.26	-3.51	60.75	74	-13.25	peak
4874	47.33	-3.51	43.82	54	-10.18	AVG
7311	56.40	-0.82	55.58	74	-18.42	peak
7311	41.49	-0.82	40.67	54	-13.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.34	-3.43	58.91	74	-15.09	peak
4924	47.12	-3.43	43.69	54	-10.31	AVG
7386	56.39	-0.75	55.64	74	-18.36	peak
7386	42.50	-0.75	41.75	54	-12.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.04	-3.43	60.61	74	-13.39	peak
4924	49.06	-3.43	45.63	54	-8.37	AVG
7386	57.88	-0.75	57.13	74	-16.87	peak
7386	44.21	-0.75	43.46	54	-10.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to be completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.16	-3.64	59.52	74	-14.48	peak
4824	47.87	-3.64	44.23	54	-9.77	AVG
7236	59.44	-0.95	58.49	74	-15.51	peak
7236	44.89	-0.95	43.94	54	-10.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	61.98	-3.64	58.34	74	-15.66	peak
4824	48.21	-3.64	44.57	54	-9.43	AVG
7236	57.99	-0.95	57.04	74	-16.96	peak
7236	46.75	-0.95	45.80	54	-8.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.25	-3.51	59.74	74.00	-14.26	peak
4874.00	48.42	-3.51	44.91	54.00	-9.09	AVG
7311.00	59.65	-0.82	58.83	74.00	-15.17	peak
7311.00	43.23	-0.82	42.41	54.00	-11.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.16	-3.51	58.65	74.00	-15.35	peak
4874.00	48.23	-3.51	44.72	54.00	-9.28	AVG
7311.00	57.99	-0.82	57.17	74.00	-16.83	peak
7311.00	41.74	-0.82	40.92	54.00	-13.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.51	-3.43	60.08	74	-13.92	peak
4924	47.00	-3.43	43.57	54	-10.43	AVG
7386	57.79	-0.75	57.04	74	-16.96	peak
7386	41.94	-0.75	41.19	54	-12.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.47	-3.43	60.04	74	-13.96	peak
4924	45.16	-3.43	41.73	54	-12.27	AVG
7386	58.40	-0.75	57.65	74	-16.35	peak
7386	41.29	-0.75	40.54	54	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.44	-3.63	60.81	74	-13.19	peak
4844	47.72	-3.63	44.09	54	-9.91	AVG
7266	59.83	-0.94	58.89	74	-15.11	peak
7266	44.06	-0.94	43.12	54	-10.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.00	-3.63	60.37	74	-13.63	peak
4844	47.65	-3.63	44.02	54	-9.98	AVG
7266	59.39	-0.94	58.45	74	-15.55	peak
7266	45.06	-0.94	44.12	54	-9.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.47	-3.51	59.96	74	-14.04	peak
4874	47.17	-3.51	43.66	54	-10.34	AVG
7311	60.71	-0.82	59.89	74	-14.11	peak
7311	46.00	-0.82	45.18	54	-8.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.42	-3.43	58.99	74	-15.01	peak
4904	47.62	-3.43	44.19	54	-9.81	AVG
7356	57.51	-0.75	56.76	74	-17.24	peak
7356	42.03	-0.75	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.12	-3.43	58.69	74	-15.31	peak
4904	46.30	-3.43	42.87	54	-11.13	AVG
7356	56.82	-0.75	56.07	74	-17.93	peak
7356	43.84	-0.75	43.09	54	-10.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.55	-5.81	50.74	74	-23.26	peak
2390	/	-5.81	/	54	/	AVG
2399	63.86	-5.84	58.02	74	-15.98	peak
2399	47.97	-5.84	42.13	54	-11.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.93	-5.81	52.12	74	-21.88	peak
2390	/	-5.81	/	54	/	AVG
2399	62.95	-5.84	57.11	74	-16.89	peak
2399	46.11	-5.84	40.27	54	-13.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.76	-5.65	51.11	74	-22.89	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.59	-5.81	52.78	74	-21.22	peak
2390	/	-5.81	/	54	/	AVG
2399	62.02	-5.84	56.18	74	-17.82	peak
2399	46.26	-5.84	40.42	54	-13.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.88	-5.81	51.07	74	-22.93	peak
2390	/	-5.81	/	54	/	AVG
2399	63.04	-5.84	57.20	74	-16.80	peak
2399	45.49	-5.84	39.65	54	-14.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.30	-5.65	50.65	74	-23.35	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.55	-5.65	51.90	74	-22.10	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.37	-5.81	51.56	74	-22.44	peak
2390	/	-5.81	/	54	/	AVG
2399	63.31	-5.84	57.47	74	-16.53	peak
2399	48.18	-5.84	42.34	54	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.96	-5.81	50.15	74	-23.85	peak
2390	/	-5.81	/	54	/	AVG
2399	61.28	-5.84	55.44	74	-18.56	peak
2399	46.63	-5.84	40.79	54	-13.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.20	-5.65	51.55	74	-22.45	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.78	-5.65	51.13	74	-22.87	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.13	-5.81	52.32	74	-21.68	peak
2390	/	-5.81	/	54	/	AVG
2399	64.04	-5.84	58.20	74	-15.80	peak
2399	45.81	-5.84	39.97	54	-14.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.05	-5.81	51.24	74	-22.76	peak
2390	/	-5.81	/	54	/	AVG
2399	60.21	-5.84	54.37	74	-19.63	peak
2399	45.61	-5.84	39.77	54	-14.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.26	-5.65	52.61	74	-21.39	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

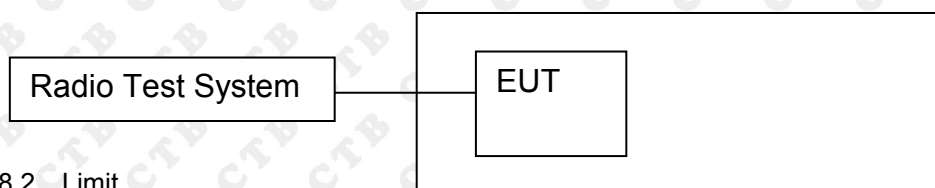

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

BAND EDGE Graphs

802.11b/LCH

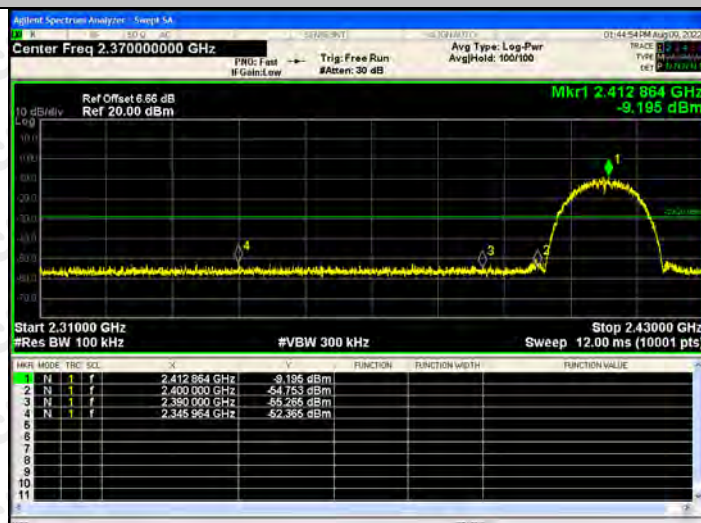


802.11b/HCH

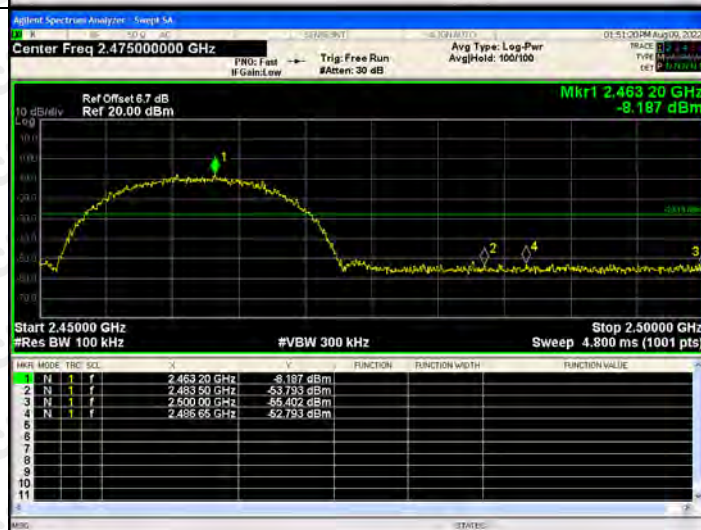

BAND EDGE Graphs

802.11g/LCH

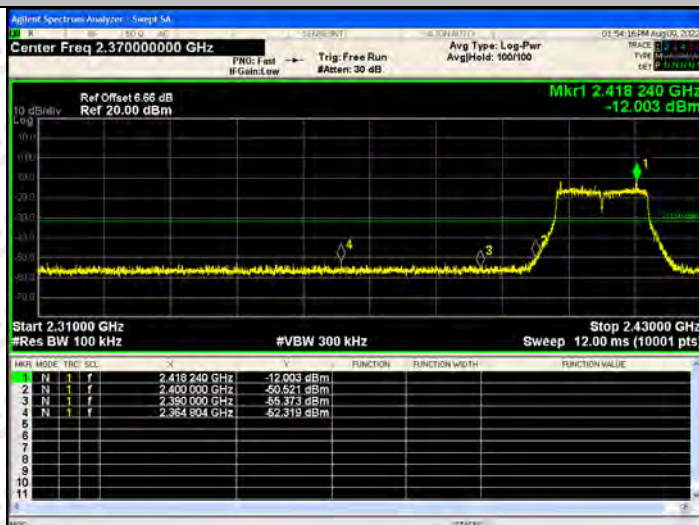


802.11g/HCH



BAND EDGE Graphs

802.11n(HT20)/L
CH

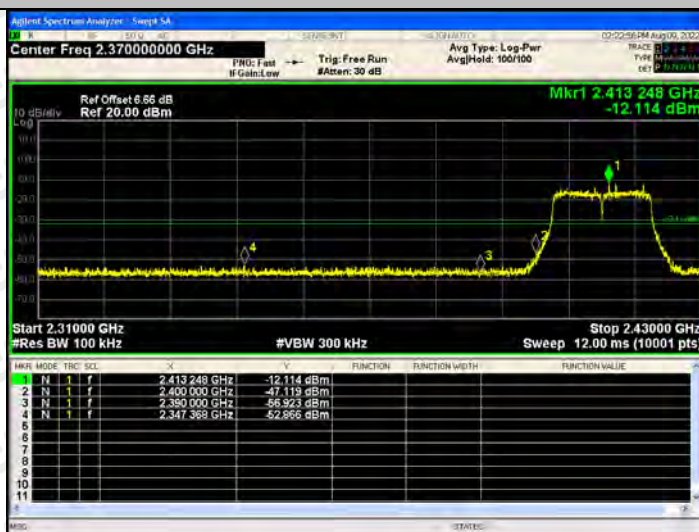


802.11n(HT20)/H
CH



BAND EDGE Graphs




802.11n(HT40)/L
CH

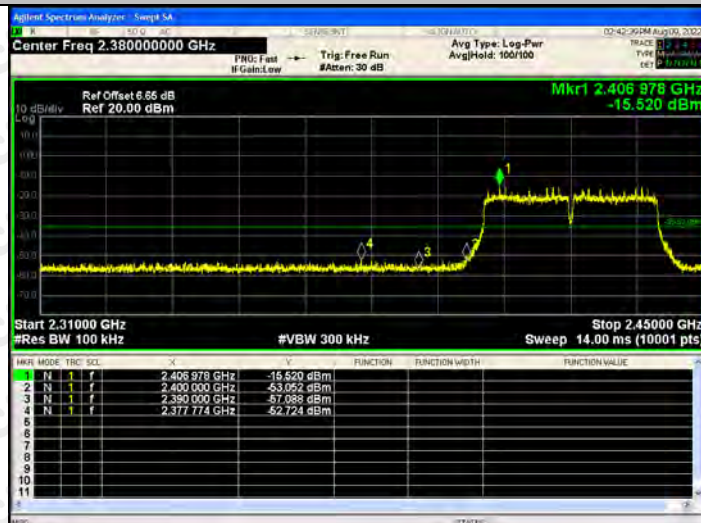

802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs

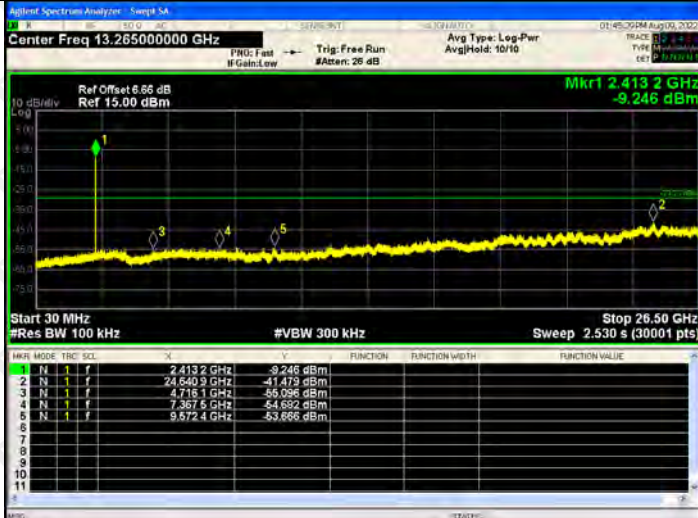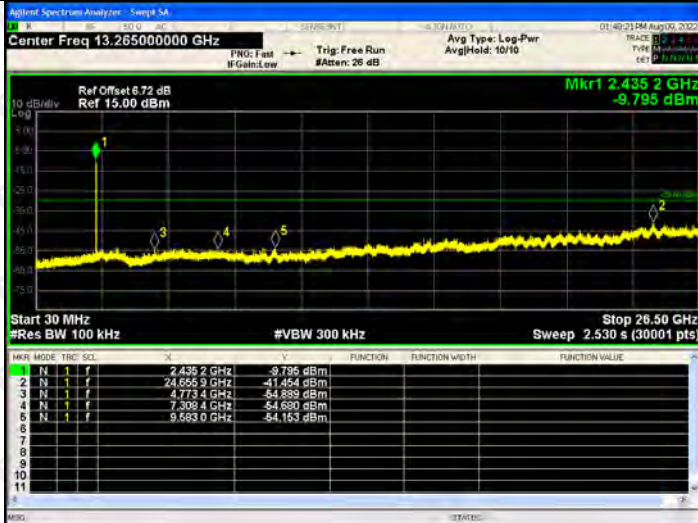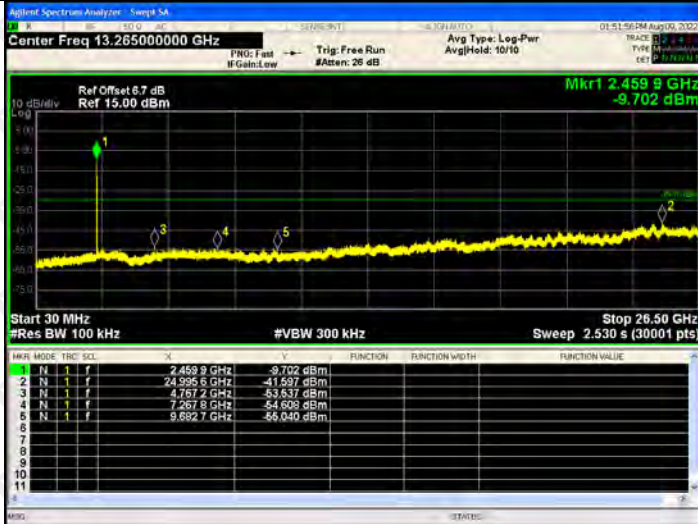
802.11b /LCH	 <table><tr><th>Peak</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4132</td><td>-9.246</td></tr><tr><td>2</td><td>2.4352</td><td>-9.795</td></tr><tr><td>3</td><td>2.4569</td><td>-9.702</td></tr><tr><td>4</td><td>2.4772</td><td>-9.637</td></tr><tr><td>5</td><td>2.4989</td><td>-9.597</td></tr></table>	Peak	Freq (GHz)	Power (dBm)	1	2.4132	-9.246	2	2.4352	-9.795	3	2.4569	-9.702	4	2.4772	-9.637	5	2.4989	-9.597
Peak	Freq (GHz)	Power (dBm)																	
1	2.4132	-9.246																	
2	2.4352	-9.795																	
3	2.4569	-9.702																	
4	2.4772	-9.637																	
5	2.4989	-9.597																	
802.11b /MCH	 <table><tr><th>Peak</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4132</td><td>-9.246</td></tr><tr><td>2</td><td>2.4352</td><td>-9.795</td></tr><tr><td>3</td><td>2.4569</td><td>-9.702</td></tr><tr><td>4</td><td>2.4772</td><td>-9.637</td></tr><tr><td>5</td><td>2.4989</td><td>-9.597</td></tr></table>	Peak	Freq (GHz)	Power (dBm)	1	2.4132	-9.246	2	2.4352	-9.795	3	2.4569	-9.702	4	2.4772	-9.637	5	2.4989	-9.597
Peak	Freq (GHz)	Power (dBm)																	
1	2.4132	-9.246																	
2	2.4352	-9.795																	
3	2.4569	-9.702																	
4	2.4772	-9.637																	
5	2.4989	-9.597																	
802.11b /HCH	 <table><tr><th>Peak</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>2.4132</td><td>-9.246</td></tr><tr><td>2</td><td>2.4352</td><td>-9.795</td></tr><tr><td>3</td><td>2.4569</td><td>-9.702</td></tr><tr><td>4</td><td>2.4772</td><td>-9.637</td></tr><tr><td>5</td><td>2.4989</td><td>-9.597</td></tr></table>	Peak	Freq (GHz)	Power (dBm)	1	2.4132	-9.246	2	2.4352	-9.795	3	2.4569	-9.702	4	2.4772	-9.637	5	2.4989	-9.597
Peak	Freq (GHz)	Power (dBm)																	
1	2.4132	-9.246																	
2	2.4352	-9.795																	
3	2.4569	-9.702																	
4	2.4772	-9.637																	
5	2.4989	-9.597																	

RF Conducted Spurious Emissions Graphs


802.11g
/LCH

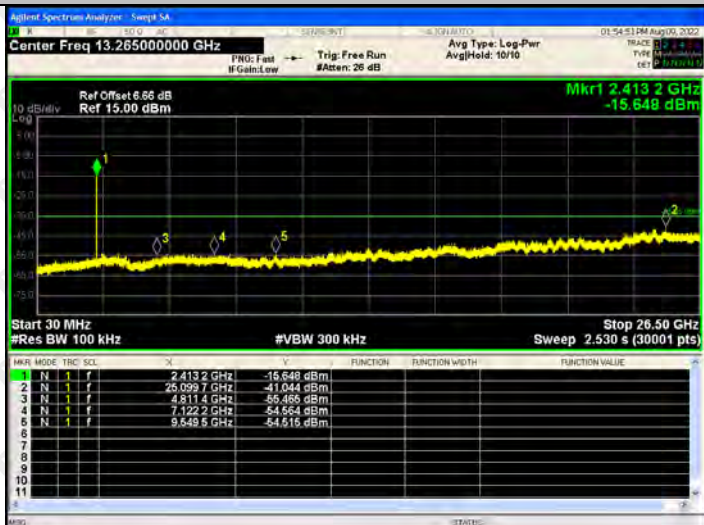

802.11g
/MCH


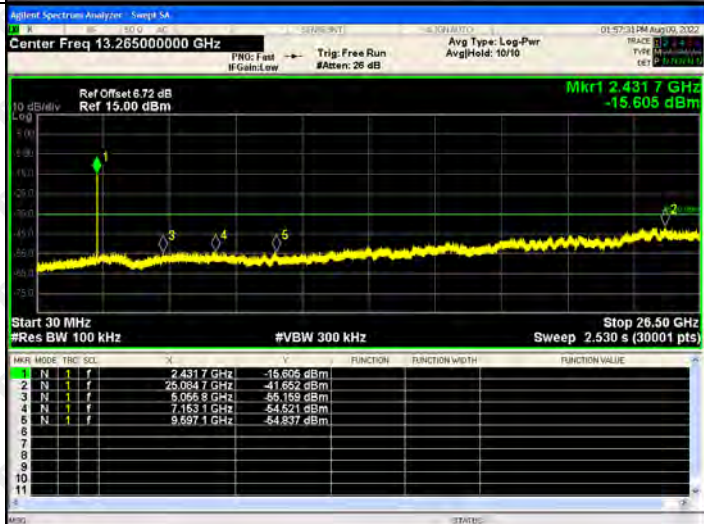


802.11g
/HCH

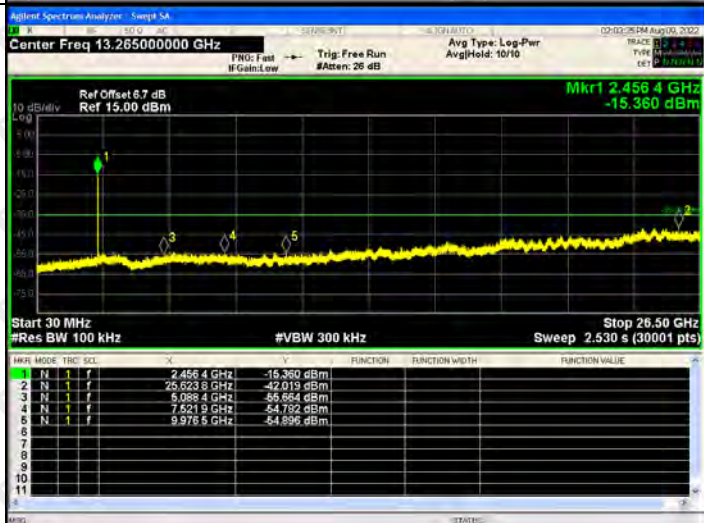

RF Conducted Spurious Emissions Graphs

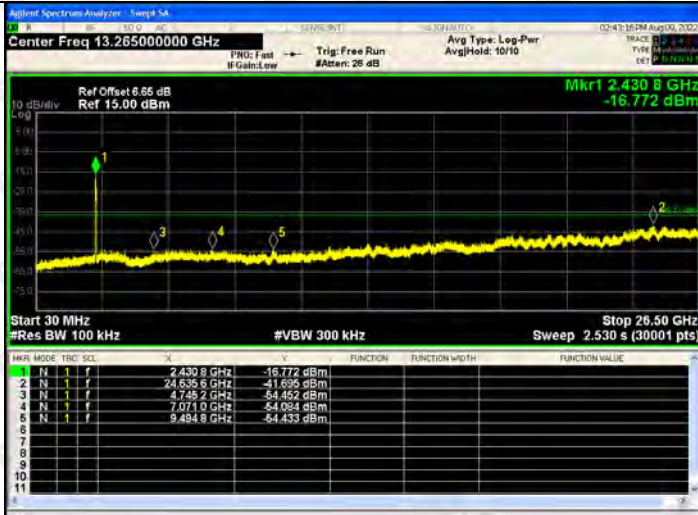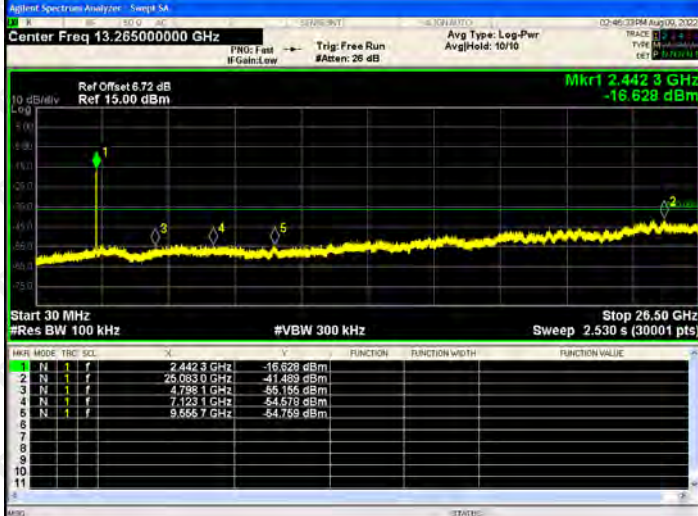


802.11n (HT40)/ LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.430 GHz -16.772 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MARK</th><th>MODE</th><th>TYPE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>2.430 GHz</td><td>-16.772 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>24.635 GHz</td><td>-41.695 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>4.745 GHz</td><td>-54.452 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>7.071 GHz</td><td>-54.034 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>9.494 GHz</td><td>-54.433 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TYPE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	2.430 GHz	-16.772 dBm				2	N	1	24.635 GHz	-41.695 dBm				3	N	1	4.745 GHz	-54.452 dBm				4	N	1	7.071 GHz	-54.034 dBm				5	N	1	9.494 GHz	-54.433 dBm			
MARK	MODE	TYPE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	2.430 GHz	-16.772 dBm																																													
2	N	1	24.635 GHz	-41.695 dBm																																													
3	N	1	4.745 GHz	-54.452 dBm																																													
4	N	1	7.071 GHz	-54.034 dBm																																													
5	N	1	9.494 GHz	-54.433 dBm																																													
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.442 GHz -16.628 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MARK</th><th>MODE</th><th>TYPE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>2.442 GHz</td><td>-16.628 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>25.083 GHz</td><td>-41.489 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>4.795 GHz</td><td>-55.155 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>7.123 GHz</td><td>-54.579 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>9.555 GHz</td><td>-54.759 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TYPE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	2.442 GHz	-16.628 dBm				2	N	1	25.083 GHz	-41.489 dBm				3	N	1	4.795 GHz	-55.155 dBm				4	N	1	7.123 GHz	-54.579 dBm				5	N	1	9.555 GHz	-54.759 dBm			
MARK	MODE	TYPE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	2.442 GHz	-16.628 dBm																																													
2	N	1	25.083 GHz	-41.489 dBm																																													
3	N	1	4.795 GHz	-55.155 dBm																																													
4	N	1	7.123 GHz	-54.579 dBm																																													
5	N	1	9.555 GHz	-54.759 dBm																																													
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.440 GHz -19.297 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MARK</th><th>MODE</th><th>TYPE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>2.440 GHz</td><td>-19.297 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>24.649 GHz</td><td>-41.263 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>4.755 GHz</td><td>-55.804 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>7.191 GHz</td><td>-54.263 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>9.614 GHz</td><td>-55.092 dBm</td><td></td><td></td><td></td></tr></table>	MARK	MODE	TYPE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	2.440 GHz	-19.297 dBm				2	N	1	24.649 GHz	-41.263 dBm				3	N	1	4.755 GHz	-55.804 dBm				4	N	1	7.191 GHz	-54.263 dBm				5	N	1	9.614 GHz	-55.092 dBm			
MARK	MODE	TYPE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	2.440 GHz	-19.297 dBm																																													
2	N	1	24.649 GHz	-41.263 dBm																																													
3	N	1	4.755 GHz	-55.804 dBm																																													
4	N	1	7.191 GHz	-54.263 dBm																																													
5	N	1	9.614 GHz	-55.092 dBm																																													


ANT2:

BAND EDGE Graphs

802.11b/LCH

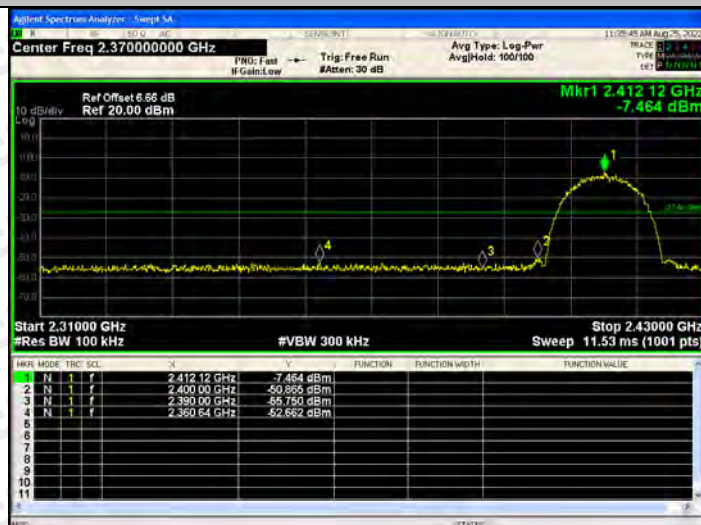


802.11b/HCH

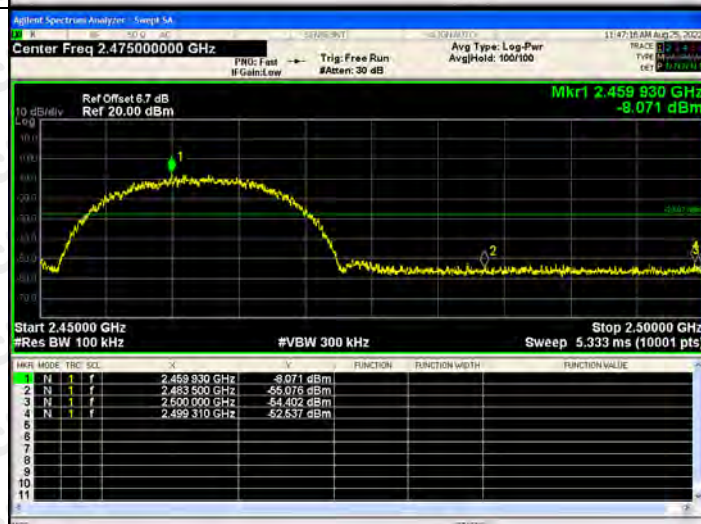


BAND EDGE Graphs

802.11g/LCH

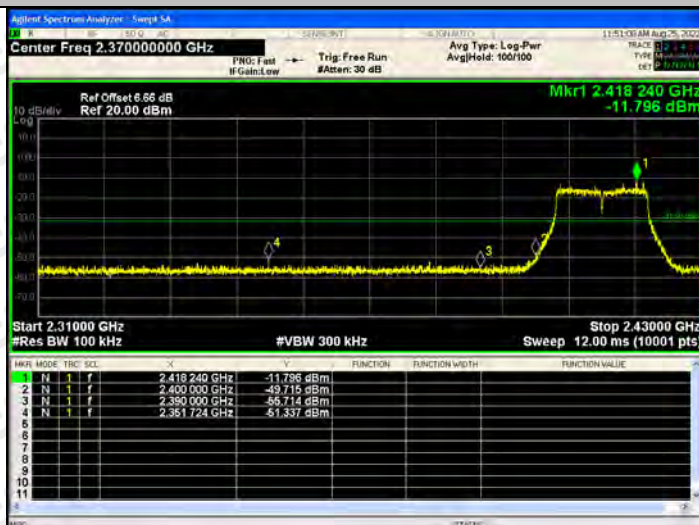


802.11g/HCH

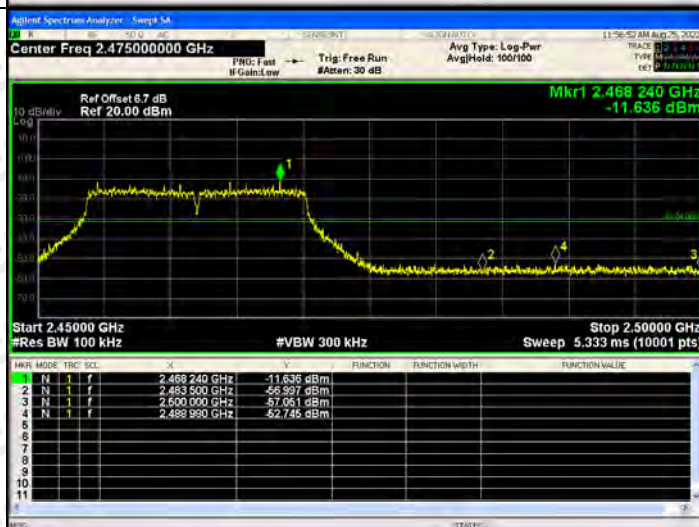

BAND EDGE Graphs

802.11n(HT20)/L
CH

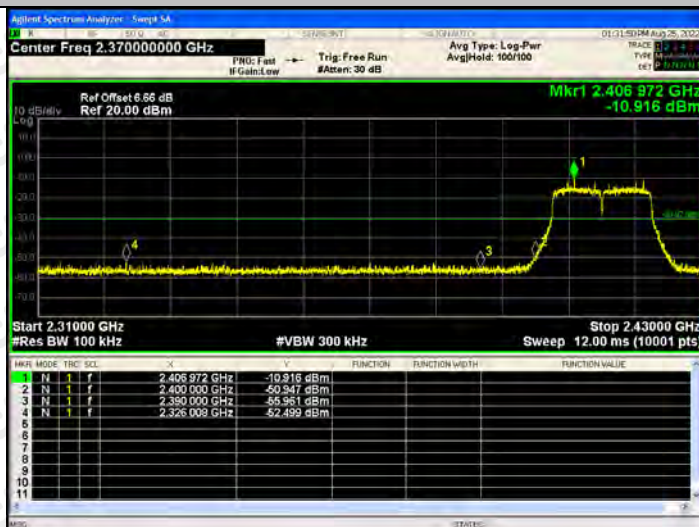


802.11n(HT20)/H
CH



BAND EDGE Graphs

802.11n(HT40)/L
CH

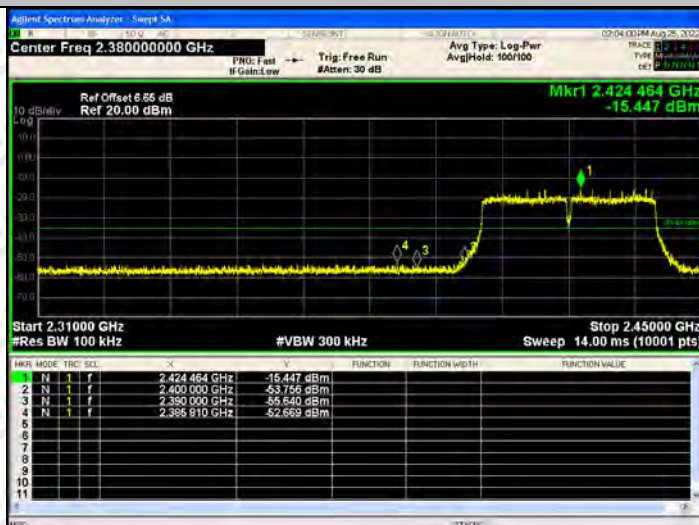


802.11n(HT40)/H
CH




RF Conducted Spurious Emissions Graphs


802.11b
/LCH

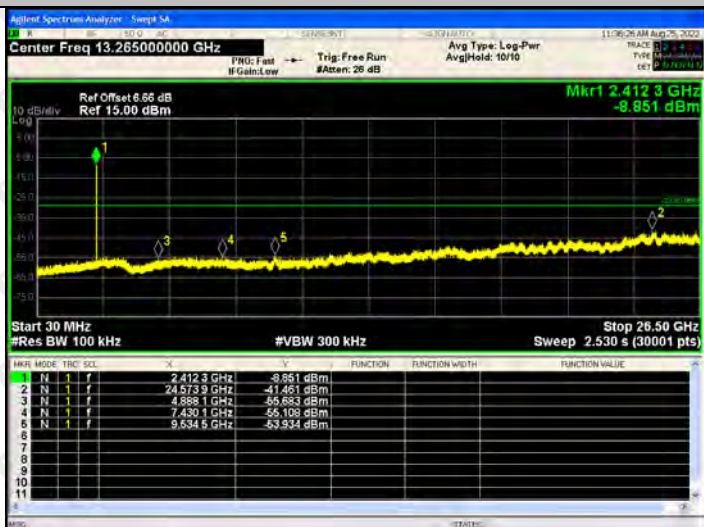


802.11b
/MCH

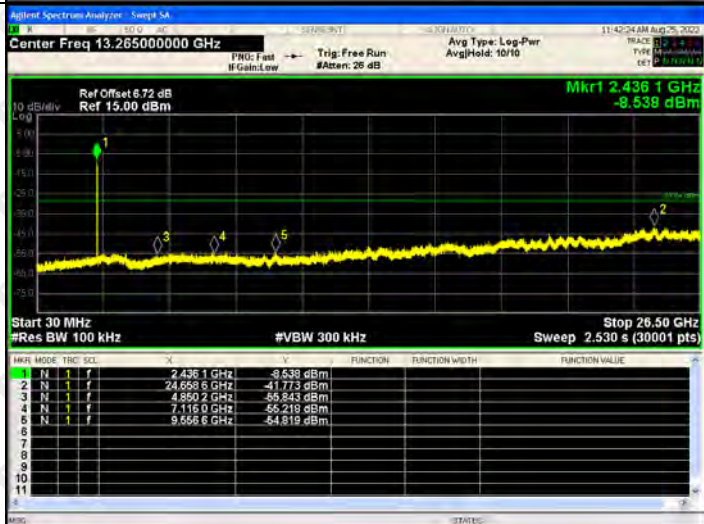

802.11b
/HCH

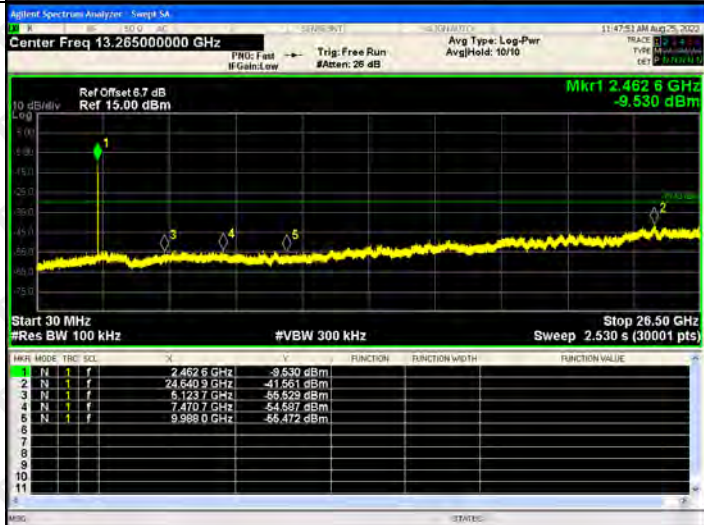




RF Conducted Spurious Emissions Graphs

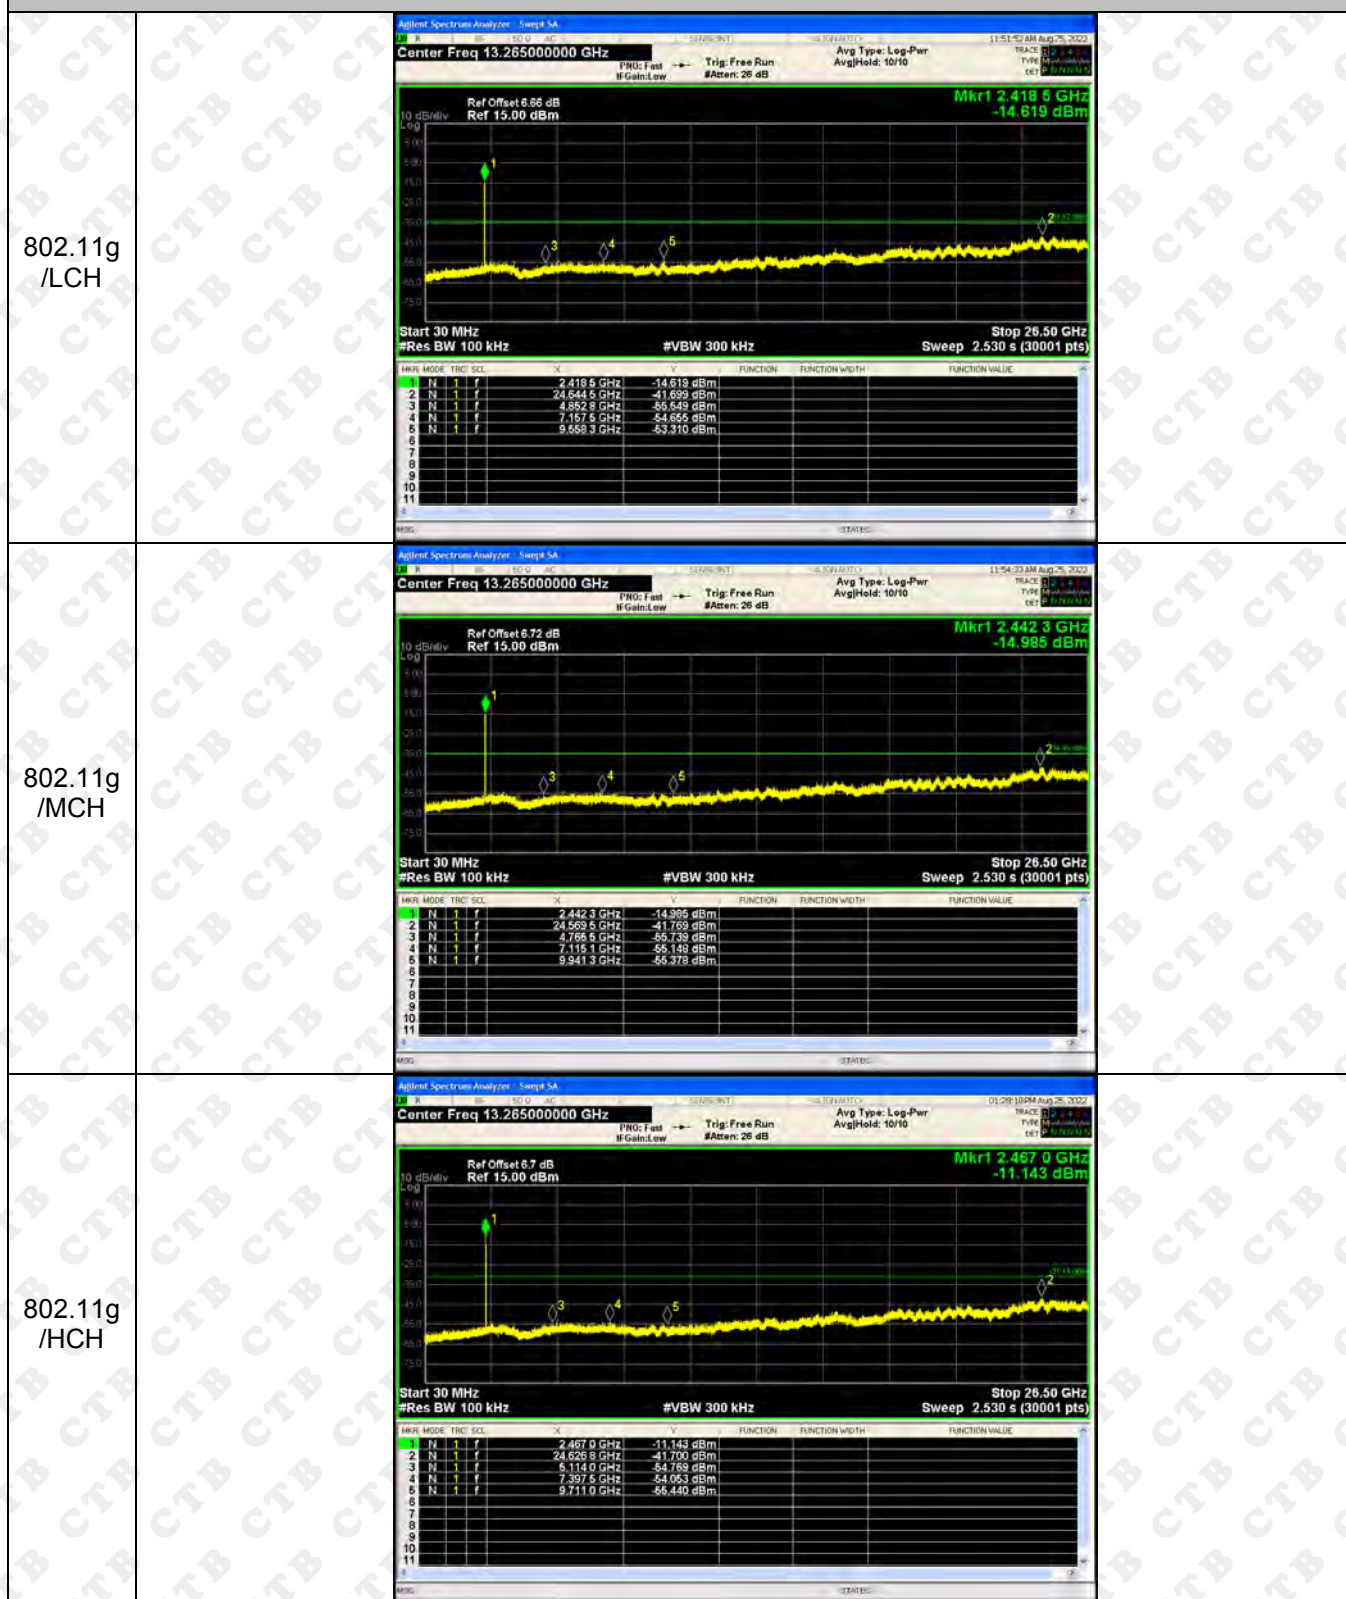

RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs

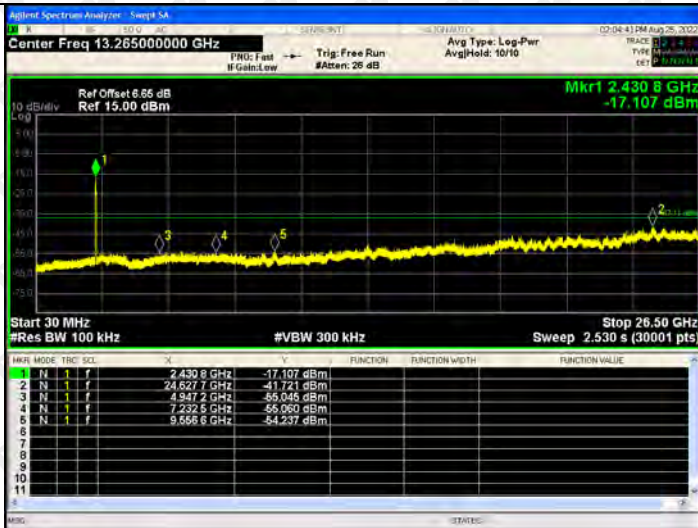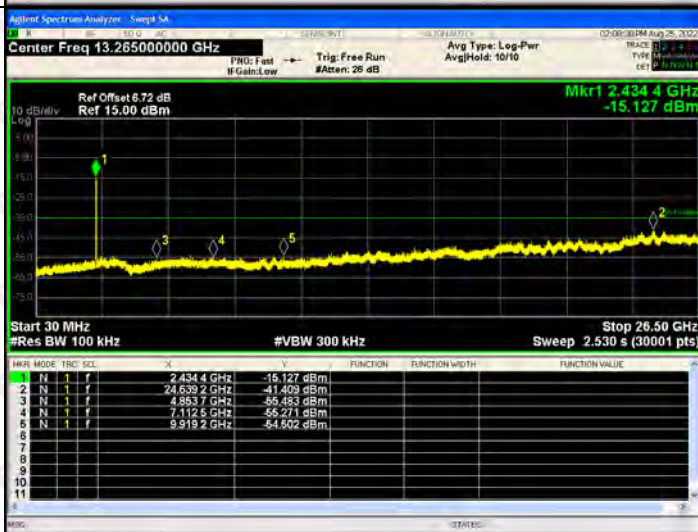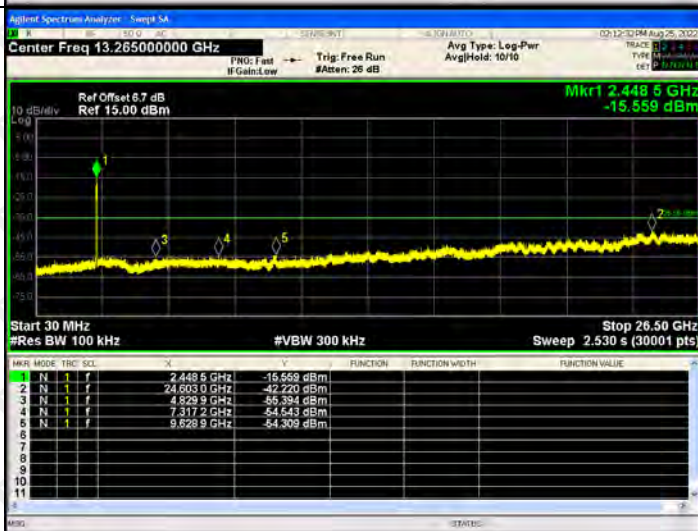802.11 n(HT40) /LCH	 <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4308 GHz</td><td>-17.107 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6277 GHz</td><td>-41.721 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9472 GHz</td><td>-55.045 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2325 GHz</td><td>-55.050 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5568 GHz</td><td>-54.237 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4308 GHz	-17.107 dBm				2	N	1	f	24.6277 GHz	-41.721 dBm				3	N	1	f	4.9472 GHz	-55.045 dBm				4	N	1	f	7.2325 GHz	-55.050 dBm				5	N	1	f	9.5568 GHz	-54.237 dBm			
MARK	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4308 GHz	-17.107 dBm																																																		
2	N	1	f	24.6277 GHz	-41.721 dBm																																																		
3	N	1	f	4.9472 GHz	-55.045 dBm																																																		
4	N	1	f	7.2325 GHz	-55.050 dBm																																																		
5	N	1	f	9.5568 GHz	-54.237 dBm																																																		
802.11 n(HT40) /MCH	 <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4344 GHz</td><td>-15.127 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6392 GHz</td><td>-41.409 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8537 GHz</td><td>-55.483 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1125 GHz</td><td>-55.221 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9192 GHz</td><td>-54.502 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4344 GHz	-15.127 dBm				2	N	1	f	24.6392 GHz	-41.409 dBm				3	N	1	f	4.8537 GHz	-55.483 dBm				4	N	1	f	7.1125 GHz	-55.221 dBm				5	N	1	f	9.9192 GHz	-54.502 dBm			
MARK	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4344 GHz	-15.127 dBm																																																		
2	N	1	f	24.6392 GHz	-41.409 dBm																																																		
3	N	1	f	4.8537 GHz	-55.483 dBm																																																		
4	N	1	f	7.1125 GHz	-55.221 dBm																																																		
5	N	1	f	9.9192 GHz	-54.502 dBm																																																		
802.11 n(HT40) /HCH	 <table><thead><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4486 GHz</td><td>-15.559 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6030 GHz</td><td>-42.220 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8299 GHz</td><td>-55.394 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.3172 GHz</td><td>-54.543 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6289 GHz</td><td>-54.309 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MARK	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4486 GHz	-15.559 dBm				2	N	1	f	24.6030 GHz	-42.220 dBm				3	N	1	f	4.8299 GHz	-55.394 dBm				4	N	1	f	7.3172 GHz	-54.543 dBm				5	N	1	f	9.6289 GHz	-54.309 dBm			
MARK	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4486 GHz	-15.559 dBm																																																		
2	N	1	f	24.6030 GHz	-42.220 dBm																																																		
3	N	1	f	4.8299 GHz	-55.394 dBm																																																		
4	N	1	f	7.3172 GHz	-54.543 dBm																																																		
5	N	1	f	9.6289 GHz	-54.309 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

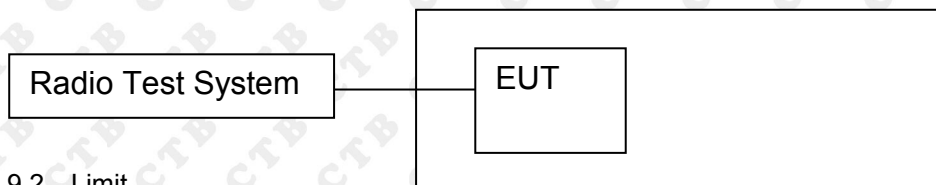

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	7.515	7.486	/	30
	MCH	7.416	7.613	/	30
	HCH	7.393	7.723	/	30
802.11g	LCH	6.349	6.467	/	30
	MCH	6.198	6.656	/	30
	HCH	6.588	6.32	/	30
802.11n(HT20)	LCH	6.506	7.165	9.858	30
	MCH	6.209	6.749	9.498	30
	HCH	6.134	6.51	9.336	30
802.11n(HT40)	LCH	5.34	5.374	8.367	30
	MCH	5.61	5.57	8.600	30
	HCH	5.33	5.635	8.495	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

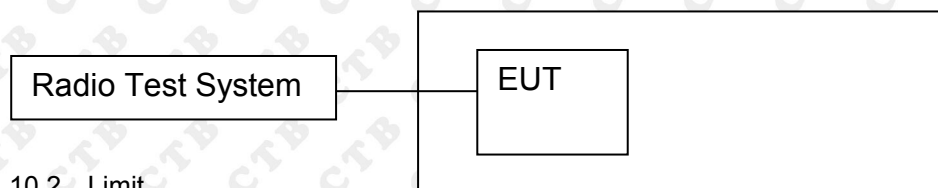

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result



ANT1:



Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.243	500	PASS
	MCH	9.545	500	PASS
	HCH	9.62	500	PASS
802.11g	LCH	16.328	500	PASS
	MCH	16.389	500	PASS
	HCH	16.093	500	PASS
802.11n(HT20)	LCH	17.31	500	PASS
	MCH	17.324	500	PASS
	HCH	17.164	500	PASS
802.11n(HT40)	LCH	36.022	500	PASS
	MCH	35.711	500	PASS
	HCH	35.522	500	PASS


ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.117	500	PASS
	MCH	10.316	500	PASS
	HCH	9.875	500	PASS
802.11g	LCH	16.387	500	PASS
	MCH	16.349	500	PASS
	HCH	16.333	500	PASS
802.11n(HT20)	LCH	17.576	500	PASS
	MCH	16.567	500	PASS
	HCH	16.8	500	PASS
802.11n(HT40)	LCH	35.599	500	PASS
	MCH	35.559	500	PASS
	HCH	35.35	500	PASS

ANT1:
Test Graph:

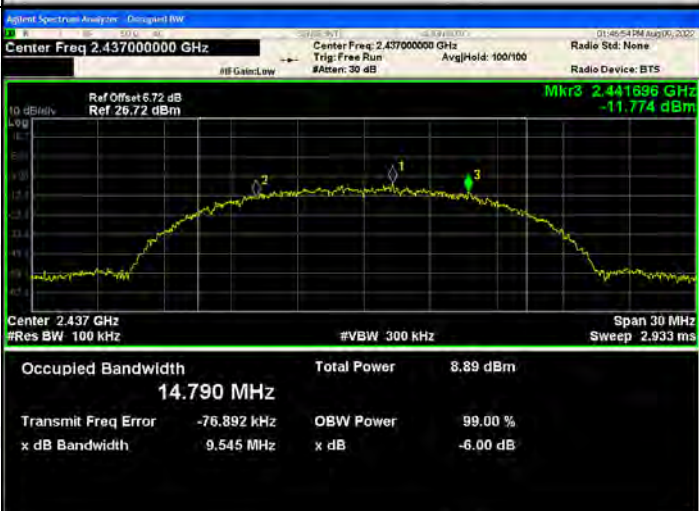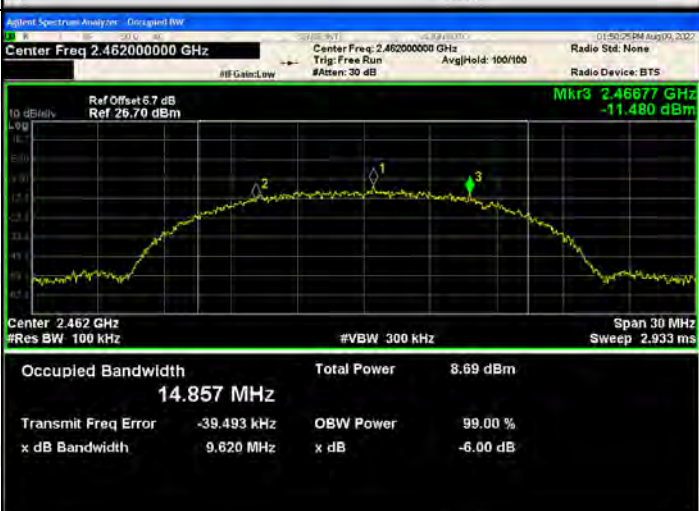
Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Aver: 30 dB AvgHld: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3 2.417092 GHz -15.913 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.889 MHz Total Power 8.92 dBm Transmit Freq Error -29.683 kHz OBW Power 99.00 % x dB Bandwidth 10.24 MHz x dB -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Aver: 30 dB AvgHld: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3 2.441696 GHz -11.774 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.790 MHz Total Power 8.89 dBm Transmit Freq Error -76.892 kHz OBW Power 99.00 % x dB Bandwidth 9.545 MHz x dB -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Aver: 30 dB AvgHld: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3 2.46677 GHz -11.480 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.857 MHz Total Power 8.69 dBm Transmit Freq Error -39.493 kHz OBW Power 99.00 % x dB Bandwidth 9.620 MHz x dB -6.00 dB

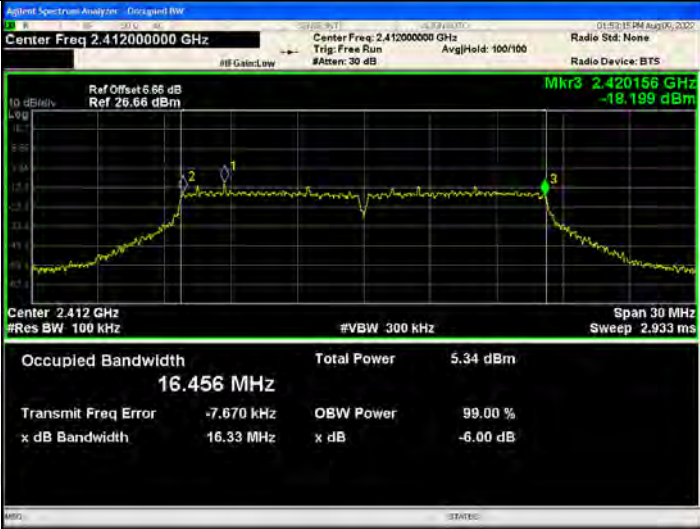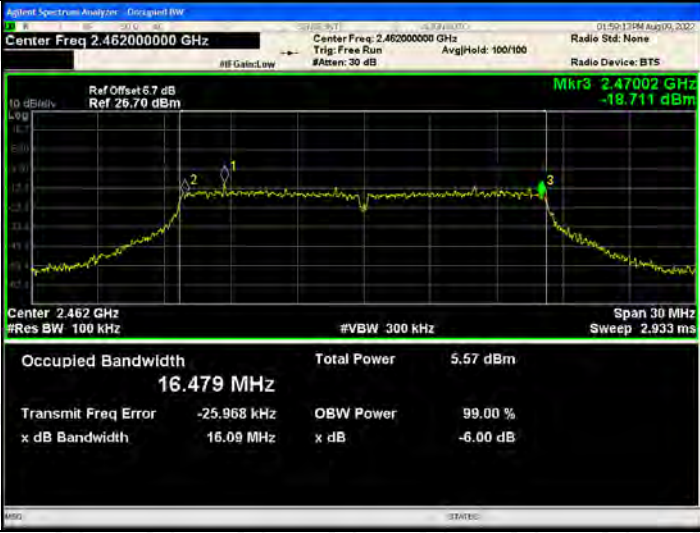802.11g/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.420156 GHz -18.199 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 16.456 MHz Total Power: 5.34 dBm Transmit Freq Error: -7.670 kHz OBW Power: 99.00 % x dB Bandwidth: 16.33 MHz x dB: -6.00 dB
802.11g/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.445171 GHz -18.158 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 16.469 MHz Total Power: 5.03 dBm Transmit Freq Error: -23.534 kHz OBW Power: 99.00 % x dB Bandwidth: 16.39 MHz x dB: -6.00 dB
802.11g/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.47002 GHz -18.711 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 16.479 MHz Total Power: 5.57 dBm Transmit Freq Error: -25.968 kHz OBW Power: 99.00 % x dB Bandwidth: 16.09 MHz x dB: -6.00 dB

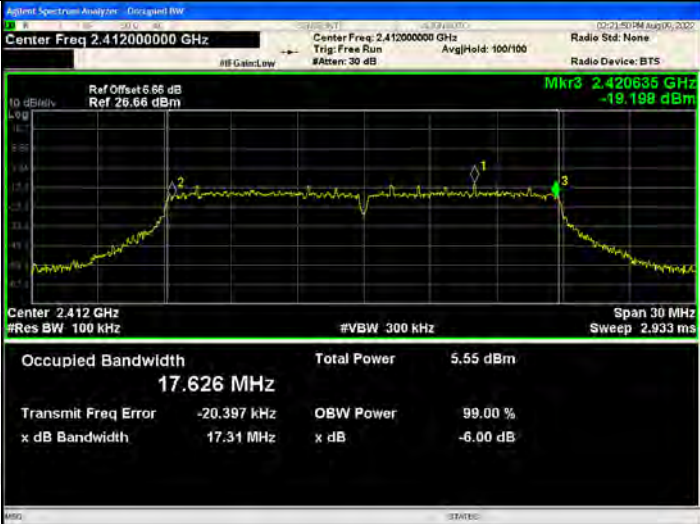
802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 26.66 dBm Mkr3 2.420635 GHz -19.198 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.626 MHz Total Power 5.55 dBm Transmit Freq Error -20.397 kHz OBW Power 99.00 % x dB Bandwidth 17.31 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.445637 GHz -19.169 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.607 MHz Total Power 5.43 dBm Transmit Freq Error -24.945 kHz OBW Power 99.00 % x dB Bandwidth 17.32 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.470561 GHz -17.734 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.613 MHz Total Power 5.12 dBm Transmit Freq Error -21.332 kHz OBW Power 99.00 % x dB Bandwidth 17.16 MHz x dB -6.00 dB

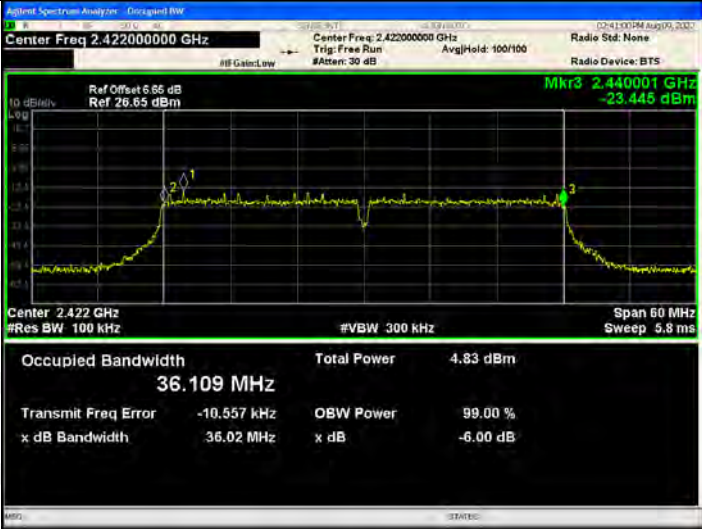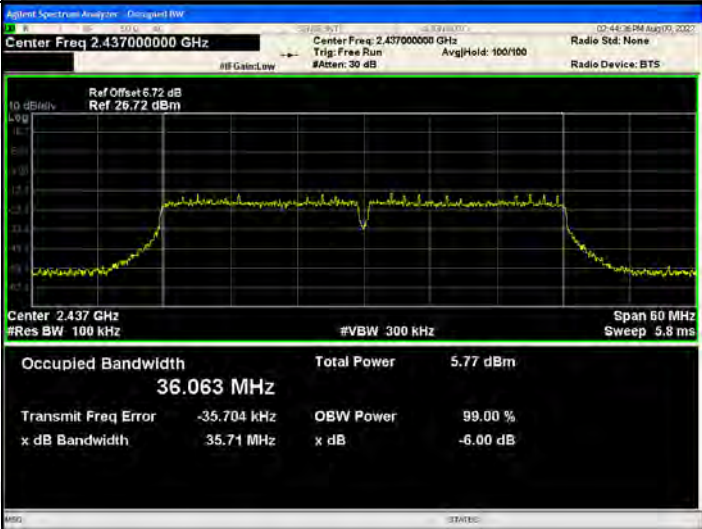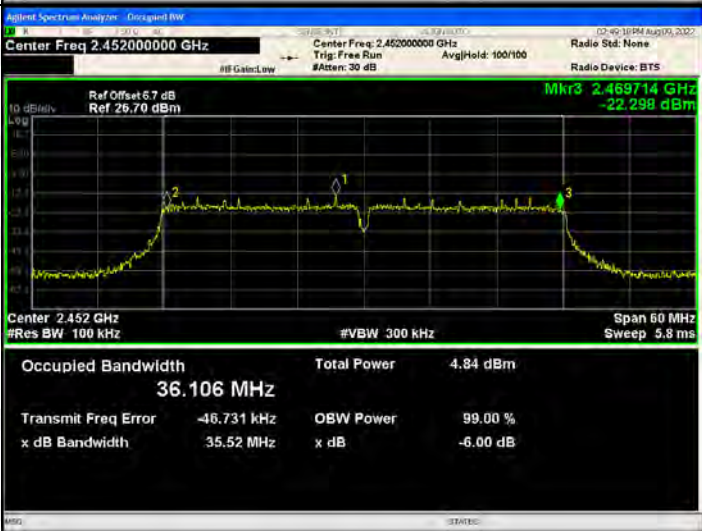802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Mkr3 2.440001 GHz -23.445 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.109 MHz Total Power 4.83 dBm Transmit Freq Error -10.557 kHz OBW Power 99.00 % x dB Bandwidth 36.02 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.063 MHz Total Power 5.77 dBm Transmit Freq Error -35.704 kHz OBW Power 99.00 % x dB Bandwidth 35.71 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.469714 GHz -22.298 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.106 MHz Total Power 4.84 dBm Transmit Freq Error -46.731 kHz OBW Power 99.00 % x dB Bandwidth 35.52 MHz x dB -6.00 dB


ANT2:
Test Graph:

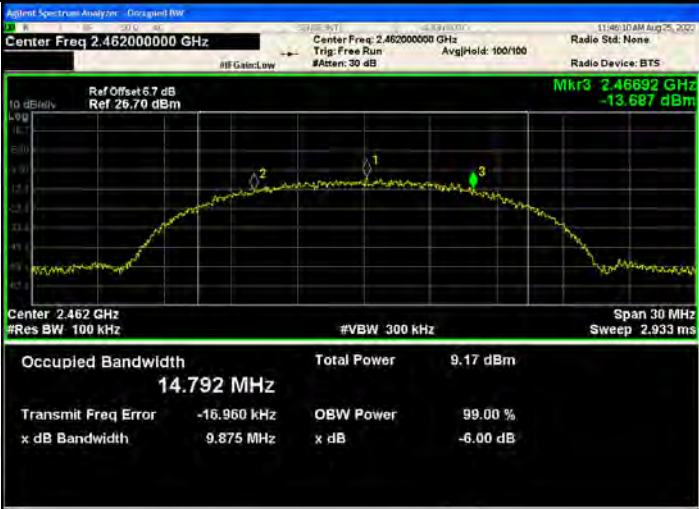Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3 2.417072 GHz -14.984 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.893 MHz Total Power 8.98 dBm Transmit Freq Error 13.028 kHz OBW Power 99.00 % x dB Bandwidth 10.12 MHz x dB -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3 2.442134 GHz -13.880 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.815 MHz Total Power 9.12 dBm Transmit Freq Error -24.168 kHz OBW Power 99.00 % x dB Bandwidth 10.32 MHz x dB -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3 2.46692 GHz -13.687 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.792 MHz Total Power 9.17 dBm Transmit Freq Error -16.960 kHz OBW Power 99.00 % x dB Bandwidth 9.875 MHz x dB -6.00 dB


802.11g/LCH



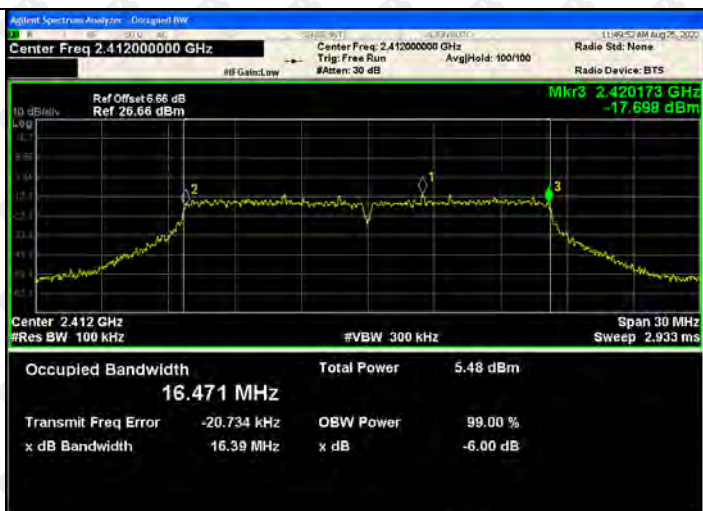




802.11g/MCH

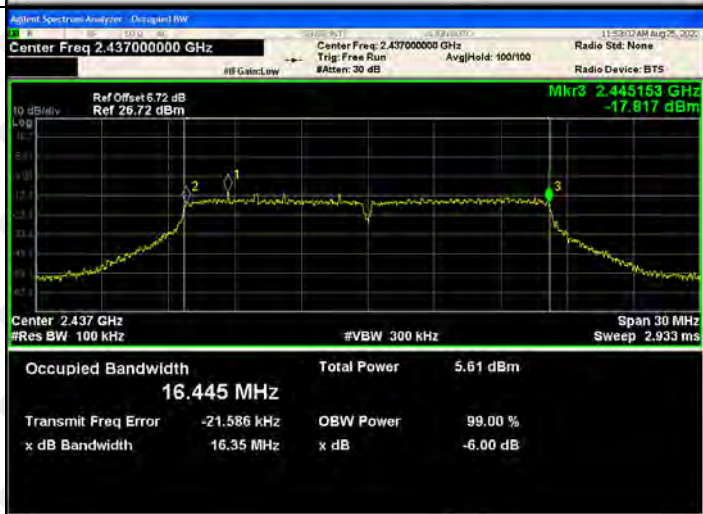

802.11g/HCH

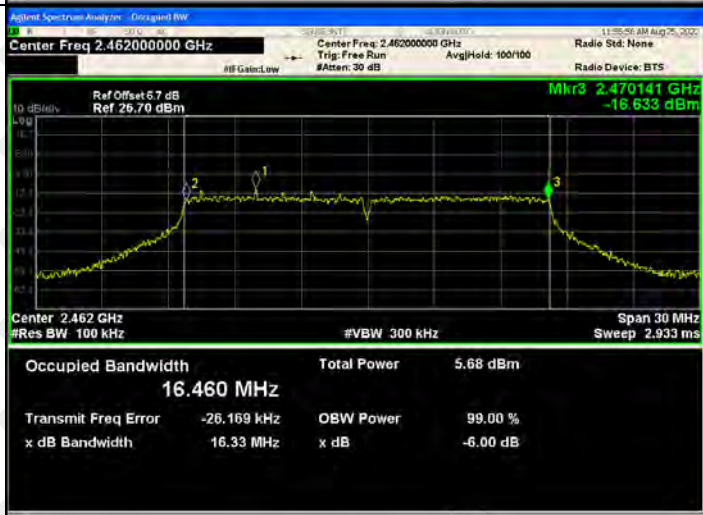


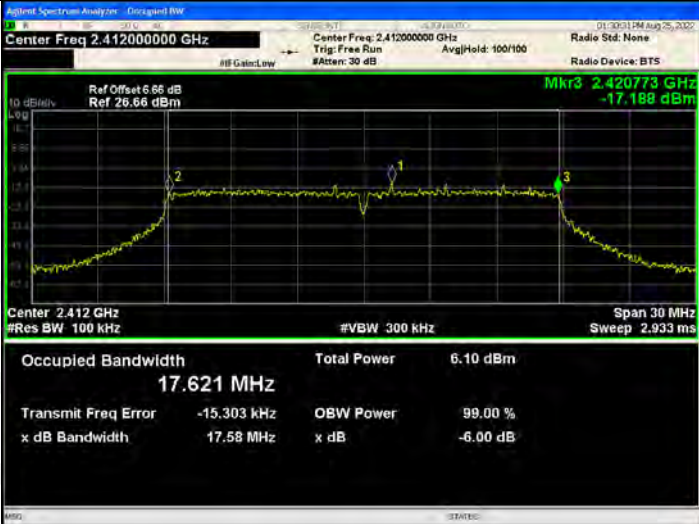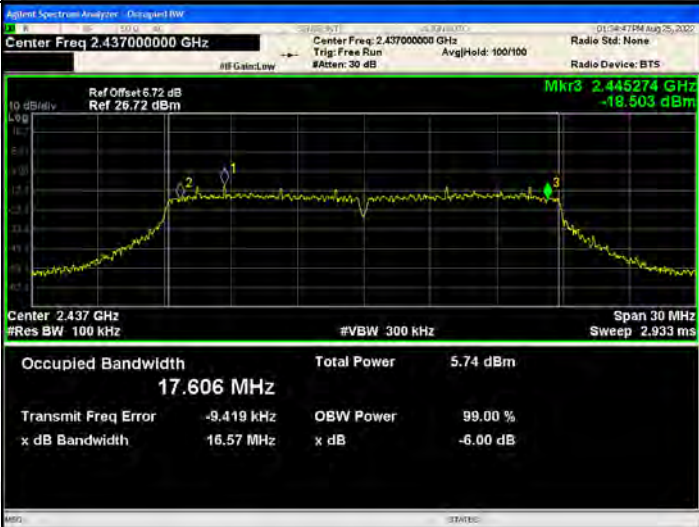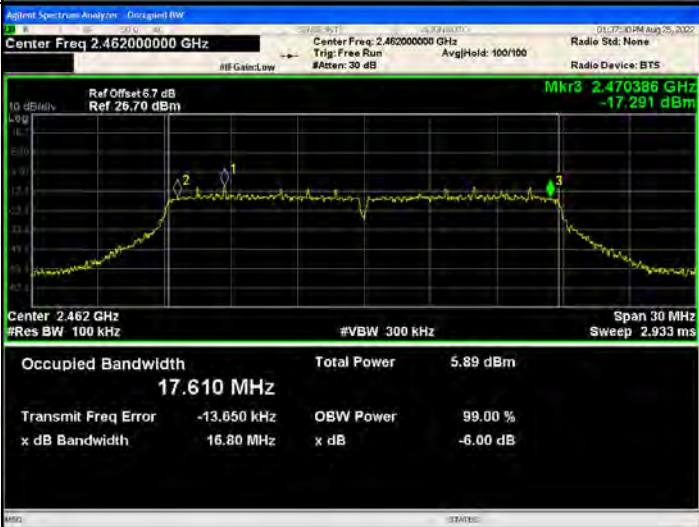802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 26.66 dBm Mkr3 2.420773 GHz -17.188 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.621 MHz Total Power 6.10 dBm Transmit Freq Error -15.303 kHz OBW Power 99.00 % x dB Bandwidth 17.58 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.445274 GHz -18.503 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.606 MHz Total Power 5.74 dBm Transmit Freq Error -9.419 kHz OBW Power 99.00 % x dB Bandwidth 16.57 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.470386 GHz -17.291 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.610 MHz Total Power 5.89 dBm Transmit Freq Error -13.650 kHz OBW Power 99.00 % x dB Bandwidth 16.80 MHz x dB -6.00 dB

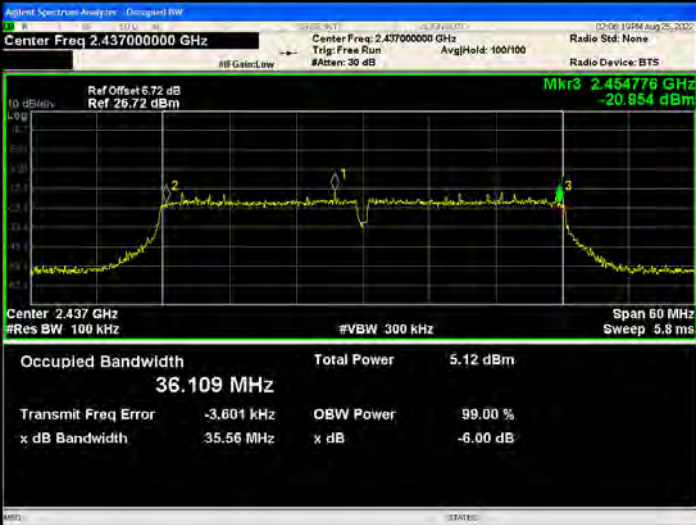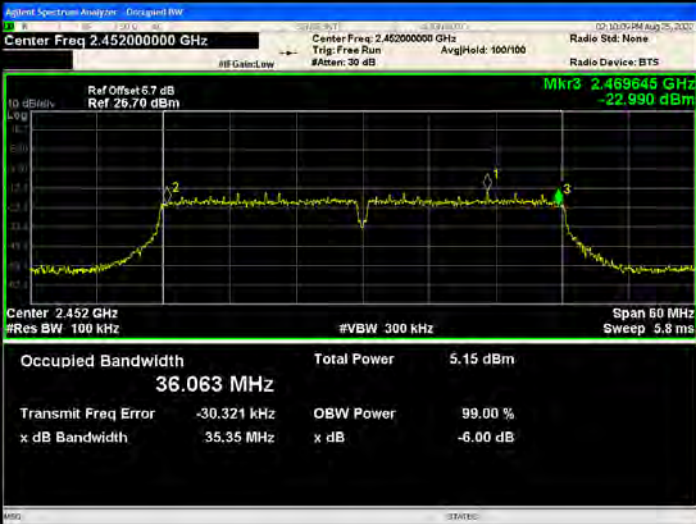802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Mkr3 2.439793 GHz -22.201 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.097 MHz Total Power 5.14 dBm Transmit Freq Error -6.735 kHz OBW Power 99.00 % x dB Bandwidth 35.60 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.454776 GHz -20.854 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.109 MHz Total Power 5.12 dBm Transmit Freq Error -3.601 kHz OBW Power 99.00 % x dB Bandwidth 35.56 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 6.7 dB Ref 26.70 dBm Mkr3 2.469645 GHz -22.990 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.063 MHz Total Power 5.15 dBm Transmit Freq Error -30.321 kHz OBW Power 99.00 % x dB Bandwidth 35.35 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

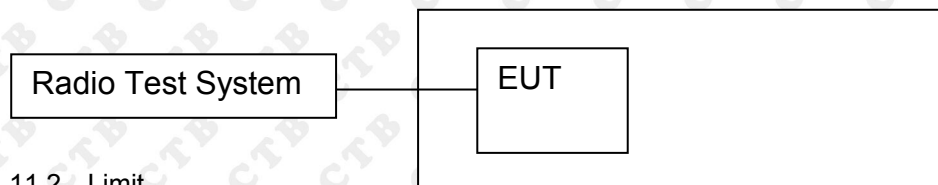

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-22.375	-22.513	/	8
	MCH	-21.43	-22.443	/	8
	HCH	-21.207	-22.026	/	8
802.11g	LCH	-26.009	-25.642	/	8
	MCH	-26.027	-25.256	/	8
	HCH	-25.402	-24.879	/	8
802.11n(H T20)	LCH	-26.303	-24.508	-22.303	8
	MCH	-26.089	-25.614	-22.835	8
	HCH	-26.139	-25.761	-22.936	8
802.11n(H T40)	LCH	-30.279	-29.526	-26.876	8
	MCH	-29.174	-30.334	-26.705	8
	HCH	-29.188	-28.93	-26.047	8


ANT1:
Test Graph

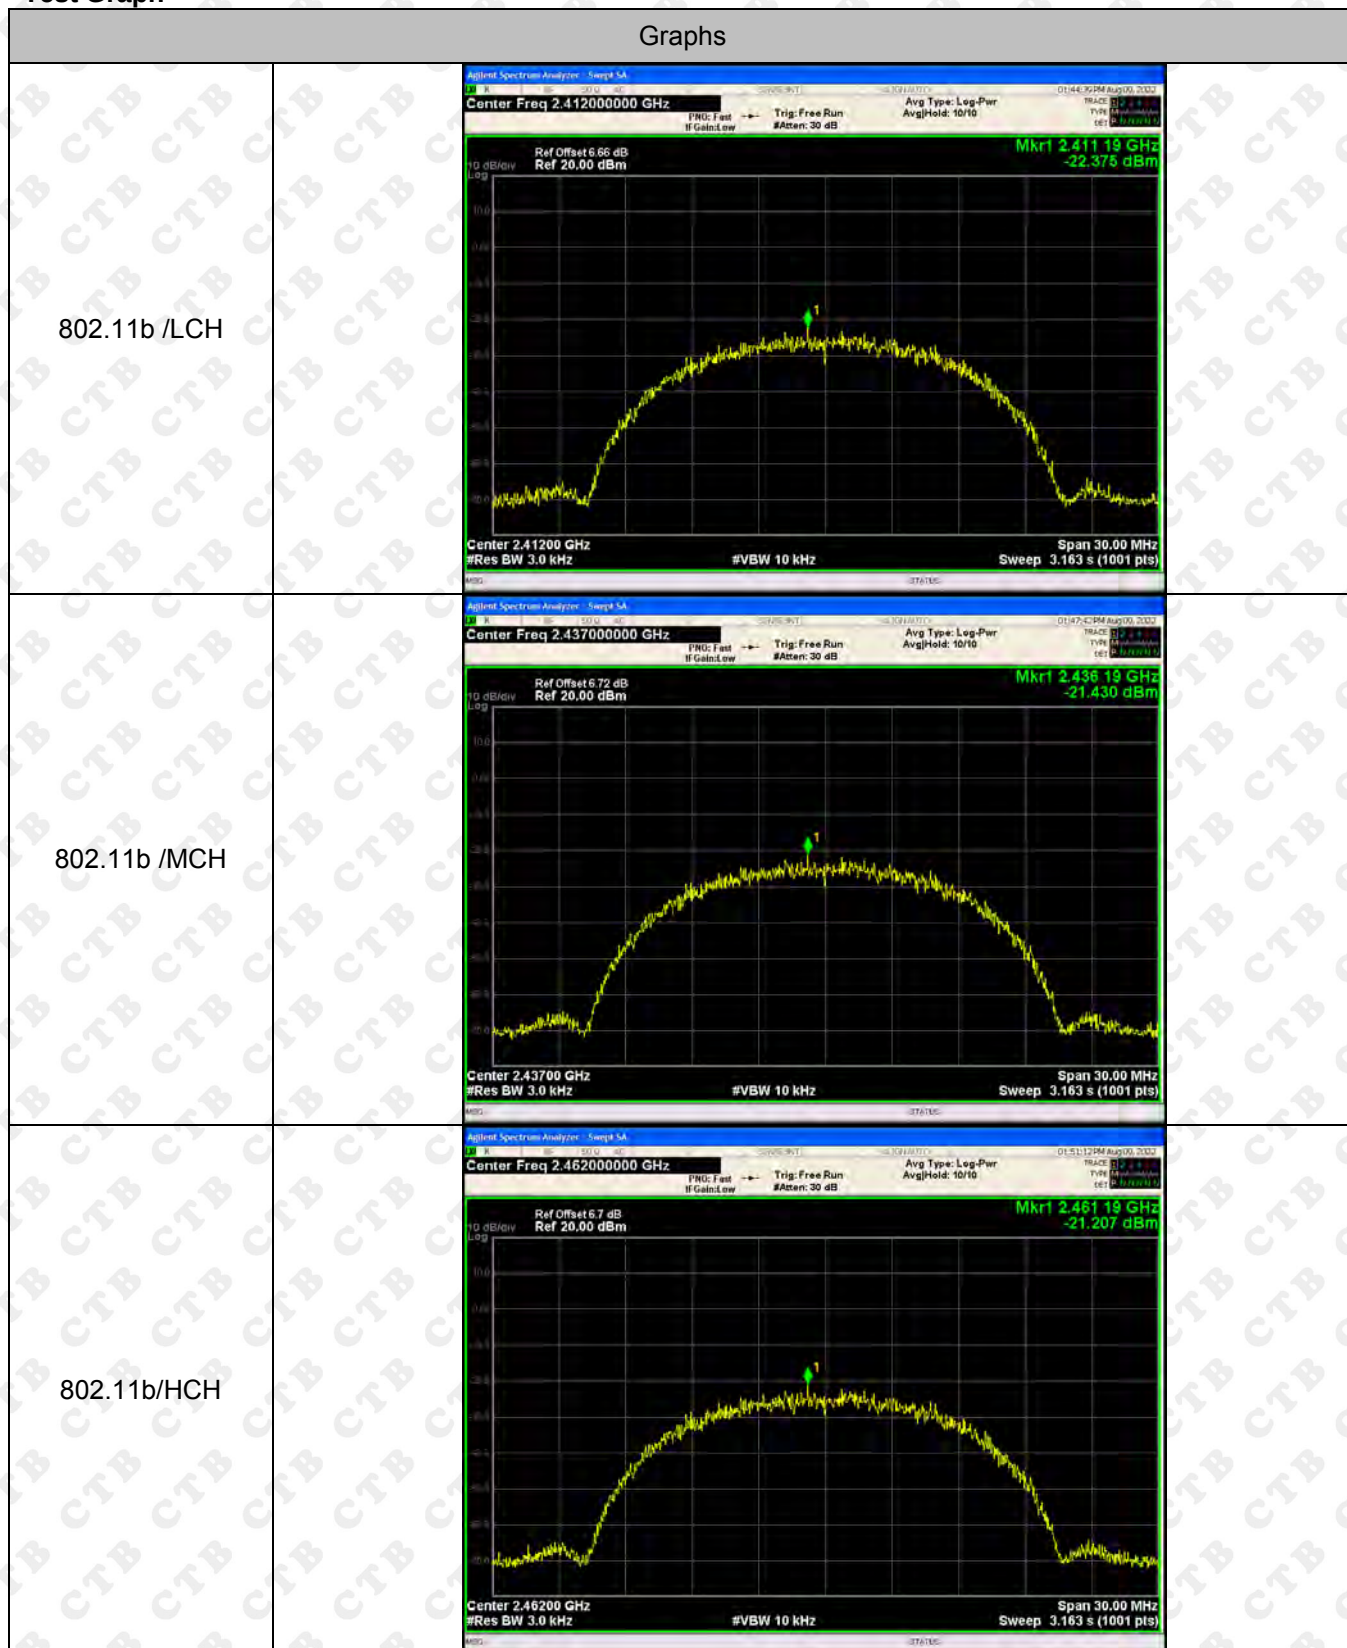


802.11g/LCH


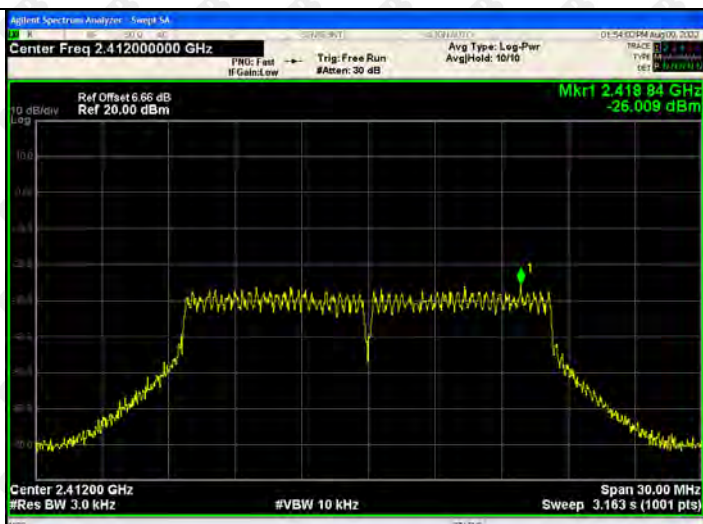





802.11g/MCH

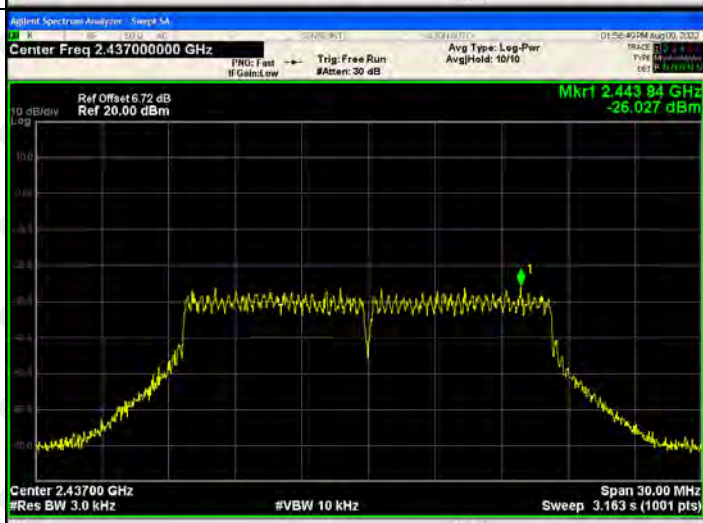


802.11g/HCH

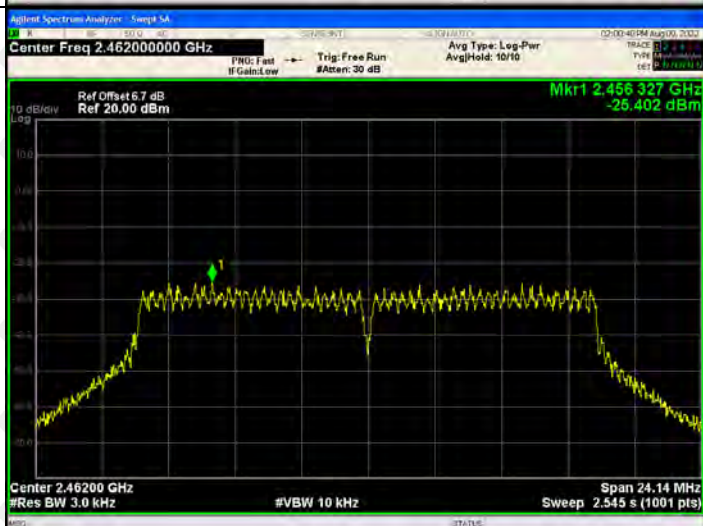

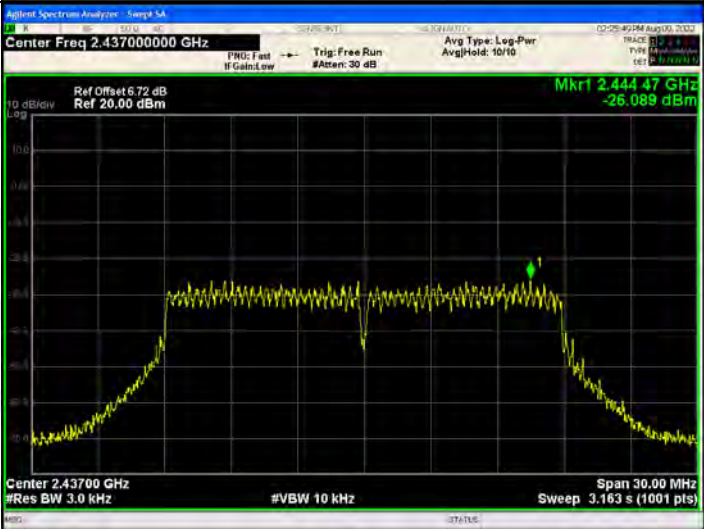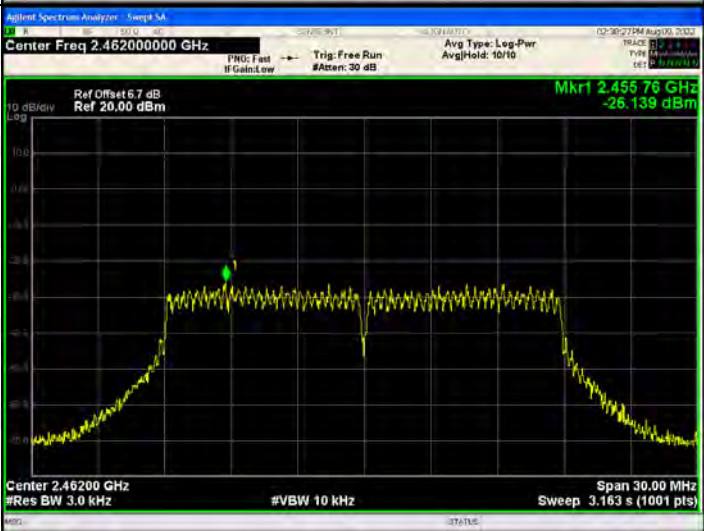802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.417 61 GHz -26.303 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.444 47 GHz -26.089 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.455 76 GHz -26.139 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

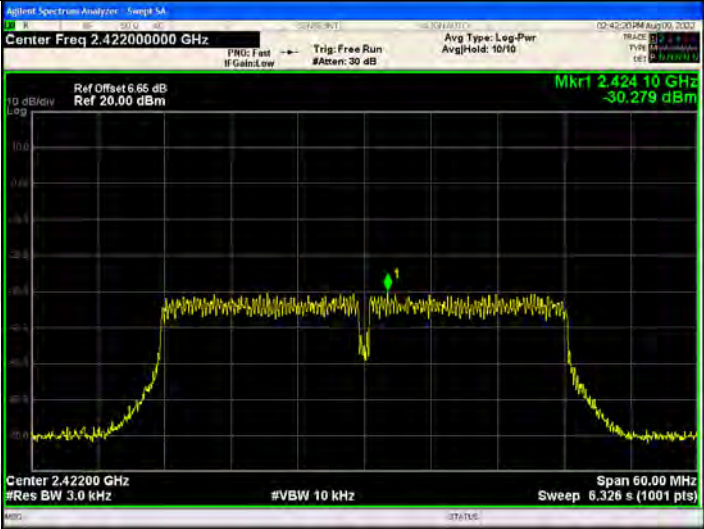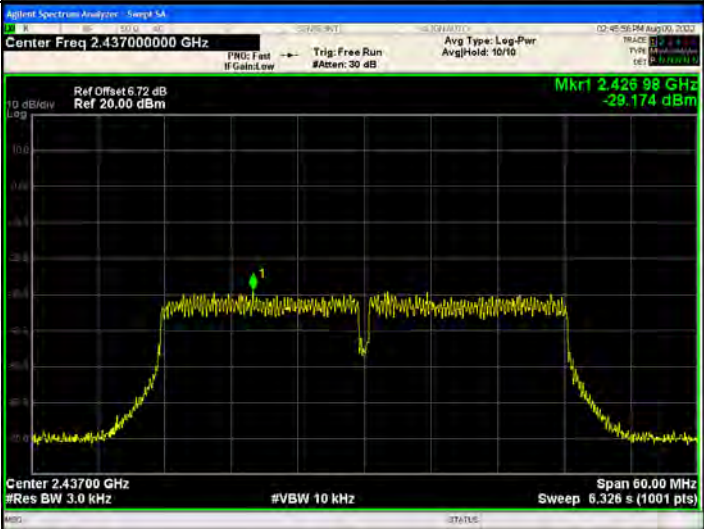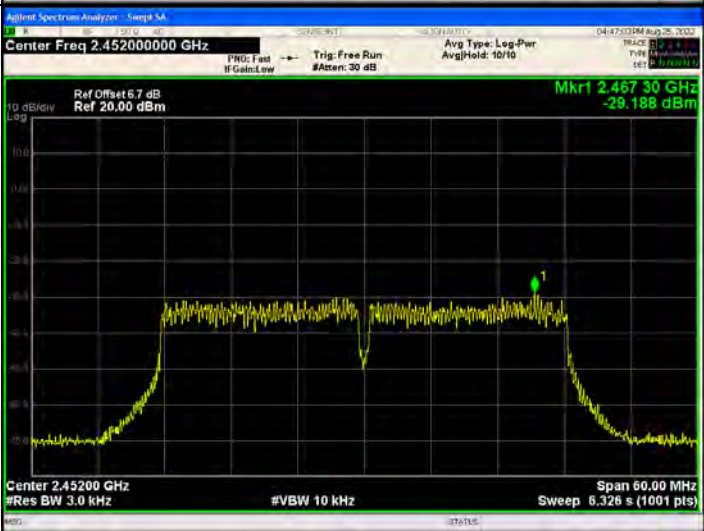802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.424 10 GHz -30.279 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.426 98 GHz -29.174 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.467 30 GHz -29.188 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

ANT 2: Test Graph

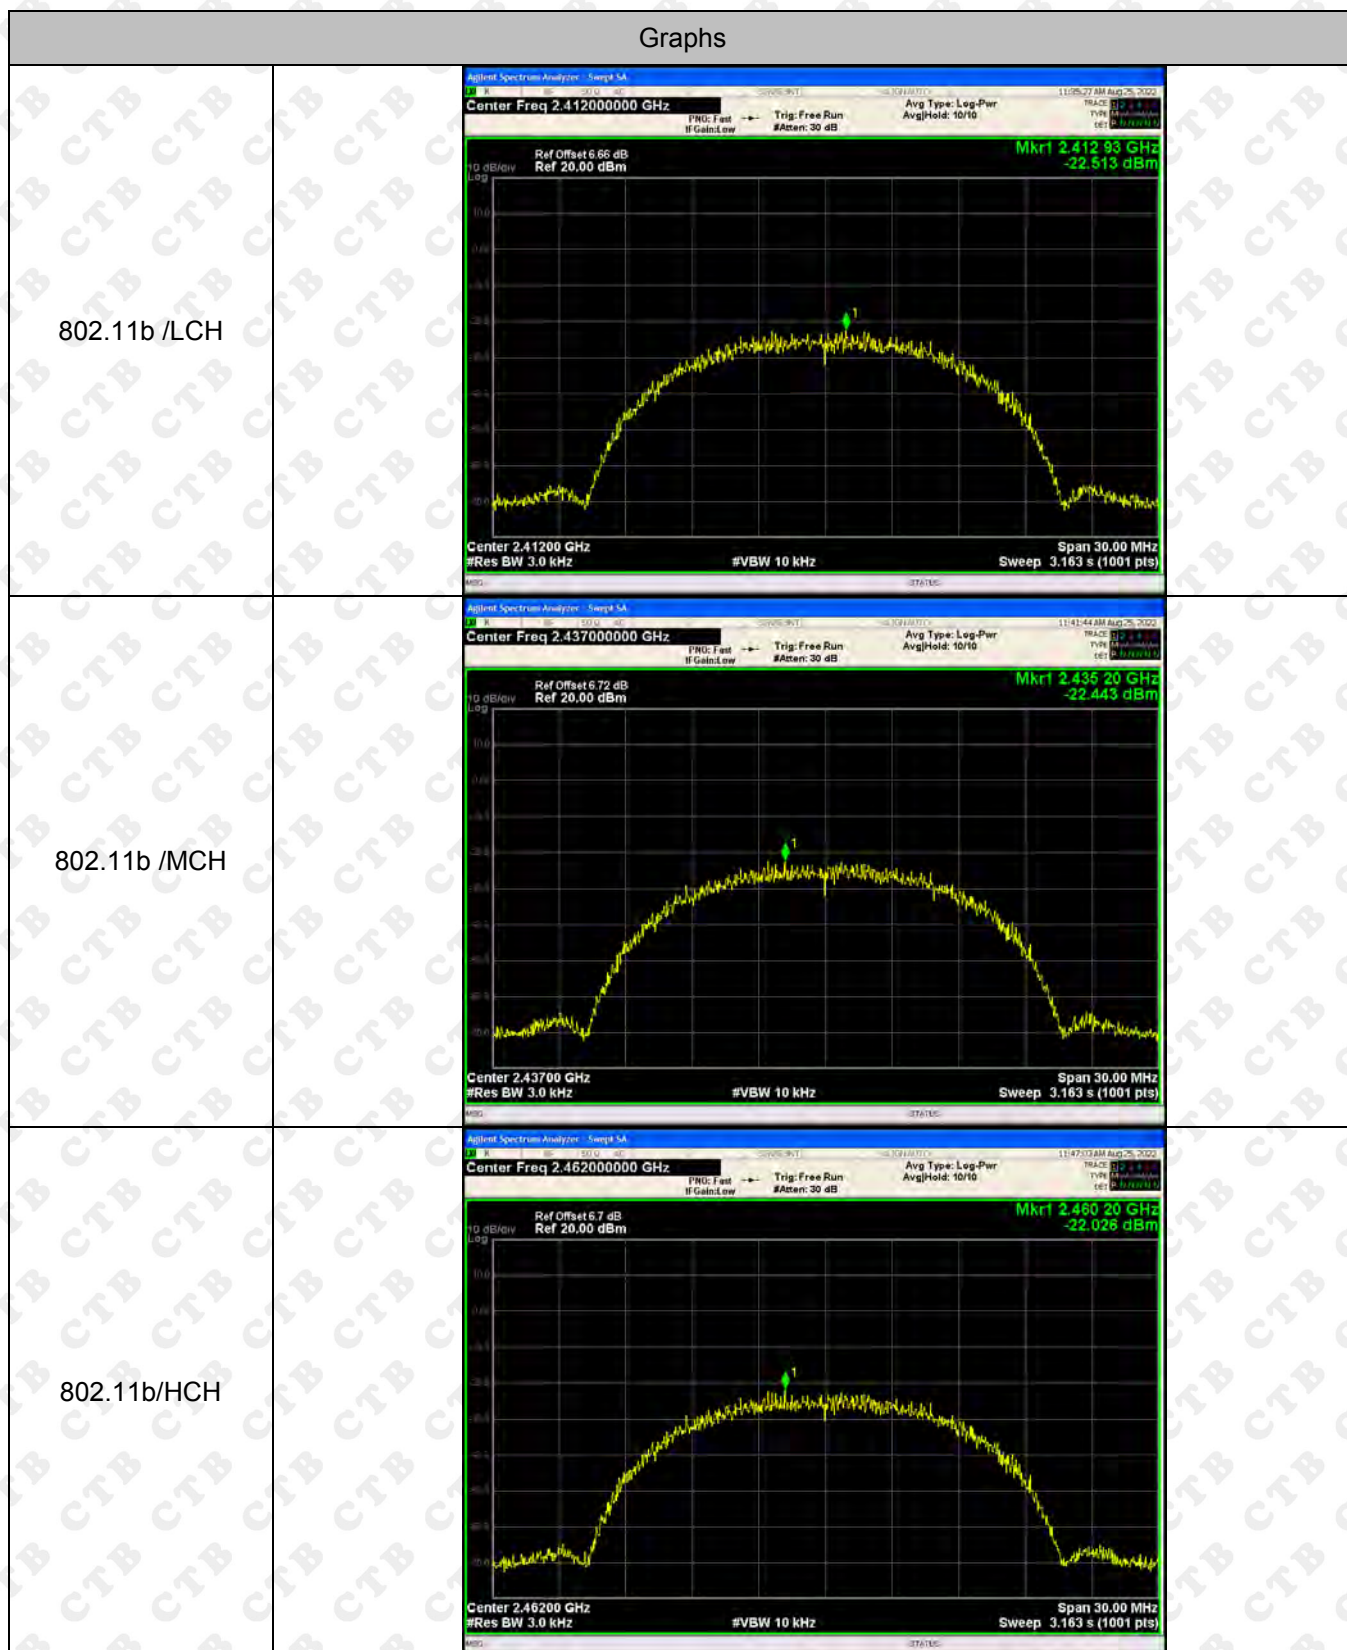


802.11g/LCH








802.11g/MCH



802.11g/HCH

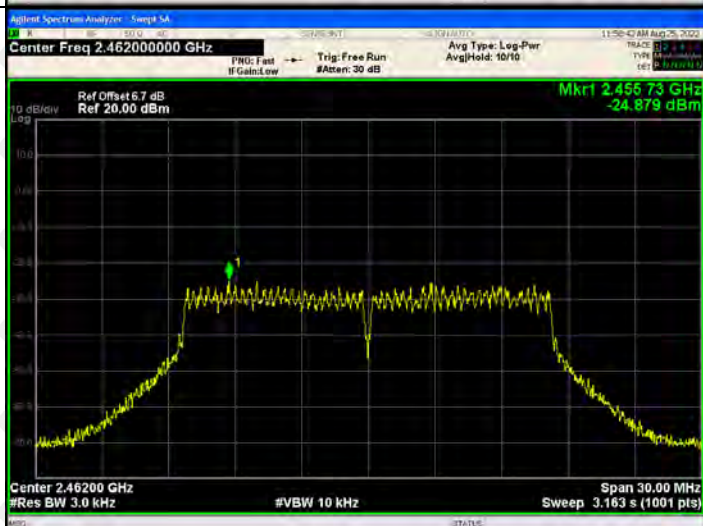

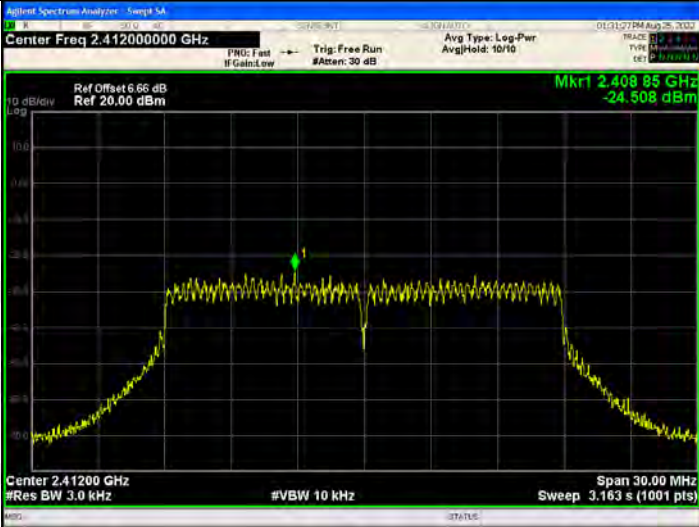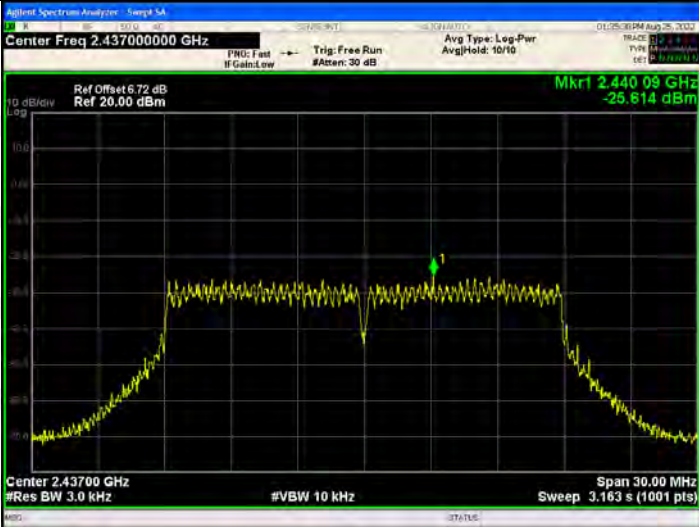802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.412000000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.408 85 GHz -24.508 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.440 09 GHz -26.614 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.455 76 GHz -26.761 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

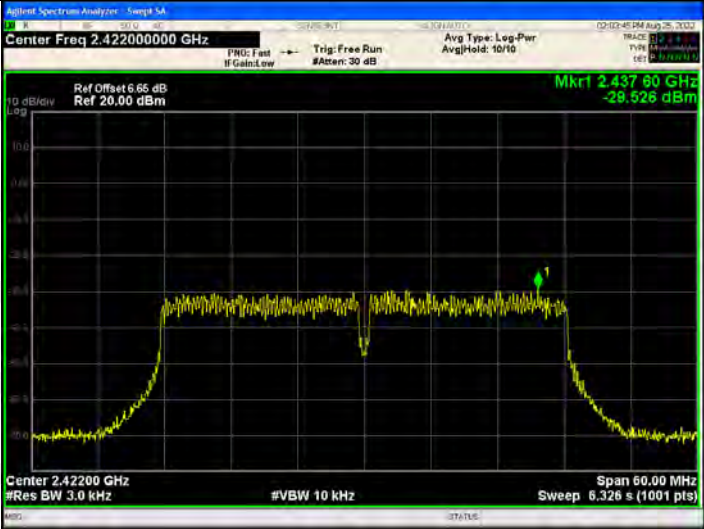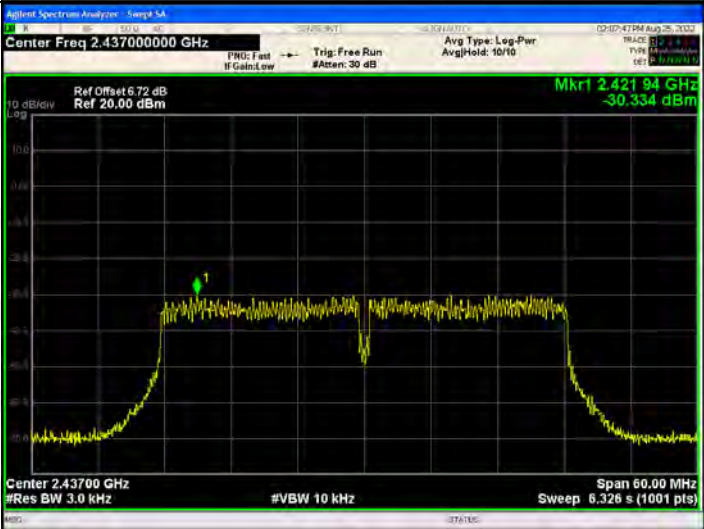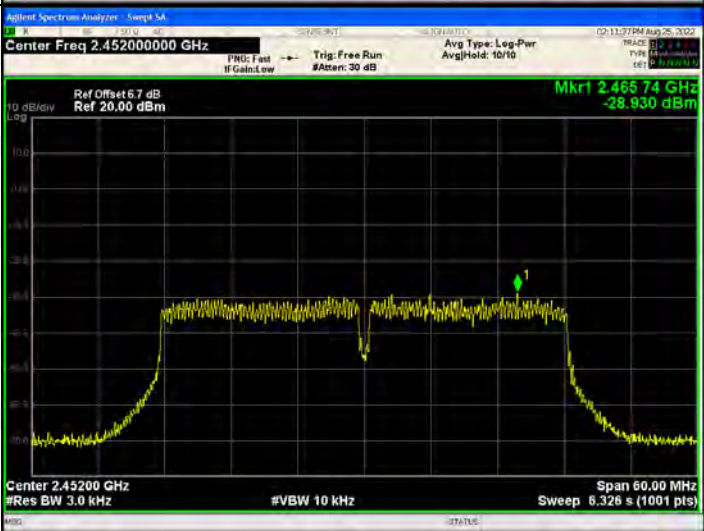802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.437 60 GHz -29.526 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.421 94 GHz -30.334 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.465 74 GHz -28.930 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is 5.3dBi.

13. EUT PHOTOGRAPHS

External Photos

EUT Photo 1



EUT Photo 2




14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

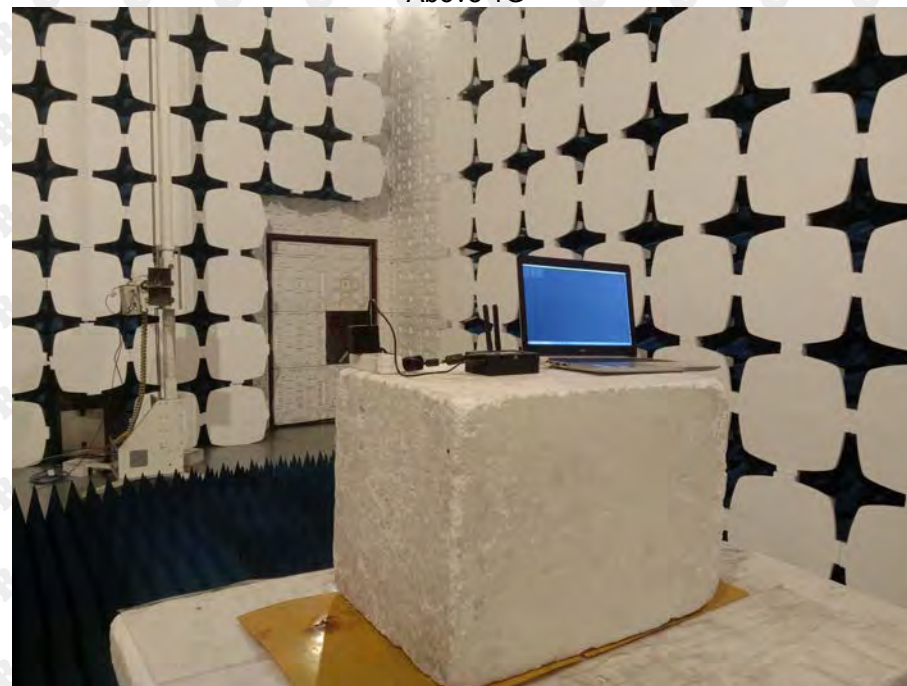

Conducted Emission



***** END OF REPORT *****