

FCC Test Report

Report No.: AGC10590230901FR01

FCC ID : 2A4FBTD831

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Two Way Radio

BRAND NAME : TIDRADIO

MODEL NAME TD-H3, TD-H1, TD-H12, TD-H4, TD-H5, TD-H3 pro, TD-H3

mini, TD-H3 plus, TD-H3 max

APPLICANT: Guangzhou TID Electronic Technology Co., Ltd

DATE OF ISSUE : Oct. 20, 2023

STANDARD(S) : FCC Part 15 Subpart C §15.247

REPORT VERSION: V1.0

Attestation Of Global Conce (Shenzhen) Co., Ltd



Page 2 of 70

Report Revise Record


Report Version	Revise Time	Revise Time Issued Date Valid Vers		Notes
V1.0	/	Oct. 20, 2023	Valid	Initial Release



Table of Contents


2. Product Information 2.1 Product Technical Description 2.2 Test Frequency List	6
·	
2.2 Test Frequency List	_
2.2 Took Toquonoy Liok	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4.System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	12
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	12
4.5 Summary of Test Results	13
5. Description of Test Modes	
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	16
7.1 Provisions Applicable	16
7.2 Measurement Procedure	16
7.3 Measurement Setup (Block Diagram of Configuration)	16
7.4 Measurement Result	17
8. 6dB Bandwidth Measurement	21
8.1 Provisions Applicable	21
8.2 Measurement Procedure	21
8.3 Measurement Setup (Block Diagram of Configuration)	21
8.4 Measurement Results	
9. Power Spectral Density Measurement	29
9.1 Provisions Applicable	
9.2 Measurement Procedure	29
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge And Out-of-Band Emissions	
10.1 Provisions Applicable. Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspisation," is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The tepresented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the tested.	st results

Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





10.2 Measurement Procedure	34
10.3 Measurement Setup (Block Diagram of Configuration)	34
10.4 Measurement Results	35
11. Radiated Spurious Emission	46
11.1 Measurement Limit	46
11.2 Measurement Procedure	46
11.3 Measurement Setup (Block Diagram of Configuration)	49
11.4 Measurement Result	49
12. AC Power Line Conducted Emission Test	66
12.1 Measurement Limit	66
12.2 Measurement Setup (Block Diagram of Configuration)	66
12.3 Preliminary Procedure of Line Conducted Emission Test	67
12.4 Final Procedure of Line Conducted Emission Test	67
12.5 Measurement Results	67
Appendix I: Photographs of Test Setup	70
Appendix II: Photographs of Test EUT	70





1. General Information

Applicant	Guangzhou TID Electronic Technology Co., Ltd		
Address	Room 602,Kaixiang Electronic Commerce Building A, Juyuan Street, Baiyun		
Addiess	District, Guangzhou,China		
Manufacturer	Guangzhou TID Electronic Technology Co., Ltd		
Address	Room 602,Kaixiang Electronic Commerce Building A, Juyuan Street, Baiyun		
/ ladi 033	District, Guangzhou,China		
Factory	Guangzhou TID Electronic Technology Co., Ltd		
Address	Room 602,Kaixiang Electronic Commerce Building A, Juyuan Street, Baiyun		
/ tudi 000	District, Guangzhou,China		
Product Designation	Two Way Radio		
Brand Name	TIDRADIO		
Test Model	TD-H3		
Series Model	TD-H1,TD-H12,TD-H4,TD-H5,TD-H3 pro,TD-H3 mini, TD-H3 plus, TD-H3 max		
Declaration of Difference	Only the model name and the enclosure design & colour are different (enclosure		
Decidration of Difference	colours can be ordered)		
Date of receipt of test item	Sep. 13, 2023		
Date of Test	Sep. 13, 2023~Oct. 20, 2023		
Deviation from Standard	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Test Report Form No	AGCER-FCC-BLE-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Hang	
	Bibo Zhang (Project Engineer)	Oct. 20, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Oct. 20, 2023
Approved By	Max Zhang	
-	Max Zhang Authorized Officer	Oct. 20, 2023



Page 6 of 70

2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz		
Operation Frequency Range	2402MHz-2480MHz		
Bluetooth Version	V5.3		
Modulation Type	BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps		
Number of channels	40		
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)		
Channel Separation	2 MHz		
Maximum Transmitter Power	Bluetooth LE (1Mbps): -10.913dBm (0.081mW) Bluetooth LE (2Mbps): -11.036dBm (0.079mW)		
Hardware Version	LT-9910-TC3		
Software Version	Ver 0.1		
Antenna Designation	PCB Antenna		
Antenna Gain	2.0dBi		
Power Supply	DC 7.4V by battery or DC 5V by adapter		

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
2400~2483.5MHz	0	2402 MHz		
	1	2404 MHz		
	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: $f = 2402 + 2 k \text{ MHz}$, $k = 0,, 39$ f is the operating frequency (MHz) k is the operating channel.				



Page 7 of 70

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2A4FBTD831**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title		
1 FCC 47 CFR Part 2		Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
KDB 558074 4 D01 15.247 Means Guidance v05r02		4 D01 15.247 Means Frequency Hopping Spread Spectrum system, and Hybrid syste		Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 2.0dBi.



Page 8 of 70

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 70

3.3 Environmental Conditions

	Normal Conditions		
Temperature range (℃)	15 - 35		
Relative humidity range	20 % - 75 %		
Pressure range (kPa)	86 - 106		
Power supply	DC 7.4V		

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

	uncertainty multiplied by a coverage factor of k=2, pro	viuling a level of confidence of approximately 95%.		
	Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port		$U_c = \pm 2.9 \text{ dB}$		
	Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
	Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted		$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted		$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted		U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth		U _c = ±2 %		



Report No.: AGC10590230901FR01 Page 10 of 70

3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08

• A	AC Power Line Conducted Emission							
Illsed I Equipment No. I Test Equipment Manufacturer Model No. Serial No.							Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	



Page 11 of 70

• Tes	● Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Report No.: AGC10590230901FR01 Page 12 of 70

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	HW-200325CP0	Huawei	Input: AC 100-240V 50/60Hz, 1.8A Output: DC 5V 2A	N/A


No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Battery	BP-H3	N/A	DC 7.4V	N/A
2	Back Clip	N/A	N/A	N/A	N/A
3	Antenna	N/A	N/A	N/A	N/A
4	USB Cable	N/A	N/A	N/A	1.0m,unshielded



Page 13 of 70

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass






5. Description of Test Modes

	Summary Table of Test Cases					
Test Item	Data Rate / Modulation					
rest item	Bluetooth – LE(1Mbps/2Mbps) / GFSK					
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)					
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)					
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)					
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered or AC/DC adapter)					
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered or AC/DC adapter)					
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered or AC/DC adapter)					
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)					

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

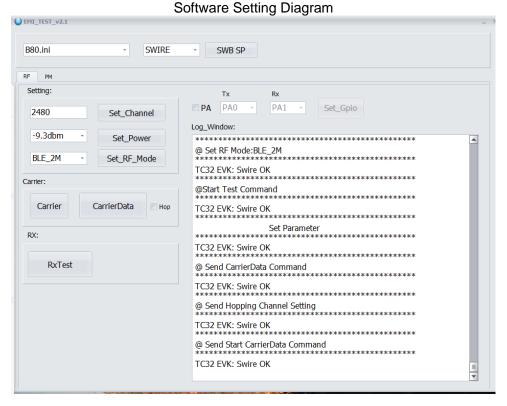



Report No.: AGC10590230901FR01 Page 15 of 70

6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	379	60	2.22	2.64
BLE_2Mbps	380	60	2.22	2.63

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

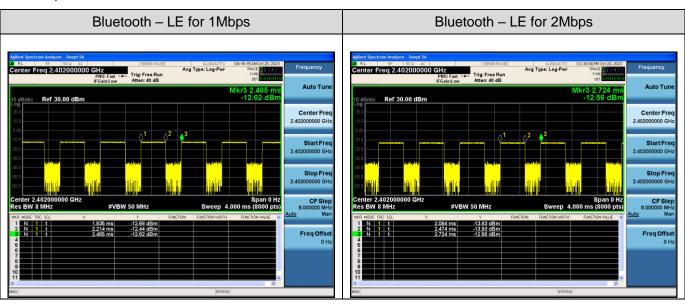



Page 16 of 70

7. RF Output Power Measurement


7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


- For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 Method Integrated band power:
- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector Function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.

7.3 Measurement Setup (Block Diagram of Configuration)

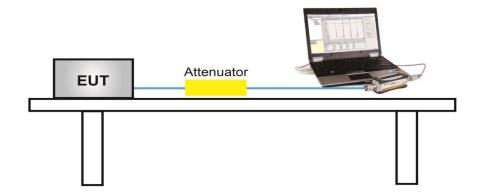



Page 17 of 70

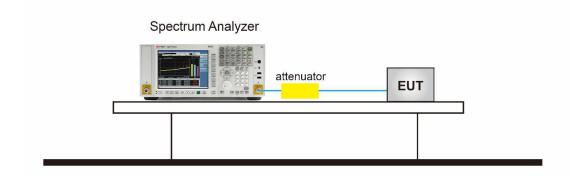


7.4 Measurement Result


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-11.098	≤30	Pass		
GFSK_1Mbps	2440	-10.913	≤30	Pass		
	2480	-10.991	≤30	Pass		
	2402	-11.162	≤30	Pass		
GFSK_2Mbps	2440	-11.036	≤30	Pass		
	2480	-11.057	≤30	Pass		

Test Result of Average Output Power (Reporting Only)


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-13.10	≤30	Pass		
GFSK_1Mbps	2440	-12.91	≤30	Pass		
	2480	-12.99	≤30	Pass		
	2402	-13.16	≤30	Pass		
GFSK_2Mbps	2440	-13.04	≤30	Pass		
	2480	-13.06	≤30	Pass		






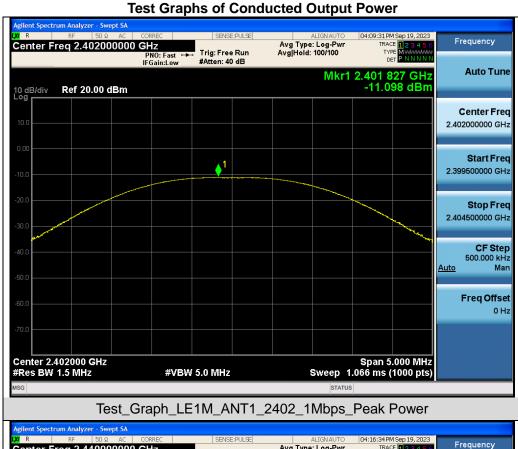








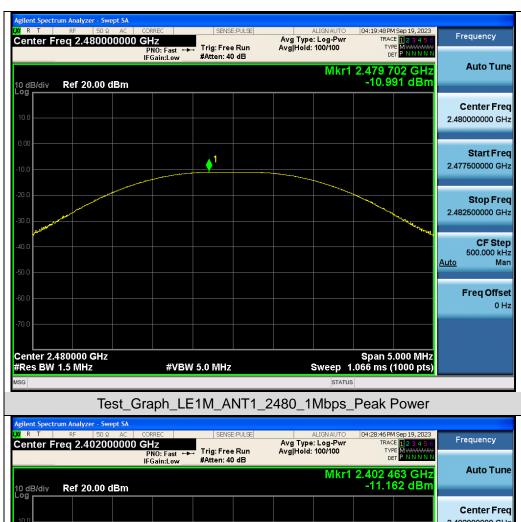











Report No.: AGC10590230901FR01 Page 21 of 70

8. 6dB Bandwidth Measurement


8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- 5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 6. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

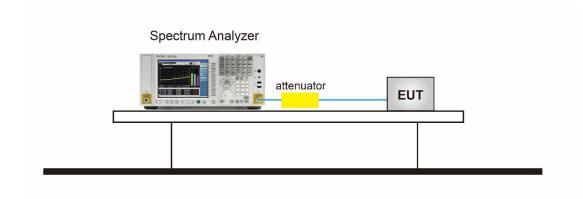







8.4 Measurement Results


	Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail			
	2402	1.025	0.681	≥0.5	Pass			
GFSK_1Mbps	2440	1.021	0.678	≥0.5	Pass			
	2480	1.025	0.673	≥0.5	Pass			
	2402	2.039	1.420	≥0.5	Pass			
GFSK_2Mbps	2440	2.046	1.388	≥0.5	Pass			
	2480	2.044	1.369	≥0.5	Pass			


Test Graphs of Occupied Bandwidth

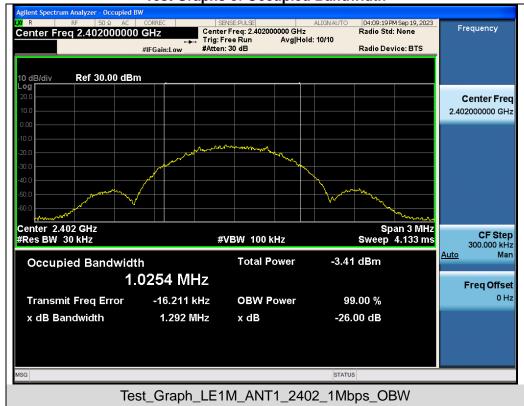







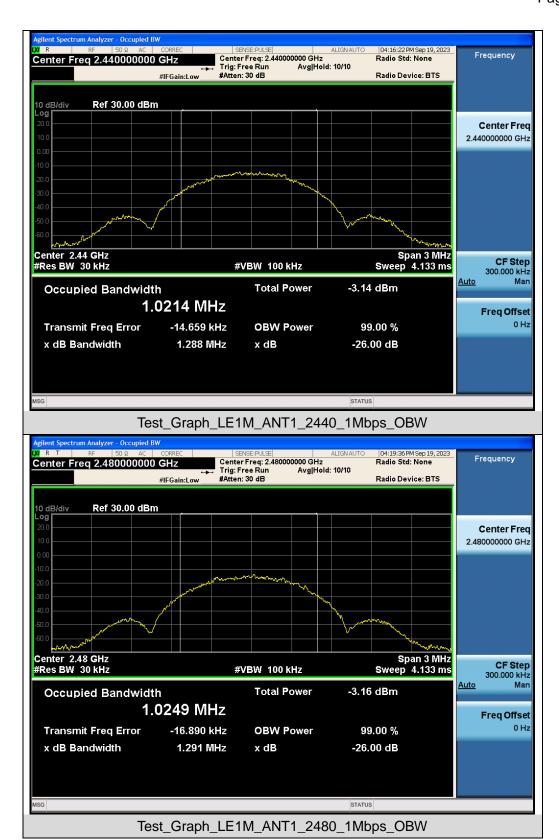







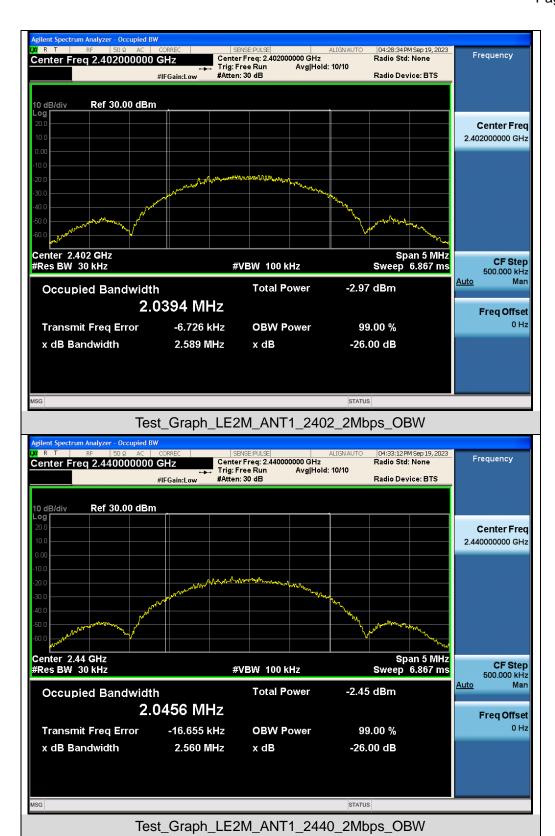







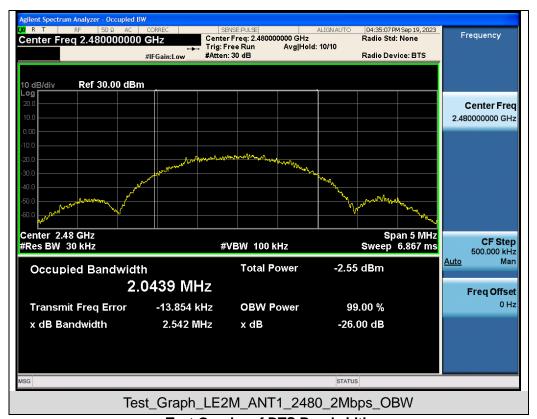

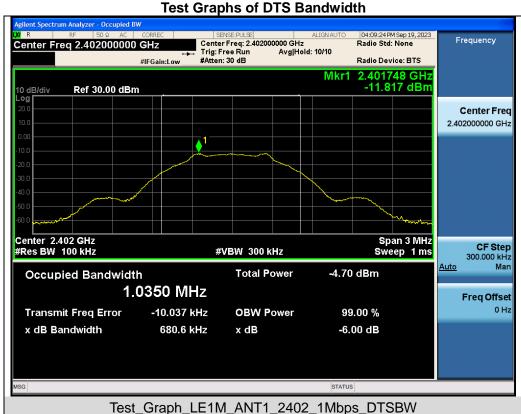







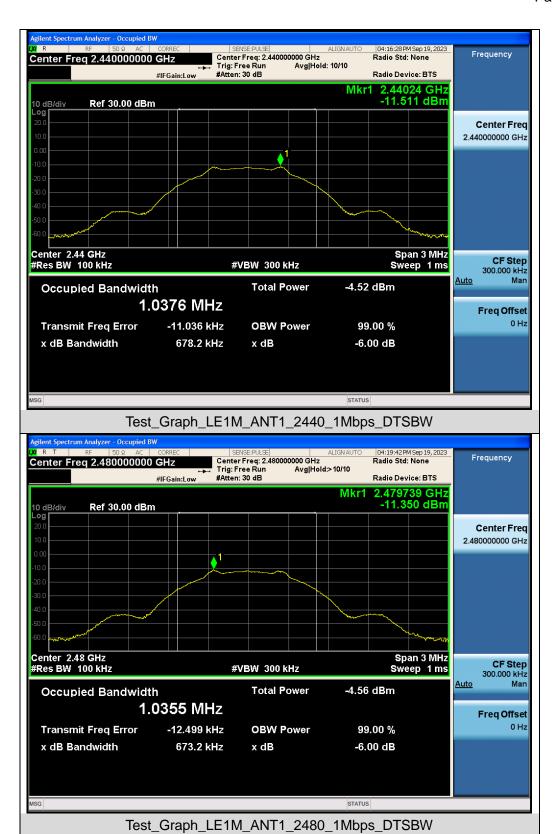


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






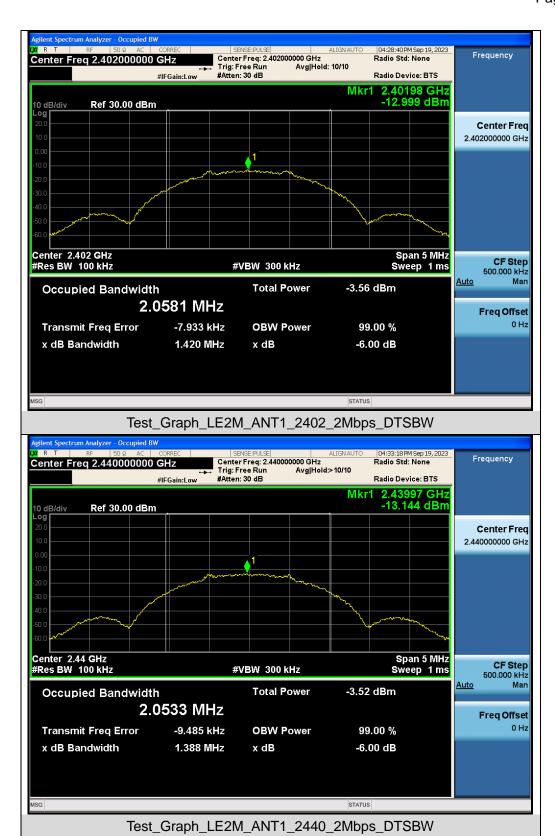

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





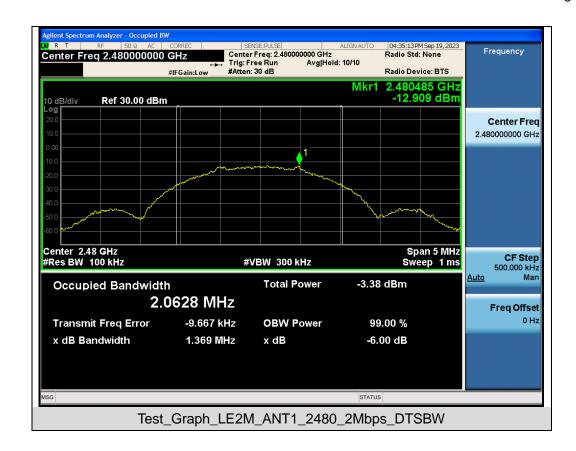



Report No.: AGC10590230901FR01 Page 29 of 70

9. Power Spectral Density Measurement


9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- 7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

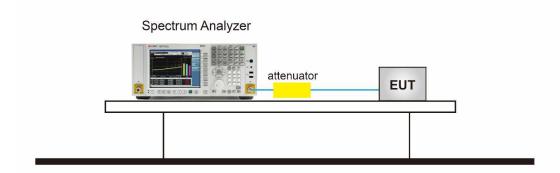





9.4 Measurement Results


Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-19.503	≪8	Pass		
GFSK_1Mbps	2440	-18.615	≪8	Pass		
	2480	-21.338	≪8	Pass		
	2402	-23.338	≪8	Pass		
GFSK_2Mbps	2440	-23.884	≪8	Pass		
	2480	-24.148	≤8	Pass		

Test Graphs of Conducted Output Power Spectral Density

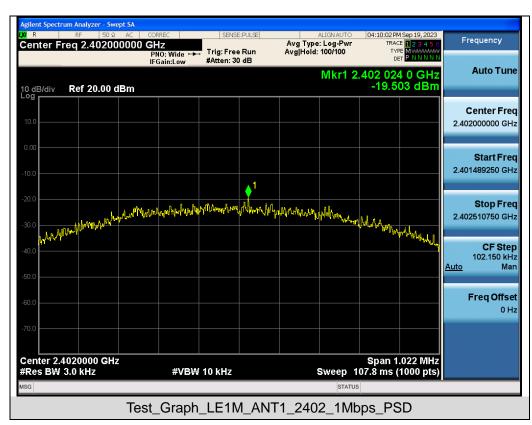





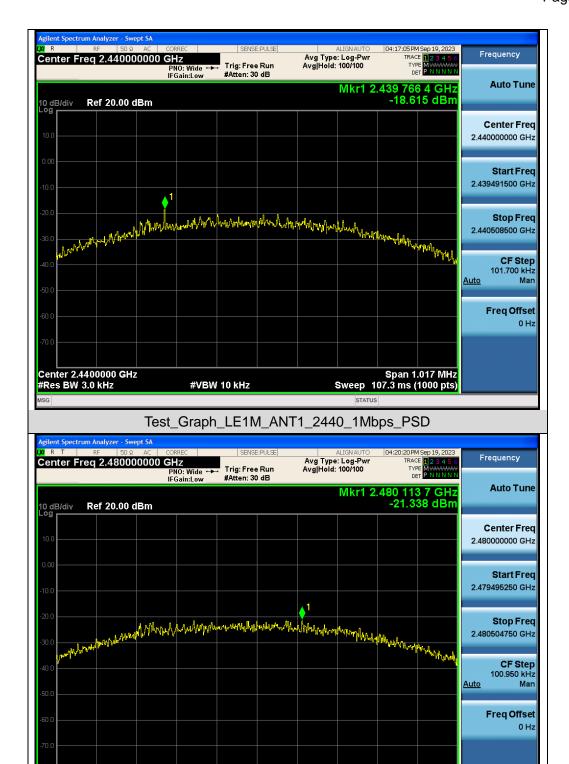


Test Graph LE1M ANT1 2480 1Mbps PSD

#VBW 10 kHz


Span 1.010 MHz Sweep 106.5 ms (1000 pts)

Center 2.4800000 GHz #Res BW 3.0 kHz



0 Hz



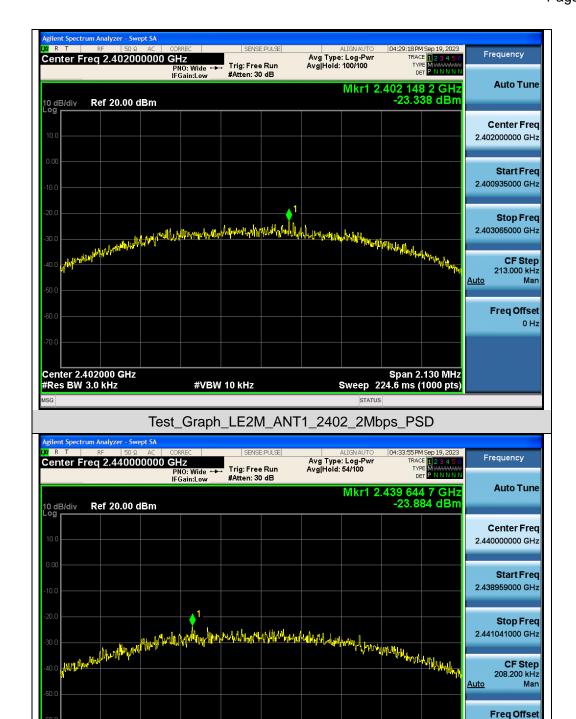


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE2M ANT1 2440 2Mbps PSD


#VBW 10 kHz

Span 2.082 MHz Sweep 219.6 ms (1000 pts)

Center 2.440000 GHz #Res BW 3.0 kHz





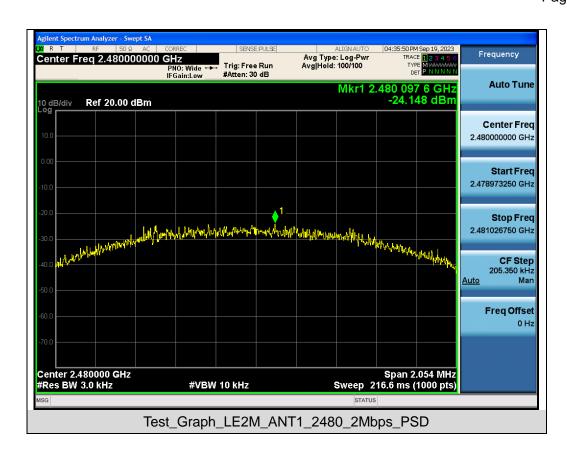



Page 34 of 70

10. Conducted Band Edge And Out-of-Band Emissions


10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to ≥ 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

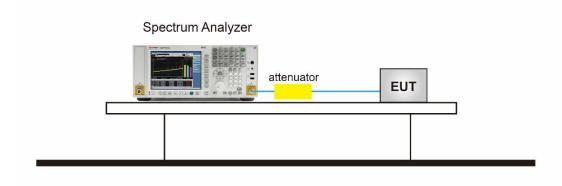








10.4 Measurement Results


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

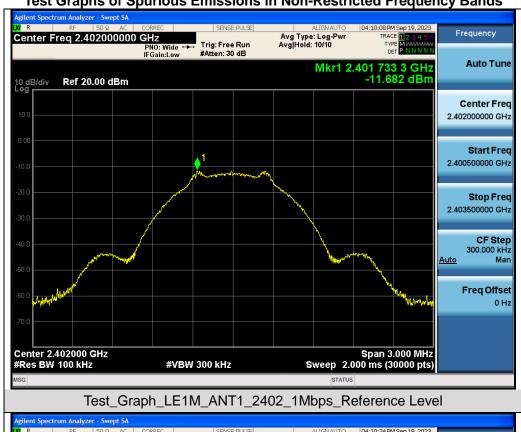

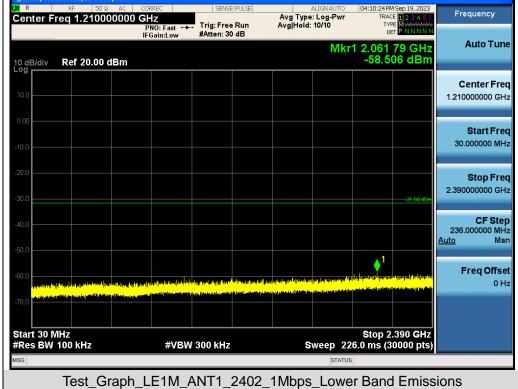





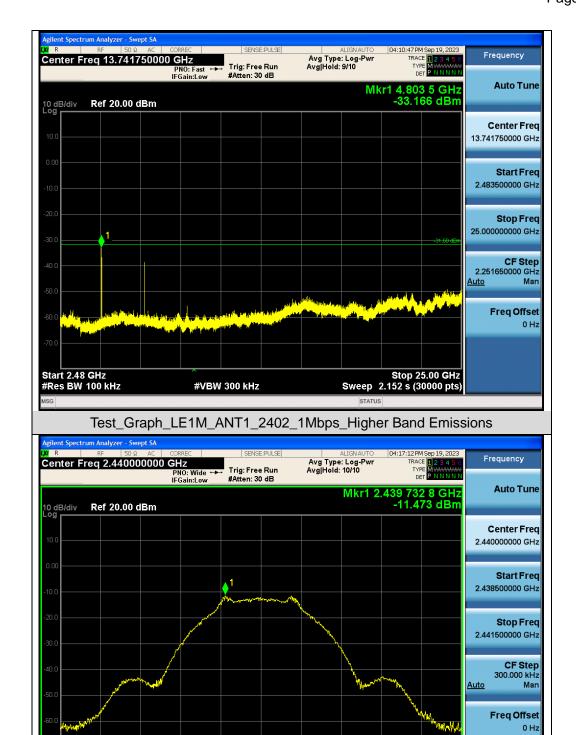


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE1M ANT1 2440 1Mbps Reference Level


#VBW 300 kHz

Span 3.000 MHz Sweep 2.000 ms (30000 pts)


Center 2.440000 GHz #Res BW 100 kHz





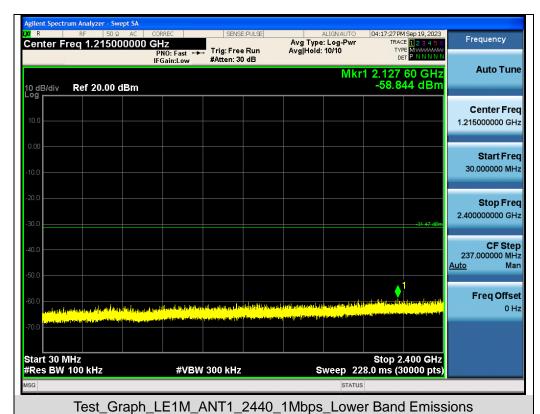






Freq Offset 0 Hz

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)



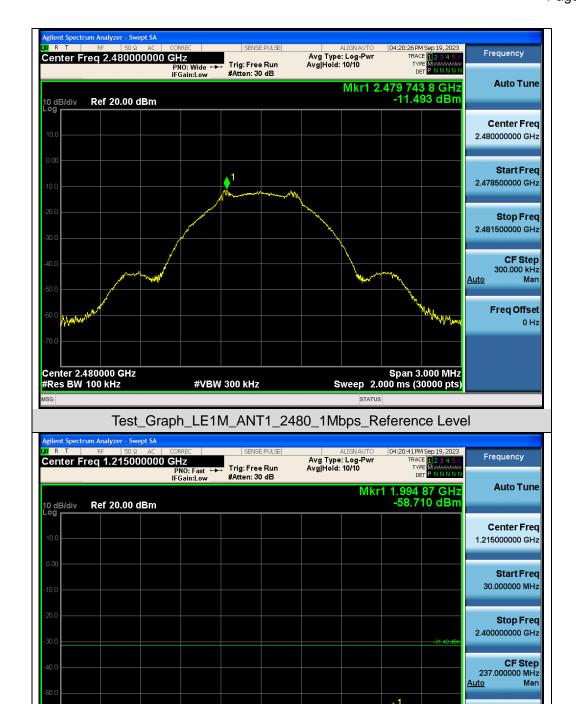


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE1M ANT1 2480 1Mbps Lower Band Emissions


#VBW 300 kHz


Start 30 MHz #Res BW 100 kHz








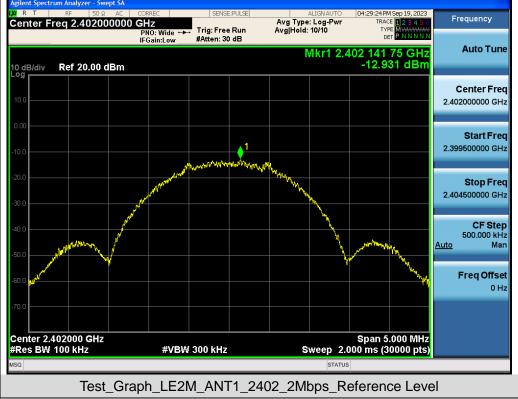






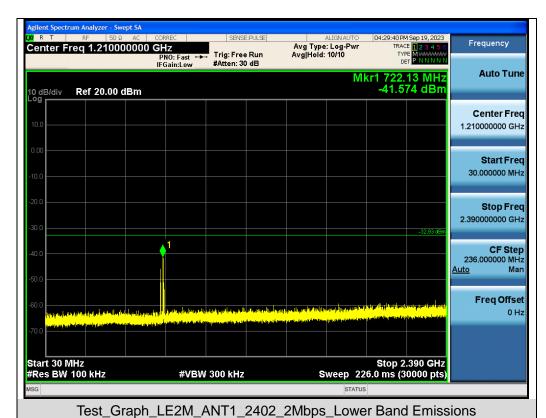












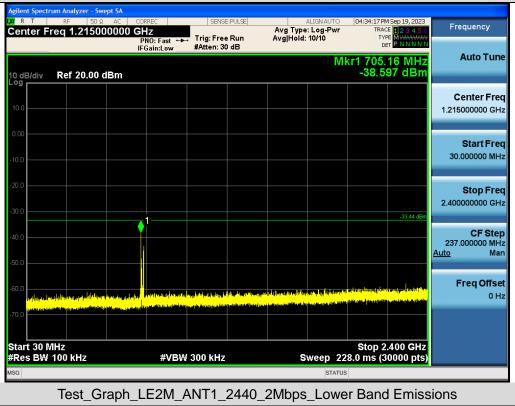



Freq Offset



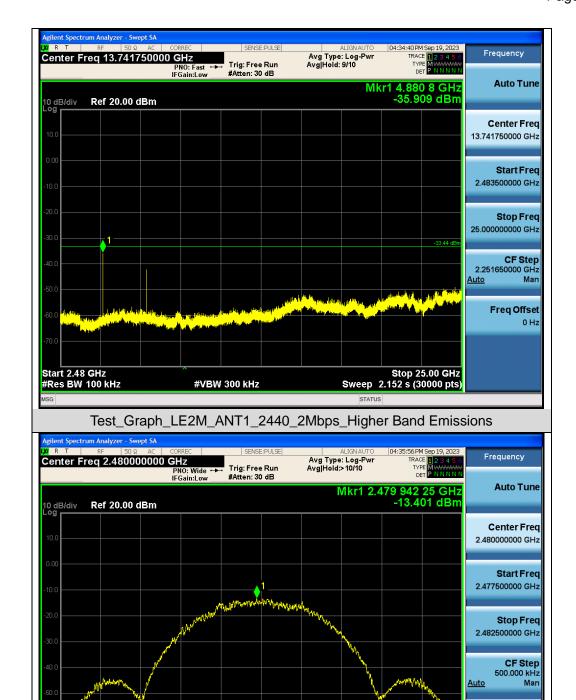


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph LE2M ANT1 2480 2Mbps Reference Level


#VBW 300 kHz

Span 5.000 MHz Sweep 2.000 ms (30000 pts)


Center 2.480000 GHz #Res BW 100 kHz






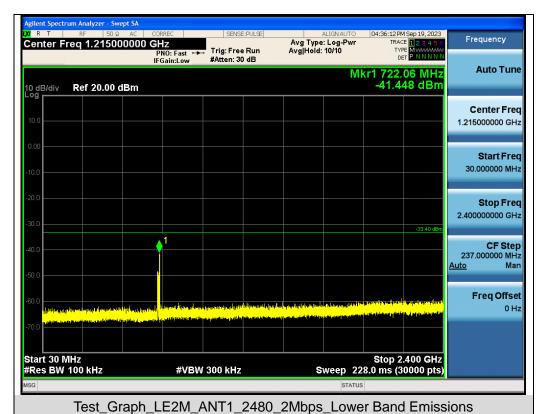









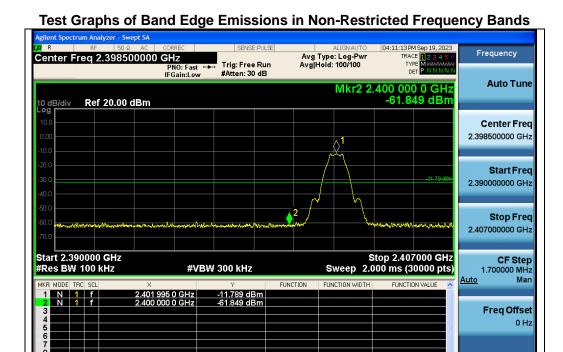


Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Edge Emissions Center Freq 2.487500000 GHz PN0: Fast PIGain:Low Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.483 500 0 GHz -61.709 dBm Ref 20.00 dBm Center Freq 2.487500000 GHz Start Freq 2.475000000 GHz Stop Freq 2.500000000 GHz Start 2.47500 GHz #Res BW 100 kHz Stop 2.50000 GHz 4.000 ms (30000 pts) **CF Step #VBW** 300 kHz Sweep 2.500000 MHz <u>Auto</u> Man 2.480 243 5 GHz 2.483 500 0 GHz Freq Offset STATUS Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Edge Emissions





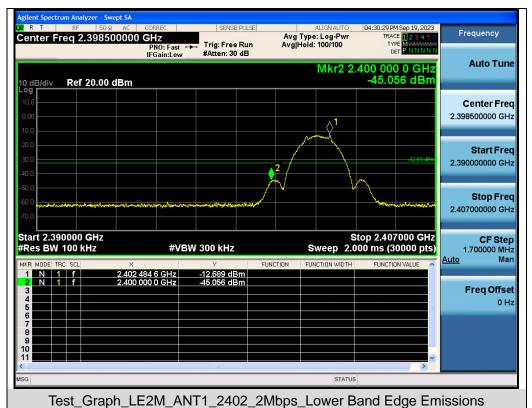

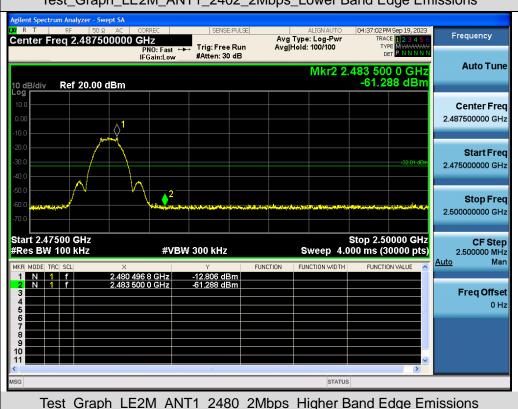



Report No.: AGC10590230901FR01 Page 46 of 70

11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



Report No.: AGC10590230901FR01 Page 47 of 70

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop i requerity	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Report No.: AGC10590230901FR01

Page 48 of 70

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW $\ge 1/T$. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

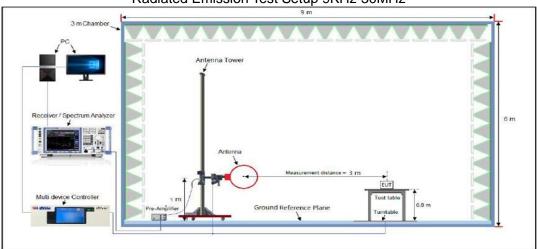

Radiated Emission Test Setup 30MHz-1000MHz

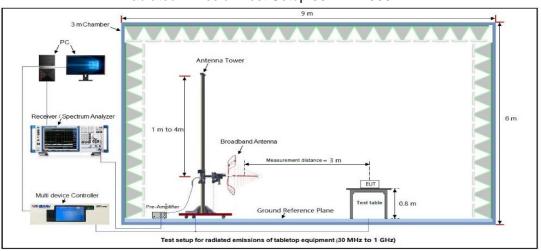


Radiated Emission Test Setup Above 1000MHz

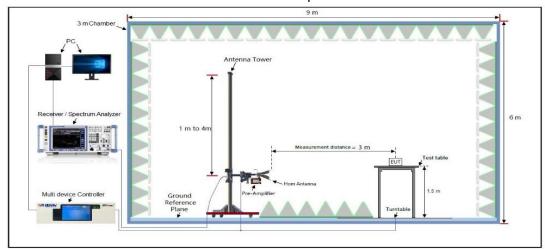

11.4 Measurement Result

Any report having not been signed by authorized approver, **Radiated Emission Below**, **30MHz** ot been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Two Way Radio	Model Name	TD-H3			
Temperature	25℃	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	DC 7.4V by battery			
Test Mode	Mode 1	Antenna Polarity	Horizontal			

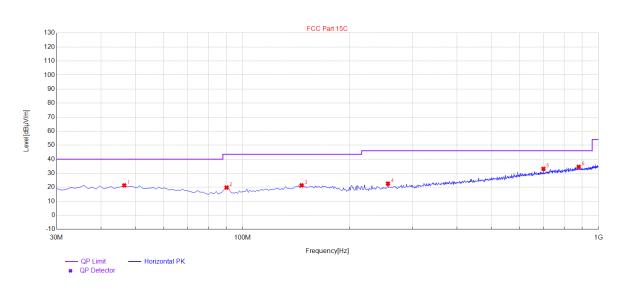


Final I	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.49	21.34	14.96	40.00	18.66	100	359	Horizontal
2	90.14	19.79	11.25	43.50	23.71	100	202	Horizontal
3	146.4	21.37	15.79	43.50	22.13	100	222	Horizontal
4	256.01	22.64	15.44	46.00	23.36	100	111	Horizontal
5	700.27	33.12	26.01	46.00	12.88	100	18	Horizontal
6	879.72	34.57	28.67	46.00	11.43	100	359	Horizontal



Report No.: AGC10590230901FR01 Page 51 of 70

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Two Way Radio	Model Name	TD-H3			
Temperature	25℃	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	DC 7.4V by battery			
Test Mode	Mode 1	Antenna Polarity	Vertical			

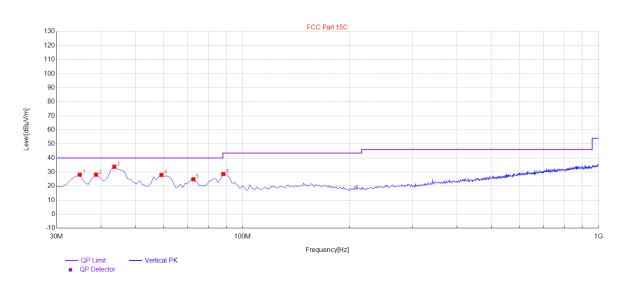

Final I	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	28.08	13.81	40.00	11.92	100	360	Vertical
2	38.73	28.08	14.23	40.00	11.92	100	167	Vertical
3	43.58	33.74	14.69	40.00	6.26	100	252	Vertical
4	59.1	27.92	14.03	40.00	12.08	100	356	Vertical
5	72.68	24.89	12.04	40.00	15.11	100	134	Vertical
6	88.2	28.57	11.24	43.50	14.93	100	24	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



Report No.: AGC10590230901FR01

Page 52 of 70

Radiated Emissions Test Results for Above 1GHz

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.011	49.36	0.08	49.44	74.00	-24.56	peak
4804.011	41.07	0.08	41.15	54.00	-12.85	AVG
7206.022	47.25	2.21	49.46	74.00	-24.54	peak
7206.022	39.63	2.21	41.84	54.00	-12.16	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.011	48.58	0.08	48.66	74.00	-25.34	peak
4804.011	40.96	0.08	41.04	54.00	-12.96	AVG
7206.022	47.15	2.21	49.36	74.00	-24.64	peak
7206.022	39.34	2.21	41.55	54.00	-12.45	AVG
Remark:						

<u>Remark:</u>

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Report No.: AGC10590230901FR01 Page 53 of 70

Radiated Emissions Test Results for Above 1GHz

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.005	48.57	0.14	48.71	74.00	-25.29	peak
4880.005	41.13	0.14	41.27	54.00	-12.73	AVG
7320.140	45.28	2.36	47.64	74.00	-26.36	peak
7320.140	39.69	2.36	42.05	54.00	-11.95	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.050	49.69	0.14	49.83	74.00	-24.17	peak
4880.050	42.37	0.14	42.51	54.00	-11.49	AVG
7320.080	47.25	2.36	49.61	74.00	-24.39	peak
7320.080	40.35	2.36	42.71	54.00	-11.29	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Report No.: AGC10590230901FR01

Page 54 of 70

Radiated Emissions Test Results for Above 1GHz

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.012	49.87	0.22	50.09	74.00	-23.91	peak
4960.012	39.61	0.22	39.83	54.00	-14.17	AVG
7440.027	47.59	2.64	50.23	74.00	-23.77	peak
7440.027	37.31	2.64	39.95	54.00	-14.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.013	48.25	0.22	48.47	74	-25.53	peak
4960.013	40.18	0.22	40.40	54	-13.60	AVG
7440.027	45.37	2.64	48.01	74	-25.99	peak
7440.027	37.46	2.64	40.10	54	-13.90	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Report No.: AGC10590230901FR01 Page 55 of 70

Radiated Emissions Test Results for Above 1GHz

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.011	49.36	0.08	49.44	74.00	-24.56	peak
4804.011	41.07	0.08	41.15	54.00	-12.85	AVG
7206.022	47.25	2.21	49.46	74.00	-24.54	peak
7206.022	39.63	2.21	41.84	54.00	-12.16	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.011	48.58	0.08	48.66	74.00	-25.34	peak
4804.011	40.96	0.08	41.04	54.00	-12.96	AVG
7206.022	47.15	2.21	49.36	74.00	-24.64	peak
7206.022	39.34	2.21	41.55	54.00	-12.45	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Report No.: AGC10590230901FR01

Page 56 of 70

Radiated Emissions Test Results for Above 1GHz

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.005	48.57	0.14	48.71	74.00	-25.29	peak
4880.005	41.13	0.14	41.27	54.00	-12.73	AVG
7320.140	45.28	2.36	47.64	74.00	-26.36	peak
7320.140	39.69	2.36	42.05	54.00	-11.95	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.050	49.69	0.14	49.83	74.00	-24.17	peak
4880.050	42.37	0.14	42.51	54.00	-11.49	AVG
7320.080	47.25	2.36	49.61	74.00	-24.39	peak
7320.080	40.35	2.36	42.71	54.00	-11.29	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Report No.: AGC10590230901FR01 Page 57 of 70

Radiated Emissions Test Results for Above 1GHz

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.012	49.87	0.22	50.09	74.00	-23.91	peak
4960.012	39.61	0.22	39.83	54.00	-14.17	AVG
7440.027	47.59	2.64	50.23	74.00	-23.77	peak
7440.027	37.31	2.64	39.95	54.00	-14.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.013	48.25	0.22	48.47	74	-25.53	peak
4960.013	40.18	0.22	40.40	54	-13.60	AVG
7440.027	45.37	2.64	48.01	74	-25.99	peak
7440.027	37.46	2.64	40.10	54	-13.90	AVG
Remark:						


<u>Remark</u>

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass

Note:


- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.






EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

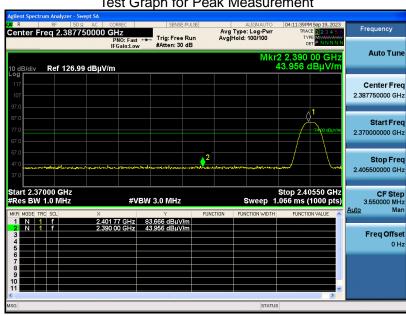



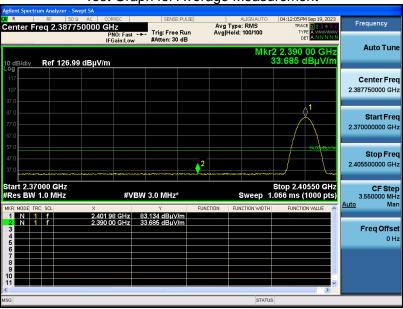


RESULT: Pass






EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical


Test Graph for Peak Measurement

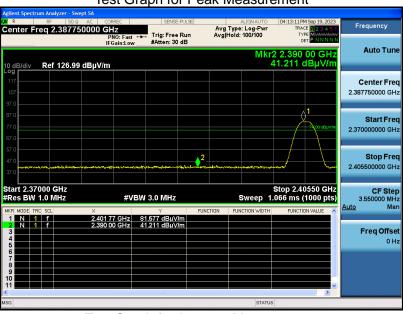



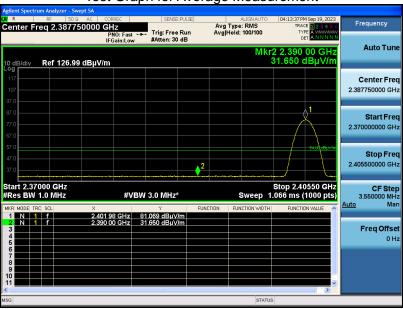


RESULT: Pass





EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

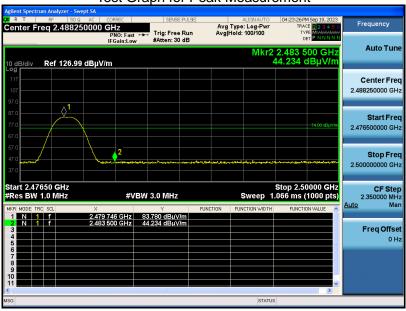






RESULT: Pass





EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

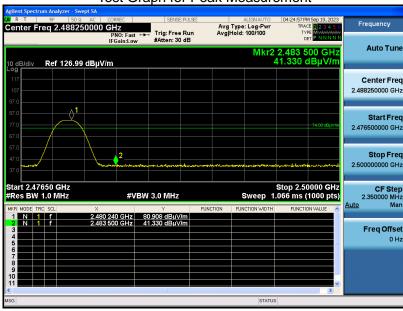






RESULT: Pass




EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

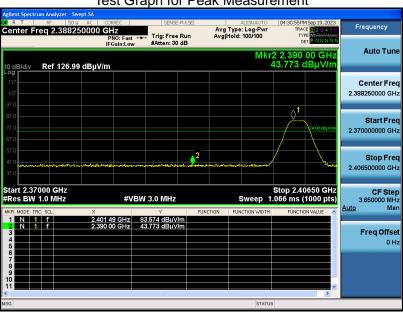



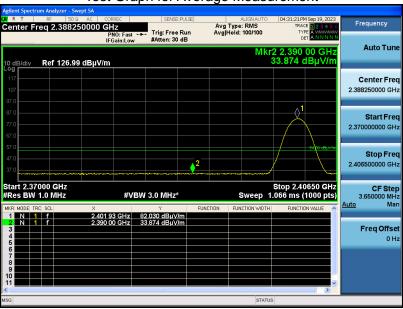


RESULT: Pass






EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical


Test Graph for Peak Measurement

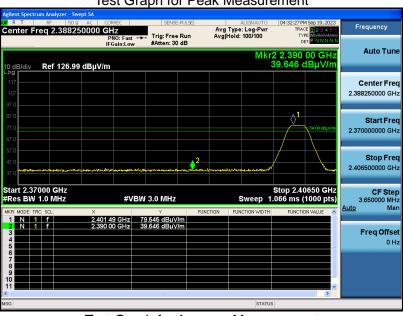



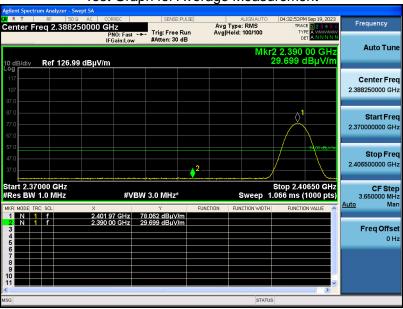


RESULT: Pass






EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

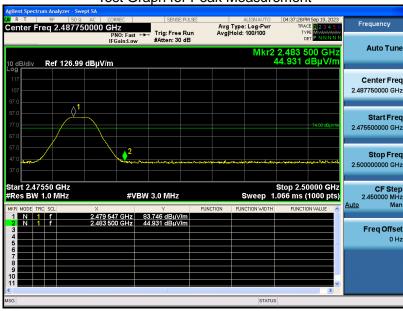



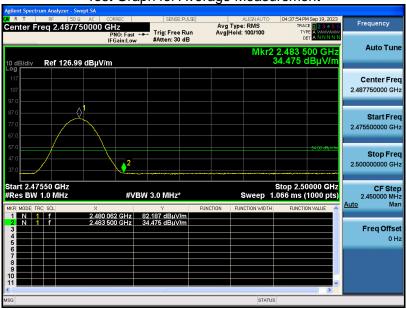


RESULT: Pass




EUT Name	Two Way Radio	Model Name	TD-H3
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 7.4V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

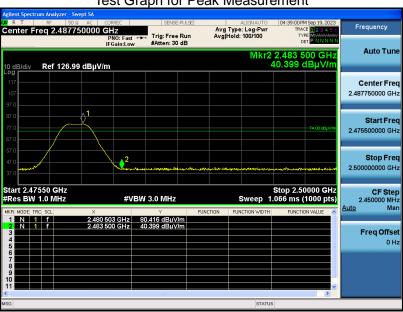



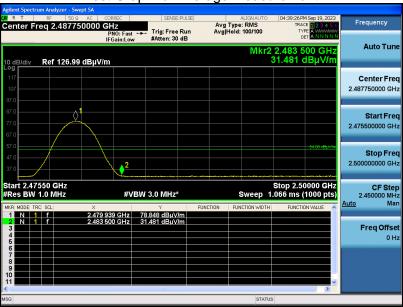

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Report No.: AGC10590230901FR01 Page 66 of 70

12. AC Power Line Conducted Emission Test


12.1 Measurement Limit

Function	Maximum RF	Line Voltage
Frequency	Q.P. (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

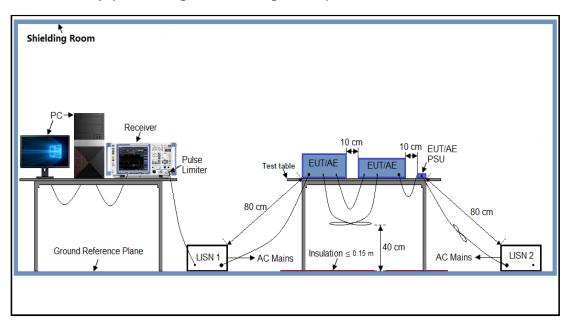



Report No.: AGC10590230901FR01 Page 67 of 70

12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results



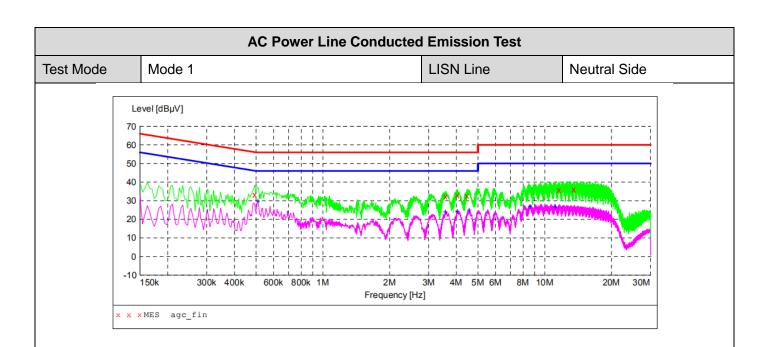

MEASUREMENT RESULT: "agc_fin"


:03					
Level	Transd	Limit	Margin	Detector	Line
dΒμV	dB	dΒμV	dB		
33.20	11.3	56	22.9	QP	L1
32.30	11.4	56	23.7	QP	L1
32.90	11.4	56	23.1	QP	L1
32.70	11.4	56	23.3	QP	L1
35.90	11.7	60	24.1	QP	L1
36.00	11.9	60	24.0	QP	L1
	dBμV 33.20 32.30 32.90 32.70 35.90	Level Transd dB	Level Transd Limit dBμV dB dBμV 33.20 11.3 56 32.30 11.4 56 32.90 11.4 56 32.70 11.4 56 35.90 11.7 60	Level dBμV Transd dB dBμV Limit dB dBμV Margin dB 33.20 11.3 56 22.9 32.30 11.4 56 23.7 32.90 11.4 56 23.1 32.70 11.4 56 23.3 35.90 11.7 60 24.1	Level dBμV Transd dB dBμV Limit dB dB Margin dB Detector dB 33.20 11.3 56 22.9 QP 32.30 11.4 56 23.7 QP 32.90 11.4 56 23.1 QP 32.70 11.4 56 23.3 QP 35.90 11.7 60 24.1 QP

MEASUREMENT RESULT: "agc fin2"

2020/09/08 14	:03					
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.510000	29.70	11.3	46	16.3	AV	L1
3.570000	23.80	11.4	46	22.2	AV	L1
4.042000	24.20	11.4	46	21.8	AV	L1
4.586000	24.80	11.4	46	21.2	AV	L1
8.594000	26.70	11.6	50	23.3	AV	L1
11.178000	26.60	11.7	50	23.4	AV	L1

RESULT: Pass



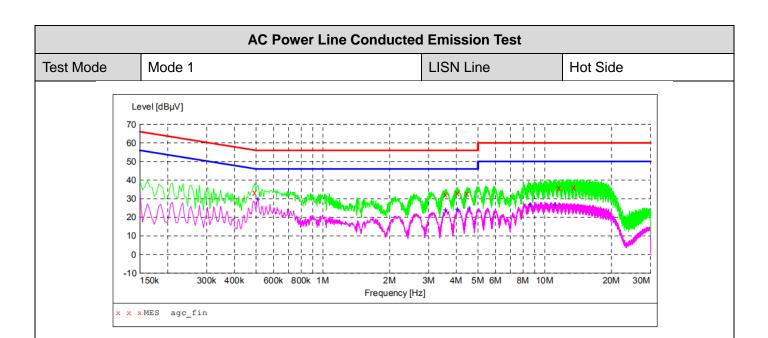

MEASUREMENT RESULT: "agc_fin"

2020/09/08 14	:03					
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.494000	33.20	11.3	56	22.9	QP	L1
3.590000	32.30	11.4	56	23.7	QP	L1
4.042000	32.90	11.4	56	23.1	QP	L1
4.474000	32.70	11.4	56	23.3	QP	L1
11.610000	35.90	11.7	60	24.1	QP	L1
13.514000	36.00	11.9	60	24.0	QP	L1

MEASUREMENT RESULT: "agc fin2"

2020/09/08 14	:03					
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dBµV	dB	dΒμV	dB		
0.510000	29.70	11.3	46	16.3	AV	L1
3.570000	23.80	11.4	46	22.2	AV	L1
4.042000	24.20	11.4	46	21.8	AV	L1
4.586000	24.80	11.4	46	21.2	AV	L1
8.594000	26.70	11.6	50	23.3	AV	L1
11.178000	26.60	11.7	50	23.4	AV	L1

RESULT: PASS



Report No.: AGC10590230901FR01

Page 70 of 70

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC10590230901AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC10590230901AP02

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.