

HB6339说明书 (HelloBaby)


说明书为折叠式
尺寸：540*120MM
材质：100g双胶纸（彩色）
版本：V1.0
类型：环保

版本	修改内容	日期
Ver: 1.0	首次发行。	2022/02/21

设计	审核	审批
Tony-W		
2022/02/21		

120.00 mm

540.00 mm

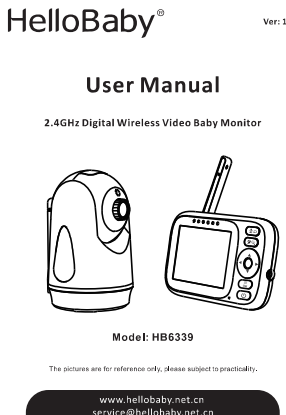

Model: HB6339

www.hellobaby.net.cn
service@hellobaby.net.cn

Thank you for purchasing the HB6339 Baby Monitor. With your baby monitor, you could see and hear your baby sleeping or playing in their room anytime.

Please retain your original dated sales receipt for your records. For warranty service of your product, you will need to provide a copy of your dated sales receipt to confirm warranty status. Registration is not required for warranty coverage.

Please make sure the following included in your package
Parent unit x 1 Camera unit x 1 Power Adapter x 2
User manual x 1 Wall mounting kit x 1


1. SAFETY INSTRUCTIONS
CAUTION: Keep the device away from children.
Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3ft (0.9m) away). Never use extension cords with AC Adapters. Only use lights or dimmer switches.
Choking hazard: This product contains small parts, please be careful when unpack and assemble the product.
Read and keep to instructions: All the safety and operating instructions should be read before the video baby monitor is operated. This product cannot replace responsible adult supervision.
Water and moisture: This product is designed for indoor use only. The unit should not be exposed to rain, moisture, dripping or splashing. No objects filled with liquid should be placed on top of, or beside the product, such as a table or vase. This item should not be used near water.
DO NOT: Use the appliance if the cord or plug is damaged. If your baby monitor is not operating properly or has suffered any damage, contact "Videotimes" service center to request inspection and repair of the appliance in order to avoid any possible risk.
DO NOT: Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit. Otherwise, the guarantee will be made void.
Ventilation: This baby monitor should not be used in a bed, sofa, rug or similar surface that may block the ventilation openings, or be placed in an enclosed area such as a bassinet or drawer that may impede air flow.
Keep away from sources of heat: This unit should not be exposed to direct heat sources such as a candle, radiator, heater, stove or other appliance that emits heat. The unit should not be left in direct sunlight.
Power source: This unit should only be used with the AC power adapters included in this package (noted SV DC 1A).
Dangerous repair service: This unit should be serviced by qualified personnel only when objects have fallen or liquid has been spilled into the product.
The units have been exposed to rain.


2. WARRANTY TERMS
We offer one-year warranty from the original purchase date against defects in workmanship and materials. If you have warranty or support issues, please contact our after-sales service via email.


3. INSTALLATION GUIDELINES
* To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions.
* Any large metal object, like a refrigerator, a mirror, a filing cabinet, metallic doors or reinforced concrete between the baby and parent unit may block the radio signal.
* The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
* Use of other 2.4GHz product, such as wireless network (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away at least 5ft (1.5m) from such products, or turn them off if they cause interference.


4. PLACEMENT OF THE BABY MONITOR
The camera can be placed on the desktop or mounted on the wall. Don't place baby monitor on soft/quality blankets or in the corners of cupboards, shelves, etc. Keep the baby monitor away from heat sources such as radiators, chimneys, cookers and direct sunlight. Keep the baby unit away from TV sets, microwave ovens and radios. If interference occurs, move the camera to elsewhere.
* Place the camera within 6 feet (2 meters) of the area being monitored for optimum performance.









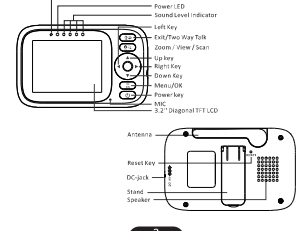

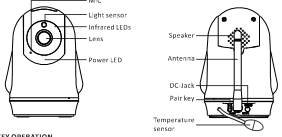5. GETTING STARTED
5.1 TURN ON THE BABY UNIT:
1. Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit;
2. Insert the other end of the power adapter into a suitable electrical outlet.
3. Once the adapter is connected, the power LED will light up.
5.2 TURN ON THE PARENT UNIT:
1. Insert the DC plug of the power adapter into the DC jack in the side of the parent unit;
2. Insert the other end of the power adapter into a suitable electrical outlet;
3. Press and hold the power key 3 seconds on the side of the parent unit;
4. Once parent unit is on, the power LED will light up and the image will display on the LCD. The unit's lens has been exposed to rain.

5.3 INFRARED NIGHT VISION (AUTOMATIC)
The infrared night vision function allows the camera to pick up images in dark or low light conditions. In this mode, only black and white images will be displayed on the screen. The optimum image lies in where baby unit is 5ft (2m) away from object. The camera is in night vision mode, the icon  will be displayed on the top of screen.




6. PRODUCT OVERVIEW
6.1 ICONS OVERVIEW:





6.2 PARENT UNIT OVERVIEW:





6.3 BABY UNIT OVERVIEW:





7. KEY OPERATION
7.1 TURN ON/OFF
Press and hold the power  key for 3 seconds to turn on / off the parent unit.
7.2 UP  KEY
Press once to tilt the camera up by one step. Press and hold to tilt continuously.
7.3 DOWN  KEY
Press once to tilt the camera down by one step. Press and hold to tilt continuously.
7.4 LEFT  KEY
Press once to pan the camera left by one step. Press and hold to pan continuously.
7.5 RIGHT  KEY
Press once to pan the camera right by one step. Press and hold to pan continuously.
7.6 CAMERA VIEW/SCAN
Press scan  key to view / scan camera; during scan mode, the scan icon  will be displayed on the top of screen. Each camera's video will be displayed on the LCD around 10 seconds then change to next camera.
7.7 DIGITAL ZOOM
Press and hold the  key around 2 seconds to operate zoom in / out;
7.8 Two Way Talk
Press and hold the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.




8. MENU OPERATION
8.1 PAIRING THE CAMERA AND PARENT UNITS
The baby unit is pre-registered to your parent unit. You do not need to register it again unless the baby unit loses its link with the parent unit. To re-register your baby unit, or register a




8.2 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.




8.3 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.




8.4 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.




8.5 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8.6 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8.7 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8.8 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8.9 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.

8.10 MENU OPERATION
Press and hold the  key around 2 seconds to enter the menu.
Press the  key to enter two way talk mode. A microphone icon  will be displayed in the corner of the LCD screen. Release the key to stop.
Note: When you are in the two-way talk mode, the parent unit speaker is muted.

9. TROUBLE SHOOTING
9.1 NO RECEPTION OF THE MONITOR
The power adapters may not be properly connected.
Confirm that the camera and monitor are ON.
Camera may be far away from the monitor.
Camera and monitor may not be properly paired; follow PAIRING instructions.
9.2 INTERFERENCE OR POOR RECEPTION
Move the monitor closer to the camera.
The camera unit or monitor may be placed too close to many metal objects.
Other electronic devices may be interfering with the signal.
The battery power may be too low.
9.3 AUDIO FEEDBACK (HIGH-PITCHED TONE)
The volume on the monitor may be set too high.
9.4 FROZEN PICTURE ON SCREEN
Repower the baby unit (plug out the adapter, then plug it into the socket again).
The camera and monitor may be placed too close to each other.
Press the RESET key at the back of the parent unit.

10. TROUBLE SHOOTING
10.1 NO RECEPTION OF THE MONITOR
The power adapters may not be properly connected.
Confirm that the camera and monitor are ON.
Camera may be far away from the monitor.
Camera and monitor may not be properly paired; follow PAIRING instructions.
10.2 INTERFERENCE OR POOR RECEPTION
Move the monitor closer to the camera.
The camera unit or monitor may be placed too close to many metal objects.
Other electronic devices may be interfering with the signal.
The battery power may be too low.
10.3 AUDIO FEEDBACK (HIGH-PITCHED TONE)
The volume on the monitor may be set too high.
10.4 FROZEN PICTURE ON SCREEN
Repower the baby unit (plug out the adapter, then plug it into the socket again).
The camera and monitor may be placed too close to each other.
Press the RESET key at the back of the parent unit.

11. MAINTENANCE
Clean your baby monitor with a slightly damp or anti-static cloth.
Never use cleaning agents or solvents.
12. DISPOSAL GUIDE FOR BATTERY AND PRODUCT
Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit.
Remember to dispose of the product in an environmentally responsible way:
For proper collection and processing of these products, take them to the collection points designated by local authorities. You can also contact the store where you purchased the product.
Improper or incorrect use of batteries may cause corrosion or battery leakage, which could cause personal injury or damage to property. Use only the types of batteries which are indicated in this manual.
CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 55 degrees C or Incinerate. Follow Manufacturer's instructions.
Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, can result in an explosion.
Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
The battery shall not be disposed to excessive heat such as sunshine, fire or the like;

13. FCCCA ISDE COMPLIANCE
This device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la partie 15 des règles de la FCC et aux normes RSS exemptées de licence d'Industrie Canada. Le fonctionnement est soumis aux deux conditions suivantes: (1) l'appareil ne doit pas causer d'interférences nuisibles, et (2) l'appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.
Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules, which are designed to provide protection against unreasonable interference against a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is advised to take the following steps:
1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.
This device meets the exemption from the routine evaluation limits in section 2.3 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.3 du titre 102 et conforme avec les 102 de l'exposition aux RF. Les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs RF à la conformité.
Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.
Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.
SAR Statement for Monitor
Specific Absorption Rate (SAR) Information:
This Monitor meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through peer-reviewed and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. IEEE R1537 Exposure Information and Statement of the SAR limits of Canada (SDO) is 1.6 W/kg averaged over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept firm from the body. To maintain compliance with IEEE R1537 exposure requirements, use accessories that maintain an 8mm separation distance between the user's body and the back of the Monitor. The use of both clips, holsters and similar accessories should not contain metal components in its assembly. The use of accessories that do not satisfy the requirements may not comply with IEEE R1537 exposure requirements, and should be avoided.
Informations sur le débit d'absorption spécifique (DAS)
Cet appareil répond aux exigences du gouvernement en matière d'exposition aux ondes radio. Les lignes directrices sont basées sur des normes établies par des organisations scientifiques indépendantes à travers une évaluation périodique et approfondie des études scientifiques. Les normes comprennent une marge de sécurité substantielle conçue pour assurer la sécurité de toutes les personnes, quel que soit leur âge ou leur état de santé. Information et déclaration d'IEEE sur l'exposition aux RF et les limites DAS du Canada (SDO) est

de 1.6 W/kg en moyenne sur un gramme de tissu. Types d'appareils: La Montre a également été testée par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Montre contre le dos du corps. Pour maintenir la conformité avec les exigences d'exposition RF d'IEEE, utilisez des accessoires qui maintiennent une distance de séparation de 8 mm entre le corps de l'utilisateur et l'arrière de la Montre. L'utilisation de clips de ceinture, d'événis d'accessoires similaires ne doit pas contenir de composants métalliques dans son assemblage. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF d'IEEE et doit être évitée.











EU Declaration of Conformity (DOC)
Directly, Videotimes declares that the radio equipment type is in compliance with RED Directive 2014/53/EU.
The full text of the EU declaration of conformity is available on the website: www.hellobaby.net.cn











Model: HB6339
Responsible Party(S): Startline LLC
Address: 23 Hazelwood Drive, Jericho, NY 11753 Tel: 315-681-3739
Authorized UK Representative(UNI): Safescore web Ltd
Address: 18 Grosvenor Road, London, UK Tel: 44(0)7405 572 2799





Shenzhen Videotimes Technology Co., Ltd
701, Building 3, No. 1, Zhenhan Road, Gankang Community, Jihua Street Office, Longgang District, Shenzhen







Risk Group 1
WARNING: IR emitted from this product. Do not stare at operating lamp.
Product tested against EN62471

Note: Camera icon with "*" means it is well registered. You should select and pair with the camera icon without "*" sign.






8.1.3 ADD CAMERA
1. Press the MENU  key then the menu will pop up;
2. Press the  key until the camera icon  is highlighted, then press  key or  key to select your desired camera;
3. Press OK  key to enter sub-menu;
4. Press  key to select ADD CAMERA; then press OK  key;
5. When the icon  displayed on the LCD screen, press the PAIR button on the back of camera;
6. Once paired,  appears on the LCD screen.
7. If fails, repeat the above steps.




8.2 DELETE CAMERA
1. Press the MENU  key and the menu will pop up;
2. Press the  key until the camera icon  is highlighted, then press  key or  key to select your desired camera;
3. Press OK  key to enter sub-menu;
4. Press  key to select DEL CAMERA; then press OK  key;
5. Press  key to delete the camera;
6. Press OK  key to confirm the option.

8.3 VOLUME
1. Press the  key and the menu bar will pop up;
2. Press the  key until  is highlighted;
3. Press the  key to select the desired volume level from level 1~5.
The default volume level setting is level 2 and level 0 is OFF.






8.4 TEMPERATURE UNIT SETTING
1. Press the  key and the menu bar will pop up;
2. Press the  key until the temperature icon  is highlighted;
3. Press  key to select between "F" or "C";
4. Press OK  key to confirm;
5. Press the  key to quit.






Note: The detected temperature range is 0~50 °C.





8.5.1 TEMPERATURE ALARM SETTING
1. Press  key to select  then  key to confirm alarm on or off then followed by  key for switching off alarm function.
2. Press  key to quit.






8.5.2 SET TEMPERATURE WIND ALERT LIMITS
1. When  is highlighted at alarm setting, then press  key to enter H/L limits settings.
2. Press  key to adjust the H limit then press key to confirm.
3. Then key will jump to L limit setting.

4. Press key to adjust the L limit then press key to confirm.
5. Press key to exit to last menu level.
Note: The high temperature alarm range is 20~40 °C, and the low temperature alarm range is 0~19 °C. The high temperature alarm default setting is 36 °C, and the low temperature alarm default setting is 8 °C. When the temperature goes above or below the settings, the temperature icon turns red. It will flash to alert user by audio beeps. Press any key on the parent unit to stop beeping and flashing.

8.6 ALLIANCE SETTING
You can soothe the baby to sleep by playing a gentle lullaby from the Camera unit.
1. Press the MENU  key and the menu will pop up;
2. Press the  key until the lullaby icon  is highlighted;
3. Press  key to select one of the 8 available lullabies, you can pick single playback, loop (all 8 lullabies) playback or stop;
4. Press OK  key to confirm.
Note: The lullaby default setting is OFF.

8.7 ALARM SETTING
You can use the Parent Unit to set an alarm as a reminder for you to take care of your baby. If an alarm time is selected, the Parent Unit will beep at the end of the selected hour period from 50mins to 45mins with 30mins step interval. The alarm will sound for about 1 minute. When the time is reached, or can be stopped by pressing any key.
1. Press the MENU  key and the menu will pop up;
2. Press the  key until the alarm icon  is highlighted;
3. Press the  key to select the expected timers.
4. Press OK  key to confirm.
Note: The alarm default setting is OFF. When the alarm is ringing, press any key on the parent unit to stop.

8.8 DISPLAY BRIGHTNESS
1. Press the  key and the menu bar will pop up;
2. Press the  key until  is highlighted;
3. Press the  key to select the desired brightness level from level 1~5.
(The default brightness level setting is level 3.)

8.9 VOX SETTING
This mode allows you to control the sound activation of your baby unit. If there is no sound around the baby unit within 30 seconds, it will stop audio transmission and turn off the screen of the parent unit. When the baby unit detects any sounds louder than the sensitivity level, it will start transmitting the signals to the parent unit again and turn on the screen of the parent unit. To change the VOX level, please follow the below instructions.
1. Press  key and the menu bar will pop up;
2. Press  key until  is highlighted;
3. Press  key to select the VOX sensitivity level.
4. Press  key to confirm setting.

9. TECHNICAL DATA

Frequency	2403.5MHz~2425.5MHz
Power Adapter	Parent Unit Input: 100-240VAC 50/60Hz Output: 5V DC 1A Camera Unit Input: 100-240VAC 50/60Hz Output: 5V DC 1A
Operating Range	Up to 1000ft (300m) outdoor (line of sight) Up to 165ft (50m) indoor
Display	7" Diagonal TFT LCD
Battery (Parent Unit)	Li-ion 3.7V 2500mAh (3.5Ah/5Wh)
Battery life	Up to 8 hours
Maximum power	< 100mW
Operation environment	Operating Temperature: -131°~+104F (0°~40°C) Battery Charging Temperature: +59°~+104F (10°~40°C) Relative Humidity: 15%~85%

10. TROUBLE SHOOTING
10.1 NO RECEPTION OF THE MONITOR
The power adapters may not be properly connected.
Confirm that the camera and monitor are ON.
Camera may be far away from the monitor.
Camera and monitor may not be properly paired; follow PAIRING instructions.
10.2 INTERFERENCE OR POOR RECEPTION
Move the monitor closer to the camera.
The camera unit or monitor may be placed too close to many metal objects.
Other electronic devices may be interfering with the signal.
The battery power may be too low.
10.3 AUDIO FEEDBACK (HIGH-PITCHED TONE)
The volume on the monitor may be set too high.
10.4 FROZEN PICTURE ON SCREEN
Repower the baby unit (plug out the adapter, then plug it into the socket again).
The camera and monitor may be placed too close to each other.
Press the RESET key at the back of the parent unit.