

4 Occupied bandwidth for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n41	30	20	518598	50@0	DFT_BPSK	18.110	18.250	PASS
n41	30	20	518598	50@0	DFT_QPSK	18.010	18.300	PASS
n41	30	20	518598	50@0	DFT_QAM16	18.030	18.290	PASS
n41	30	20	518598	50@0	DFT_QAM64	18.060	18.270	PASS
n41	30	20	518598	50@0	DFT_QAM256	17.930	18.230	PASS
n41	30	40	518598	100@0	DFT_BPSK	37.560	36.340	PASS
n41	30	40	518598	100@0	DFT_QPSK	37.450	36.380	PASS
n41	30	40	518598	100@0	DFT_QAM16	37.450	36.380	PASS
n41	30	40	518598	100@0	DFT_QAM64	37.600	36.330	PASS
n41	30	40	518598	100@0	DFT_QAM256	37.410	36.340	PASS
n41	30	50	518598	128@0	DFT_BPSK	46.930	46.430	PASS
n41	30	50	518598	128@0	DFT_QPSK	47.030	46.400	PASS
n41	30	50	518598	128@0	DFT_QAM16	47.000	46.340	PASS
n41	30	50	518598	128@0	DFT_QAM64	47.080	46.380	PASS
n41	30	50	518598	128@0	DFT_QAM256	47.090	46.400	PASS
n41	30	60	518598	162@0	DFT_BPSK	57.690	58.740	PASS
n41	30	60	518598	162@0	DFT_QPSK	57.840	58.600	PASS
n41	30	60	518598	162@0	DFT_QAM16	57.720	58.610	PASS
n41	30	60	518598	162@0	DFT_QAM64	57.680	58.530	PASS
n41	30	60	518598	162@0	DFT_QAM256	57.780	58.640	PASS
n41	30	80	518598	216@0	DFT_BPSK	77.050	78.100	PASS
n41	30	80	518598	216@0	DFT_QPSK	77.050	78.210	PASS
n41	30	80	518598	216@0	DFT_QAM16	76.940	77.990	PASS
n41	30	80	518598	216@0	DFT_QAM64	76.950	78.140	PASS
n41	30	80	518598	216@0	DFT_QAM256	77.040	78.120	PASS
n41	30	90	518598	240@0	DFT_BPSK	86.900	86.710	PASS
n41	30	90	518598	240@0	DFT_QPSK	86.900	86.810	PASS
n41	30	90	518598	240@0	DFT_QAM16	86.760	86.720	PASS
n41	30	90	518598	240@0	DFT_QAM64	86.800	86.730	PASS
n41	30	90	518598	240@0	DFT_QAM256	86.640	86.720	PASS
n41	30	100	518598	270@0	DFT_BPSK	96.560	97.520	PASS
n41	30	100	518598	270@0	DFT_QPSK	96.560	97.560	PASS
n41	30	100	518598	270@0	DFT_QAM16	96.430	97.490	PASS
n41	30	100	518598	270@0	DFT_QAM64	96.570	97.520	PASS
n41	30	100	518598	270@0	DFT_QAM256	96.450	97.580	PASS

n41 SCS=30kHz DFT_BPSK BW=100MHz Channel=518598 RB=270@0



n41 SCS=30kHz DFT_BPSK BW=20MHz Channel=518598 RB=50@0



n41 SCS=30kHz DFT_BPSK BW=40MHz Channel=518598 RB=100@0



n41 SCS=30kHz DFT_BPSK BW=50MHz Channel=518598 RB=128@0



n41 SCS=30kHz DFT_BPSK BW=60MHz Channel=518598 RB=162@0




n41 SCS=30kHz DFT_BPSK BW=80MHz Channel=518598 RB=216@0



n41 SCS=30kHz DFT_BPSK BW=90MHz Channel=518598 RB=240@0



n41 SCS=30kHz DFT_QAM16 BW=100MHz Channel=518598 RB=270@0

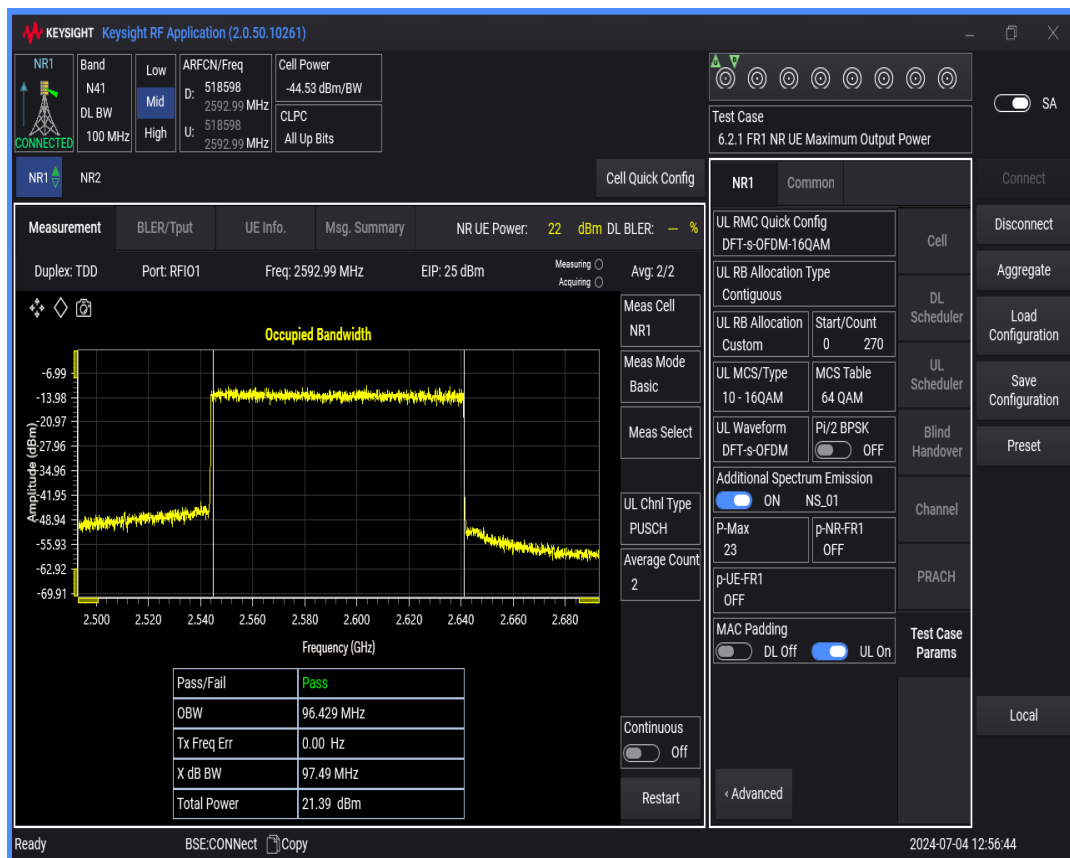

n41 SCS=30kHz DFT_QAM16 BW=20MHz Channel=518598 RB=50@0




n41 SCS=30kHz DFT_QAM16 BW=40MHz Channel=518598 RB=100@0



n41 SCS=30kHz DFT_QAM16 BW=50MHz Channel=518598 RB=128@0



n41 SCS=30kHz DFT_QAM16 BW=60MHz Channel=518598 RB=162@0

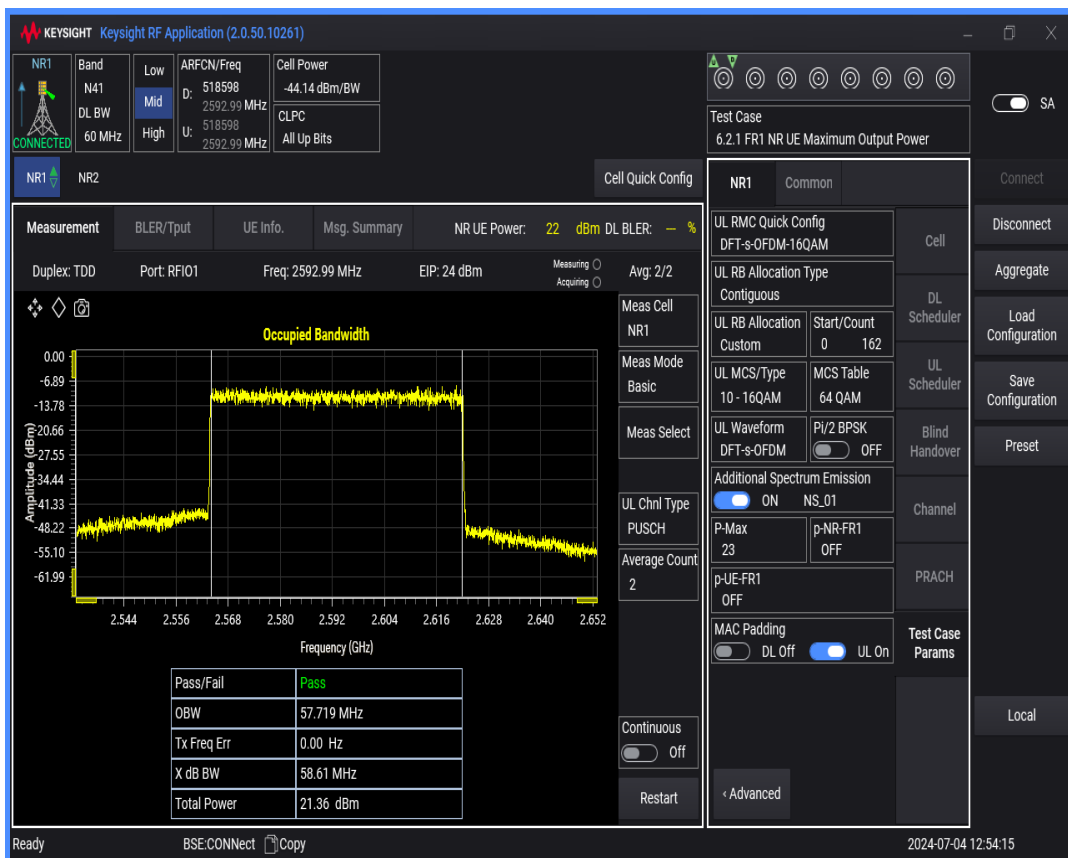


n41 SCS=30kHz DFT_QAM16 BW=80MHz Channel=518598 RB=216@0



n41 SCS=30kHz DFT_QAM16 BW=90MHz Channel=518598 RB=240@0



n41 SCS=30kHz DFT_QAM256 BW=100MHz Channel=518598 RB=270@0

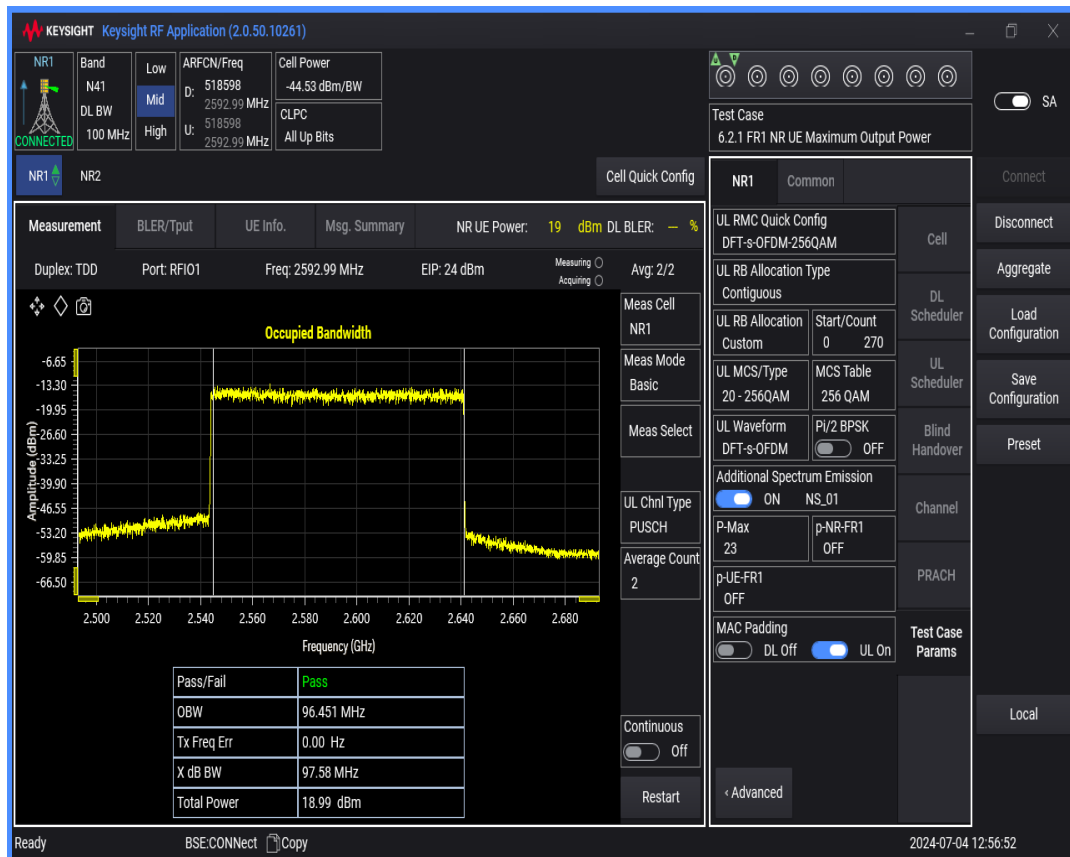

n41 SCS=30kHz DFT_QAM256 BW=20MHz Channel=518598 RB=50@0



n41 SCS=30kHz DFT_QAM256 BW=40MHz Channel=518598 RB=100@0




n41 SCS=30kHz DFT_QAM256 BW=50MHz Channel=518598 RB=128@0




n41 SCS=30kHz DFT_QAM256 BW=60MHz Channel=518598 RB=162@0




n41 SCS=30kHz DFT_QAM256 BW=80MHz Channel=518598 RB=216@0

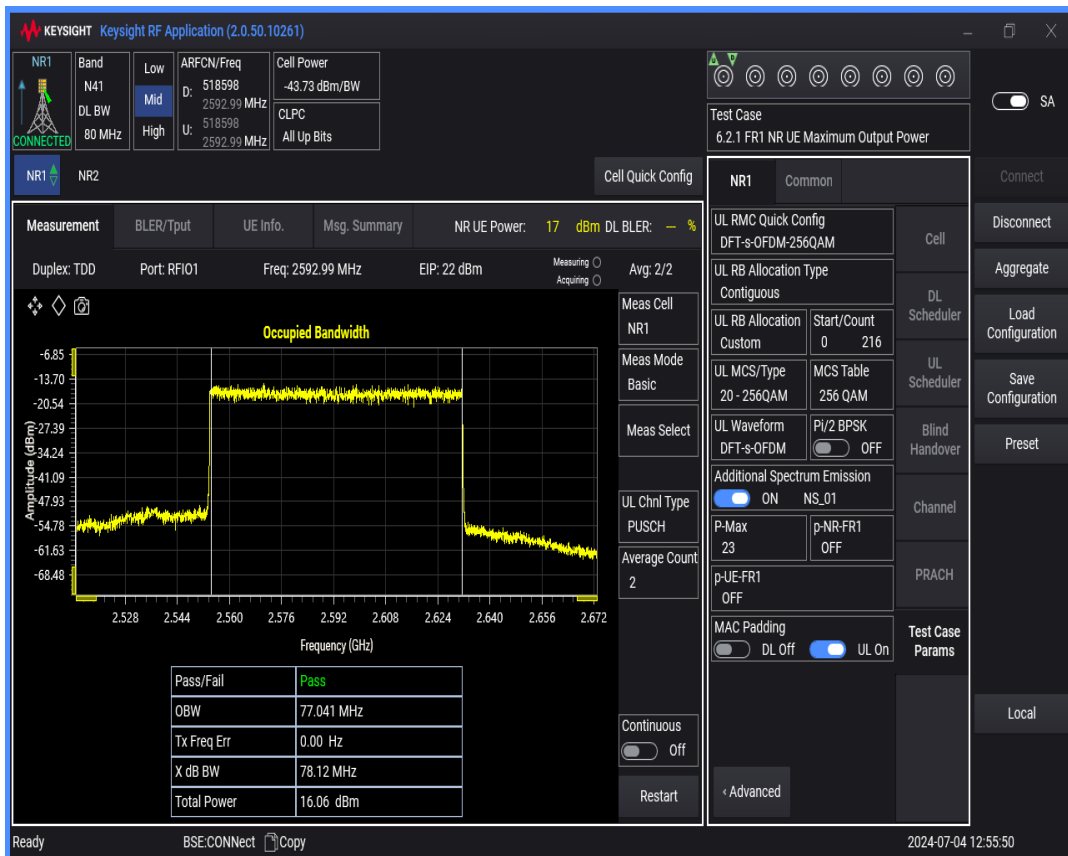

n41 SCS=30kHz DFT_QAM256 BW=90MHz Channel=518598 RB=240@0

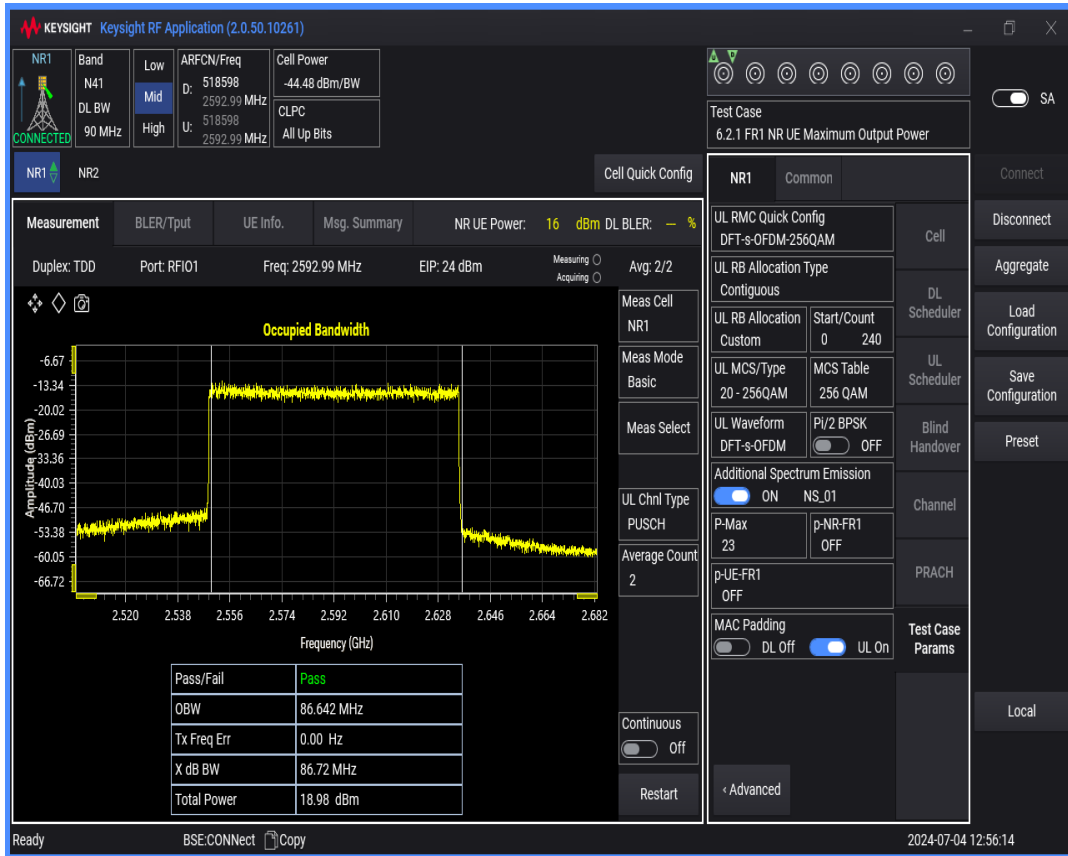

n41 SCS=30kHz DFT_QAM64 BW=100MHz Channel=518598 RB=270@0

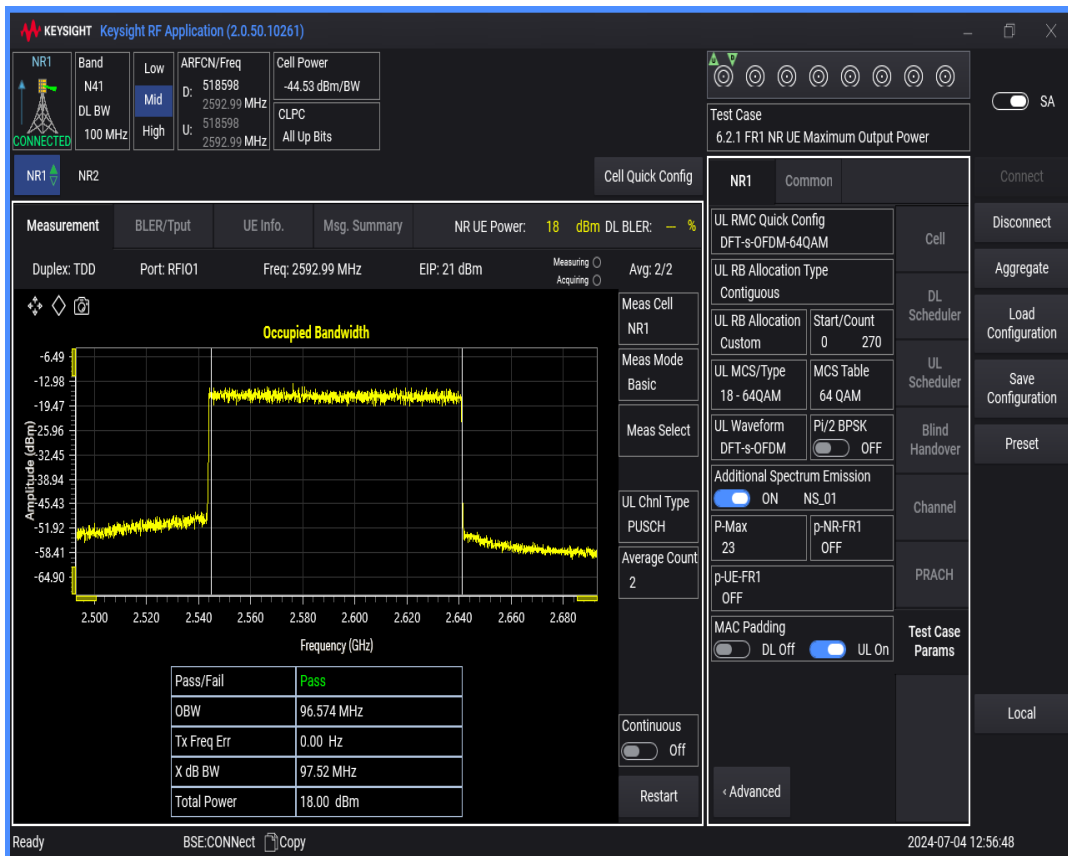


n41 SCS=30kHz DFT_QAM64 BW=20MHz Channel=518598 RB=50@0




n41 SCS=30kHz DFT_QAM64 BW=40MHz Channel=518598 RB=100@0



n41 SCS=30kHz DFT_QAM64 BW=50MHz Channel=518598 RB=128@0

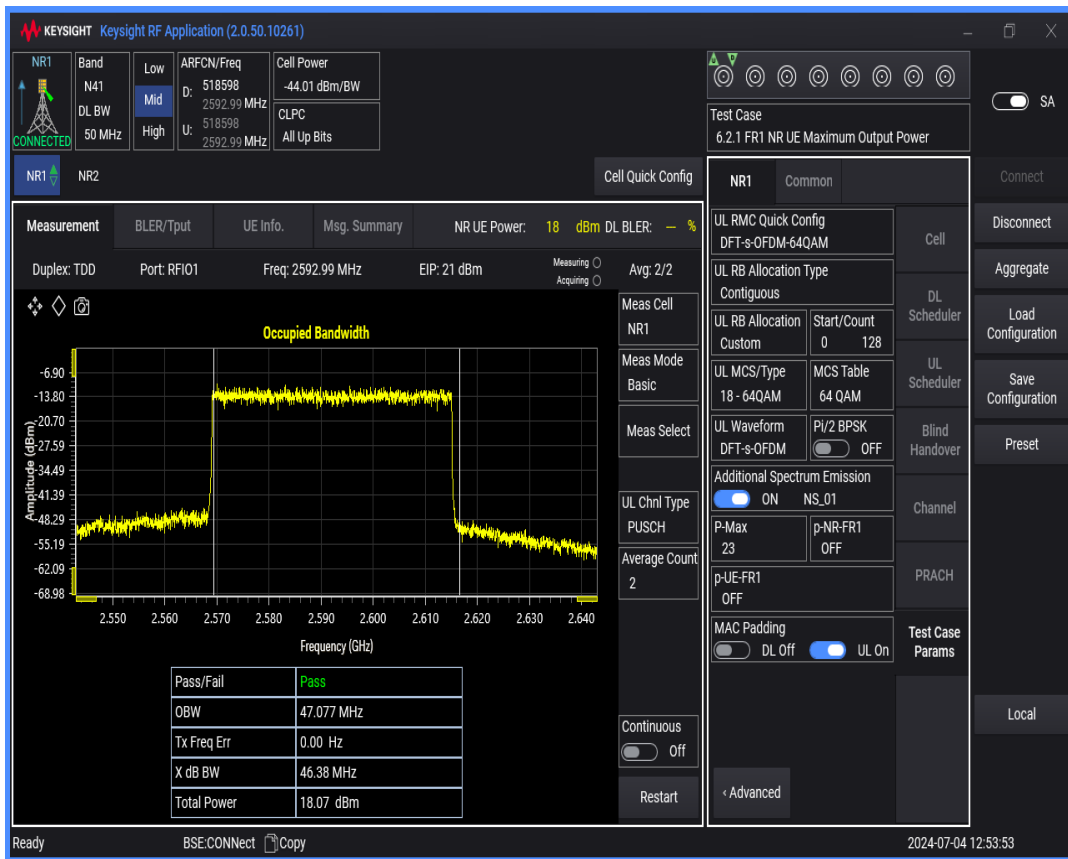


n41 SCS=30kHz DFT_QAM64 BW=60MHz Channel=518598 RB=162@0

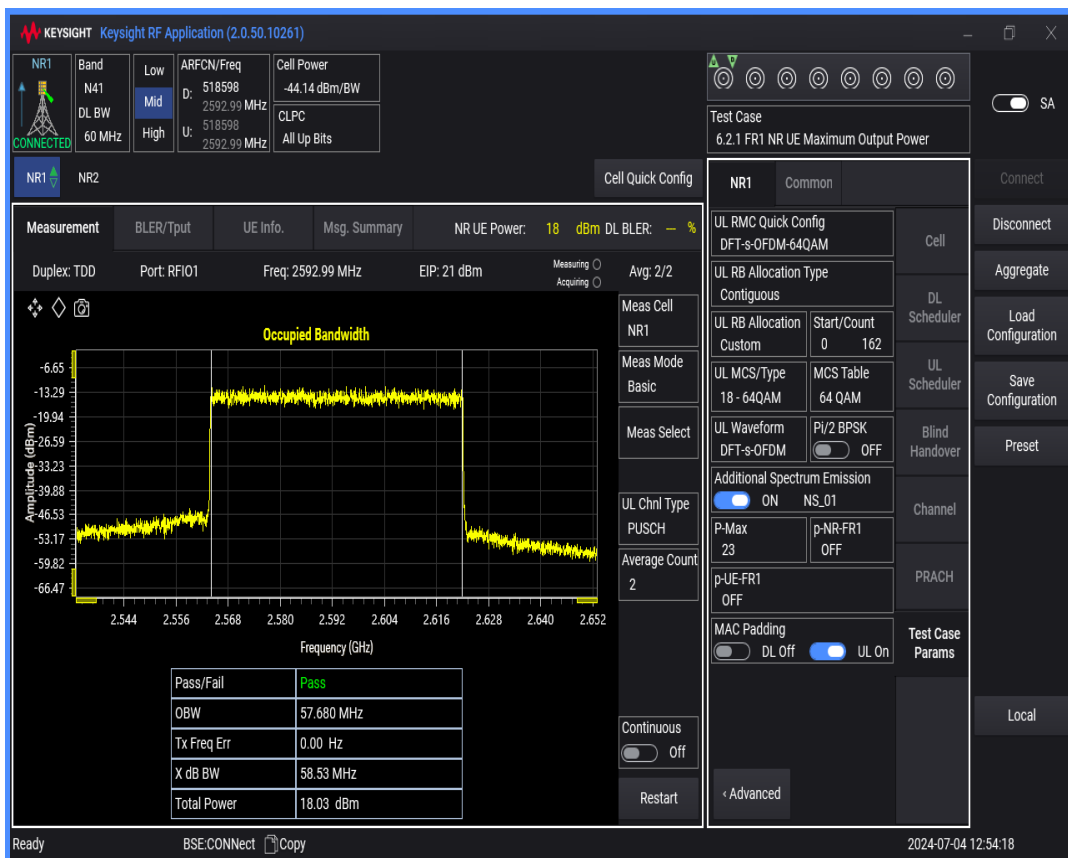


n41 SCS=30kHz DFT_QAM64 BW=80MHz Channel=518598 RB=216@0



n41 SCS=30kHz DFT_QAM64 BW=90MHz Channel=518598 RB=240@0

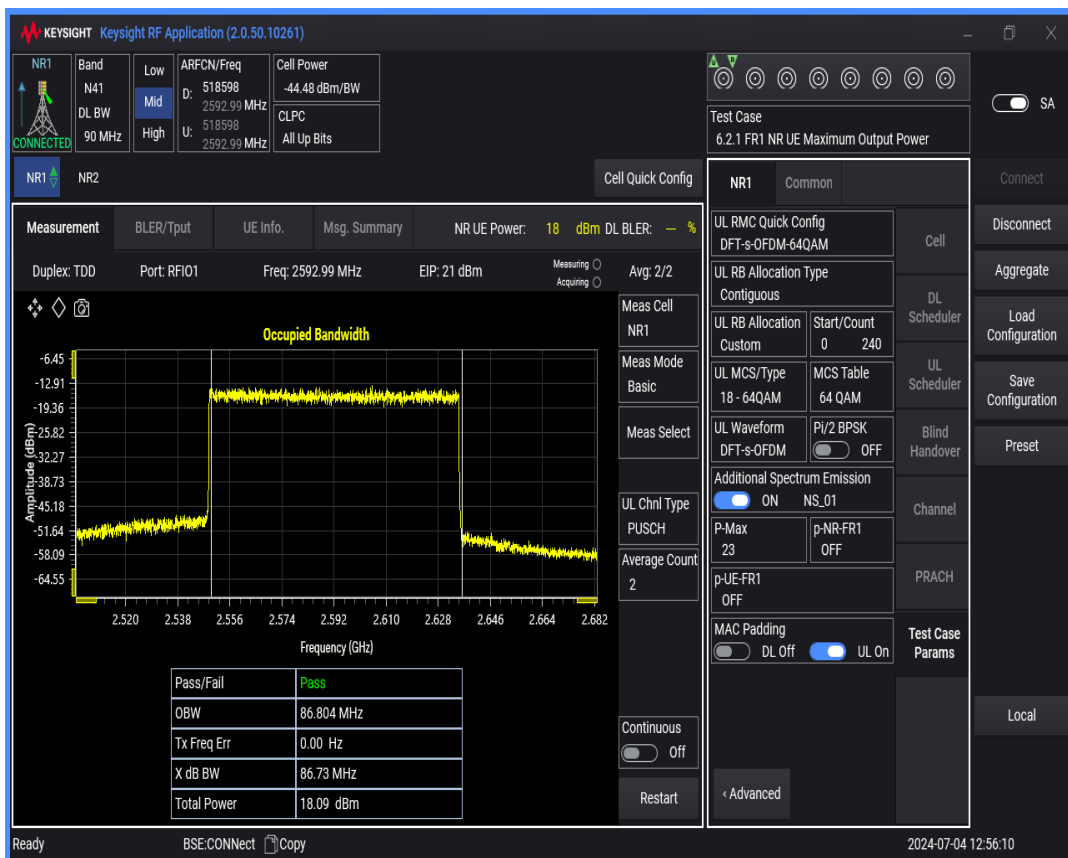

n41 SCS=30kHz DFT_QPSK BW=100MHz Channel=518598 RB=270@0

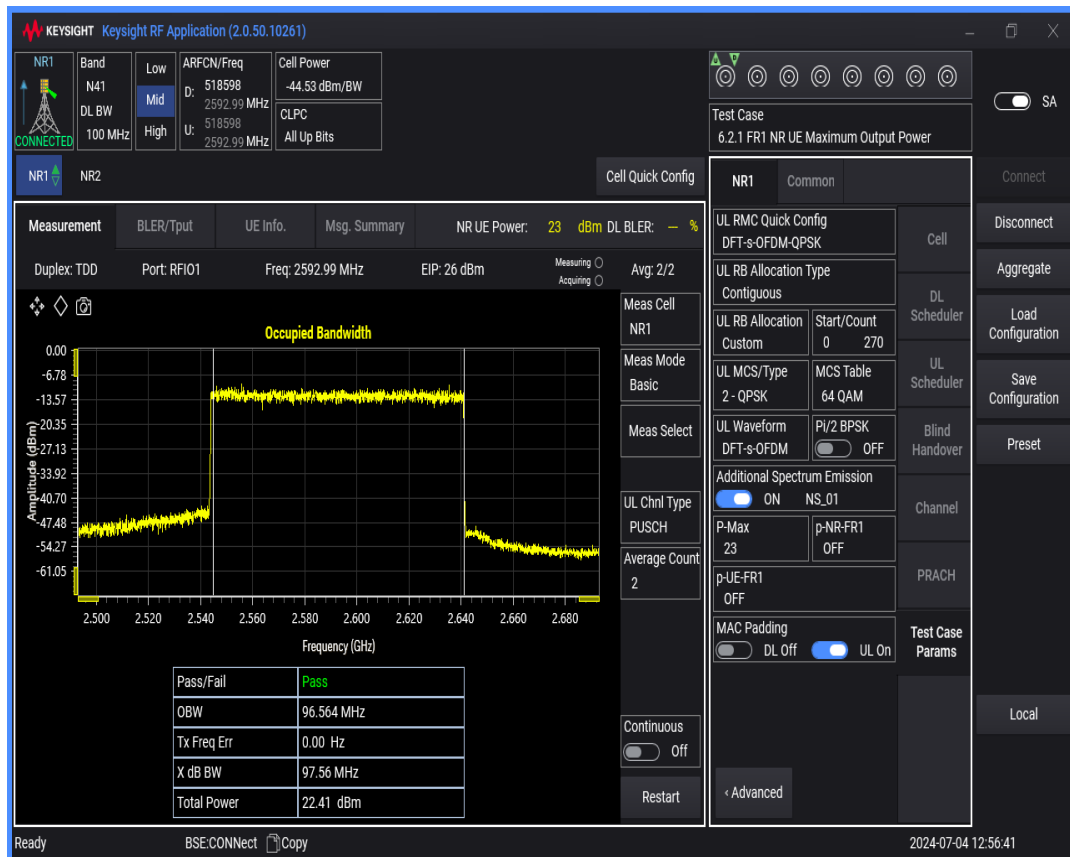

n41 SCS=30kHz DFT_QPSK BW=20MHz Channel=518598 RB=50@0



n41 SCS=30kHz DFT_QPSK BW=40MHz Channel=518598 RB=100@0



n41 SCS=30kHz DFT_QPSK BW=50MHz Channel=518598 RB=128@0



n41 SCS=30kHz DFT_QPSK BW=60MHz Channel=518598 RB=162@0



n41 SCS=30kHz DFT_QPSK BW=80MHz Channel=518598 RB=216@0




n41 SCS=30kHz DFT_QPSK BW=90MHz Channel=518598 RB=240@0




5 Band edge for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
n41	30	20	501204	51@0	CP_QPSK	2490.42	-30.97	-25	PASS
n41	30	20	501204	1@0	CP_QPSK	2487.91	-41.70	-25	PASS
n41	30	20	501204	1@50	CP_QPSK	2485.59	-41.17	-25	PASS
n41	30	20	535998	51@0	CP_QPSK	2710.34	-36.55	-25	PASS
n41	30	20	535998	1@0	CP_QPSK	2714.34	-41.85	-25	PASS
n41	30	20	535998	1@50	CP_QPSK	2712.25	-41.68	-25	PASS
n41	30	50	504204	133@0	CP_QPSK	2490.39	-34.14	-25	PASS
n41	30	50	504204	1@0	CP_QPSK	2485.54	-41.48	-25	PASS
n41	30	50	504204	1@132	CP_QPSK	2453.05	-41.22	-25	PASS
n41	30	50	532998	133@0	CP_QPSK	2690.01	-26.17	-10	PASS
n41	30	50	532998	1@0	CP_QPSK	2746.10	-41.68	-25	PASS
n41	30	50	532998	1@132	CP_QPSK	2744.38	-41.35	-25	PASS
n41	30	100	509202	273@0	CP_QPSK	2495.99	-23.49	-13	PASS
n41	30	100	509202	1@0	CP_QPSK	2461.58	-41.49	-25	PASS
n41	30	100	509202	1@272	CP_QPSK	2478.07	-41.58	-25	PASS
n41	30	100	528000	273@0	CP_QPSK	2690.02	-26.46	-10	PASS
n41	30	100	528000	1@0	CP_QPSK	2796.38	-41.82	-25	PASS
n41	30	100	528000	1@272	CP_QPSK	2797.33	-41.66	-25	PASS

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=509202 RB=1@0

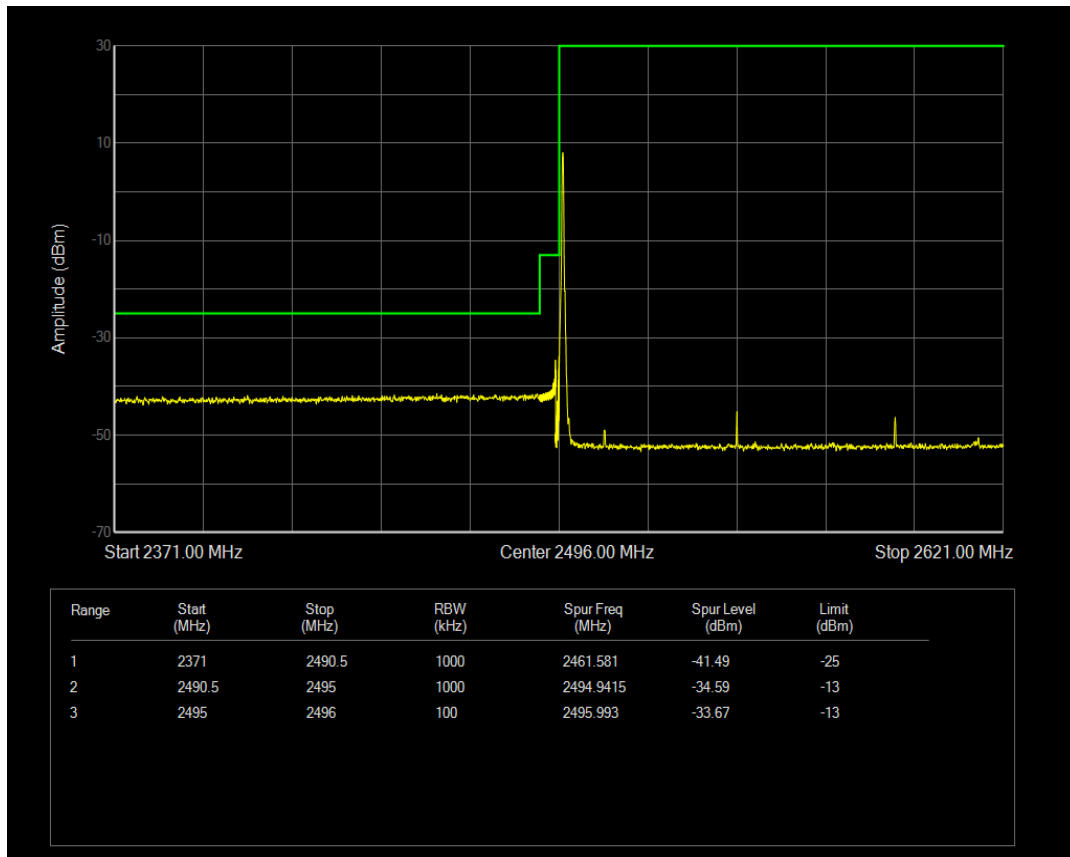

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=509202 RB=1@272

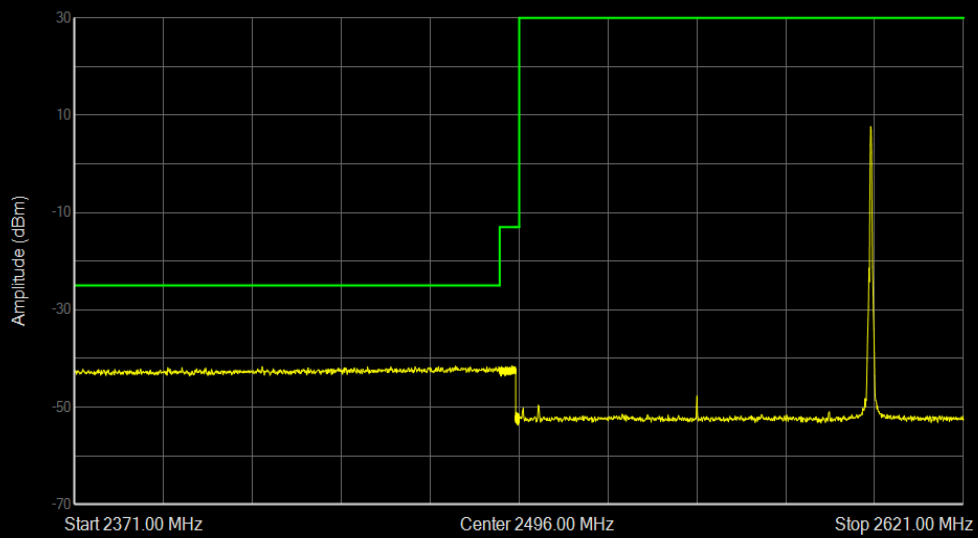


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2371	2490.5	1000	2478.072	-41.58	-25
2	2490.5	2495	1000	2493.974	-41.47	-13
3	2495	2496	100	2495.064	-51.06	-13

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=509202 RB=273@0




Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2371	2490.5	1000	2490.022	-36.12	-25
2	2490.5	2495	1000	2494.973	-34.9	-13
3	2495	2496	1000	2495.988	-23.49	-13

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=528000 RB=1@0

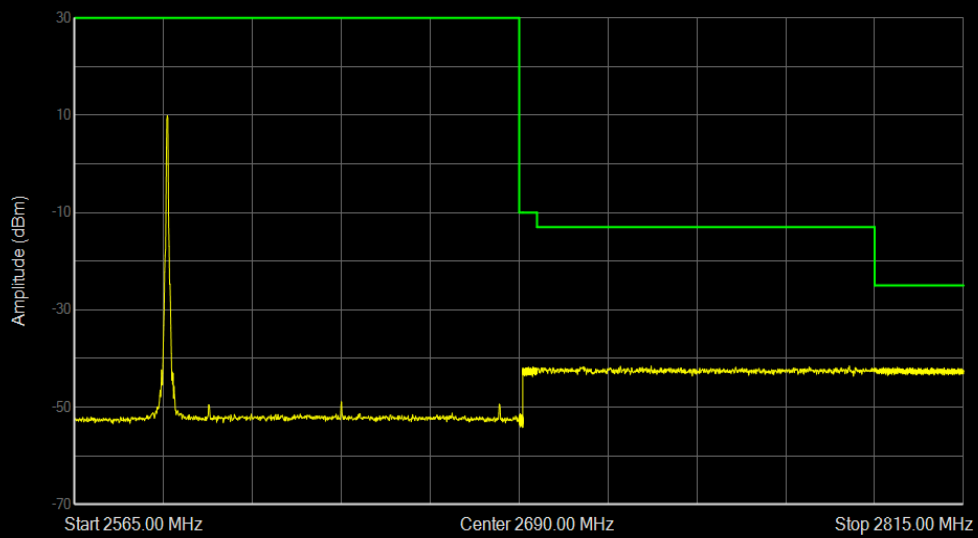


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	100	2690.303	-51.38	-10
3	2691	2695	1000	2693.84	-41.79	-10
4	2695	2790	1000	2782.875	-41.55	-13
5	2790	2815	1000	2796.375	-41.82	-25

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=528000 RB=1@272

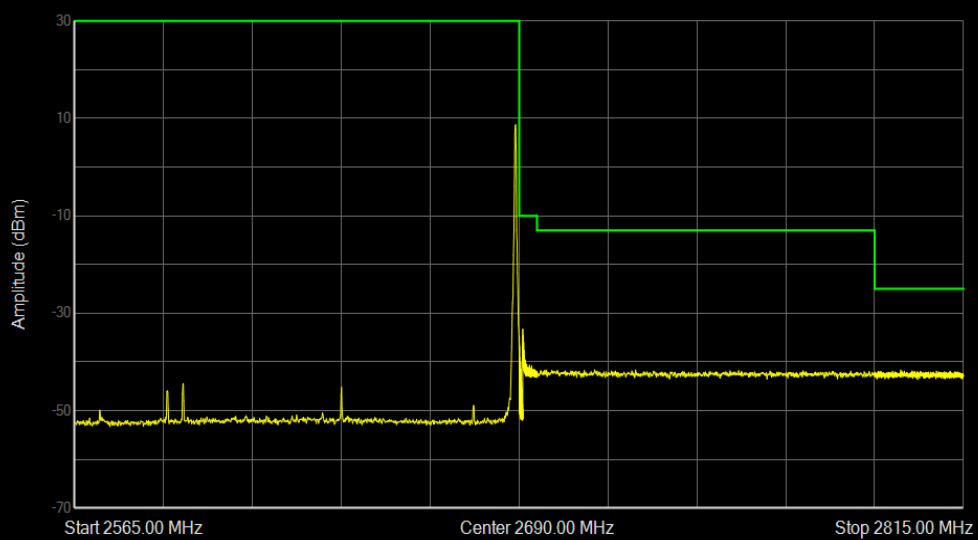

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	100	2690.018	-34.54	-10
3	2691	2695	1000	2691.012	-33.25	-10
4	2695	2790	1000	2711.245	-41.62	-13
5	2790	2815	1000	2797.325	-41.66	-25

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=528000 RB=273@0

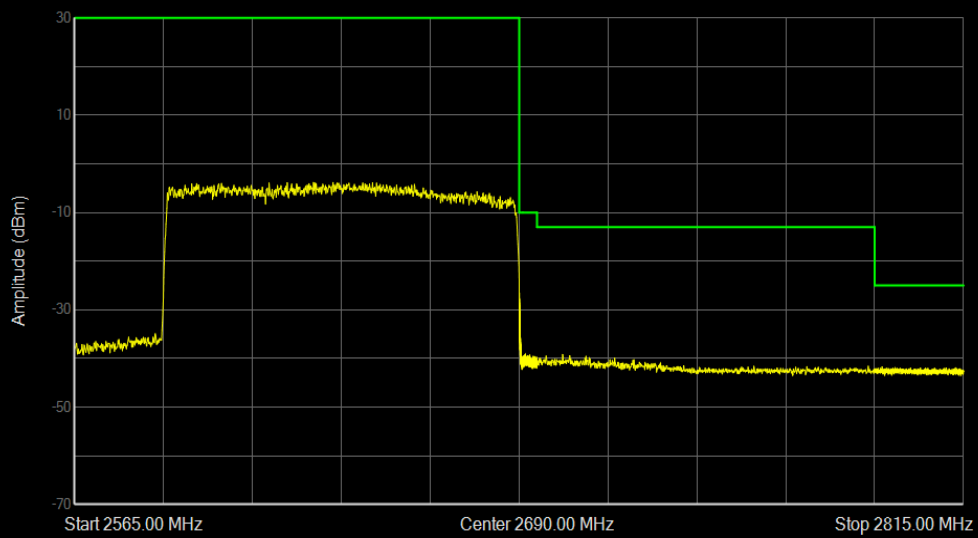


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	1000	2690.023	-26.46	-10
3	2691	2695	1000	2691.748	-39.05	-10
4	2695	2790	1000	2702.22	-39.16	-13
5	2790	2815	1000	2792.075	-41.7	-25

n41 SCS=30kHz CP_QPSK BW=20MHz Channel=501204 RB=1@0



Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2471	2490.5	1000	2487.9065	-41.7	-25
2	2490.5	2495	1000	2495	-36.57	-13
3	2495	2496	100	2495.984	-38.14	-13

n41 SCS=30kHz CP_QPSK BW=20MHz Channel=501204 RB=1@50

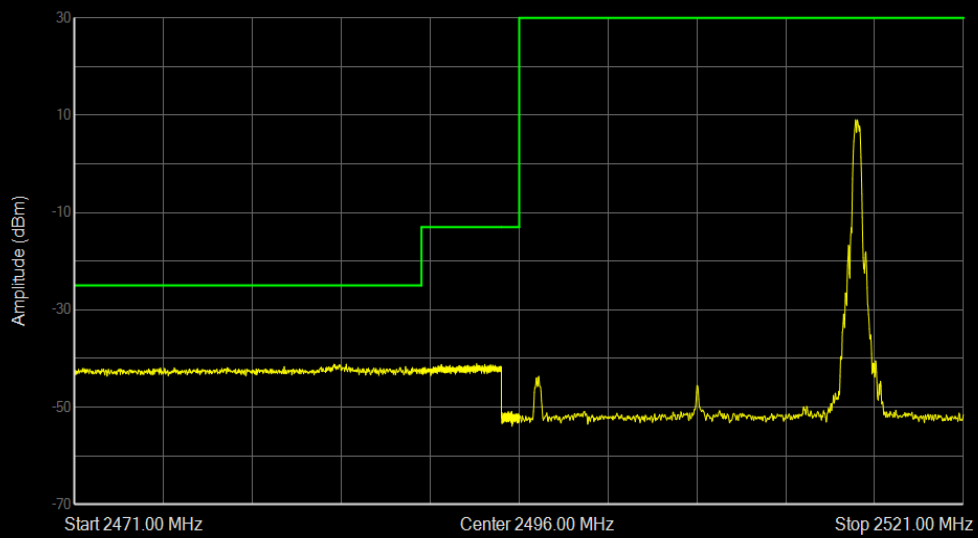


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2471	2490.5	1000	2485.586	-41.17	-25
2	2490.5	2495	1000	2493.605	-41.08	-13
3	2495	2496	100	2495.574	-50.88	-13

n41 SCS=30kHz CP_QPSK BW=20MHz Channel=501204 RB=51@0




Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2471	2490.5	1000	2490.422	-30.97	-25
2	2490.5	2495	1000	2494.6625	-27.99	-13
3	2495	2496	200	2495.983	-34.12	-13

n41 SCS=30kHz CP_QPSK BW=20MHz Channel=535998 RB=1@0

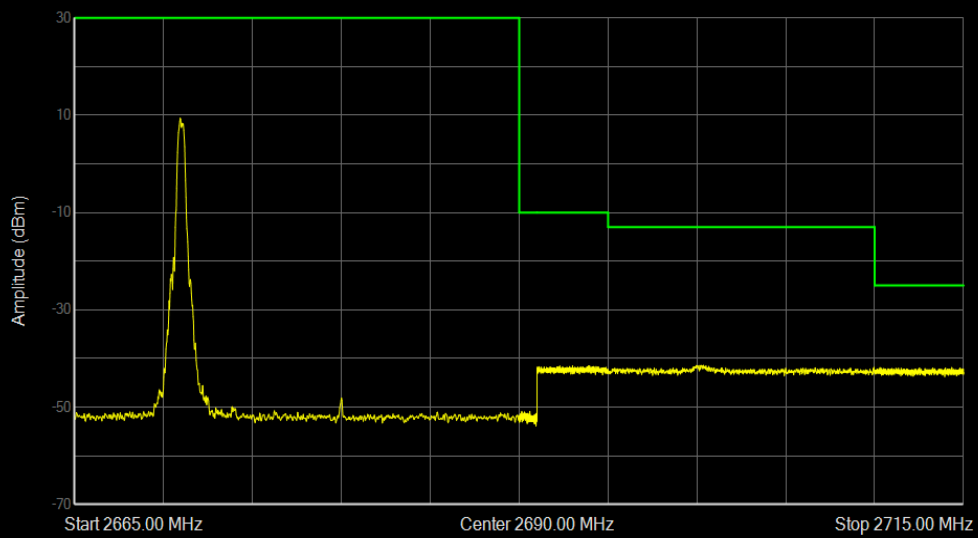


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	100	2690.598	-50.9	-10
3	2691	2695	1000	2693	-41.49	-10
4	2695	2710	1000	2700.355	-41.4	-13
5	2710	2715	1000	2714.34	-41.85	-25

n41 SCS=30kHz CP_QPSK BW=20MHz Channel=535998 RB=1@50

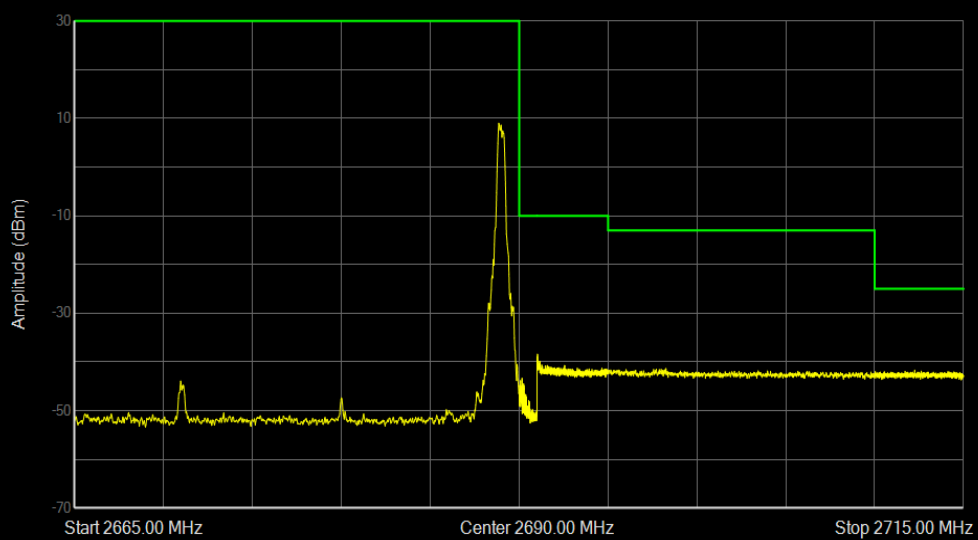


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	100	2690.158	-43.34	-10
3	2691	2695	1000	2691.028	-38.42	-10
4	2695	2710	1000	2698.255	-41.36	-13
5	2710	2715	1000	2712.25	-41.68	-25

n41 SCS=30kHz CP_QPSK BW=20MHz Channel=535998 RB=51@0

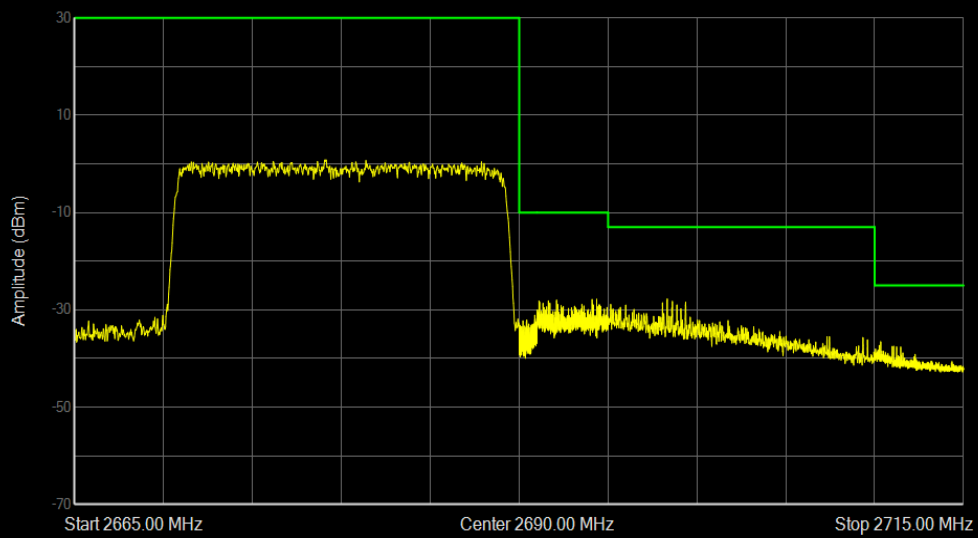


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	430	2690.873	-31.11	-10
3	2691	2695	1000	2694.356	-27.83	-10
4	2695	2710	1000	2698.33	-27.76	-13
5	2710	2715	1000	2710.34	-36.55	-25

n41 SCS=30kHz CP_QPSK BW=50MHz Channel=504204 RB=133@0

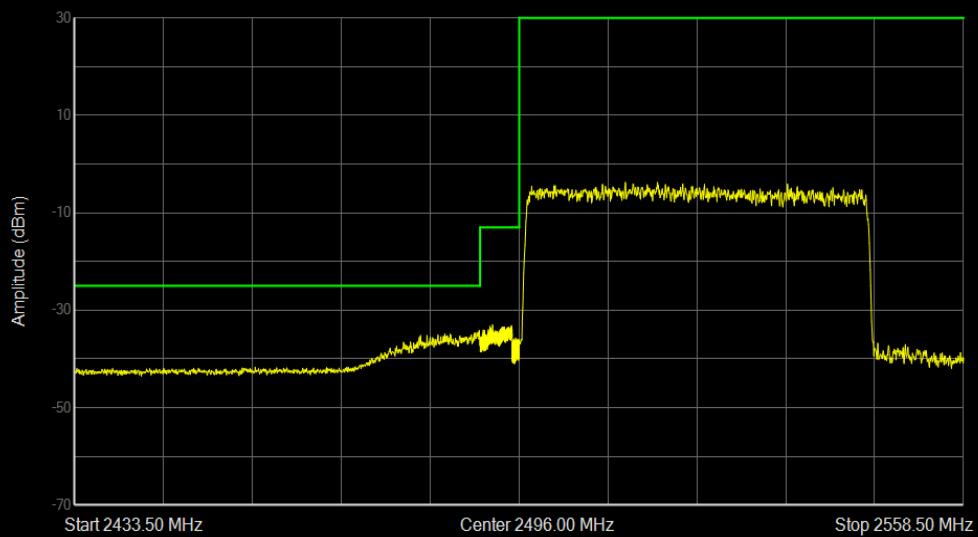


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2433.5	2490.5	1000	2490.386	-34.14	-25
2	2490.5	2495	1000	2492.2415	-33.01	-13
3	2495	2496	510	2495.499	-35.72	-13

n41 SCS=30kHz CP_QPSK BW=50MHz Channel=504204 RB=1@0

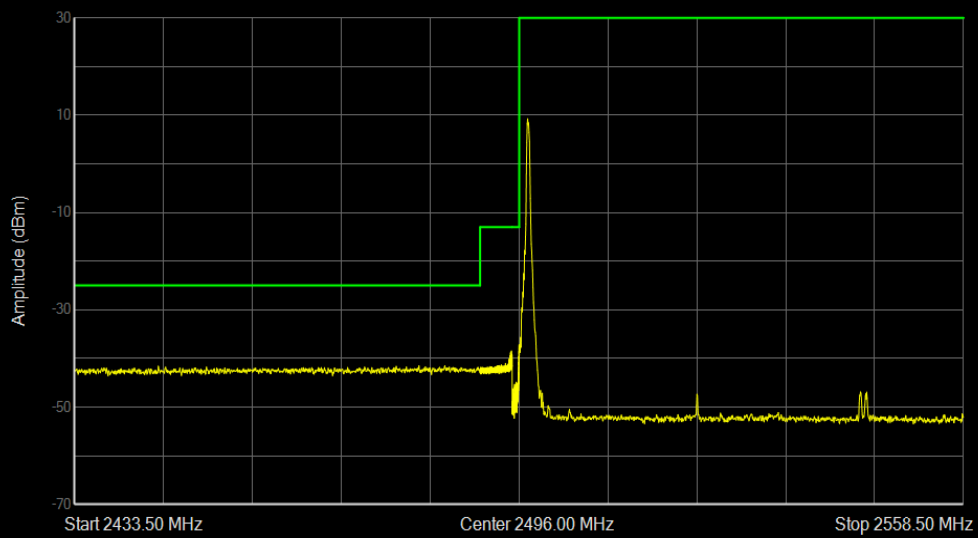


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2433.5	2490.5	1000	2485.541	-41.48	-25
2	2490.5	2495	1000	2494.901	-38.45	-13
3	2495	2496	100	2495.984	-37.2	-13

n41 SCS=30kHz CP_QPSK BW=50MHz Channel=504204 RB=1@132

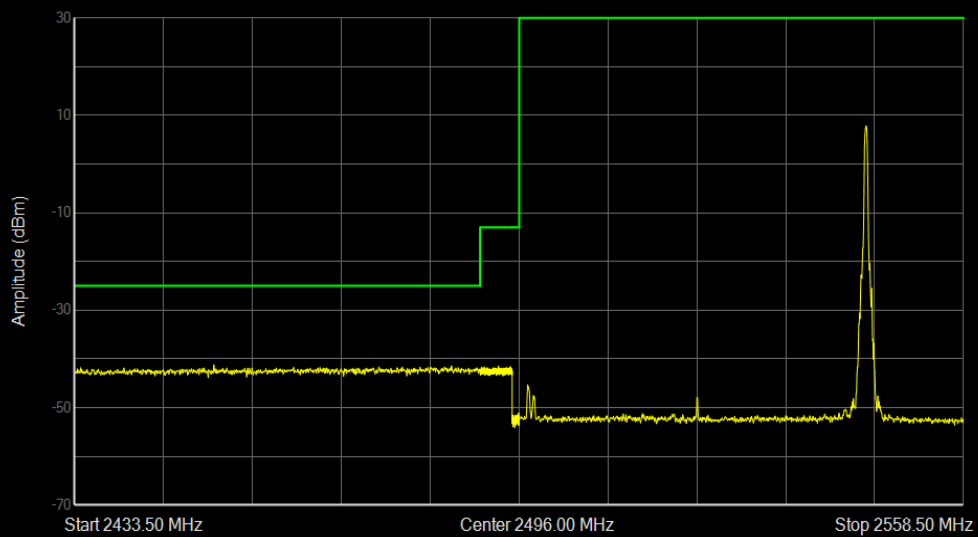


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2433.5	2490.5	1000	2453.051	-41.22	-25
2	2490.5	2495	1000	2493.0965	-41.45	-13
3	2495	2496	100	2495.914	-51.15	-13

n41 SCS=30kHz CP_QPSK BW=50MHz Channel=532998 RB=133@0

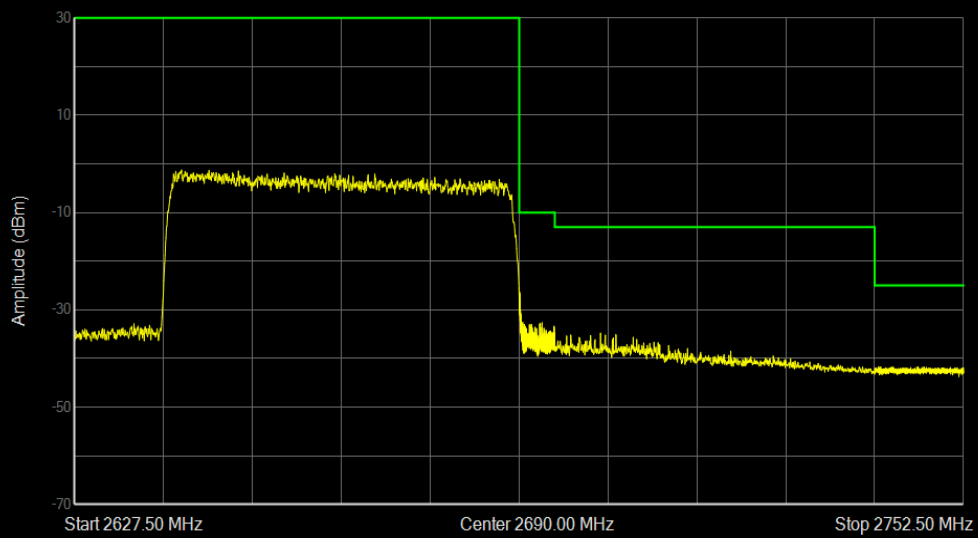


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	1000	2690.008	-26.17	-10
3	2691	2695	1000	2693.204	-32.65	-10
4	2695	2740	1000	2701.435	-34.78	-13
5	2740	2752.5	1000	2740.525	-41.7	-25

n41 SCS=30kHz CP_QPSK BW=50MHz Channel=532998 RB=1@0

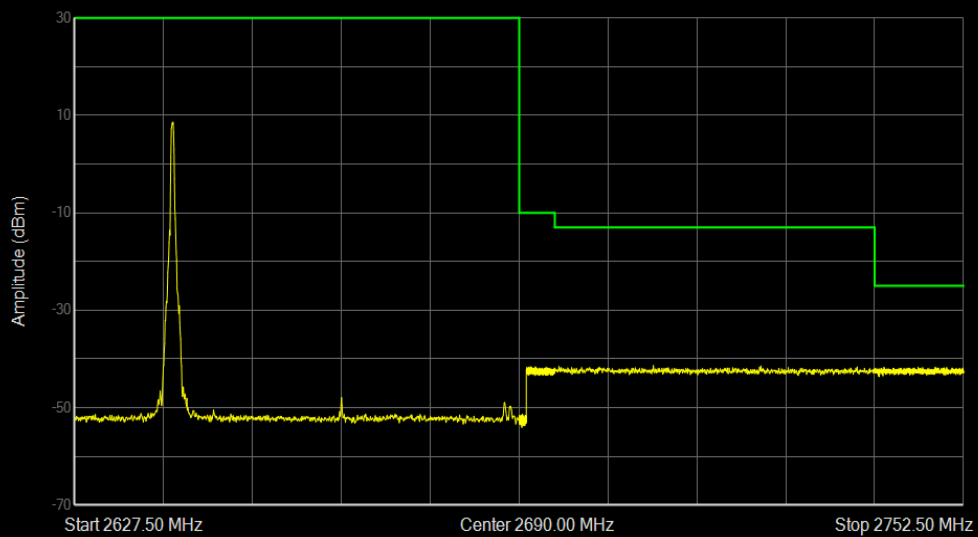

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
2	2690	2691	100	2690.451	-51.34	-10
3	2691	2695	1000	2691.572	-41.6	-10
4	2695	2740	1000	2708.86	-41.36	-13
5	2740	2752.5	1000	2746.1	-41.68	-25


n41 SCS=30kHz CP_QPSK BW=50MHz Channel=532998 RB=1@132

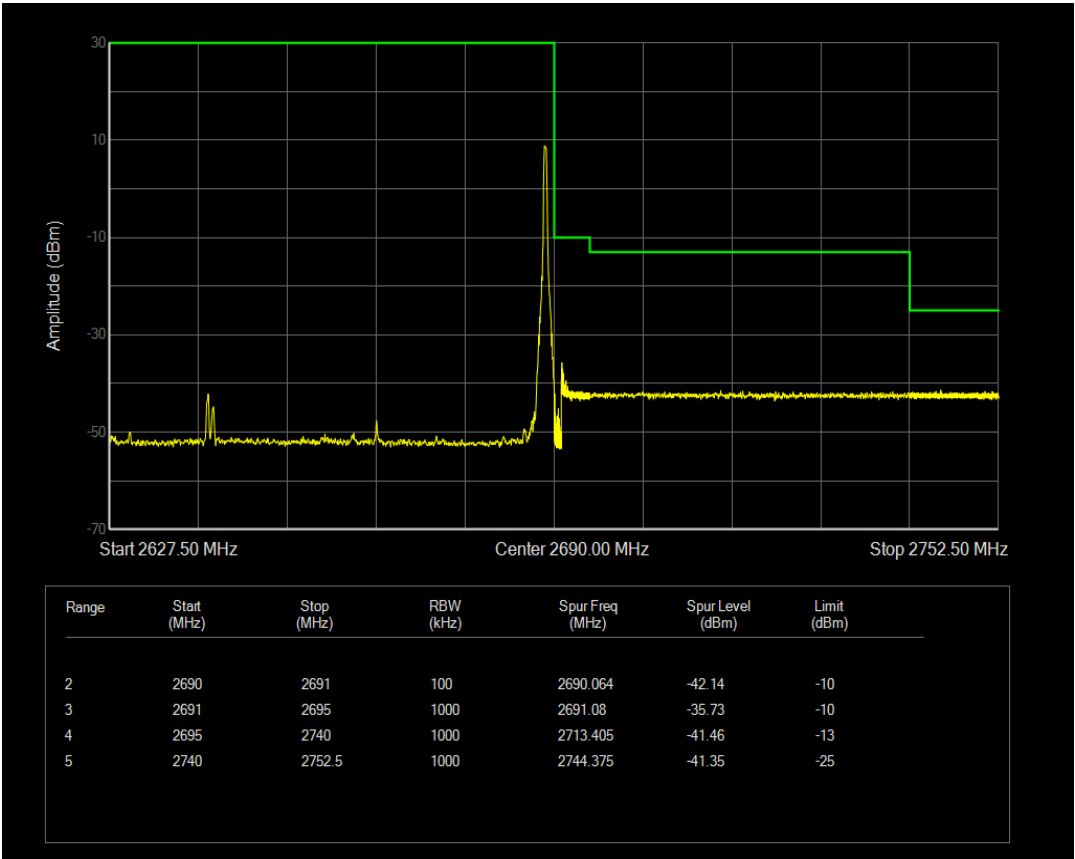


6 Out-of-band emissions for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
n41	30	20	501204	51@0	CP_QPSK	24292.10	-33.70	-25	PASS
n41	30	20	501204	1@0	CP_QPSK	26288.90	-31.74	-25	PASS
n41	30	20	501204	1@50	CP_QPSK	26101.70	-32.51	-25	PASS
n41	30	20	535998	51@0	CP_QPSK	26045.15	-32.12	-25	PASS
n41	30	20	535998	1@0	CP_QPSK	25798.15	-33.00	-25	PASS
n41	30	20	535998	1@50	CP_QPSK	5378.40	-30.95	-25	PASS
n41	30	50	504204	133@0	CP_QPSK	24015.20	-32.68	-25	PASS
n41	30	50	504204	1@0	CP_QPSK	26452.70	-32.86	-25	PASS
n41	30	50	504204	1@132	CP_QPSK	25791.65	-33.14	-25	PASS
n41	30	50	532998	133@0	CP_QPSK	26312.95	-33.00	-25	PASS
n41	30	50	532998	1@0	CP_QPSK	26342.20	-32.92	-25	PASS
n41	30	50	532998	1@132	CP_QPSK	5377.75	-32.55	-25	PASS
n41	30	100	509202	273@0	CP_QPSK	26340.90	-32.86	-25	PASS
n41	30	100	509202	1@0	CP_QPSK	26368.20	-32.28	-25	PASS
n41	30	100	509202	1@272	CP_QPSK	26264.85	-32.85	-25	PASS
n41	30	100	528000	273@0	CP_QPSK	25688.30	-32.80	-25	PASS
n41	30	100	528000	1@0	CP_QPSK	26236.90	-33.32	-25	PASS
n41	30	100	528000	1@272	CP_QPSK	5378.40	-30.92	-25	PASS

n41 SCS=30kHz CP_QPSK BW=100MHz Channel=509202 RB=1@0

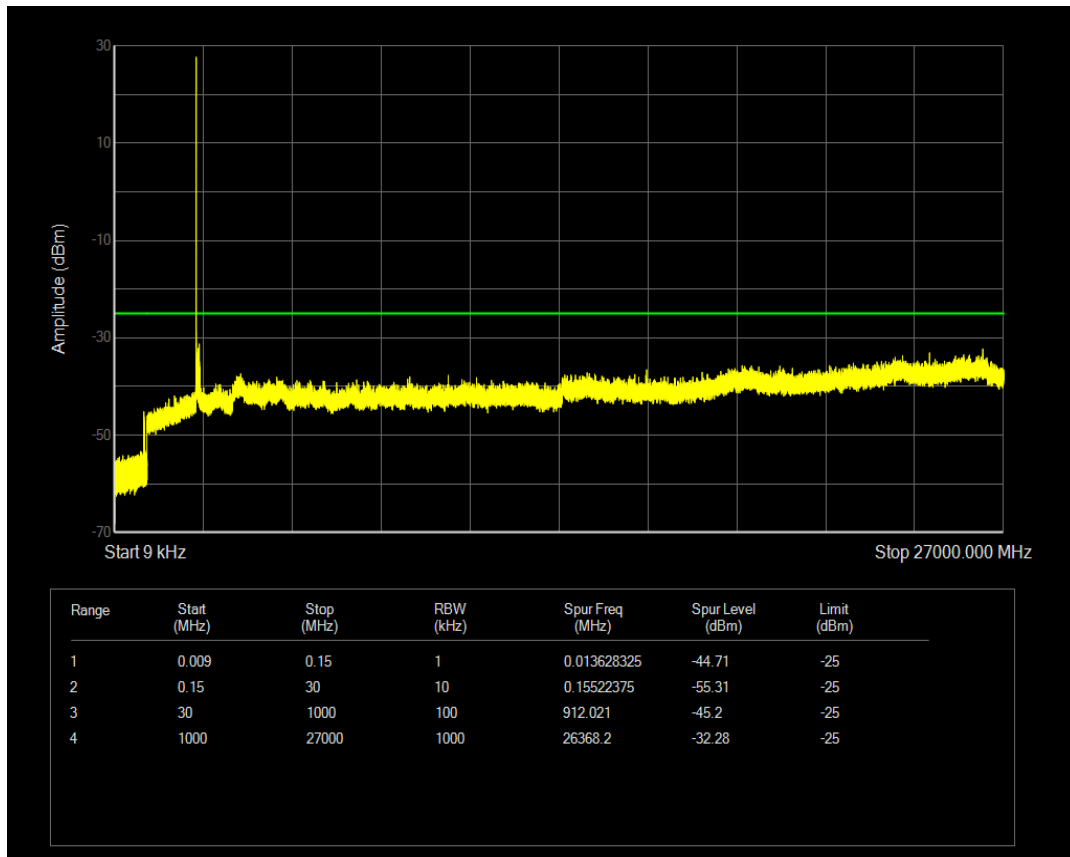


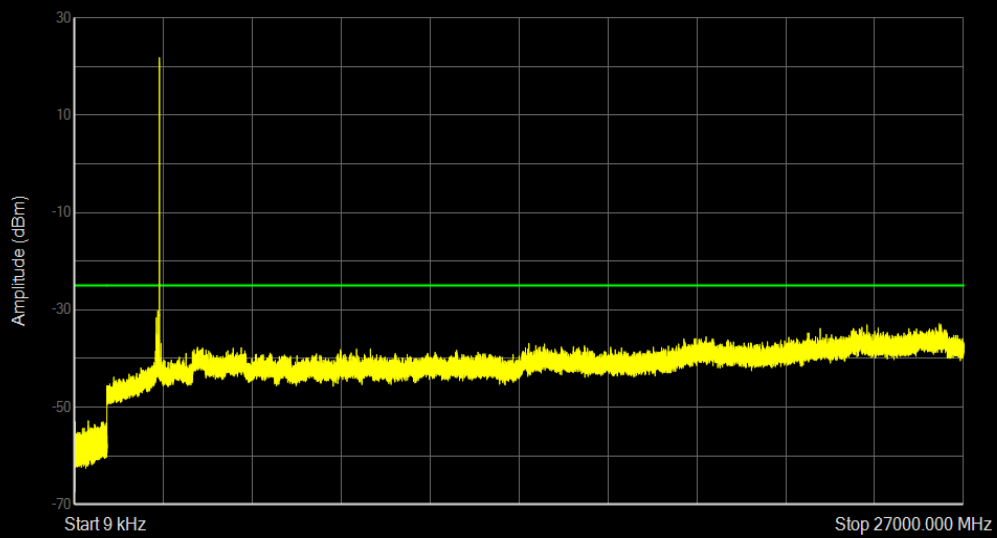n41 SCS=30kHz CP_QPSK BW=100MHz Channel=509202 RB=1@272


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.011224275	-45.47	-25
2	0.15	30	10	0.17761125	-55.75	-25
3	30	1000	100	439.02475	-52.82	-25
4	1000	27000	1000	26264.85	-32.85	-25

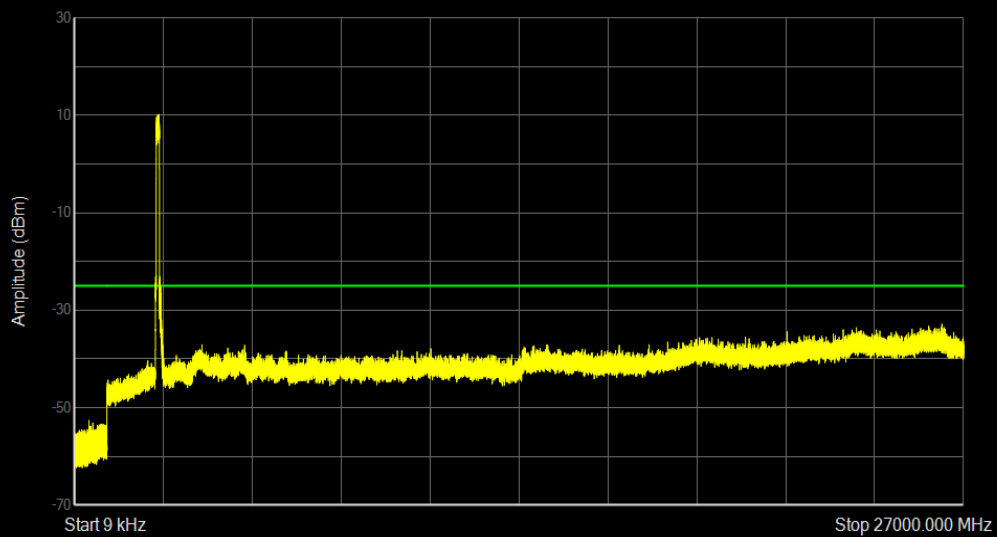n41 SCS=30kHz CP_QPSK BW=100MHz Channel=509202 RB=273@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.011386425	-43.43	-25
2	0.15	30	10	0.1544775	-56.57	-25
3	30	1000	100	456.92125	-52.61	-25
4	1000	27000	1000	26340.9	-32.86	-25

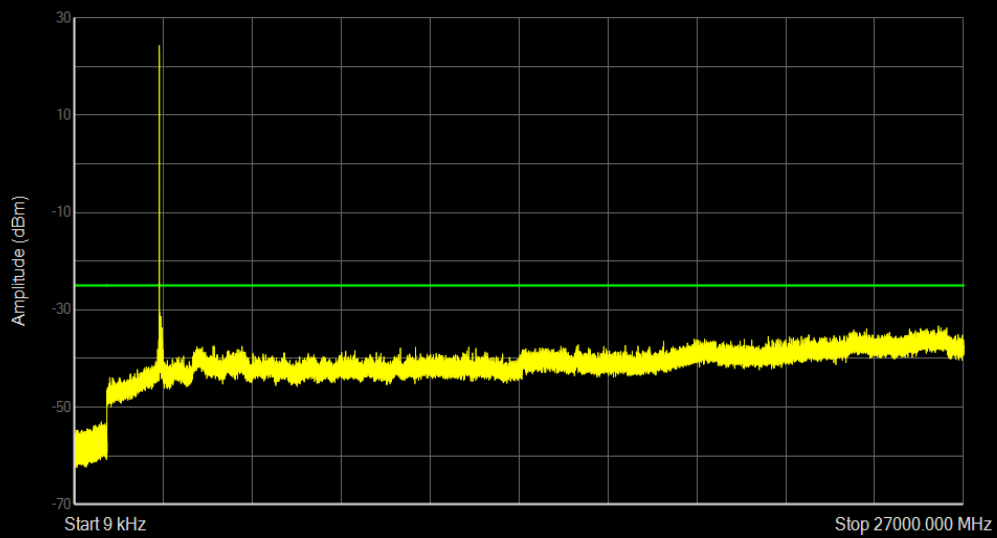n41 SCS=30kHz CP_QPSK BW=100MHz Channel=528000 RB=1@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0135966	-44.22	-25
2	0.15	30	10	0.15223875	-56.15	-25
3	30	1000	100	830.51675	-53.05	-25
4	1000	27000	1000	26236.9	-33.32	-25

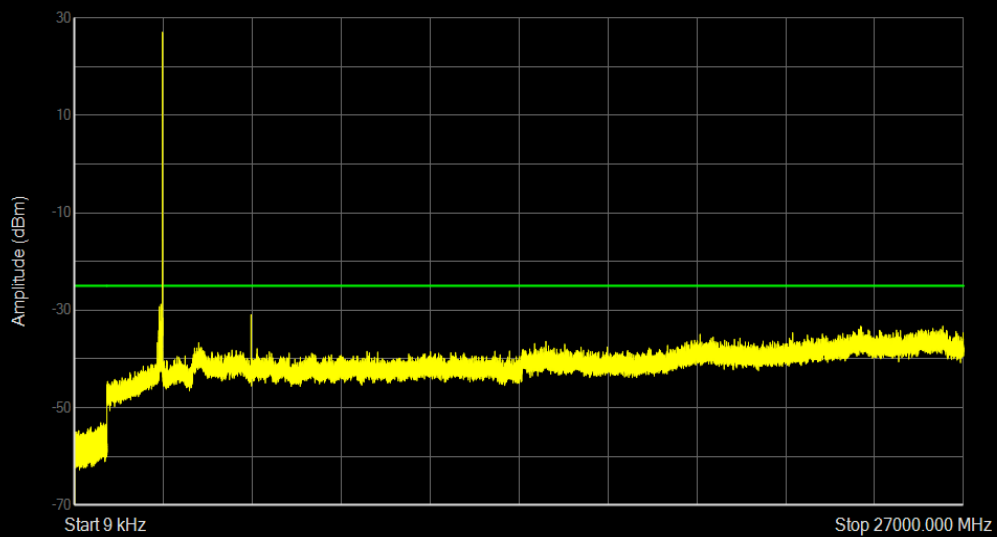n41 SCS=30kHz CP_QPSK BW=100MHz Channel=528000 RB=1@272


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0154437	-44.37	-25
2	0.15	30	10	0.1514925	-54.74	-25
3	30	1000	100	816.7185	-53.09	-25
4	1000	27000	1000	5378.4	-30.92	-25

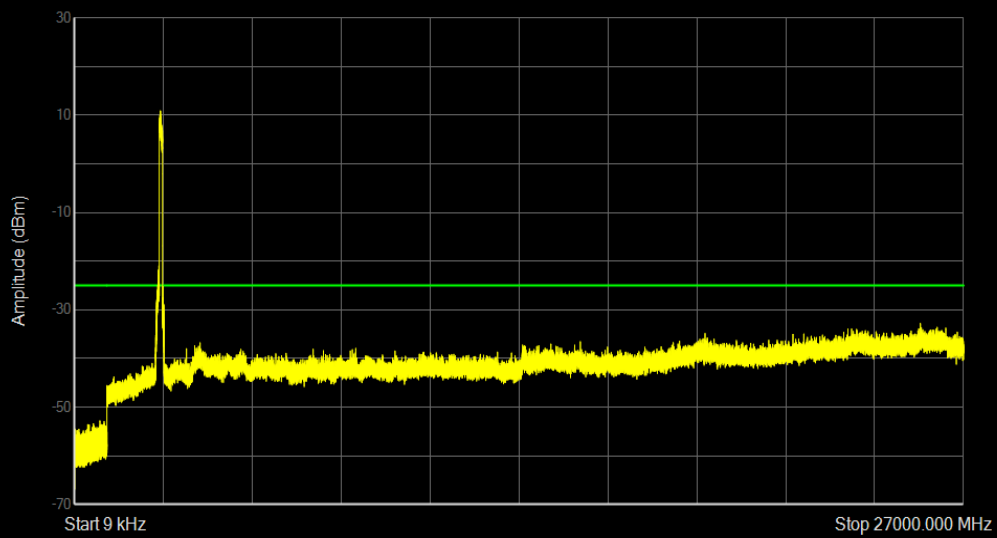n41 SCS=30kHz CP_QPSK BW=100MHz Channel=528000 RB=273@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01134765	-43.09	-25
2	0.15	30	10	0.1544775	-53.48	-25
3	30	1000	100	790.26175	-52.81	-25
4	1000	27000	1000	25688.3	-32.8	-25

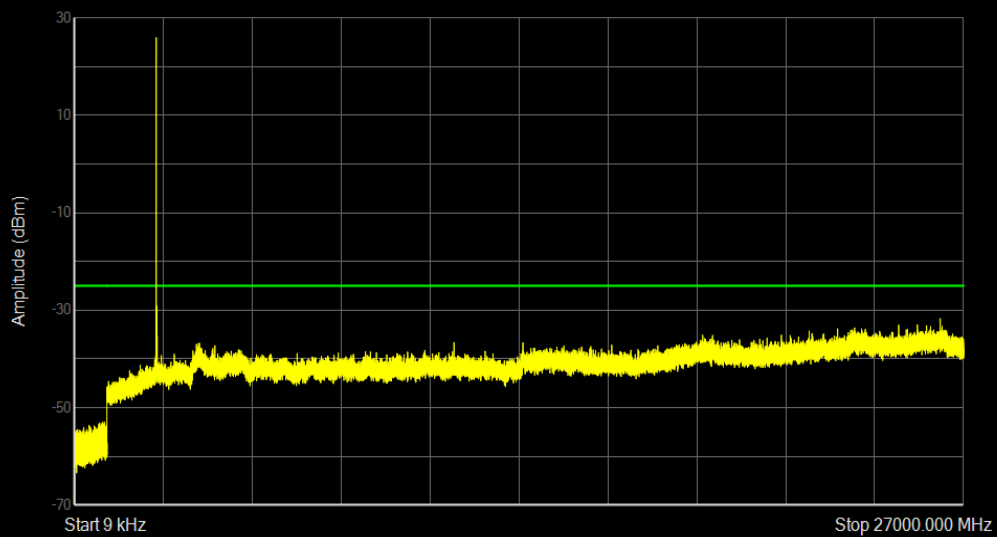n41 SCS=30kHz CP_QPSK BW=20MHz Channel=501204 RB=1@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01339215	-43.84	-25
2	0.15	30	10	0.15223875	-55.24	-25
3	30	1000	100	927.46825	-52.97	-25
4	1000	27000	1000	26288.9	-31.74	-25

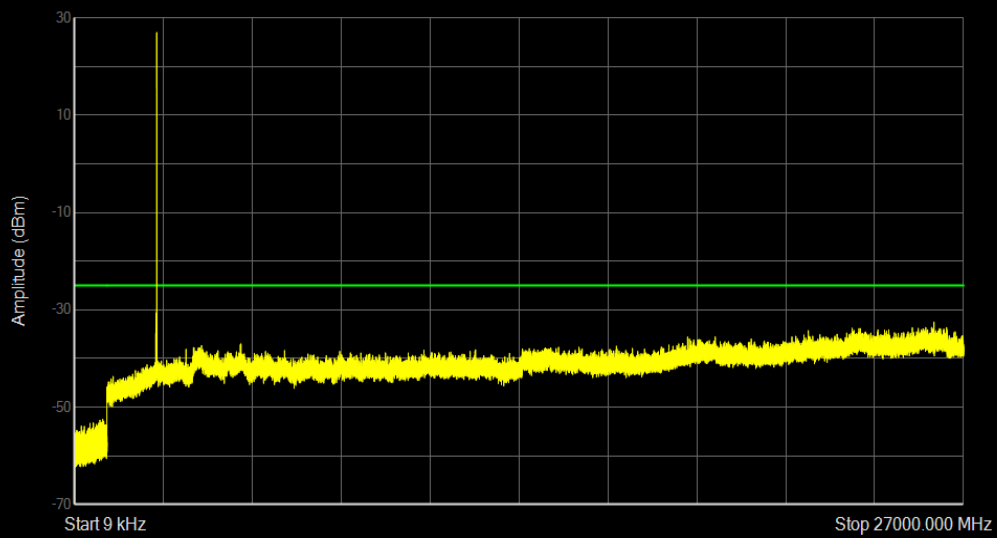n41 SCS=30kHz CP_QPSK BW=20MHz Channel=501204 RB=1@50


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0093243	-43.46	-25
2	0.15	30	10	0.15	-56.13	-25
3	30	1000	100	874.60325	-52.49	-25
4	1000	27000	1000	26101.7	-32.51	-25

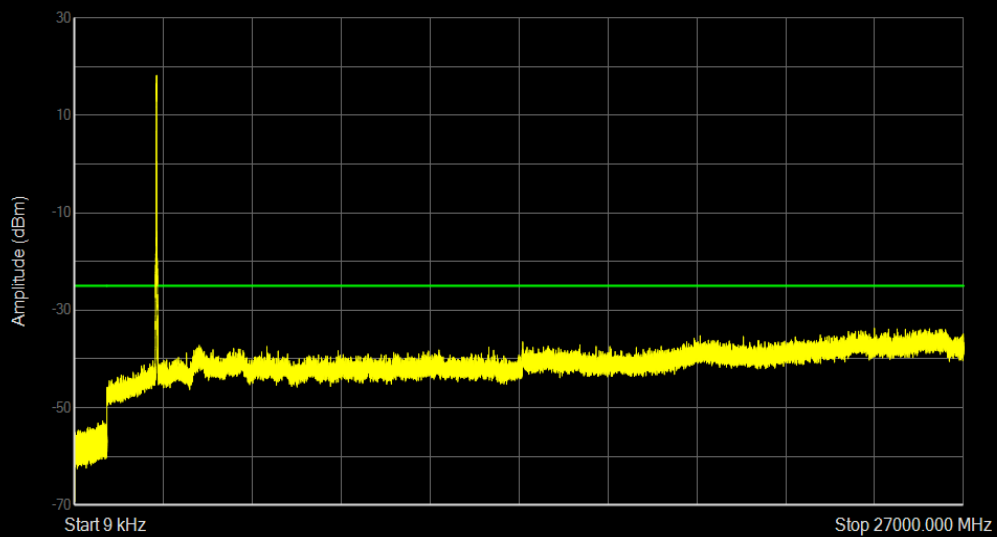n41 SCS=30kHz CP_QPSK BW=20MHz Channel=501204 RB=51@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.010138575	-43.6	-25
2	0.15	30	10	0.152985	-54.41	-25
3	30	1000	100	872.61475	-52.75	-25
4	1000	27000	1000	24292.1	-33.7	-25

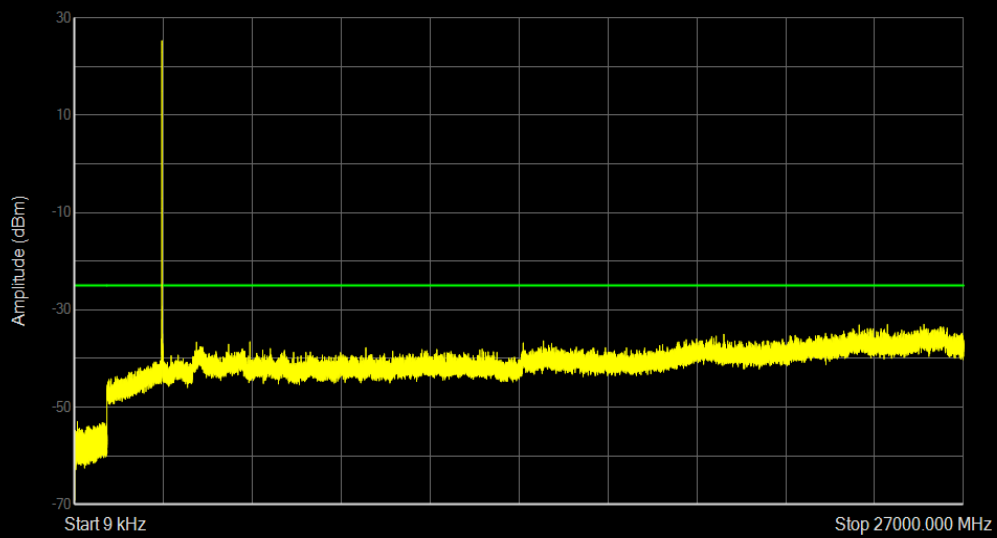n41 SCS=30kHz CP_QPSK BW=20MHz Channel=535998 RB=1@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01388565	-44.69	-25
2	0.15	30	10	0.194775	-54.58	-25
3	30	1000	100	109.80675	-52.98	-25
4	1000	27000	1000	25798.15	-33	-25

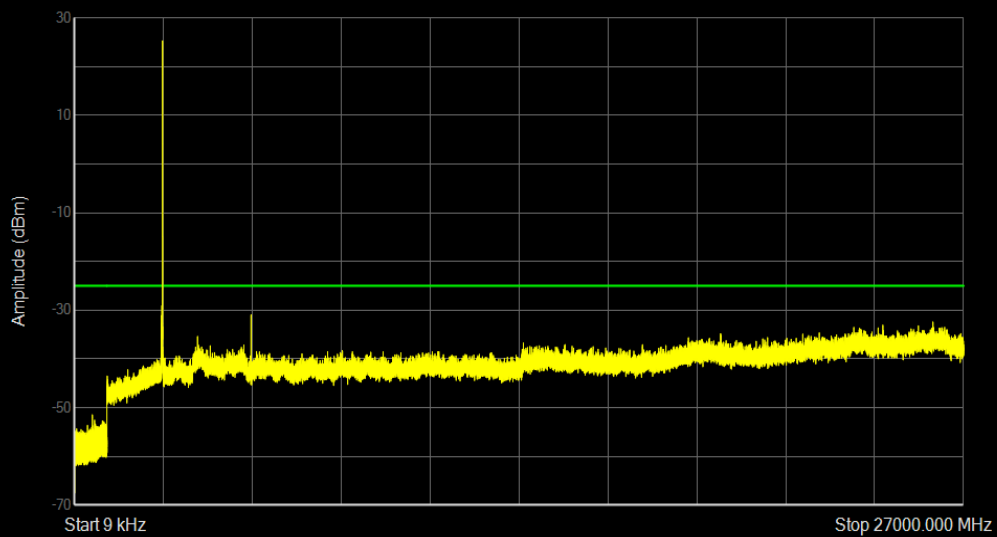n41 SCS=30kHz CP_QPSK BW=20MHz Channel=535998 RB=1@50


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.011136175	-43.09	-25
2	0.15	30	10	0.15522375	-54.12	-25
3	30	1000	100	560.978	-51.47	-25
4	1000	27000	1000	5378.4	-30.95	-25

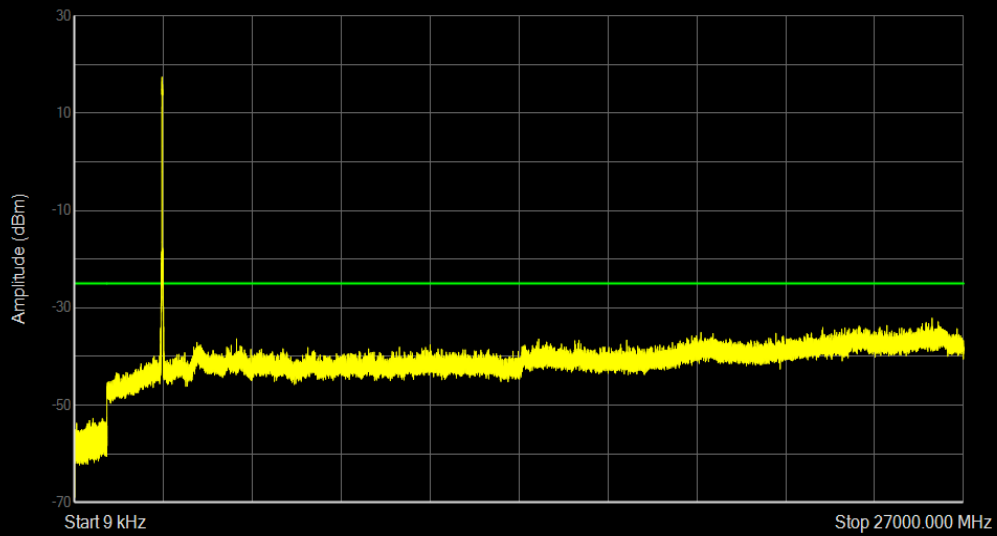n41 SCS=30kHz CP_QPSK BW=20MHz Channel=535998 RB=51@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.011386425	-43.89	-25
2	0.15	30	10	0.17164125	-55.75	-25
3	30	1000	100	999.39375	-52.54	-25
4	1000	27000	1000	26045.15	-32.12	-25

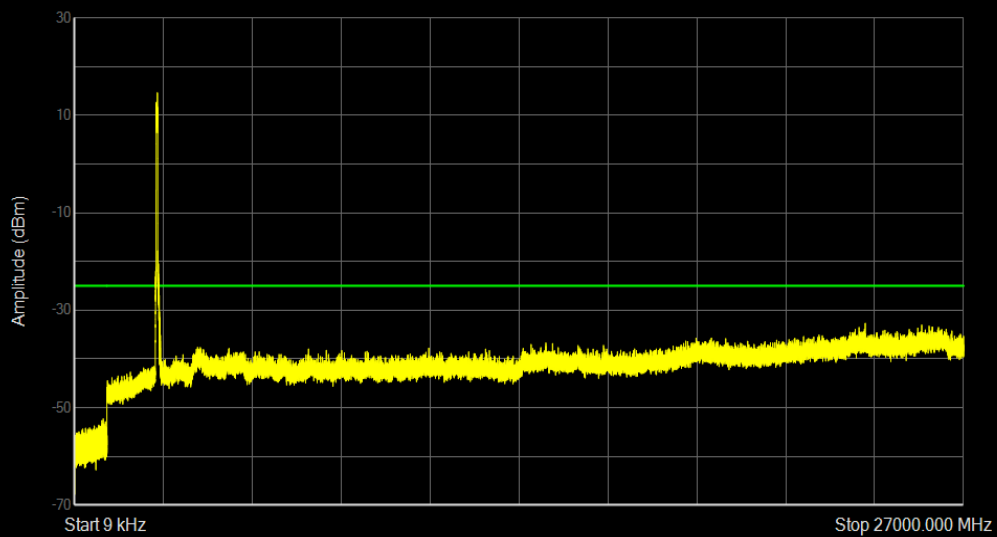n41 SCS=30kHz CP_QPSK BW=50MHz Channel=504204 RB=133@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0093807	-44.23	-25
2	0.15	30	10	0.15	-54.33	-25
3	30	1000	100	888.4985	-52.31	-25
4	1000	27000	1000	24015.2	-32.68	-25

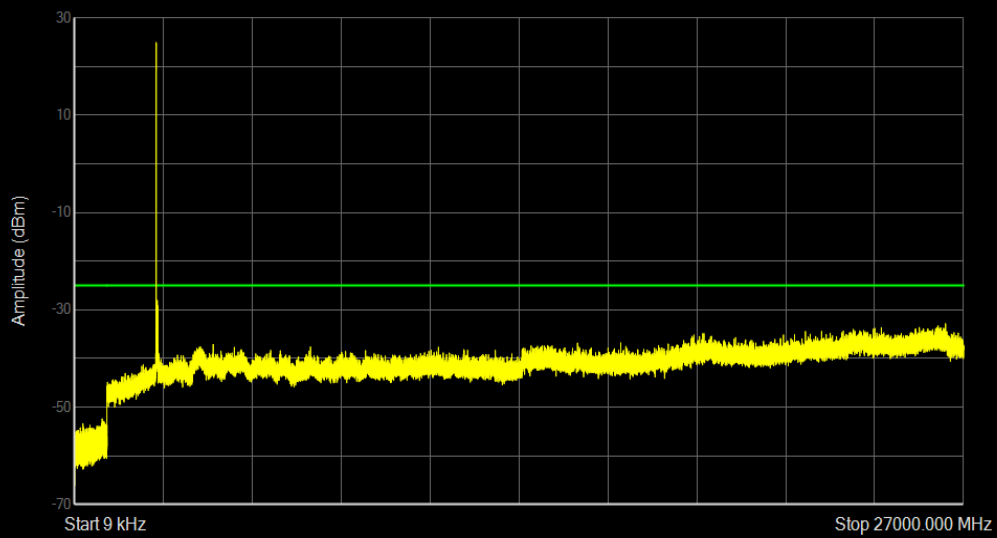n41 SCS=30kHz CP_QPSK BW=50MHz Channel=504204 RB=1@0


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.016370775	-43.8	-25
2	0.15	30	10	0.15	-54.25	-25
3	30	1000	100	858.3315	-52.4	-25
4	1000	27000	1000	26452.7	-32.86	-25

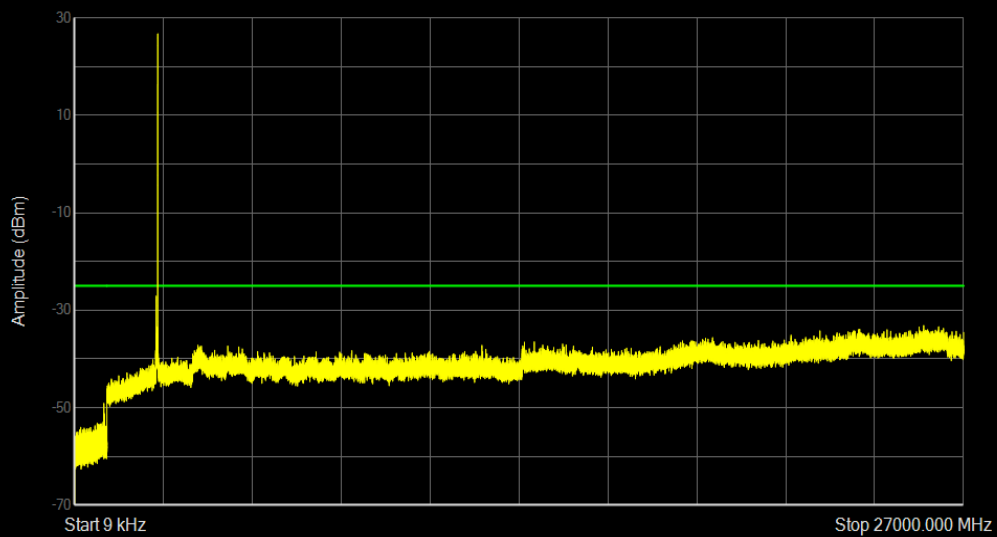n41 SCS=30kHz CP_QPSK BW=50MHz Channel=504204 RB=1@132

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0174882	-44.51	-25
2	0.15	30	10	0.15	-55.17	-25
3	30	1000	100	912.118	-49.12	-25
4	1000	27000	1000	25791.65	-33.14	-25

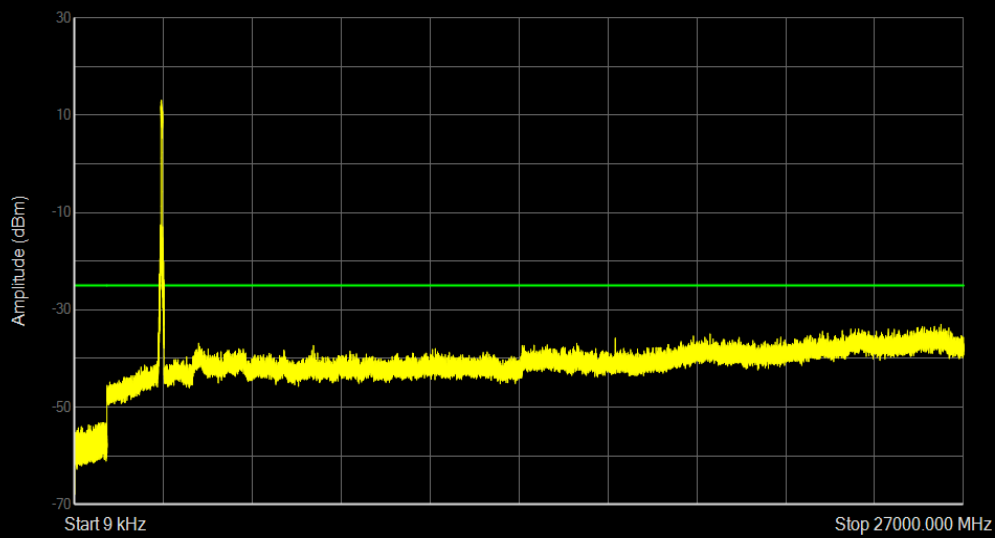n41 SCS=30kHz CP_QPSK BW=50MHz Channel=532998 RB=133@0

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.015249825	-44.97	-25
2	0.15	30	10	0.15597	-54.74	-25
3	30	1000	100	873.512	-53.18	-25
4	1000	27000	1000	26312.95	-33	-25

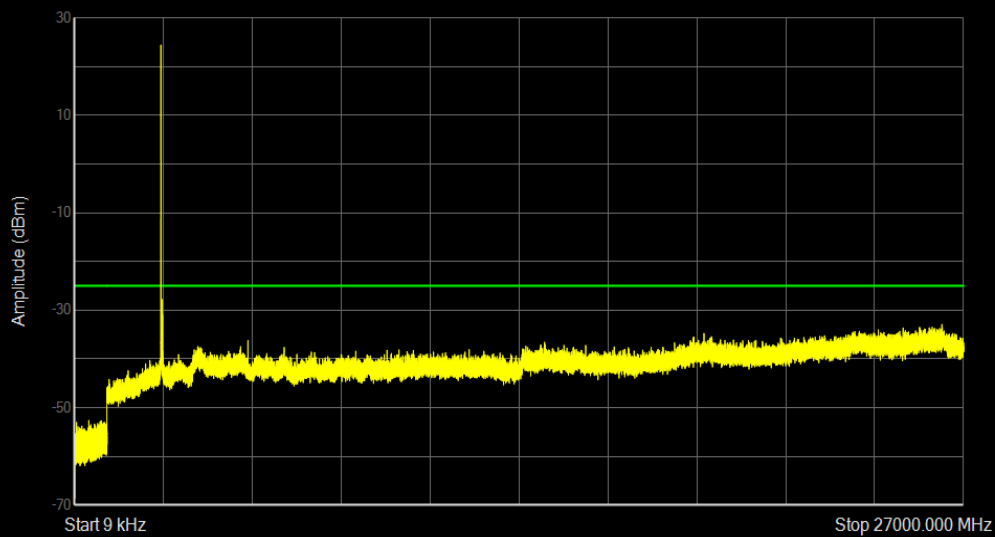n41 SCS=30kHz CP_QPSK BW=50MHz Channel=532998 RB=1@0

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.014446125	-44.37	-25
2	0.15	30	10	0.1843275	-52.61	-25
3	30	1000	100	454.9085	-52.63	-25
4	1000	27000	1000	26342.2	-32.92	-25

n41 SCS=30kHz CP_QPSK BW=50MHz Channel=532998 RB=1@132

