

FCC Test Report

Report No.: AGC03278180301FE07

FCC ID : 2APEZ-RB3P
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Remoto Basic V3 Plus OBDII Dongle
BRAND NAME : N/A
MODEL NAME : RB3P
CLIENT : Bright Box HK Limited
DATE OF ISSUE : May. 22, 2018
STANDARD(S) : FCC Part 24 Rules
 FCC Part 27 Rules
REPORT VERSION : V1.1

Attestation of Global Compliance (Shenzhen) Co., Ltd.



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May. 03, 2018	Invalid	Original Report
V1.1	1 st	May. 22, 2018	Valid	Revise Report P6

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE.....	5
2. GENERAL INFORMATION	6
2.1 PRODUCT DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 TEST METHODOLOGY	7
2.4 TEST FACILITY	8
2.5 SPECIAL ACCESSORIES.....	9
2.6 EQUIPMENT MODIFICATIONS.....	9
3. SYSTEM TEST CONFIGURATION.....	10
3.1 EUT CONFIGURATION.....	10
3.2 EUT EXERCISE.....	10
3.3 GENERAL TECHNICAL REQUIREMENTS	10
3.4 CONFIGURATION OF EUT SYSTEM.....	11
4. SUMMARY OF TEST RESULTS.....	12
5. DESCRIPTION OF TEST MODES	13
6. OUTPUT POWER	14
6.1 CONDUCTED OUTPUT POWER	14
6.1.1 MEASUREMENT METHOD	14
6.2 RADIATED OUTPUT POWER	21
6.2.1 MEASUREMENT METHOD	21
6.3. PEAK-TO-AVERAGE RATIO.....	26
6.3.1 MEASUREMENT METHOD	26
7. SPURIOUS EMISSION.....	35
7.1 CONDUCTED SPURIOUS EMISSION	35
7.2 RADIATED SPURIOUS EMISSION	37
8. FREQUENCY STABILITY	41
8.1 MEASUREMENT METHOD	41
8.2 PROVISIONS APPLICABLE	42
8.3 MEASUREMENT RESULT (WORST).....	43
9. OCCUPIED BANDWIDTH	44
9.1 MEASUREMENT METHOD	44
9.2 PROVISIONS APPLICABLE	44
9.3 MEASUREMENT RESULT	44
10. EMISSION BANDWIDTH	47

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



10.1 MEASUREMENT METHOD	47
10.2 PROVISIONS APPLICABLE	47
10.3 MEASUREMENT RESULT	47
11. BAND EDGE	50
11.1 MEASUREMENT METHOD	50
11.2 PROVISIONS APPLICABLE	50
11.3 MEASUREMENT RESULT	50
APPENDIX A	51
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION	51
APPENDIX B	54
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	54
EMISSION BANDWIDTH (-26dBC)	54
APPENDIX C	59
TEST PLOTS FOR BAND EDGES	59
APPENDIX D PHOTOGRAPHS OF TEST SETUP	63

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



1. VERIFICATION OF COMPLIANCE

Applicant	Bright Box HK Limited
Address	NO. 5, 17/F BONHAM TRADE CENTRE, 50 BONHAM STRAND SHEUNG WAN, HONG KONG, CHINA
Manufacturer	TRADEZONE HK LIMITED
Address	Unit 14-17, 11/F., International Plaza, NO. 20 Sheung Yuet Road, Kowloon Bay, Hong Kong, China.
Product Designation	Remoto Basic V3 Plus OBDII Dongle
Brand Name	N/A
Test Model	RB3P
Date of test	Mar. 30, 2018~May. 03, 2018
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 24 and 27.

The test results of this report relate only to the tested sample identified in this report.

Tested By



Donjon Huang(Huang Dongyang)

May. 03, 2018

Reviewed By



Bart Xie(Xie Xiaobin)

May. 22, 2018

Approved By



Forrest Lei(Lei Yonggang)
Authorized Officer

May. 22, 2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Radio System Type:	LTE						
Hardware version:	3.5.0						
Software version:	REM_B_v230						
Frequency Bands:	<input checked="" type="checkbox"/> FDD Band 2 <input type="checkbox"/> FDD Band 4 <input type="checkbox"/> FDD Band 5 <input type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 12 <input type="checkbox"/> FDD Band 17 <input type="checkbox"/> FDD Band 26 <input type="checkbox"/> TDD Band 41 (U.S. Bands) <input type="checkbox"/> FDD Band 1 <input type="checkbox"/> FDD Band 3 <input type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 8 <input type="checkbox"/> FDD Band 20 <input type="checkbox"/> TDD Band 33 <input type="checkbox"/> TDD Band 34 <input type="checkbox"/> TDD Band 38 <input type="checkbox"/> FDD Band 40 <input type="checkbox"/> FDD Band 42 <input type="checkbox"/> FDD Band 43 (Non-U.S. Bands)						
Frequency Range	LTE Band 2	Transmission (TX): 1850 to 1909.9 MHz					
		Receiving (RX): 1930 to 1989.9 MHz					
Supported Channel Bandwidth	LTE Band 2	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz					
Antenna:	PIFA Antenna						
Type of Modulation	QPSK/16QAM						
Antenna gain:	1.60dBi(LTE band 2)						
Diversity Antenna Gain	1.30dBi(LTE band 2)						
Power Supply:	DC 12V						
Single Card:	WCDMA/LTE Card Slot						
Power Class	3						
Extreme Vol. Limits:	DC10.8 V to 13.2 V (Normal: 12 V)						
Temperature range	-10°C to +50°C						

Note1: The High Voltage DC13.2V and Low Voltage DC10.8V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage.

Note2: SIM 7500A FCC ID: 2APEZ-RB3P, don't support full RB of the bandwidth more 10MHz@16QAM mode.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2APEZ-RB3P**, filing to comply with the FCC Part24 and Part27 requirements

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and FCC KDB 971168 D01 Power Means License Digital Systems v03.



Attestation of Global Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2.4 TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, ChaxiSanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, BaoanBldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 21, 2017	Sep. 20, 2018
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Sep. 21, 2017	Sep. 20, 2018
Universal Radio Communication Tester	R&S	CMU200	120237	Mar.01,2018	Feb.28,2019
Universal Radio Communication Tester	Agilent	8960	GB46200384	July 16,2017	July 15,2018
Wireless communication test	R&S	CMW500	120909	July 13, 2017	July 12, 2018
Power Splitter	Agilent	11636A	34	Sep.21,2017	Sep.20,2018
Attenuator	JFW	50FHC-006-50	N/A	June 20, 2017	June 19, 2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



2.5 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/27.50(d)/ 27.50(c)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	27.50(d)
3	Spurious Emission	Conducted spurious emission	2.1051 / 27.53(h)/ 27.53(g)
		Radiated spurious emission	
4	Frequency Stability		2.1055/27.54
5	Occupied Bandwidth		2.1049 (h)(i)
6	Emission Bandwidth		2.1049/27.53(h)/ 27.53(g)
7	Band Edge		27.53(h)/ 27.53(g)

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Remoto Basic V3 Plus OBDII Dongle	RB3P	2APEZ-RB3P	EUT

***Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/27.50(d)/ 27.50(c)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	27.50(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 27.53(h)/ 27.53(g)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1055/27.54	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Emission Bandwidth		2.1049/27.53(h)/ 27.53(g)	Pass
7	Band Edge		27.53(h)/ 27.53(g)	Pass

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMW 500) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both LTE frequency band.

The worst condition was recorded in the test report if no other modes test data.

Test Mode	Test Modes Description		
LTE	LTE system, QPSK modulation		
LTE	LTE system, 16QAM modulation		

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX (1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX (3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX (5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX (10M)	Channel 18650	Channel 18900	Channel 19150
		1855.0 MHz	1880 MHz	1905.0 MHz
	RX (1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	RX (3M)	Channel 615	Channel 900	Channel 1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	RX (5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	RX (10M)	Channel 650	Channel 900	Channel 1150
		1935 MHz	1960 MHz	1985 MHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50ohm, the path loss as the factor is calibrated to correct the reading. A system simulator was used to establish communication with the EUT, Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported. The measurements were performed on all modes at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits		
Mode	Average Power	Tolerance(dB)
LTE	23 dBm (0.2W)	± 2.7

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

LTE Band 2

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	18650	1855.0	QPSK	1	0	0	22.68
				1	24	0	22.11
				1	49	0	21.09
				25	0	1	21.36
				25	12	1	21.88
				25	25	1	22.11
				50	0	1	21.41
			16QAM	1	0	1	21.89
				1	24	1	21.74
				1	49	1	21.66
				25	0	2	22.22
				25	12	2	22.47
				25	25	2	22.34
				50	0	2	/
	18900	1880.0	QPSK	1	0	0	22.44
				1	24	0	21.93
				1	49	0	22.33
				25	0	1	21.82
				25	12	1	21.80
				25	25	1	21.79
				50	0	1	22.09
			16QAM	1	0	1	22.14
				1	24	1	22.17
				1	49	1	22.15
				25	0	2	21.79
				25	12	2	21.86
				25	25	2	21.75
				50	0	2	/
	19150	1905.0	QPSK	1	0	0	22.21
				1	24	0	21.99
				1	49	0	22.25
				25	0	1	21.44
				25	12	1	21.58
				25	25	1	21.46
				50	0	1	20.69
			16QAM	1	0	1	20.78

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



1	24	1	20.99
1	49	1	21.06
25	0	2	22.41
25	12	2	22.30
25	25	2	22.58
50	0	2	/

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	18625	1852.5	QPSK	1	0	0	21.77
				1	12	0	22.11
				1	24	0	21.98
				12	0	1	21.64
				12	6	1	21.47
				12	11	1	21.69
				25	0	1	21.55
		1880.0	16QAM	1	0	1	21.49
				1	12	1	21.66
				1	24	1	21.48
				12	0	2	21.43
				12	6	2	21.52
				12	11	2	21.47
				25	0	2	21.50
		18900	QPSK	1	0	0	20.96
				1	12	0	20.78
				1	24	0	21.01
				12	0	1	22.02
				12	6	1	21.96
				12	11	1	22.00
				25	0	1	22.33
		1907.5	16QAM	1	0	1	22.09
				1	12	1	22.14
				1	24	1	21.28
				12	0	2	21.33
				12	6	2	21.41
				12	11	2	21.39
				25	0	2	21.42
			QPSK	1	0	0	20.99

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



1	12	0	22.74	
1	24	0	22.66	
12	0	1	21.57	
12	6	1	21.49	
12	11	1	21.54	
25	0	1	21.96	
16QAM	1	0	21.49	
	1	12	1	21.53
	1	24	1	21.47
	12	0	2	21.36
	12	6	2	21.40
	12	11	2	21.33
	25	0	2	21.28

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	18615	1851.5	QPSK	1	0	0	22.33
				1	7	0	22.48
				1	14	0	22.45
				8	0	1	21.00
				8	4	1	20.94
				8	7	1	20.89
				15	0	1	22.33
	18900	1880.0	16QAM	1	0	1	22.44
				1	7	1	22.36
				1	14	1	22.49
				8	0	2	21.96
				8	4	2	22.45
				8	7	2	22.33
				15	0	2	22.49
	QPSK	1880.0	QPSK	1	0	0	23.06
				1	7	0	22.77
				1	14	0	22.45
				8	0	1	21.99
				8	4	1	21.79
				8	7	1	21.75
				15	0	1	21.86
			16QAM	1	0	1	21.88

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



19185	1908.5	QPSK	1	7	1	22.22
			1	14	1	22.14
			8	0	2	22.12
			8	4	2	22.36
			8	7	2	21.99
			15	0	2	21.45
		16QAM	1	0	0	22.10
			1	7	0	22.01
			1	14	0	22.14
			8	0	1	21.45
			8	4	1	21.96
			8	7	1	22.49
			15	0	1	22.67
		16QAM	1	0	1	22.58
			1	7	1	22.04
			1	14	1	20.88
			8	0	2	20.96
			8	4	2	21.14
			8	7	2	21.69
			15	0	2	21.77

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	18607	QPSK	QPSK	1	0	0	22.01
				1	3	0	22.32
				1	5	0	22.11
				3	0	0	21.45
				3	2	0	21.89
				3	3	0	21.87
				6	0	1	21.44
		16QAM	16QAM	1	0	1	21.55
				1	2	1	22.25
				1	5	1	22.64
				3	0	1	22.15
				3	1	1	21.57
				3	2	1	21.48
				6	0	2	21.49
18900	1880.0	QPSK		1	0	0	21.22

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



19193	1909.3	16QAM	1	2	0	21.88
			1	5	0	21.96
			3	0	0	22.04
			3	1	0	22.09
			3	2	0	22.11
			6	0	1	22.17
			1	0	1	22.36
			1	2	1	21.45
			1	5	1	21.59
			3	0	1	22.57
			3	1	1	21.96
			3	2	1	21.45
			6	0	2	22.00
19193	1909.3	QPSK	1	0	0	21.97
			1	2	0	21.58
			1	5	0	21.48
			3	0	0	22.14
			3	1	0	21.96
			3	2	0	22.31
			6	0	1	22.04
		16QAM	1	0	1	22.22
			1	2	1	21.66
			1	5	1	21.41
			3	0	1	21.58
			3	1	1	21.87
			3	2	1	22.06
			6	0	2	22.12

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



According to 3GPP 36.521 sub-clause 6.2.3.3, the maximum output power is allowed to be reduced by following the table.

Table 6.2.3.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (For PRACH, PUCCH and SRS transmission, the allowed MPR is according to that specified for PUSCH QPSK modulation for the corresponding transmission bandwidth.).

When PRACH, PUCCH are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

For each subframe, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) within the slot, the maximum MPR over the two slots is then applied for the entire subframe.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5.3 apply. The normative reference for this requirement is TS 36.101 clause 6.2.3.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl}=P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power=PM_{ea}+AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 27.50(d)(4). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi..}$

Test Setup

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.




Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

Step 1: Pre-test

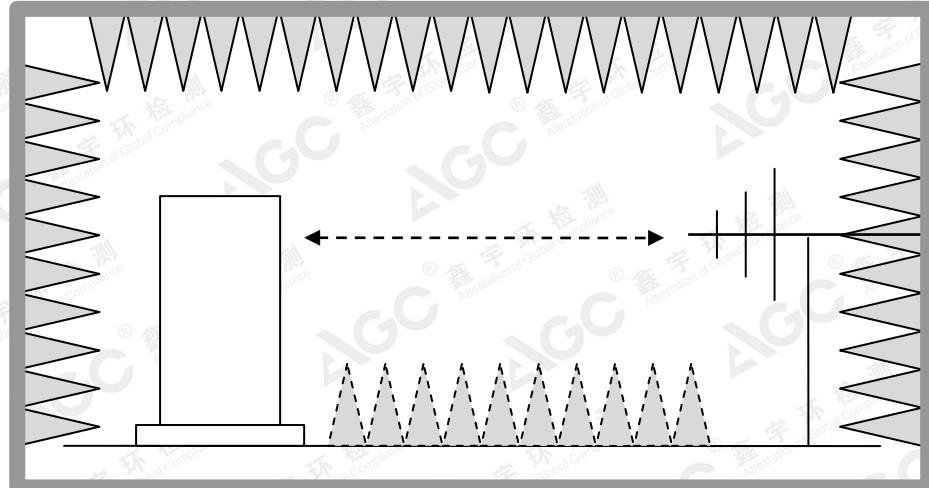

Step 2: Substitution method to verify the maximum ERP

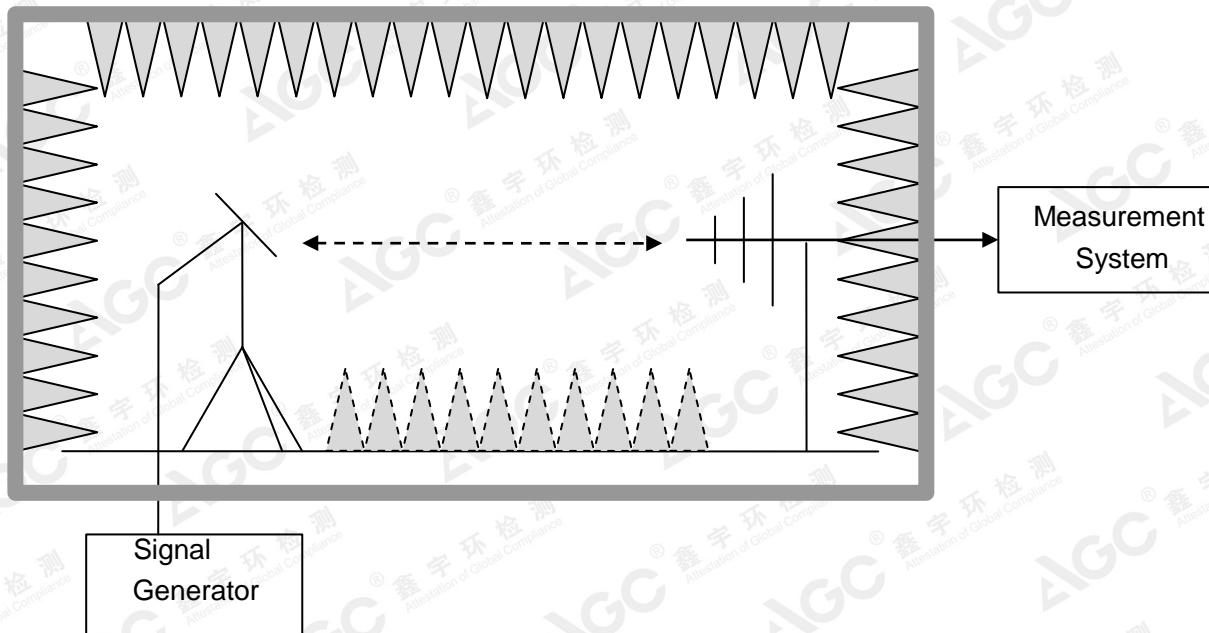

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

Mode	Nominal Peak Power
LTE Band 2	<=33 dBm (2W)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

6.2.3 MEASUREMENT RESULT

EIRP for LTE Band2

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1850.7	1.4	QPSK	1/0	13.11	V	7.95	0.79	20.27	33
1880.0	1.4	QPSK	1/0	12.36	V	7.95	0.79	19.52	33
1909.3	1.4	QPSK	1/0	12.11	V	7.95	0.79	19.27	33
1850.7	1.4	QPSK	1/0	12.40	H	7.95	0.79	19.56	33
1880.0	1.4	QPSK	1/0	10.89	H	7.95	0.79	18.05	33
1909.3	1.4	QPSK	1/0	12.59	H	7.95	0.79	19.75	33
1850.7	1.4	16-QAM	1/5	13.11	V	7.95	0.79	20.27	33
1880.0	1.4	16-QAM	1/0	10.89	V	7.95	0.79	18.05	33
1909.3	1.4	16-QAM	1/0	10.64	V	7.95	0.79	17.80	33
1850.7	1.4	16-QAM	1/5	12.15	H	7.95	0.79	19.31	33
1880.0	1.4	16-QAM	1/0	12.10	H	7.95	0.79	19.26	33
1909.3	1.4	16-QAM	1/0	11.33	H	7.95	0.79	18.49	33
1851.5	3	QPSK	1/0	11.01	V	7.95	0.79	18.17	33
1880.0	3	QPSK	1/0	13.05	V	7.95	0.79	20.21	33
1908.5	3	QPSK	1/0	12.98	V	7.95	0.79	20.14	33
1851.5	3	QPSK	1/0	12.78	H	7.95	0.79	19.94	33
1880.0	3	QPSK	1/0	10.44	H	7.95	0.79	17.60	33
1908.5	3	QPSK	1/0	11.46	H	7.95	0.79	18.62	33
1851.5	3	16-QAM	1/0	11.52	V	7.95	0.79	18.68	33
1880.0	3	16-QAM	1/0	11.72	V	7.95	0.79	18.88	33
1908.5	3	16-QAM	1/0	11.37	V	7.95	0.79	18.53	33
1851.5	3	16-QAM	1/0	11.06	H	7.95	0.79	18.22	33
1880.0	3	16-QAM	1/0	11.88	H	7.95	0.79	19.04	33
1908.5	3	16-QAM	1/0	11.85	H	7.95	0.79	19.01	33
1852.5	5	QPSK	1/0	12.11	V	7.95	0.79	19.27	33
1880.0	5	QPSK	1/0	12.19	V	7.95	0.79	19.35	33
1907.5	5	QPSK	1/24	12.31	V	7.95	0.79	19.47	33
1852.5	5	QPSK	1/0	12.43	H	7.95	0.79	19.59	33
1880.0	5	QPSK	1/0	12.28	H	7.95	0.79	19.44	33
1907.5	5	QPSK	1/24	11.99	H	7.95	0.79	19.15	33
1852.5	5	16-QAM	1/0	12.36	V	7.95	0.79	19.52	33
1880.0	5	16-QAM	1/0	13.52	V	7.95	0.79	20.68	33

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



1907.5	5	16-QAM	1/24	11.58	V	7.95	0.79	18.74	33
1852.5	5	16-QAM	1/0	11.49	H	7.95	0.79	18.65	33
1880.0	5	16-QAM	1/0	13.33	H	7.95	0.79	20.49	33
1907.5	5	16-QAM	1/24	12.17	H	7.95	0.79	19.33	33
1855	10	QPSK	1/0	11.96	V	7.95	0.79	19.12	33
1880	10	QPSK	1/49	11.87	V	7.95	0.79	19.03	33
1905	10	QPSK	1/0	12.67	V	7.95	0.79	19.83	33
1855	10	QPSK	1/0	12.58	H	7.95	0.79	19.74	33
1880	10	QPSK	1/49	12.49	H	7.95	0.79	19.65	33
1905	10	QPSK	1/0	12.33	H	7.95	0.79	19.49	33
1855	10	16-QAM	1/0	12.83	V	7.95	0.79	19.99	33
1880	10	16-QAM	1/49	12.89	V	7.95	0.79	20.05	33
1905	10	16-QAM	1/0	13.34	V	7.95	0.79	20.50	33
1855	10	16-QAM	1/0	13.78	H	7.95	0.79	20.94	33
1880	10	16-QAM	1/49	12.88	H	7.95	0.79	20.04	33
1905	10	16-QAM	1/0	13.18	H	7.95	0.79	20.34	33

Note: Above is the worst mode data.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 D01v03 - Section 5.7:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics /CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

6.3.3 MEASUREMENT RESULT

LTE Band 2

Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.32	<13	PASS
		1	3	3.99	<13	PASS
		1	5	4.30	<13	PASS
		3	0	4.52	<13	PASS
		3	2	3.40	<13	PASS
		3	3	4.48	<13	PASS
		6	0	4.90	<13	PASS
	MCH	1	0	4.36	<13	PASS
		1	3	3.36	<13	PASS
		1	5	4.43	<13	PASS
		3	0	4.14	<13	PASS
		3	2	3.89	<13	PASS
		3	3	4.44	<13	PASS
		6	0	4.40	<13	PASS
16QAM	LCH	1	0	3.77	<13	PASS
		1	3	4.14	<13	PASS
		1	5	3.64	<13	PASS
		3	0	3.59	<13	PASS
		3	2	4.01	<13	PASS
		3	3	3.65	<13	PASS
		6	0	3.77	<13	PASS
	MCH	1	0	5.23	<13	PASS
		1	3	4.46	<13	PASS
		1	5	5.19	<13	PASS
		3	0	4.94	<13	PASS
		3	2	5.04	<13	PASS
		3	3	5.43	<13	PASS
		6	0	5.75	<13	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



	HCH	1	5	5.20	<13	PASS
		3	0	5.26	<13	PASS
		3	2	5.10	<13	PASS
		3	3	5.32	<13	PASS
		6	0	5.61	<13	PASS
		1	0	4.67	<13	PASS
		1	3	4.59	<13	PASS
		1	5	4.61	<13	PASS
		3	0	4.29	<13	PASS
		3	2	4.59	<13	PASS
		3	3	4.56	<13	PASS
		6	0	5.50	<13	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

 Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

Channel Bandwidth: 3 MHz

Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.33	<13	PASS
		1	7	3.96	<13	PASS
		1	14	4.28	<13	PASS
		8	0	4.15	<13	PASS
		8	4	4.33	<13	PASS
		8	7	4.71	<13	PASS
		15	0	4.95	<13	PASS
	MCH	1	0	4.20	<13	PASS
		1	7	3.59	<13	PASS
		1	14	4.16	<13	PASS
		8	0	4.10	<13	PASS
		8	4	4.25	<13	PASS
		8	7	4.64	<13	PASS
		15	0	4.72	<13	PASS
16QAM	LCH	1	0	3.97	<13	PASS
		1	7	3.58	<13	PASS
		1	14	3.47	<13	PASS
		8	0	4.01	<13	PASS
		8	4	4.33	<13	PASS
		8	7	4.38	<13	PASS
		15	0	4.55	<13	PASS
	MCH	1	0	3.97	<13	PASS
		1	7	4.01	<13	PASS
		1	14	3.47	<13	PASS
		8	0	3.33	<13	PASS
		8	4	4.27	<13	PASS
		8	7	4.38	<13	PASS
		15	0	4.55	<13	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



		8	4	4.56	<13	PASS
		8	7	5.52	<13	PASS
		15	0	5.61	<13	PASS
HCH		1	0	4.89	<13	PASS
		1	7	4.99	<13	PASS
		1	14	4.56	<13	PASS
		8	0	4.58	<13	PASS
		8	4	4.96	<13	PASS
		8	7	5.28	<13	PASS
		15	0	5.52	<13	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

 Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China

Channel Bandwidth: 5 MHz

Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.33	<13	PASS
		1	12	4.18	<13	PASS
		1	24	4.27	<13	PASS
		12	0	3.99	<13	PASS
		12	6	4.24	<13	PASS
		12	13	4.66	<13	PASS
		25	0	4.97	<13	PASS
	MCH	1	0	4.43	<13	PASS
		1	12	3.49	<13	PASS
		1	24	3.44	<13	PASS
		12	0	4.11	<13	PASS
		12	6	4.27	<13	PASS
		12	13	4.43	<13	PASS
		25	0	4.76	<13	PASS
16QAM	LCH	1	0	4.19	<13	PASS
		1	12	4.31	<13	PASS
		1	24	3.63	<13	PASS
		12	0	4.18	<13	PASS
		12	6	4.25	<13	PASS
		12	13	4.38	<13	PASS
		25	0	4.68	<13	PASS
	MCH	1	0	5.17	<13	PASS
		1	12	5.00	<13	PASS
		1	24	5.14	<13	PASS
		12	0	4.97	<13	PASS
		12	6	4.33	<13	PASS
		12	13	5.54	<13	PASS
		25	0	5.81	<13	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



		12	6	4.15	<13	PASS
		12	13	5.38	<13	PASS
		25	0	5.61	<13	PASS
HCH	HCH	1	0	5.15	<13	PASS
		1	12	5.05	<13	PASS
		1	24	4.70	<13	PASS
		12	0	4.39	<13	PASS
		12	6	4.88	<13	PASS
		12	13	5.19	<13	PASS
		25	0	5.55	<13	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.



Attestation of Global Compliance

 Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 400 089 2118
 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China