



TEST REPORT

Product Name: Bluetooth headset
FCC ID: 2BC8W-M47
Trademark: N/A
Model Number: M47, M48, M49, M50, M51, M52, M53, M54, M55, M56, M57, M58, M59, M60, M61, M62, M63, M64, M65, M66, M67, M68, M69, M70, M71, M72, M73, M74, M75, M76, M77, M78, M79, M80, M81, M82, M83, M84, M85, M86, M87, M88, M89, M90, M91, M92, M93, M94, M95, M96, M97, M98, M99, M100, M101, M102, M103, M104, M105, M106, M107, M108, M109, M110, M111, M112, M113, M114, M115, M116, M117, M118, M119, M120, M121, M122, M123, M124, M125, M126, M127, M128, M129, M130
Prepared For: Dongguan Ruige Electronics Co., LTD
Address: 2F, Building 3, No. 24, Puxinhu Xincheng Road, Tangxia Town, Dongguan City, Guangdong Province
Manufacturer: Dongguan Ruige Electronics Co., LTD
Address: 2F, Building 3, No. 24, Puxinhu Xincheng Road, Tangxia Town, Dongguan City, Guangdong Province
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 28, 2024
Sample tested Date: Apr. 28, 2024 to May. 28, 2024
Issue Date: May. 28, 2024
Report No.: CTB240511072RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	11
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test procedure	35
8.4 Test Result	36
9. COUDUCTED PEAK OUTPUT POWER	50
9.1 Block Diagram Of Test Setup	50
9.2 Limit	50
9.3 Test procedure	50
9.4 Test Result	51
10. 20DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58
10.4 Test Result	58
11. CARRIERFREQUENCIES SEPARATION	65
11.1 Block Diagram Of Test Setup	65
11.2 Limit	65
11.3 Test procedure	65
11.4 Test Result	65
12. HOPPING CHANNEL NUMBER	72
12.1 Block Diagram Of Test Setup	72
12.2 Limit	72
12.3 Test procedure	72
12.4 Test Result	72

13. DWELL TIME	75
13.1 Block Diagram Of Test Setup	75
13.2 Limit	75
13.3 Test procedure	75
13.4 Test Result	76
14. PSEUDORANDOM FREQUENCY	83
14.1 Limit	83
14.2 Test procedure	83
14.3 Test Result	84
15. ANTENNA REQUIREMENT	85
16. EUT TEST SETUP PHOTOGRAPHS	86

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240511072RFX	May. 28, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	M47, M48, M49, M50, M51, M52, M53, M54, M55, M56, M57, M58, M59, M60, M61, M62, M63, M64, M65, M66, M67, M68, M69, M70, M71, M72, M73, M74, M75, M76, M77, M78, M79, M80, M81, M82, M83, M84, M85, M86, M87, M88, M89, M90, M91, M92, M93, M94, M95, M96, M97, M98, M99, M100, M101, M102, M103, M104, M105, M106, M107, M108, M109, M110, M111, M112, M113, M114, M115, M116, M117, M118, M119, M120, M121, M122, M123, M124, M125, M126, M127, M128, M129, M130
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: M47
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 3.613dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Chip antenna
Antenna Gain:	Bluetooth: 3dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

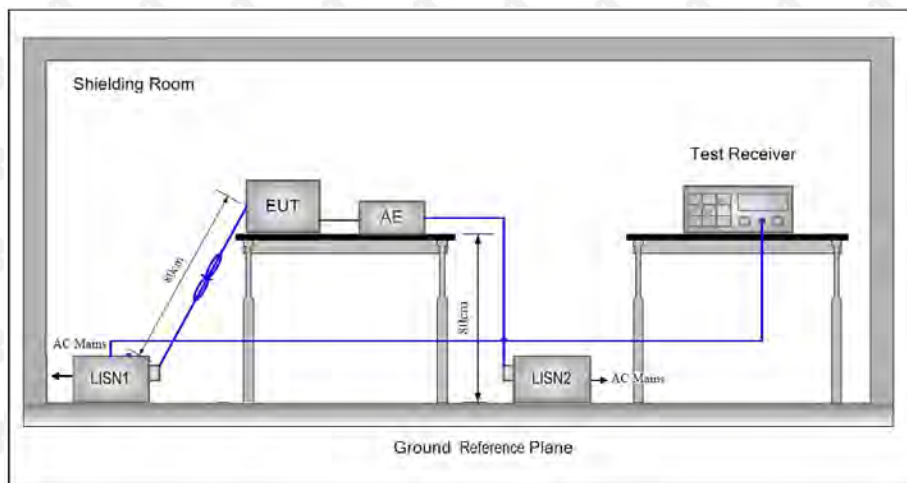

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

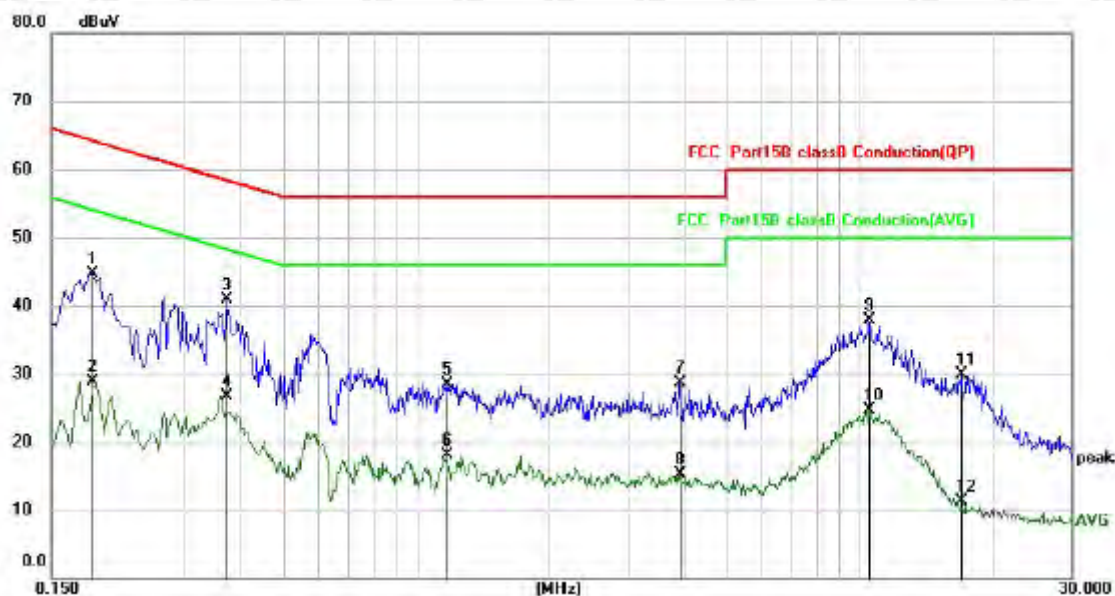


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	34.79	9.95	44.74	64.21	-19.47	QP
2		0.1860	18.98	9.95	28.93	54.21	-25.28	AVG
3	*	0.3740	30.87	9.97	40.84	58.41	-17.57	QP
4		0.3740	16.74	9.97	26.71	48.41	-21.70	AVG
5		1.1740	18.51	10.02	28.53	56.00	-27.47	QP
6		1.1740	8.01	10.02	18.03	46.00	-27.97	AVG
7		3.9020	18.36	10.27	28.63	56.00	-27.37	QP
8		3.9020	4.99	10.27	15.26	46.00	-30.74	AVG
9		10.5020	27.33	10.60	37.93	60.00	-22.07	QP
10		10.5020	14.11	10.60	24.71	50.00	-25.29	AVG
11		16.9300	19.11	10.76	29.87	60.00	-30.13	QP
12		16.9300	0.50	10.76	11.26	50.00	-38.74	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

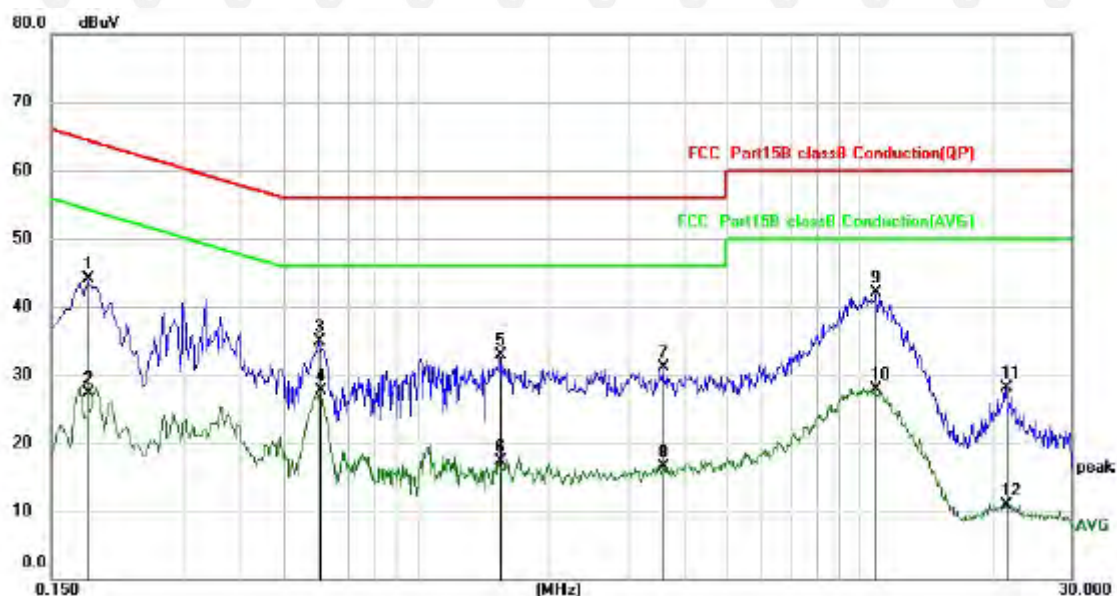

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	34.06	9.95	44.01	64.40	-20.39	QP
2		0.1819	17.36	9.95	27.31	54.40	-27.09	AVG
3		0.6020	24.99	10.01	35.00	56.00	-21.00	QP
4		0.6060	17.61	10.01	27.62	46.00	-18.38	AVG
5		1.5420	22.77	10.05	32.82	56.00	-23.18	QP
6		1.5420	7.21	10.05	17.26	46.00	-28.74	AVG
7		3.6180	20.89	10.25	31.14	56.00	-24.86	QP
8		3.6180	6.23	10.25	16.48	46.00	-29.52	AVG
9	*	10.8900	31.47	10.61	42.08	60.00	-17.92	QP
10		10.8900	17.30	10.61	27.91	50.00	-22.09	AVG
11		21.2900	17.23	10.87	28.10	60.00	-31.90	QP
12		21.2900	-0.01	10.87	10.86	50.00	-39.14	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

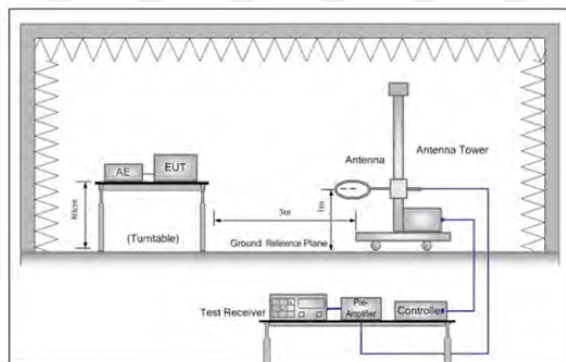


Figure 1. Below 30MHz

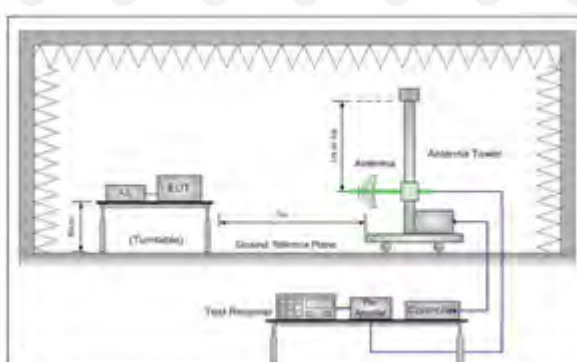


Figure 2. 30MHz to 1GHz

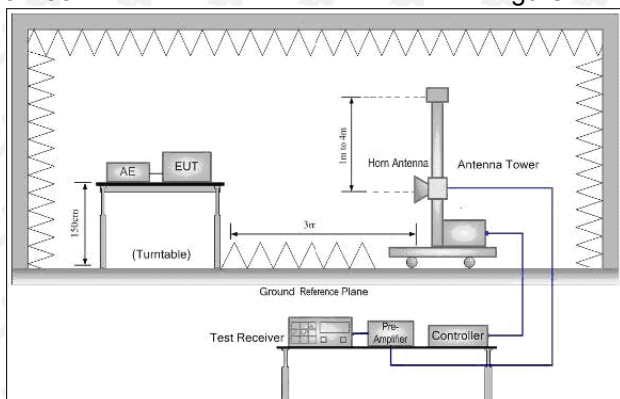


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

Left ear:

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)

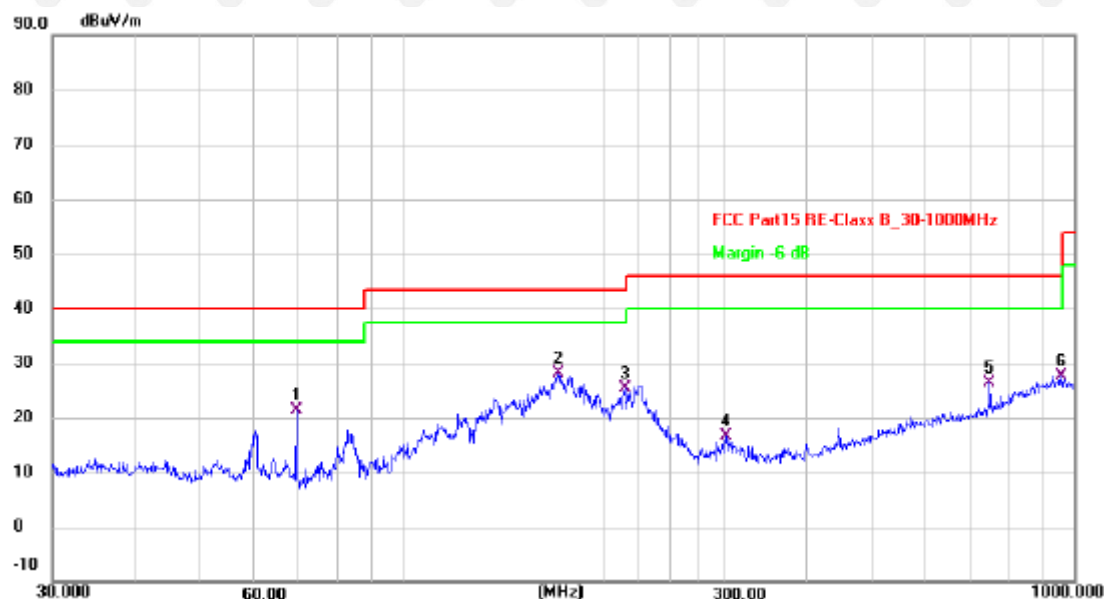

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	69.3568	39.44	-18.01	21.43	40.00	-18.57	QP
2 *	170.1947	41.78	-13.75	28.03	43.50	-15.47	QP
3	213.7634	41.48	-16.14	25.34	43.50	-18.16	QP
4	302.4811	29.48	-12.97	16.51	46.00	-29.49	QP
5	747.4825	29.27	-2.77	26.50	46.00	-19.50	QP
6	955.4381	26.56	1.01	27.57	46.00	-18.43	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.9942	37.84	-13.55	24.29	40.00	-15.71	QP
2	59.2324	41.47	-15.26	26.21	40.00	-13.79	QP
3 *	116.9494	47.77	-15.75	32.02	43.50	-11.48	QP
4	177.5091	43.90	-14.85	29.05	43.50	-14.45	QP
5	438.6554	25.58	-10.26	15.32	46.00	-30.68	QP
6	948.7610	26.85	1.05	27.90	46.00	-18.10	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Right ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

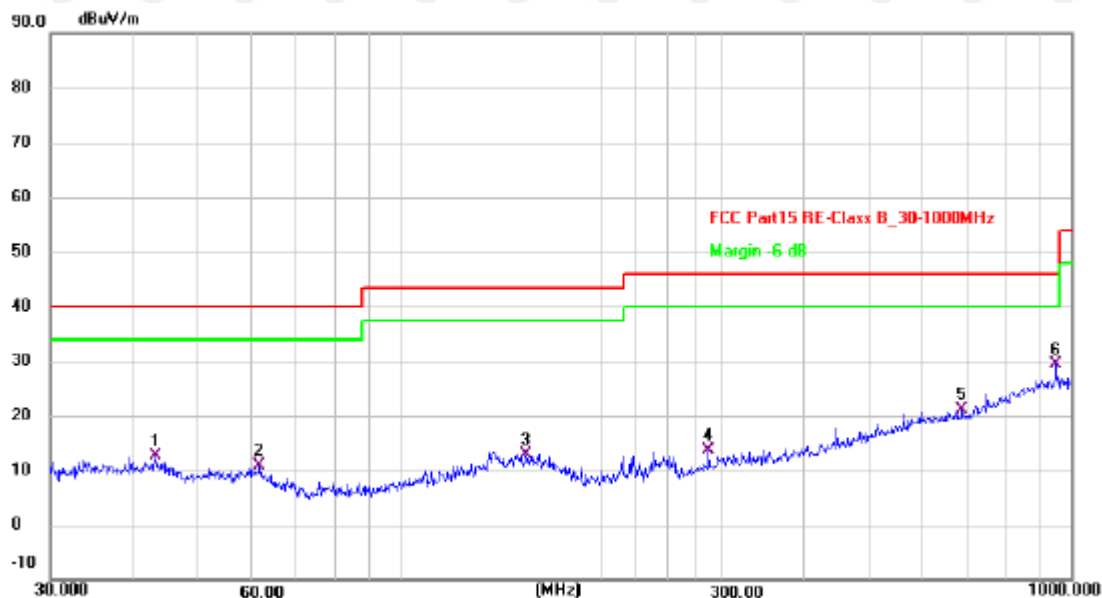

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.0504	26.67	-14.10	12.57	40.00	-27.43	QP
2	61.5618	26.69	-15.70	10.99	40.00	-29.01	QP
3	153.7385	25.54	-12.58	12.96	43.50	-30.54	QP
4	287.9904	27.26	-13.63	13.63	46.00	-32.37	QP
5	687.1506	25.37	-4.27	21.10	46.00	-24.90	QP
6 *	948.7610	28.36	1.05	29.41	46.00	-16.59	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

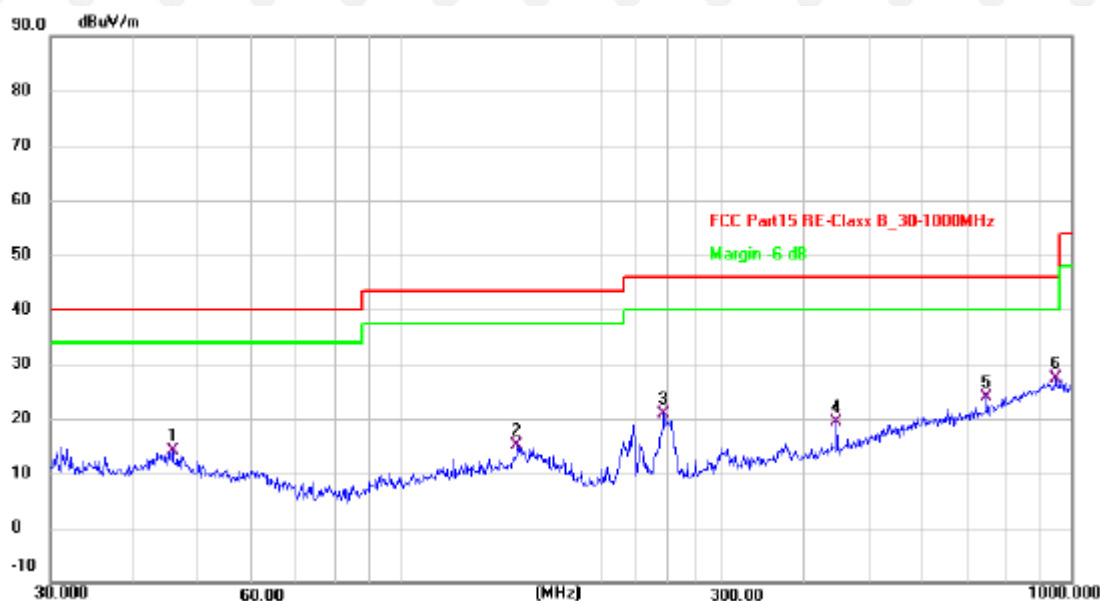

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.6947	28.76	-14.59	14.17	40.00	-25.83	QP
2	148.9624	27.85	-12.67	15.18	43.50	-28.32	QP
3	246.8150	36.70	-15.70	21.00	46.00	-25.00	QP
4	446.4140	29.40	-10.00	19.40	46.00	-26.60	QP
5	747.4825	26.56	-2.77	23.79	46.00	-22.21	QP
6 *	948.7610	26.37	1.05	27.42	46.00	-18.58	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.53	-3.65	54.88	74.00	-19.12	peak
4804	49.31	-3.65	45.66	54.00	-8.34	AVG
7206	61.51	-0.95	60.56	74.00	-13.44	peak
7206	42.15	-0.95	41.20	54.00	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.53	-3.65	54.88	74.00	-19.12	peak
4804	50.03	-3.65	46.38	54.00	-7.62	AVG
7206	60.95	-0.95	60.00	74.00	-14.00	peak
7206	41.54	-0.95	40.59	54.00	-13.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.74	-3.54	56.20	74.00	-17.80	peak
4882.00	49.56	-3.54	46.02	54.00	-7.98	AVG
7323.00	57.80	-0.81	56.99	74.00	-17.01	peak
7323.00	44.47	-0.81	43.66	54.00	-10.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.50	-3.54	53.96	74.00	-20.04	peak
4882.00	49.74	-3.54	46.20	54.00	-7.80	AVG
7323.00	58.12	-0.81	57.31	74.00	-16.69	peak
7323.00	41.21	-0.81	40.40	54.00	-13.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.45	-3.43	54.02	74.00	-19.98	peak
4960	47.29	-3.44	43.85	54.00	-10.15	AVG
7440	60.99	-0.77	60.22	74.00	-13.78	peak
7440	39.78	-0.77	39.01	54.00	-14.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.84	-3.43	53.41	74.00	-20.59	peak
4960	47.72	-3.44	44.28	54.00	-9.72	AVG
7440	61.13	-0.77	60.36	74.00	-13.64	peak
7440	40.16	-0.77	39.39	54.00	-14.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.90	-5.81	52.09	74.00	-21.91	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.37	-5.84	49.53	74.00	-24.47	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.98	-5.81	51.17	74.00	-22.83	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.11	-5.84	50.27	74.00	-23.73	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.91	-5.81	50.10	74.00	-23.90	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.51	-6.06	48.45	74.00	-25.55	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.28	-5.81	51.47	74.00	-22.53	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.73	-6.06	48.67	74.00	-25.33	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.52	-5.81	49.71	74.00	-24.29	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.63	-5.84	49.79	74.00	-24.21	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.47	-5.81	48.66	74.00	-25.34	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.60	-5.84	47.76	74.00	-26.24	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.76	-5.81	50.95	74.00	-23.05	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.98	-6.06	49.92	74.00	-24.08	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.89	-5.81	51.08	74.00	-22.92	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.42	-6.06	48.36	74.00	-25.64	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.29	-3.65	54.64	74.00	-19.36	peak
4804	48.52	-3.65	44.87	54.00	-9.13	AVG
7206	61.42	-0.95	60.47	74.00	-13.53	peak
7206	41.14	-0.95	40.19	54.00	-13.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.73	-3.65	53.08	74.00	-20.92	peak
4804	49.09	-3.65	45.44	54.00	-8.56	AVG
7206	59.19	-0.95	58.24	74.00	-15.76	peak
7206	41.83	-0.95	40.88	54.00	-13.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.96	-3.54	55.42	74.00	-18.58	peak
4882.00	49.44	-3.54	45.90	54.00	-8.10	AVG
7323.00	57.95	-0.81	57.14	74.00	-16.86	peak
7323.00	42.02	-0.81	41.21	54.00	-12.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.00	-3.54	54.46	74.00	-19.54	peak
4882.00	49.79	-3.54	46.25	54.00	-7.75	AVG
7323.00	58.42	-0.81	57.61	74.00	-16.39	peak
7323.00	41.99	-0.81	41.18	54.00	-12.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.84	-3.43	55.41	74.00	-18.59	peak
4960	49.91	-3.44	46.47	54.00	-7.53	AVG
7440	60.66	-0.77	59.89	74.00	-14.11	peak
7440	40.69	-0.77	39.92	54.00	-14.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.10	-3.43	55.67	74.00	-18.33	peak
4960	49.37	-3.44	45.93	54.00	-8.07	AVG
7440	59.04	-0.77	58.27	74.00	-15.73	peak
7440	39.86	-0.77	39.09	54.00	-14.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.87	-5.81	51.06	74.00	-22.94	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.26	-5.84	49.42	74.00	-24.58	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.05	-5.81	50.24	74.00	-23.76	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.06	-5.84	49.22	74.00	-24.78	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.67	-5.81	49.86	74.00	-24.14	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.81	-6.06	48.75	74.00	-25.25	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.90	-5.81	50.09	74.00	-23.91	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.32	-6.06	48.26	74.00	-25.74	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.77	-5.81	48.96	74.00	-25.04	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.51	-5.84	48.67	74.00	-25.33	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.91	-5.81	51.10	74.00	-22.90	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.56	-5.84	49.72	74.00	-24.28	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.31	-5.81	51.50	74.00	-22.50	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.59	-6.06	49.53	74.00	-24.47	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.66	-5.81	50.85	74.00	-23.15	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.76	-6.06	47.70	74.00	-26.30	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

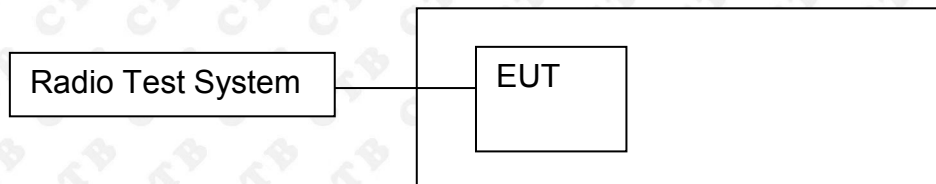

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result


Left ear:




GFSK/HCH/
Hop



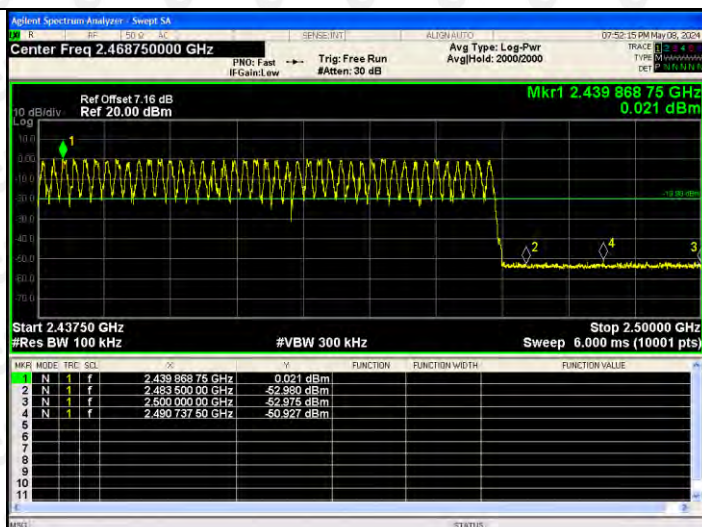


$\pi/4$ DQPSK/LCH/
No Hop

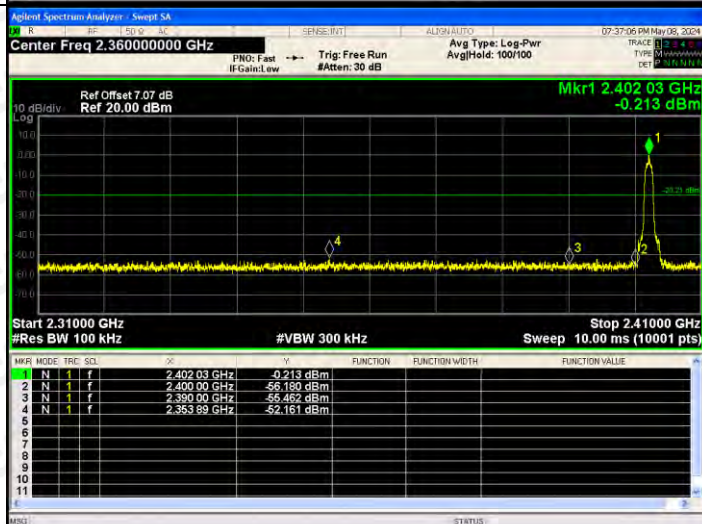


$\pi/4$ DQPSK/LCH/
Hop

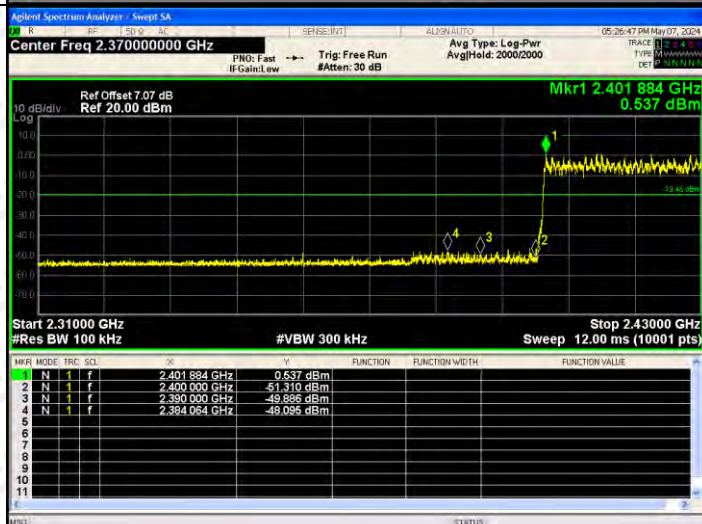


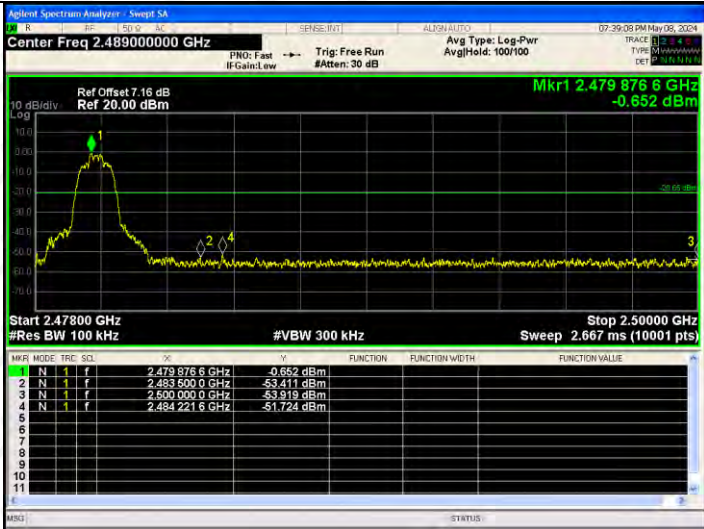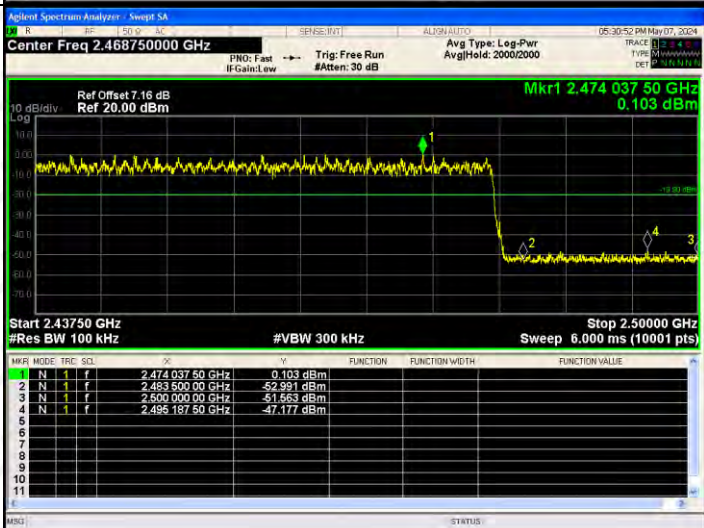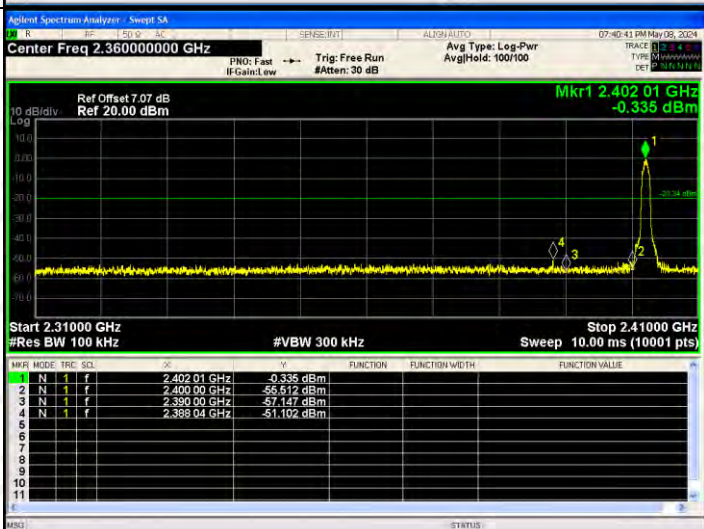π /4DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 876 6 GHz -0.652 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (10001 pts) Stop 2.50000 GHz <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.479 876 6 GHz</td><td></td><td></td><td>-0.652 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 500 0 GHz</td><td></td><td></td><td>-53.411 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 0 GHz</td><td></td><td></td><td>-53.919 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.484 221 6 GHz</td><td></td><td></td><td>-51.724 dBm</td></tr></table>	MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.479 876 6 GHz			-0.652 dBm	2	N	1	f		2.483 500 0 GHz			-53.411 dBm	3	N	1	f		2.500 000 0 GHz			-53.919 dBm	4	N	1	f		2.484 221 6 GHz			-51.724 dBm
MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.479 876 6 GHz			-0.652 dBm																																						
2	N	1	f		2.483 500 0 GHz			-53.411 dBm																																						
3	N	1	f		2.500 000 0 GHz			-53.919 dBm																																						
4	N	1	f		2.484 221 6 GHz			-51.724 dBm																																						
π /4DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.474 037 50 GHz 0.103 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts) Stop 2.50000 GHz <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.474 037 50 GHz</td><td></td><td></td><td>0.103 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.463 500 00 GHz</td><td></td><td></td><td>-52.991 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td></td><td></td><td>-51.663 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.495 187 50 GHz</td><td></td><td></td><td>-47.177 dBm</td></tr></table>	MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.474 037 50 GHz			0.103 dBm	2	N	1	f		2.463 500 00 GHz			-52.991 dBm	3	N	1	f		2.500 000 00 GHz			-51.663 dBm	4	N	1	f		2.495 187 50 GHz			-47.177 dBm
MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.474 037 50 GHz			0.103 dBm																																						
2	N	1	f		2.463 500 00 GHz			-52.991 dBm																																						
3	N	1	f		2.500 000 00 GHz			-51.663 dBm																																						
4	N	1	f		2.495 187 50 GHz			-47.177 dBm																																						
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 01 GHz -0.335 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts) Stop 2.41000 GHz <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.402 01 GHz</td><td></td><td></td><td>-0.335 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.400 00 GHz</td><td></td><td></td><td>-55.612 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.390 00 GHz</td><td></td><td></td><td>-57.147 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.398 04 GHz</td><td></td><td></td><td>-51.192 dBm</td></tr></table>	MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.402 01 GHz			-0.335 dBm	2	N	1	f		2.400 00 GHz			-55.612 dBm	3	N	1	f		2.390 00 GHz			-57.147 dBm	4	N	1	f		2.398 04 GHz			-51.192 dBm
MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.402 01 GHz			-0.335 dBm																																						
2	N	1	f		2.400 00 GHz			-55.612 dBm																																						
3	N	1	f		2.390 00 GHz			-57.147 dBm																																						
4	N	1	f		2.398 04 GHz			-51.192 dBm																																						


8DPSK
/LCH/Hop

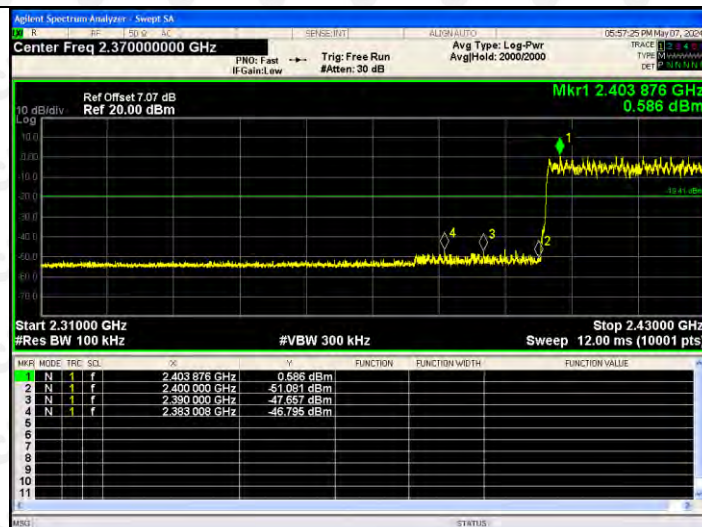

8DPSK /HCH/No
Hop

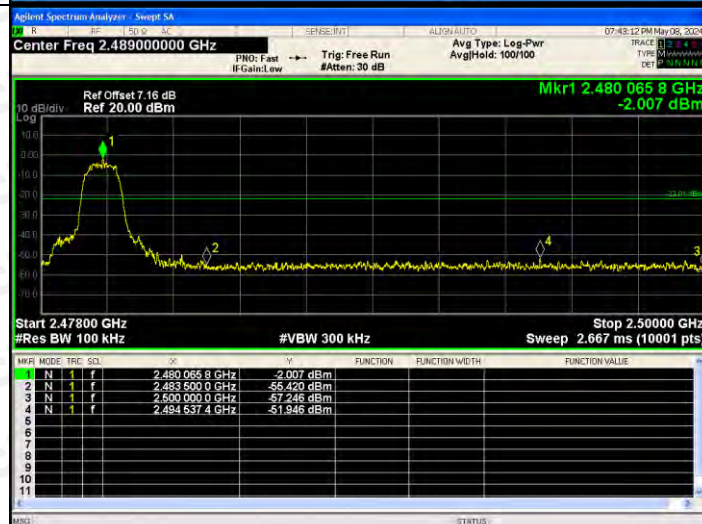


8DPSK
/HCH/Hop

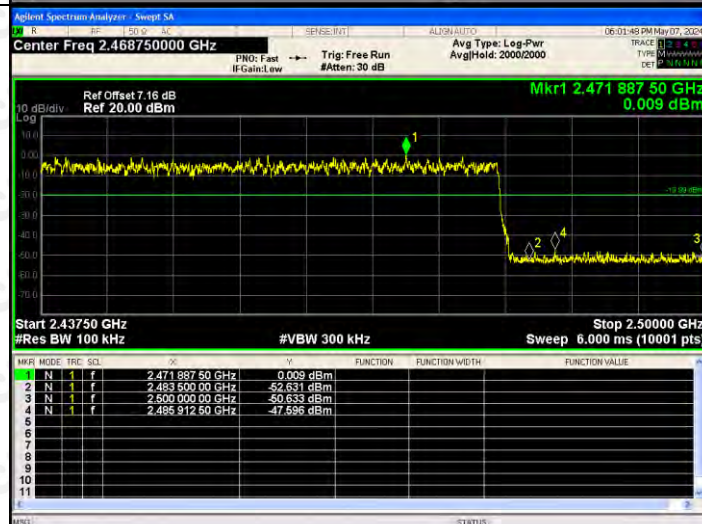


RF Conducted Spurious Emissions Graphs


GFSK/LCH



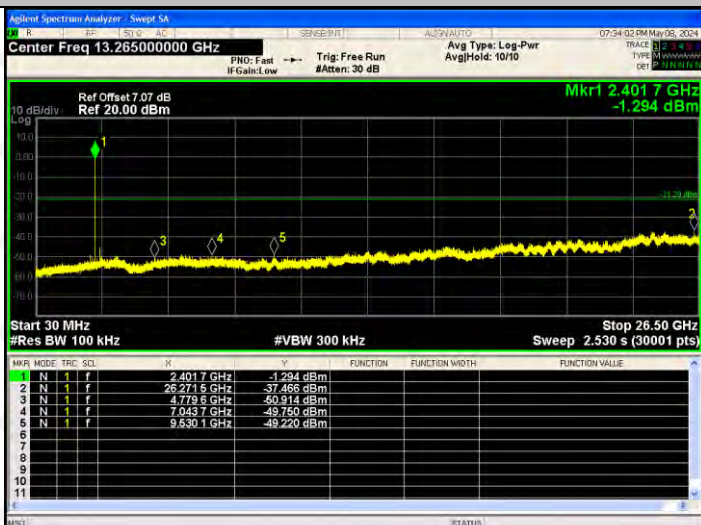


GFSK/MCH

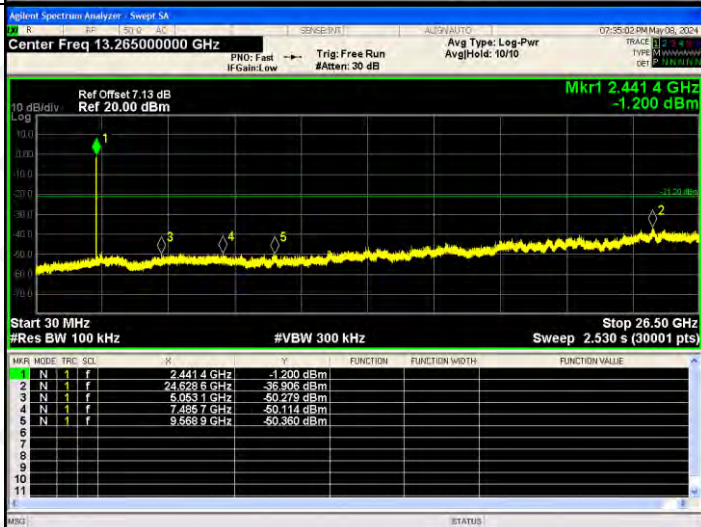


GFSK/HCH

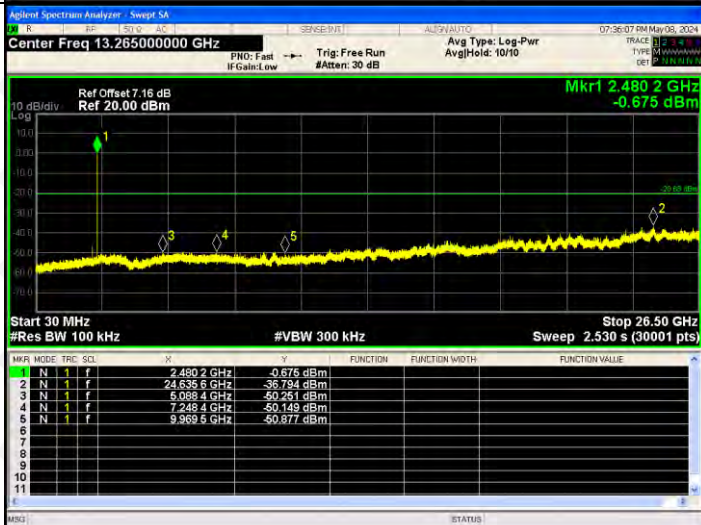


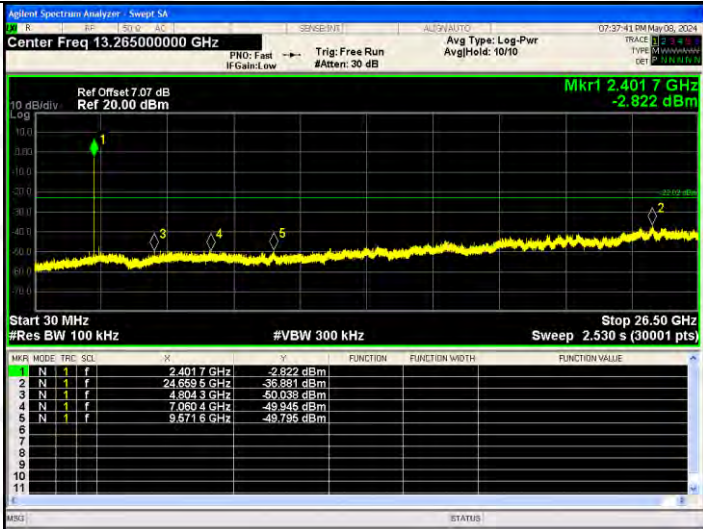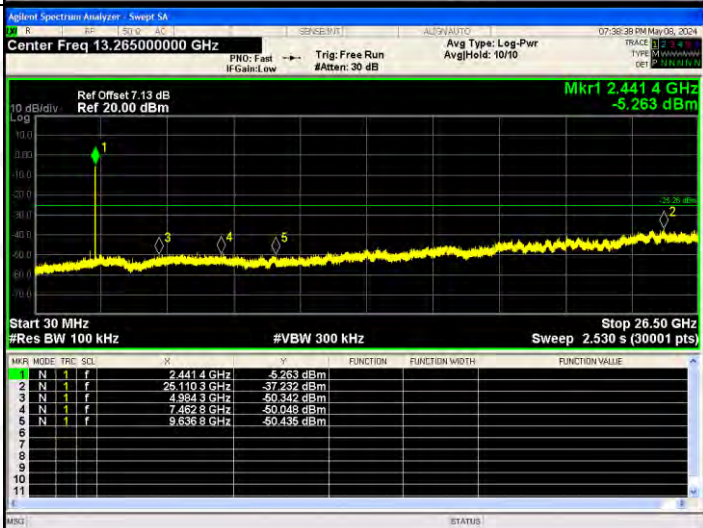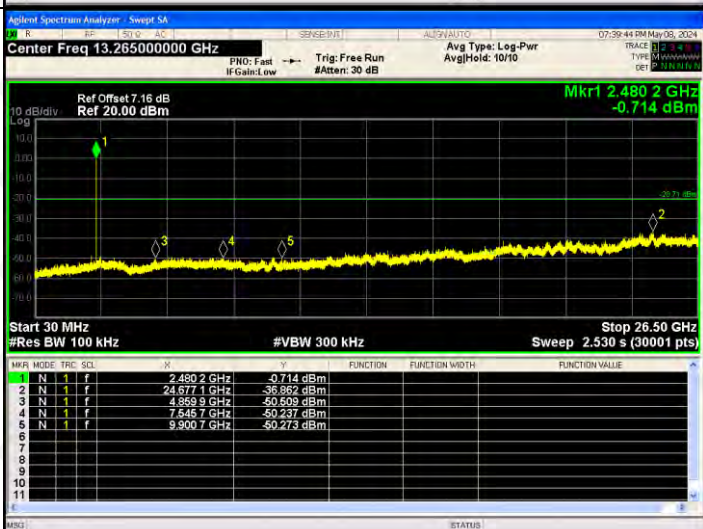$\pi/4$ DQPSK /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4017 GHz -2.822 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4017 GHz</td><td>-2.822 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.669 GHz</td><td>-36.881 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.804 GHz</td><td>-50.039 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.060 GHz</td><td>-49.945 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.671 GHz</td><td>-49.795 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-2.822 dBm				2	N	1	f	24.669 GHz	-36.881 dBm				3	N	1	f	4.804 GHz	-50.039 dBm				4	N	1	f	7.060 GHz	-49.945 dBm				5	N	1	f	9.671 GHz	-49.795 dBm			
MNR	MODE	TRF	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-2.822 dBm																																																		
2	N	1	f	24.669 GHz	-36.881 dBm																																																		
3	N	1	f	4.804 GHz	-50.039 dBm																																																		
4	N	1	f	7.060 GHz	-49.945 dBm																																																		
5	N	1	f	9.671 GHz	-49.795 dBm																																																		
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.4414 GHz -5.263 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4414 GHz</td><td>-5.263 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.110 GHz</td><td>-37.232 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.804 GHz</td><td>-50.342 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.462 GHz</td><td>-50.048 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.636 GHz</td><td>-50.435 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-5.263 dBm				2	N	1	f	25.110 GHz	-37.232 dBm				3	N	1	f	4.804 GHz	-50.342 dBm				4	N	1	f	7.462 GHz	-50.048 dBm				5	N	1	f	9.636 GHz	-50.435 dBm			
MNR	MODE	TRF	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-5.263 dBm																																																		
2	N	1	f	25.110 GHz	-37.232 dBm																																																		
3	N	1	f	4.804 GHz	-50.342 dBm																																																		
4	N	1	f	7.462 GHz	-50.048 dBm																																																		
5	N	1	f	9.636 GHz	-50.435 dBm																																																		
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.4802 GHz -0.714 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-0.714 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.677 GHz</td><td>-36.862 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.809 GHz</td><td>-50.509 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.545 GHz</td><td>-50.237 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.900 GHz</td><td>-50.273 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-0.714 dBm				2	N	1	f	24.677 GHz	-36.862 dBm				3	N	1	f	4.809 GHz	-50.509 dBm				4	N	1	f	7.545 GHz	-50.237 dBm				5	N	1	f	9.900 GHz	-50.273 dBm			
MNR	MODE	TRF	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-0.714 dBm																																																		
2	N	1	f	24.677 GHz	-36.862 dBm																																																		
3	N	1	f	4.809 GHz	-50.509 dBm																																																		
4	N	1	f	7.545 GHz	-50.237 dBm																																																		
5	N	1	f	9.900 GHz	-50.273 dBm																																																		


8DPSK /LCH

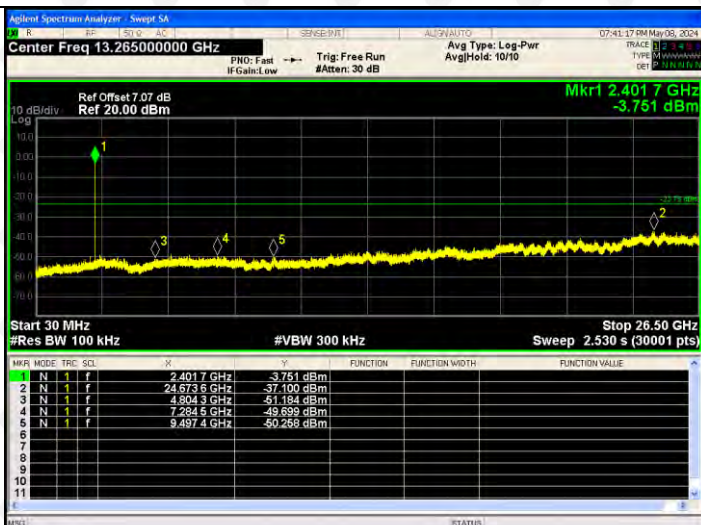

8DPSK /MCH



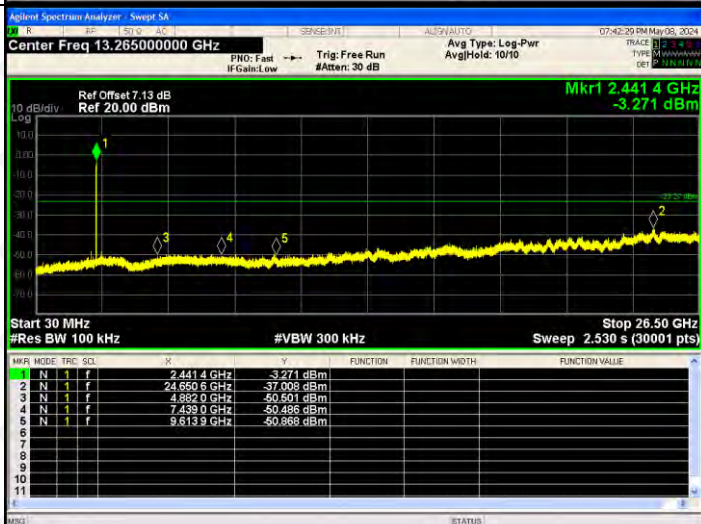


8DPSK /HCH

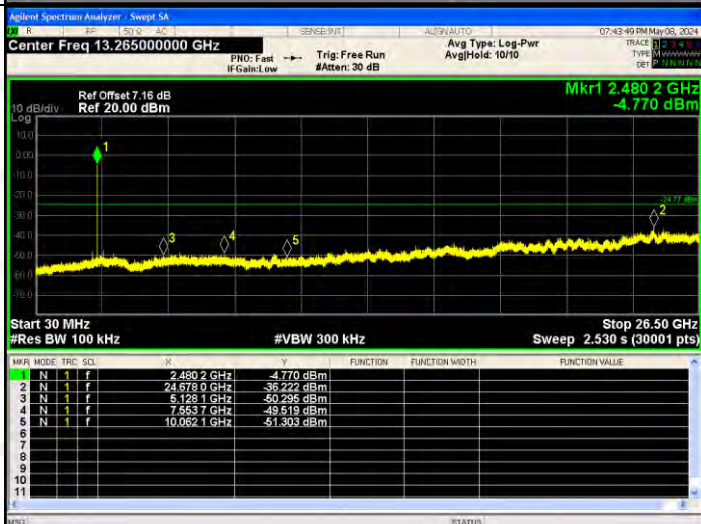


Right ear:


BAND EDGE Graphs

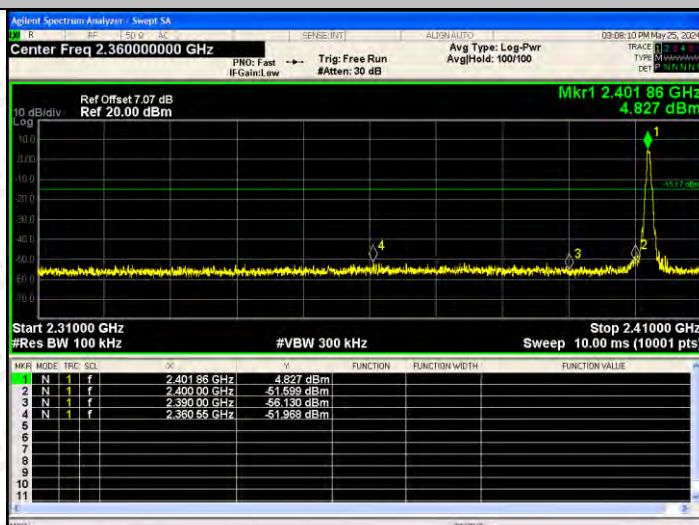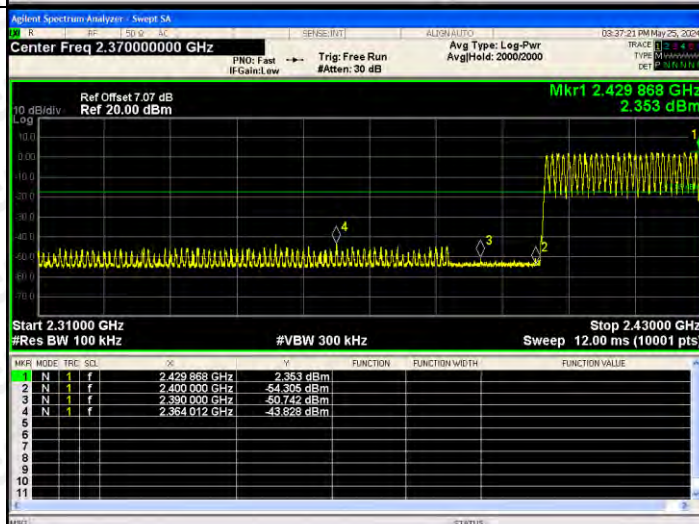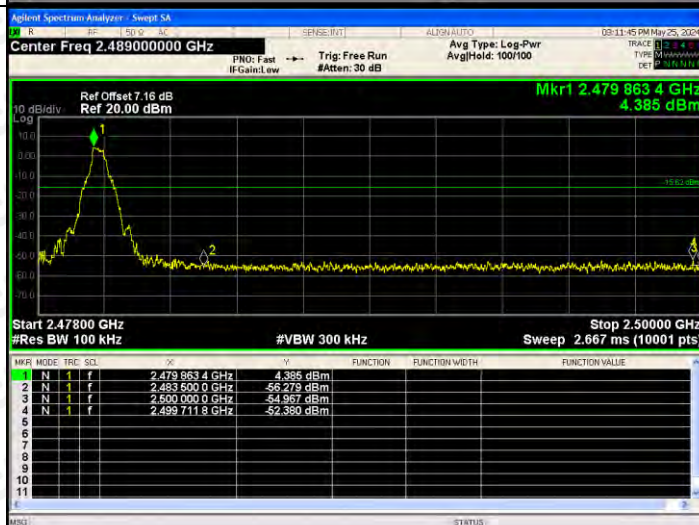GFSK/LCH/
No Hop

GFSK/LCH/
Hop

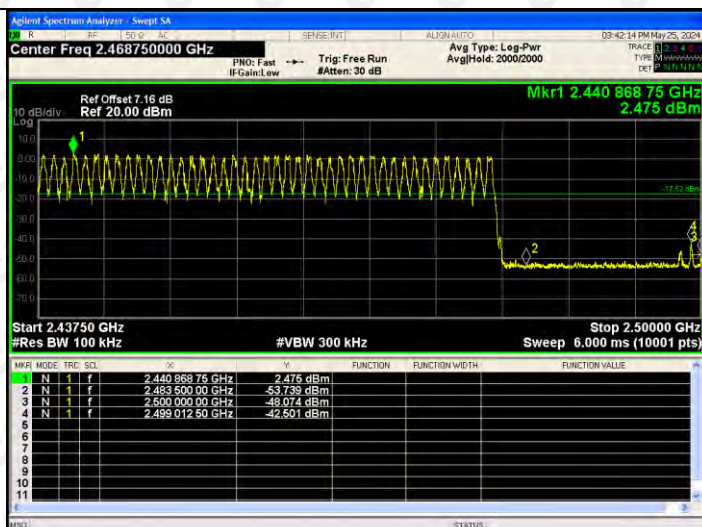GFSK/HCH/
No Hop


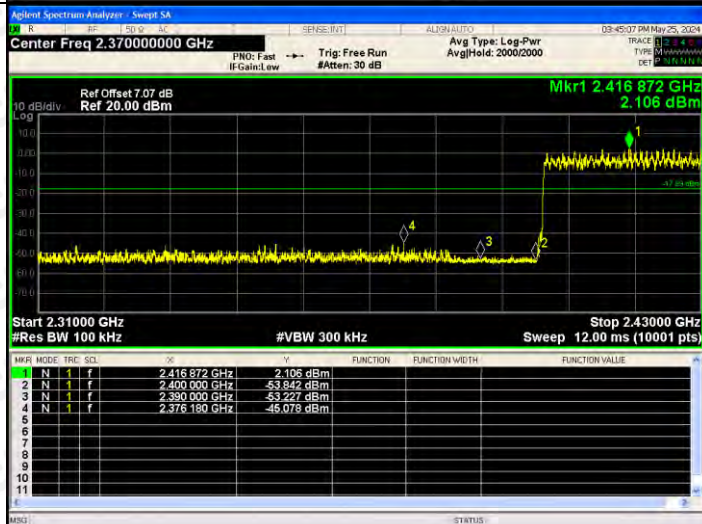
GFSK/HCH/
Hop



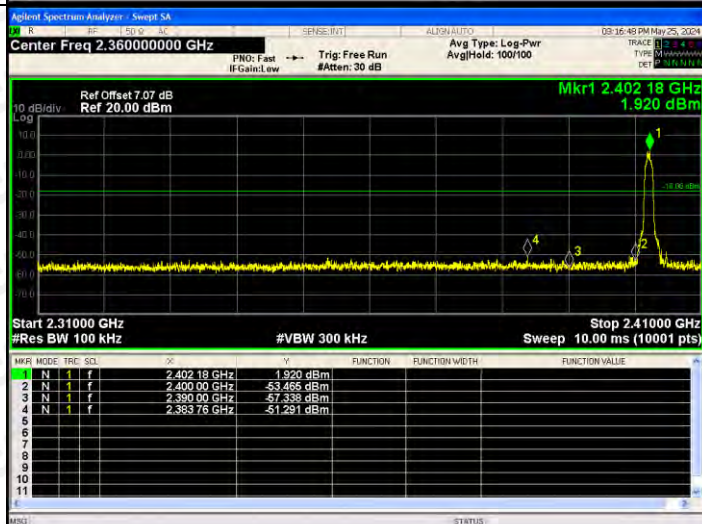


$\pi/4$ DQPSK/LCH/
No Hop




$\pi/4$ DQPSK/LCH/
Hop

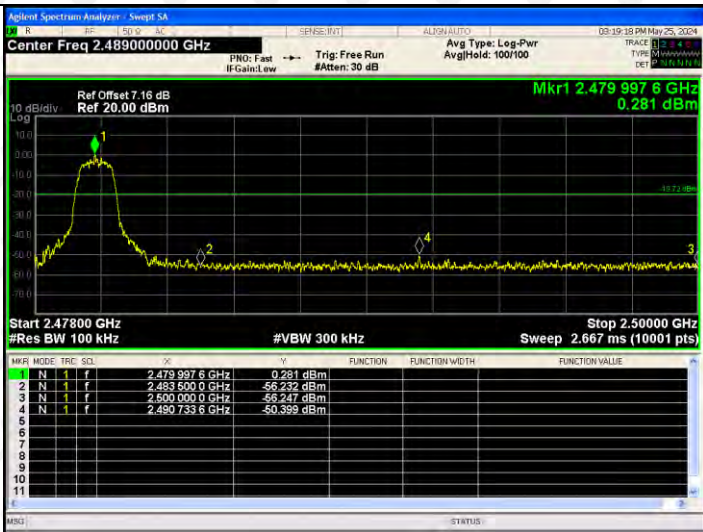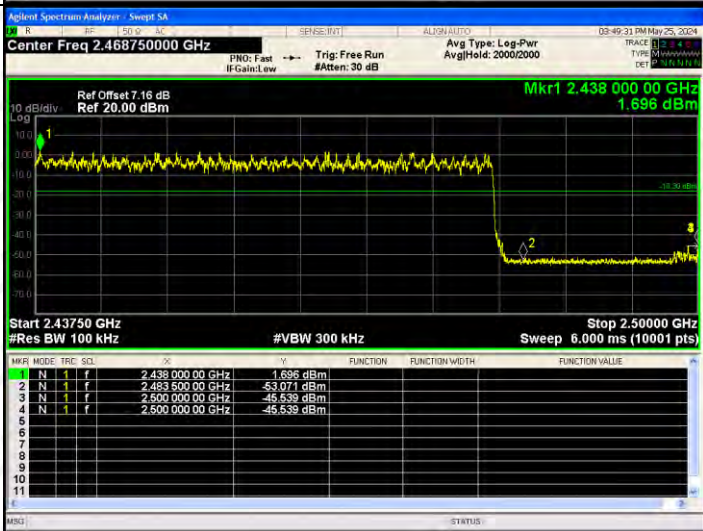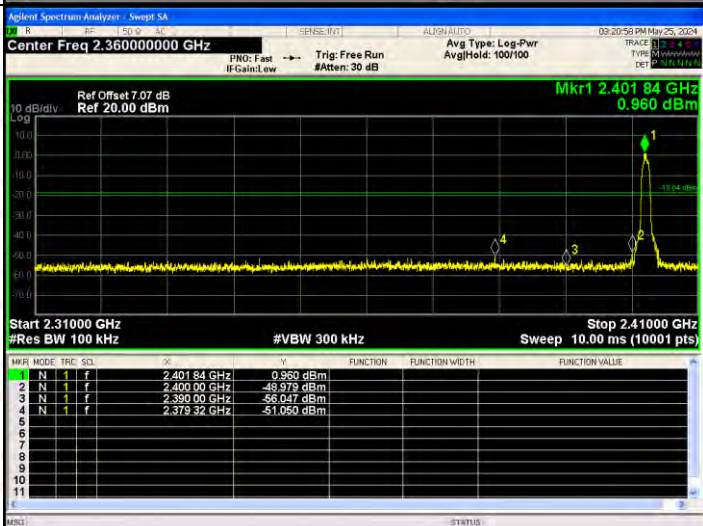


$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 997 6 GHz 0.281 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.479 997 6 GHz</td><td></td><td></td><td>0.281 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 500 0 GHz</td><td></td><td></td><td>-56.232 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 0 GHz</td><td></td><td></td><td>-55.242 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.490 733 6 GHz</td><td></td><td></td><td>-50.399 dBm</td></tr></table>	MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.479 997 6 GHz			0.281 dBm	2	N	1	f		2.483 500 0 GHz			-56.232 dBm	3	N	1	f		2.500 000 0 GHz			-55.242 dBm	4	N	1	f		2.490 733 6 GHz			-50.399 dBm
MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.479 997 6 GHz			0.281 dBm																																						
2	N	1	f		2.483 500 0 GHz			-56.232 dBm																																						
3	N	1	f		2.500 000 0 GHz			-55.242 dBm																																						
4	N	1	f		2.490 733 6 GHz			-50.399 dBm																																						
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.438 000 00 GHz 1.696 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.438 000 00 GHz</td><td></td><td></td><td>1.696 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.463 500 00 GHz</td><td></td><td></td><td>-53.071 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td></td><td></td><td>-45.539 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td></td><td></td><td>-45.539 dBm</td></tr></table>	MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.438 000 00 GHz			1.696 dBm	2	N	1	f		2.463 500 00 GHz			-53.071 dBm	3	N	1	f		2.500 000 00 GHz			-45.539 dBm	4	N	1	f		2.500 000 00 GHz			-45.539 dBm
MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.438 000 00 GHz			1.696 dBm																																						
2	N	1	f		2.463 500 00 GHz			-53.071 dBm																																						
3	N	1	f		2.500 000 00 GHz			-45.539 dBm																																						
4	N	1	f		2.500 000 00 GHz			-45.539 dBm																																						
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 84 GHz 0.960 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>XX</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.401 84 GHz</td><td></td><td></td><td>0.960 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.400 00 GHz</td><td></td><td></td><td>-48.979 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.390 00 GHz</td><td></td><td></td><td>-56.047 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.373 32 GHz</td><td></td><td></td><td>-51.050 dBm</td></tr></table>	MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.401 84 GHz			0.960 dBm	2	N	1	f		2.400 00 GHz			-48.979 dBm	3	N	1	f		2.390 00 GHz			-56.047 dBm	4	N	1	f		2.373 32 GHz			-51.050 dBm
MNR	MODE	TRC	SQL	XX	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.401 84 GHz			0.960 dBm																																						
2	N	1	f		2.400 00 GHz			-48.979 dBm																																						
3	N	1	f		2.390 00 GHz			-56.047 dBm																																						
4	N	1	f		2.373 32 GHz			-51.050 dBm																																						


8DPSK
/LCH/Hop

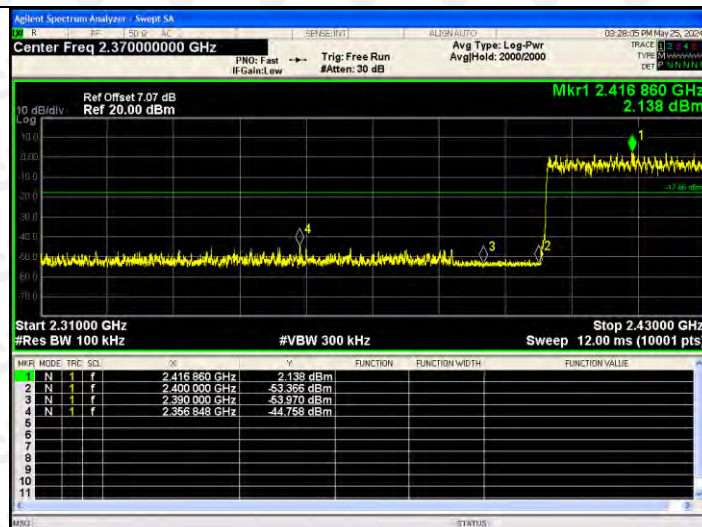

8DPSK /HCH/No
Hop

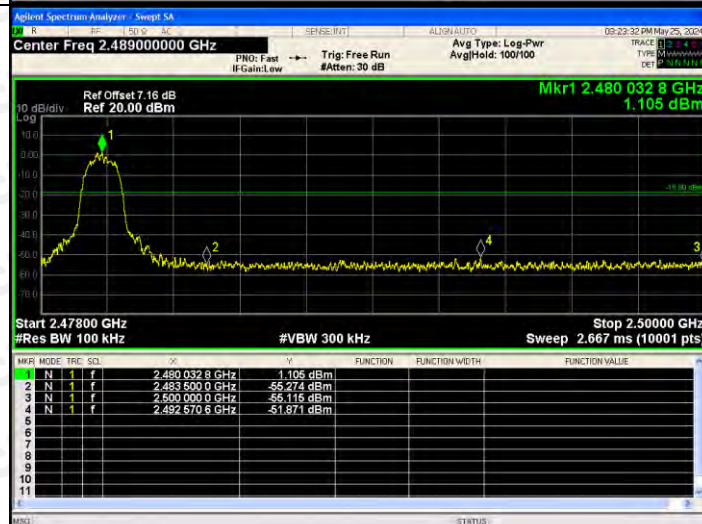


8DPSK
/HCH/Hop

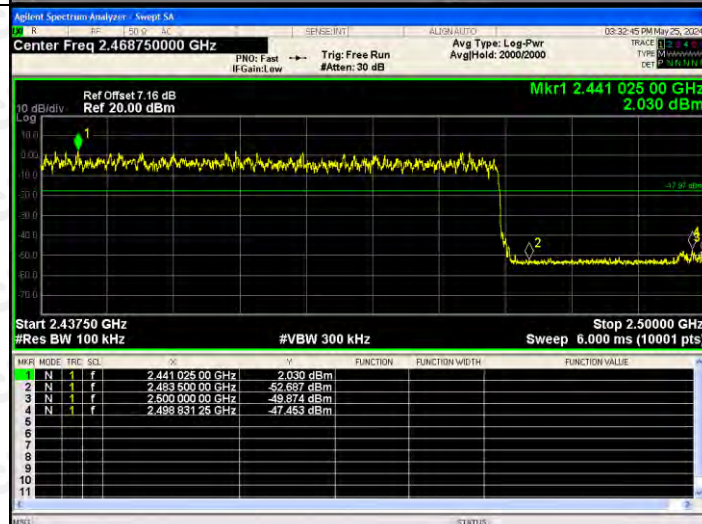


RF Conducted Spurious Emissions Graphs


GFSK/LCH



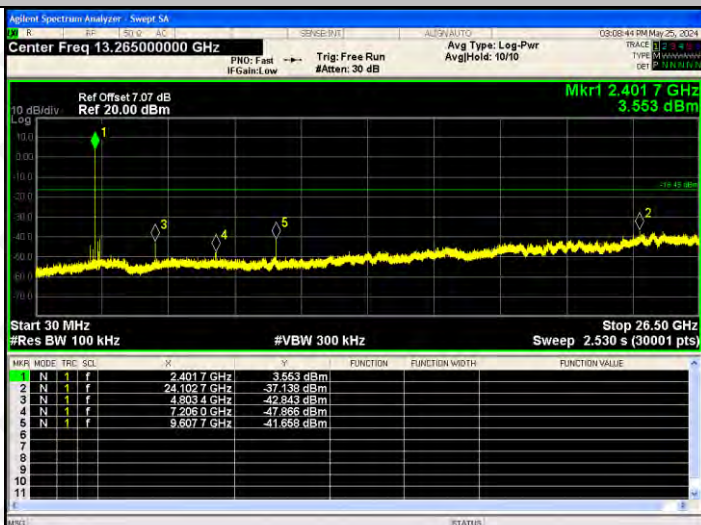


GFSK/MCH

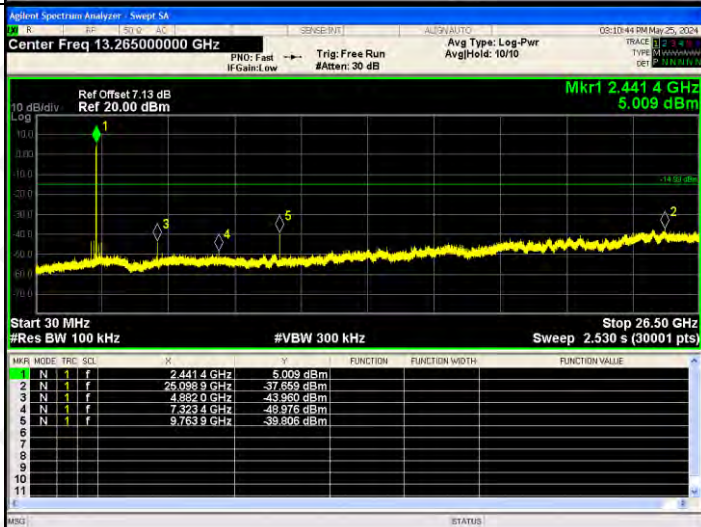


GFSK/HCH

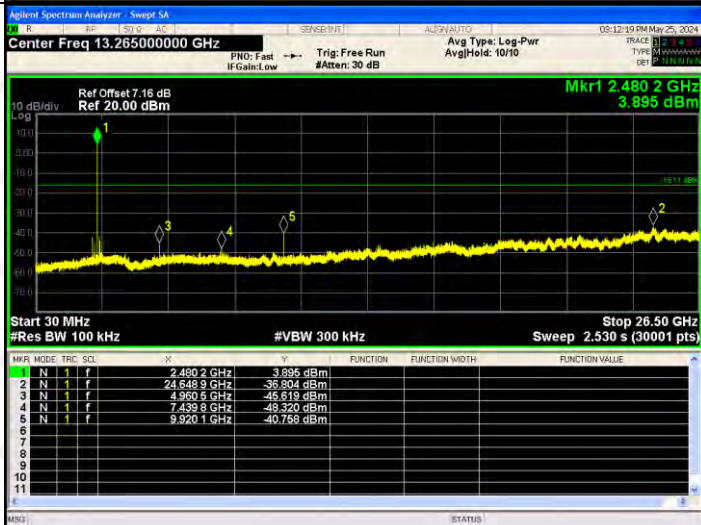


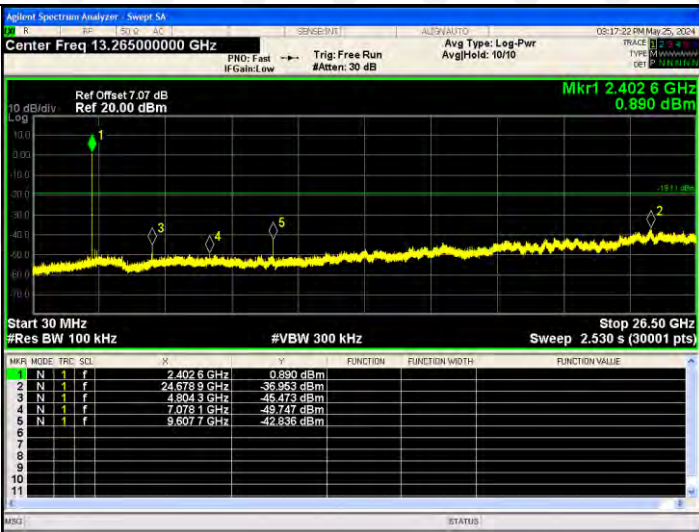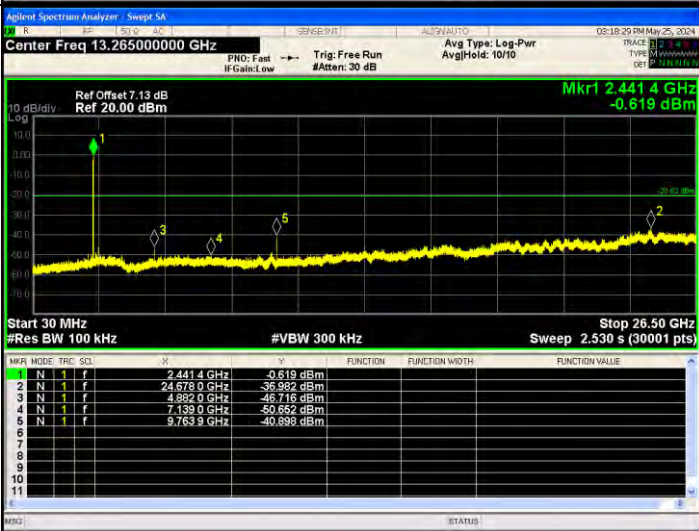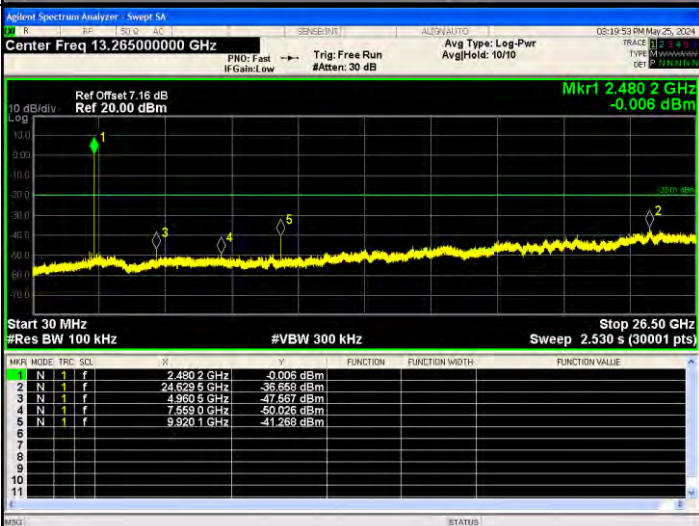$\pi/4$ DQPSK /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4026 GHz 0.890 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4026 GHz</td><td>0.890 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6789 GHz</td><td>-36.953 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9043 GHz</td><td>-46.473 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.0781 GHz</td><td>-49.747 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6077 GHz</td><td>-42.836 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	0.890 dBm				2	N	1	f	24.6789 GHz	-36.953 dBm				3	N	1	f	4.9043 GHz	-46.473 dBm				4	N	1	f	7.0781 GHz	-49.747 dBm				5	N	1	f	9.6077 GHz	-42.836 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4026 GHz	0.890 dBm																																																		
2	N	1	f	24.6789 GHz	-36.953 dBm																																																		
3	N	1	f	4.9043 GHz	-46.473 dBm																																																		
4	N	1	f	7.0781 GHz	-49.747 dBm																																																		
5	N	1	f	9.6077 GHz	-42.836 dBm																																																		
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.4414 GHz -0.619 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4414 GHz</td><td>-0.619 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6780 GHz</td><td>-36.982 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8920 GHz</td><td>-46.716 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1390 GHz</td><td>-50.682 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.7639 GHz</td><td>-40.898 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-0.619 dBm				2	N	1	f	24.6780 GHz	-36.982 dBm				3	N	1	f	4.8920 GHz	-46.716 dBm				4	N	1	f	7.1390 GHz	-50.682 dBm				5	N	1	f	9.7639 GHz	-40.898 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-0.619 dBm																																																		
2	N	1	f	24.6780 GHz	-36.982 dBm																																																		
3	N	1	f	4.8920 GHz	-46.716 dBm																																																		
4	N	1	f	7.1390 GHz	-50.682 dBm																																																		
5	N	1	f	9.7639 GHz	-40.898 dBm																																																		
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.4802 GHz -0.006 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-0.006 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6295 GHz</td><td>-36.658 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9605 GHz</td><td>-47.557 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5590 GHz</td><td>-50.026 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9201 GHz</td><td>-41.288 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-0.006 dBm				2	N	1	f	24.6295 GHz	-36.658 dBm				3	N	1	f	4.9605 GHz	-47.557 dBm				4	N	1	f	7.5590 GHz	-50.026 dBm				5	N	1	f	9.9201 GHz	-41.288 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-0.006 dBm																																																		
2	N	1	f	24.6295 GHz	-36.658 dBm																																																		
3	N	1	f	4.9605 GHz	-47.557 dBm																																																		
4	N	1	f	7.5590 GHz	-50.026 dBm																																																		
5	N	1	f	9.9201 GHz	-41.288 dBm																																																		


8DPSK /LCH

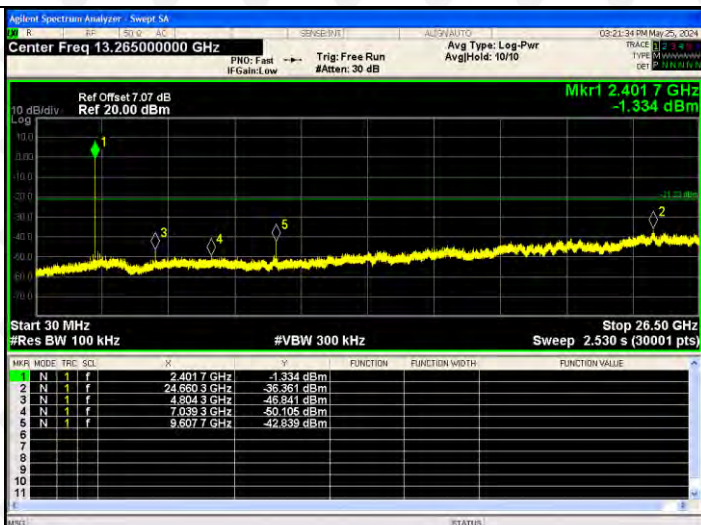

8DPSK /MCH

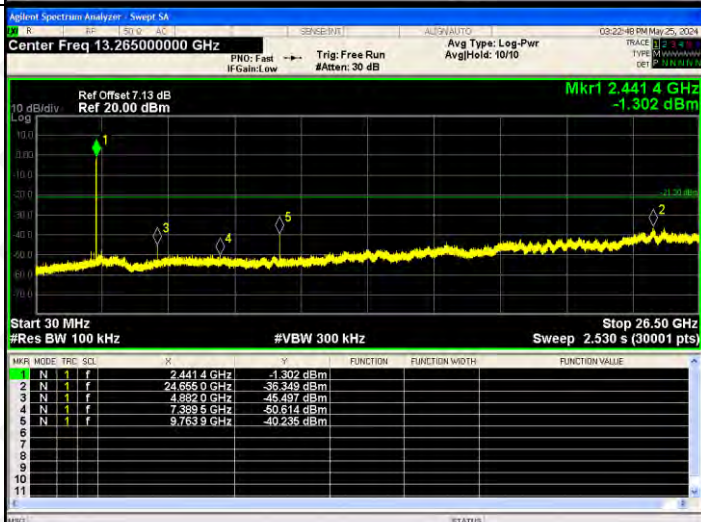


8DPSK /HCH

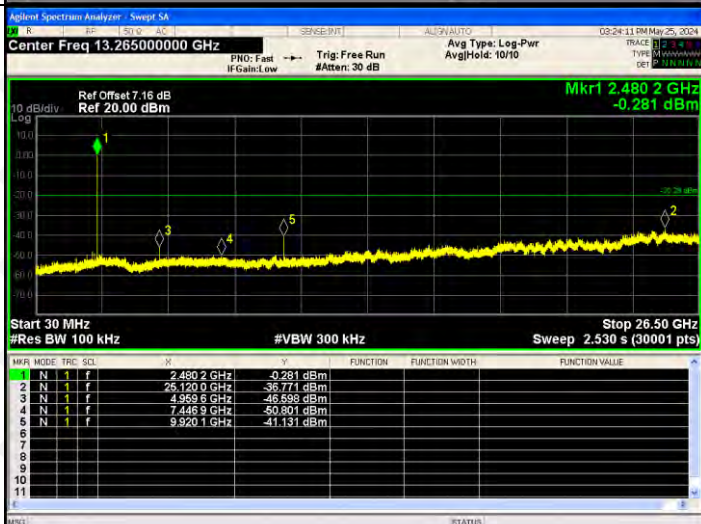

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

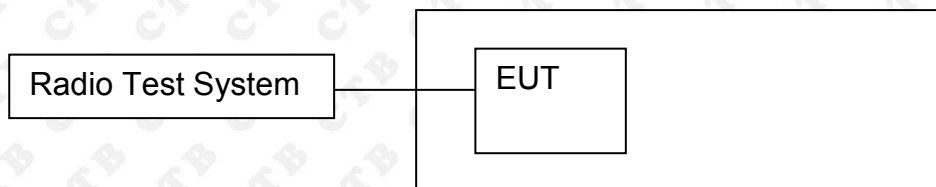

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Left ear:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	0.234	20.97	PASS
	MCH	0.077	20.97	PASS
	HCH	-0.262	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.01	20.97	PASS
	MCH	0.852	20.97	PASS
	HCH	0.471	20.97	PASS
EDR mode (8DPSK)	LCH	1.37	20.97	PASS
	MCH	1.152	20.97	PASS
	HCH	0.771	20.97	PASS


Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	2.18	20.97	PASS
	MCH	2.584	20.97	PASS
	HCH	1.6	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	2.958	20.97	PASS
	MCH	3.278	20.97	PASS
	HCH	2.311	20.97	PASS
EDR mode (8DPSK)	LCH	3.273	20.97	PASS
	MCH	3.613	20.97	PASS
	HCH	2.659	20.97	PASS

Left ear:

Test Graph:

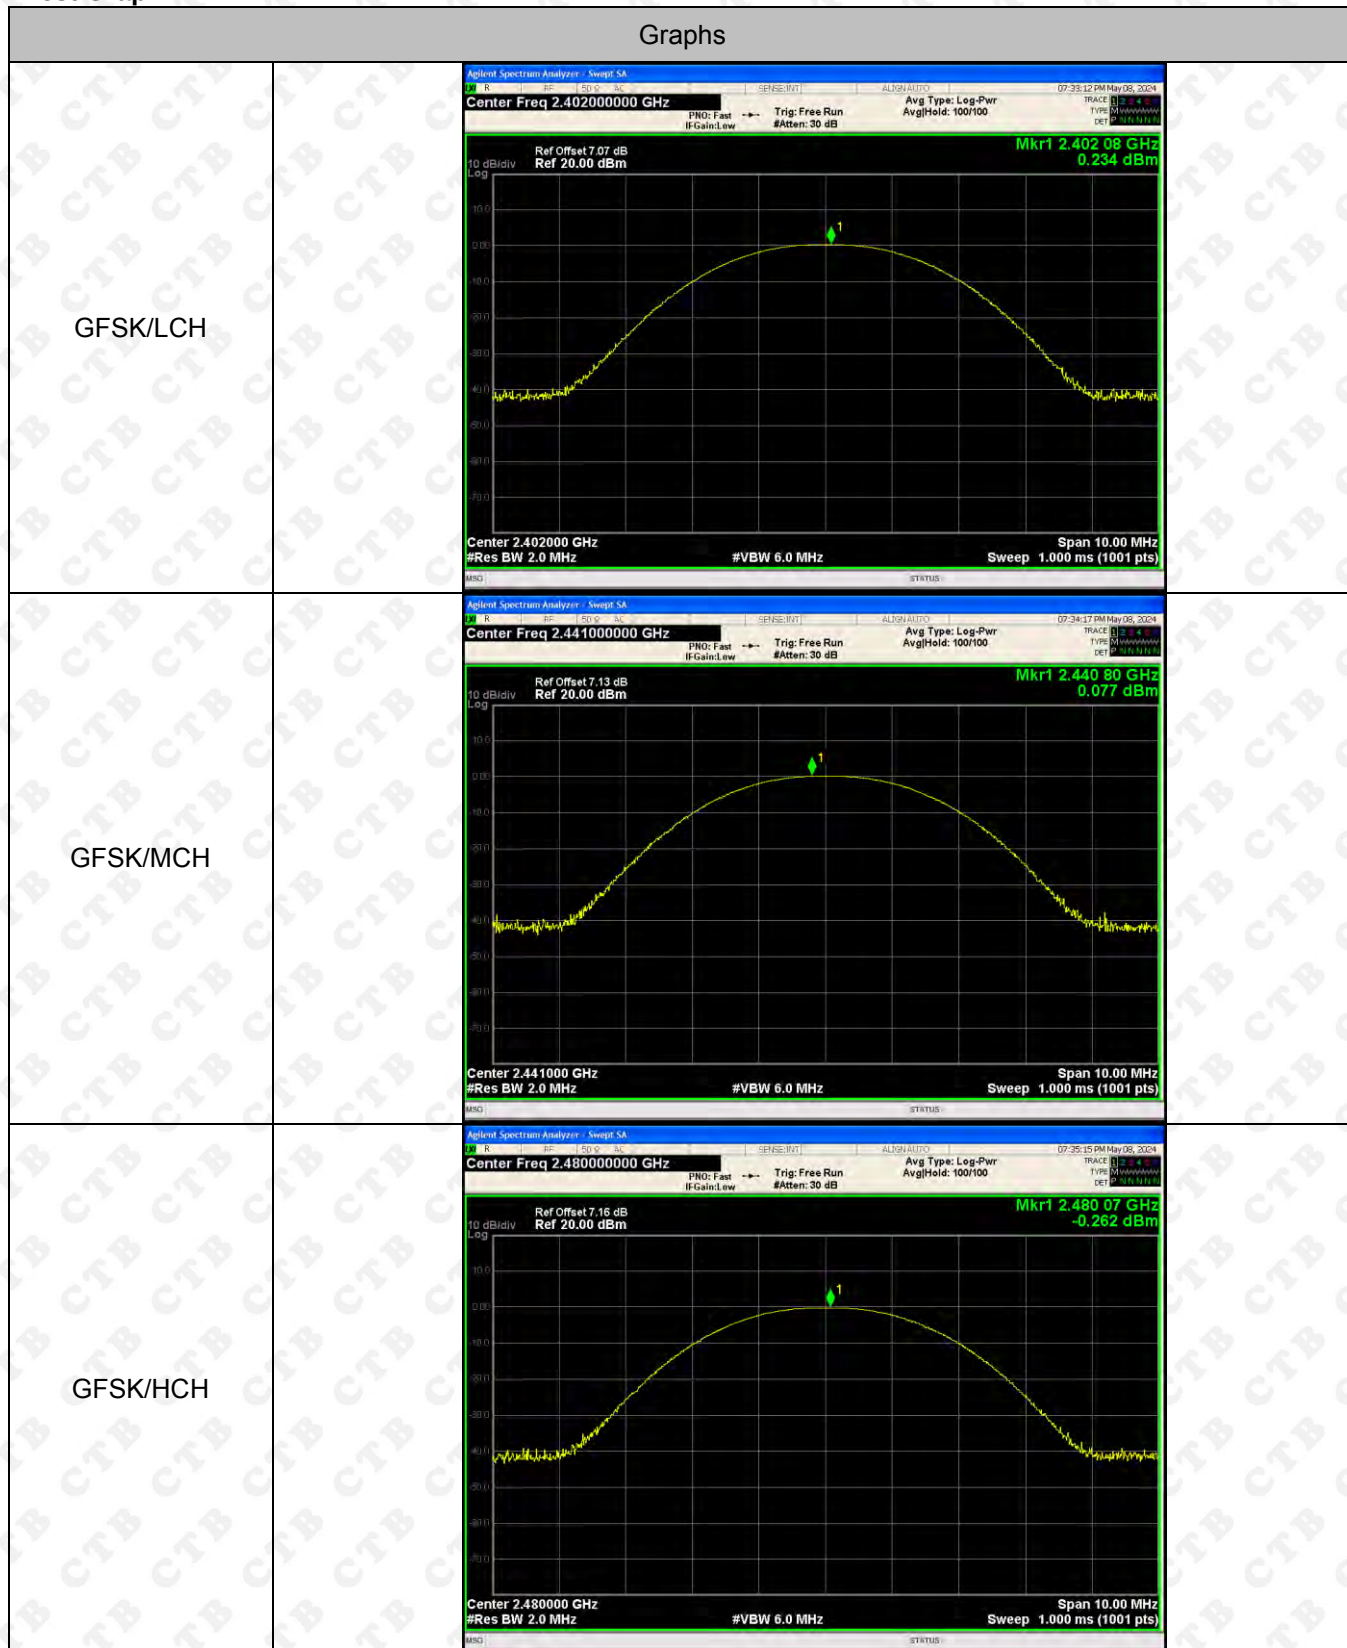


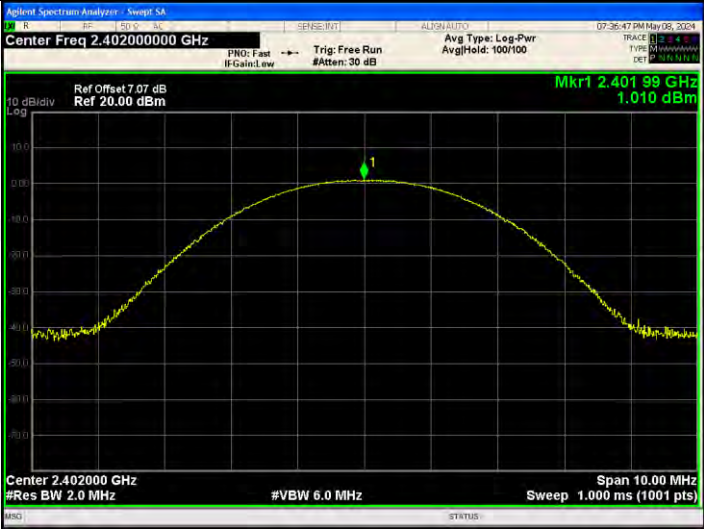$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 99 GHz 1.010 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.440 95 GHz 0.852 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 94 GHz 0.471 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 7.07 dB Ref: 20.00 dBm Mkr1 2.402 00 GHz 1.370 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 7.13 dB Ref: 20.00 dBm Mkr1 2.440 84 GHz 1.152 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 7.16 dB Ref: 20.00 dBm Mkr1 2.479 94 GHz 0.771 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

Right ear:

Test Graph:

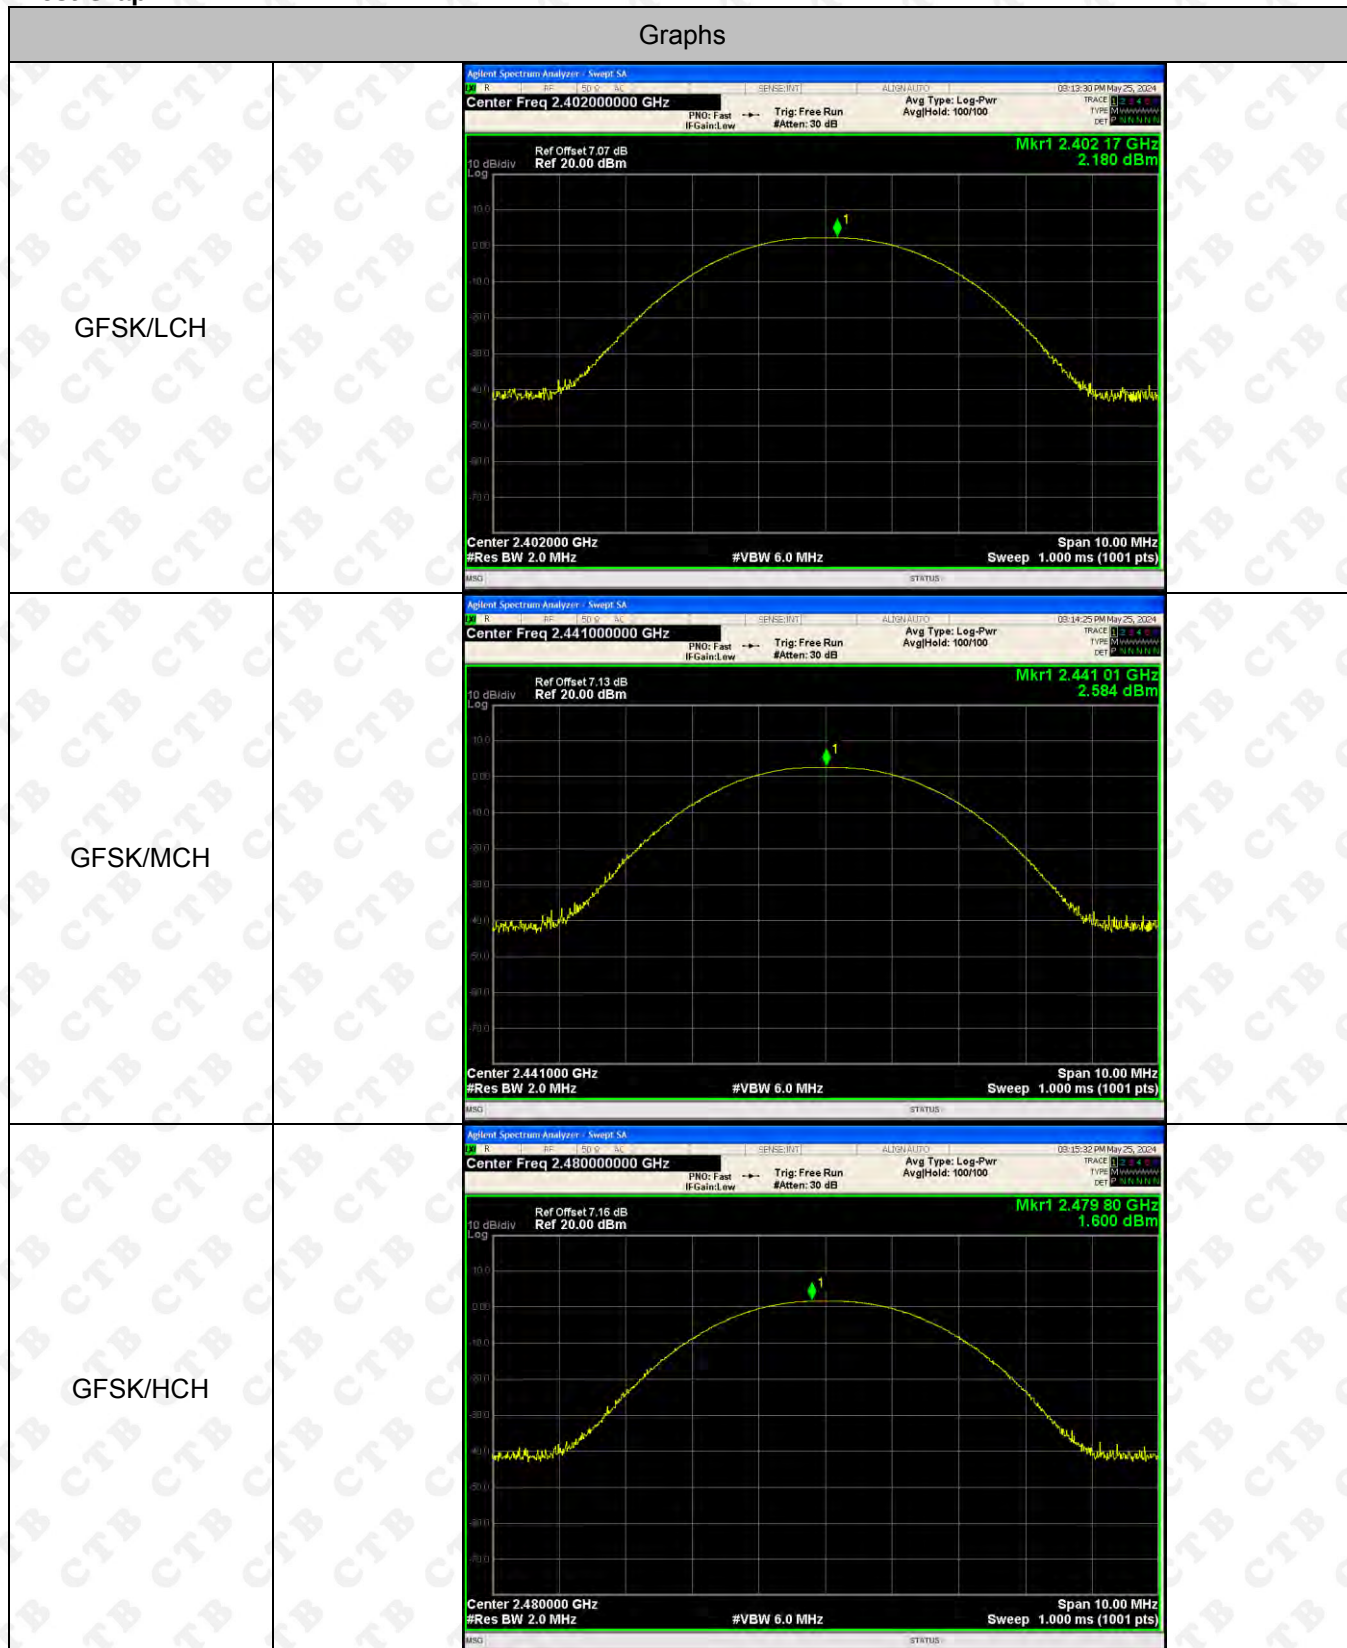


$\pi/4$ DQPSK/LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 06 GHz 2.958 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.441 07 GHz 3.278 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 87 GHz 2.311 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 7.07 dB Ref: 20.00 dBm Mkr1 2.40190 GHz 3.273 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 7.13 dB Ref: 20.00 dBm Mkr1 2.44099 GHz 3.613 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 7.16 dB Ref: 20.00 dBm Mkr1 2.48000 GHz 2.659 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

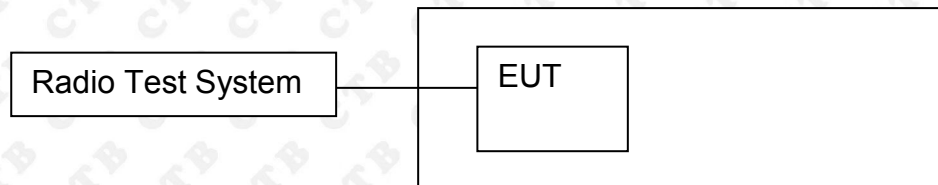

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.844	PASS
	Mid channel	0.853	PASS
	High channel	0.916	PASS
$\pi/4$ DQPSK	Low channel	1.283	PASS
	Mid channel	1.336	PASS
	High channel	1.336	PASS
8DPSK	Low channel	1.291	PASS
	Mid channel	1.291	PASS
	High channel	1.305	PASS

Right ear:


Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.907	PASS
	Mid channel	0.928	PASS
	High channel	0.863	PASS
$\pi/4$ DQPSK	Low channel	1.31	PASS
	Mid channel	1.329	PASS
	High channel	1.311	PASS
8DPSK	Low channel	1.291	PASS
	Mid channel	1.294	PASS
	High channel	1.297	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Left ear:

Test Graph:


GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

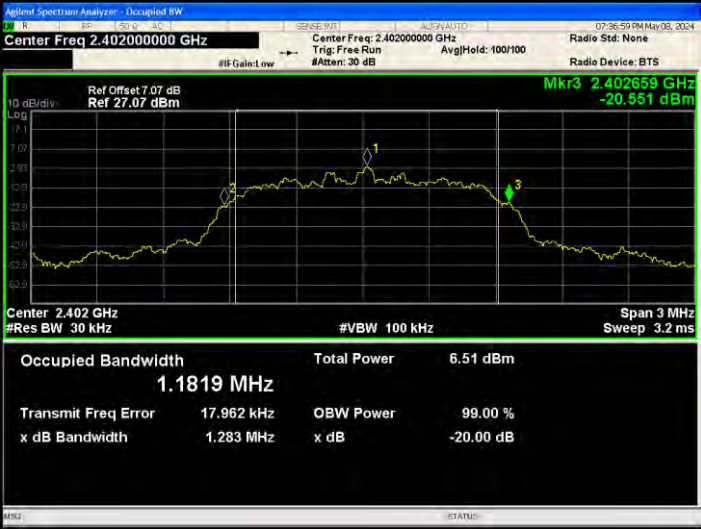$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Occupied Bandwidth: 1.1819 MHz Total Power: 6.51 dBm Transmit Freq Error: 17.962 kHz OBW Power: 99.00 % x dB Bandwidth: 1.283 MHz x dB: -20.00 dB
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 7.13 dB Ref: 27.13 dBm Occupied Bandwidth: 1.2031 MHz Total Power: 5.76 dBm Transmit Freq Error: 20.316 kHz OBW Power: 99.00 % x dB Bandwidth: 1.336 MHz x dB: -20.00 dB
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 7.16 dB Ref: 27.16 dBm Occupied Bandwidth: 1.2050 MHz Total Power: 5.43 dBm Transmit Freq Error: 26.658 kHz OBW Power: 99.00 % x dB Bandwidth: 1.336 MHz x dB: -20.00 dB

8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

Right ear:
Test Graph:


GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

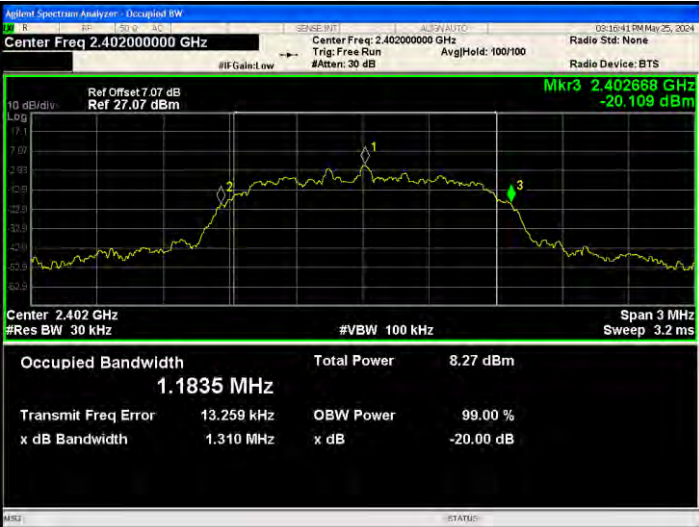$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 7.07 dB Ref: 27.07 dBm Occupied Bandwidth: 1.1835 MHz Total Power: 8.27 dBm Transmit Freq Error: 13.259 kHz x dB Bandwidth: 1.310 MHz OBW Power: 99.00 % x dB: -20.00 dB
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 7.13 dB Ref: 27.13 dBm Occupied Bandwidth: 1.1953 MHz Total Power: 8.34 dBm Transmit Freq Error: 17.699 kHz x dB Bandwidth: 1.329 MHz OBW Power: 99.00 % x dB: -20.00 dB
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 7.16 dB Ref: 27.16 dBm Occupied Bandwidth: 1.1871 MHz Total Power: 7.54 dBm Transmit Freq Error: 15.224 kHz x dB Bandwidth: 1.311 MHz OBW Power: 99.00 % x dB: -20.00 dB

8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

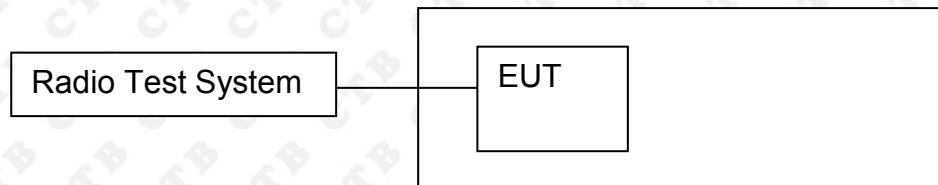

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

11.4 Test Result

Left ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.563	PASS
GFSK	MCH	1.004	0.569	PASS
GFSK	HCH	1.006	0.611	PASS
$\pi/4$ DQPSK	LCH	1.002	0.855	PASS
$\pi/4$ DQPSK	MCH	0.996	0.891	PASS
$\pi/4$ DQPSK	HCH	1.002	0.891	PASS
8DPSK	LCH	1.000	0.861	PASS
8DPSK	MCH	1.000	0.861	PASS
8DPSK	HCH	1.000	0.870	PASS

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.992	0.605	PASS
GFSK	MCH	1.002	0.619	PASS
GFSK	HCH	1.002	0.575	PASS
$\pi/4$ DQPSK	LCH	0.998	0.873	PASS
$\pi/4$ DQPSK	MCH	1.002	0.886	PASS
$\pi/4$ DQPSK	HCH	1.004	0.874	PASS
8DPSK	LCH	0.998	0.861	PASS
8DPSK	MCH	1.006	0.863	PASS
8DPSK	HCH	0.998	0.865	PASS

Left ear:
Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH



$\pi/4$ DQPSK/LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>Δf</th><th>ΔP</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.002 MHz</td><td>(Δ)</td><td>0.777 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 018 GHz</td><td></td><td>-2.339 dBm</td><td></td></tr></table>	MNR	MODE	TRF	SOL	Δf	ΔP	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)	0.777 dB		2	F	1	f		2.402 018 GHz		-2.339 dBm		
MNR	MODE	TRF	SOL	Δf	ΔP	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)	0.777 dB																						
2	F	1	f		2.402 018 GHz		-2.339 dBm																						
$\pi/4$ DQPSK/MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>Δf</th><th>ΔP</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>996 kHz</td><td>(Δ)</td><td>-0.607 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.441 018 GHz</td><td></td><td>-1.991 dBm</td><td></td></tr></table>	MNR	MODE	TRF	SOL	Δf	ΔP	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	996 kHz	(Δ)	-0.607 dB		2	F	1	f		2.441 018 GHz		-1.991 dBm		
MNR	MODE	TRF	SOL	Δf	ΔP	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	996 kHz	(Δ)	-0.607 dB																						
2	F	1	f		2.441 018 GHz		-1.991 dBm																						
$\pi/4$ DQPSK/HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SOL</th><th>Δf</th><th>ΔP</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.002 MHz</td><td>(Δ)</td><td>-0.551 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.479 016 GHz</td><td></td><td>-2.230 dBm</td><td></td></tr></table>	MNR	MODE	TRF	SOL	Δf	ΔP	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)	-0.551 dB		2	F	1	f		2.479 016 GHz		-2.230 dBm		
MNR	MODE	TRF	SOL	Δf	ΔP	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)	-0.551 dB																						
2	F	1	f		2.479 016 GHz		-2.230 dBm																						

8DPSK/LCH



8DPSK /MCH



8DPSK /HCH



Right ear:
Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH



$\pi/4$ DQPSK/LCH


 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH



8DPSK/LCH



8DPSK /MCH

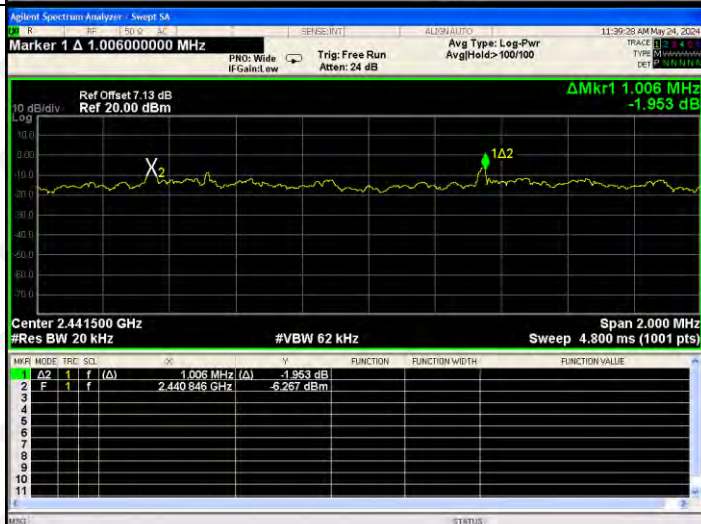


8DPSK /HCH

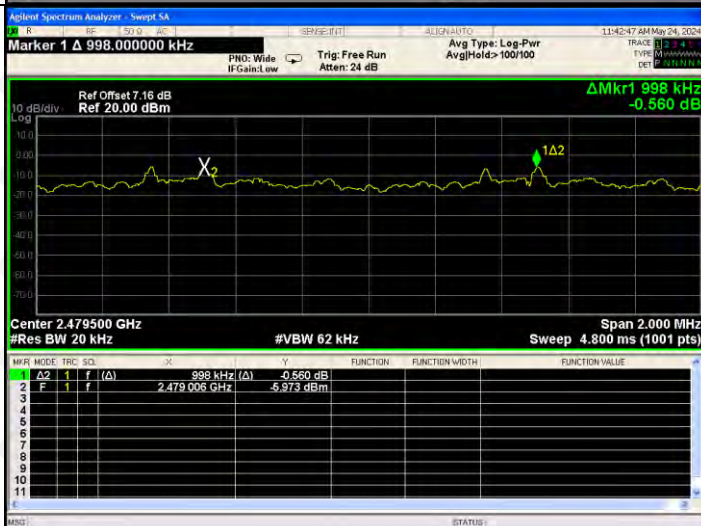

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

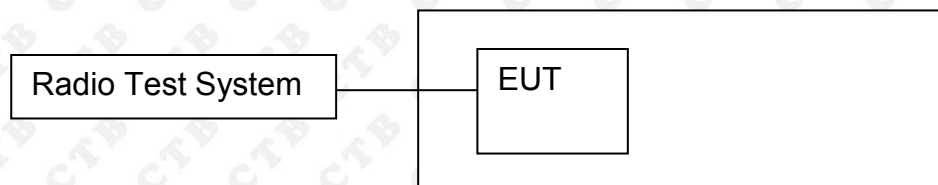

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Left ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Right ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Left ear:
Test Graph

Graphs


GFSK/Hop

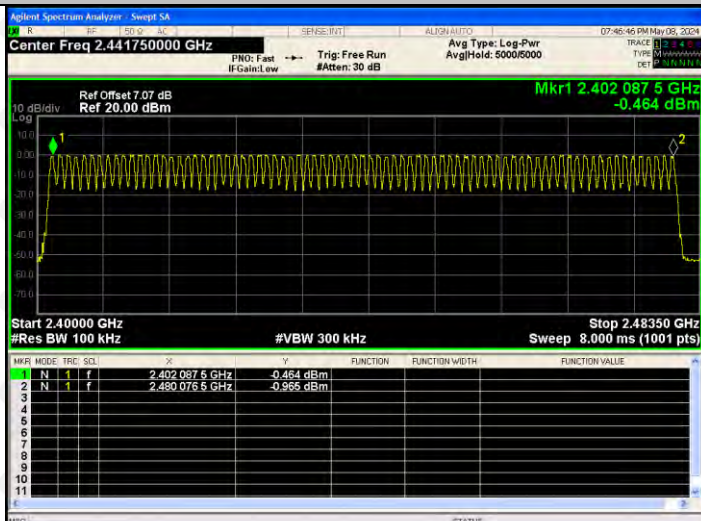

$\pi/4$ DQPSK/Hop

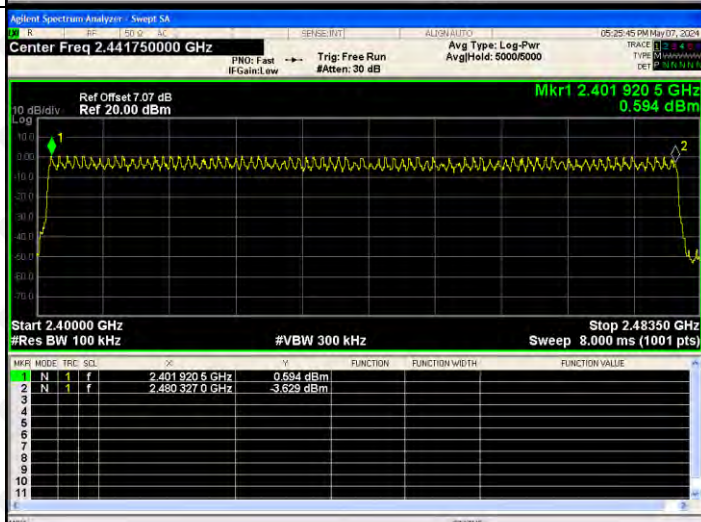


8DPSK/Hop

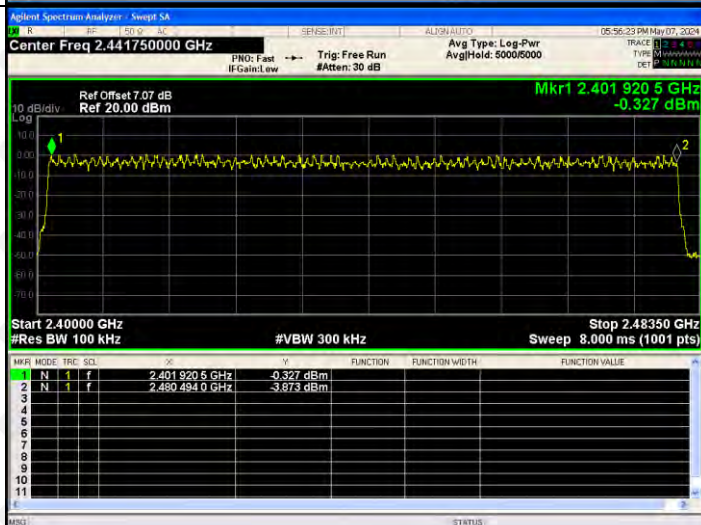


Right ear:
Test Graph

Graphs


GFSK/Hop

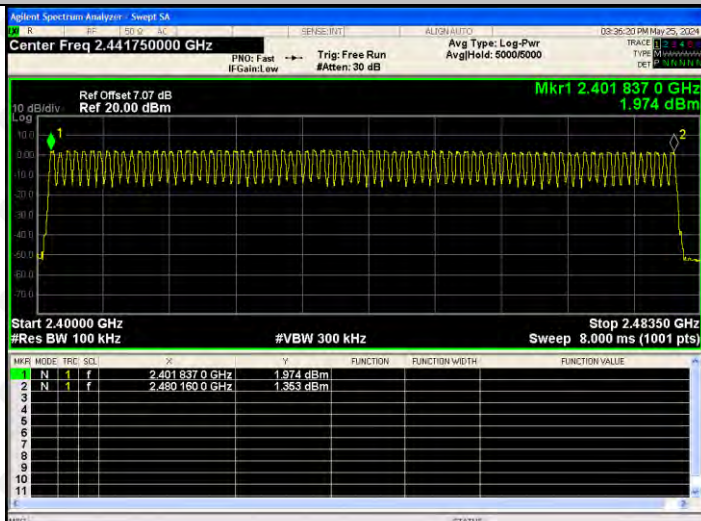

$\pi/4$ DQPSK/Hop

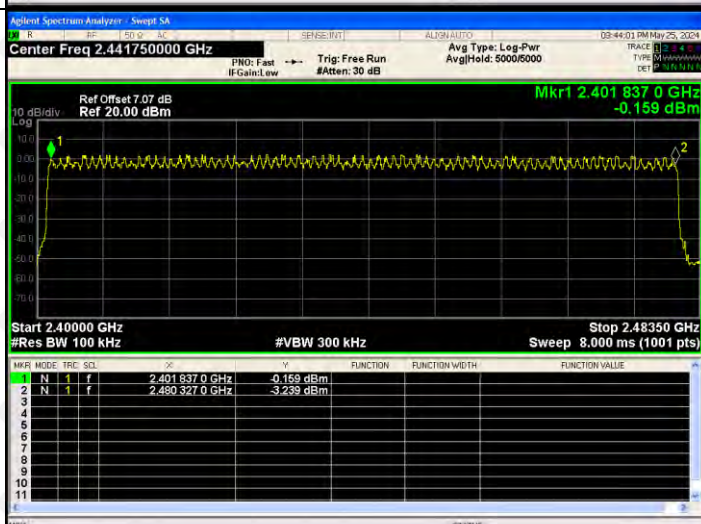


8DPSK/Hop

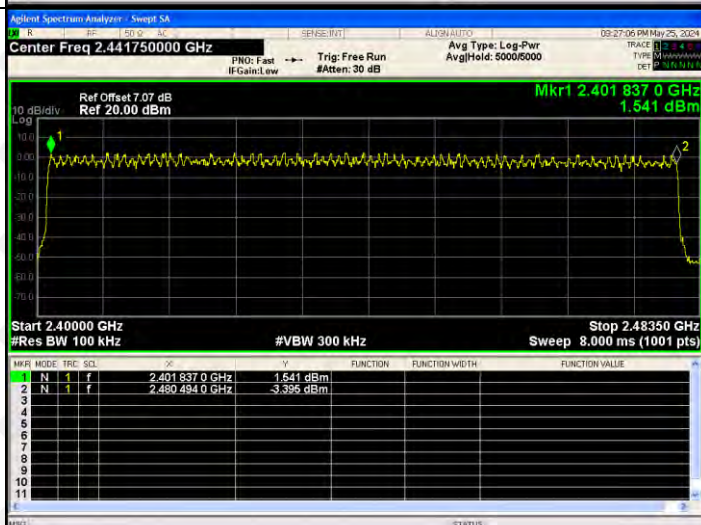

13. DWELL TIME

13.1 Block Diagram Of Test Setup

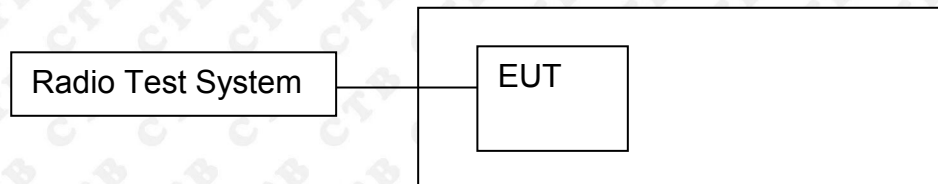

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Left ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.638	262.08	400	PASS
	DH3	MCH	1.638	262.08	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.887	307.947	400	PASS
	DH5	MCH	2.887	307.947	400	PASS
	DH5	HCH	2.888	308.053	400	PASS

Right ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.384	122.88	400	PASS
	DH1	HCH	0.384	122.88	400	PASS
	DH3	LCH	1.645	263.2	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.645	263.2	400	PASS
	DH5	LCH	2.895	308.8	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Left ear:
Test Graph

Graphs


GFSK_DH1/LCH

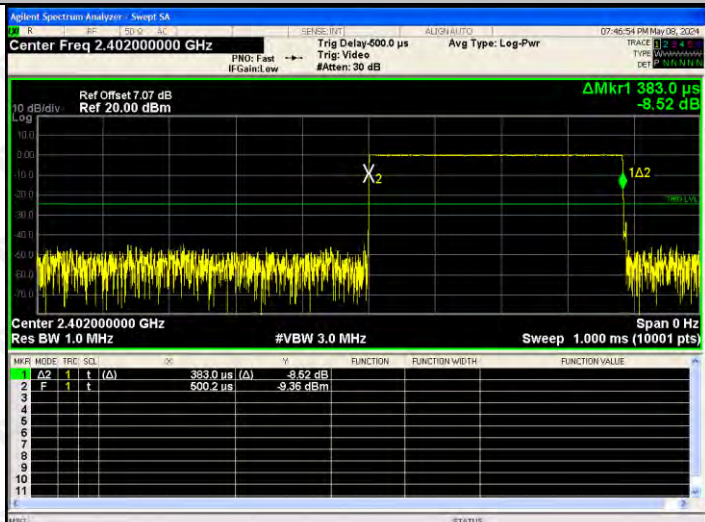


GFSK_DH1/MCH

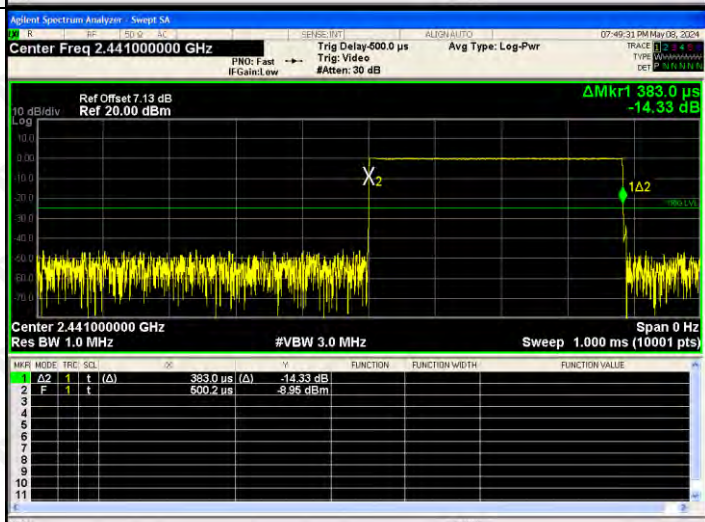


GFSK_DH1/HCH

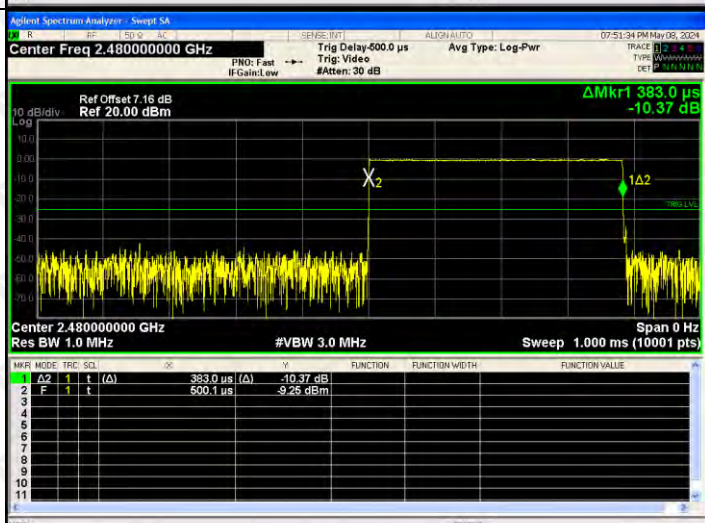


GFSK_DH3/LCH

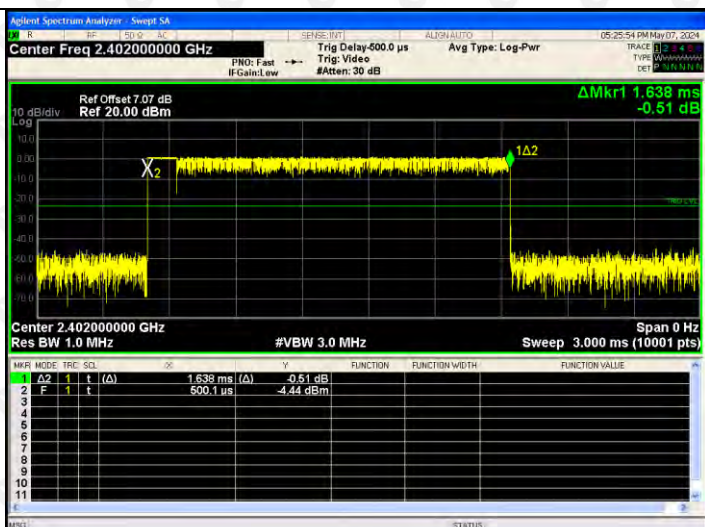


GFSK_DH3/MCH

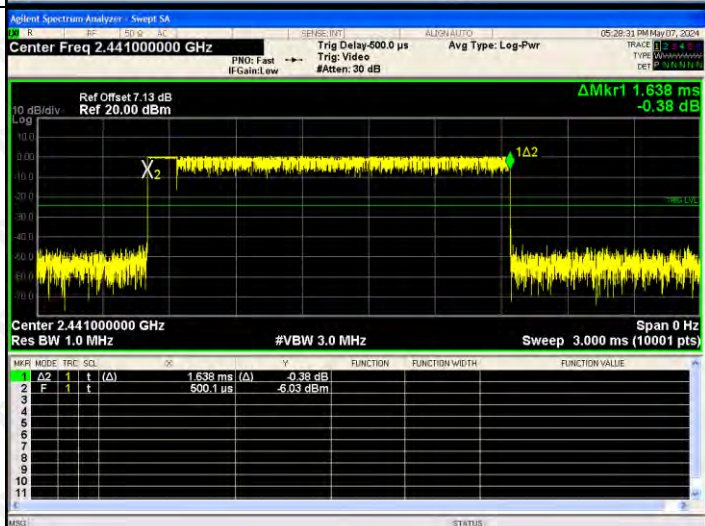


GFSK_DH3/HCH

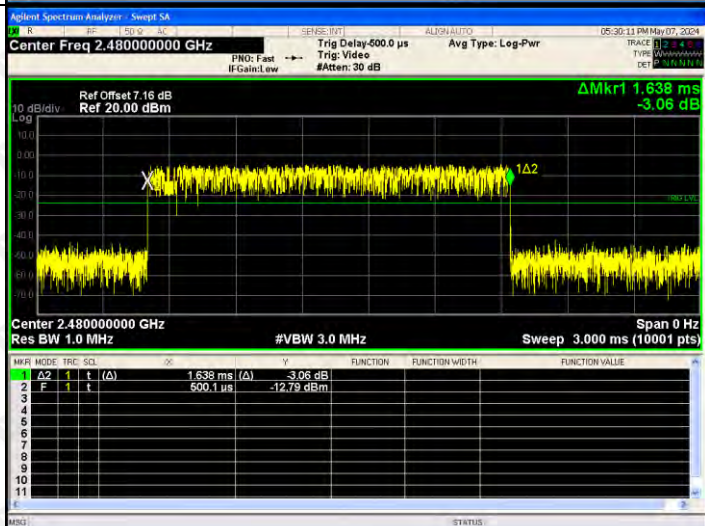


GFSK_DH5/LCH

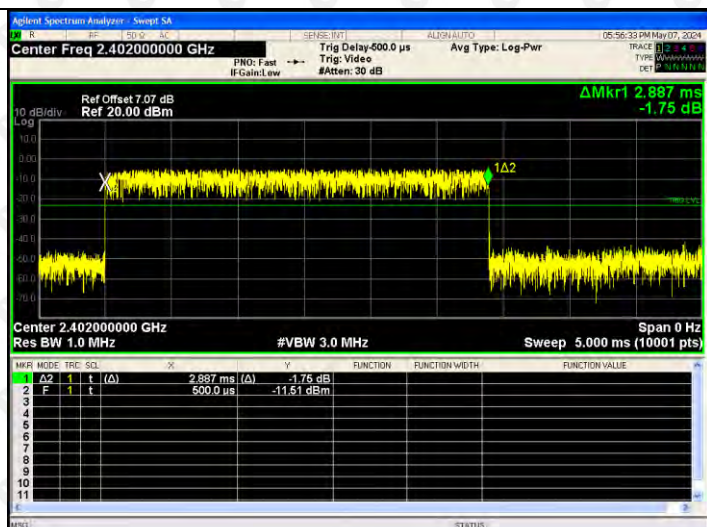


GFSK_DH5/MCH

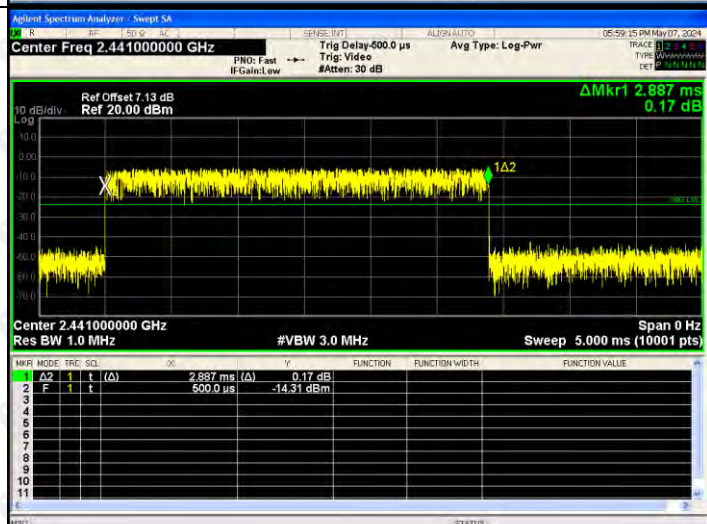

GFSK_DH5/HCH

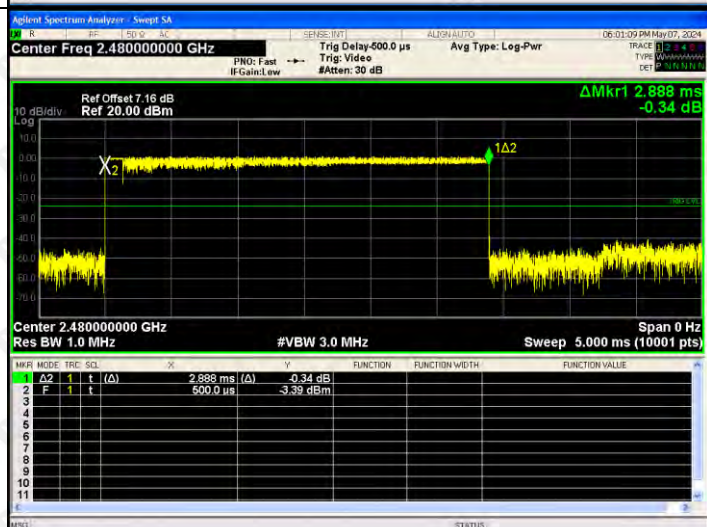


Right ear:
Test Graph

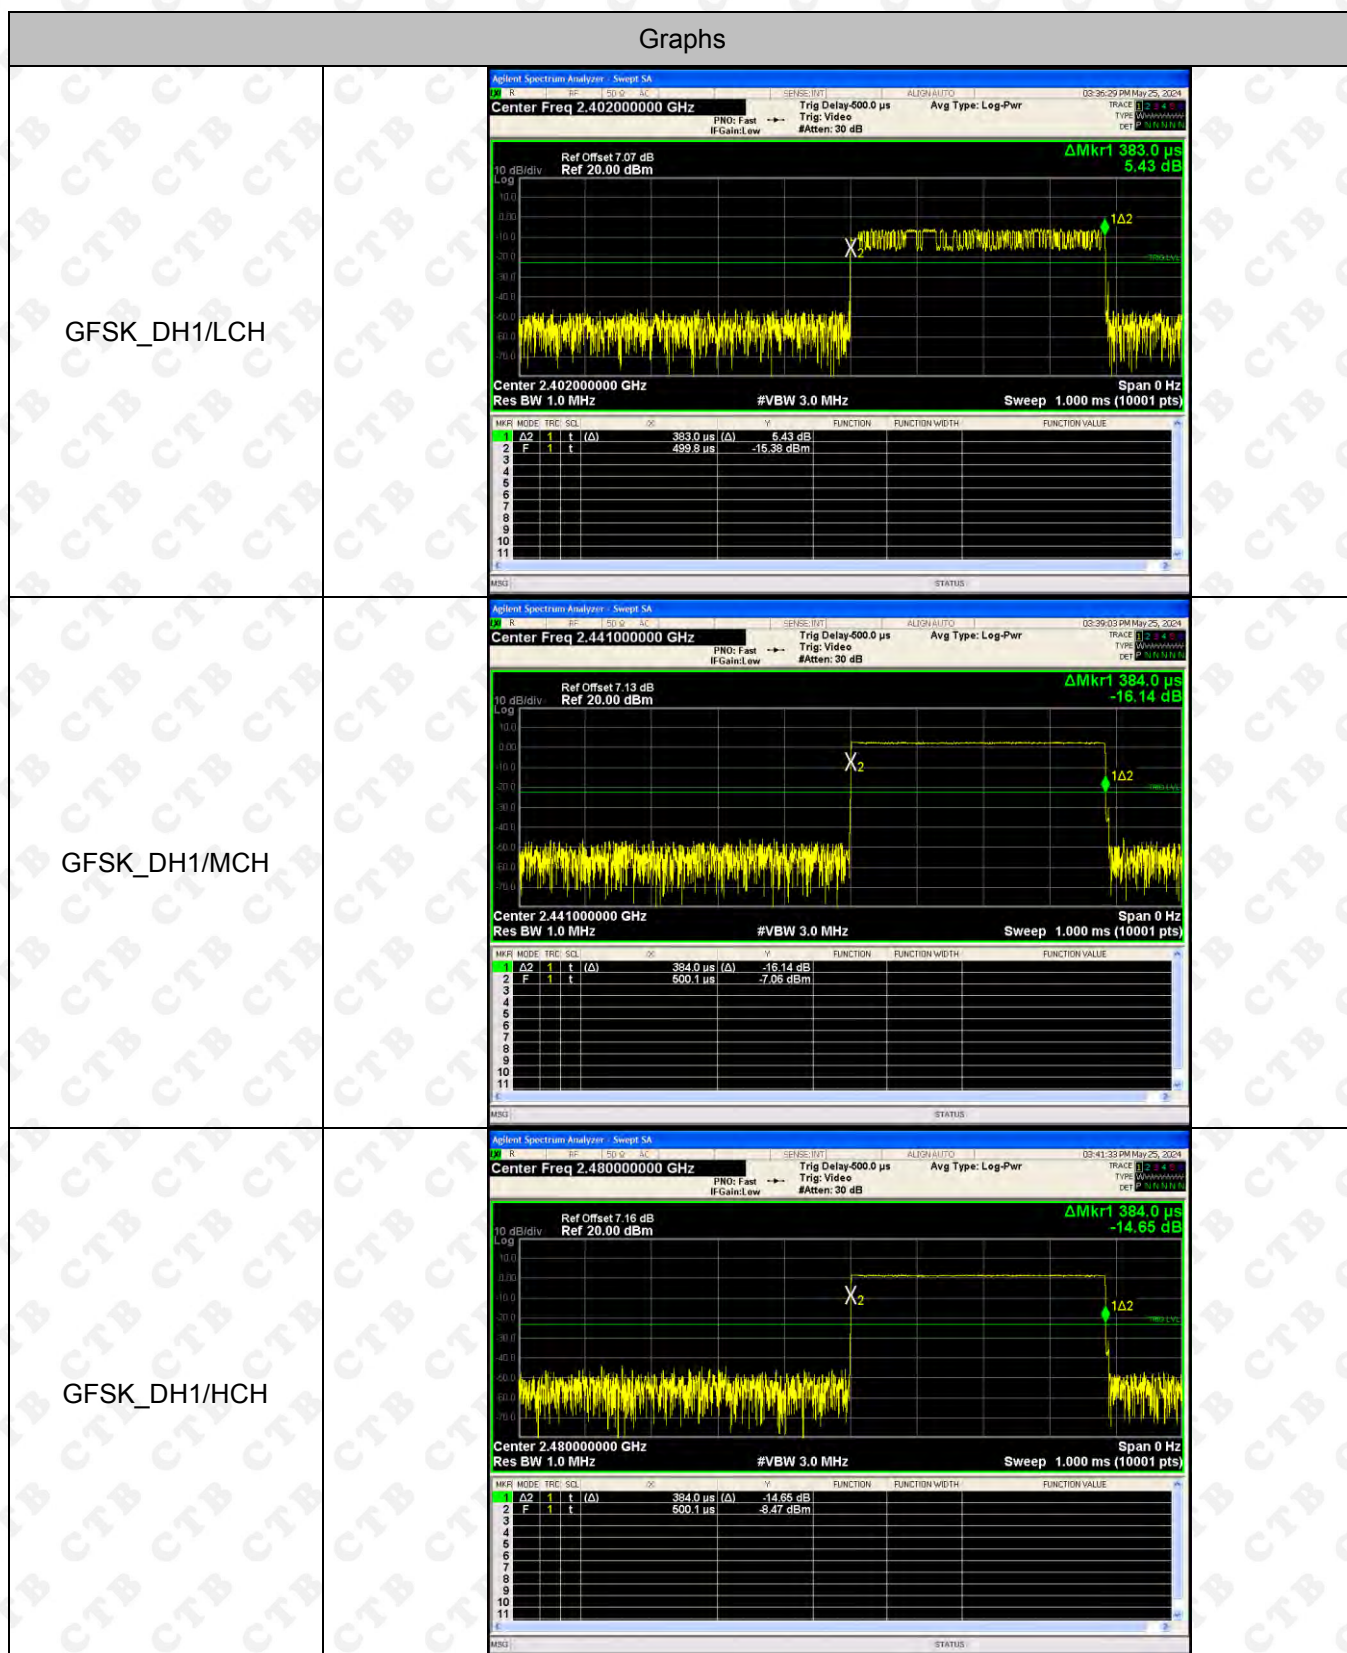


GFSK_DH3/LCH




GFSK_DH3/MCH

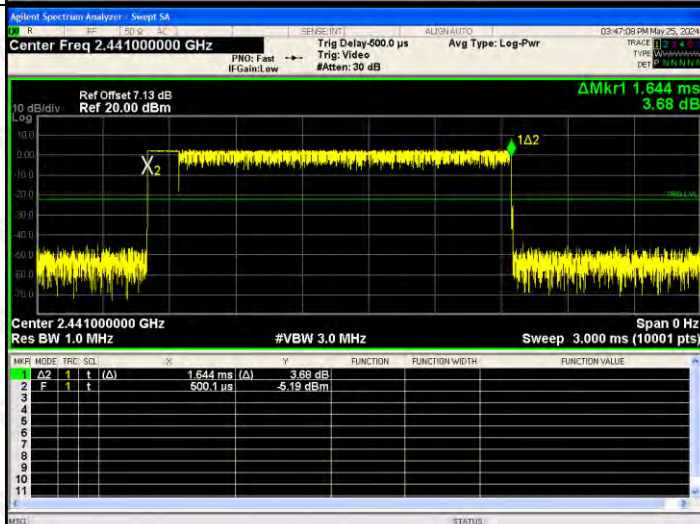


GFSK_DH3/HCH

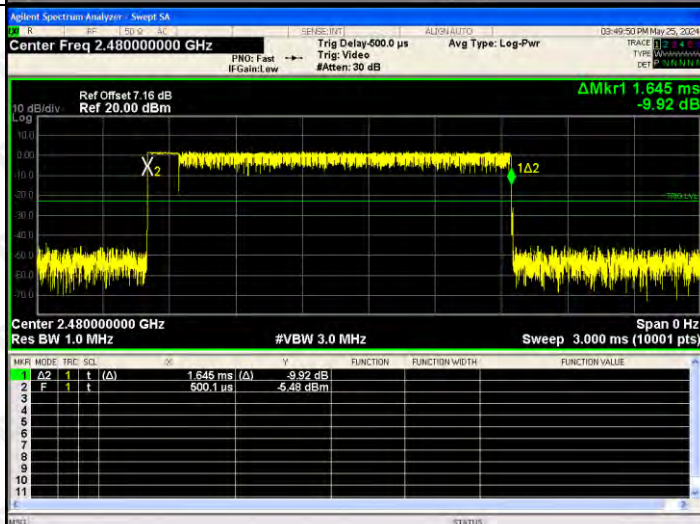


GFSK_DH5/LCH

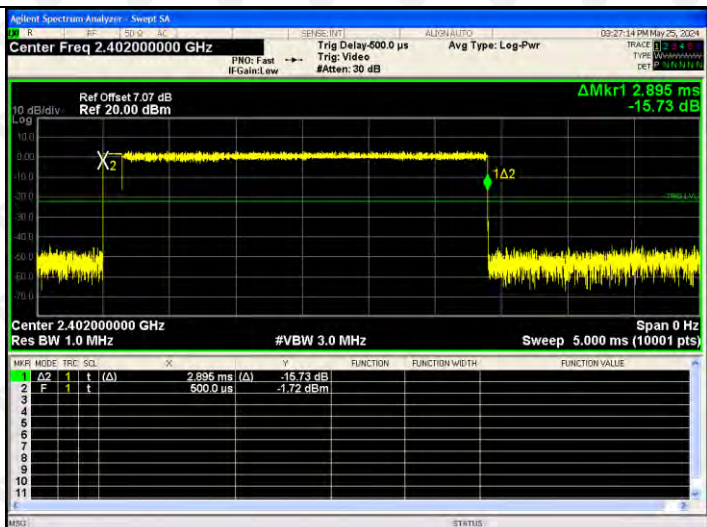

GFSK_DH5/MCH

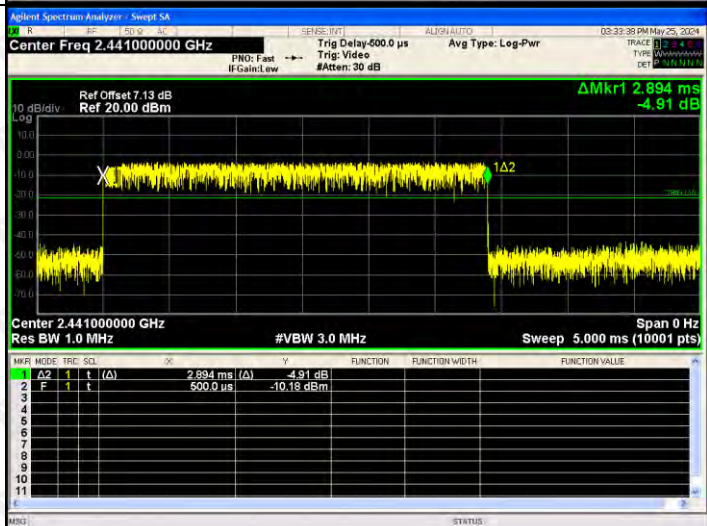

GFSK_DH5/HCH

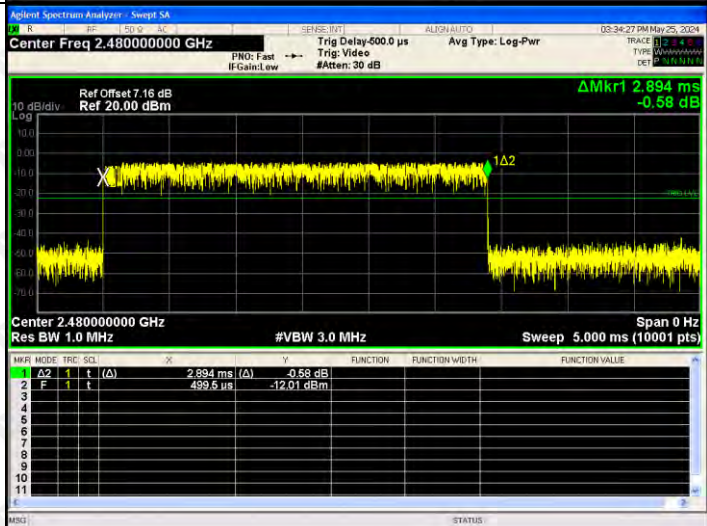

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

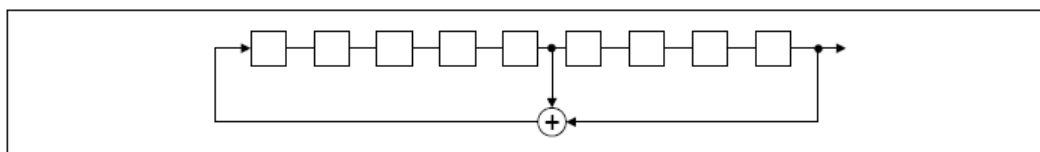

An example of Pseudorandom Frequency Hopping Sequence as follow:

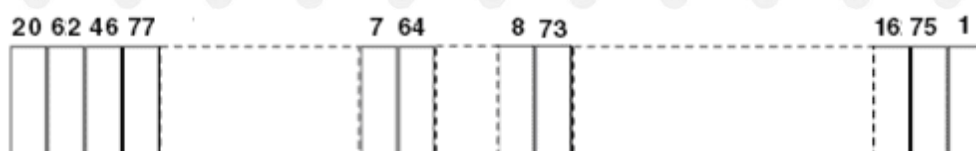

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Chip antenna. The best case gain of the antenna is 3dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

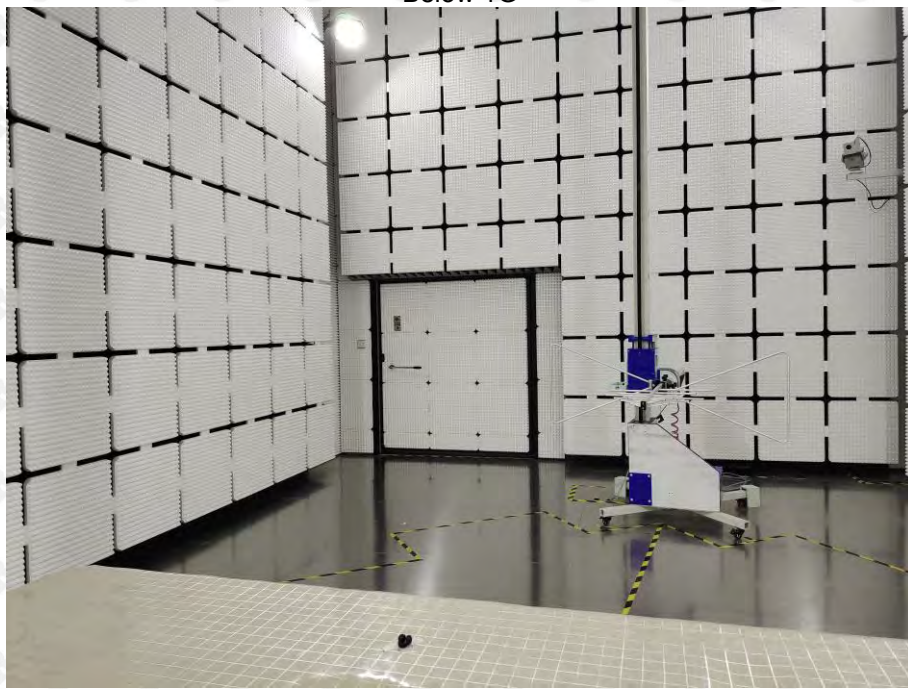

Above 1G

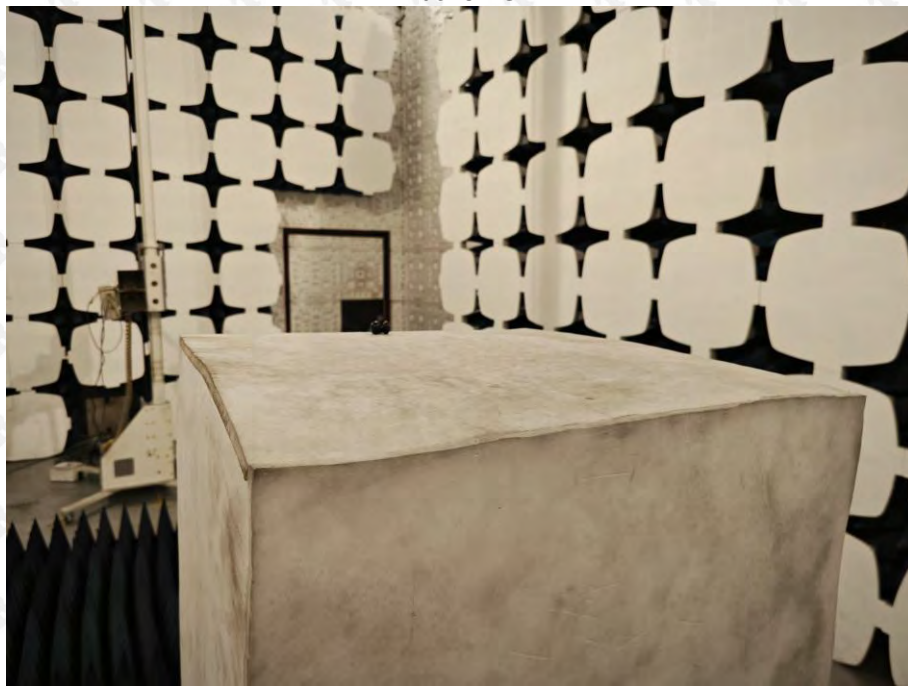

Conducted emissions



***** END OF REPORT *****