

TEST REPORT

Product Name: Car Connectivity Box
FCC ID: 2BHNQ-U1
Trademark: N/A
Model Number: U1, T1, U2, T2+, TC2, U3, U4, U5, U6, U7, U8, U9
Prepared For: Guangdong Junyong Technology Co., Ltd.
Address: Slot 23B, 7th Floor, Zhixian Building, No.3 Longjing South Road, Shiqi District, Zhongshan City
Manufacturer: Guangdong Junyong Technology Co., Ltd.
Address: Slot 23B, 7th Floor, Zhixian Building, No.3 Longjing South Road, Shiqi District, Zhongshan City
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jul. 08, 2024
Sample tested Date: Jul. 08, 2024 to Jul. 24, 2024
Issue Date: Jul. 24, 2024
Report No.: CTB240724045RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test procedure	35
8.4 Test Result	36
9. CONDUCTED OUTPUT POWER	48
9.1 Block Diagram Of Test Setup	48
9.2 Limit	48
9.3 Test procedure	48
9.4 Test Result	48
10. 6DB OCCUPIED BANDWIDTH	49
10.1 Block Diagram Of Test Setup	49
10.2 Limit	49
10.3 Test procedure	49
10.4 Test Result	49
11. POWER SPECTRAL DENSITY	57
11.1 Block Diagram Of Test Setup	57
11.2 Limit	57



11.3 Test procedure 57
11.4 Test Result 57
12. ANTENNA REQUIREMENT 64
13. EUT TEST SETUP PHOTOGRAPHS 65

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240724045RFX	Jul. 24, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): U1, T1, U2, T2+, TC2, U3, U4, U5, U6, U7, U8, U9

Model Description: All the model are the same circuit and RF module, only the name and appearance are different. Test sample model: U1

Wi-Fi Specification: IEEE 802.11b/g/n

Hardware Version: A18 V05

Software Version: V1.0

Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel

Max. RF output power: WiFi (2.4G): 16.801dBm

Type of Modulation: WiFi: DSSS, OFDM

Antenna installation: WiFi: PCB antenna

Antenna Gain: WiFi (2.4G): ANT1: 2.28dBi
ANT2: 0.72dBi

Ratings: DC 5V charging from adapter

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Laptop	DELL	Vostro 5490	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	5V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28


Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_ 7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-N MS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-N MS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-S MS-20	/	/	2025/6/28



12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

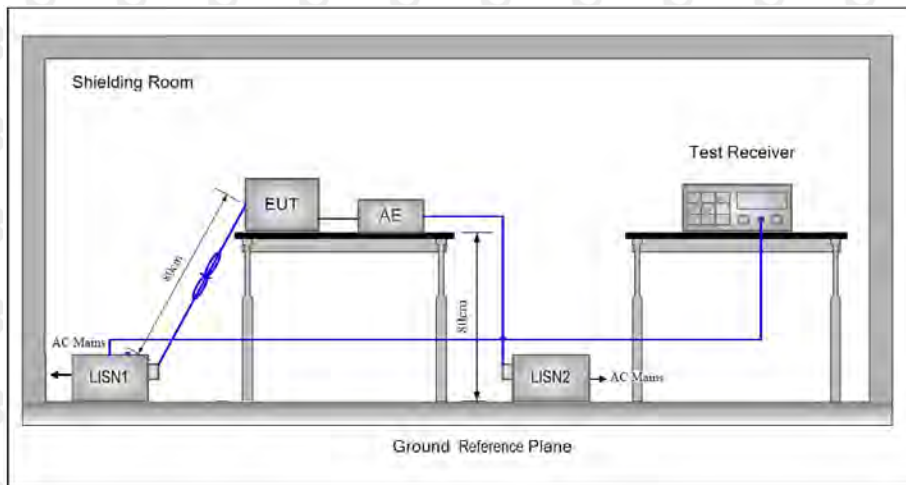

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

6.4 Test Result

Test Specification: Line
 AC 120V 60Hz
 the worst: 802.11b (low channel)

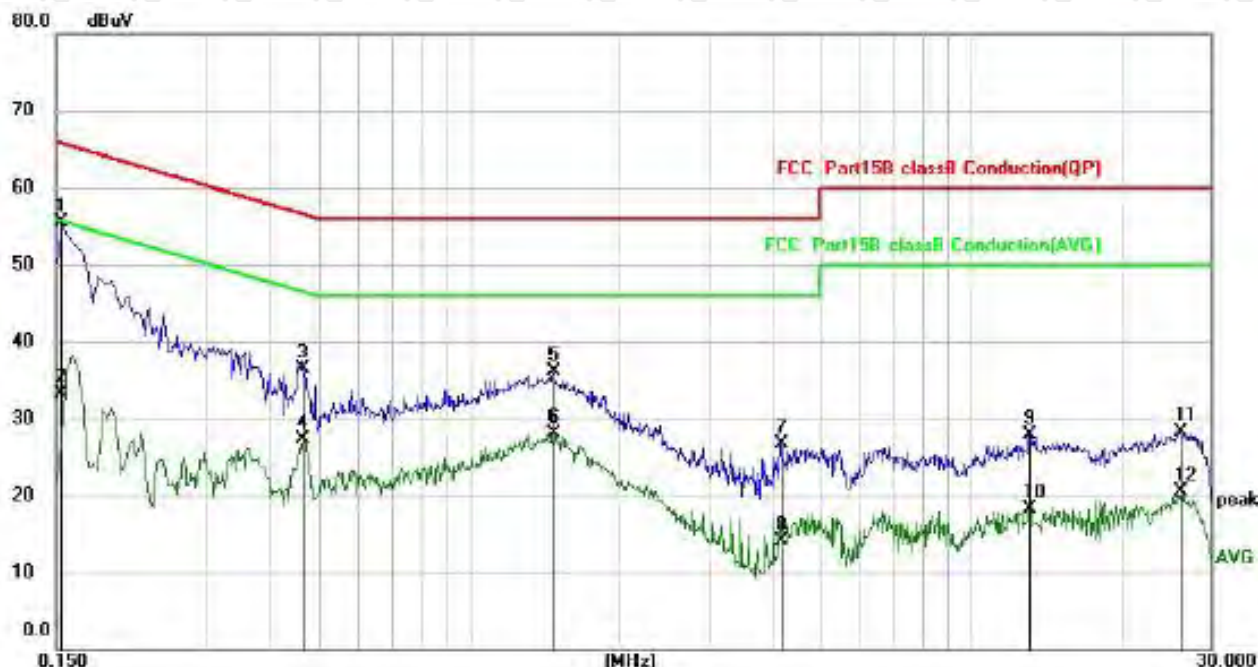


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	45.56	9.95	55.51	65.79	-10.28	QP
2		0.1539	23.32	9.95	33.27	55.79	-22.52	AVG
3		0.4661	26.58	9.99	36.57	56.58	-20.01	QP
4		0.4661	17.25	9.99	27.24	46.58	-19.34	AVG
5		1.4700	26.04	10.05	36.09	56.00	-19.91	QP
6		1.4700	18.12	10.05	28.17	46.00	-17.83	AVG
7		4.1779	16.47	10.30	26.77	56.00	-29.23	QP
8		4.1779	3.82	10.30	14.12	46.00	-31.88	AVG
9		13.0059	17.31	10.67	27.98	60.00	-32.02	QP
10		13.0059	7.56	10.67	18.23	50.00	-31.77	AVG
11		26.0019	17.18	11.10	28.28	60.00	-31.72	QP
12		26.0019	9.36	11.10	20.46	50.00	-29.54	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
 AC 120V 60Hz
 the worst: 802.11b (low channel)

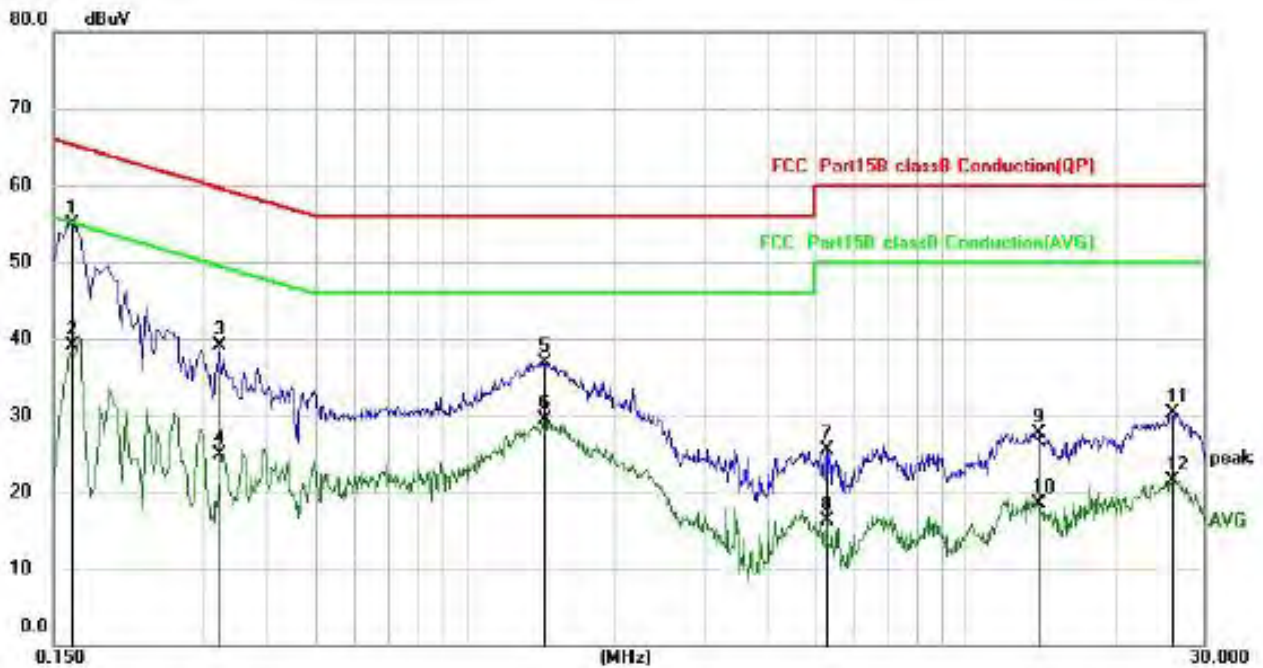

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	*	0.1640	44.87	9.95	54.82	65.26	-10.44	QP
2		0.1640	29.10	9.95	39.05	55.26	-16.21	AVG
3		0.3220	29.09	9.97	39.06	59.66	-20.60	QP
4		0.3220	14.84	9.97	24.81	49.66	-24.85	AVG
5		1.4379	26.84	10.04	36.88	56.00	-19.12	QP
6		1.4379	19.44	10.04	29.48	46.00	-16.52	AVG
7		5.2900	15.12	10.40	25.52	60.00	-34.48	QP
8		5.2900	5.85	10.40	16.25	50.00	-33.75	AVG
9		13.9219	17.09	10.70	27.79	60.00	-32.21	QP
10		13.9219	7.87	10.70	18.57	50.00	-31.43	AVG
11		25.9579	19.30	11.09	30.39	60.00	-29.61	QP
12		25.9579	10.51	11.09	21.60	50.00	-28.40	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

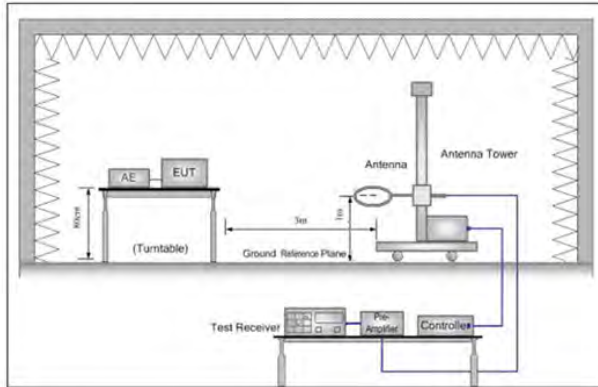


Figure 1. Below 30MHz

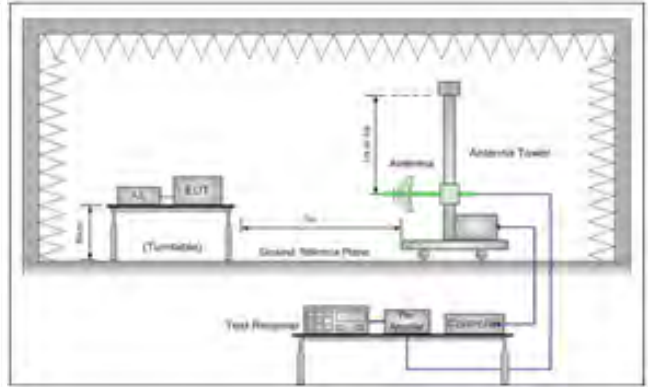


Figure 2. 30MHz to 1GHz

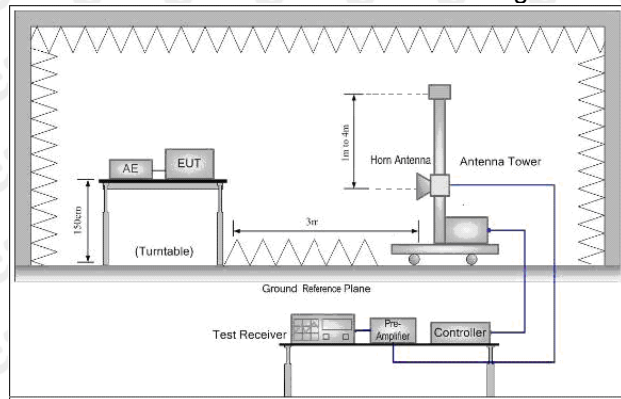


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

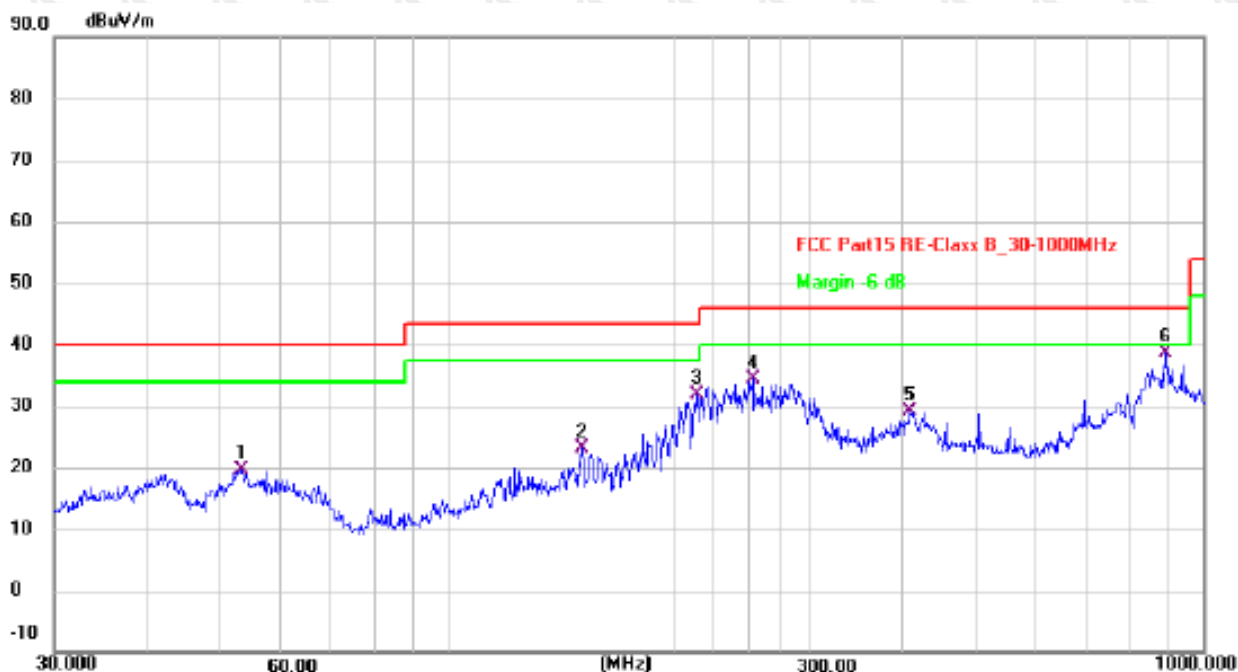

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.1313	34.87	-15.33	19.54	40.00	-20.46	QP
2	150.0107	35.63	-12.54	23.09	43.50	-20.41	QP
3	213.0150	48.06	-16.16	31.90	43.50	-11.60	QP
4	252.9481	49.79	-15.49	34.30	46.00	-11.70	QP
5	408.9460	40.39	-11.22	29.17	46.00	-16.83	QP
6 *	890.7277	37.53	1.16	38.69	46.00	-7.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

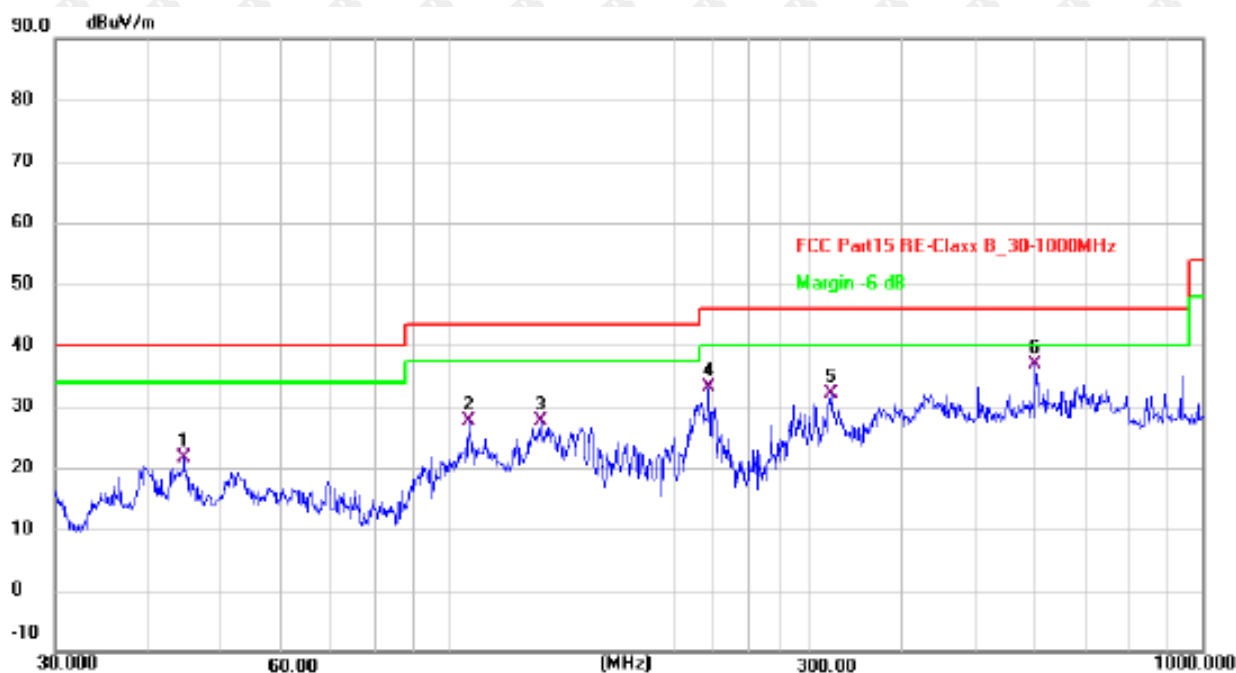

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.5867	35.97	-14.39	21.58	40.00	-18.42	QP
2	106.0126	44.60	-16.95	27.65	43.50	-15.85	QP
3	132.2204	42.02	-14.36	27.66	43.50	-15.84	QP
4	221.3920	49.24	-16.04	33.20	46.00	-12.80	QP
5	322.1884	44.68	-12.67	32.01	46.00	-13.99	QP
6 *	599.3211	42.23	-5.36	36.87	46.00	-9.13	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.69	-3.64	60.05	74	-13.95	peak
4824	50.94	-3.64	47.30	54	-6.70	AVG
7236	57.98	-0.95	57.03	74	-16.97	peak
7236	43.79	-0.95	42.84	54	-11.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.10	-3.64	62.46	74	-11.54	peak
4824	46.87	-3.64	43.23	54	-10.77	AVG
7236	56.54	-0.95	55.59	74	-18.41	peak
7236	45.52	-0.95	44.57	54	-9.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.11	-3.51	61.60	74	-12.40	peak
4874	49.24	-3.51	45.73	54	-8.27	AVG
7311	58.27	-0.82	57.45	74	-16.55	peak
7311	43.00	-0.82	42.18	54	-11.82	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.24	-3.51	61.73	74	-12.27	peak
4874	49.57	-3.51	46.06	54	-7.94	AVG
7311	60.48	-0.82	59.66	74	-14.34	peak
7311	42.66	-0.82	41.84	54	-12.16	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Correction Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detected Type
4924	63.79	-3.43	60.36	74	-13.64	peak
4924	46.22	-3.43	42.79	54	-11.21	AVG
7386	59.72	-0.75	58.97	74	-15.03	peak
7386	42.46	-0.75	41.71	54	-12.29	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Correction Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detected Type
4924	63.02	-3.43	59.59	74	-14.41	peak
4924	48.37	-3.43	44.94	54	-9.06	AVG
7386	58.86	-0.75	58.11	74	-15.89	peak
7386	43.05	-0.75	42.30	54	-11.70	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.59	-3.64	62.95	74	-11.05	peak
4824	50.42	-3.64	46.78	54	-7.22	AVG
7236	56.87	-0.95	55.92	74	-18.08	peak
7236	44.64	-0.95	43.69	54	-10.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.35	-3.64	62.71	74	-11.29	peak
4824	49.50	-3.64	45.86	54	-8.14	AVG
7236	56.15	-0.95	55.20	74	-18.80	peak
7236	45.77	-0.95	44.82	54	-9.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.33	-3.51	61.82	74	-12.18	peak
4874	47.97	-3.51	44.46	54	-9.54	AVG
7311	58.17	-0.82	57.35	74	-16.65	peak
7311	43.93	-0.82	43.11	54	-10.89	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	63.89	-3.51	60.38	74	-13.62	peak
4874	48.51	-3.51	45.00	54	-9.00	AVG
7311	58.44	-0.82	57.62	74	-16.38	peak
7311	43.72	-0.82	42.90	54	-11.10	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detected Type
4924	64.14	-3.43	60.71	74	-13.29	peak
4924	48.40	-3.43	44.97	54	-9.03	AVG
7386	59.80	-0.75	59.05	74	-14.95	peak
7386	44.29	-0.75	43.54	54	-10.46	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detected Type
4924	65.32	-3.43	61.89	74	-12.11	peak
4924	46.86	-3.43	43.43	54	-10.57	AVG
7386	56.35	-0.75	55.60	74	-18.40	peak
7386	42.06	-0.75	41.31	54	-12.69	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.26	-3.64	60.62	74	-13.38	peak
4824	50.68	-3.64	47.04	54	-6.96	AVG
7236	57.14	-0.95	56.19	74	-17.81	peak
7236	44.49	-0.95	43.54	54	-10.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.31	-3.64	62.67	74	-11.33	peak
4824	47.18	-3.64	43.54	54	-10.46	AVG
7236	57.08	-0.95	56.13	74	-17.87	peak
7236	45.21	-0.95	44.26	54	-9.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.29	-3.51	61.78	74	-12.22	peak
4874	48.09	-3.51	44.58	54	-9.42	AVG
7311	58.90	-0.82	58.08	74	-15.92	peak
7311	43.58	-0.82	42.76	54	-11.24	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	63.80	-3.51	60.29	74	-13.71	peak
4874	48.96	-3.51	45.45	54	-8.55	AVG
7311	59.87	-0.82	59.05	74	-14.95	peak
7311	42.94	-0.82	42.12	54	-11.88	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Correction Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detected Type
4924	64.32	-3.43	60.89	74	-13.11	peak
4924	45.88	-3.43	42.45	54	-11.55	AVG
7386	58.94	-0.75	58.19	74	-15.81	peak
7386	45.20	-0.75	44.45	54	-9.55	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Correction Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detected Type
4924	64.78	-3.43	61.35	74	-12.65	peak
4924	48.11	-3.43	44.68	54	-9.32	AVG
7386	59.17	-0.75	58.42	74	-15.58	peak
7386	41.43	-0.75	40.68	54	-13.32	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.96	-5.81	52.15	74	-21.85	peak
2390	/	-5.81	/	54	/	AVG
2399	64.52	-5.84	58.68	74	-15.32	peak
2399	49.91	-5.84	44.07	54	-9.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.74	-5.81	50.93	74	-23.07	peak
2390	/	-5.81	/	54	/	AVG
2399	61.91	-5.84	56.07	74	-17.93	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.10	-5.65	50.45	74	-23.55	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.19	-5.65	50.54	74	-23.46	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.02	-5.81	53.21	74	-20.79	peak
2390	/	-5.81	/	54	/	AVG
2399	61.53	-5.84	55.69	74	-18.31	peak
2399	45.79	-5.84	39.95	54	-14.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.72	-5.81	50.91	74	-23.09	peak
2390	/	-5.81	/	54	/	AVG
2399	61.78	-5.84	55.94	74	-18.06	peak
2399	46.58	-5.84	40.74	54	-13.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.85	-5.65	51.20	74	-22.80	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.16	-5.65	51.51	74	-22.49	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.90	-5.81	51.09	74	-22.91	peak
2390	/	-5.81	/	54	/	AVG
2399	63.54	-5.84	57.70	74	-16.30	peak
2399	47.74	-5.84	41.90	54	-12.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.56	-5.81	50.75	74	-23.25	peak
2390	/	-5.81	/	54	/	AVG
2399	60.56	-5.84	54.72	74	-19.28	peak
2399	48.05	-5.84	42.21	54	-11.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.31	-5.65	50.66	74	-23.34	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.00	-5.65	50.35	74	-23.65	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

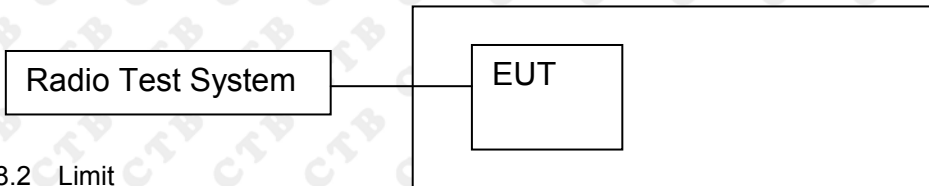

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Blow 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:

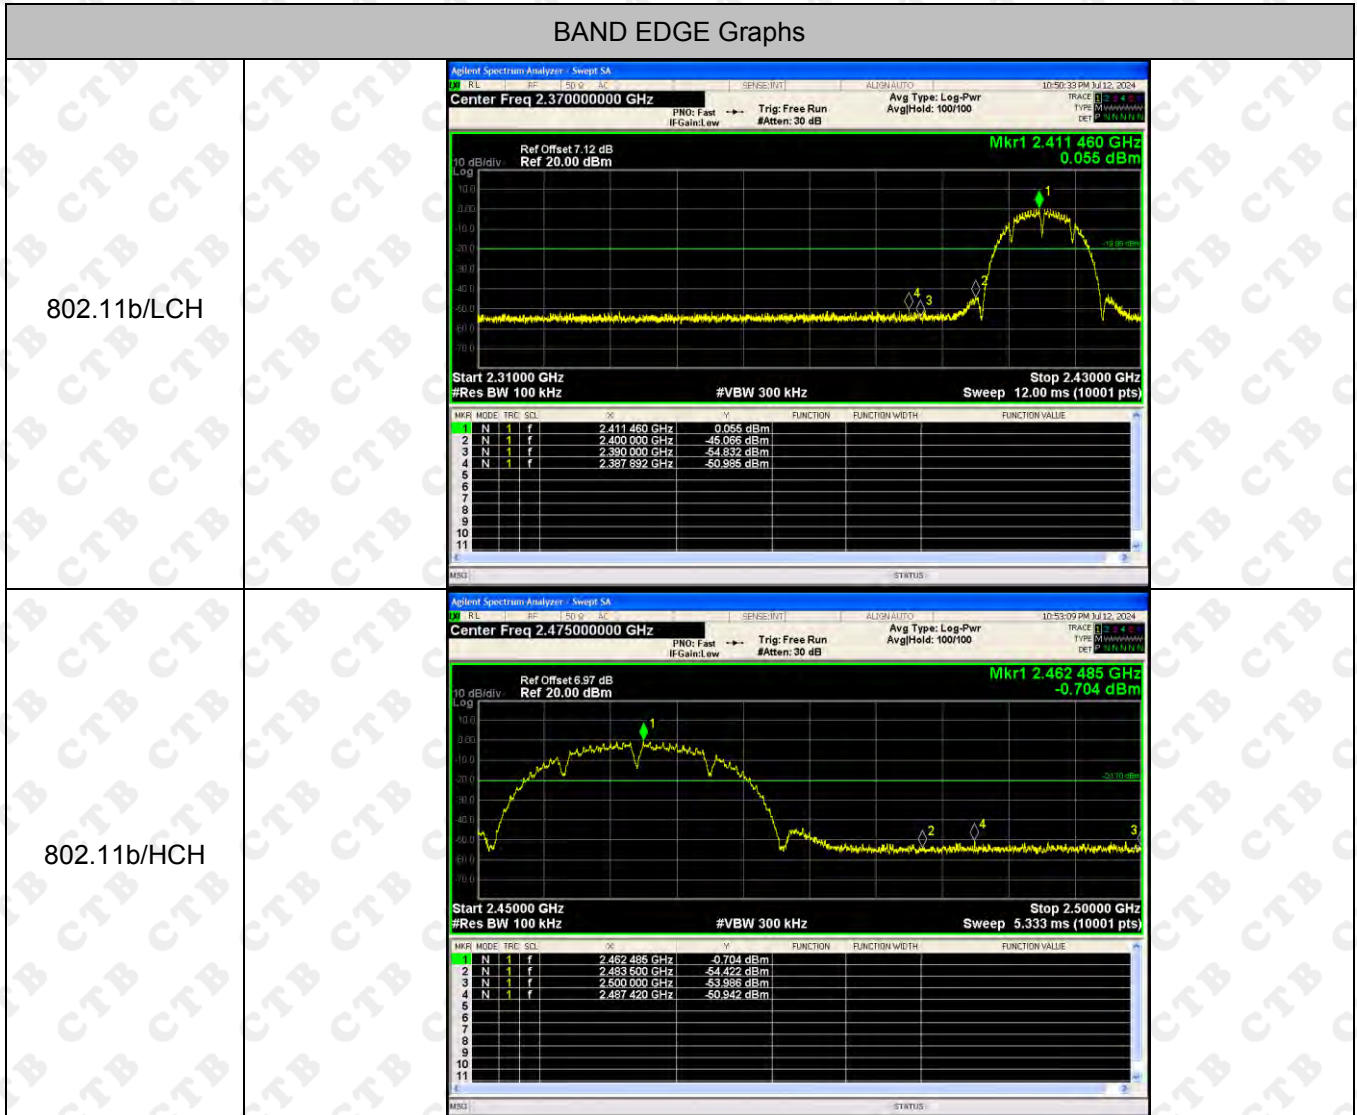



BAND EDGE Graphs

802.11g/LCH

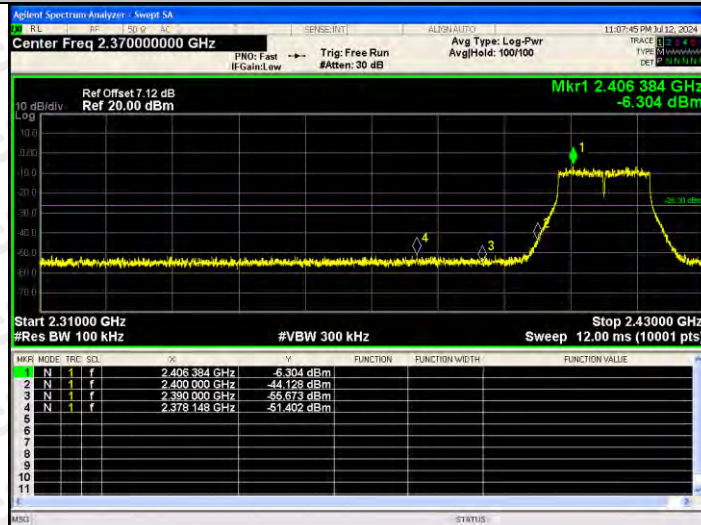

802.11g/HCH

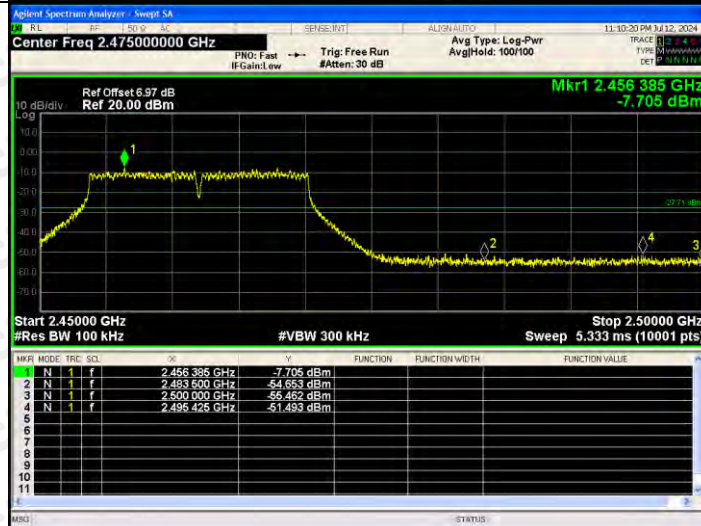

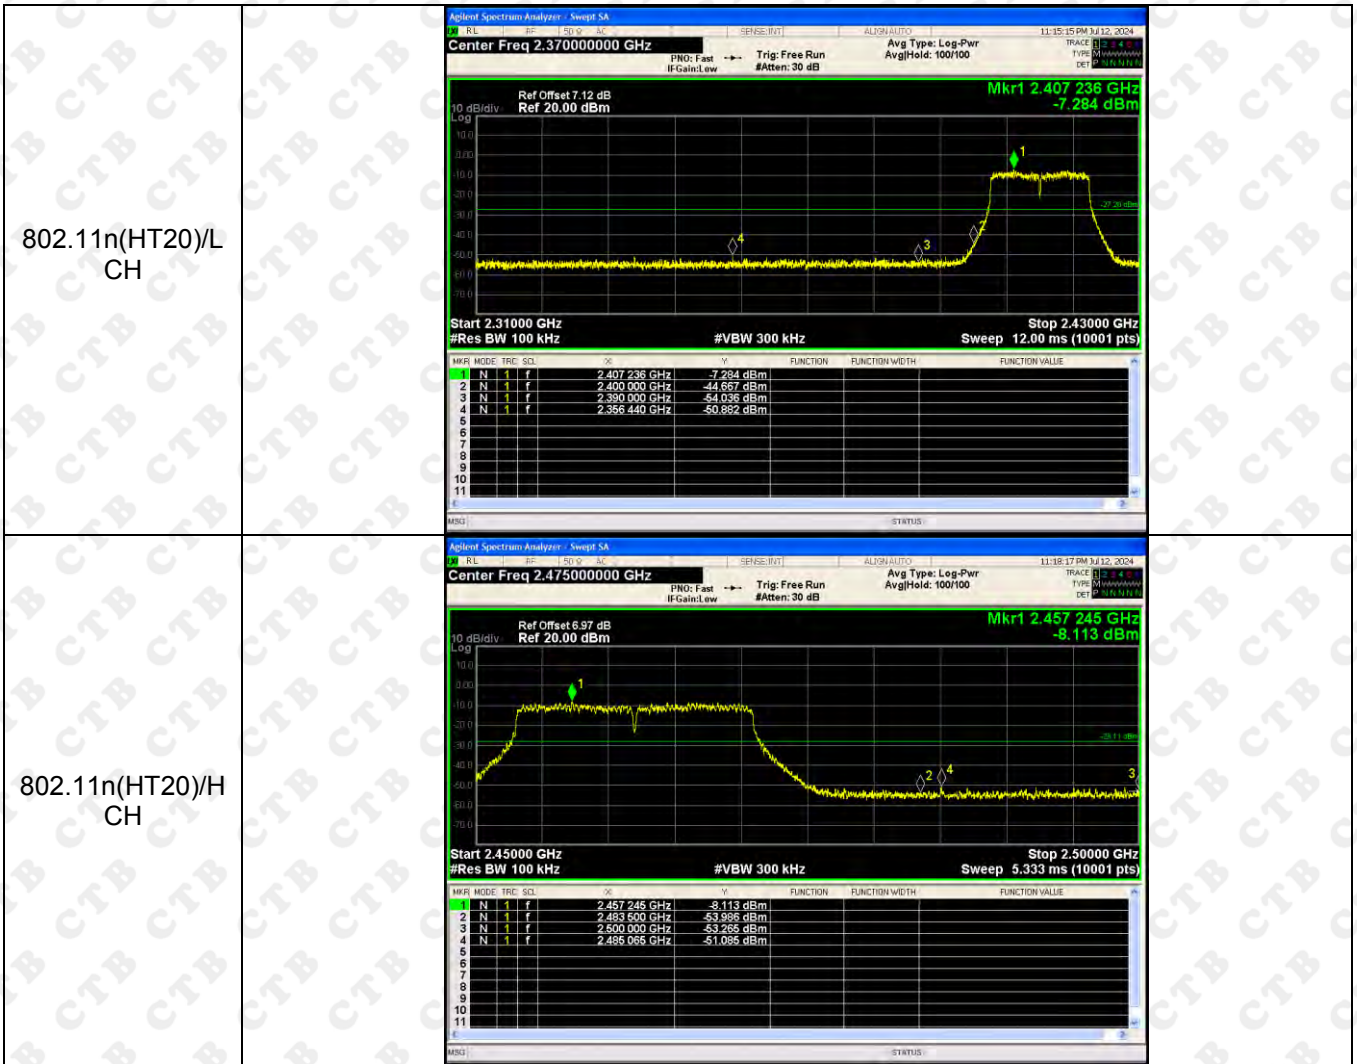


RF Conducted Spurious Emissions Graphs

<p>802.11b/LCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4114 GHz</td> <td>-0.105 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.1369 GHz</td> <td>-39.242 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8065 GHz</td> <td>-63.761 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1795 GHz</td> <td>-53.017 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5504 GHz</td> <td>-52.439 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4114 GHz	-0.105 dBm				2	N	1	f	26.1369 GHz	-39.242 dBm				3	N	1	f	4.8065 GHz	-63.761 dBm				4	N	1	f	7.1795 GHz	-53.017 dBm				5	N	1	f	9.5504 GHz	-52.439 dBm			
MFR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4114 GHz	-0.105 dBm																																																		
2	N	1	f	26.1369 GHz	-39.242 dBm																																																		
3	N	1	f	4.8065 GHz	-63.761 dBm																																																		
4	N	1	f	7.1795 GHz	-53.017 dBm																																																		
5	N	1	f	9.5504 GHz	-52.439 dBm																																																		
<p>802.11b/MCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4352 GHz</td> <td>-0.718 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6215 GHz</td> <td>-41.326 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7837 GHz</td> <td>-63.246 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4945 GHz</td> <td>-63.305 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5707 GHz</td> <td>-53.551 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4352 GHz	-0.718 dBm				2	N	1	f	24.6215 GHz	-41.326 dBm				3	N	1	f	4.7837 GHz	-63.246 dBm				4	N	1	f	7.4945 GHz	-63.305 dBm				5	N	1	f	9.5707 GHz	-53.551 dBm			
MFR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4352 GHz	-0.718 dBm																																																		
2	N	1	f	24.6215 GHz	-41.326 dBm																																																		
3	N	1	f	4.7837 GHz	-63.246 dBm																																																		
4	N	1	f	7.4945 GHz	-63.305 dBm																																																		
5	N	1	f	9.5707 GHz	-53.551 dBm																																																		
<p>802.11b/HCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4626 GHz</td> <td>-1.371 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6924 GHz</td> <td>-40.292 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9084 GHz</td> <td>-63.452 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4804 GHz</td> <td>-61.997 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9936 GHz</td> <td>-54.179 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4626 GHz	-1.371 dBm				2	N	1	f	24.6924 GHz	-40.292 dBm				3	N	1	f	4.9084 GHz	-63.452 dBm				4	N	1	f	7.4804 GHz	-61.997 dBm				5	N	1	f	9.9936 GHz	-54.179 dBm			
MFR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4626 GHz	-1.371 dBm																																																		
2	N	1	f	24.6924 GHz	-40.292 dBm																																																		
3	N	1	f	4.9084 GHz	-63.452 dBm																																																		
4	N	1	f	7.4804 GHz	-61.997 dBm																																																		
5	N	1	f	9.9936 GHz	-54.179 dBm																																																		

RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs

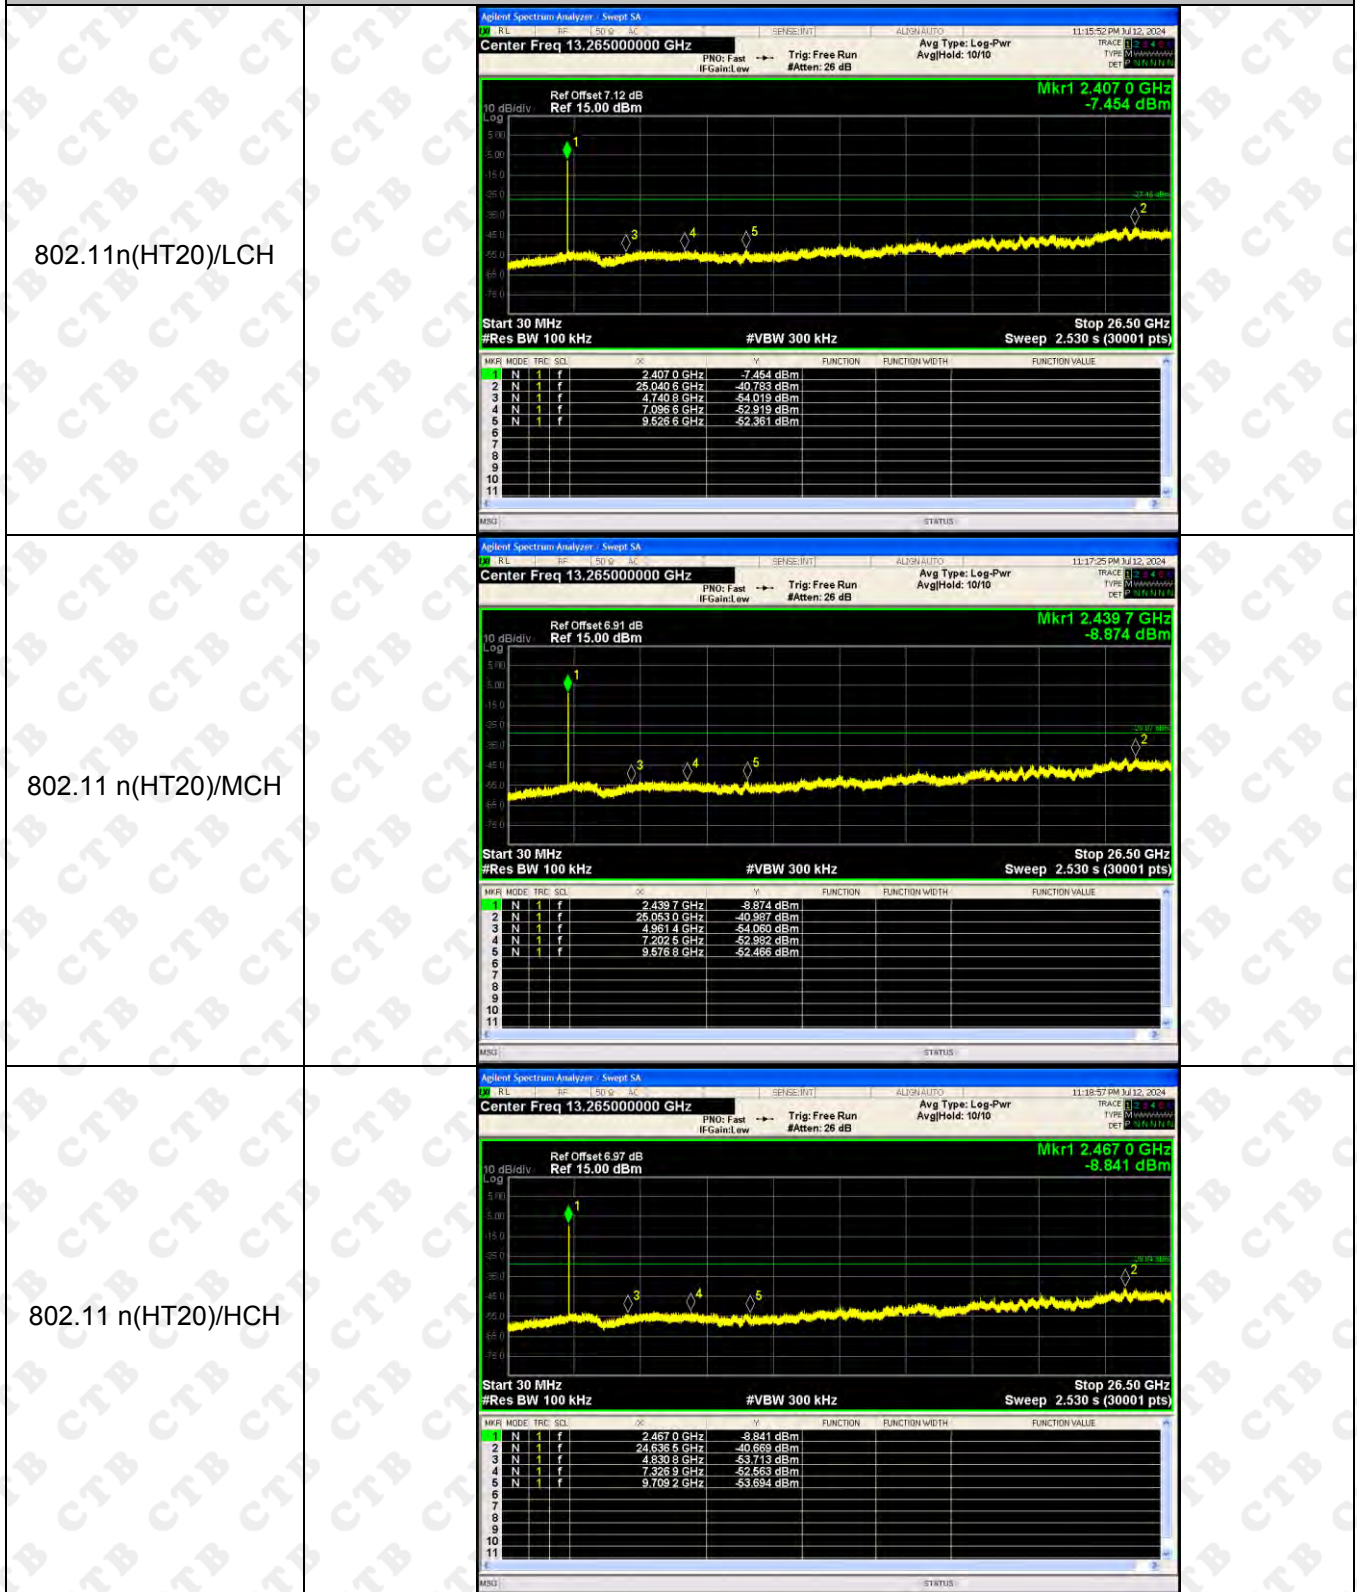

ANT2:

BAND EDGE Graphs

802.11b/LCH

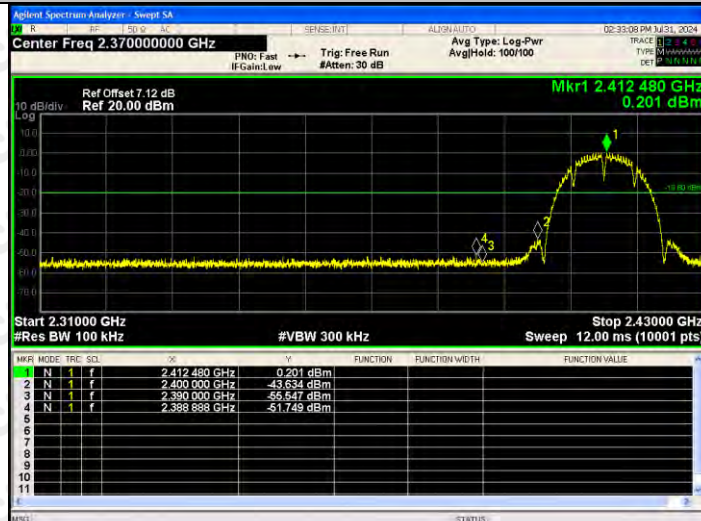


802.11b/HCH





BAND EDGE Graphs

802.11g/LCH

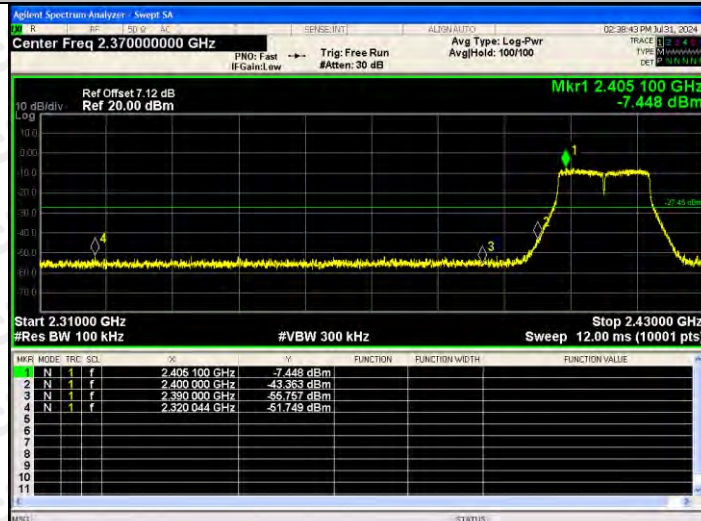


802.11g/HCH

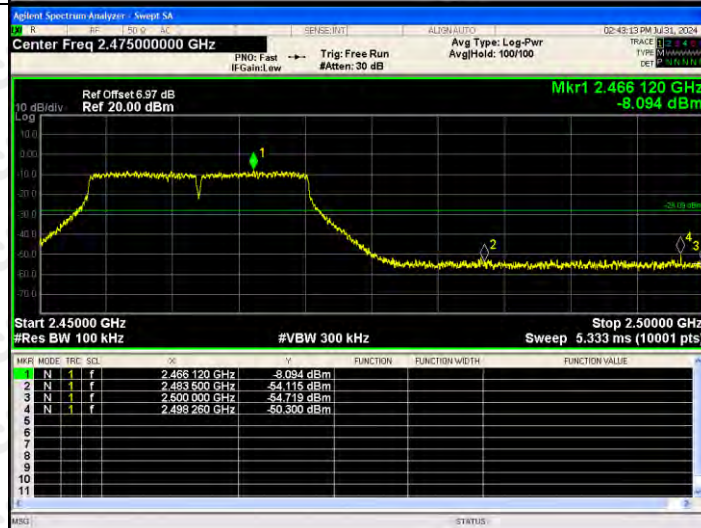

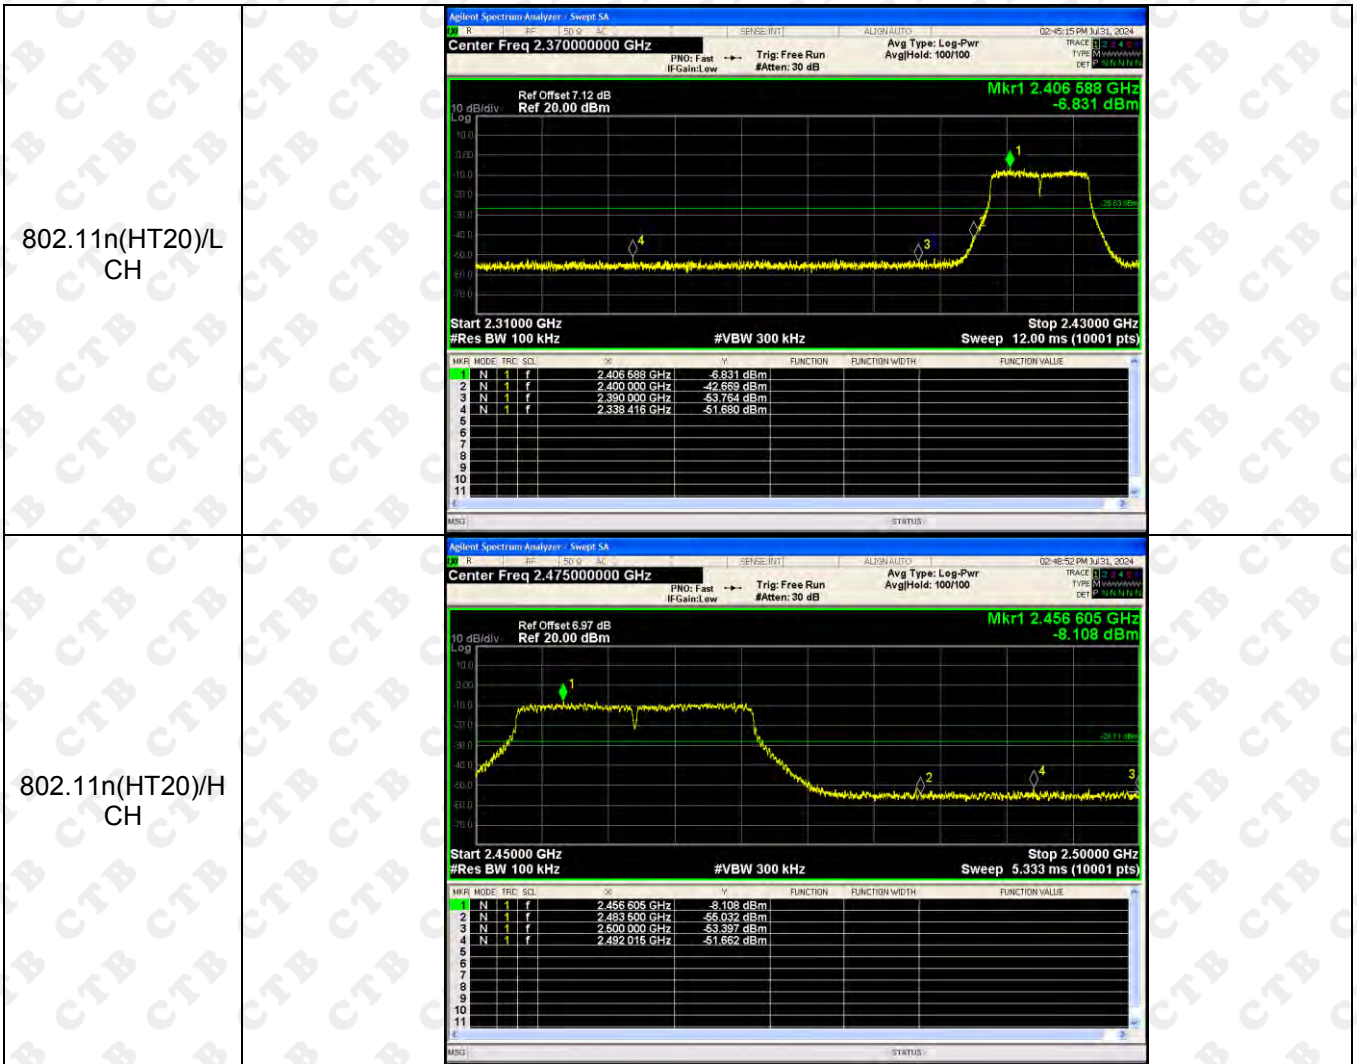

RF Conducted Spurious Emissions Graphs

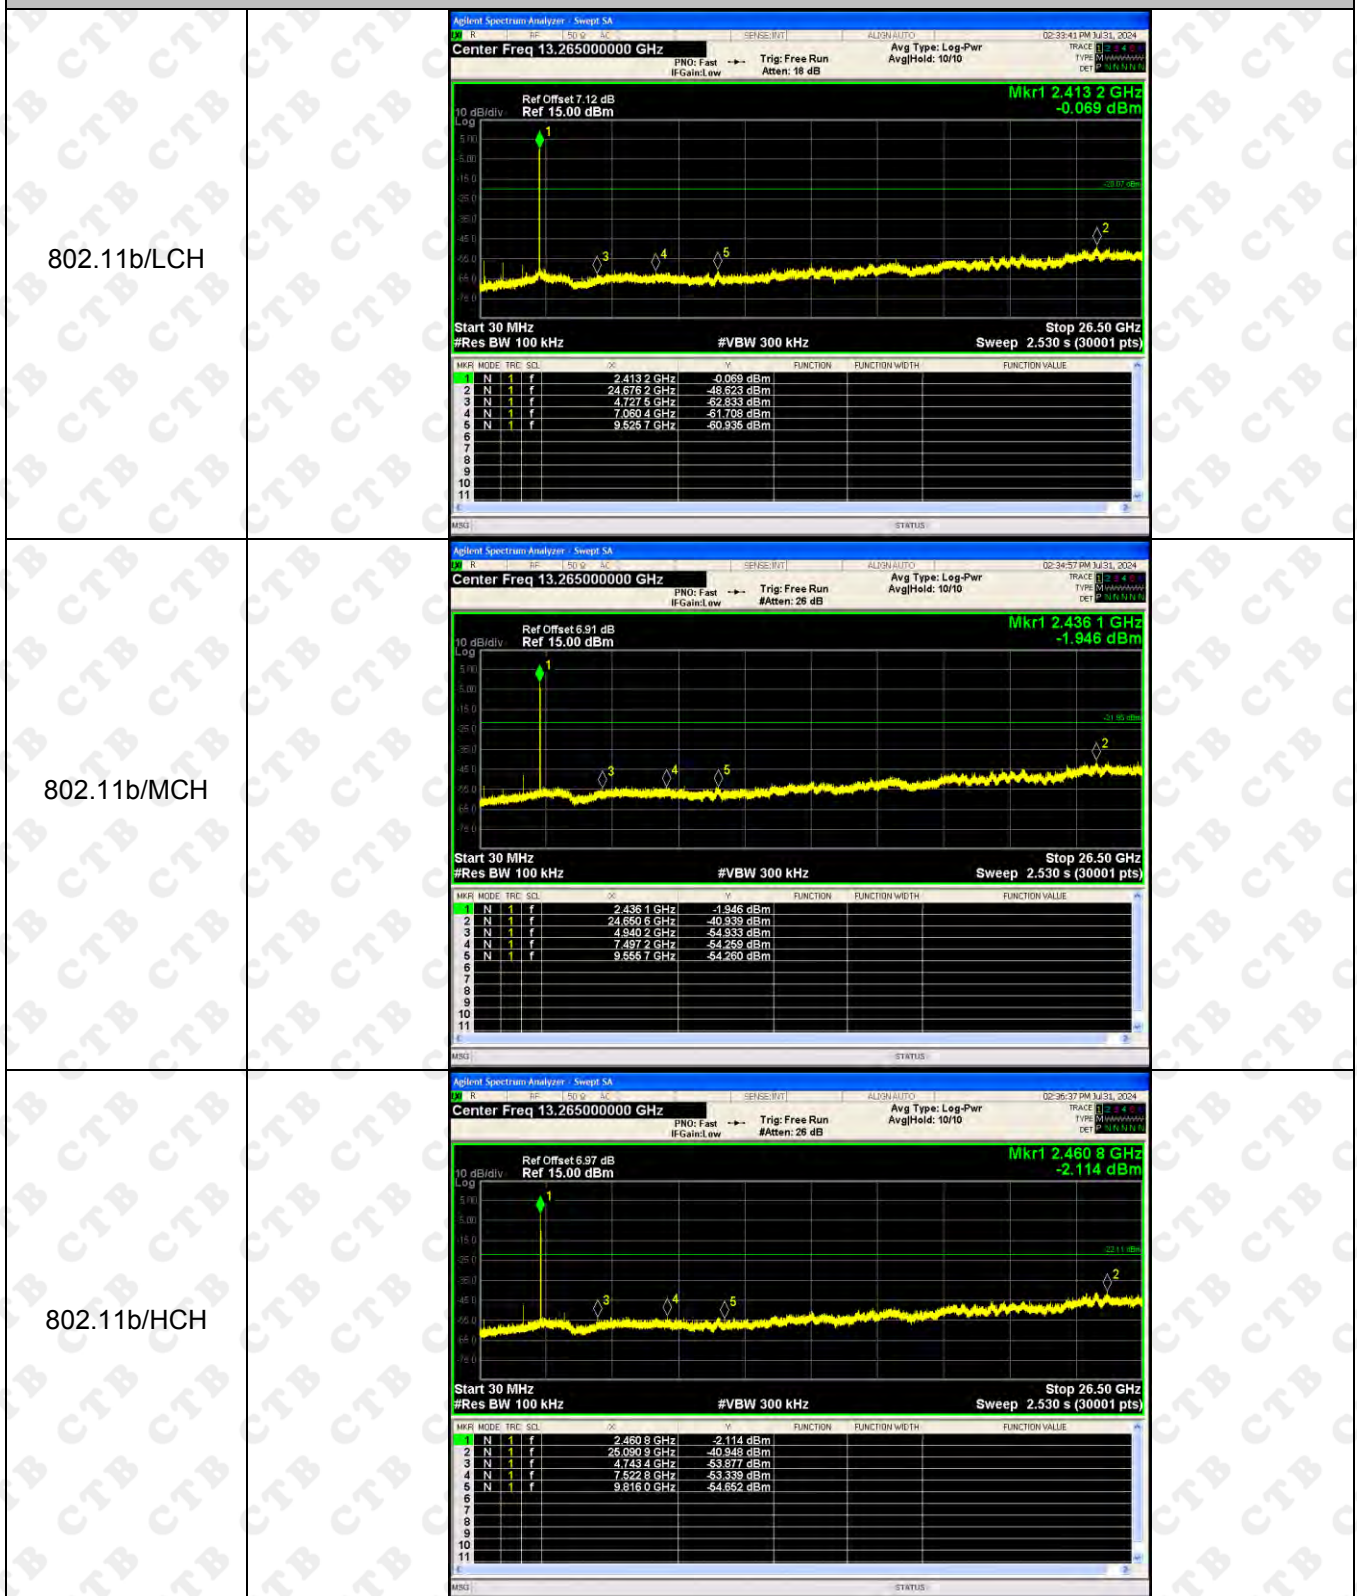


RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

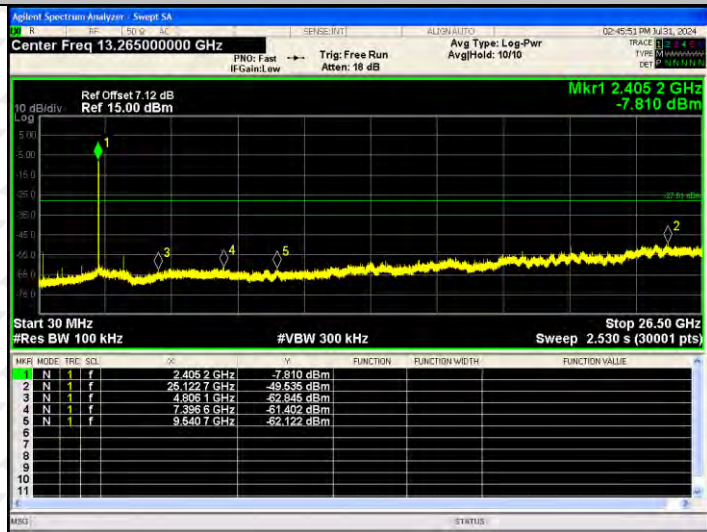

802.11 n(HT20)/MCH

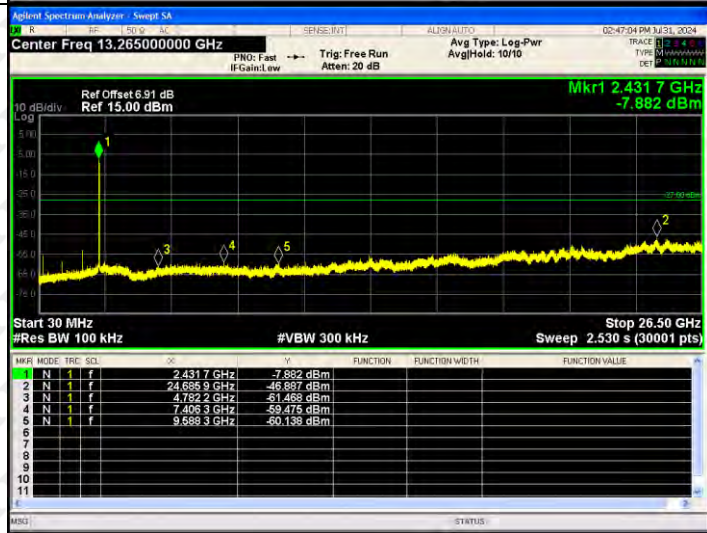

802.11 n(HT20)/HCH

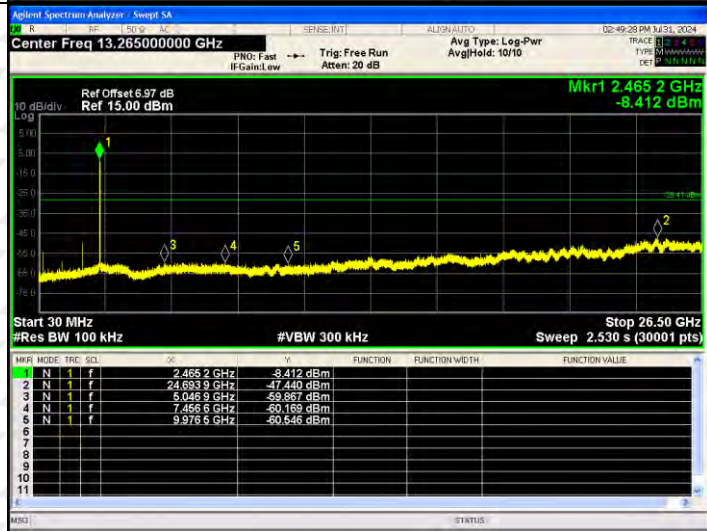

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.986	13.613	/	30
	MCH	12.717	12.387	/	30
	HCH	12.649	12.525	/	30
802.11g	LCH	13.471	13.572	/	30
	MCH	12.236	13.176	/	30
	HCH	12.082	13.268	/	30
802.11n(HT20)	LCH	13.038	14.432	16.801	30
	MCH	12.381	13.336	15.895	30
	HCH	12.127	13.443	15.845	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

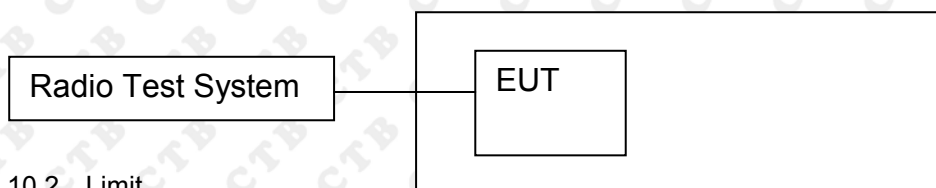

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.122	500	PASS
	MCH	10.135	500	PASS
	HCH	10.083	500	PASS
802.11g	LCH	16.485	500	PASS
	MCH	16.526	500	PASS
	HCH	16.516	500	PASS
802.11n(HT20)	LCH	17.759	500	PASS
	MCH	17.758	500	PASS
	HCH	17.777	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.127	500	PASS
	MCH	10.117	500	PASS
	HCH	10.124	500	PASS
802.11g	LCH	16.534	500	PASS
	MCH	16.552	500	PASS
	HCH	16.549	500	PASS
802.11n(HT20)	LCH	17.778	500	PASS
	MCH	17.676	500	PASS
	HCH	17.762	500	PASS

ANT1:
Test Graph:

Graphs													
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.12 dB Ref 27.12 dBm</p> <p>Mkr3 2.417024 GHz -5.0901 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.0 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">15.001 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	17.0 dBm	15.001 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	17.0 dBm											
15.001 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.442022 GHz -5.4389 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.4 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">15.007 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	16.4 dBm	15.007 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	16.4 dBm											
15.007 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.97 dB Ref 26.97 dBm</p> <p>Mkr3 2.467034 GHz -7.1686 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.3 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;">15.002 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	16.3 dBm	15.002 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	16.3 dBm											
15.002 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											



<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.12 dB</p> <p>Ref: 27.12 dBm</p> <p>Mkr3 2.420201 GHz</p> <p>-10.761 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.449 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -41.695 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.49 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.91 dB</p> <p>Ref: 26.91 dBm</p> <p>Mkr3 2.445215 GHz</p> <p>-13.787 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.469 MHz</p> <p>Total Power 11.1 dBm</p> <p>Transmit Freq Error -47.770 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.53 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.97 dB</p> <p>Ref: 26.97 dBm</p> <p>Mkr3 2.470223 GHz</p> <p>-13.667 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.445 MHz</p> <p>Total Power 10.9 dBm</p> <p>Transmit Freq Error -35.147 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.52 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.12 dB Ref: 27.12 dBm</p> <p>Mkr3 2.420853 GHz -12.887 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3">17.644 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.644 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.3 dBm											
17.644 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.445837 GHz -14.481 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.6 dBm</td> </tr> <tr> <td colspan="3">17.620 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.6 dBm	17.620 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.6 dBm											
17.620 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.97 dB Ref: 26.97 dBm</p> <p>Mkr3 2.470871 GHz -14.296 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.5 dBm</td> </tr> <tr> <td colspan="3">17.640 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.5 dBm	17.640 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.5 dBm											
17.640 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

ANT2:
Test Graph:


Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.12 dB</p> <p>Ref 27.12 dBm</p> <p>Mkr3 2.41704 GHz</p> <p>-6.0051 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.991 MHz</p> <p>Total Power 17.2 dBm</p> <p>Transmit Freq Error -23.876 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.13 MHz</p> <p>x dB -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.91 dB</p> <p>Ref 26.91 dBm</p> <p>Mkr3 2.442014 GHz</p> <p>-6.6120 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.994 MHz</p> <p>Total Power 16.0 dBm</p> <p>Transmit Freq Error -44.811 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.12 MHz</p> <p>x dB -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.97 dB</p> <p>Ref 26.97 dBm</p> <p>Mkr3 2.467055 GHz</p> <p>-6.8207 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.984 MHz</p> <p>Total Power 16.1 dBm</p> <p>Transmit Freq Error -6.702 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 10.12 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.12 dB</p> <p>Ref: 27.12 dBm</p> <p>Mkr3 2.420221 GHz</p> <p>-13.411 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.458 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error -46.526 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.53 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.91 dB</p> <p>Ref: 26.91 dBm</p> <p>Mkr3 2.445233 GHz</p> <p>-13.570 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.448 MHz</p> <p>Total Power 12.0 dBm</p> <p>Transmit Freq Error -42.734 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.55 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.97 dB</p> <p>Ref: 26.97 dBm</p> <p>Mkr3 2.470239 GHz</p> <p>-14.322 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.452 MHz</p> <p>Total Power 12.0 dBm</p> <p>Transmit Freq Error -35.197 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.55 MHz</p> <p>x dB -6.00 dB</p>
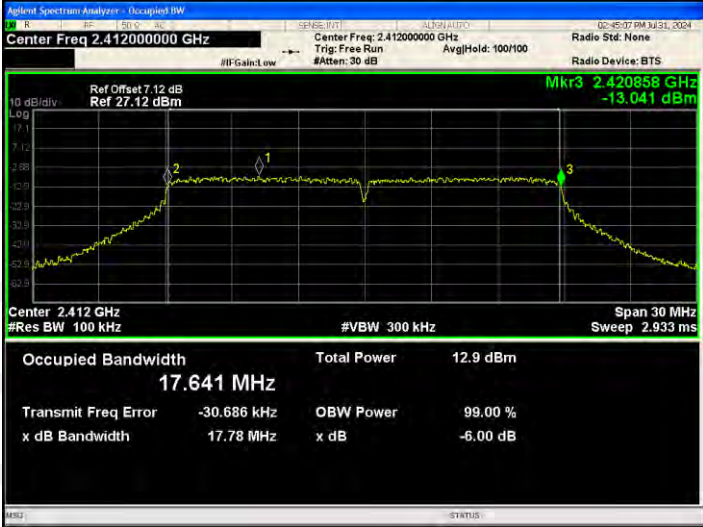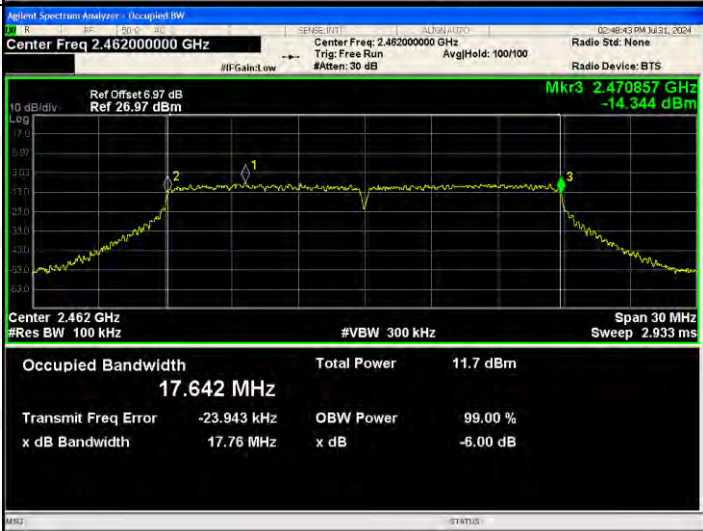
<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.12 dB Ref: 27.12 dBm</p> <p>Mkr3 2.420858 GHz -13.041 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">17.641 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.641 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm											
17.641 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.445801 GHz -13.351 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.8 dBm</td> </tr> <tr> <td colspan="3">17.636 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.8 dBm	17.636 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.8 dBm											
17.636 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.97 dB Ref: 26.97 dBm</p> <p>Mkr3 2.470857 GHz -14.344 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.7 dBm</td> </tr> <tr> <td colspan="3">17.642 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	11.7 dBm	17.642 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	11.7 dBm											
17.642 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

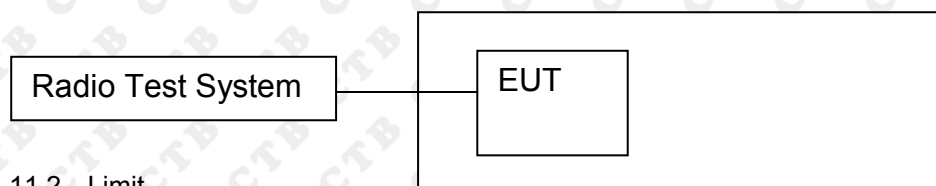

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-14.007	-15.807	/	8
	MCH	-14.355	-15.651	/	8
	HCH	-14.521	-15.554	/	8
802.11g	LCH	-21.361	-19.264	/	8
	MCH	-20.81	-18.899	/	8
	HCH	-21.273	-18.876	/	8
802.11n(H T20)	LCH	-21.168	-17.388	-15.869	8
	MCH	-21.81	-19.675	-17.602	8
	HCH	-21.702	-17.306	-15.960	8

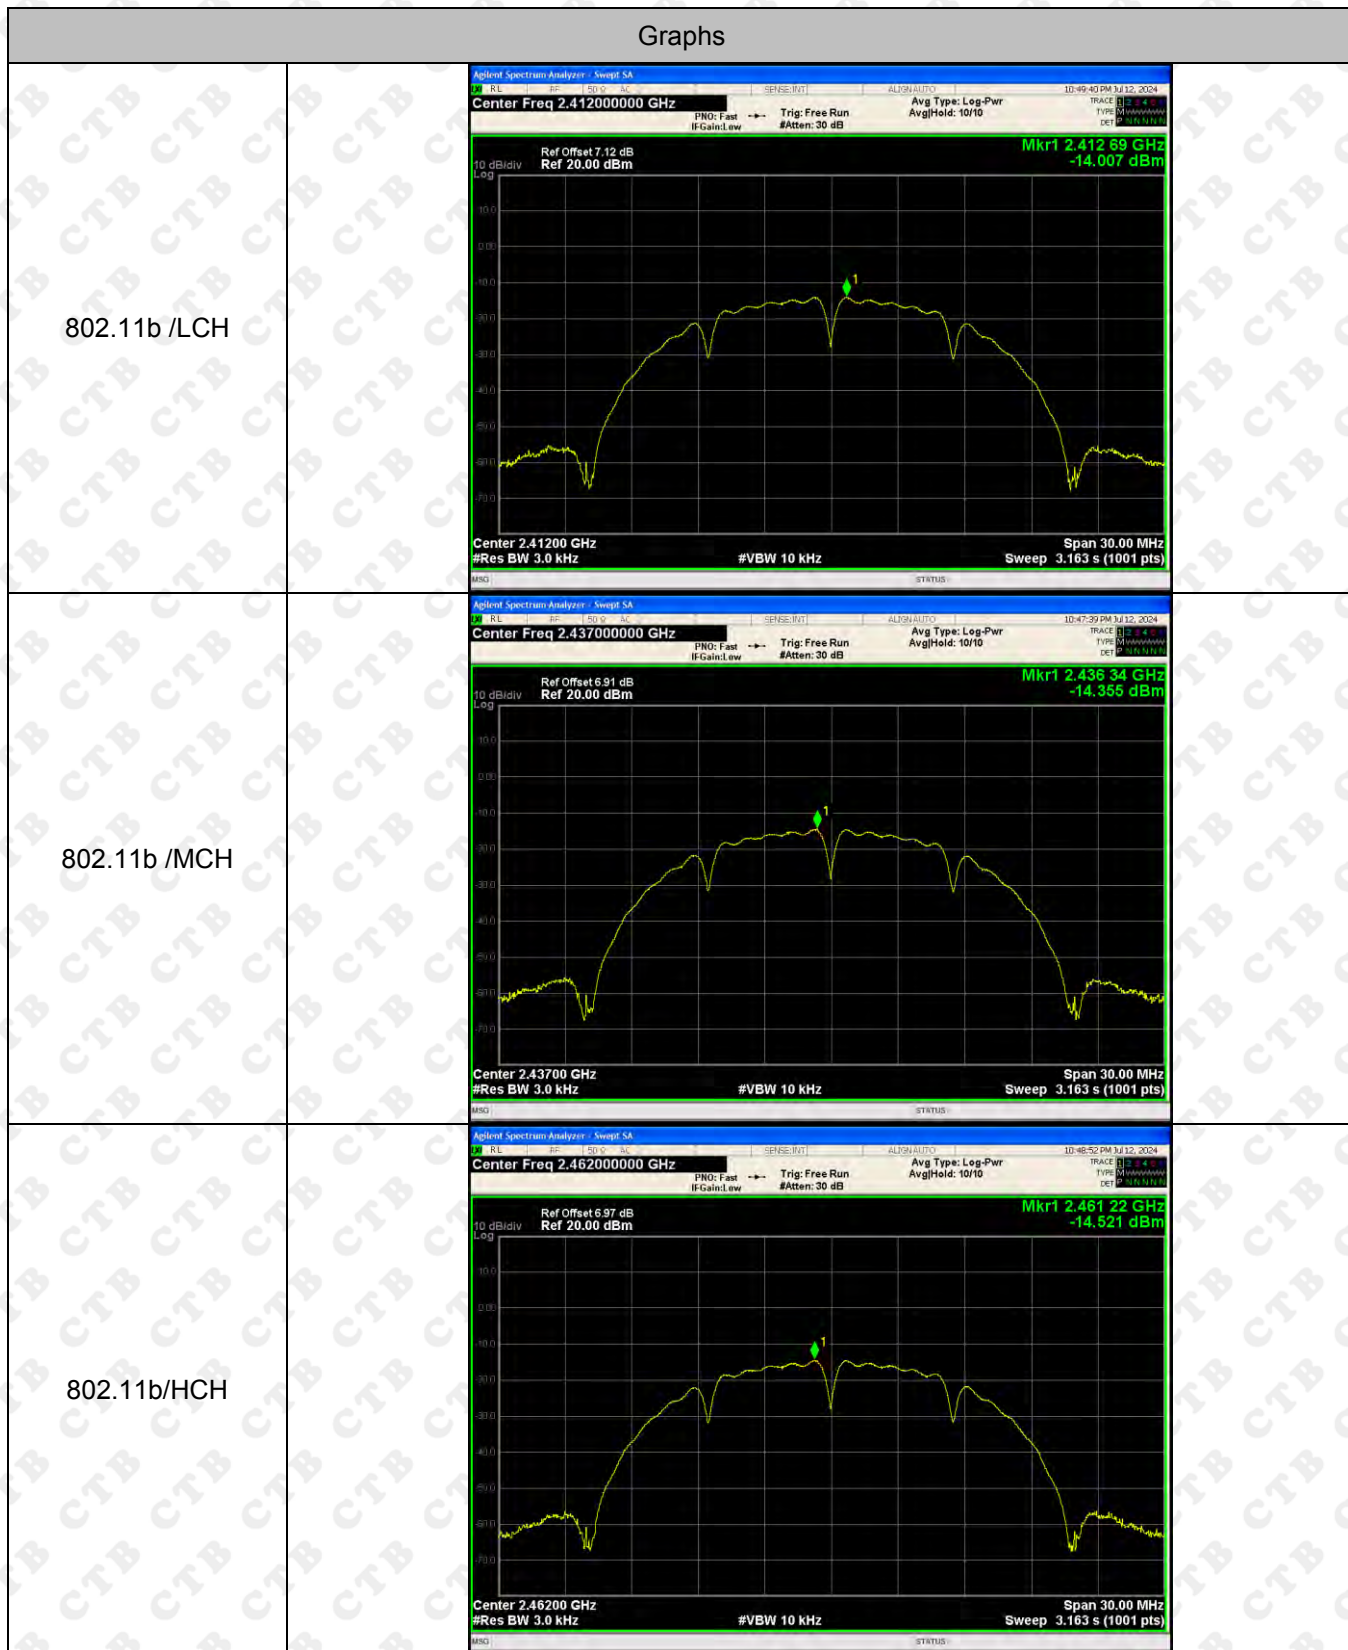
**ANT1:
Test Graph**






<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset: 7.12 dB Ref 20.00 dBm Mkr1 2.40576 GHz -21.361 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset: 6.91 dB Ref 20.00 dBm Mkr1 2.43076 GHz -20.810 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset: 6.97 dB Ref 20.00 dBm Mkr1 2.46635 GHz -21.273 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT20)/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset: 7.12 dB Ref 20.00 dBm Mkr1 2.41788 GHz -21.168 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset: 6.91 dB Ref 20.00 dBm Mkr1 2.43541 GHz -21.810 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset: 6.97 dB Ref 20.00 dBm Mkr1 2.46914 GHz -21.702 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

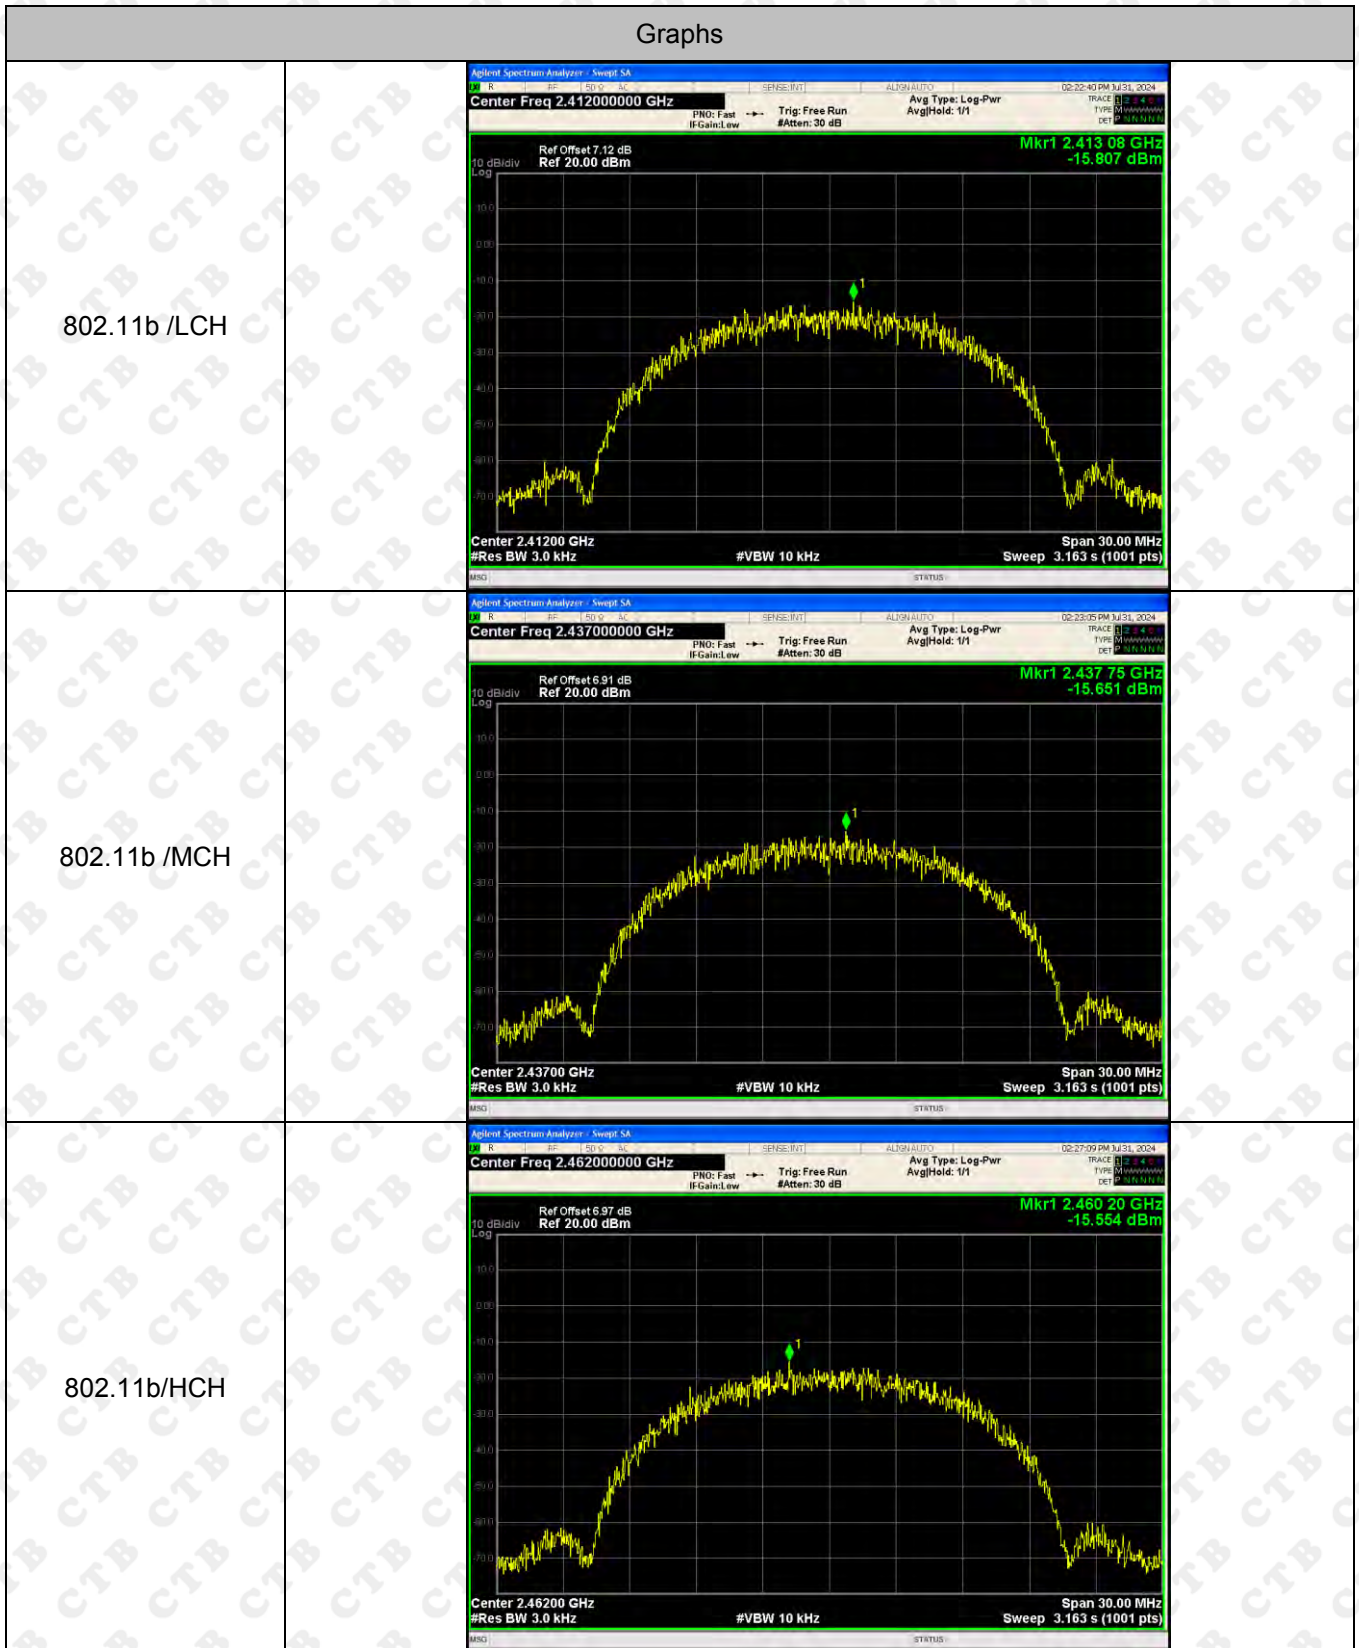ANT2:
Test Graph

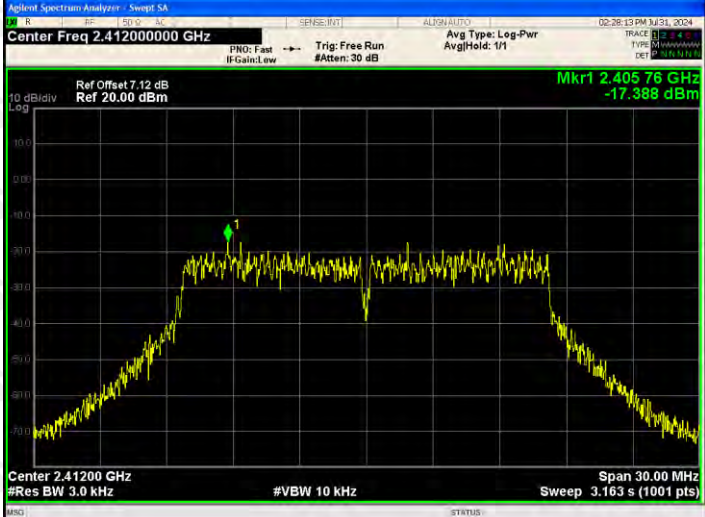

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset: 7.12 dB Ref 20.00 dBm Mkr1 2.410 68 GHz -19.264 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset: 6.91 dB Ref 20.00 dBm Mkr1 2.430 10 GHz -18.899 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset: 6.97 dB Ref 20.00 dBm Mkr1 2.469 47 GHz -18.876 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT20)/LCH</p>	
<p>802.11n(HT20)/MCH</p>	
<p>802.11n(HT20)/HCH</p>	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is ANT1: 2.28dBi, ANT2: 0.72dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

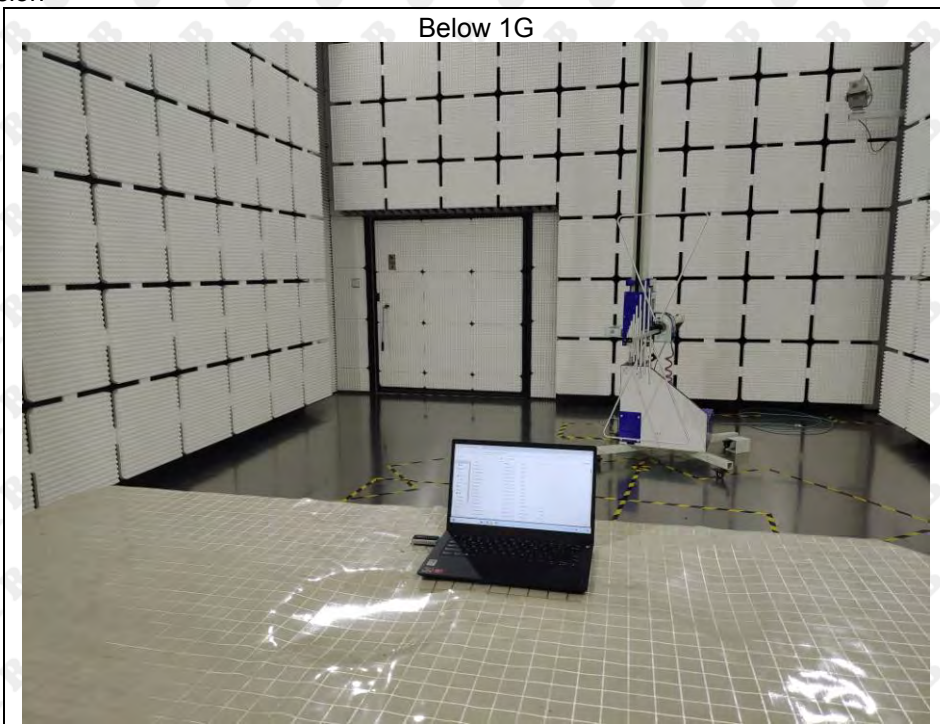

Above 1G



Conducted Emission



※※※※ END OF REPORT ※※※※