




Band Edge\_ANT A\_ 802.11ax(160)\_HE0(Full)\_6025

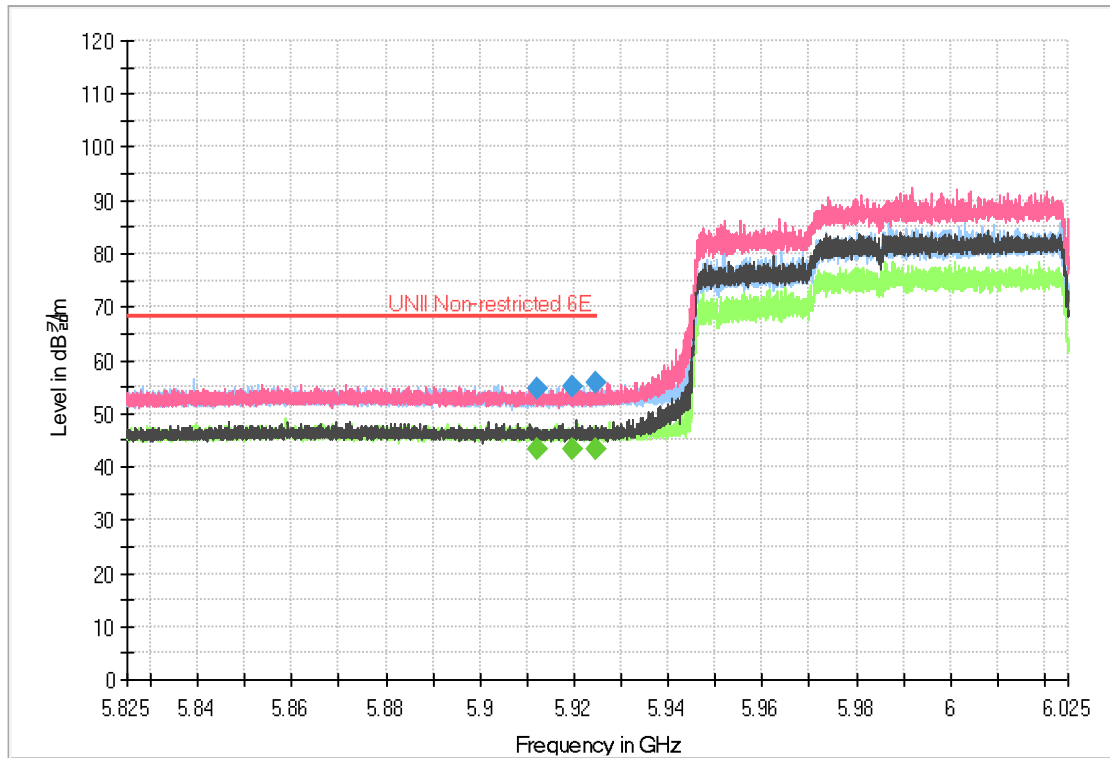


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 911.94	41.01	54.71	-	-	-	346	H	158	13.70	13.49	68.20	-	68.20
5 919.48	41.37	55.07	-	-	-	214	V	0	13.70	13.13	68.20	-	68.20
5 924.76	42.11	55.81	-	-	-	251	V	211	13.70	12.39	68.20	-	68.20

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_ANT B\_ 802.11ax(20)\_HE0(Full)\_5955

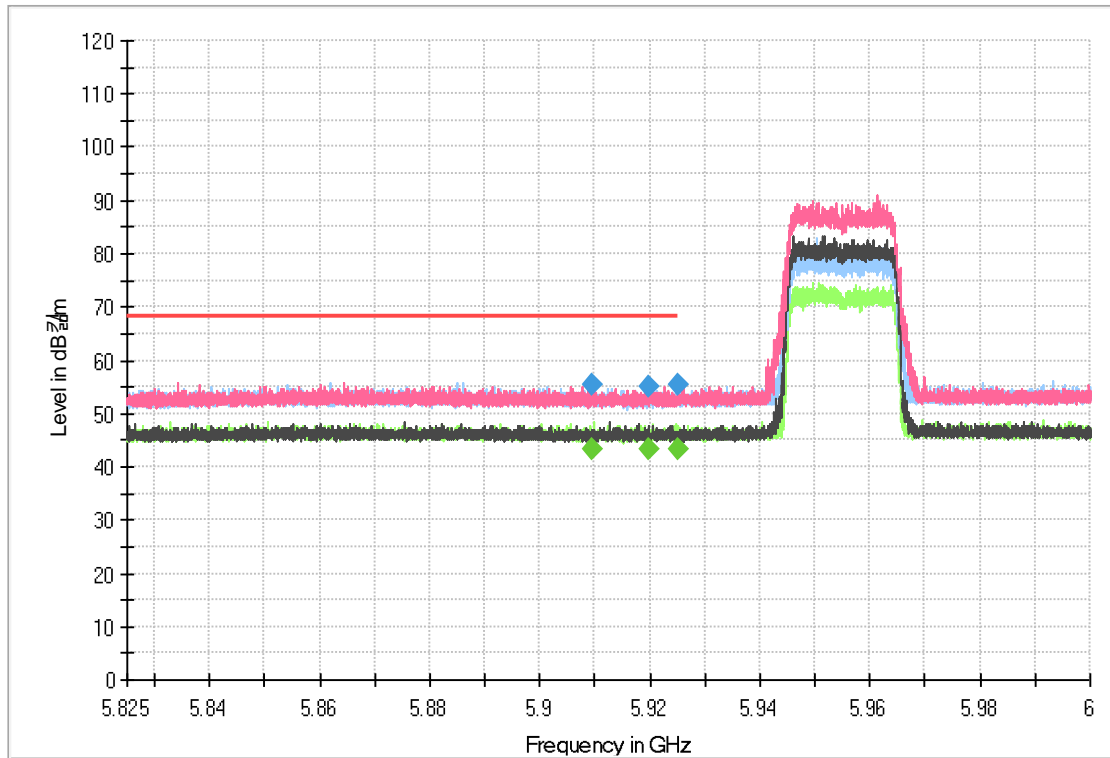

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 909.40	41.85	55.55	-	-	-	261	H	314	13.70	12.65	68.20	-	-
5 919.85	41.45	55.15	-	-	-	172	V	260	13.70	13.05	68.20	-	-
5 925.00	41.81	55.51	-	-	-	199	H	33	13.70	12.69	68.20	-	-


**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)




### Band Edge\_ANT B\_ 802.11ax(20)\_HE0(Full)\_7115

Peak

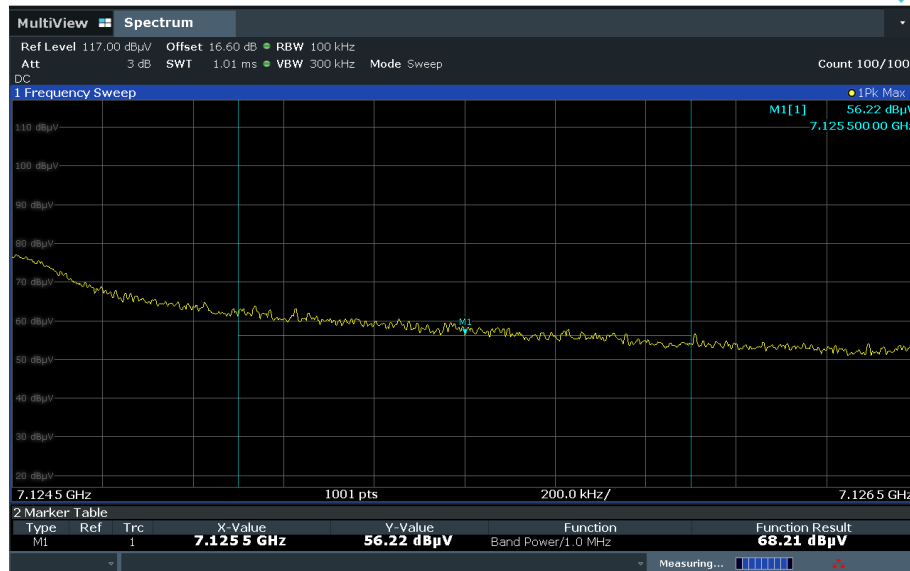

Average

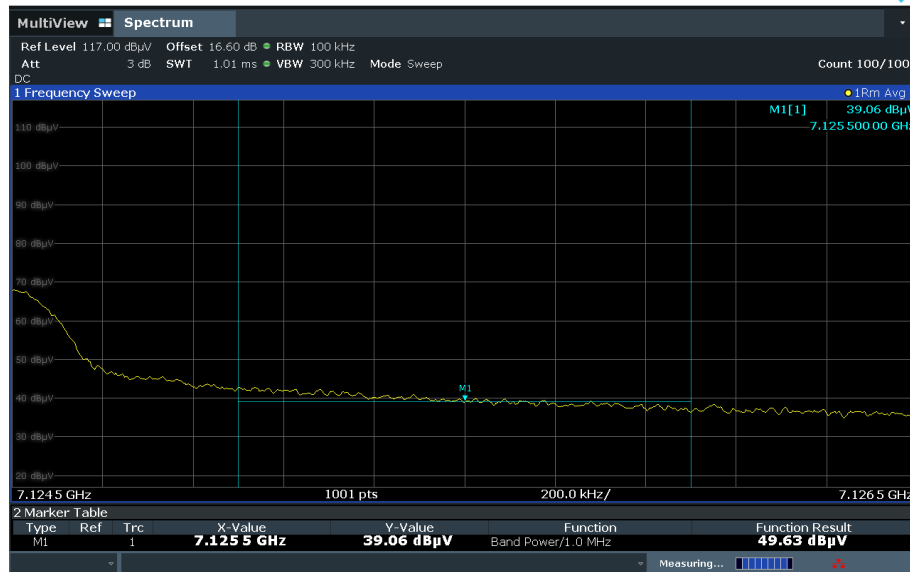


#### Remarks

1. The Results included Correction Factor using offset Function.
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + DCCF(dB).
3. Peak Limit = 88.2 dBµV/m , Average Limit = 68.2 dBµV/m.
3. Peak Margin = 19.99 dB, Average Margin = 18.57 dB.
4. DCCF(Duty Cycle Correction Factor) =  $10 \times \log(1/\text{Duty Cycle})$
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_ANT B\_ 802.11ax(40)\_HE0(Full)\_5965

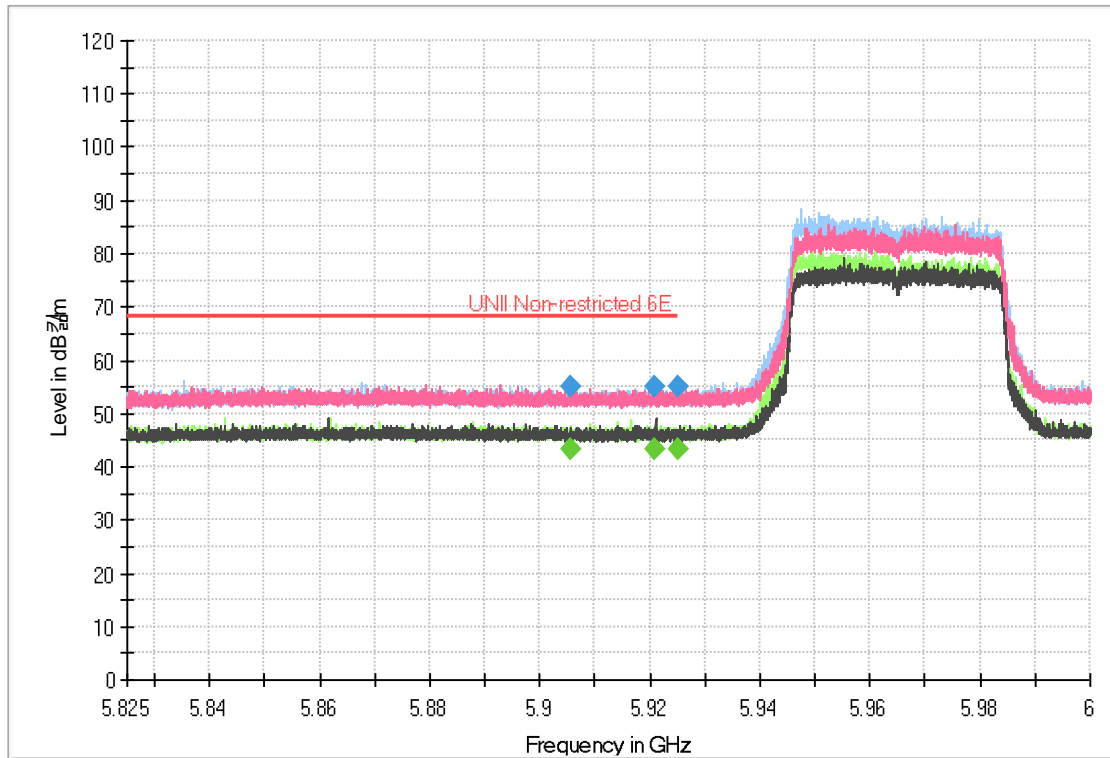


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 905.48	41.32	54.92	-	-	-	350	H	164	13.60	13.28	68.20	-	68.20
5 920.83	41.36	55.06	-	-	-	250	V	10	13.70	13.14	68.20	-	68.20
5 924.93	41.34	55.04	-	-	-	265	H	132	13.70	13.16	68.20	-	68.20

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_ANT B\_ 802.11ax(40)\_HE0(Full)\_7085

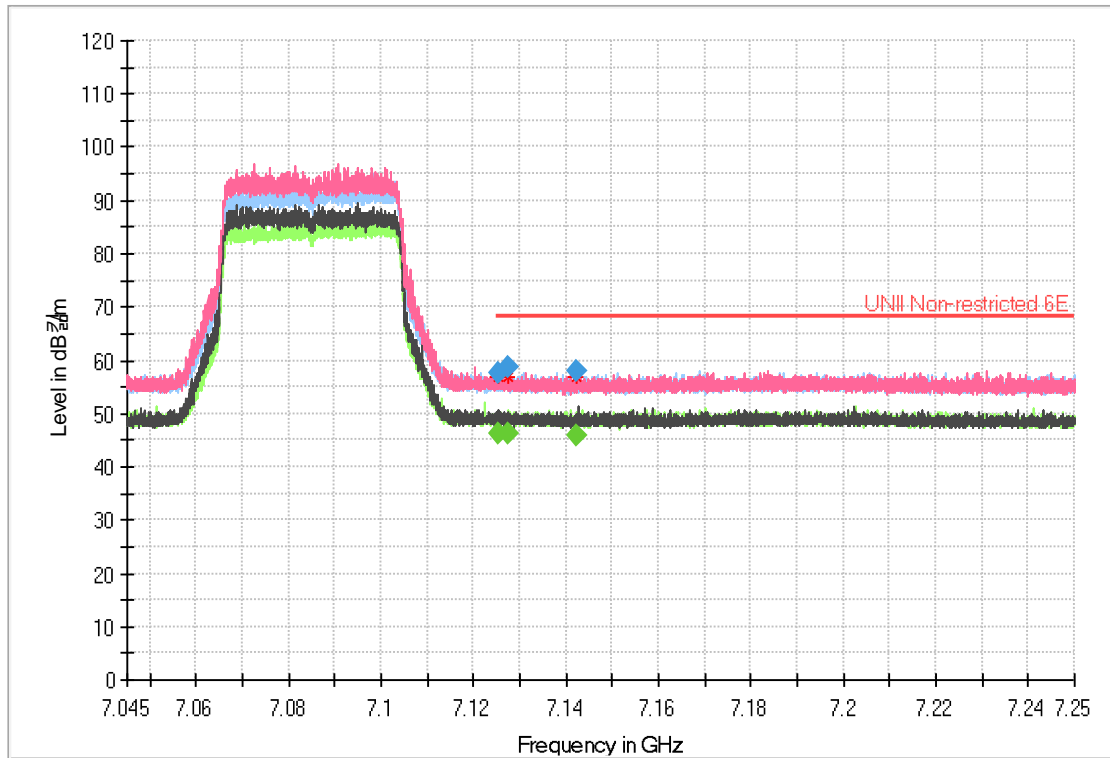


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
7 125.16	40.97	57.57	-	-	-	250	V	10	16.60	10.63	68.20	-	-
7 127.57	42.00	58.60	-	-	-	214	V	242	16.60	9.60	68.20	-	-
7 142.31	41.35	57.95	-	-	-	344	H	157	16.60	10.25	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_ANT B\_ 802.11ax(80)\_HE0(Full)\_5985

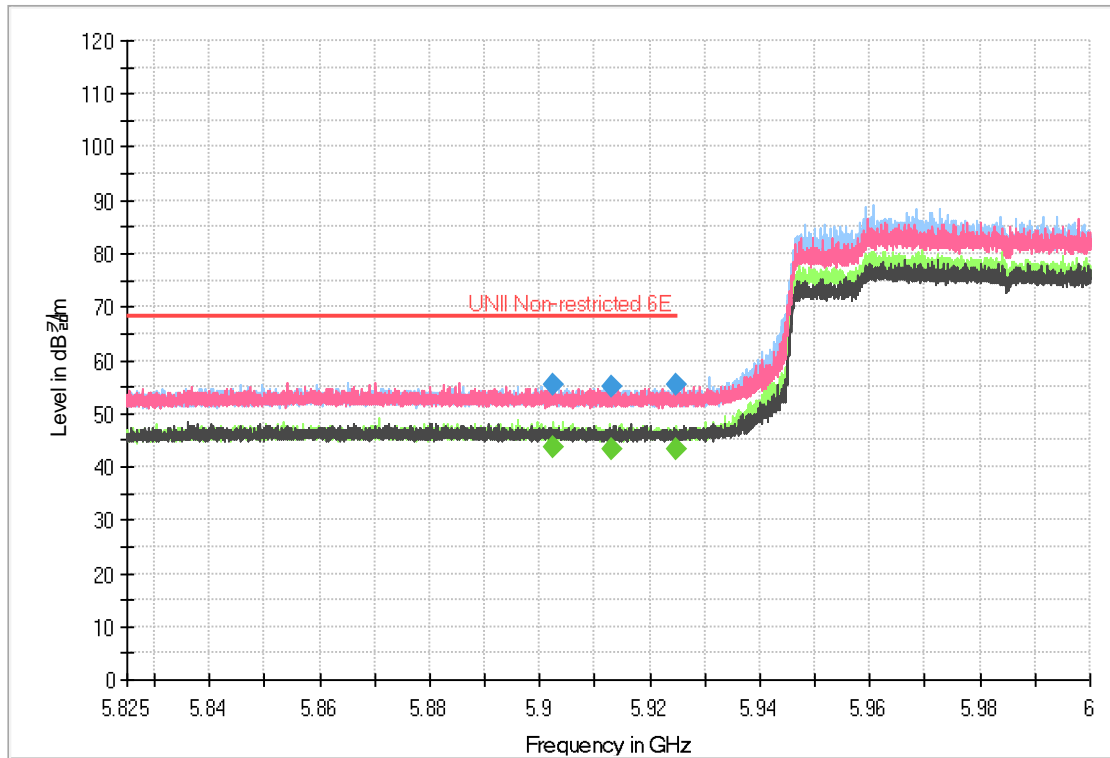


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 902.23	41.82	55.42	-	-	-	252	H	582	13.60	12.78	68.20	-	-
5 913.03	41.40	55.10	-	-	-	178	V	708	13.70	13.10	68.20	-	-
5 924.91	41.59	55.29	-	-	-	176	V	625	13.70	12.91	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)

Band Edge\_ANT B\_ 802.11ax(80)\_HE0(Full)\_7025

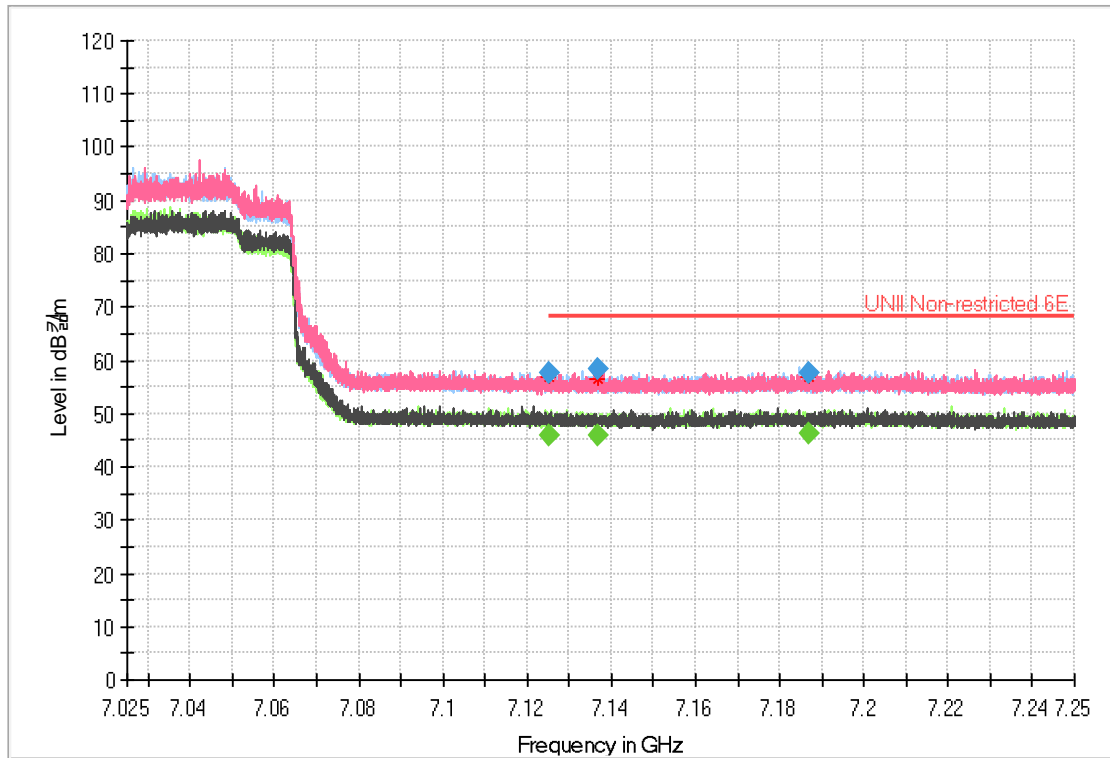


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
7 125.01	41.10	57.70	-	-	-	350	H	54	16.60	10.50	68.20	-	-
7 136.78	41.84	58.44	-	-	-	350	H	97	16.60	9.76	68.20	-	-
7 186.78	41.10	57.70	-	-	-	343	V	359	16.60	10.50	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_ANT B\_ 802.11ax(160)\_HE0(Full)\_6025

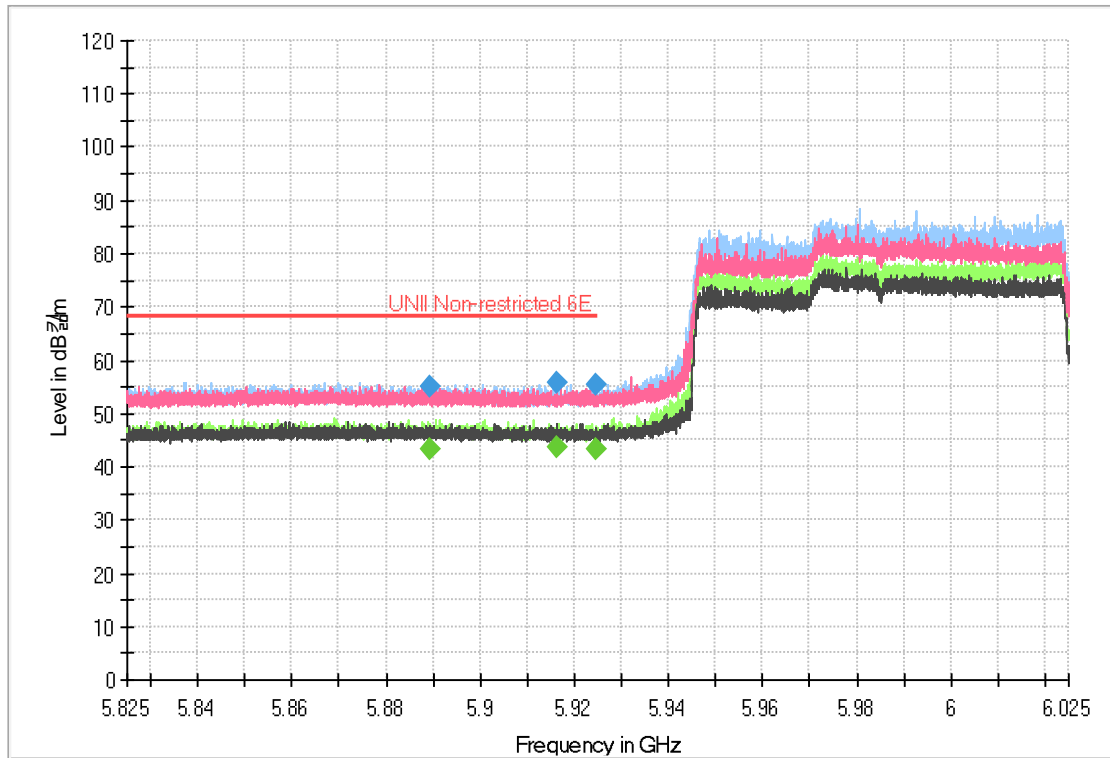

Frequency [MHz]	Peak Reading Value [dBμV]	Peak Result [dBμV/m]	AVG Reading Value [dBμV]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
5 889.50	41.61	55.21	-	-	-	346	H	342	13.60	12.99	68.20	-	-
5 916.44	42.16	55.86	-	-	-	274	H	252	13.70	12.34	68.20	-	-
5 924.70	41.65	55.35	-	-	-	151	V	139	13.70	12.85	68.20	-	-


**Remarks**

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)





Band Edge\_MIMO\_ 802.11ax(20)\_HE0(Full)\_5955

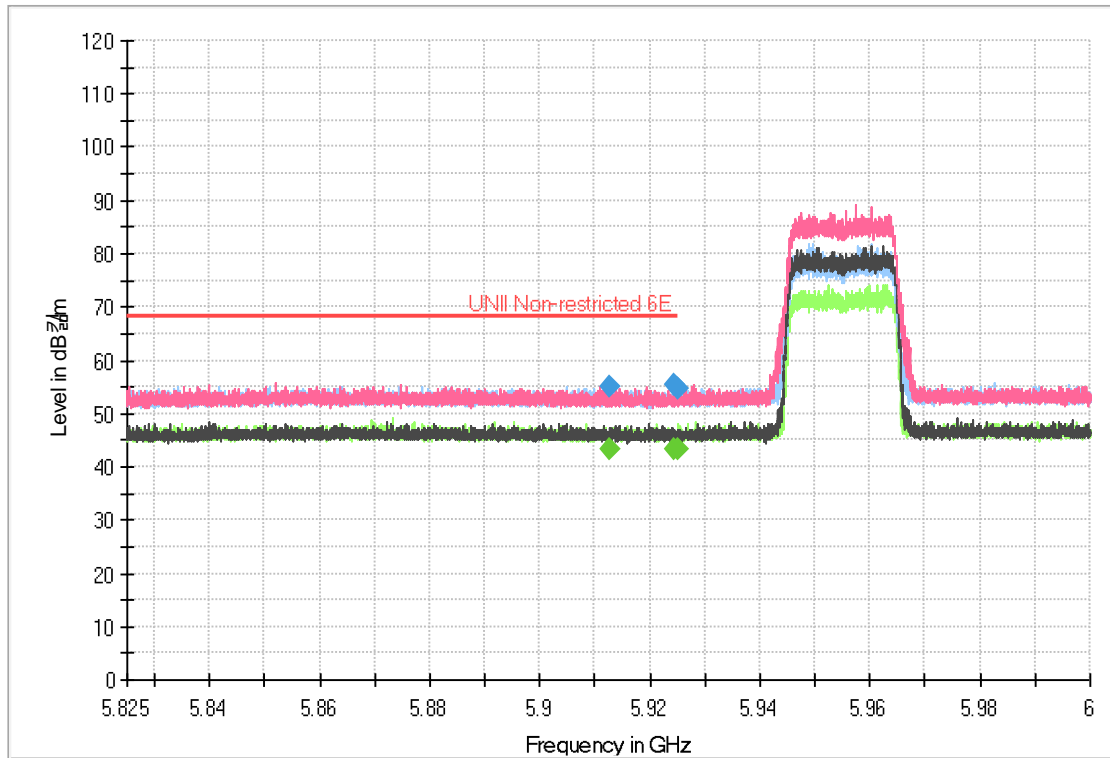


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 912.85	41.52	55.22	-	-	-	234	H	186	13.70	12.98	68.20	-	-
5 924.45	41.65	55.35	-	-	-	250	V	43	13.70	12.85	68.20	-	-
5 925.00	41.05	54.75	-	-	-	250	V	328	13.70	13.45	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_MIMO\_ 802.11ax(20)\_HE0(Full)\_7115

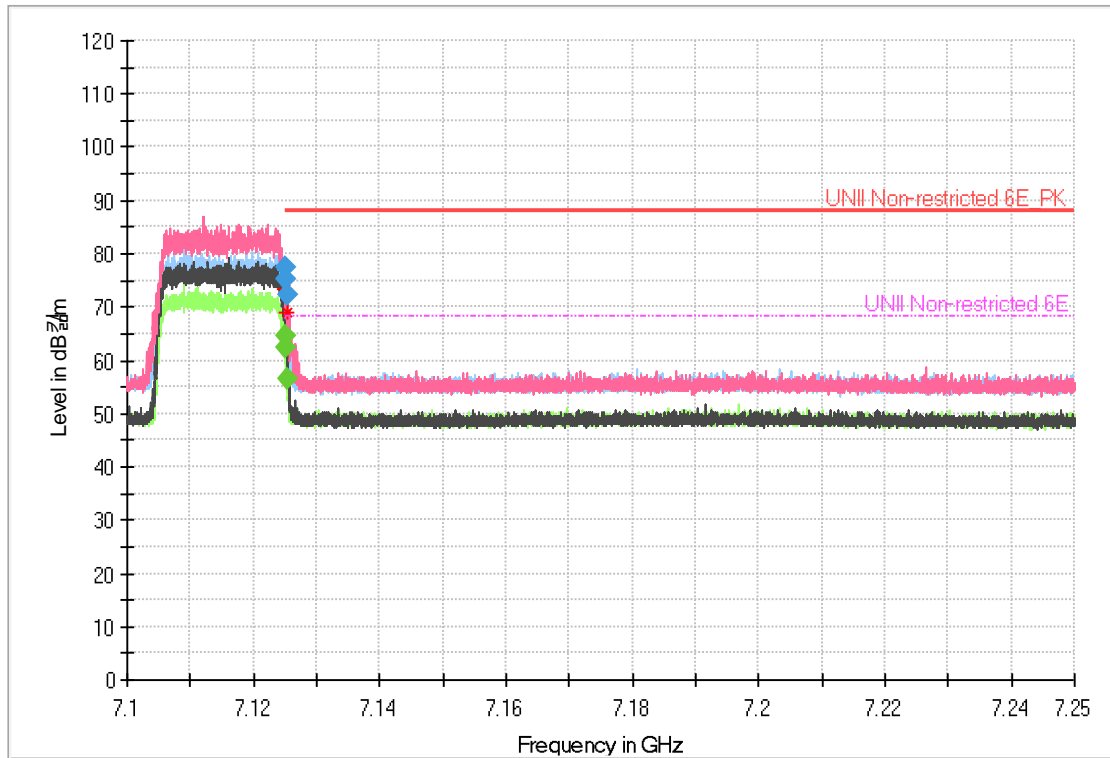


Frequency [MHz]	Peak Reading Value [dBμV/m]	Peak Result [dBμV/m]	AVG Reading Value [dBμV/m]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
7 125.01	60.67	77.27	-	-	-	163	V	278	16.60	10.93	88.20	-	-
7 125.01	-	-	47.98	64.58	-	163	V	278	16.60	-	-	3.62	68.20
7 125.04	58.70	75.30	-	-	-	159	V	277	16.60	12.90	88.20	-	-
7 125.04	-	-	45.72	62.32	-	159	V	277	16.60	-	-	5.88	68.20
7 125.25	-	-	40.00	56.60	-	318	H	352	16.60	-	-	11.60	68.20
7 125.25	55.55	72.15	-	-	-	318	H	352	16.60	16.05	88.20	-	-

**Remarks**

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)



Band Edge\_MIMO\_ 802.11ax(40)\_HE0(Full)\_5965

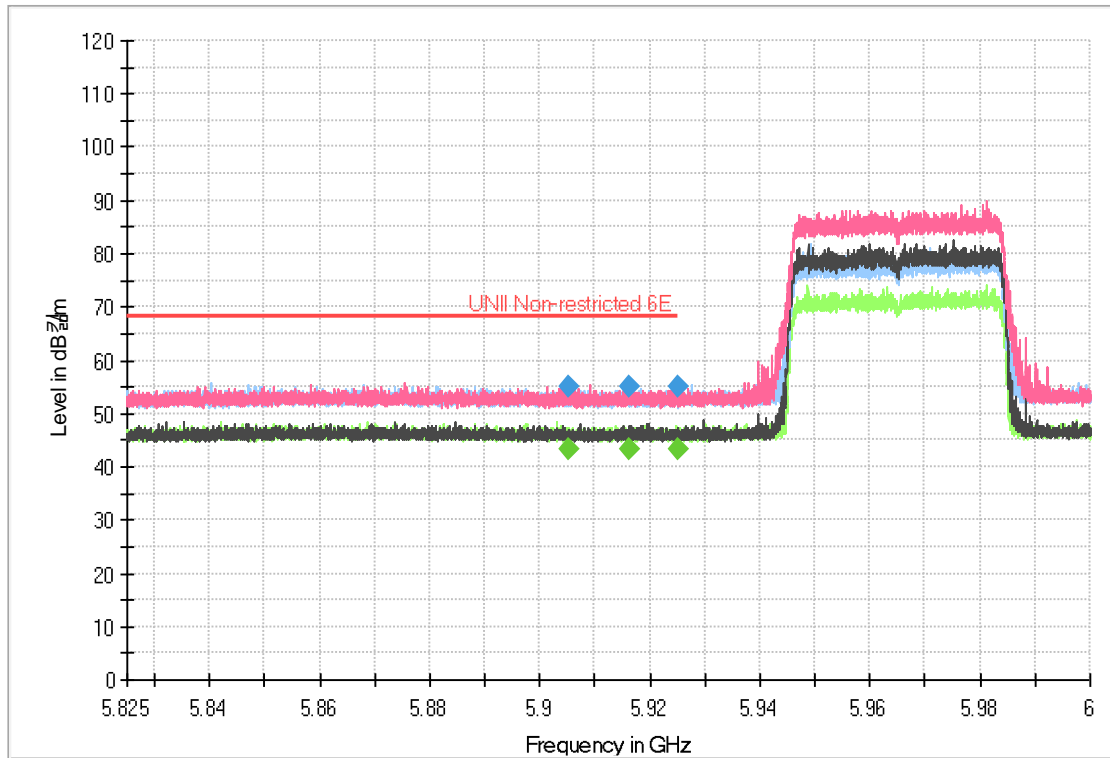


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 905.15	41.59	55.19	-	-	-	276	H	281	13.60	13.01	68.20	-	-
5 916.33	41.52	55.22	-	-	-	350	V	156	13.70	12.98	68.20	-	-
5 924.98	41.48	55.18	-	-	-	313	H	43	13.70	13.02	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_MIMO\_ 802.11ax(40)\_HE0(Full)\_7085

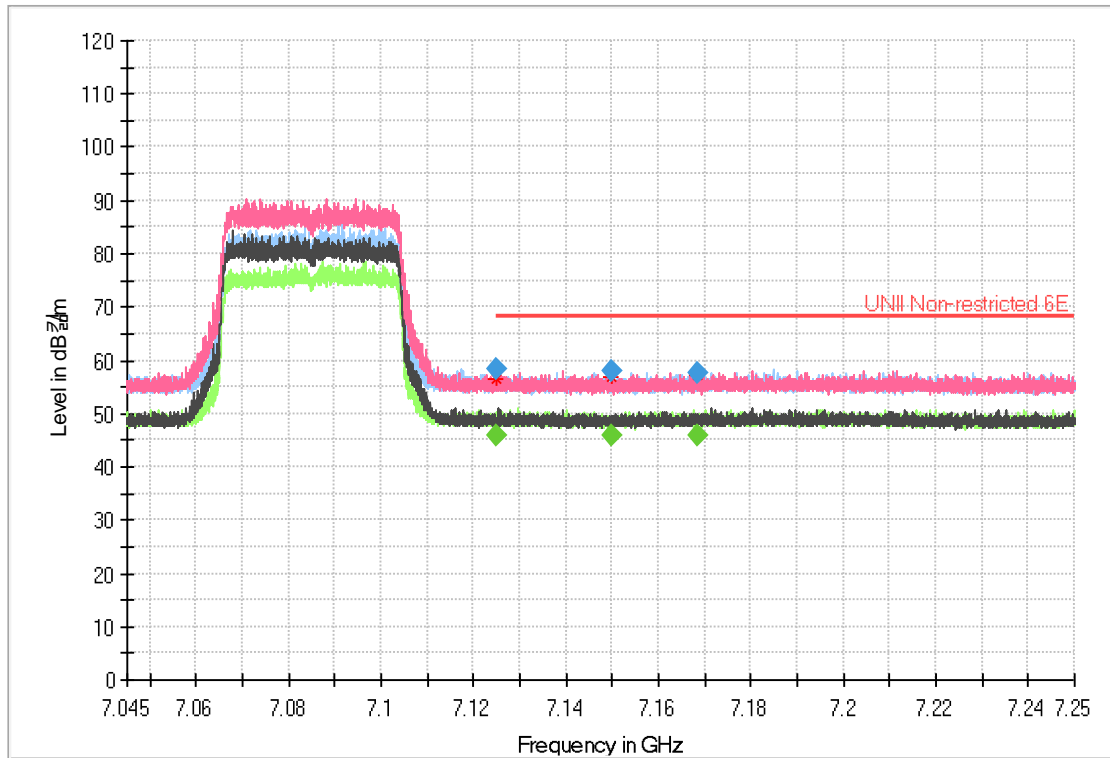


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
7 125.01	41.62	58.22	-	-	-	150	V	357	16.60	9.98	68.20	-	-
7 149.86	41.51	58.11	-	-	-	287	H	10	16.60	10.09	68.20	-	-
7 168.55	40.85	57.45	-	-	-	214	V	183	16.60	10.75	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_MIMO\_ 802.11ax(80)\_HE0(Full)\_5985

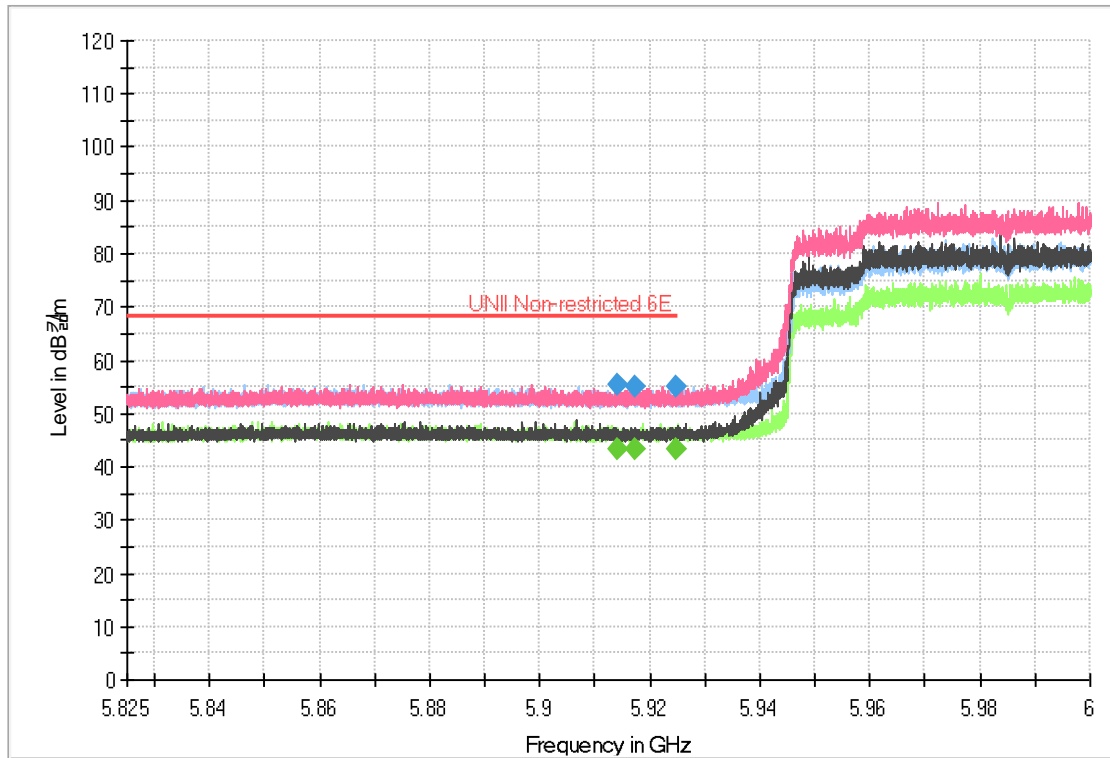


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
5 913.94	41.72	55.42	-	-	-	216	V	130	13.70	12.78	68.20	-	-
5 917.45	41.37	55.07	-	-	-	213	H	25	13.70	13.13	68.20	-	-
5 924.87	41.50	55.20	-	-	-	336	H	264	13.70	13.00	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)

Band Edge\_MIMO\_ 802.11ax(80)\_HE0(Full)\_7025

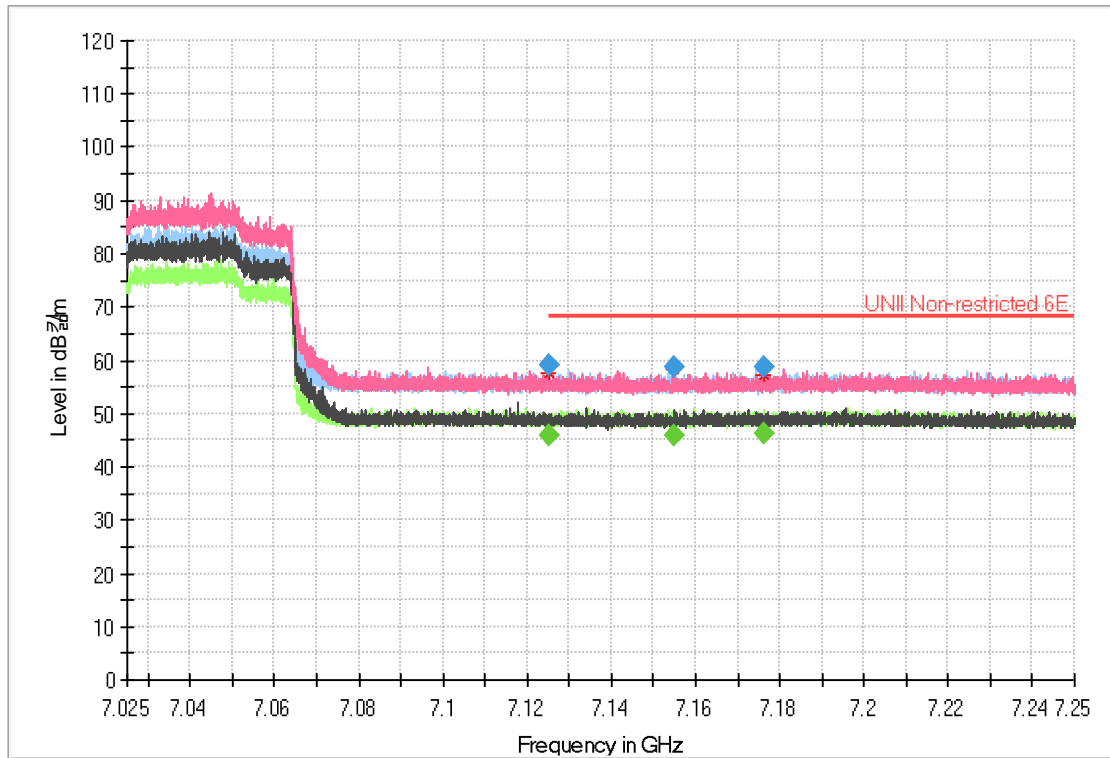


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
7 125.33	42.36	58.96	-	-	-	250	H	354	16.60	9.24	68.20	-	-
7 154.94	41.97	58.57	-	-	-	150	V	336	16.60	9.63	68.20	-	-
7 176.16	41.95	58.55	-	-	-	223	H	0	16.60	9.65	68.20	-	-

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



Band Edge\_MIMO\_ 802.11ax(160)\_HE0(Full)\_6025

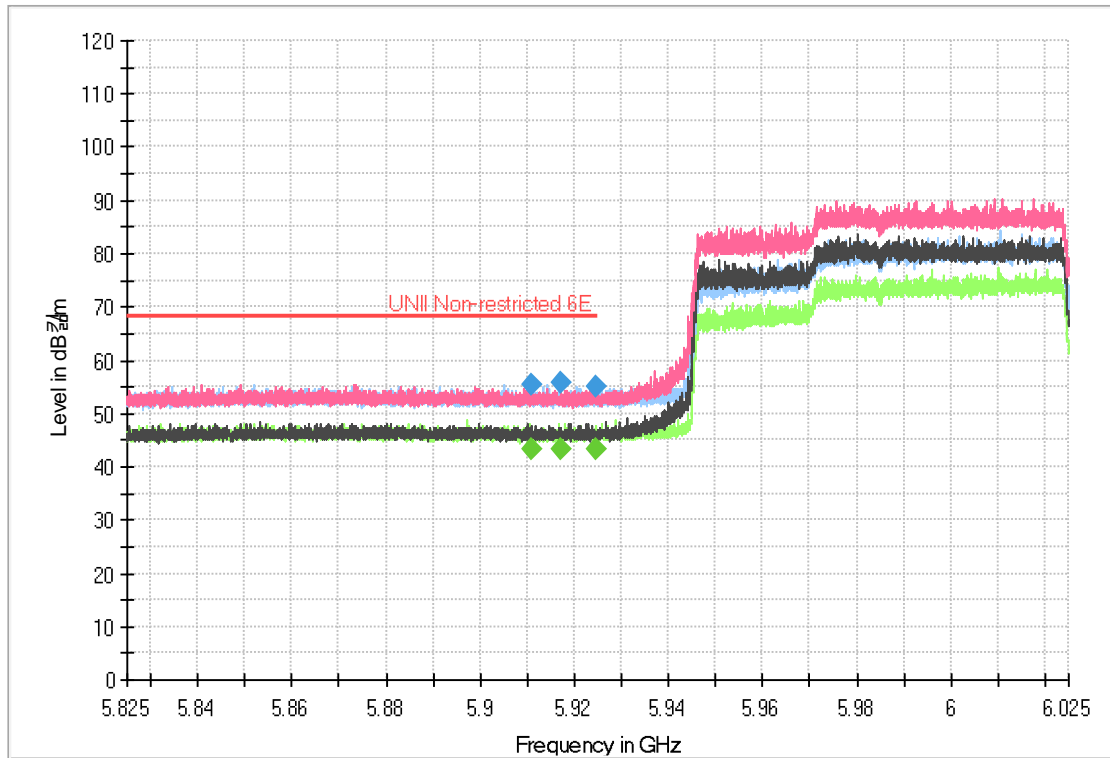

Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
5 910.90	41.78	55.48	-	-	-	252	V	83	13.70	12.72	68.20	-	-
5 917.22	42.17	55.87	-	-	-	239	H	256	13.70	12.33	68.20	-	-
5 924.76	41.37	55.07	-	-	-	164	H	278	13.70	13.13	68.20	-	-


**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



### 3.2.5.6 Simultaneously transmission Spurious Emissions

5 GHz UNII band

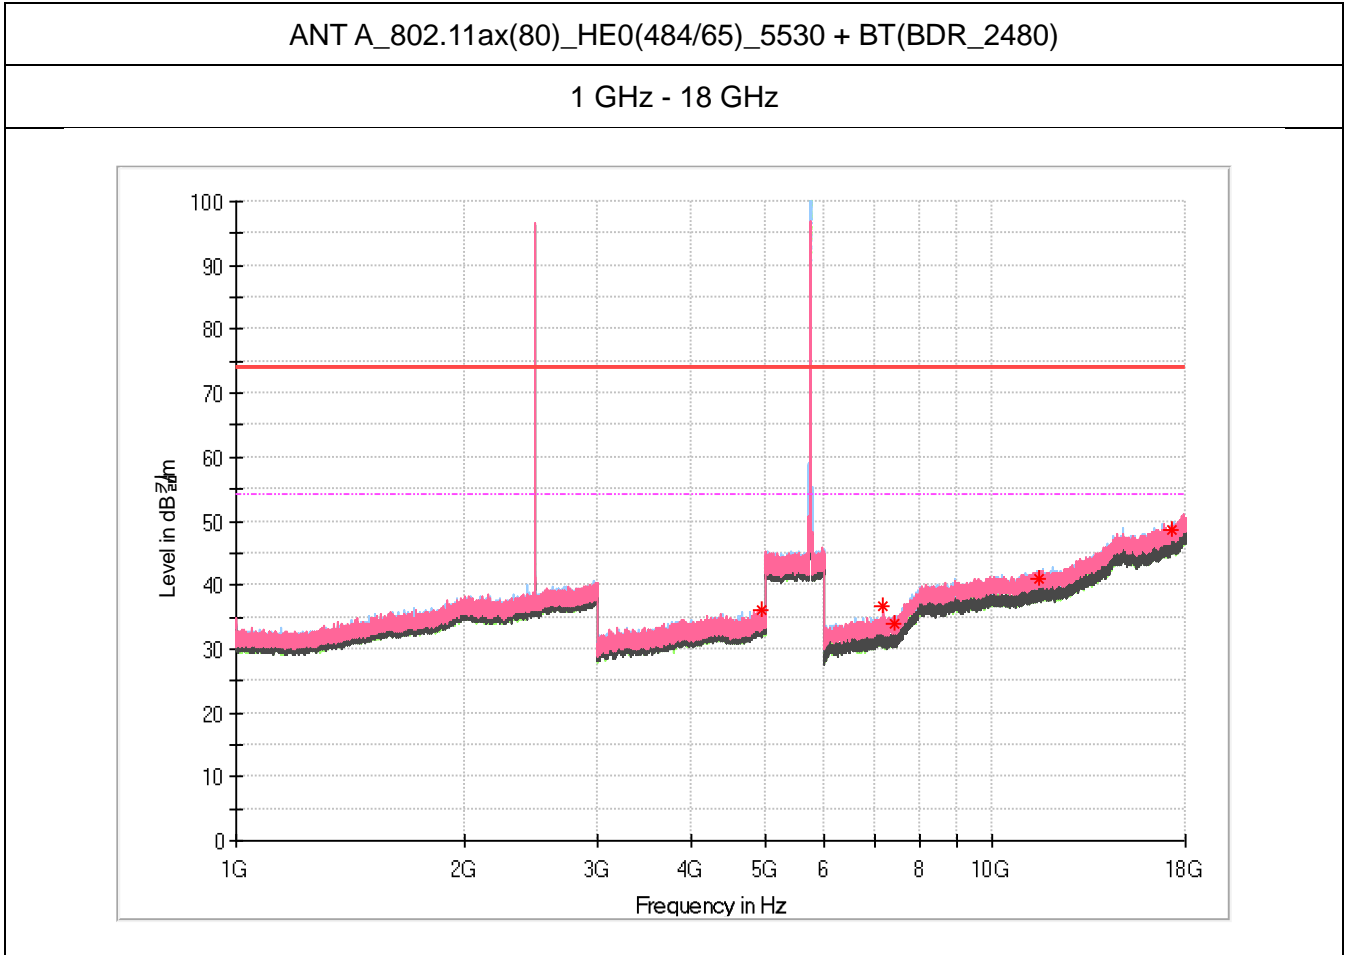

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
* 4961.81	32.58	35.98	---	---	---	200	H	207	3.40	38.02	74.00	---	---
7181.25	32.36	36.76	---	---	---	200	V	191	4.40	31.44	68.20	---	---
* 7440.75	29.06	33.86	---	---	---	200	H	7	4.80	40.14	74.00	---	---
* 11490.00	27.45	41.05	---	---	---	200	H	106	13.60	32.95	74.00	---	---
17235.00	27.09	48.49	---	---	---	200	H	7	21.40	19.71	68.20	---	---

#### Remarks


1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)





ANT B\_802.11ax(20)\_HE0(106/53)\_5745 + BT(BDR\_2480)

1 GHz - 18 GHz

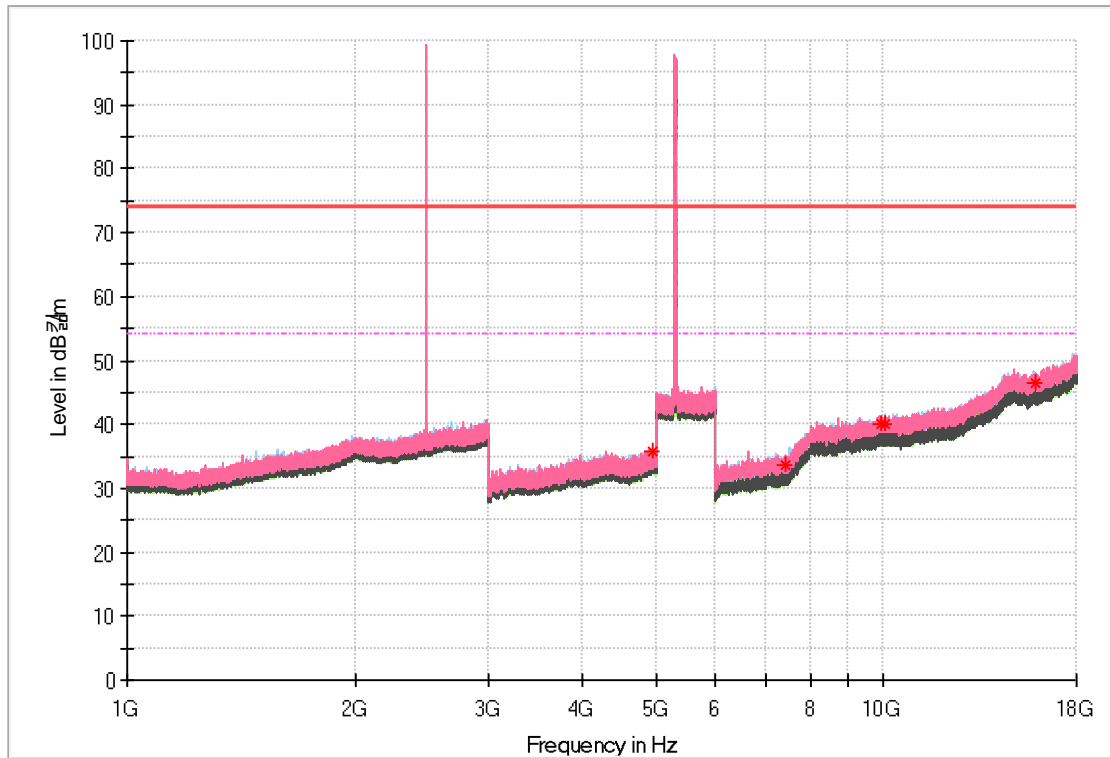

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
* 4960.69	32.32	35.82	---	---	---	300	V	264	3.50	38.18	74.00	---	---
* 7440.00	28.82	33.62	---	---	---	200	H	107	4.80	40.38	74.00	---	---
9920.25	28.56	39.96	---	---	---	300	H	24	11.40	28.24	68.20	---	---
10062.38	28.33	40.03	---	---	---	300	V	22	11.70	28.17	68.20	---	---
* 15930.38	26.50	46.40	---	---	---	300	V	102	19.90	27.60	74.00	---	---


**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



MIMO\_802.11ax(40)\_HE0(242/62)\_5310 + BT(BDR\_2480)

1 GHz - 18 GHz

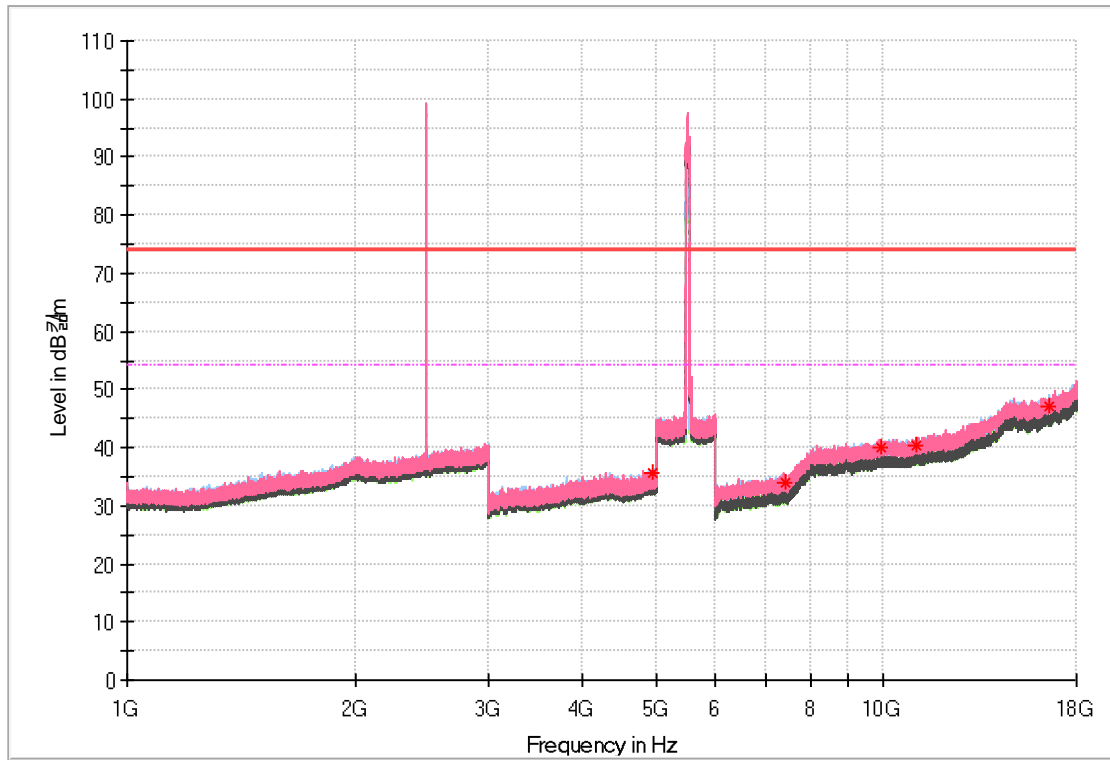

Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
* 4960.00	32.03	35.53	---	---	---	300	V	73	3.50	38.47	74.00	---	---
* 7440.38	29.13	33.93	---	---	---	200	V	220	4.80	40.07	74.00	---	---
9920.25	28.52	39.92	---	---	---	200	H	84	11.40	28.28	68.20	---	---
* 11060.25	27.19	40.29	---	---	---	300	V	139	13.10	33.71	74.00	---	---
16590.38	26.28	47.08	---	---	---	300	V	0	20.80	21.12	68.20	---	---

**Remarks**


1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



**6 GHz UNII band**

ANT A\_802.11ax(160)\_HE0(Full)\_6025 + BT(BDR\_2480)

1 GHz - 18 GHz

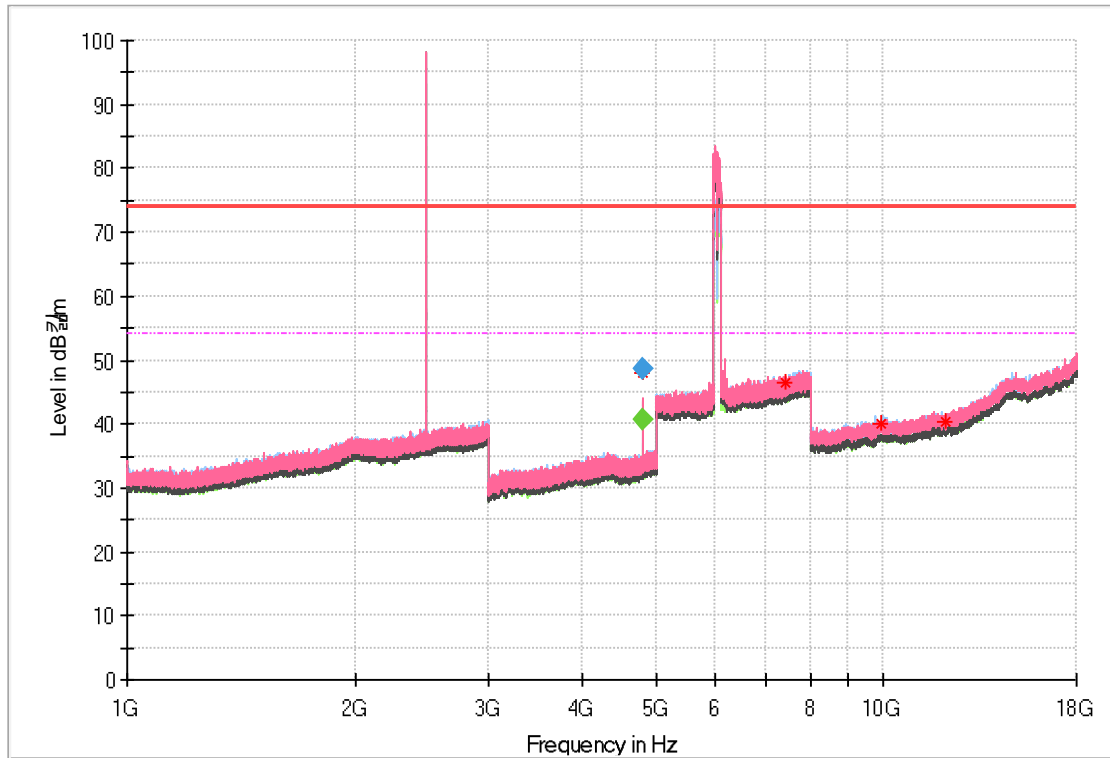

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
* 4820.06	---	---	37.73	40.73	---	226	V	62	3.00	---	---	13.27	54.00
* 4820.06	45.57	48.57	---	---	---	226	V	62	3.00	25.43	74.00	---	---
* 7440.13	29.29	46.49	---	---	---	200	H	283	17.20	27.51	74.00	---	---
9925.63	28.72	40.12	---	---	---	200	V	131	11.40	28.08	68.20	---	---
* 12050.00	26.46	40.26	---	---	---	300	H	132	13.80	33.74	74.00	---	---


**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



ANT B\_802.11ax(160)\_HE0(Full)\_6025 + BT(BDR\_2480)

1 GHz - 18 GHz

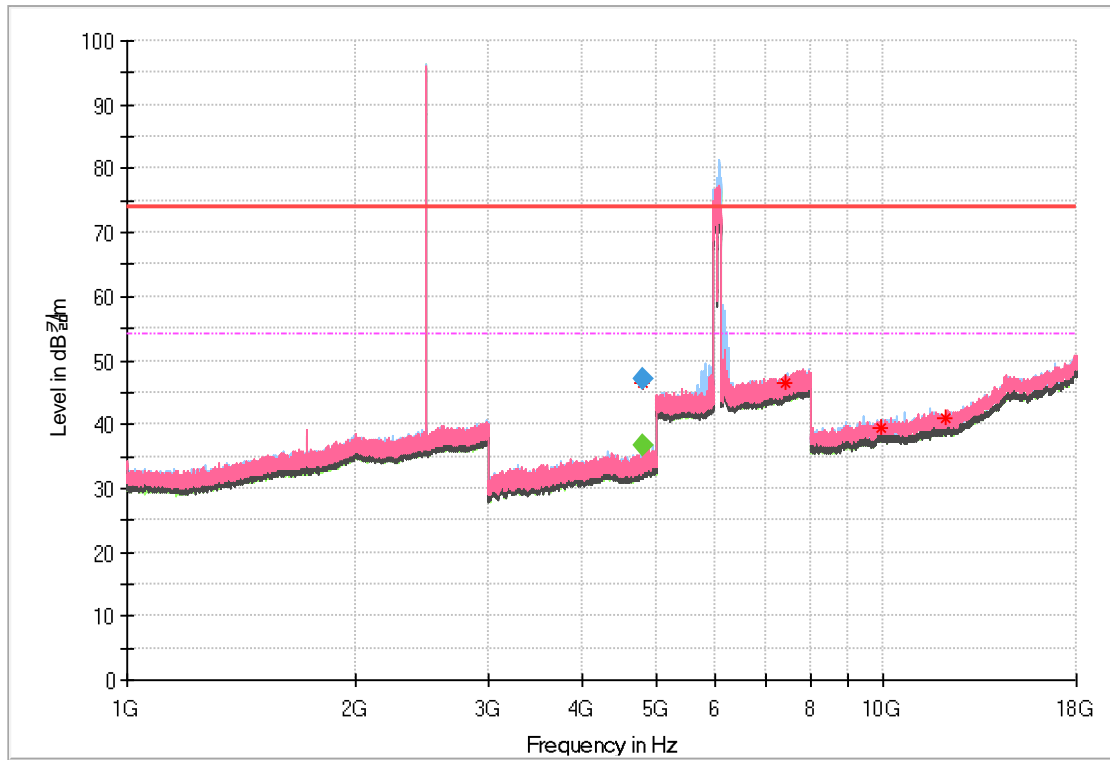

	Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
*	4819.81	43.35	46.35	---	---	---	188	V	195	3.00	27.65	74.00	---	---
*	7440.03	29.27	46.47	---	---	---	300	V	275	17.20	27.53	74.00	---	---
	9920.00	28.12	39.52	---	---	---	200	V	133	11.40	28.68	68.20	---	---
*	12050.31	27.19	40.99	---	---	---	200	V	0	13.80	33.01	74.00	---	---


**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



MIMO\_802.11ax(160)\_HE0(Full)\_6025 + BT(BDR\_2480)

1 GHz - 18 GHz

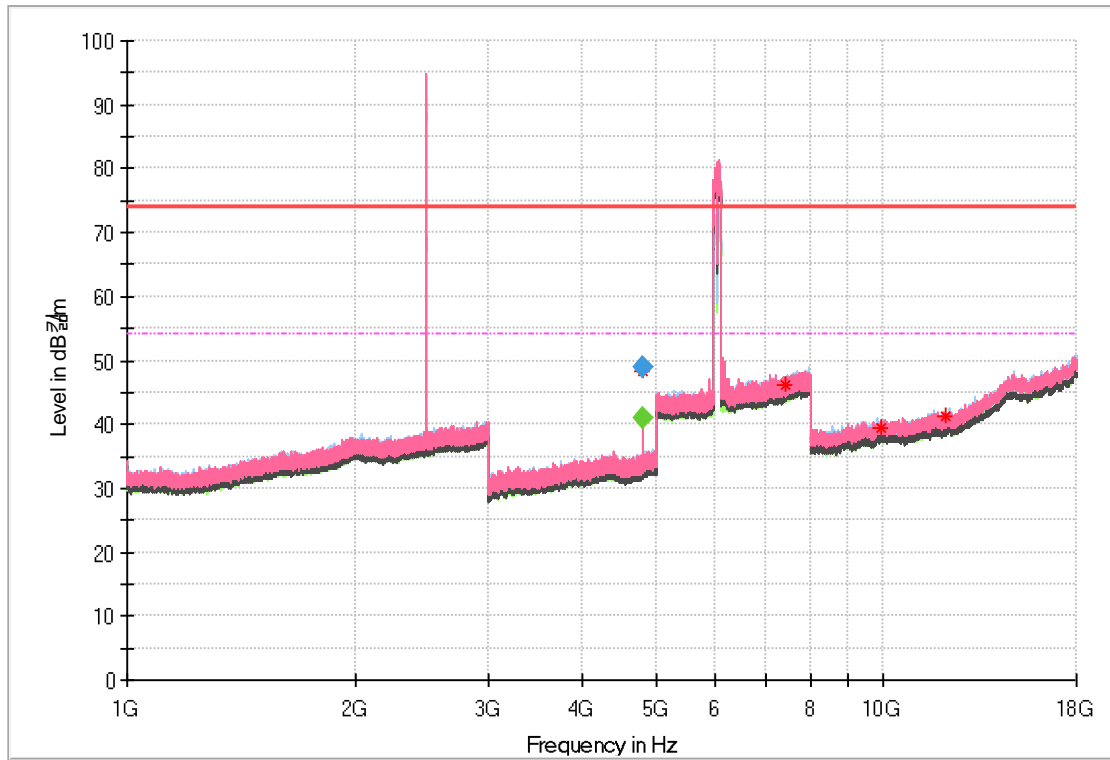

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
* 4820.13	---	---	38.08	41.08	---	260	V	59	3.00	---	---	12.92	54.00
* 4820.13	45.82	48.82	---	---	---	260	V	59	3.00	25.18	74.00	---	---
* 7439.94	29.08	46.28	---	---	---	200	V	52	17.20	27.72	74.00	---	---
9920.00	28.11	39.51	---	---	---	200	H	54	11.40	28.69	68.20	---	---
* 12050.00	27.60	41.40	---	---	---	300	V	0	13.80	32.60	74.00	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)