

# User manual of CCBP730Q

## 1. Introduction

CCBP730Q is a Wi-Fi / Bluetooth Combo module compliant with IEEE802.11 a.b.g.n.ac MAC/baseband/radio applications. The core chipset is from Qualcomm, part number QCA9379-7.

## 2. Hardware Architecture:

### 2.1 Main Chipset Information

Item	Vendor	Part Number
IEEE802.11 a.b.g.n.ac mac/baseband/radio Bluetooth 4.2 + HS	Qualcomm	QCA9379-7

### 2.2 Circuit Block Diagram

The major internal and external block diagram of CCBP730Q is illustrated in Figure 1-1.

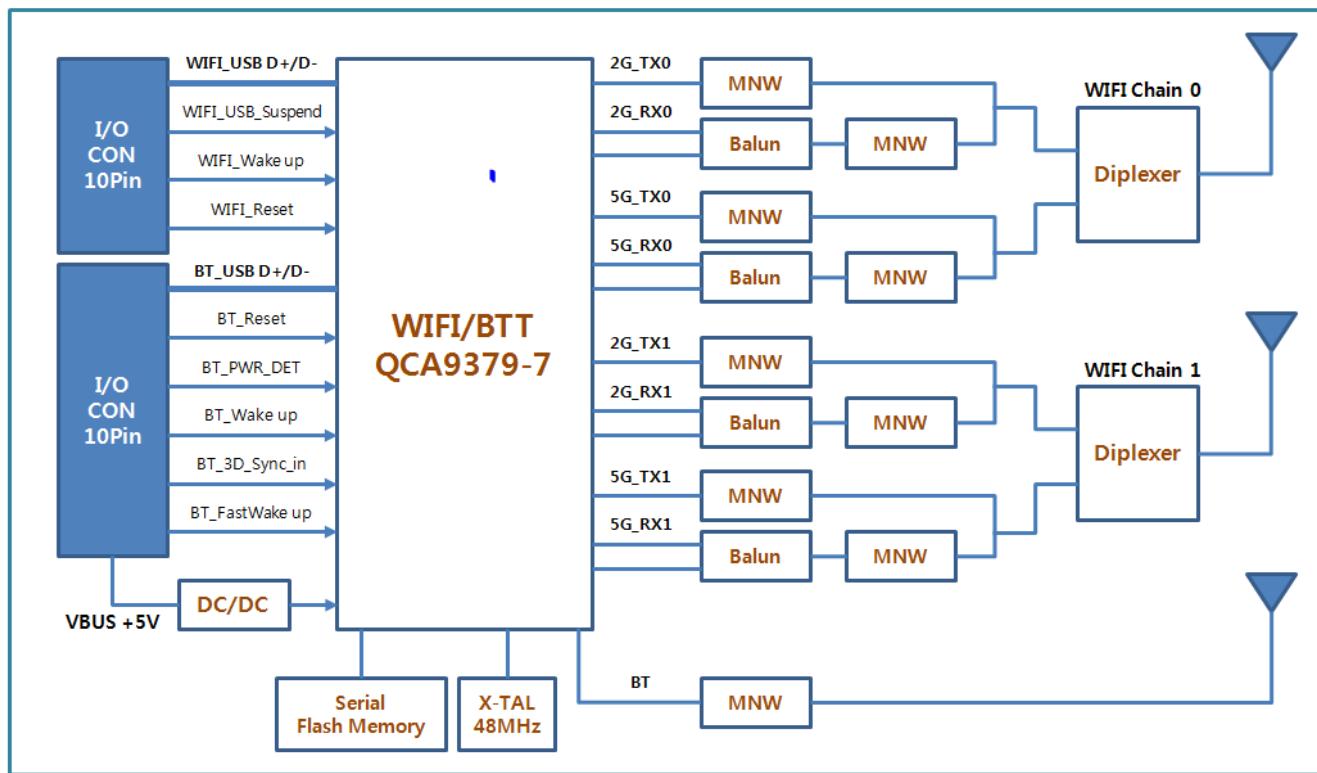


Figure 1-1 CCBP730Q block diagram and System Interface

### 3. Operational Description

CCBP730Q is the 802.11a/b/g/n /ac WIFI Module that acts as a communication controller for users of a wireless device to connect to Air-Conditioner.

#### - Features

- >IEEE 802.11ac Draft compliant.
- >Dual-band 2.4GHz /5 GHz
- >Dual-stream spatial multiplexing up to 867Mbps data rate
- >Support 20,40,80MHz channel with optional SGI(256QAM modulation)
- >On-chip power amplifiers and low –noise amplifiers for both bands

#### - Time base of the RF frequency

For IF and RF frequency, a crystal(48MHz) is a clock reference.

#### - Synthesizer

Synthesizer inside Transceiver. Internal voltage controlled oscillator (VCO) provides the desired LO signal base on the phase-locked loop (PLL) with a relatively wide tuning range for this application. Internal fractional nPLL allows support for a wide range of reference clock frequencies

#### - WIFI Transmission

Baseband data is modulated and upconverted to the 2.4GHz ISM and 5-GHz U-NII bands, respectively. Linear on chip power amplifier are included, which are capable of delivering high output powers while Meeting IEEE802.11ac and IEEE802.a/b/g/n specifications without the need for external Pas.

When using the internal Pas, closed-loop output power control is completely integrated.

Base-band Processing (BBP) IC has DSSS (BPSK/QPSK/CCK) and OFDM (BPSK/QPSK/16QAM/64QAM/25QAM) modulation function, it provides transmission data rate are 1, 2, 5.5, 11Mbps on DSSS and 6, 12, 18, 24, 36, 48, 54 Mbps on OFDM. Digital data signal will be converted to analog (TX IQ) signals through DAC in BBP IC, TX IQ pass through to low pass filter. TX I/Q signal use direct conversion (zero-IF) architecture converter to generate carrier frequency signal. Transceiver IC and internal PA magnify output power.

#### - WIFI Receiver

The QCA9379-7 has a wide dynamic range, direct conversion receiver that employs high-order on-chip channel filtering to ensure reliable operation in the noisy 2.4GHz ISM band or the entire 5GHz U-NII band .Control signals are available that can support the use of optional LNAs for each band,which can increase the receive sensitivity by several decibels.

Reverse direction isolation of LNA inside Transceiver IC suppresses unwanted radiation. Then RF signal will be directly down to IF signal (RX IQ) and high frequency spurious emissions are suppressed by LPF. At last RX IQ signal will be demodulated digital data.

- Product Details

> Data Modulation

DSSS:CCK,BPSK,QPSK for 802.11b

OFDM:BPSK,QPSK,16QAM,64QAM,256QAM for 802.11a,g,n,ac

> Frequency : 2.4GHz/ 5GHz

- 802.11n+HT20 spec

MCS Index	Modulation	$R$	$N_{BPSCS}(i_{SS})$	$N_{SD}$	$N_{SP}$	$N_{CBPS}$	$N_{DBPS}$	Data rate (Mb/s)	
								800 ns GI	400 ns GI (see NOTE)
0	BPSK	1/2	1	52	4	52	26	6.5	7.2
1	QPSK	1/2	2	52	4	104	52	13.0	14.4
2	QPSK	3/4	2	52	4	104	78	19.5	21.7
3	16-QAM	1/2	4	52	4	208	104	26.0	28.9
4	16-QAM	3/4	4	52	4	208	156	39.0	43.3
5	64-QAM	2/3	6	52	4	312	208	52.0	57.8
6	64-QAM	3/4	6	52	4	312	234	58.5	65.0
7	64-QAM	5/6	6	52	4	312	260	65.0	72.2

802.11n+HT40 spec

MCS Index	Modulation	$R$	$N_{BPSCS}(i_{SS})$	$N_{SD}$	$N_{SP}$	$N_{CBPS}$	$N_{DBPS}$	Data rate (Mb/s)	
								800 ns GI	400 ns GI
8	BPSK	1/2	1	108	6	216	108	27.0	30.0
9	QPSK	1/2	2	108	6	432	216	54.0	60.0
10	QPSK	3/4	2	108	6	432	324	81.0	90.0
11	16-QAM	1/2	4	108	6	864	432	108.0	120.0
12	16-QAM	3/4	4	108	6	864	648	162.0	180.0
13	64-QAM	2/3	6	108	6	1296	864	216.0	240.0
14	64-QAM	3/4	6	108	6	1296	972	243.0	270.0
15	64-QAM	5/6	6	108	6	1296	1080	270.0	300.0

802.11ac spec

MCS	Modula-tion & Rate	20 MHz 1x SS	20 MHz 2x SS	20 MHz 4x SS	20 MHz 8x SS	40 MHz 1x SS	40 MHz 2x SS	40 MHz 4x SS	40 MHz 8x SS	80 MHz 1x SS	80 MHz 2x SS	80 MHz 4x SS	80 MHz 8x SS	160 MHz 1x SS	160 MHz 2x SS	160 MHz 4x SS	160 MHz 8x SS
0	BPSK 1/2	7.2	14.4	28.9	57.8	15.0	30.0	60.0	120.0	32.5	65.0	130.0	260.0	65.0	130.0	260.0	520.0
1	QPSK 1/2	14.4	28.9	57.8	115.6	30.0	60.0	120.0	240.0	65.0	130.0	260.0	520.0	130.0	260.0	520.0	1040.0
2	QPSK 3/4	21.7	43.3	86.7	173.3	45.0	90.0	180.0	360.0	97.5	195.0	390.0	780.0	195.0	390.0	780.0	1560.0
3	16-QAM 1/2	28.9	57.8	115.6	231.1	60.0	120.0	240.0	480.0	130.0	260.0	520.0	1040.0	260.0	520.0	1040.0	2080.0
4	16-QAM 3/4	43.3	86.7	173.3	346.7	90.0	180.0	360.0	720.0	195.0	390.0	780.0	1560.0	390.0	780.0	1560.0	3120.0
5	64-QAM 2/3	57.8	115.6	231.1	462.2	120.0	240.0	480.0	960.0	260.0	520.0	1040.0	2080.0	520.0	1040.0	2080.0	4160.0
6	64-QAM 3/4	65.0	130.0	260.0	520.0	135.0	270.0	540.0	1080.0	292.5	585.0	1170.0	2340.0	585.0	1170.0	2340.0	4680.0
7	64-QAM 5/6	72.2	144.4	288.9	577.8	150.0	300.0	600.0	1200.0	325.0	650.0	1300.0	26000	650.0	1300.0	2600.0	5200.0
8	256 QAM 3/4	86.7	173.3	346.7	693.3	180.0	360.0	720.0	1440.0	390.0	780.0	1560.0	3120.0	780.0	1560.0	3120.0	6240.0
9	256-QAM 5/6	-	-	-	-	200.0	400.0	800.0	1600.0	433.3	866.7	1733.3	3466.7	866.7	1733.3	3466.7	6933.3

## 4. Notice

### FCC Statement

## Approval Statement

### **FCC approval**

This device complies with Part 15 of the FCC's Rules. Operation is subject to the following two Conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesirable operation.

To satisfy FCC exterior labeling requirements, the following text must be placed on the exterior of the end product.

**Contains Transmitter module FCC ID: A3LCCBP730Q**

### **IC approval**

This device complies with Innovation, Science and Economic Development Canada's license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

*Cet appareil est conforme avec d'Innovation, Sciences et Développement économique Canada exempts de licence standard RSS (s). L'opération est soumise aux deux conditions suivantes:*

- (1) cet appareil ne peut causer d'interférences, et  
(2) cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.*

The host device must be labeled to display the Industry Canada certification number of the module.

**Contains transmitter module IC:649E-CCBP730Q**

*Le dispositif d'accueil doivent être étiquetés pour afficher le numéro de certification d'Industrie Canada du module.*

**Contient module émetteur IC :649E-CCBP730Q**

## IMPORTANT NOTE

This device complies with FCC & IC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device is intended only for OEM integrators under the following conditions:

- 1) This module may not be co-located with any other transmitters or antennas.
- 2) The antenna must be installed such that 20cm is maintained between the antenna and users.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements with this module installed.

In the event that these conditions cannot be met, then the FCC & IC authorizations are no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product including this module and obtaining separate FCC & IC authorizations.

*Cet appareil est conforme aux limites de la FCC et IC exposition aux radiations dans un environnement non contrôlé. Cet appareil doit être installé et ne doit pas être co-localisées ou opérant en conjonction avec une autre antenne ou un autre émetteur.*

*Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes :*

- 1 ) L'antenne doit être installée de telle sorte que 20 cm est maintenue entre l'antenne et les utilisateurs .*
- 2 ) Ce module ne peut pas être co-localisé avec d'autres émetteurs ou des antennes .*

*Aussi longtemps que deux conditions précitées sont remplies, le test du transmetteur supplémentaires ne seront pas tenus. Toutefois, l'intégrateur OEM est toujours responsable de tester leurs produits finis pour toutes les exigences de conformité supplémentaires avec ce module installé.*

*Dans le cas où ces conditions ne peuvent pas être remplies, alors la FCC et IC autorisations ne sont plus considérés comme valides et l'ID de la FCC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera responsable de réévaluer le produit final, y compris l'obtention de ce module et séparée de la FCC et IC Autorisations*

## User Information

**Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

**Attention:** Toute changé ou modifications non expressément approuvés par la partie responsable de la conformité pourraient annuler l'utilisateur 'autorité de faire fonctionner cet équipement.

-This device is restricted to indoor use only within the 5.15 ~ 5.25GHz Band.

-User should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

*-Cet appareil est restreint à l'utilisation à l'intérieur seulement dans la bande 5.15 ~ 5.25GHz.*