



Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: 3 Inch RGB Smart Recessed Lighting with Gradient Accent Light and Night Light

Test Model: LJD005SMG2WH

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 23.8°C |
| Relative Humidity: | 52.1% |
| ATM Pressure: | 100.0 kPa |
| Test Engineer: | Jay Luo |
| Supervised by: | Nick Peng |





A.1 -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT | BLE | 2402 | Ant | 0.663 | ≥ 0.5 | Pass |
| NVNT | BLE | 2440 | Ant | 0.663 | ≥ 0.5 | Pass |
| NVNT | BLE | 2480 | Ant | 0.661 | ≥ 0.5 | Pass |







Test Graphs

-6dB Bandwidth NVNT BLE 2402MHz Ant

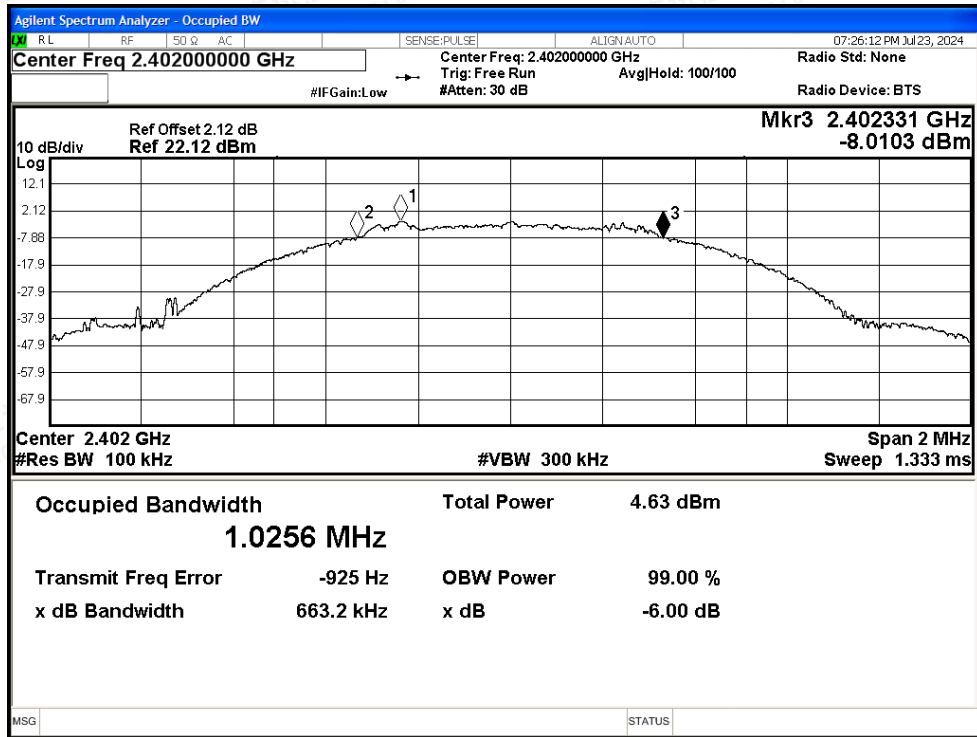

-6dB Bandwidth NVNT BLE 2440MHz Ant

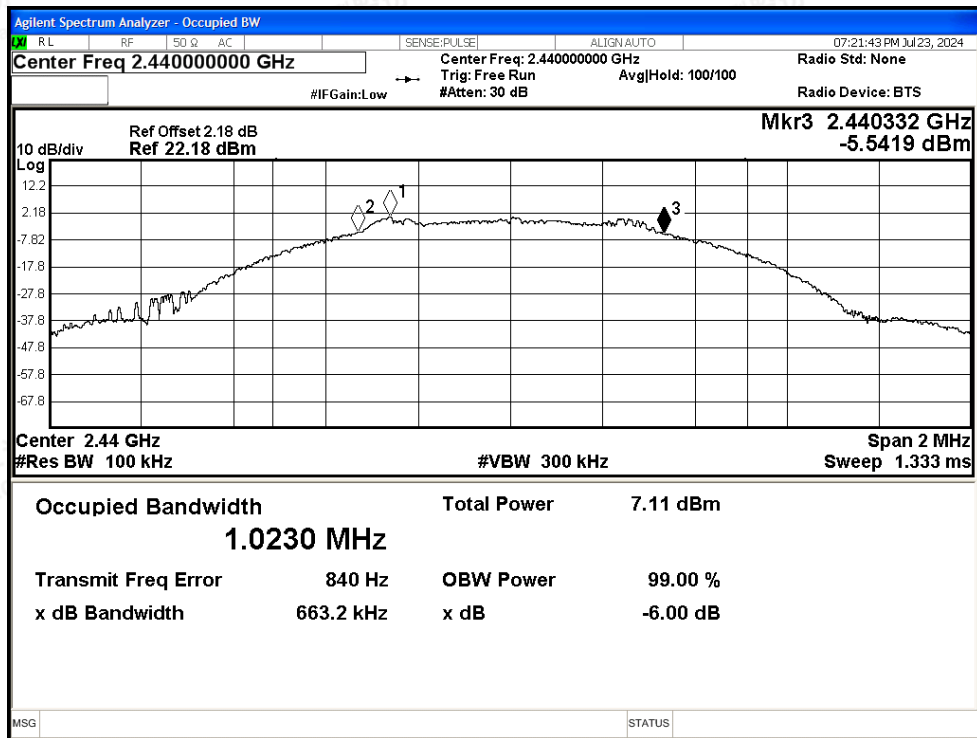


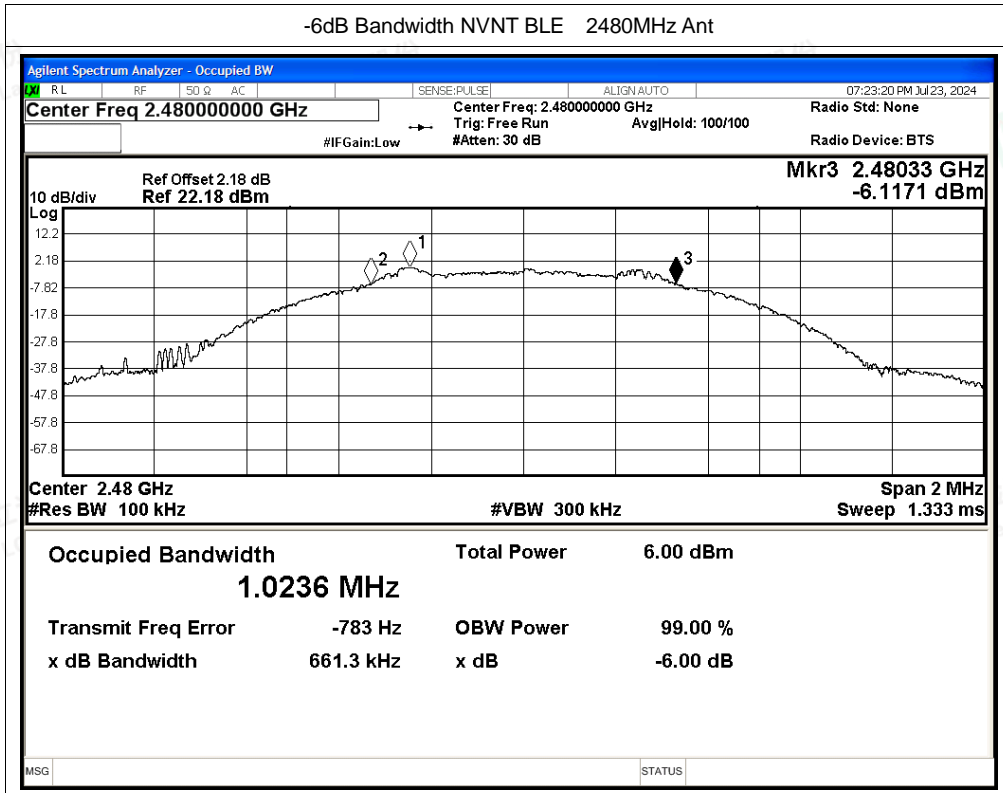





A.2 Maximum Peak Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT | BLE | 2402 | Ant | -0.97 | 30 | Pass |
| NVNT | BLE | 2440 | Ant | 1.25 | 30 | Pass |
| NVNT | BLE | 2480 | Ant | 0.17 | 30 | Pass |



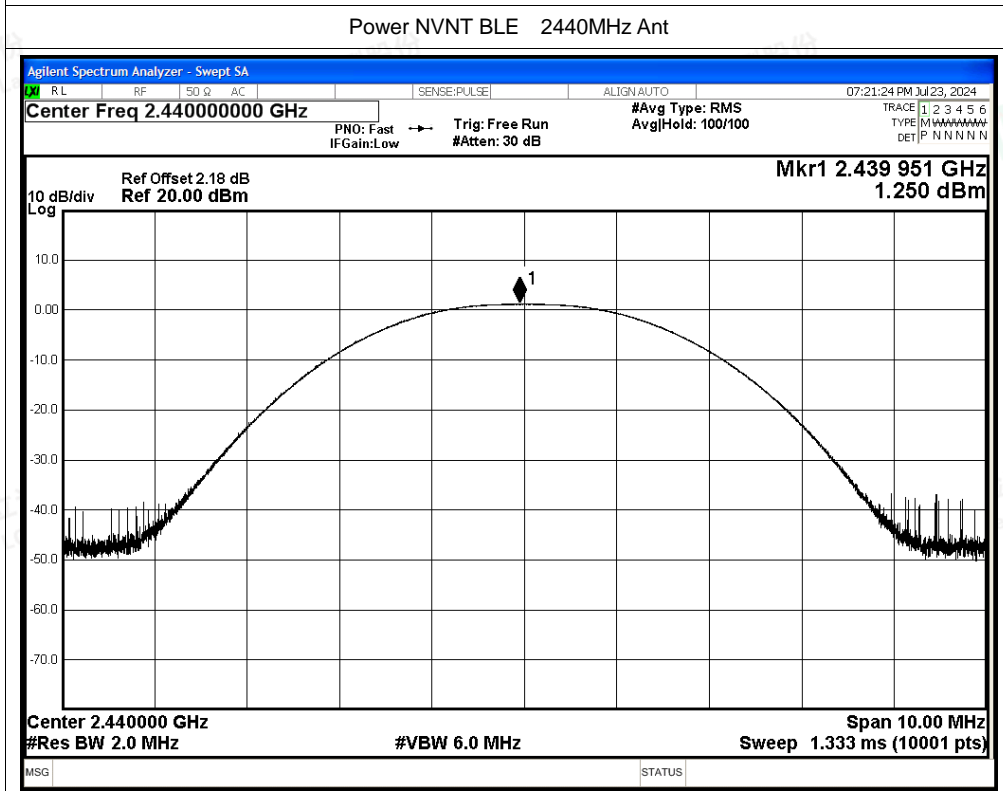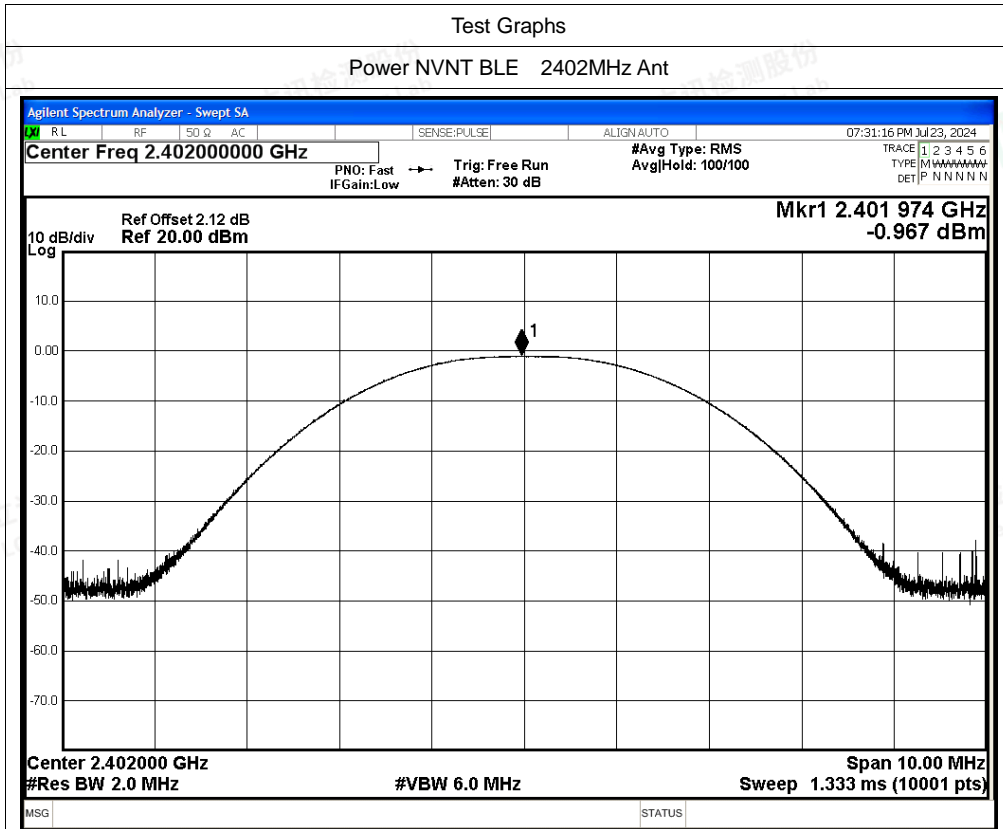


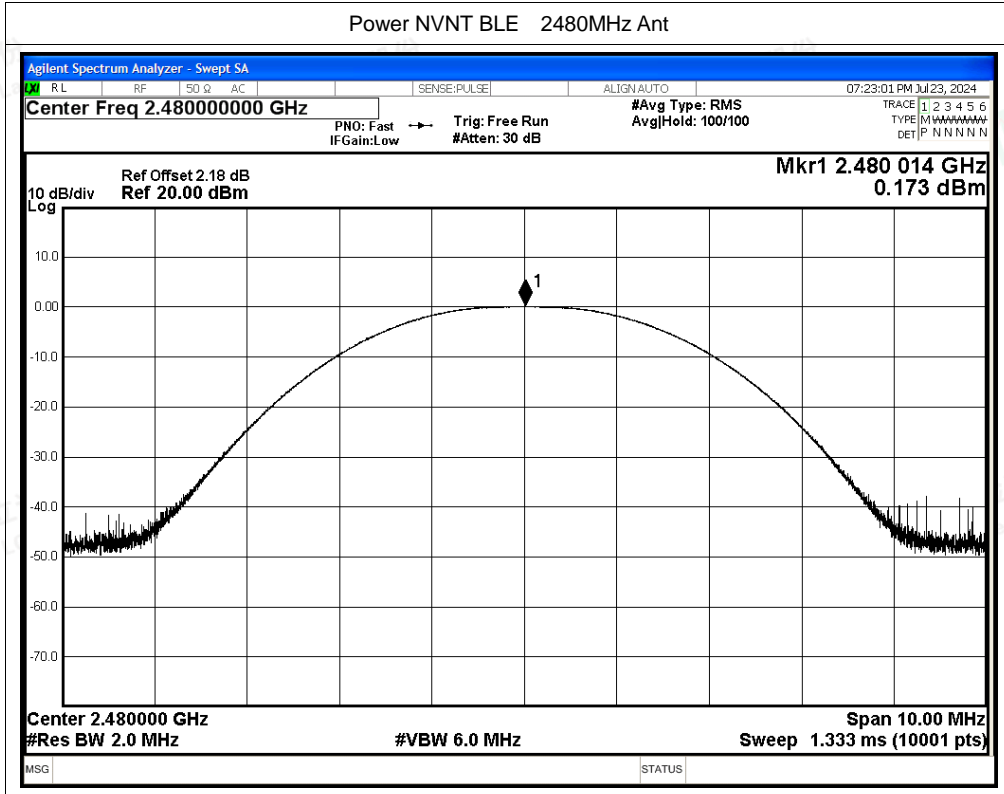





A.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|---------|
| NVNT | BLE | 2402 | Ant | -17.74 | 8 | Pass |
| NVNT | BLE | 2440 | Ant | -15.47 | 8 | Pass |
| NVNT | BLE | 2480 | Ant | -16.43 | 8 | Pass |



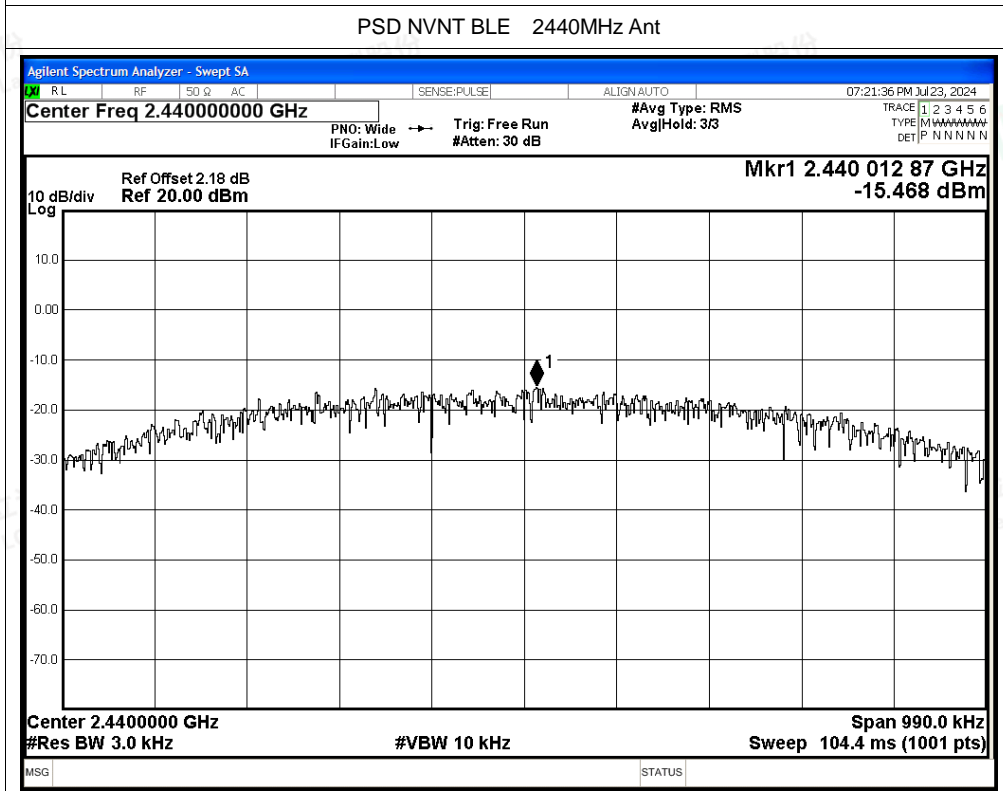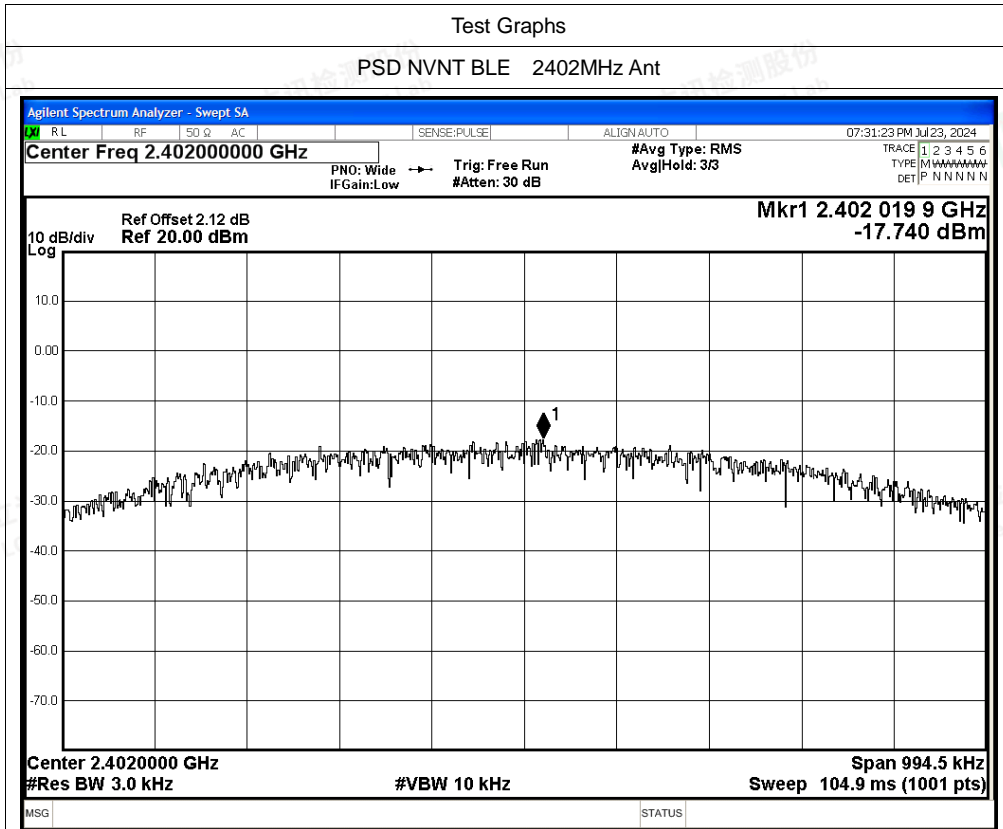

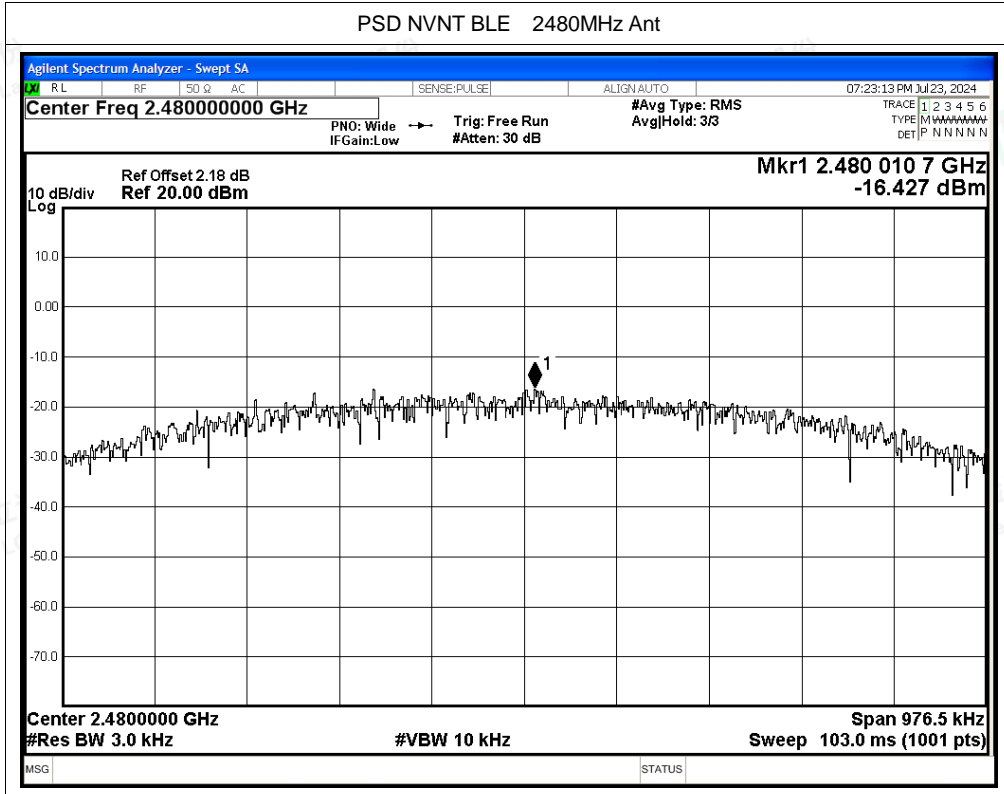



A.4 Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE | 2402 | Ant | -54.27 | -20 | Pass |
| NVNT | BLE | 2480 | Ant | -55.54 | -20 | Pass |








Test Graphs

Band Edge NVNT BLE 2402MHz Ant Ref

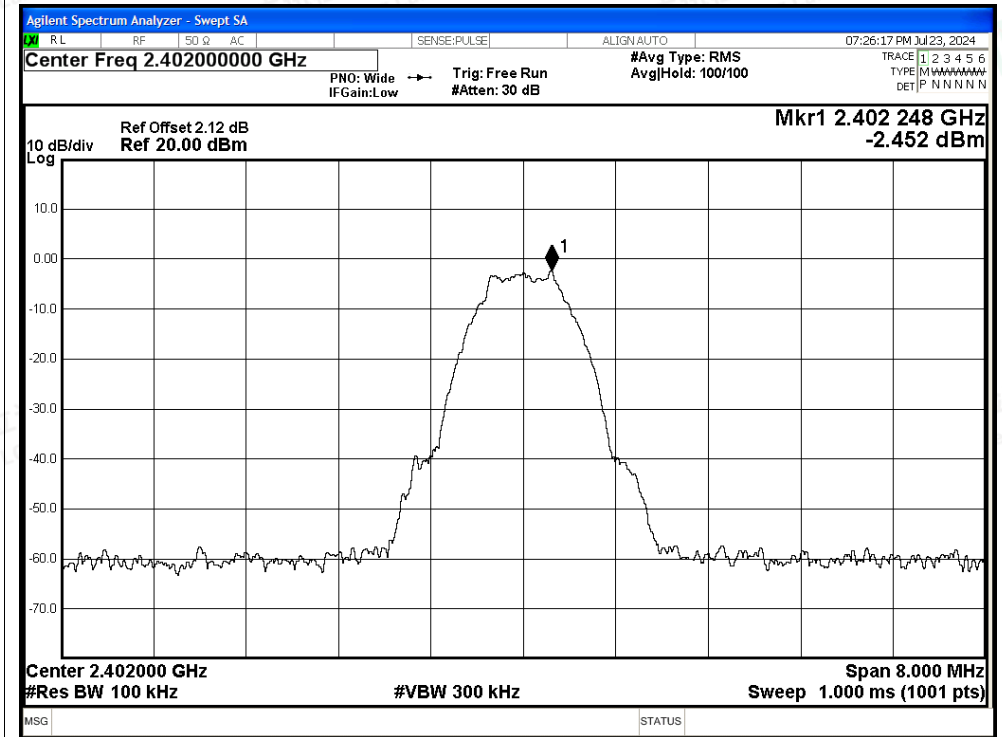

Band Edge NVNT BLE 2402MHz Ant Emission

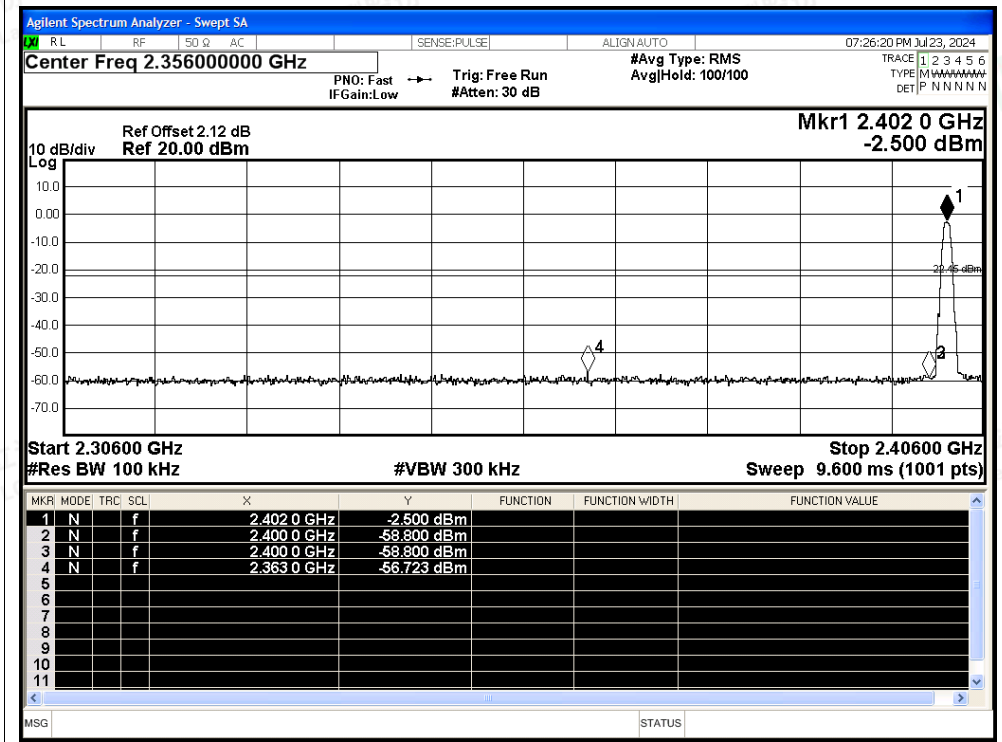

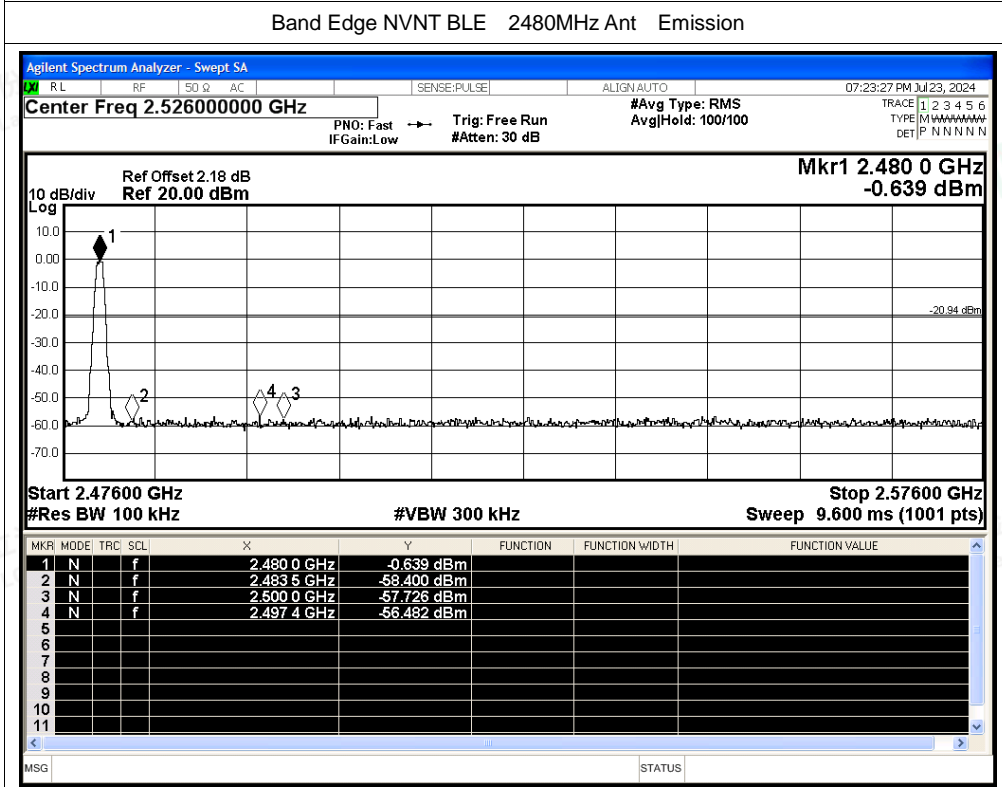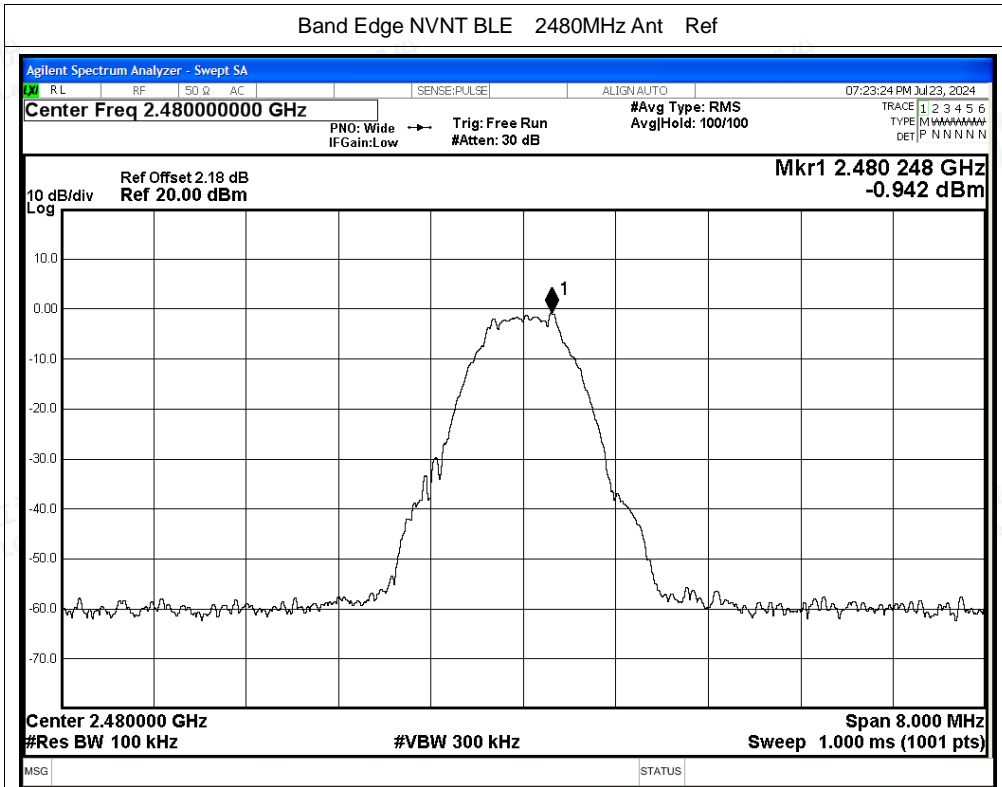



A.5 Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT | BLE | 2402 | Ant | -54.03 | -20 | Pass |
| NVNT | BLE | 2440 | Ant | -56.33 | -20 | Pass |
| NVNT | BLE | 2480 | Ant | -54.75 | -20 | Pass |






Test Graphs

Tx. Spurious NVNT BLE 2402MHz Ant Ref

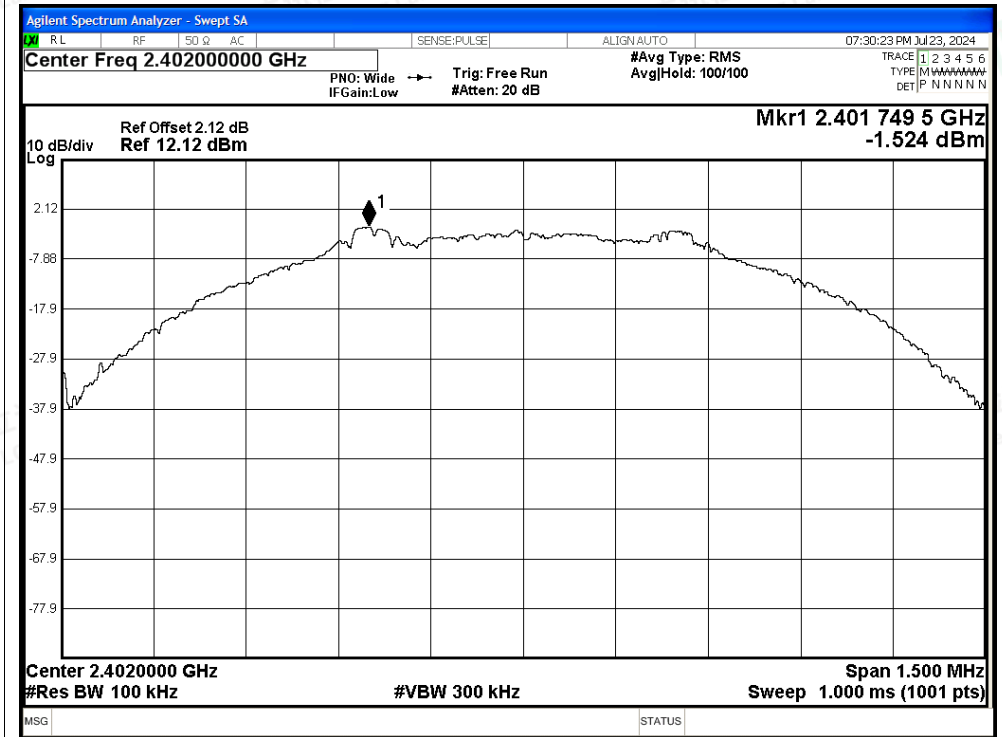


Tx. Spurious NVNT BLE 2402MHz Ant Emission

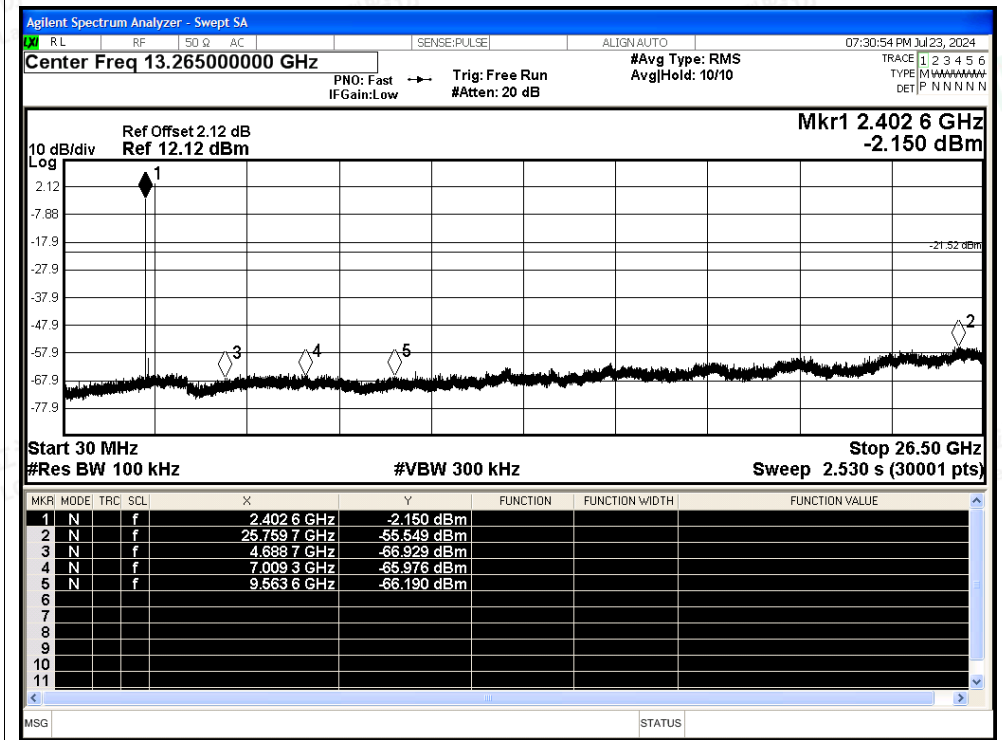






Tx. Spurious NVNT BLE 2440MHz Ant Ref

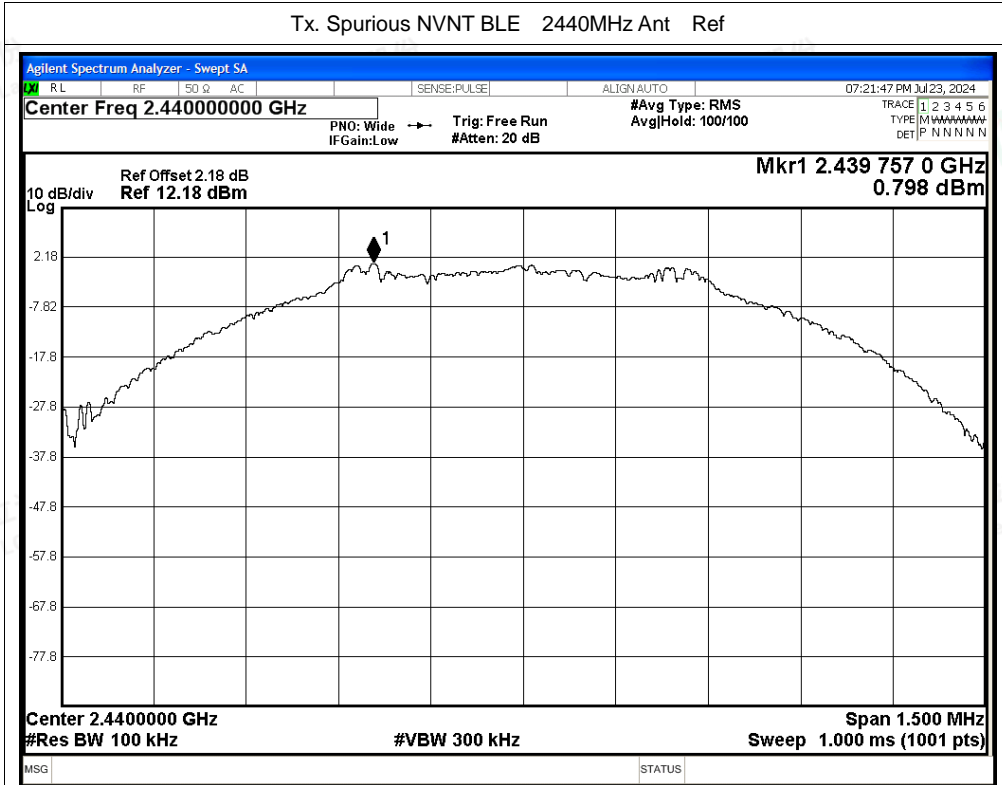

Tx. Spurious NVNT BLE 2440MHz Ant Emission

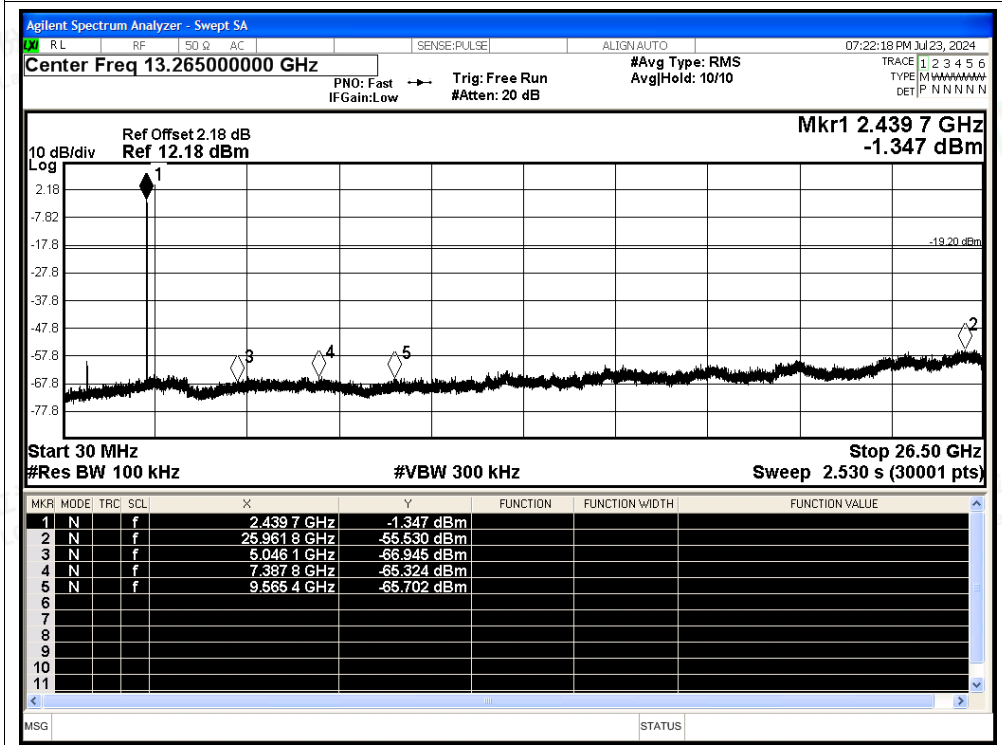

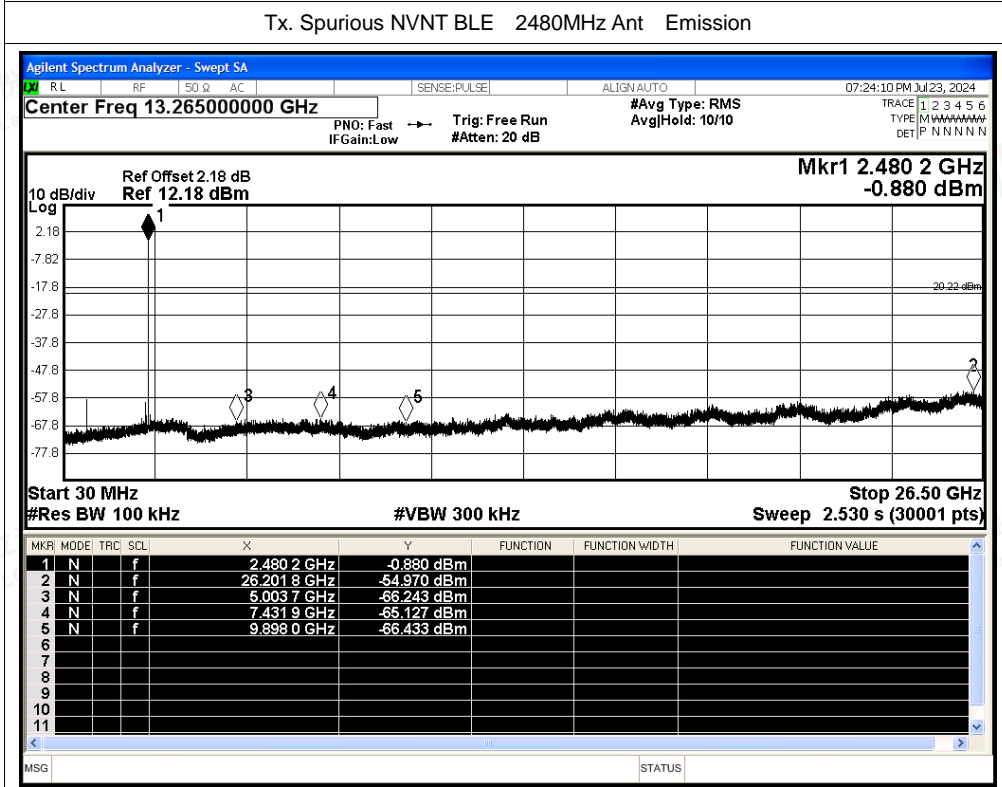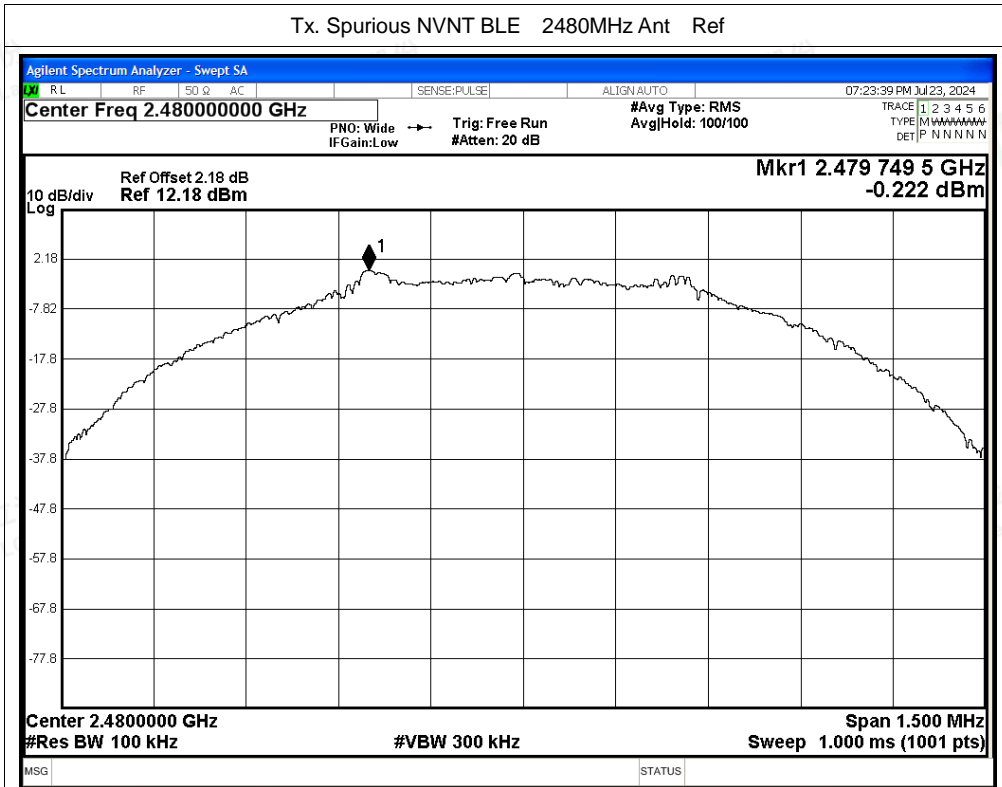



A.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT | BLE | 2402 | Ant | 87.39 | 0.59 | 0.61 |
| NVNT | BLE | 2440 | Ant | 87.39 | 0.59 | 0.61 |
| NVNT | BLE | 2480 | Ant | 87.39 | 0.59 | 0.61 |







Test Graphs

Duty Cycle NVNT BLE 2402MHz Ant

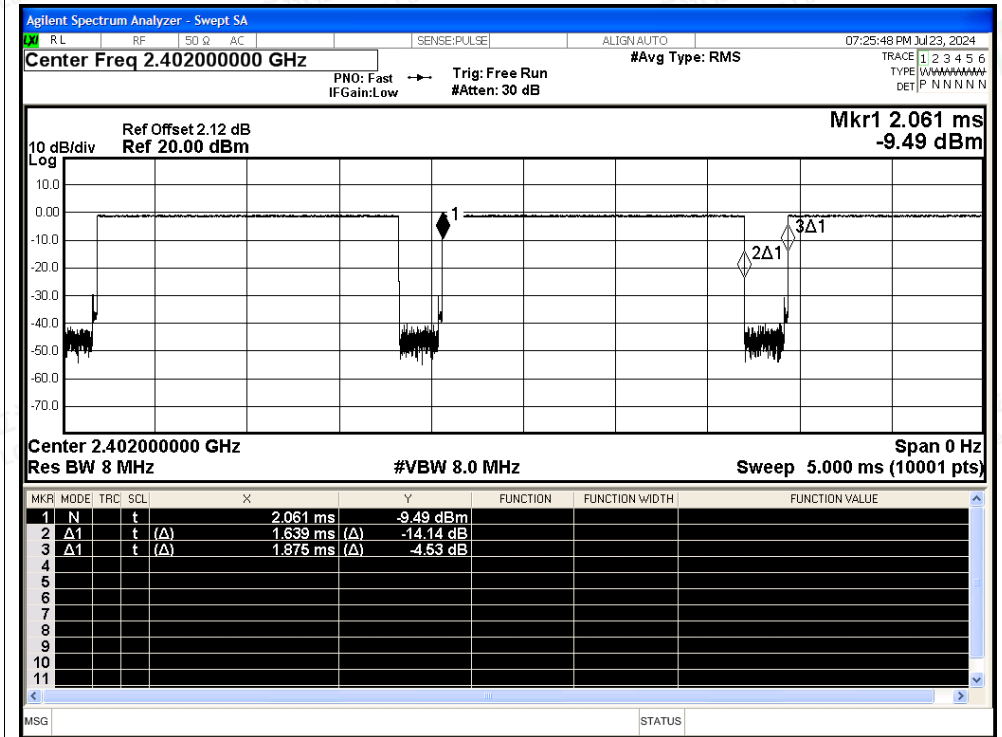

Duty Cycle NVNT BLE 2440MHz Ant

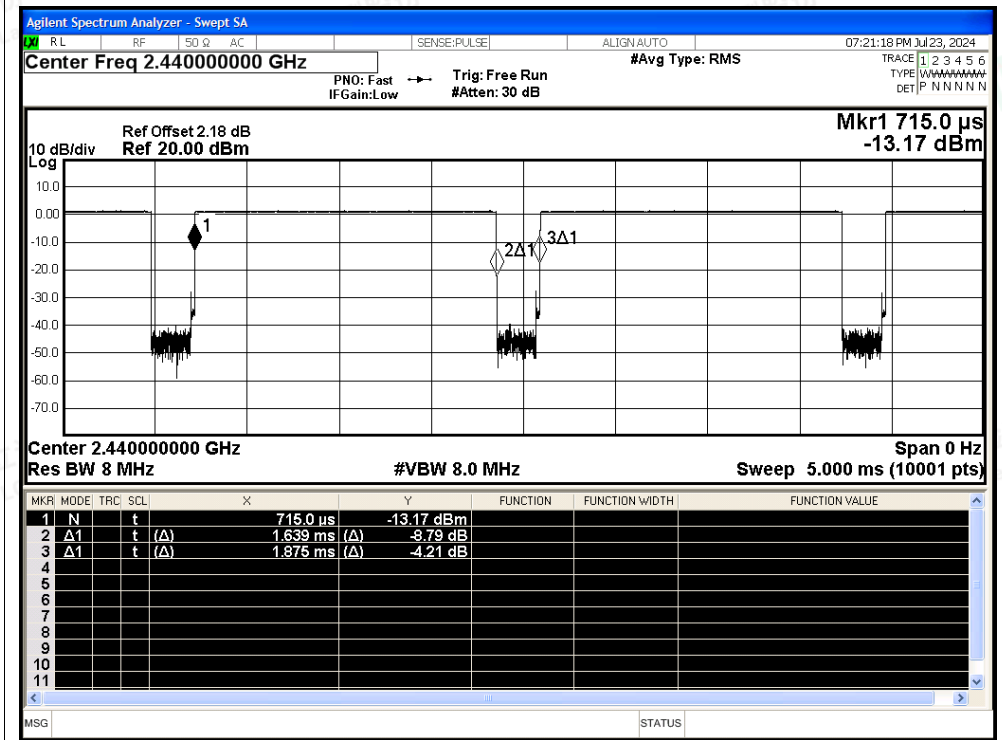

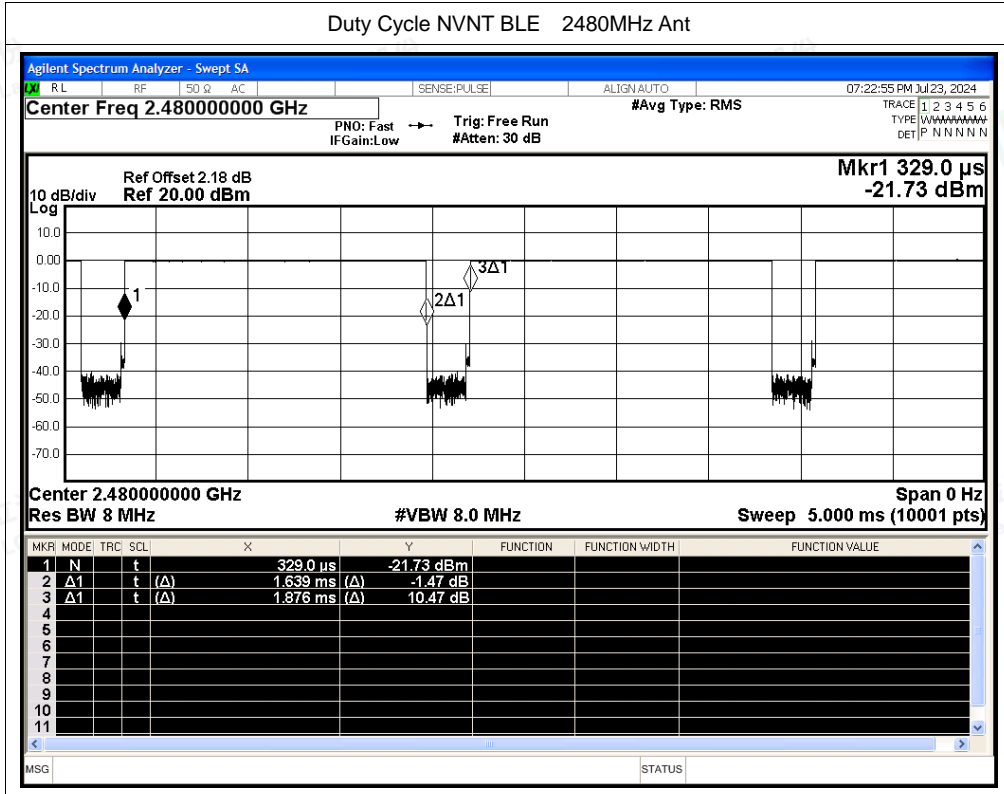



A.7 Restrict Band


| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT | BLE | 2402 | Ant | 2310 | -50.65 | 2.21 | - | 46.81 | Peak | 74 | Pass |
| NVNT | BLE | 2402 | Ant | 2310 | -58.11 | 2.21 | 0.59 | 39.94 | Average | 54 | Pass |
| NVNT | BLE | 2402 | Ant | 2324.496 | -47.28 | 2.21 | - | 50.18 | Peak | 74 | Pass |
| NVNT | BLE | 2402 | Ant | 2338.8 | -57.63 | 2.21 | 0.59 | 40.42 | Average | 54 | Pass |
| NVNT | BLE | 2402 | Ant | 2390 | -50.51 | 2.21 | - | 46.95 | Peak | 74 | Pass |
| NVNT | BLE | 2402 | Ant | 2390 | -58.86 | 2.21 | 0.59 | 39.19 | Average | 54 | Pass |
| NVNT | BLE | 2480 | Ant | 2483.5 | -44.43 | 2.21 | - | 53.03 | Peak | 74 | Pass |
| NVNT | BLE | 2480 | Ant | 2483.5 | -57.16 | 2.21 | 0.59 | 40.89 | Average | 54 | Pass |
| NVNT | BLE | 2480 | Ant | 2484.928 | -43.2 | 2.21 | - | 54.26 | Peak | 74 | Pass |
| NVNT | BLE | 2480 | Ant | 2485.792 | -56.99 | 2.21 | 0.59 | 41.06 | Average | 54 | Pass |
| NVNT | BLE | 2480 | Ant | 2500 | -49.81 | 2.21 | - | 47.65 | Peak | 74 | Pass |
| NVNT | BLE | 2480 | Ant | 2500 | -57.11 | 2.21 | 0.59 | 40.94 | Average | 54 | Pass |





Test Graphs

Restrict Band NVNT BLE 2402MHz Ant Peak

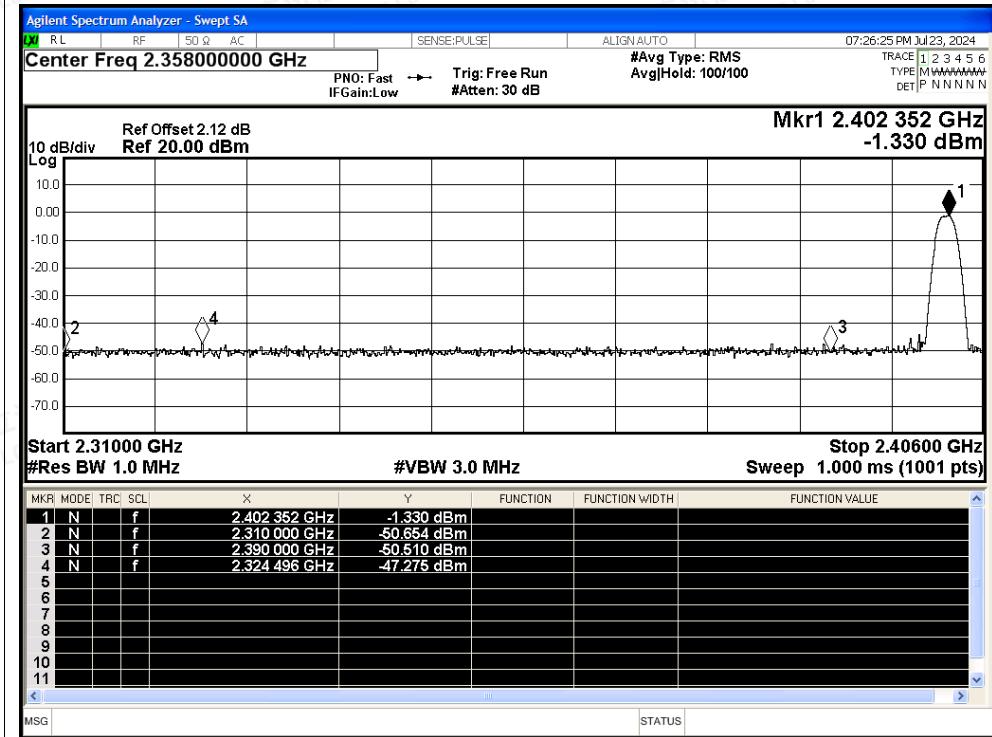

Restrict Band NVNT BLE 2402MHz Ant Average

