



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-I9000  
FCC ID(Requested) : A3LGTI9000  
Report No : FH-054-R1  
Job No : FH-054  
Date issued : April 3, 2010

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,  
Part22, Part24.

Prepared By

---

KJ KWON – Test Engineer

Authorized By

---

WT JANG – Technical Manager



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC CERTIFICATION INFORMATION .....</b>	<b>3</b>
1.1. §2.1033 General Information .....	3
<b>2. INTRODUCTION.....</b>	<b>4</b>
2.1. General.....	4
<b>3. MEASURING INSTRUMENT CALIBRATION .....</b>	<b>5</b>
<b>4. TEST EQUIPMENT LIST.....</b>	<b>6</b>
<b>5. DESCRIPTION OF TESTS .....</b>	<b>7</b>
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power .....	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio .....	9
5.4. Occupied Bandwidth .....	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits .....	10
5.5.2. Conducted Spurious Emission .....	12
5.6. Frequency Stability / Temperature Variation.....	13
<b>6. TEST DATA.....</b>	<b>14</b>
6.1. Conducted Output Power .....	14
6.2. Effective Radiated Power (E.R.P.) .....	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.).....	16
6.4. GSM850 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement.....	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table .....	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table .....	20
6.8. Frequency Stability .....	21
6.8.1. GSM850 Frequency Stability Table .....	21
6.8.2. GSM850 Frequency Stability Graph.....	22
6.8.3. GSM1900 Frequency Stability Table .....	24
6.8.4. GSM1900 Frequency Stability Graph.....	25
<b>7. CONCLUSION.....</b>	<b>27</b>
<b>8. TEST PLOTS.....</b>	<b>28</b>



# MEASUREMENT REPORT

## 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

### 1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTI9000
- Model : GT-I9000
- Quantity : Quantity production is planned
- Emission Designators : 247KGXW(GSM850), 255KG7W(GSM850 EDGE)  
245KGXW(GSM1900), 249KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)  
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)  
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.307 W ERP GSM850 (24.87 dBm)  
0.944 W EIRP GSM1900 (29.75 dBm)  
0.108 W ERP GSM850 EDGE(20.34 dBm)  
0.604 W EIRP GSM1900 EDGE(27.81 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE/GPRS and 1900 WCDMA Phone  
with Bluetooth, WLAN and HSPA
- Frequency Tolerance :  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : April 1-2, 2010
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FH-054-R1

## 2. INTRODUCTION

### 2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.  
The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742  
The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

### **Measurement Procedure**

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber



### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



#### 4. TEST EQUIPMENT LIST


Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2010-10-20
	E4440A(3Hz~26.5GHz)	MY46187454	2011-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2010-12-15
Communication test set	8960	MY47510060	2011-03-08
	8960	GB42230535	2010-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	360306/011	2010-06-13
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2011-03-05
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2010-11-11
	SH-241	92000548	2010-11-11
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. DESCRIPTION OF TESTS

### 5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

#### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

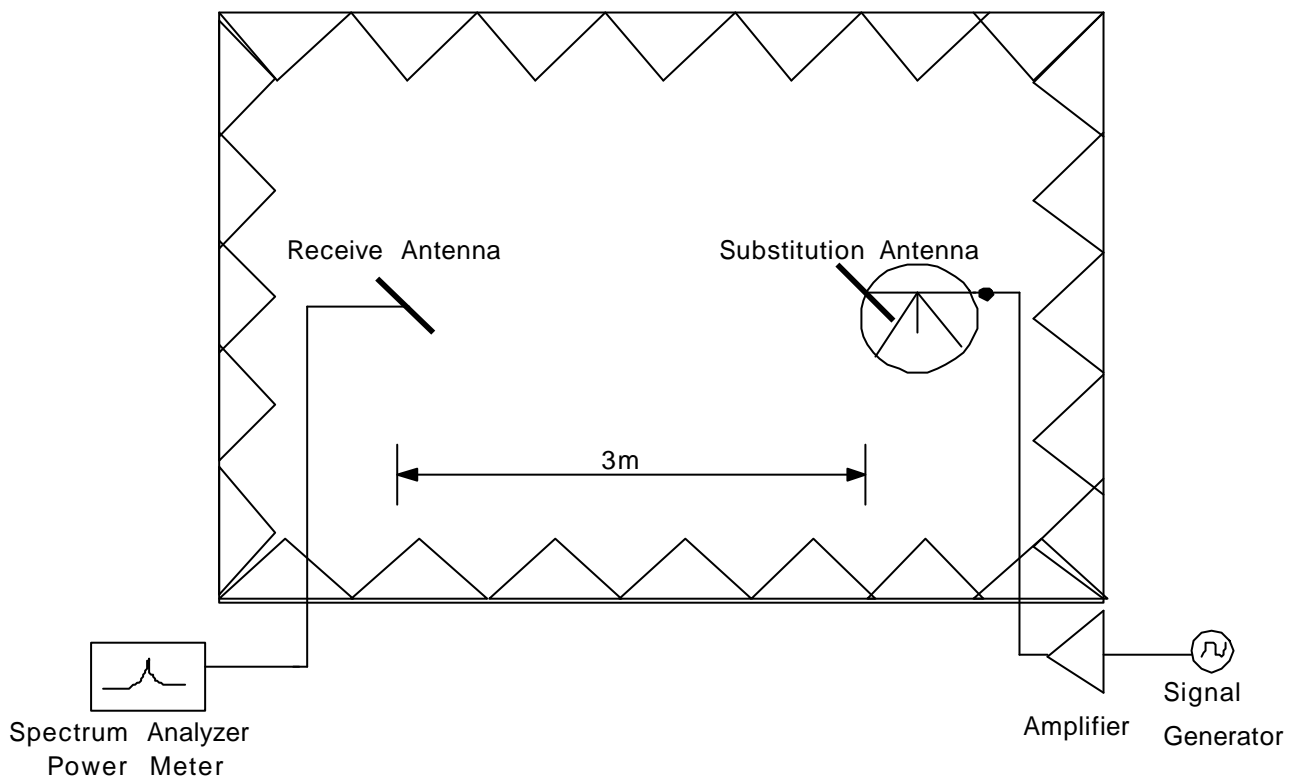


**Figure 3. Diagram of ERP/EIRP test Set-up**

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.2. Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

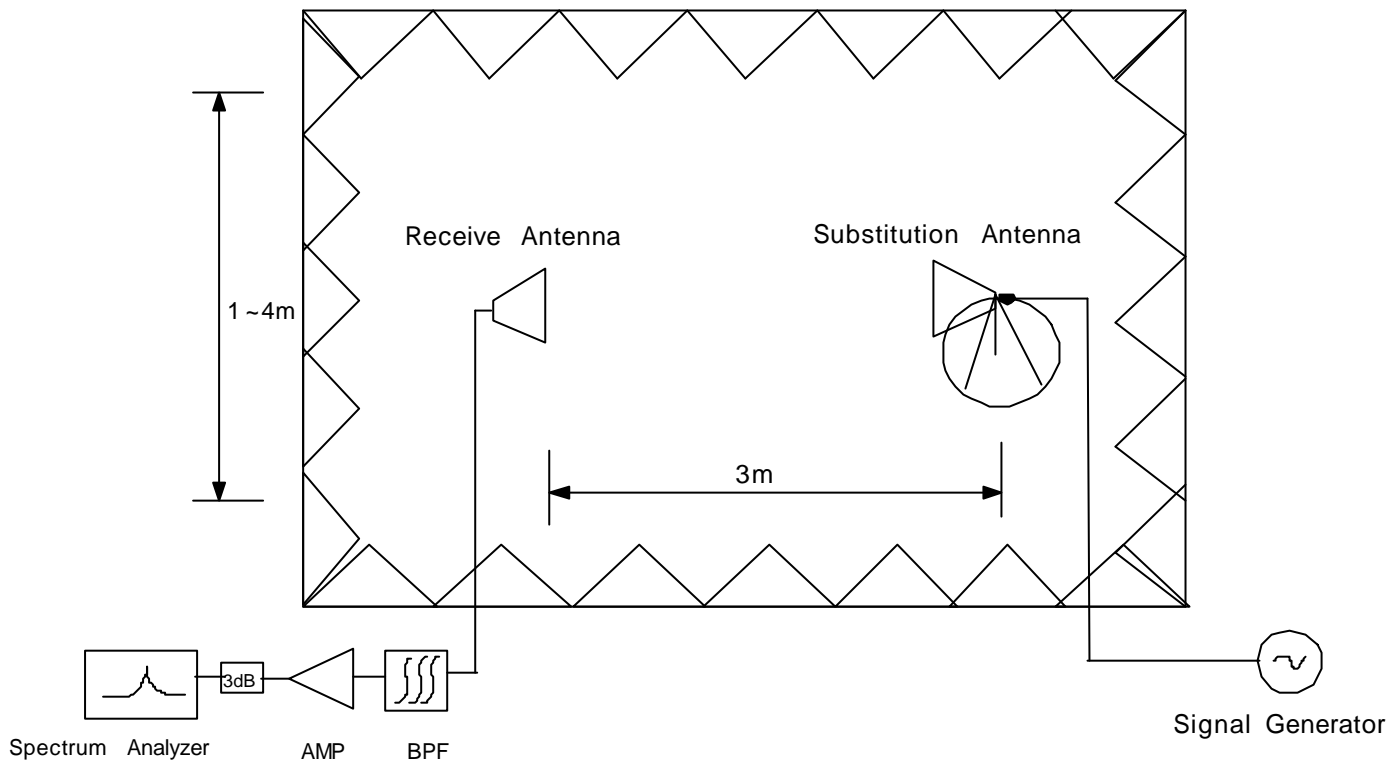

**Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up**

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. **The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported.** A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## SAMPLE CALCULATION

### **Example: Channel 661 , Second Harmonic(3760.00MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0$ dBm. The gain of the substituted antenna is  $8.1$ dB. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$ dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$ dB at 3760.00MHz. So  $6.1$ dB is added to the signal generator reading of  $-30.9$ dBm yielding  $-24.8$ dBm. The fundamental EIRP was  $25.5$ dBm so this harmonic was  $25.5$ dBm  $-(-24.8)= 50.3$ dBc .

### 5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

## 5.4. Occupied Bandwidth

### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

## 5.5. Spurious and Harmonic Emission at Antenna Terminal

### 5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks**

<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

**Table 2. Cellular Service Frequency Blocks**

## 5.5.2. Conducted Spurious Emission

### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log ( 0.307 \text{ W} ) = 37.87 \text{ dB}$$

$$24.87 \text{ dBm} - 37.87 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM :  $0.01 * 273\text{KHz} = 2.73\text{KHz}$   
A Resolution BW of 3KHz was used for measurement at the band edges.

### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5$ ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



## 6. TEST DATA

### 6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS and 1900 WCDMA Phone with Bluetooth , WLAN and HSPA FCC ID: A3LGTI9000. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits all set to “1” and in GSM mode and using a Power Control Level of “0” in the PCS BAND and “5” in the Cellular Band. The GSM and WCDMA conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.7	29.69	29.69	26.52	25.01
	661	30.00	29.98	29.99	26.83	25.29
	810	29.86	29.86	29.85	26.76	25.24
Cellular	128	32.85	32.84	32.84	29.73	28.22
	190	32.83	32.81	32.83	29.71	28.24
	251	32.86	32.84	32.86	29.71	29.70

Table 6-1 GSM Conducted Output Powers



## 6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

### Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	24.00	H	-12.55	-0.67	-11.88
		V	-13.39	-0.67	-12.72
836.60	24.00	H	-13.03	-0.73	-12.30
		V	-13.32	-0.73	-12.59
848.80	25.00	H	-14.19	-0.79	-13.40
		V	-13.40	-0.79	-12.61

### Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-11.73	H	294/125	24.15	0.260	Standard
836.60	-12.16	H	289/70	24.14	0.259	Standard
848.80	-13.53	H	286/55	24.87	0.307	Standard

### EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-18.10	H	286/55	20.34	0.108	Standard

**NOTE : Standard batteries are the only battery options for this phone**

- All modes of operation were investigated, and the worst-case results are reported.

**Radiated measurements at 3 meters by Substitution Method**



### 6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

#### Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-10.32	9.60	-19.92
		V	-9.91	9.60	-19.51
1880.00	30.00	H	-8.95	9.60	-18.55
		V	-9.32	9.60	-18.92
1909.80	30.00	H	-9.49	9.60	-19.09
		V	-9.17	9.60	-18.77

#### Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.80	V	328/80	28.71	0.743	Standard
1880.00	-19.17	V	222/90	29.75	0.944	Standard
1909.80	-19.14	V	217/90	29.63	0.918	Standard

#### EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1880.00	-21.11	V	222/90	27.81	0.604	Standard

**NOTE : Standard batteries are the only battery options for this phone**

- All modes of operation were investigated, and the worst-case results are reported.

**Radiated measurements at 3 meters by Substitution Method**



## 6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 24.87 dBm = 0.307 W

Modulation Signal : GSM850

Limit :  $43 + 10\log_{10}(P) = 37.87$  dBc

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-46.90	H	59.67
	3	2472.60	-40.35	V	48.91
	4	3296.80	-66.37	H	71.04
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-47.04	H	58.85
	3	2509.80	-44.30	V	52.67
	4	3346.40	-64.22	V	68.63
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-47.30	V	59.56
	3	2546.40	-46.31	V	53.38
	4	3395.20	-65.26	V	69.81
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported..

### Radiated Spurious Emission measurements at 3 meters by Substitution Method



## 6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.75 dBm = 0.944 W

Modulation Signal : GSM1900

Limit :  $43 + 10\log_{10}(P) = 42.75$  dBc

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-63.95	V	70.13
	3	5550.60	-57.35	V	57.30
	4	7400.80	-68.35	H	63.77
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-64.68	H	70.35
	3	5640.00	-59.10	H	59.12
	4	7520.00	-67.85	H	63.48
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-64.01	H	68.74
	3	5729.40	-60.45	H	59.72
	4	7639.20	-67.81	V	63.12
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported.

### Radiated Spurious Emission measurements at 3 meters by Substitution Method



## 6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : April 2, 2010

Test Engineer : KJ KWON

Tx Cable loss  
 Tx Horn Ant Gain  
 Tx Level to radiate -13dBm  
 ESI Level received from Tx with -13dBm  
 Tested Level from EUT  
 = ERP+2.15 - (-13 + - )

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-46.90	-47.44	59.67	60.35
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-46.55	-40.35	54.86	48.91
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-66.37	-66.46	71.42	71.04
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
	190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-47.04	-47.47	59.31
3		2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-44.53	-44.30	52.85	52.67
4		3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-66.40	-64.22	70.95	68.63
5		4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
6		5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
7		5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251		2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-49.23	-47.30	61.29
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-47.39	-46.31	55.82	53.38
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-65.78	-65.26	70.62	69.81
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-



## 6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : April 2, 2010

Test Engineer : KJ KWON

Tx Cable loss  
 Tx Horn Ant Gain  
 Tx Level to radiate -13dBm  
 ESI Level received from Tx with -13dBm  
 Tested Level from EUT  
 = EIRP - (-13 + - )

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-65.03	-63.95	70.84	70.13
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-58.85	-57.35	58.92	57.30
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-68.35	-68.35	63.77	64.14
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-64.68	-66.62	70.35	72.32
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-59.10	-61.72	59.12	61.39
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-67.85	-68.04	63.48	63.84
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-64.01	-64.72	68.74	68.79
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-60.45	-62.64	59.72	61.90
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-68.40	-67.81	63.86	63.12
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-	-	-	-
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

## 6.8. Frequency Stability

### 6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-14.30	836,599,986	-0.000002	-0.017
100%		-30	34.20	836,600,034	0.000004	0.041
100%		-20	-32.20	836,599,968	-0.000004	-0.038
100%		-10	21.60	836,600,022	0.000003	0.026
100%		0	8.40	836,600,008	0.000001	0.010
100%		+10	-2.20	836,599,998	0.000000	-0.003
100%		+20	-14.30	836,599,986	-0.000002	-0.017
100%		+30	23.70	836,600,024	0.000003	0.028
100%		+40	-17.90	836,599,982	-0.000002	-0.021
100%		+50	-11.90	836,599,988	-0.000001	-0.014
100%		+60	-27.30	836,599,973	-0.000003	-0.033
85%		3.35	+20	16.50	836,600,017	0.000002
115%	4.26	+20	-36.00	836,599,964	-0.000004	-0.043
Batt.Endpoint	3.35	+20	16.50	836,600,017	0.000002	0.020


**Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.**

**The EUT is tested down to the battery end point.**

6.8.2. GSM850 Frequency Stability Graph

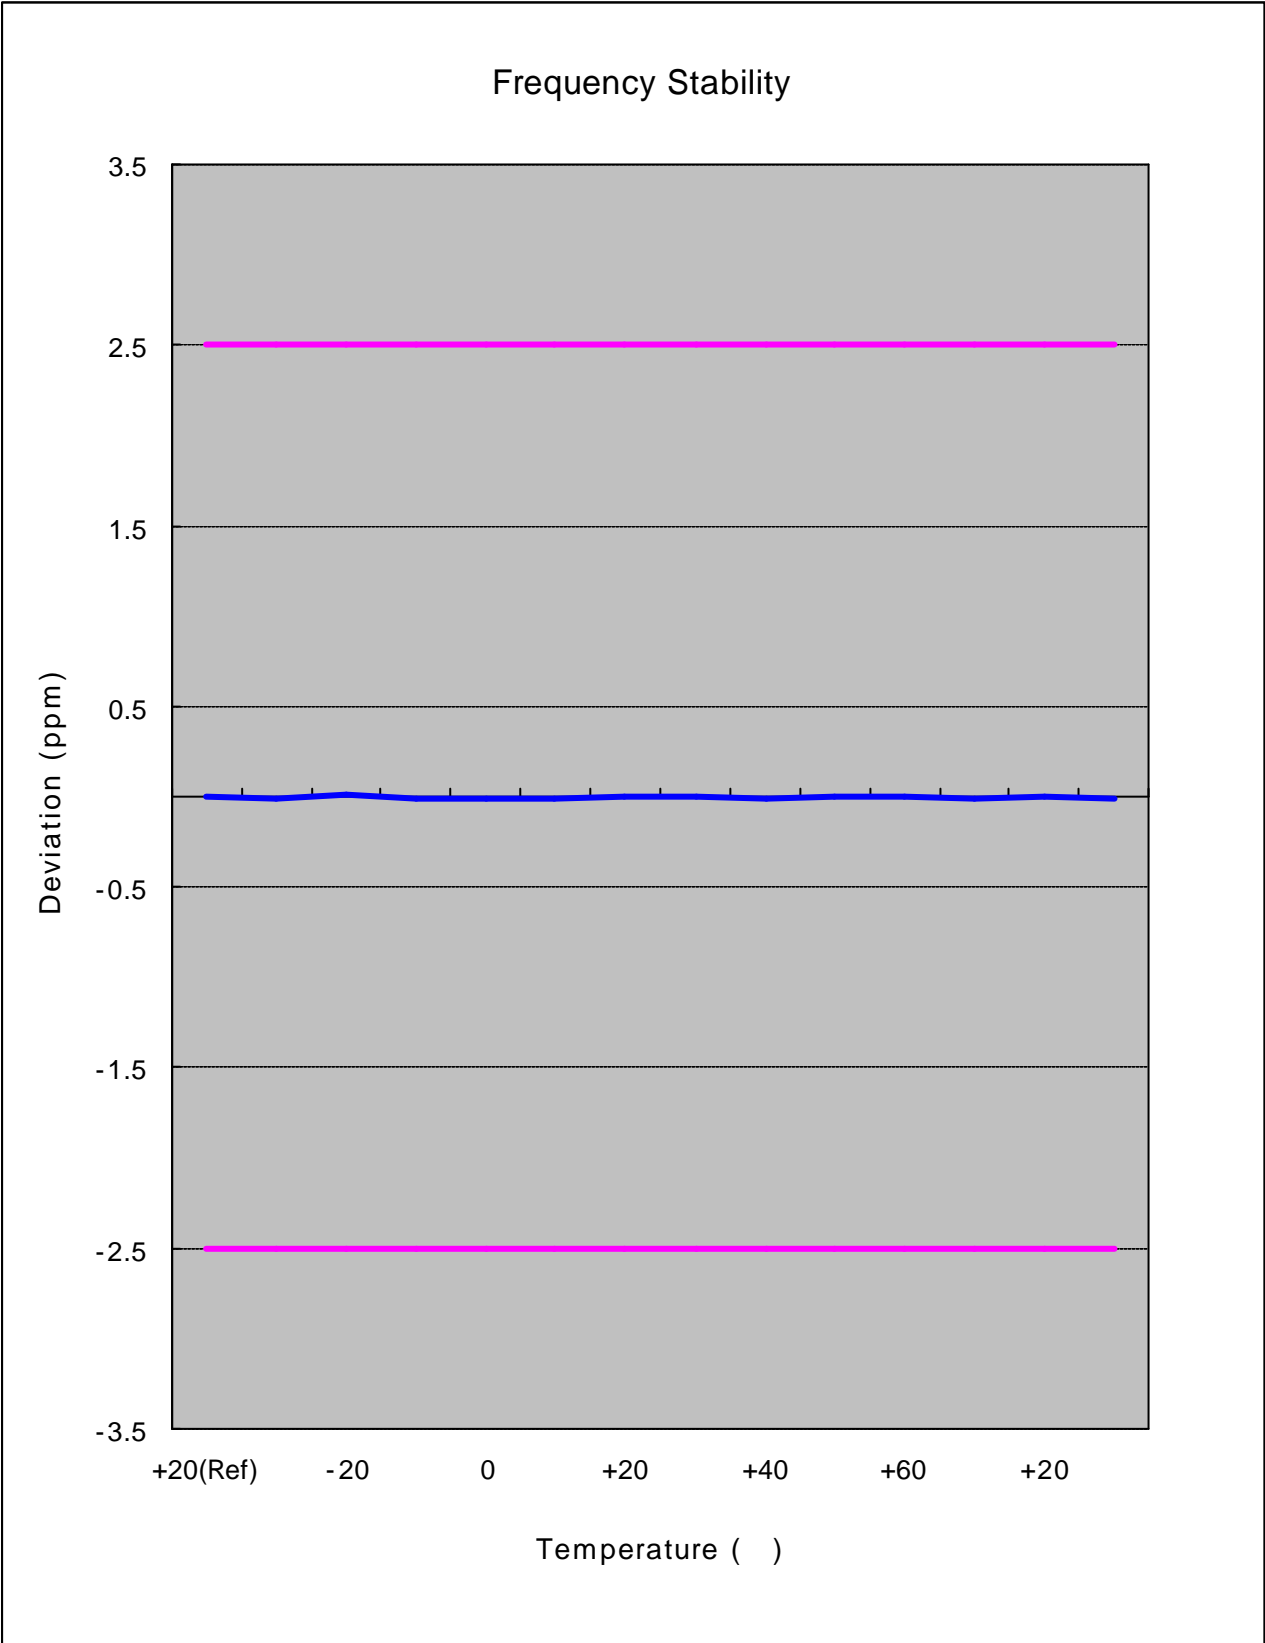

**Zoom IN**

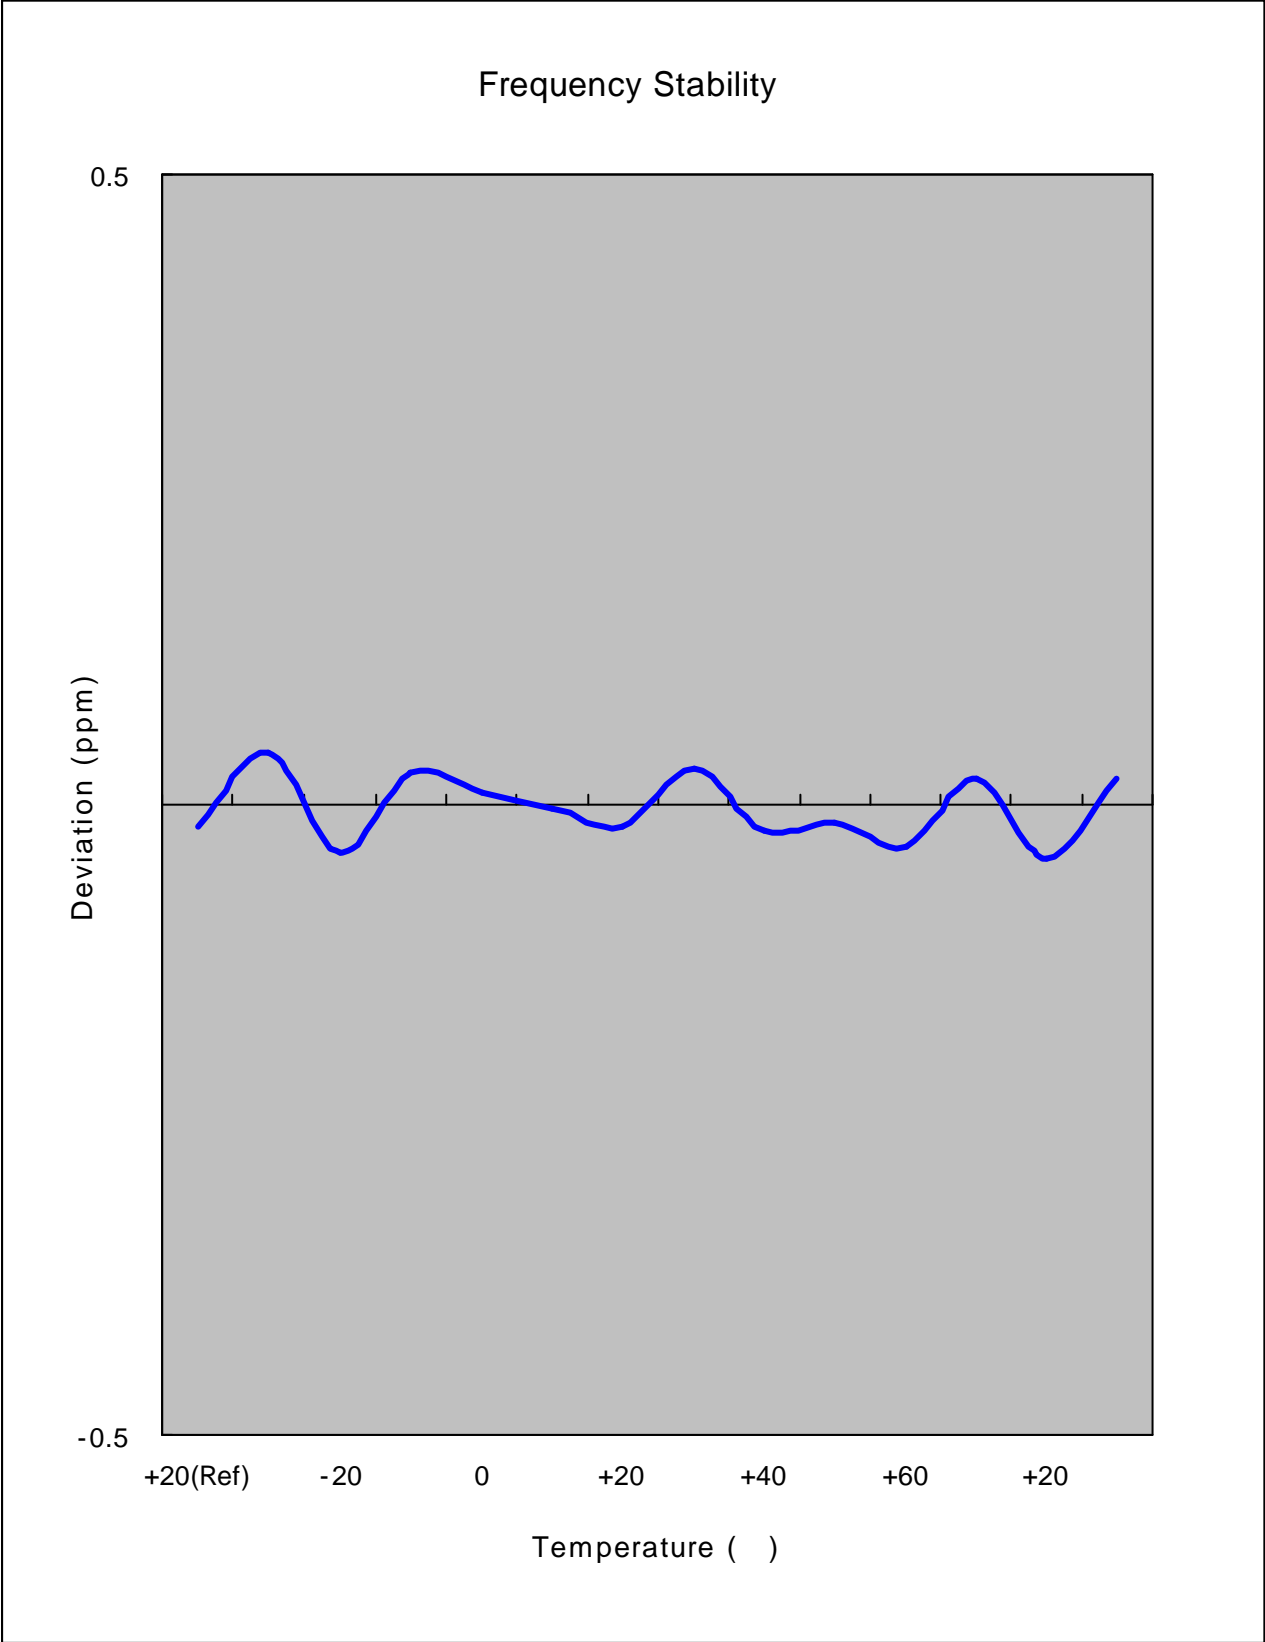

### 6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	20.20	1,880,000,020	0.000001	0.011
100%		-30	-32.20	1,879,999,968	-0.000002	-0.017
100%		-20	-22.10	1,879,999,978	-0.000001	-0.012
100%		-10	-8.40	1,879,999,992	0.000000	-0.004
100%		0	-30.20	1,879,999,970	-0.000002	-0.016
100%		+10	-28.90	1,879,999,971	-0.000002	-0.015
100%		+20	20.20	1,880,000,020	0.000001	0.011
100%		+30	-23.60	1,879,999,976	-0.000001	-0.013
100%		+40	13.60	1,880,000,014	0.000001	0.007
100%		+50	35.20	1,880,000,035	0.000002	0.019
100%		+60	5.40	1,880,000,005	0.000000	0.003
85%		3.35	+20	18.60	1,880,000,019	0.000001
115%	4.26	+20	-39.70	1,879,999,960	-0.000002	-0.021
Batt.Endpoint	3.35	+20	18.60	1,880,000,019	0.000001	0.010


**Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.**

**The EUT is tested down to the battery end point.**

6.8.4. GSM1900 Frequency Stability Graph

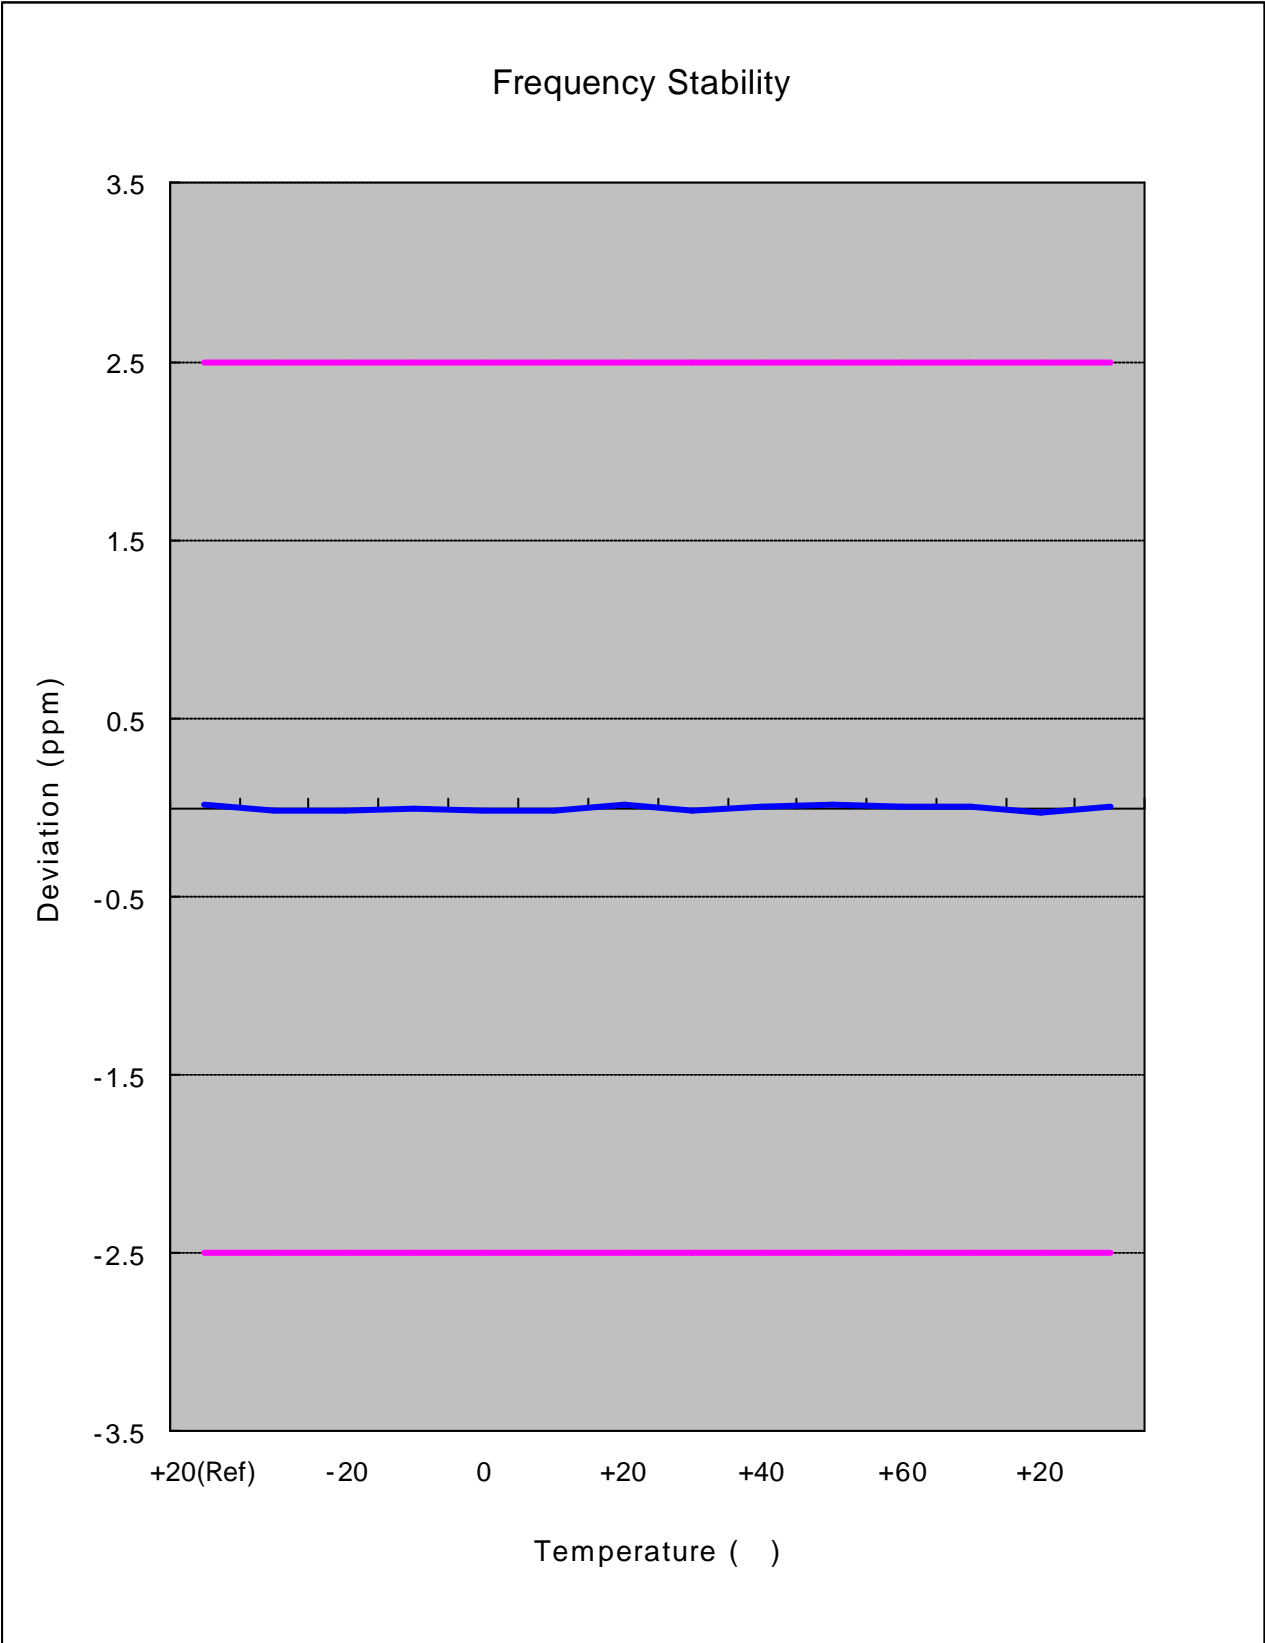

**Zoom IN**

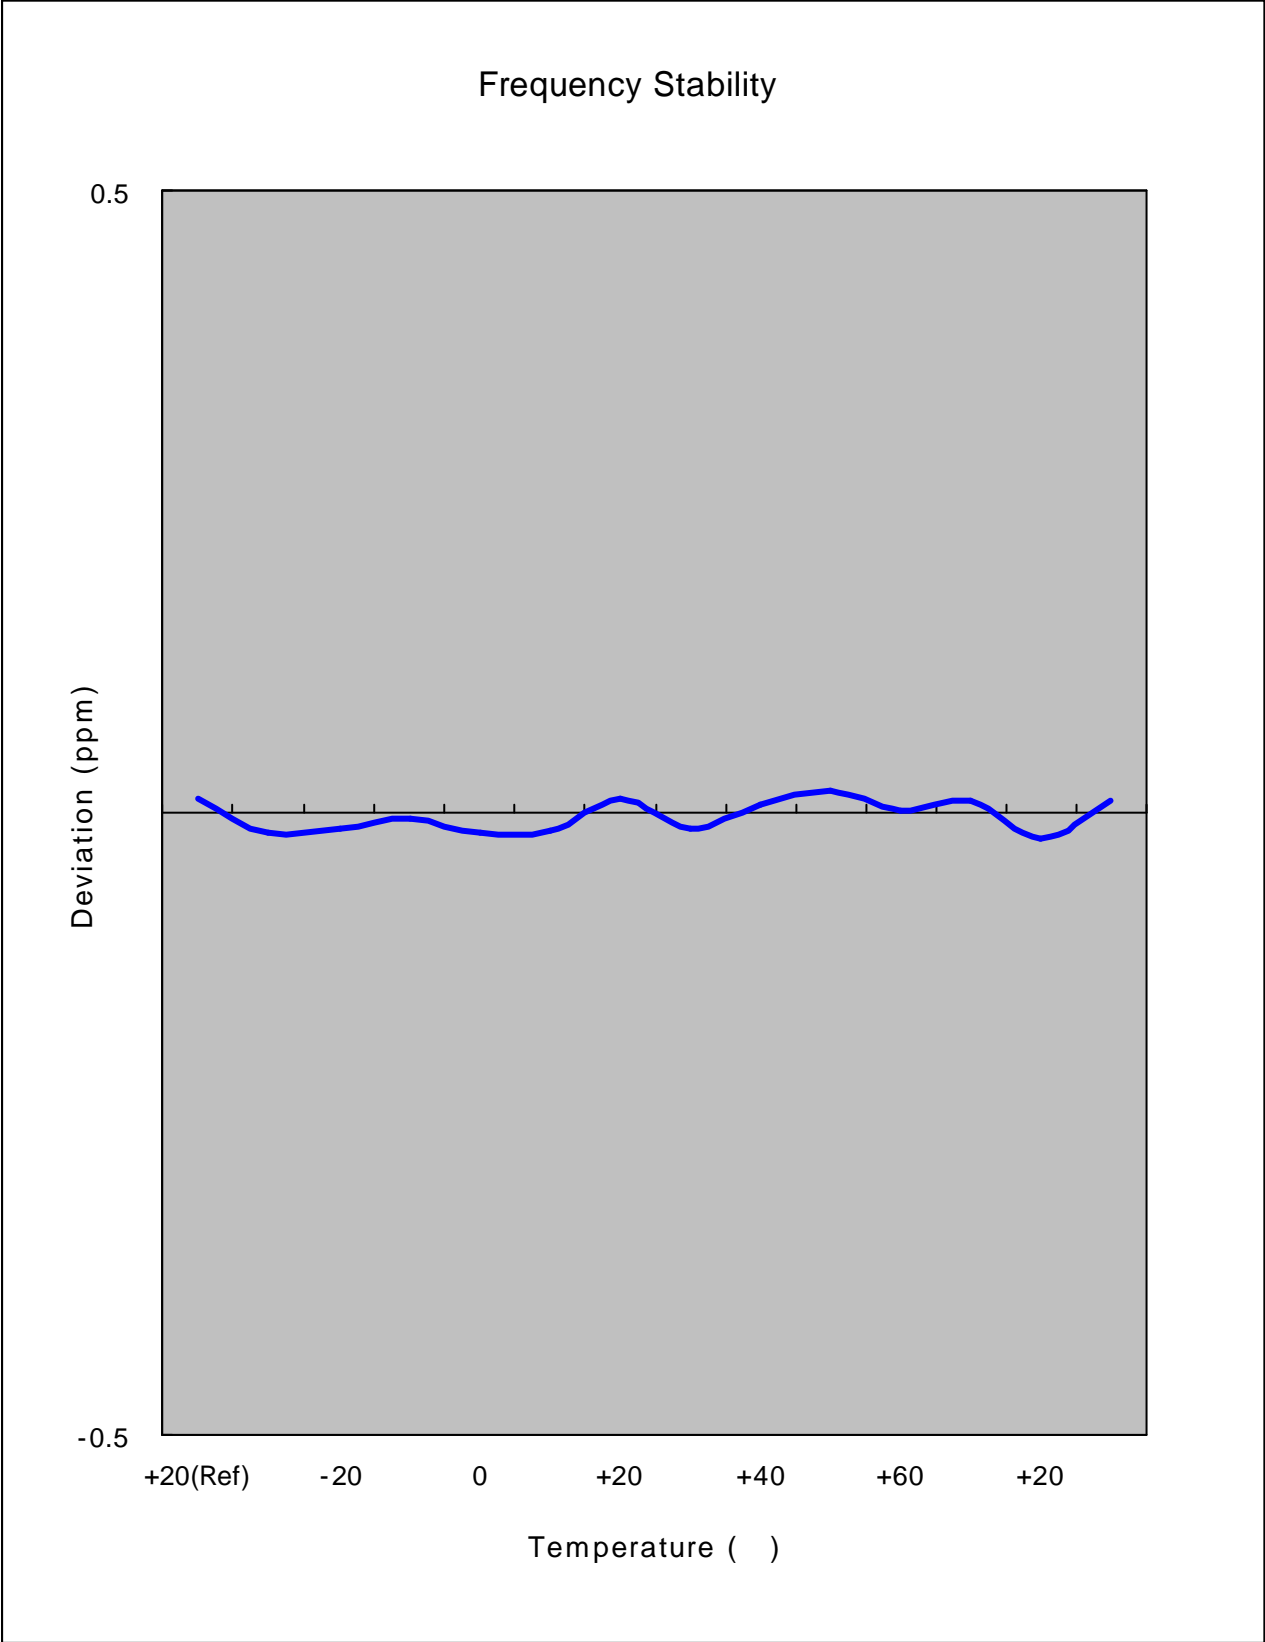



## 7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS and 1900 WCDMA Phone with Bluetooth, WLAN and HSPA FCC ID : A3LGTI9000 complies with all the requirements of Parts 2,22,24 of the FCC Rules.



## 8. TEST PLOTS

GSM850

Agilent

R T

Ch Freq 824.2 MHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTI9000 0BW Ch.128  
Ref 33 dBm Atten 40 dB

Center 824.200 MHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
244.5884 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	-214.822 Hz	
<b>x dB Bandwidth</b>	309.839 kHz	

Freq/Channel	
Center Freq	824.200000 MHz
Start Freq	823.700000 MHz
Stop Freq	824.700000 MHz
CF Step	100.000000 kHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 836.6 MHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTI9000 0BW Ch.190  
Ref 33 dBm Atten 40 dB

Center 836.600 MHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
243.2806 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	-837.999 Hz	
<b>x dB Bandwidth</b>	308.468 kHz	

Freq/Channel	
Center Freq	836.600000 MHz
Start Freq	836.100000 MHz
Stop Freq	837.100000 MHz
CF Step	100.000000 kHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

File Operation Status, C:\TEMP.GIF file saved



<b>Ch Freq</b> 848.8 MHz <b>Trig</b> Free		<b>Freq/Channel</b>	
Occupied Bandwidth		<b>Center Freq</b> 848.800000 MHz	
FCC ID:A3LGTI9000 0BW Ch.251 Ref 33 dBm Atten 40 dB		<b>Start Freq</b> 848.300000 MHz	
#Peak Log 10 dB/ Offst 7.96 dB		<b>Stop Freq</b> 849.300000 MHz	
		<b>CF Step</b> 100.000000 kHz Auto Man	
Center 848.800 MHz <b>Span</b> 1 MHz		<b>Freq Offset</b> 0.00000000 Hz	
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)		<b>Signal Track</b> On Off	
<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b> 99.00 %	
246.5488 kHz		<b>x dB</b> -26.00 dB	
<b>Transmit Freq Error</b> -16.438 Hz			
<b>x dB Bandwidth</b> 310.162 kHz			
File Operation Status, C:\TEMP.GIF file saved			



Control	Transmit Power								TCH Parms	
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				32.85	----	----	----	Traffic Band	
Swap Window Positions	Estimated Carrier Power				32.85	----	----	----	GSM850	
									Traffic Channel	
									128	
									MS TX Level	
								5		
								Channel Mode Setup		
								Return		
								1 of 2		
		Active Cell Connected				Sys Type: GSM				
		IntRef	Offset	R	T					


Control	Transmit Power								TCH Parms	
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				32.83	----	----	----	Traffic Band	
Swap Window Positions	Estimated Carrier Power				32.83	----	----	----	GSM850	
									Traffic Channel	
									190	
									MS TX Level	
								5		
								Channel Mode Setup		
								Return		
								1 of 2		
		Active Cell Connected				Sys Type: GSM				
		IntRef	Offset	R	T					

Control	Transmit Power				TCH Parms																								
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.86</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.86</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>					Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.86	----	----	----	Estimated Carrier Power	32.86	----	----	----	Downlink Traffic Power									
	Burst 1	Burst 2	Burst 3	Burst 4																									
Burst Power	32.86	----	----	----																									
Estimated Carrier Power	32.86	----	----	----																									
	Single				Traffic Band																								
					GS1850																								
					Traffic Channel																								
					251																								
					MS TX Level																								
					5																								
Swap Window Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase &amp; Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.91</td> <td>0.52</td> <td>-9.23</td> </tr> <tr> <td>Maximum</td> <td>4.12</td> <td>0.86</td> <td>-0.86</td> </tr> <tr> <td>Average</td> <td>3.55</td> <td>0.71</td> <td>-3.44</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>				Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.91	0.52	-9.23	Maximum	4.12	0.86	-0.86	Average	3.55	0.71	-3.44	Pass/Fail	Pass	Pass	Pass	Channel Node Setup
Phase & Frequency Error																													
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	2.91	0.52	-9.23																										
Maximum	4.12	0.86	-0.86																										
Average	3.55	0.71	-3.44																										
Pass/Fail	Pass	Pass	Pass																										
	50 / 50				Return																								
	Single																												
	Active Cell Connected		Sys Type: GSM																										
1 of 2		IntRef	Offset	R T	1 of 2																								

Control	Power vs Time Graph	TCH Parms																				
Power vs Time Setup		Downlink Traffic Power																				
Change View	<table border="1"> <thead> <tr> <th>Burst</th> <th>Px Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.85</td> <td>GMSK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>	Burst	Px Power (dBm)	Modulation	Mask	1	32.85	GMSK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	Traffic Band
Burst	Px Power (dBm)	Modulation	Mask																			
1	32.85	GMSK	ETSI																			
2	----	----	----																			
3	----	----	----																			
4	----	----	----																			
	Pass Rise B1 Fall	GS1850																				
	Continuous	Traffic Channel																				
		128																				
		MS TX Level																				
		5																				
		Channel Node Setup																				
		Return																				
	Active Cell Connected	Sys Type: GSM																				
1 of 2	IntRef	Offset	R T																			

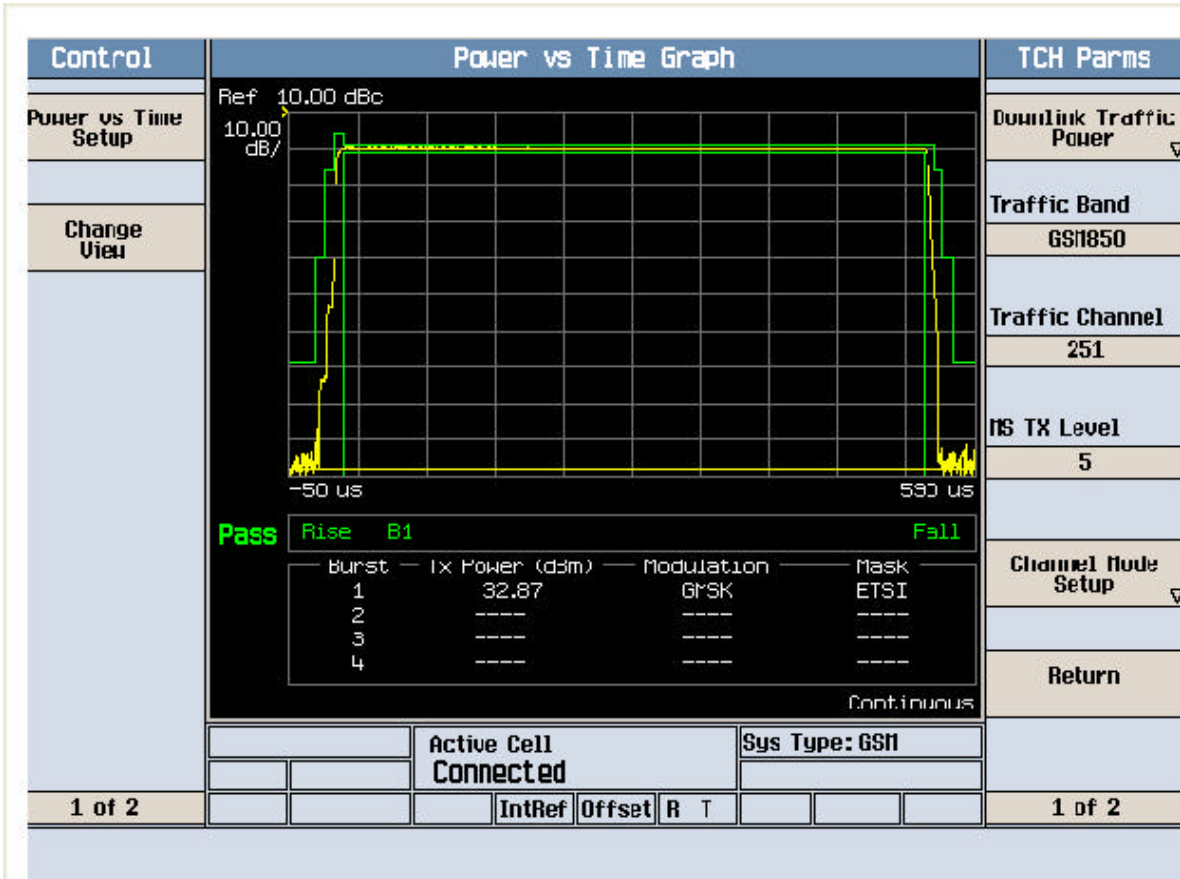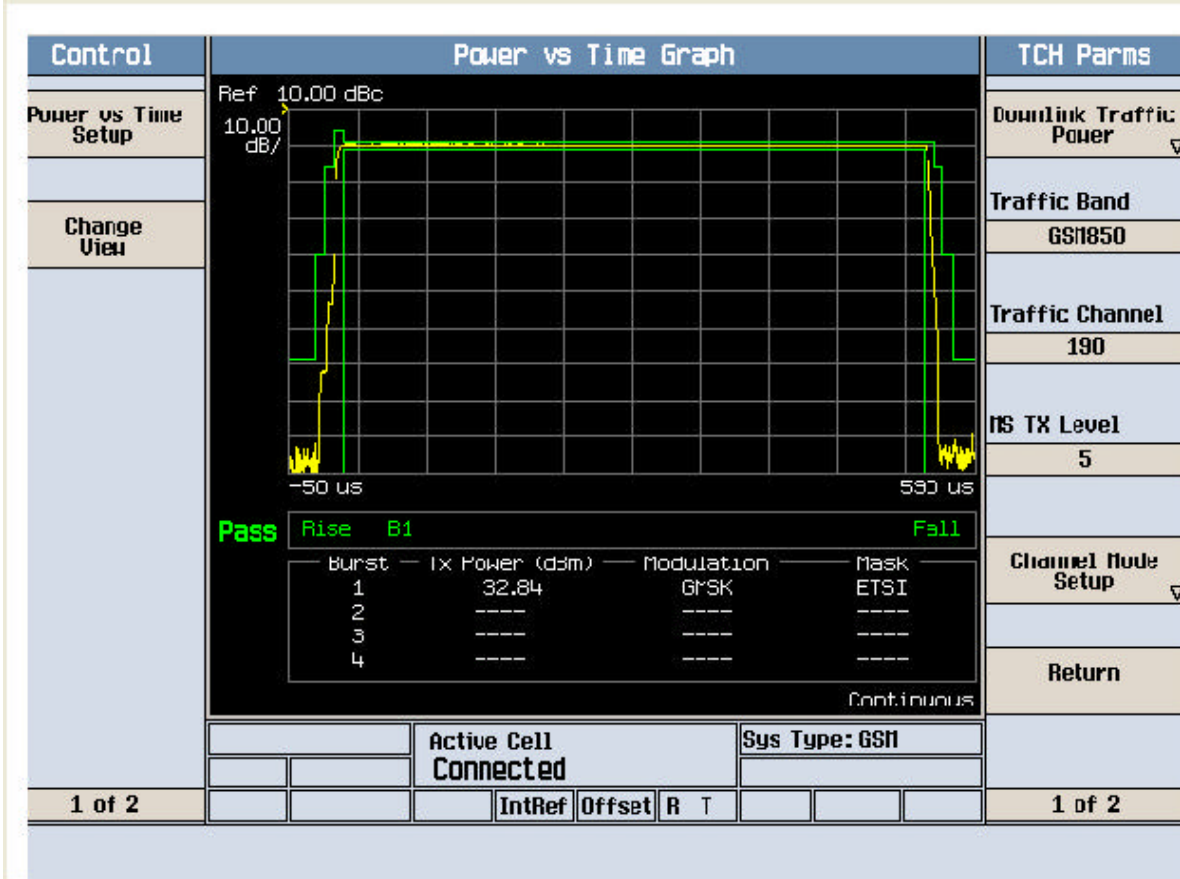

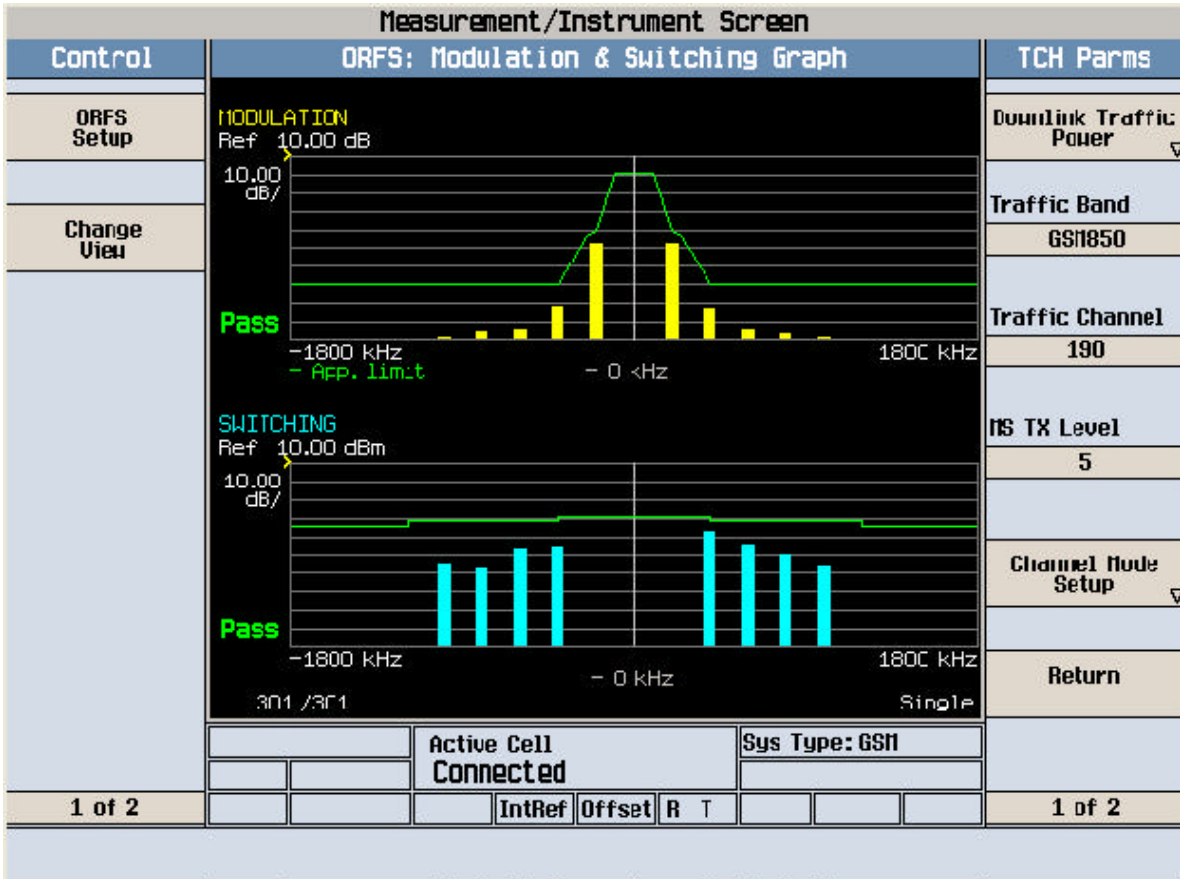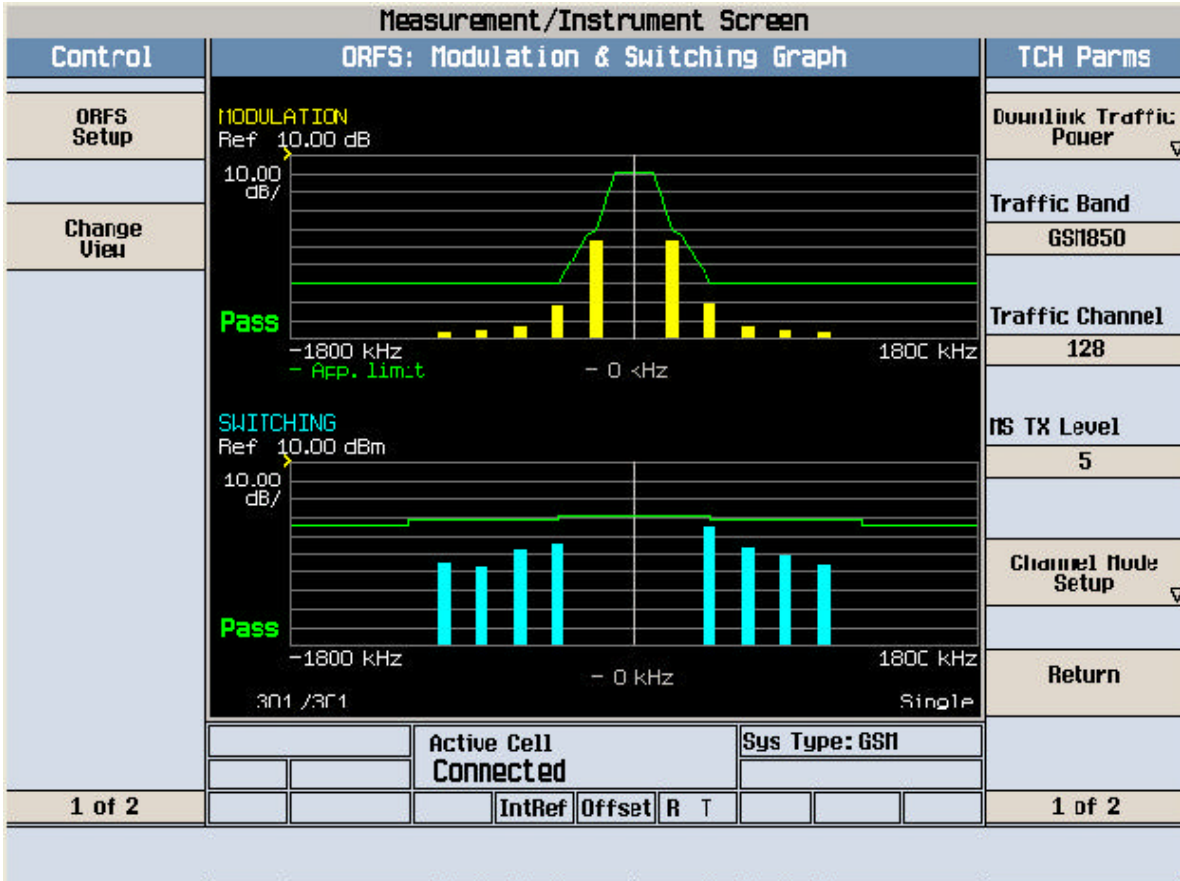

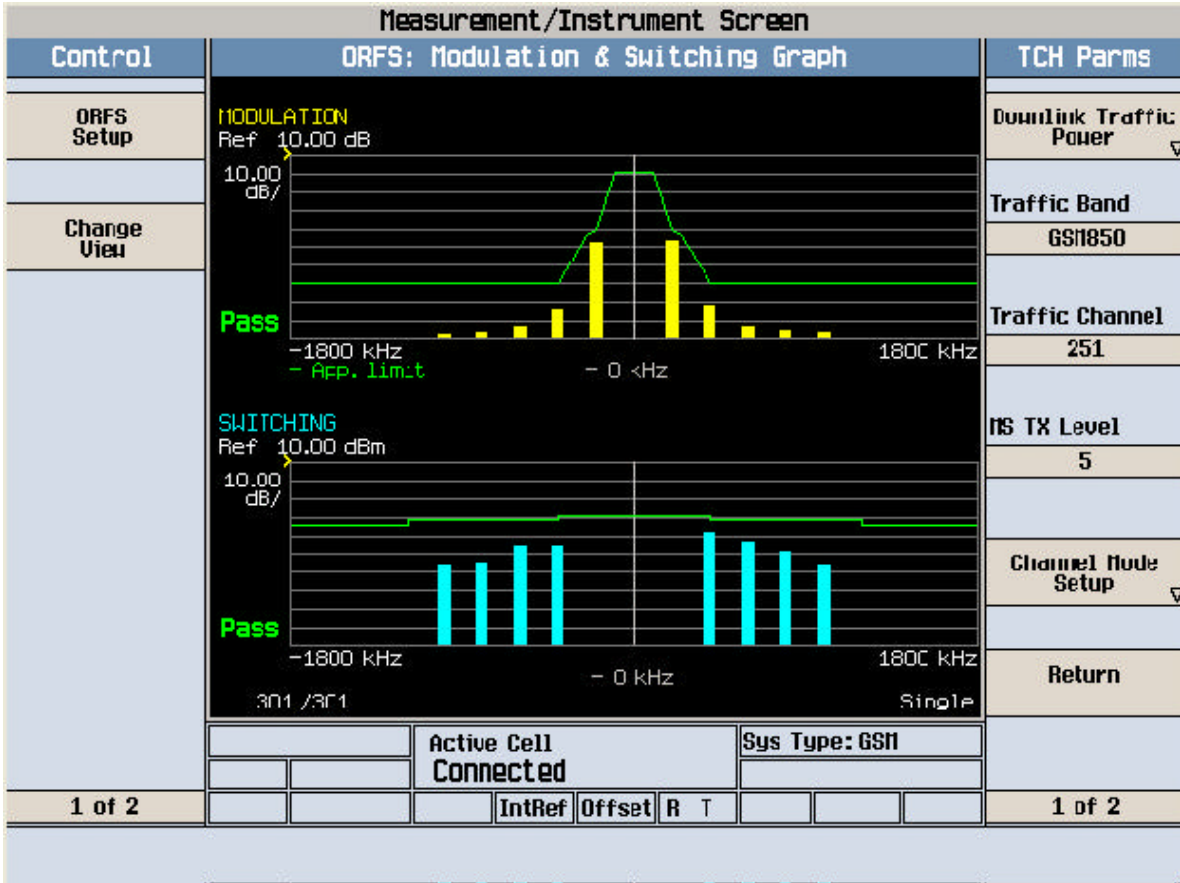

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.128

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

FTun

Swp

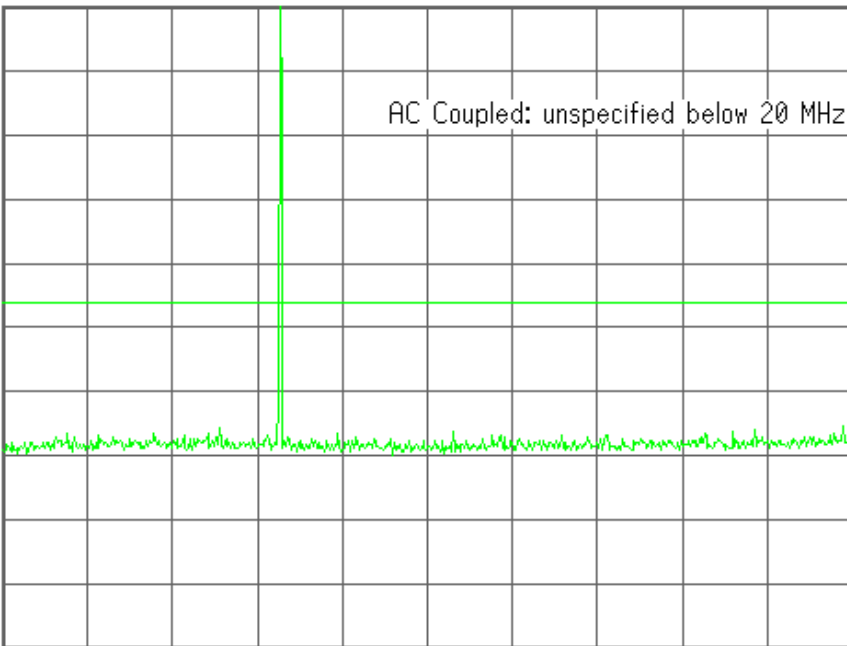

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.00000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.0000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.128

Mkr1 772.0 MHz

Ref 33 dBm

Atten 40 dB

-33.67 dBm

#Peak

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

FTun

Swp

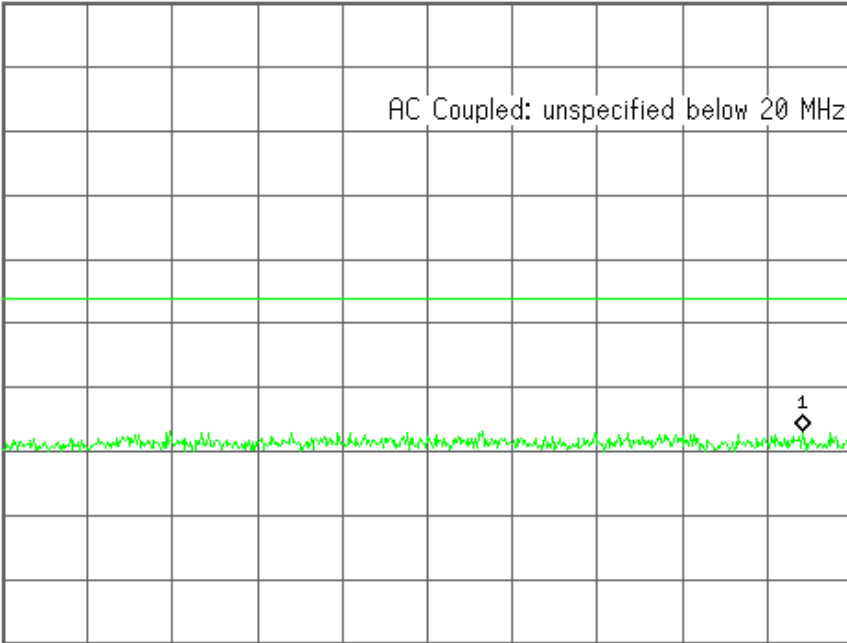

Center 414.6 MHz

Span 809.2 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.36 ms (601 pts)

Center Freq  
414.600000 MHz

Start Freq  
10.00000000 MHz

Stop Freq  
819.200000 MHz

CF Step  
80.9200000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

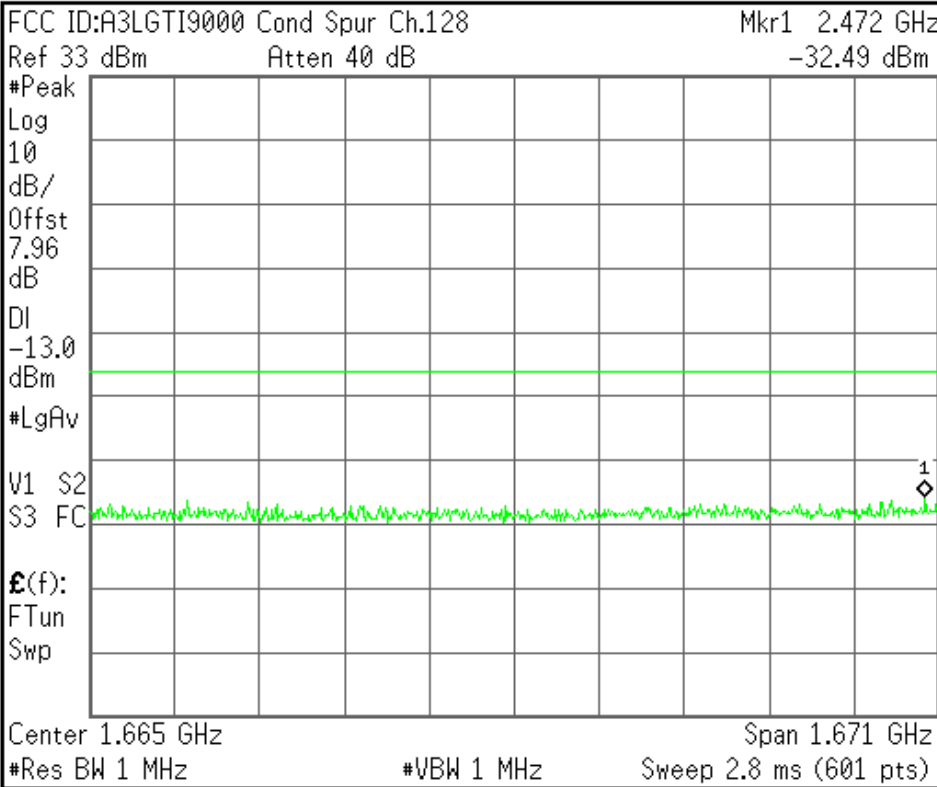


<b>Center Freq</b> 1.66460000 GHz
<b>Start Freq</b> 829.200000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 167.080000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

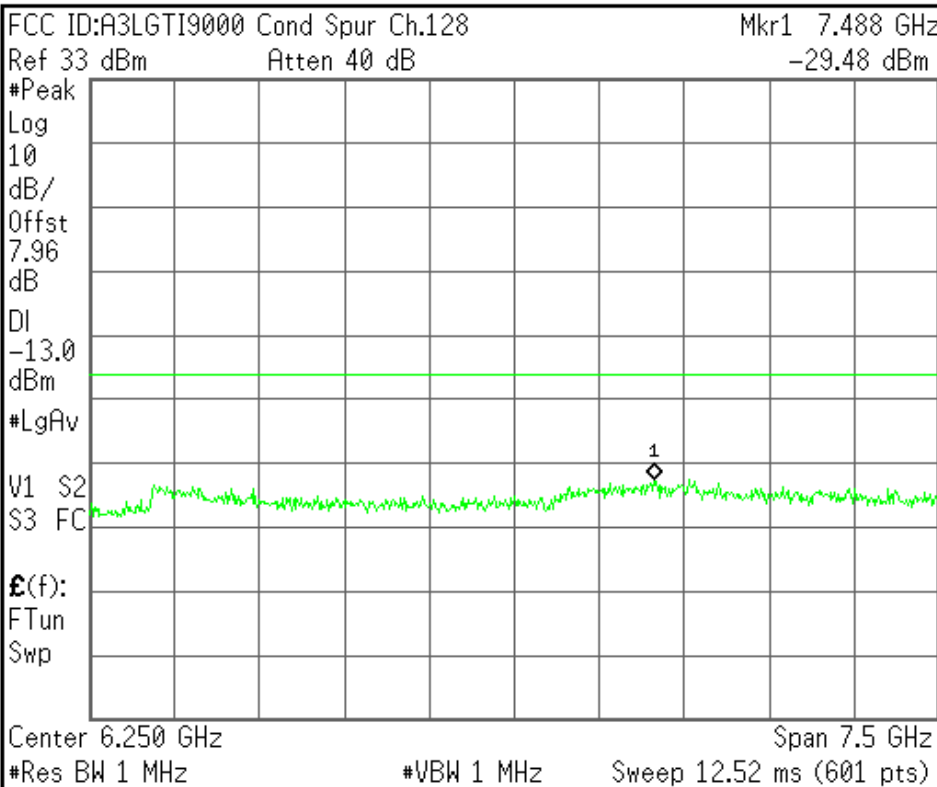

<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.190

Mkr1 615.2 MHz

Ref 33 dBm

Atten 40 dB

-33.03 dBm

#Peak

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq  
420.800000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
831.600000 MHz

CF Step  
82.1600000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

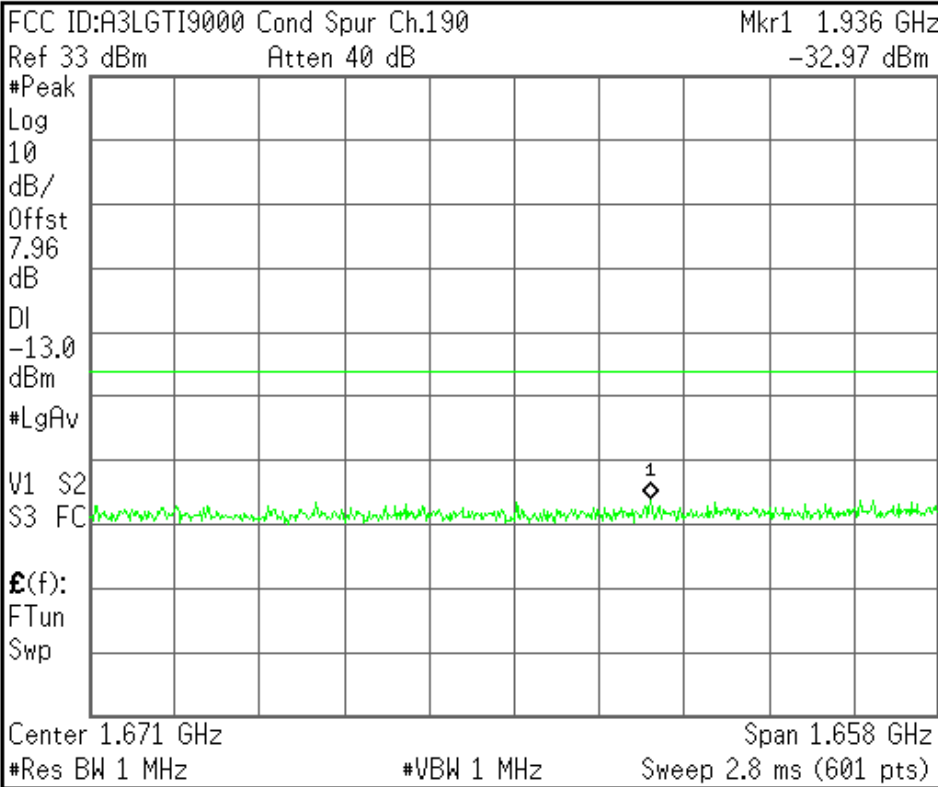


<b>Center Freq</b> 1.67080000 GHz
<b>Start Freq</b> 841.600000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 165.840000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

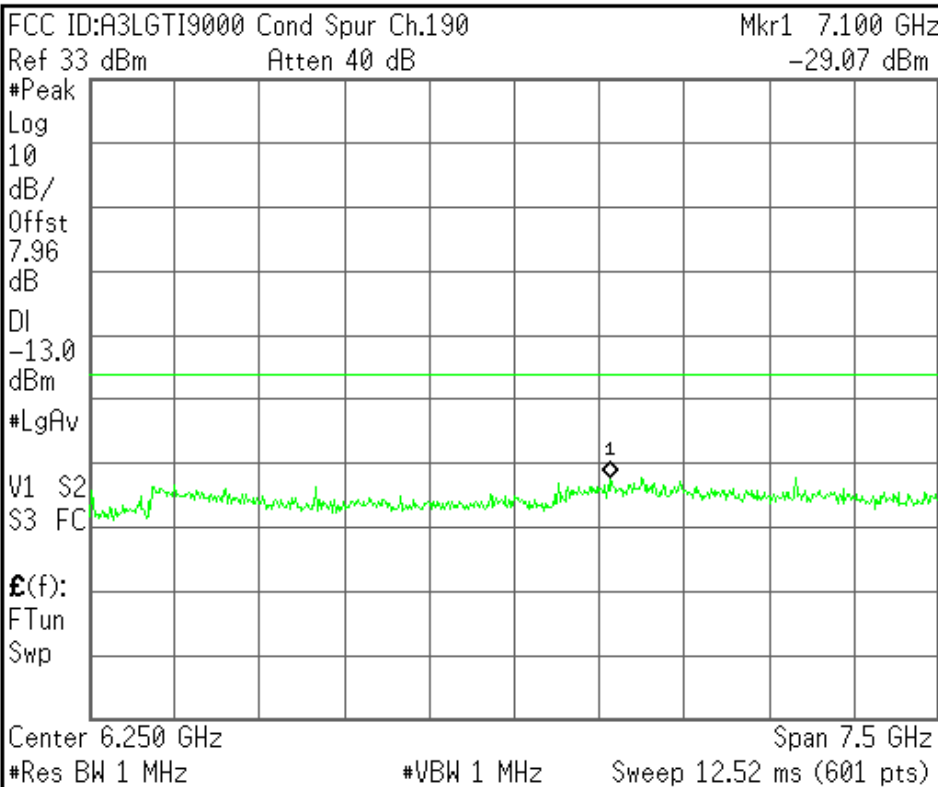


<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

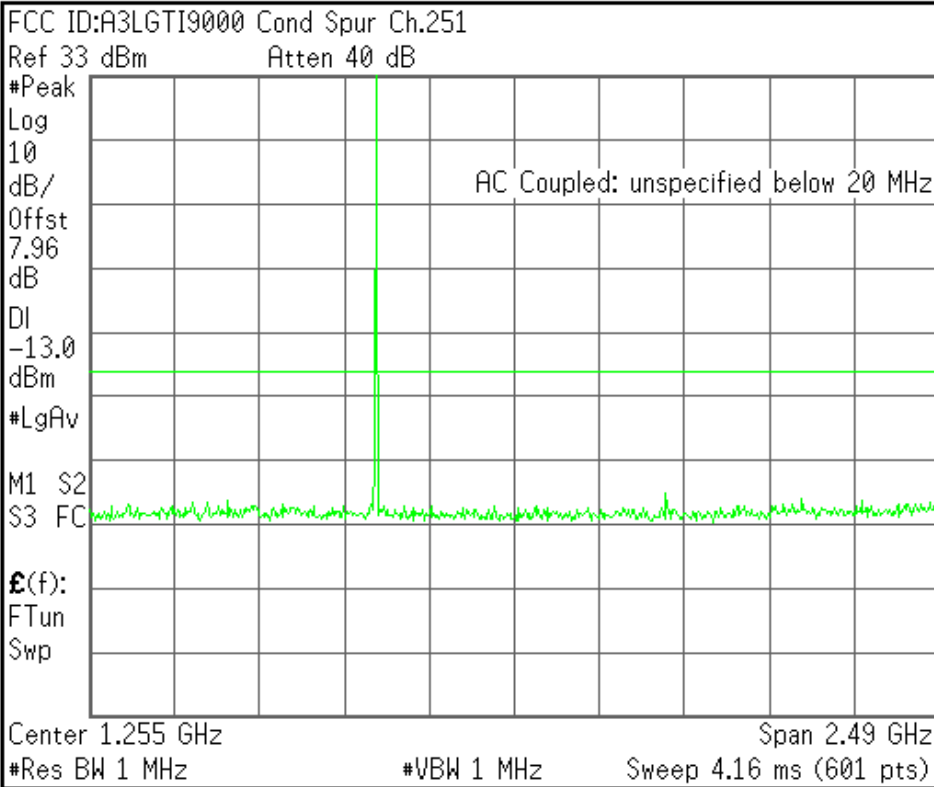


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.0000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

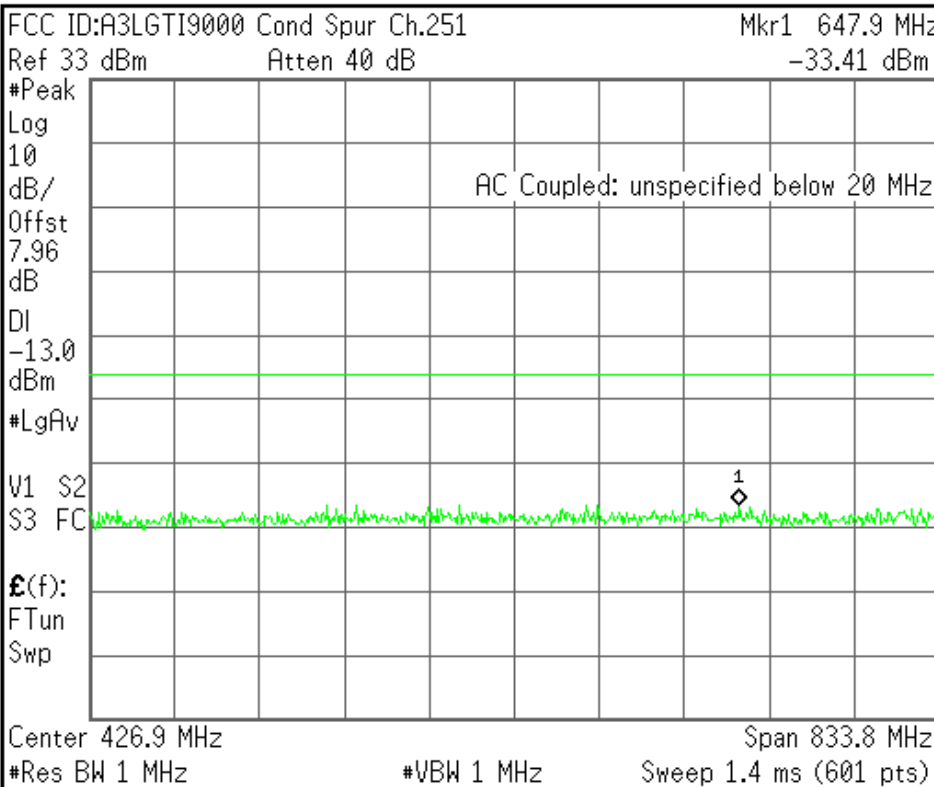


<b>Center Freq</b> 426.900000 MHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 843.800000 MHz
<b>CF Step</b> 83.3800000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

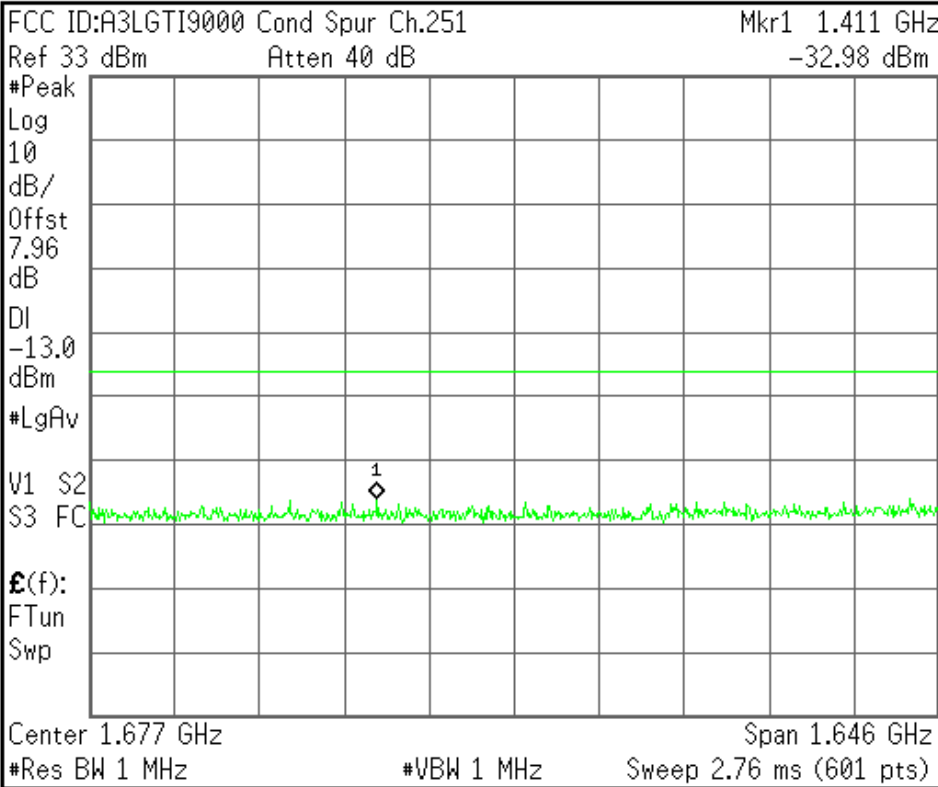


<b>Center Freq</b> 1.67690000 GHz
<b>Start Freq</b> 853.800000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 164.620000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

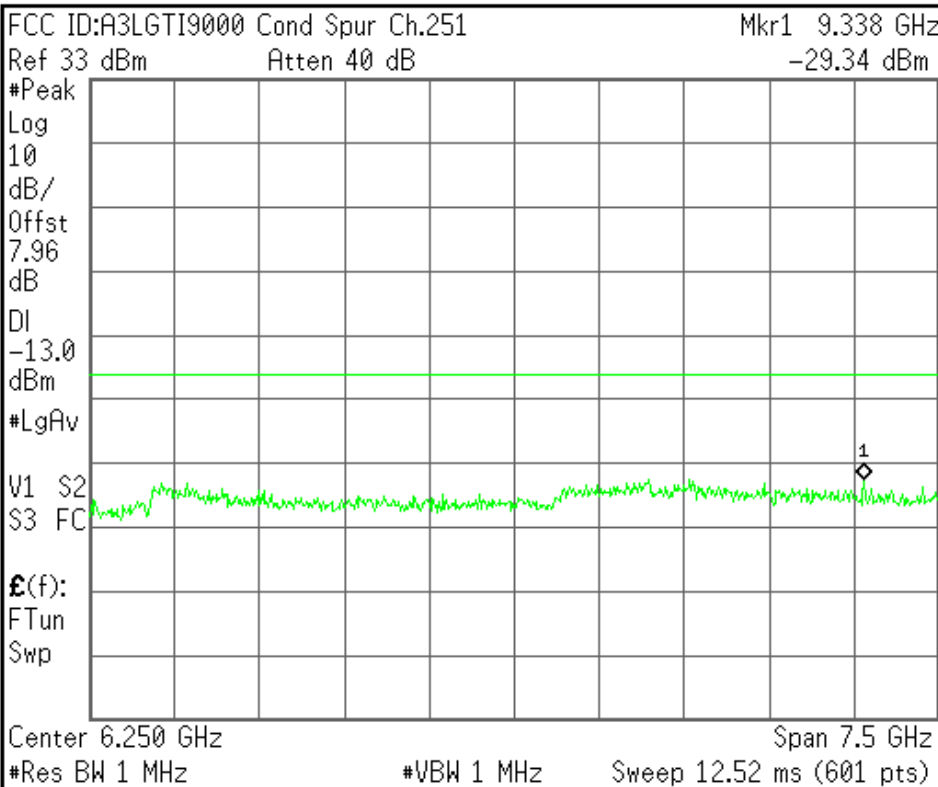

<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

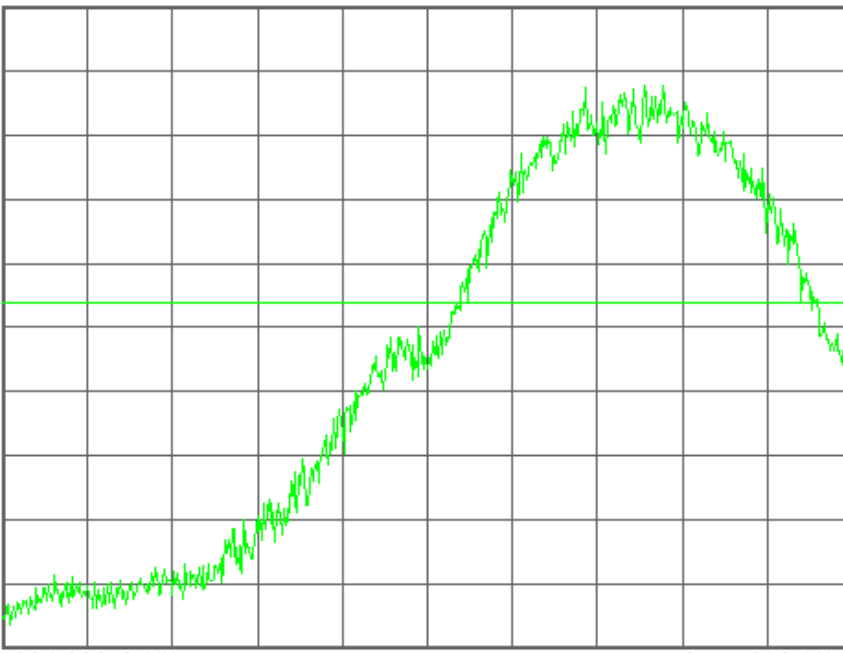

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
824.000000 MHz

Start Freq  
823.595000 MHz

Stop Freq  
824.405000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.128

Mkr1 823.974 6 MHz

Ref 33 dBm

Atten 40 dB

-17.16 dBm

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

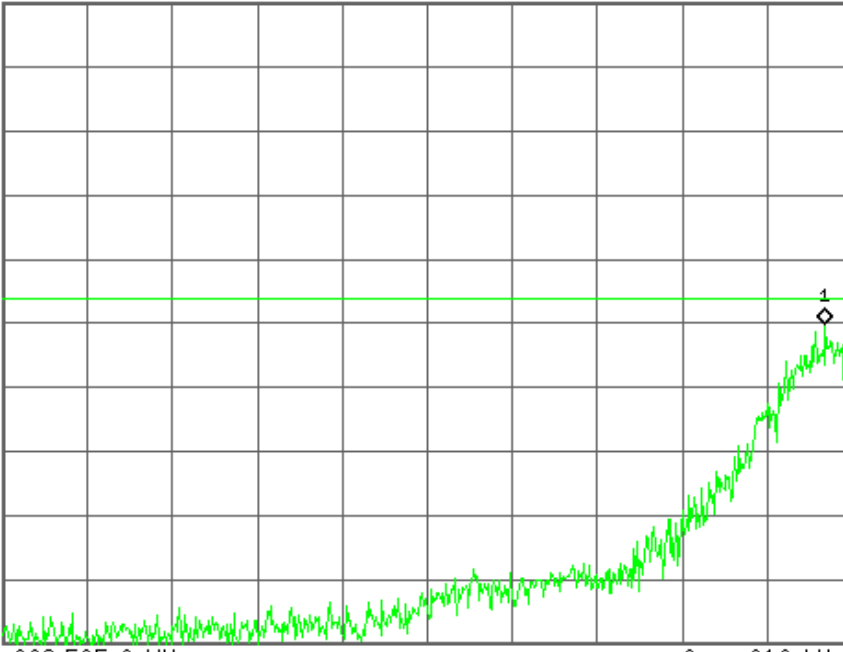

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
823.595000 MHz

Start Freq  
823.190000 MHz

Stop Freq  
824.000000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.251

Ref 33 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

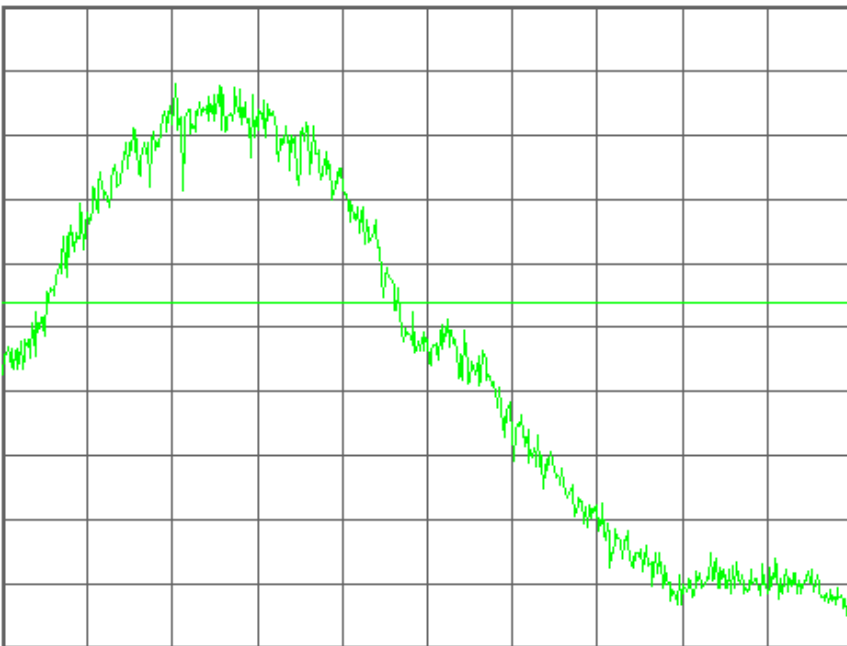

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
849.000000 MHz

Start Freq  
848.595000 MHz

Stop Freq  
849.405000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.251

Mkr1 849.021 4 MHz

Ref 33 dBm Atten 40 dB

-16.92 dBm

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

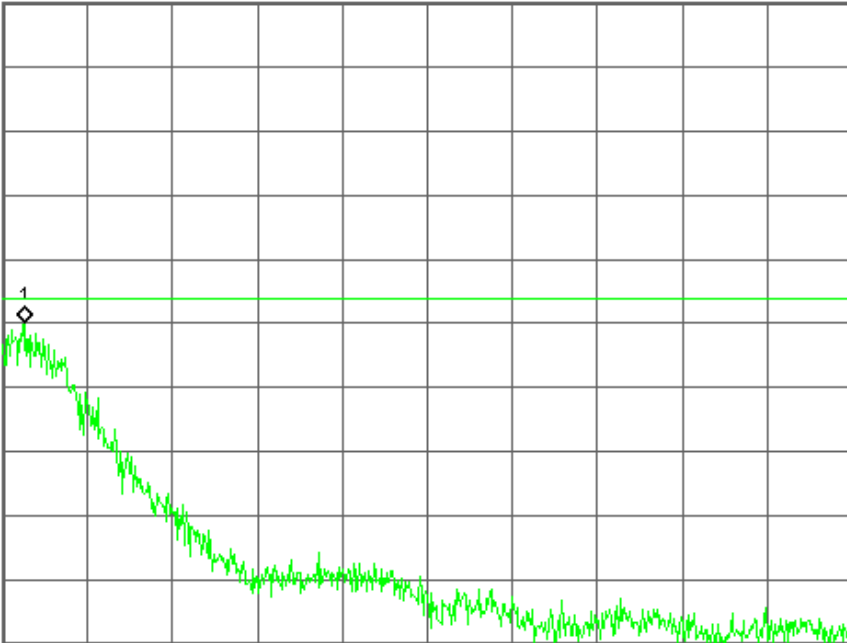

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
849.405000 MHz

Start Freq  
849.000000 MHz

Stop Freq  
849.810000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

Freq/Channel

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

Center Freq  
1.85020000 GHz

Start Freq  
1.84970000 GHz

Stop Freq  
1.85070000 GHz


CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LGTI9000 0BW Ch.512

Ref 30 dBm Atten 40 dB

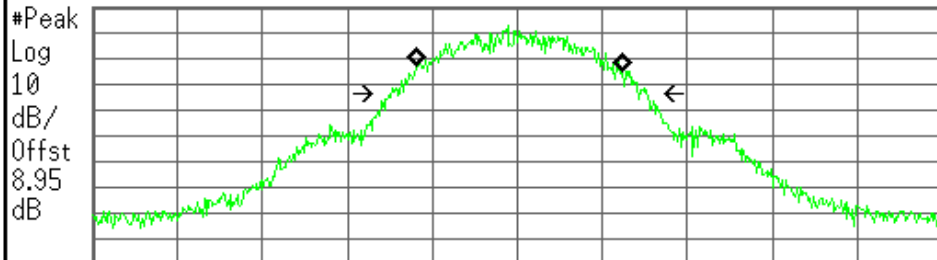

Center 1.850 200 GHz Span 1 MHz

#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
244.5619 kHz x dB -26.00 dB

Transmit Freq Error 1.859 kHz  
x dB Bandwidth 303.917 kHz

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

Center Freq  
1.88000000 GHz

Start Freq  
1.87950000 GHz

Stop Freq  
1.88050000 GHz


CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LGTI9000 0BW Ch.661

Ref 30 dBm Atten 40 dB

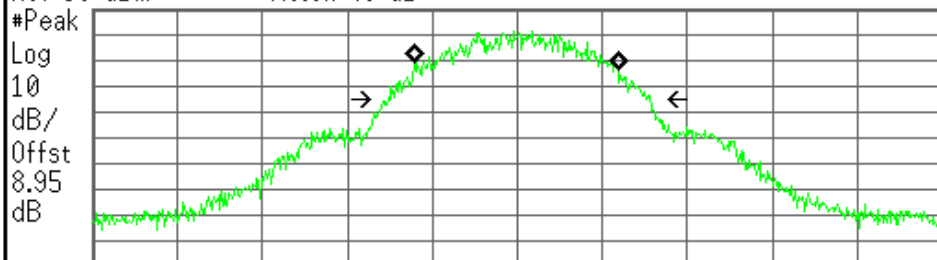

Center 1.880 000 GHz Span 1 MHz

#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
242.5167 kHz x dB -26.00 dB

Transmit Freq Error -1.284 kHz  
x dB Bandwidth 312.590 kHz

File Operation Status, C:\TEMP.GIF file saved

**Ch Freq** 1.9098 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LGTI9000 0BW Ch.810  
 Ref 30 dBm Atten 40 dB

Center 1.909 800 GHz Span 1 MHz  
 #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
243.0038 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	253.767 Hz	
<b>x dB Bandwidth</b>	312.528 kHz	

**Freq/Channel**

**Center Freq**  
1.90980000 GHz

**Start Freq**  
1.90930000 GHz

**Stop Freq**  
1.91030000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved



FCC ID : A3LGTI9000 Transmit Power 512CH



**Measurement/Instrument Screen**



Control	Transmit Power	TCH Parms																								
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.70</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.70</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>		Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.70	----	----	----	Estimated Carrier Power	29.70	----	----	----	Downlink Traffic Power									
		Burst 1	Burst 2	Burst 3	Burst 4																					
Burst Power	29.70	----	----	----																						
Estimated Carrier Power	29.70	----	----	----																						
Supp Monitor Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase &amp; Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.72</td> <td>0.79</td> <td>-30.98</td> </tr> <tr> <td>Maximum</td> <td>5.72</td> <td>1.29</td> <td>-17.10</td> </tr> <tr> <td>Average</td> <td>4.98</td> <td>1.05</td> <td>-22.79</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>	Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.72	0.79	-30.98	Maximum	5.72	1.29	-17.10	Average	4.98	1.05	-22.79	Pass/Fail	Pass	Pass	Pass	Traffic Band PCS
	Phase & Frequency Error																									
		Peak Phase °	RMS Phase °	Frequency Hz																						
	Minimum	3.72	0.79	-30.98																						
Maximum	5.72	1.29	-17.10																							
Average	4.98	1.05	-22.79																							
Pass/Fail	Pass	Pass	Pass																							
	Single	Traffic Channel 512																								
	50 / 50 Single	NIS TX Level 0																								
	Background Active Cell Connected Sys Type: GSM	Channel Mode Setup																								
1 of 2	IntRef Offset R T	Return																								
		1 of 2																								

Measurement/Instrument Screen										
Control	Transmit Power							TCH Parms		
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				30.00	----	----	----	Traffic Band	
Swap Window Positions	Estimated Carrier Power				30.00	----	----	----	PCS	
								Single	Traffic Channel	661
Phase & Frequency Error										
		Peak Phase °		RMS Phase °		Frequency Hz		MS TX Level		
Minimum		3.25		0.74		-27.37		0		
Maximum		6.06		1.24		-7.14		Channel Mode Setup		
Average		4.39		0.94		-14.16		Return		
Pass/Fail		Pass		Pass		Pass				
50 / 50							Single			
Background		Active Cell Connected				Sys Type: GSM				
1 of 2				IntRef	Offset	R	T	1 of 2		

Measurement/Instrument Screen										
Control	Transmit Power							TCH Parms		
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				29.86	----	----	----	Traffic Band	
Swap Window Positions	Estimated Carrier Power				29.86	----	----	----	PCS	
								Single	Traffic Channel	810
Phase & Frequency Error										
		Peak Phase °		RMS Phase °		Frequency Hz		MS TX Level		
Minimum		3.28		0.80		-25.69		0		
Maximum		5.39		1.30		-8.36		Channel Mode Setup		
Average		4.35		0.98		-14.64		Return		
Pass/Fail		Pass		Pass		Pass				
50 / 50							Single			
Background		Active Cell Connected				Sys Type: GSM				
1 of 2				IntRef	Offset	R	T	1 of 2		

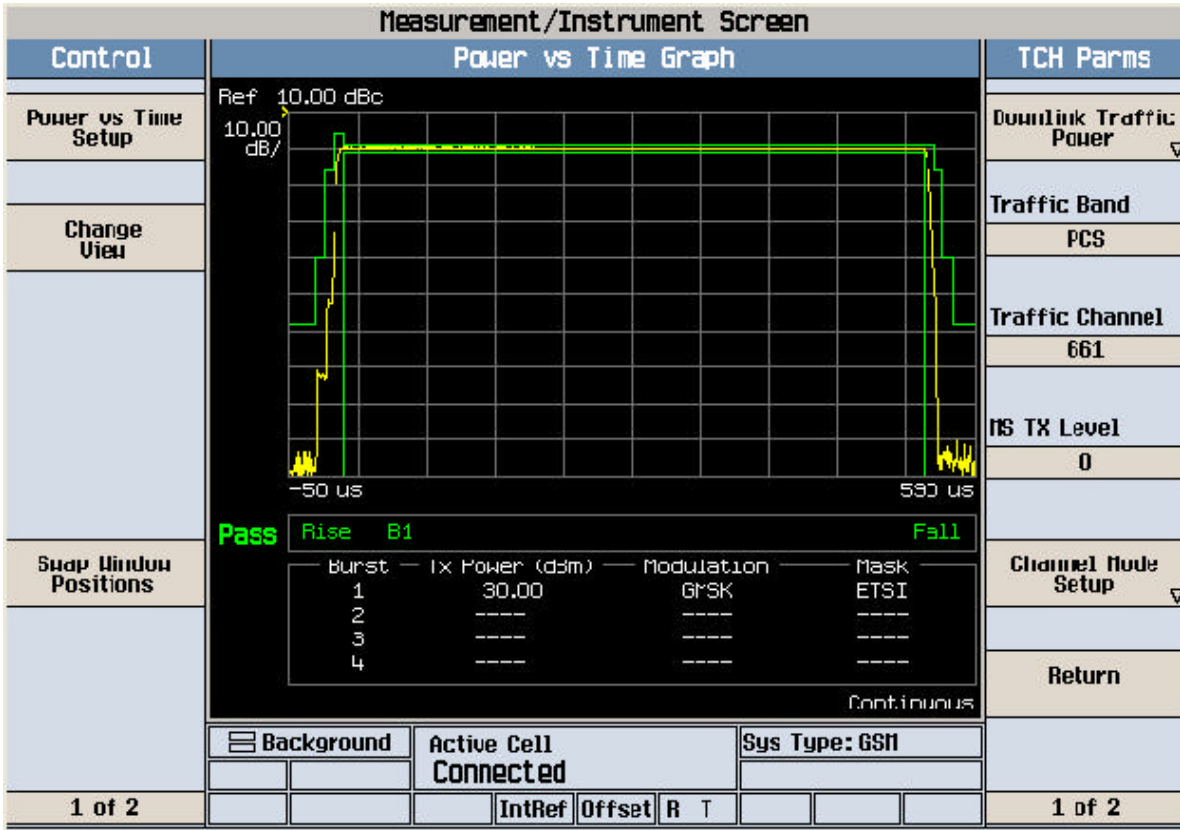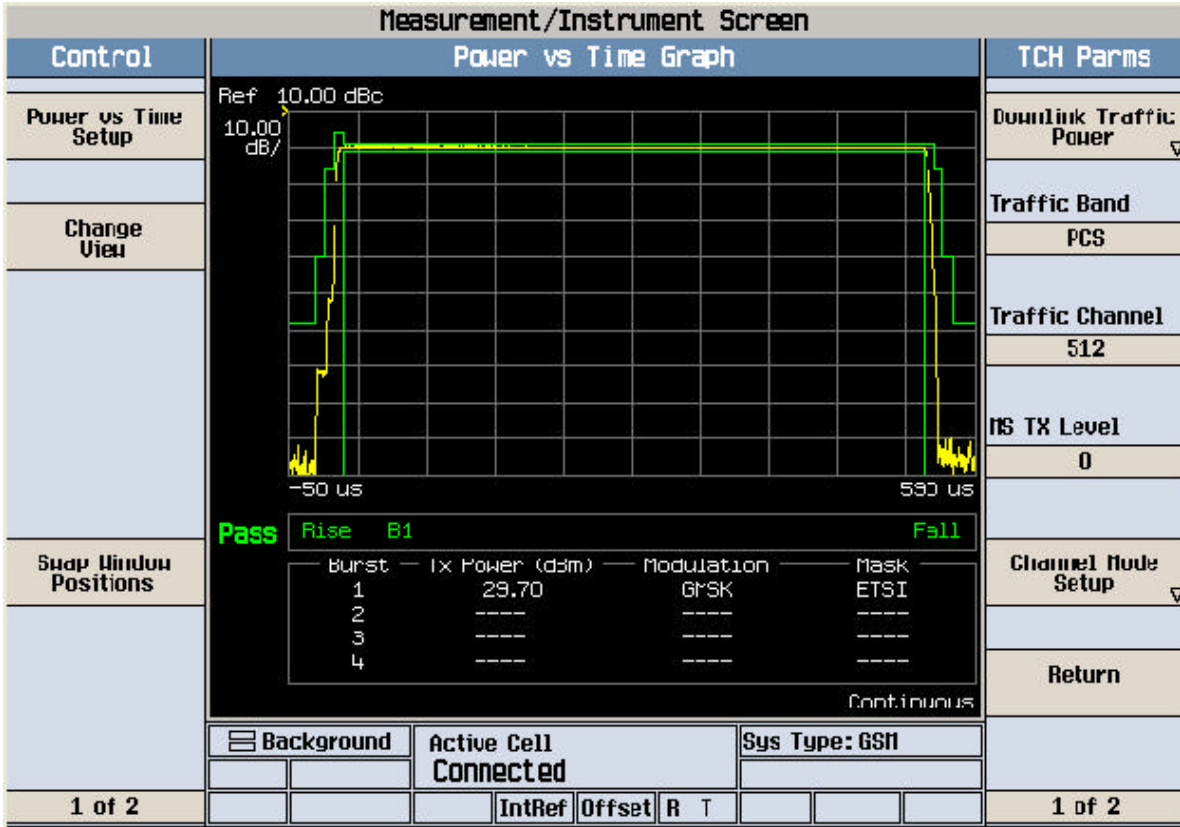

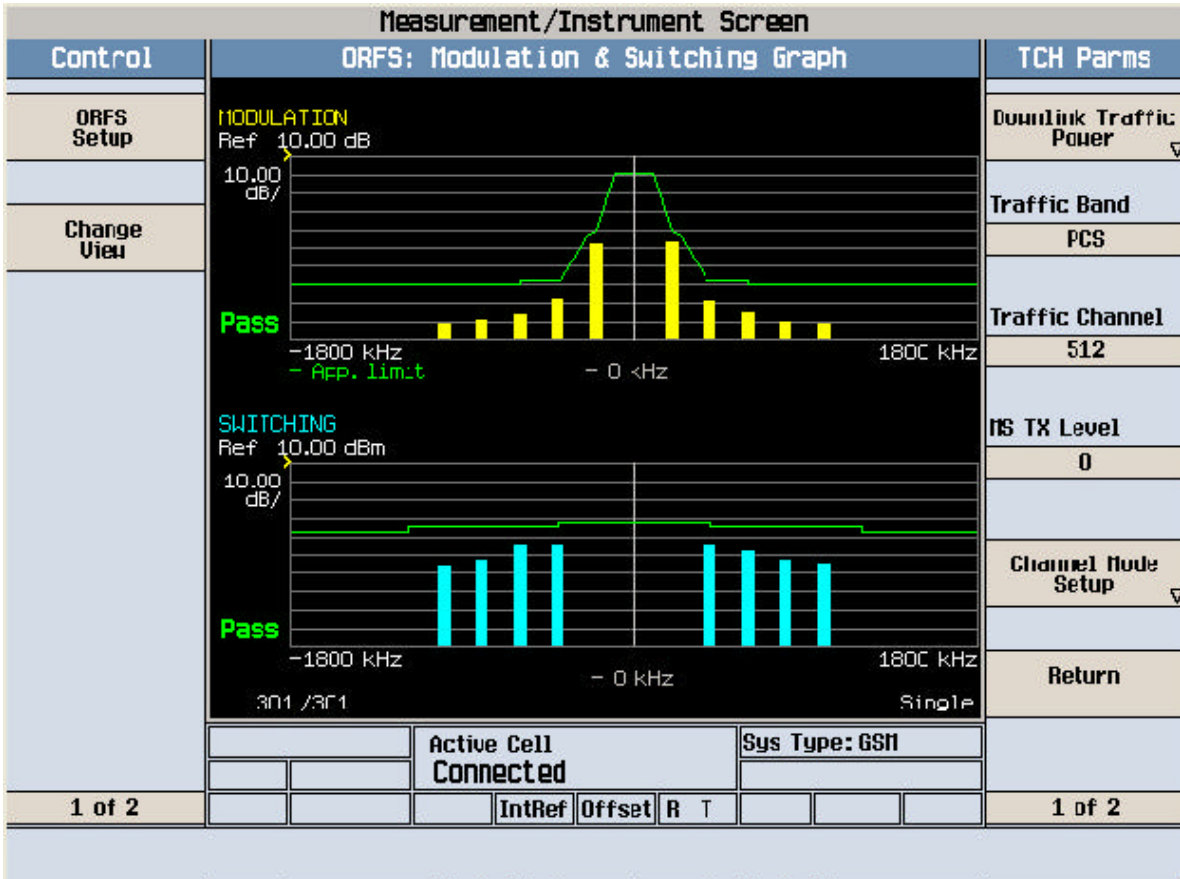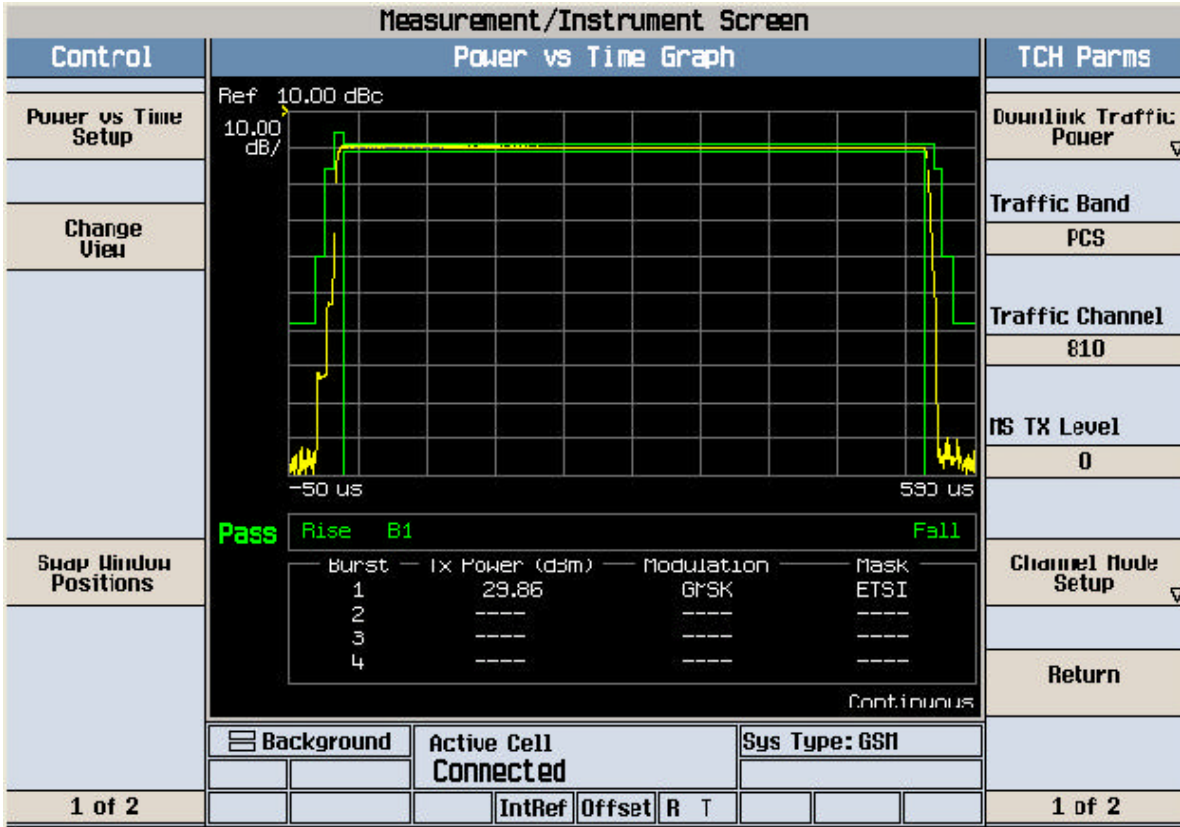

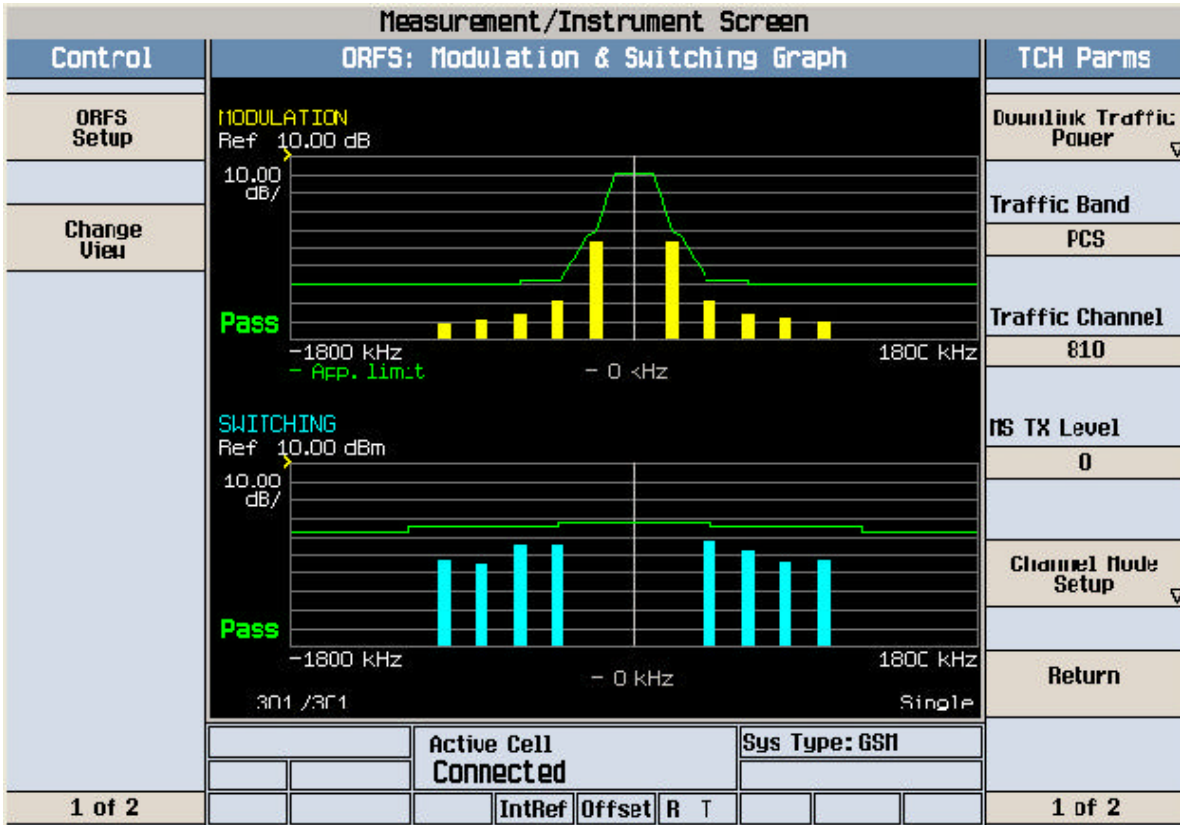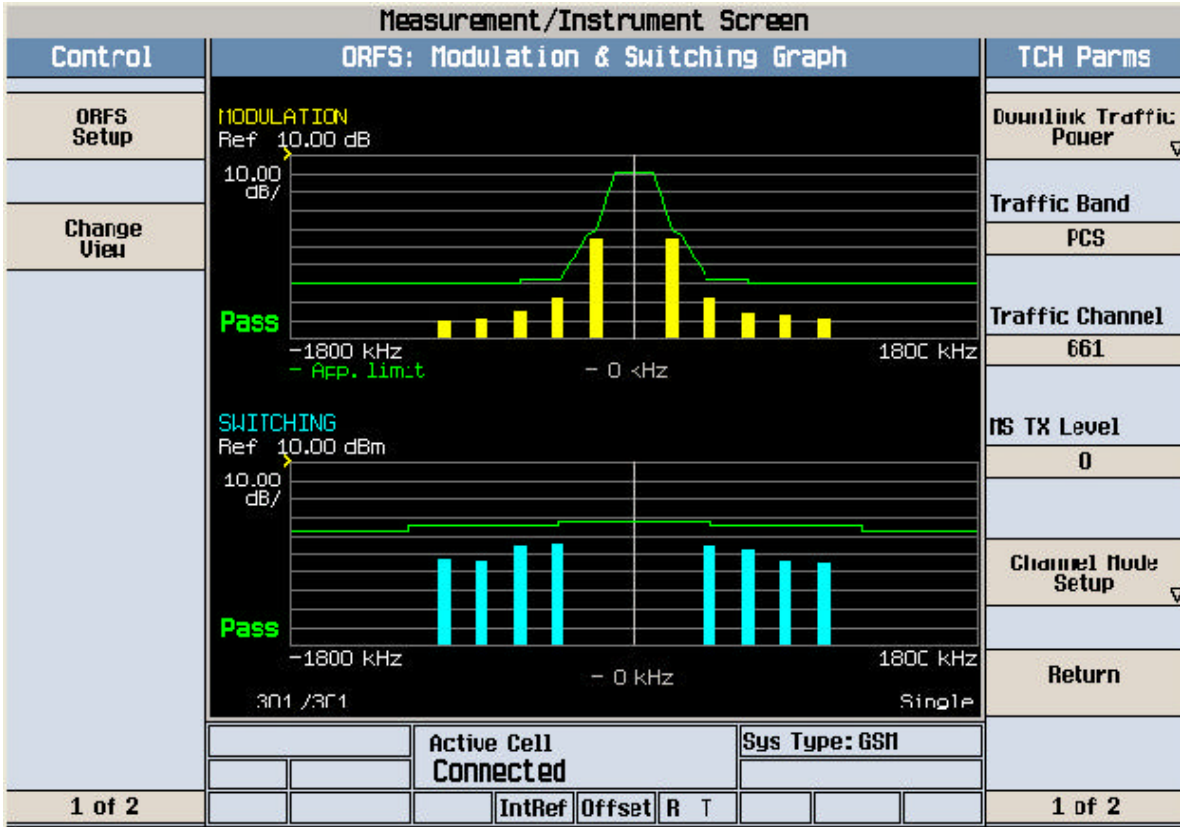


Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.512

Ref 30 dBm Atten 40 dB

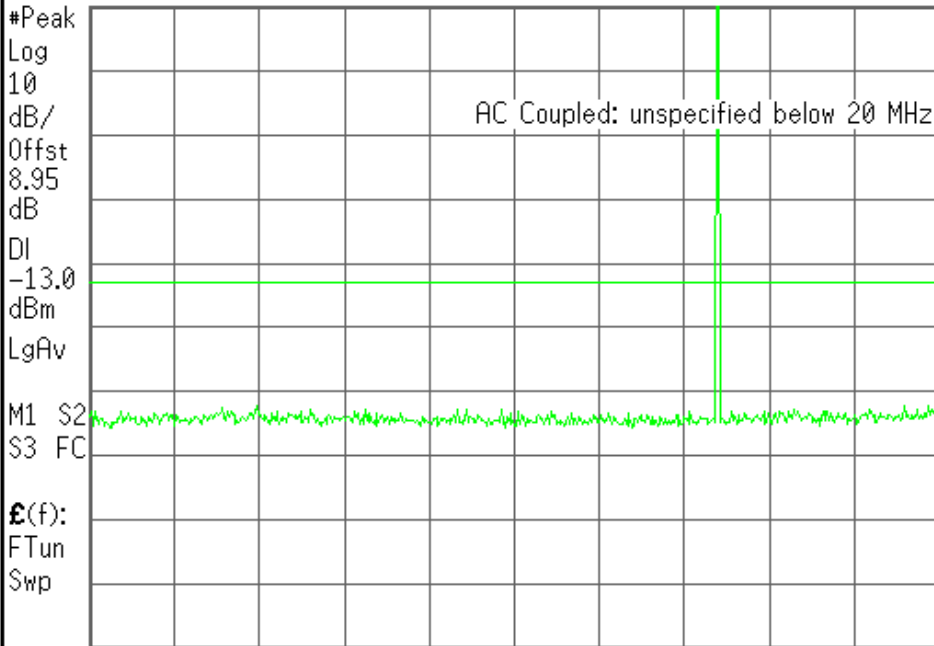

Center 1.255 GHz Span 2.49 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.00000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.0000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2005 Agilent Technologies

Agilent

R L


Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.512

Ref 30 dBm Atten 40 dB

Mkr1 383 MHz

-31.69 dBm

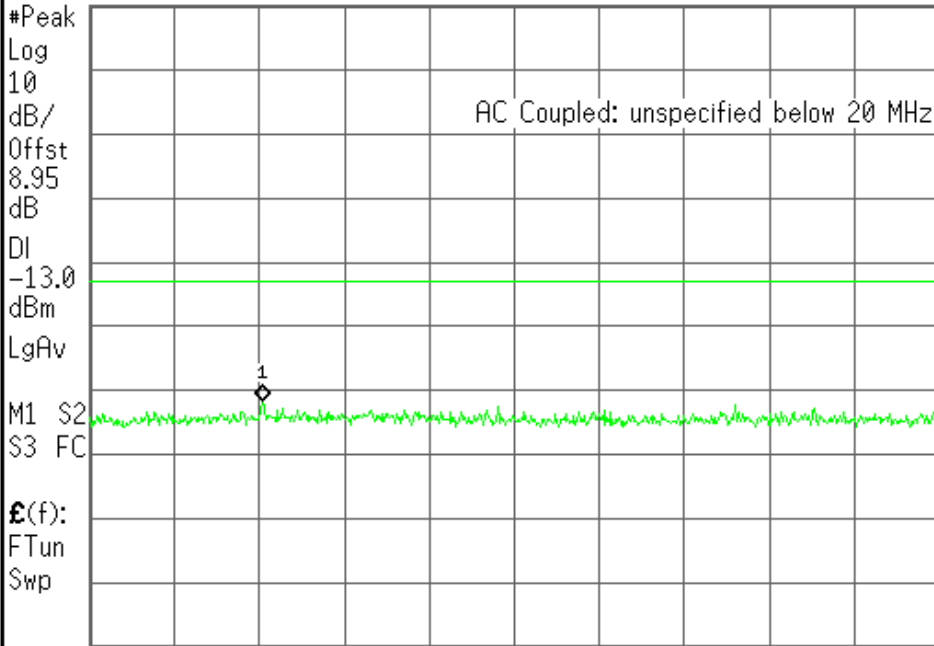

Center 926 MHz Span 1.833 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 3.08 ms (601 pts)

Center Freq  
926.350000 MHz

Start Freq  
10.00000000 MHz

Stop Freq  
1.84270000 GHz

CF Step  
183.2700000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

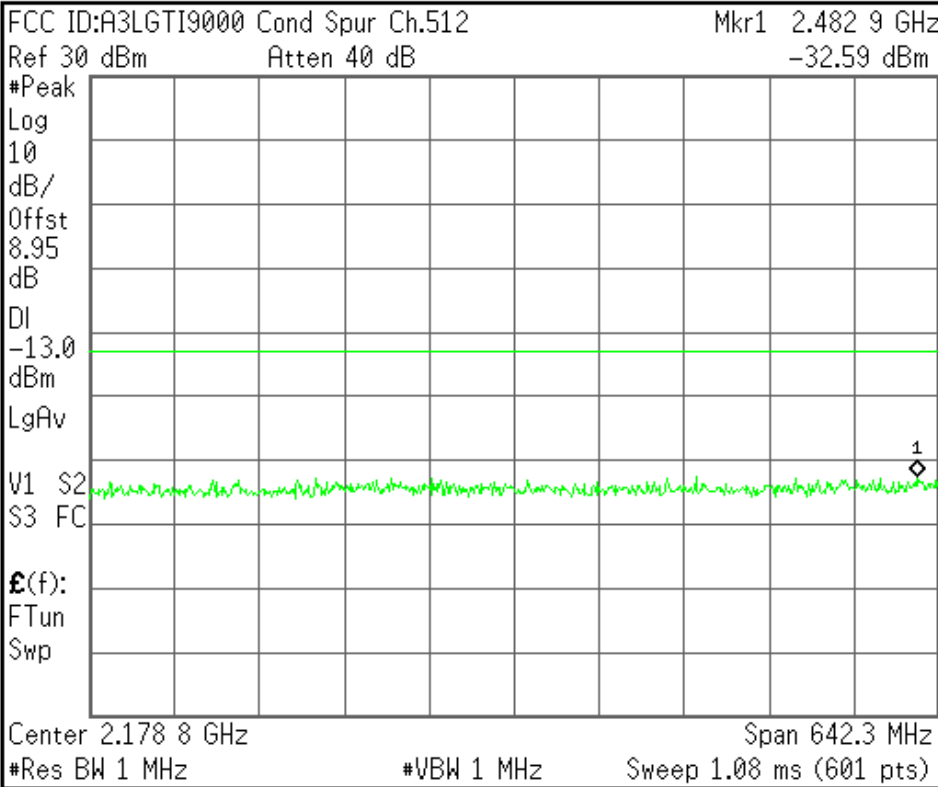


<b>Center Freq</b> 2.17885000 GHz
<b>Start Freq</b> 1.85770000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 64.2300000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

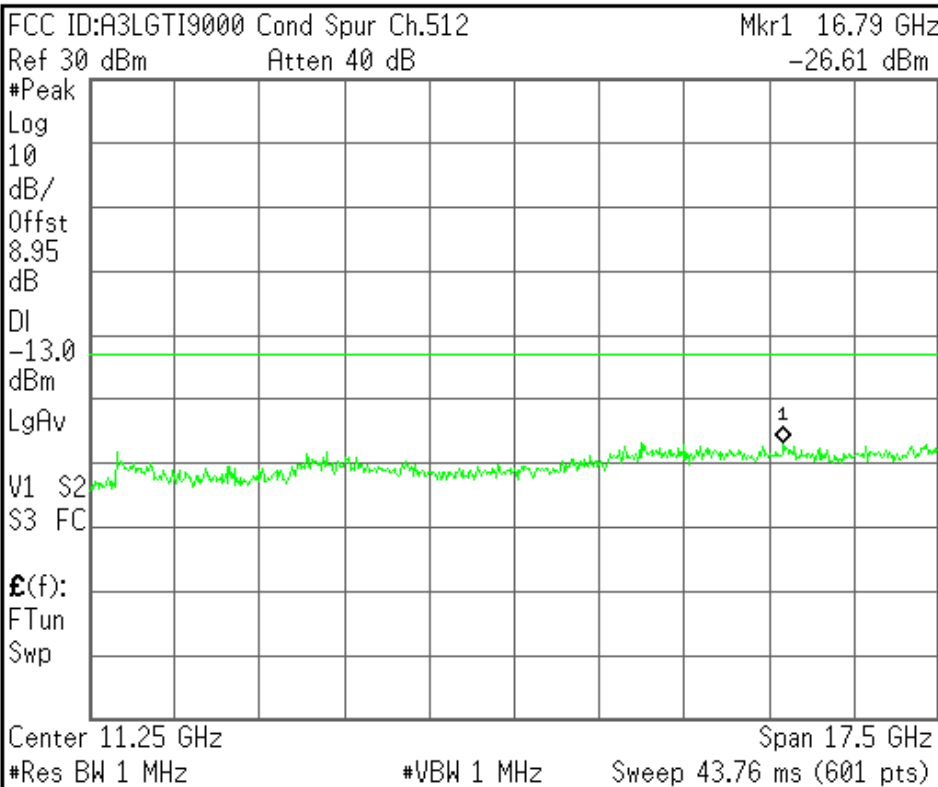

<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.00000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.0000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

Mkr1 476 MHz

-31.80 dBm

#Peak

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.12 ms (601 pts)

Center Freq  
941.250000 MHz

Start Freq  
10.00000000 MHz

Stop Freq  
1.87250000 GHz

CF Step  
186.2500000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

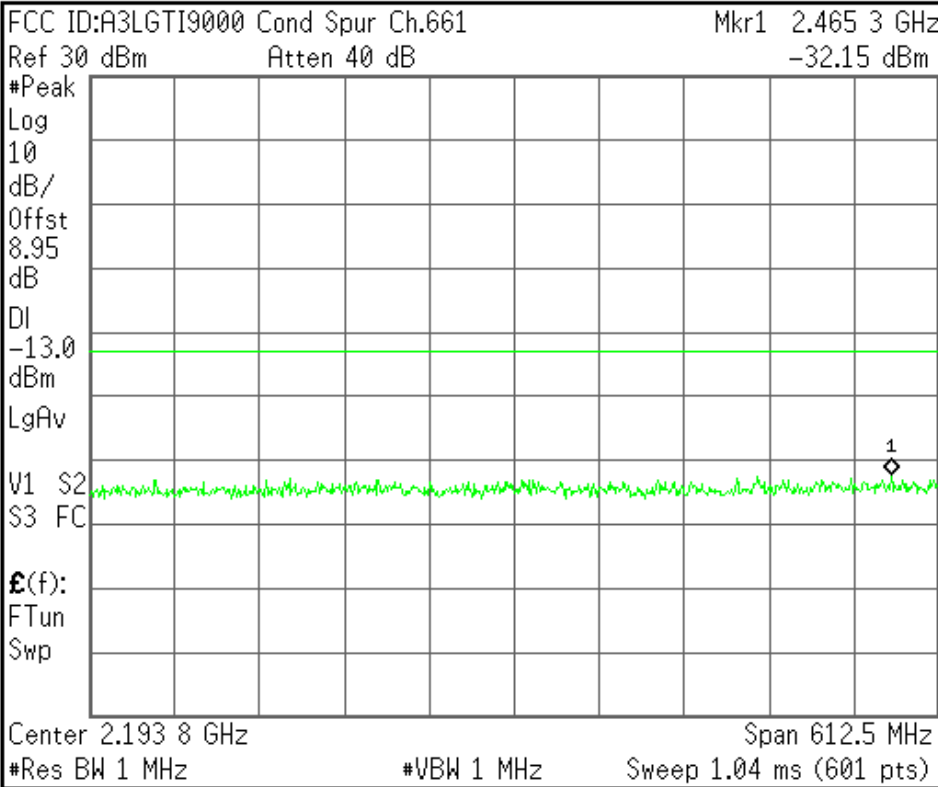


<b>Center Freq</b> 2.19375000 GHz
<b>Start Freq</b> 1.88750000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 61.2500000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

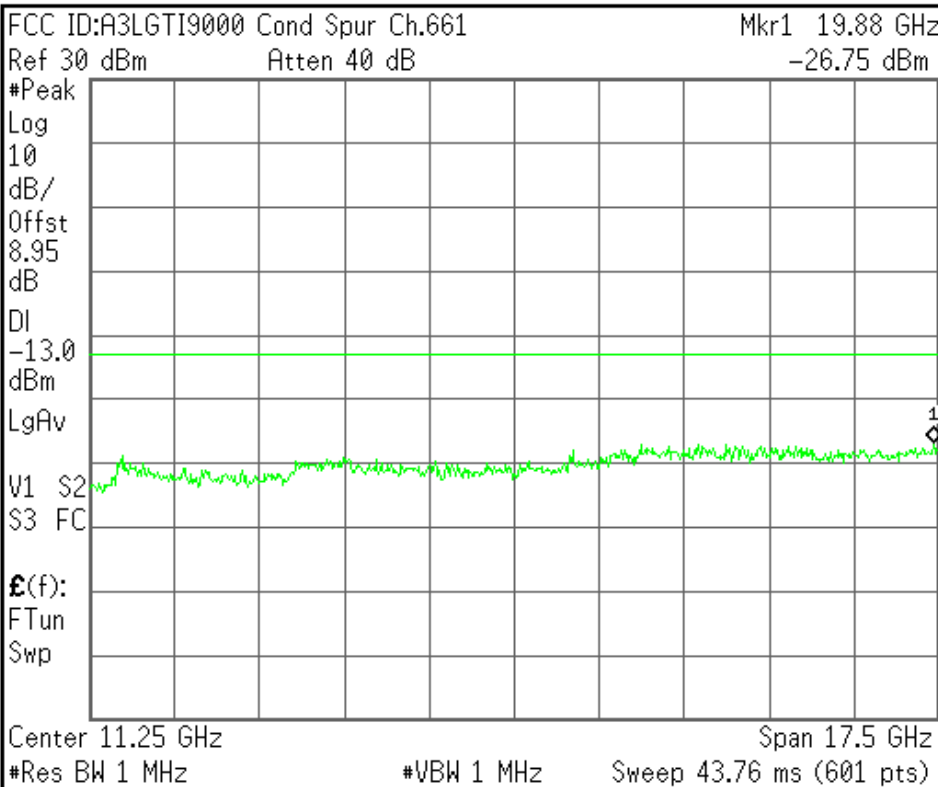


<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

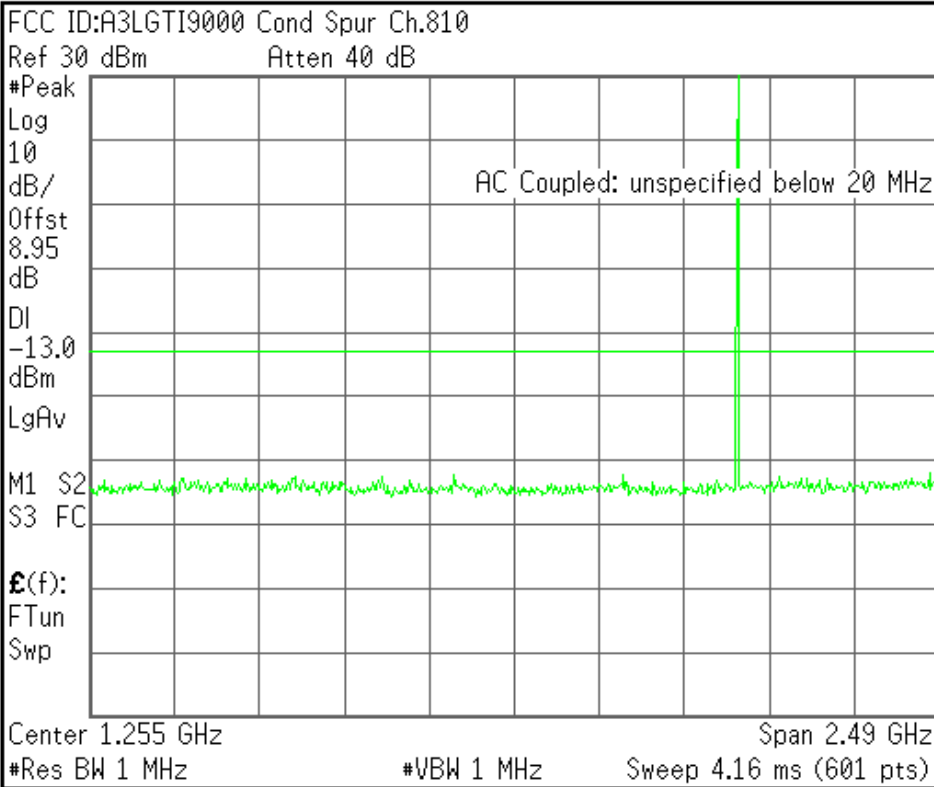


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

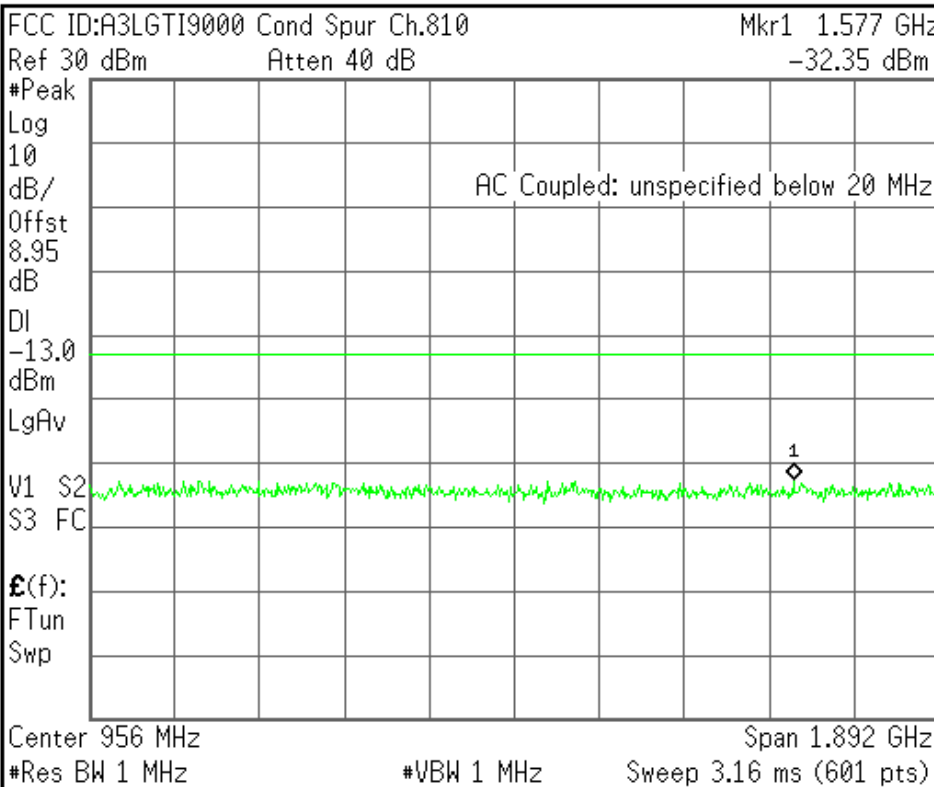


<b>Center Freq</b> 956.150000 MHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 1.90230000 GHz
<b>CF Step</b> 189.230000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

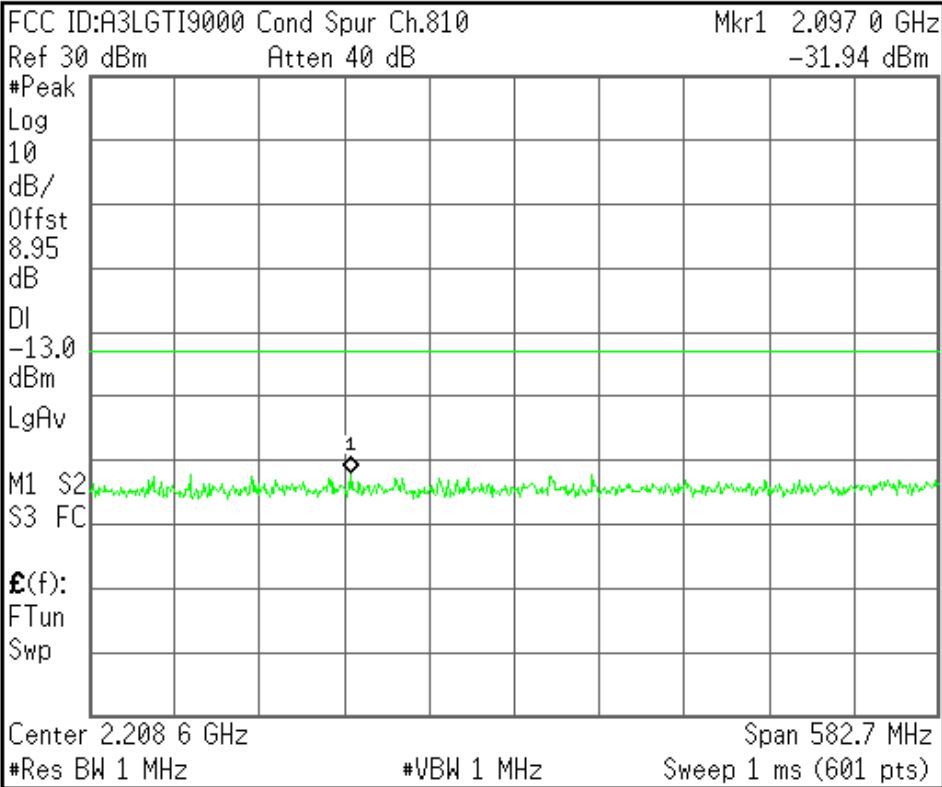


<b>Center Freq</b> 2.20865000 GHz
<b>Start Freq</b> 1.91730000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 58.2700000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

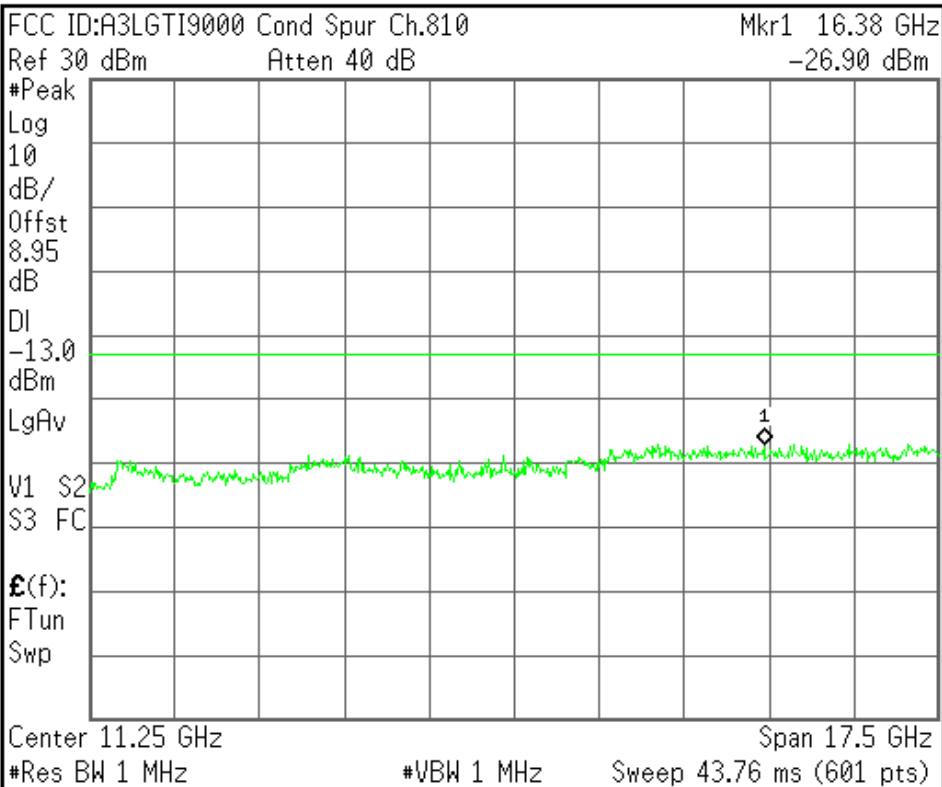

<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.512

Ref 30 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

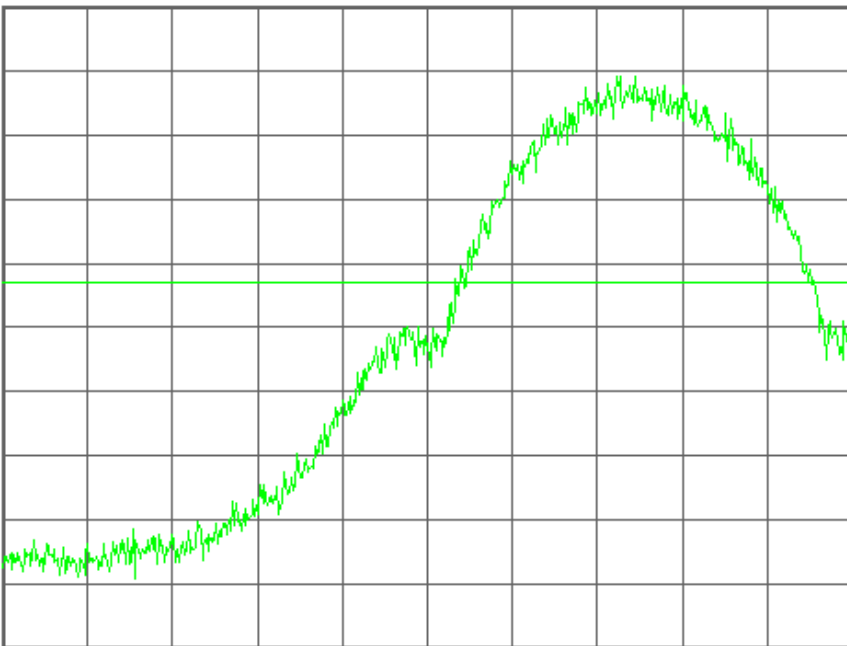

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
1.85000000 GHz

Start Freq  
1.84959500 GHz

Stop Freq  
1.85040500 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.512

Mkr1 1.849 977 3 GHz

Ref 30 dBm Atten 40 dB

-18.74 dBm

#Avg

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

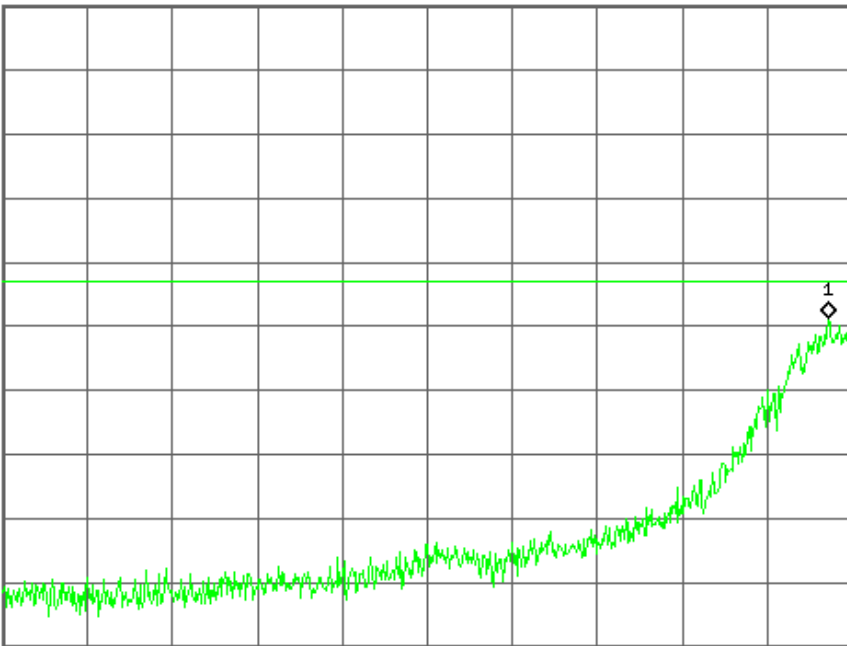

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
1.84959500 GHz

Start Freq  
1.84919000 GHz

Stop Freq  
1.85000000 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.810

Ref 30 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

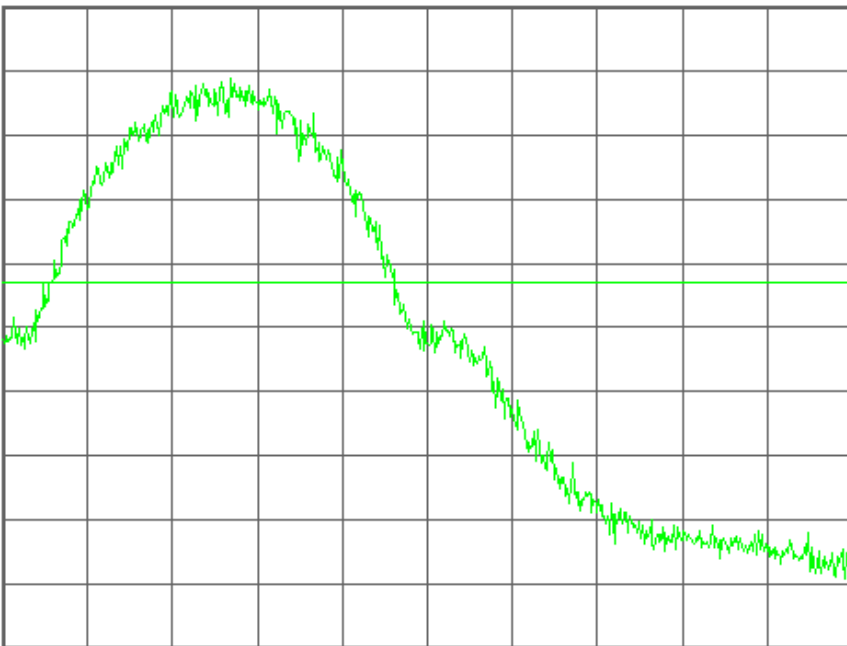

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
1.91000000 GHz

Start Freq  
1.90959500 GHz

Stop Freq  
1.91040500 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.810

Mkr1 1.910 020 4 GHz

Ref 30 dBm Atten 40 dB

-16.78 dBm

#Avg

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

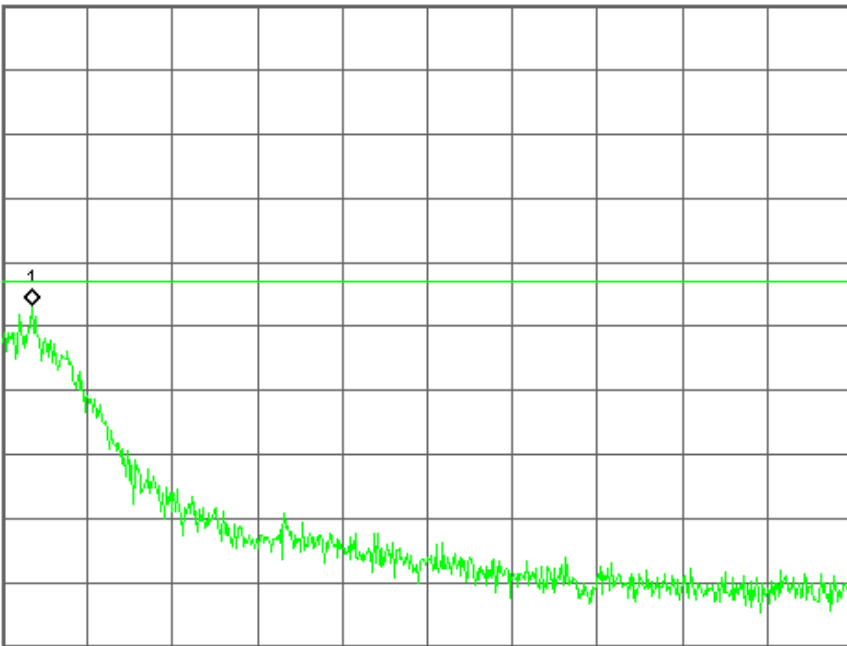

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
1.91040500 GHz

Start Freq  
1.91000000 GHz

Stop Freq  
1.91081000 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

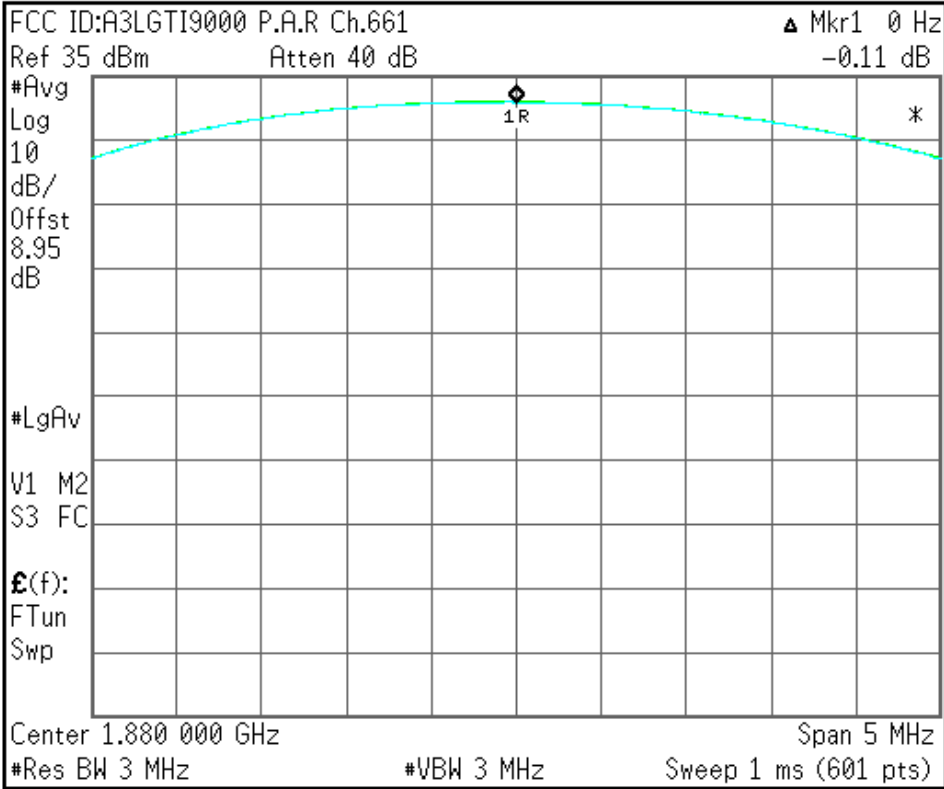

<b>Center Freq</b> 1.88000000 GHz
<b>Start Freq</b> 1.87750000 GHz
<b>Stop Freq</b> 1.88250000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE850

Agilent

R T

Freq/Channel

Ch Freq 824.2 MHz Trig Free  
 Occupied Bandwidth

Center Freq  
824.200000 MHz

Start Freq  
823.700000 MHz


Stop Freq  
824.700000 MHz

CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LGTI9000 0BW Ch.128 EDGE  
 Ref 27 dBm Atten 30 dB

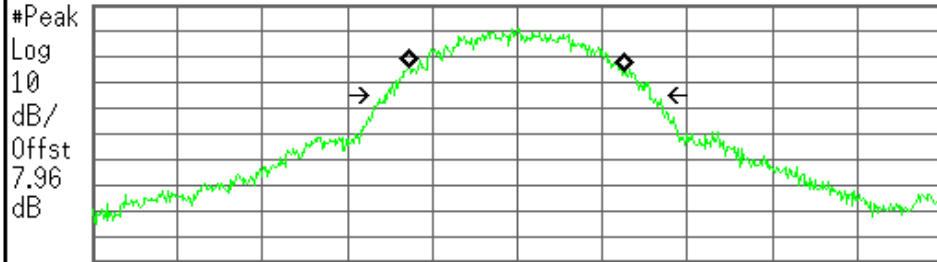

Center 824.200 MHz Span 1 MHz  
 #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
 255.0170 kHz x dB -26.00 dB  
 Transmit Freq Error -337.968 Hz  
 x dB Bandwidth 312.875 kHz

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

Ch Freq 836.6 MHz Trig Free  
 Occupied Bandwidth

Center Freq  
836.600000 MHz

Start Freq  
836.100000 MHz


Stop Freq  
837.100000 MHz

CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


FCC ID:A3LGTI9000 0BW Ch.190 EDGE  
 Ref 27 dBm Atten 30 dB

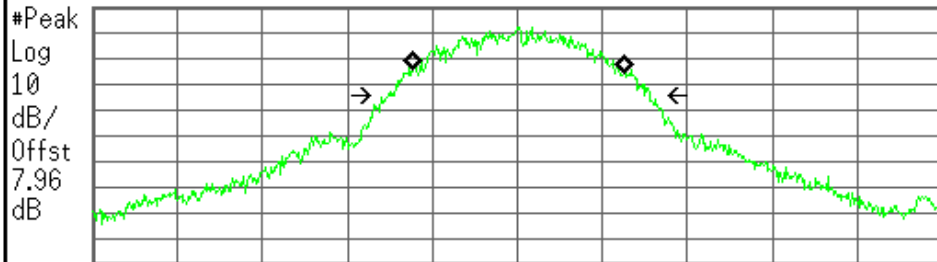

Center 836.600 MHz Span 1 MHz  
 #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
 250.6006 kHz x dB -26.00 dB  
 Transmit Freq Error 559.840 Hz  
 x dB Bandwidth 310.648 kHz

File Operation Status, C:\TEMP.GIF file saved
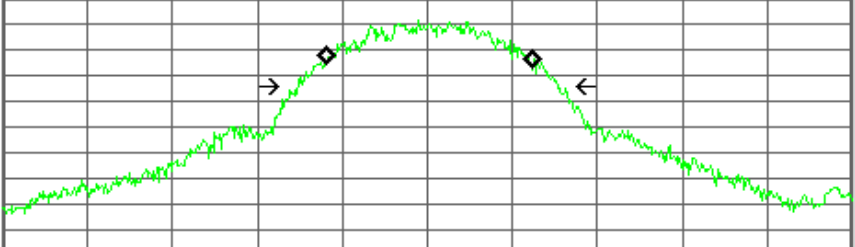
<p><b>Ch Freq</b> 848.8 MHz <span style="float: right;"><b>Trig</b> Free</span></p> <p>Occupied Bandwidth <span style="float: right;">[ ] [ ]</span></p> <p>FCC ID:A3LGTI9000 0BW Ch.251 EDGE                  Ref 27 dBm Atten 30 dB</p> <div style="border: 1px solid black; padding: 5px;"> <p>#Peak Log 10 dB/ Offst 7.96 dB</p>  <p>Center 848.800 MHz <span style="float: right;">Span 1 MHz</span></p> <p>#Res BW 3 kHz <span style="margin-left: 100px;">#VBW 3 kHz</span> <span style="float: right;">#Sweep 1 s (601 pts)</span></p> </div>	<p><b>Freq/Channel</b></p> <p><b>Center Freq</b> 848.800000 MHz</p> <p><b>Start Freq</b> 848.300000 MHz</p> <p><b>Stop Freq</b> 849.300000 MHz</p> <p><b>CF Step</b> 100.000000 kHz Auto Man</p> <p><b>Freq Offset</b> 0.00000000 Hz</p> <p><b>Signal Track</b> On Off</p>
<p><b>Occupied Bandwidth</b> <span style="float: right;"><b>Occ BW % Pwr</b> 99.00 %</span></p> <p style="text-align: center; font-size: 1.2em;">247.1452 kHz</p> <p style="text-align: right;"><b>x dB</b> -26.00 dB</p> <p><b>Transmit Freq Error</b> 1.039 kHz</p> <p><b>x dB Bandwidth</b> 310.353 kHz</p>	
<p><b>File Operation Status, C:\TEMP.GIF file saved</b></p>	

FCC ID : A3LGTI9000 Transmit Power 128CH EDGE

Control	EGPRS Transmit Power	PDCH Parms																
<p>EGPRS Transmit Power Setup ▾</p>	<p><b>EPK Burst Power</b>      <b>EPK Est Carrier Power</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">Minimum</td> <td style="width: 25%;">Maximum</td> <td style="width: 25%;">Minimum</td> <td style="width: 25%;">Maximum</td> </tr> <tr> <td style="text-align: center;">26.25 dBm</td> <td style="text-align: center;">27.35 dBm</td> <td style="text-align: center;">26.88 dBm</td> <td style="text-align: center;">27.06 dBm</td> </tr> <tr> <td>Average</td> <td>Std Dev</td> <td>Average</td> <td>Std Dev</td> </tr> <tr> <td style="text-align: center;">26.85 dBm</td> <td style="text-align: center;">0.20 dBm</td> <td style="text-align: center;">26.96 dBm</td> <td style="text-align: center;">0.04 dBm</td> </tr> </table> <p style="font-size: 0.8em;">200 /200 <span style="float: right;">Single</span></p>	Minimum	Maximum	Minimum	Maximum	26.25 dBm	27.35 dBm	26.88 dBm	27.06 dBm	Average	Std Dev	Average	Std Dev	26.85 dBm	0.20 dBm	26.96 dBm	0.04 dBm	<p>Downlink Traffic Power ▾</p> <p>Traffic Band GSM850</p> <p>Traffic Channel 128</p> <p>HS TX Level ▾</p> <p>Modulation Coding Scheme ▾</p> <p>Return</p>
Minimum	Maximum	Minimum	Maximum															
26.25 dBm	27.35 dBm	26.88 dBm	27.06 dBm															
Average	Std Dev	Average	Std Dev															
26.85 dBm	0.20 dBm	26.96 dBm	0.04 dBm															
	<p>Active Cell Transferring</p> <p>Sys Type: EGPRS</p>																	
1 of 2	<table style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <tr> <td style="width: 10%;"></td> <td style="width: 10%;">IntRef</td> <td style="width: 10%;">Offset</td> <td style="width: 10%;">R T</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> </tr> </table>		IntRef	Offset	R T				1 of 2									
	IntRef	Offset	R T															


Control	EGPRS Transmit Power				PDCH Parms		
EGPRS Transmit Power Setup	EPK Burst Power		EPK Est Carrier Power		Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	26.31 dBm	27.51 dBm	26.92 dBm	27.11 dBm	GS1850		
	Average	Std Dev	Average	Std Dev	Traffic Channel		
26.95 dBm	0.21 dBm	27.02 dBm	0.04 dBm	190			
	200 / 200		Single		HS TX Level		
	Active Cell Transferring				Modulation Coding Scheme		
					Return		
					Sys Type: EGPRS		
1 of 2			IntRef	Offset	R	T	1 of 2

Control	EGPRS Transmit Power				PDCH Parms		
EGPRS Transmit Power Setup	EPK Burst Power		EPK Est Carrier Power		Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	26.44 dBm	27.55 dBm	26.98 dBm	27.17 dBm	GS1850		
	Average	Std Dev	Average	Std Dev	Traffic Channel		
27.02 dBm	0.22 dBm	27.08 dBm	0.04 dBm	251			
	200 / 200		Single		HS TX Level		
	Active Cell Transferring				Modulation Coding Scheme		
					Return		
					Sys Type: EGPRS		
1 of 2			IntRef	Offset	R	T	1 of 2

Agilent

R L

Freq/Channel

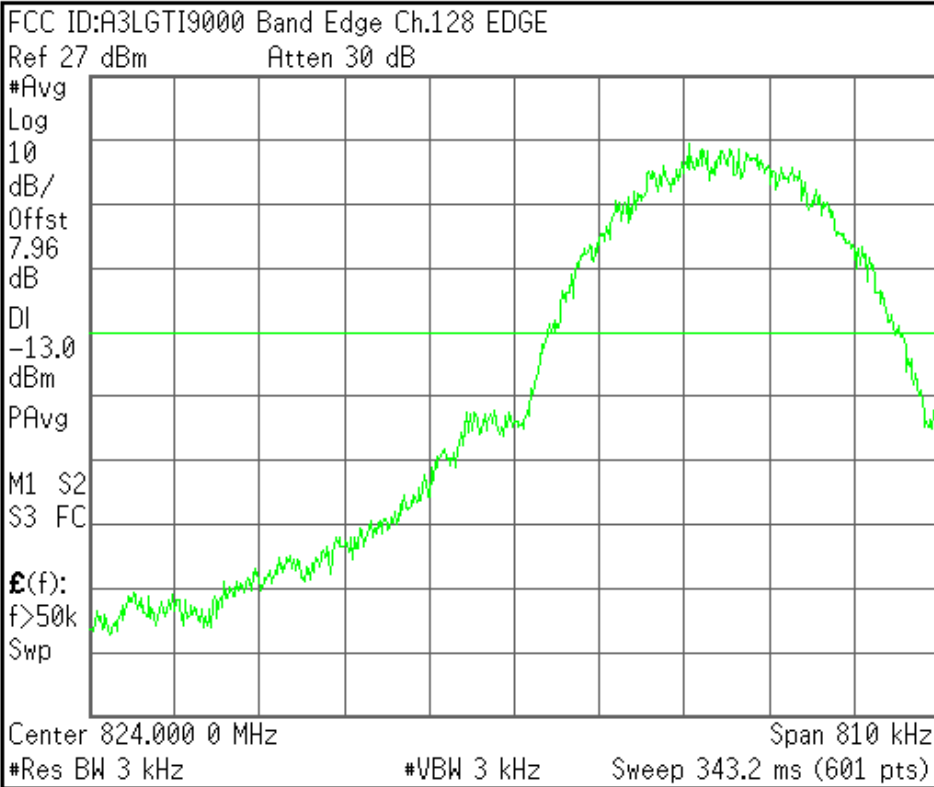


<b>Center Freq</b> 824.000000 MHz
<b>Start Freq</b> 823.595000 MHz
<b>Stop Freq</b> 824.405000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

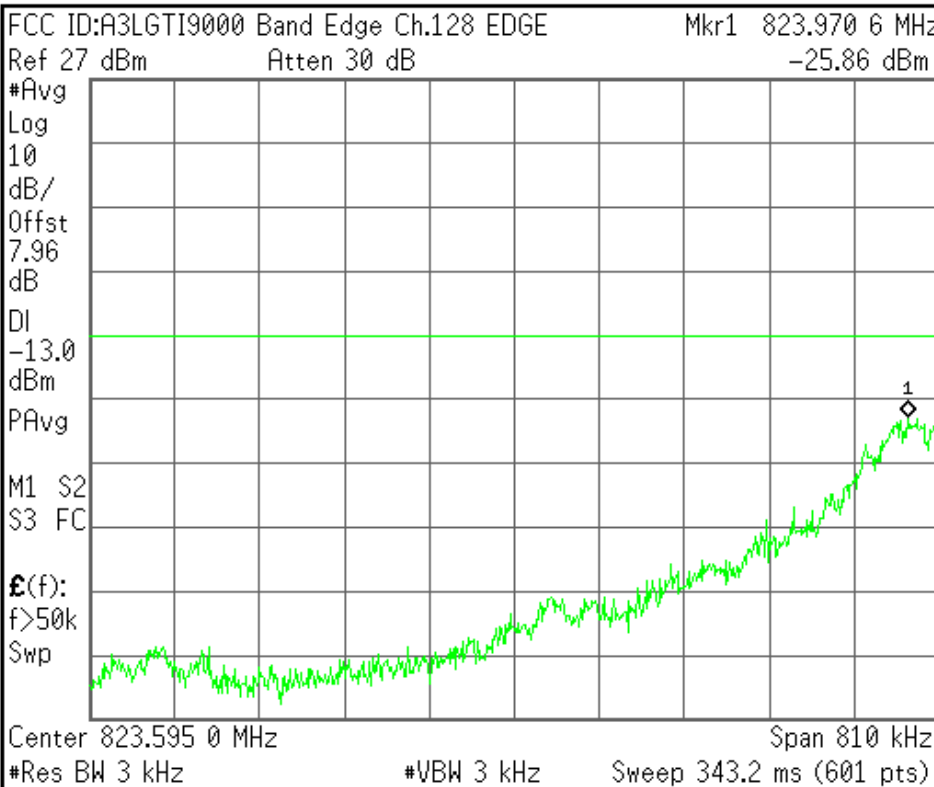

<b>Center Freq</b> 823.595000 MHz
<b>Start Freq</b> 823.190000 MHz
<b>Stop Freq</b> 824.000000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.251 EDGE

Ref 27 dBm Atten 30 dB

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

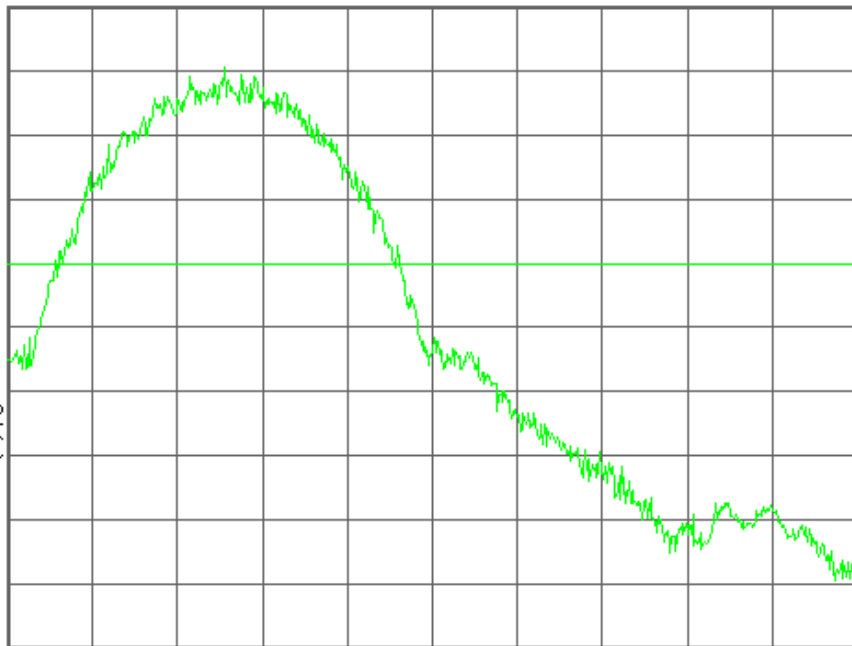

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
849.000000 MHz

Start Freq  
848.595000 MHz

Stop Freq  
849.405000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTI9000 Band Edge Ch.251 EDGE

Mkr1 849.004 0 MHz

Ref 27 dBm

Atten 30 dB

-24.11 dBm

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

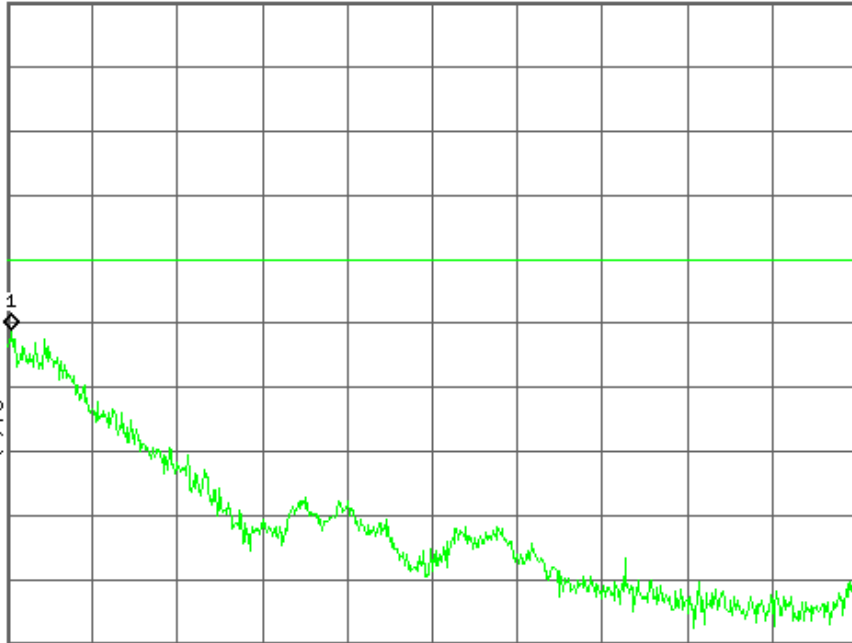

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
849.405000 MHz

Start Freq  
849.000000 MHz

Stop Freq  
849.810000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE1900

Agilent

R T

Freq/Channel

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

Center Freq  
1.85020000 GHz

Start Freq  
1.84970000 GHz


Stop Freq  
1.85070000 GHz

CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LGTI9000 0BW Ch.512 EDGE  
Ref 26 dBm Atten 30 dB

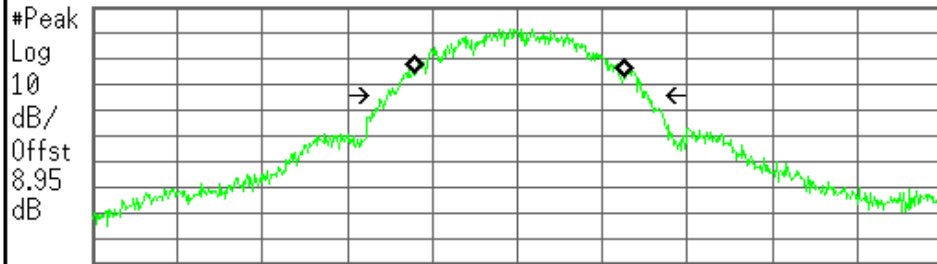

Center 1.850 200 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
248.8320 kHz x dB -26.00 dB

Transmit Freq Error 2.037 kHz  
x dB Bandwidth 310.031 kHz

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

Center Freq  
1.88000000 GHz

Start Freq  
1.87950000 GHz


Stop Freq  
1.88050000 GHz

CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

FCC ID:A3LGTI9000 0BW Ch.661 EDGE  
Ref 26 dBm Atten 30 dB

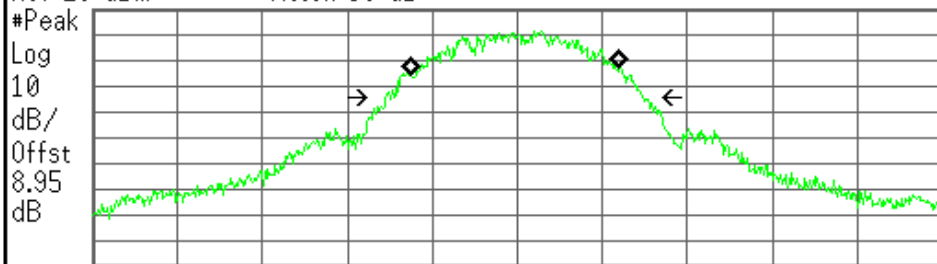


Center 1.880 000 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

**Occupied Bandwidth** Occ BW % Pwr 99.00 %  
247.5921 kHz x dB -26.00 dB

Transmit Freq Error -2.070 kHz  
x dB Bandwidth 305.870 kHz

File Operation Status, C:\TEMP.GIF file saved

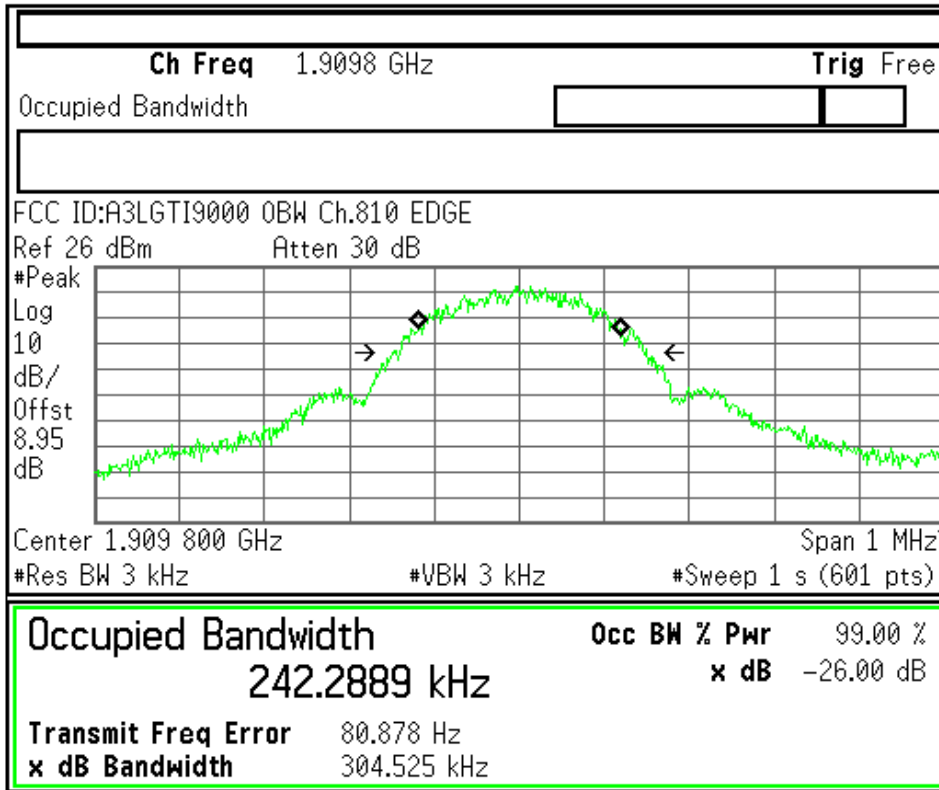

<b>Freq/Channel</b>
<b>Center Freq</b> 1.90980000 GHz
<b>Start Freq</b> 1.90930000 GHz
<b>Stop Freq</b> 1.91030000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

FCC ID : A3LGTI9000 Transmit Power 512CH EDGE

Measurement/Instrument Screen						
Control	EGPRS Transmit Power				PDCH Parms	
EGPRS Transmit Power Setup	EPK Burst Power		EPK Est Carrier Power		Downlink Traffic Power	
	Minimum	Maximum	Minimum	Maximum	Traffic Band	
	25.27 dBm	26.65 dBm	25.87 dBm	26.10 dBm	PCS	
	Average	Std Dev	Average	Std Dev	Traffic Channel	
	25.94 dBm	0.22 dBm	26.04 dBm	0.04 dBm	512	
	200 /200				HS TX Level	
					Modulation Coding Scheme	
					Return	
	Active Cell Transferring			Sys Type: EGPRS		
1 of 2			IntRef	Offset	R T	1 of 2


Measurement/Instrument Screen									
Control	EGPRS Transmit Power						PDCH Parms		
EGPRS Transmit Power Setup ▾	EPK Burst Power			EPK Est Carrier Power			Downlink Traffic Power ▾		
	Minimum	Maximum		Minimum	Maximum		Traffic Band		
	25.70 dBm	26.82 dBm		26.33 dBm	26.45 dBm		PCS		
	Average	Std Dev		Average	Std Dev		Traffic Channel		
26.29 dBm	0.23 dBm		26.38 dBm	0.03 dBm		661			
	200 /200			Single			NS TX Level ▾		
	Active Cell Transferring						Sys Type: EGPRS		
							Return		
1 of 2				IntRef	Offset	R T			1 of 2

Measurement/Instrument Screen									
Control	EGPRS Transmit Power						PDCH Parms		
EGPRS Transmit Power Setup ▾	EPK Burst Power			EPK Est Carrier Power			Downlink Traffic Power ▾		
	Minimum	Maximum		Minimum	Maximum		Traffic Band		
	25.53 dBm	26.80 dBm		26.15 dBm	26.28 dBm		PCS		
	Average	Std Dev		Average	Std Dev		Traffic Channel		
26.18 dBm	0.23 dBm		26.21 dBm	0.03 dBm		810			
	200 /200			Single			NS TX Level ▾		
	Active Cell Transferring						Sys Type: EGPRS		
							Return		
1 of 2				IntRef	Offset	R T			1 of 2

Agilent

R L

Freq/Channel

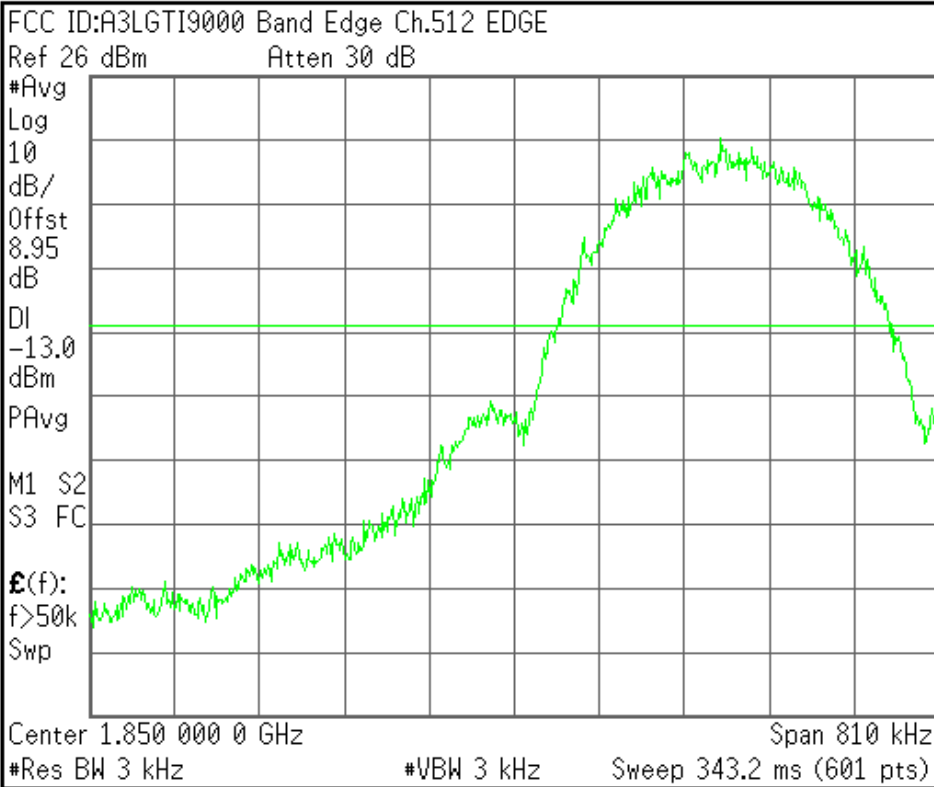


<b>Center Freq</b> 1.85000000 GHz
<b>Start Freq</b> 1.84959500 GHz
<b>Stop Freq</b> 1.85040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2005 Agilent Technologies

Agilent

R T

Freq/Channel

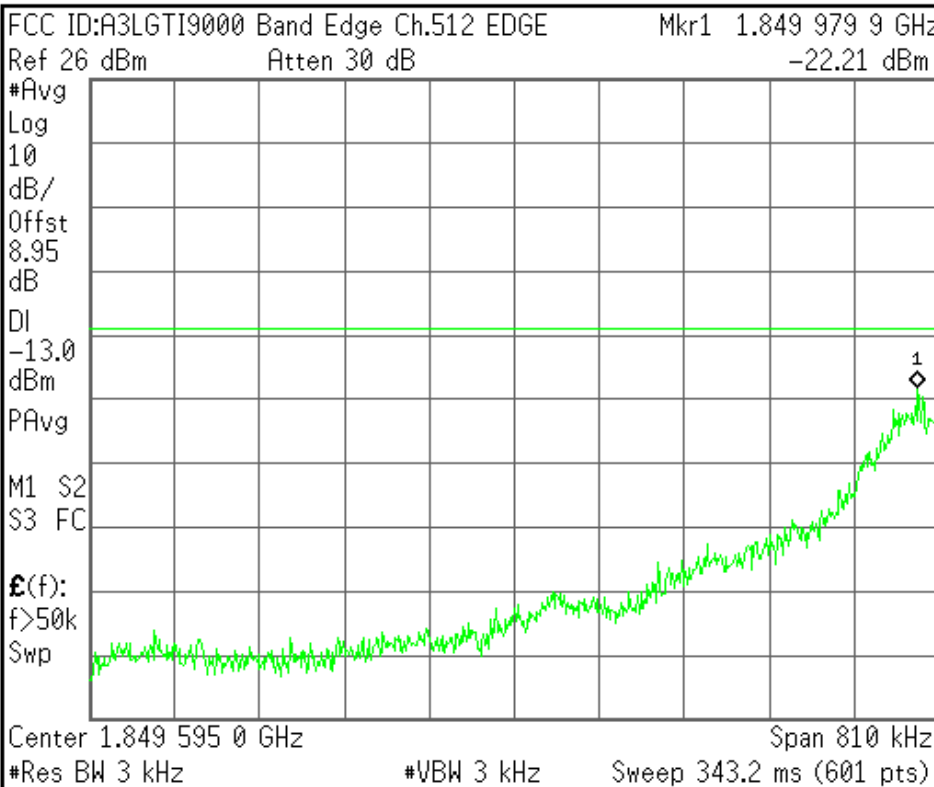


<b>Center Freq</b> 1.84959500 GHz
<b>Start Freq</b> 1.84919000 GHz
<b>Stop Freq</b> 1.85000000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

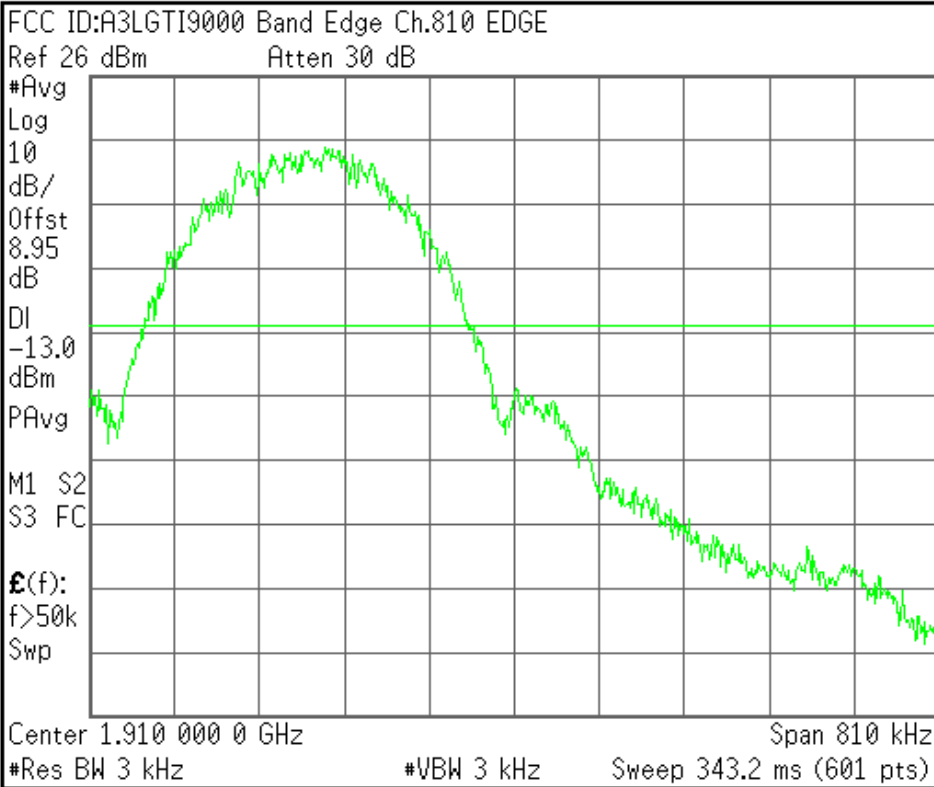


<b>Center Freq</b> 1.91000000 GHz
<b>Start Freq</b> 1.90959500 GHz
<b>Stop Freq</b> 1.91040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.0000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

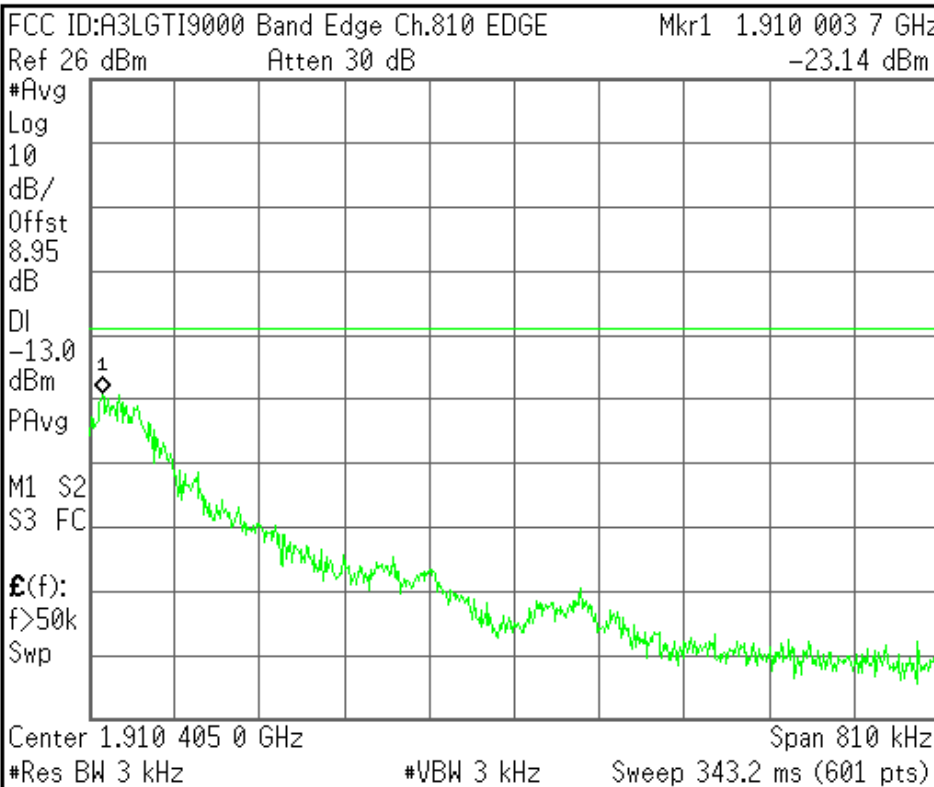


<b>Center Freq</b> 1.91040500 GHz
<b>Start Freq</b> 1.91000000 GHz
<b>Stop Freq</b> 1.91081000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.0000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

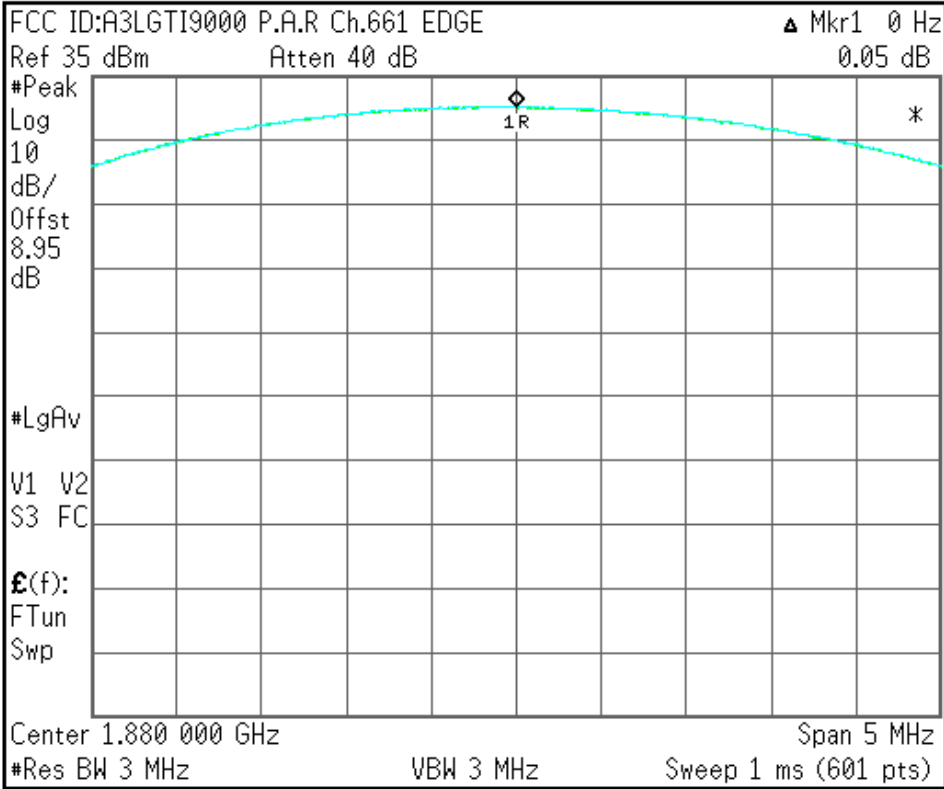

<b>Center Freq</b> 1.88000000 GHz
<b>Start Freq</b> 1.87750000 GHz
<b>Stop Freq</b> 1.88250000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2005 Agilent Technologies