

FCC TEST REPORT

Client Name : DATAplus Supplies, Inc.

Address : 9F, No.279, Sec.4, Hsin Yi Rd, Taipei, Taiwan

Product Name : Wireless mouse

Date : Mar. 16, 2022

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	12
4.1. Test Standard and Limit.....	12
4.2. Test Setup.....	12
4.3. Test Procedure.....	13
4.4. Test Data.....	14
5. Maximum Peak Output Power Test.....	22
5.1. Test Standard and Limit.....	22
5.2. Test Setup.....	22
5.3. Test Procedure.....	22
5.4. Test Data.....	22
6. 20DB Occupy Bandwidth Test.....	25
6.1. Test Standard.....	25
6.2. Test Setup.....	25
6.3. Test Procedure.....	25
6.4. Test Data.....	25
7. Carrier Frequency Separation Test.....	28
7.1. Test Standard and Limit.....	28
7.2. Test Setup.....	28
7.3. Test Procedure.....	28
7.4. Test Data.....	28
8. Number of Hopping Channel Test.....	31
8.1. Test Standard and Limit.....	31



8.2. Test Setup.....	31
8.3. Test Procedure.....	31
8.4. Test Data.....	31
9. Dwell Time Test.....	33
9.1. Test Standard and Limit.....	33
9.2. Test Setup.....	33
9.3. Test Procedure.....	33
9.4. Test Data.....	33
10. 100kHz Bandwidth of Frequency Band Edge Requirement.....	35
10.1. Test Standard and Limit.....	35
10.2. Test Setup.....	35
10.3. Test Procedure.....	35
10.4. Test Data.....	35
11. Antenna Requirement.....	39
11.1. Test Standard and Requirement.....	39
11.2. Antenna Connected Construction.....	39
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	40
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	41
APPENDIX III -- INTERNAL PHOTOGRAPH.....	45



TEST REPORT

Applicant : DATAplus Supplies, Inc.

Manufacturer : X-SCEND TECHNOLOGY CO.,LIMITED

Product Name : Wireless mouse

Model No. : 2MTMS1466F1BL, 2MTMS1466G1BL, 2MTMS1466U1BL,
2MTMS1466N1BL, 2MTMS1466

Trade Mark : N.A.

Rating(s) : Mouse input: DC 1.5V with "AA" battery
Dongle input: DC 5V via UAB port

Test Standard(s) : **FCC Part15 Subpart C, Section 15.247**

Test Method(s) : **ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of receipt

Feb. 17, 2022

Date of Test

Feb. 17~26, 2022

Prepared by

Sherry Xie

(Sherry Xie)

Approved & Authorized Signer

Tom Chen

(Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	DATAplus Supplies, Inc.
Address	:	9F, No.279, Sec.4, Hsin Yi Rd, Taipei, Taiwan
Manufacturer	:	X-SCEND TECHNOLOGY CO.,LIMITED
Address	:	399 changwei industrial park,dabutou rd.,longhua district,shenzhen,China.
Factory	:	X-SCEND TECHNOLOGY CO.,LIMITED
Address	:	399 changwei industrial park,dabutou rd.,longhua district,shenzhen,China.

1.2. Description of Device (EUT)

Product Name	:	Wireless mouse	
Model No.	:	2MTMS1466F1BL, 2MTMS1466G1BL, 2MTMS1466U1BL, 2MTMS1466N1BL, 2MTMS1466 (Note: All samples are the same except the model number, so we prepare "2MTMS1466F1BL" for test only.)	
Trade Mark	:	N.A.	
Test Power Supply	:	DC 1.5V battery	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2402~2480MHz
	:	Number of Channel:	40 Channels
	:	Modulation Type:	GFSK
	:	Antenna Type:	PCB Antenna
	:	Antenna Gain(Peak):	0 dBi(Provided by customer)
	:	Adapter:	N/A
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for SRD module. 3) The device work in the 16 channels, these 16 channels from 40 randomly generated.			



1.3. Auxiliary Equipment Used During Test

N/A	:	
-----	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

TEST MODE:

Mode 1	GFSK	CH01	TX Only
Mode 2		CH20	
Mode 3		CH40	

Note: (1) The measurements are performed at the highest, middle, lowest available channels.


1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2402	11	2422	21	2442	31	2462
02	2404	12	2424	22	2444	32	2464
03	2406	13	2426	23	2446	33	2466
04	2408	14	2428	24	2448	34	2468
05	2410	15	2430	25	2450	35	2470
06	2412	16	2432	26	2452	36	2472
07	2414	17	2434	27	2454	37	2474
08	2416	18	2436	28	2456	38	2476
09	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.6. Description Of Test Setup

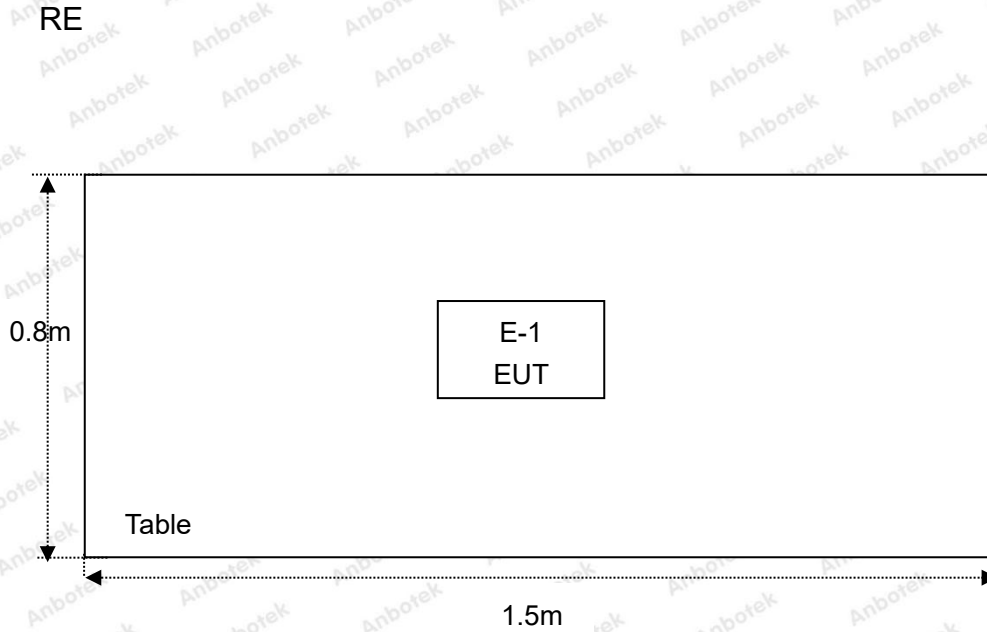

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year



1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.205/15.209	Spurious Emission	PASS
15.247(b)(1)	Conducted Peak Output Power	PASS
15.247(a)(1)	20dB Occupied Bandwidth	PASS
15.247(a)(1)	Carrier Frequencies Separation	PASS
15.247(a)(1)	Hopping Channel Number	PASS
15.247(a)(1)	Dwell Time	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

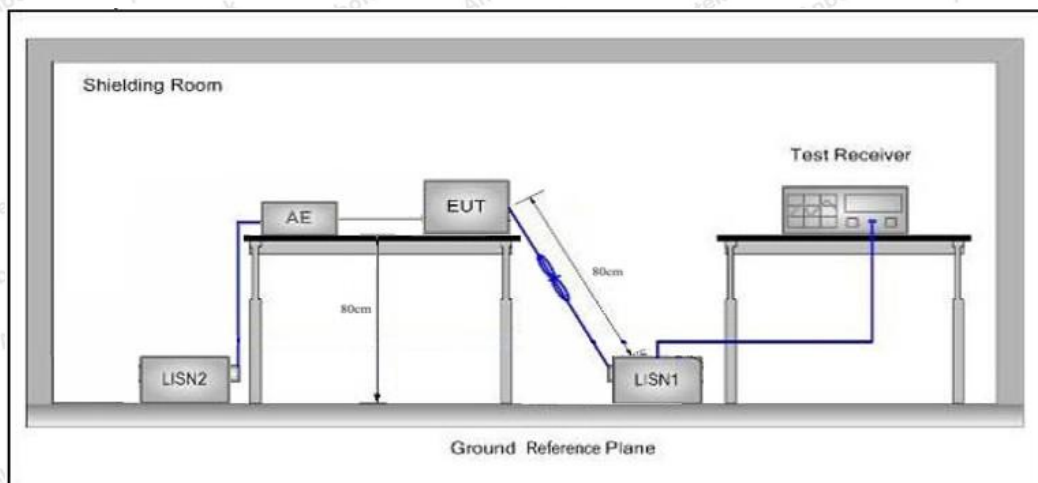

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Not applicable for equipment operated with DC power supply.

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

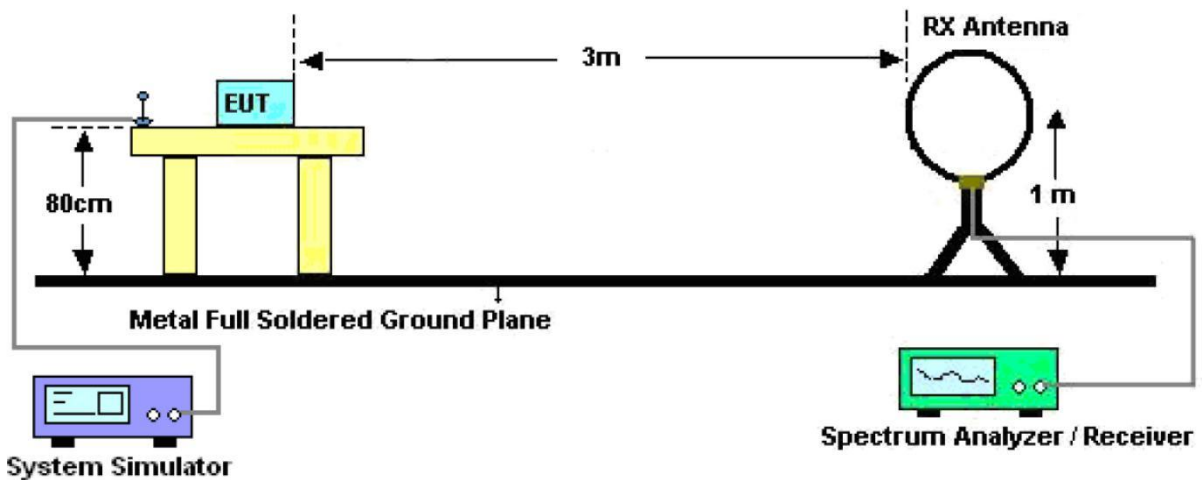


Figure 1. Below 30MHz

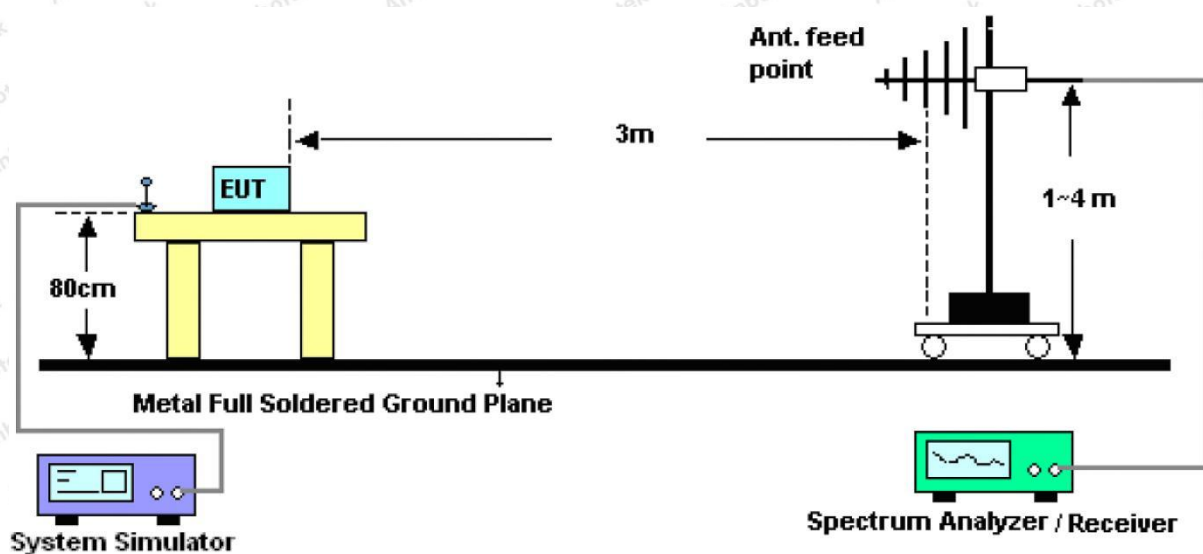


Figure 2. 30MHz to 1GHz

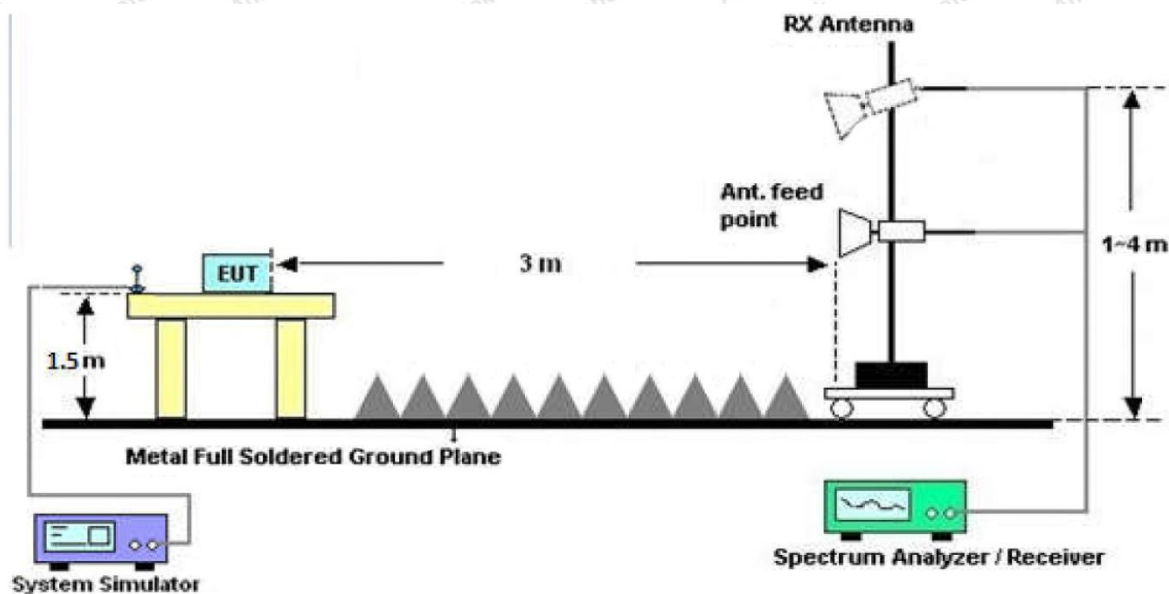


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS


During the test, pre-scan all the Modes, and found CH01(TX Only) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: DC 1.5V battery
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 21.5°C/49%RH

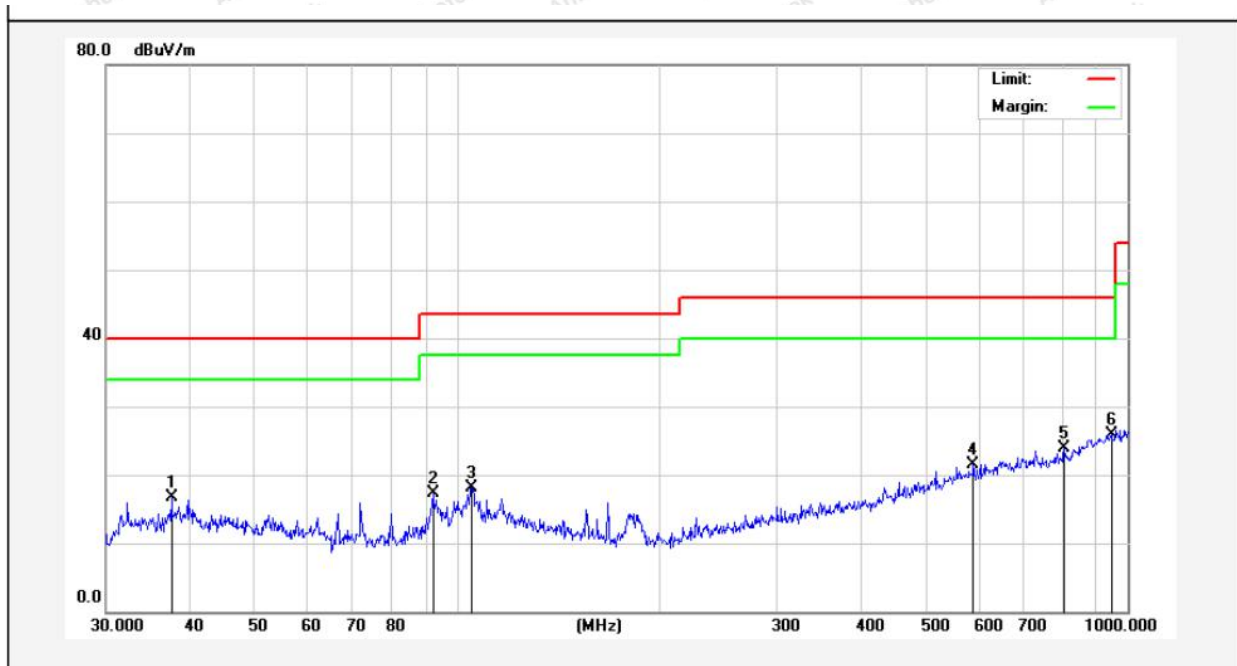


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.5479	32.51	-15.83	16.68	40.00	-23.32	QP			
2	92.1388	34.64	-17.43	17.21	43.50	-26.29	QP			
3	105.2718	35.53	-17.42	18.11	43.50	-25.39	QP			
4	588.9051	32.32	-10.79	21.53	46.00	-24.47	QP			
5	804.6028	32.16	-8.19	23.97	46.00	-22.03	QP			
6	945.4399	31.66	-5.69	25.97	46.00	-20.03	QP			



Test Results (30~1000MHz)

Test Mode: Mode 1
Power Source: DC 1.5V battery
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 21.5°C/49%RH

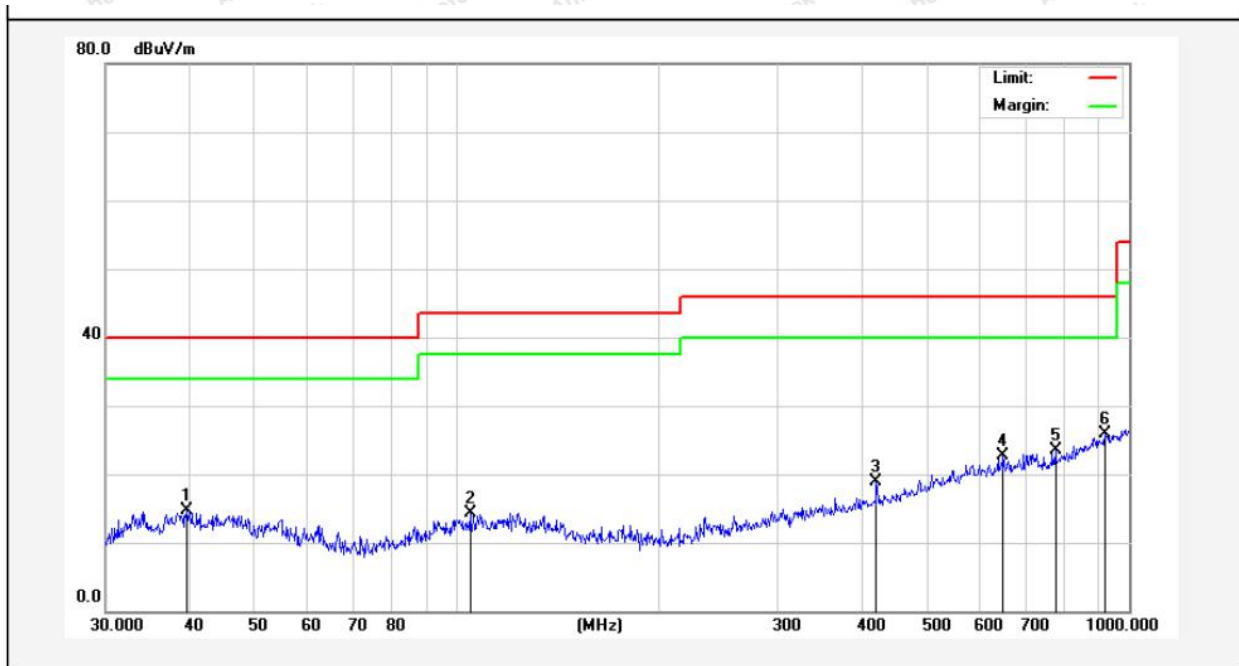

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.5757	30.90	-16.24	14.66	40.00	-25.34	QP			
2	104.5361	36.52	-22.13	14.39	43.50	-29.11	QP			
3	420.5803	34.68	-15.86	18.82	46.00	-27.18	QP			
4	649.6597	33.31	-10.67	22.64	46.00	-23.36	QP			
5	776.8778	32.25	-8.71	23.54	46.00	-22.46	QP			
6	919.2866	31.82	-5.99	25.83	46.00	-20.17	QP			

Test Results (1GHz-25GHz)

Test Mode: CH01				Test channel: Lowest		
Peak Value						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	28.84	15.27	44.11	74.00	-29.89	Vertical
7206.00	29.71	18.09	47.80	74.00	-26.20	Vertical
9608.00	31.11	23.76	54.87	74.00	-19.13	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	29.07	15.27	44.34	74.00	-29.66	Horizontal
7206.00	30.50	18.09	48.59	74.00	-25.41	Horizontal
9608.00	28.95	23.76	52.71	74.00	-21.29	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	18.22	15.27	33.49	54.00	-20.51	Vertical
7206.00	18.74	18.09	36.83	54.00	-17.17	Vertical
9608.00	20.13	23.76	43.89	54.00	-10.11	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	17.42	15.27	32.69	54.00	-21.31	Horizontal
7206.00	19.56	18.09	37.65	54.00	-16.35	Horizontal
9608.00	18.26	23.76	42.02	54.00	-11.98	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

Test Results (1GHz-25GHz)

Test Mode: CH20				Test channel: Middle		
Peak Value						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	28.86	15.42	44.28	74.00	-29.72	Vertical
7320.00	29.56	18.02	47.58	74.00	-26.42	Vertical
9760.00	30.12	23.80	53.92	74.00	-20.08	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	28.77	15.42	44.19	74.00	-29.81	Horizontal
7320.00	30.49	18.02	48.51	74.00	-25.49	Horizontal
9760.00	28.65	23.80	52.45	74.00	-21.55	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	17.95	15.42	33.37	54.00	-20.63	Vertical
7320.00	18.84	18.02	36.86	54.00	-17.14	Vertical
9760.00	19.99	23.80	43.79	54.00	-10.21	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	17.33	15.42	32.75	54.00	-21.25	Horizontal
7320.00	19.12	18.02	37.14	54.00	-16.86	Horizontal
9760.00	18.77	23.80	42.57	54.00	-11.43	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal


Test Results (1GHz-25GHz)


Test Mode: CH40				Test channel: Highest		
Peak Value						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	29.13	15.58	44.71	74.00	-29.29	Vertical
7440.00	29.57	17.93	47.50	74.00	-26.50	Vertical
9920.00	30.67	23.83	54.50	74.00	-19.50	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	28.84	15.58	44.42	74.00	-29.58	Horizontal
7440.00	30.52	17.93	48.45	74.00	-25.55	Horizontal
9920.00	29.33	23.83	53.16	74.00	-20.84	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	19.07	15.58	34.65	54.00	-19.35	Vertical
7440.00	19.85	17.93	37.78	54.00	-16.22	Vertical
9920.00	20.54	23.83	44.37	54.00	-9.63	Vertical
12400.00				54.00		Vertical
14880.00				54.00		Vertical
4960.00	18.77	15.58	34.35	54.00	-19.65	Horizontal
7440.00	20.49	17.93	38.42	54.00	-15.58	Horizontal
9920.00	18.67	23.83	42.50	54.00	-11.50	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

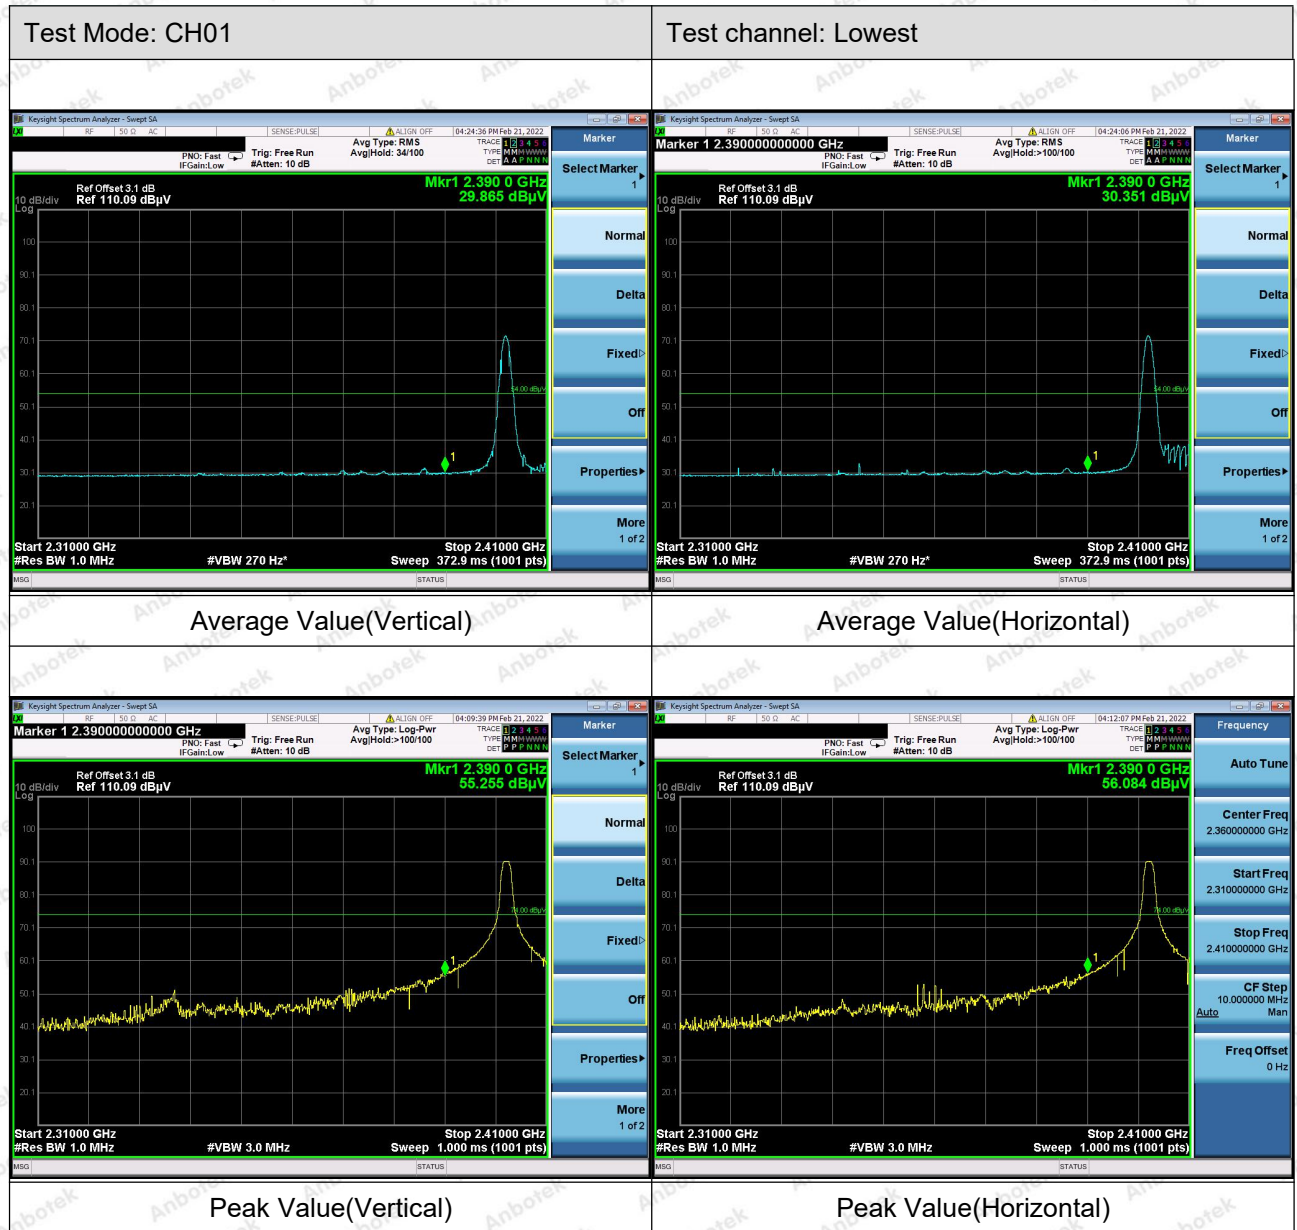

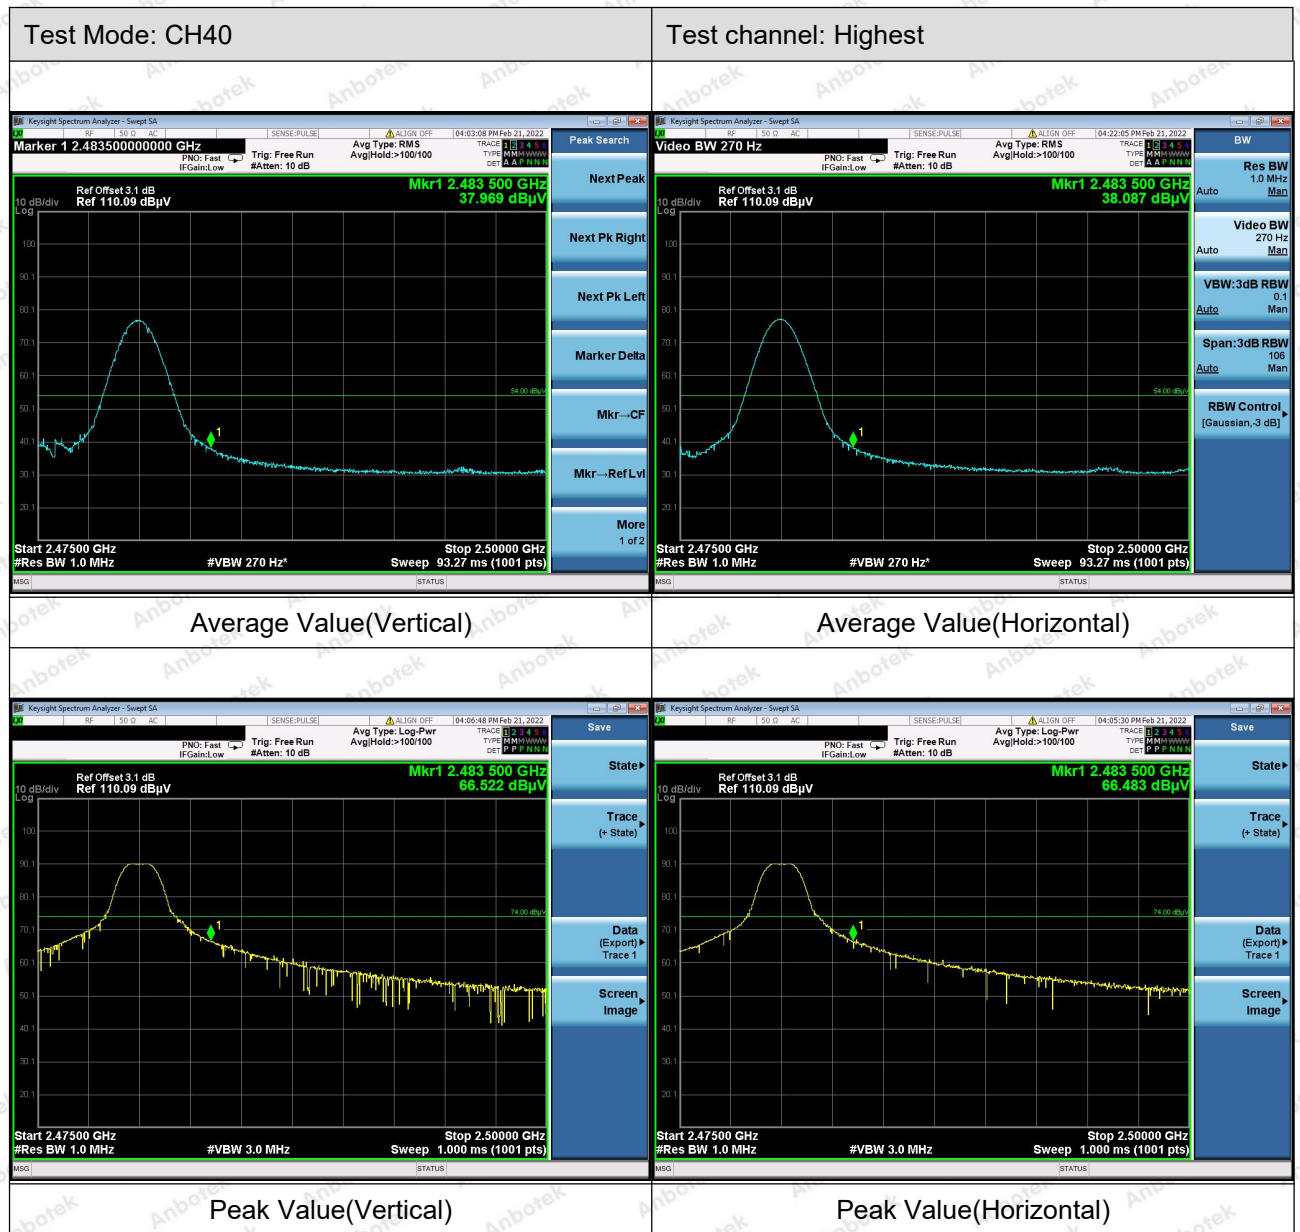


5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	125mW

5.2. Test Setup



5.3. Test Procedure



1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold


5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 1.5V battery	Temperature	: 23.2°C
Test Result	: PASS	Humidity	: 55%RH

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results	Modulation
2402	-10.686	20.96	PASS	GFSK
2440	-11.072	20.96	PASS	GFSK
2480	-11.283	20.96	PASS	GFSK



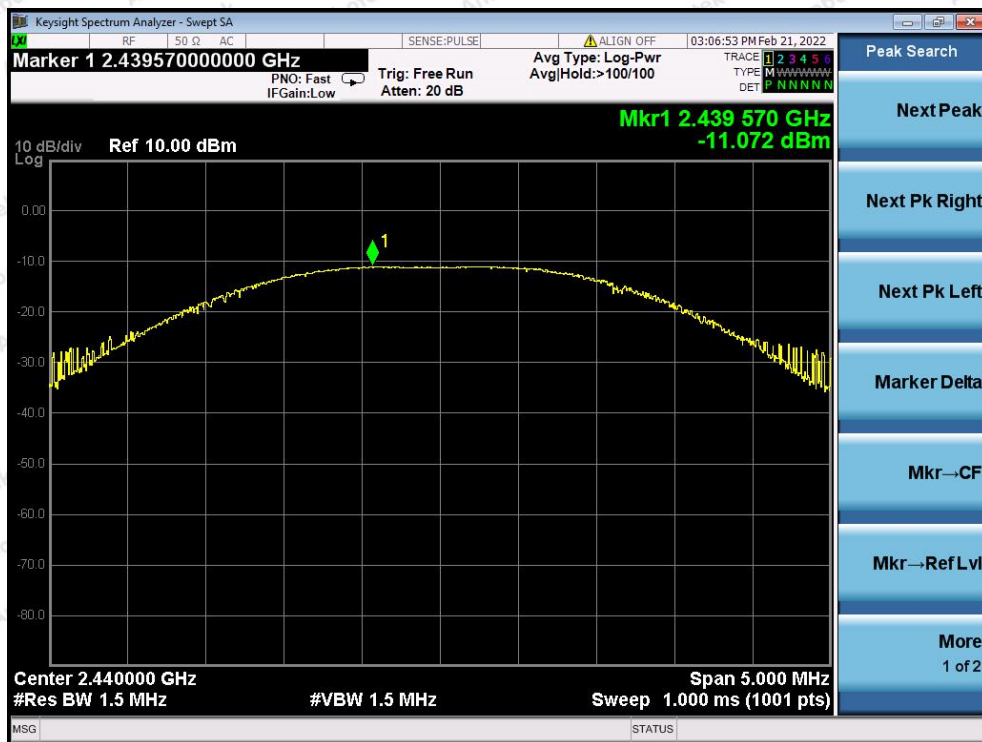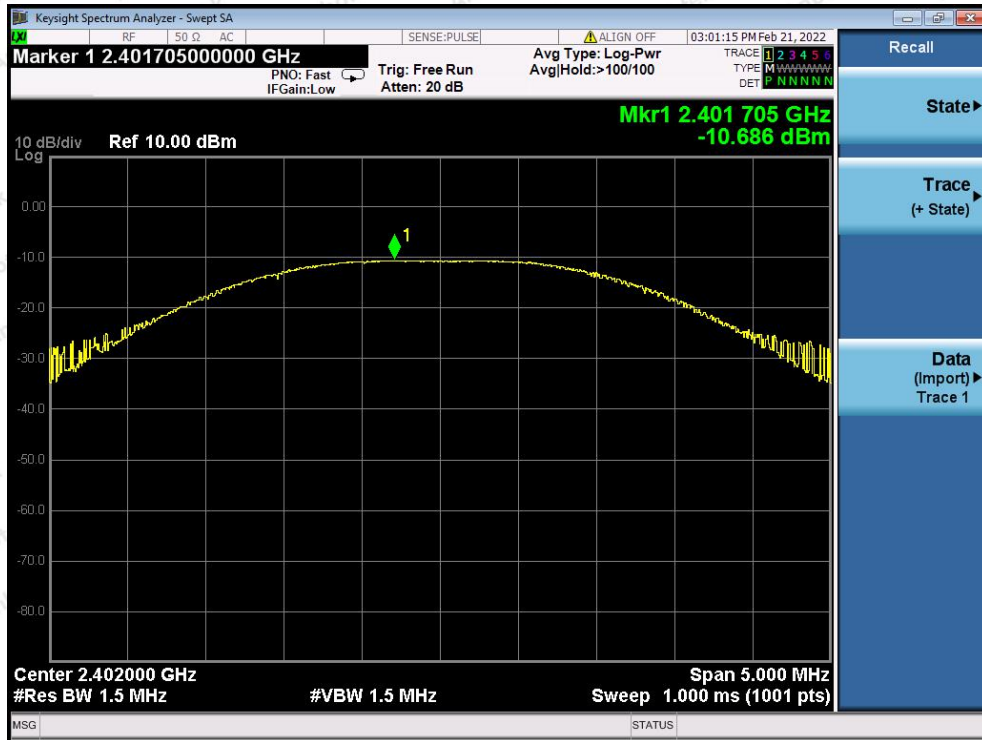

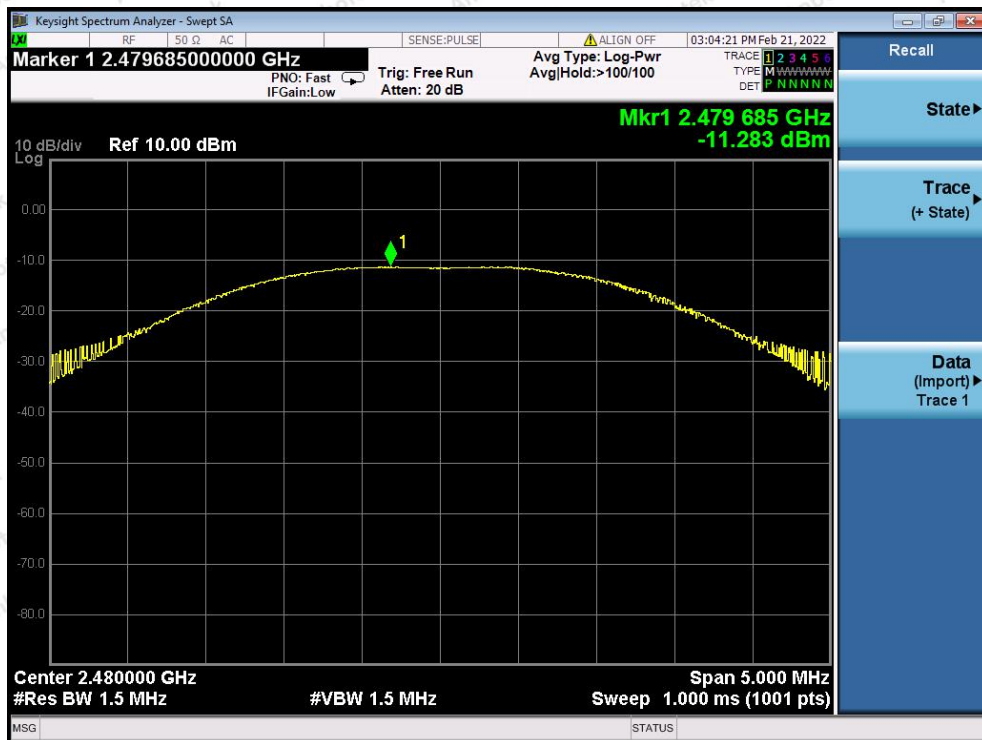


Test Mode: High

6. 20DB Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

Using the following spectrum analyzer settings:


1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Data


Test Item	: 20dB BW
Test Voltage	: DC 1.5V battery
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 23.2℃
Humidity	: 55%RH

Channel	Frequency(MHz)	20dB Down BW(MHz)	Modulation Mode
Low	2402	2.044	GFSK
Middle	2440	2.030	GFSK
High	2480	2.044	GFSK

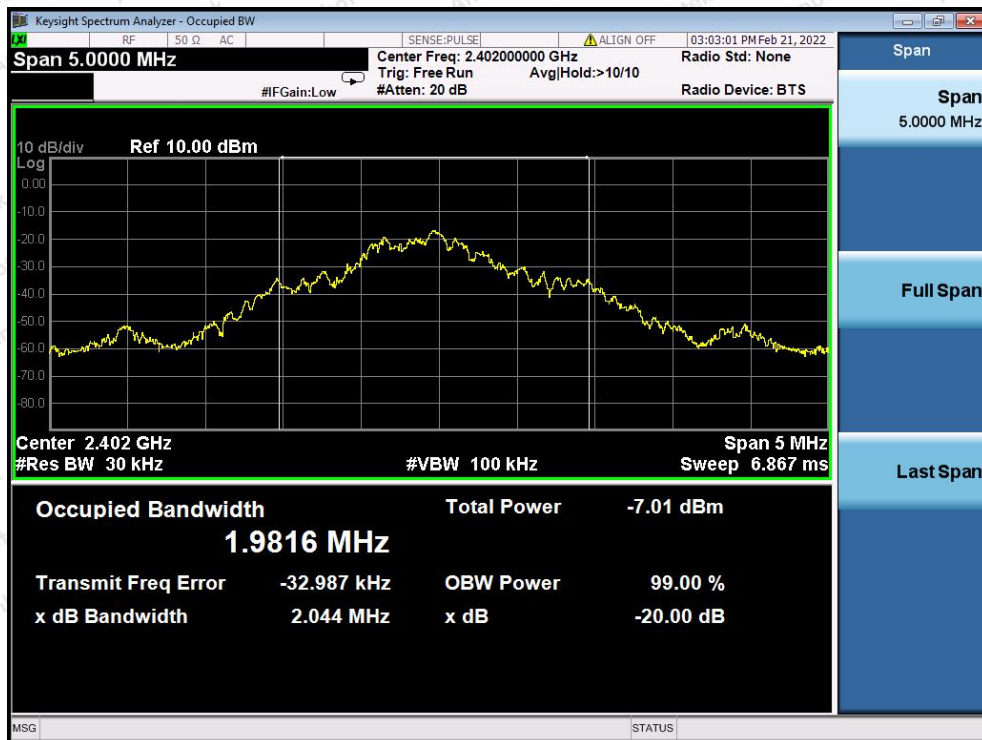


Test Mode: Low

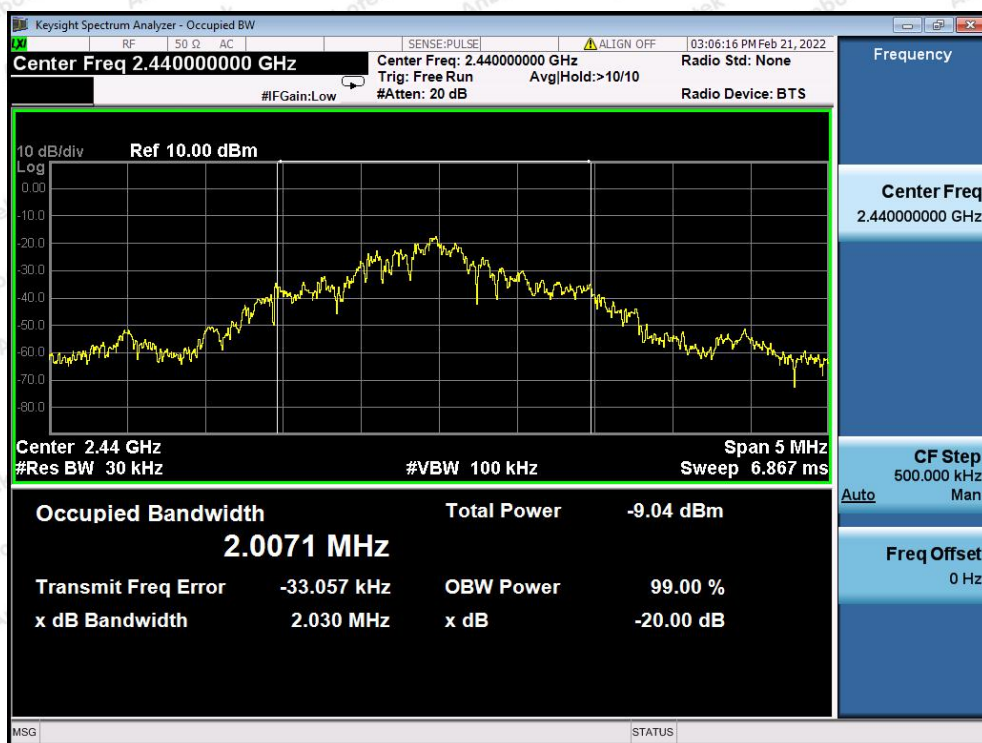

Test Mode: Middle



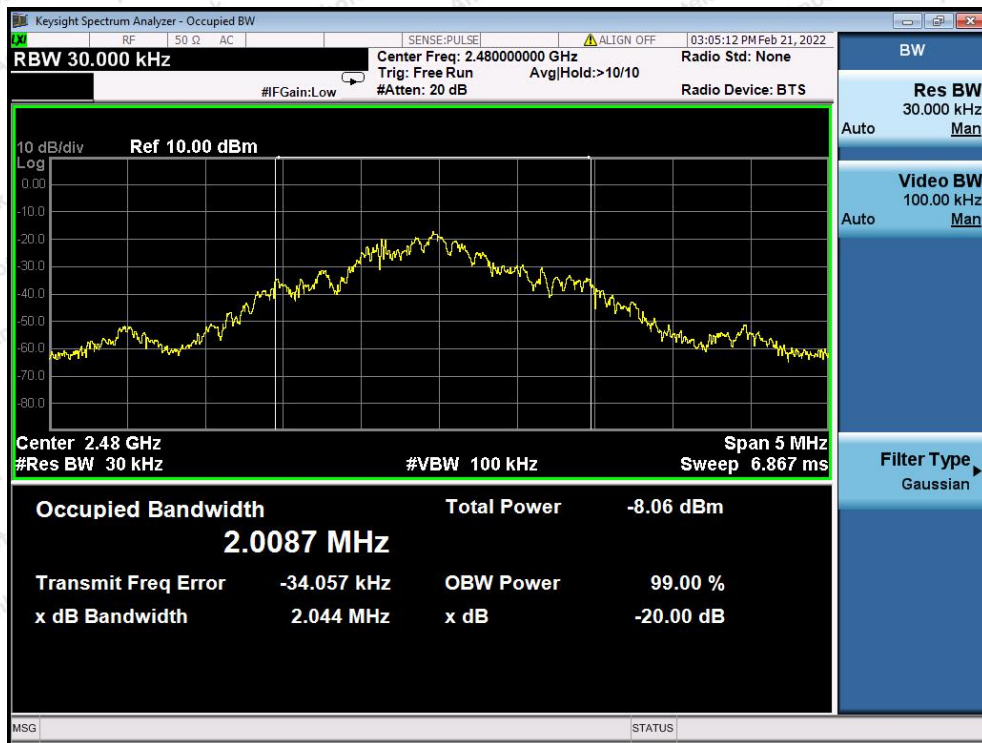

Test Mode: High




7. Carrier Frequency Separation Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

7.4. Test Data

Test Item : Frequency Separation
 Test Voltage : DC 1.5V battery
 Test Result : PASS

Test Mode : CH Low ~ CH High
 Temperature : 23.2℃
 Humidity : 55%RH

Channel	Frequency (MHz)	Separation Read Value (MHz)	Limit (kHz)
Low	2402	1.995	1362.67
Middle	2440	1.990	1353.33
High	2480	4.000	1362.67
Remark: The limit is 2/3 of 20dB BW.			






Test Mode: High

8. Number of Hopping Channel Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

8.2. Test Setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


8.4. Test Data

Test Item	: Number of Hopping Frequency
Test Voltage	: DC 1.5V battery
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 23.2°C
Humidity	: 55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480MHz	16	> 15



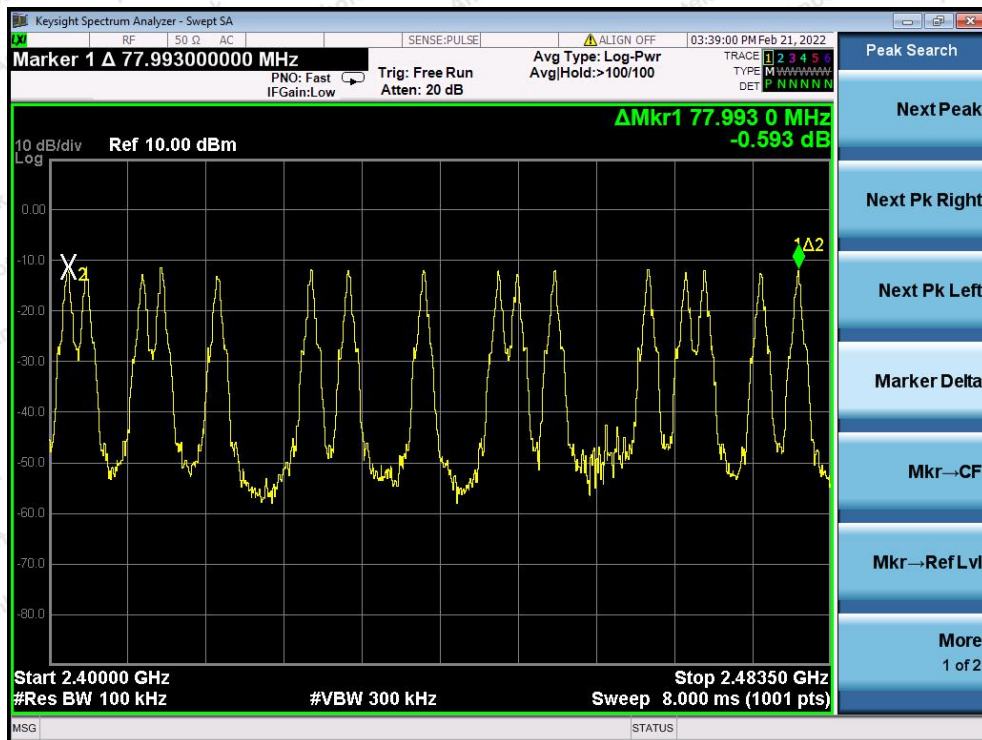


9. Dwell Time Test

9.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

9.2. Test Setup



9.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4. Test Data

Test Item : Time of Occupancy
Test Voltage : DC 1.5V battery
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 23.2℃
Humidity : 55%RH

Channel	Burst width (ms)	Total hopping number in 16	Total dwell time (s)	Limit (s)	Result
Hopping	4.008	62	0.2485	≤0.4	Pass



Note:

(1) Total dwell time=Burst width*Total hopping number

(2) There are total 16 channels were active at any time. So the test period is $0.4s \times 16 = 6.4s$.



Test Mode: Hopping

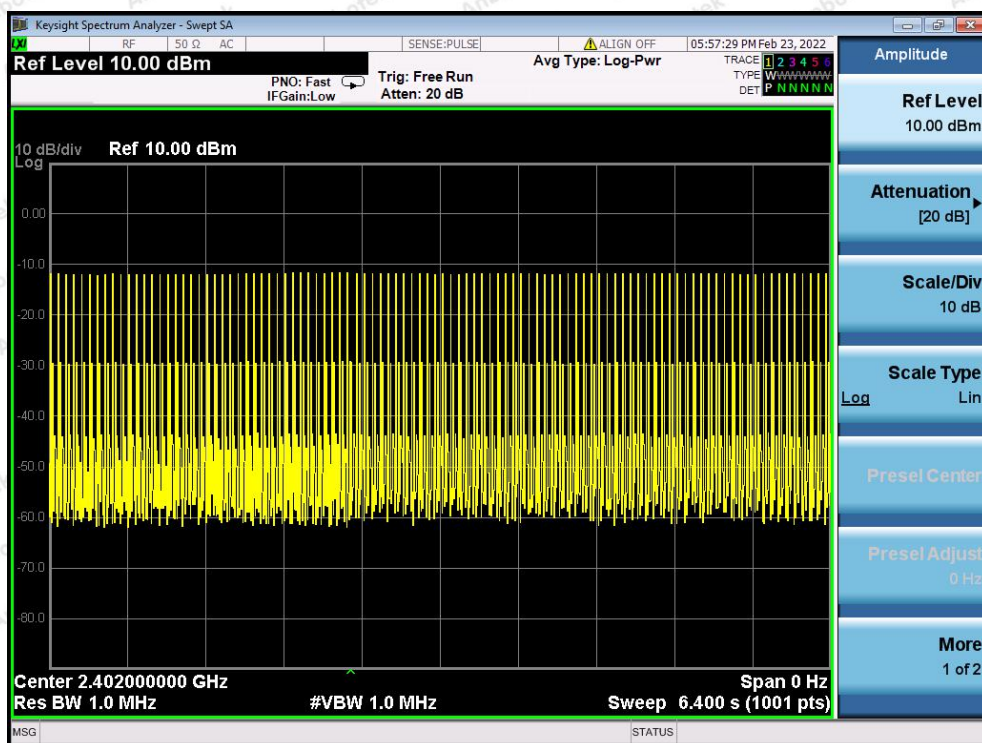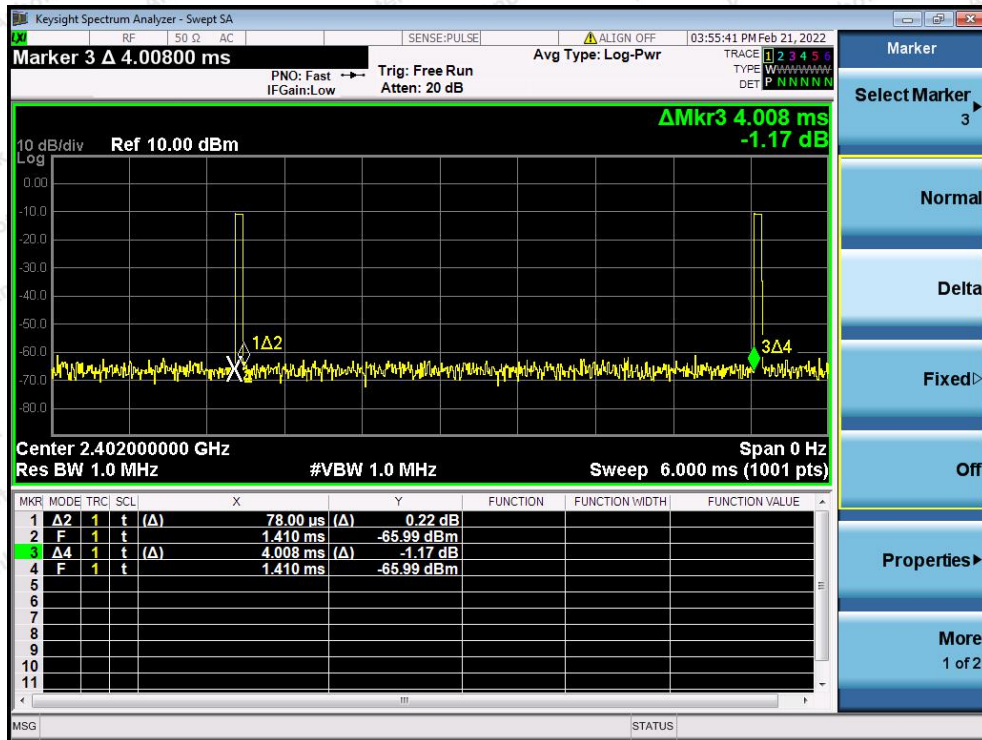


10. 100kHz Bandwidth of Frequency Band Edge Requirement

10.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

10.2. Test Setup



10.3. Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

10.4. Test Data


Test Item	:	Band edge
Test Voltage	:	DC 1.5V battery
Test Result	:	PASS

Test Mode	:	CH Low ~ CH High
Temperature	:	23.2°C
Humidity	:	55%RH


For Hopping Mode

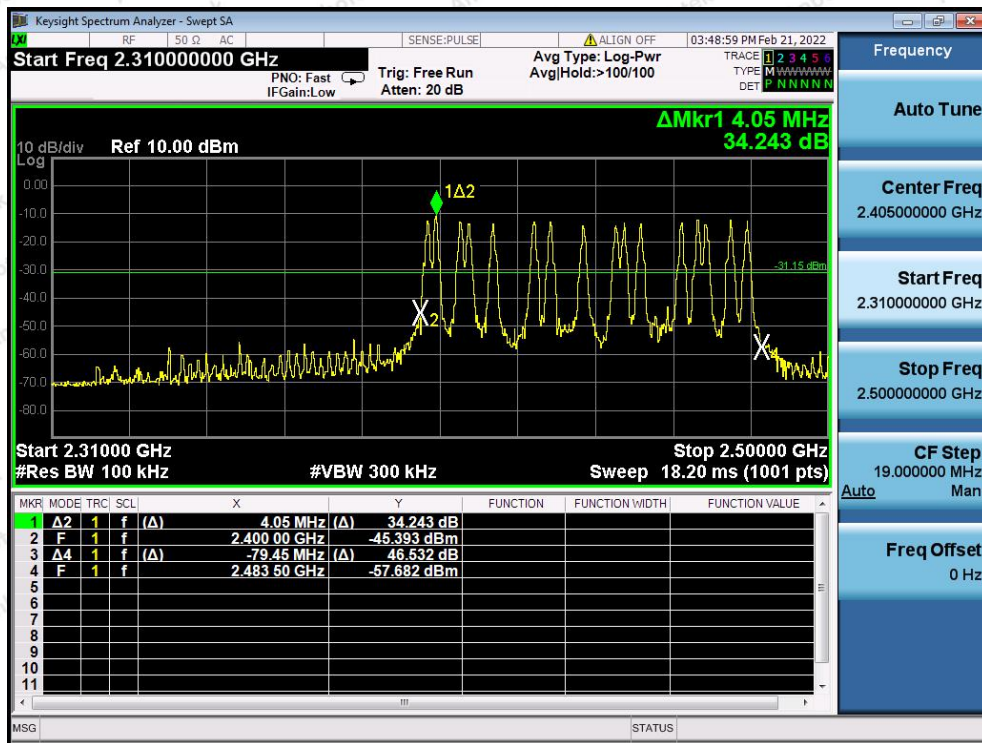

For Non-Hopping Mode

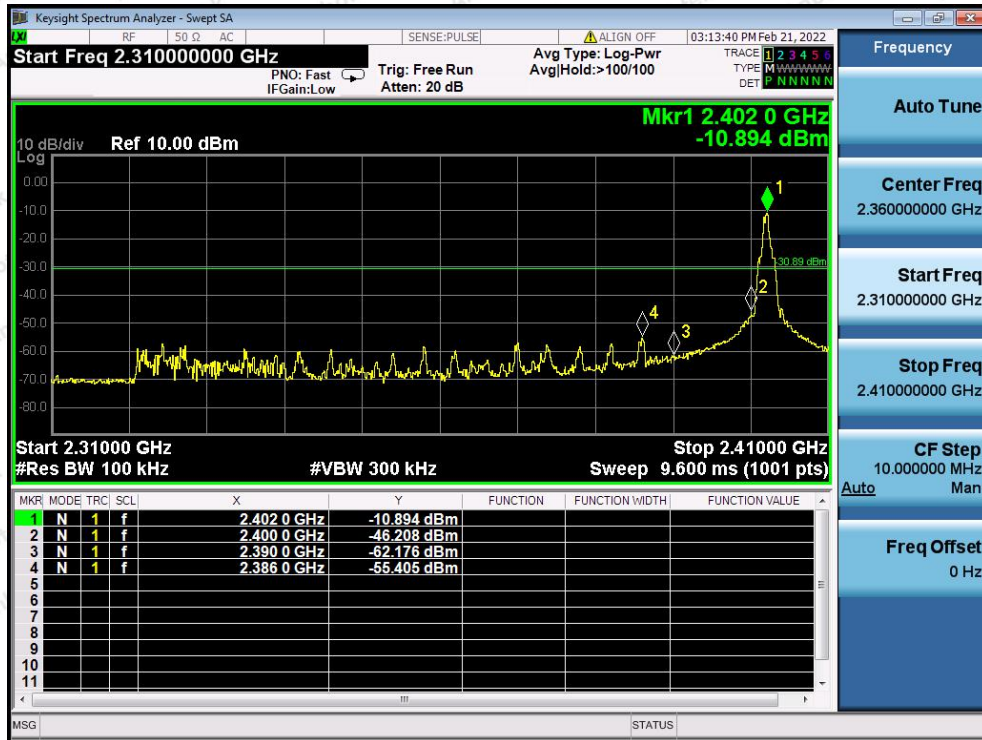


Lowest

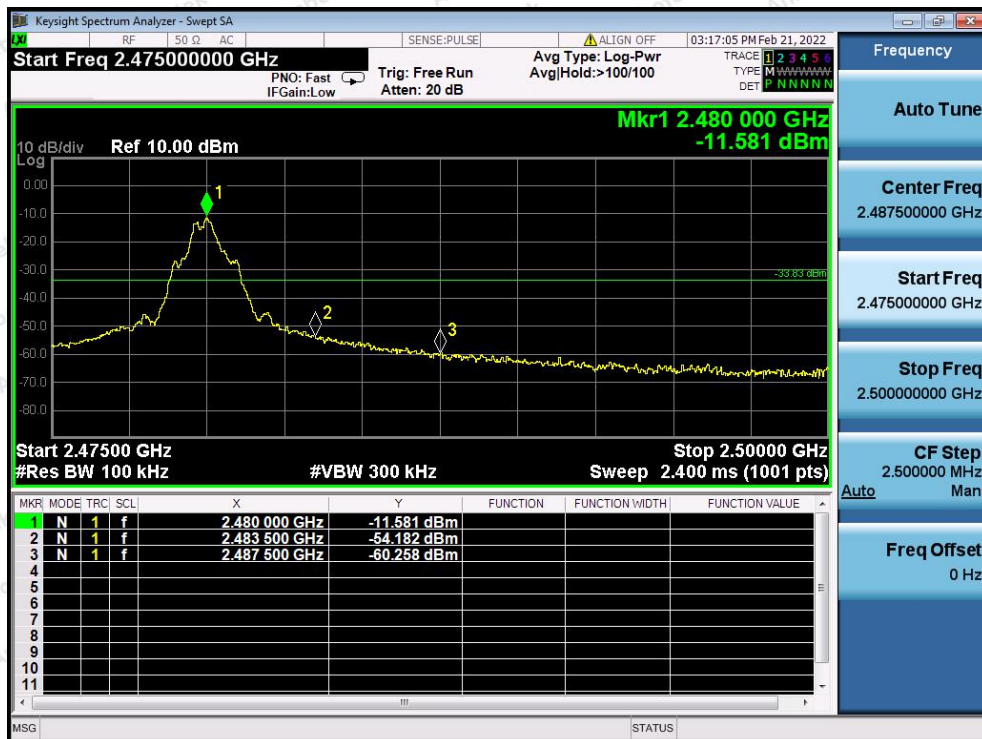


Highest


Conducted Emission Method

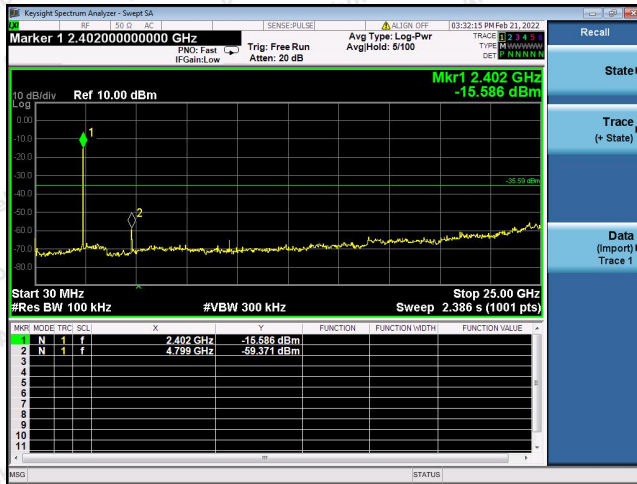

Test Mode: Low

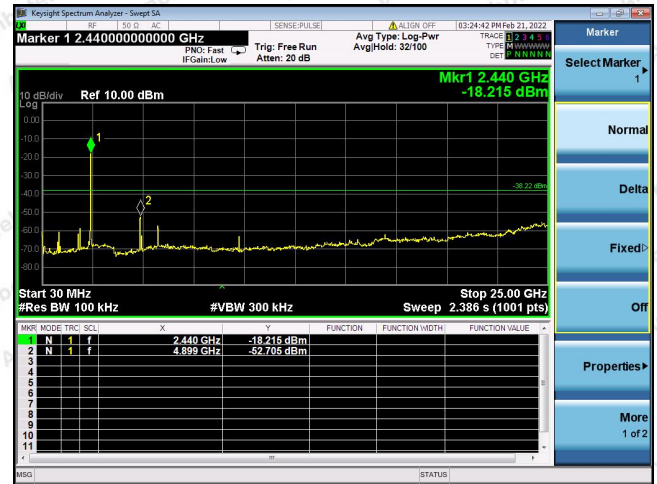

Test Mode: Mid

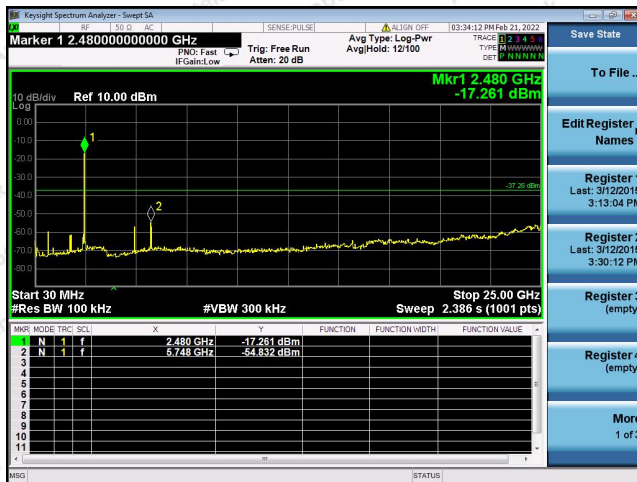

Test Mode: High

11. Antenna Requirement

11.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2. Antenna Connected Construction

The antenna is **PCB Antenna** which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.




APPENDIX I -- TEST SETUP PHOTOGRAPH


Photo of Radiation Emission Test



APPENDIX II -- EXTERNAL PHOTOGRAPH

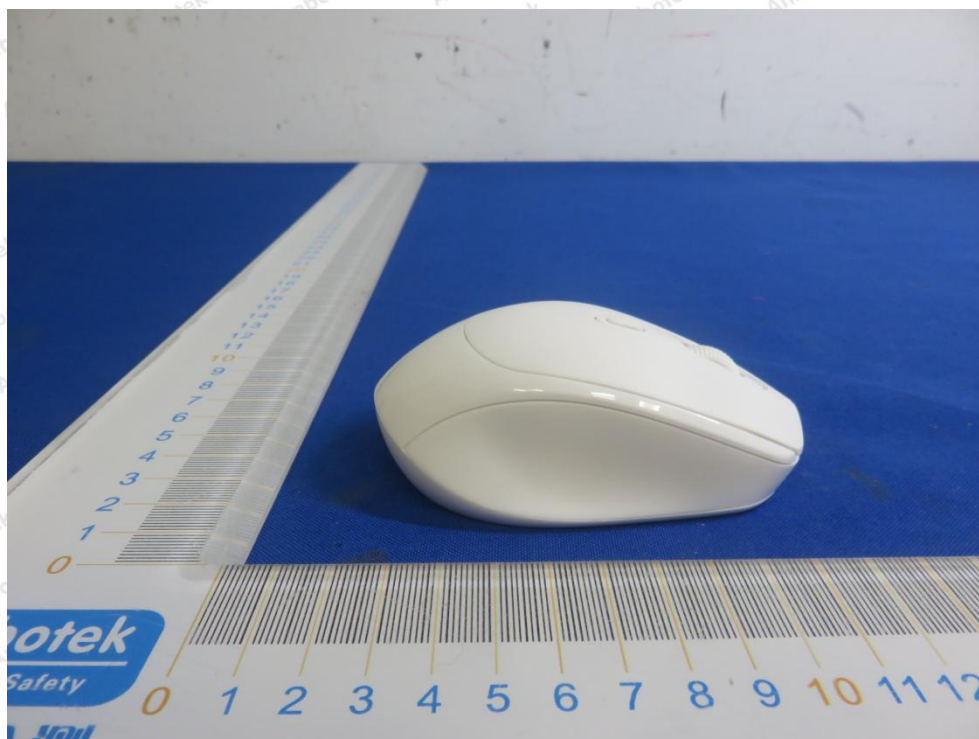





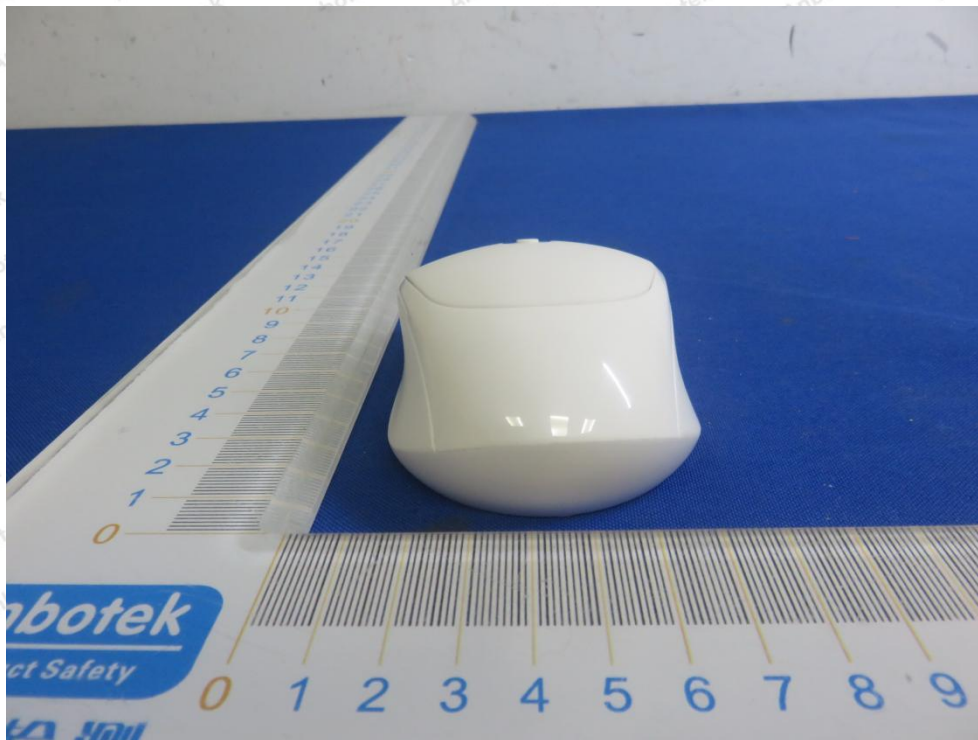

APPENDIX III -- INTERNAL PHOTOGRAPH



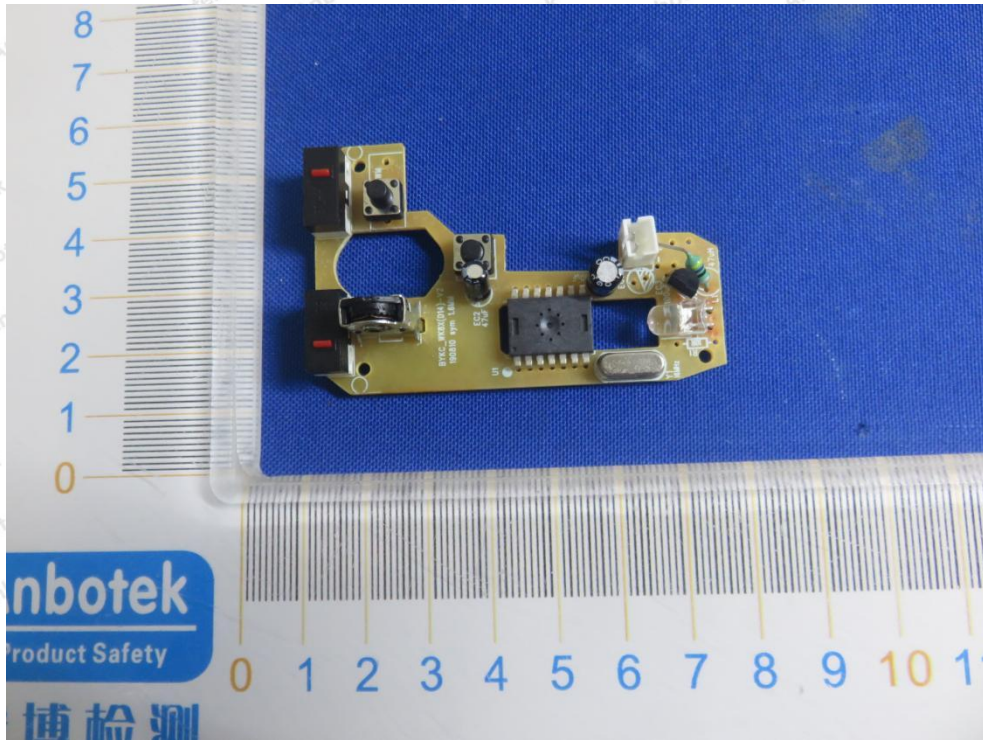

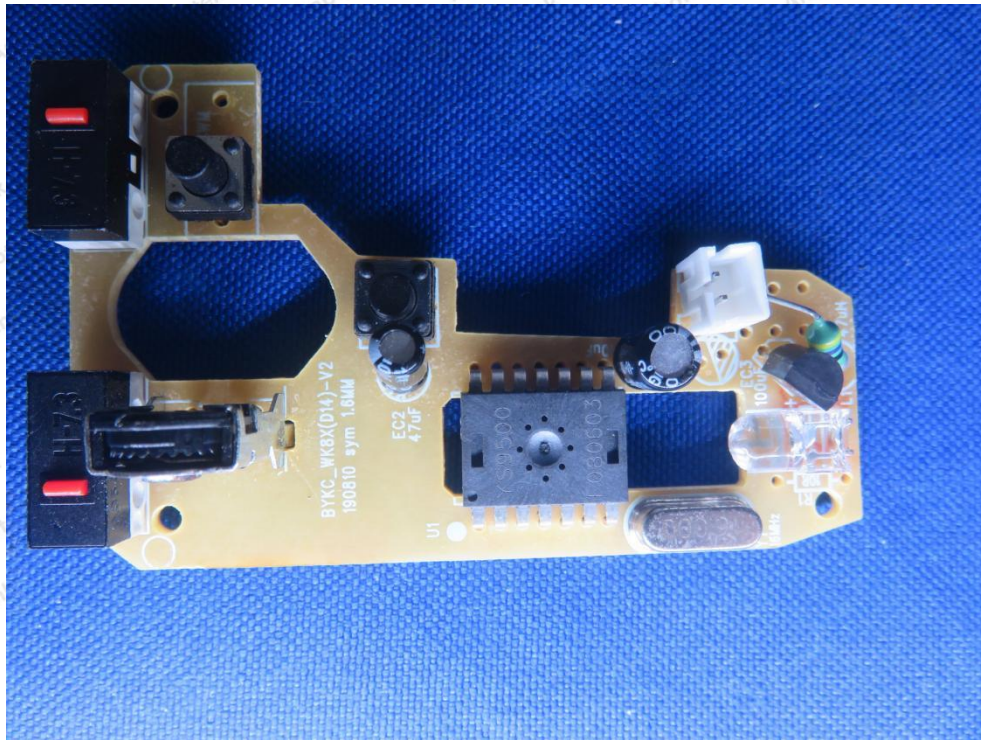

----- End of Report -----