



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-N7105
FCC ID (Requested) : A3LGTN7105
Report No : FJ-216-R1
Job No : FJ-216
Date issued : Sep 5, 2012

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2, Part22, Part24.

Prepared By

HK LEE – Test Engineer

Authorized By

WT JANG – Technical Manager



TABLE OF CONTENT

| MEASUREMENT REPORT | Page |
|---|-------------|
| 1. FCC CERTIFICATION INFORMATION | 3 |
| 1.1. §2.1033 General Information | 3 |
| 2. INTRODUCTION | 4 |
| 2.1. General | 4 |
| 3. MEASURING INSTRUMENT CALIBRATION | 5 |
| 4. TEST EQUIPMENT LIST..... | 6 |
| 5. DESCRIPTION OF TESTS..... | 7 |
| 5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power | 7 |
| 5.2. Radiated Spurious & Harmonic Emission | 8 |
| 5.3. Peak-Average Ratio | 9 |
| 5.4. Occupied Bandwidth | 10 |
| 5.5. Spurious and Harmonic Emission at Antenna Terminal..... | 10 |
| 5.5.1. Occupied Bandwidth Emission Limits | 10 |
| 5.5.2. Conducted Spurious Emission | 12 |
| 5.6. Frequency Stability / Temperature Variation | 13 |
| 6. TEST DATA | 14 |
| 6.1. Effective Radiated Power (E.R.P)..... | 14 |
| 6.2. Equivalent Isotropic Radiated Power (E.I.R.P) | 15 |
| 6.3. GSM850 Radiated Spurious & Harmonic measurement | 16 |
| 6.4. GSM1900 Radiated Spurious & Harmonic measurement | 17 |
| 6.5. Frequency Stability..... | 18 |
| 6.5.1. GSM850 Frequency Stability Table | 18 |
| 6.5.2. GSM850 Frequency Stability Graph..... | 19 |
| 6.5.3. GSM1900 Frequency Stability Table | 21 |
| 6.5.4. GSM1900 Frequency Stability Graph..... | 22 |
| 7. CONCLUSION..... | 24 |
| 8. TEST PLOTS..... | 25 |



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

| | | |
|-------------------------|---|--|
| • Applicant Name | : | SAMSUNG ELECTRONICS CO., LTD. |
| • Address | : | 416 Maetan3-Dong, Yeongtong-gu, Suwon City Gyeonggi-Do, Korea 443-742 |
| • FCC ID | : | A3LGTN7105 |
| • Model | : | GT-N7105 |
| • Quantity | : | Quantity production is planned |
| • Emission Designators | : | 246KGXW(GSM850), 244KG7W(GSM850 EDGE) 247KGXW(GSM1900), 243KG7W(GSM1900 EDGE) |
| • Tx Freq. Range | : | 824.2 - 848.8MHz (GSM850) 1850.2MHz - 1909.8MHz (GSM1900) |
| • Rx Freq. Range | : | 869.2 - 893.8 MHz (GSM850) 1930.2MHz - 1989.8MHz (GSM1900) |
| • Max. Power Rating | : | 0.255 W ERP GSM850 (24.07 dBm) 0.968 W EIRP GSM1900 (29.86 dBm) 0.129 W ERP GSM850 EDGE(21.10 dBm) 0.541 W EIRP GSM1900 EDGE(27.33 dBm) |
| • FCC Classification(s) | : | PCS Licensed Portable Tx Held to Ear (PCE) |
| • Equipment (EUT) Type | : | Portable Handset |
| • Device Capabilities | : | 850/1900 GSM/GPRS/EDGE and Cellular WCDMA/HSPA Phone with Bluetooth and WLAN |
| • Frequency Tolerance | : | ±0.00025% (2.5ppm) |
| • FCC Rule Part(s) | : | §24(E), §22(H), §2. |
| • Dates of Test | : | August 14-16, 2012 |
| • Place of Test | : | SAMSUNG Lab, |
| • Test Report S/N | : | FJ-216-R1 |

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
The site have 1 Fully-anechoic chamber and measurement facility.

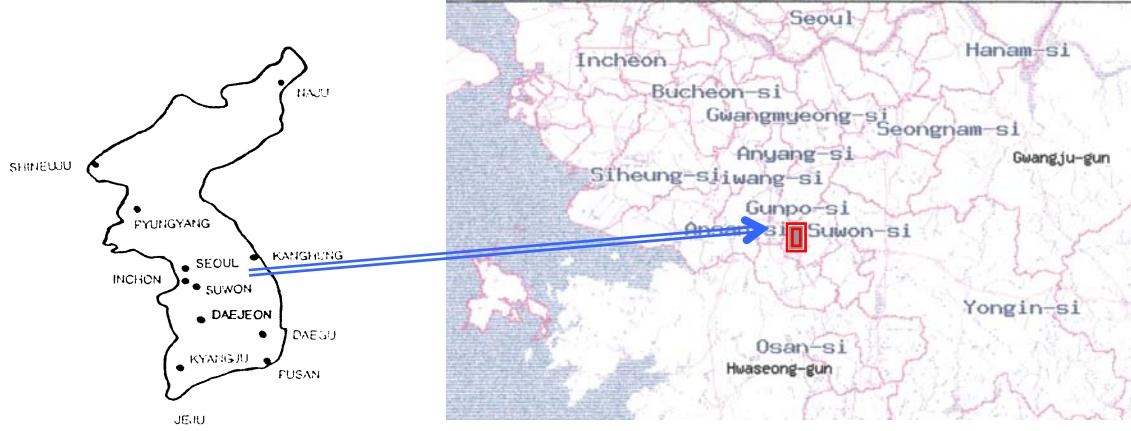


Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

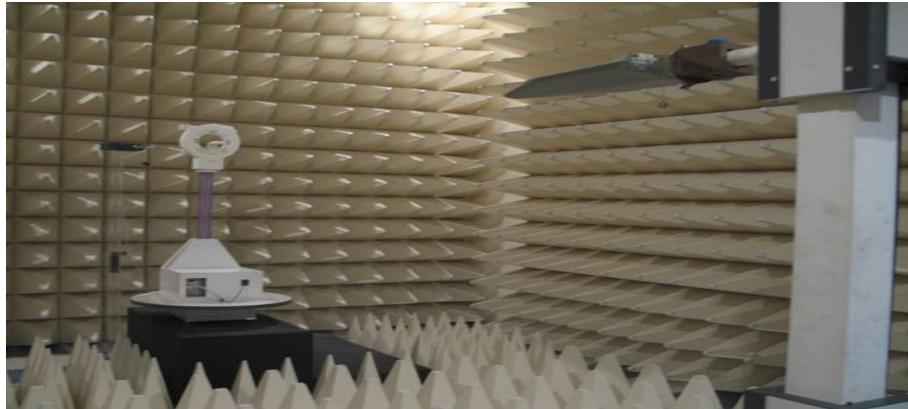


Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



4. TEST EQUIPMENT LIST

| Name Of Equipment | Model | Serial No. | Due Date |
|---------------------------------|---------------------|------------------|--------------|
| Spectrum Analyzer | ESI26 | 836119/010 | 2012-10-25 |
| | E4440A(3Hz~26.5GHz) | MY46187454 | 2013-03-14 |
| | E4440A(3Hz~26.5GHz) | MY41000236 | 2013-04-26 |
| Signal Generator | SMR20 | 835197/030 | 2012-12-01 |
| Network Analyzer | 8753E | JP38160590 | 2013-06-19 |
| Pre-Amplifier | 8449B | 3008A00691 | 2012-12-09 |
| Communication test set | E5515C | MY47510060 | 2013-03-05 |
| | E5515C | GB42360886 | 2013-08-20 |
| Controller | CO2000 | CO2000/424 | Not Required |
| Turn Unit | CT0800 | CT0800/057 | Not Required |
| Rotating Device | DE3600-RH-PR | DE3600-RH-PR/050 | Not Required |
| Antenna Master | MA4000 | MA4000/204 | Not Required |
| Horn Antenna | HF906 | 100134 | 2013-09-05 |
| | BBHA9120 | 9120D-637 | 2013-09-14 |
| Dipole Antenna | UHA 9105 | 9105-2412 | 2013-09-09 |
| | UHA 9105 | 9105-2412 | 2013-09-09 |
| Receive Antenna | HL040 | 353255/019 | 2013-09-05 |
| Power Supply | E3640A | MY40003594 | 2013-06-19 |
| | E3640A | MY40003595 | 2013-05-16 |
| | E3632A | MY40022438 | 2013-03-02 |
| Divider | 11636B | 58456 | 2013-04-03 |
| | 11636B | 51942 | 2013-07-11 |
| | 11636B | 58459 | 2013-04-03 |
| | 11636B | 56918 | 2012-09-28 |
| High Pass Filter | WHK/3.0/18G-10SS | 492 | 2013-04-09 |
| | WHK/3.5/18G-10SS | 4 | 2013-04-09 |
| Environmental Chamber | SH-241 | 92000548 | 2012-11-14 |
| | SH-241 | 92000549 | 2012-11-14 |
| Shielded Fully Anechoic Chamber | CHAMBER | ANT0001 | Not Required |

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

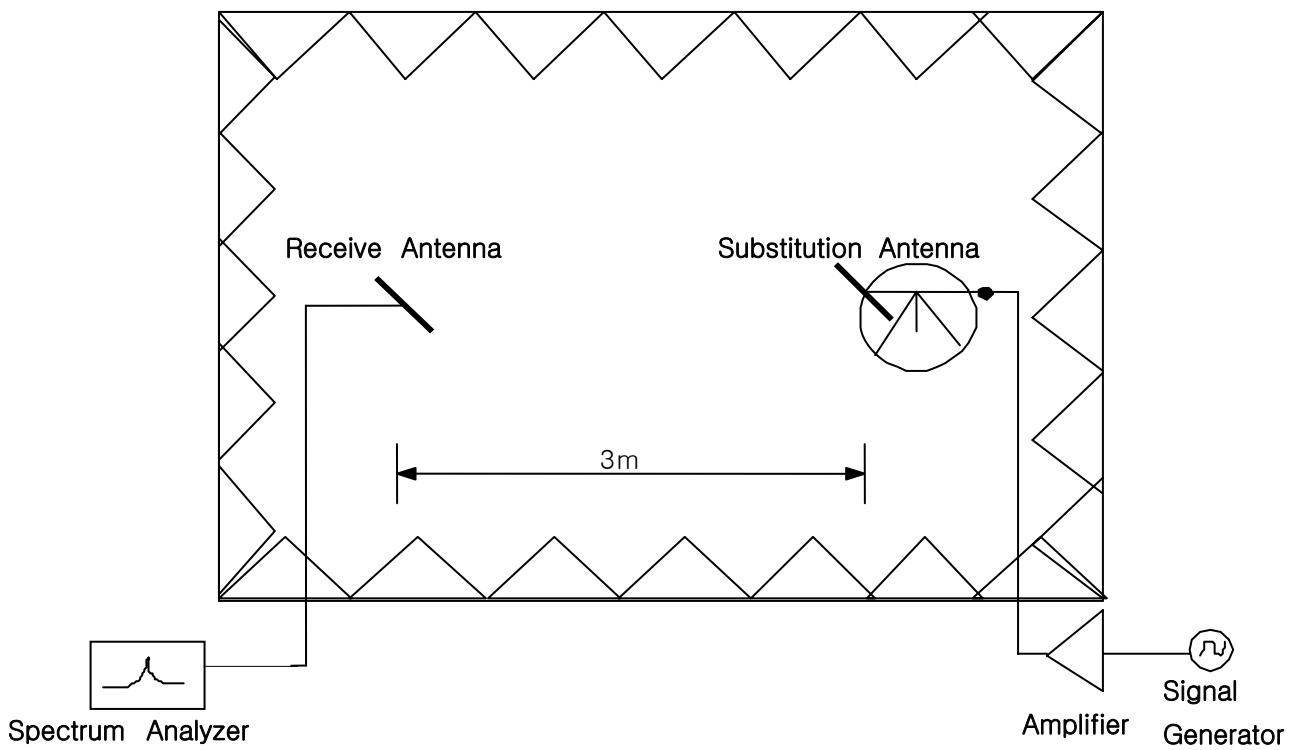


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole and Horn antenna was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to
ANSI/TIA/EIA-603-C-2004

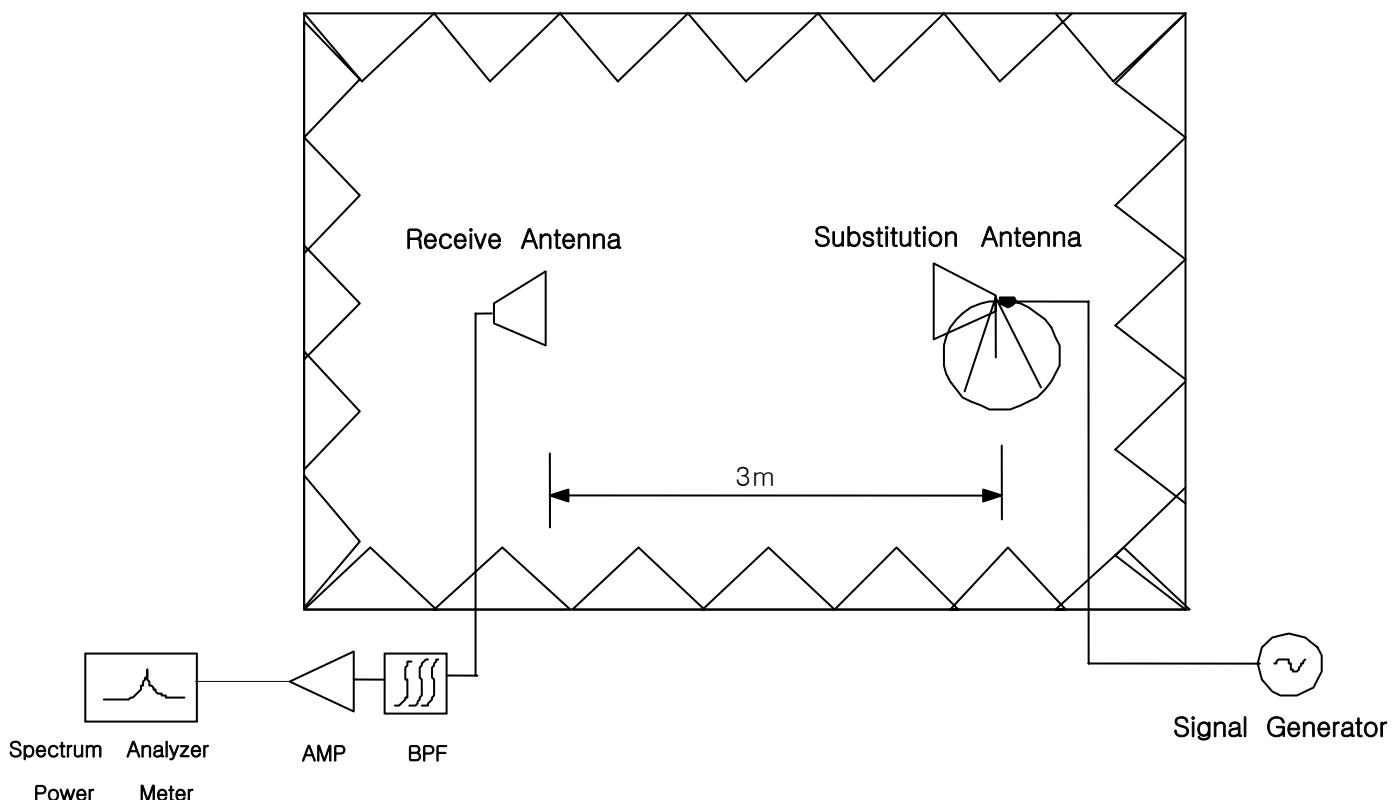


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION


Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was **-81.0dBm**. The gain of the substituted antenna is **8.1dBi**. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of **-81.0dBm** of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is **2.0dB** at 3760.00MHz. So **6.1dB** is added to the signal generator reading of **-30.9dBm** yielding **-24.8dBm**. The fundamental EIRP was **25.5dBm** so this harmonic was **25.5dBm -(-24.8)= 50.3dBc**.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

* RF Conduction Test set-up

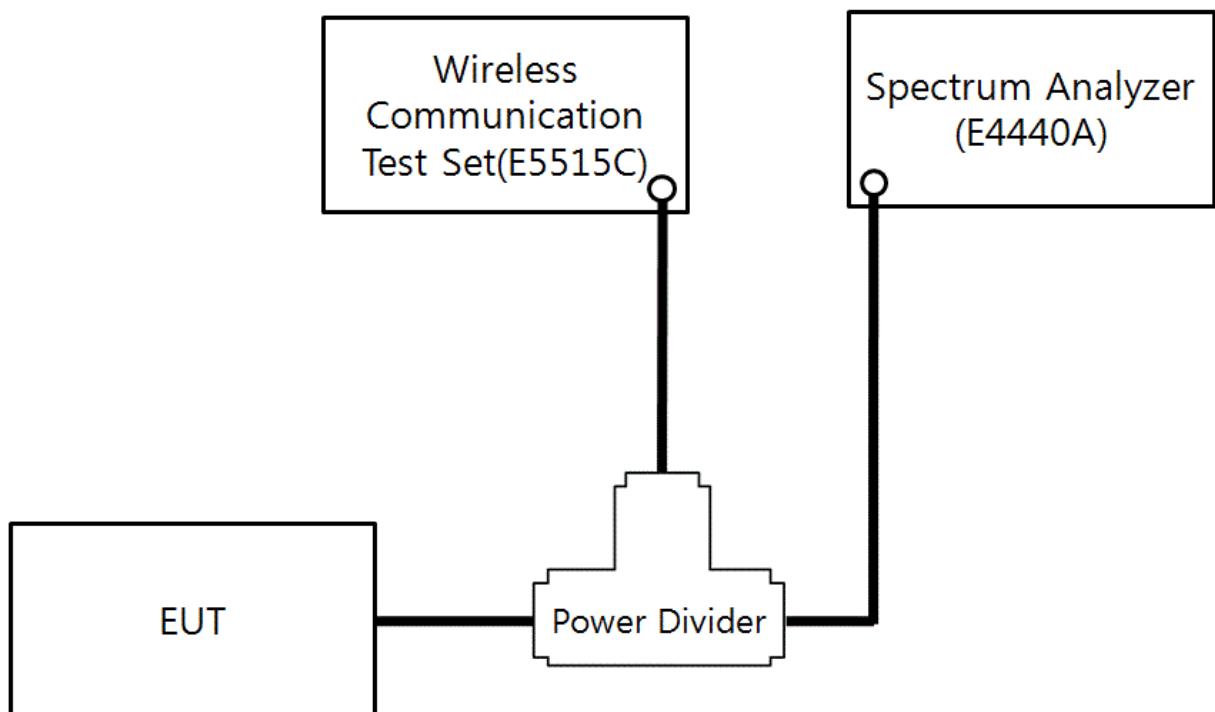



5.4.Occupied Bandwidth

Test Procedure

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution and video bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. Video averaging is not permitted. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. These measurements were performed on Agilent E4440A Spectrum Analyzer, and use analyzer's bandwidth measurement function.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

Part 24

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.



Part 22

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

| BLOCK | Freq. Range (MHz) Transmitter (Tx) | Freq. Range (MHz) Receiver (Rx) |
|-------|---------------------------------------|------------------------------------|
| A | 1850 – 1865 | 1930 – 1945 |
| B | 1870 – 1885 | 1950 – 1965 |
| C | 1895 – 1910 | 1975 – 1990 |
| D | 1865 – 1870 | 1945 – 1950 |
| E | 1885 – 1890 | 1965 – 1970 |
| F | 1890 – 1895 | 1970 – 1975 |

Table 1. Broadband PCS Service Frequency Blocks

| BLOCK | Freq. Range (MHz) Transmitter (Tx) | Freq. Range (MHz) Receiver (Rx) |
|------------|---------------------------------------|------------------------------------|
| A* Low + A | 824 ~ 835 | 869 ~ 880 |
| B | 835 ~ 845 | 880 ~ 890 |
| A* High | 845 ~ 846.5 | 890 ~ 891.5 |
| B* | 846.5 ~ 849 | 891.5 ~ 894 |

Table 2. Cellular Service Frequency Blocks



5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.255 \text{ W}) = 37.07 \text{ dB}$$

$$24.07 \text{ dBm} - 37.07 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

Example)

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$

A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.



5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature(25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (Usually 14~16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Result

| Frequency (MHz) | Tested level [dBm] | Substitute Level [dBm] | Antenna Gain [dBr] | Polarizatio n [H/V] | ERP [dBm] | ERP [W] | Battery |
|--------------------|--------------------------|------------------------------|--------------------------|---------------------------|--------------|------------|----------|
| 824.20 | -11.42 | 25.80 | -1.95 | H | 23.85 | 0.243 | Standard |
| 836.60 | -13.08 | 25.76 | -1.72 | H | 24.04 | 0.254 | Standard |
| 848.80 | -14.66 | 25.65 | -1.58 | H | 24.07 | 0.255 | Standard |

■ EDGE Result

| Frequency (MHz) | Tested level [dBm] | Substitute Level [dBm] | Antenna Gain [dBr] | Polarizatio n [H/V] | ERP [dBm] | ERP [W] | Battery |
|--------------------|--------------------------|------------------------------|--------------------------|---------------------------|--------------|------------|----------|
| 848.80 | -17.59 | 22.68 | -1.58 | H | 21.10 | 0.129 | Standard |

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Result

| Frequency (MHz) | Tested level [dBm] | Substitute Level [dBm] | Antenna Gain [dBi] | Polarizati on [H/V] | EIRP [dBm] | EIRP [W] | Battery |
|--------------------|--------------------------|------------------------------|--------------------------|---------------------------|---------------|-------------|----------|
| 1850.20 | -21.16 | 18.22 | 10.16 | V | 28.38 | 0.689 | Standard |
| 1880.00 | -20.36 | 19.70 | 10.16 | V | 29.86 | 0.968 | Standard |
| 1909.80 | -21.87 | 17.93 | 10.16 | V | 28.09 | 0.644 | Standard |

■ EDGE Result

| Frequency (MHz) | Tested level (dBm) | Substitute Level [dBm] | Antenna Gain [dBi] | Polarizati on [H/V] | EIRP (dBm) | EIRP (W) | Battery |
|--------------------|--------------------------|------------------------------|--------------------------|---------------------------|---------------|-------------|----------|
| 1880.00 | -22.89 | 17.17 | 10.16 | V | 27.33 | 0.541 | Standard |

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 24.07 dBm = 0.255 W

Modulation Signal : GSM850

$$\text{Limit} : 43 + 10\log_{10}(P) = 37.07 \text{ dBc}$$

Result(dBc) = Output Power(ERP, dBm) - Spurious Emission Level(dBm)

■ Result

| Channel | Frequency (MHz) | Level @ Antenna Terminals (dBm) | Substitute Antenna Gain (dBd) | Spurious Emission level (dBm) | Result (dBc) | POL (H/V) |
|---------|-----------------|---------------------------------|-------------------------------|-------------------------------|--------------|-----------|
| 128 | 1648.40 | -45.40 | 9.40 | -36.00 | 60.07 | V |
| | 2472.60 | -31.70 | 10.60 | -21.10 | 45.17 | V |
| | 3296.80 | -50.47 | 12.00 | -38.47 | 62.54 | H |
| | 4121.00 | - | - | - | - | - |
| | 4945.20 | - | - | - | - | - |
| | 5769.40 | - | - | - | - | - |
| 190 | 1673.20 | -46.86 | 9.40 | -37.46 | 61.53 | V |
| | 2509.80 | -33.26 | 10.60 | -22.66 | 46.73 | V |
| | 3346.40 | -55.17 | 12.00 | -43.17 | 67.24 | V |
| | 4183.00 | - | - | - | - | - |
| | 5019.60 | - | - | - | - | - |
| | 5856.20 | - | - | - | - | - |
| 251 | 1697.60 | -46.28 | 9.40 | -36.88 | 60.95 | V |
| | 2546.40 | -35.94 | 10.60 | -25.34 | 49.41 | H |
| | 3395.20 | -55.89 | 12.00 | -43.89 | 67.96 | V |
| | 4244.00 | - | - | - | - | - |
| | 5092.80 | - | - | - | - | - |
| | 5941.60 | - | - | - | - | - |

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.86 dBm = 0.968 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 42.86 \text{ dBc}$

■ Result

| Channel | Frequency (MHz) | Level @ Antenna Terminals (dBm) | Substitute Antenna Gain (dBi) | Spurious Emission level (dBm) | Result (dBc) | POL (H/V) |
|---------|-----------------|---------------------------------|-------------------------------|-------------------------------|--------------|-----------|
| 512 | 3700.40 | -41.52 | 12.60 | -28.92 | 58.78 | H |
| | 5550.60 | -46.26 | 12.50 | -33.76 | 63.62 | V |
| | 7400.80 | -42.71 | 11.50 | -31.21 | 61.07 | V |
| | 9251.00 | - | - | - | - | - |
| | 11101.20 | - | - | - | - | - |
| | 12951.40 | - | - | - | - | - |
| 661 | 3760.00 | -40.55 | 12.60 | -27.95 | 57.81 | H |
| | 5640.00 | -46.79 | 12.50 | -34.29 | 64.15 | H |
| | 7520.00 | -41.68 | 11.50 | -30.18 | 60.04 | H |
| | 9400.00 | - | - | - | - | - |
| | 11280.00 | - | - | - | - | - |
| | 13160.00 | - | - | - | - | - |
| 810 | 3819.60 | -40.89 | 12.60 | -28.29 | 58.15 | H |
| | 5729.40 | -46.77 | 12.50 | -34.27 | 64.13 | V |
| | 7639.20 | -43.07 | 11.50 | -31.57 | 61.43 | H |
| | 9549.00 | - | - | - | - | - |
| | 11458.80 | - | - | - | - | - |
| | 13368.60 | - | - | - | - | - |

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.5. Frequency Stability

6.5.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ±0.00025 % or 2.5ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency Error (Hz) | Frequency (Hz) | Deviation (%) | ppm |
|---------------|-------------|------------|----------------------|----------------|---------------|--------|
| 100% | 3.70 | +20(Ref) | -27.40 | 836,599,973 | -0.000003 | -0.033 |
| 100% | | -30 | 46.10 | 836,600,046 | 0.000006 | 0.055 |
| 100% | | -20 | 2.70 | 836,600,003 | 0.000000 | 0.003 |
| 100% | | -10 | 49.80 | 836,600,050 | 0.000006 | 0.060 |
| 100% | | 0 | 43.20 | 836,600,043 | 0.000005 | 0.052 |
| 100% | | +10 | 38.40 | 836,600,038 | 0.000005 | 0.046 |
| 100% | | +20 | -27.40 | 836,599,973 | -0.000003 | -0.033 |
| 100% | | +30 | -31.40 | 836,599,969 | -0.000004 | -0.038 |
| 100% | | +40 | 39.70 | 836,600,040 | 0.000005 | 0.047 |
| 100% | | +50 | 34.10 | 836,600,034 | 0.000004 | 0.041 |
| 115% | 4.26 | +20 | 26.40 | 836,600,026 | 0.000003 | 0.032 |
| Batt.Endpoint | 3.35 | +20 | -39.40 | 836,599,961 | -0.000005 | -0.047 |


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.5.2. GSM850 Frequency Stability Graph

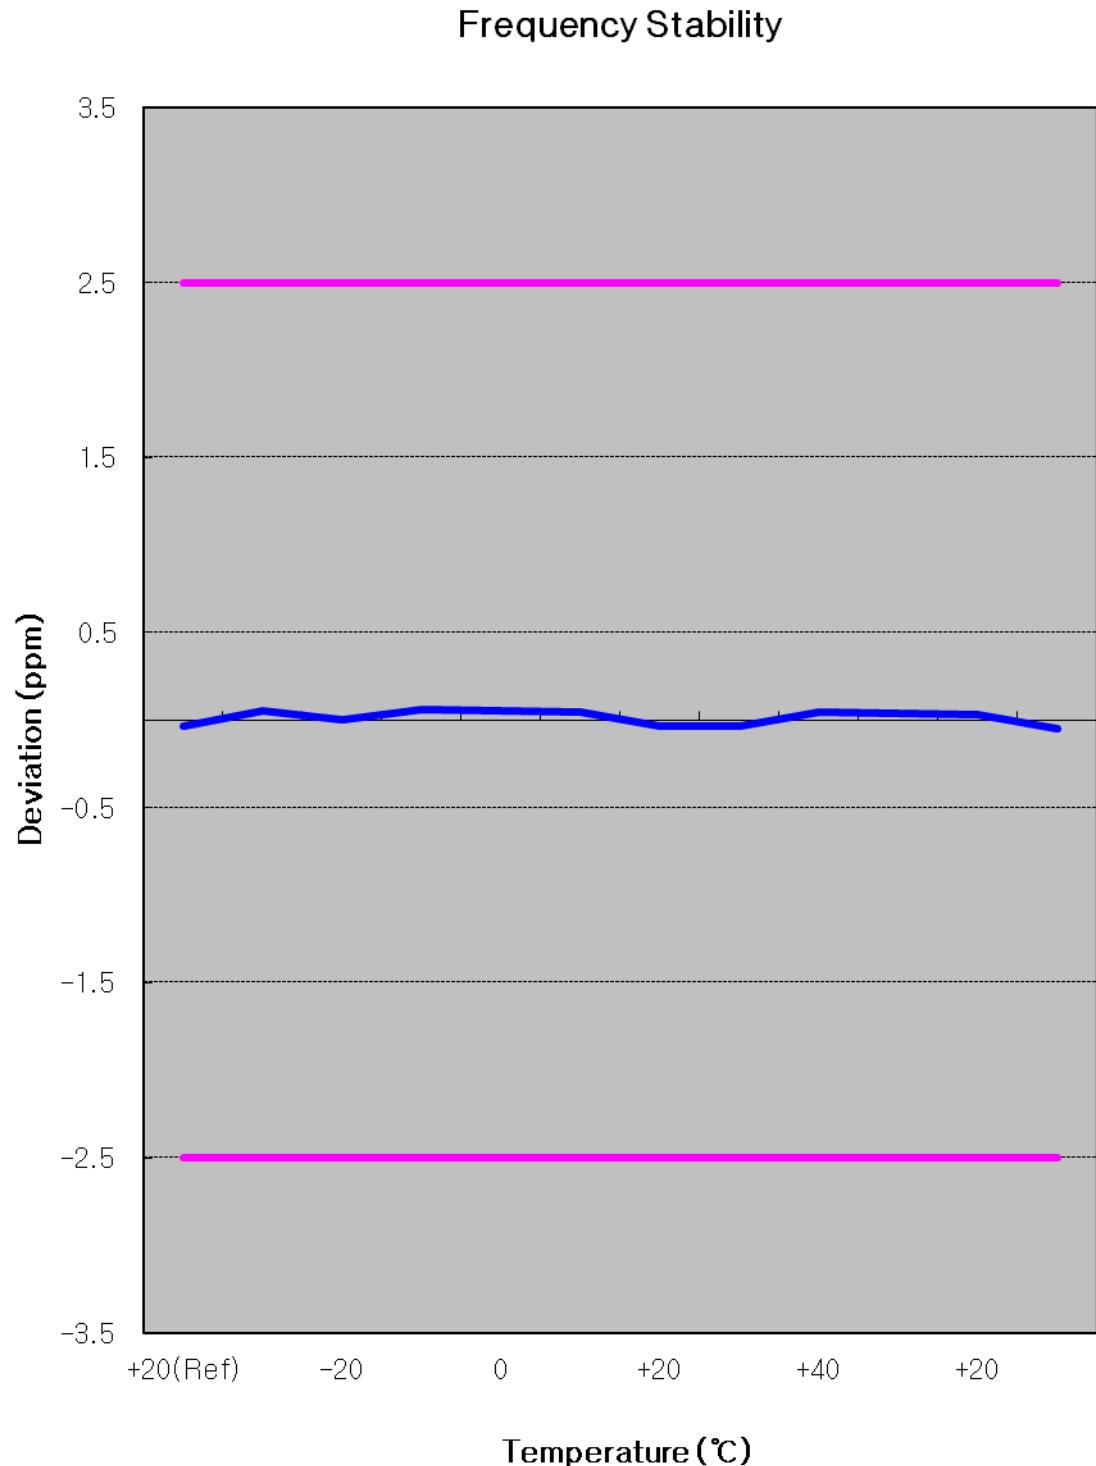

Zoom IN

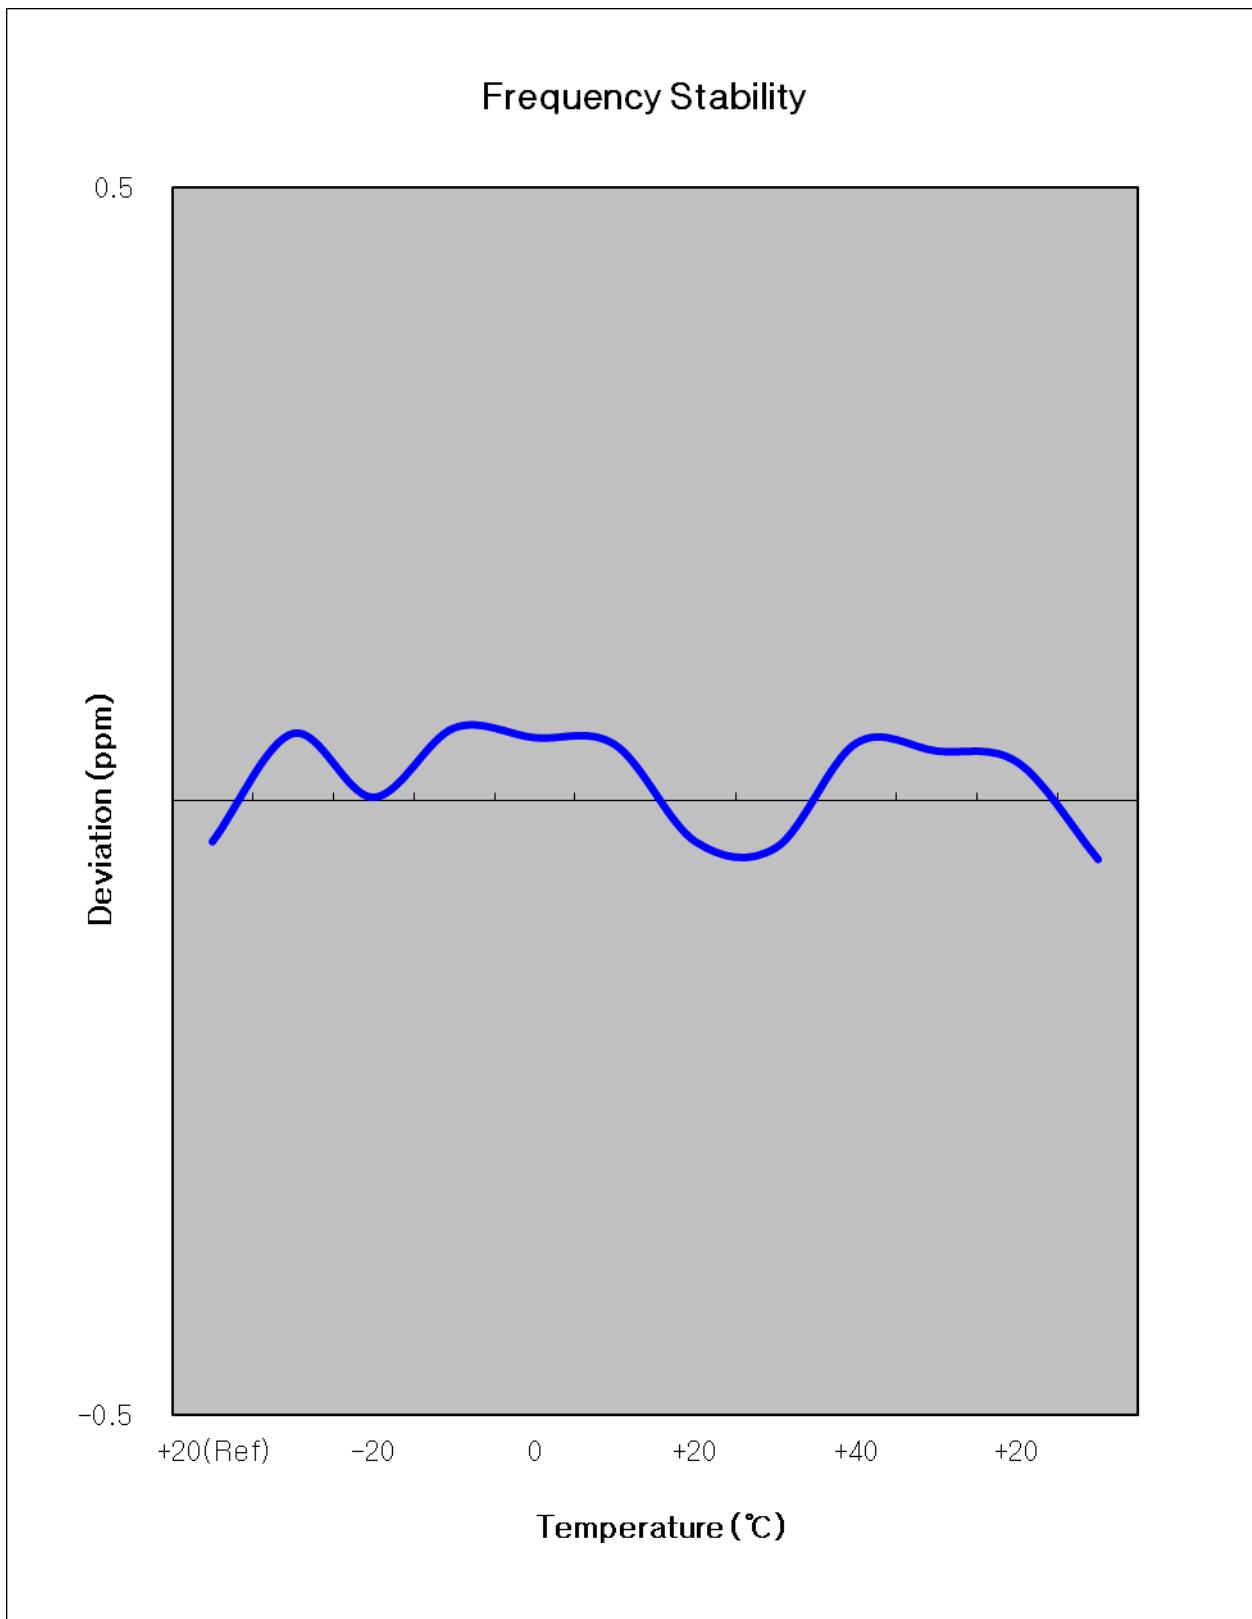



6.5.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : $\pm 0.00025\%$ or 2.5ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency Error (Hz) | Frequency (Hz) | Deviation (%) | ppm |
|---------------|-------------|------------|----------------------|----------------|---------------|--------|
| 100% | 3.70 | +20(Ref) | -18.40 | 1,879,999,982 | -0.000001 | -0.010 |
| 100% | | -30 | 2.30 | 1,880,000,002 | 0.000000 | 0.001 |
| 100% | | -20 | 29.60 | 1,880,000,030 | 0.000002 | 0.016 |
| 100% | | -10 | 47.40 | 1,880,000,047 | 0.000003 | 0.025 |
| 100% | | 0 | 38.40 | 1,880,000,038 | 0.000002 | 0.020 |
| 100% | | +10 | 36.90 | 1,880,000,037 | 0.000002 | 0.020 |
| 100% | | +20 | -18.40 | 1,879,999,982 | -0.000001 | -0.010 |
| 100% | | +30 | 15.50 | 1,880,000,016 | 0.000001 | 0.008 |
| 100% | | +40 | -44.00 | 1,879,999,956 | -0.000002 | -0.023 |
| 100% | | +50 | 37.30 | 1,880,000,037 | 0.000002 | 0.020 |
| 115% | 4.26 | +20 | -6.20 | 1,879,999,994 | 0.000000 | -0.003 |
| Batt.Endpoint | 3.35 | +20 | -28.30 | 1,879,999,972 | -0.000002 | -0.015 |


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.5.4. GSM1900 Frequency Stability Graph

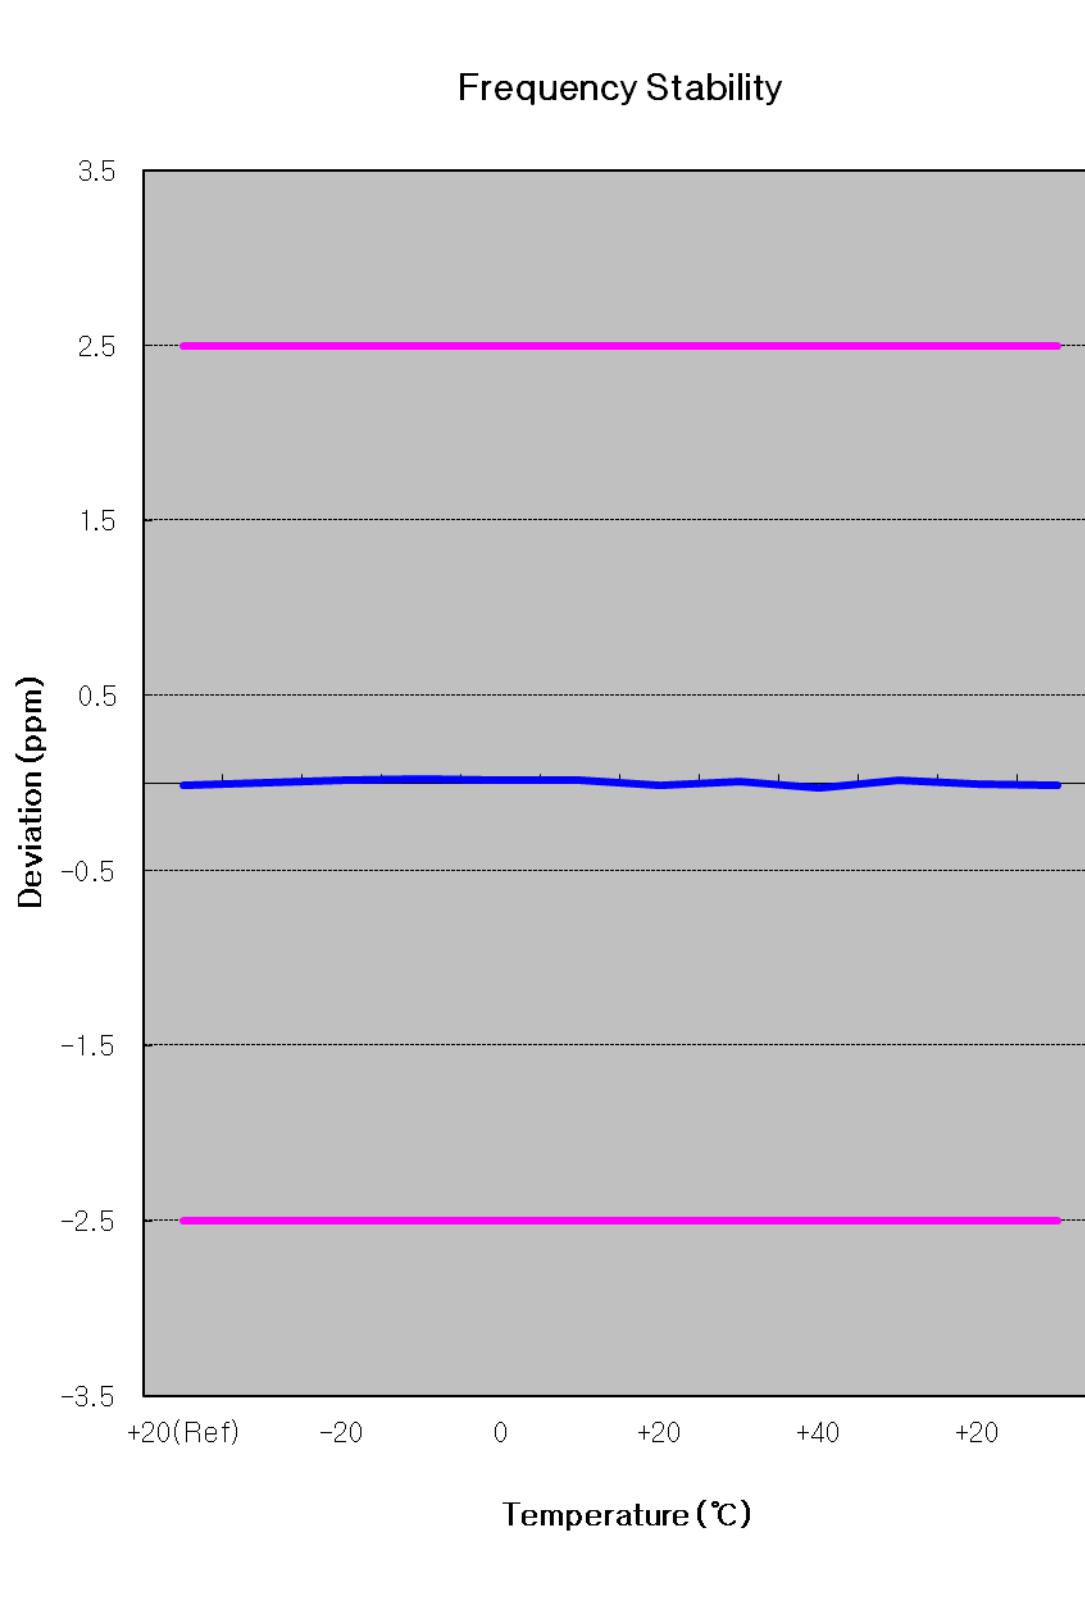

Zoom IN

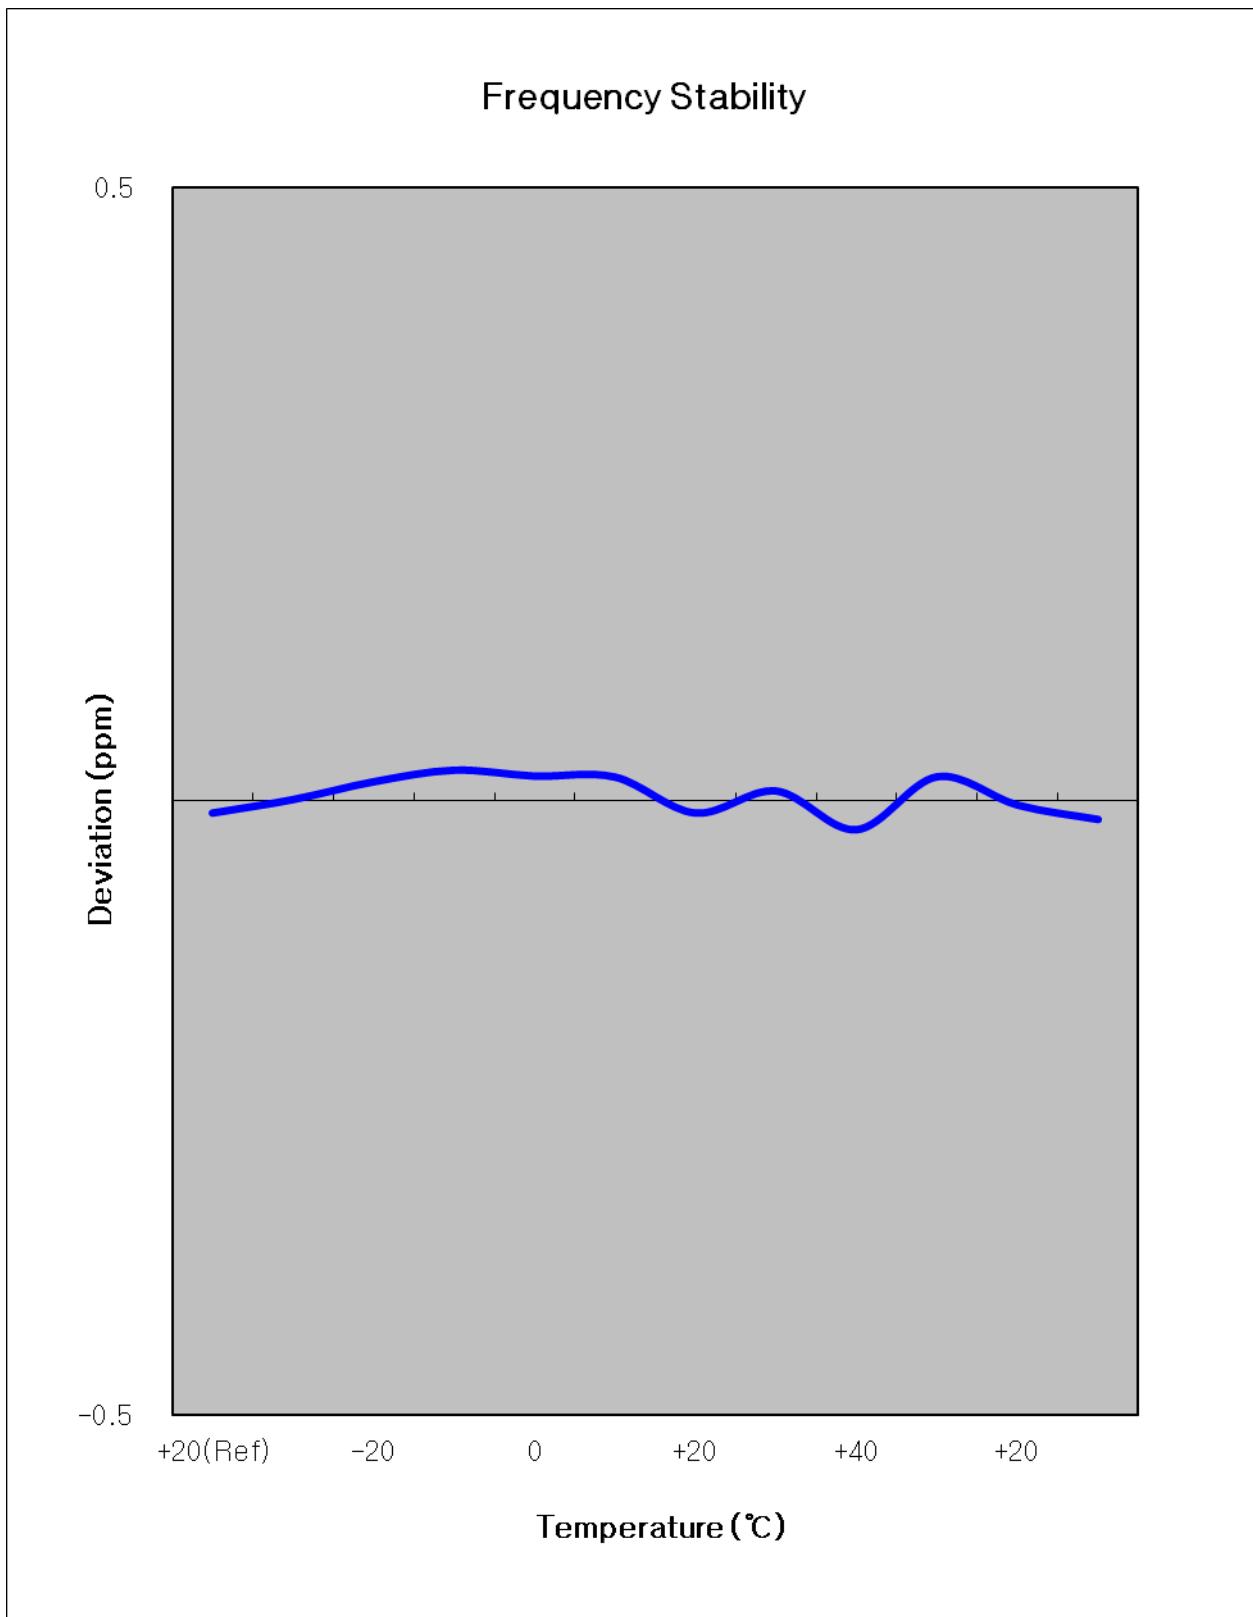



7. CONCLUSION

The data collected shows that the SAMSUNG Portable Handset
FCC ID : A3LGTN7105 complies with all the requirements of Parts 2,22,24 of the FCC Rules.



8. TEST PLOTS

* For all frequencies, we measure Ref. offset every 1GHz. And we tested the plots with worst offset of all offset.


1. Spectrum Offset(dB) = Cable loss(dB) + Power divider(dB)
2. Ref Offset at 1880 MHz = 8.83dBm

GSM850

Agilent

R T

Freq/Channel

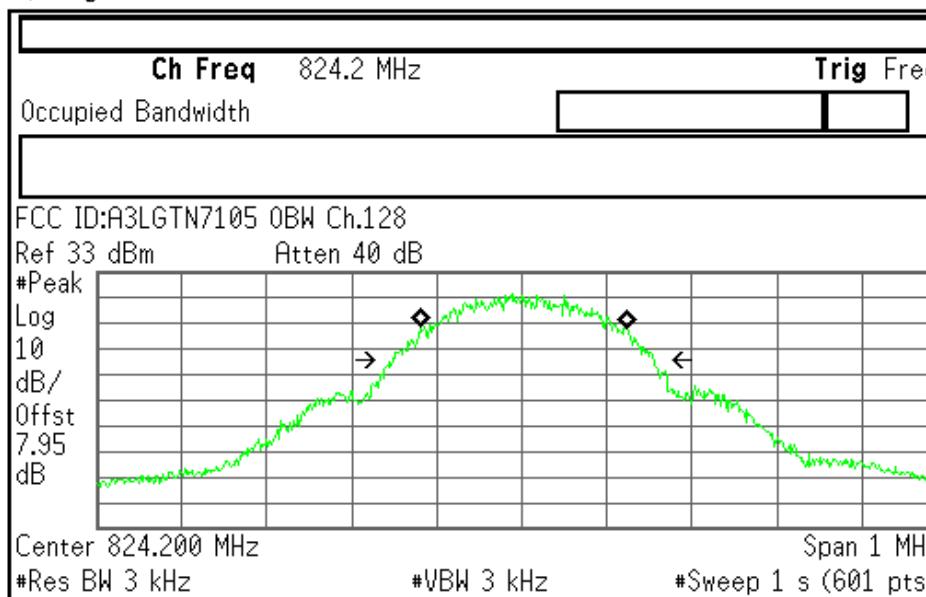
Center Freq
824.200000 MHzStart Freq
823.700000 MHzStop Freq
824.700000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Neg.Trig Delay unavailable in Swept Mode, zero delay used.

Agilent

R T

Freq/Channel

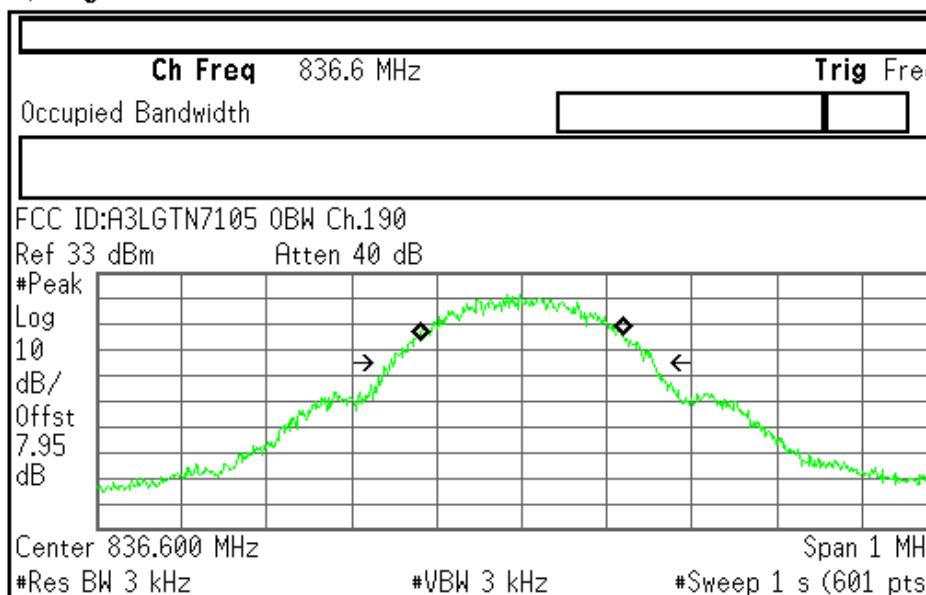Center Freq
836.600000 MHzStart Freq
836.100000 MHzStop Freq
837.100000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Neg.Trig Delay unavailable in Swept Mode, zero delay used.

Agilent

R T


Freq/Channel

Ch Freq 848.8 MHz Trig Free
Occupied Bandwidth

Center Freq
848.800000 MHz

FCC ID:A3LGTN7105 0BW Ch.251
Ref 33 dBm Atten 40 dB

Start Freq
848.300000 MHz

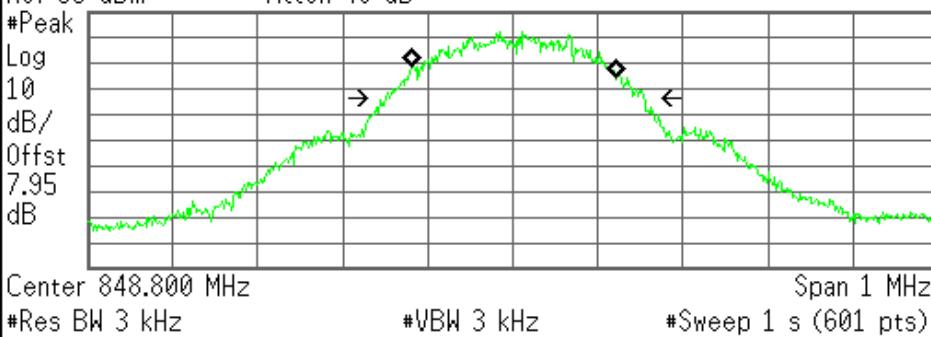

Stop Freq
849.300000 MHz

Occupied Bandwidth 245.4030 kHz Occ BW % Pwr 99.00 %
Transmit Freq Error 1.096 kHz x dB -26.00 dB
x dB Bandwidth 308.672 kHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Neg.Trig Delay unavailable in Swept Mode, zero delay used.

FCC ID : A3LGTN7105 Transmit Power 128CH

| Measurement/Instrument Screen | | | | | | | |
|-------------------------------|-------------------------|--|-----------------------|-------------|--------------|---------------|----------|
| Control | Transmit Power | | | | | | TCHParms |
| Transmit Power Setup | | Burst 1 Burst 2 Burst 3 Burst 4 Burst 5 Burst 6 | | | | | |
| | BP | Avg | 33.15 | ----- | ----- | ----- | ----- |
| | BP | SDev | 0.00 | ----- | ----- | ----- | ----- |
| | ECP | Avg | 33.15 | ----- | ----- | ----- | ----- |
| | ECP | SDev | 0.00 | ----- | ----- | ----- | ----- |
| | 100 / 100 | | | | | | Single |
| | Phase & Frequency Error | | | | | | |
| | | | Peak Phase ° | RMS Phase ° | Frequency Hz | | |
| | | Minimum | 3.25 | 0.67 | -19.27 | | |
| | | Maximum | 5.71 | 0.87 | -13.54 | | |
| | | Average | 4.35 | 0.77 | -16.67 | | |
| | | Pass/Fail | Pass | Pass | Pass | | |
| | 100 / 100 | | | | | | Single |
| | | | Active Cell Connected | | | Sys Type: GSM | |
| | | | | | | | |
| 1 of 2 | | | IntRef | Offset | R T | | |
| 1 of 2 | | | | | | | |


FCC ID : A3LGTN7105 Transmit Power 190CH

| Measurement/Instrument Screen | | | | | | | |
|-------------------------------|-------------------------|--|-----------------------|-------------|--------------|---------------|----------|
| Control | Transmit Power | | | | | | TCHParms |
| Transmit Power Setup | | Burst 1 Burst 2 Burst 3 Burst 4 Burst 5 Burst 6 | | | | | |
| | BP | Avg | 33.02 | ----- | ----- | ----- | ----- |
| | BP | SDev | 0.00 | ----- | ----- | ----- | ----- |
| | ECP | Avg | 33.02 | ----- | ----- | ----- | ----- |
| | ECP | SDev | 0.00 | ----- | ----- | ----- | ----- |
| | 100 / 100 | | | | | | Single |
| | Phase & Frequency Error | | | | | | |
| | | | Peak Phase ° | RMS Phase ° | Frequency Hz | | |
| | | Minimum | 3.94 | 0.67 | -26.54 | | |
| | | Maximum | 6.02 | 0.92 | -15.32 | | |
| | | Average | 4.91 | 0.79 | -22.60 | | |
| | | Pass/Fail | Pass | Pass | Pass | | |
| | 100 / 100 | | | | | | Single |
| | | | Active Cell Connected | | | Sys Type: GSM | |
| | | | | | | | |
| 1 of 2 | | | IntRef | Offset | R T | | |
| 1 of 2 | | | | | | | |


FCC ID : A3LGTN7105 Transmit Power 251CH

| Measurement/Instrument Screen | | | | | | | | | |
|-------------------------------|-------------------------|----------------|-----------------------|-------|--------|---------------|--------|------------------------|---------|
| Control | | Transmit Power | | | | | | TCHParms | |
| Transmit Power Setup | | | | | | | | Downlink Traffic Power | |
| BP | Avg | 32.71 | ----- | ----- | ----- | ----- | ----- | Traffic Band | GSM1850 |
| | SDev | 0.00 | ----- | ----- | ----- | ----- | ----- | Traffic Channel | 251 |
| | Avg | 32.71 | ----- | ----- | ----- | ----- | ----- | MS TX Level | 5 |
| | SDev | 0.00 | ----- | ----- | ----- | ----- | ----- | Channel Node Setup | |
| | 100 / 100 | | | | | | Single | Return | |
| | Phase & Frequency Error | | | | | | | | |
| | Minimum | 4.72 | 0.72 | 0.72 | -26.60 | | | 1 of 2 | |
| | Maximum | 6.31 | 0.90 | 0.90 | -19.46 | | | | |
| ECP | Average | 5.48 | 0.83 | 0.83 | -22.70 | | | | |
| | Pass/Fail | Pass | Pass | Pass | Pass | | | | |
| | 100 / 100 | | | | | | Single | | |
| | | | Active Cell Connected | | | Sys Type: GSM | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |


FCC ID : A3LGTN7105 GMSK Power vs Time 128CH

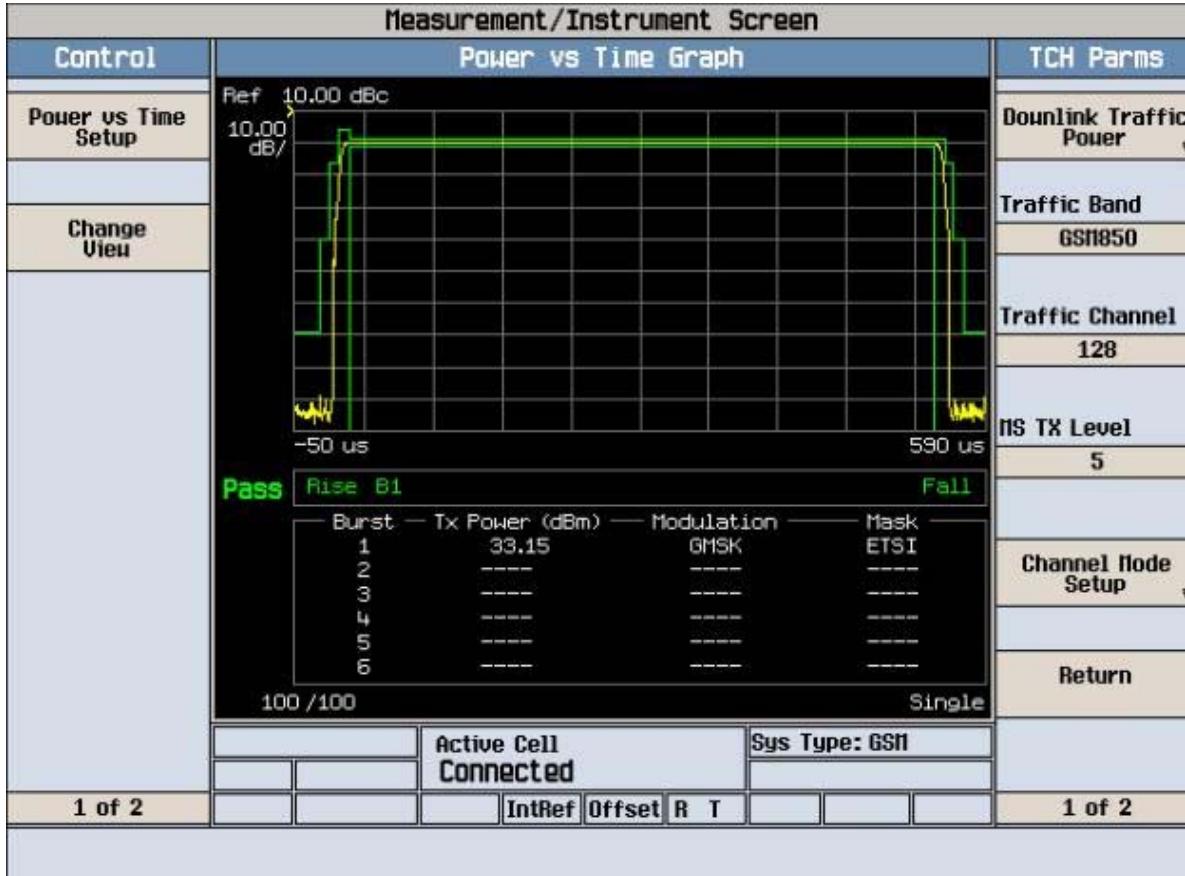


FCC ID : A3LGTN7105 GMSK Power vs Time 190CH

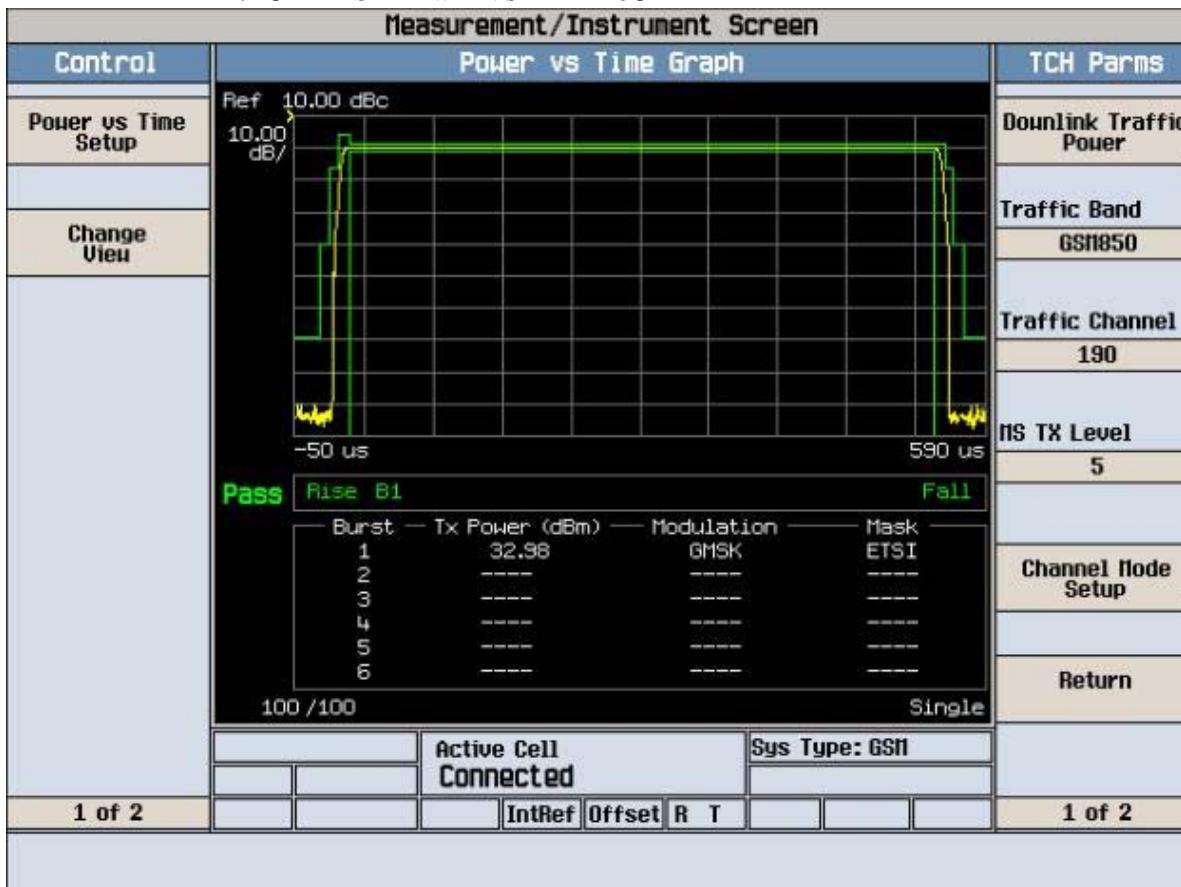


FCC ID : A3LGTN7105 GMSK Power vs Time 251CH

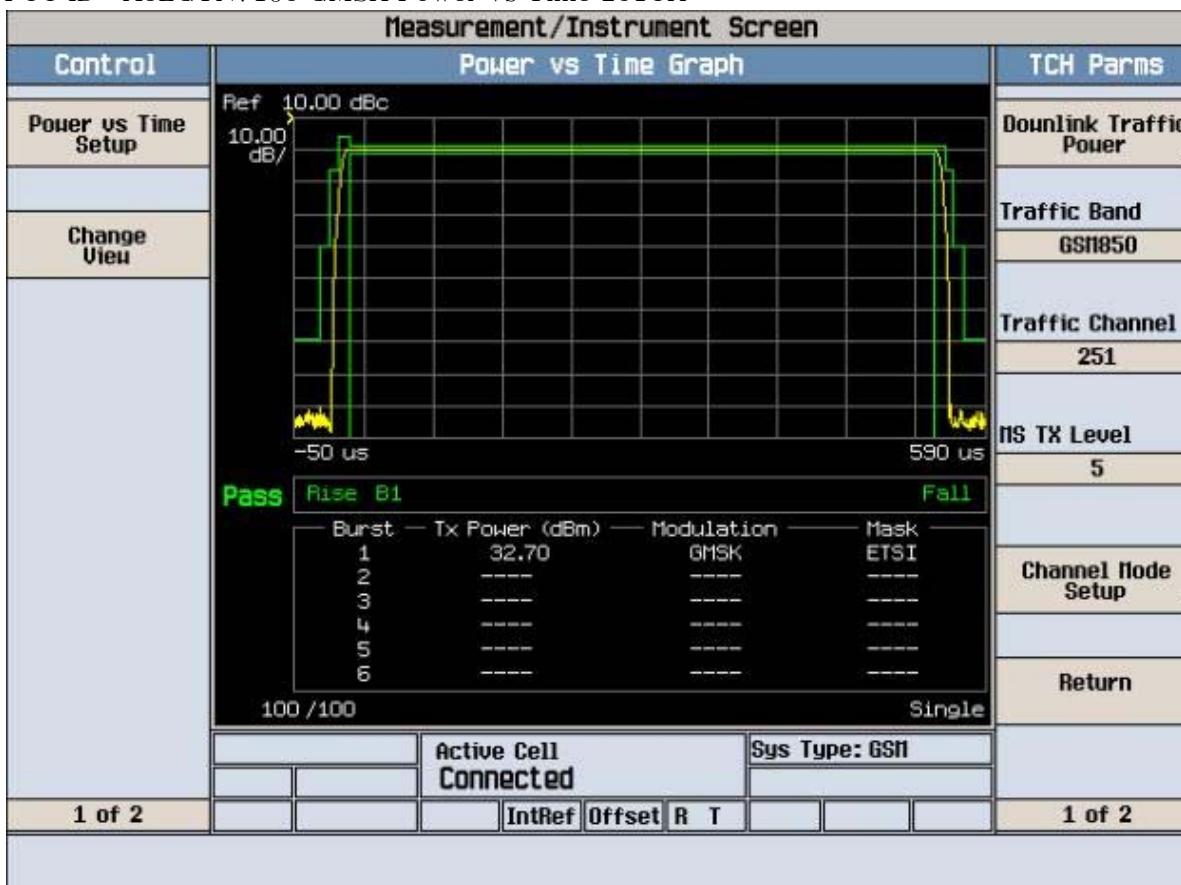


FCC ID : A3LGTN7105 Modulation & Switching 128CH

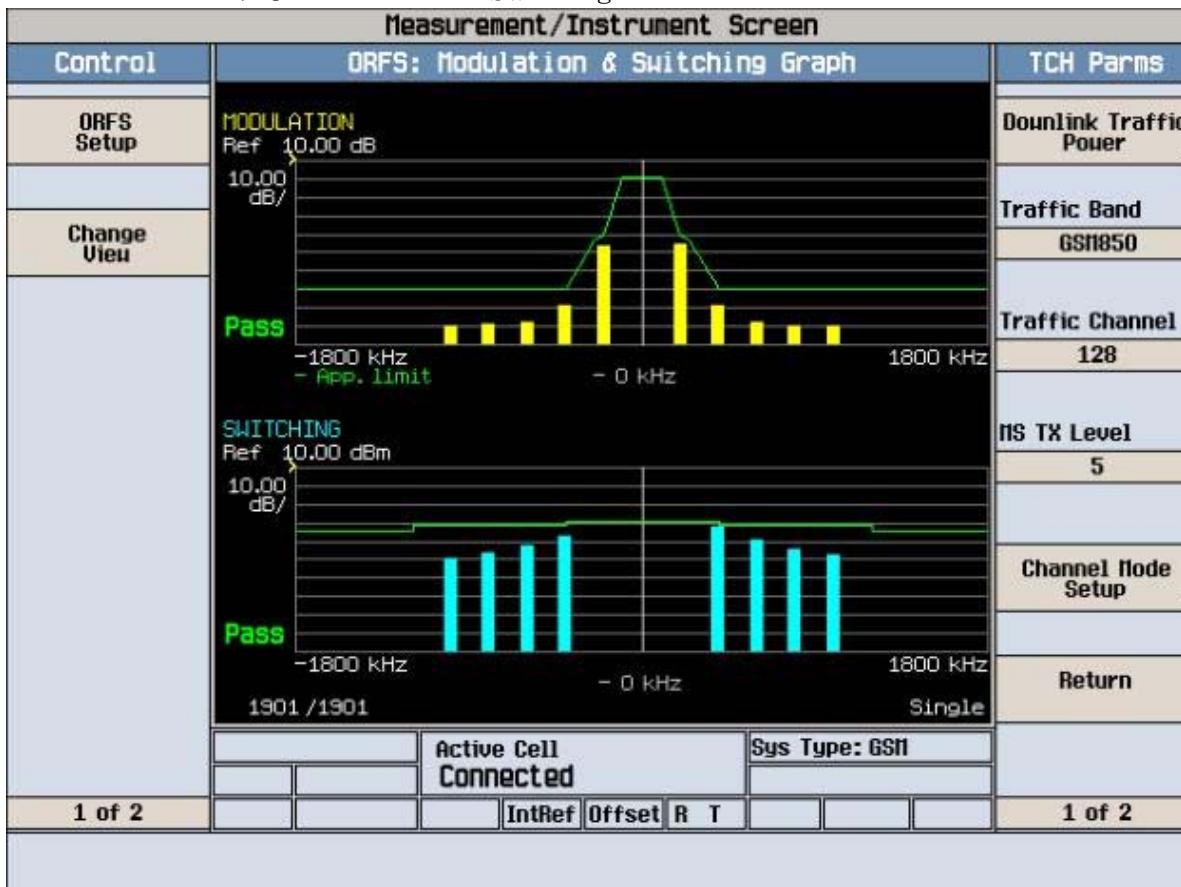

FCC ID : A3LGTN7105 Modulation & Switching 190CH

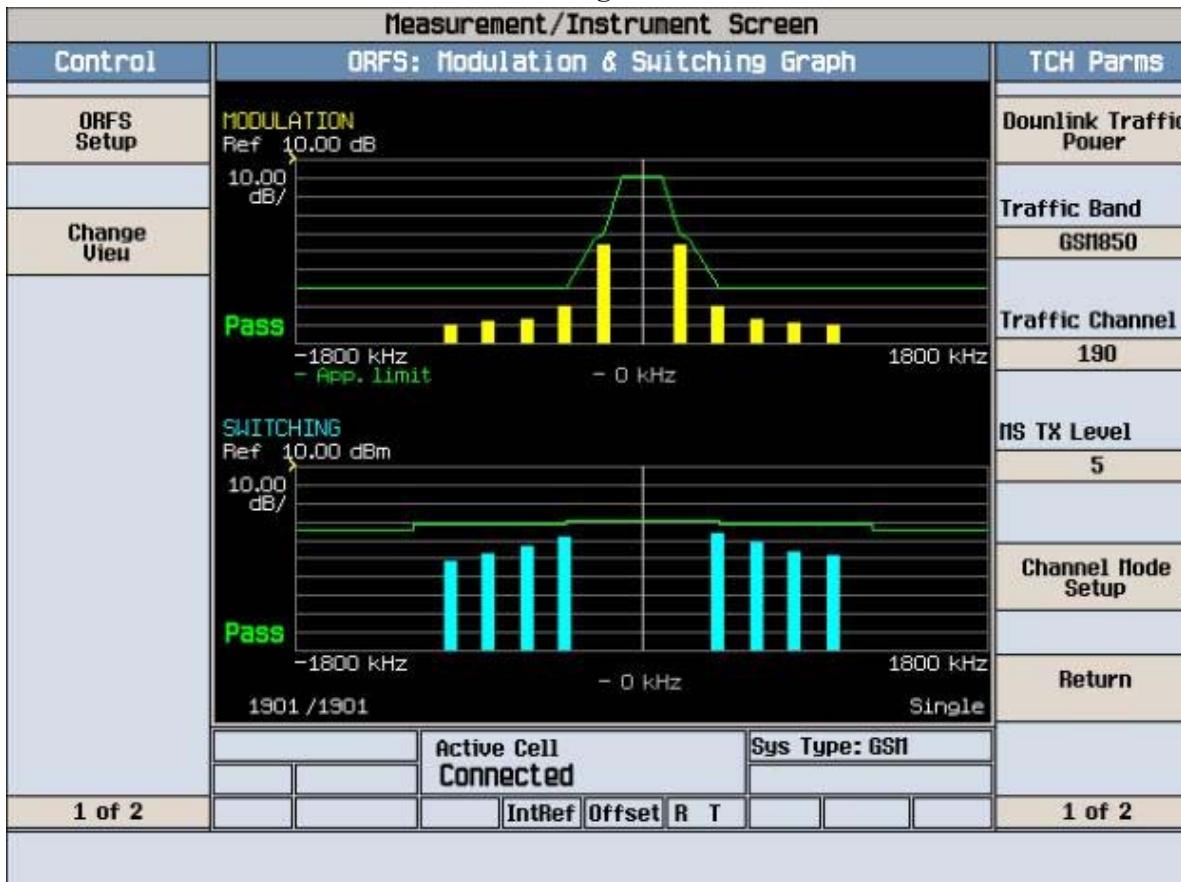


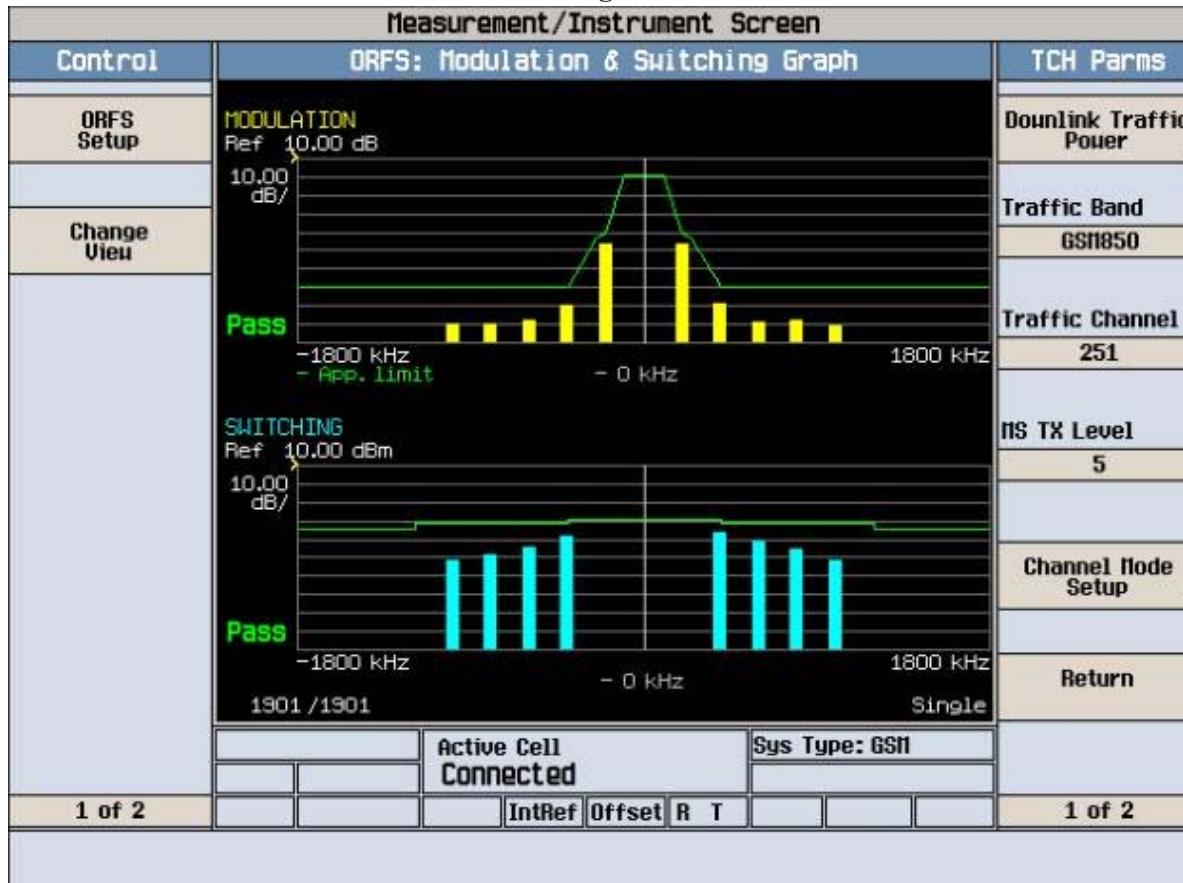

 Agilent

R T

Freq/Channel

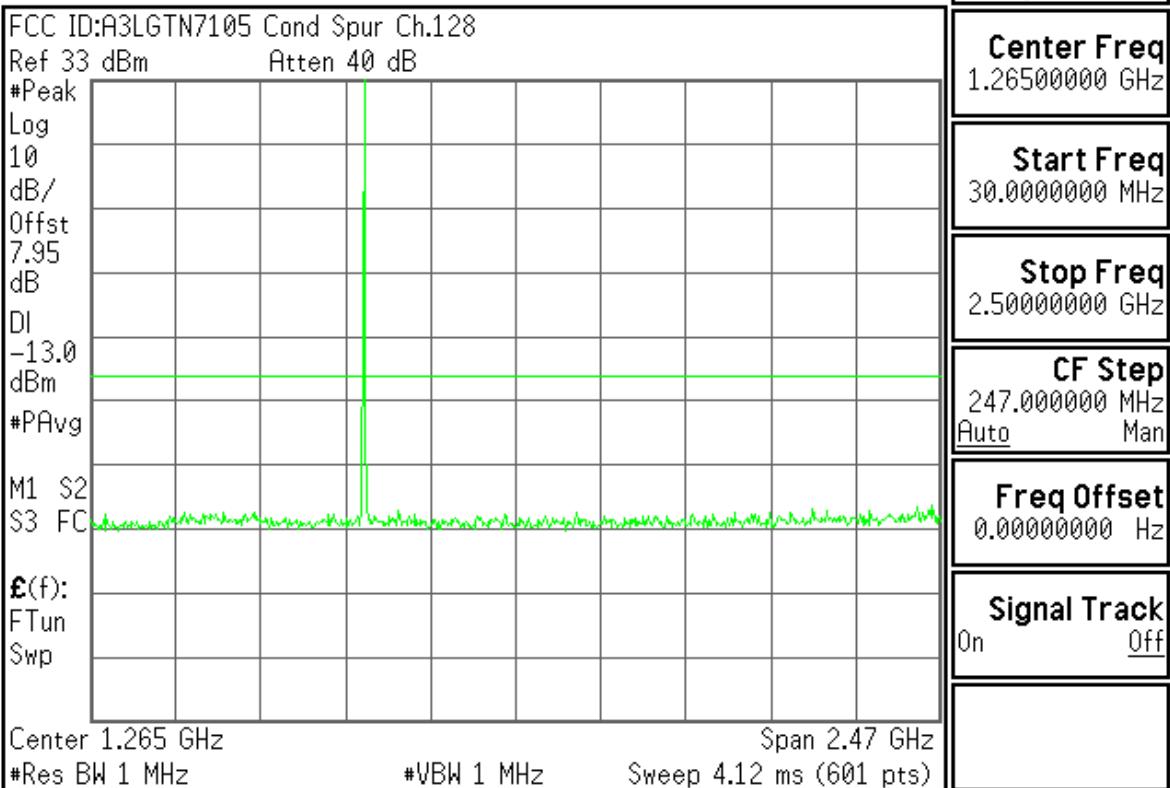


File Operation Status, C:\TEMP.GIF file saved



 Agilent



R T



Freq/Channel


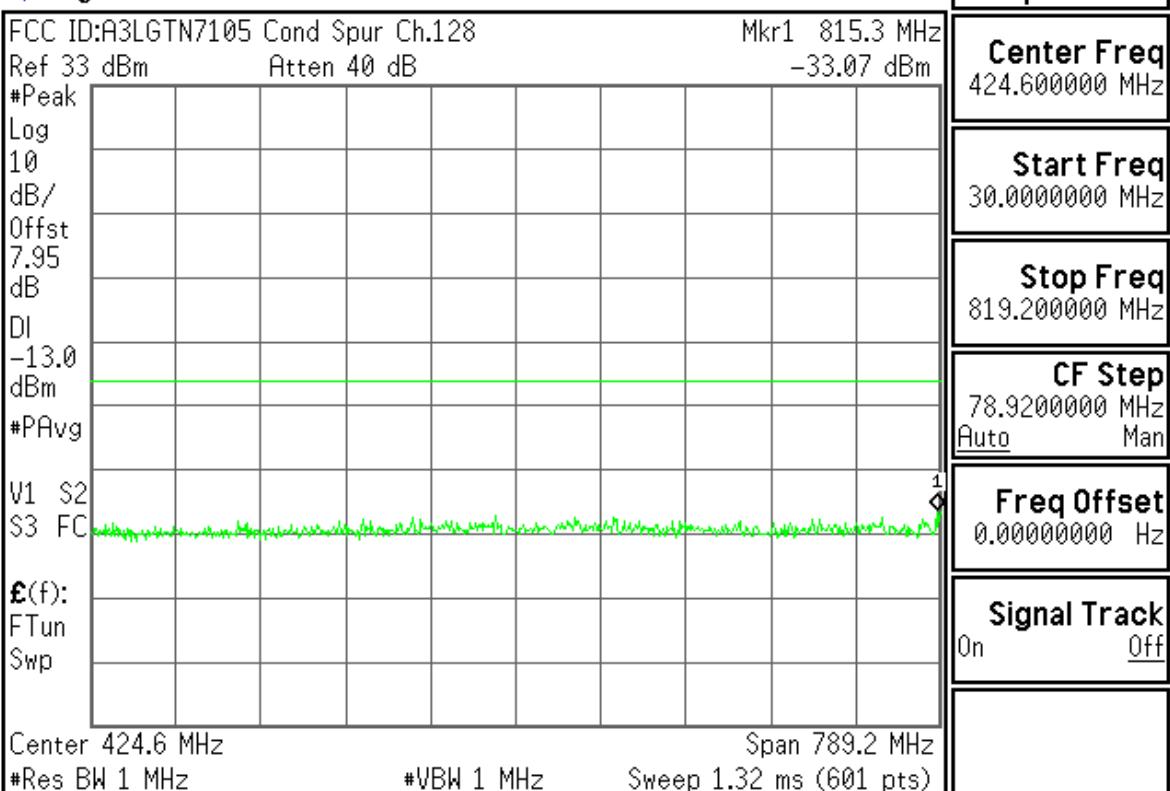




File Operation Status, C:\TEMP.GIF file saved

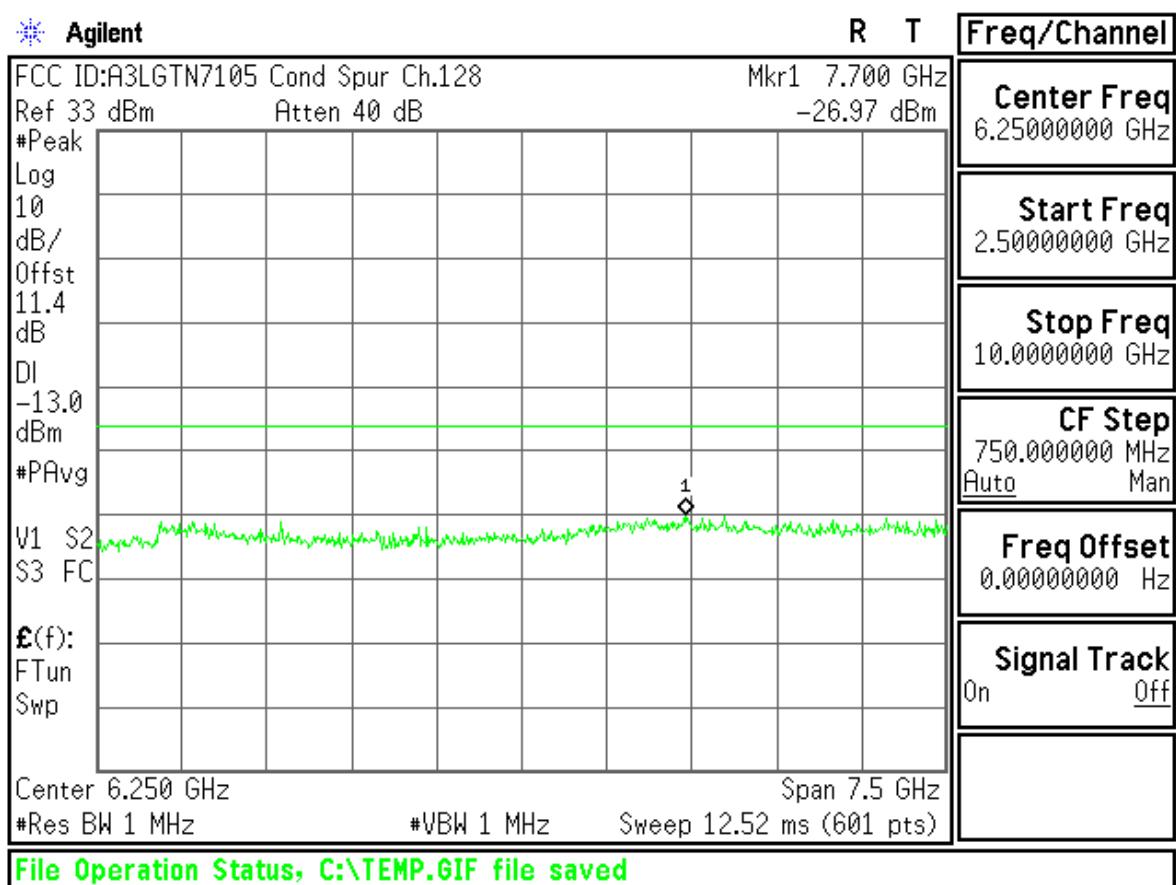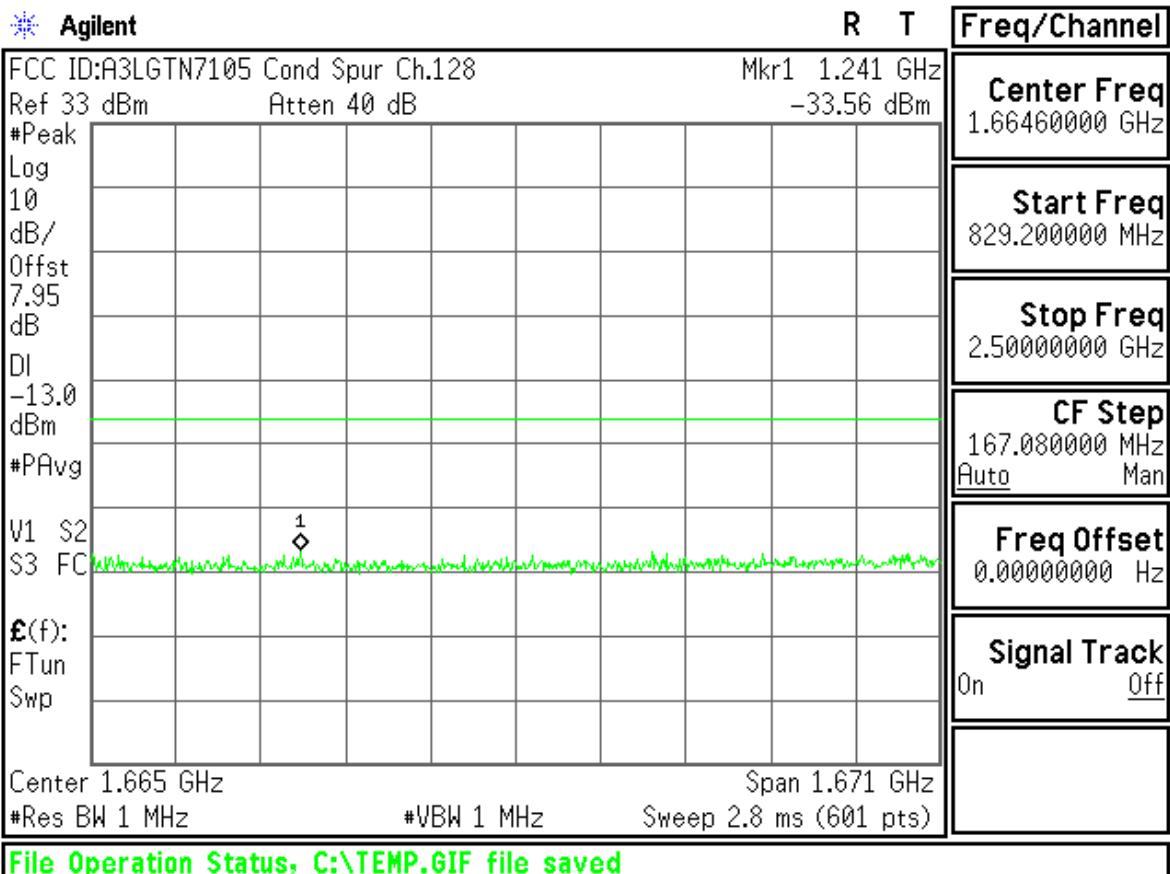

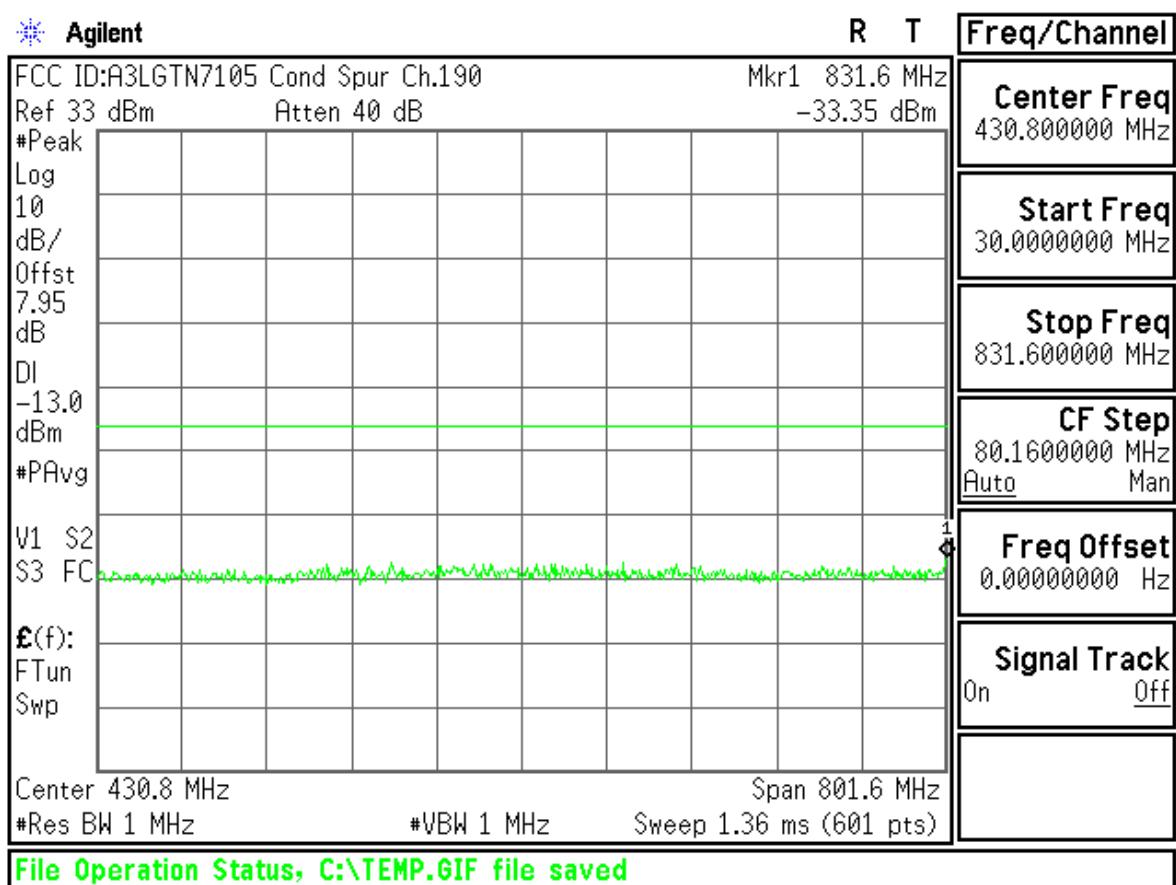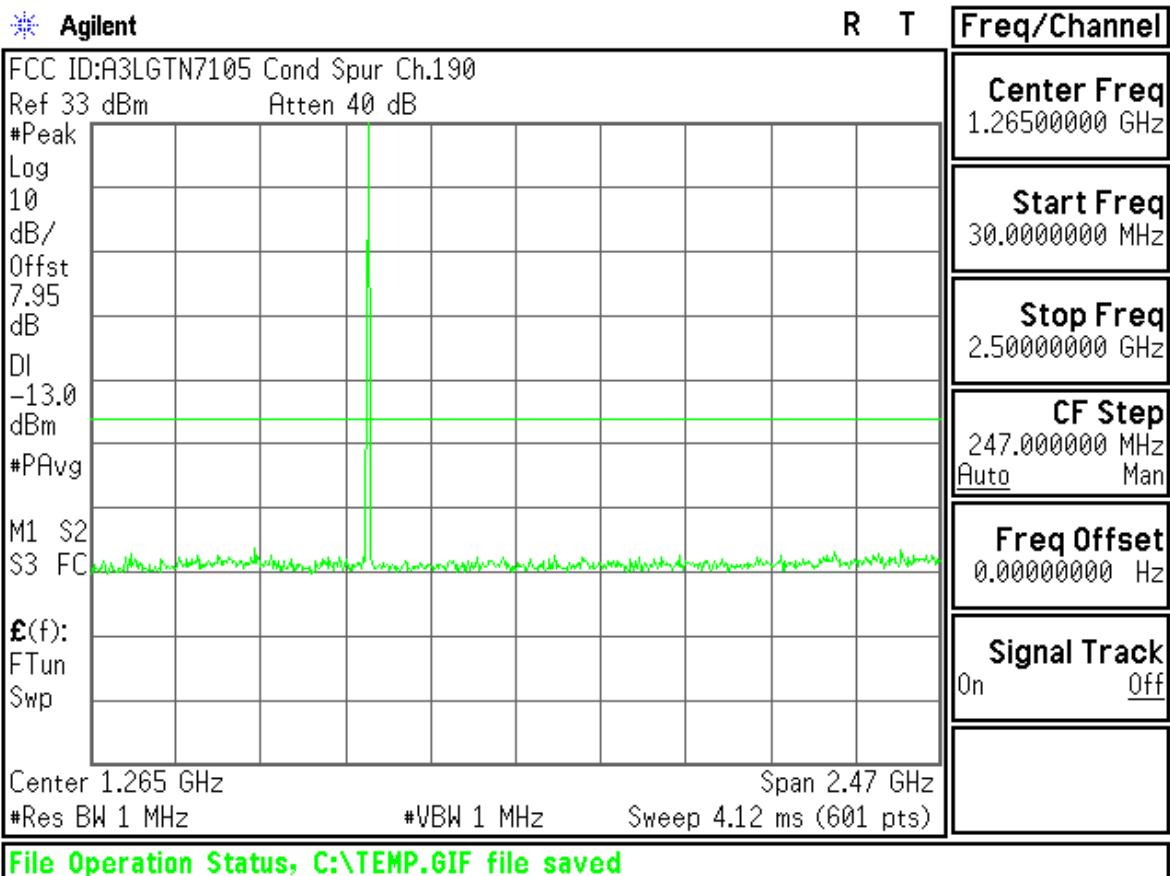

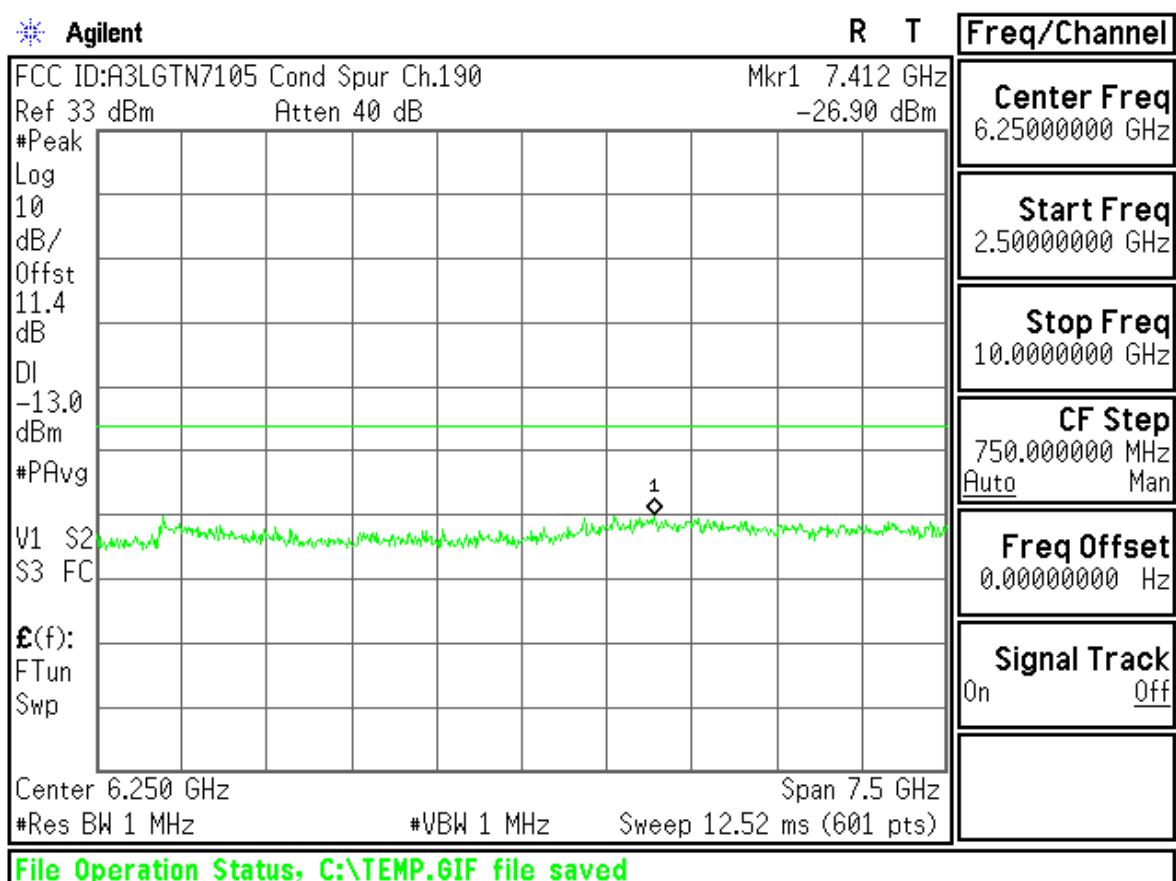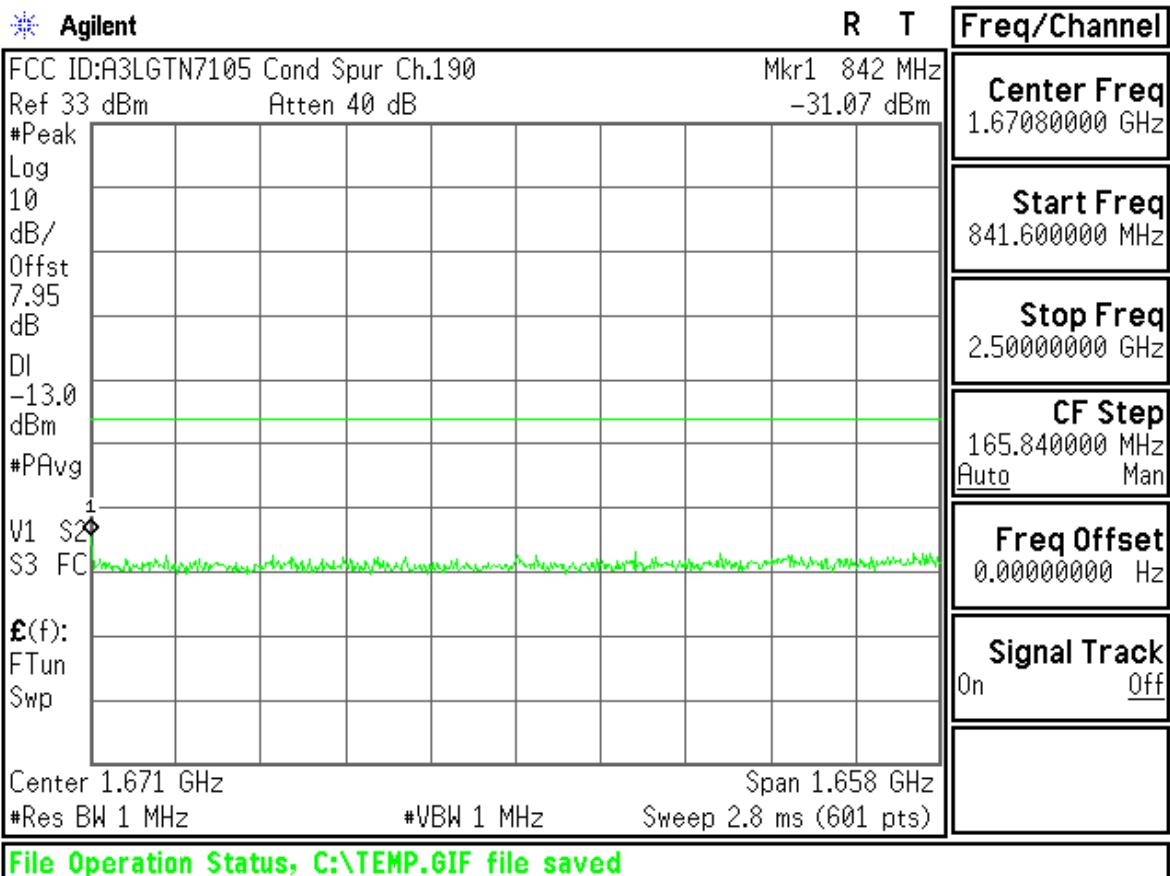

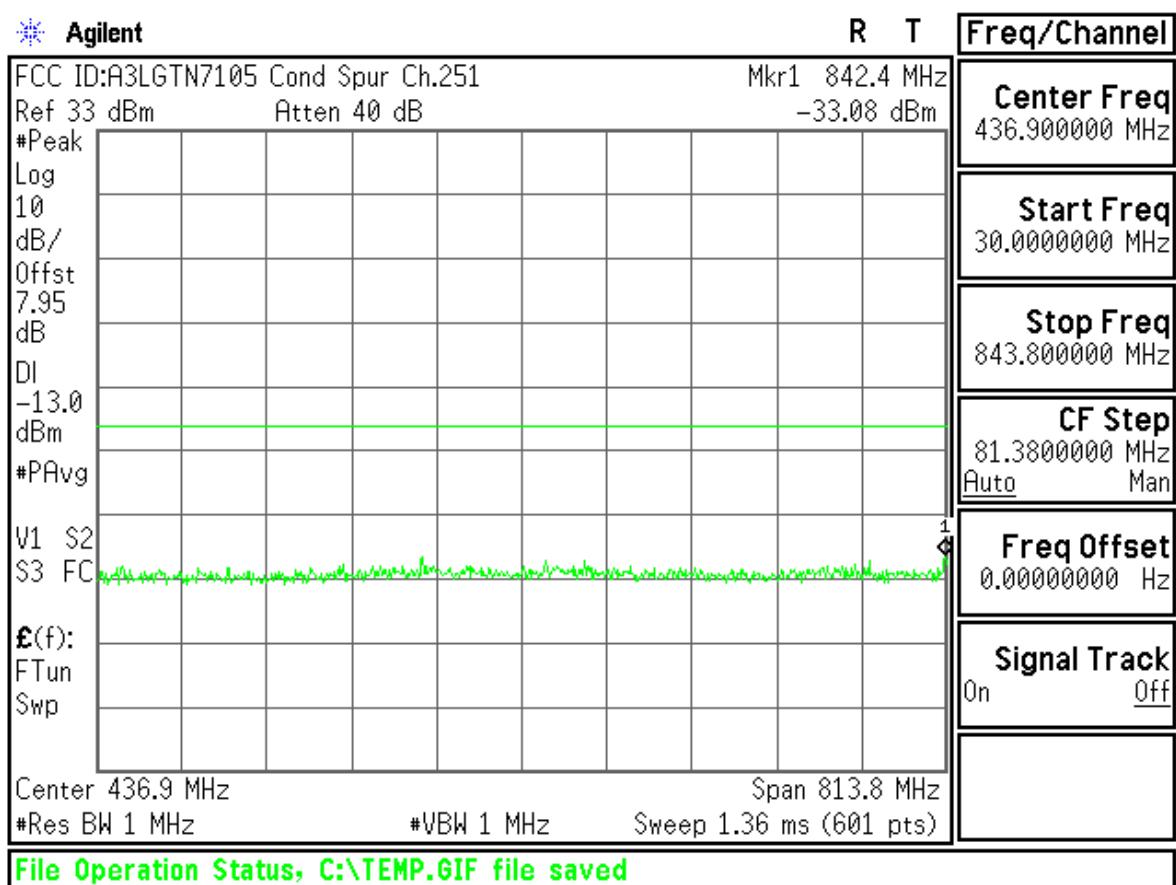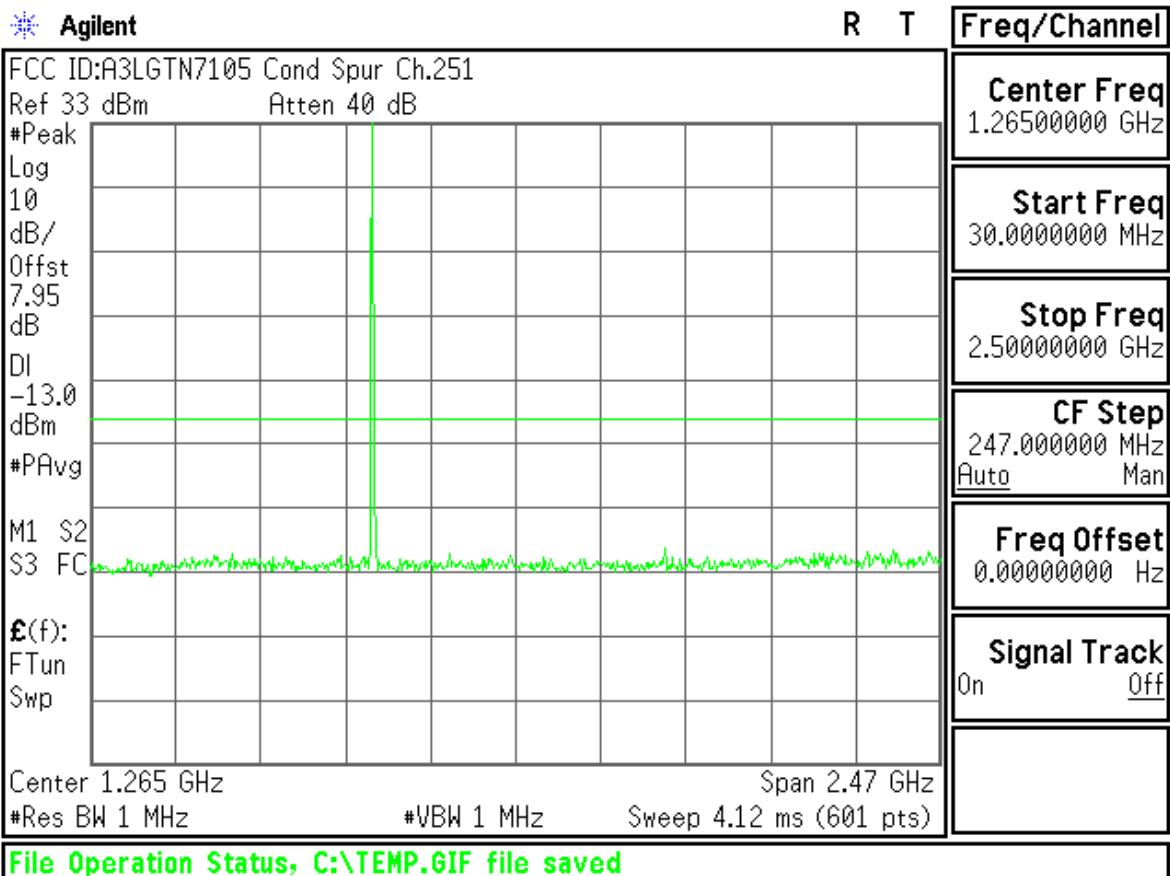

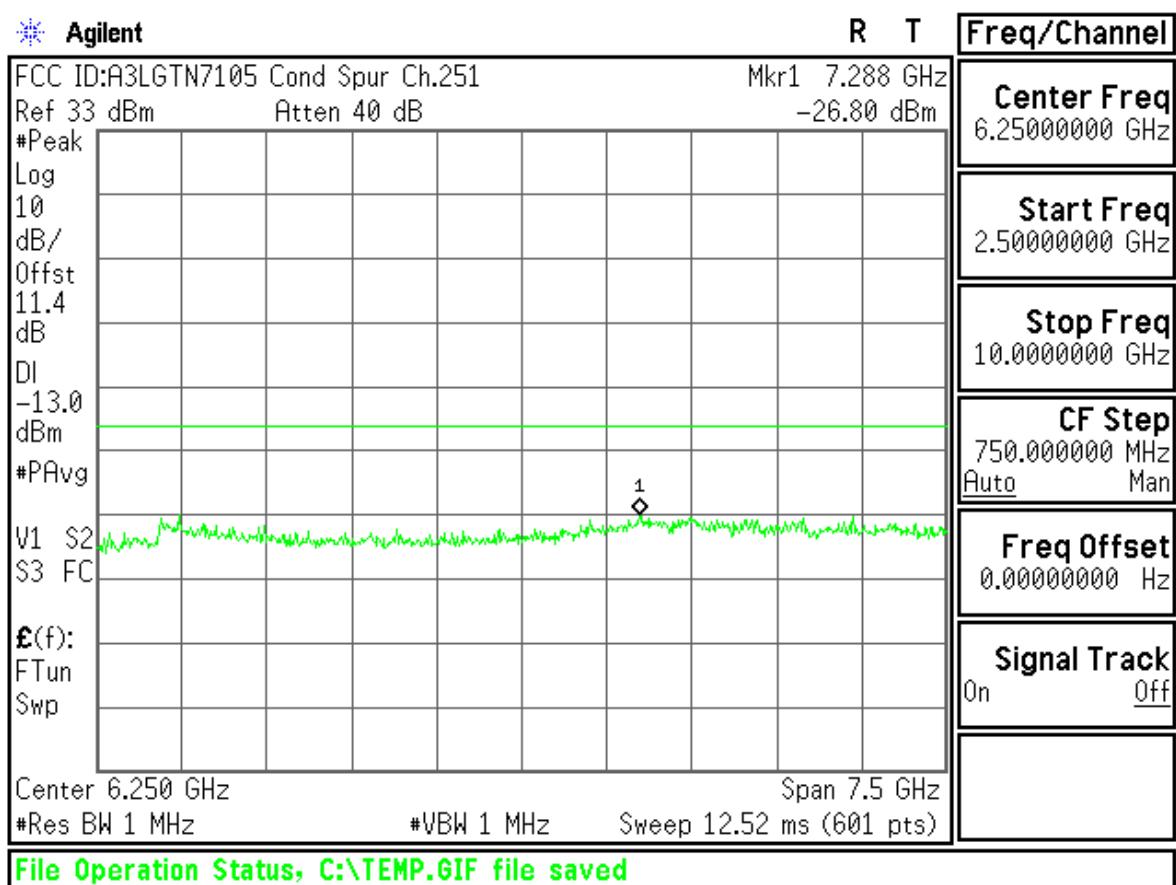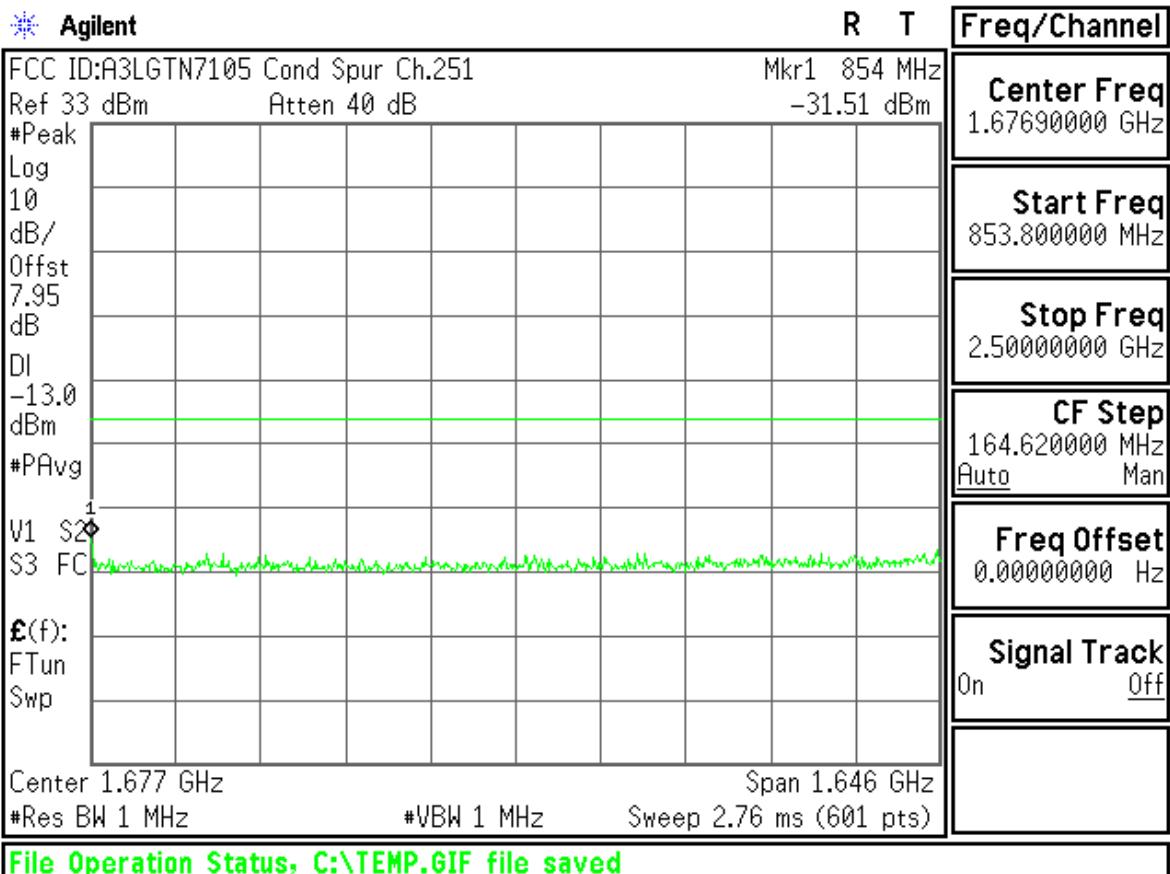


 Agilent

R T

Freq/Channel

FCC ID:A3LGTN7105 Band Edge Ch.128
Ref 33 dBm Atten 40 dB

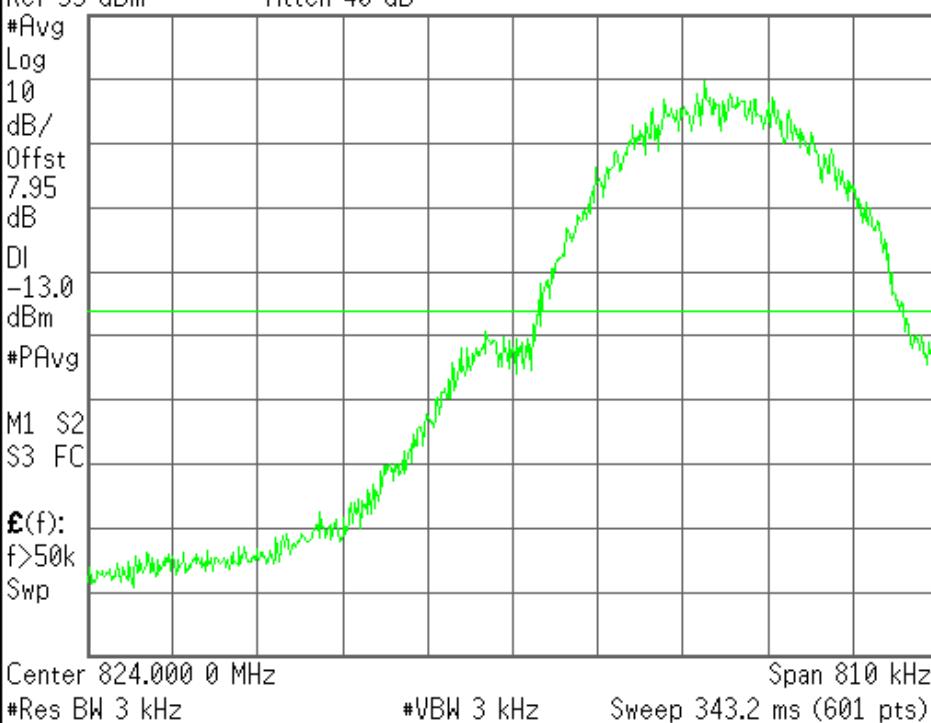

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Neg.Trig Delay unavailable in Swept Mode, zero delay used.


 Agilent

R T

Freq/Channel

FCC ID:A3LGTN7105 Band Edge Ch.128
Ref 33 dBm Atten 40 dB

Mkr1 823.992 0 MHz
-16.19 dBm

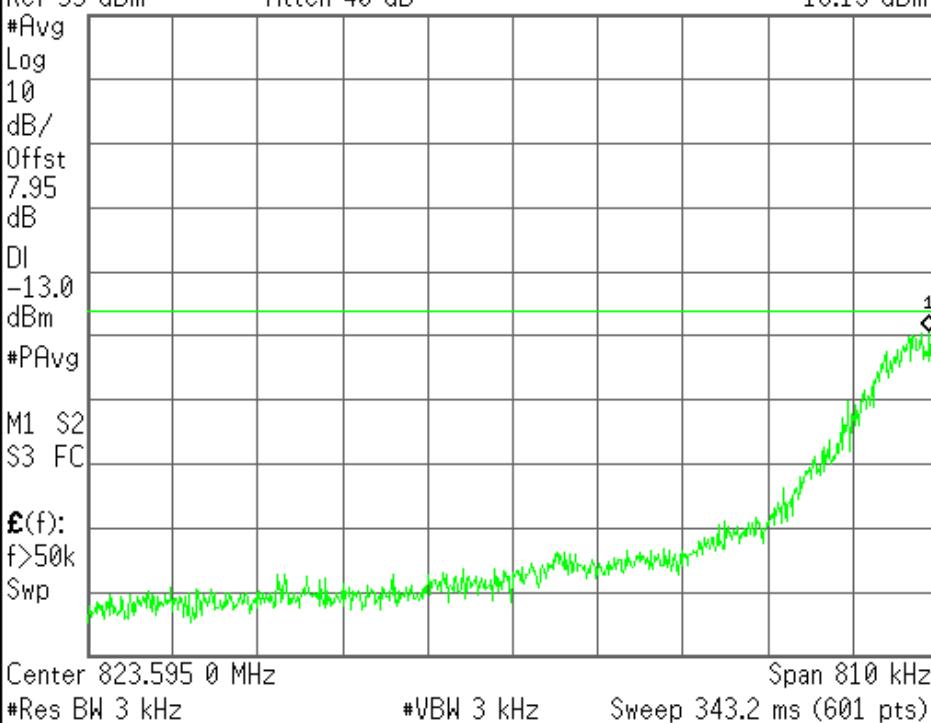

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz


Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGTN7105 Band Edge Ch.251
Ref 33 dBm Atten 40 dB

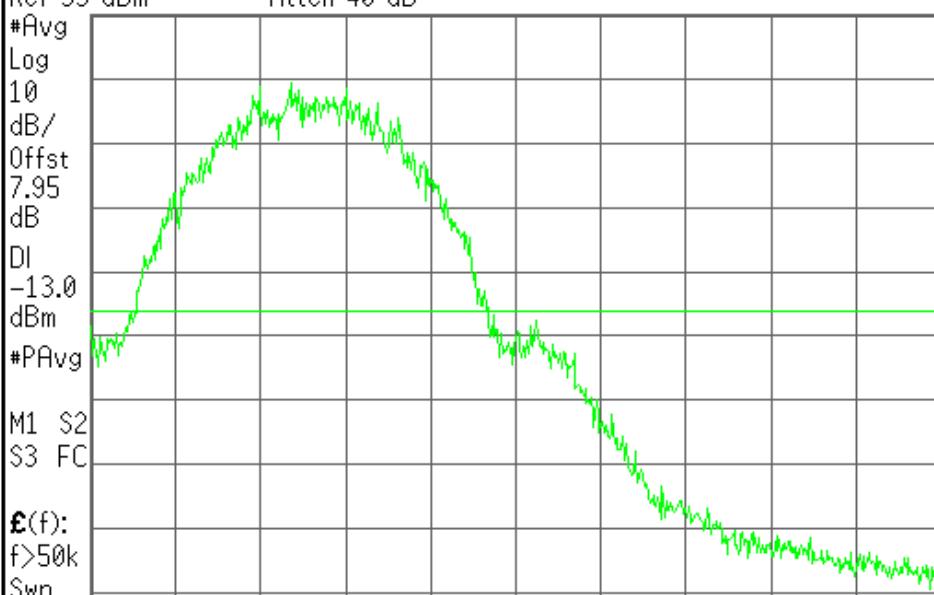

Center 849.000 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Neg.Trig Delay unavailable in Swept Mode, zero delay used.

 Agilent

R T

Freq/Channel

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz


CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGTN7105 Band Edge Ch.251
Ref 33 dBm Atten 40 dB

Mkr1 849.006 7 MHz
-15.01 dBm

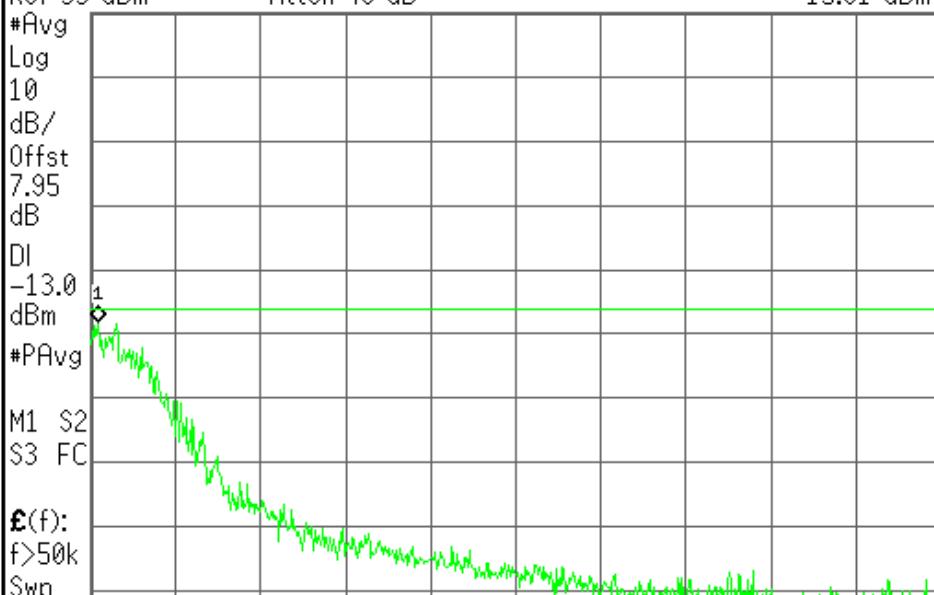

Center 849.405 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)


File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

Freq/Channel

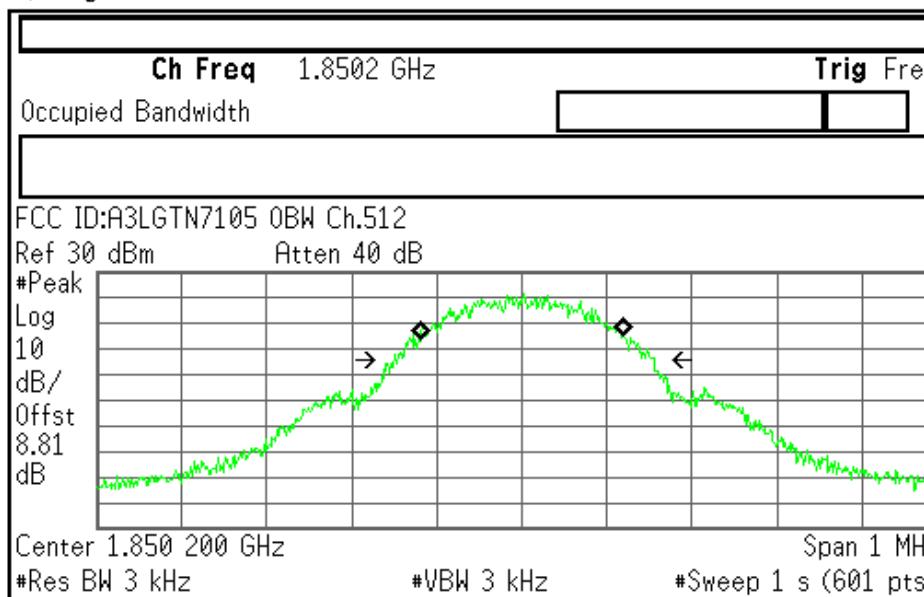
Center Freq
1.85020000 GHzStart Freq
1.84970000 GHzStop Freq
1.85070000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Occupied Bandwidth 243.2209 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -124.033 Hz
x dB Bandwidth 310.178 kHz

File Operation Status, C:\TEMP.GIF file saved

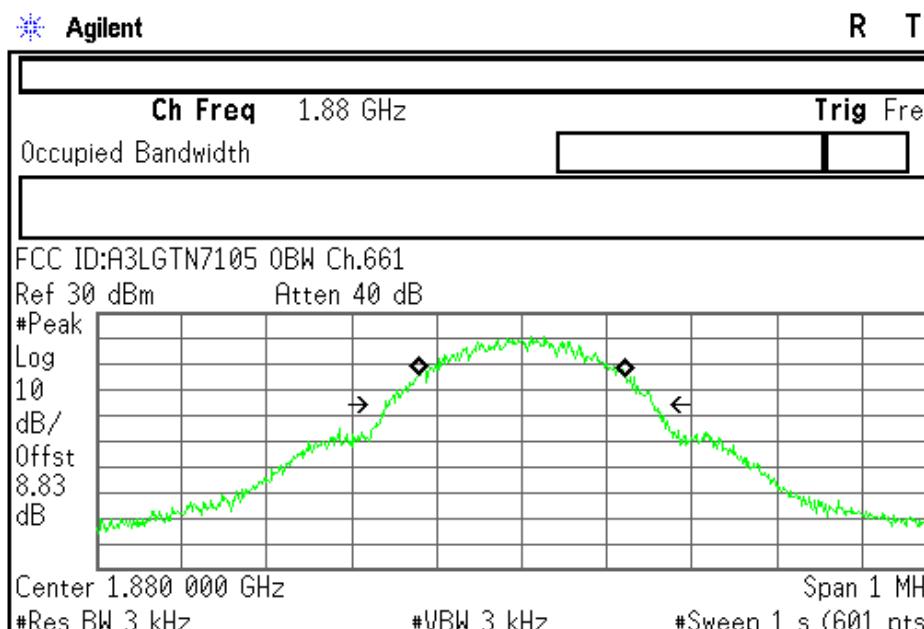Center Freq
1.88000000 GHzStart Freq
1.87950000 GHzStop Freq
1.88050000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Occupied Bandwidth 247.0357 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -51.178 Hz
x dB Bandwidth 317.398 kHz

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

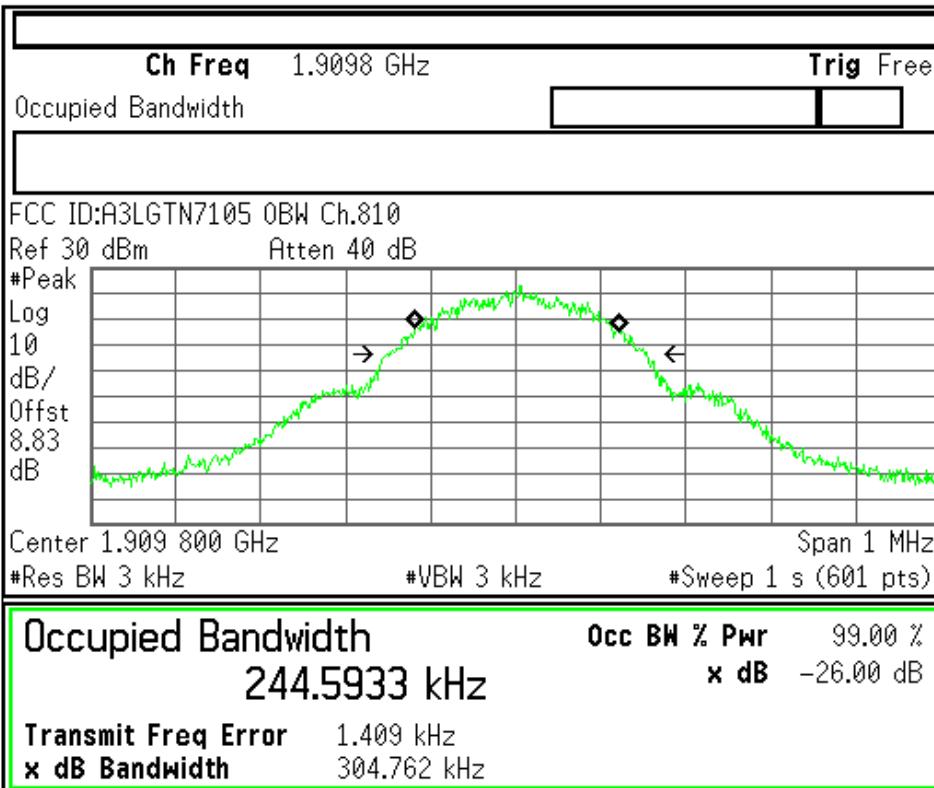Center Freq
1.90980000 GHzStart Freq
1.90930000 GHzStop Freq
1.91030000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

FCC ID : A3LGTN7105 Transmit Power 512CH

| Measurement/Instrument Screen | | | | | | | | TCHParms | | | | |
|-------------------------------|-----------|----------------|-----------------------|-------------|--------------|---------------|-------|------------------------|--|--------|--|--|
| Control | | Transmit Power | | | | | | Downlink Traffic Power | | | | |
| Transmit Power Setup | | | | | | | | Traffic Band | | | | |
| BP | Avg | 29.54 | ----- | ----- | ----- | ----- | ----- | PCS | | | | |
| | SDev | 0.01 | ----- | ----- | ----- | ----- | ----- | Traffic Channel | | | | |
| | Avg | 29.54 | ----- | ----- | ----- | ----- | ----- | 512 | | | | |
| | SDev | 0.01 | ----- | ----- | ----- | ----- | ----- | MS TX Level | | | | |
| 100 / 100 | | | | | | | | 0 | | | | |
| Phase & Frequency Error | | | | | | | | | | | | |
| ECP | | | Peak Phase ° | RMS Phase ° | Frequency Hz | | | | | | | |
| | Minimum | 4.52 | 1.06 | -25.15 | | | | | | | | |
| | Maximum | 7.19 | 1.38 | -10.91 | | | | | | | | |
| | Average | 5.57 | 1.22 | -18.89 | | | | | | | | |
| | Pass/Fail | Pass | Pass | Pass | | | | | | | | |
| 100 / 100 | | | | | | | | Return | | | | |
| Swap Handoff Positions | | | Active Cell Connected | | | Sys Type: GSM | | | | 1 of 2 | | |
| | | | IntRef | Offset | R T | | | | | | | |
| 1 of 2 | | | | | | | | | | 1 of 2 | | |


FCC ID : A3LGTN7105 Transmit Power 661CH

| Measurement/Instrument Screen | | | | | | | | | | | |
|-------------------------------|-----|-----------------------|-------------|--------------|---------------|------|------|------------------------|-----|--|--|
| Control | | Transmit Power | | | | | | TCHParms | | | |
| Transmit Power Setup | | | | | | | | Downlink Traffic Power | | | |
| Burst 1 | BP | Avg | 29.37 | ---- | ---- | ---- | ---- | Traffic Band | PCS | | |
| | | SDev | 0.00 | ---- | ---- | ---- | ---- | Traffic Channel | 661 | | |
| | ECP | Avg | 29.37 | ---- | ---- | ---- | ---- | MS TX Level | 0 | | |
| | | SDev | 0.00 | ---- | ---- | ---- | ---- | Channel Node Setup | | | |
| 100 / 100 Single | | | | | | | | Return | | | |
| Phase & Frequency Error | | | | | | | | | | | |
| | | Peak Phase ° | RMS Phase ° | Frequency Hz | | | | | | | |
| Minimum | | | 2.41 | 0.87 | -24.62 | | | | | | |
| Maximum | | | 5.08 | 1.22 | -4.37 | | | | | | |
| Average | | | 3.37 | 1.04 | -13.82 | | | | | | |
| Pass/Fail | | | Pass | Pass | Pass | | | | | | |
| 100 / 100 Single | | | | | | | | | | | |
| Burst 2 | BP | Active Cell Connected | | | Sys Type: GSM | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | 1 of 2 | | | | | | | | | |
| | | IntRef | | Offset | R | T | | | | | |
| | | | | | | | | | | | |
| | | 1 of 2 | | | | | | | | | |


FCC ID : A3LGTN7105 Transmit Power 810CH

| Measurement/Instrument Screen | | | | | | | | | | | |
|-------------------------------|-----|-------------------------|-------|--------------|---------------|--------------|------|------------------------|-----|--|--|
| Control | | Transmit Power | | | | | | TCHParms | | | |
| Transmit Power Setup | | | | | | | | Downlink Traffic Power | | | |
| Burst 1 | BP | Avg | 29.53 | ---- | ---- | ---- | ---- | Traffic Band | PCS | | |
| | | SDev | 0.00 | ---- | ---- | ---- | ---- | Traffic Channel | 810 | | |
| | ECP | Avg | 29.53 | ---- | ---- | ---- | ---- | MS TX Level | 0 | | |
| | | SDev | 0.00 | ---- | ---- | ---- | ---- | Channel Node Setup | | | |
| | | 100 / 100 Single | | | | | | | | | |
| | | Phase & Frequency Error | | | | | | | | | |
| | | | | Peak Phase ° | RMS Phase ° | Frequency Hz | | | | | |
| | | Minimum | | 5.15 | 1.15 | -11.55 | | | | | |
| | | Maximum | | 9.45 | 1.46 | 4.75 | | | | | |
| | | Average | | 7.03 | 1.28 | -3.65 | | | | | |
| | | Pass/Fail | | Pass | Pass | Pass | | | | | |
| | | 100 / 100 Single | | | | | | | | | |
| Burst 2 | BP | Active Cell Connected | | | Sys Type: GSM | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | 1 of 2 | | | | | | | | | |
| | | IntRef | | Offset | R | T | | | | | |
| | | | | | | | | | | | |
| | | 1 of 2 | | | | | | | | | |


FCC ID : A3LGTN7105 GMSK Power vs Time 512CH

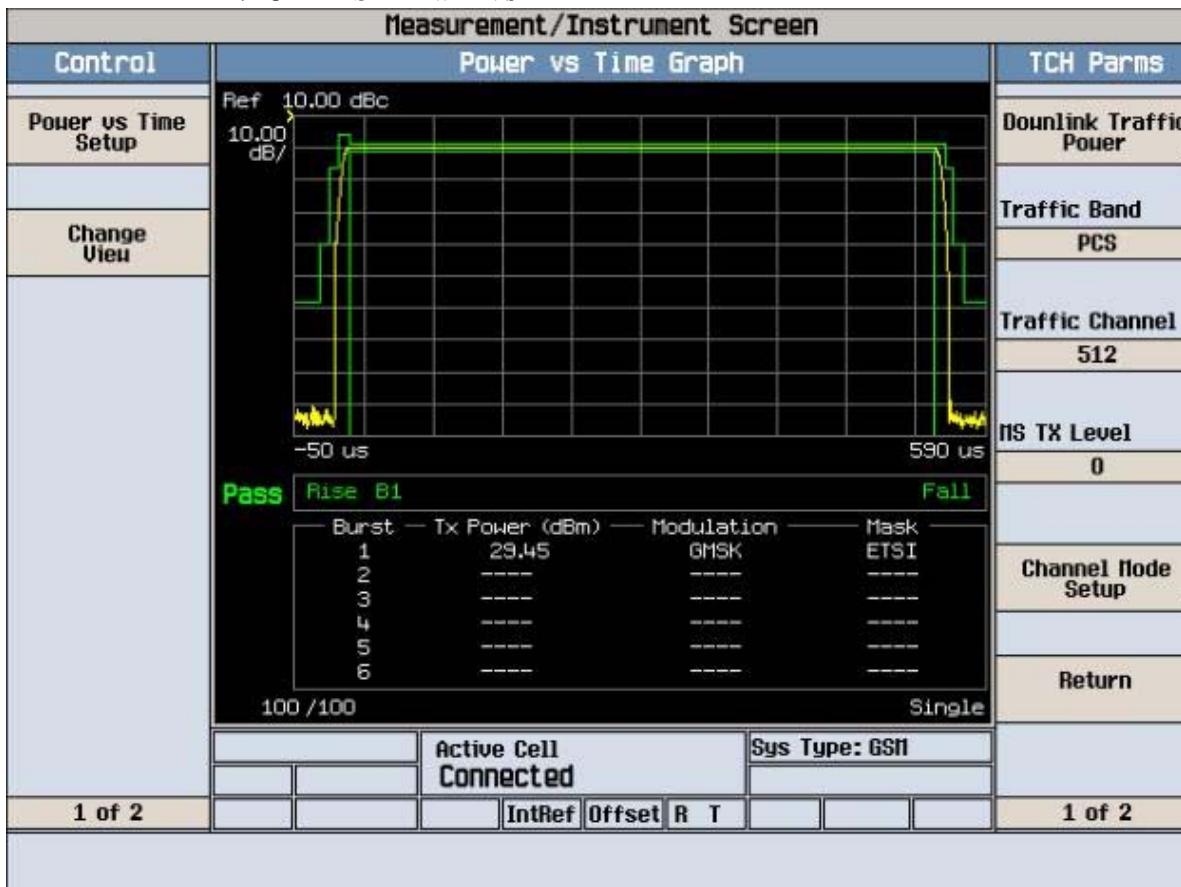


FCC ID : A3LGTN7105 GMSK Power vs Time 661CH

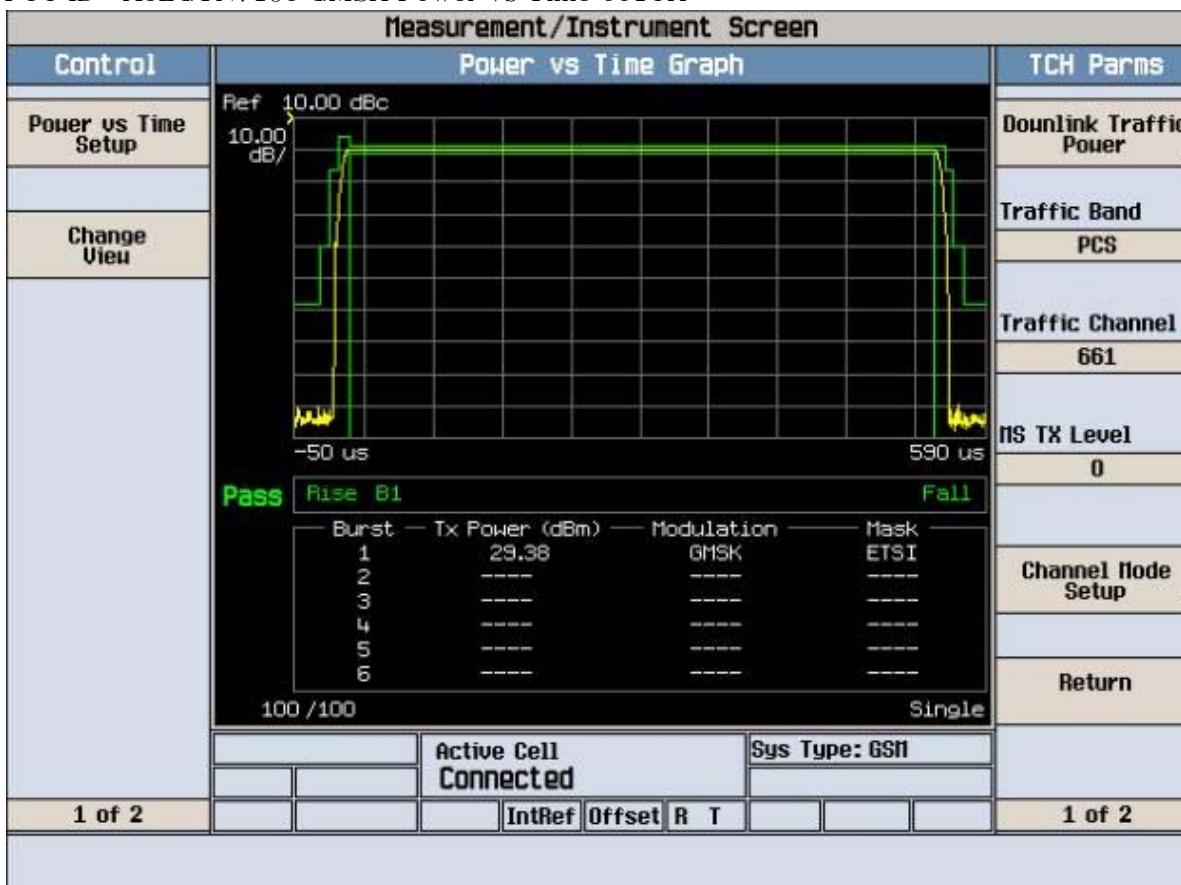


FCC ID : A3LGTN7105 GMSK Power vs Time 810CH

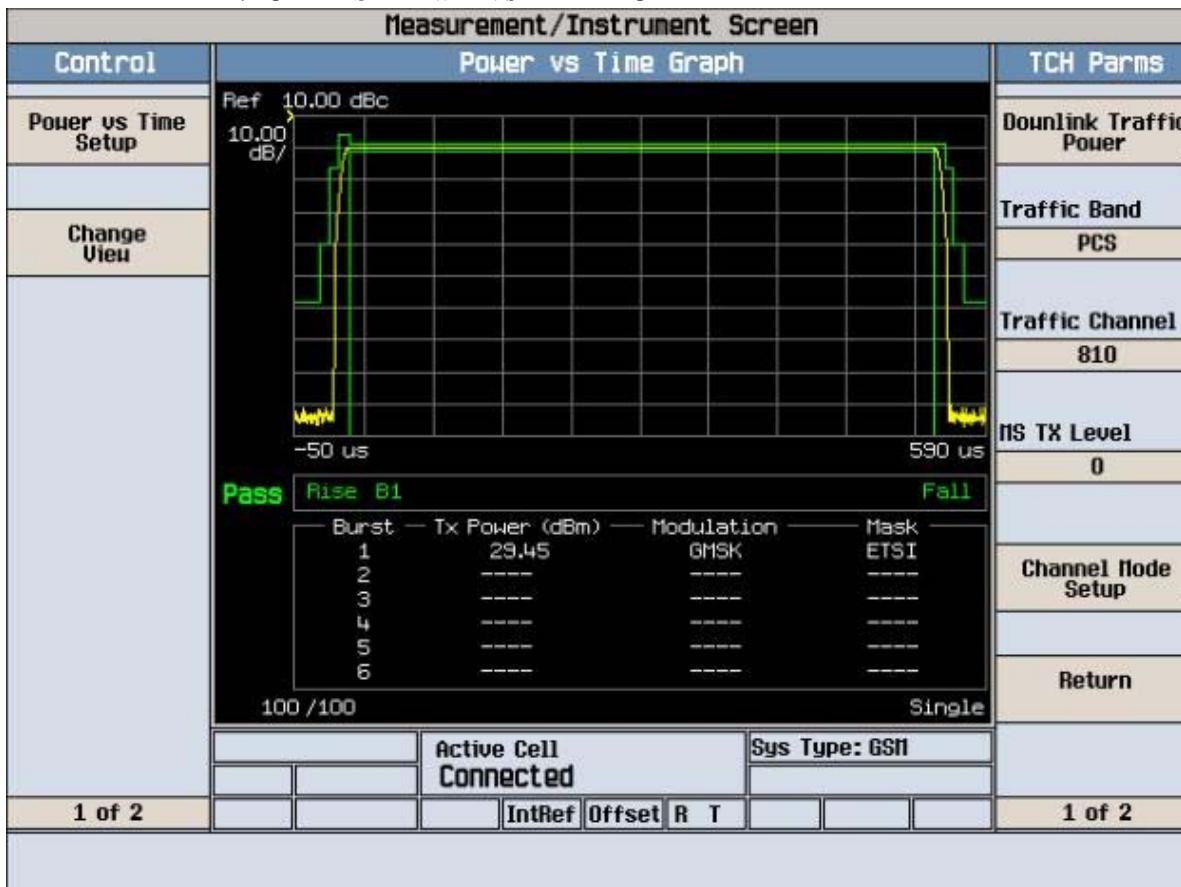


FCC ID : A3LGTN7105 Modulation & Switching 512CH

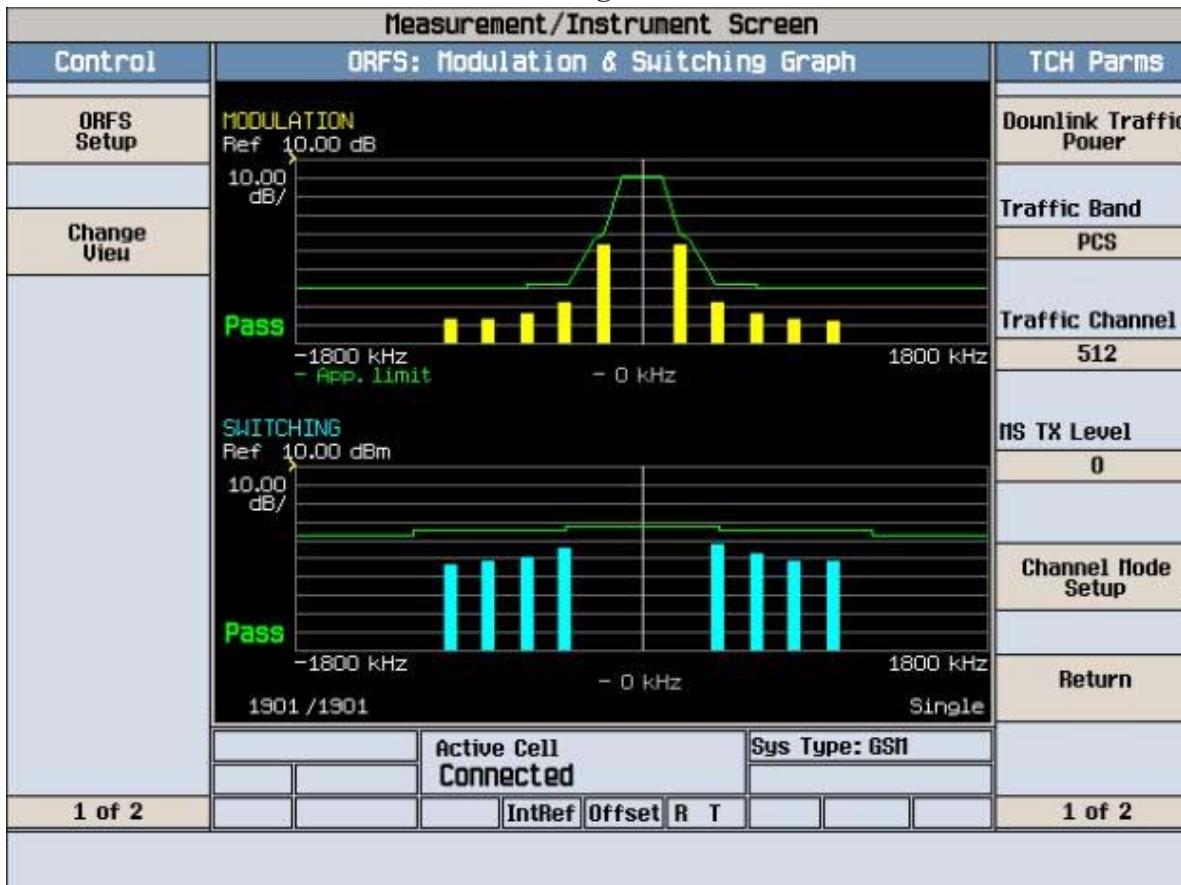

FCC ID : A3LGTN7105 Modulation & Switching 661CH

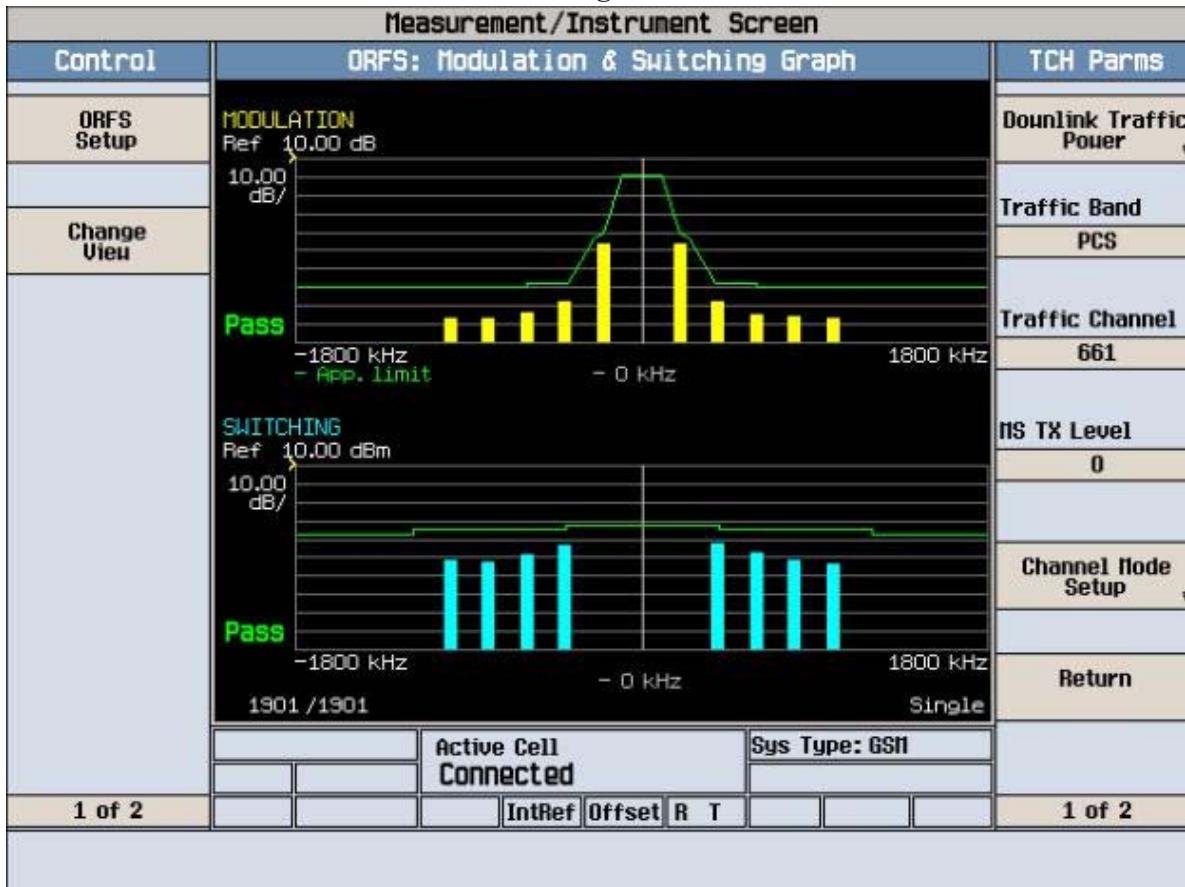

FCC ID : A3LGTN7105 Modulation & Switching 810CH

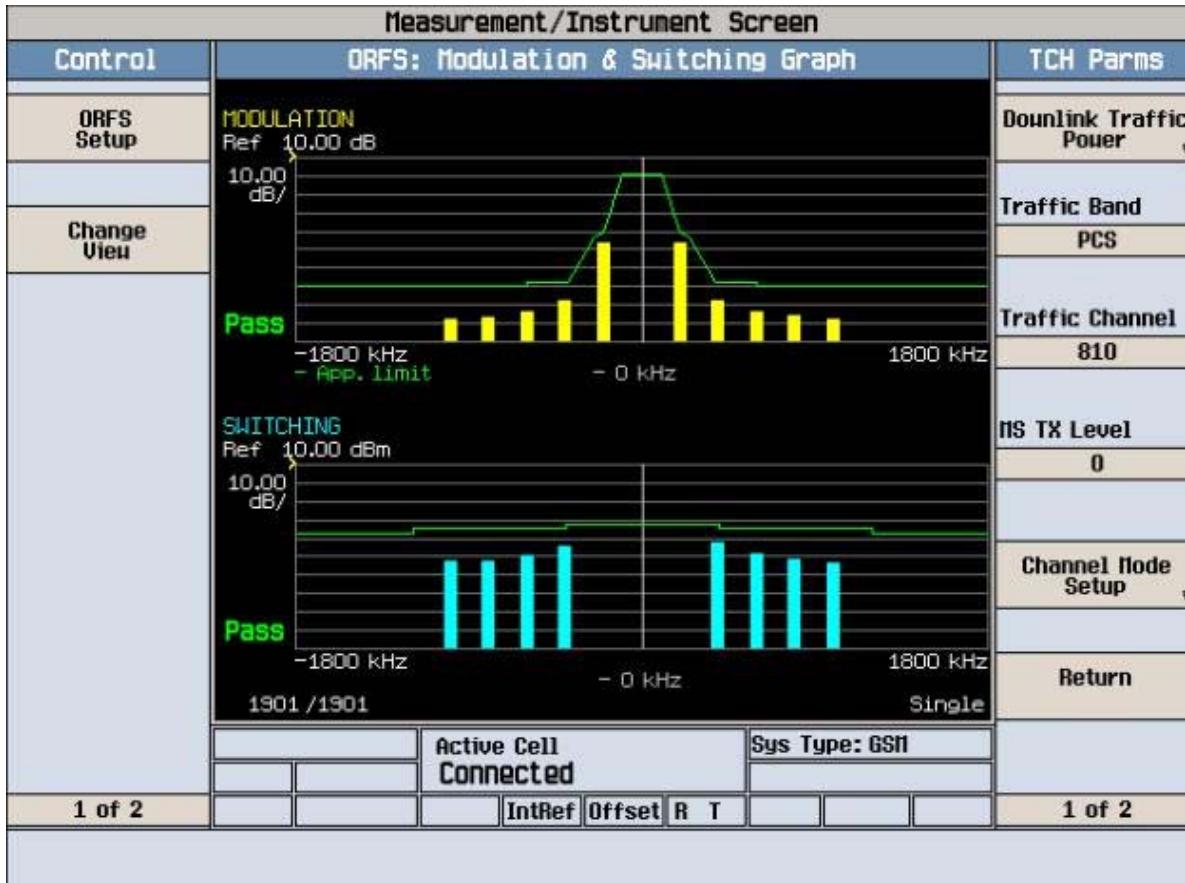


 Agilent

R T

Freq/Channel

FCC ID:A3LGTN7105 Cond Spur Ch.512
Ref 30 dBm Atten 40 dB

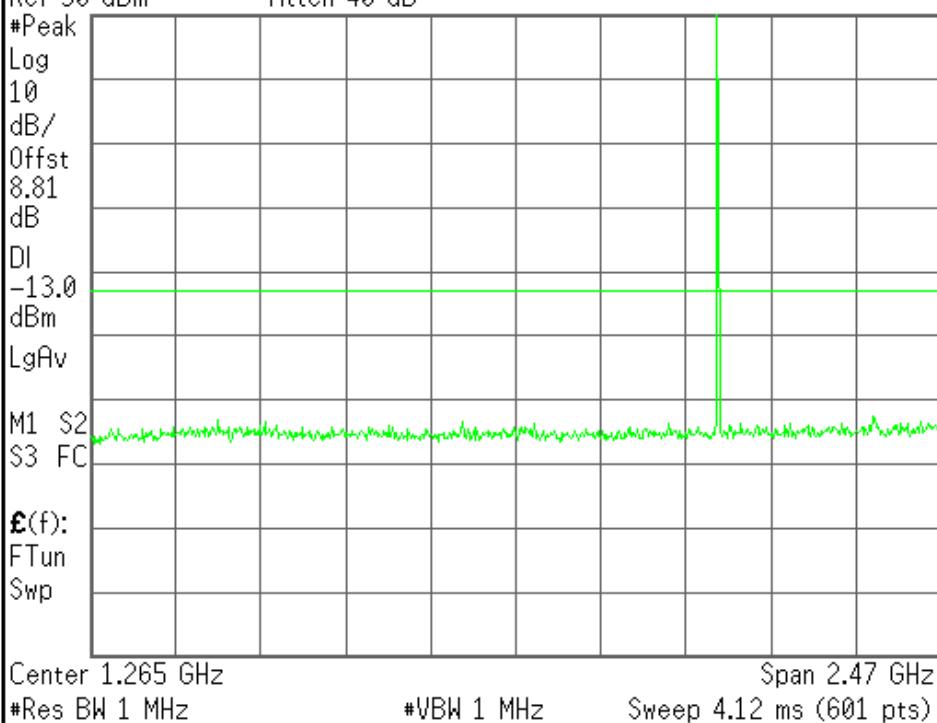

Center Freq
1.26500000 GHz

Start Freq
30.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
247.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000–2006 Agilent Technologies


 Agilent

R T

Freq/Channel

FCC ID:A3LGTN7105 Cond Spur Ch.512
Ref 30 dBm Atten 40 dB

Mkr1 501 MHz
-32.25 dBm

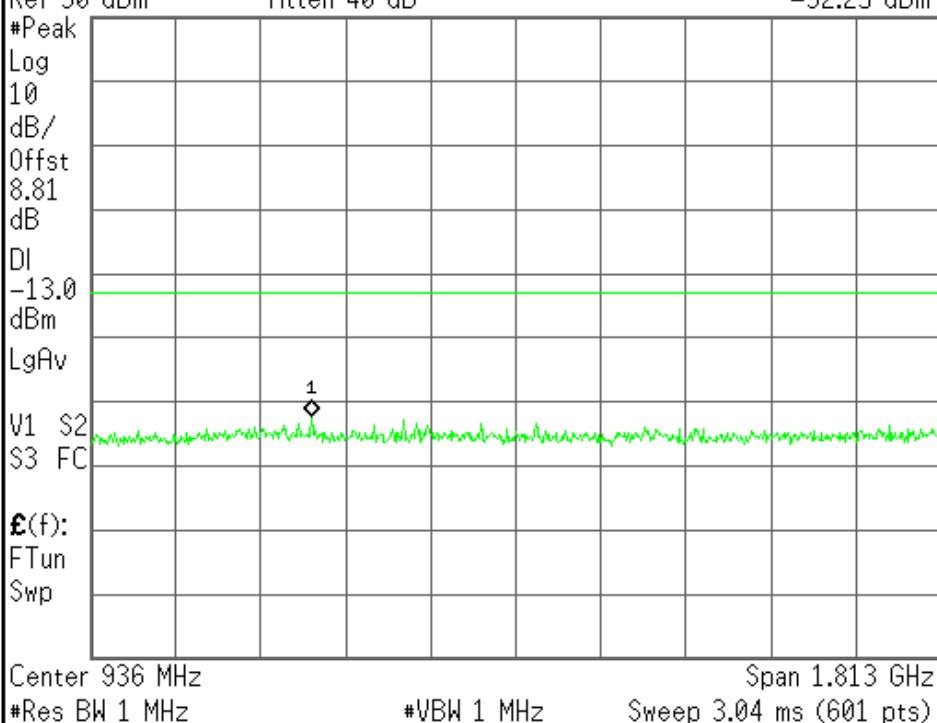

Center Freq
936.350000 MHz

Start Freq
30.0000000 MHz

Stop Freq
1.84270000 GHz


CF Step
181.270000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

 Agilent

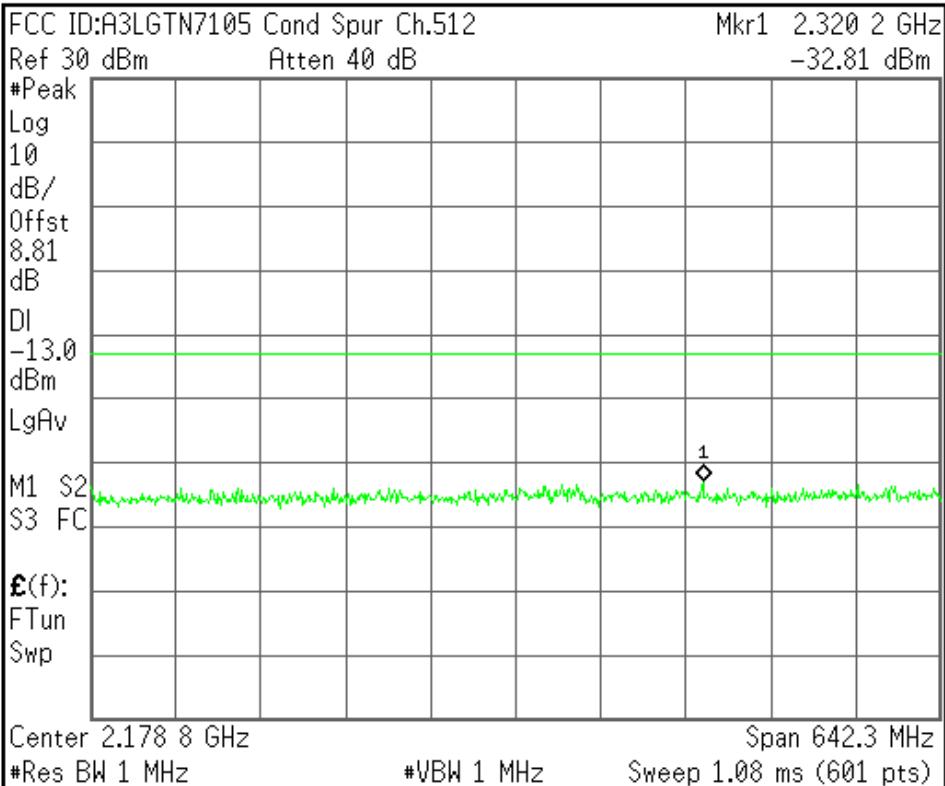

R T

Freq/Channel

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz


CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

 Agilent

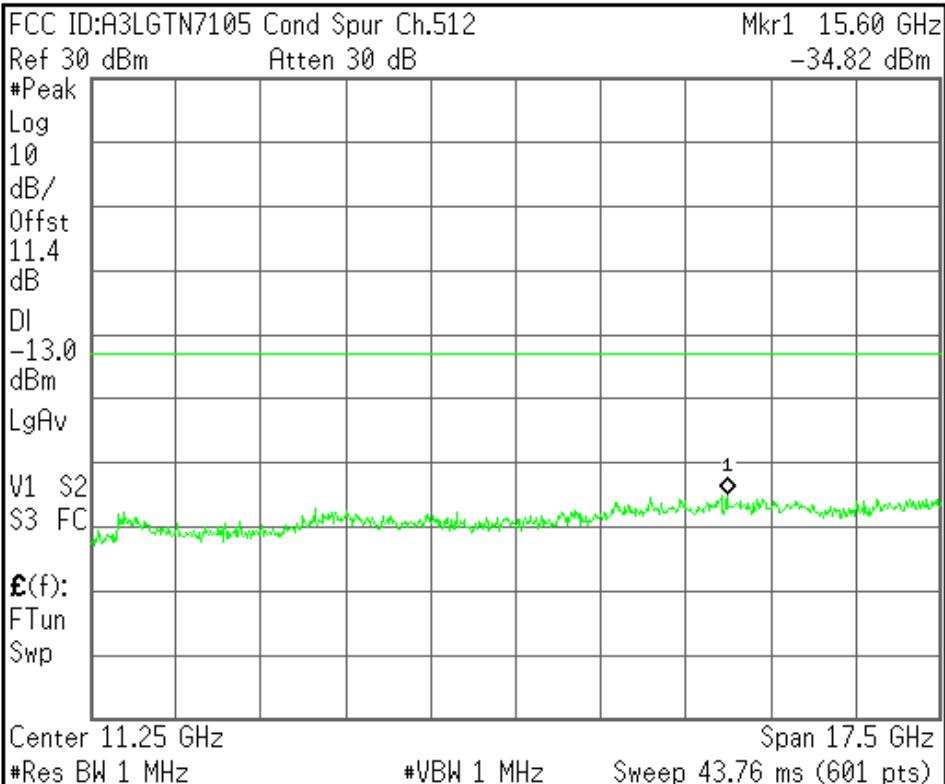

R T

Freq/Channel

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz



Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

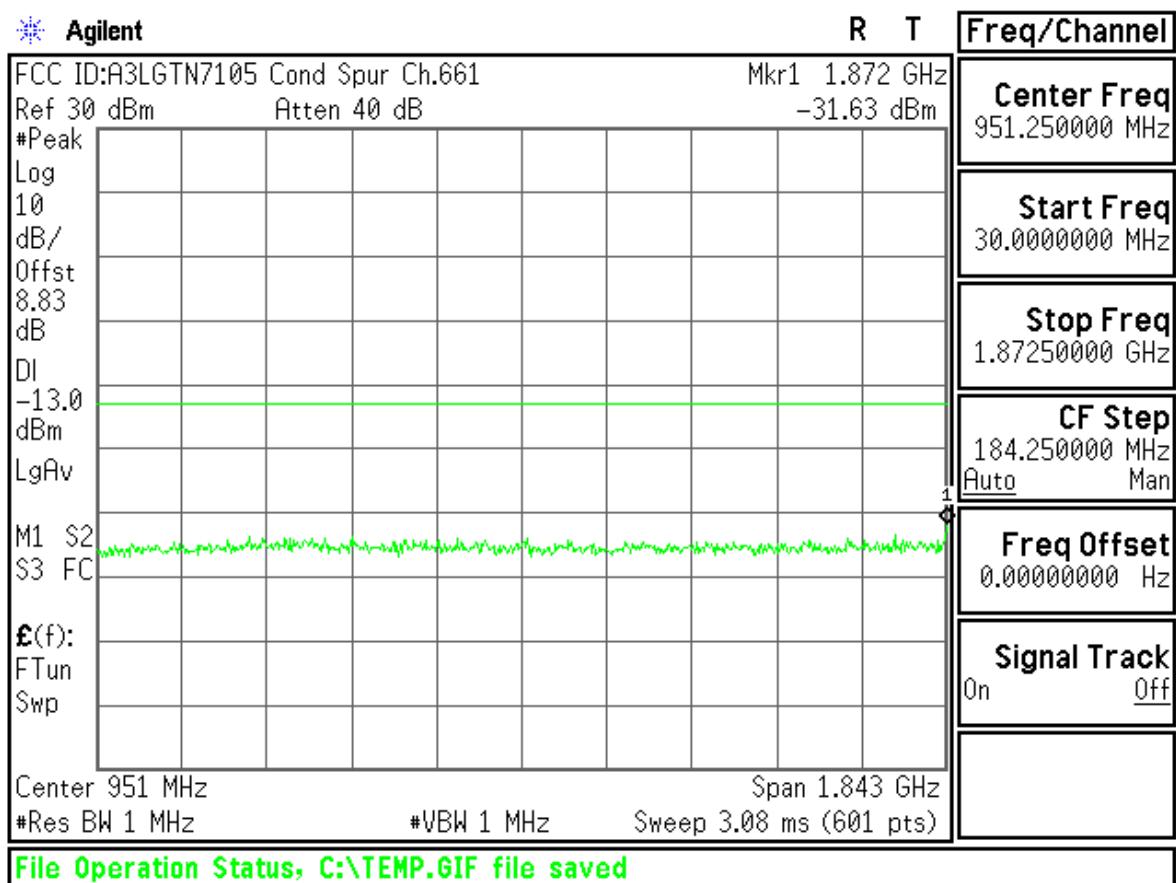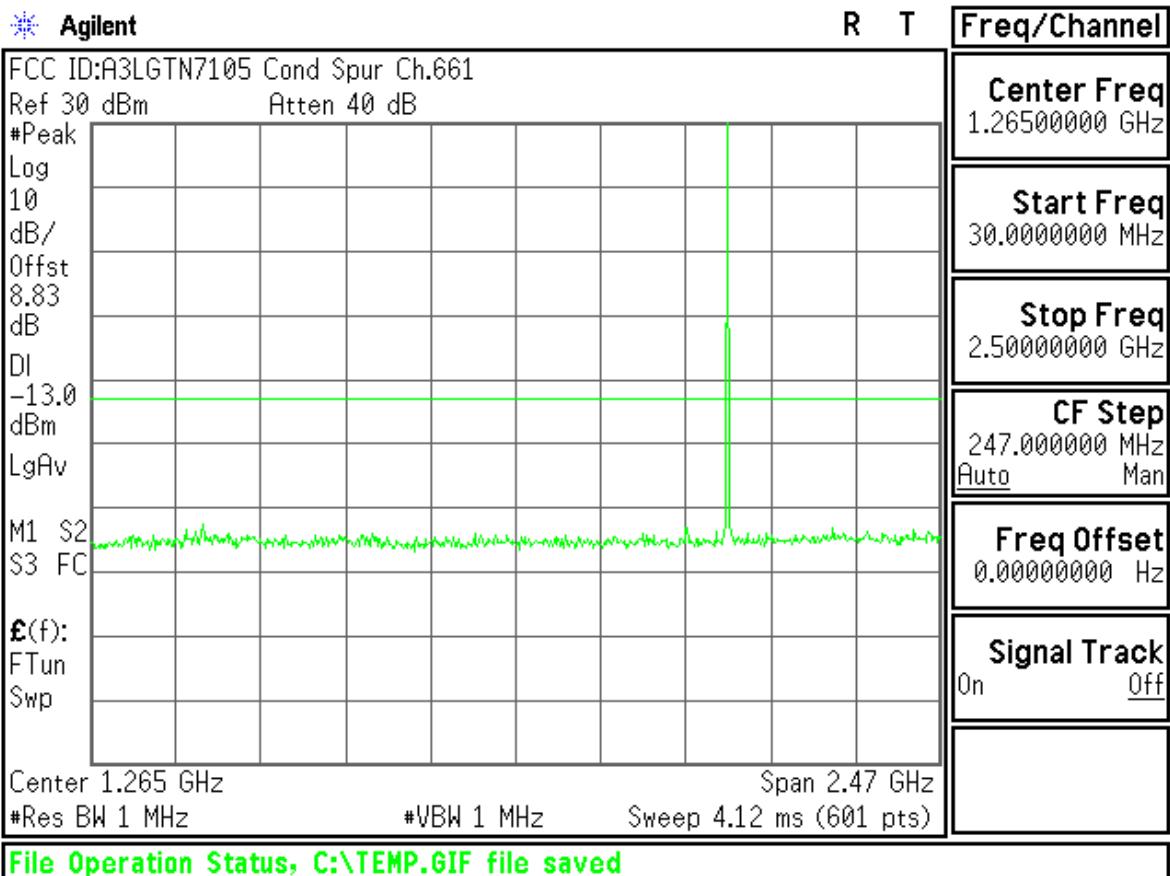

 Agilent

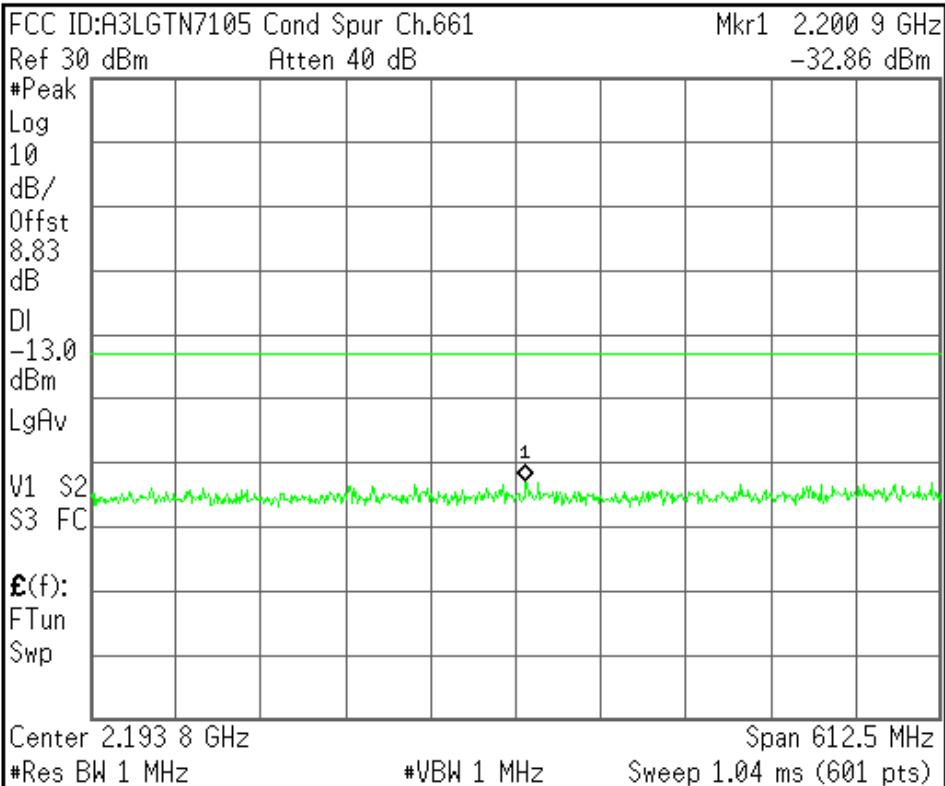

R T

Freq/Channel

Center Freq

2.19375000 GHz

Start Freq

1.88750000 GHz

Stop Freq

2.50000000 GHz

CF Step

61.2500000 MHz

Auto Man

Freq Offset


0.00000000 Hz

Signal Track

On Off

File Operation Status, C:\TEMP.GIF file saved

 Agilent

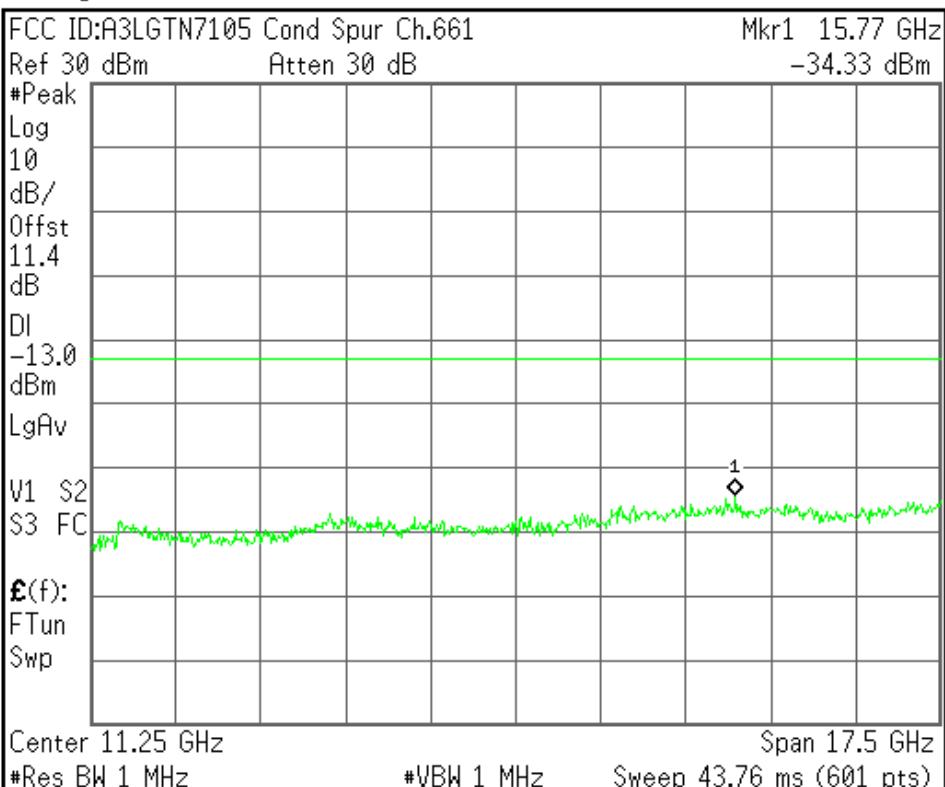

R T

Freq/Channel

Center Freq

11.2500000 GHz

Start Freq

2.50000000 GHz

Stop Freq

20.0000000 GHz

CF Step

1.75000000 GHz

Auto Man



Freq Offset

0.00000000 Hz


Signal Track

On Off

File Operation Status, C:\TEMP.GIF file saved

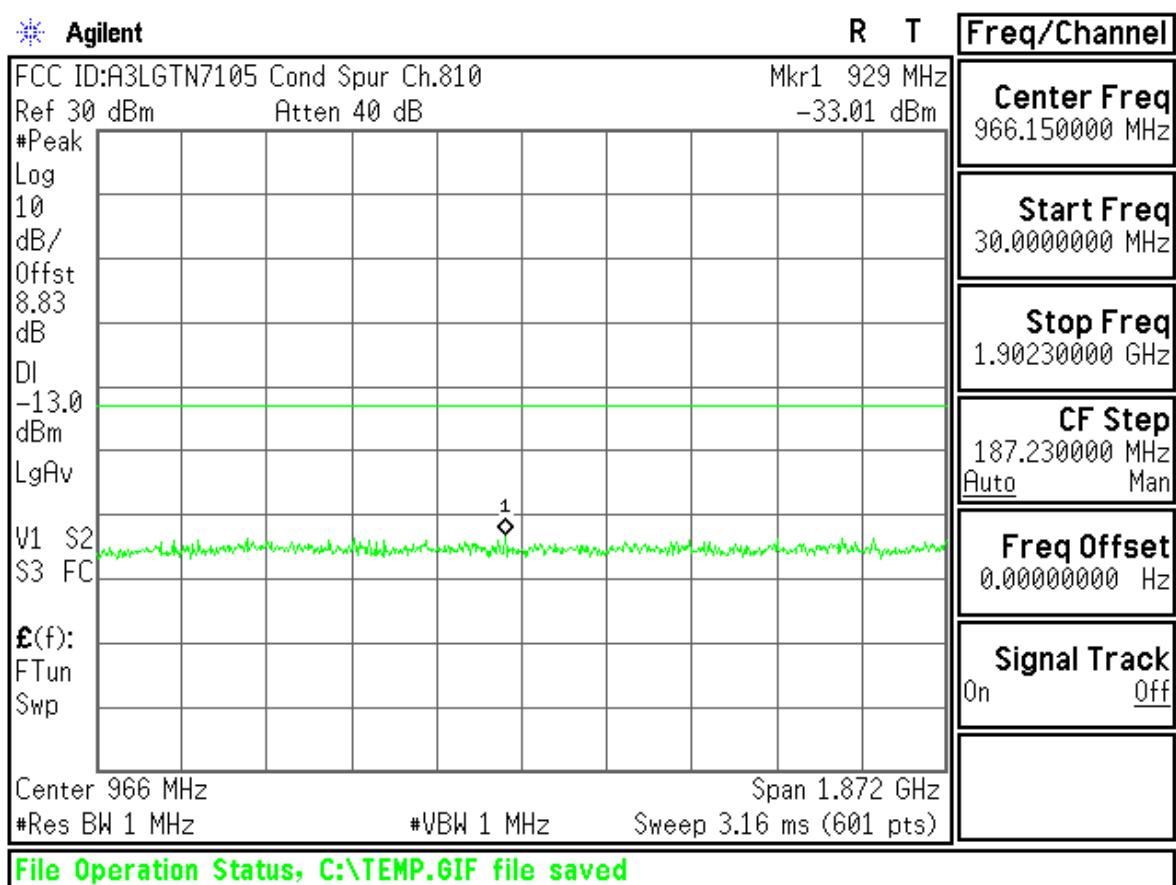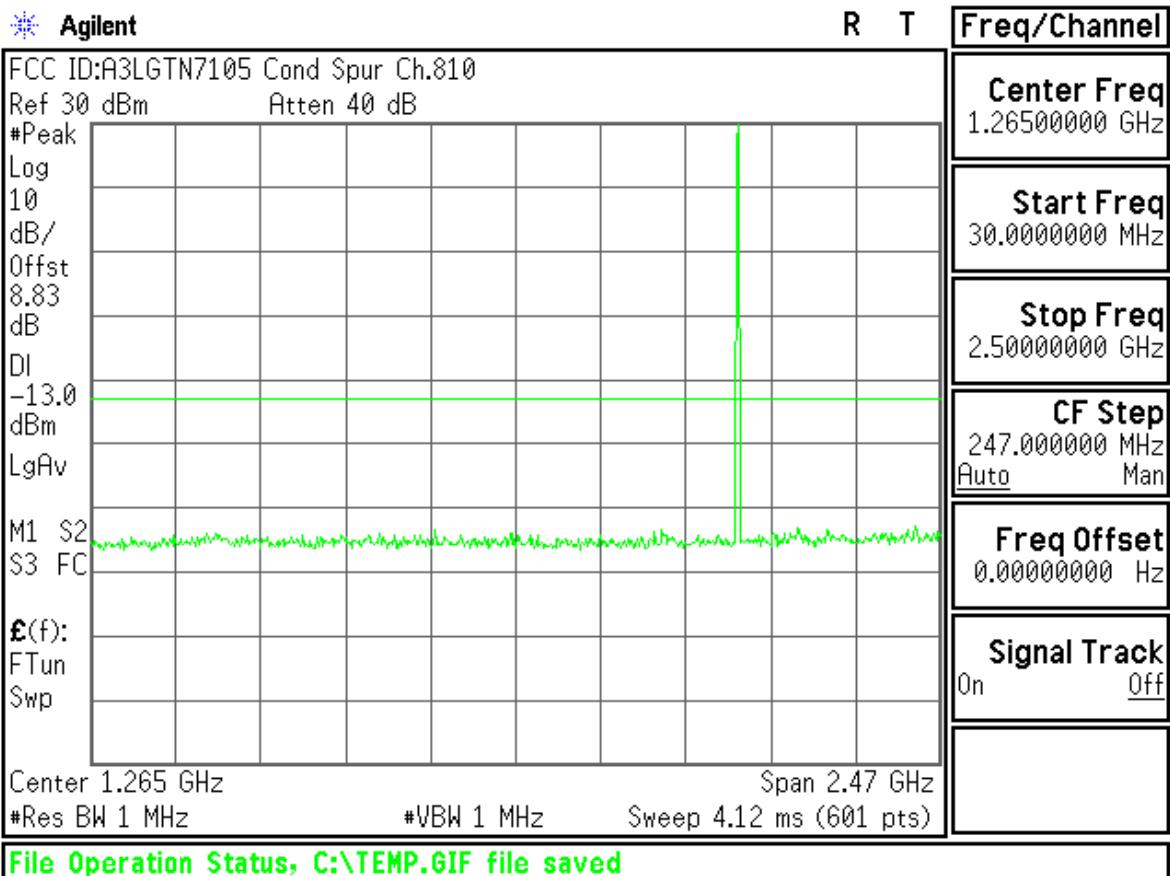

 Agilent

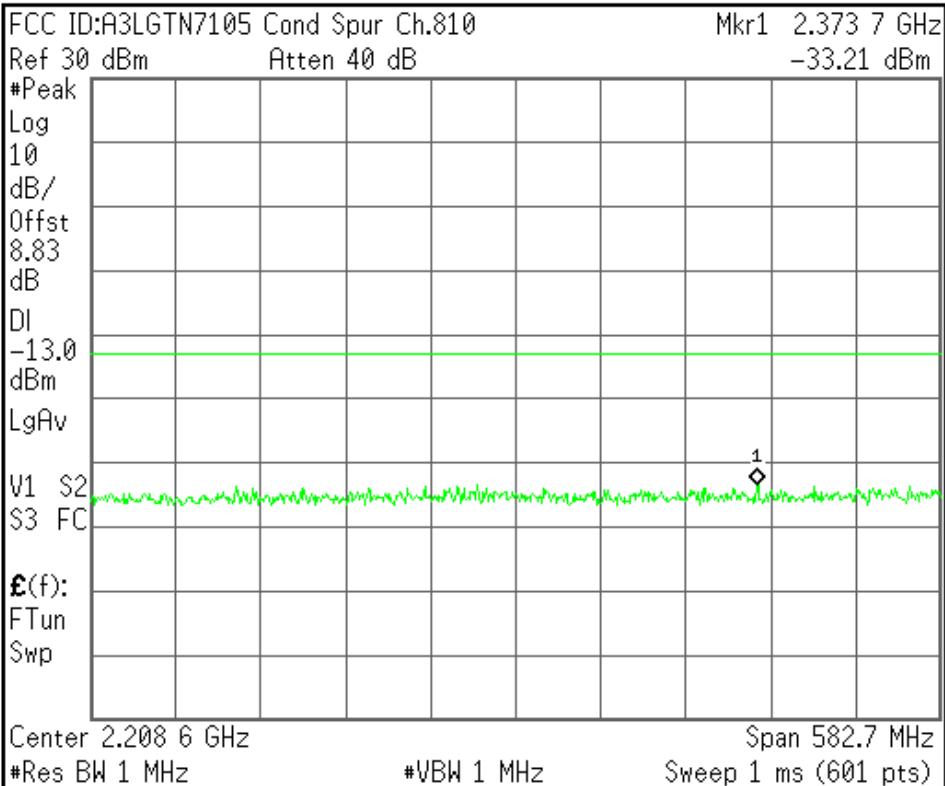

R T

Freq/Channel

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz


CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

 Agilent

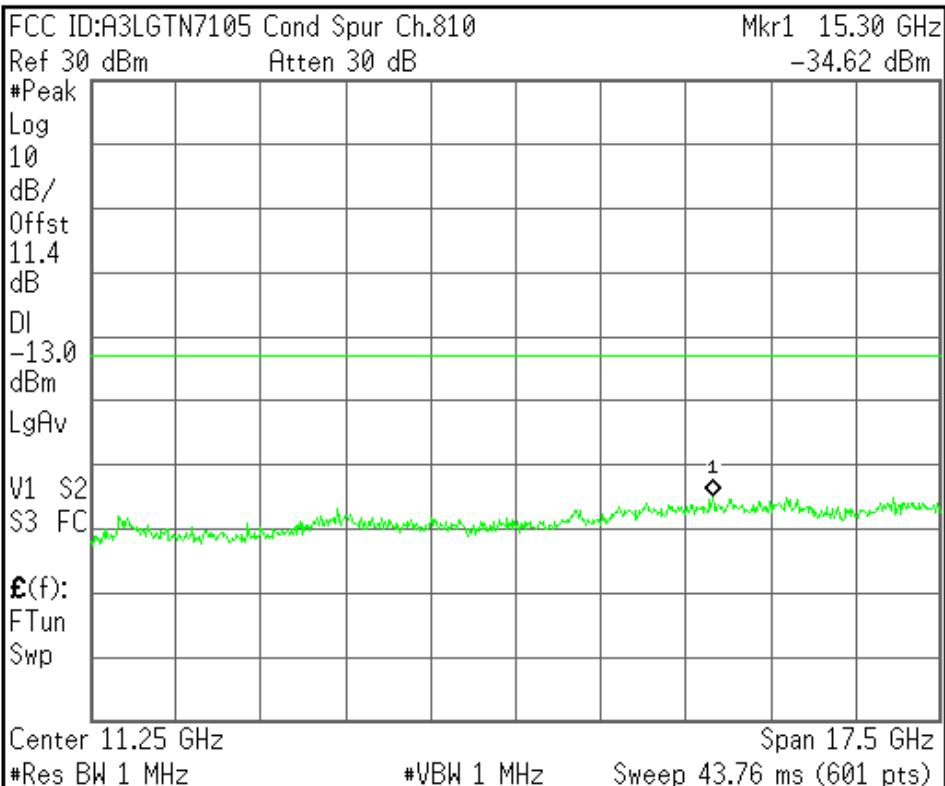

R T

Freq/Channel

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

FCC ID:A3LGTN7105 Band Edge Ch.512
Ref 30 dBm Atten 40 dB

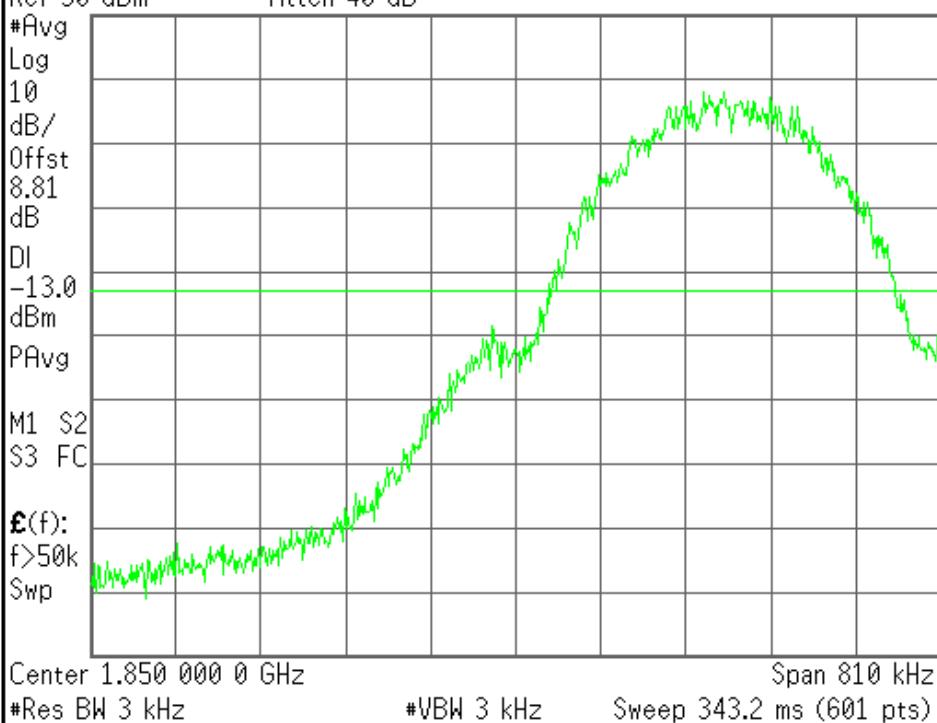

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

FCC ID:A3LGTN7105 Band Edge Ch.512 Mkr1 1.849 986 6 GHz
Ref 30 dBm Atten 40 dB -19.23 dBm

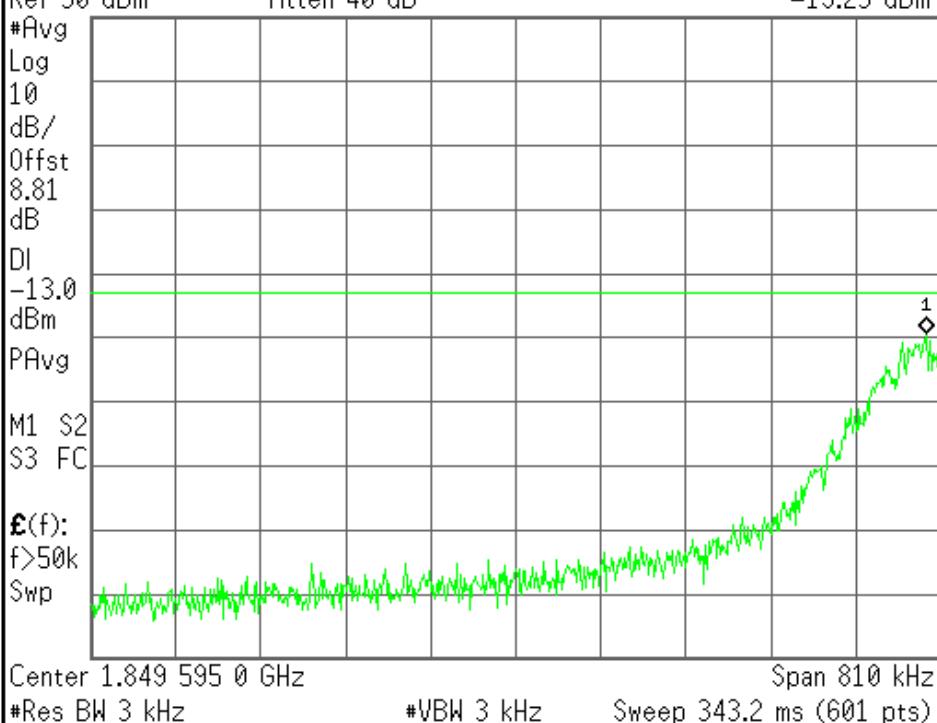

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz



Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

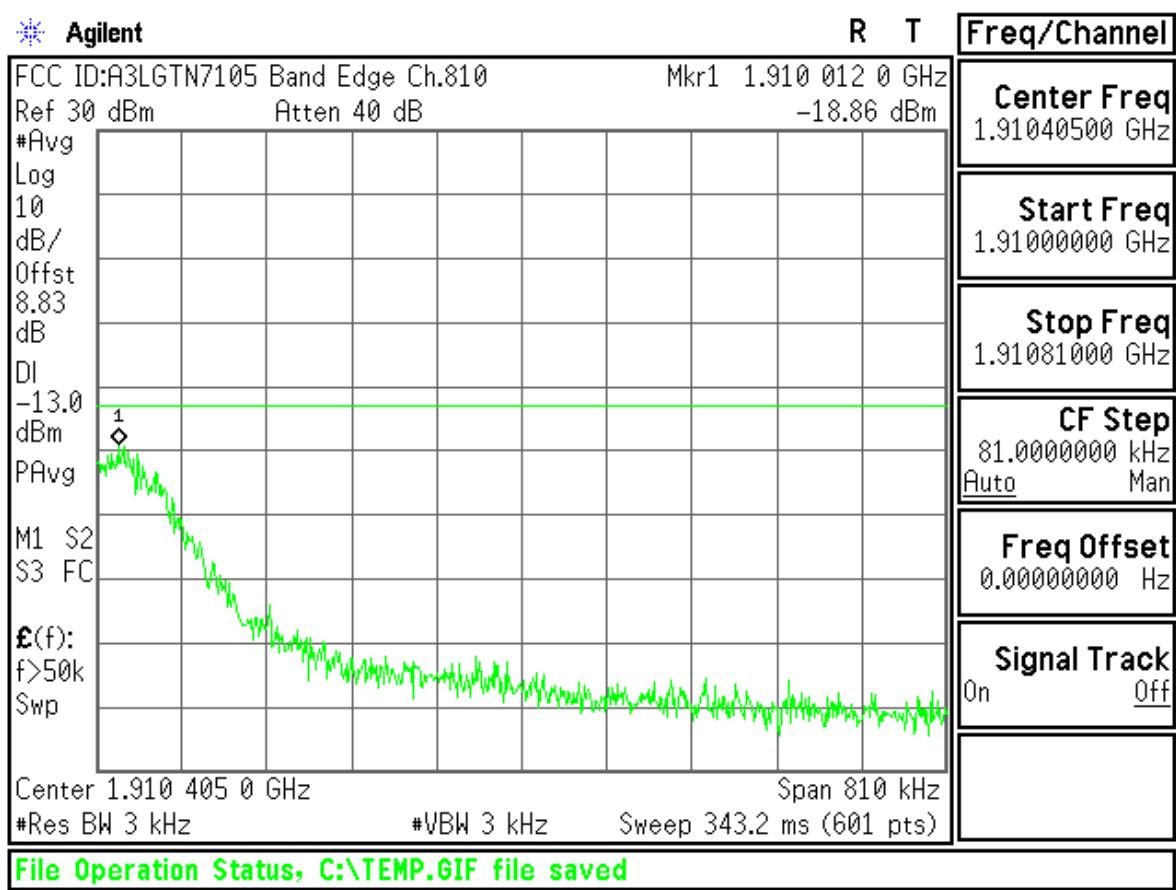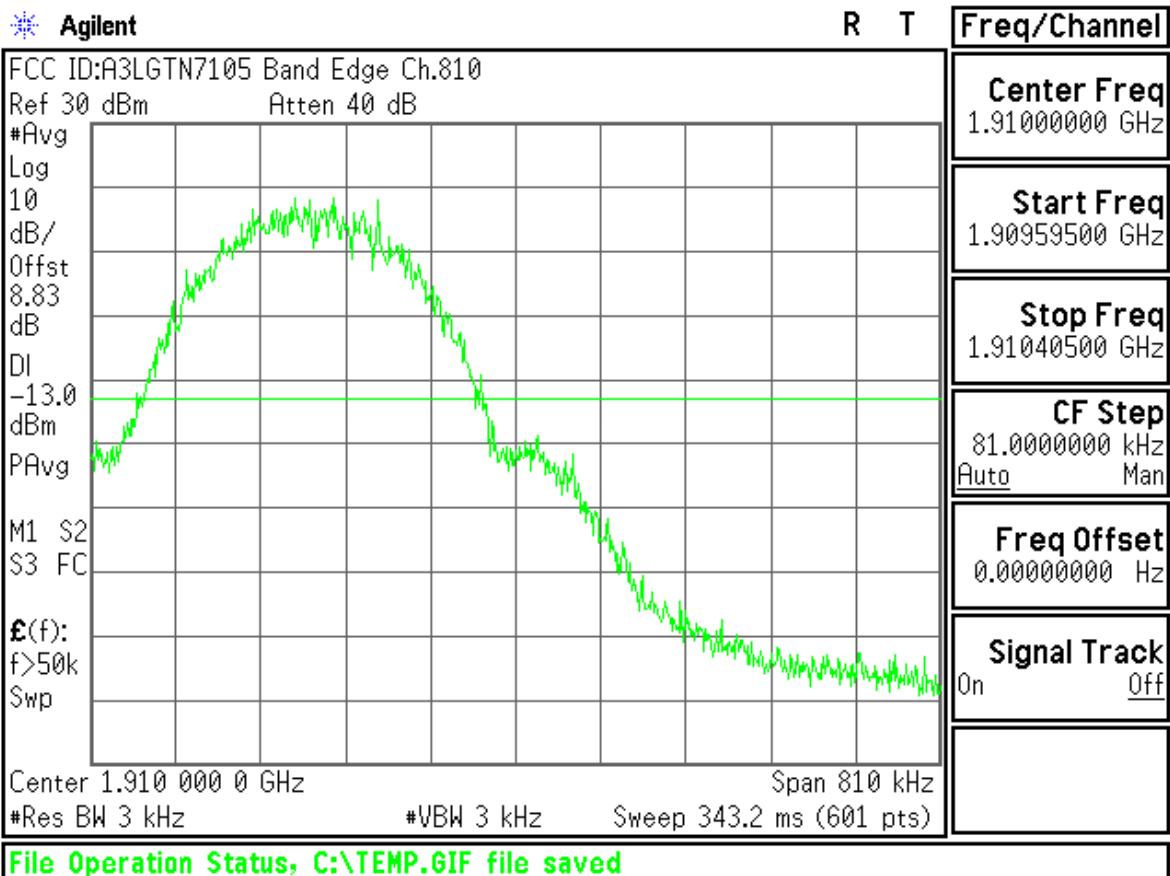

 Agilent

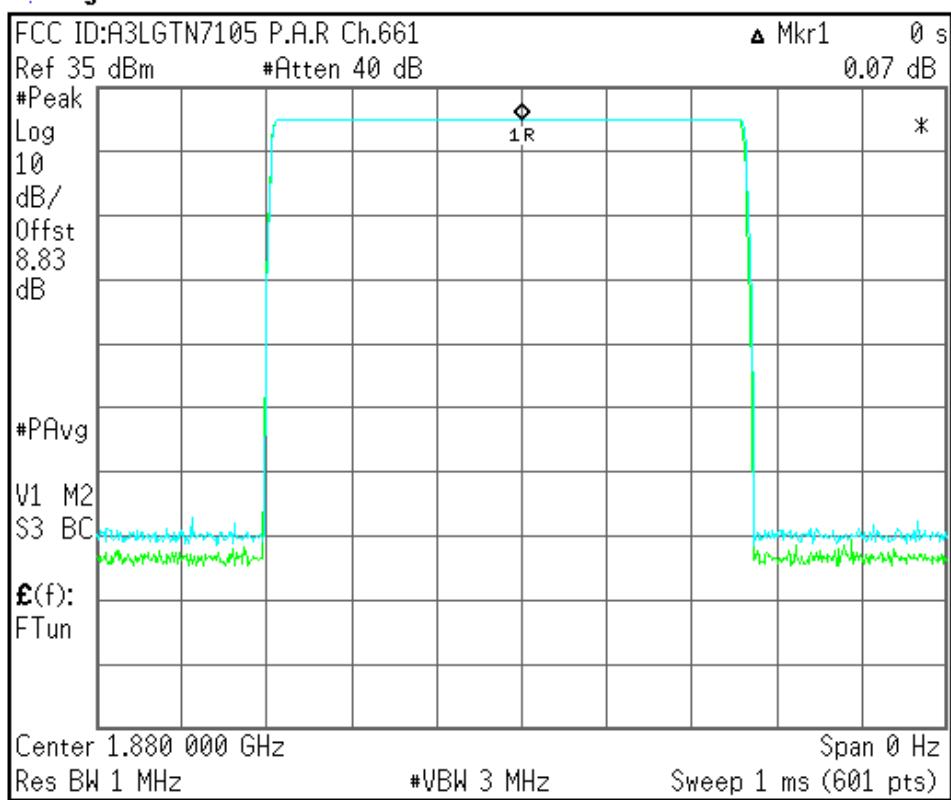

| R | T | Freq/Channel |
|--------|---------|----------------|
| △ Mkr1 | 0 s | Center Freq |
| | 0.07 dB | 1.88000000 GHz |
| | | Start Freq |
| | | 1.88000000 GHz |
| | | Stop Freq |
| | | 1.88000000 GHz |
| | | CF Step |
| | | 1.00000000 MHz |
| | | Auto Man |
| | | Freq Offset |
| | | 0.00000000 Hz |
| | | Signal Track |
| On | Off | |


File Operation Status, C:\TEMP.GIF file saved

EDGE850



R T

Freq/Channel

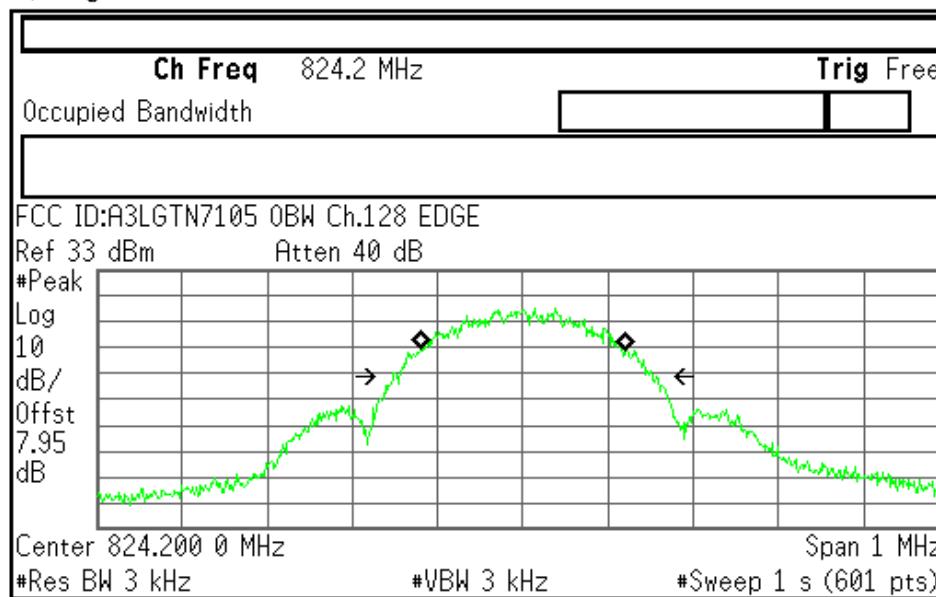
Center Freq
824.200000 MHzStart Freq
823.700000 MHzStop Freq
824.700000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Neg.Trig Delay unavailable in Swept Mode, zero delay used.



R T

Freq/Channel

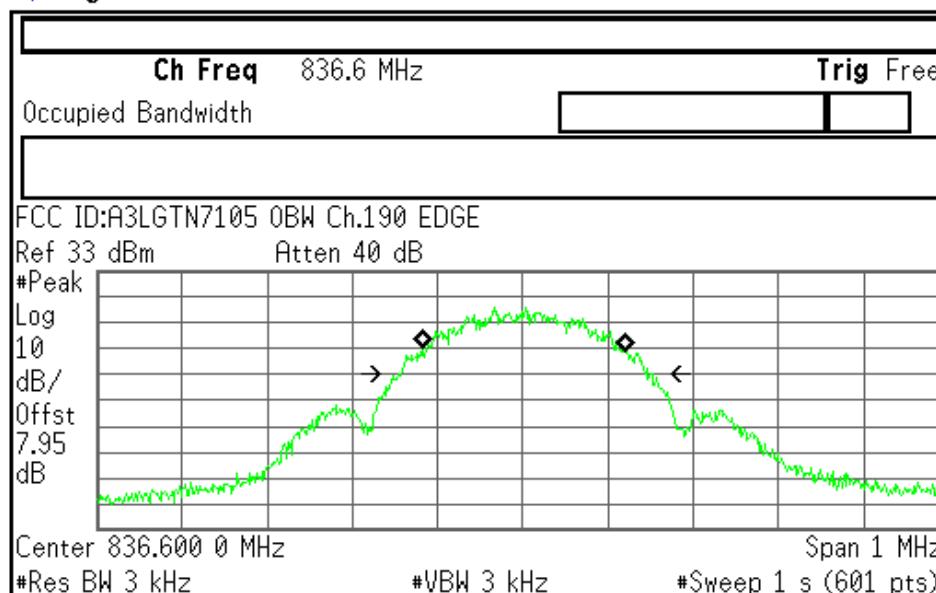
Center Freq
836.600000 MHzStart Freq
836.100000 MHzStop Freq
837.100000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Neg.Trig Delay unavailable in Swept Mode, zero delay used.

Agilent

R T

Freq/Channel

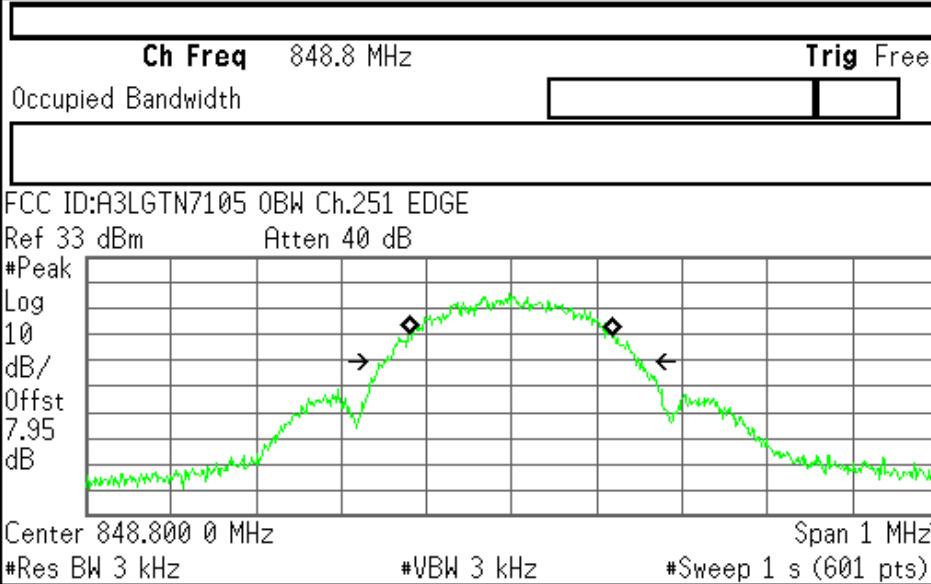

Center Freq
848.800000 MHz

Start Freq
848.300000 MHz

Stop Freq
849.300000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


Occupied Bandwidth 242.8494 kHz
Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -695.621 Hz
x dB Bandwidth 301.381 kHz

Neg.Trig Delay unavailable in Swept Mode, zero delay used.


 Agilent

R T

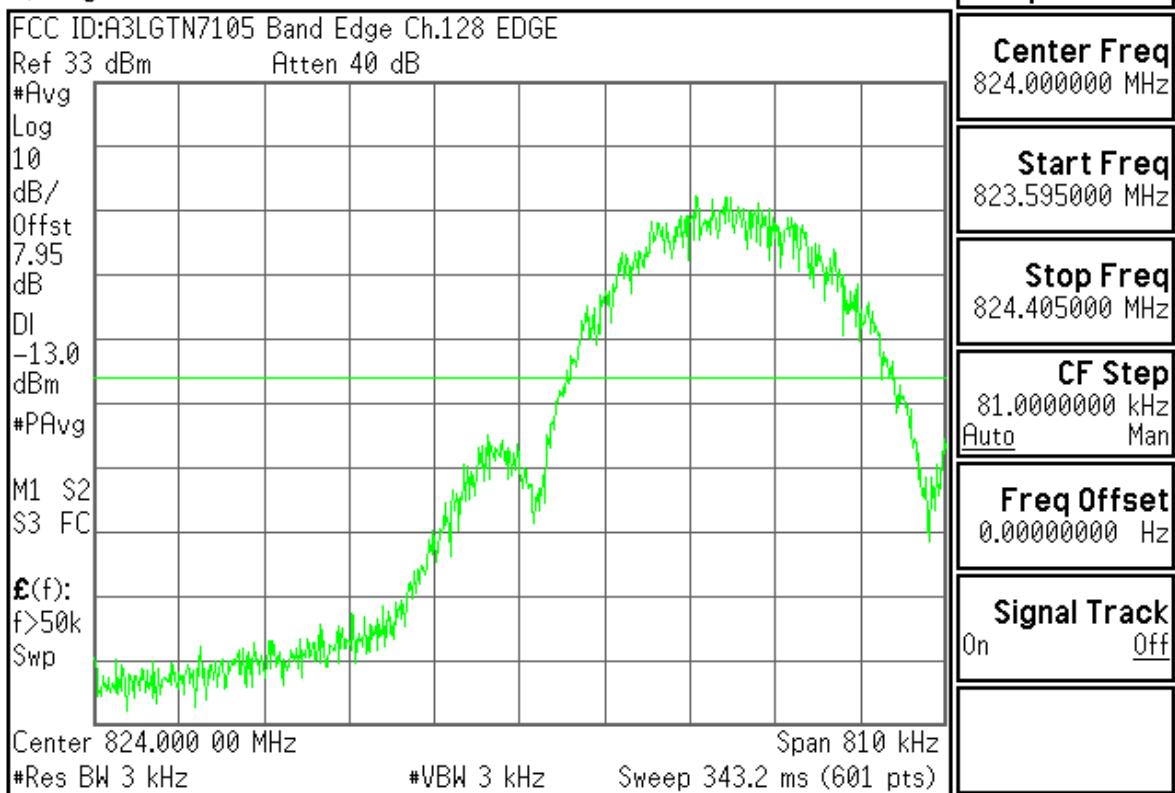

 Agilent


R T

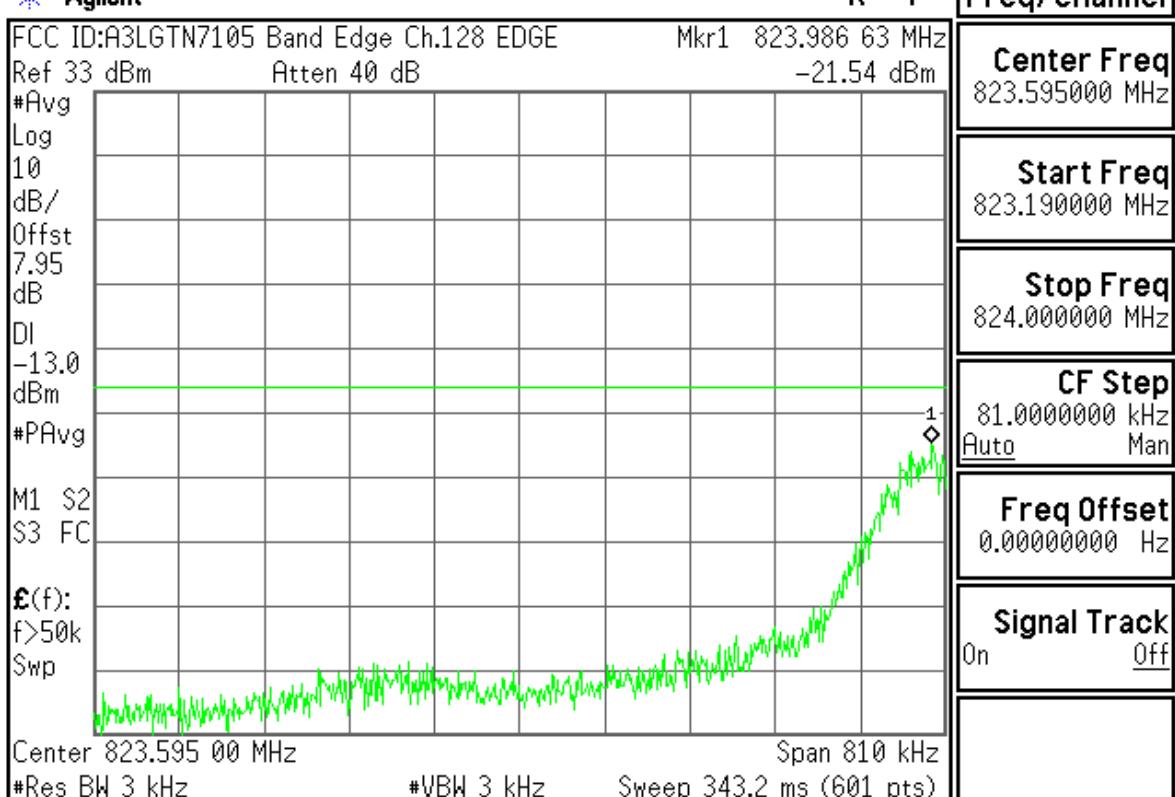

File Operation Status, C:\TEMP.GIF file saved


 Agilent

R T

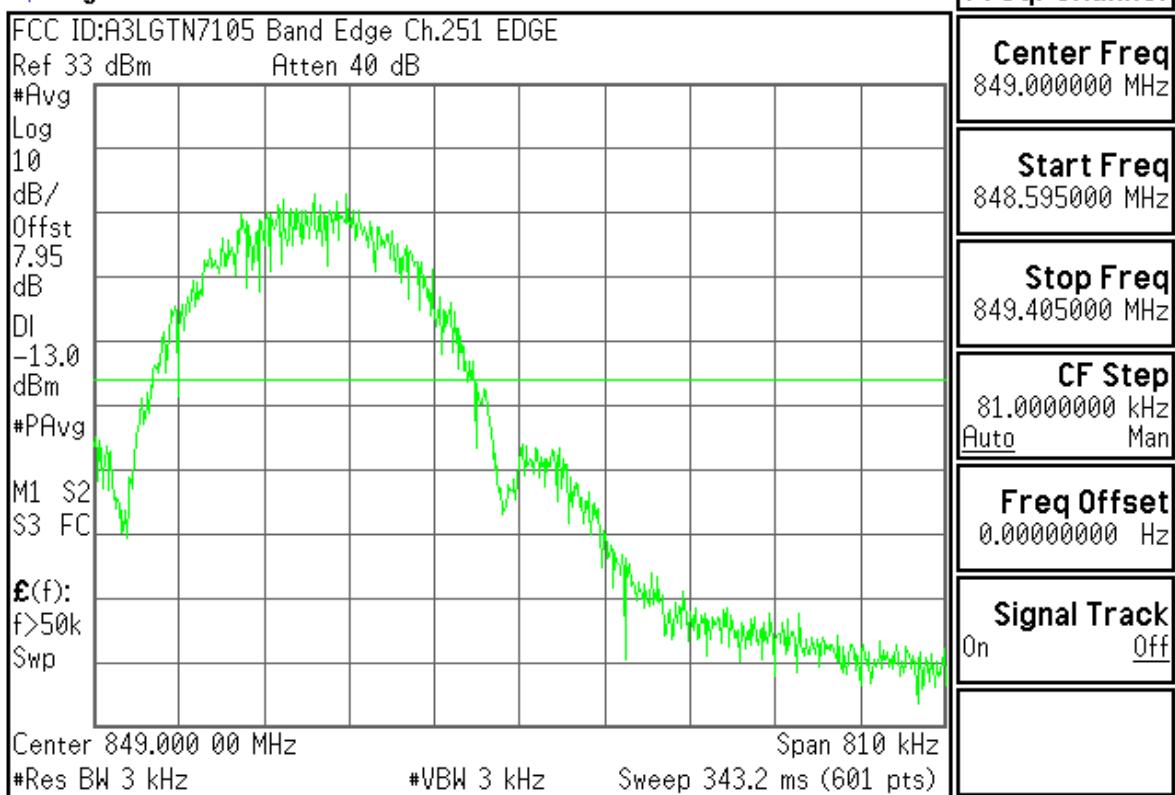

 Agilent

R T

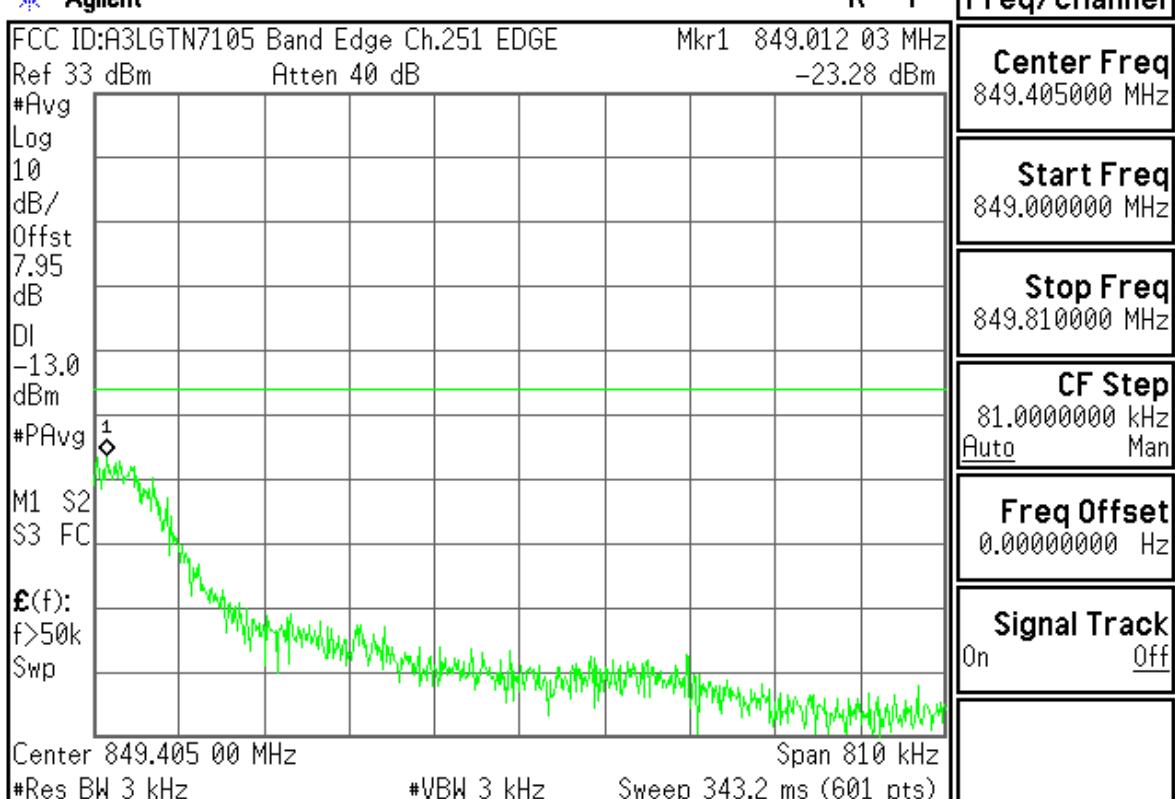

EDGE1900



R T

Freq/Channel


Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

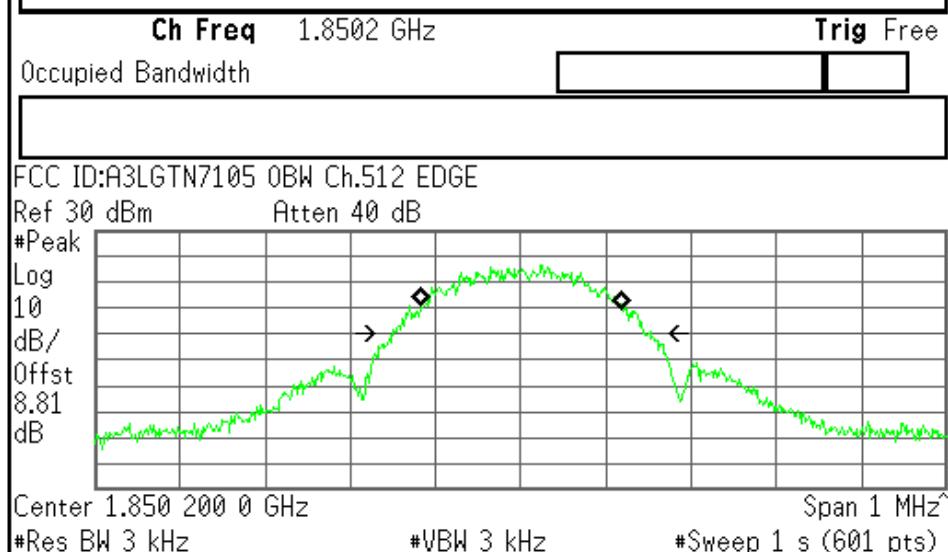Signal Track
On Off


Occupied Bandwidth 239.4679 kHz **Occ BW % Pwr** 99.00 %
x dB Bandwidth 306.130 kHz **x dB** -26.00 dB

File Operation Status, C:\TEMP.GIF file saved



R T

Freq/Channel


Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

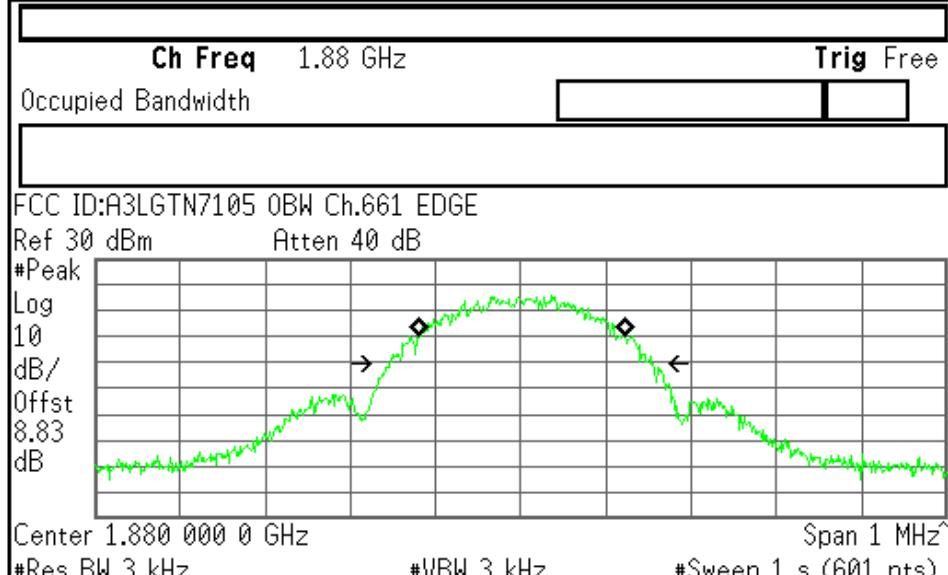Signal Track
On Off


Occupied Bandwidth 243.2641 kHz **Occ BW % Pwr** 99.00 %
x dB Bandwidth 311.215 kHz **x dB** -26.00 dB

File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

Center Freq
1.90980000 GHz


Start Freq
1.90930000 GHz

Stop Freq
1.91030000 GHz

CF Step
100.000000 kHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

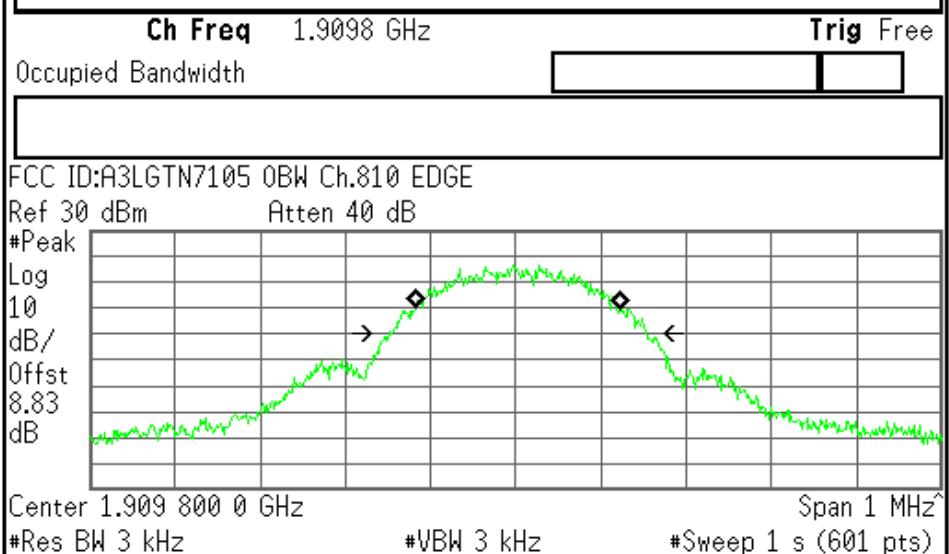


Occupied Bandwidth 241.0410 kHz
Transmit Freq Error 2.476 kHz
x dB Bandwidth 306.378 kHz



File Operation Status, C:\TEMP.GIF file saved

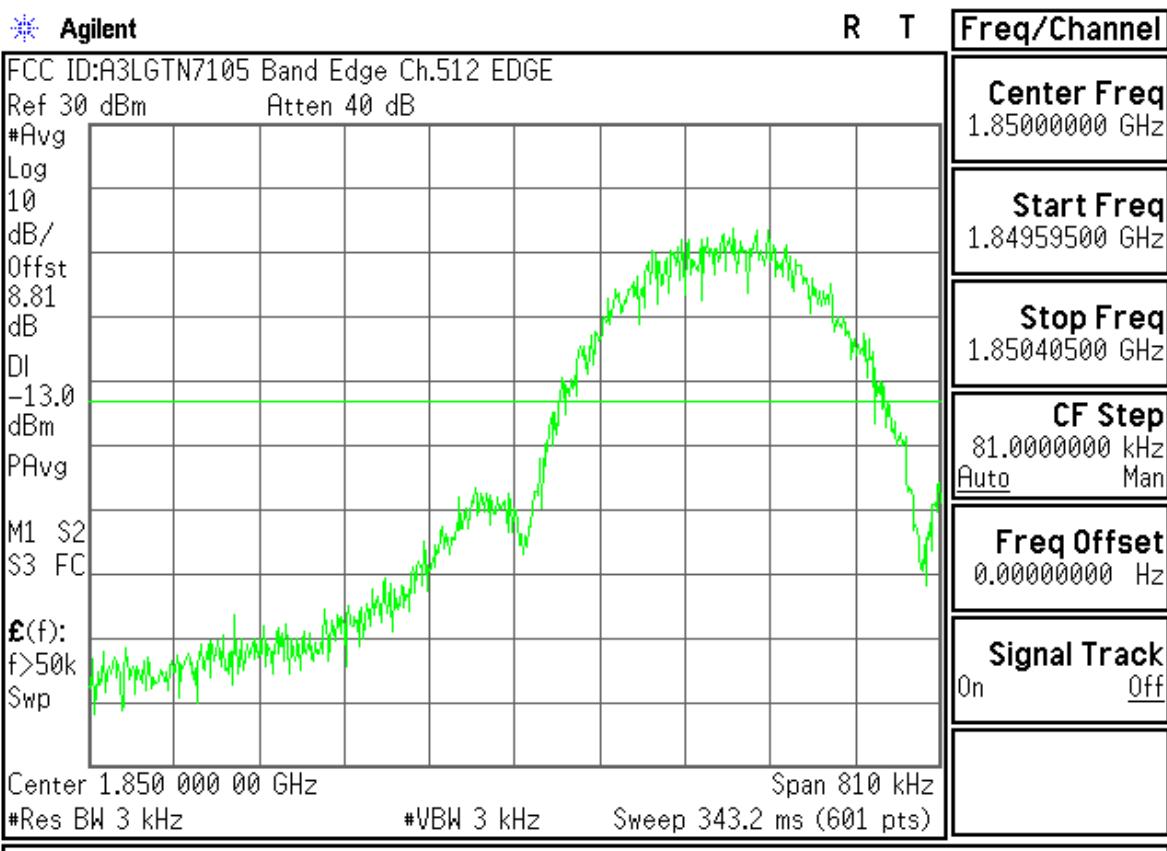


Copyright 2000-2007 Agilent Technologies

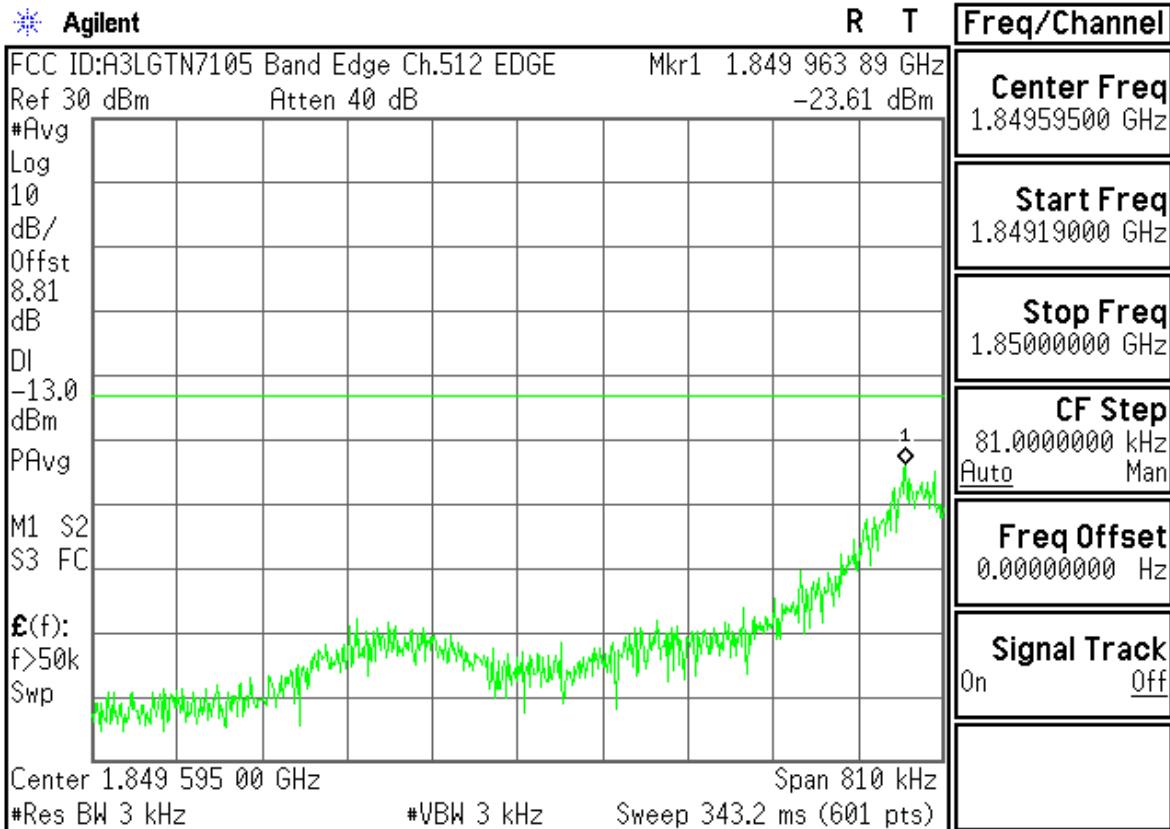

File Operation Status, C:\TEMP.GIF file saved

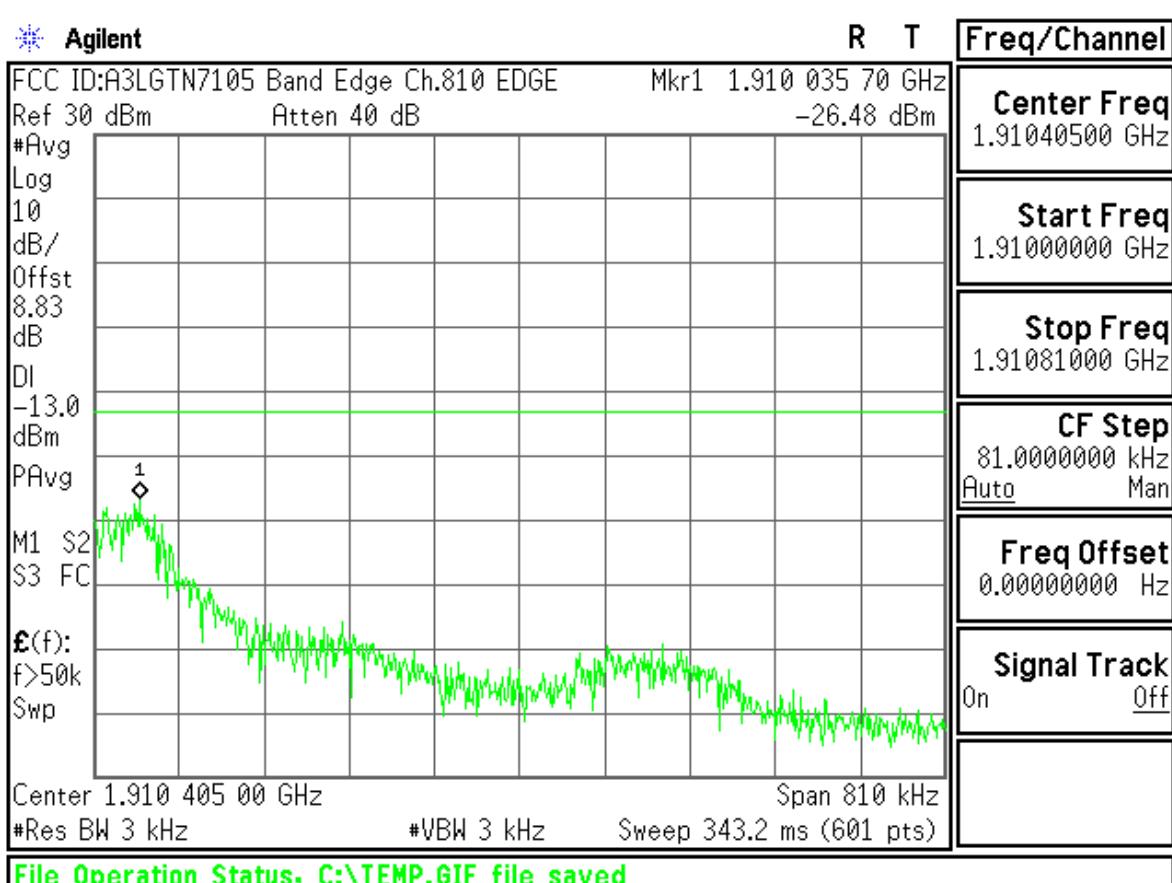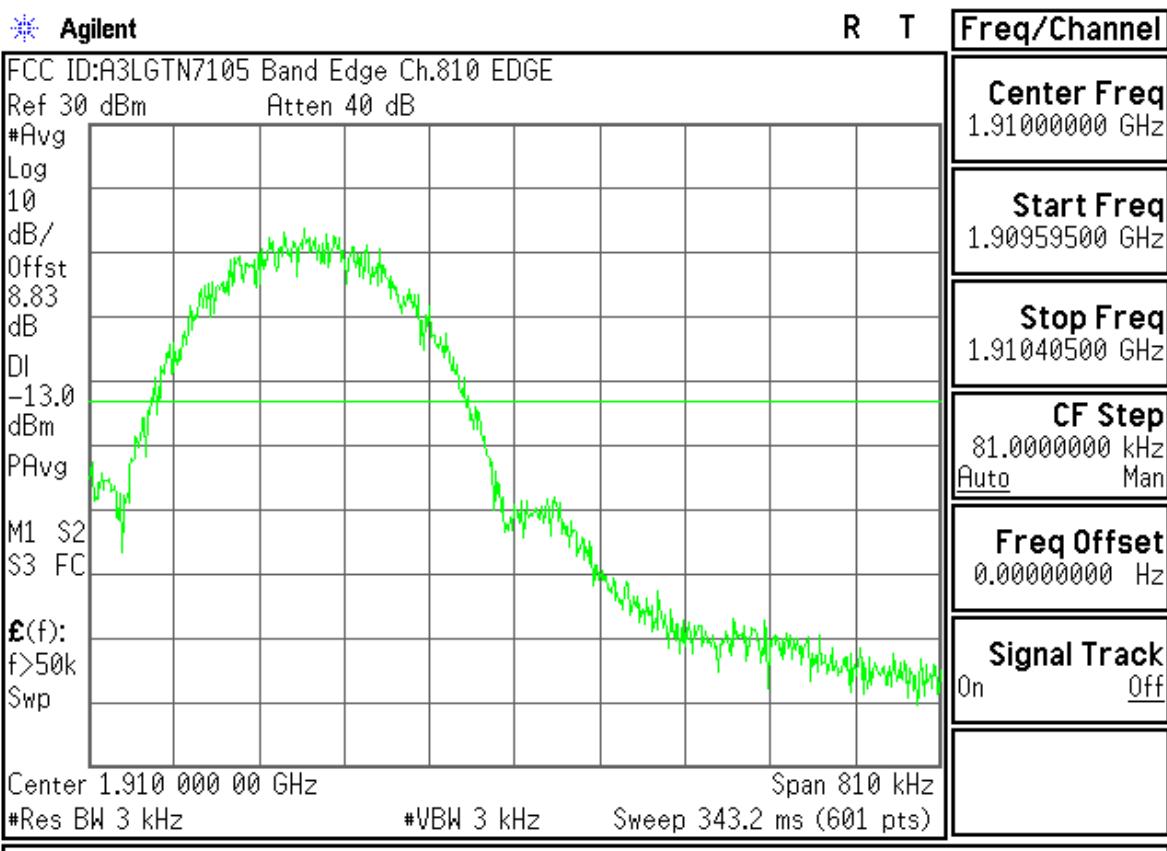

 Agilent

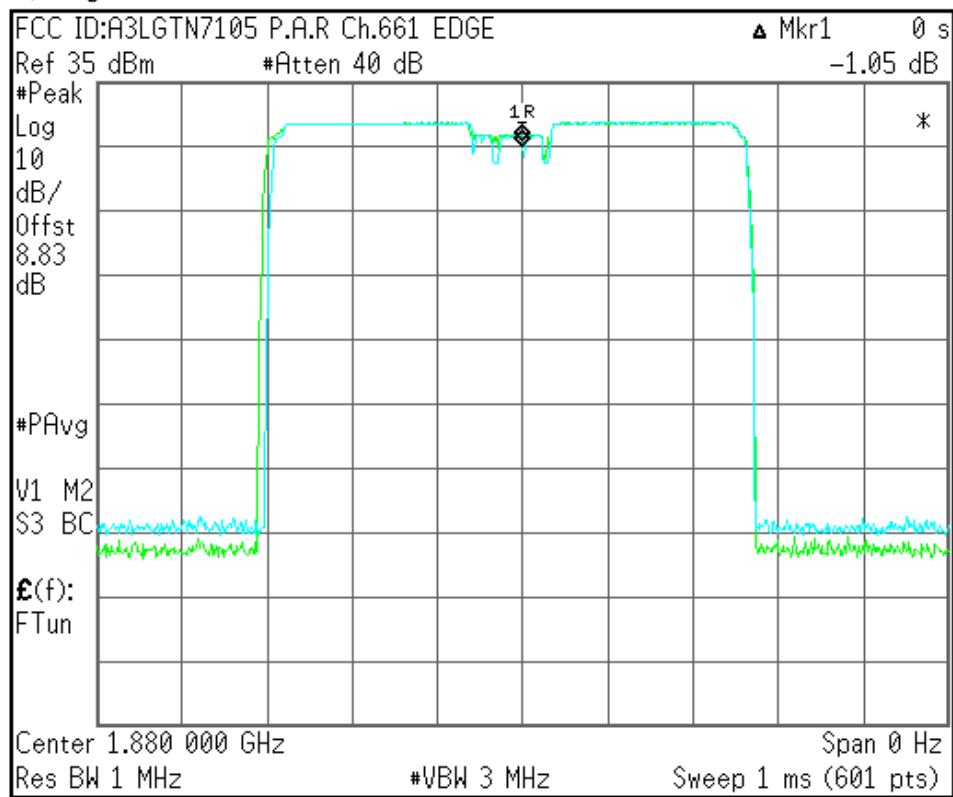

| Freq/Channel | |
|--------------|----------------|
| Center Freq | 1.88000000 GHz |
| Start Freq | 1.88000000 GHz |
| Stop Freq | 1.88000000 GHz |
| CF Step | 1.00000000 MHz |
| | Auto Man |
| Freq Offset | 0.00000000 Hz |
| Signal Track | On Off |

File Operation Status, C:\TEMP.GIF file saved