



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S3770M
FCC ID (Requested) : A3LGTS3770M
Report No : FI-328-R1
Job No : FI-328
Date issued : January 5, 2012

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2, Part22, Part24.

Prepared By

HK LEE – Test Engineer

Authorized By

WT JANG – Technical Manager



TABLE OF CONTENT

| MEASUREMENT REPORT | Page |
|---|-------------|
| 1. FCC CERTIFICATION INFORMATION | 3 |
| 1.1. §2.1033 General Information | 3 |
| 2. INTRODUCTION | 4 |
| 2.1. General | 4 |
| 3. MEASURING INSTRUMENT CALIBRATION | 5 |
| 4. TEST EQUIPMENT LIST | 6 |
| 5. DESCRIPTION OF TESTS | 7 |
| 5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power | 7 |
| 5.2. Radiated Spurious & Harmonic Emission | 8 |
| 5.3. Peak-Average Ratio | 9 |
| 5.4. Occupied Bandwidth | 10 |
| 5.5. Spurious and Harmonic Emission at Antenna Terminal | 10 |
| 5.5.1. Occupied Bandwidth Emission Limits | 10 |
| 5.5.2. Conducted Spurious Emission | 12 |
| 5.6. Frequency Stability / Temperature Variation | 13 |
| 6. TEST DATA | 14 |
| 6.1. Conducted Output Power | 14 |
| 6.2. Effective Radiated Power (E.R.P.) | 15 |
| 6.3. Equivalent Isotropic Radiated Power (E.I.R.P.) | 16 |
| 6.4. GSM850 Radiated Spurious & Harmonic measurement | 17 |
| 6.5. GSM1900 Radiated Spurious & Harmonic measurement | 18 |
| 6.6. GSM850 Radiated Spurious & Harmonic Conversion Table | 19 |
| 6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table | 20 |
| 6.8. Frequency Stability | 21 |
| 6.8.1. GSM850 Frequency Stability Table | 21 |
| 6.8.2. GSM850 Frequency Stability Graph | 22 |
| 6.8.3. GSM1900 Frequency Stability Table | 24 |
| 6.8.4. GSM1900 Frequency Stability Graph | 25 |
| 7. CONCLUSION | 27 |
| 8. TEST PLOTS | 28 |



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTS3770M
- Model : GT-S3770M
- Quantity : Quantity production is planned
- Emission Designators : 250KGXW(GSM850)
249KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.507 W ERP GSM850 (27.05 dBm)
0.700 W EIRP GSM1900 (28.45 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/GPRS and Cellular/PCS WCDMA/HSDPA Phone with Bluetooth, EDGE Rx only and WLAN
- Frequency Tolerance : ±0.00025% (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : December 22-23, 2011
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FI-328-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

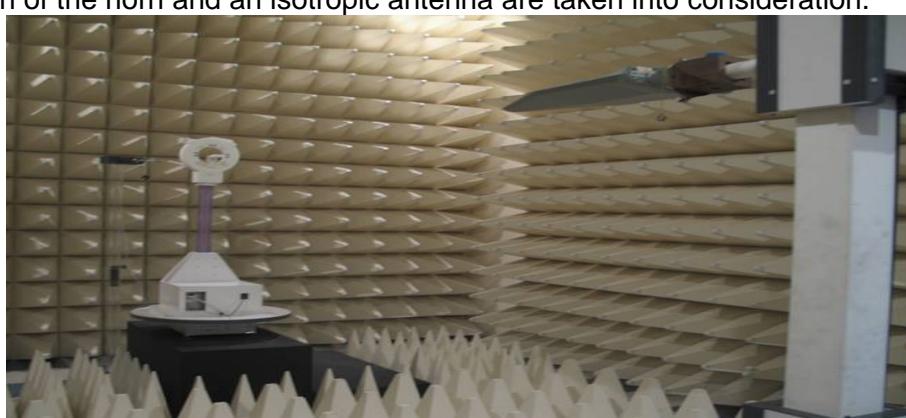


Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



4. TEST EQUIPMENT LIST

| Name Of Equipment | Model | Serial No. | Due Date |
|---------------------------------|---------------------|------------------|--------------|
| Spectrum Analyzer | ESI26 | 836119/010 | 2012-10-25 |
| | E4440A(3Hz~26.5GHz) | MY46187454 | 2012-03-08 |
| | E4440A(3Hz~26.5GHz) | MY41000236 | 2012-04-27 |
| Signal Generator | SMR20 | 835197/030 | 2012-12-01 |
| Network Analyzer | 8753E | JP38160590 | 2012-06-21 |
| Pre-Amplifier | 8449B | 3008A00691 | 2012-12-09 |
| Communication test set | 8960 | MY47510060 | 2012-03-08 |
| | 8960 | GB42360886 | 2012-09-02 |
| Controller | CO2000 | CO2000/424 | Not Required |
| Turn Unit | CT0800 | CT0800/057 | Not Required |
| Rotating Device | DE3600-RH-PR | DE3600-RH-PR/050 | Not Required |
| Antenna Master | MA4000 | MA4000/204 | Not Required |
| Horn Antenna | HF906 | 100134 | 2013-09-05 |
| | BBHA9120 | 9120D-636 | 2012-07-14 |
| Dipole Antenna | UHA 9105 | 9105-2412 | 2013-09-09 |
| | UHA 9105 | 9105-2413 | 2012-07-15 |
| Receive Antenna | HL040 | 353255/019 | 2013-09-05 |
| Power Supply | E3640A | MY40003594 | 2012-06-21 |
| | E3640A | MY40003595 | 2012-05-27 |
| | E3632A | MY40022438 | 2012-03-08 |
| Divider | 11636B | 51946 | 2012-07-04 |
| | 11636B | 51942 | 2012-07-05 |
| | 11636B | 56918 | 2012-09-28 |
| High Pass Filter | WHK/3.0/18G-10SS | 492 | Not Required |
| | WHK/3.5/18G-10SS | 4 | Not Required |
| Environmental Chamber | SH-241 | 92000549 | 2012-11-14 |
| | SH-241 | 92000548 | 2012-11-14 |
| Shielded Fully Anechoic Chamber | CHAMBER | ANT0001 | Not Required |

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

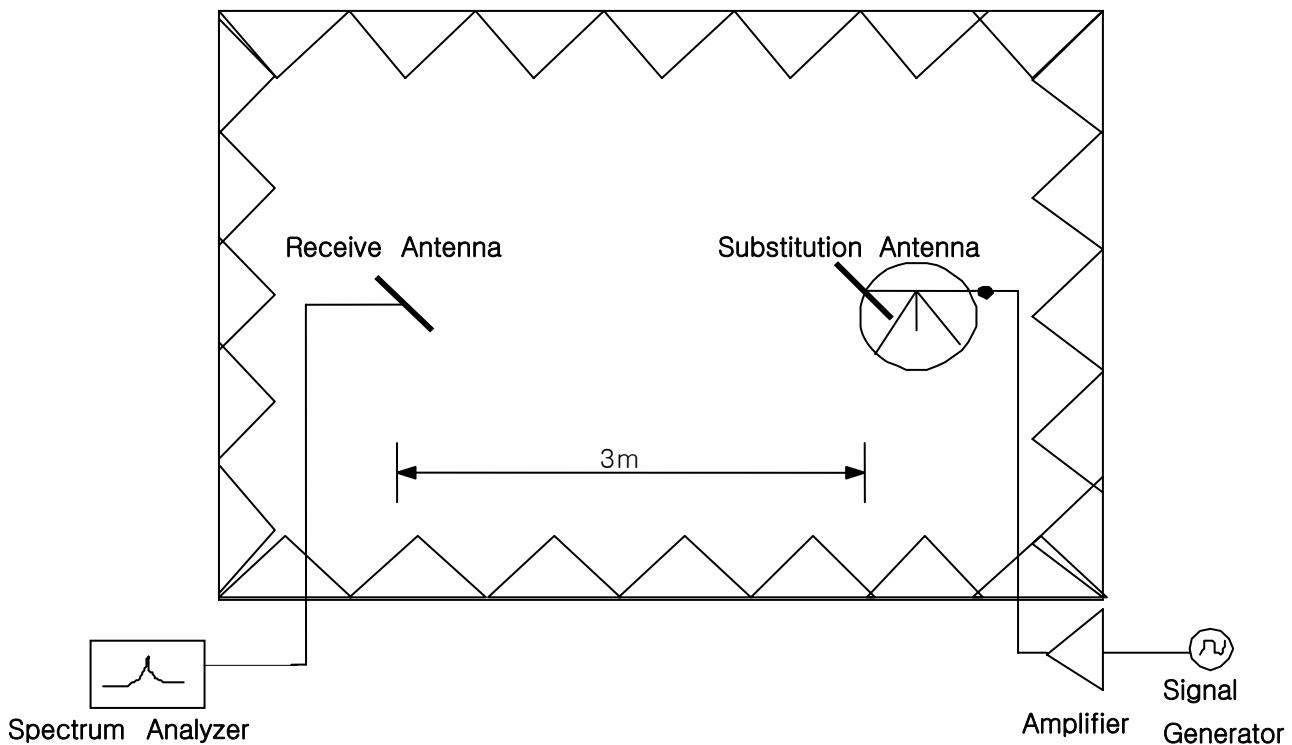


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to
ANSI/TIA/EIA-603-C-2004

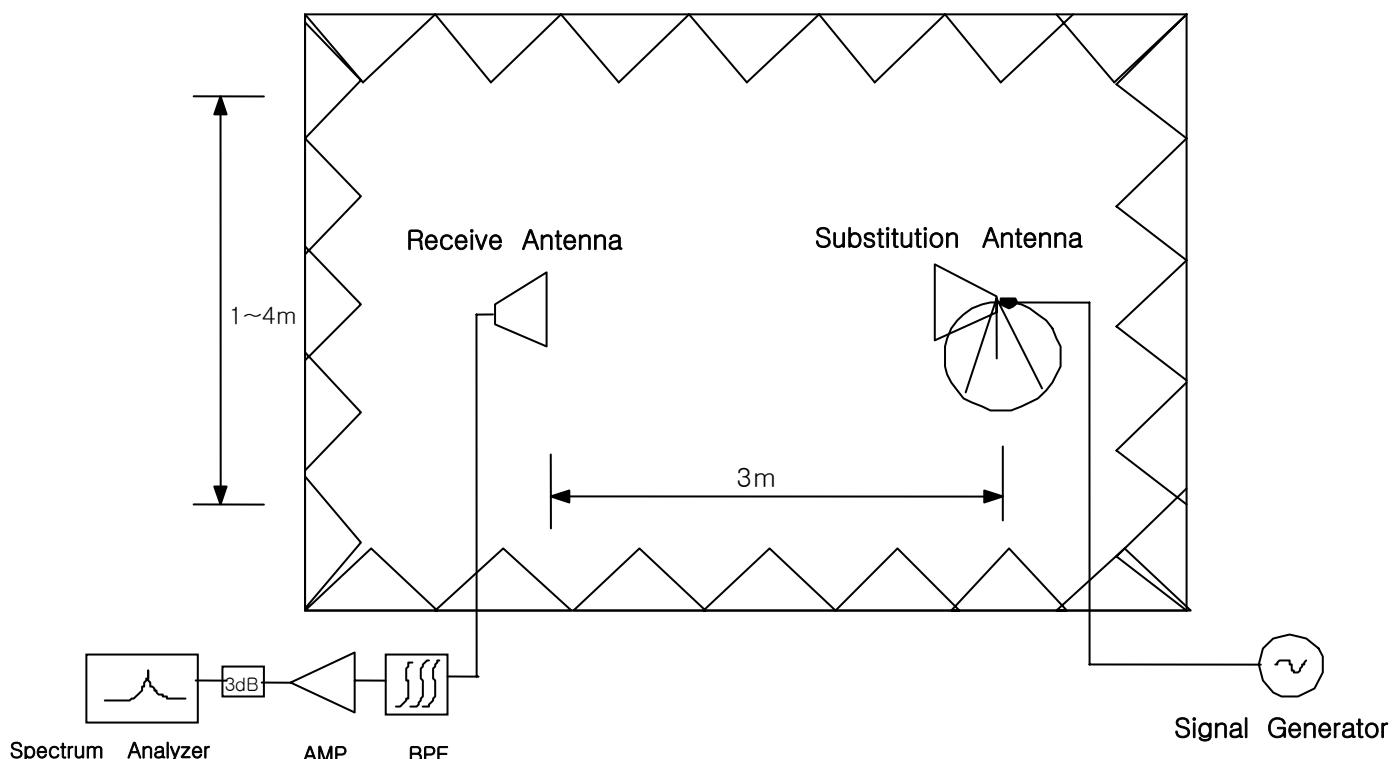


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was **-81.0dBm**. The gain of the substituted antenna is **8.1dBi**. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of **-81.0dBm** of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is **2.0dB** at 3760.00MHz. So **6.1dB** is added to the signal generator reading of **-30.9dBm** yielding **-24.8dBm**. The fundamental EIRP was **25.5dBm** so this harmonic was **25.5dBm** $-(-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.



5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.



| BLOCK | Freq. Range (MHz) Transmitter (Tx) | Freq. Range (MHz) Receiver (Rx) |
|-------|---------------------------------------|------------------------------------|
| A | 1850 – 1865 | 1930 – 1945 |
| B | 1870 – 1885 | 1950 – 1965 |
| C | 1895 – 1910 | 1975 – 1990 |
| D | 1865 – 1870 | 1945 – 1950 |
| E | 1885 – 1890 | 1965 – 1970 |
| F | 1890 – 1895 | 1970 – 1975 |

Table 1. Broadband PCS Service Frequency Blocks

| BLOCK | Freq. Range (MHz) Transmitter (Tx) | Freq. Range (MHz) Receiver (Rx) |
|------------|---------------------------------------|------------------------------------|
| A* Low + A | 824 ~ 835 | 869 ~ 880 |
| B | 835 ~ 845 | 880 ~ 890 |
| A* High | 845 ~ 846.5 | 890 ~ 891.5 |
| B* | 846.5 ~ 849 | 891.5 ~ 894 |

Table 2. Cellular Service Frequency Blocks



5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.507 \text{ W}) = 40.05 \text{ dB}$$

$$27.05 \text{ dBm} - 40.05 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

Example)

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$

A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.



5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature(25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (Usually 14~16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/GPRS and Cellular/PCS WCDMA/HSDPA Phone with Bluetooth, EDGE Rx only and WLAN FCC ID: A3LGTS3770M. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS BAND and "5" in the Cellular Band. The GSM conducted powers are reported below, respectively.

| BAND | Channel | RF Conducted Power Table | | | | |
|----------|---------|--------------------------|-----------|-----------|-----------|-----------|
| | | Voice | GPRS Data | | | |
| | | | 1 Tx Slot | 2 Tx Slot | 3 Tx Slot | 4 Tx Slot |
| PCS | 512 | 29.18 | 29.18 | 29.18 | 26.69 | 25.56 |
| | 661 | 29.2 | 29.2 | 29.2 | 26.74 | 25.55 |
| | 810 | 29.42 | 29.42 | 29.42 | 27.25 | 26.03 |
| Cellular | 128 | 32.44 | 32.44 | 32.42 | 29.48 | 28.7 |
| | 190 | 32.46 | 32.46 | 32.45 | 29.46 | 28.69 |
| | 251 | 32.75 | 32.75 | 32.73 | 29.4 | 28.64 |

Table 6-1 GSM Conducted Output Powers



6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

| Frequency (MHz) | Output (dBm) | Polarization (H/V) | S/A (dBm) | Ant gain (dBd) | Ref level (dBm) |
|--------------------|-----------------|-----------------------|--------------|-------------------|--------------------|
| 824.20 | 26.00 | H | -11.50 | -0.67 | -10.83 |
| | | V | -12.38 | -0.67 | -11.71 |
| 836.60 | 27.00 | H | -10.99 | -0.73 | -10.26 |
| | | V | -11.28 | -0.73 | -10.55 |
| 848.80 | 27.00 | H | -13.18 | -0.79 | -12.39 |
| | | V | -12.36 | -0.79 | -11.57 |

■ Result

| Frequency (MHz) | Tested level (dBm) | Polarization (H/V) | Azimuth (angle) | ERP (dBm) | ERP (W) | Battery |
|--------------------|-----------------------|-----------------------|--------------------|--------------|------------|----------|
| 824.20 | -10.53 | H | 283/135 | 26.30 | 0.427 | Standard |
| 836.60 | -10.58 | H | 288/115 | 26.68 | 0.466 | Standard |
| 848.80 | -12.34 | H | 287/115 | 27.05 | 0.507 | Standard |

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

| Frequency (MHz) | Output (dBm) | Polarization (H/V) | S/A (dBm) | Ant gain (dBi) | Ref level (dBm) |
|--------------------|-----------------|-----------------------|--------------|-------------------|--------------------|
| 1850.20 | 27.00 | H | -12.32 | 9.60 | -21.92 |
| | | V | -11.91 | 9.60 | -21.51 |
| 1880.00 | 27.00 | H | -11.95 | 9.60 | -21.55 |
| | | V | -12.32 | 9.60 | -21.92 |
| 1909.80 | 28.00 | H | -11.49 | 9.60 | -21.09 |
| | | V | -11.17 | 9.60 | -20.77 |

■ Result

| Frequency (MHz) | Tested level (dBm) | Polarization (H/V) | Azimuth (angle) | EIRP (dBm) | EIRP (W) | Battery |
|--------------------|-----------------------|-----------------------|--------------------|---------------|-------------|----------|
| 1850.20 | -21.69 | H | 121/180 | 27.23 | 0.528 | Standard |
| 1880.00 | -21.13 | H | 99/10 | 27.42 | 0.552 | Standard |
| 1909.80 | -20.64 | H | 266/180 | 28.45 | 0.700 | Standard |

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 27.05 dBm = 0.507 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 40.05 \text{ dBc}$

■ Result

| Channel | Harmonic | Frequency (MHz) | From EUT Tested level (dBm) | POL (H/V) | Result (dBc) |
|---------|----------|-----------------|-----------------------------------|--------------|-----------------|
| 128 | 2 | 1648.40 | -60.36 | V | 75.52 |
| | 3 | 2472.60 | -67.93 | H | 77.15 |
| | 4 | 3296.80 | -67.04 | V | 72.39 |
| | 5 | 4121.00 | - | - | - |
| | 6 | 4945.20 | - | - | - |
| | 7 | 5769.40 | - | - | - |
| 190 | 2 | 1673.20 | -61.56 | V | 76.54 |
| | 3 | 2509.80 | -66.75 | H | 75.76 |
| | 4 | 3346.40 | -67.92 | V | 72.45 |
| | 5 | 4183.00 | - | - | - |
| | 6 | 5019.60 | - | - | - |
| | 7 | 5856.20 | - | - | - |
| 251 | 2 | 1697.60 | -62.48 | H | 75.41 |
| | 3 | 2546.40 | -64.24 | V | 73.58 |
| | 4 | 3395.20 | -67.33 | V | 72.63 |
| | 5 | 4244.00 | - | - | - |
| | 6 | 5092.80 | - | - | - |
| | 7 | 5941.60 | - | - | - |

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 28.45 dBm = 0.700 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 41.45 \text{ dBc}$

■ Result

| Channel | Harmonic | Frequency (MHz) | From EUT Tested level (dBm) | POL (H/V) | Result (dBc) |
|---------|----------|-----------------|--------------------------------|-----------|--------------|
| 512 | 2 | 3700.40 | -63.82 | V | 66.24 |
| | 3 | 5550.60 | -64.29 | H | 62.34 |
| | 4 | 7400.80 | -64.94 | V | 57.83 |
| | 5 | 9251.00 | - | - | - |
| | 6 | 11101.20 | - | - | - |
| | 7 | 12951.40 | - | - | - |
| 661 | 2 | 3760.00 | -62.99 | V | 65.28 |
| | 3 | 5640.00 | -64.53 | H | 62.24 |
| | 4 | 7520.00 | -64.79 | H | 57.48 |
| | 5 | 9400.00 | - | - | - |
| | 6 | 11280.00 | - | - | - |
| | 7 | 13160.00 | - | - | - |
| 810 | 2 | 3819.60 | -62.81 | H | 64.31 |
| | 3 | 5729.40 | -66.76 | H | 64.01 |
| | 4 | 7639.20 | -68.00 | H | 61.20 |
| | 5 | 9549.00 | - | - | - |
| | 6 | 11458.80 | - | - | - |
| | 7 | 13368.60 | - | - | - |

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : December 23, 2011

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP + 2.15 - (-13 + ⑤ - ④)

| CH | Har | Frequency (MHz) | ① Tx C/L dB | ② Tx Horn Gain dBi | ③ Tx Level dBm | ④ ESI Level : H dBm | ④ ESI Level : V dBm | ⑤ Tested EUT Level : H dBm | ⑤ Tested EUT Level : V dBm | ⑥ Result EUT : H (dBc) | ⑥ Result EUT : V (dBc) |
|-----|-----|-----------------|-------------|--------------------|----------------|---------------------|---------------------|----------------------------|----------------------------|------------------------|------------------------|
| 128 | 2 | 1648.40 | -8.77 | 9.40 | -13.60 | -27.73 | -27.03 | -61.89 | -60.36 | 76.35 | 75.52 |
| | 3 | 2472.60 | -11.12 | 10.60 | -12.50 | -32.97 | -32.23 | -67.93 | -67.64 | 77.15 | 77.60 |
| | 4 | 3296.80 | -12.19 | 12.00 | -12.80 | -36.08 | -36.84 | -66.82 | -67.04 | 72.93 | 72.39 |
| | 5 | 4121.00 | -13.85 | 12.60 | -11.80 | -39.75 | -39.33 | - | - | - | - |
| | 6 | 4945.20 | -15.03 | 12.70 | -10.70 | -42.44 | -42.28 | - | - | - | - |
| | 7 | 5769.40 | -17.11 | 13.10 | -9.00 | -44.12 | -44.43 | - | - | - | - |
| 190 | 2 | 1673.20 | -8.83 | 9.40 | -13.60 | -27.98 | -27.21 | -63.34 | -61.56 | 77.55 | 76.54 |
| | 3 | 2509.80 | -11.24 | 10.60 | -12.40 | -33.18 | -32.42 | -66.75 | -67.19 | 75.76 | 76.96 |
| | 4 | 3346.40 | -12.13 | 12.00 | -12.90 | -36.09 | -36.75 | -66.72 | -67.01 | 72.82 | 72.45 |
| | 5 | 4183.00 | -14.18 | 12.60 | -11.40 | -39.47 | -39.56 | - | - | - | - |
| | 6 | 5019.60 | -15.91 | 12.70 | -9.80 | -42.07 | -42.44 | - | - | - | - |
| | 7 | 5856.20 | -17.15 | 13.10 | -9.00 | -45.07 | -44.94 | - | - | - | - |
| 251 | 2 | 1697.60 | -8.88 | 9.40 | -13.50 | -29.26 | -28.45 | -62.48 | -64.73 | 75.41 | 78.47 |
| | 3 | 2546.40 | -11.22 | 10.60 | -12.40 | -32.63 | -32.85 | -65.43 | -64.24 | 74.99 | 73.58 |
| | 4 | 3395.20 | -12.28 | 12.00 | -12.70 | -36.60 | -36.89 | -67.64 | -67.33 | 73.23 | 72.63 |
| | 5 | 4244.00 | -14.15 | 12.60 | -11.50 | -39.36 | -39.77 | - | - | - | - |
| | 6 | 5092.80 | -16.16 | 12.70 | -9.50 | -42.73 | -42.38 | - | - | - | - |
| | 7 | 5941.60 | -17.34 | 13.10 | -8.80 | -45.37 | -45.34 | - | - | - | - |



6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : December 23, 2011

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

| CH | Har | Frequency (MHz) | ① Tx C/L dB | ② Tx Horn Gain dBi | ③ Tx Level dBm | ④ ESI Level : H dBm | ④ ESI Level : V dBm | ⑤ Tested EUT Level : H dBm | ⑤ Tested EUT Level : V dBm | ⑥ Result EUT : H (dBc) | ⑥ Result EUT : V (dBc) |
|-----|-----|-----------------|-------------|--------------------|----------------|---------------------|---------------------|----------------------------|----------------------------|------------------------|------------------------|
| 512 | 2 | 3700.40 | -12.85 | 12.60 | -12.80 | -39.98 | -39.03 | -66.12 | -63.82 | 67.59 | 66.24 |
| | 3 | 5550.60 | -16.92 | 12.50 | -8.60 | -43.40 | -42.99 | -64.29 | -64.39 | 62.34 | 62.85 |
| | 4 | 7400.80 | -20.20 | 11.50 | -4.30 | -48.71 | -48.56 | -66.32 | -64.94 | 59.06 | 57.83 |
| | 5 | 9251.00 | -23.05 | 11.90 | -1.90 | -53.11 | -52.12 | - | - | - | - |
| | 6 | 11101.20 | -25.08 | 11.50 | 0.60 | -57.75 | -54.90 | - | - | - | - |
| | 7 | 12951.40 | -28.10 | 14.42 | 0.70 | -61.50 | -58.01 | - | - | - | - |
| 661 | 2 | 3760.00 | -13.35 | 12.60 | -12.30 | -39.89 | -39.16 | -64.84 | -62.99 | 66.40 | 65.28 |
| | 3 | 5640.00 | -17.07 | 12.50 | -8.40 | -43.74 | -43.42 | -64.53 | -65.66 | 62.24 | 63.69 |
| | 4 | 7520.00 | -20.60 | 11.50 | -3.90 | -48.76 | -48.06 | -64.79 | -65.54 | 57.48 | 58.93 |
| | 5 | 9400.00 | -23.50 | 11.90 | -1.40 | -52.65 | -51.24 | - | - | - | - |
| | 6 | 11280.00 | -26.24 | 11.50 | 1.70 | -56.66 | -54.54 | - | - | - | - |
| | 7 | 13160.00 | -28.79 | 14.42 | 1.40 | -61.01 | -57.76 | - | - | - | - |
| 810 | 2 | 3819.60 | -13.30 | 12.60 | -12.30 | -39.95 | -39.55 | -62.81 | -63.70 | 64.31 | 65.60 |
| | 3 | 5729.40 | -17.16 | 12.50 | -8.30 | -44.20 | -43.35 | -66.76 | -67.50 | 64.01 | 65.60 |
| | 4 | 7639.20 | -20.88 | 11.50 | -3.60 | -48.25 | -47.92 | -68.00 | -68.52 | 61.20 | 62.05 |
| | 5 | 9549.00 | -24.09 | 11.90 | -0.80 | -52.88 | -51.48 | - | - | - | - |
| | 6 | 11458.80 | -26.05 | 11.50 | 1.60 | -57.49 | -54.67 | - | - | - | - |
| | 7 | 13368.60 | -28.74 | 14.42 | 1.30 | -63.03 | -59.49 | - | - | - | - |



6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ±0.00025 % or 2.5ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency Error (Hz) | Frequency (Hz) | Deviation (%) | ppm |
|---------------|-------------|------------|----------------------|----------------|---------------|--------|
| 100% | 3.70 | +20(Ref) | 2.70 | 836,600,003 | 0.000000 | 0.003 |
| 100% | | -30 | -4.20 | 836,599,996 | -0.000001 | -0.005 |
| 100% | | -20 | -46.10 | 836,599,954 | -0.000006 | -0.055 |
| 100% | | -10 | 41.90 | 836,600,042 | 0.000005 | 0.050 |
| 100% | | 0 | -48.50 | 836,599,952 | -0.000006 | -0.058 |
| 100% | | +10 | -37.70 | 836,599,962 | -0.000005 | -0.045 |
| 100% | | +20 | 2.70 | 836,600,003 | 0.000000 | 0.003 |
| 100% | | +30 | 7.90 | 836,600,008 | 0.000001 | 0.009 |
| 100% | | +40 | 45.70 | 836,600,046 | 0.000005 | 0.055 |
| 100% | | +50 | -28.20 | 836,599,972 | -0.000003 | -0.034 |
| 100% | | +60 | 48.50 | 836,600,049 | 0.000006 | 0.058 |
| 115% | 4.26 | +20 | -37.90 | 836,599,962 | -0.000005 | -0.045 |
| Batt.Endpoint | 3.35 | +20 | 11.00 | 836,600,011 | 0.000001 | 0.013 |


Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

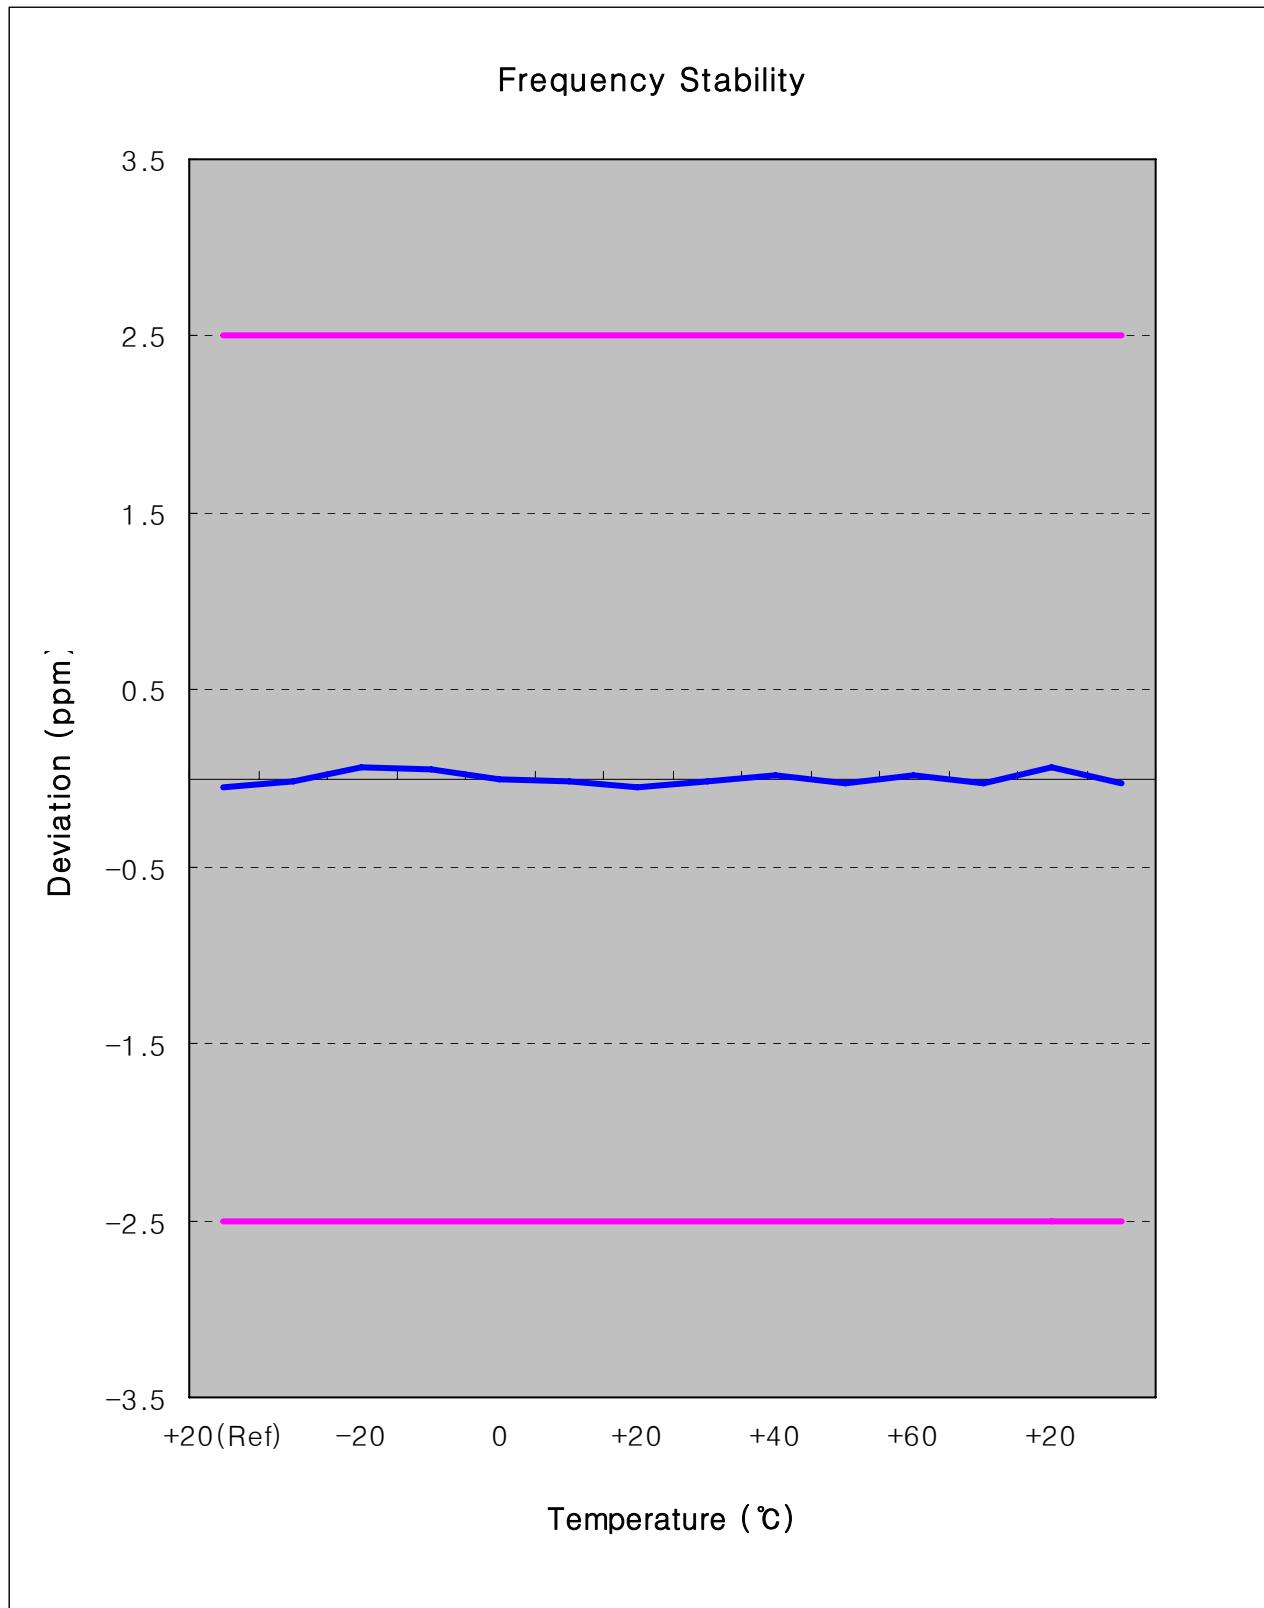

Zoom IN

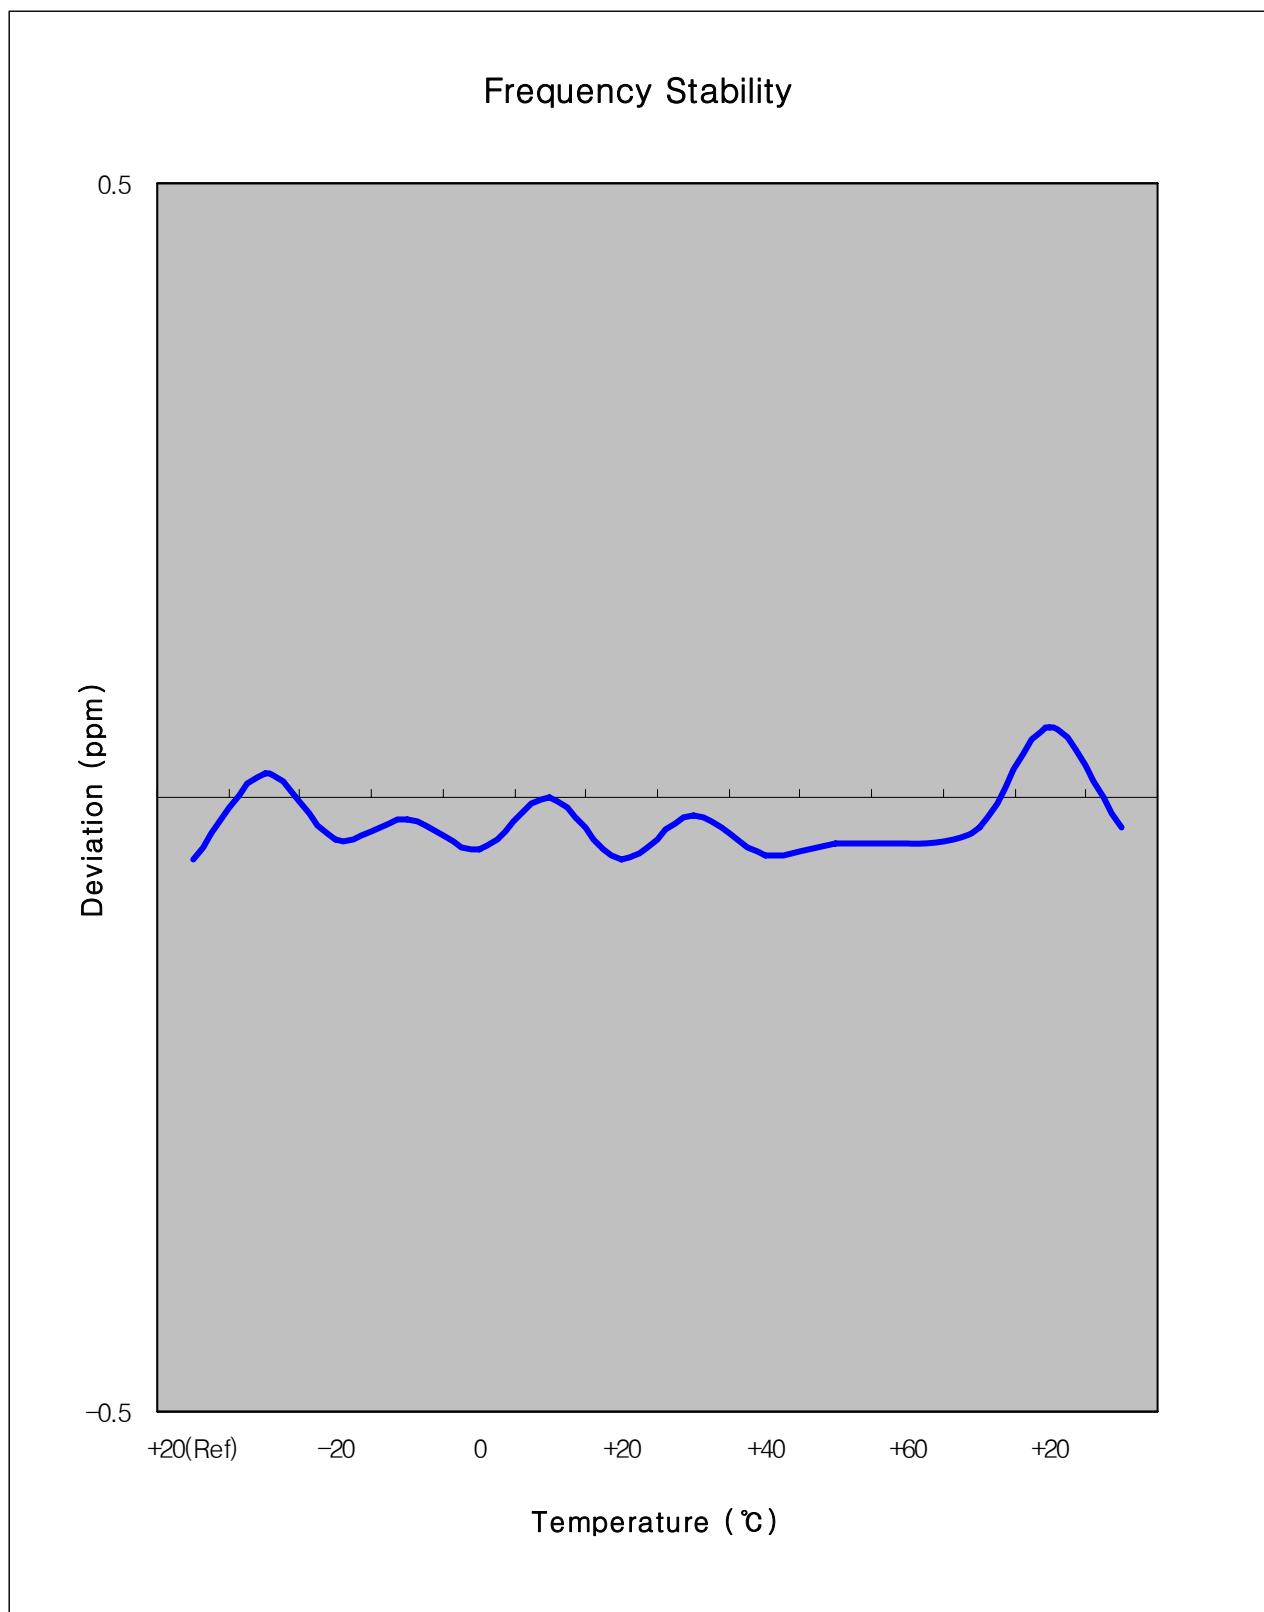



6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : $\pm 0.00025\%$ or 2.5ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency Error (Hz) | Frequency (Hz) | Deviation (%) | ppm |
|---------------|-------------|------------|----------------------|----------------|---------------|--------|
| 100% | 3.70 | +20(Ref) | -42.60 | 1,879,999,957 | -0.000002 | -0.023 |
| 100% | | -30 | -15.60 | 1,879,999,984 | -0.000001 | -0.008 |
| 100% | | -20 | -7.10 | 1,879,999,993 | 0.000000 | -0.004 |
| 100% | | -10 | 45.50 | 1,880,000,046 | 0.000002 | 0.024 |
| 100% | | 0 | -46.90 | 1,879,999,953 | -0.000002 | -0.025 |
| 100% | | +10 | -22.60 | 1,879,999,977 | -0.000001 | -0.012 |
| 100% | | +20 | -42.60 | 1,879,999,957 | -0.000002 | -0.023 |
| 100% | | +30 | -26.80 | 1,879,999,973 | -0.000001 | -0.014 |
| 100% | | +40 | 1.00 | 1,880,000,001 | 0.000000 | 0.001 |
| 100% | | +50 | 15.30 | 1,880,000,015 | 0.000001 | 0.008 |
| 100% | | +60 | 41.80 | 1,880,000,042 | 0.000002 | 0.022 |
| 115% | 4.26 | +20 | -42.00 | 1,879,999,958 | -0.000002 | -0.022 |
| Batt.Endpoint | 3.35 | +20 | -38.90 | 1,879,999,961 | -0.000002 | -0.021 |


Note : The temperature is varied from $-30\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.4. GSM1900 Frequency Stability Graph

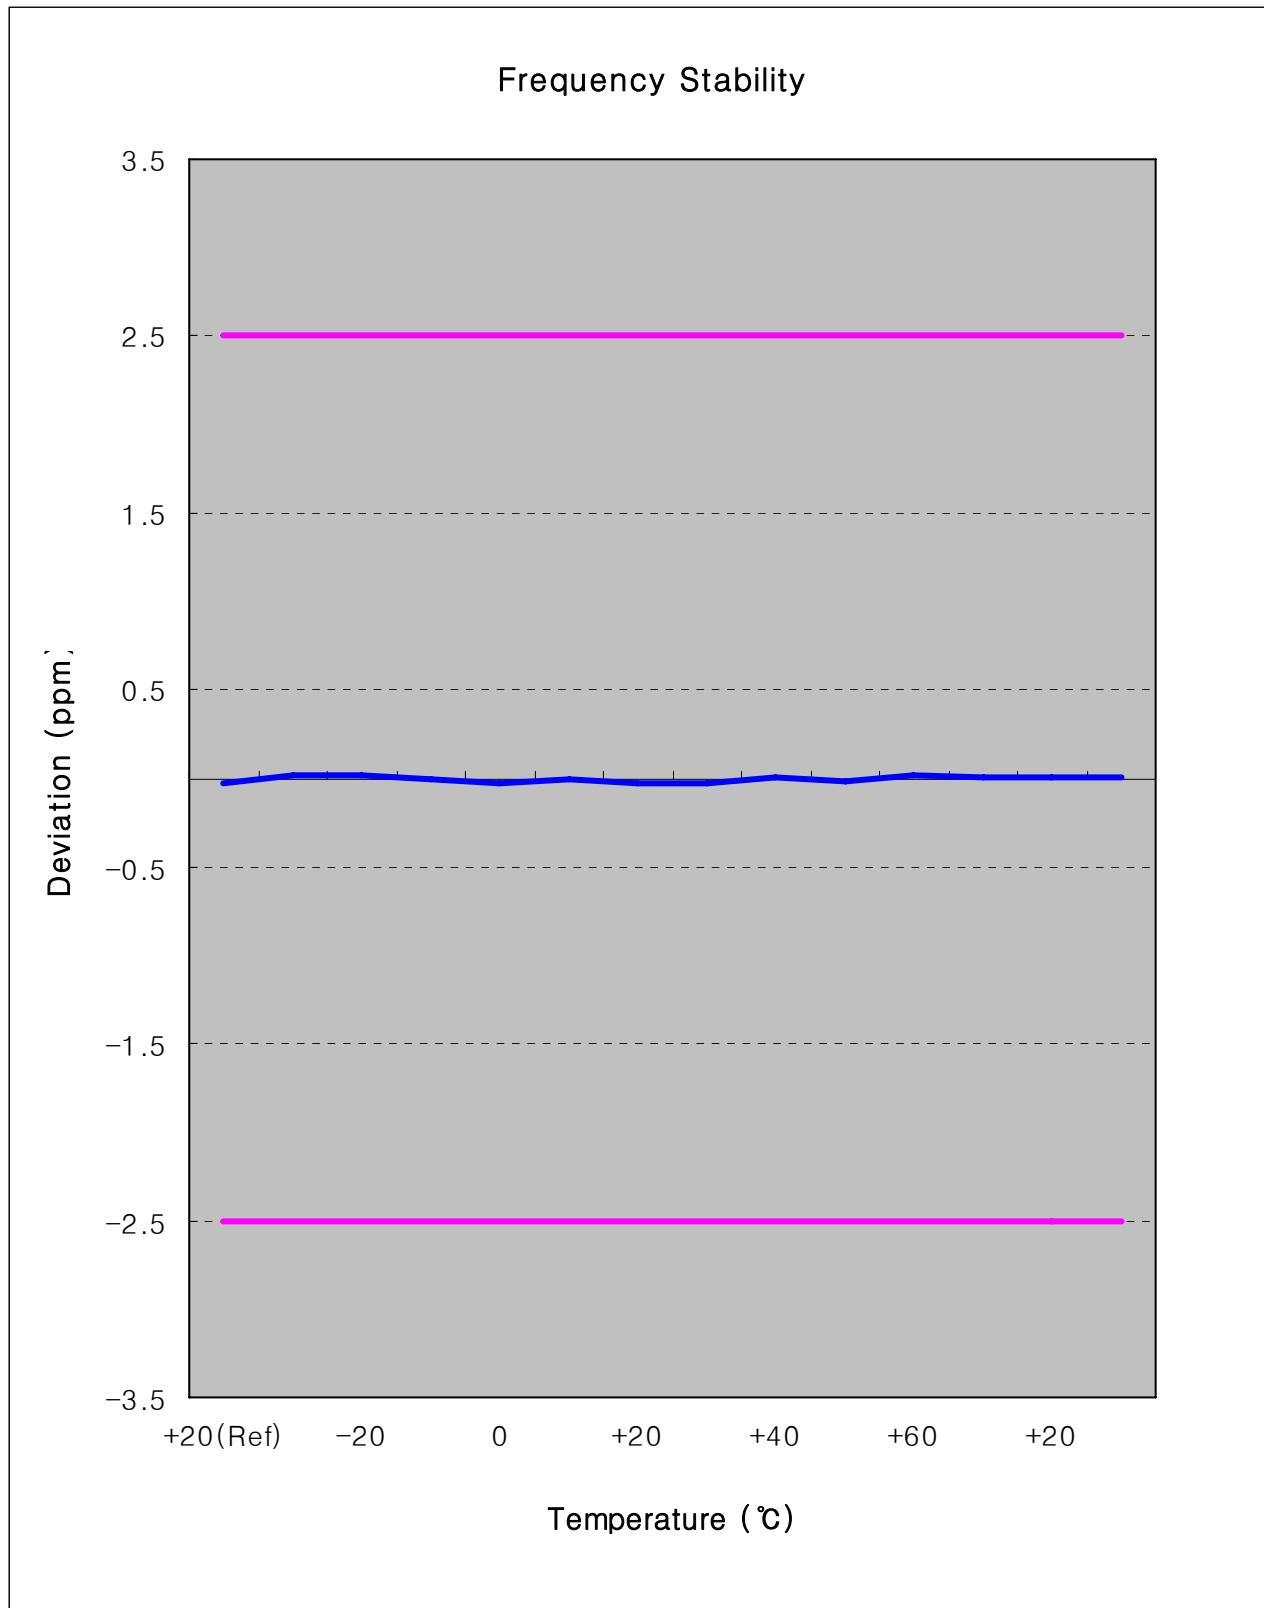

Zoom IN

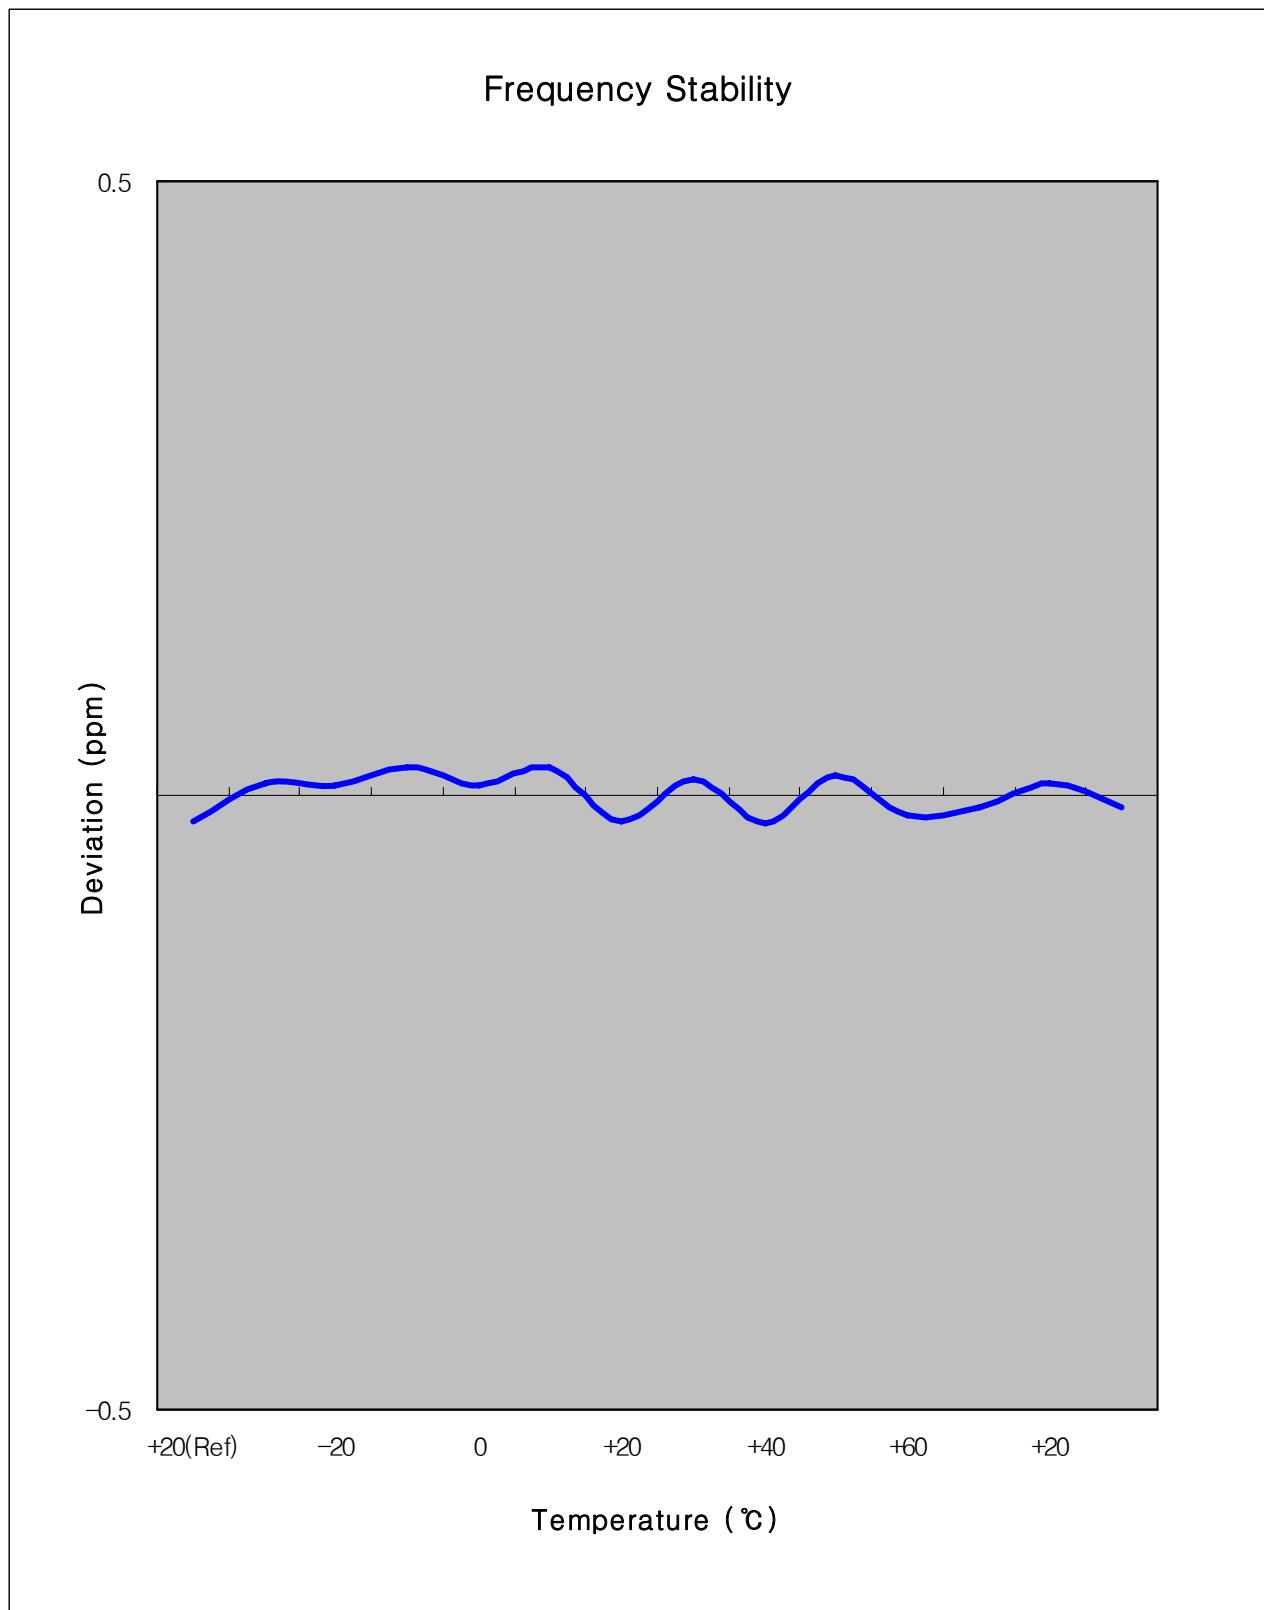



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS and Cellular/PCS WCDMA/HSDPA Phone with Bluetooth, EDGE Rx only and WLAN.

FCC ID : A3LGTS3770M complies with all the requirements of Parts 2,22,24 of the FCC Rules.




8. TEST PLOTS

GSM850

Agilent

R T

Freq/Channel

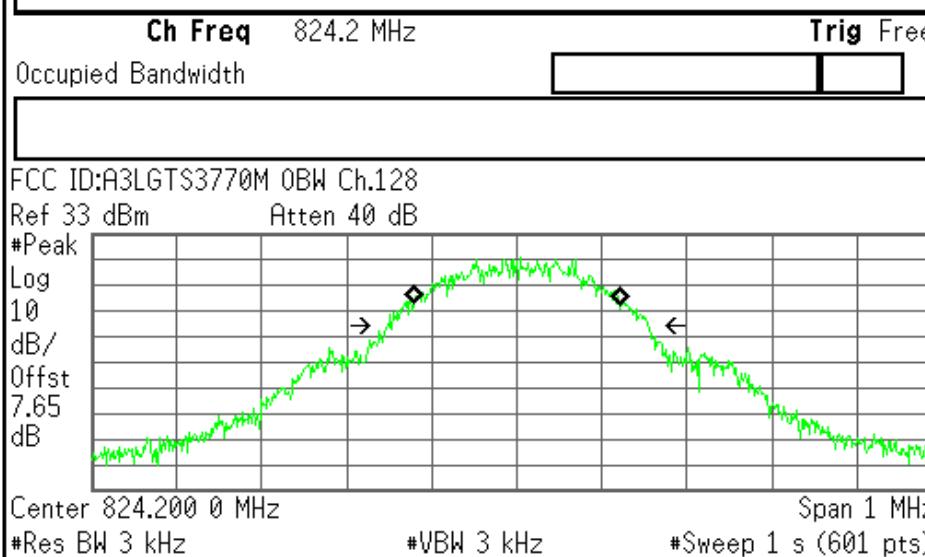Center Freq
824.200000 MHzStart Freq
823.700000 MHzStop Freq
824.700000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Occupied Bandwidth 245.7851 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -134.118 Hz


x dB Bandwidth 308.669 kHz

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

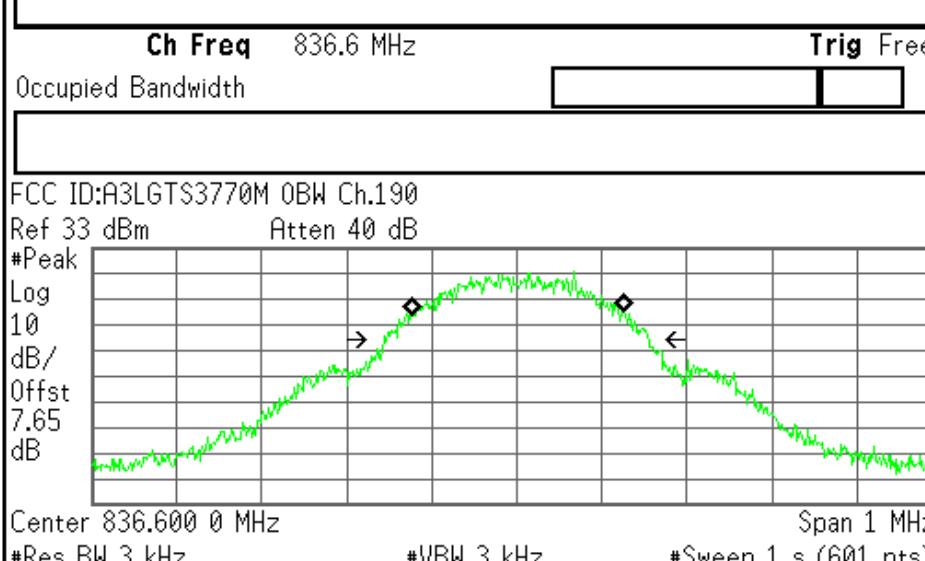Center Freq
836.600000 MHzStart Freq
836.100000 MHzStop Freq
837.100000 MHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

Occupied Bandwidth 249.7877 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 948.742 Hz


x dB Bandwidth 313.479 kHz

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

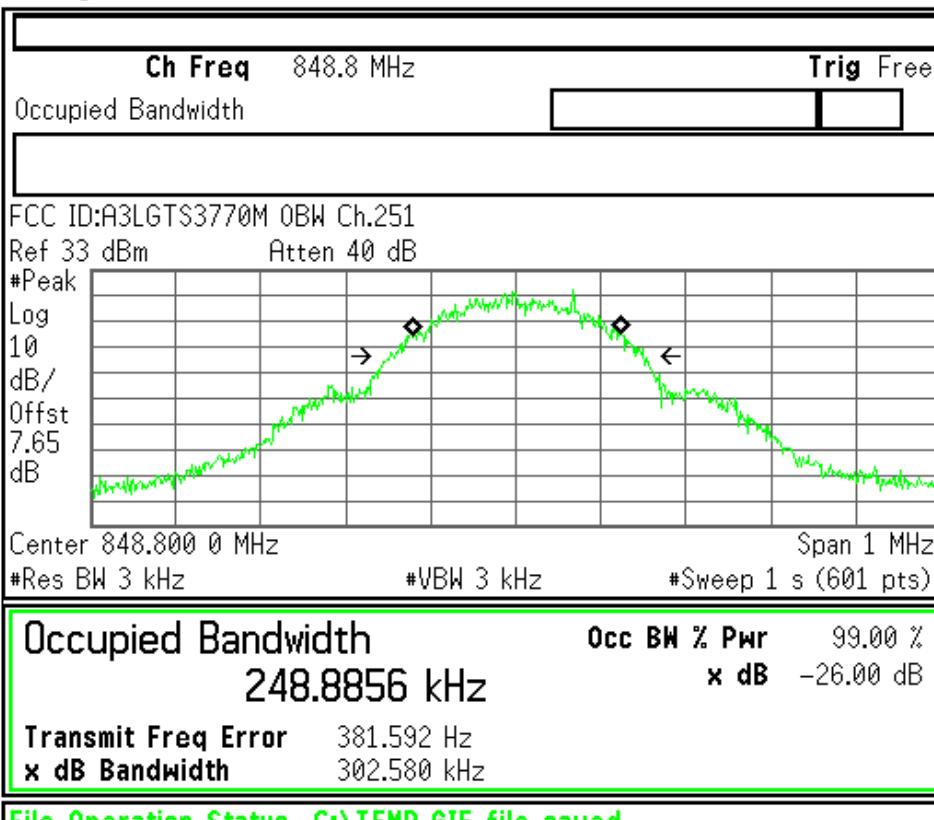

Center Freq
848.800000 MHz

Start Freq
848.300000 MHz

Stop Freq
849.300000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


FCC ID : A3LGTS3770M Transmit Power 128CH

| Control | | Measurement/Instrument Screen | | | | | | TCHParms | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------|-----------------------|--|--------------|---------------|---------|---------|--|------------------------|-----------------------|-------------|--------------|---------------|---------|---------|--------|---------|-------|-------|-------|---------|-------|------|-------|-----------|-------|-------|-------|-------|--|--|
| Transmit Power Setup | | Transmit Power | | | | | | Downlink Traffic Power | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th></th><th>Burst 1</th><th>Burst 2</th><th>Burst 3</th><th>Burst 4</th><th>Burst 5</th><th>Burst 6</th></tr> </thead> <tbody> <tr> <td>BP</td><td>32.44</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td></tr> <tr> <td>ECP</td><td>32.44</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td></tr> </tbody> </table> | | | | | | | Burst 1 | Burst 2 | Burst 3 | Burst 4 | Burst 5 | Burst 6 | BP | 32.44 | ----- | ----- | ----- | ----- | ----- | ECP | 32.44 | ----- | ----- | ----- | ----- | ----- | | |
| | Burst 1 | Burst 2 | Burst 3 | Burst 4 | Burst 5 | Burst 6 | | | | | | | | | | | | | | | | | | | | | | | | |
| BP | 32.44 | ----- | ----- | ----- | ----- | ----- | | | | | | | | | | | | | | | | | | | | | | | | |
| ECP | 32.44 | ----- | ----- | ----- | ----- | ----- | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Single | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Snap Window Positions | | Phase & Frequency Error | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th></th><th>Peak Phase °</th><th>RMS Phase °</th><th>Frequency Hz</th></tr> </thead> <tbody> <tr> <td>Minimum</td><td>3.43</td><td>1.56</td><td>-14.34</td></tr> <tr> <td>Maximum</td><td>4.62</td><td>1.85</td><td>2.05</td></tr> <tr> <td>Average</td><td>4.06</td><td>1.70</td><td>-7.35</td></tr> <tr> <td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr> </tbody> </table> | | | | | | | Peak Phase ° | RMS Phase ° | Frequency Hz | Minimum | 3.43 | 1.56 | -14.34 | Maximum | 4.62 | 1.85 | 2.05 | Average | 4.06 | 1.70 | -7.35 | Pass/Fail | Pass | Pass | Pass | | | |
| | Peak Phase ° | RMS Phase ° | Frequency Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Minimum | 3.43 | 1.56 | -14.34 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum | 4.62 | 1.85 | 2.05 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Average | 4.06 | 1.70 | -7.35 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pass/Fail | Pass | Pass | Pass | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 / 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th></th><th colspan="3">Active Cell Connected</th><th colspan="2">Sys Type: GSM</th></tr> </thead> <tbody> <tr> <td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table> | | | | | | | Active Cell Connected | | | Sys Type: GSM | | | | | | | | | | | | | | | | | | |
| | Active Cell Connected | | | Sys Type: GSM | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 of 2 | | | | | | | | 1 of 2 | | | | | | | | | | | | | | | | | | | | | | |


FCC ID : A3LGTS3770M Transmit Power 190CH

| Control | | Measurement/Instrument Screen | | | | | | TCHParms | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------|-----------------------|---|--------------|---------------|---------|---------|--|------------------------|-----------------------|-------------|--------------|---------------|---------|---------|--------|---------|-------|-------|-------|---------|-------|------|-------|-----------|-------|-------|-------|-------|--|--|
| Transmit Power Setup | | Transmit Power | | | | | | Downlink Traffic Power | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th></th><th>Burst 1</th><th>Burst 2</th><th>Burst 3</th><th>Burst 4</th><th>Burst 5</th><th>Burst 6</th></tr> </thead> <tbody> <tr> <td>BP</td><td>32.46</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td></tr> <tr> <td>ECP</td><td>32.46</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td><td>-----</td></tr> </tbody> </table> | | | | | | | Burst 1 | Burst 2 | Burst 3 | Burst 4 | Burst 5 | Burst 6 | BP | 32.46 | ----- | ----- | ----- | ----- | ----- | ECP | 32.46 | ----- | ----- | ----- | ----- | ----- | | |
| | Burst 1 | Burst 2 | Burst 3 | Burst 4 | Burst 5 | Burst 6 | | | | | | | | | | | | | | | | | | | | | | | | |
| BP | 32.46 | ----- | ----- | ----- | ----- | ----- | | | | | | | | | | | | | | | | | | | | | | | | |
| ECP | 32.46 | ----- | ----- | ----- | ----- | ----- | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Single | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Snap Window Positions | | Phase & Frequency Error | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th></th><th>Peak Phase °</th><th>RMS Phase °</th><th>Frequency Hz</th></tr> </thead> <tbody> <tr> <td>Minimum</td><td>3.46</td><td>1.55</td><td>-15.97</td></tr> <tr> <td>Maximum</td><td>4.91</td><td>1.71</td><td>-3.71</td></tr> <tr> <td>Average</td><td>3.92</td><td>1.62</td><td>-9.50</td></tr> <tr> <td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr> </tbody> </table> | | | | | | | Peak Phase ° | RMS Phase ° | Frequency Hz | Minimum | 3.46 | 1.55 | -15.97 | Maximum | 4.91 | 1.71 | -3.71 | Average | 3.92 | 1.62 | -9.50 | Pass/Fail | Pass | Pass | Pass | | | |
| | Peak Phase ° | RMS Phase ° | Frequency Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Minimum | 3.46 | 1.55 | -15.97 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum | 4.91 | 1.71 | -3.71 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Average | 3.92 | 1.62 | -9.50 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pass/Fail | Pass | Pass | Pass | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 / 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th></th><th colspan="3">Active Cell Connected</th><th colspan="2">Sys Type: GSM</th></tr> </thead> <tbody> <tr> <td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table> | | | | | | | Active Cell Connected | | | Sys Type: GSM | | | | | | | | | | | | | | | | | | |
| | Active Cell Connected | | | Sys Type: GSM | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 of 2 | | | | | | | | 1 of 2 | | | | | | | | | | | | | | | | | | | | | | |


FCC ID : A3LGTS3770M Transmit Power 251CH

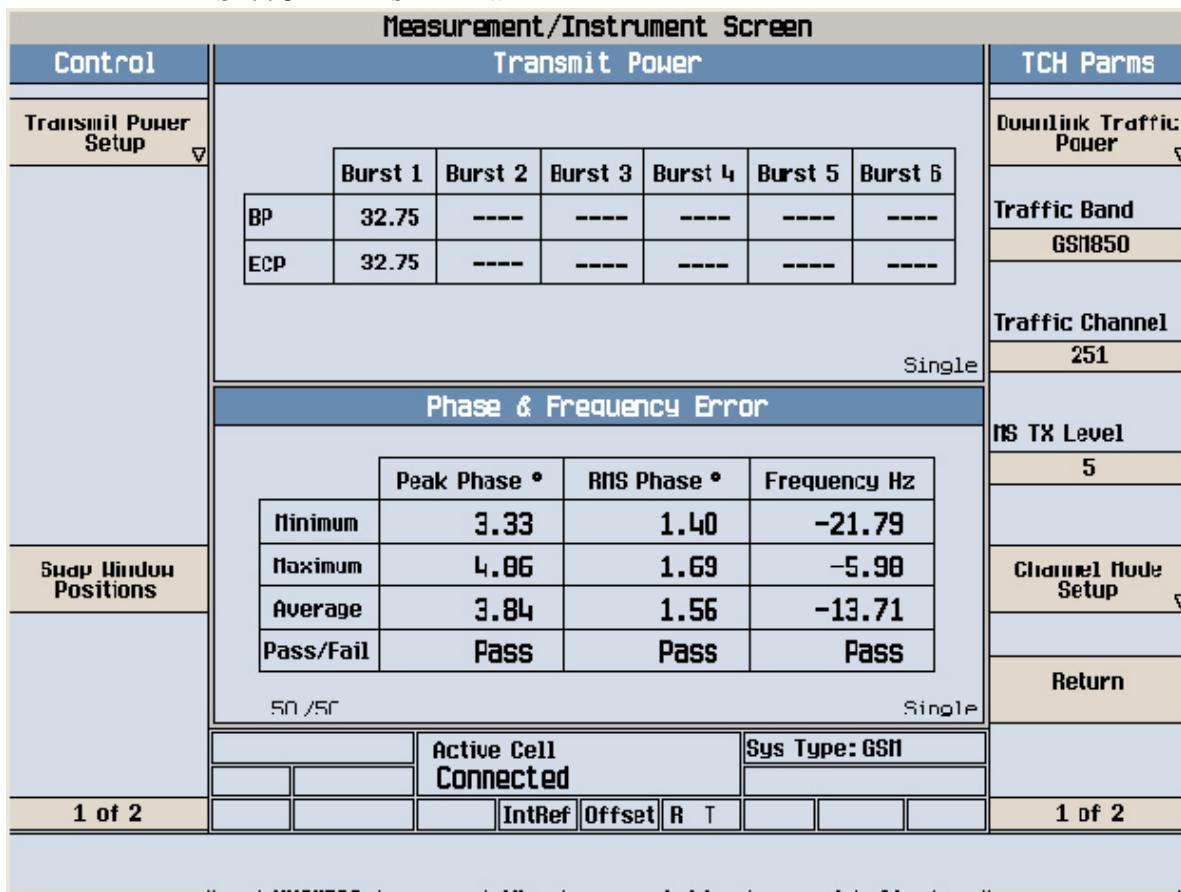


FCC ID : A3LGTS3770M GMSK Power vs Time 128CH

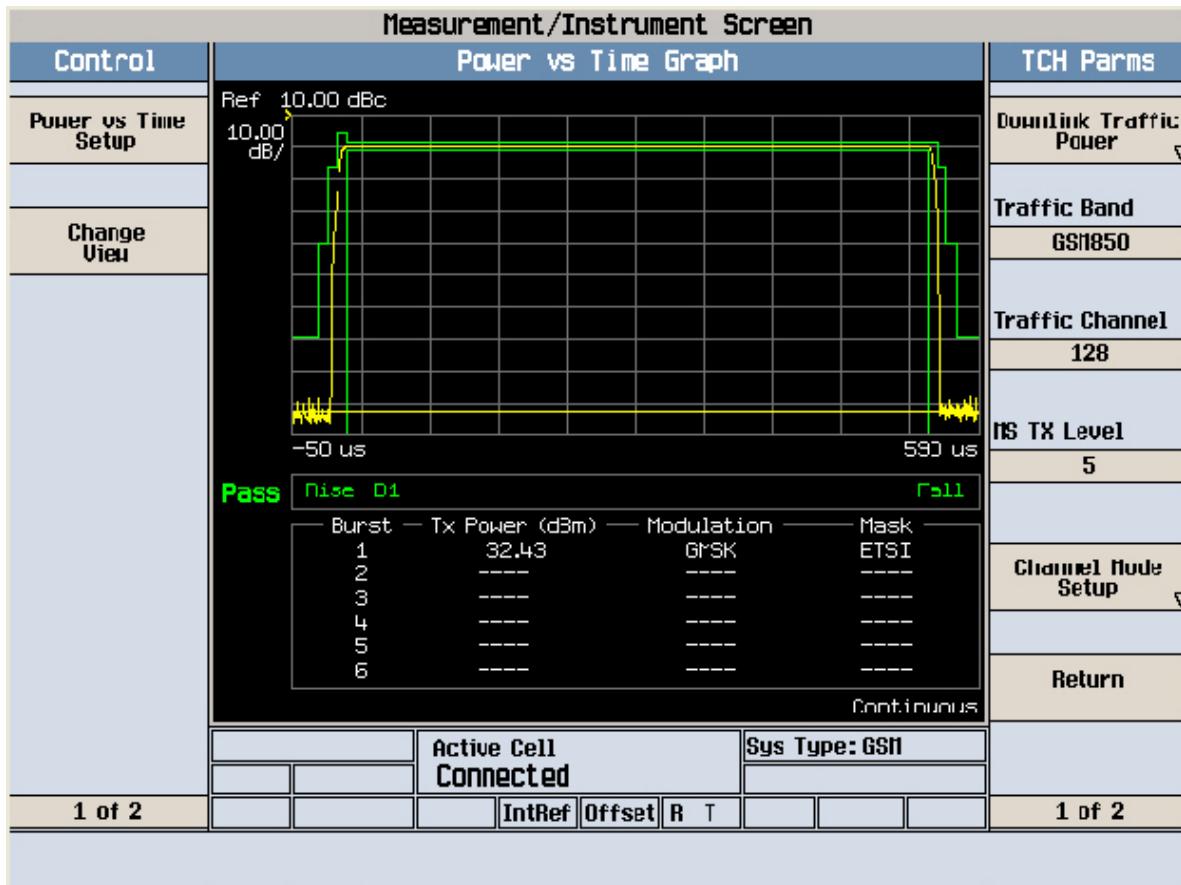


FCC ID : A3LGTS3770M GMSK Power vs Time 190CH

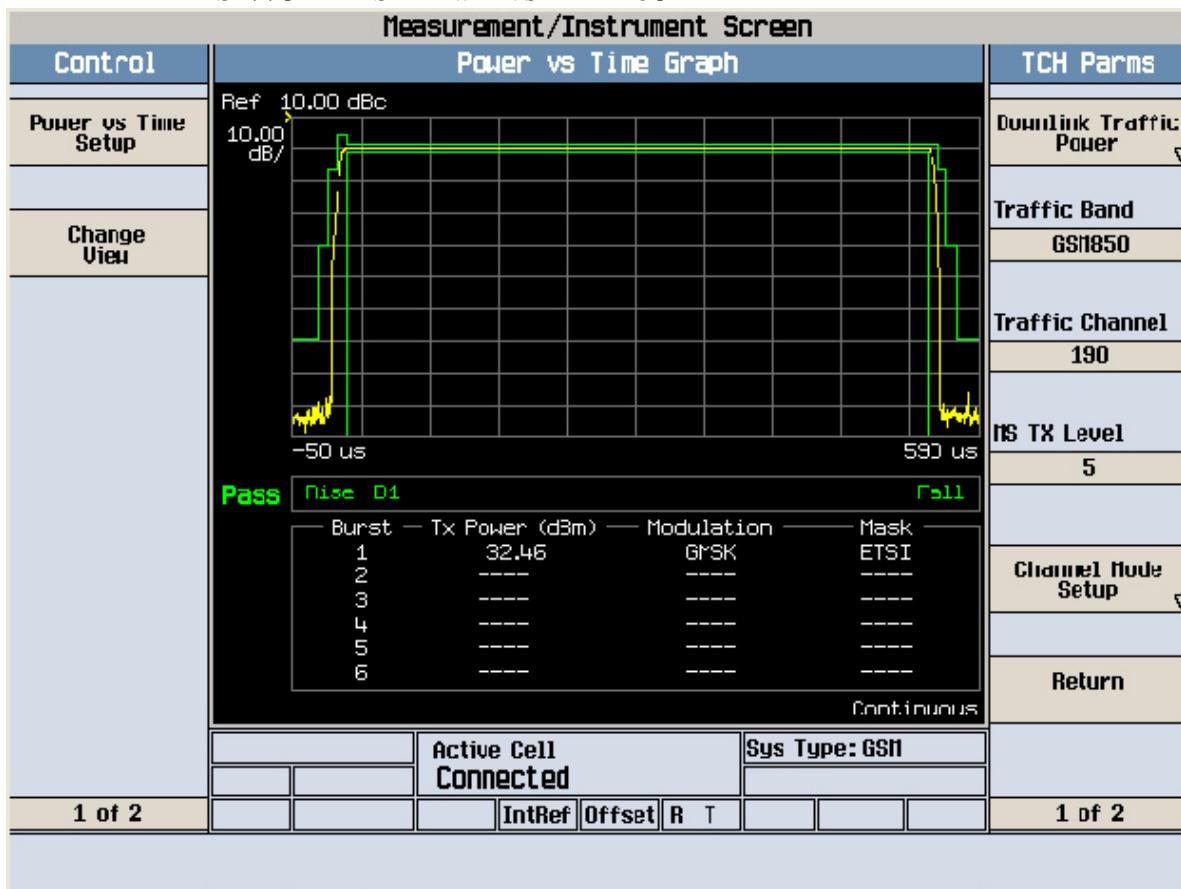


FCC ID : A3LGTS3770M GMSK Power vs Time 251CH

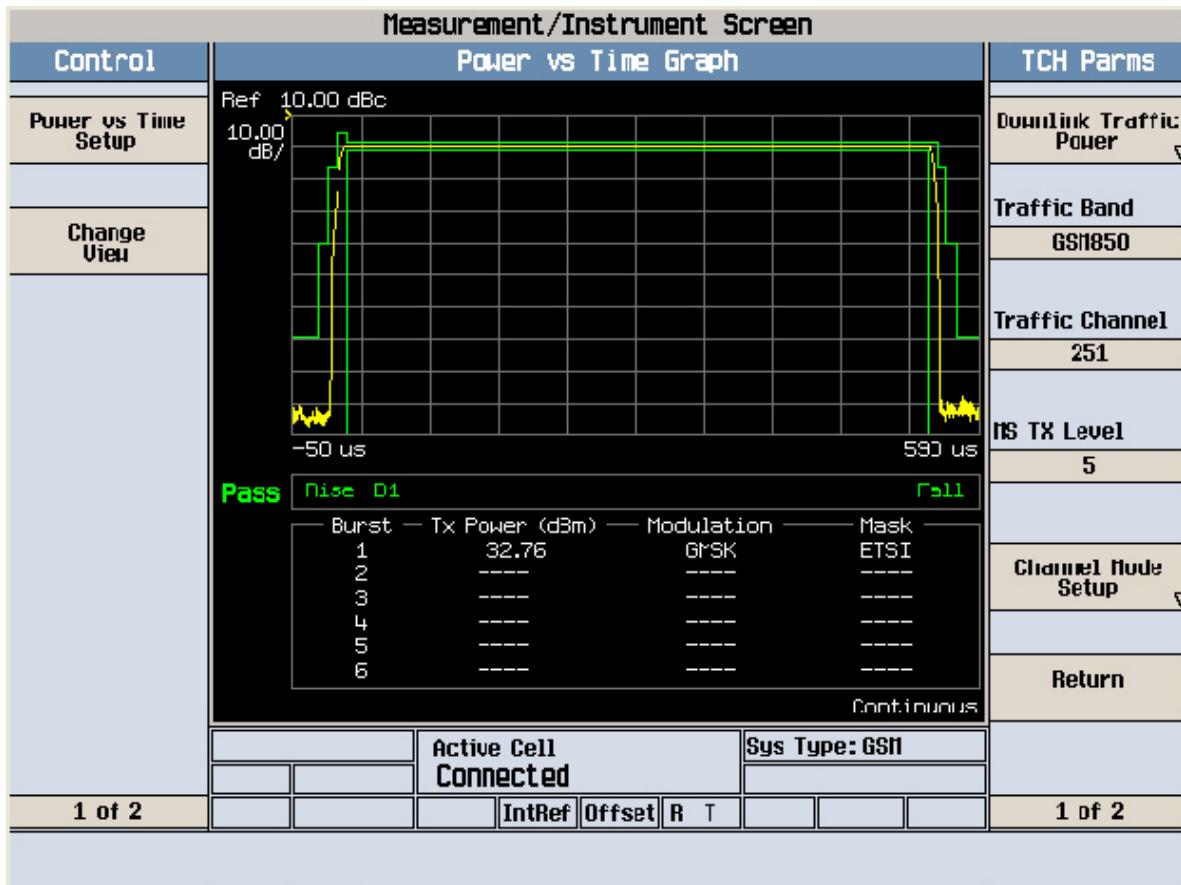


FCC ID : A3LGTS3770M Modulation & Switching 128CH

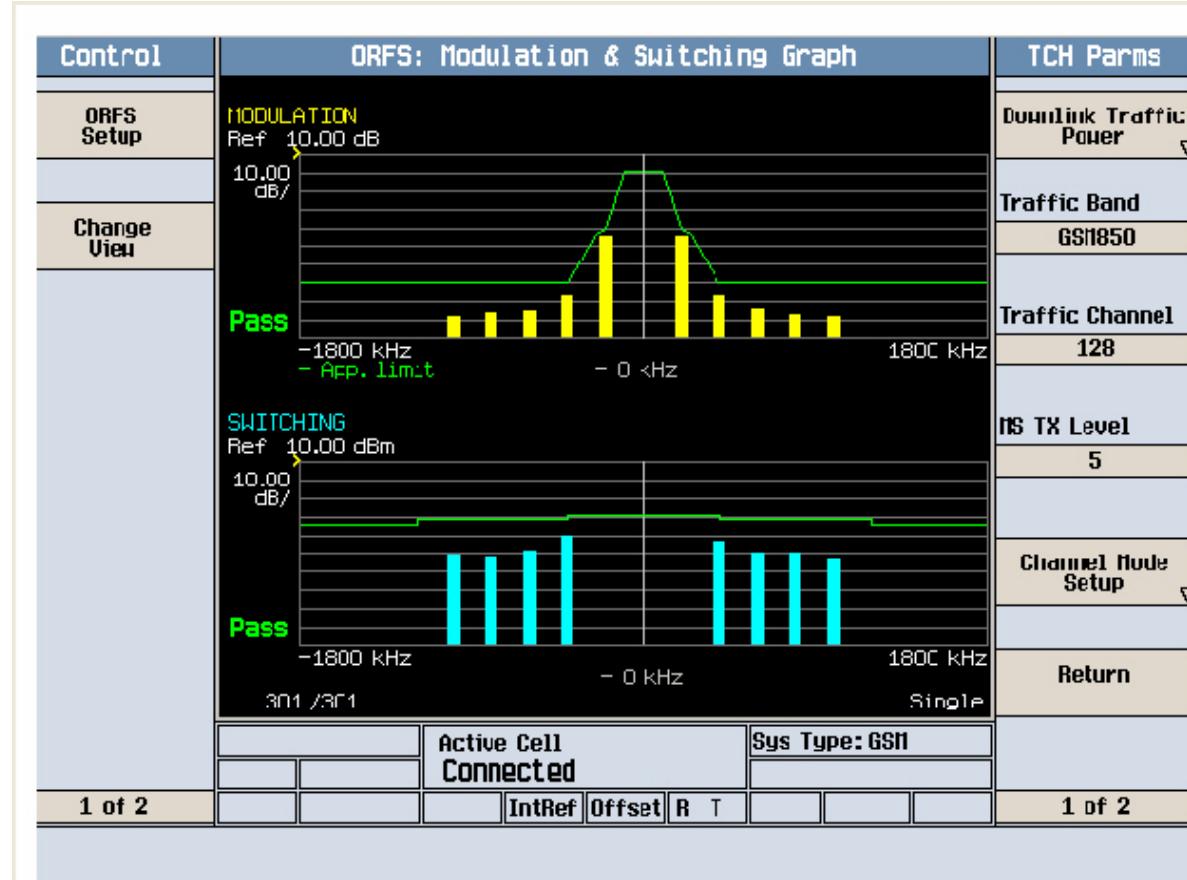

FCC ID : A3LGTS3770M Modulation & Switching 190CH

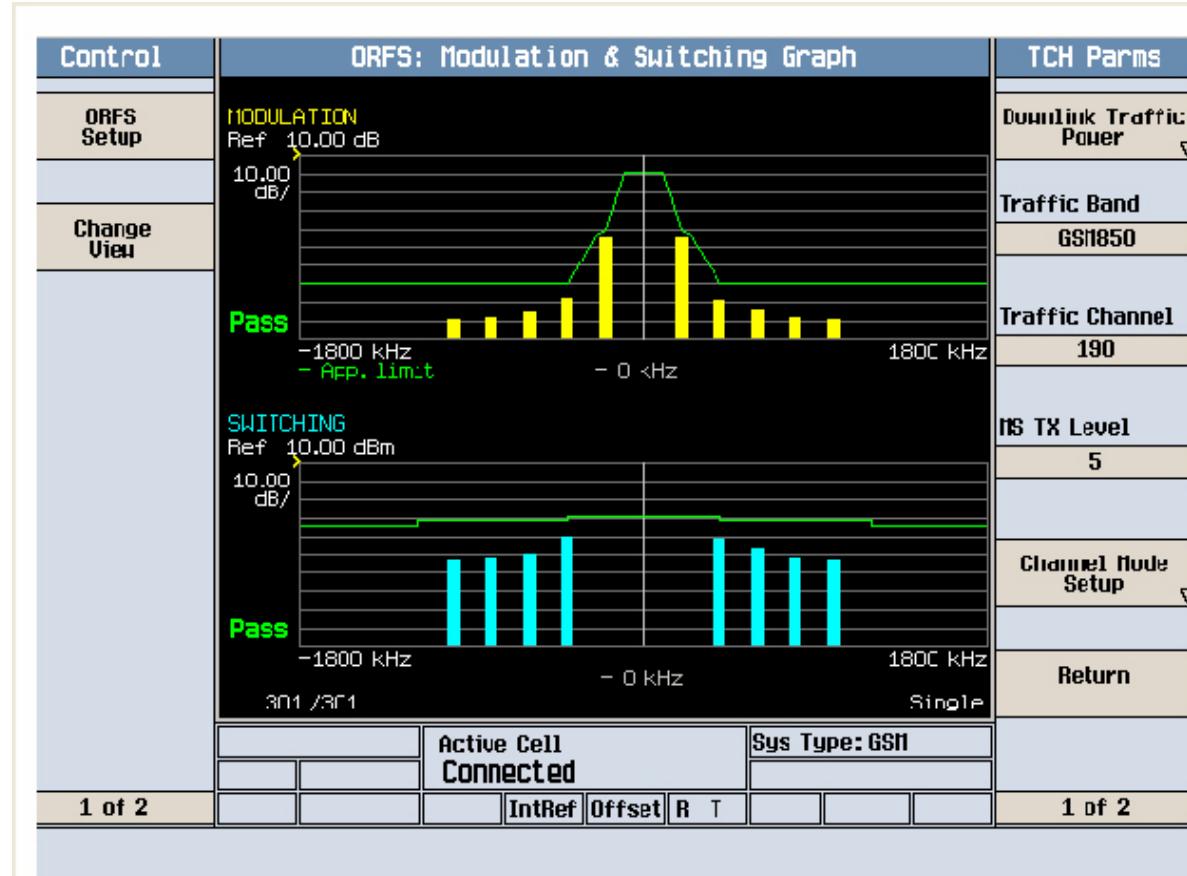

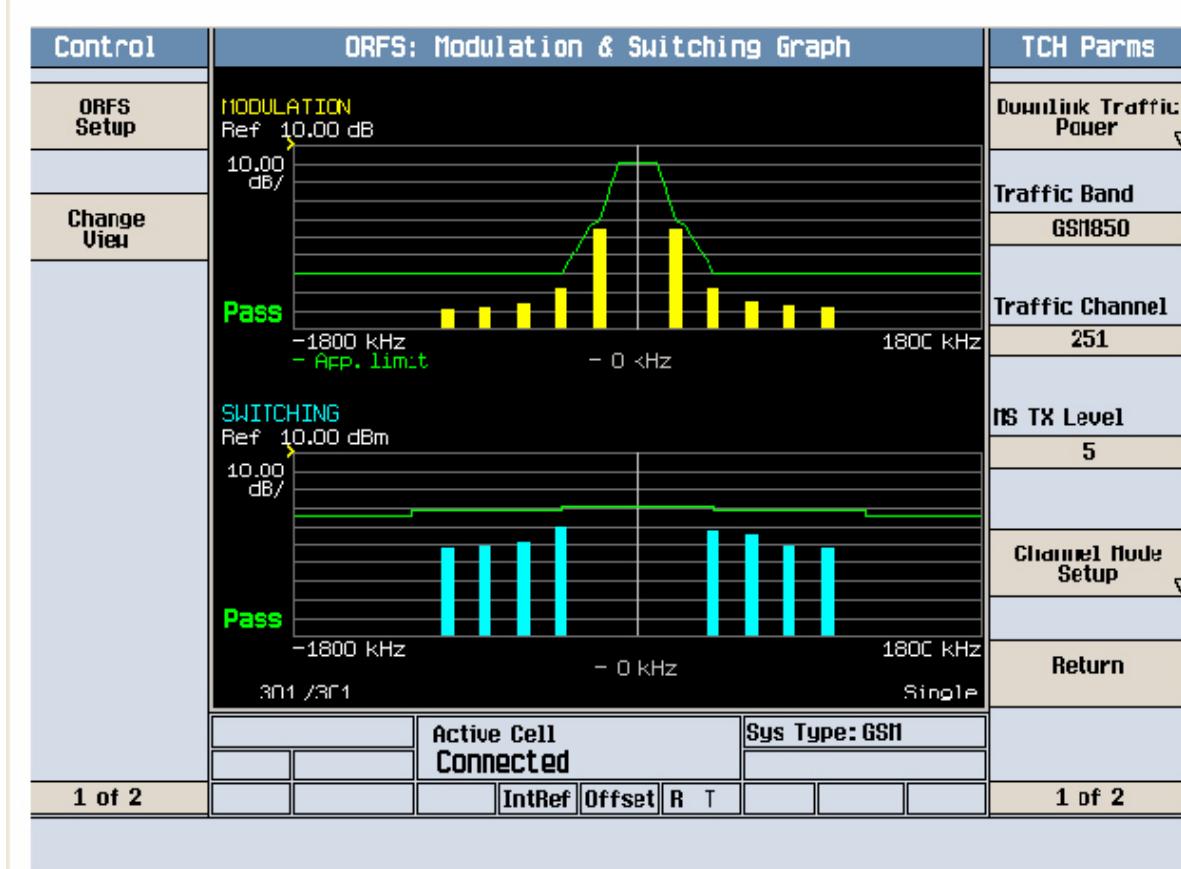


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.128

Ref 33 dBm Atten 40 dB

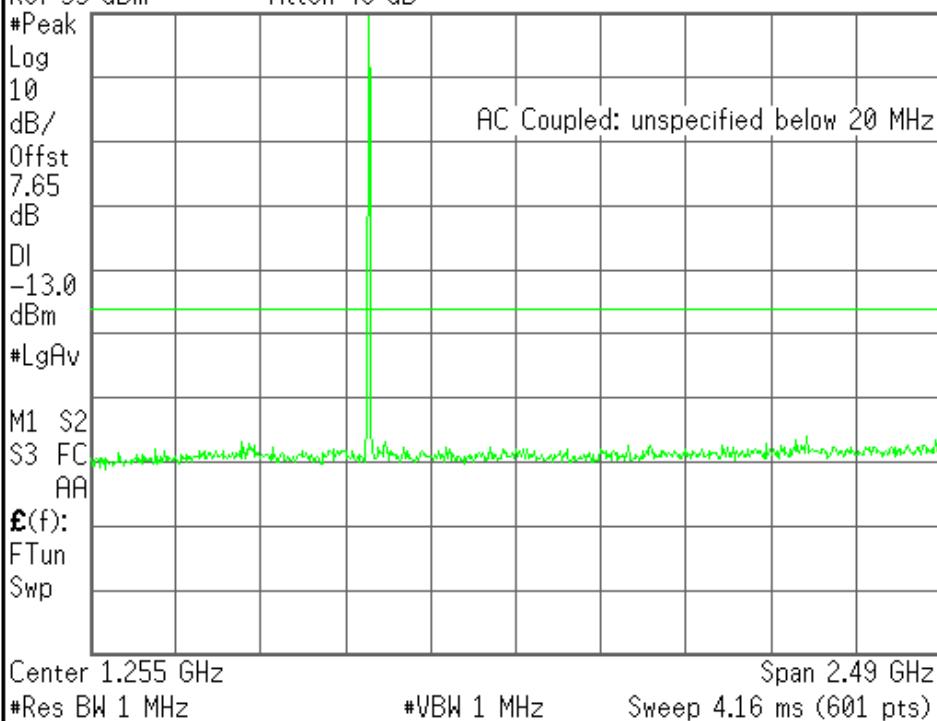

Center Freq

1.2500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.5000000 GHz

CF Step

249.000000 MHz

Auto Man

Freq Offset

0.00000000 Hz

Signal Track

On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.128

Mkr1 494.2 MHz

Ref 33 dBm Atten 40 dB

-34.36 dBm

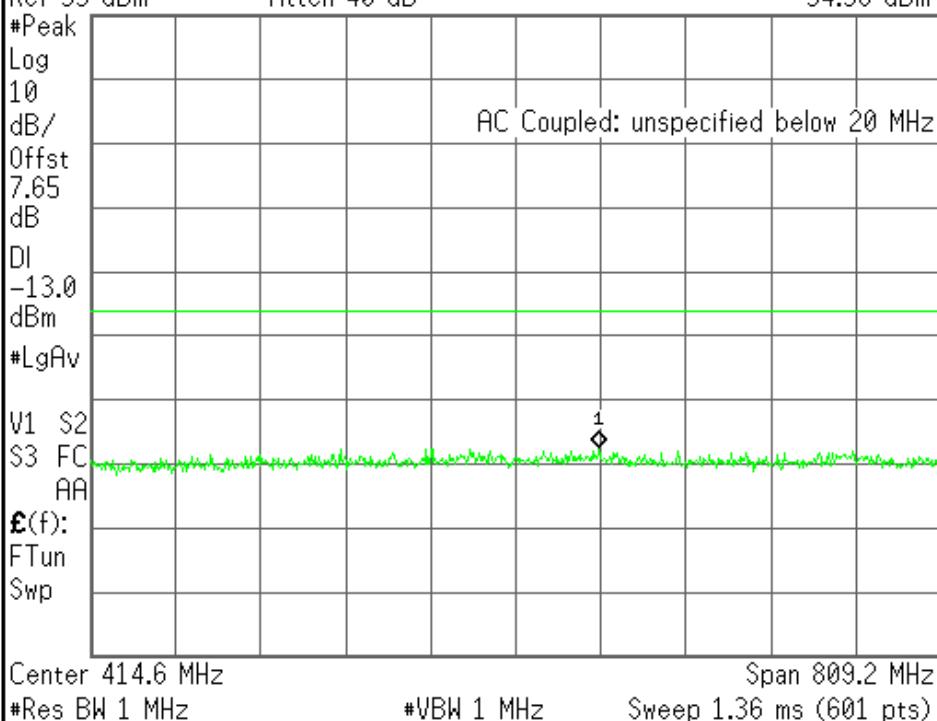

Center Freq

414.600000 MHz

Start Freq

10.0000000 MHz

Stop Freq

819.200000 MHz

CF Step

80.9200000 MHz

Auto Man



Freq Offset

0.00000000 Hz

Signal Track

On Off

File Operation Status, C:\TEMP.GIF file saved

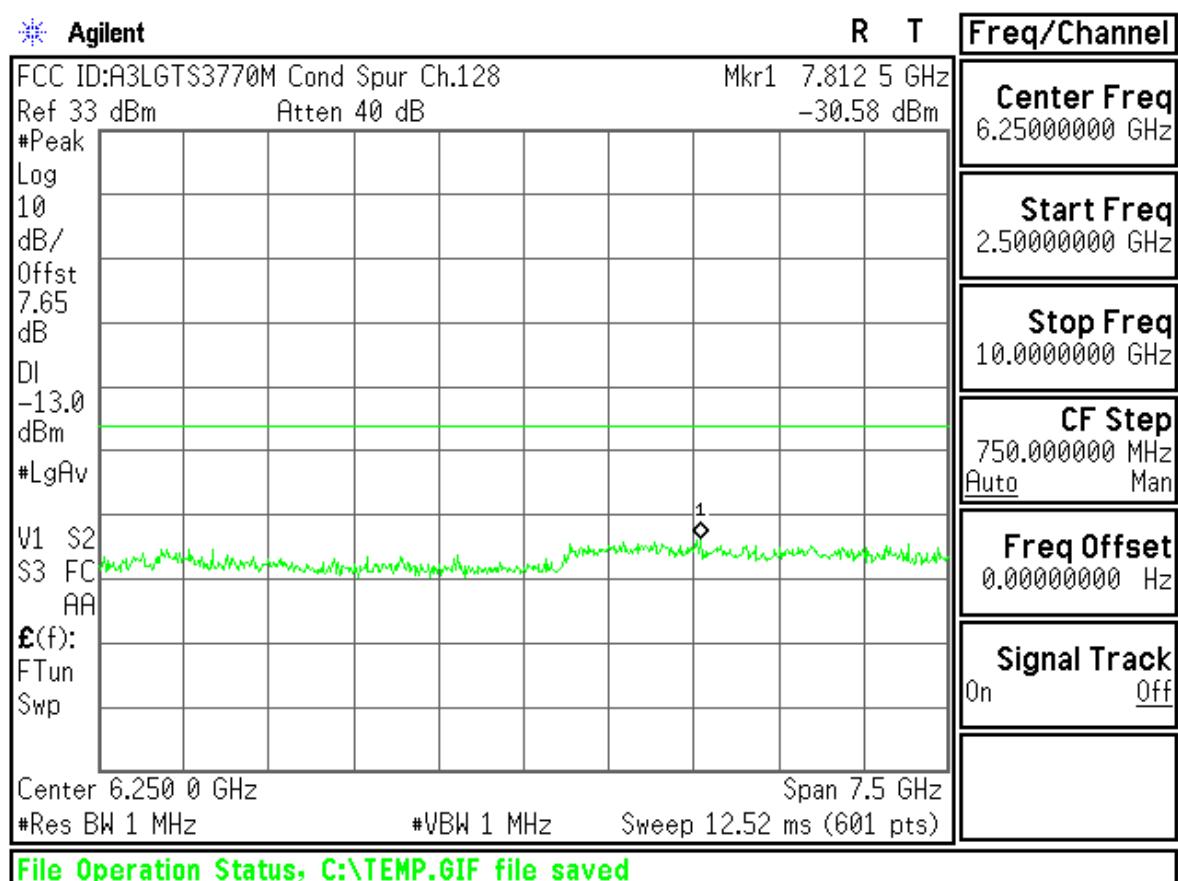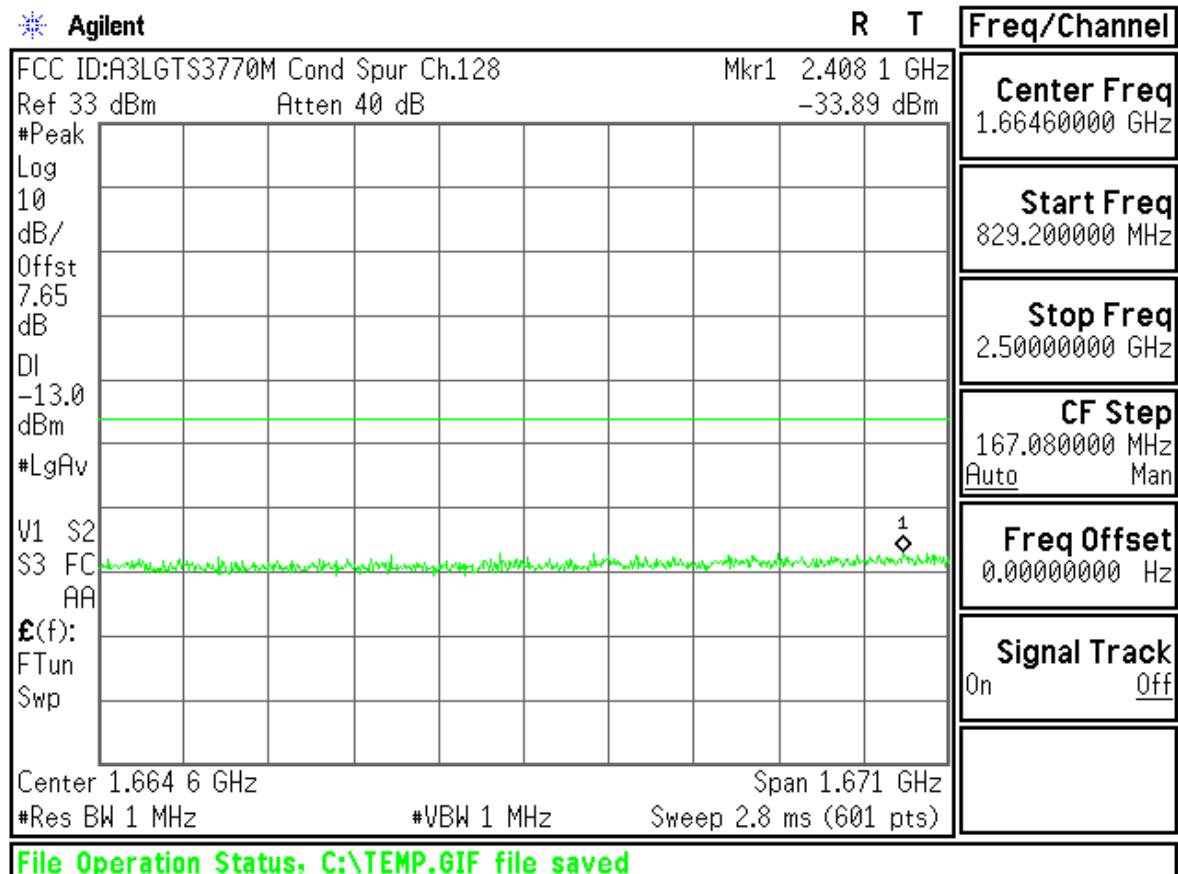


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.190

Ref 33 dBm Atten 40 dB

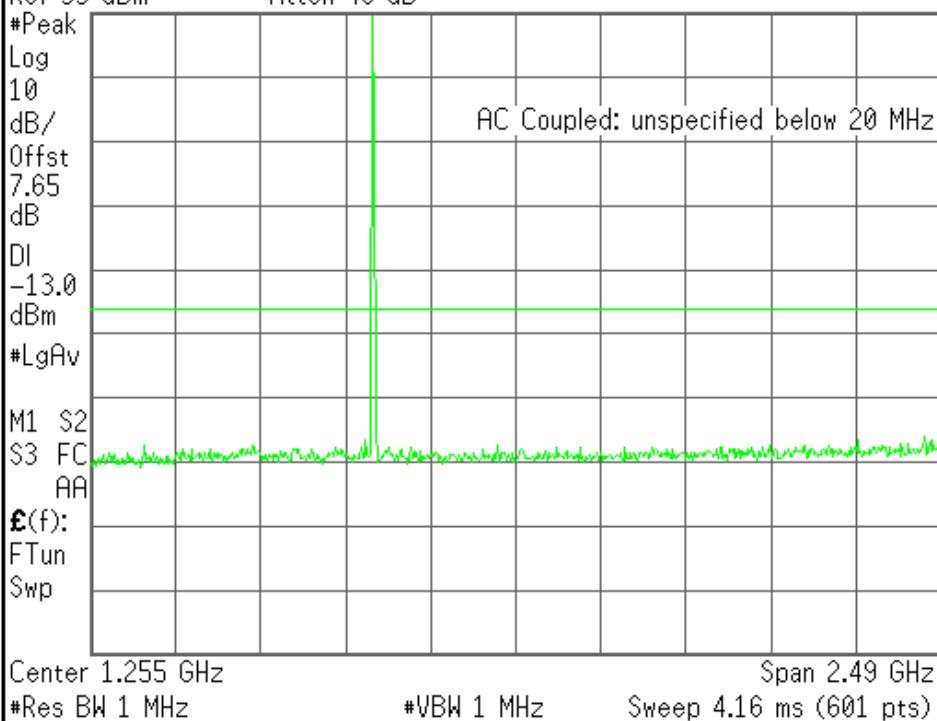

Center Freq

1.2500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.5000000 GHz

CF Step

249.000000 MHz

Auto

Freq Offset

0.00000000 Hz

Signal Track

On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.190

Mkr1 448.2 MHz

Ref 33 dBm Atten 40 dB

-33.94 dBm

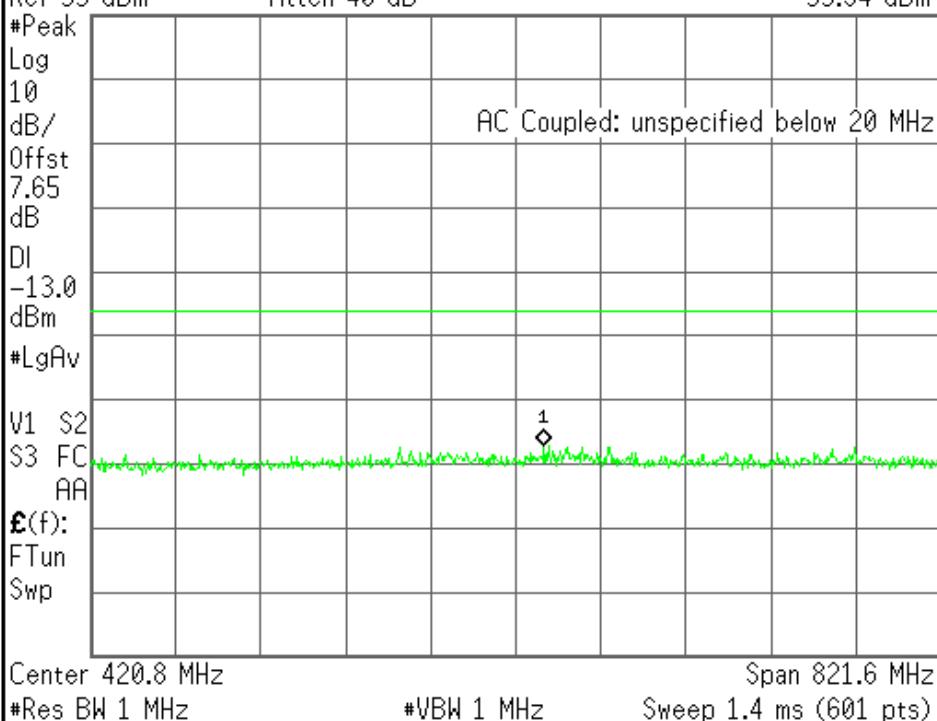

Center Freq

420.800000 GHz

Start Freq

10.0000000 MHz

Stop Freq

831.600000 MHz

CF Step

82.1600000 MHz

Auto

Freq Offset


0.00000000 Hz

Signal Track

On Off


File Operation Status, C:\TEMP.GIF file saved

Agilent

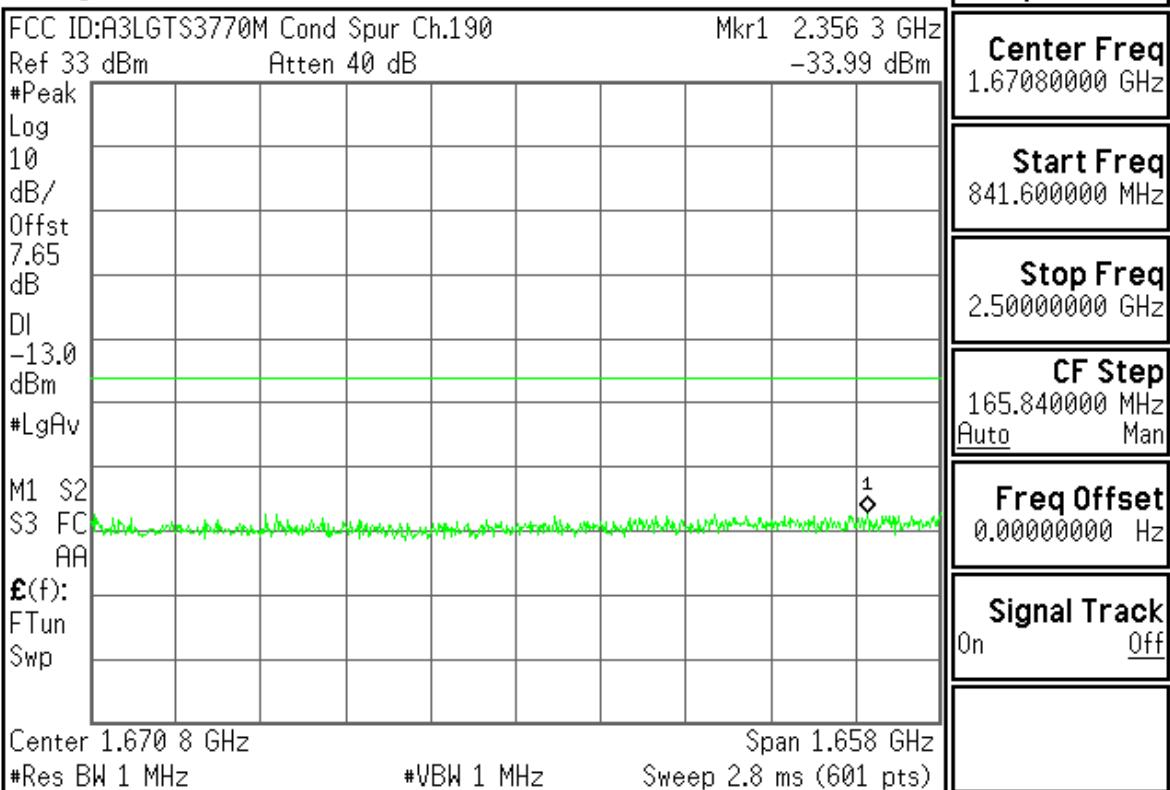

File Operation Status, C:\TEMP.GIF file saved

Agilent

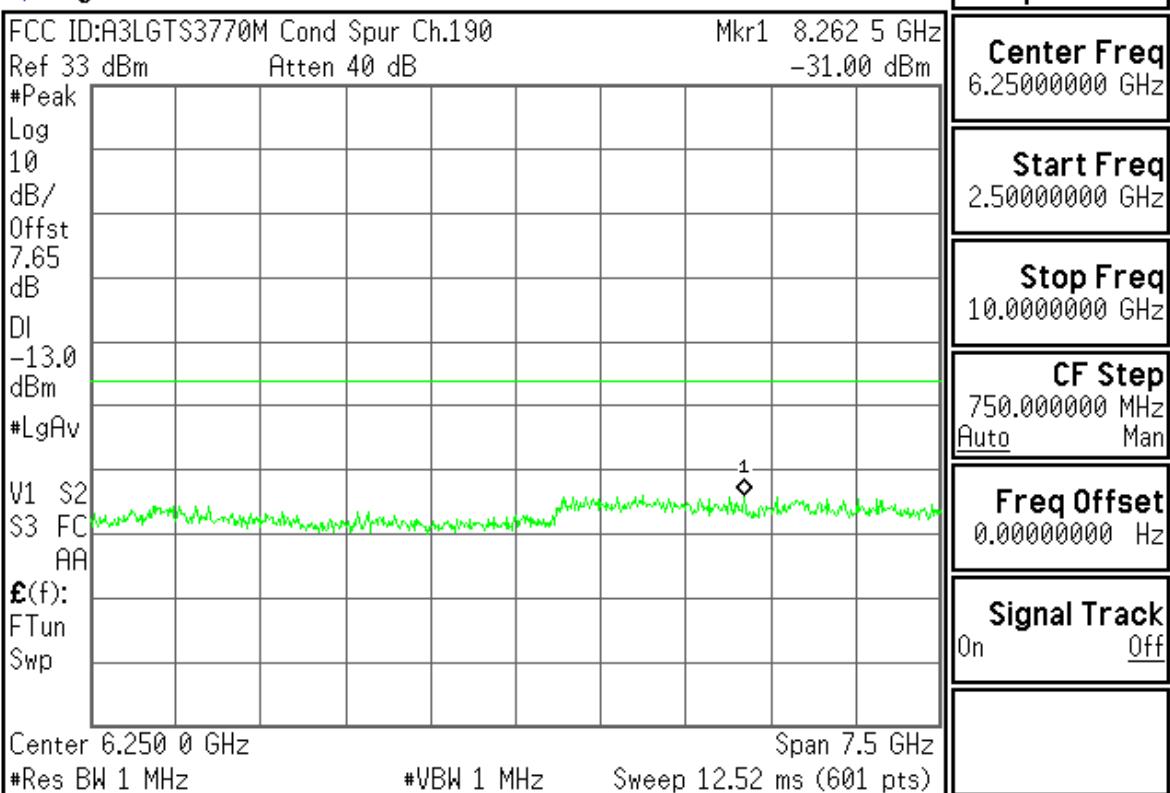

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.251

Ref 33 dBm Atten 40 dB

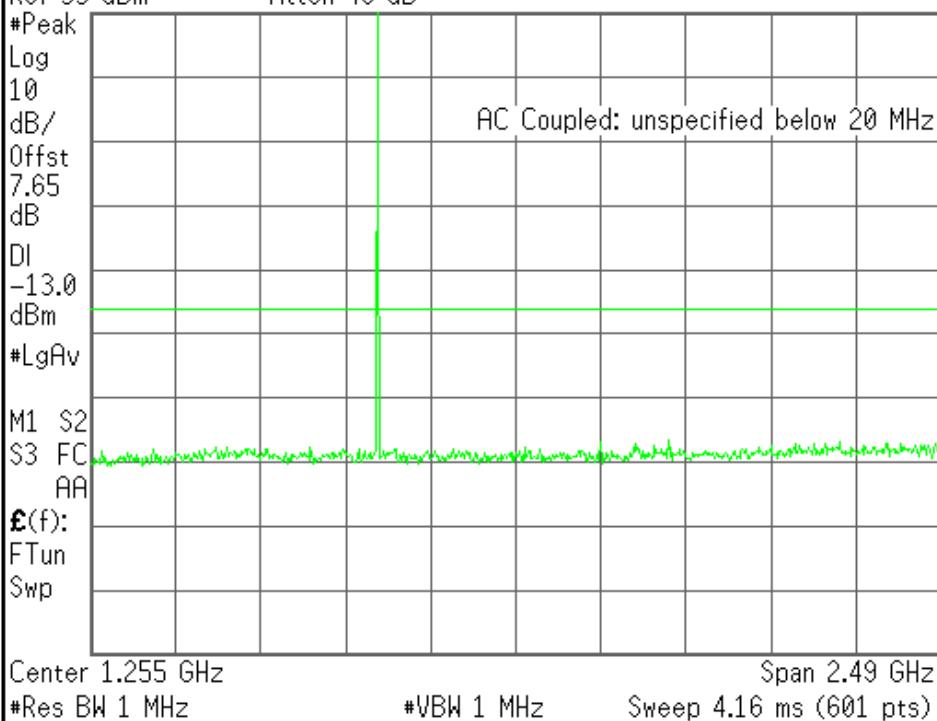

Center Freq

1.2500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.5000000 GHz

CF Step

249.000000 MHz

Auto Man

Freq Offset

0.0000000 Hz

Signal Track

On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.251

Mkr1 841.0 MHz

Ref 33 dBm Atten 40 dB

-31.42 dBm

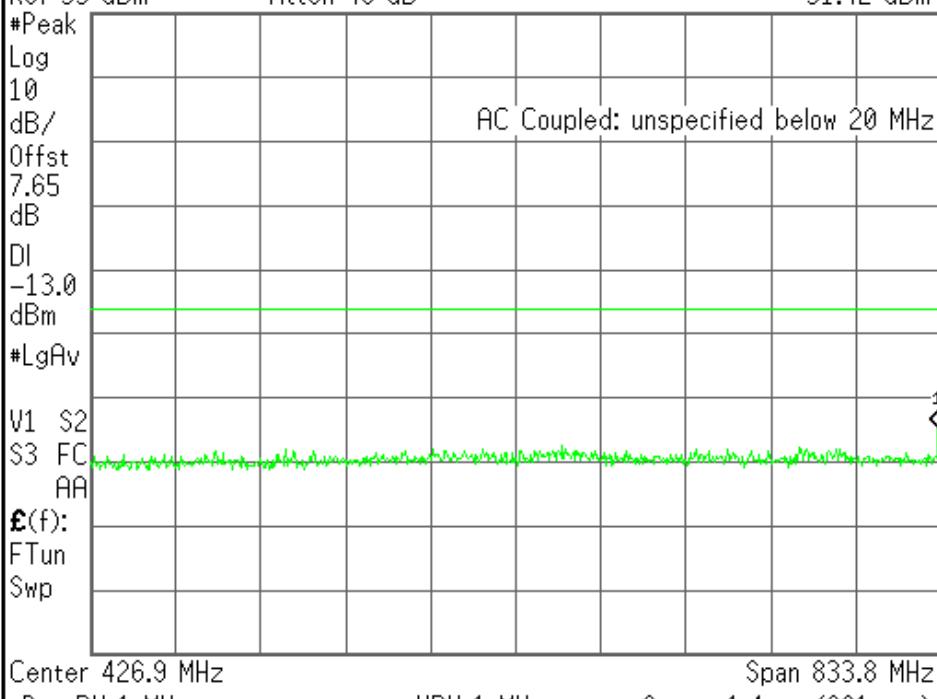

Center Freq

426.900000 MHz

Start Freq

10.0000000 MHz

Stop Freq

843.800000 MHz

CF Step

83.3800000 MHz

Auto Man

Freq Offset


0.0000000 Hz

Signal Track


On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

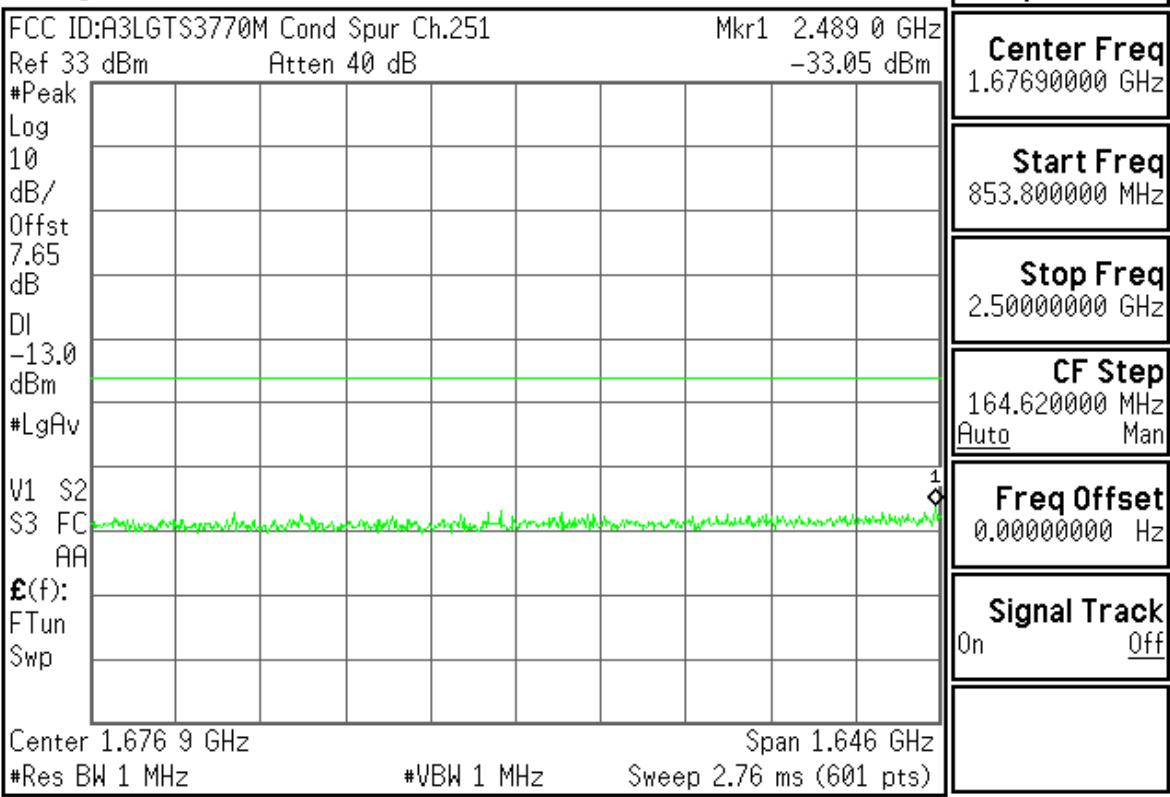

Agilent

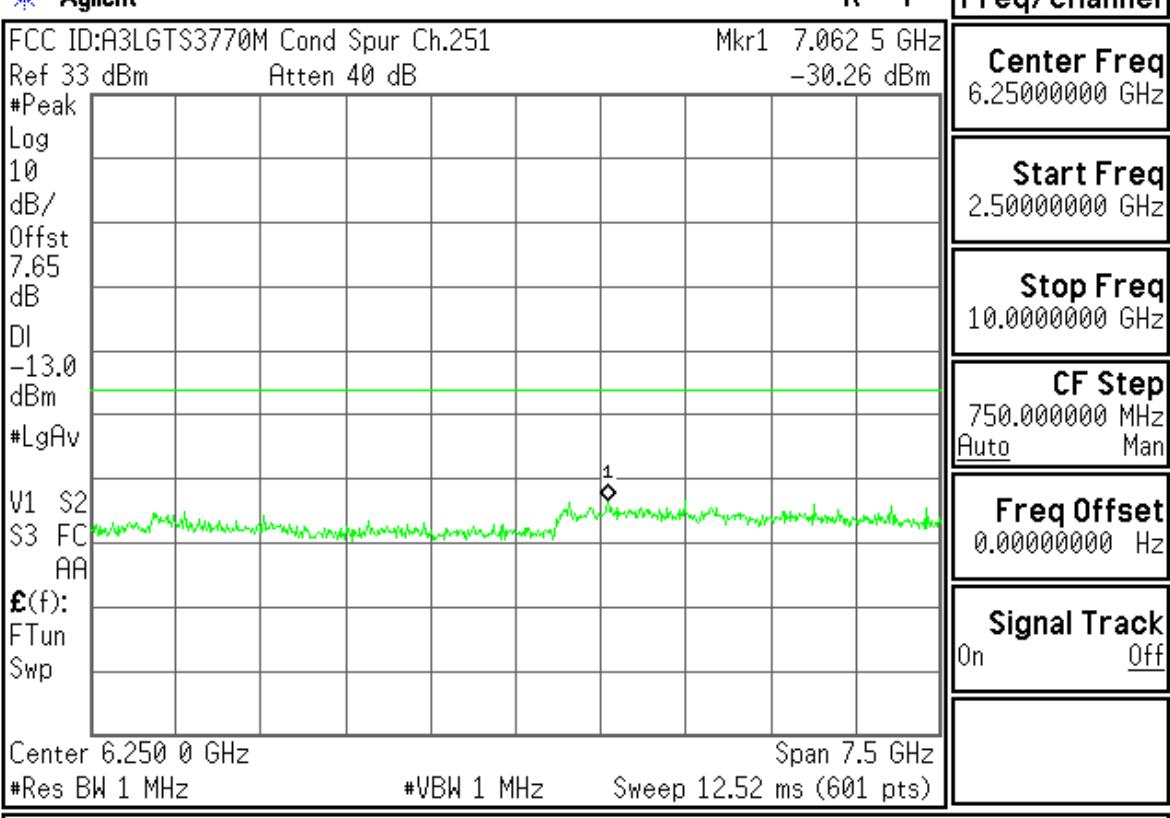


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.128
Ref 33 dBm Atten 40 dB

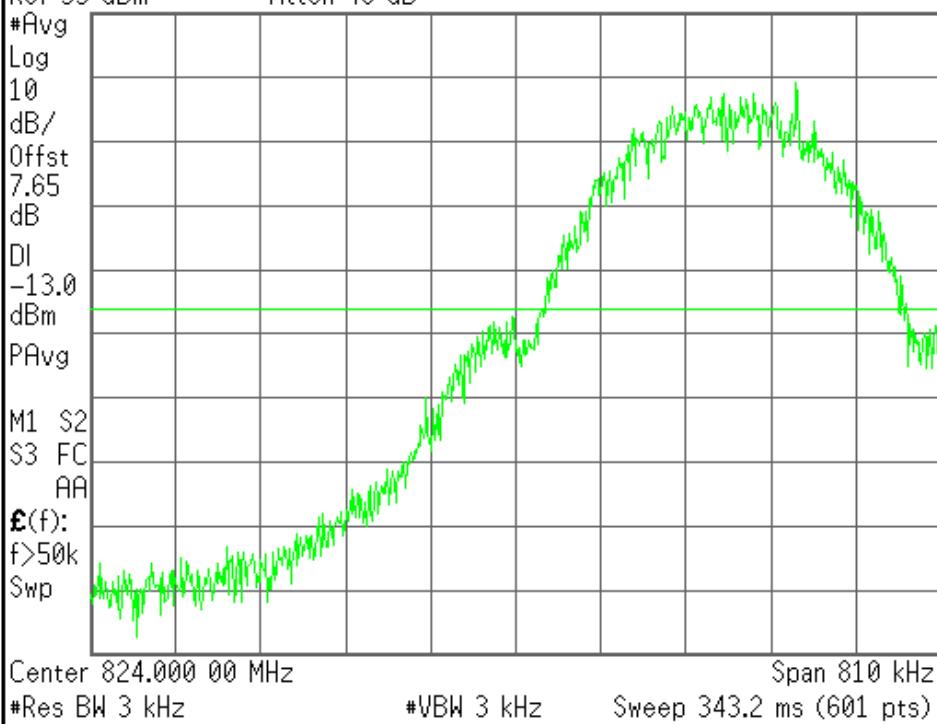

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2007 Agilent Technologies


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.128
Ref 33 dBm Atten 40 dB

Mkr1 823.997 33 MHz
-14.68 dBm

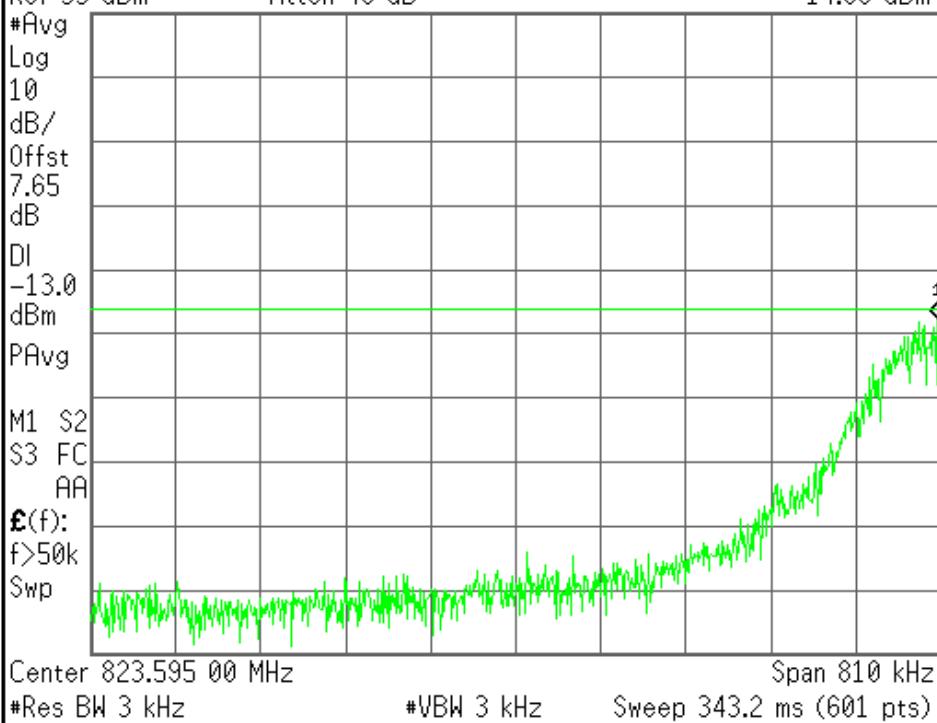

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.251
Ref 33 dBm Atten 40 dB

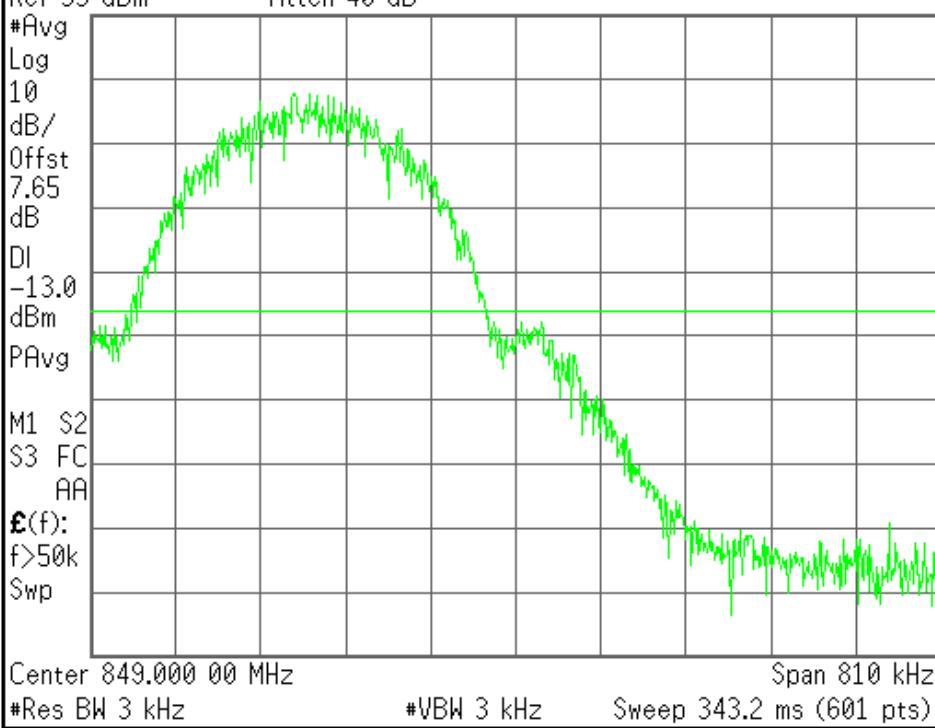

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.251
Ref 33 dBm Atten 40 dB

Mkr1 849.021 40 MHz
-14.44 dBm

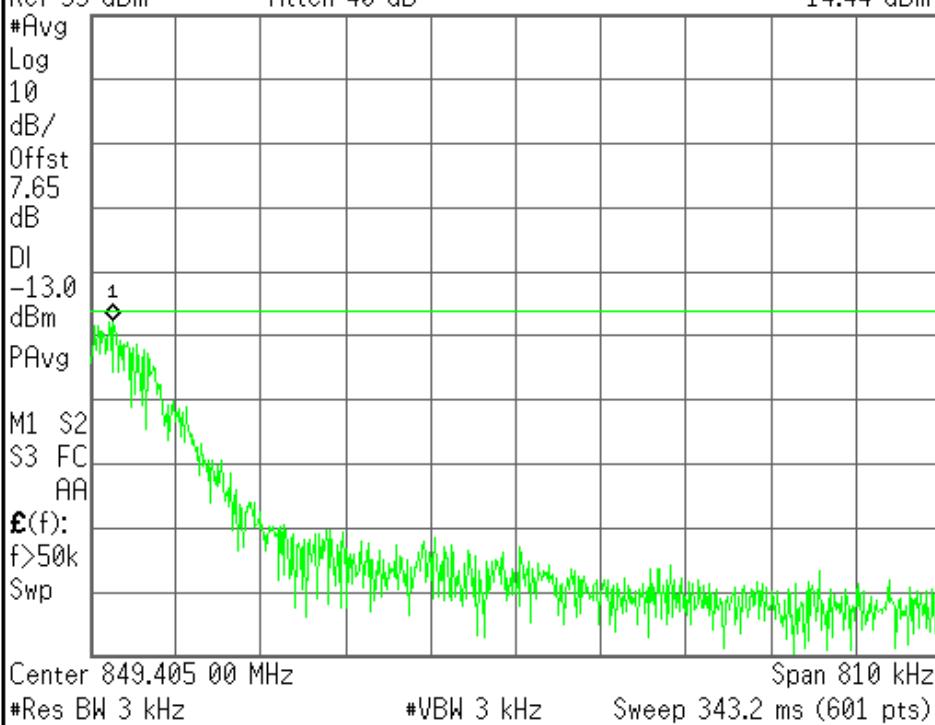

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

Freq/Channel

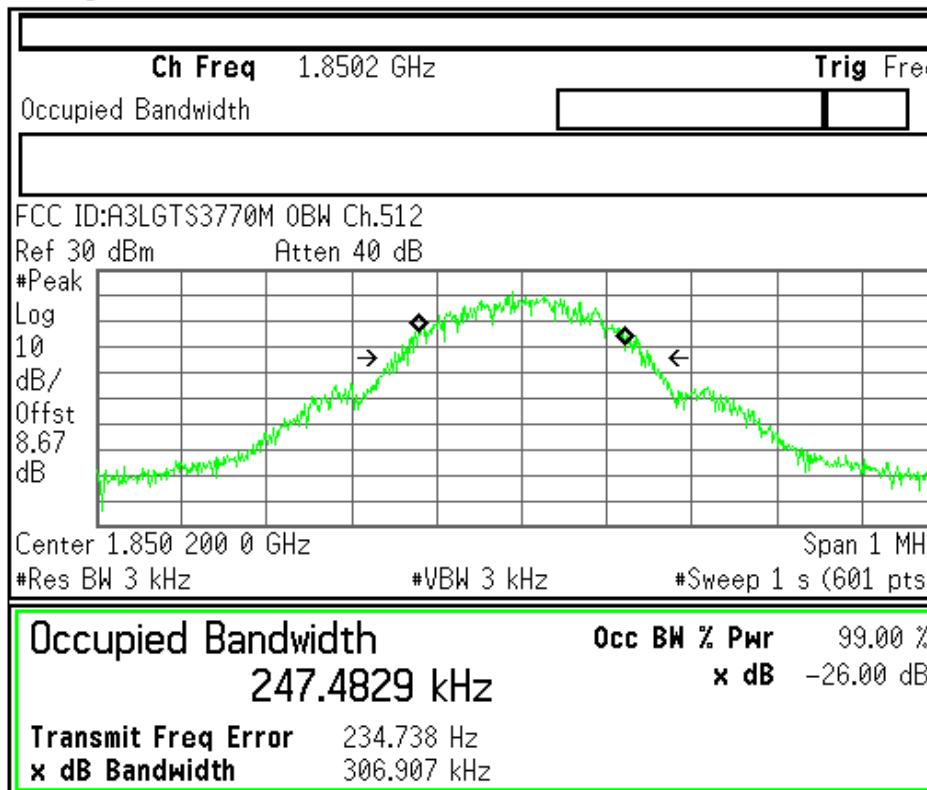
Center Freq
1.85020000 GHzStart Freq
1.84970000 GHzStop Freq
1.85070000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T


Freq/Channel

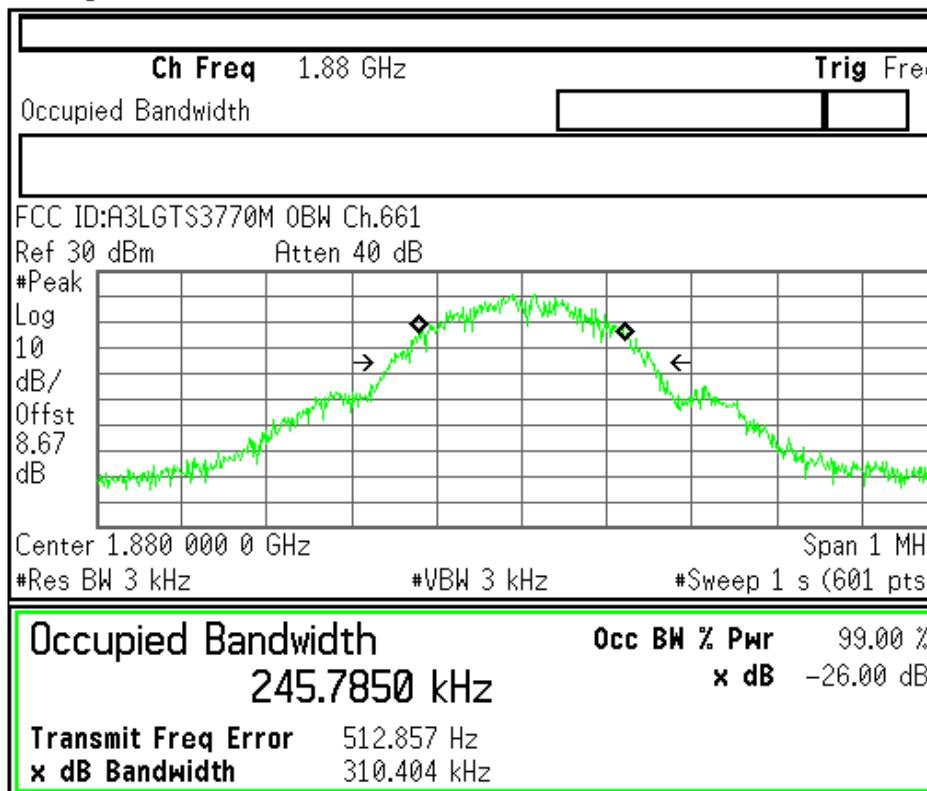Center Freq
1.88000000 GHzStart Freq
1.87950000 GHzStop Freq
1.88050000 GHzCF Step
100.000000 kHz
Auto ManFreq Offset
0.00000000 HzSignal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

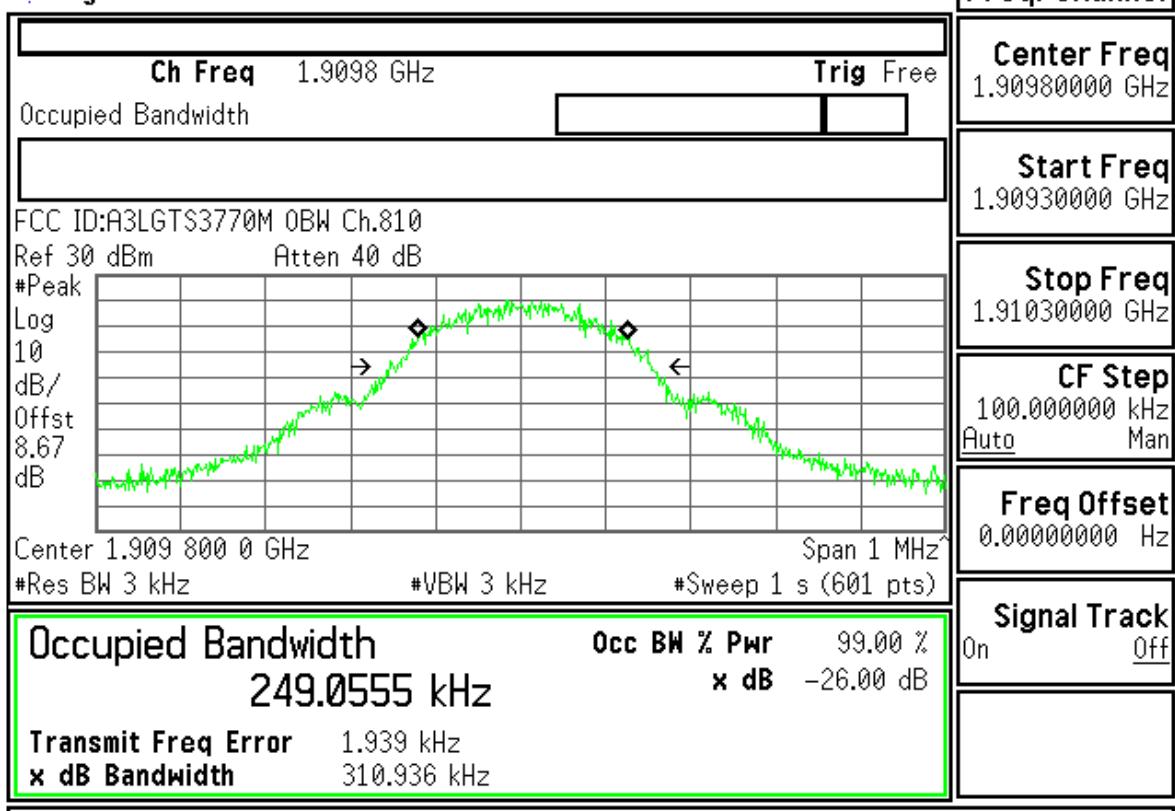

FCC ID : A3LGTS3770M Transmit Power 512CH

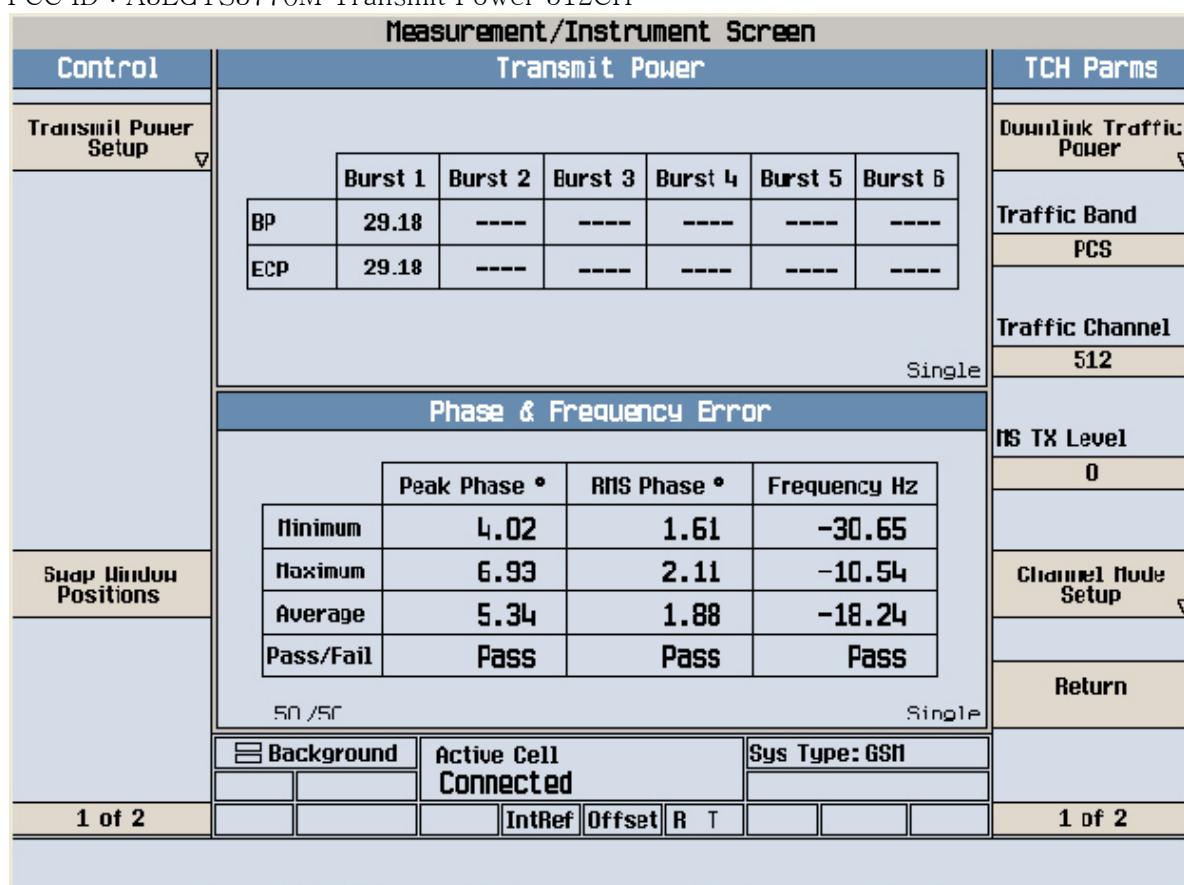


FCC ID : A3LGTS3770M Transmit Power 661CH


FCC ID : A3LGT3770M Transmit Power 810CH

| Measurement/Instrument Screen | | | | | | | |
|-------------------------------|-------------------------|-----------------------|--------------|---------|---------------|---------|------------------------|
| Control | Transmit Power | | | | | | TCHParms |
| Transmit Power Setup | | | | | | | Downlink Traffic Power |
| | Burst 1 | Burst 2 | Burst 3 | Burst 4 | Burst 5 | Burst 6 | |
| BP | 29.42 | ----- | ----- | ----- | ----- | ----- | Traffic Band |
| ECP | 29.42 | ----- | ----- | ----- | ----- | ----- | PCS |
| | | | | | | | Traffic Channel |
| | | | | | | | 810 |
| | | | | | | | MS TX Level |
| | | | | | | | 0 |
| Sync Window Positions | Phase & Frequency Error | | | | | | Channel Mode Setup |
| | Peak Phase ° | RMS Phase ° | Frequency Hz | | | | |
| Minimum | 4.22 | 1.62 | -19.72 | | | | |
| Maximum | 6.79 | 2.20 | 1.50 | | | | |
| Average | 5.21 | 1.84 | -7.44 | | | | |
| Pass/Fail | Pass | Pass | Pass | | | | |
| | 50/50 | | | | | | Return |
| | Background | Active Cell Connected | | | Sys Type: GSM | | |
| 1 of 2 | | IntRef | Offset | R T | | | 1 of 2 |


FCC ID : A3LGTS3770M GMSK Power vs Time 512CH

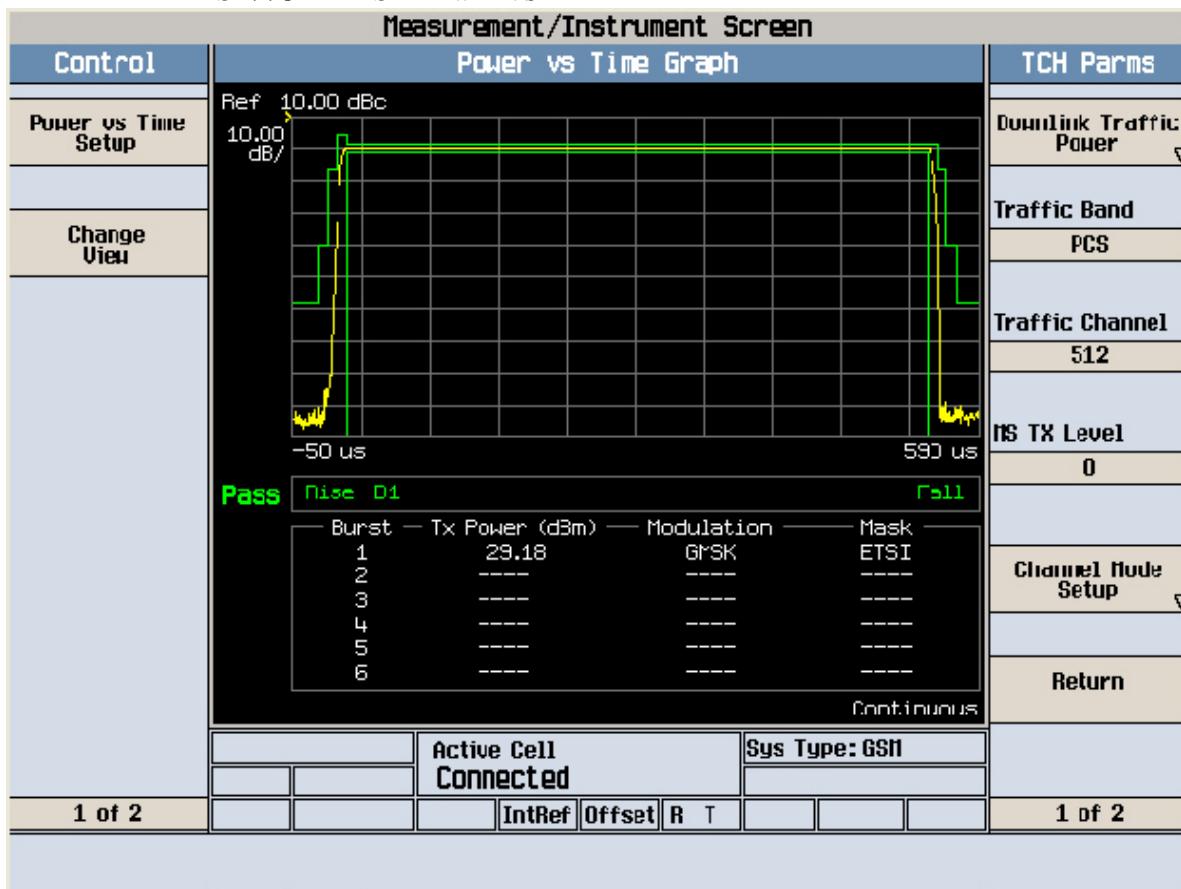


FCC ID : A3LGTS3770M GMSK Power vs Time 661CH

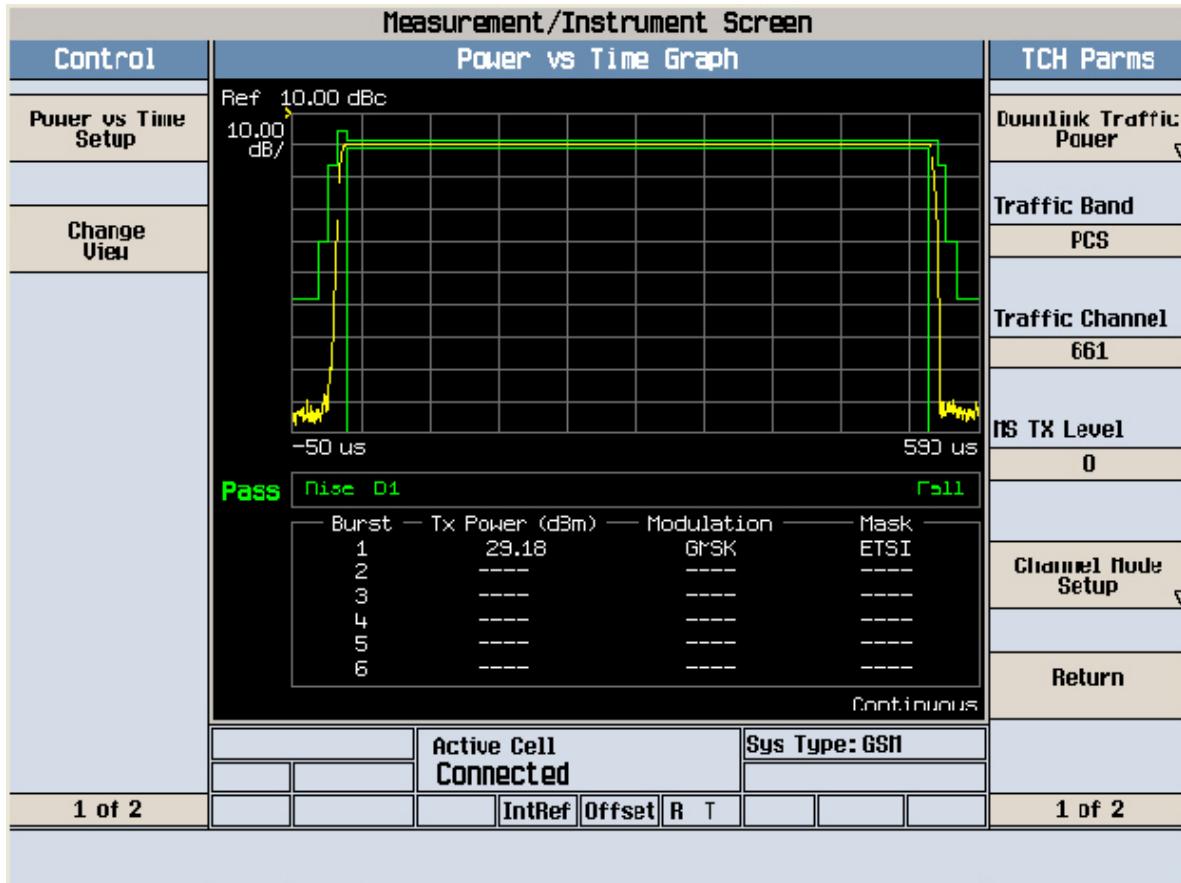


FCC ID : A3LGTS3770M GMSK Power vs Time 810CH

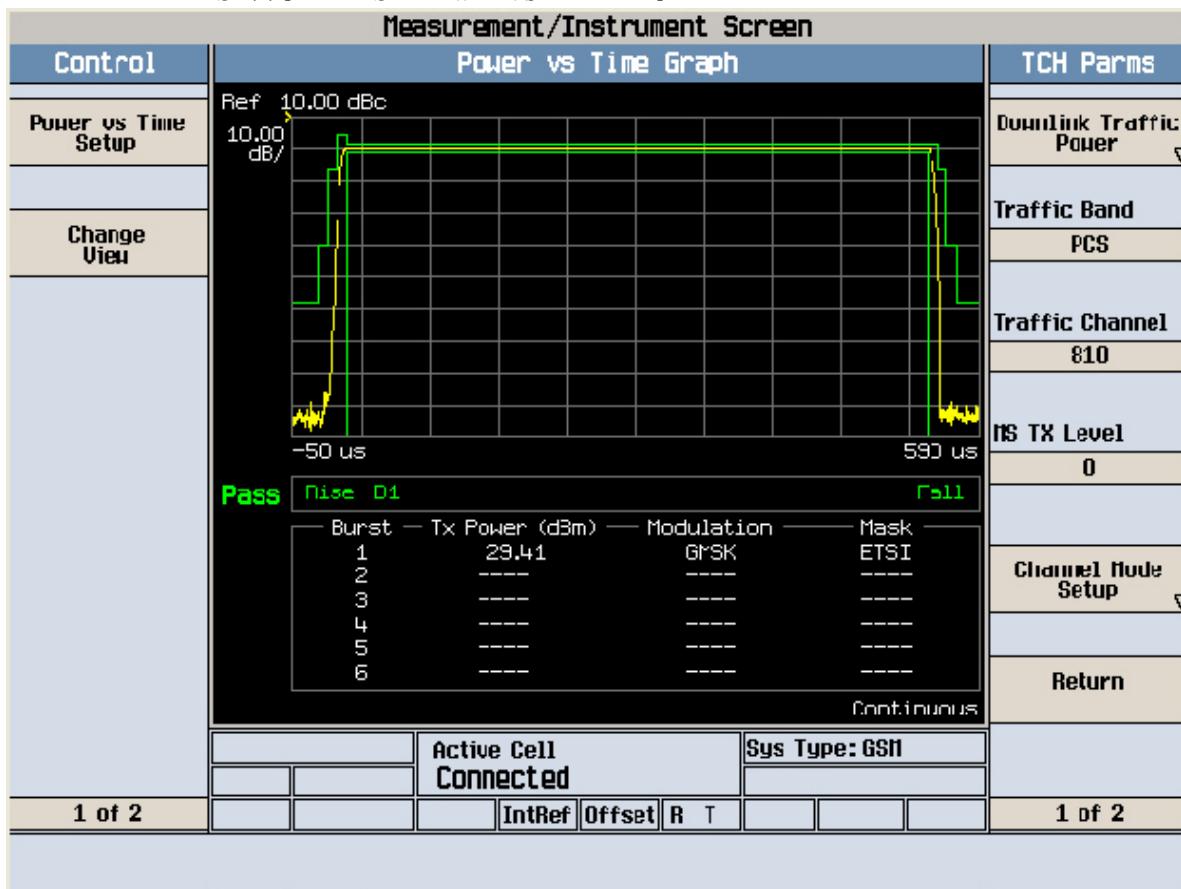


FCC ID : A3LGTS3770M Modulation & Switching 512CH

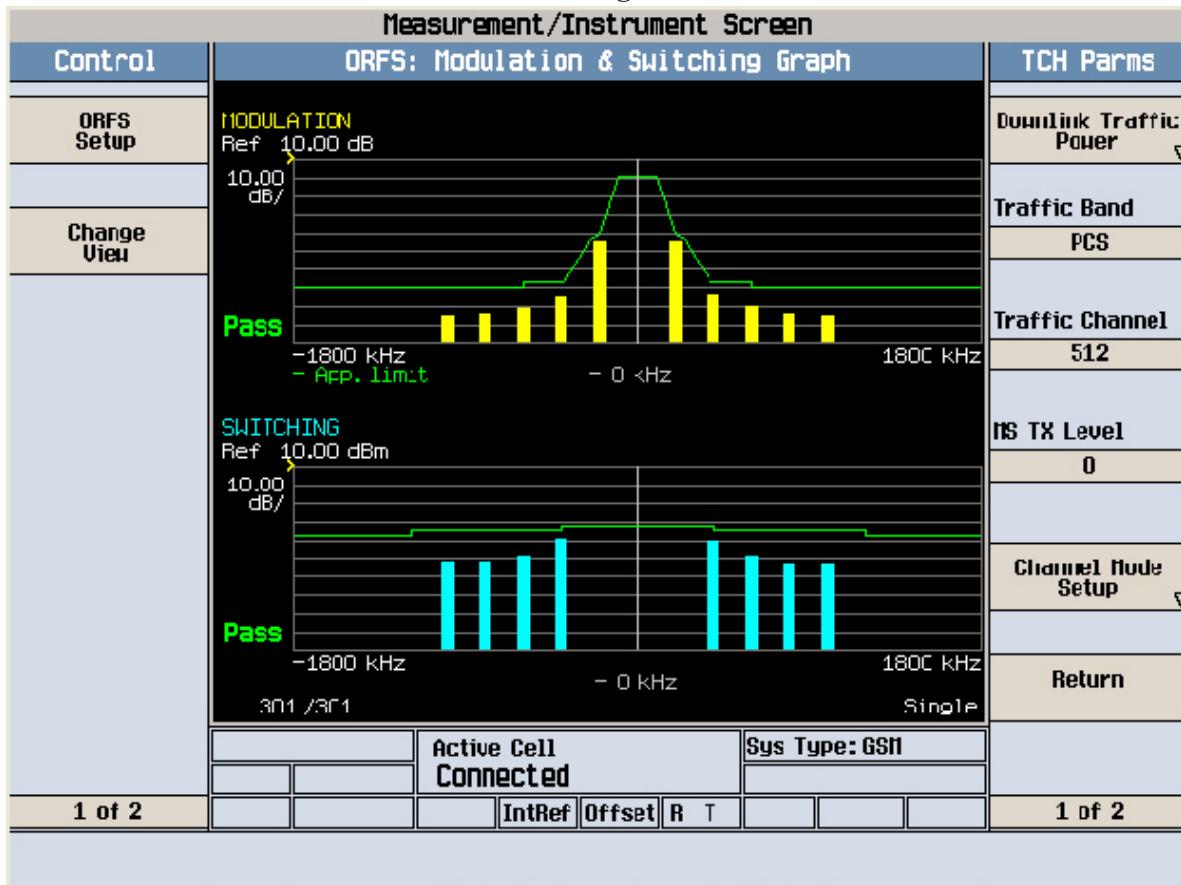

FCC ID : A3LGTS3770M Modulation & Switching 661CH

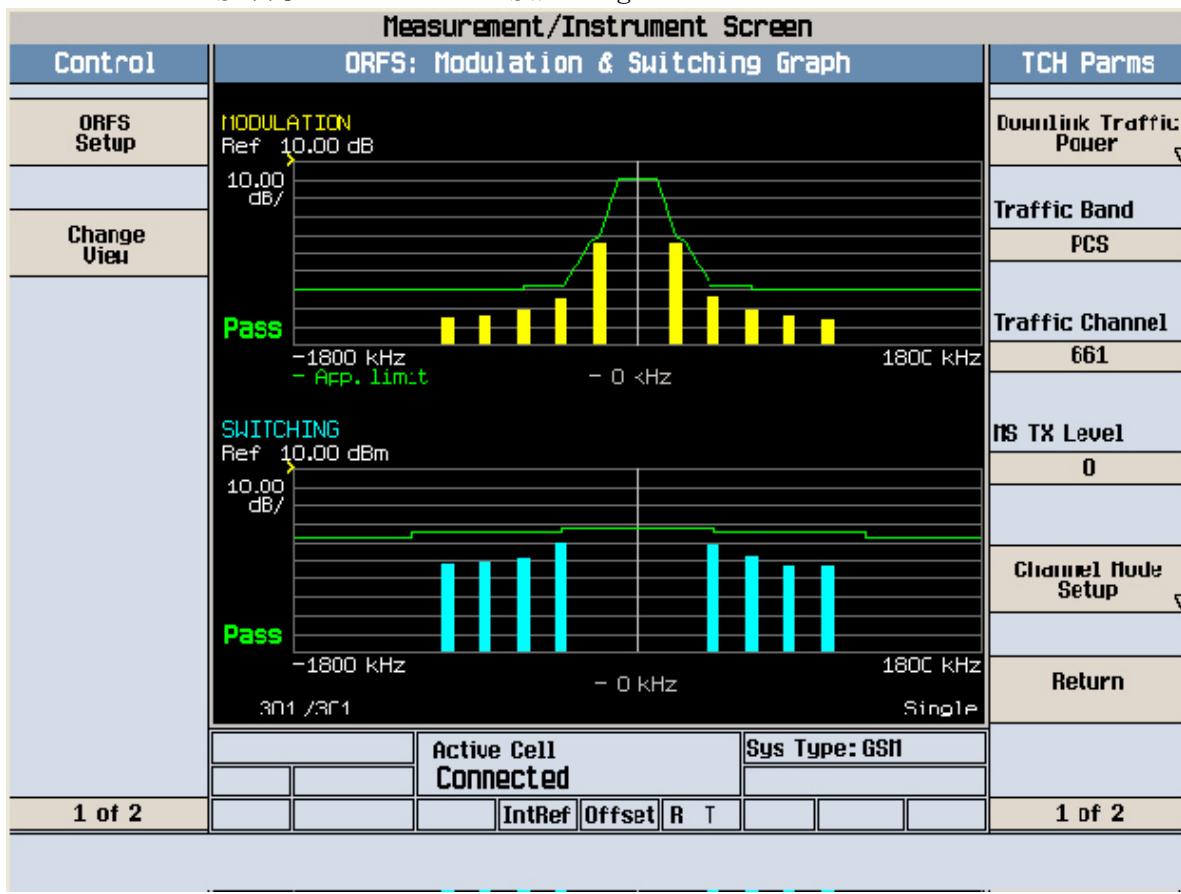

FCC ID : A3LGTS3770M Modulation & Switching 810CH

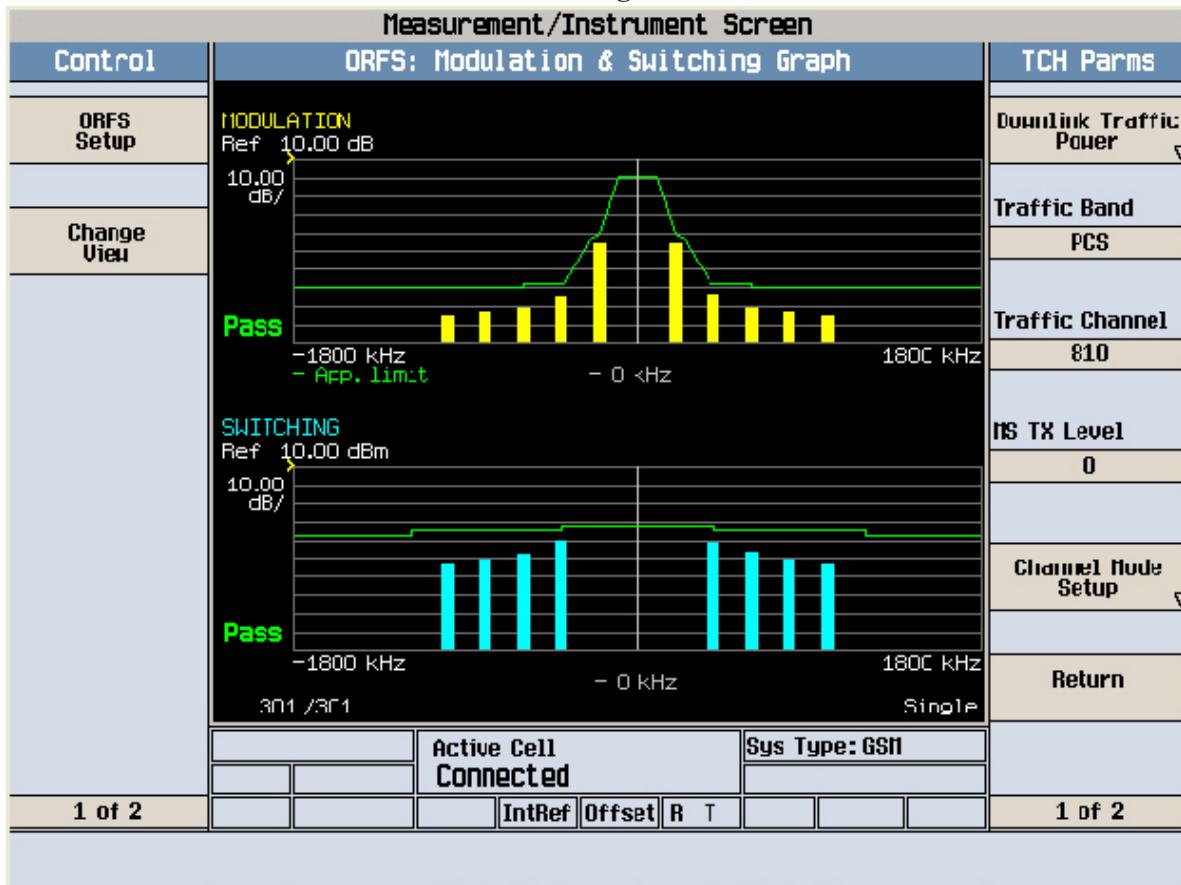


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.512
Ref 30 dBm Atten 40 dB

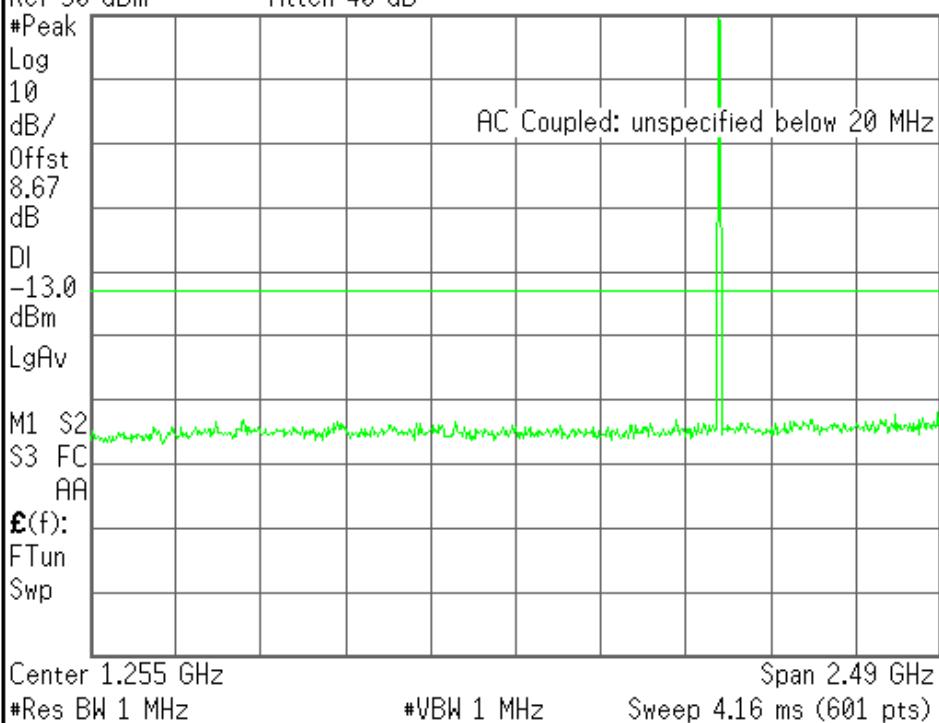

Center Freq 1.2500000 GHz

Start Freq 10.0000000 MHz

Stop Freq 2.5000000 GHz

CF Step 249.000000 MHz Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Copyright 2000-2007 Agilent Technologies


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.512
Ref 30 dBm Atten 40 dB

Mkr1 899 MHz
-32.57 dBm

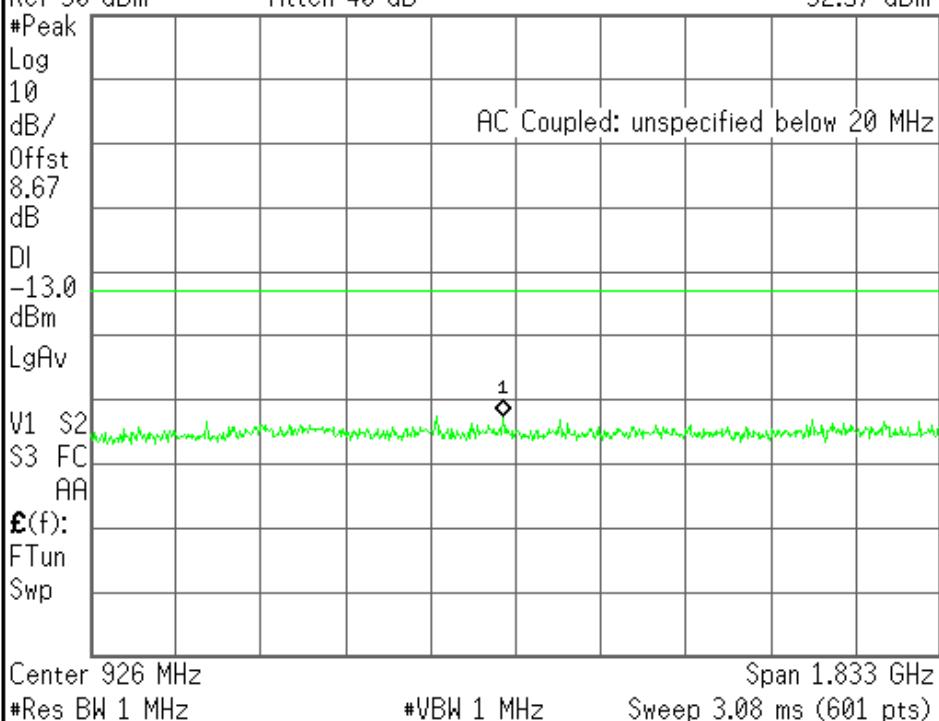

Center Freq 926.350000 MHz

Start Freq 10.0000000 MHz

Stop Freq 1.84270000 GHz


CF Step 183.270000 MHz Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

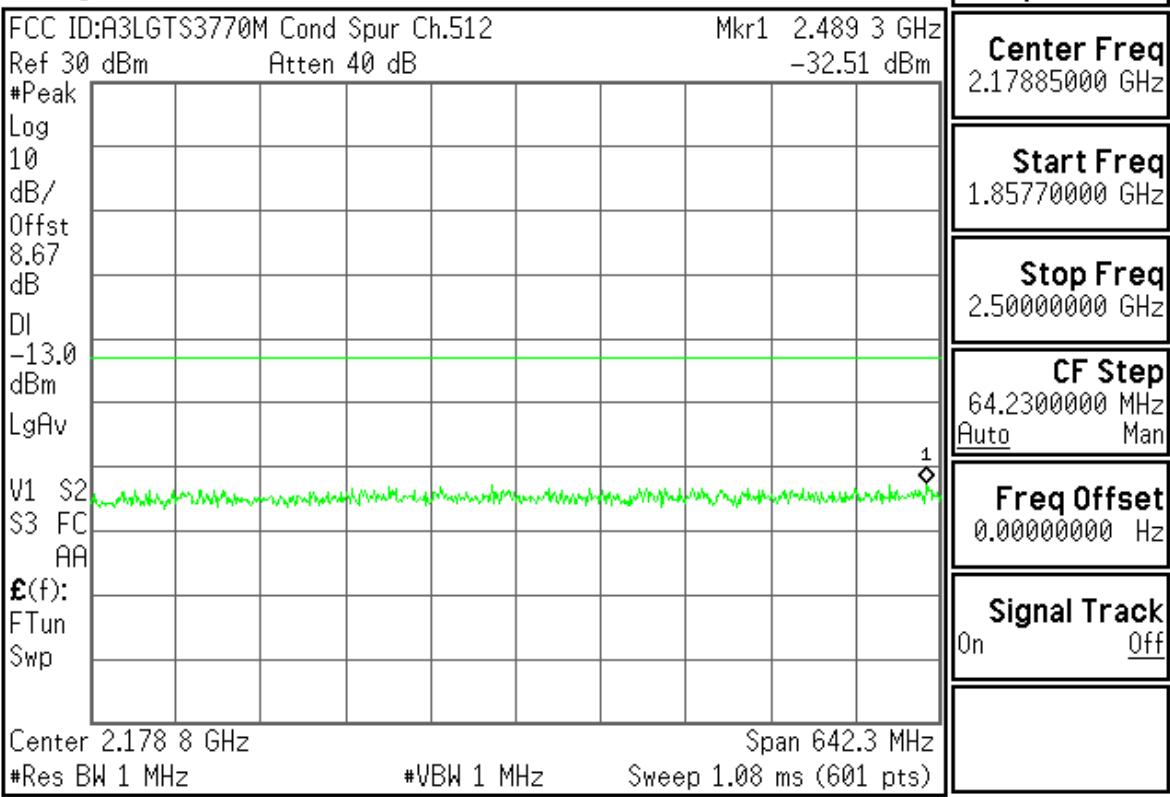

Agilent

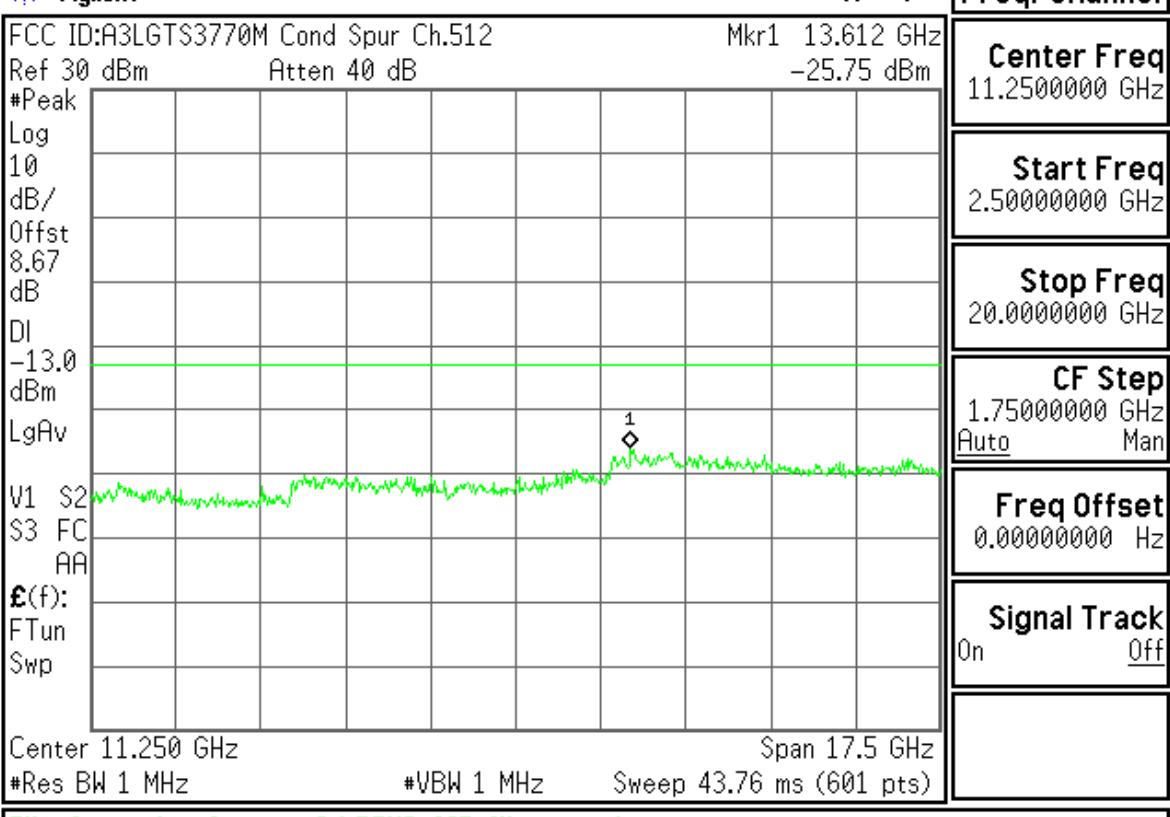


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.661
Ref 30 dBm Atten 40 dB

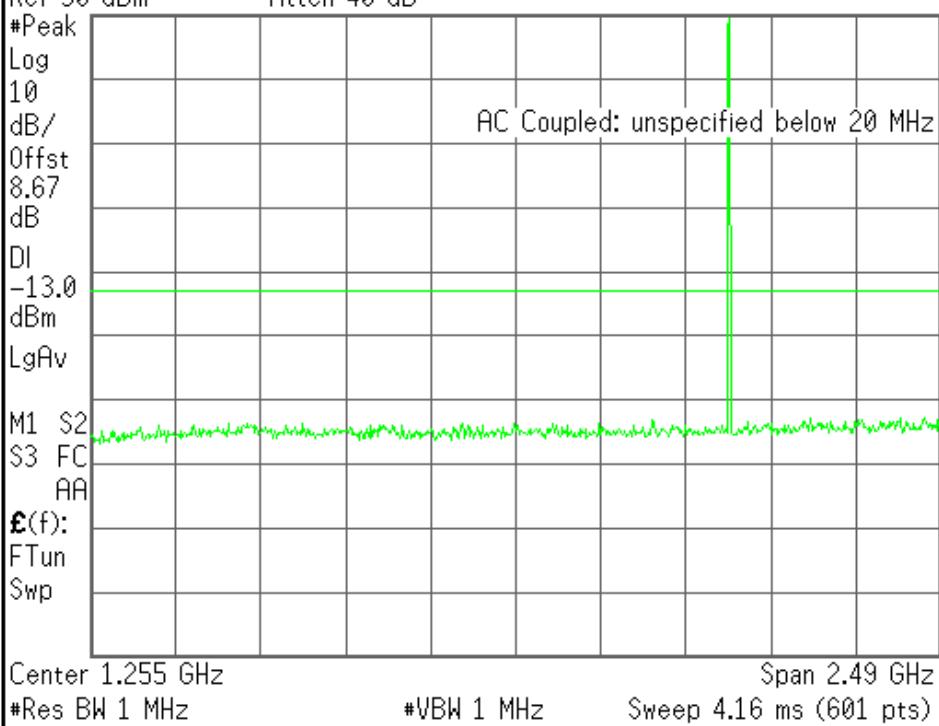

Center Freq 1.2500000 GHz

Start Freq 10.0000000 MHz

Stop Freq 2.5000000 GHz

CF Step 249.000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.661
Ref 30 dBm Atten 40 dB

Mkr1 1.637 GHz
-32.69 dBm

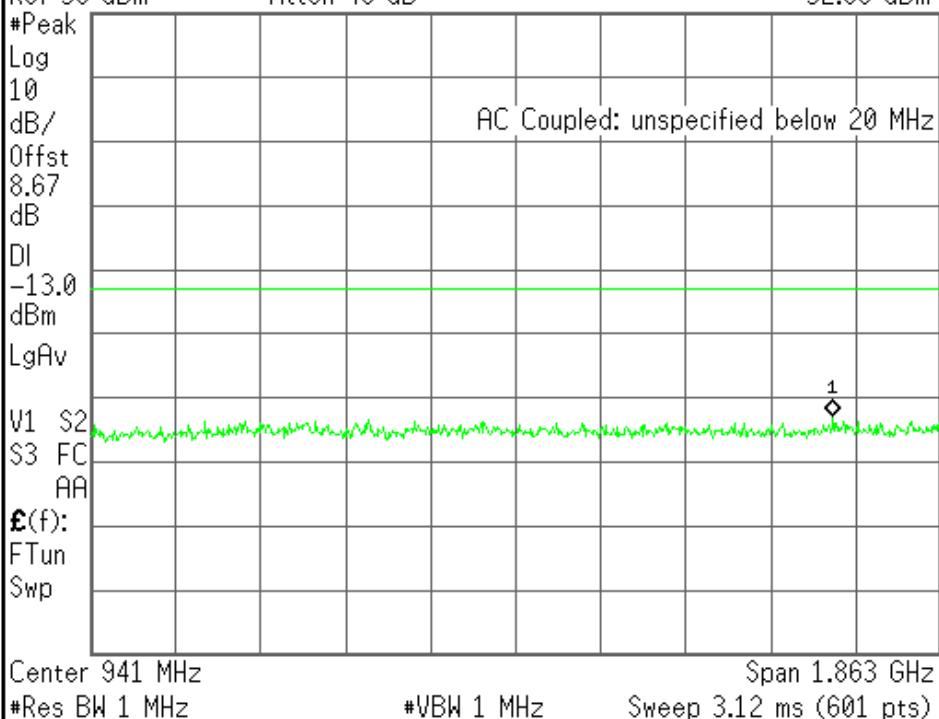

Center Freq 941.250000 MHz

Start Freq 10.0000000 MHz

Stop Freq 1.87250000 GHz


CF Step 186.250000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

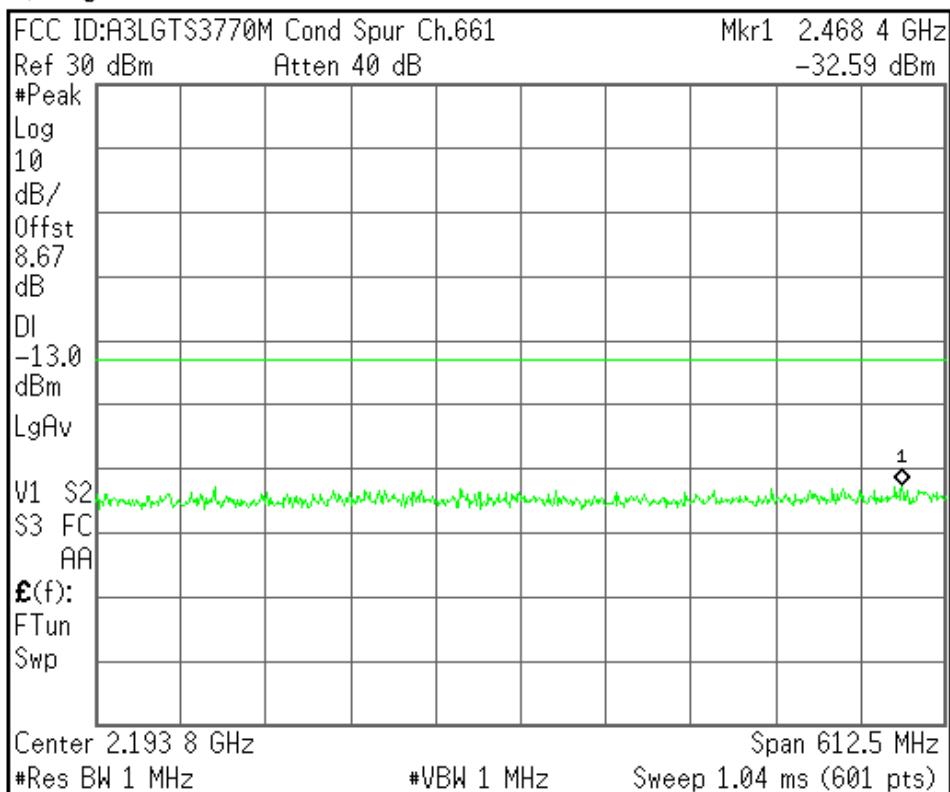

R T

Freq/Channel

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz


CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

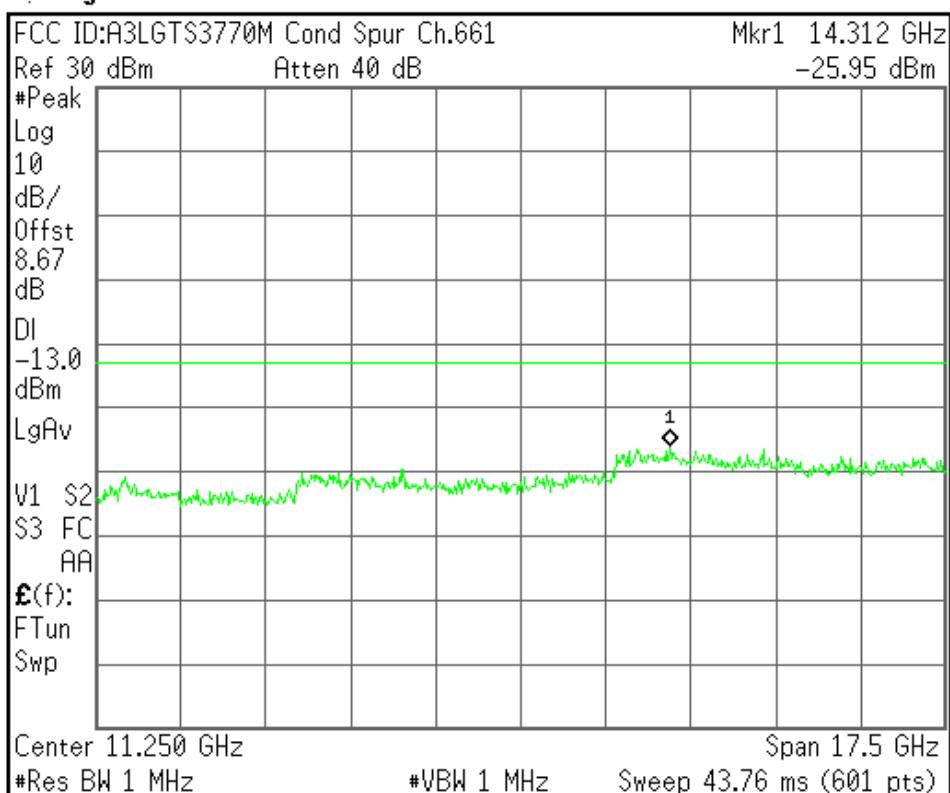

R T

Freq/Channel

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.810
Ref 30 dBm Atten 40 dB

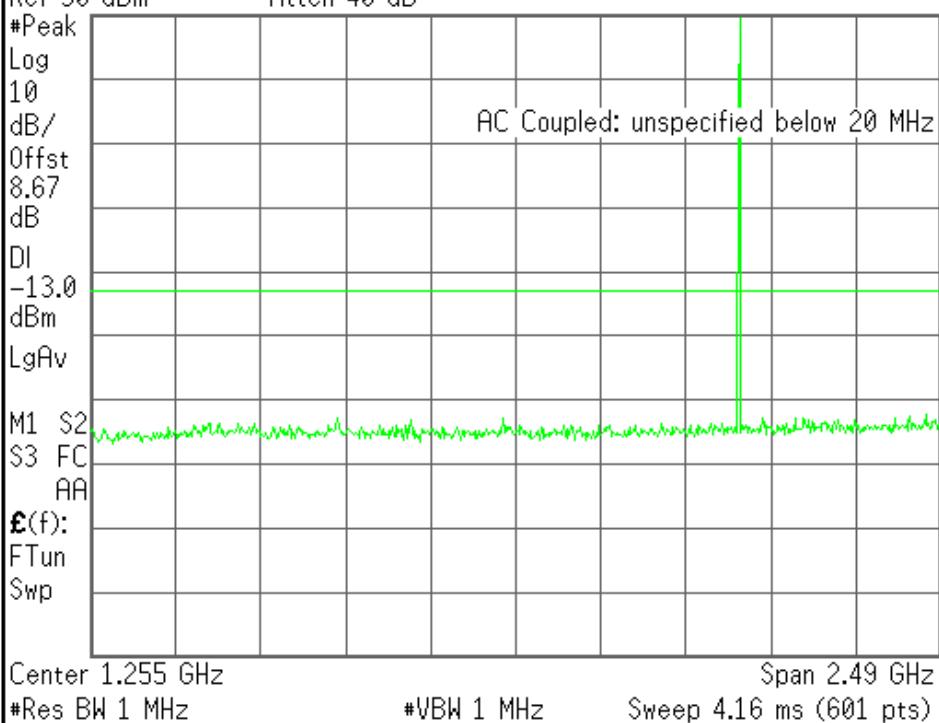

Center Freq 1.2500000 GHz

Start Freq 10.0000000 MHz

Stop Freq 2.5000000 GHz

CF Step 249.000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Cond Spur Ch.810
Ref 30 dBm Atten 40 dB

Mkr1 925 MHz
-33.04 dBm

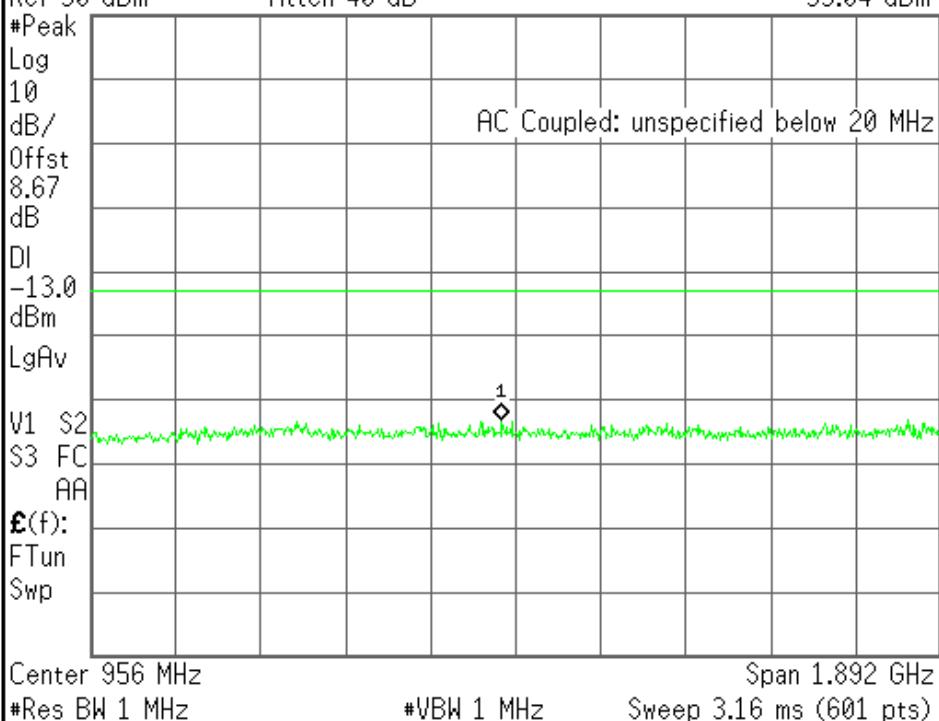

Center Freq 956.150000 MHz

Start Freq 10.0000000 MHz

Stop Freq 1.90230000 GHz


CF Step 189.230000 MHz
Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

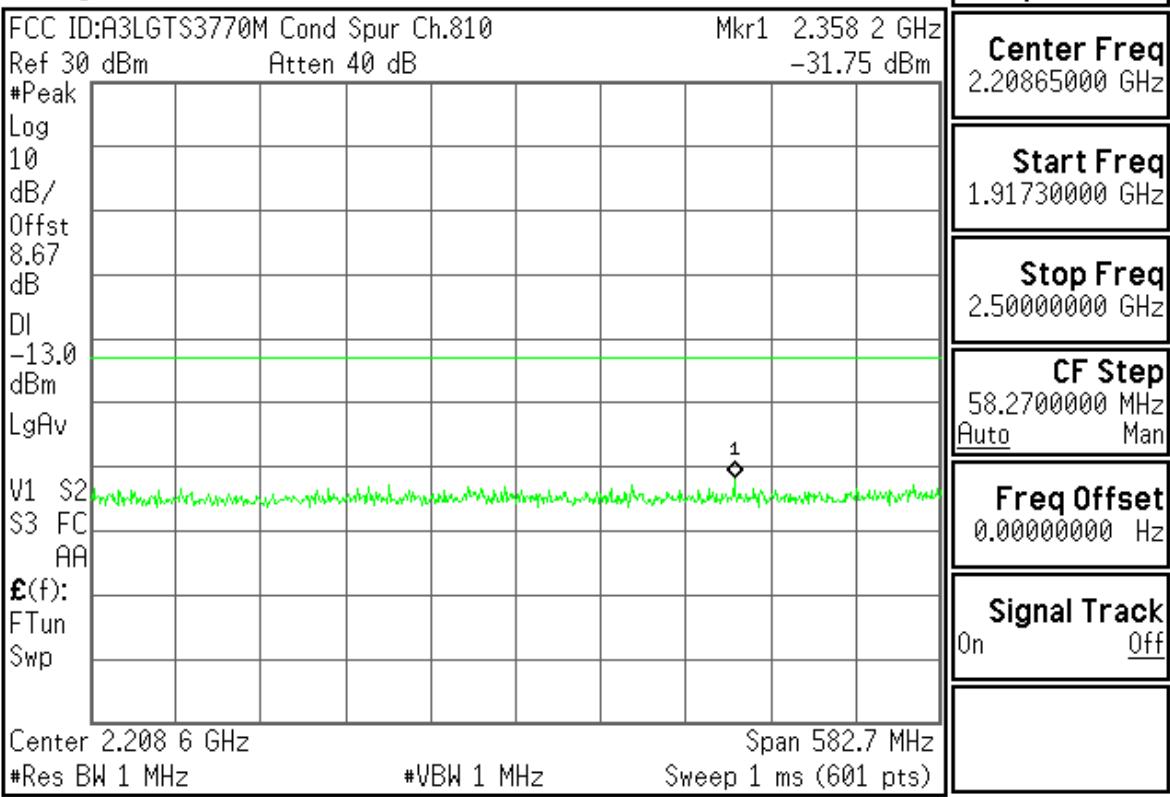

Agilent

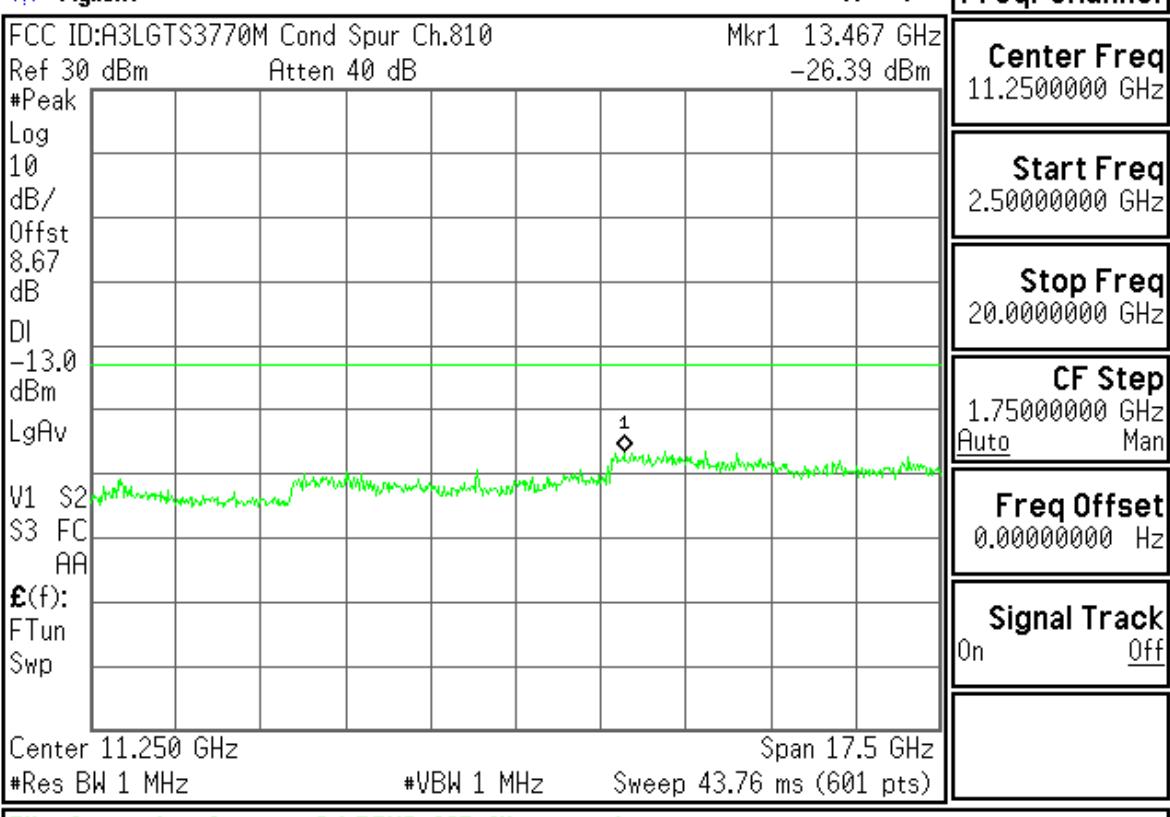


Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.512
Ref 30 dBm Atten 40 dB

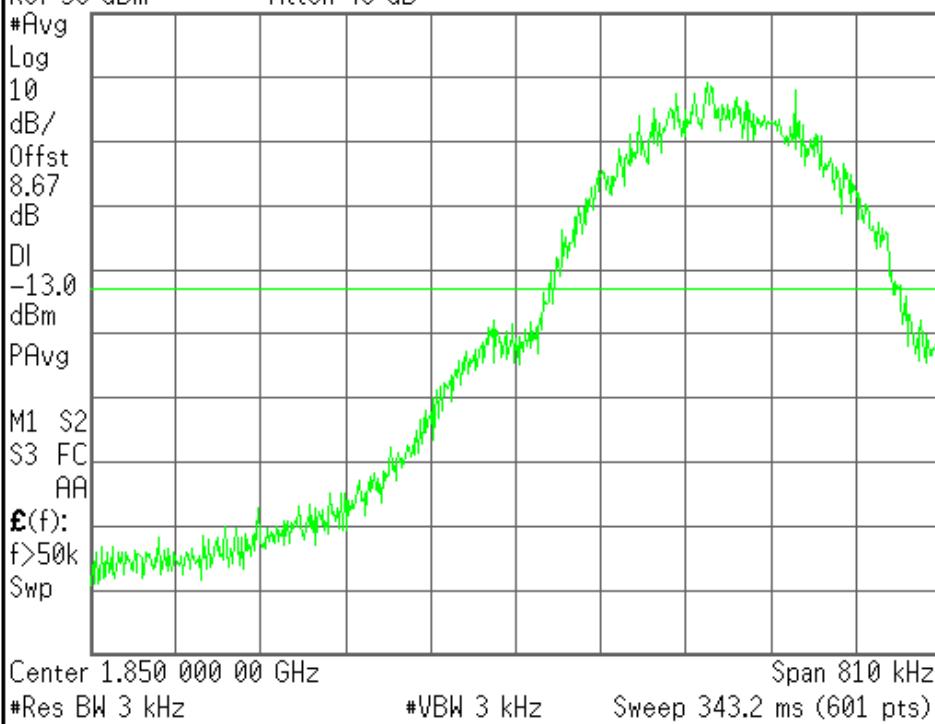

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

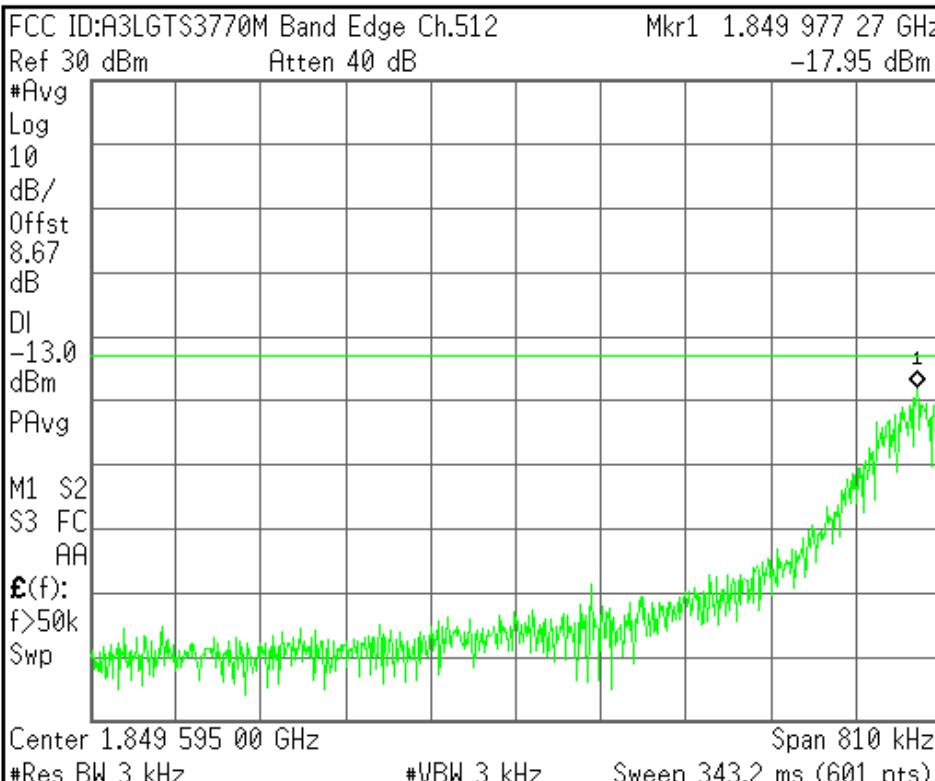

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.810
Ref 30 dBm Atten 40 dB

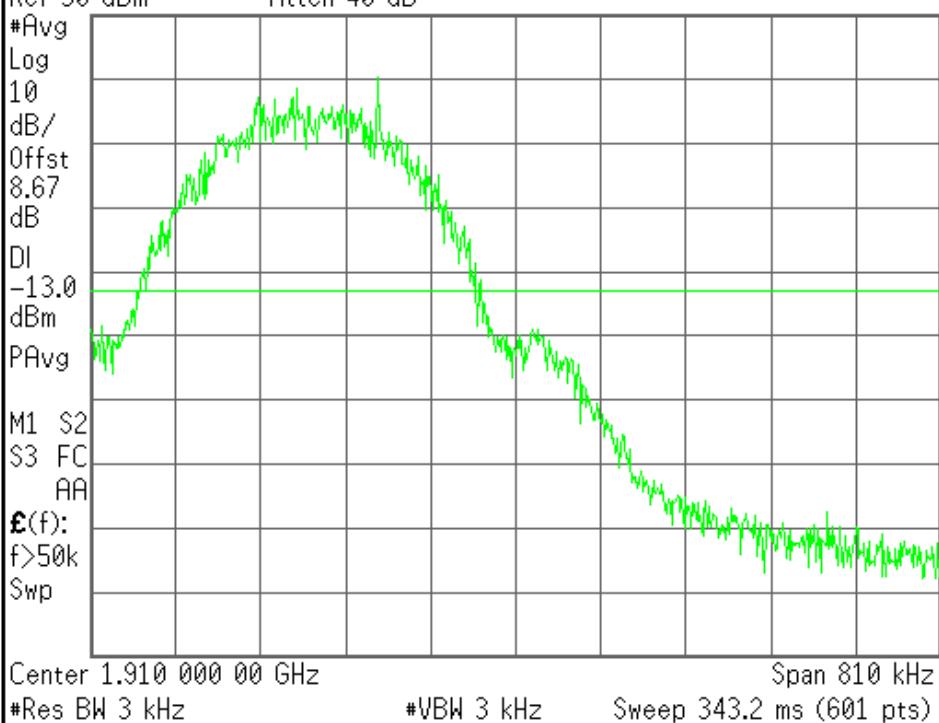

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTS3770M Band Edge Ch.810 Mkr1 1.910 020 39 GHz
Ref 30 dBm Atten 40 dB -16.89 dBm

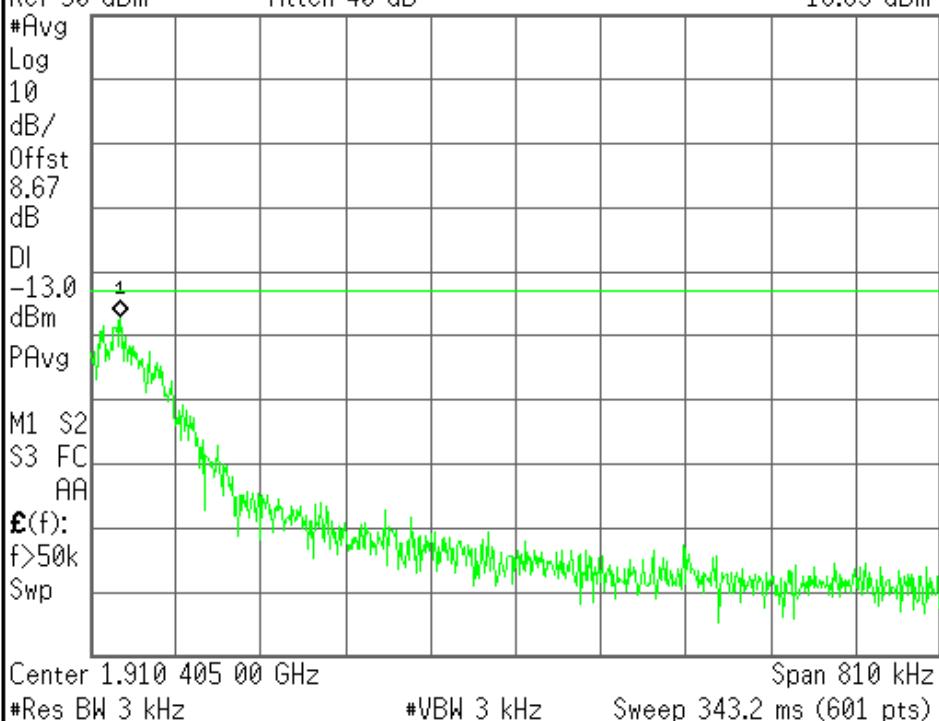

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

 Agilent

