



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S3778  
FCC ID (Requested) : A3LGTS3778  
Report No : FI-129-R1  
Job No : FI-129  
Date issued : June 18, 2011

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,  
Part22, Part24.

**Prepared By**

---

KJ KWON – Test Engineer

**Authorized By**

---

WT JANG – Technical Manager



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC CERTIFICATION INFORMATION</b> .....	<b>3</b>
1.1. §2.1033 General Information .....	3
<b>2. INTRODUCTION</b> .....	<b>4</b>
2.1. General .....	4
<b>3. MEASURING INSTRUMENT CALIBRATION</b> .....	<b>5</b>
<b>4. TEST EQUIPMENT LIST</b> .....	<b>6</b>
<b>5. DESCRIPTION OF TESTS</b> .....	<b>7</b>
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power .....	7
5.2. Radiated Spurious & Harmonic Emission .....	8
5.3. Peak-Average Ratio .....	9
5.4. Occupied Bandwidth .....	10
5.5. Spurious and Harmonic Emission at Antenna Terminal .....	10
5.5.1. Occupied Bandwidth Emission Limits .....	10
5.5.2. Conducted Spurious Emission .....	12
5.6. Frequency Stability / Temperature Variation .....	13
<b>6. TEST DATA</b> .....	<b>14</b>
6.1. Conducted Output Power .....	14
6.2. Effective Radiated Power (E.R.P.) .....	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.) .....	16
6.4. GSM850 Radiated Spurious & Harmonic measurement .....	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement .....	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table .....	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table .....	20
6.8. Frequency Stability .....	21
6.8.1. GSM850 Frequency Stability Table .....	21
6.8.2. GSM850 Frequency Stability Graph .....	22
6.8.3. GSM1900 Frequency Stability Table .....	24
6.8.4. GSM1900 Frequency Stability Graph .....	25
<b>7. CONCLUSION</b> .....	<b>27</b>
<b>8. TEST PLOTS</b> .....	<b>28</b>



# MEASUREMENT REPORT

## 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

### 1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTS3778
- Model : GT-S3778
- Quantity : Quantity production is planned
- Emission Designators : 251KGXW(GSM850)  
253KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)  
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)  
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.427 W ERP GSM850 (26.30 dBm)  
0.818 W EIRP GSM1900 (29.13 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx  
Only
- Frequency Tolerance :  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : June 14-16, 2011
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FI-129-R1

## 2. INTRODUCTION

### 2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742 The site have 1 Fully-anechoic chamber and measurement facility.



**Figure1. Map of the Suwon City area.**

### **Measurement Procedure**

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



**Figure2. Photograph of 3m Fully-Anechoic Chamber**



### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



#### 4. TEST EQUIPMENT LIST


Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2011-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2012-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2012-04-26
Network Analyzer	8753E	JP38160590	2012-06-20
Pre-Amplifier	8449B	3008A00691	2011-12-15
Communication test set	8960	MY47510060	2012-03-08
	8960	GB42360886	2011-08-06
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-23
	HF906	360306/011	2012-06-13
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2012-06-13
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003594	2011-06-17
	E3632A	MY40022438	2012-03-05
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2011-11-15
	SH-241	92000548	2011-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. DESCRIPTION OF TESTS

### 5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

#### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

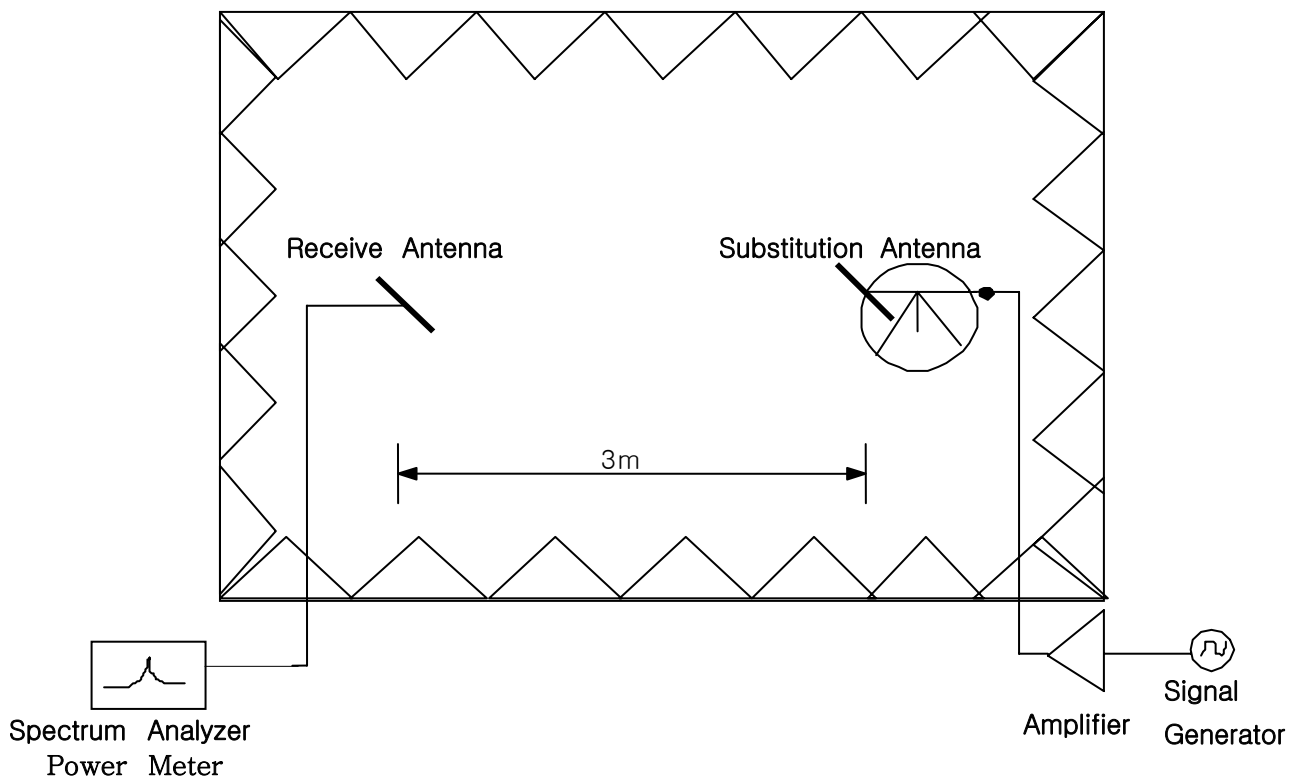


**Figure 3. Diagram of ERP/EIRP test Set-up**

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.2. Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

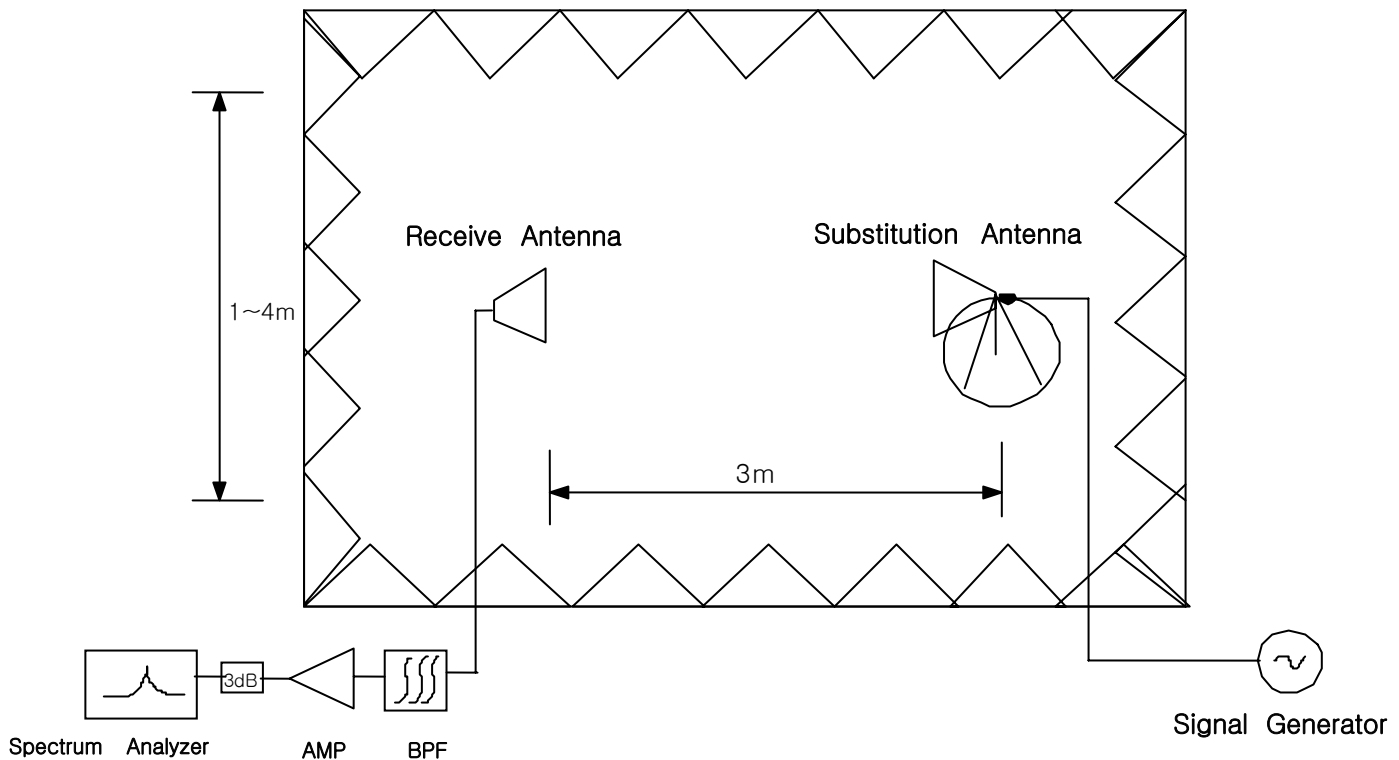

**Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up**

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## SAMPLE CALCULATION

### **Example: Channel 661 , Second Harmonic(3760.00MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3760.00\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.8\text{dBm}$ . The fundamental EIRP was  $25.5\text{dBm}$  so this harmonic was  $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$ .

### 5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

## 5.4. Occupied Bandwidth

### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

## 5.5. Spurious and Harmonic Emission at Antenna Terminal

### 5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks**

<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

**Table 2. Cellular Service Frequency Blocks**

## 5.5.2. Conducted Spurious Emission

### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log ( 0.427 W) = 39.3 \text{ dB}$$

$$26.30 \text{ dBm} - 39.3 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM :  $0.01 * 273\text{KHz} = 2.73\text{KHz}$   
A Resolution BW of 3KHz was used for measurement at the band edges.

### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature ( $25^{\circ}\text{C}$  to  $27^{\circ}\text{C}$  to provide a reference).
2. The equipment is subjected to an overnight "soak" at  $-30^{\circ}\text{C}$  without any power applied.
3. After the overnight "soak" at  $-30^{\circ}\text{C}$  (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at  $10^{\circ}\text{C}$  interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at  $-30^{\circ}\text{C}$  up to  $+50^{\circ}\text{C}$  allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



## 6. TEST DATA

### 6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx Only FCC ID: A3LGTS3778. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS BAND and "5" in the Cellular Band. The GSM conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	28.78	28.78	28.42	25.23	24.27
	661	28.58	28.6	28.18	24.76	23.71
	810	28.77	28.77	28.36	24.89	23.8
Cellular	128	32.59	32.62	31.36	30.42	29.17
	190	32.52	32.53	31.35	30.34	29.13
	251	32.53	32.53	31.33	30.39	29.19

Table 6-1 GSM Conducted Output Powers



## 6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

### Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	26.00	H	-11.50	-0.67	-10.83
		V	-12.38	-0.67	-11.71
836.60	25.00	H	-13.05	-0.73	-12.32
		V	-13.32	-0.73	-12.59
848.80	25.00	H	-15.19	-0.79	-14.40
		V	-14.40	-0.79	-13.61

### Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-10.53	H	285/125	26.30	0.427	Standard
836.60	-12.34	H	288/110	24.98	0.315	Standard
848.80	-14.23	H	277/100	25.17	0.329	Standard

**NOTE :** Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

### Radiated measurements at 3 meters by Substitution Method

### 6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

#### ■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-10.32	9.60	-19.92
		V	-9.91	9.60	-19.51
1880.00	29.00	H	-9.95	9.60	-19.55
		V	-10.32	9.60	-19.92
1909.80	29.00	H	-10.49	9.60	-20.09
		V	-10.17	9.60	-19.77

#### ■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-20.19	H	118/180	28.73	0.746	Standard
1880.00	-20.00	V	44/90	28.92	0.780	Standard
1909.80	-19.96	H	98/0	29.13	0.818	Standard

**NOTE :** Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

#### Radiated measurements at 3 meters by Substitution Method

## 6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 26.30 dBm = 0.427 W

Modulation Signal : GSM850

Limit :  $43 + 10\log_{10}(P) = 39.3$  dBc

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-64.18	H	77.89
	3	2472.60	-62.09	H	70.56
	4	3296.80	-66.77	V	71.37
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-61.09	H	74.55
	3	2509.80	-60.81	V	69.67
	4	3346.40	-67.18	V	71.87
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-67.01	H	79.19
	3	2546.40	-67.16	V	75.75
	4	3395.20	-67.73	V	72.28
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

#### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported..

### Radiated Spurious Emission measurements at 3 meters by Substitution Method

## 6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.13 dBm = 0.818 W

Modulation Signal : GSM1900

Limit :  $43 + 10\log_{10}(P) = 42.13$  dBc

### ■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-60.06	H	62.21
	3	5550.60	-62.70	V	61.68
	4	7400.80	-55.16	V	48.73
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-60.92	V	63.89
	3	5640.00	-62.35	V	61.06
	4	7520.00	-63.48	V	57.55
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-61.31	V	63.89
	3	5729.40	-61.81	V	60.59
	4	7639.20	-68.68	V	62.62
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

#### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported.

### Radiated Spurious Emission measurements at 3 meters by Substitution Method



## 6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : June 16, 2011

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-8.77	9.40	-13.60	-27.73	-27.03	-64.18	-64.47	77.89	78.88
	3	2472.60	-11.12	10.60	-12.50	-32.97	-32.23	-62.09	-62.28	70.56	71.49
	4	3296.80	-12.19	12.00	-12.80	-36.08	-36.84	-67.85	-66.77	73.21	71.37
	5	4121.00	-13.85	12.60	-11.80	-39.75	-39.33	-	-	-	-
	6	4945.20	-15.03	12.70	-10.70	-42.44	-42.28	-	-	-	-
	7	5769.40	-17.11	13.10	-9.00	-44.12	-44.43	-	-	-	-
190	2	1673.20	-8.83	9.40	-13.60	-27.98	-27.21	-61.09	-62.59	74.55	76.82
	3	2509.80	-11.24	10.60	-12.40	-33.18	-32.42	-61.41	-60.81	69.67	69.83
	4	3346.40	-12.13	12.00	-12.90	-36.09	-36.75	-67.57	-67.18	72.92	71.87
	5	4183.00	-14.18	12.60	-11.40	-39.47	-39.56	-	-	-	-
	6	5019.60	-15.91	12.70	-9.80	-42.07	-42.44	-	-	-	-
	7	5856.20	-17.15	13.10	-9.00	-45.07	-44.94	-	-	-	-
251	2	1697.60	-8.88	9.40	-13.50	-29.26	-28.45	-67.01	-67.11	79.19	80.10
	3	2546.40	-11.22	10.60	-12.40	-32.63	-32.85	-67.62	-67.16	76.43	75.75
	4	3395.20	-12.28	12.00	-12.70	-36.60	-36.89	-67.74	-67.73	72.58	72.28
	5	4244.00	-14.15	12.60	-11.50	-39.36	-39.77	-	-	-	-
	6	5092.80	-16.16	12.70	-9.50	-42.73	-42.38	-	-	-	-
	7	5941.60	-17.34	13.10	-8.80	-45.37	-45.34	-	-	-	-



## 6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : June 16, 2011

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-12.85	12.60	-12.80	-39.98	-39.03	-60.06	-64.22	62.21	67.32
	3	5550.60	-16.92	12.50	-8.60	-43.40	-42.99	-62.95	-62.70	61.68	61.84
	4	7400.80	-20.20	11.50	-4.30	-48.71	-48.56	-58.63	-55.16	52.05	48.73
	5	9251.00	-23.05	11.90	-1.90	-53.11	-52.12	-	-	-	-
	6	11101.20	-25.08	11.50	0.60	-57.75	-54.90	-	-	-	-
	7	12951.40	-28.10	14.42	0.70	-61.50	-58.01	-	-	-	-
661	2	3760.00	-13.35	12.60	-12.30	-39.89	-39.16	-62.52	-60.92	64.76	63.89
	3	5640.00	-17.07	12.50	-8.40	-43.74	-43.42	-63.08	-62.35	61.47	61.06
	4	7520.00	-20.60	11.50	-3.90	-48.76	-48.06	-66.21	-63.48	59.58	57.55
	5	9400.00	-23.50	11.90	-1.40	-52.65	-51.24	-	-	-	-
	6	11280.00	-26.24	11.50	1.70	-56.66	-54.54	-	-	-	-
	7	13160.00	-28.79	14.42	1.40	-61.01	-57.76	-	-	-	-
810	2	3819.60	-13.30	12.60	-12.30	-39.95	-39.55	-61.85	-61.31	64.03	63.89
	3	5729.40	-17.16	12.50	-8.30	-44.20	-43.35	-65.44	-61.81	63.37	60.59
	4	7639.20	-20.88	11.50	-3.60	-48.25	-47.92	-68.74	-68.68	62.62	62.89
	5	9549.00	-24.09	11.90	-0.80	-52.88	-51.48	-	-	-	-
	6	11458.80	-26.05	11.50	1.60	-57.49	-54.67	-	-	-	-
	7	13368.60	-28.74	14.42	1.30	-63.03	-59.49	-	-	-	-

## 6.8. Frequency Stability

### 6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-20.80	836,599,979	-0.000002	-0.025
100%		-30	7.20	836,600,007	0.000001	0.009
100%		-20	21.60	836,600,022	0.000003	0.026
100%		-10	8.10	836,600,008	0.000001	0.010
100%		0	5.20	836,600,005	0.000001	0.006
100%		+10	-14.00	836,599,986	-0.000002	-0.017
100%		+20	-20.80	836,599,979	-0.000002	-0.025
100%		+30	25.00	836,600,025	0.000003	0.030
100%		+40	31.80	836,600,032	0.000004	0.038
100%		+50	27.60	836,600,028	0.000003	0.033
100%		+60	20.40	836,600,020	0.000002	0.024
85%		3.15	+20	17.80	836,600,018	0.000002
115%	4.26	+20	-15.20	836,599,985	-0.000002	-0.018
Batt.Endpoint	3.15	+20	17.80	836,600,018	0.000002	0.021


**Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.**

**The EUT is tested down to the battery end point.**

### 6.8.2. GSM850 Frequency Stability Graph

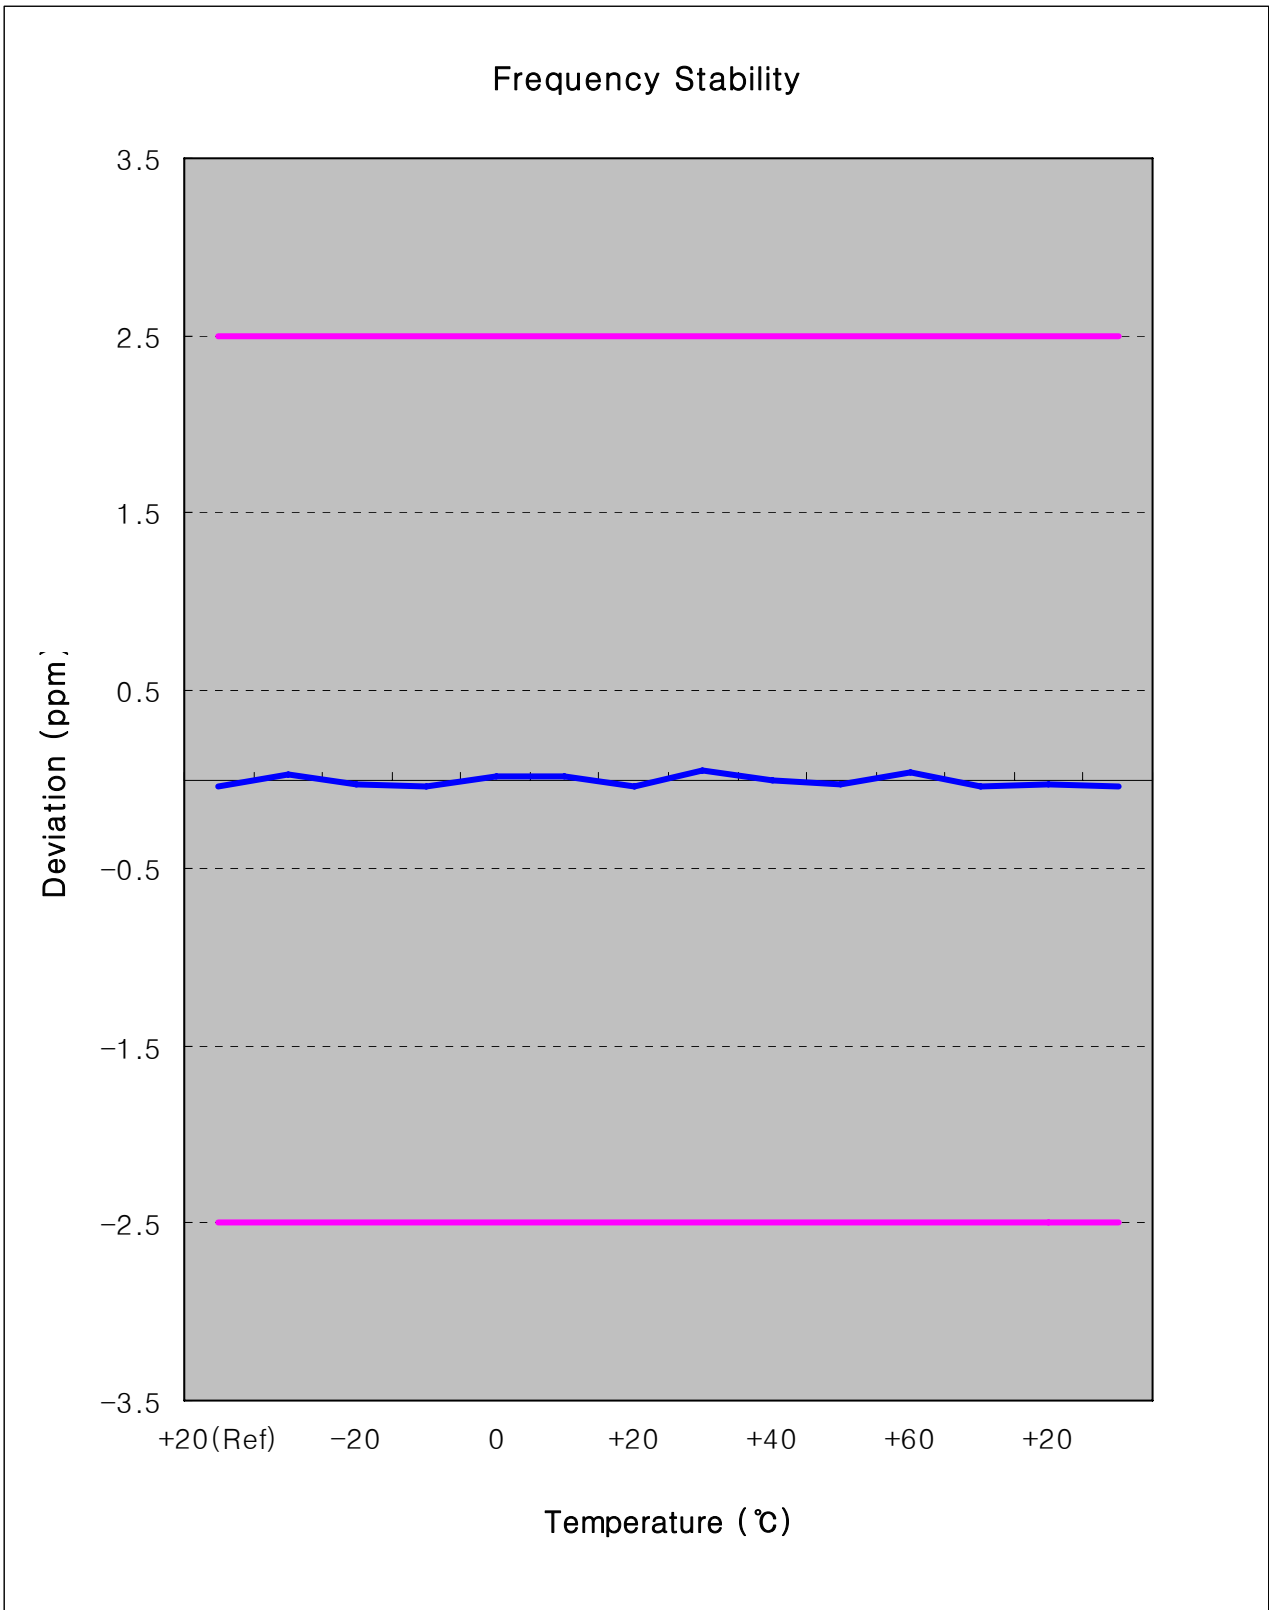

**Zoom IN**

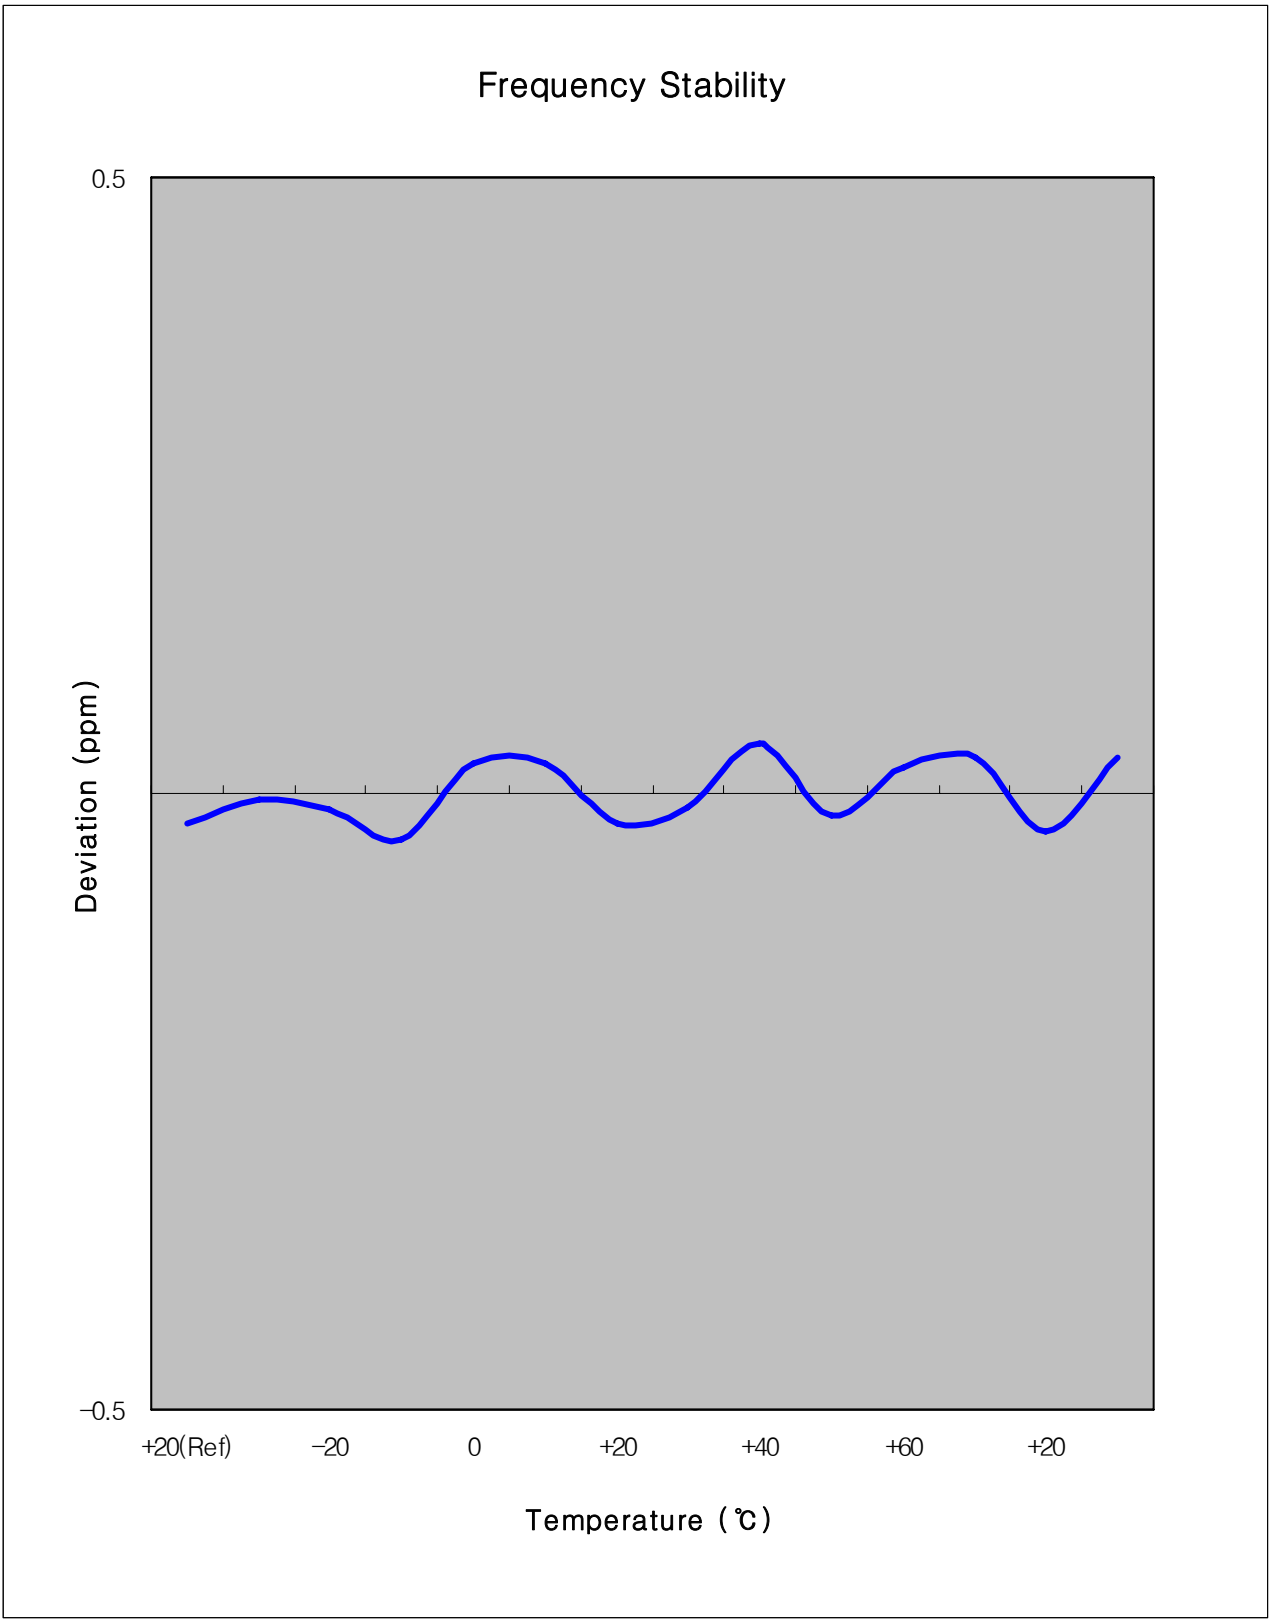



### 6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	23.10	1,880,000,023	0.000001	0.012
100%		-30	-26.00	1,879,999,974	-0.000001	-0.014
100%		-20	-39.50	1,879,999,961	-0.000002	-0.021
100%		-10	38.30	1,880,000,038	0.000002	0.020
100%		0	33.50	1,880,000,034	0.000002	0.018
100%		+10	3.20	1,880,000,003	0.000000	0.002
100%		+20	23.10	1,880,000,023	0.000001	0.012
100%		+30	-10.40	1,879,999,990	-0.000001	-0.006
100%		+40	-12.70	1,879,999,987	-0.000001	-0.007
100%		+50	31.60	1,880,000,032	0.000002	0.017
100%		+60	-37.30	1,879,999,963	-0.000002	-0.020
85%		3.15	+20	-34.80	1,879,999,965	-0.000002
115%	4.26	+20	-4.00	1,879,999,996	0.000000	-0.002
Batt.Endpoint	3.15	+20	-34.80	1,879,999,965	-0.000002	-0.019


**Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.**

**The EUT is tested down to the battery end point.**

### 6.8.4. GSM1900 Frequency Stability Graph

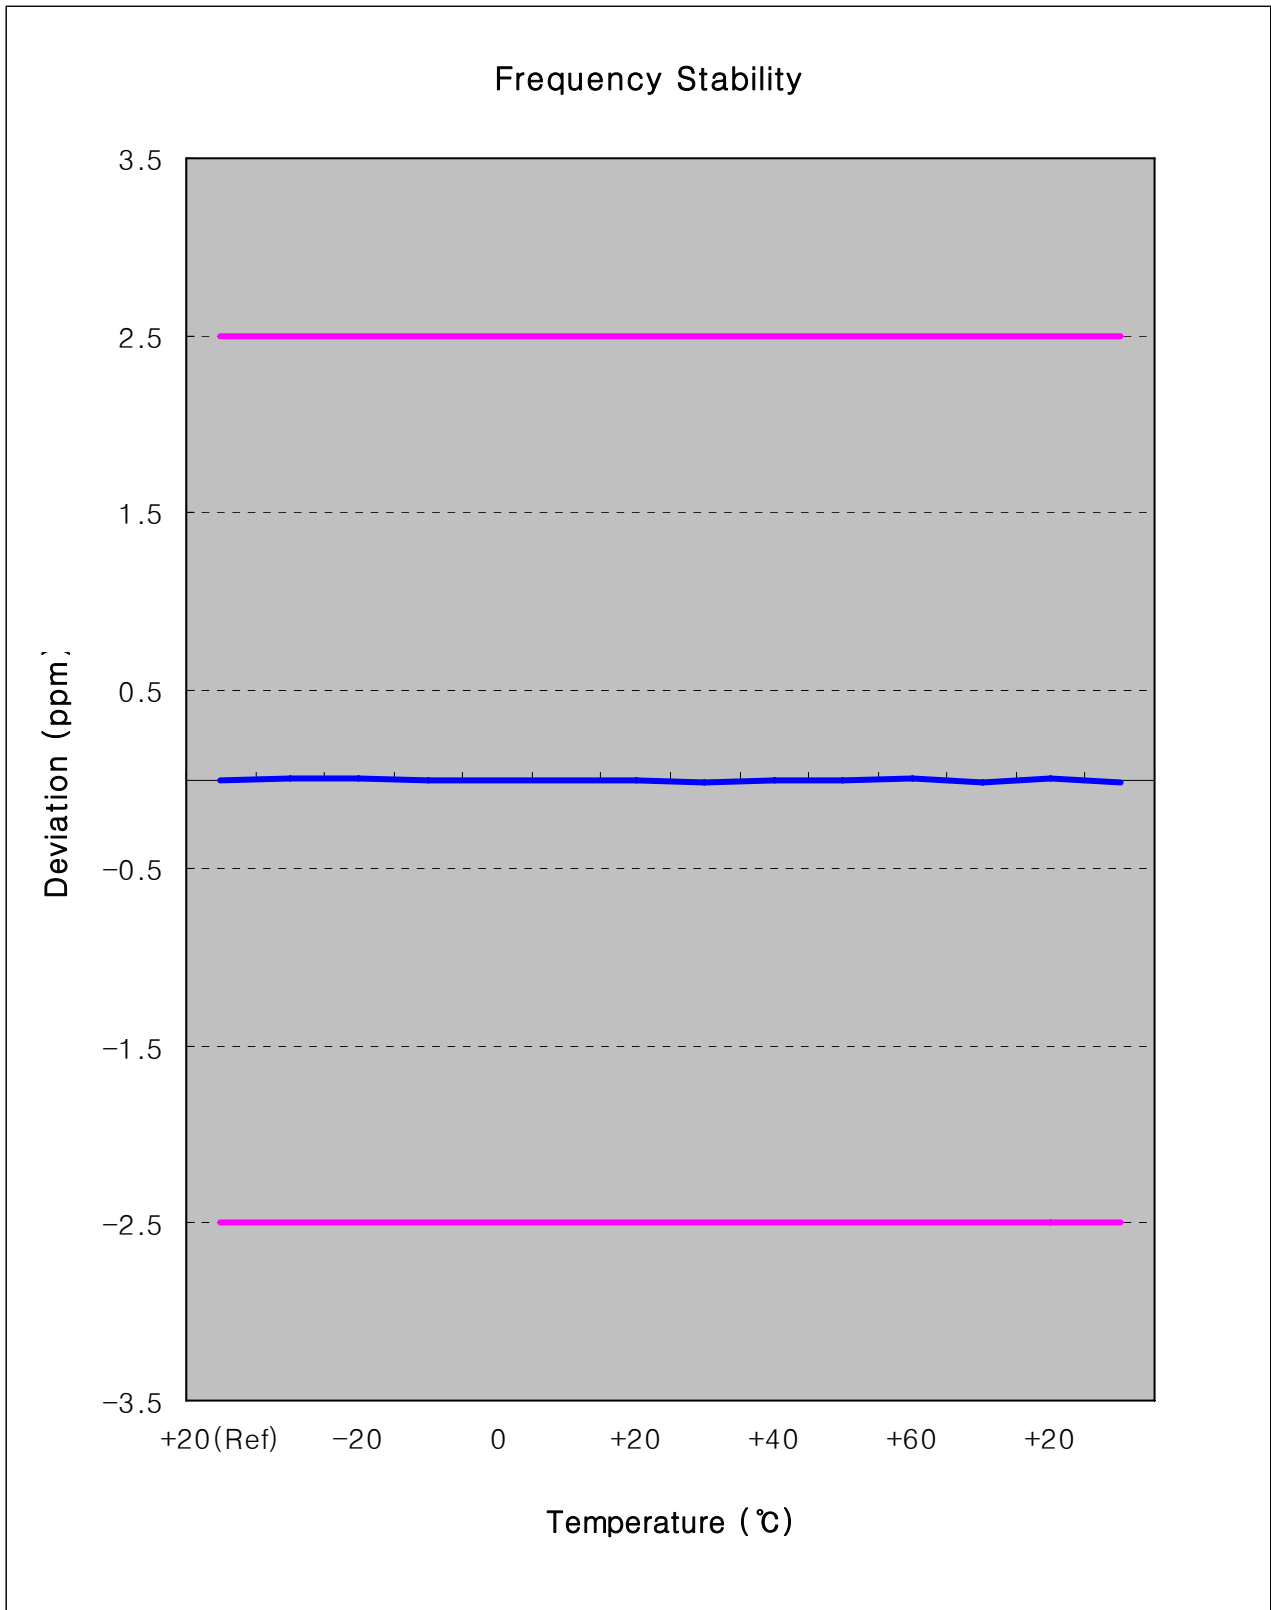

**Zoom IN**

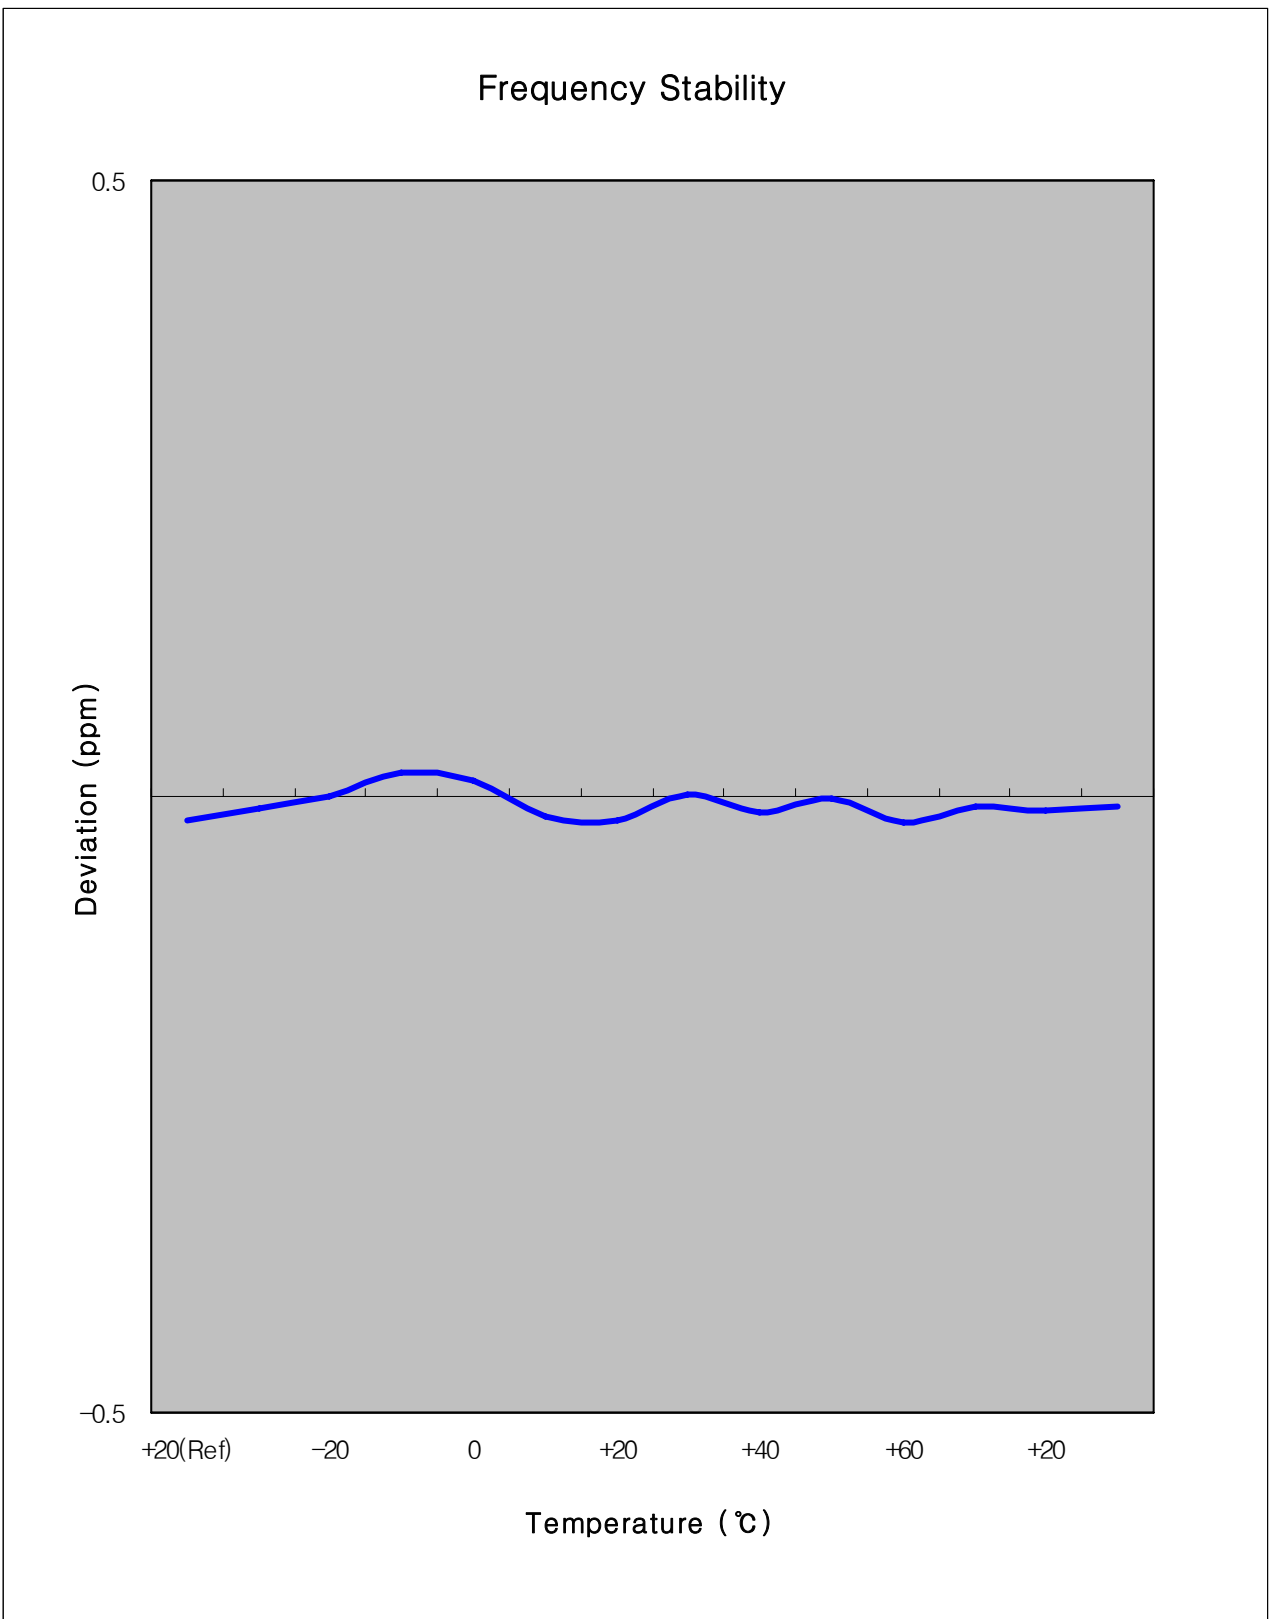



## 7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS Phone with Bluetooth and EDGE Rx Only.

FCC ID : A3LGTS3778 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

## 8. TEST PLOTS

Agilent

R T

<b>Ch Freq</b> 824.2 MHz <span style="float: right;"><b>Trig</b> Free</span>		<b>Freq/Channel</b>												
Occupied Bandwidth <span style="float: right;">[Progress Bar]</span>		<b>Center Freq</b> 824.200000 MHz												
FCC ID:A3LGTS3778 0BW Ch.128 Ref 33 dBm Atten 40 dB		<b>Start Freq</b> 823.700000 MHz												
		<b>Stop Freq</b> 824.700000 MHz												
		<b>CF Step</b> 100.000000 kHz Auto Man												
Center 824.200 MHz <span style="float: right;">Span 1 MHz</span> #Res BW 3 kHz <span style="margin-left: 100px;">#VBW 3 kHz</span> <span style="float: right;">#Sweep 1 s (601 pts)</span>		<b>Freq Offset</b> 0.00000000 Hz												
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"><b>Occupied Bandwidth</b></td> <td style="width: 25%;"><b>Occ BW % Pwr</b></td> <td style="width: 25%; text-align: right;">99.00 %</td> </tr> <tr> <td style="text-align: center;">251.3762 kHz</td> <td style="text-align: center;"><b>x dB</b></td> <td style="text-align: right;">-26.00 dB</td> </tr> <tr> <td><b>Transmit Freq Error</b></td> <td colspan="2">802.342 Hz</td> </tr> <tr> <td><b>x dB Bandwidth</b></td> <td colspan="2">310.012 kHz</td> </tr> </table>		<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %	251.3762 kHz	<b>x dB</b>	-26.00 dB	<b>Transmit Freq Error</b>	802.342 Hz		<b>x dB Bandwidth</b>	310.012 kHz		<b>Signal Track</b> On Off
<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %												
251.3762 kHz	<b>x dB</b>	-26.00 dB												
<b>Transmit Freq Error</b>	802.342 Hz													
<b>x dB Bandwidth</b>	310.012 kHz													
<b>File Operation Status, C:\TEMP.GIF file saved</b>														

Agilent

R T

<b>Ch Freq</b> 836.6 MHz <span style="float: right;"><b>Trig</b> Free</span>		<b>Freq/Channel</b>												
Occupied Bandwidth <span style="float: right;">[Progress Bar]</span>		<b>Center Freq</b> 836.600000 MHz												
FCC ID:A3LGTS3778 0BW Ch.190 Ref 33 dBm Atten 40 dB		<b>Start Freq</b> 836.100000 MHz												
		<b>Stop Freq</b> 837.100000 MHz												
		<b>CF Step</b> 100.000000 kHz Auto Man												
Center 836.600 MHz <span style="float: right;">Span 1 MHz</span> #Res BW 3 kHz <span style="margin-left: 100px;">#VBW 3 kHz</span> <span style="float: right;">#Sweep 1 s (601 pts)</span>		<b>Freq Offset</b> 0.00000000 Hz												
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"><b>Occupied Bandwidth</b></td> <td style="width: 25%;"><b>Occ BW % Pwr</b></td> <td style="width: 25%; text-align: right;">99.00 %</td> </tr> <tr> <td style="text-align: center;">248.4801 kHz</td> <td style="text-align: center;"><b>x dB</b></td> <td style="text-align: right;">-26.00 dB</td> </tr> <tr> <td><b>Transmit Freq Error</b></td> <td colspan="2">2.856 kHz</td> </tr> <tr> <td><b>x dB Bandwidth</b></td> <td colspan="2">307.991 kHz</td> </tr> </table>		<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %	248.4801 kHz	<b>x dB</b>	-26.00 dB	<b>Transmit Freq Error</b>	2.856 kHz		<b>x dB Bandwidth</b>	307.991 kHz		<b>Signal Track</b> On Off
<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %												
248.4801 kHz	<b>x dB</b>	-26.00 dB												
<b>Transmit Freq Error</b>	2.856 kHz													
<b>x dB Bandwidth</b>	307.991 kHz													
<b>File Operation Status, C:\TEMP.GIF file saved</b>														



<b>Ch Freq</b> 848.8 MHz <span style="float: right;"><b>Trig</b> Free</span>		<b>Freq/Channel</b>	
Occupied Bandwidth <span style="float: right;">[ ] [ ]</span>		<b>Center Freq</b> 848.800000 MHz	
FCC ID:A3LGTS3778 0BW Ch.251 Ref 33 dBm Atten 40 dB		<b>Start Freq</b> 848.300000 MHz	
		<b>Stop Freq</b> 848.300000 MHz	
#Peak Log 10 dB/ Offst 7.77 dB		<b>CF Step</b> 100.000000 kHz Auto Man	
Center 848.800 MHz <span style="float: right;">Span 1 MHz</span> #Res BW 3 kHz <span style="margin-left: 100px;">#VBW 3 kHz</span> <span style="margin-left: 100px;">#Sweep 1 s (601 pts)</span>		<b>Freq Offset</b> 0.00000000 Hz	
<b>Occupied Bandwidth</b> 249.5987 kHz		<b>Signal Track</b> On Off	
<b>Occ BW % Pwr</b> 99.00 % <b>x dB</b> -26.00 dB			
<b>Transmit Freq Error</b> -1.346 kHz			
<b>x dB Bandwidth</b> 314.570 kHz			
<b>File Operation Status, C:\TEMP.GIF file saved</b>			



Control	Transmit Power							TCH Parms																							
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> </thead> <tbody> <tr> <td>BP</td> <td>32.59</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>32.59</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	32.59	----	----	----	----	----	ECP	32.59	----	----	----	----	----	Downlink Traffic Power		
		Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																								
BP	32.59	----	----	----	----	----																									
ECP	32.59	----	----	----	----	----																									
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.99</td> <td>1.38</td> <td>-16.65</td> </tr> <tr> <td>Maximum</td> <td>4.04</td> <td>1.72</td> <td>1.78</td> </tr> <tr> <td>Average</td> <td>3.54</td> <td>1.58</td> <td>-7.42</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.99	1.38	-16.65	Maximum	4.04	1.72	1.78	Average	3.54	1.58	-7.42	Pass/Fail	Pass	Pass	Pass	Traffic Band GSM850			
		Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	2.99	1.38	-16.65																												
Maximum	4.04	1.72	1.78																												
Average	3.54	1.58	-7.42																												
Pass/Fail	Pass	Pass	Pass																												
1 of 2	50 / 50 Single							Traffic Channel 128																							
	Active Cell Connected Sys Type: GSM							MS TX Level 5																							
<table border="1"> <thead> <tr> <th></th> <th>IntRef</th> <th>Offset</th> <th>R</th> <th>T</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								IntRef	Offset	R	T						Channel Mode Setup														
	IntRef	Offset	R	T																											
							Return																								
							1 of 2																								


Control	Transmit Power							TCH Parms																							
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> </thead> <tbody> <tr> <td>BP</td> <td>32.52</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>32.52</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	32.52	----	----	----	----	----	ECP	32.52	----	----	----	----	----	Downlink Traffic Power		
		Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																								
BP	32.52	----	----	----	----	----																									
ECP	32.52	----	----	----	----	----																									
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.83</td> <td>1.36</td> <td>-15.79</td> </tr> <tr> <td>Maximum</td> <td>4.10</td> <td>1.61</td> <td>-1.73</td> </tr> <tr> <td>Average</td> <td>3.49</td> <td>1.51</td> <td>-8.73</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.83	1.36	-15.79	Maximum	4.10	1.61	-1.73	Average	3.49	1.51	-8.73	Pass/Fail	Pass	Pass	Pass	Traffic Band GSM850			
		Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	2.83	1.36	-15.79																												
Maximum	4.10	1.61	-1.73																												
Average	3.49	1.51	-8.73																												
Pass/Fail	Pass	Pass	Pass																												
1 of 2	50 / 50 Single							Traffic Channel 190																							
	Active Cell Connected Sys Type: GSM							MS TX Level 5																							
<table border="1"> <thead> <tr> <th></th> <th>IntRef</th> <th>Offset</th> <th>R</th> <th>T</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>								IntRef	Offset	R	T						Channel Mode Setup														
	IntRef	Offset	R	T																											
							Return																								
							1 of 2																								

Control	Transmit Power							TCH Parms																									
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> </thead> <tbody> <tr> <td>BP</td> <td>32.53</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>32.53</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	32.53	----	----	----	----	----	ECP	32.53	----	----	----	----	----	Downlink Traffic Power				
	Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																											
BP	32.53	----	----	----	----	----																											
ECP	32.53	----	----	----	----	----																											
	Single							Traffic Band	GSM850																								
								Traffic Channel	251																								
								MS TX Level	5																								
Swap Window Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase &amp; Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.89</td> <td>1.32</td> <td>-13.69</td> </tr> <tr> <td>Maximum</td> <td>3.90</td> <td>1.59</td> <td>-0.61</td> </tr> <tr> <td>Average</td> <td>3.38</td> <td>1.46</td> <td>-6.83</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.89	1.32	-13.69	Maximum	3.90	1.59	-0.61	Average	3.38	1.46	-6.83	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	2.89	1.32	-13.69																														
Maximum	3.90	1.59	-0.61																														
Average	3.38	1.46	-6.83																														
Pass/Fail	Pass	Pass	Pass																														
	50 / 50 Single							Return																									
	Active Cell Connected				Sys Type: GSM																												
1 of 2			IntRef	Offset	R	T		1 of 2																									

Control	Power vs Time Graph							TCH Parms	
Power vs Time Setup								Downlink Traffic Power	
Change View								Traffic Band	GSM850
								Traffic Channel	128
								MS TX Level	5
								Channel Mode Setup	
								Return	
	Active Cell Connected				Sys Type: GSM				
1 of 2			IntRef	Offset	R	T		1 of 2	

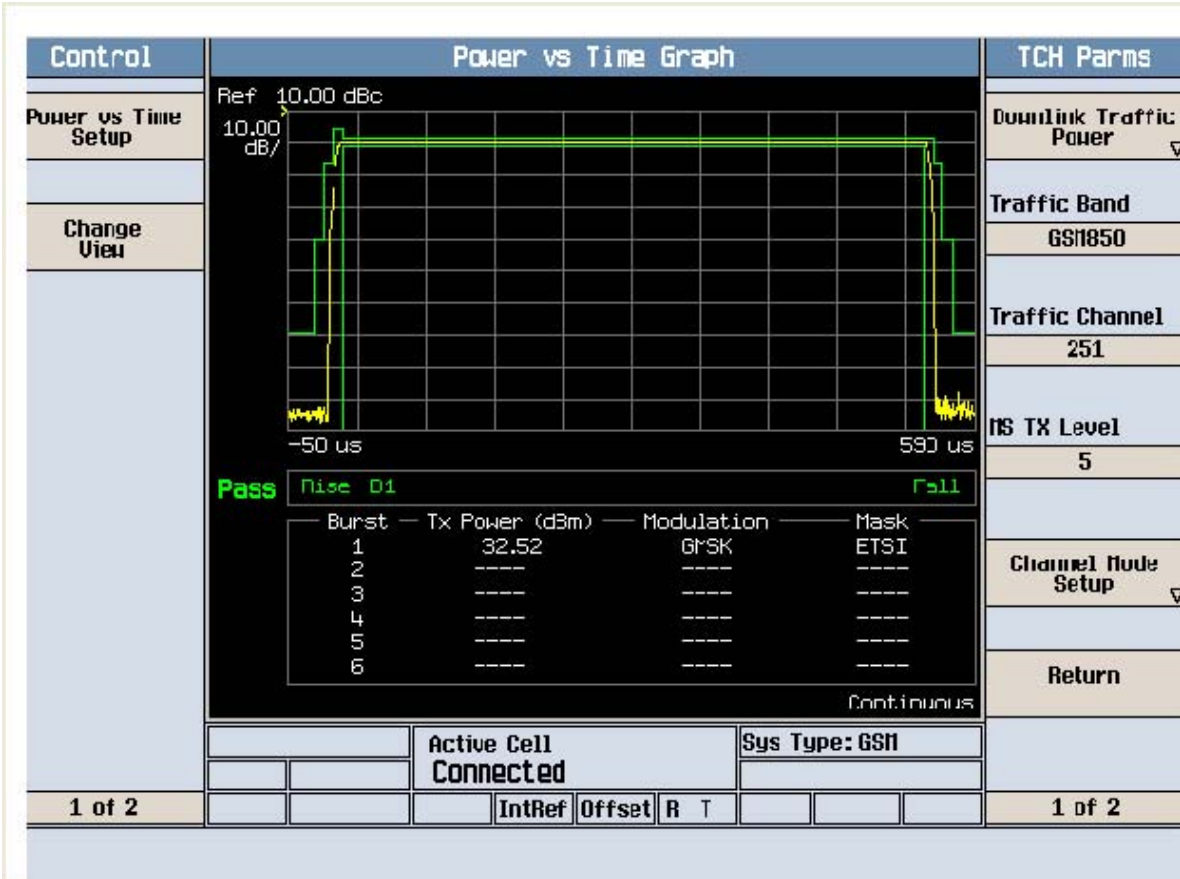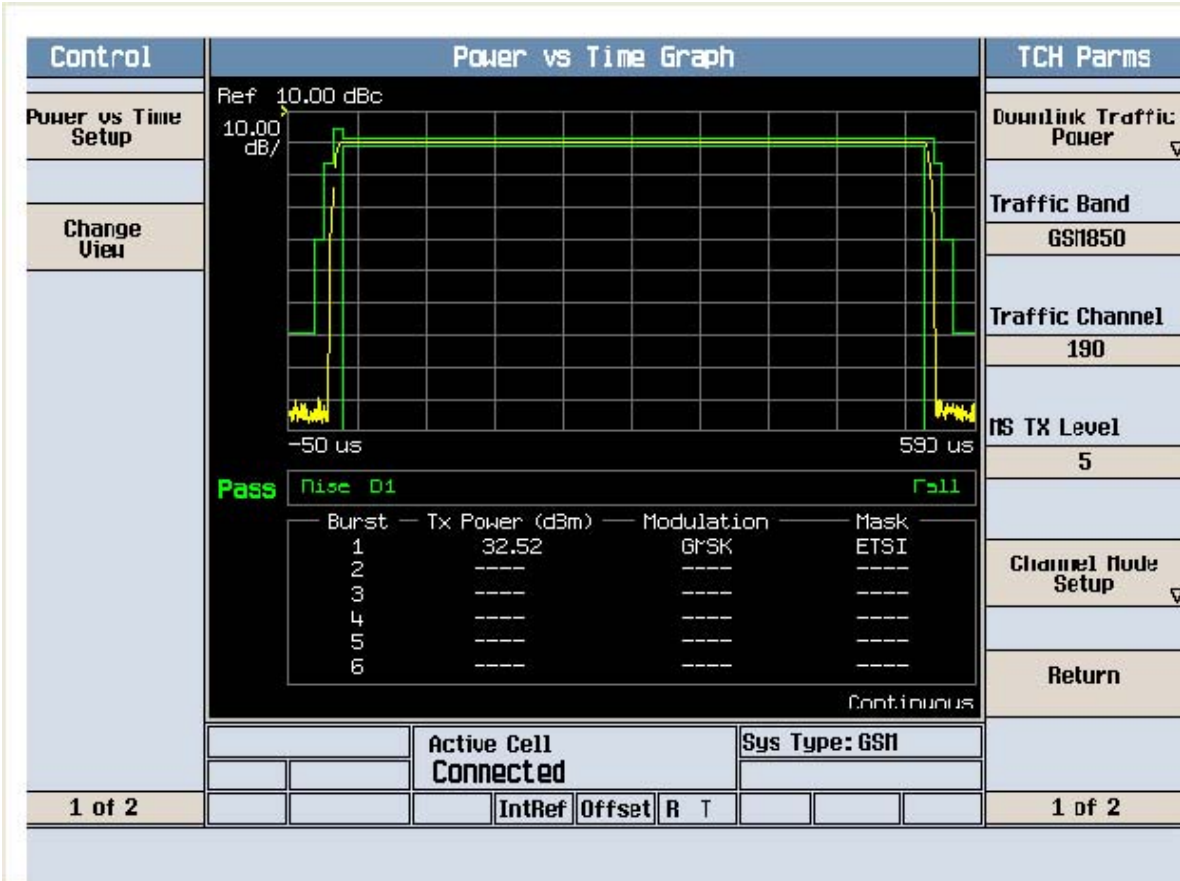

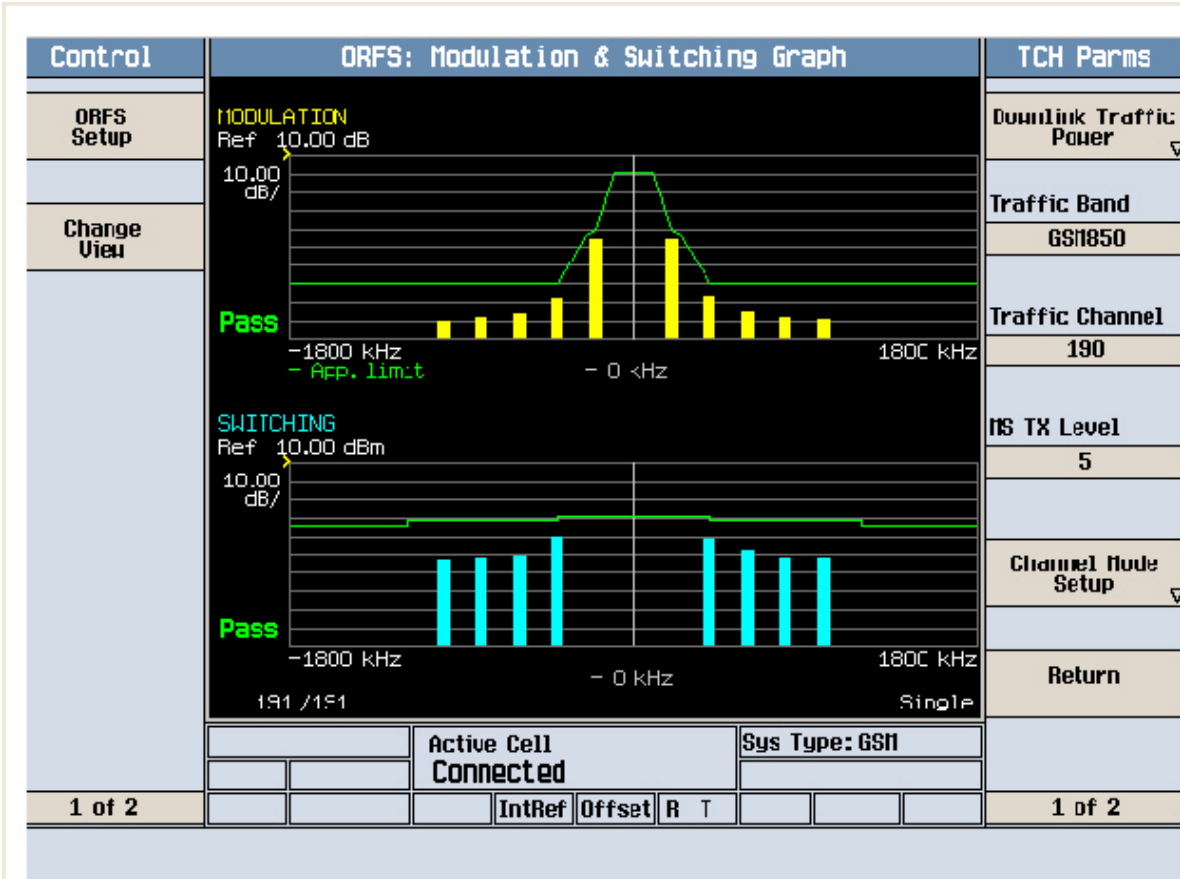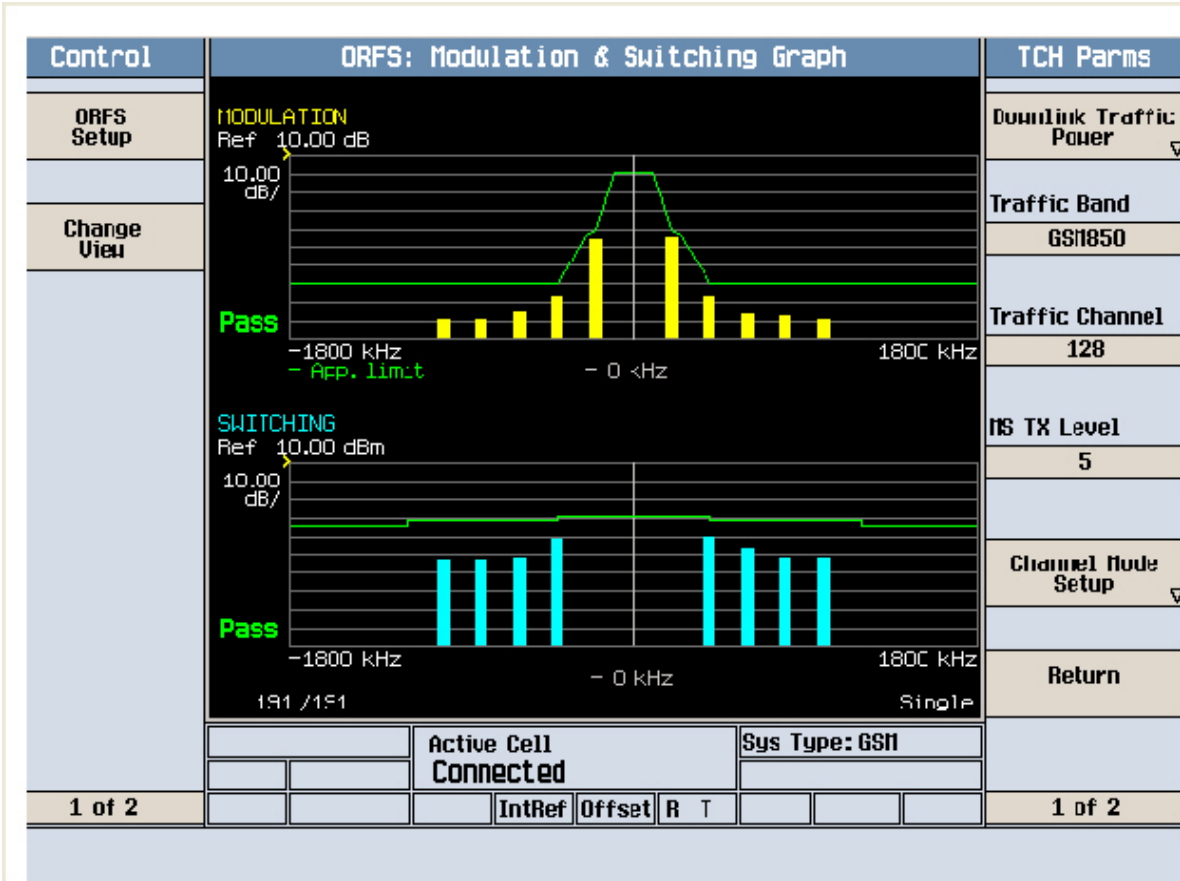

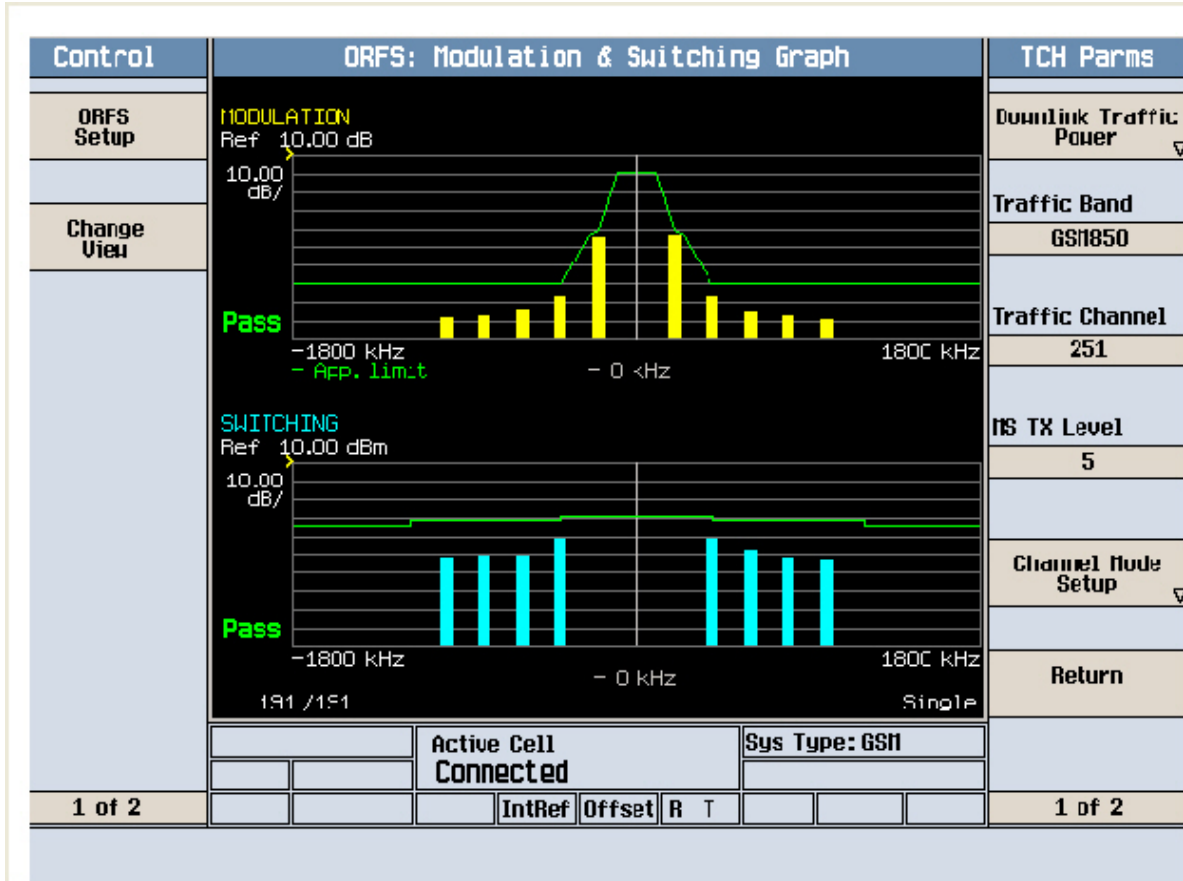


Agilent

R T

Freq/Channel

FCC ID:A3LGT53778 Cond Spur Ch.128

Ref 33 dBm Atten 40 dB

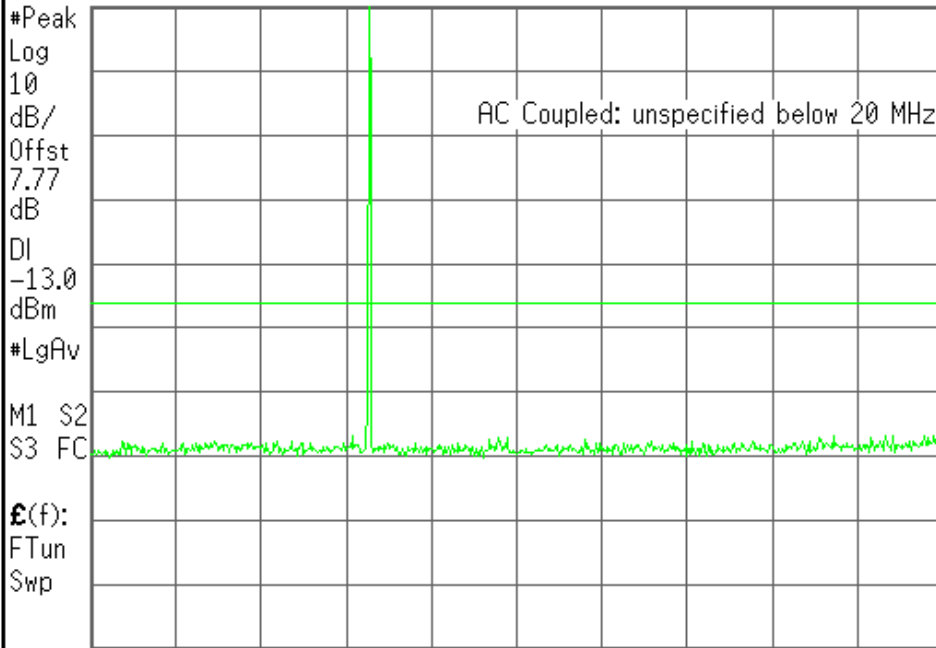

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Center 1.255 GHz Span 2.49 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGT53778 Cond Spur Ch.128

Mkr1 420.0 MHz

Ref 33 dBm Atten 40 dB

-33.92 dBm

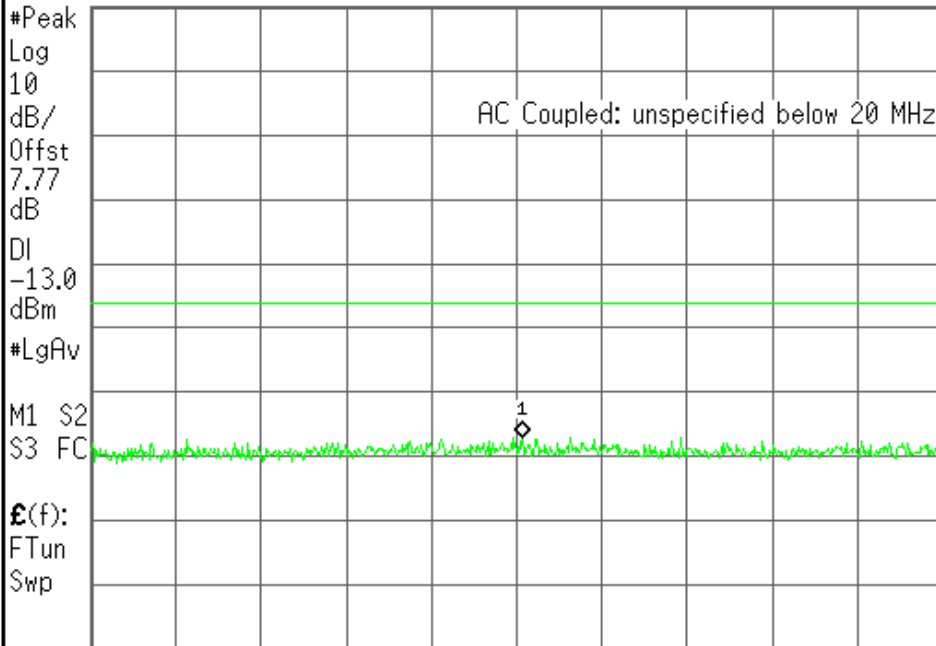

Center Freq  
414.600000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
819.200000 MHz

CF Step  
80.9200000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


Center 414.6 MHz Span 809.2 MHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 1.36 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

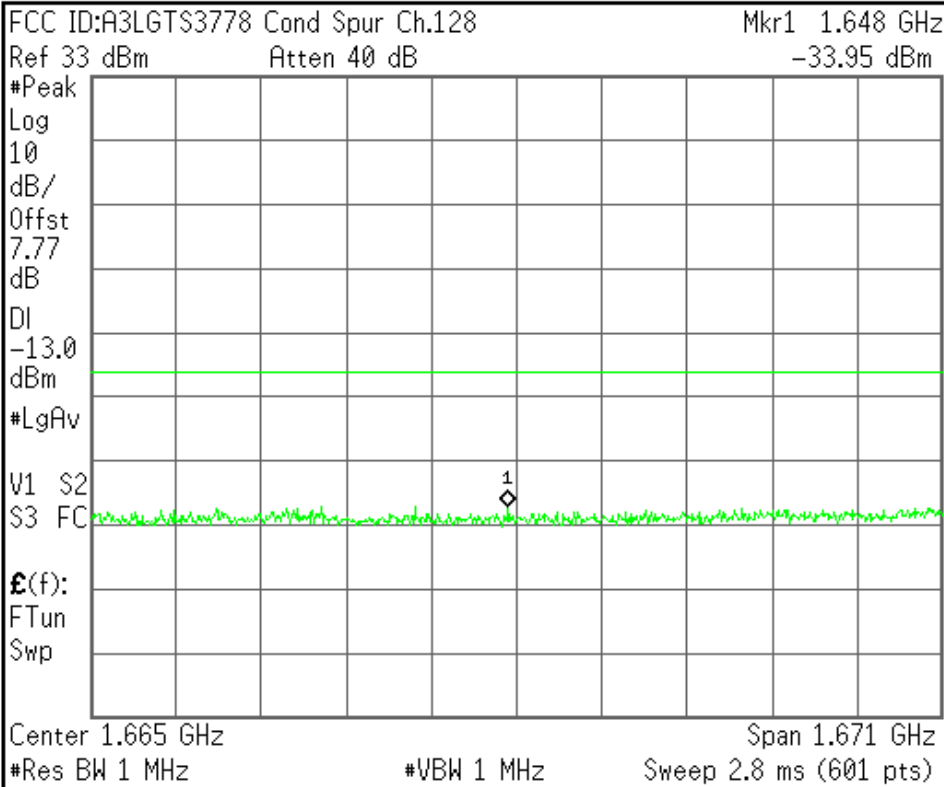


<b>Center Freq</b> 1.66460000 GHz
<b>Start Freq</b> 829.200000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 167.080000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

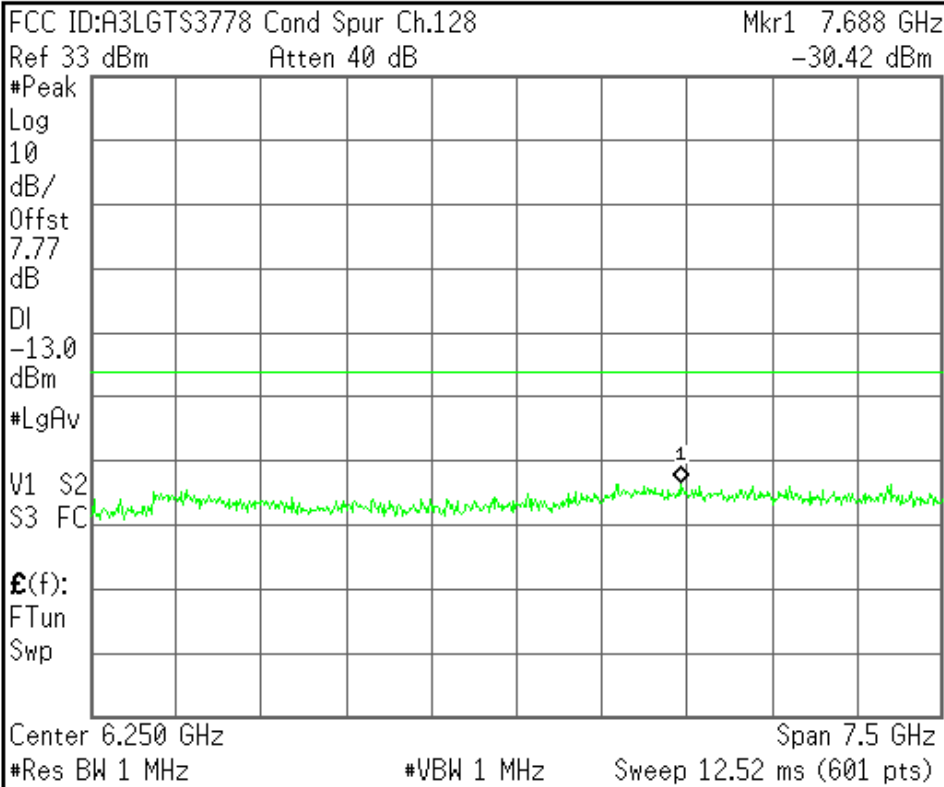


<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

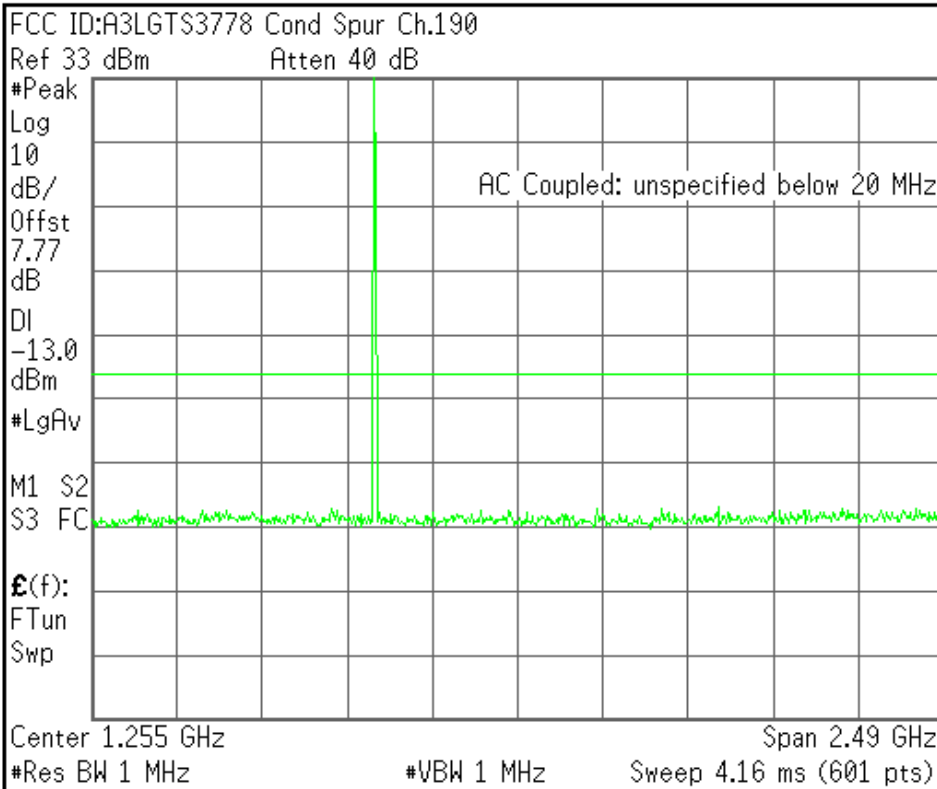


<b>Center Freq</b>	1.25500000 GHz
<b>Start Freq</b>	10.0000000 MHz
<b>Stop Freq</b>	2.50000000 GHz
<b>CF Step</b>	249.000000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

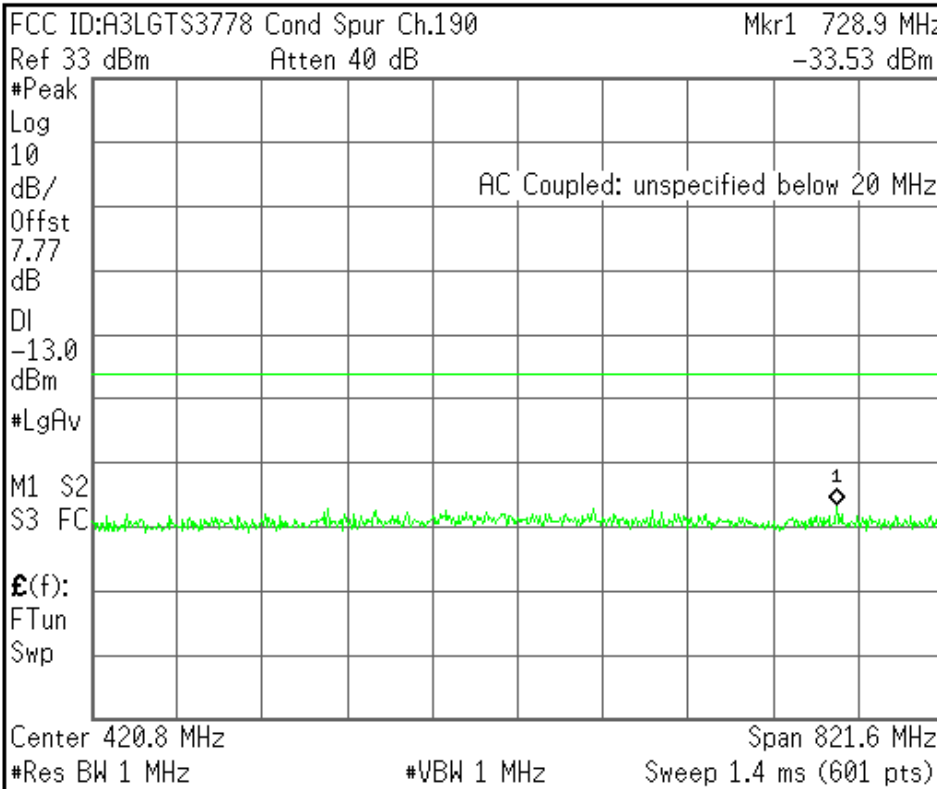


<b>Center Freq</b>	420.800000 MHz
<b>Start Freq</b>	10.0000000 MHz
<b>Stop Freq</b>	831.600000 MHz
<b>CF Step</b>	82.1600000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

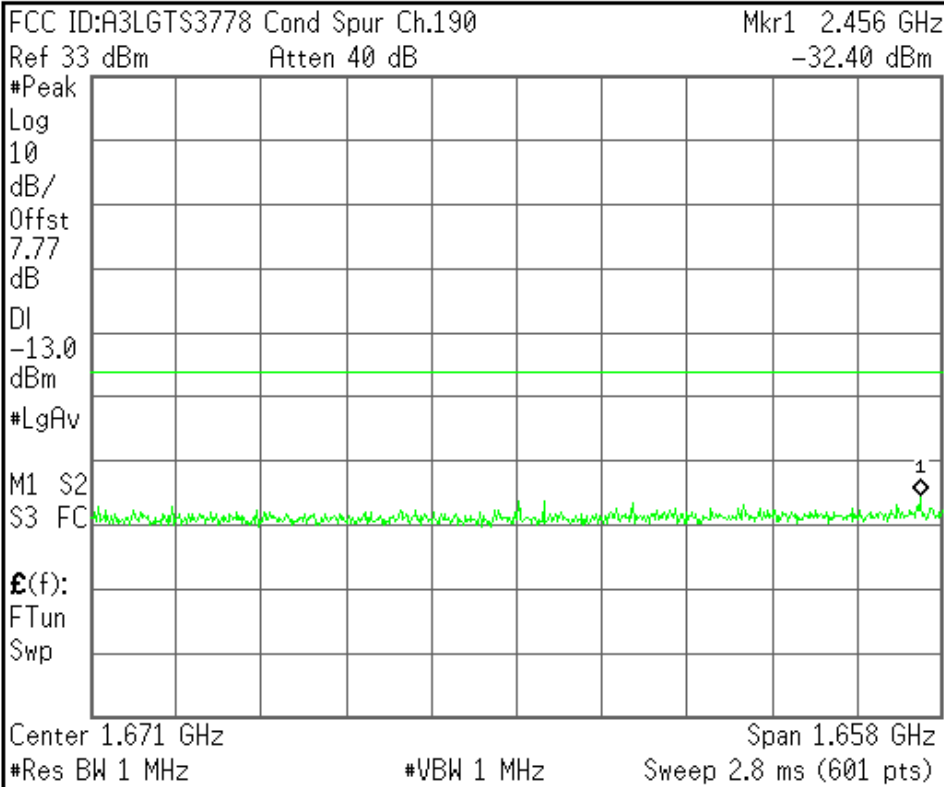


<b>Center Freq</b> 1.67080000 GHz
<b>Start Freq</b> 841.600000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 165.840000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

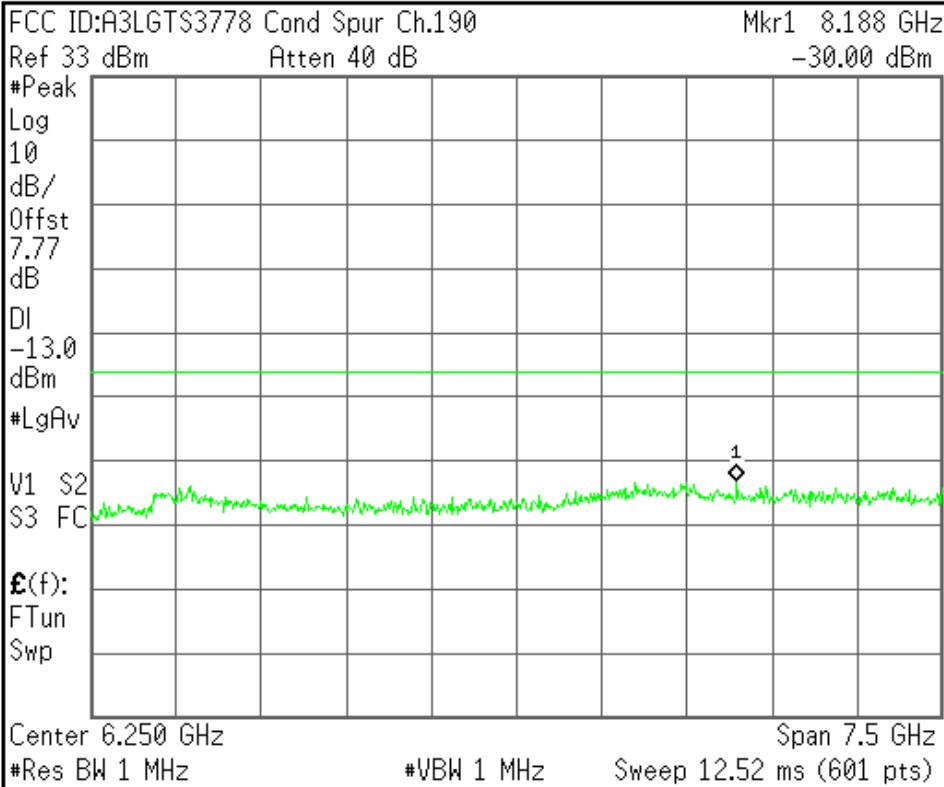


<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

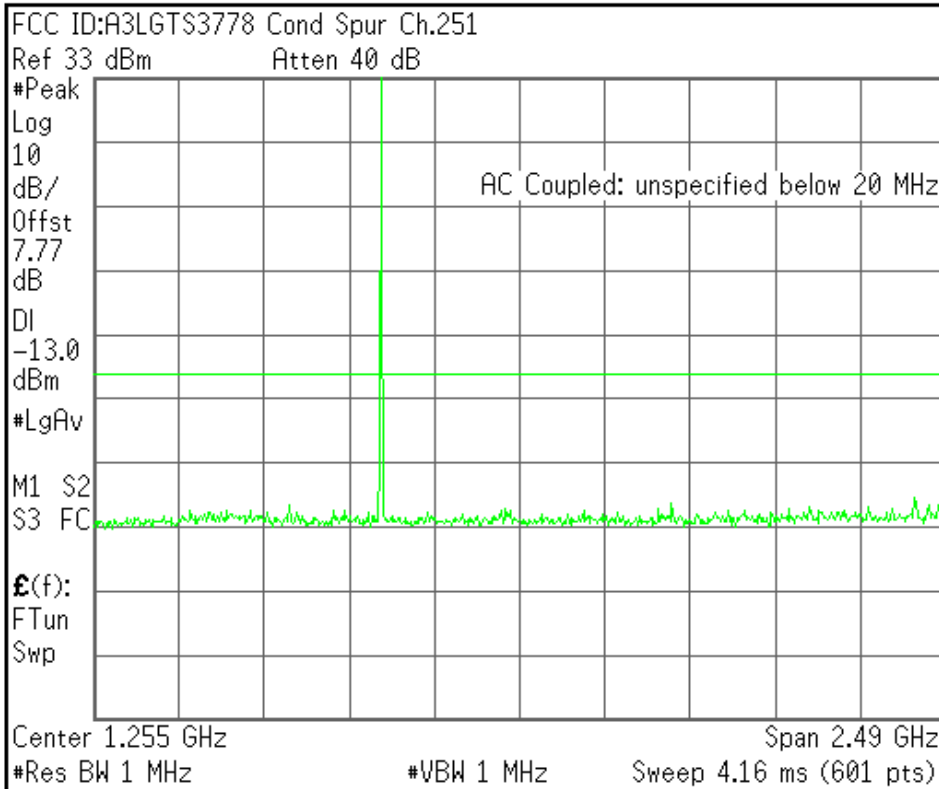

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

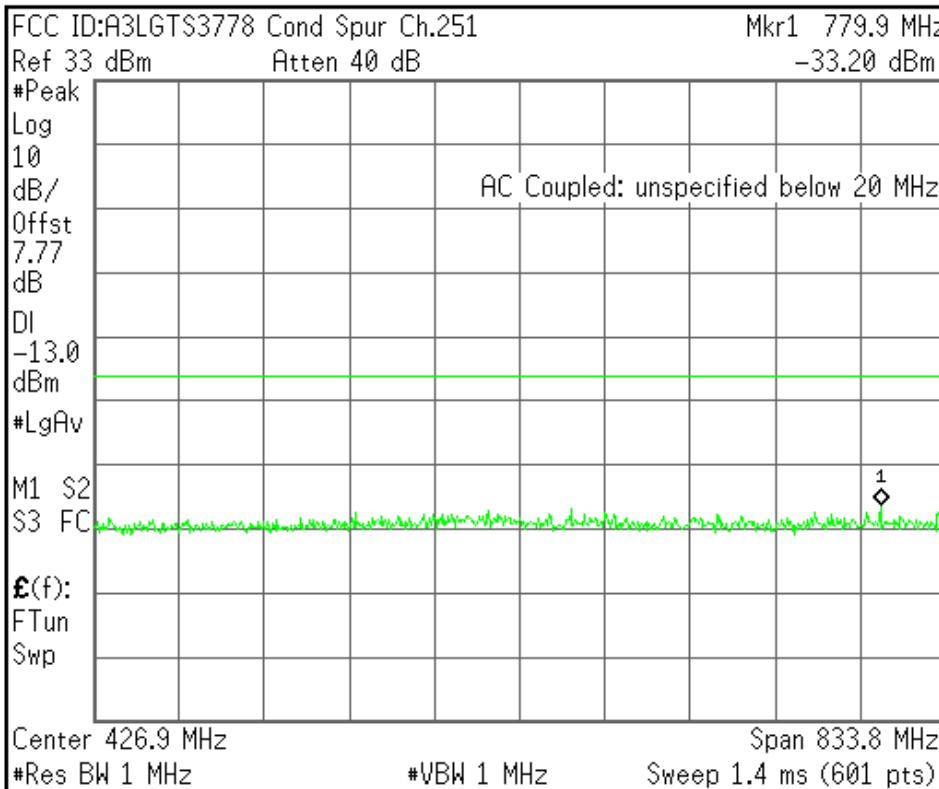

Center Freq  
426.900000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
843.800000 MHz

CF Step  
83.3800000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

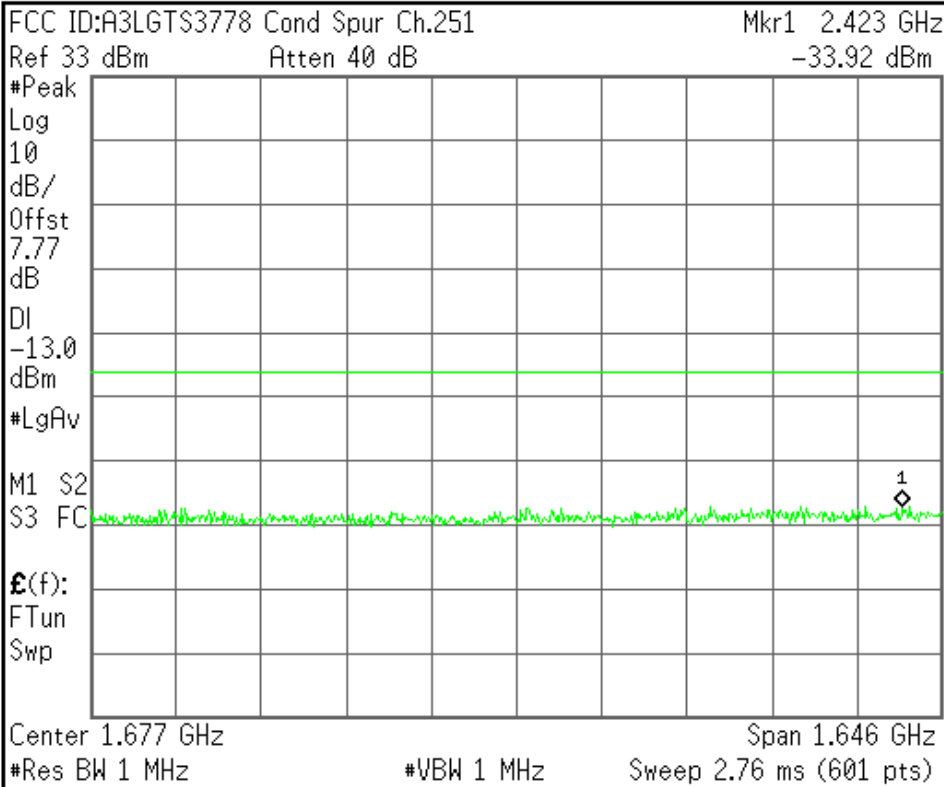


<b>Center Freq</b> 1.67690000 GHz
<b>Start Freq</b> 853.800000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 164.620000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

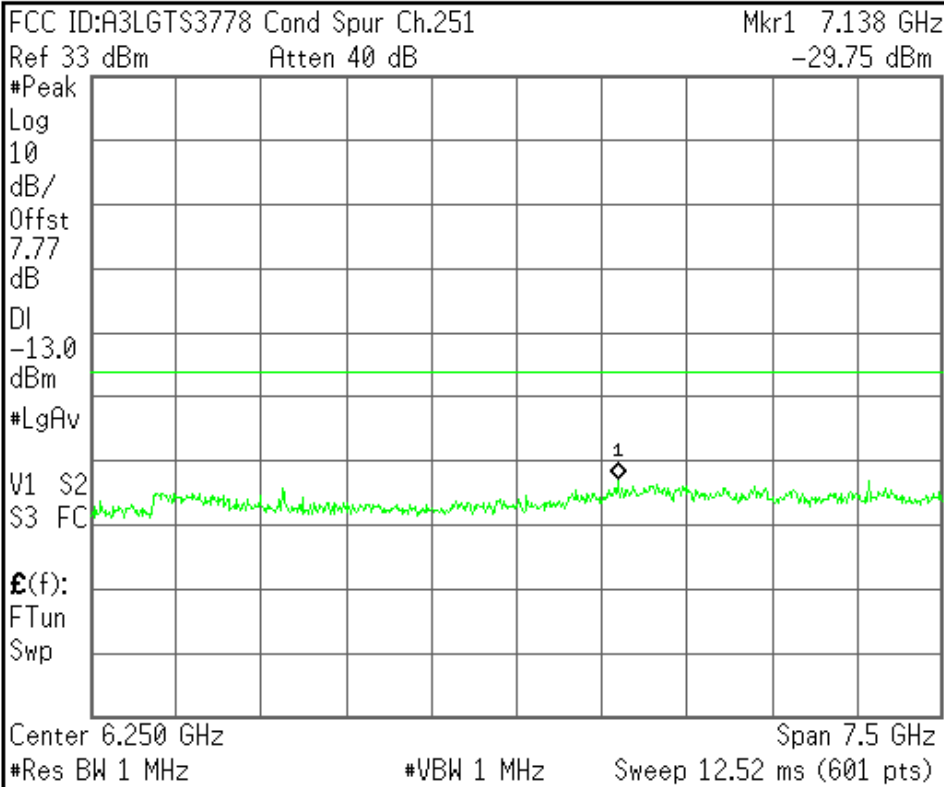

<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT53778 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

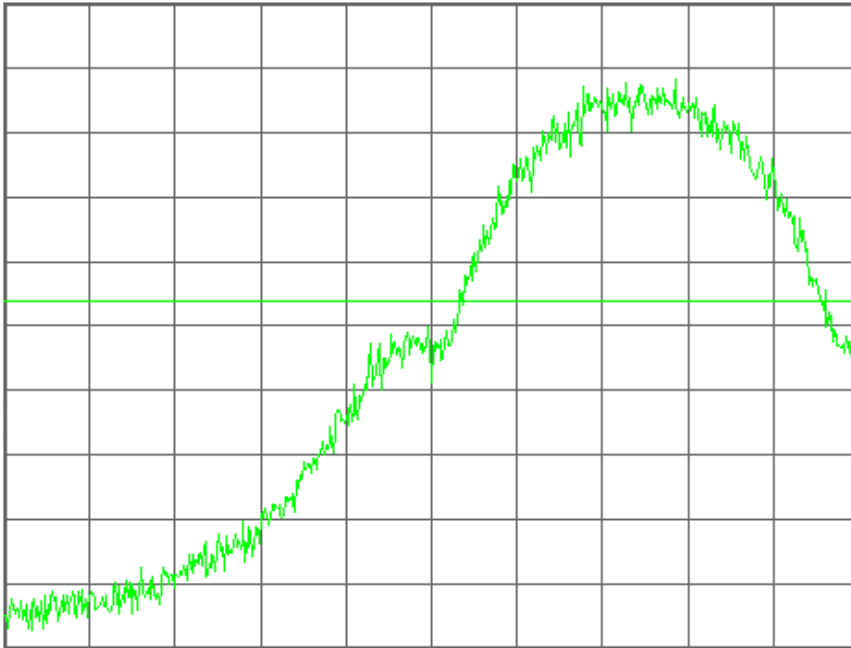

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
824.000000 MHz

Start Freq  
823.595000 MHz

Stop Freq  
824.405000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LGT53778 Band Edge Ch.128

Mkr1 823.996 0 MHz

Ref 33 dBm

Atten 40 dB

-13.98 dBm

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

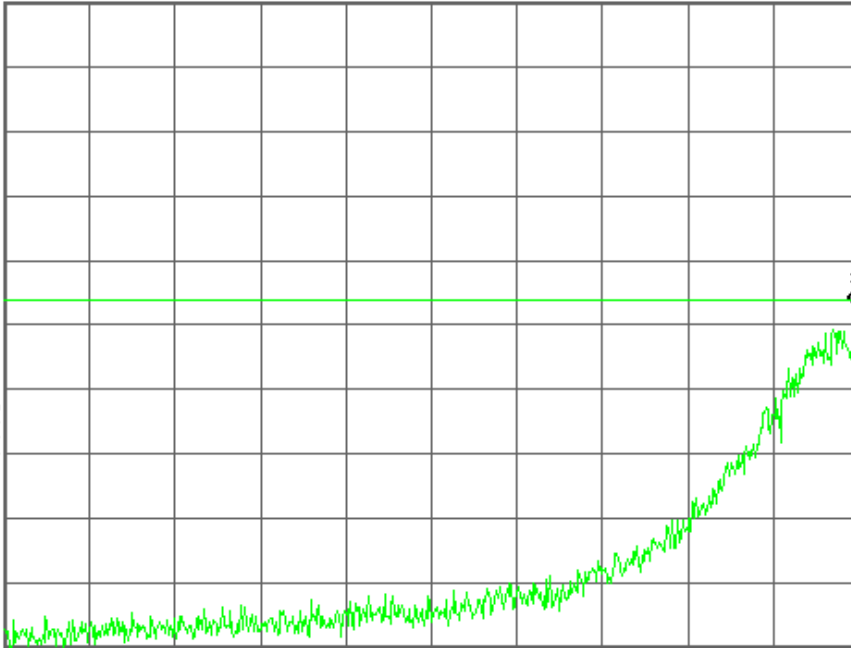

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
823.595000 MHz

Start Freq  
823.190000 MHz

Stop Freq  
824.000000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent


R T

Freq/Channel

FCC ID:A3LGT53778 Band Edge Ch.251

Ref 33 dBm Atten 40 dB

#Avg  
Log  
10  
dB/  
Offst  
7.77  
dB  
DI  
-13.0  
dBm  
PAvg  
M1 S2  
S3 FC  
E(f):  
f>50k  
Swp

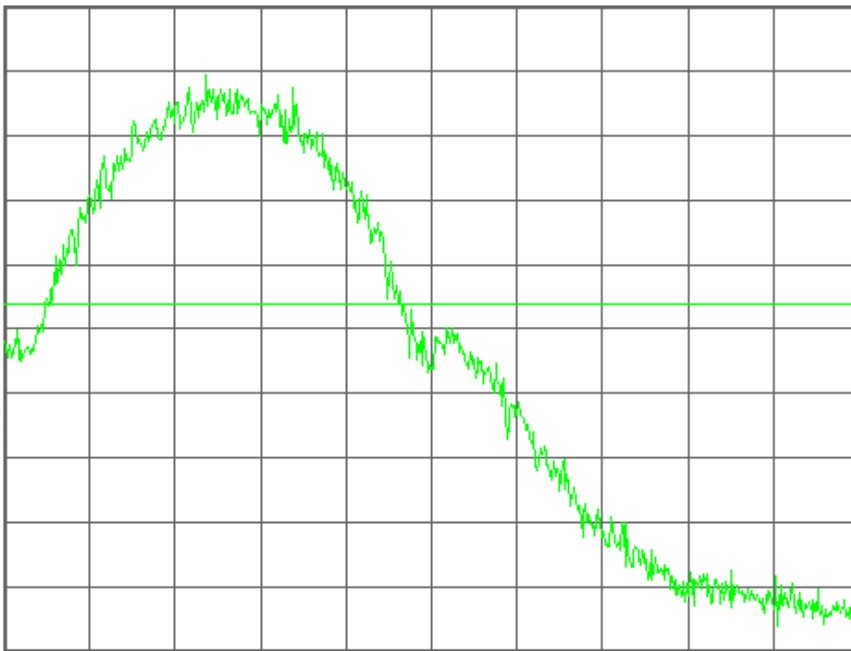

Center 849.000 0 MHz Span 810 kHz  
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq  
849.000000 MHz

Start Freq  
848.595000 MHz

Stop Freq  
849.405000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel


FCC ID:A3LGT53778 Band Edge Ch.251

Mkr1 849.020 1 MHz

Ref 33 dBm Atten 40 dB

-16.17 dBm

#Avg  
Log  
10  
dB/  
Offst  
7.77  
dB  
DI  
-13.0  
dBm  
PAvg  
M1 S2  
S3 FC  
E(f):  
f>50k  
Swp

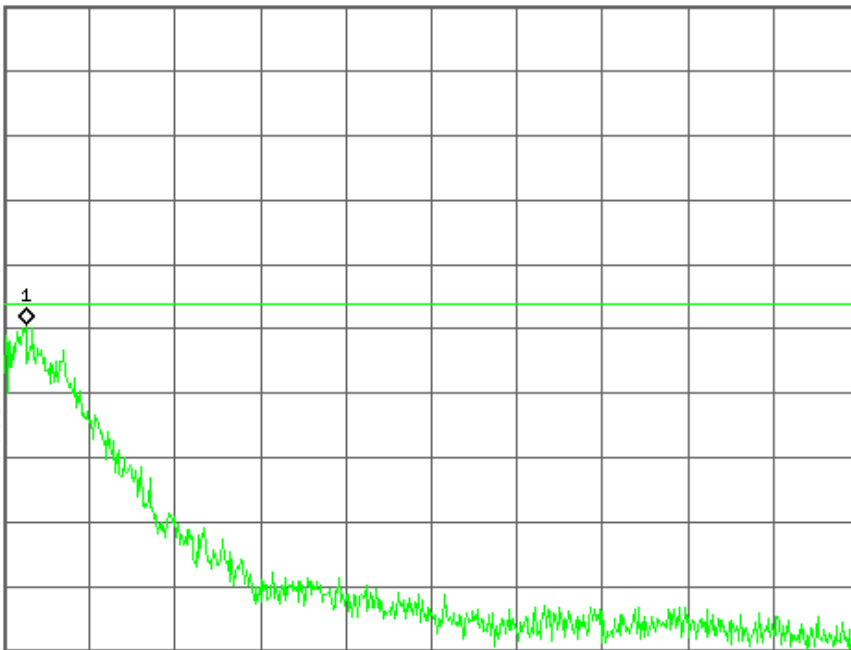

Center 849.405 0 MHz Span 810 kHz  
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq  
849.405000 MHz

Start Freq  
849.000000 MHz

Stop Freq  
849.810000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

<b>Ch Freq</b> 1.8502 GHz		<b>Trig</b> Free	
Occupied Bandwidth			
FCC ID:A3LGTS3778 0BW Ch.512 Ref 30 dBm Atten 40 dB			
#Peak			
Center	1.850 200 GHz	Span	1 MHz
#Res BW	3 kHz	#VBW	3 kHz
#Sweep	1 s (601 pts)		
<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b>	99.00 %
252.9990 kHz		<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	2.072 kHz		
<b>x dB Bandwidth</b>	327.570 kHz		
<b>File Operation Status, C:\TEMP.GIF file saved</b>			

<b>Freq/Channel</b>
<b>Center Freq</b> 1.85020000 GHz
<b>Start Freq</b> 1.84970000 GHz
<b>Stop Freq</b> 1.85070000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Agilent

R T

<b>Ch Freq</b> 1.88 GHz		<b>Trig</b> Free	
Occupied Bandwidth			
FCC ID:A3LGTS3778 0BW Ch.661 Ref 30 dBm Atten 40 dB			
#Peak			
Center	1.880 000 GHz	Span	1 MHz
#Res BW	3 kHz	#VBW	3 kHz
#Sweep	1 s (601 pts)		
<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b>	99.00 %
250.7735 kHz		<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	-173.876 Hz		
<b>x dB Bandwidth</b>	309.964 kHz		
<b>File Operation Status, C:\TEMP.GIF file saved</b>			

<b>Freq/Channel</b>
<b>Center Freq</b> 1.88000000 GHz
<b>Start Freq</b> 1.87950000 GHz
<b>Stop Freq</b> 1.88050000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

<b>Ch Freq</b> 1.9098 GHz		<b>Trig</b> Free
Occupied Bandwidth		
FCC ID:A3LGTS3778 0BW Ch.810 Ref 30 dBm Atten 40 dB		
Center 1.909 800 GHz		Span 1 MHz
#Res BW 3 kHz	#VBW 3 kHz	#Sweep 1 s (601 pts)
<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b> 99.00 %
246.7982 kHz		<b>x dB</b> -26.00 dB
<b>Transmit Freq Error</b> 2.131 kHz		
<b>x dB Bandwidth</b> 316.829 kHz		
File Operation Status, C:\TEMP.GIF file saved		



<b>Freq/Channel</b>
<b>Center Freq</b> 1.90980000 GHz
<b>Start Freq</b> 1.90930000 GHz
<b>Stop Freq</b> 1.91030000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off



FCC ID : A3LGTS3778 Transmit Power 512CH



Measurement/Instrument Screen																											
Control	Transmit Power					TCH Parms																					
Transmit Power Setup	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> <tr> <td>BP</td> <td>28.78</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>28.78</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </table>						Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	28.78	----	----	----	----	----	ECP	28.78	----	----	----	----	----	Downlink Traffic Power
		Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																				
BP	28.78	----	----	----	----	----																					
ECP	28.78	----	----	----	----	----																					
Snap Window Positions	Single					Traffic Band																					
						PCS																					
						Traffic Channel																					
						512																					
<b>Phase &amp; Frequency Error</b>																											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> <tr> <td>Minimum</td> <td>4.06</td> <td>1.54</td> <td>-45.56</td> </tr> <tr> <td>Maximum</td> <td>7.30</td> <td>2.12</td> <td>-14.18</td> </tr> <tr> <td>Average</td> <td>4.98</td> <td>1.76</td> <td>-29.76</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.06	1.54	-45.56	Maximum	7.30	2.12	-14.18	Average	4.98	1.76	-29.76	Pass/Fail	Pass	Pass	Pass	
	Peak Phase °	RMS Phase °	Frequency Hz																								
Minimum	4.06	1.54	-45.56																								
Maximum	7.30	2.12	-14.18																								
Average	4.98	1.76	-29.76																								
Pass/Fail	Pass	Pass	Pass																								
50 / 50 Single																											
			Active Cell Connected		Sys Type: GSM																						
1 of 2																											
			IntRef	Offset	R T	1 of 2																					

Measurement/Instrument Screen																														
Control	Transmit Power							TCH Parms																						
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> </thead> <tbody> <tr> <td>BP</td> <td>28.58</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>28.58</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	28.58	----	----	----	----	----	ECP	28.58	----	----	----	----	----	Downlink Traffic Power	
		Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																							
BP	28.58	----	----	----	----	----																								
ECP	28.58	----	----	----	----	----																								
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.98</td> <td>1.55</td> <td>-30.77</td> </tr> <tr> <td>Maximum</td> <td>6.11</td> <td>1.97</td> <td>-9.46</td> </tr> <tr> <td>Average</td> <td>5.04</td> <td>1.75</td> <td>-19.18</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.98	1.55	-30.77	Maximum	6.11	1.97	-9.46	Average	5.04	1.75	-19.18	Pass/Fail	Pass	Pass	Pass	Traffic Band	PCS	
		Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	3.98	1.55	-30.77																											
Maximum	6.11	1.97	-9.46																											
Average	5.04	1.75	-19.18																											
Pass/Fail	Pass	Pass	Pass																											
1 of 2	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.13</td> <td>1.53</td> <td>-31.55</td> </tr> <tr> <td>Maximum</td> <td>6.58</td> <td>2.00</td> <td>-6.39</td> </tr> <tr> <td>Average</td> <td>4.94</td> <td>1.73</td> <td>-19.17</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.13	1.53	-31.55	Maximum	6.58	2.00	-6.39	Average	4.94	1.73	-19.17	Pass/Fail	Pass	Pass	Pass	Traffic Channel	661	
		Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	4.13	1.53	-31.55																											
Maximum	6.58	2.00	-6.39																											
Average	4.94	1.73	-19.17																											
Pass/Fail	Pass	Pass	Pass																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				MS TX Level	0					
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				Channel Mode Setup						
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				Return						
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				1 of 2						
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											

Measurement/Instrument Screen																														
Control	Transmit Power							TCH Parms																						
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> <th>Burst 5</th> <th>Burst 6</th> </tr> </thead> <tbody> <tr> <td>BP</td> <td>28.77</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>ECP</td> <td>28.77</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6	BP	28.77	----	----	----	----	----	ECP	28.77	----	----	----	----	----	Downlink Traffic Power	
		Burst 1	Burst 2	Burst 3	Burst 4	Burst 5	Burst 6																							
BP	28.77	----	----	----	----	----																								
ECP	28.77	----	----	----	----	----																								
Swap Window Positions	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.13</td> <td>1.53</td> <td>-31.55</td> </tr> <tr> <td>Maximum</td> <td>6.58</td> <td>2.00</td> <td>-6.39</td> </tr> <tr> <td>Average</td> <td>4.94</td> <td>1.73</td> <td>-19.17</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.13	1.53	-31.55	Maximum	6.58	2.00	-6.39	Average	4.94	1.73	-19.17	Pass/Fail	Pass	Pass	Pass	Traffic Band	PCS	
		Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	4.13	1.53	-31.55																											
Maximum	6.58	2.00	-6.39																											
Average	4.94	1.73	-19.17																											
Pass/Fail	Pass	Pass	Pass																											
1 of 2	<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.13</td> <td>1.53</td> <td>-31.55</td> </tr> <tr> <td>Maximum</td> <td>6.58</td> <td>2.00</td> <td>-6.39</td> </tr> <tr> <td>Average</td> <td>4.94</td> <td>1.73</td> <td>-19.17</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>								Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.13	1.53	-31.55	Maximum	6.58	2.00	-6.39	Average	4.94	1.73	-19.17	Pass/Fail	Pass	Pass	Pass	Traffic Channel	810	
		Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	4.13	1.53	-31.55																											
Maximum	6.58	2.00	-6.39																											
Average	4.94	1.73	-19.17																											
Pass/Fail	Pass	Pass	Pass																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				MS TX Level	0					
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				Channel Mode Setup						
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				Return						
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T				1 of 2						
Active Cell Connected			Sys Type: GSM																											
IntRef	Offset	R	T																											

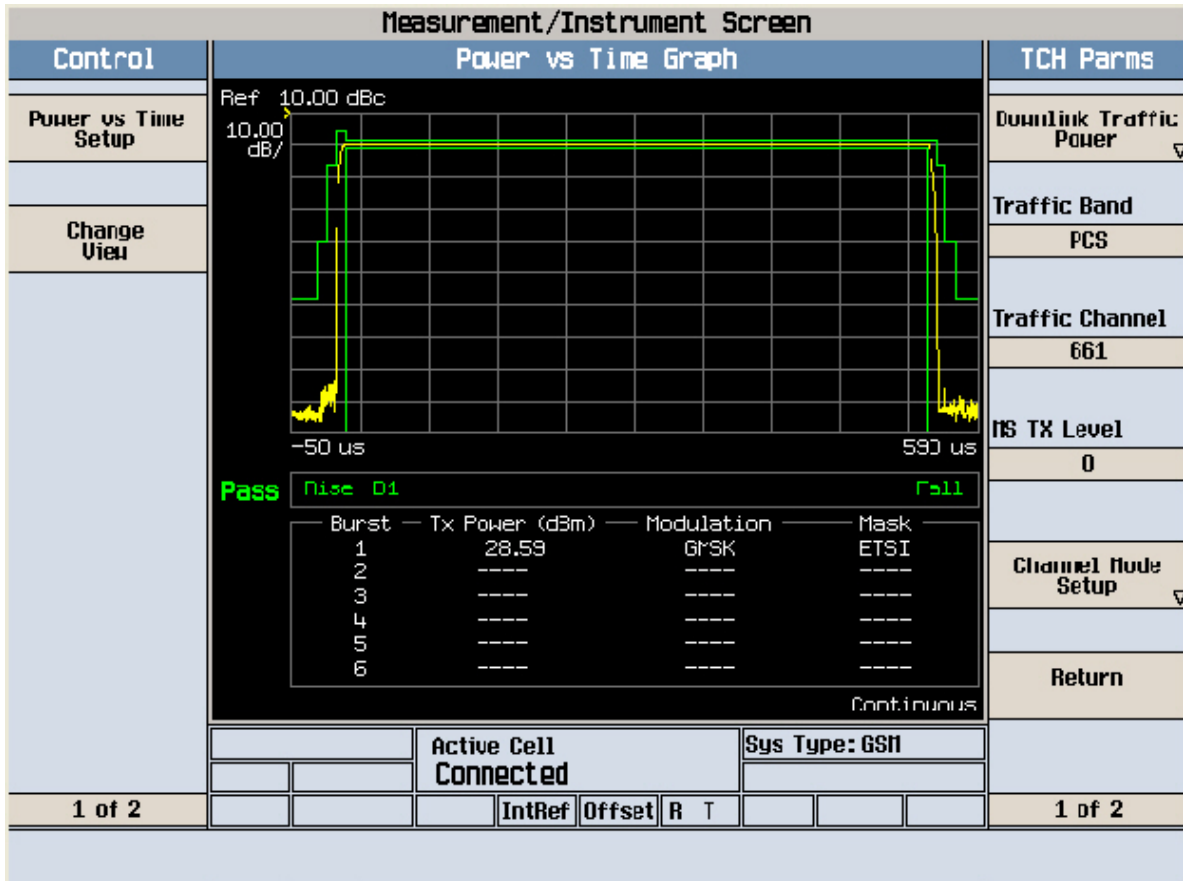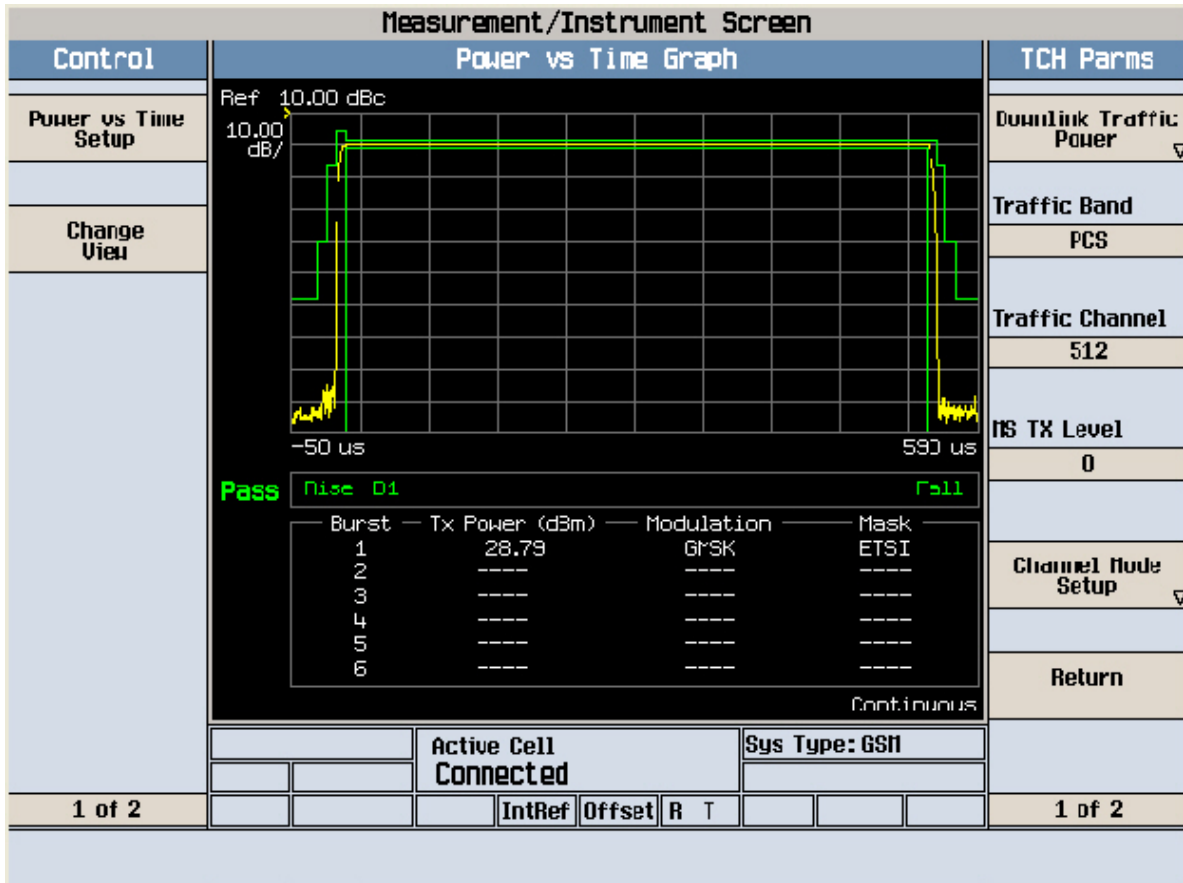

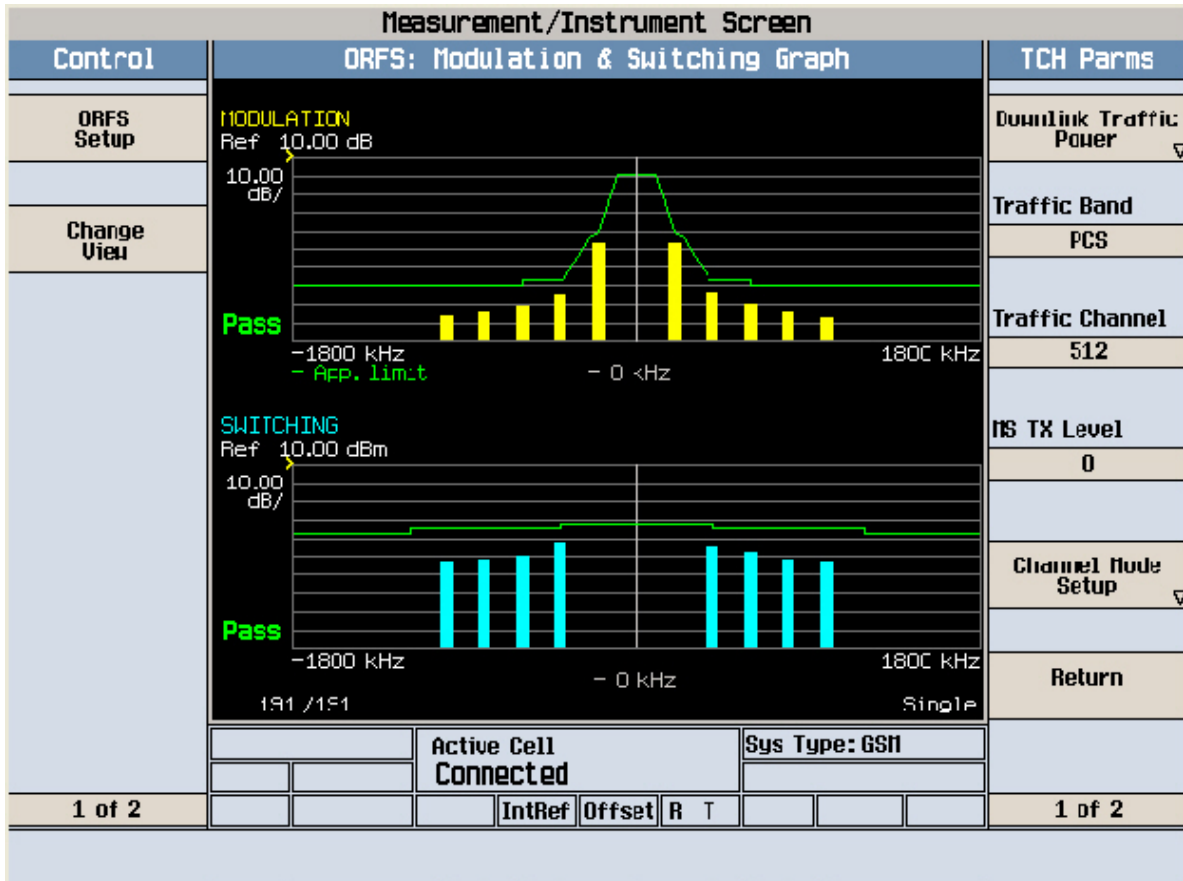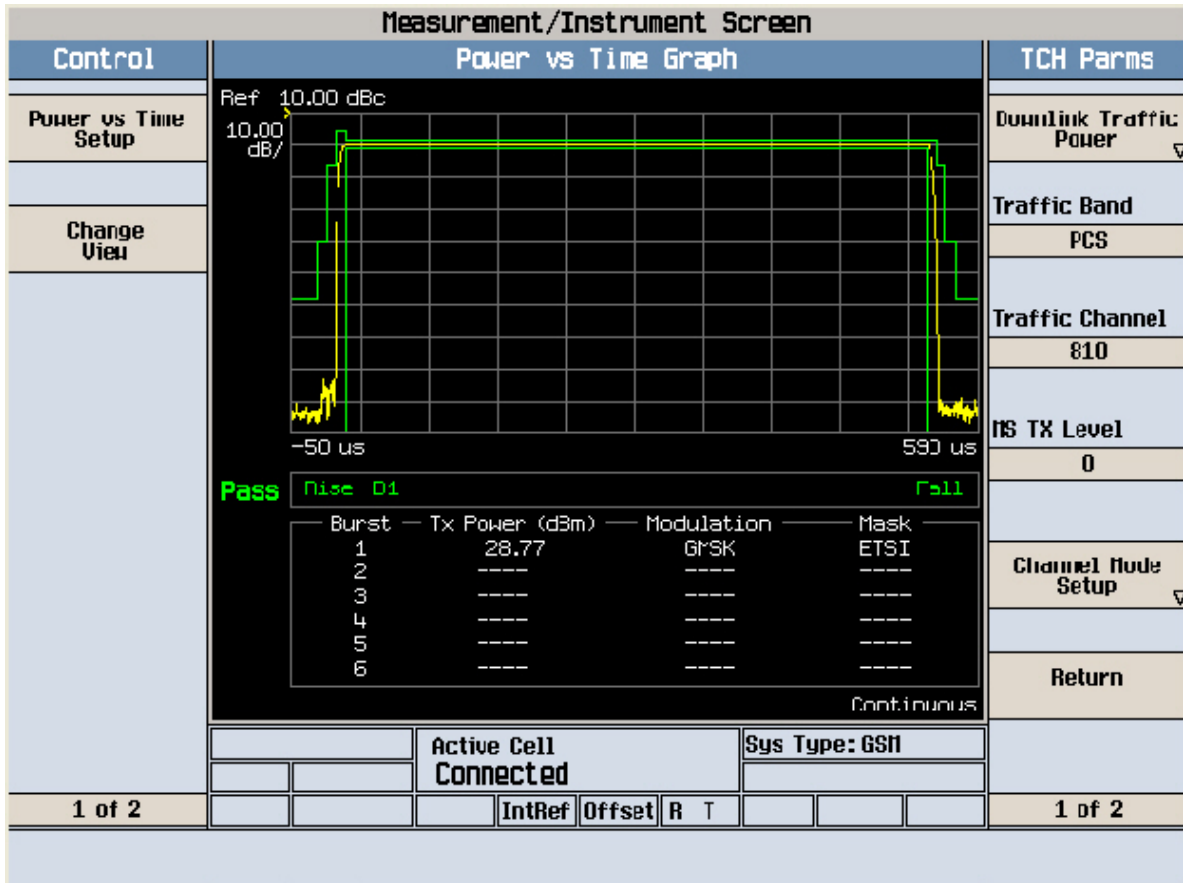


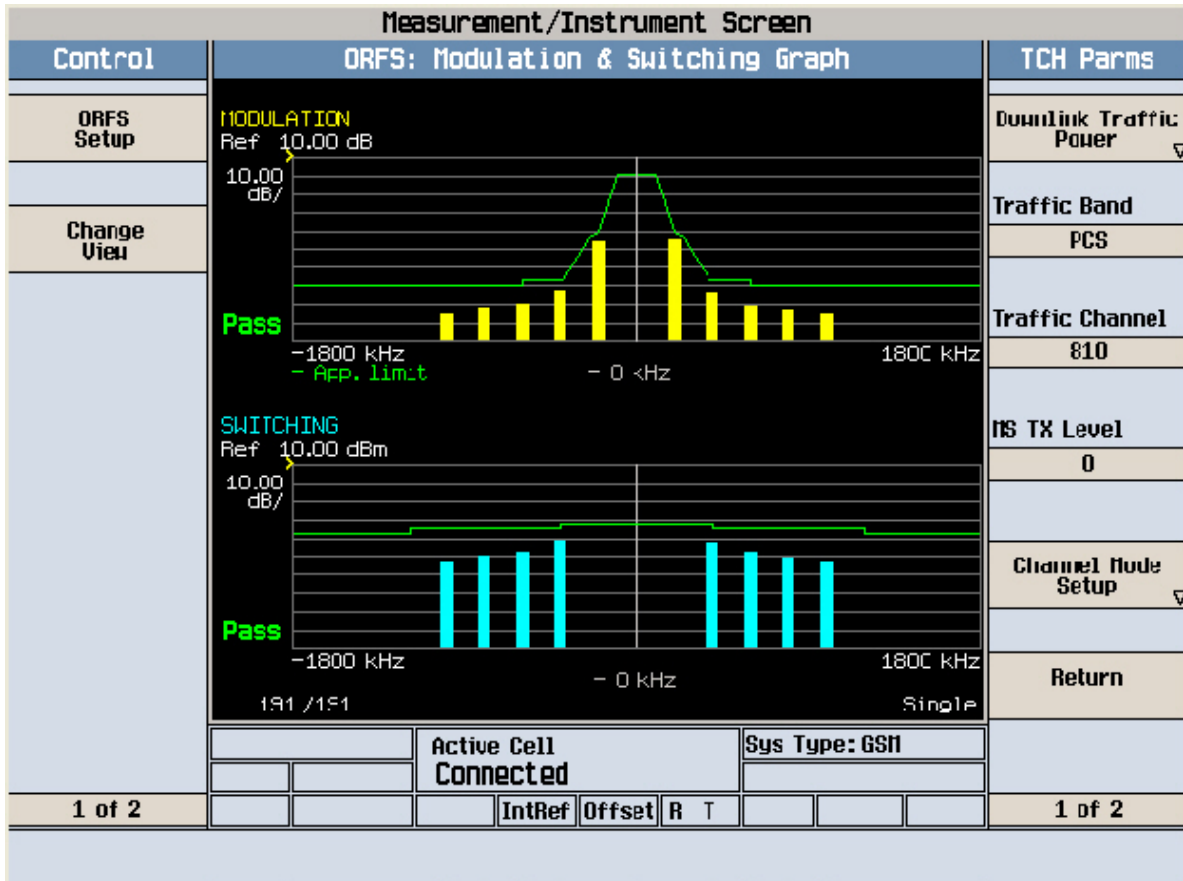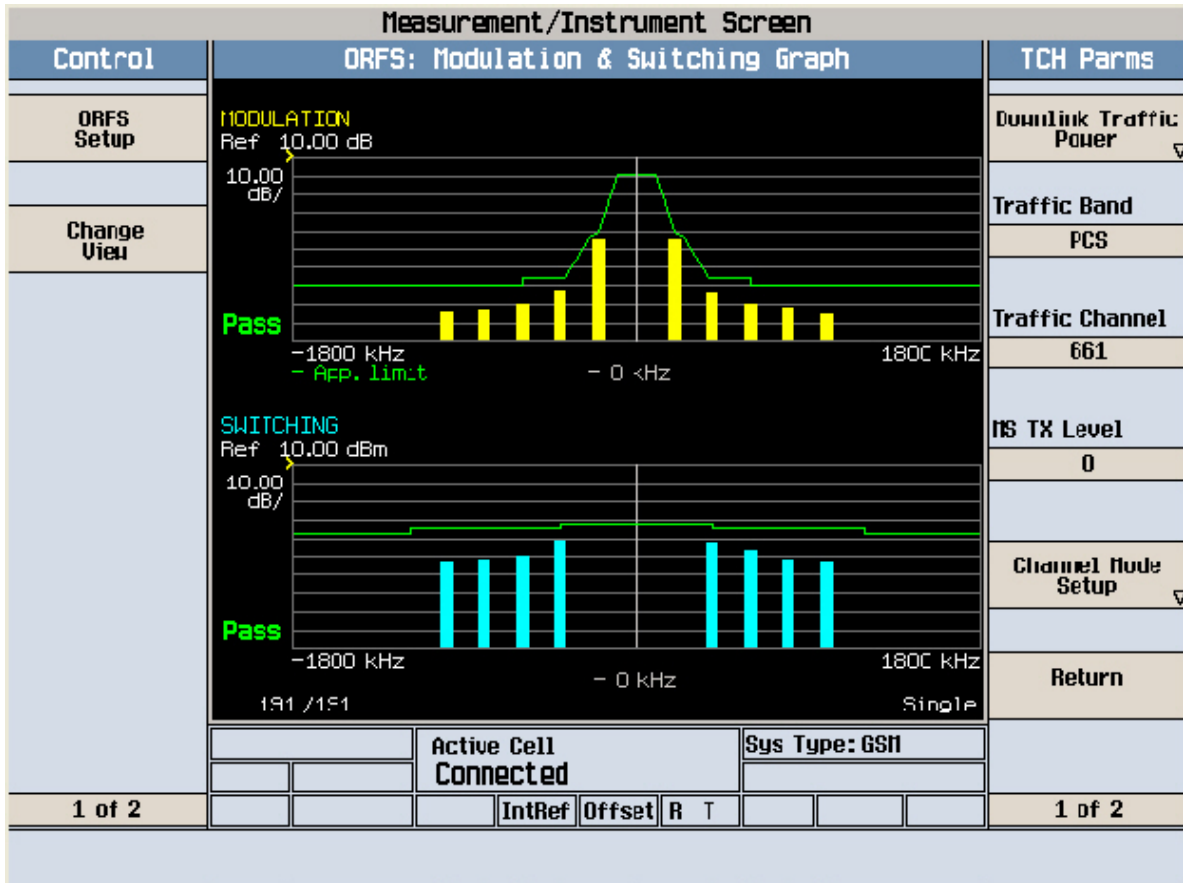

Agilent

R T

Freq/Channel

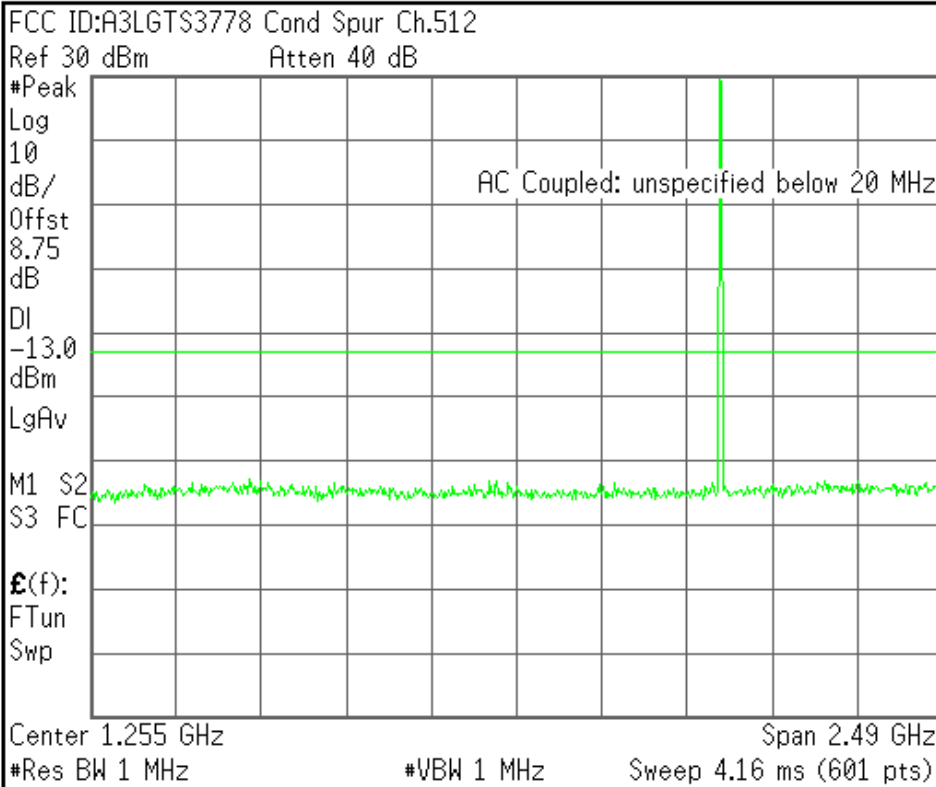


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.0000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

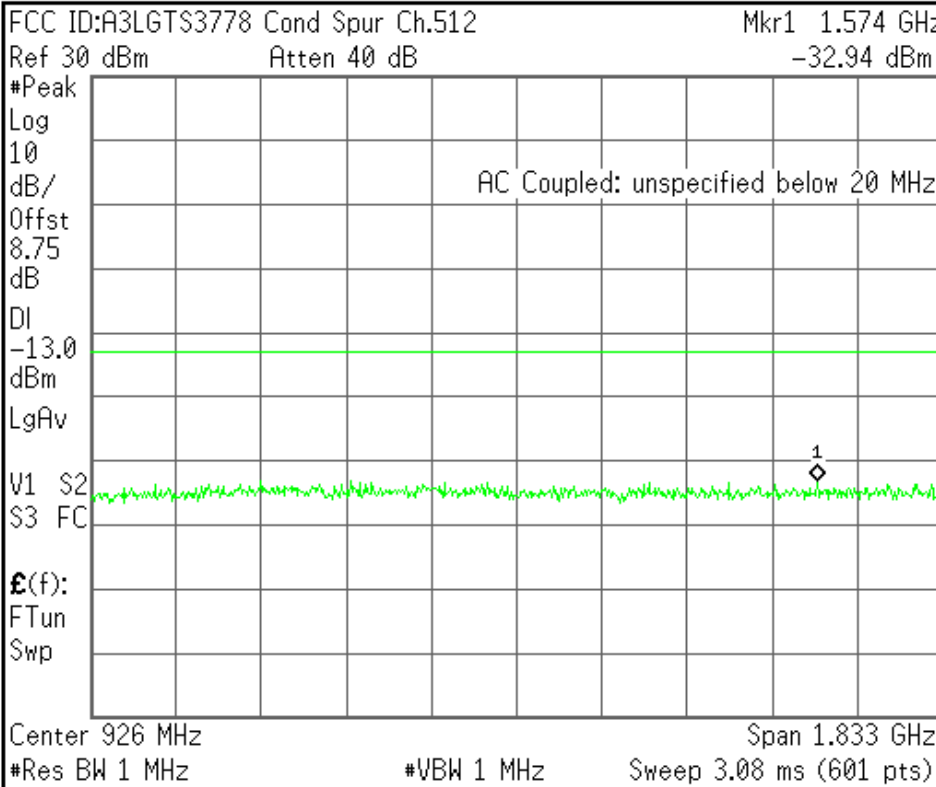


<b>Center Freq</b> 926.350000 MHz
<b>Start Freq</b> 10.0000000 MHz
<b>Stop Freq</b> 1.84270000 GHz
<b>CF Step</b> 183.270000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

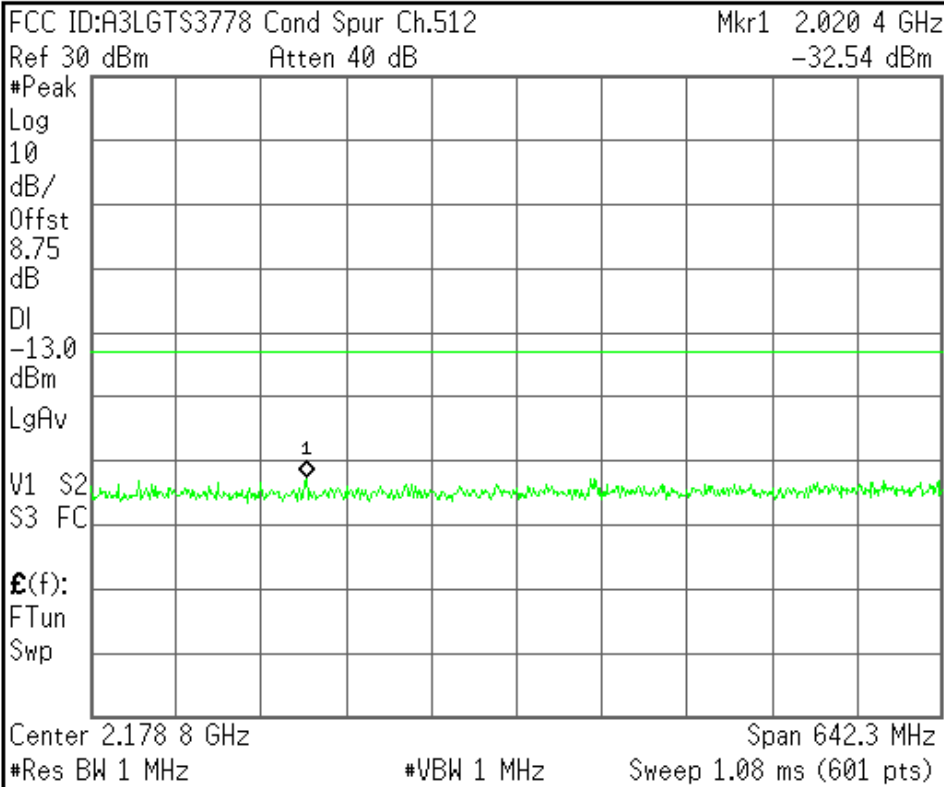


<b>Center Freq</b> 2.17885000 GHz
<b>Start Freq</b> 1.85770000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 64.2300000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

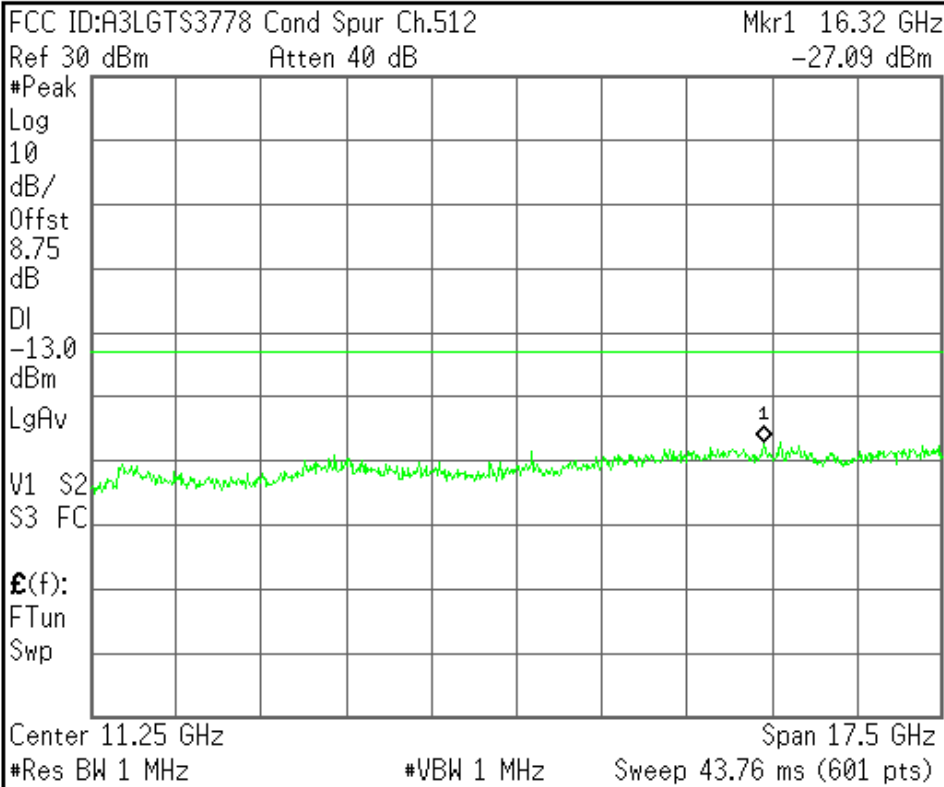


<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

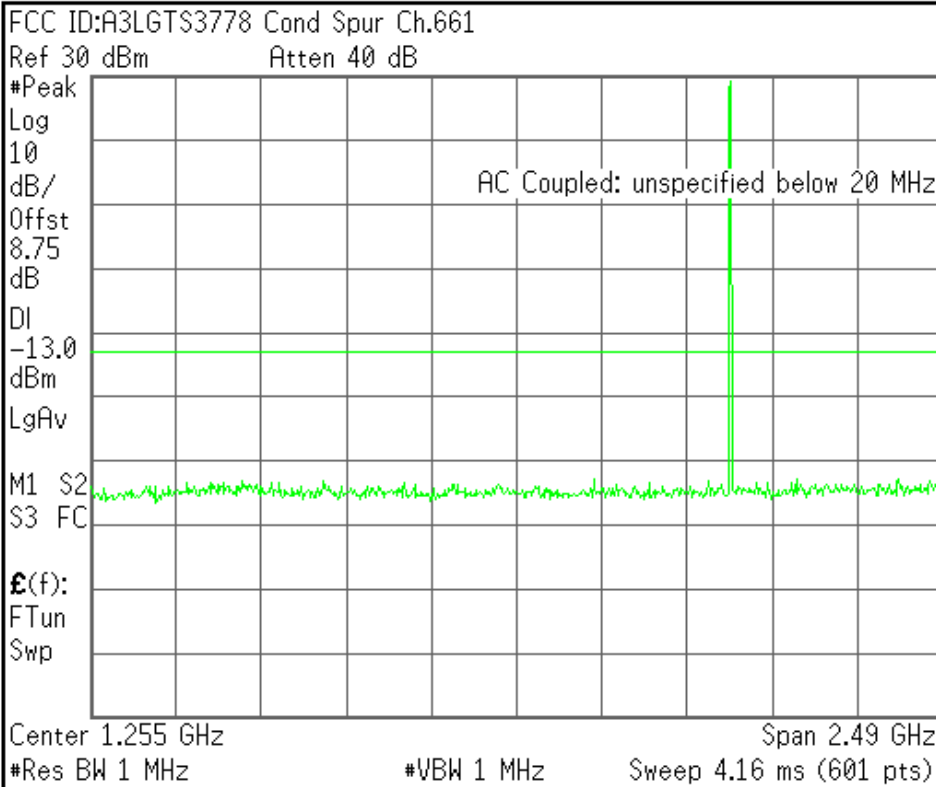


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.0000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

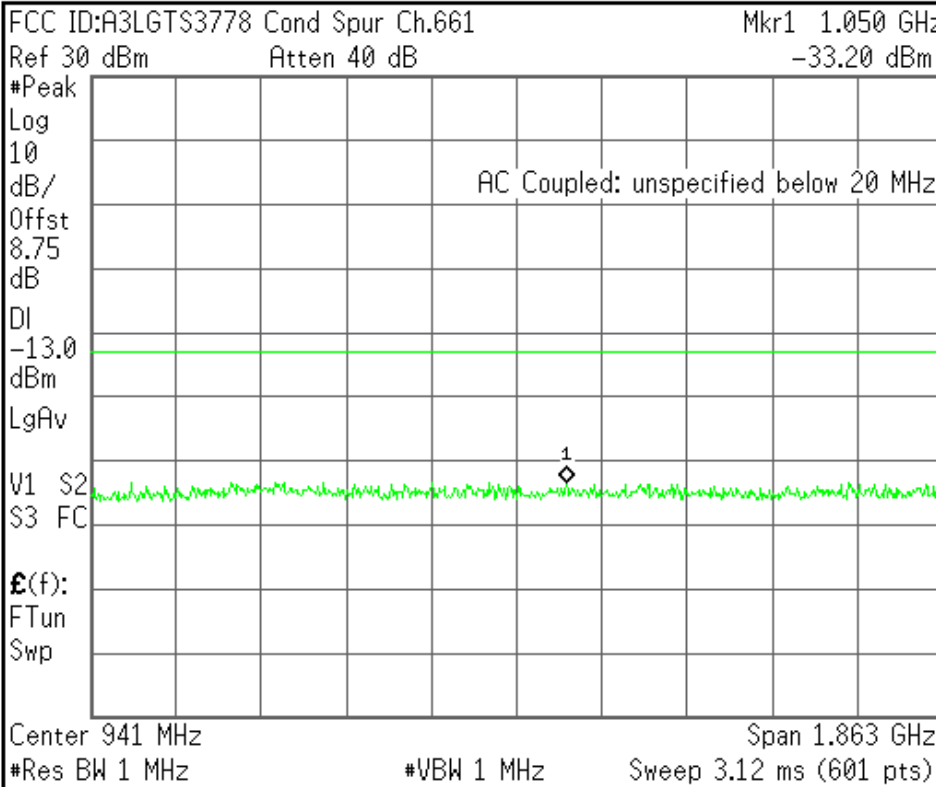


<b>Center Freq</b> 941.250000 MHz
<b>Start Freq</b> 10.0000000 MHz
<b>Stop Freq</b> 1.87250000 GHz
<b>CF Step</b> 186.250000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

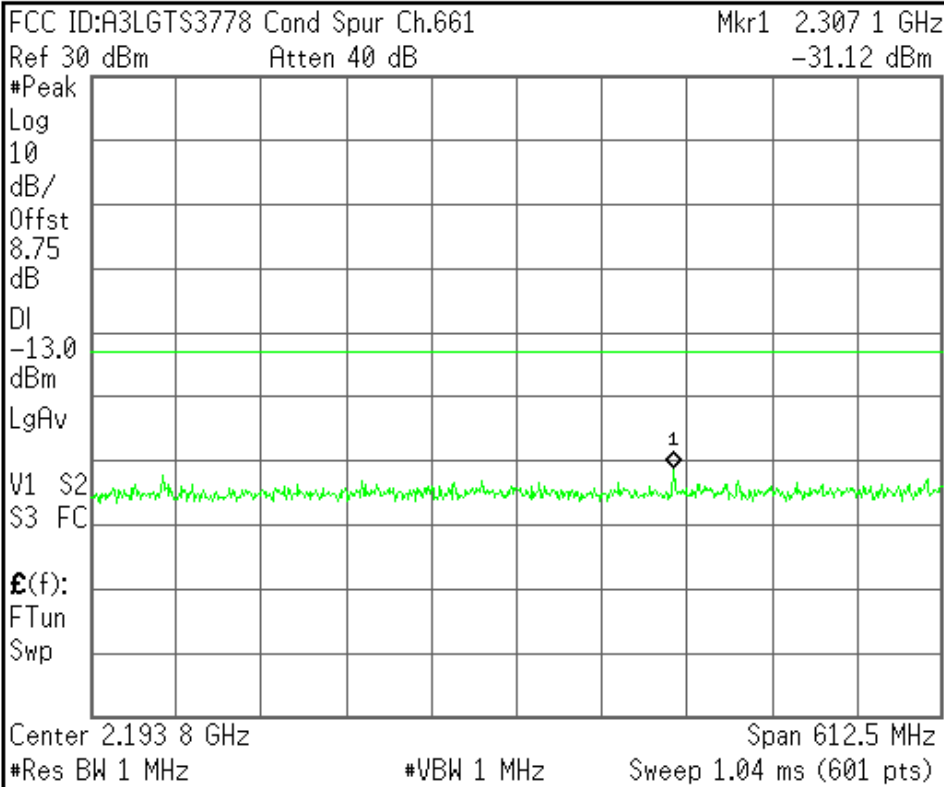


<b>Center Freq</b> 2.19375000 GHz
<b>Start Freq</b> 1.88750000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 61.2500000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

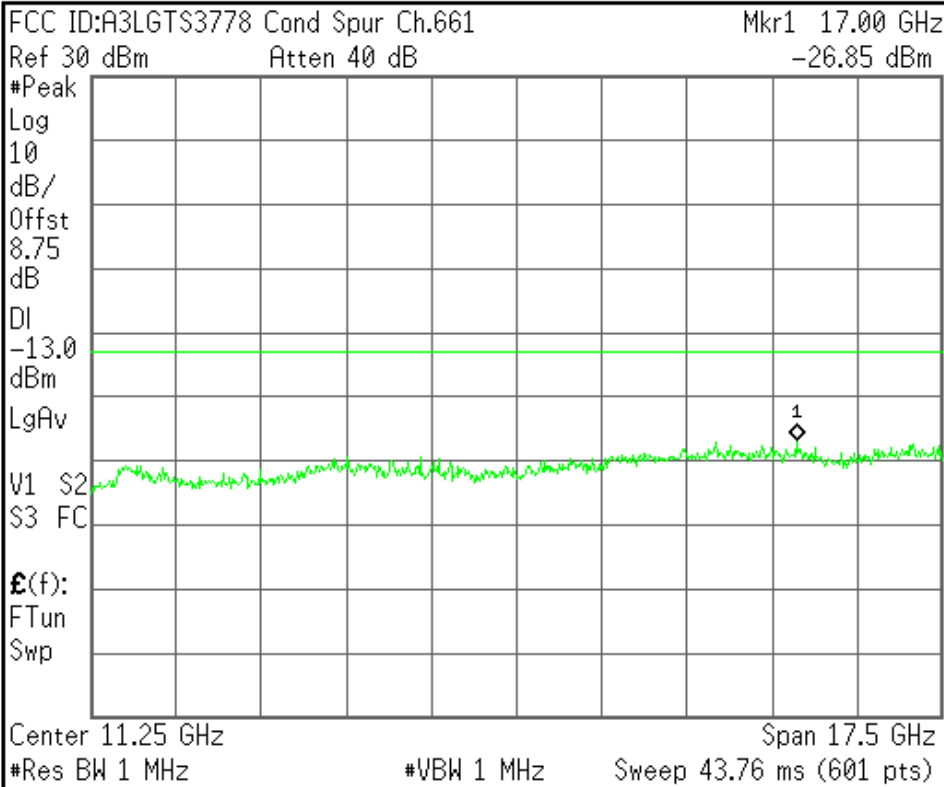

<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Freq/Channel

FCC ID:A3LGT\$3778 Cond Spur Ch.810

Ref 30 dBm Atten 40 dB

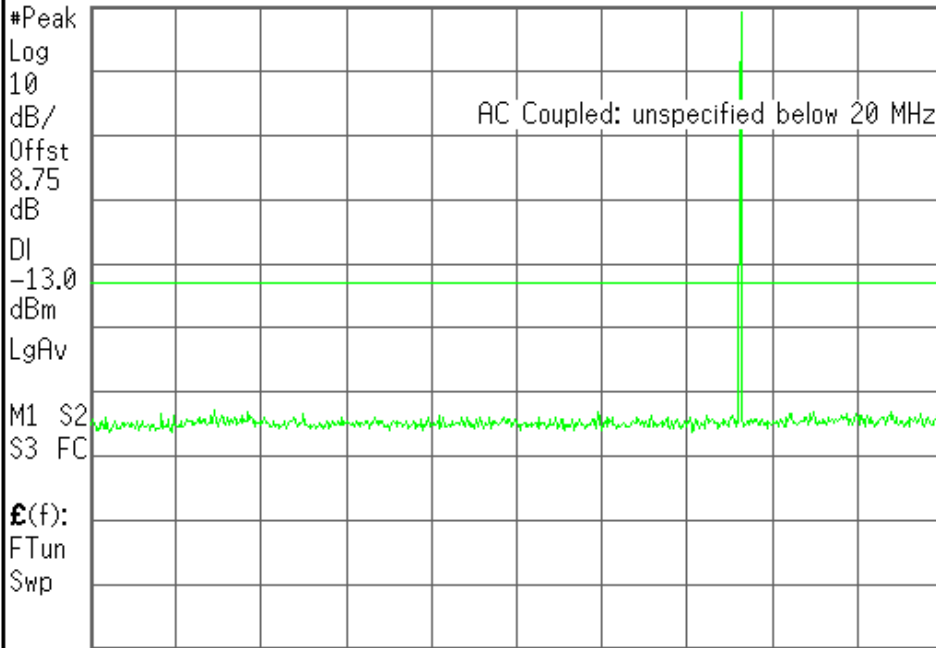

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Center 1.255 GHz Span 2.49 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGT\$3778 Cond Spur Ch.810

Mkr1 1.559 GHz

Ref 30 dBm Atten 40 dB

-33.15 dBm

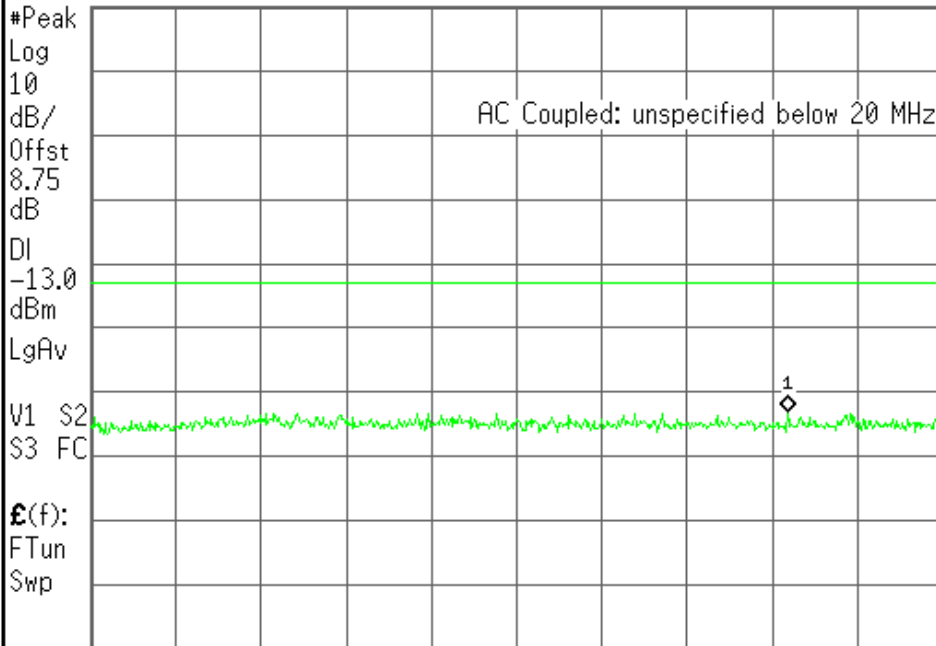

Center Freq  
956.150000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
1.90230000 GHz

CF Step  
189.230000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


Center 956 MHz Span 1.892 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

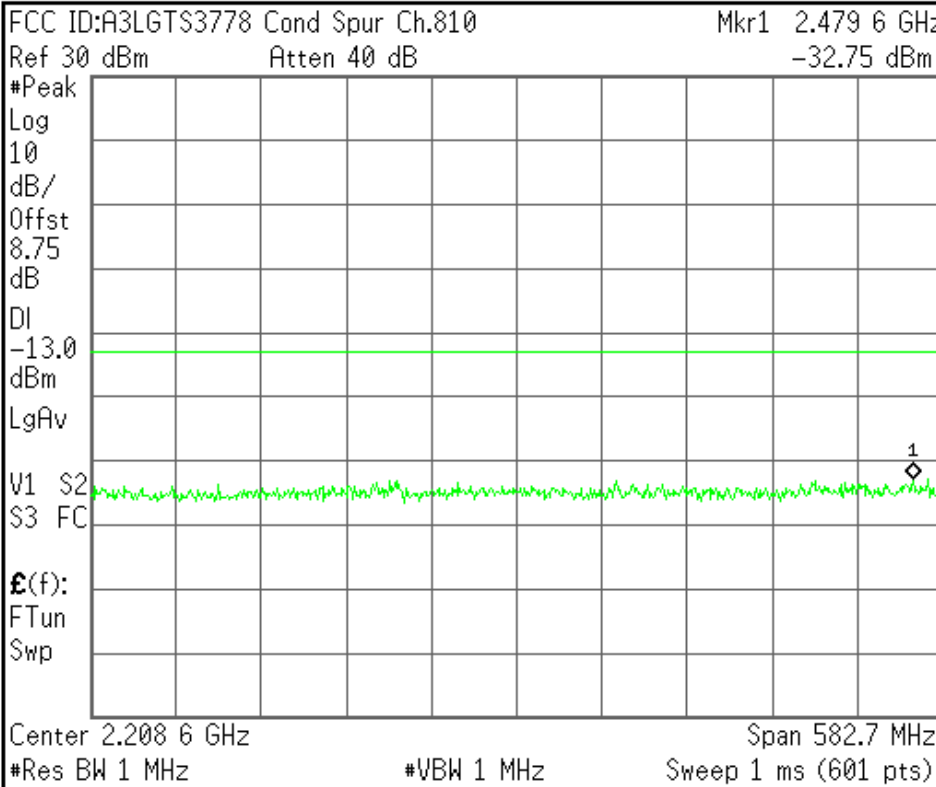


<b>Center Freq</b> 2.20865000 GHz
<b>Start Freq</b> 1.91730000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 58.2700000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

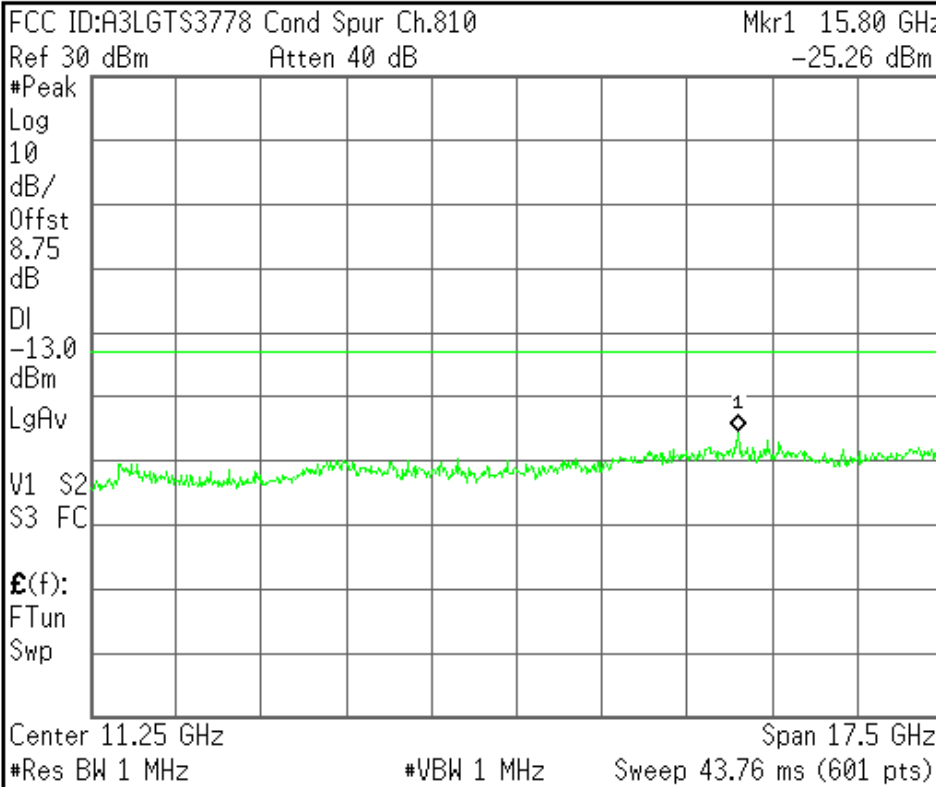


<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

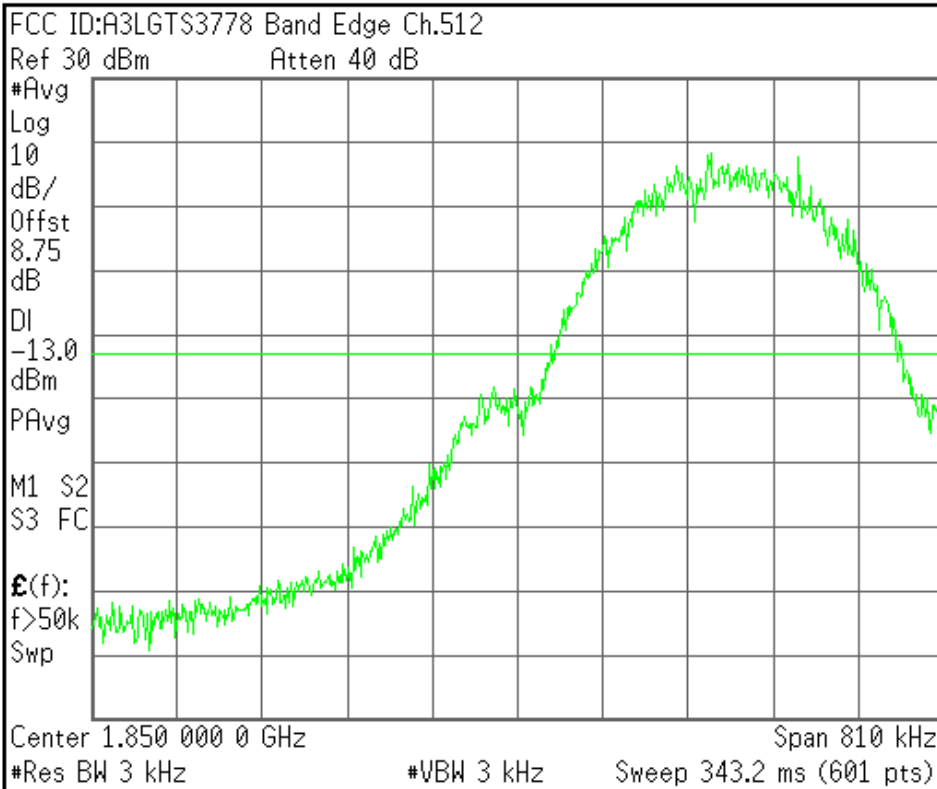


<b>Center Freq</b> 1.85000000 GHz
<b>Start Freq</b> 1.84959500 GHz
<b>Stop Freq</b> 1.85040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

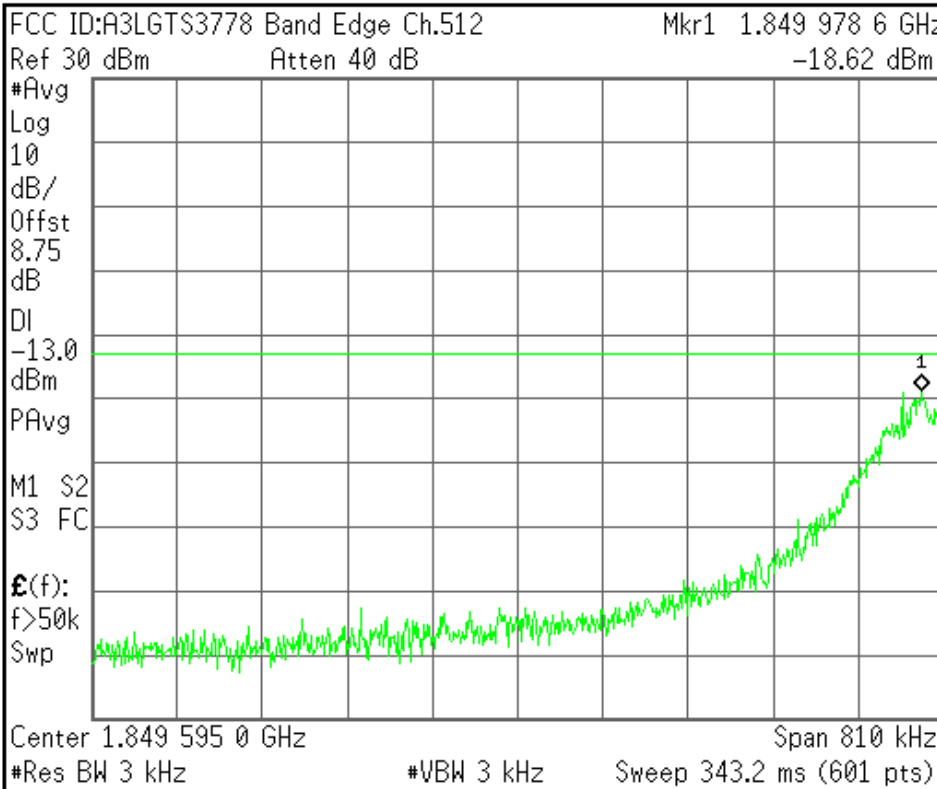


<b>Center Freq</b> 1.84959500 GHz
<b>Start Freq</b> 1.84919000 GHz
<b>Stop Freq</b> 1.85000000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

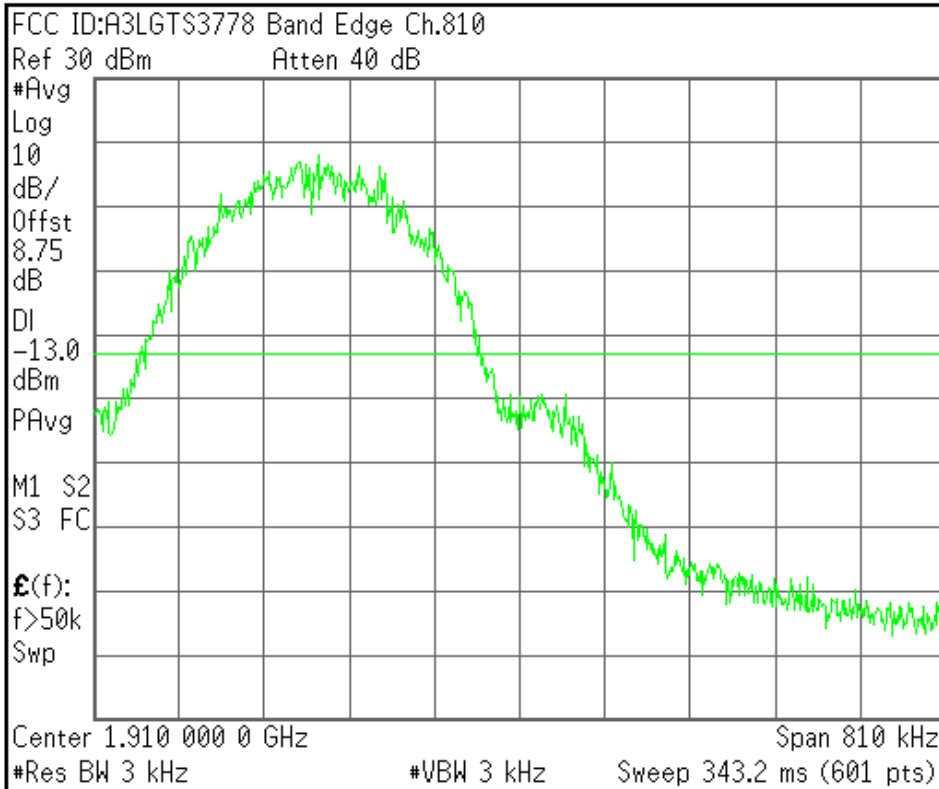


<b>Center Freq</b> 1.91000000 GHz
<b>Start Freq</b> 1.90959500 GHz
<b>Stop Freq</b> 1.91040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

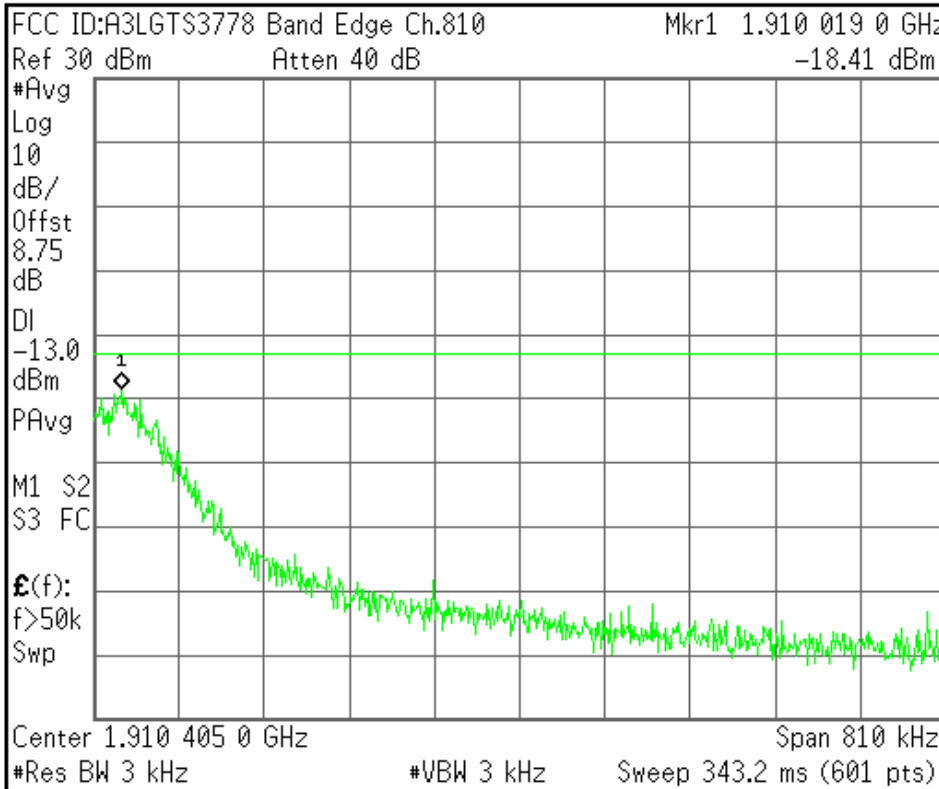


<b>Center Freq</b> 1.91040500 GHz
<b>Start Freq</b> 1.91000000 GHz
<b>Stop Freq</b> 1.91081000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

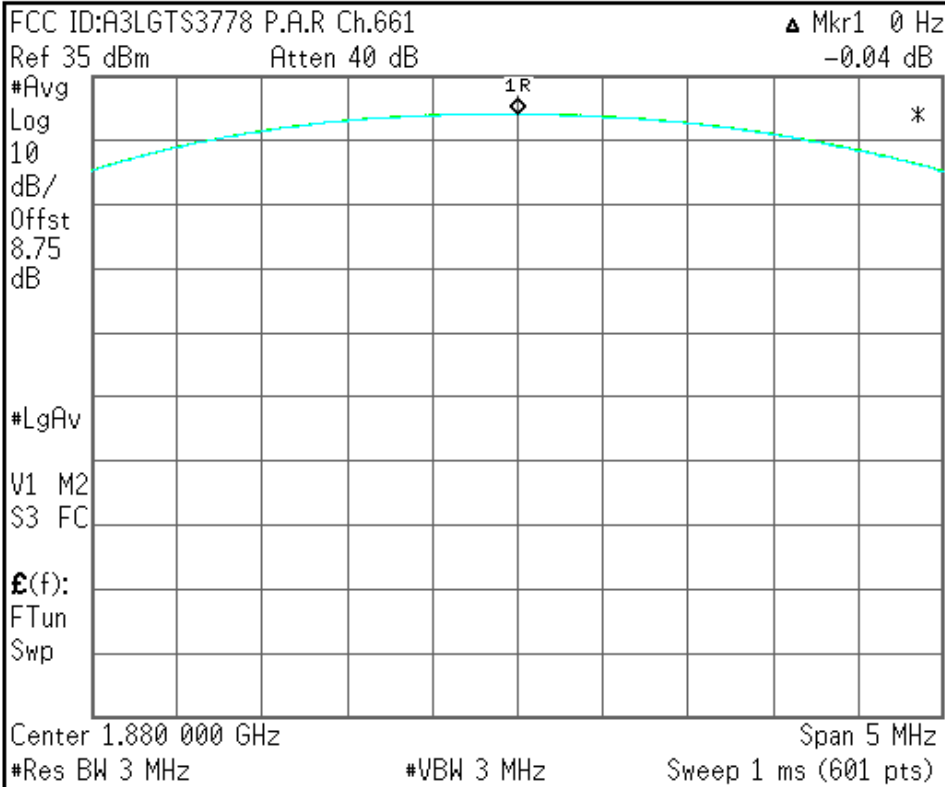

<b>Center Freq</b> 1.88000000 GHz
<b>Start Freq</b> 1.87750000 GHz
<b>Stop Freq</b> 1.88250000 GHz
<b>CF Step</b> 500.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved