



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S8000L
FCC ID(Requested) : A3LGTS8000L
Report No : FG-135-R1
Job No : FG-135
Date issued : May 12 2009

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

KJ KWON – Test Engineer

Authorized By

WT JANG – Technical Manager



TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)	16
6.4. GSM850 Radiated Spurious & Harmonic measurement	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph	25
7. CONCLUSION	27
8. TEST PLOTS	28



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LGTS8000L
- Model : GT-S8000L
- Quantity : Quantity production is planned
- Emission Designators : 249KGXW(GSM850), 247KG7W(GSM850 EDGE)
247KGXW(GSM1900), 249KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.336 W ERP GSM850 (25.26 dBm)
1.656 W EIRP GSM1900 (32.19 dBm)
0.109 W ERP GSM850 EDGE(20.36 dBm)
0.822 W EIRP GSM1900 EDGE(29.15 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE/GPRS and WCDMA Phone with
Bluetooth and WLAN.
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : May 09-11, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-135-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2009-10-21
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2009-06-20
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2009-10-24
Dipole Antenna	UHA 9105	9105-2412	2009-11-07
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2009-06-20
	E3640A	MY40003595	2009-05-22
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2009-11-14
	SH-241	92000548	2009-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

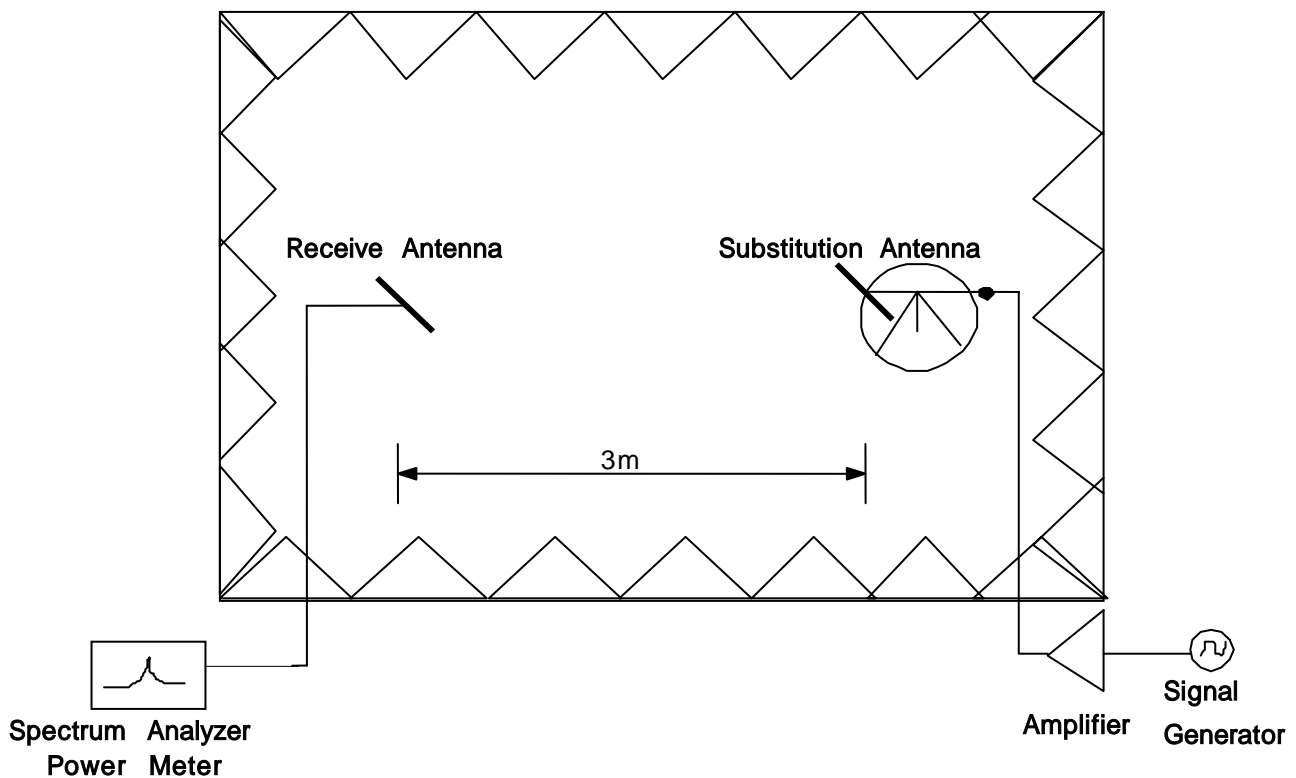


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

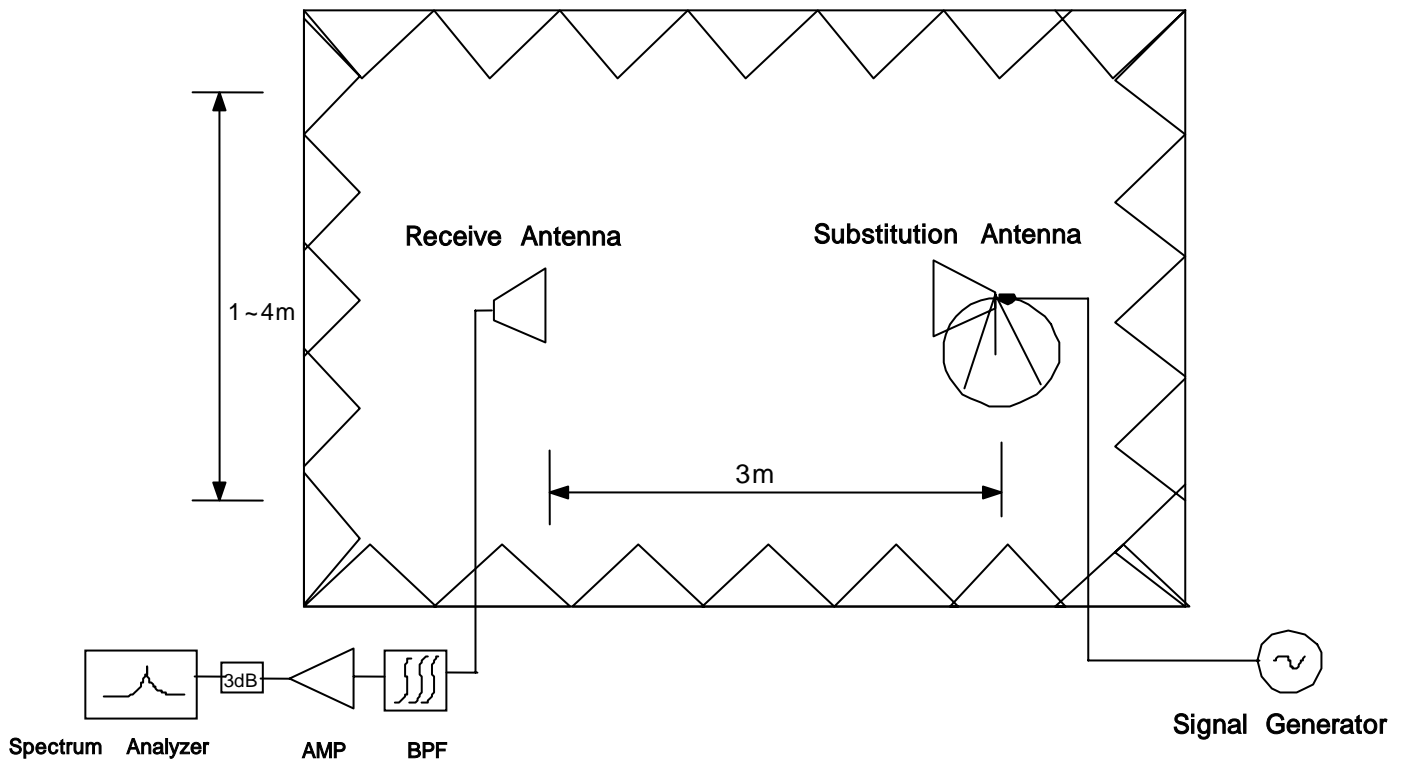


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. **The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported.** A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.



BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (0.336 \text{ W}) = 38.26 \text{ dB}$$

$$25.26 \text{ dBm} - 38.26 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS and WCDMA Phone with Bluetooth and WLAN.

FCC ID: A3LGTS8000L. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS BAND and "5" in the Cellular Band. The GSM and WCDMA conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.92	29.91	29.54	26.37	25.1
	661	29.92	29.92	29.55	26.37	25.1
	810	29.97	29.95	29.59	26.42	25.16
Cellular	128	32.74	32.72	32.33	29.08	27.8
	190	32.71	32.67	32.29	29.03	27.76
	251	32.61	32.57	32.19	28.93	27.66

Table 6-1 GSM Conducted Output Powers



6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	25.00	H	-11.79	-0.67	-11.12
		V	-12.18	-0.67	-11.51
836.60	24.00	H	-13.47	-0.73	-12.74
		V	-13.42	-0.73	-12.69
848.80	25.00	H	-14.43	-0.79	-13.64
		V	-13.44	-0.79	-12.65

Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-10.86	H	293/90	25.26	0.336	Standard
836.60	-12.35	H	291/80	24.39	0.275	Standard
848.80	-13.64	H	279/90	25.00	0.316	Standard

EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-15.77	H	293/90	20.36	0.109	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-9.82	9.70	-19.52
		V	-9.73	9.70	-19.43
1880.00	30.00	H	-9.20	9.70	-18.90
		V	-9.45	9.70	-19.15
1909.80	32.00	H	-7.36	9.70	-17.06
		V	-7.18	9.70	-16.88

Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.36	V	341/90	29.07	0.807	Standard
1880.00	-19.29	V	302/90	29.86	0.968	Standard
1909.80	-16.69	V	213/90	32.19	1.656	Standard

EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1909.80	-19.73	V	213/90	29.15	0.822	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 25.26 dBm = 0.336 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 38.26$ dBc

Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-53.36	H	66.71
	3	2472.60	-61.13	H	69.39
	4	3296.80	-66.54	V	71.51
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-54.42	V	66.19
	3	2509.80	-63.52	V	71.82
	4	3346.40	-66.44	V	71.24
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-56.48	V	69.13
	3	2546.40	-55.77	V	63.23
	4	3395.20	-67.21	V	72.00
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 32.19 dBm = 1.656 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 45.19$ dBc

Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-66.36	H	73.83
	3	5550.60	-63.44	H	65.82
	4	7400.80	-68.26	H	66.04
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-67.38	H	74.46
	3	5640.00	-62.90	V	64.79
	4	7520.00	-68.16	H	65.72
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-67.35	H	74.24
	3	5729.40	-64.47	H	65.99
	4	7639.20	-68.33	H	65.66
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 05. 11

Test Engineer : KJ KWON

Tx Cable loss
 Tx Horn Ant Gain
 Tx Level to radiate -13dBm
 ESI Level received from Tx with-13dBm
 Tested Level from EUT
 = ERP+2.14 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-25.78	-25.24	-53.36	-53.41	67.08	66.71
	3	2472.60	-11.25	10.70	-12.50	-30.65	-30.96	-61.13	-62.02	69.39	70.97
	4	3296.80	-13.26	12.30	-12.00	-34.30	-34.88	-67.45	-66.54	72.54	71.51
	5	4121.00	-14.79	12.50	-10.70	-37.37	-37.16	-	-	-	-
	6	4945.20	-16.60	12.70	-9.10	-39.95	-40.17	-	-	-	-
	7	5769.40	-18.02	12.90	-7.90	-42.25	-42.16	-	-	-	-
	190	2	1673.20	-9.05	9.50	-13.50	-26.45	-26.15	-54.75	-54.42	67.15
3		2509.80	-11.31	10.70	-12.40	-30.90	-30.96	-63.82	-63.52	71.82	72.28
4		3346.40	-13.33	12.30	-12.00	-34.28	-34.36	-66.98	-66.44	71.65	71.24
5		4183.00	-15.01	12.50	-10.50	-36.90	-37.13	-	-	-	-
6		5019.60	-16.84	12.70	-8.90	-40.04	-40.64	-	-	-	-
7		5856.20	-18.26	12.90	-7.60	-42.75	-42.94	-	-	-	-
251		2	1697.60	-9.07	9.50	-13.40	-26.64	-26.78	-58.46	-56.48	70.03
	3	2546.40	-11.35	10.70	-12.40	-30.32	-30.81	-63.73	-55.77	71.75	63.23
	4	3395.20	-13.26	12.30	-12.00	-34.25	-34.55	-67.54	-67.21	72.00	72.15
	5	4244.00	-15.20	12.50	-10.30	-37.07	-37.26	-	-	-	-
	6	5092.80	-16.99	12.70	-8.70	-40.12	-40.75	-	-	-	-
	7	5941.60	-18.38	12.90	-7.50	-43.10	-42.67	-	-	-	-



6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 05. 11

Test Engineer : KJ KWON

Tx Cable loss
 Tx Horn Ant Gain
 Tx Level to radiate -13dBm
 ESI Level received from Tx with -13dBm
 Tested Level from EUT
 = EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.02	12.40	-11.40	-37.72	-37.72	-66.36	-68.04	73.83	75.51
	3	5550.60	-17.68	12.90	-8.20	-42.81	-43.00	-63.44	-65.46	65.82	67.65
	4	7400.80	-20.47	10.50	-3.00	-47.41	-47.39	-68.26	-68.62	66.04	66.42
	5	9251.00	-23.65	11.20	-0.50	-50.87	-51.74	-	-	-	-
	6	11101.20	-26.73	11.60	2.10	-55.94	-55.98	-	-	-	-
	7	12951.40	-28.60	12.90	2.70	-59.18	-59.44	-	-	-	-
	661	2	3760.00	-14.17	12.40	-11.20	-38.11	-38.15	-67.38	-67.73	74.46
3		5640.00	-17.83	12.90	-8.10	-42.84	-43.30	-65.06	-62.90	67.41	64.79
4		7520.00	-20.58	10.60	-3.00	-47.63	-47.25	-68.16	-68.20	65.72	66.14
5		9400.00	-23.19	11.60	-1.40	-51.86	-52.85	-	-	-	-
6		11280.00	-26.31	12.10	1.20	-56.33	-56.80	-	-	-	-
7		13160.00	-28.22	12.80	2.40	-59.42	-59.52	-	-	-	-
810		2	3819.60	-14.18	12.40	-11.20	-38.30	-38.19	-67.35	-67.61	74.24
	3	5729.40	-17.92	13.00	-8.10	-43.67	-43.62	-64.47	-64.80	65.99	66.37
	4	7639.20	-20.95	11.20	-3.30	-47.83	-48.14	-68.33	-68.61	65.69	65.66
	5	9549.00	-23.60	11.70	-1.10	-52.43	-52.81	-	-	-	-
	6	11458.80	-26.67	11.70	2.00	-56.85	-56.63	-	-	-	-
	7	13368.60	-28.41	12.30	3.10	-60.50	-59.87	-	-	-	-



6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : $\pm 0.00025\%$ or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-25.70	836,599,974	-0.000003	-0.031
100%		-30	4.50	836,600,005	0.000001	0.005
100%		-20	-16.00	836,599,984	-0.000002	-0.019
100%		-10	-23.80	836,599,976	-0.000003	-0.028
100%		0	-17.10	836,599,983	-0.000002	-0.020
100%		+10	17.60	836,600,018	0.000002	0.021
100%		+20	-25.70	836,599,974	-0.000003	-0.031
100%		+30	8.00	836,600,008	0.000001	0.010
100%		+40	39.30	836,600,039	0.000005	0.047
100%		+50	-20.90	836,599,979	-0.000002	-0.025
100%		+60	25.20	836,600,025	0.000003	0.030
85%		3.35	+20	-36.50	836,599,964	-0.000004
115%	4.26	+20	20.10	836,600,020	0.000002	0.024
Batt.Endpoint	3.35	+20	-36.50	836,599,964	-0.000004	-0.044


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

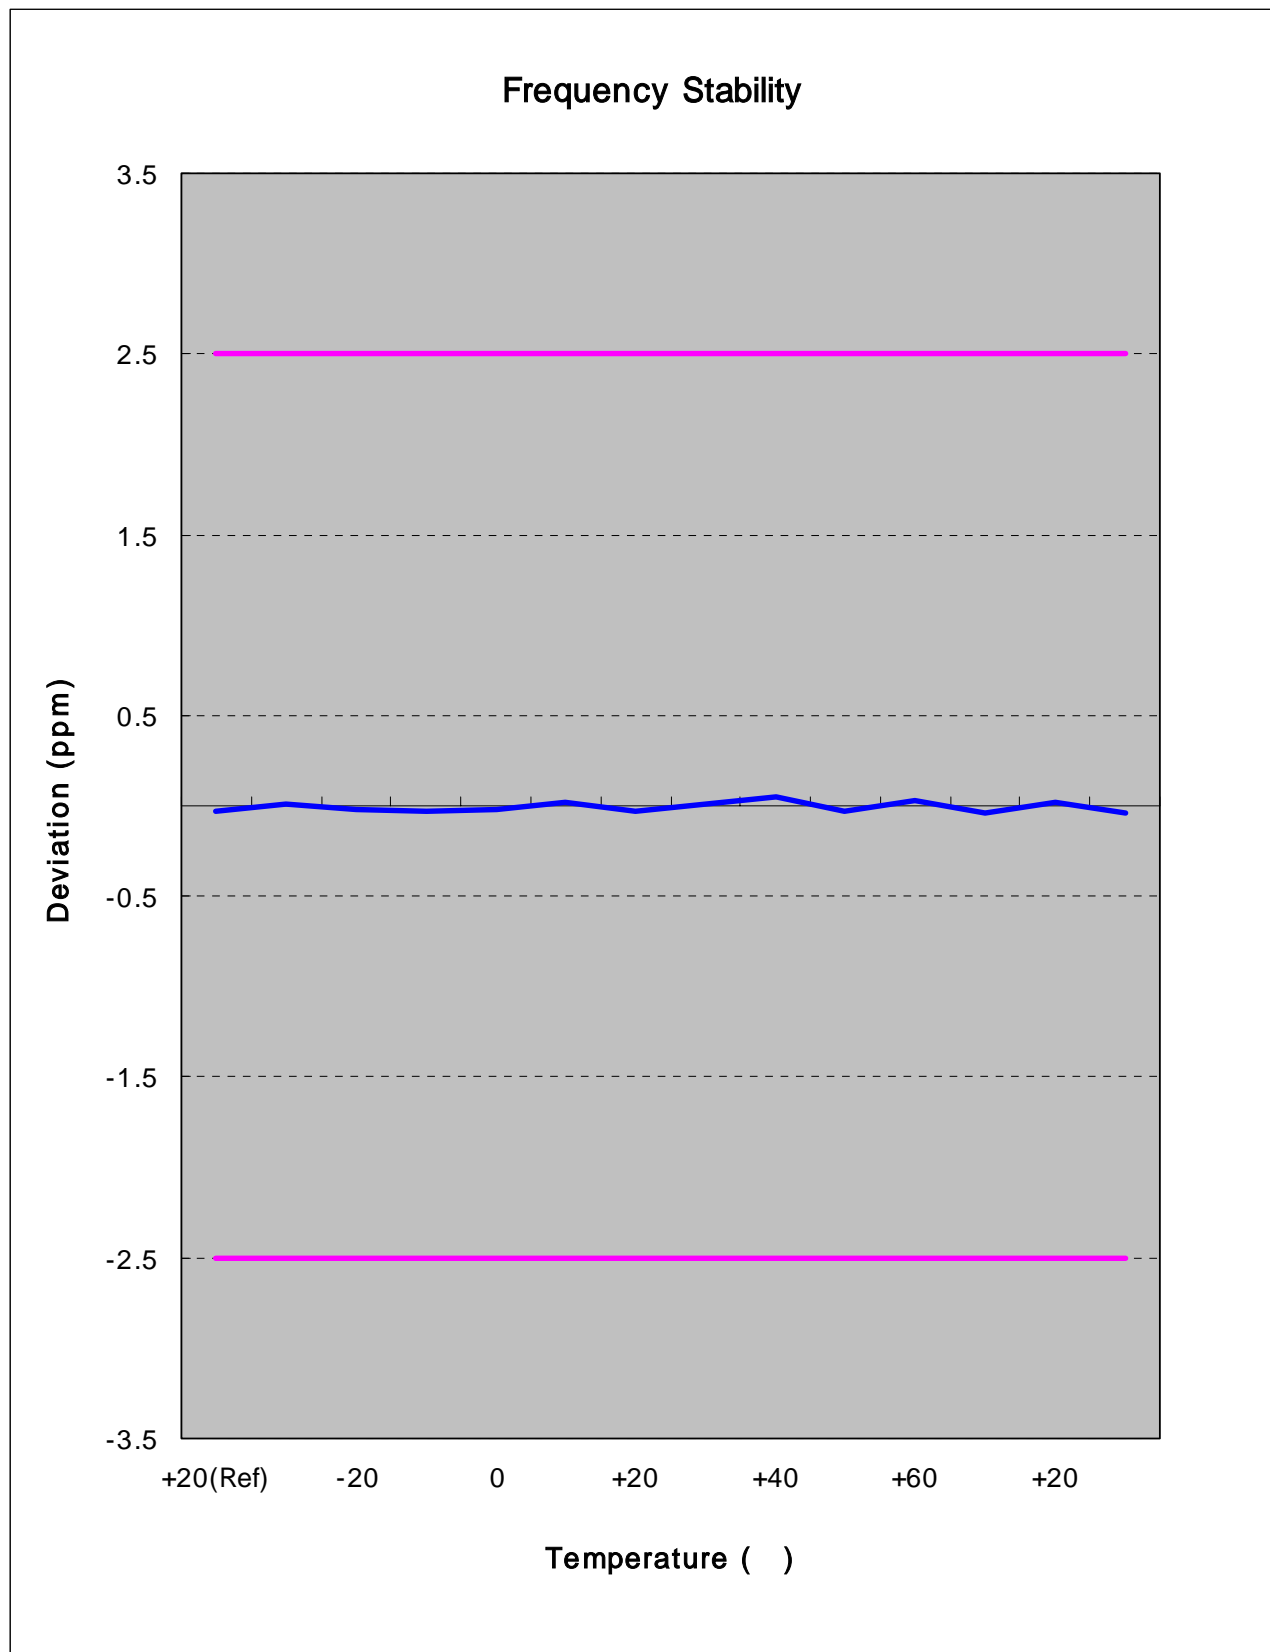

Zoom IN

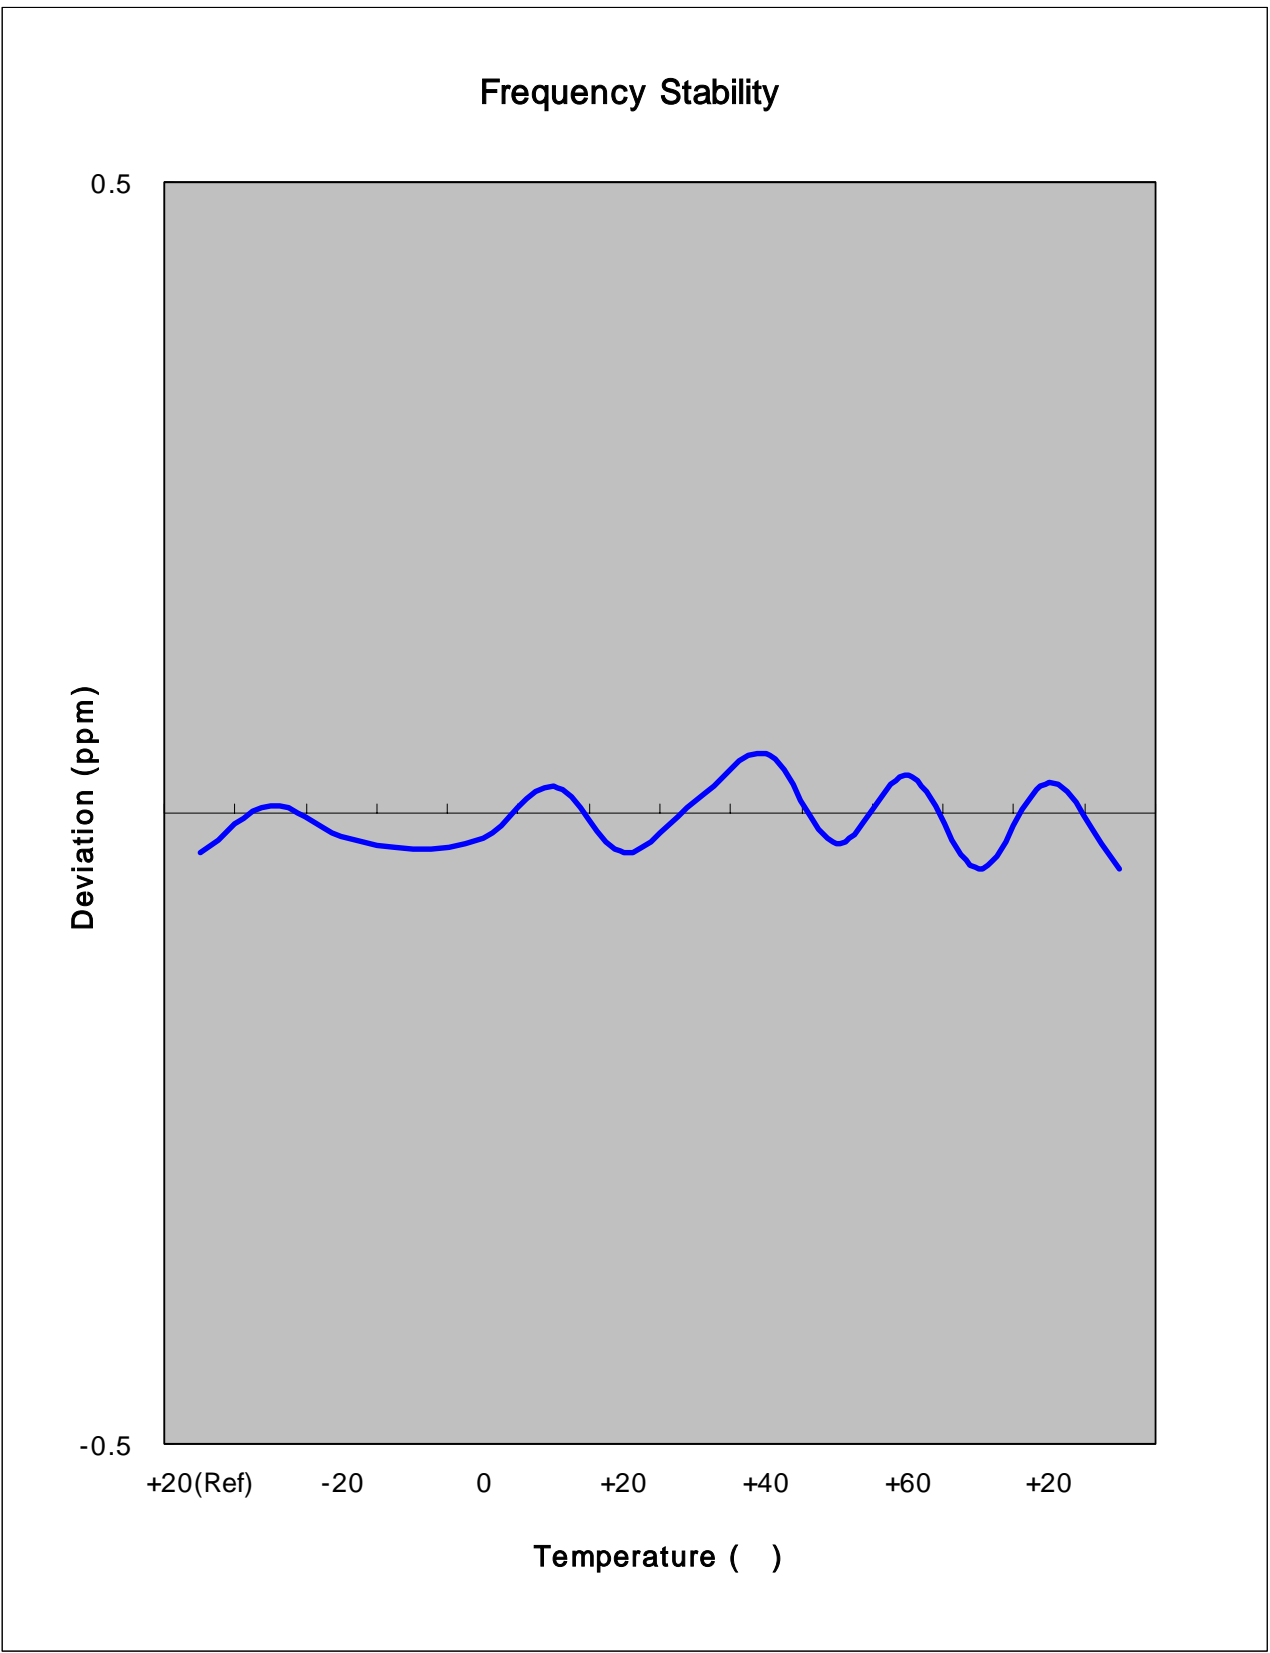



6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	39.30	1,880,000,039	0.000002	0.021
100%		-30	-34.40	1,879,999,966	-0.000002	-0.018
100%		-20	-3.60	1,879,999,996	0.000000	-0.002
100%		-10	-24.30	1,879,999,976	-0.000001	-0.013
100%		0	-17.10	1,879,999,983	-0.000001	-0.009
100%		+10	-39.20	1,879,999,961	-0.000002	-0.021
100%		+20	39.30	1,880,000,039	0.000002	0.021
100%		+30	-21.10	1,879,999,979	-0.000001	-0.011
100%		+40	-31.10	1,879,999,969	-0.000002	-0.017
100%		+50	8.60	1,880,000,009	0.000000	0.005
100%		+60	-14.10	1,879,999,986	-0.000001	-0.008
85%		3.35	+20	-28.80	1,879,999,971	-0.000002
115%	4.26	+20	16.40	1,880,000,016	0.000001	0.009
Batt.Endpoint	3.35	+20	-28.80	1,879,999,971	-0.000002	-0.015


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.4. GSM1900 Frequency Stability Graph

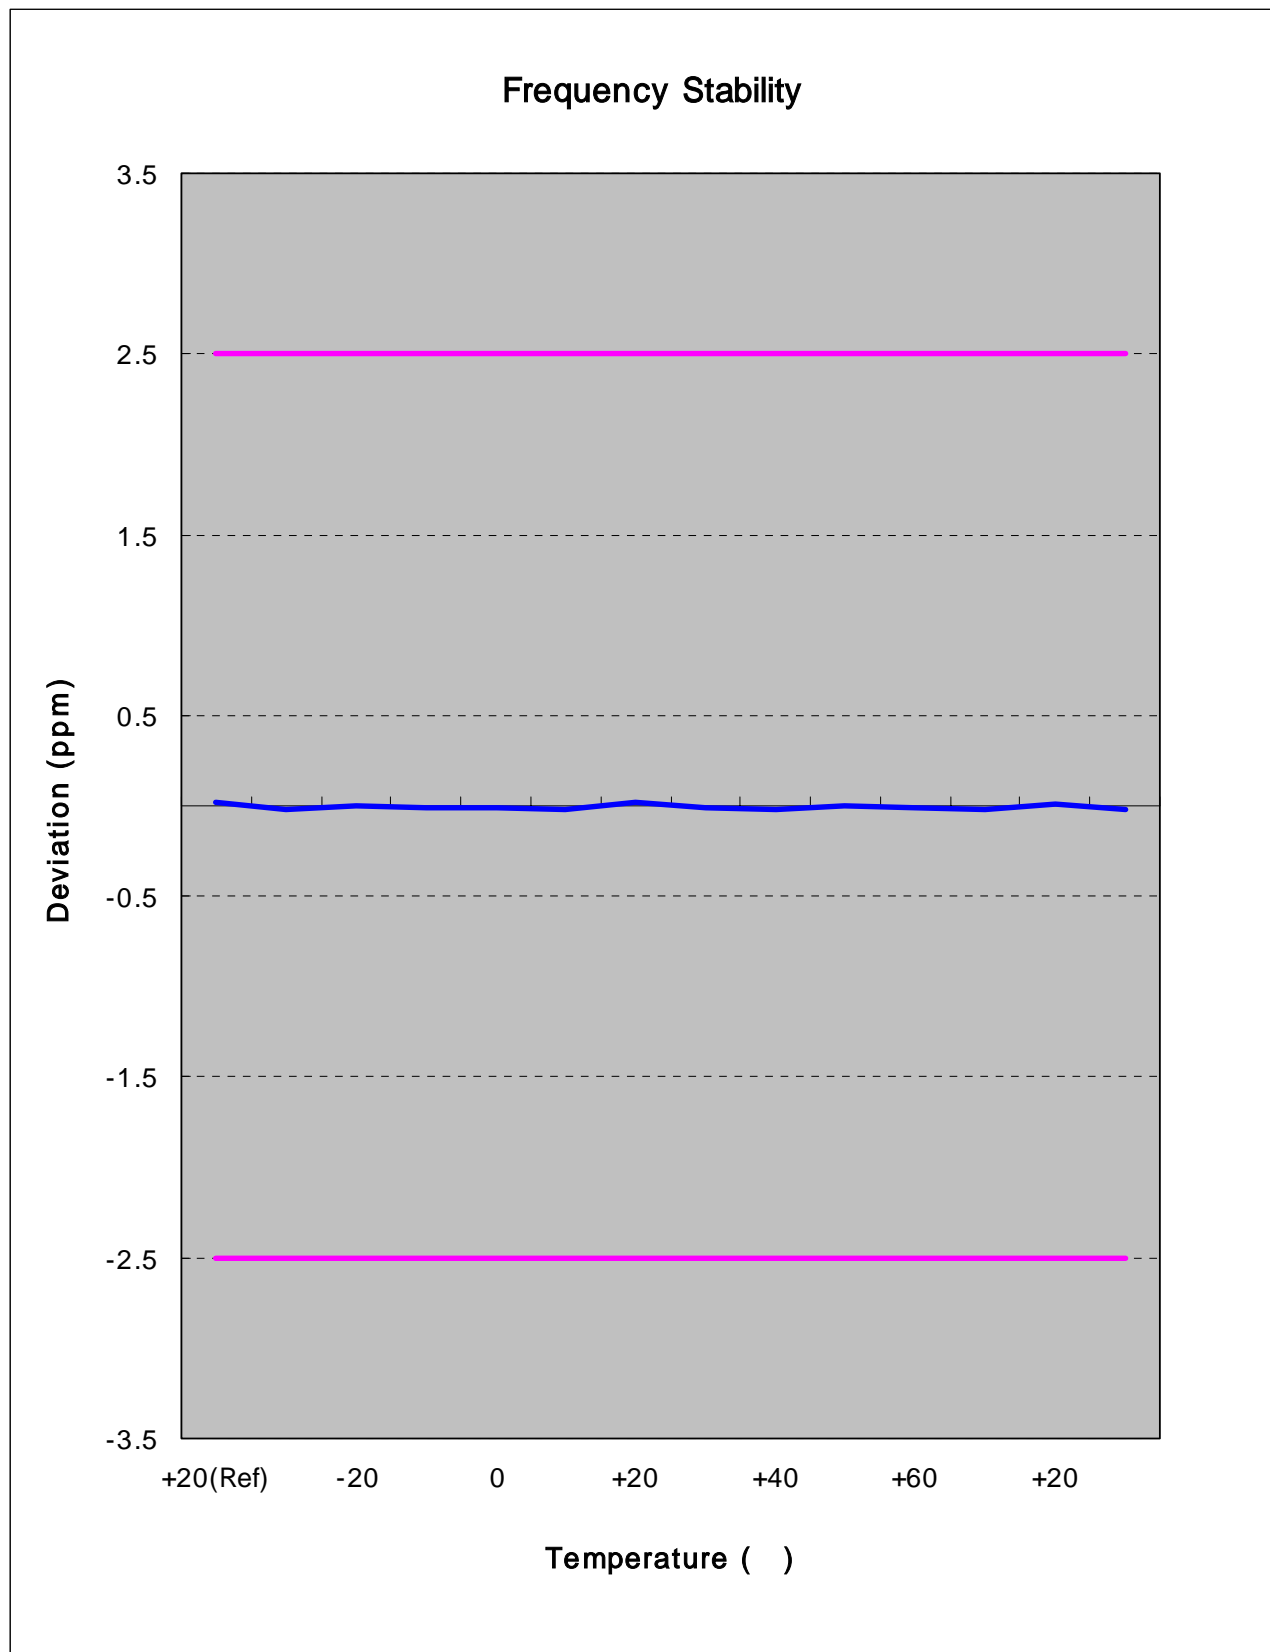

Zoom IN

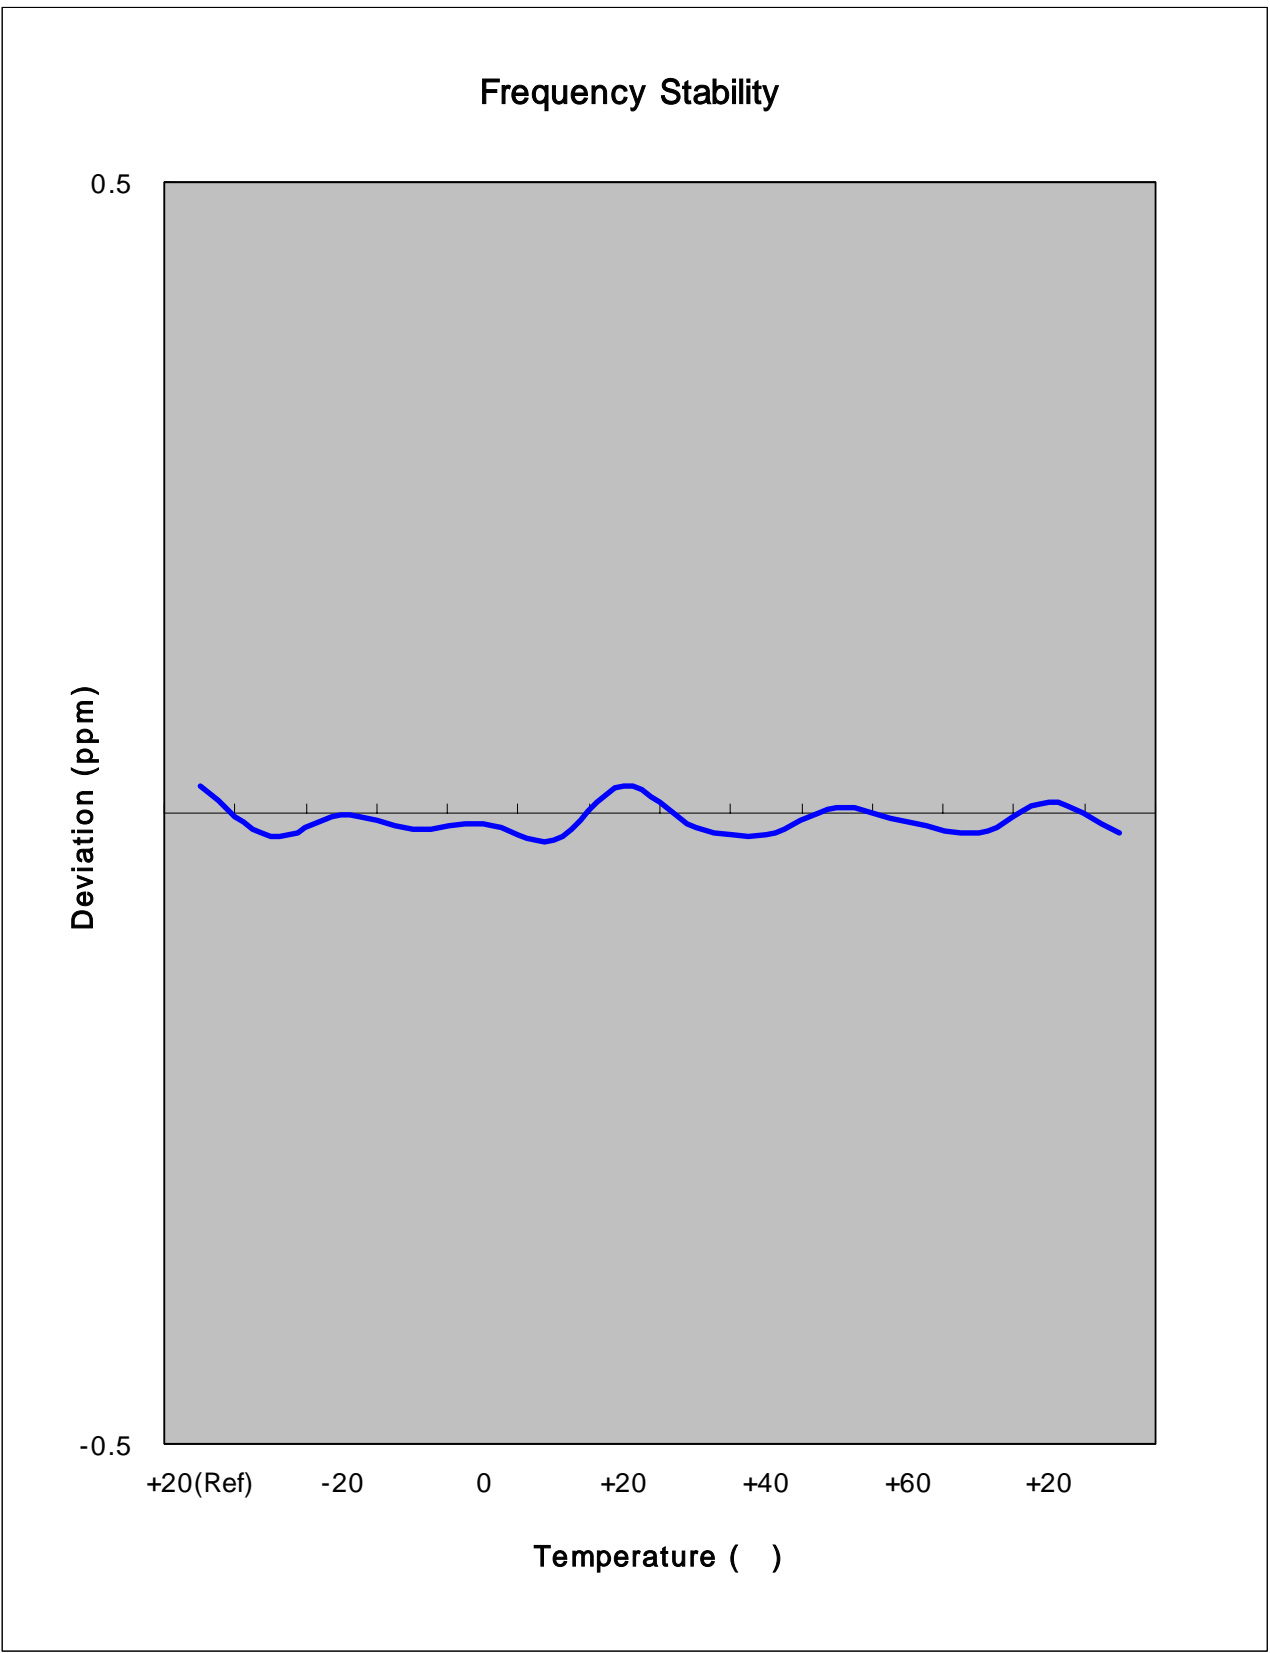



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS and WCDMA Phone with Bluetooth and WLAN.

FCC ID : A3LGTS8000L complies with all the requirements of Parts 2,22,24 of the FCC Rules.



8. TEST PLOTS

GSM850

Agilent

R T

Ch Freq 824.2 MHz Trig Free		Freq/Channel	
Occupied Bandwidth		Center Freq 824.200000 MHz	
FCC ID:A3LGTS8000L 0BW Ch.128 Ref 33 dBm Atten 40 dB		Start Freq 823.700000 MHz	
		Stop Freq 824.700000 MHz	
Center 824.200 MHz Span 1 MHz #Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)		CF Step 100.000000 kHz Auto Man	
Occupied Bandwidth 245.2374 kHz Occ BW % Pwr 99.00 % x dB Bandwidth 308.838 kHz x dB -26.00 dB		Freq Offset 0.00000000 Hz	
Transmit Freq Error 688.878 Hz		Signal Track On Off	
File Operation Status, C:\TEMP.GIF file saved			

Agilent

R T

Ch Freq 836.6 MHz Trig Free		Freq/Channel	
Occupied Bandwidth		Center Freq 836.600000 MHz	
FCC ID:A3LGTS8000L 0BW Ch.190 Ref 33 dBm Atten 40 dB		Start Freq 836.100000 MHz	
		Stop Freq 837.100000 MHz	
Center 836.600 MHz Span 1 MHz #Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)		CF Step 100.000000 kHz Auto Man	
Occupied Bandwidth 245.0750 kHz Occ BW % Pwr 99.00 % x dB Bandwidth 314.959 kHz x dB -26.00 dB		Freq Offset 0.00000000 Hz	
Transmit Freq Error -274.915 Hz		Signal Track On Off	
File Operation Status, C:\TEMP.GIF file saved			



Ch Freq 848.8 MHz Trig Free		Freq/Channel	
Occupied Bandwidth [] []		Center Freq 848.800000 MHz	
FCC ID:A3LGTS8000L 0BW Ch.251 Ref 33 dBm Atten 40 dB		Start Freq 848.300000 MHz	
		Stop Freq 848.300000 MHz	
Occupied Bandwidth 248.6486 kHz		CF Step 100.000000 kHz Auto Man	
Transmit Freq Error 896.435 Hz x dB Bandwidth 306.480 kHz		Freq Offset 0.00000000 Hz	
Occ BW % Pwr 99.00 % x dB -26.00 dB		Signal Track On Off	
File Operation Status, C:\TEMP.GIF file saved			



Measurement/Instrument Screen																															
Control	Transmit Power							TCH Parms																							
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.74</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.74</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.74	----	----	----	Estimated Carrier Power	32.74	----	----	----	Downlink Traffic Power								
		Burst 1	Burst 2	Burst 3	Burst 4																										
Burst Power	32.74	----	----	----																											
Estimated Carrier Power	32.74	----	----	----																											
Swap Window Positions	Single							Traffic Band																							
								GSM850																							
								Traffic Channel																							
								128																							
								MS TX Level																							
							5																								
							Channel Mode Setup																								
							Return																								
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.07</td> <td>0.94</td> <td>6.22</td> </tr> <tr> <td>Maximum</td> <td>3.09</td> <td>1.17</td> <td>18.13</td> </tr> <tr> <td>Average</td> <td>2.54</td> <td>1.08</td> <td>13.26</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.07	0.94	6.22	Maximum	3.09	1.17	18.13	Average	2.54	1.08	13.26	Pass/Fail	Pass	Pass	Pass	
Phase & Frequency Error																															
	Peak Phase °	RMS Phase °	Frequency Hz																												
Minimum	2.07	0.94	6.22																												
Maximum	3.09	1.17	18.13																												
Average	2.54	1.08	13.26																												
Pass/Fail	Pass	Pass	Pass																												
50 / 50 Single																															
			Active Cell Connected			Sys Type: GSM																									
1 of 2			IntRef	Offset	R T			1 of 2																							


Measurement/Instrument Screen																															
Control	Transmit Power							TCH Parms																							
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.71</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.71</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.71	----	----	----	Estimated Carrier Power	32.71	----	----	----	Downlink Traffic Power								
		Burst 1	Burst 2	Burst 3	Burst 4																										
Burst Power	32.71	----	----	----																											
Estimated Carrier Power	32.71	----	----	----																											
Swap Window Positions	Single							Traffic Band																							
								GSM850																							
								Traffic Channel																							
								190																							
								MS TX Level																							
							5																								
							Channel Mode Setup																								
							Return																								
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.08</td> <td>0.90</td> <td>23.73</td> </tr> <tr> <td>Maximum</td> <td>3.39</td> <td>1.21</td> <td>35.36</td> </tr> <tr> <td>Average</td> <td>2.62</td> <td>1.06</td> <td>29.06</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.08	0.90	23.73	Maximum	3.39	1.21	35.36	Average	2.62	1.06	29.06	Pass/Fail	Pass	Pass	Pass	
Phase & Frequency Error																															
	Peak Phase °	RMS Phase °	Frequency Hz																												
Minimum	2.08	0.90	23.73																												
Maximum	3.39	1.21	35.36																												
Average	2.62	1.06	29.06																												
Pass/Fail	Pass	Pass	Pass																												
50 / 50 Single																															
			Active Cell Connected			Sys Type: GSM																									
1 of 2			IntRef	Offset	R T			1 of 2																							

Control	Transmit Power						TCH Parms																									
Transmit Power Setup	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.61</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.61</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.61	----	----	----	Estimated Carrier Power	32.61	----	----	----	Downlink Traffic Power										
	Burst 1	Burst 2	Burst 3	Burst 4																												
Burst Power	32.61	----	----	----																												
Estimated Carrier Power	32.61	----	----	----																												
	Single						Traffic Band																									
							GSM850																									
							Traffic Channel																									
							251																									
							MS TX Level																									
							5																									
Swap Window Positions	<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.01</td> <td>0.89</td> <td>17.22</td> </tr> <tr> <td>Maximum</td> <td>2.99</td> <td>1.15</td> <td>31.23</td> </tr> <tr> <td>Average</td> <td>2.46</td> <td>1.02</td> <td>23.63</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>						Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.01	0.89	17.22	Maximum	2.99	1.15	31.23	Average	2.46	1.02	23.63	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
Phase & Frequency Error																																
	Peak Phase °	RMS Phase °	Frequency Hz																													
Minimum	2.01	0.89	17.22																													
Maximum	2.99	1.15	31.23																													
Average	2.46	1.02	23.63																													
Pass/Fail	Pass	Pass	Pass																													
	50 / 50						Return																									
	Single																															
	Active Cell Connected				Sys Type: GSM																											
1 of 2			IntRef	Offset	R	T		1 of 2																								

Control	Power vs Time Graph						TCH Parms	
Power vs Time Setup							Downlink Traffic Power	
Change View							Traffic Band	
							GSM850	
							Traffic Channel	
							128	
							MS TX Level	
							5	
							Channel Mode Setup	
							Return	
	Active Cell Connected				Sys Type: GSM			
1 of 2			IntRef	Offset	R	T		1 of 2

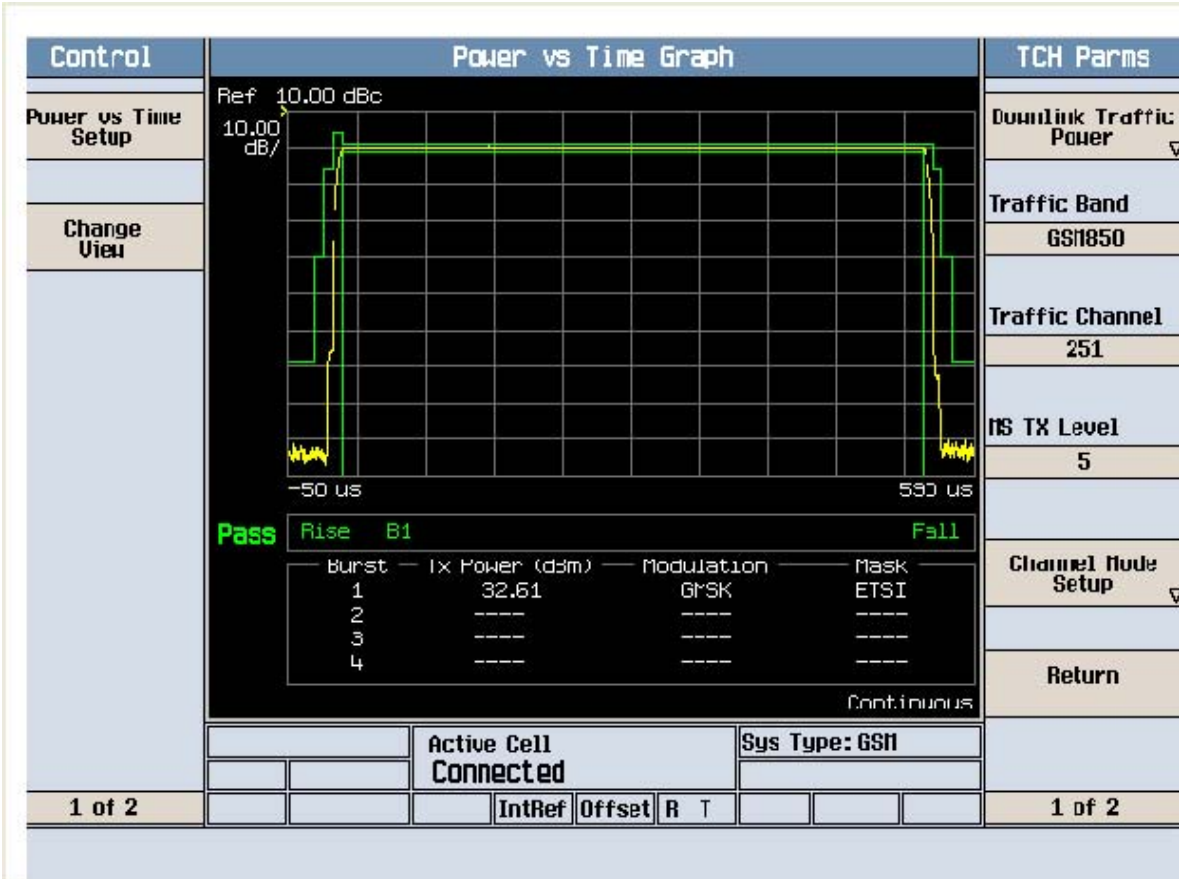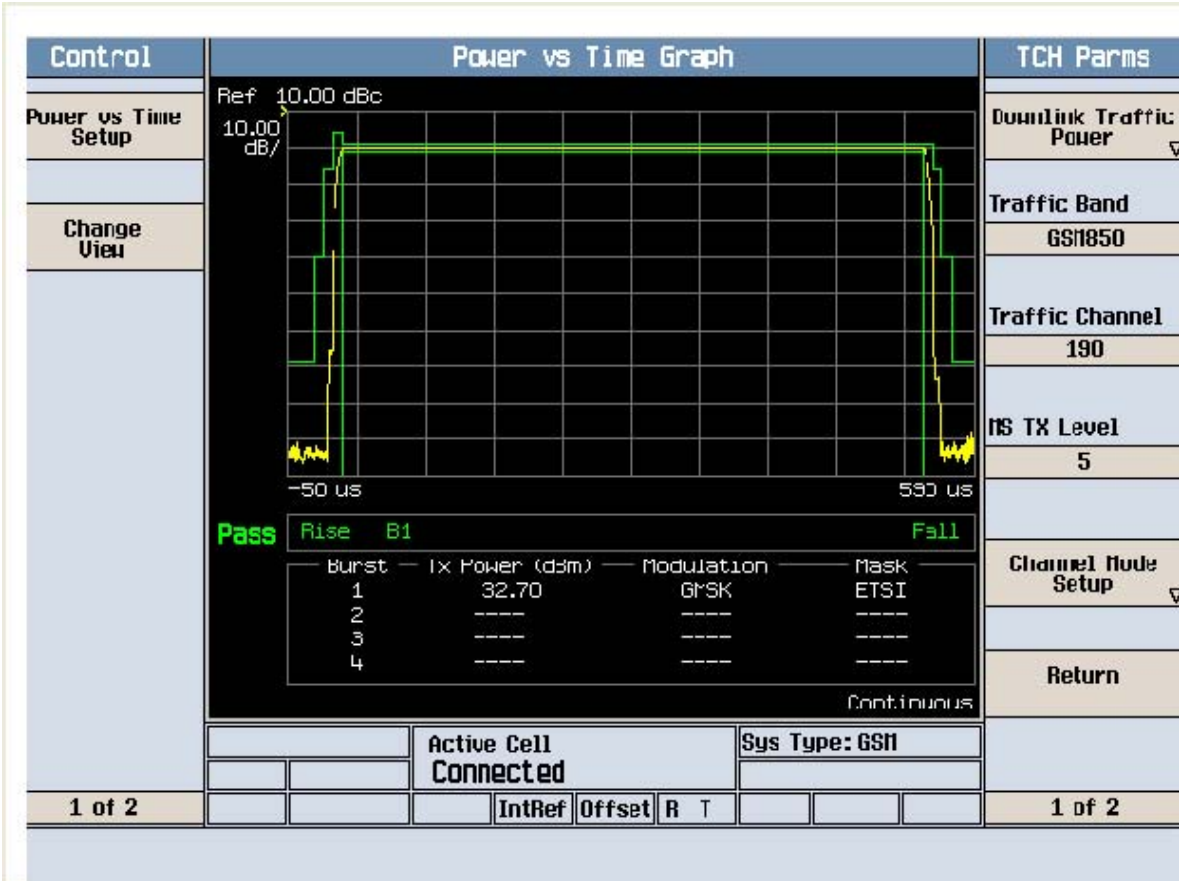

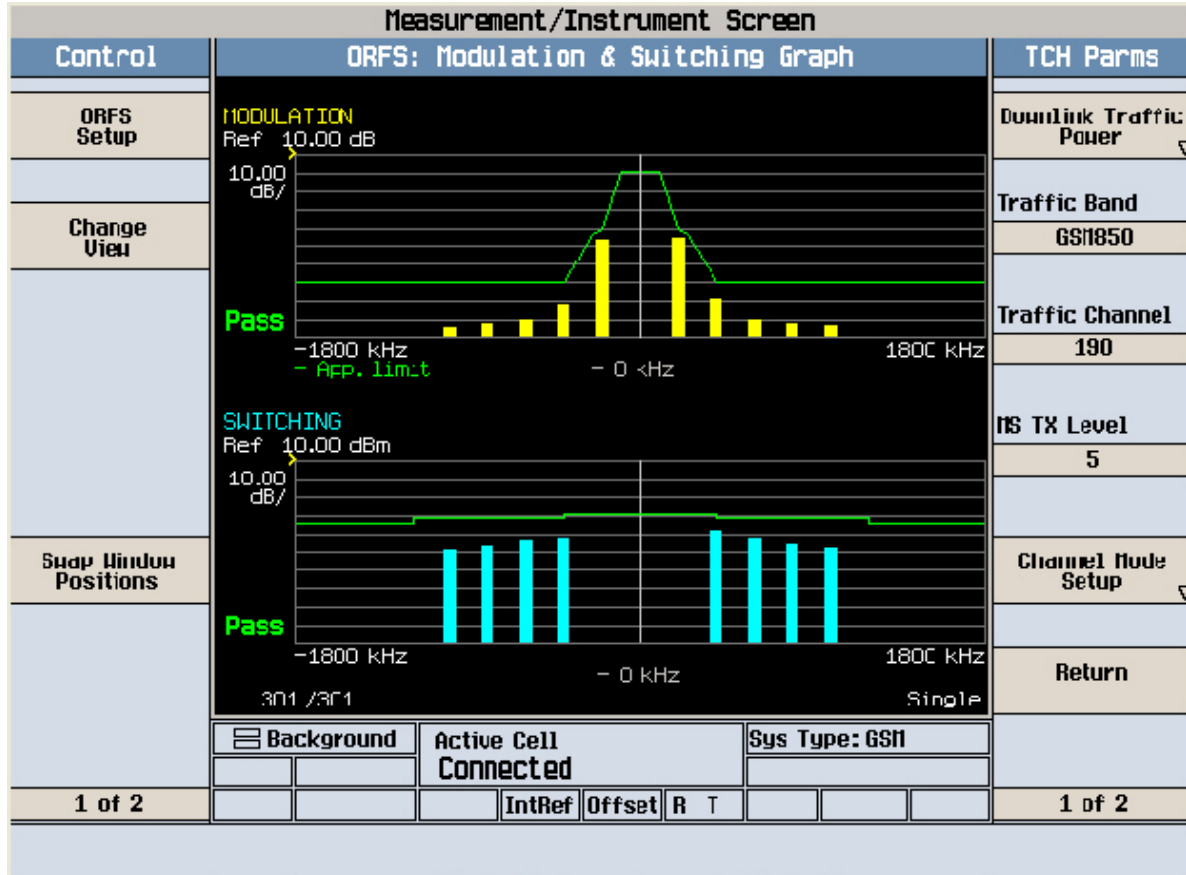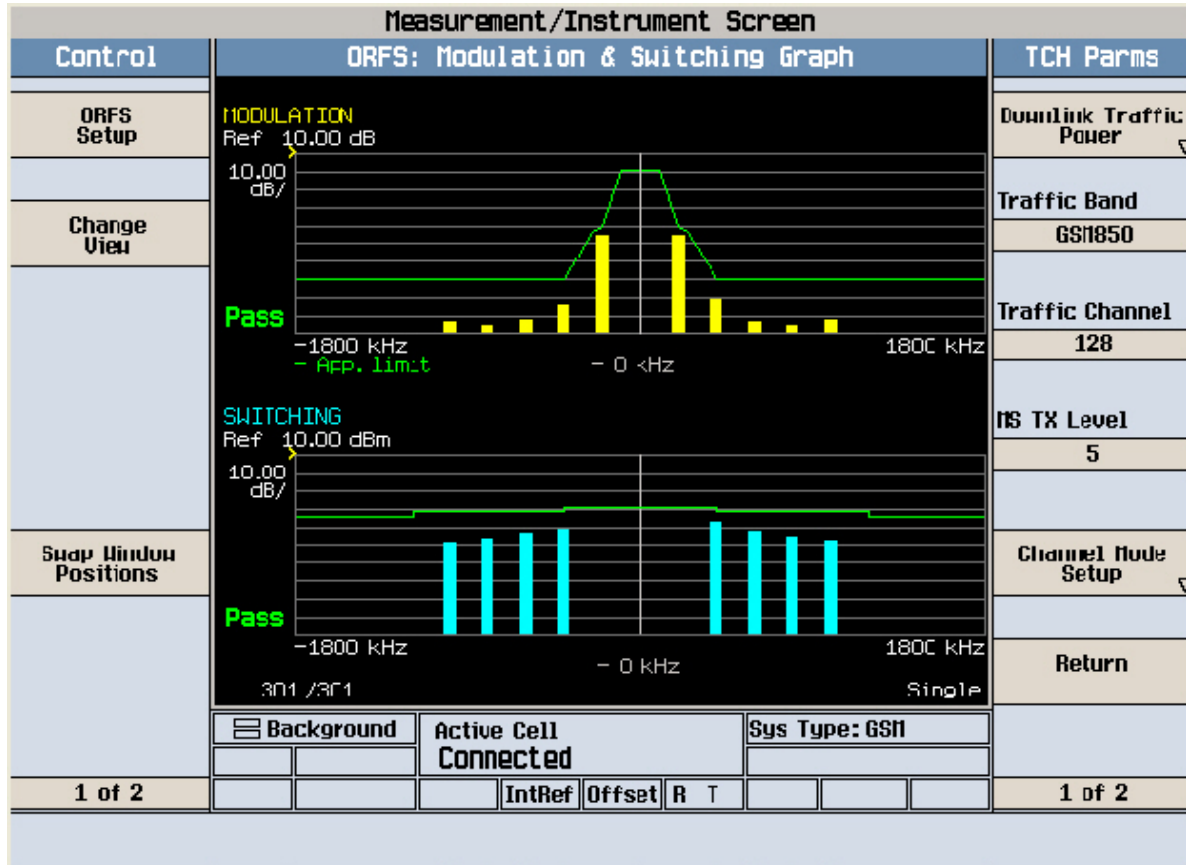

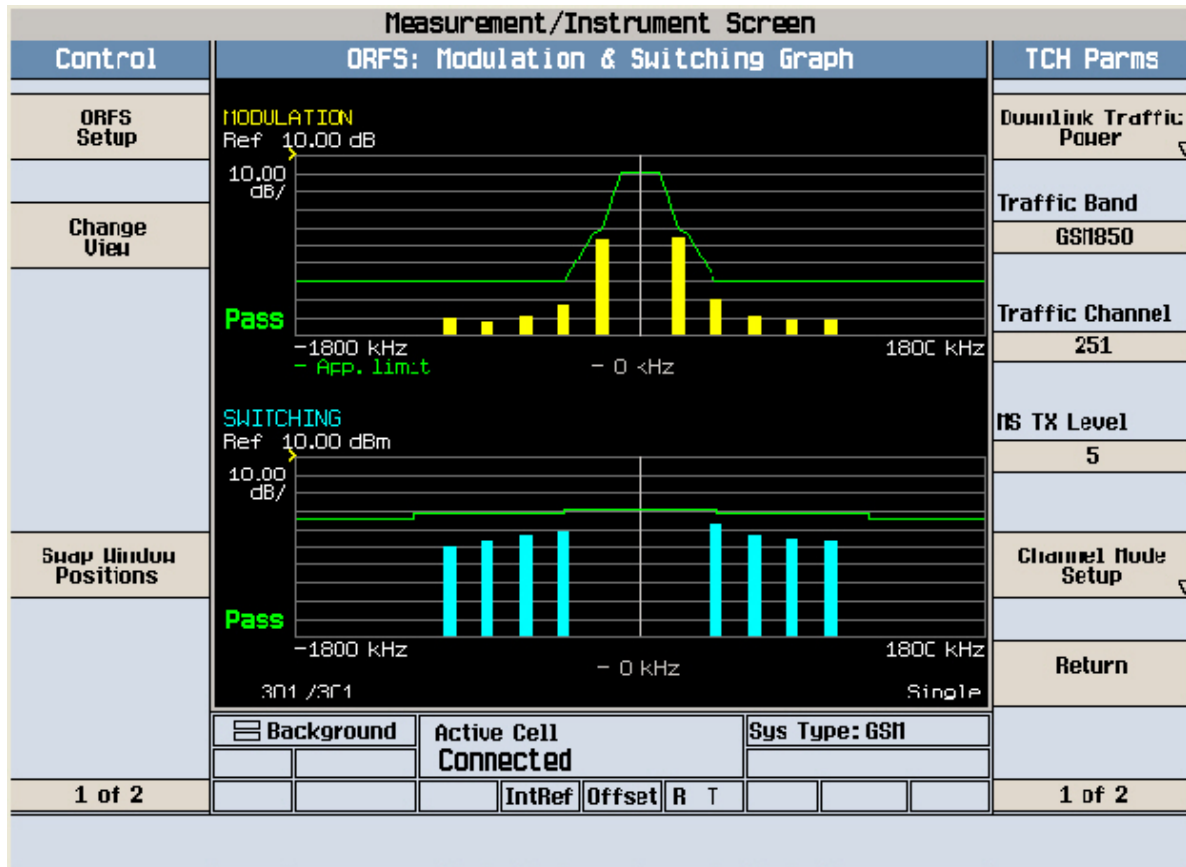

Agilent

R T

Freq/Channel

FCC ID:A3LGTS8000L Cond Spur Ch.128

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LGTS8000L Cond Spur Ch.128

Mkr1 227.1 MHz

Ref 33 dBm

Atten 40 dB

-33.85 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

$\mathcal{E}(f)$:

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 414.6 MHz

Span 809.2 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.36 ms (601 pts)

Center Freq
414.600000 MHz

Start Freq
10.0000000 MHz

Stop Freq
819.200000 MHz

CF Step
80.9200000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

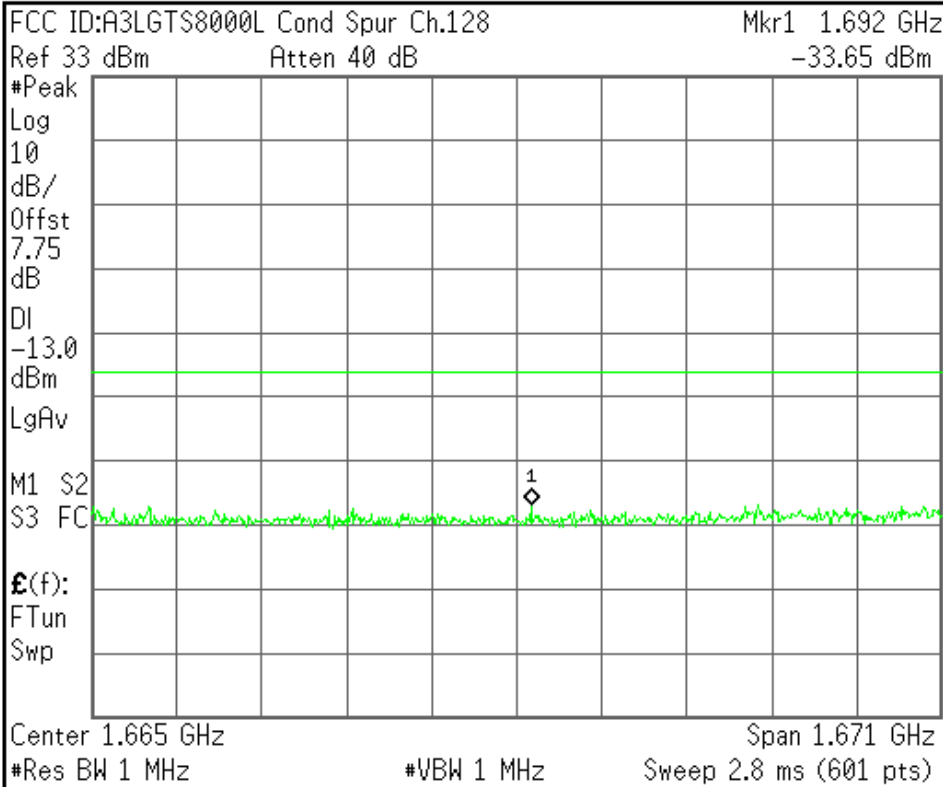


Center Freq 1.66460000 GHz
Start Freq 829.200000 MHz
Stop Freq 2.50000000 GHz
CF Step 167.080000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

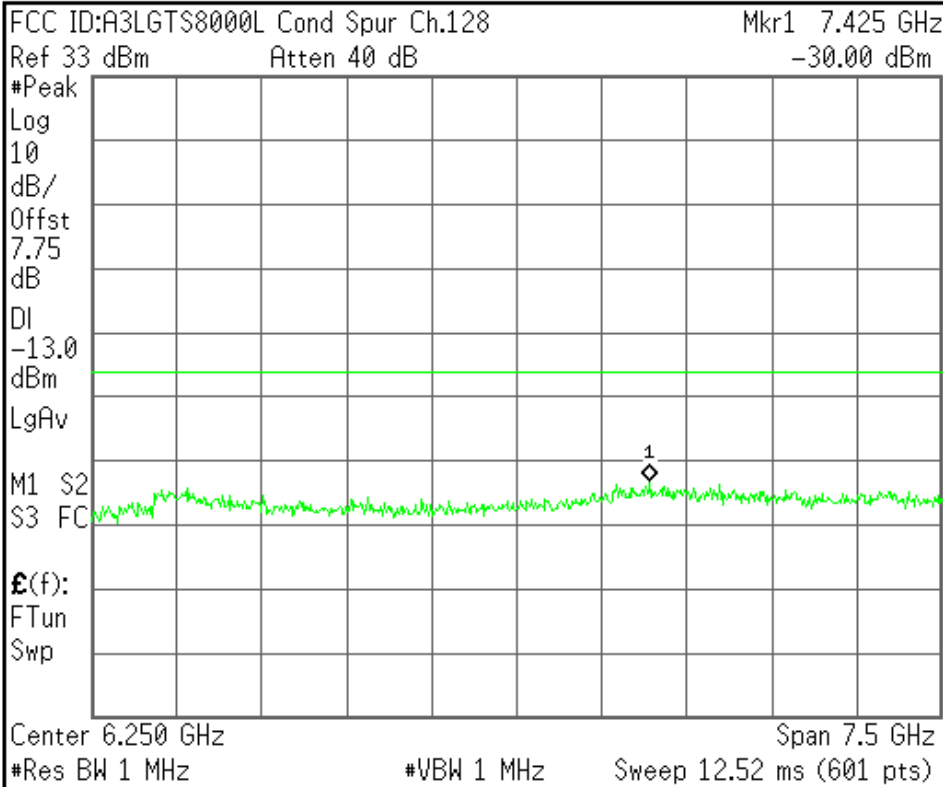

Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv


M1 S2

S3 FC

£(f):

FTun

Swp

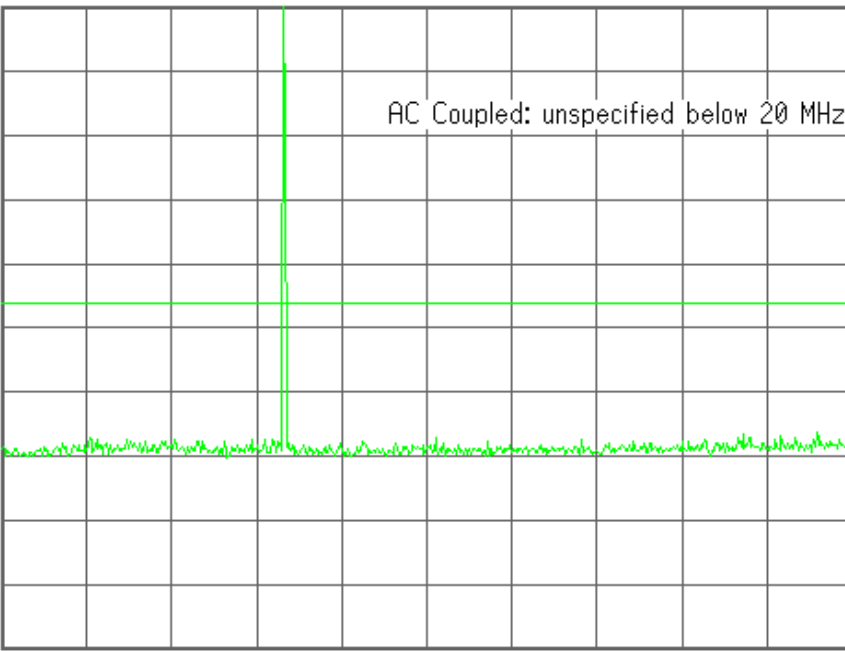

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Cond Spur Ch.190

Mkr1 292.1 MHz

Ref 33 dBm

Atten 40 dB

-33.18 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv


V1 S2

S3 FC

£(f):

FTun

Swp

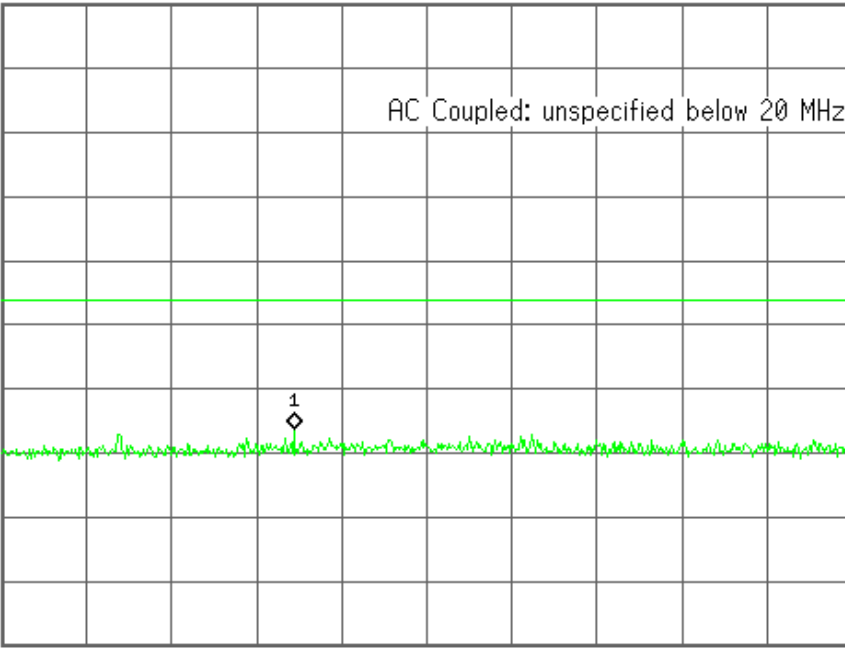

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
420.800000 MHz

Start Freq
10.0000000 MHz

Stop Freq
831.600000 MHz

CF Step
82.1600000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

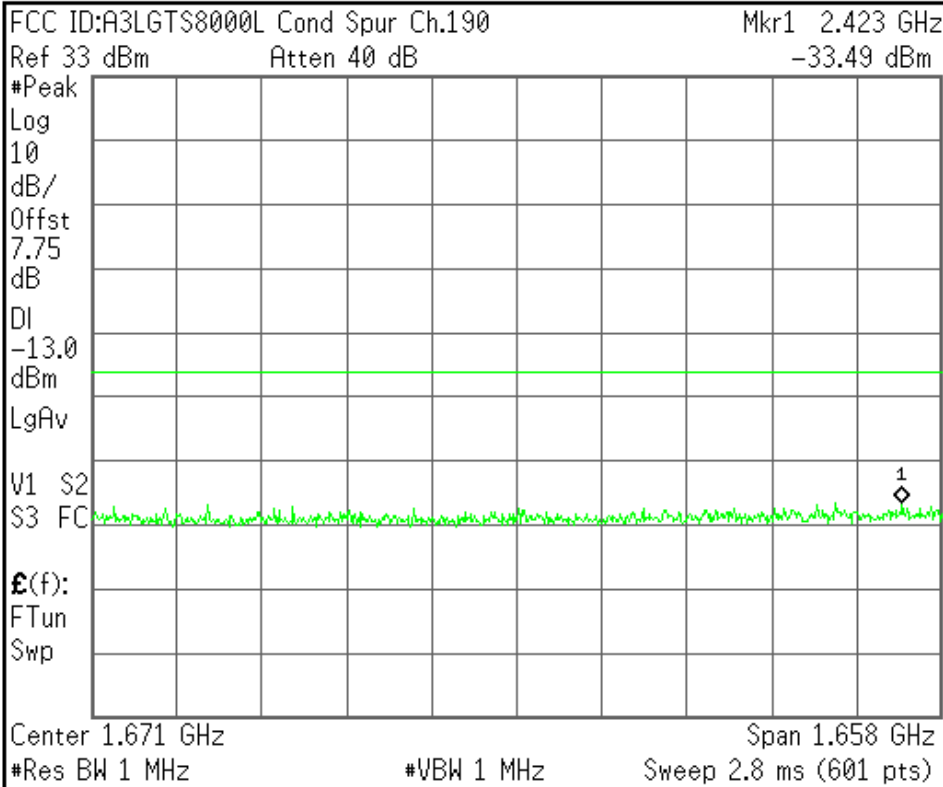


Center Freq 1.67080000 GHz
Start Freq 841.600000 MHz
Stop Freq 2.50000000 GHz
CF Step 165.840000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

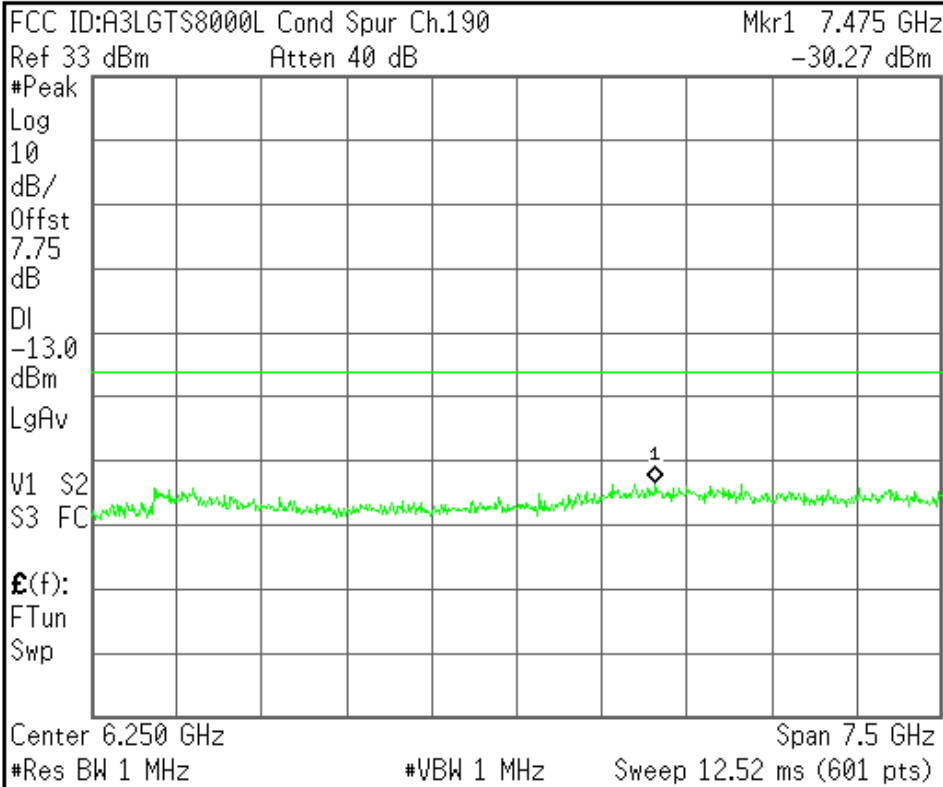

Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Cond Spur Ch.251

Mkr1 721.5 MHz

Ref 33 dBm

Atten 40 dB

-33.90 dBm

#Peak

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq
426.900000 MHz

Start Freq
10.0000000 MHz

Stop Freq
843.800000 MHz

CF Step
83.3800000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

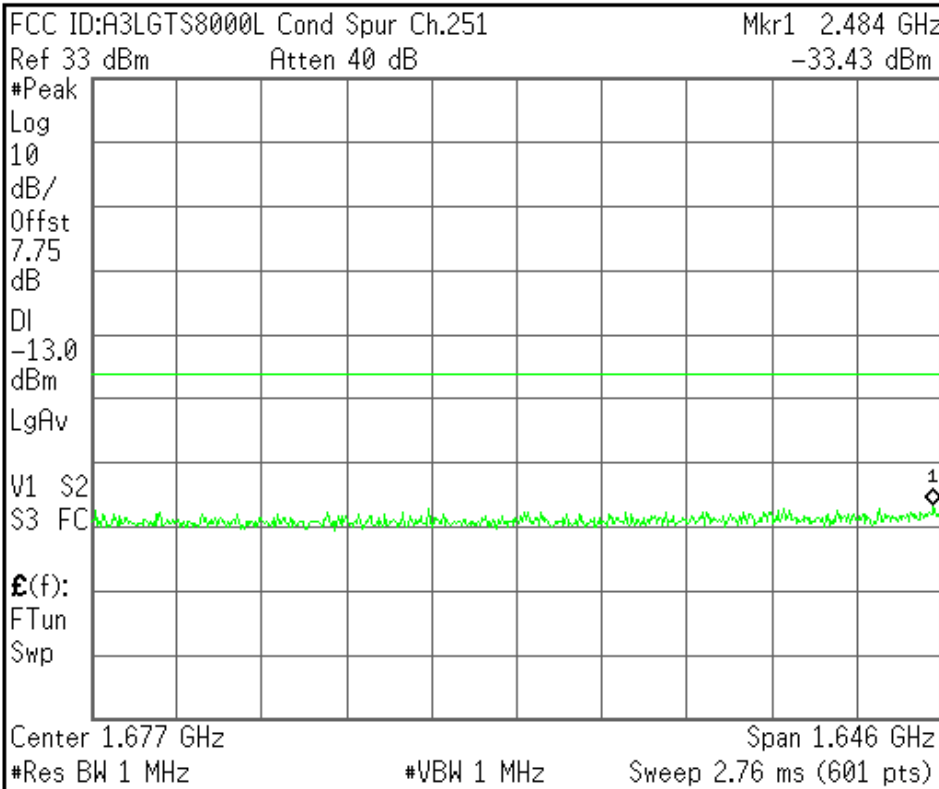


Freq/Channel
Center Freq 1.67690000 GHz
Start Freq 853.800000 MHz
Stop Freq 2.50000000 GHz
CF Step 164.620000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

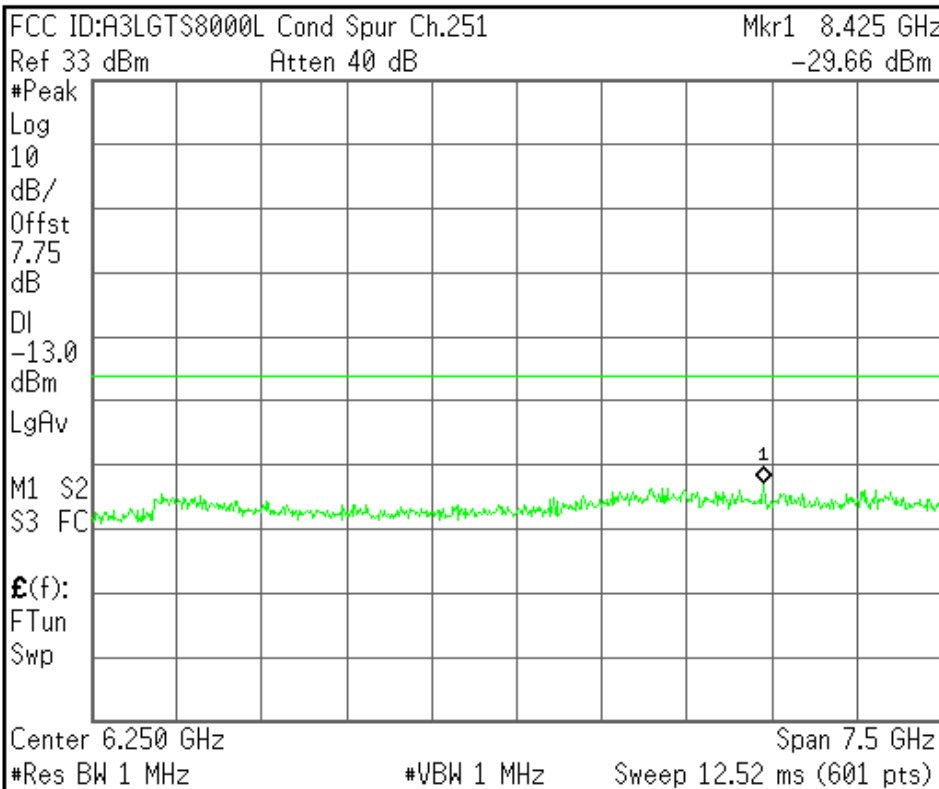

Freq/Channel
Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent


R T

Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.128

Ref 33 dBm Atten 40 dB

#Avg
Log
10
dB/
Offst
7.75
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

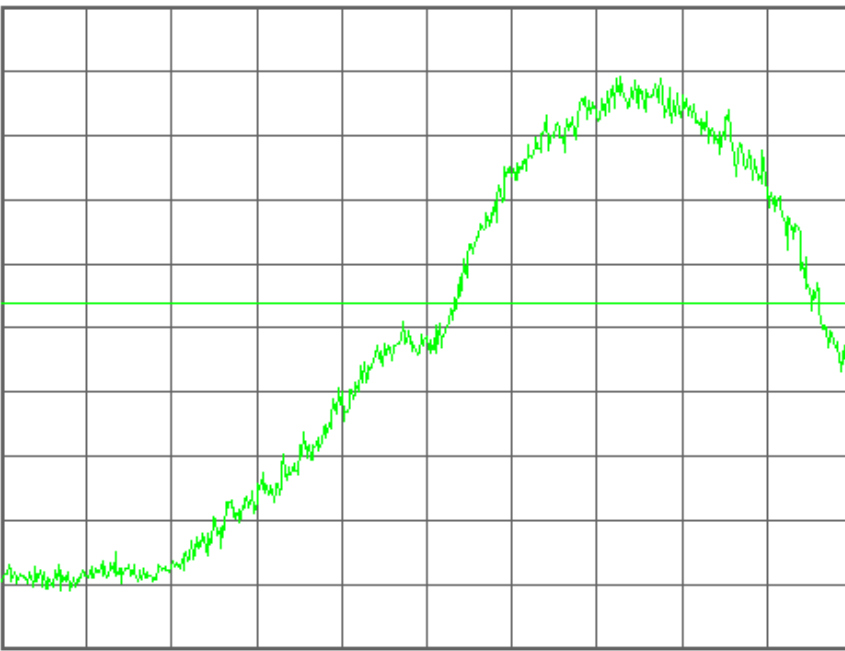

Center 824.000 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel


FCC ID:A3LGT8000L Band Edge Ch.128

Mkr1 823.974 6 MHz

Ref 33 dBm Atten 40 dB

-16.09 dBm

#Avg
Log
10
dB/
Offst
7.75
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

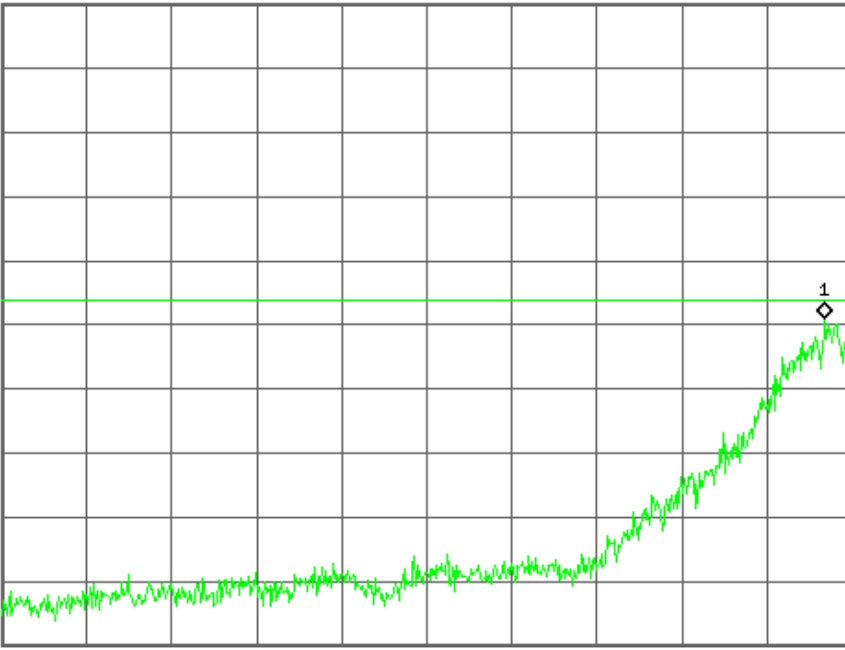

Center 823.595 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTS8000L Band Edge Ch.251

Ref 33 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

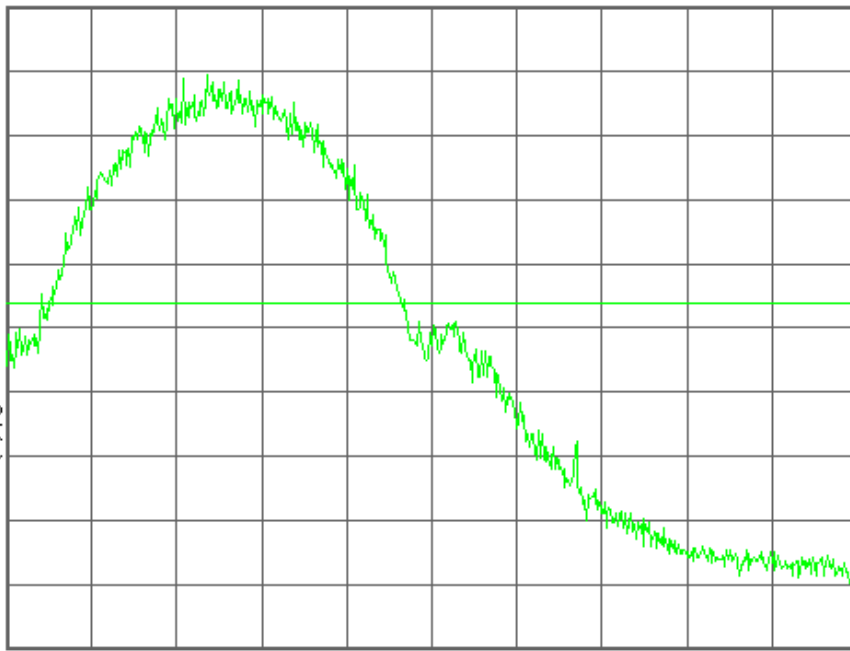

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTS8000L Band Edge Ch.251

Mkr1 849.002 7 MHz

Ref 33 dBm Atten 40 dB

-15.64 dBm

#Avg

Log

10

dB/

Offst

7.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

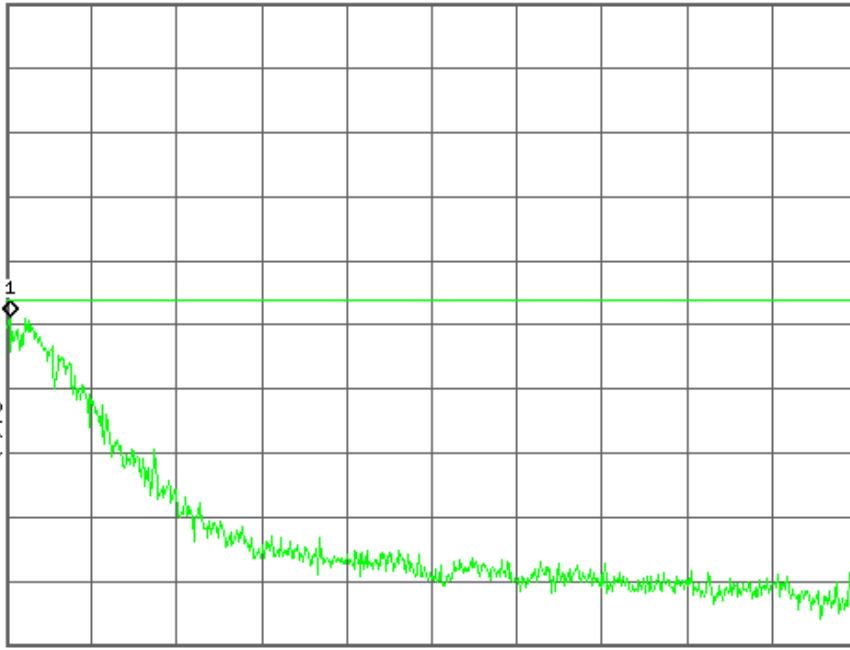

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTS8000L 0BW Ch.512
Ref 30 dBm Atten 40 dB

Center 1.850 200 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
247.0961 kHz	x dB	-26.00 dB
Transmit Freq Error	890.923 Hz	
x dB Bandwidth	314.858 kHz	

Freq/Channel

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTS8000L 0BW Ch.661
Ref 30 dBm Atten 40 dB

Center 1.880 000 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
245.3857 kHz	x dB	-26.00 dB
Transmit Freq Error	-809.895 Hz	
x dB Bandwidth	307.519 kHz	

Freq/Channel

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz


Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


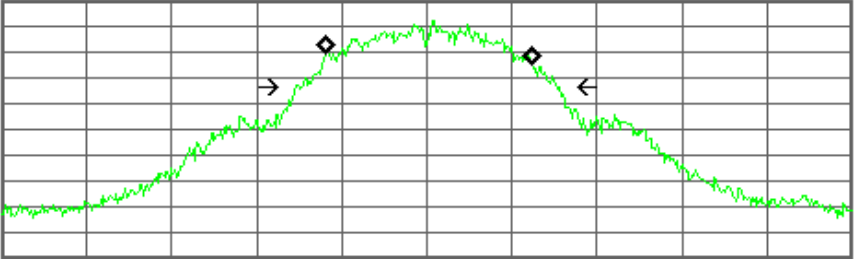
<p>Ch Freq 1.9098 GHz Trig Free</p> <p>Occupied Bandwidth [] []</p> <hr/> <p>FCC ID:A3LGTS8000L 0BW Ch.810 Ref 30 dBm Atten 40 dB</p> <div style="border: 1px solid black; padding: 5px;"> <p>#Peak Log 10 dB/Offst 8.8 dB</p>  <p style="text-align: center;">Center 1.909 800 GHz Span 1 MHz</p> <p>#Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)</p> </div>	<p>Freq/Channel</p> <p>Center Freq 1.90980000 GHz</p> <hr/> <p>Start Freq 1.90930000 GHz</p> <hr/> <p>Stop Freq 1.91030000 GHz</p> <hr/> <p>CF Step 100.000000 kHz Auto Man</p> <hr/> <p>Freq Offset 0.00000000 Hz</p> <hr/> <p>Signal Track On Off</p>
<p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p style="text-align: center; font-size: 1.2em;">247.3355 kHz x dB -26.00 dB</p> <p>Transmit Freq Error 1.704 kHz</p> <p>x dB Bandwidth 314.864 kHz</p>	
<p>File Operation Status, C:\TEMP.GIF file saved</p>	



FCC ID : A3LGTS8000L Transmit Power 512CH



Measurement/Instrument Screen																													
Control	Transmit Power							TCH Parms																					
<p>Transmit Power Setup ▾</p> <hr/> <p>Setup Window Positions</p> <hr/> <p>1 of 2</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.92</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.92</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table> <p style="text-align: right;">Single</p>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.92	----	----	----	Estimated Carrier Power	29.92	----	----	----	<p>Downlink Traffic Power ▾</p> <hr/> <p>Traffic Band PCS</p> <hr/> <p>Traffic Channel 512</p> <hr/> <p>MS TX Level 0</p> <hr/> <p>Channel Mode Setup ▾</p> <hr/> <p>Return</p>						
	Burst 1	Burst 2	Burst 3	Burst 4																									
Burst Power	29.92	----	----	----																									
Estimated Carrier Power	29.92	----	----	----																									
	Phase & Frequency Error																												
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>2.45</td> <td>0.83</td> <td>-19.36</td> </tr> <tr> <td>Maximum</td> <td>4.12</td> <td>1.38</td> <td>-2.03</td> </tr> <tr> <td>Average</td> <td>3.14</td> <td>1.09</td> <td>-13.22</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table> <p style="text-align: center;">50 / 50 Single</p>										Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.45	0.83	-19.36	Maximum	4.12	1.38	-2.03	Average	3.14	1.09	-13.22	Pass/Fail	Pass	Pass	Pass
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	2.45	0.83	-19.36																										
Maximum	4.12	1.38	-2.03																										
Average	3.14	1.09	-13.22																										
Pass/Fail	Pass	Pass	Pass																										
	Active Cell Connected				Sys Type: GSM																								
			IntRef	Offset	R T																								
								1 of 2																					

Measurement/Instrument Screen										
Control	Transmit Power							TCH Parms		
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				29.92	----	----	----	Traffic Band	PCS
Swap Window Positions	Estimated Carrier Power				29.92	----	----	----	Traffic Channel	661
	Single									
	Phase & Frequency Error									
			Peak Phase °	RMS Phase °	Frequency Hz					
	Minimum	2.32	0.91	-13.81						
Maximum	4.11	1.49	9.01							
Average	3.35	1.21	-5.51							
Pass/Fail	Pass	Pass	Pass							
50 / 50 Single										
			Active Cell Connected			Sys Type: GSM				
1 of 2				IntRef	Offset	R	T		1 of 2	

Measurement/Instrument Screen										
Control	Transmit Power							TCH Parms		
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				29.97	----	----	----	Traffic Band	PCS
Swap Window Positions	Estimated Carrier Power				29.97	----	----	----	Traffic Channel	810
	Single									
	Phase & Frequency Error									
			Peak Phase °	RMS Phase °	Frequency Hz					
	Minimum	2.82	0.95	-12.31						
Maximum	4.99	1.50	10.40							
Average	3.49	1.24	-4.08							
Pass/Fail	Pass	Pass	Pass							
50 / 50 Single										
			Active Cell Connected			Sys Type: GSM				
1 of 2				IntRef	Offset	R	T		1 of 2	

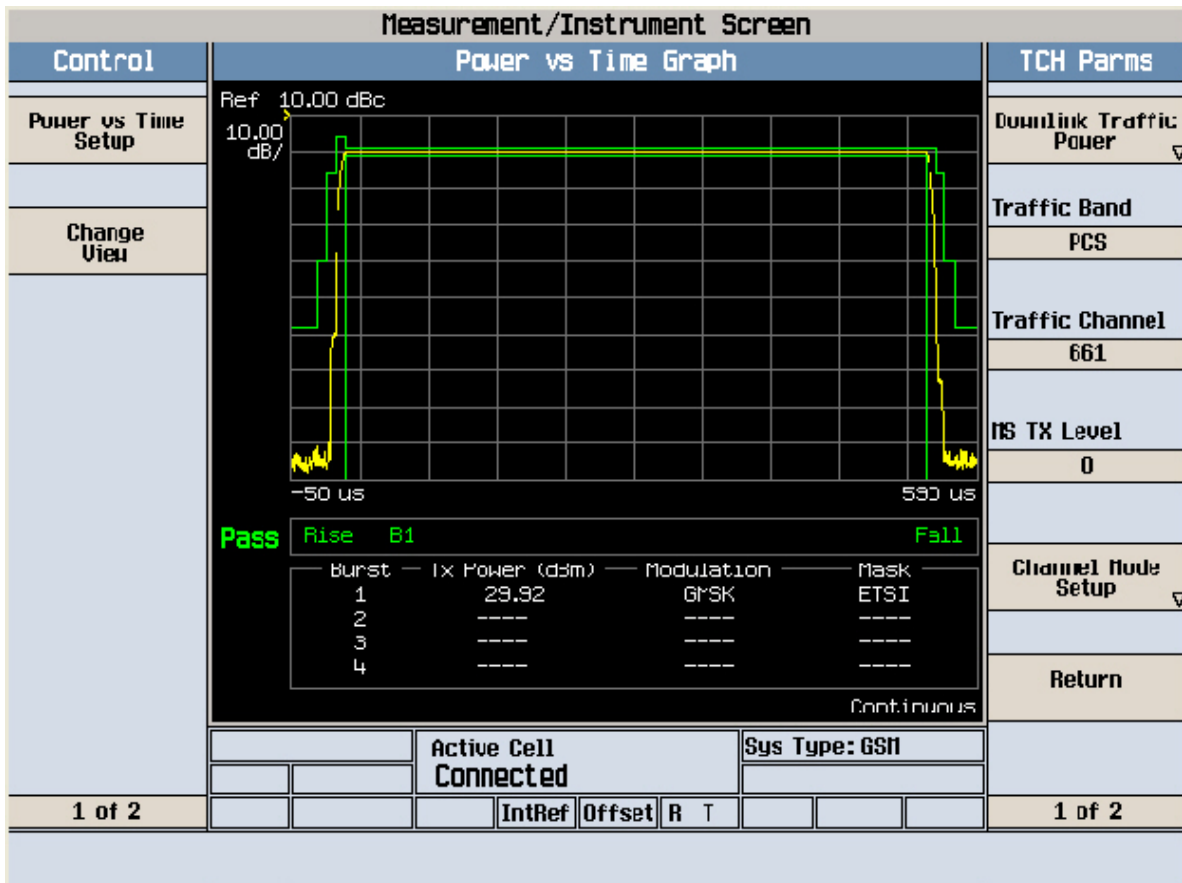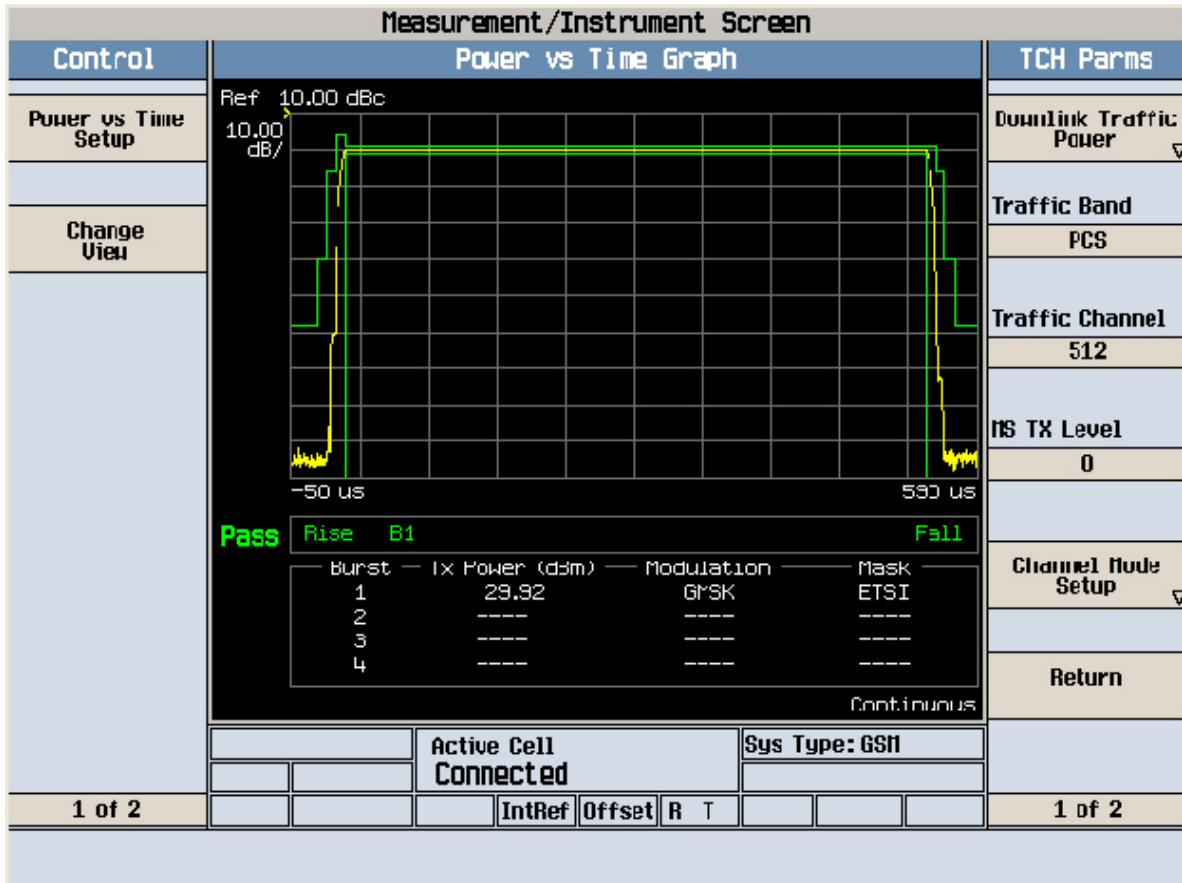

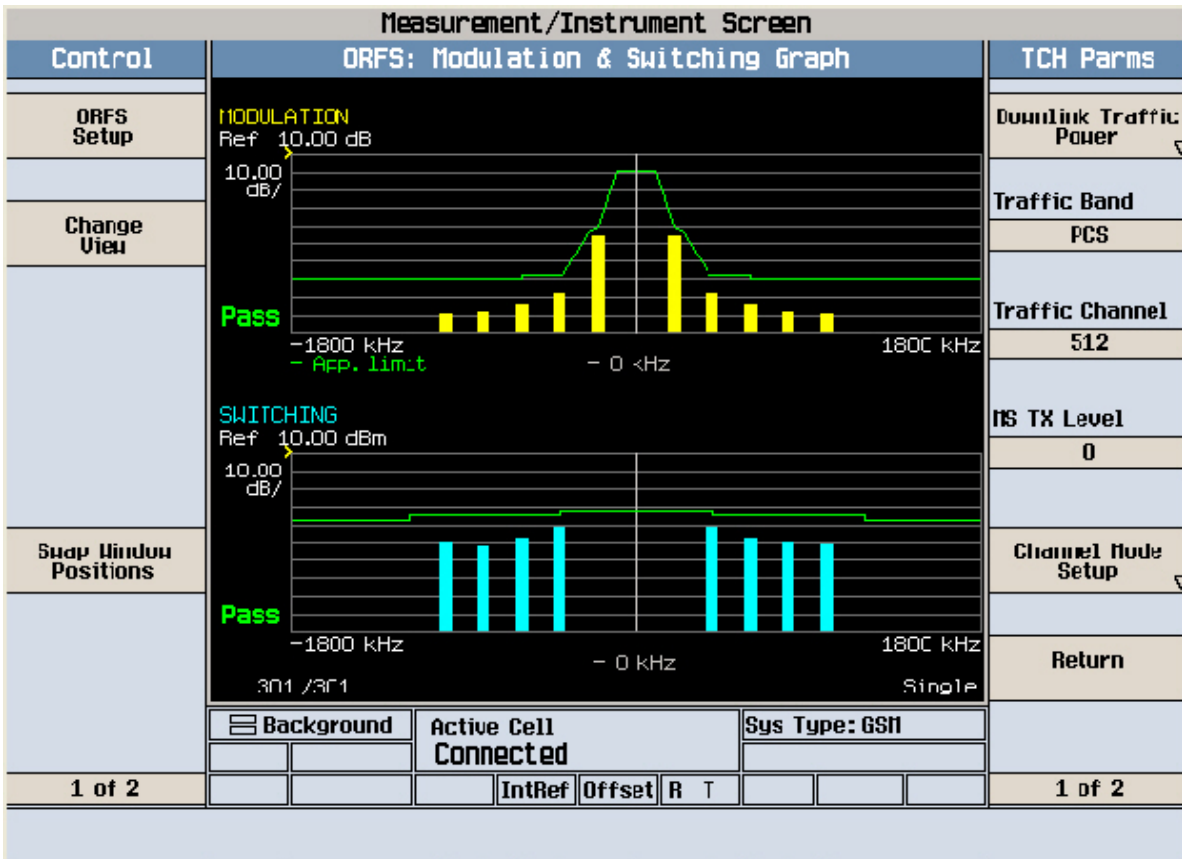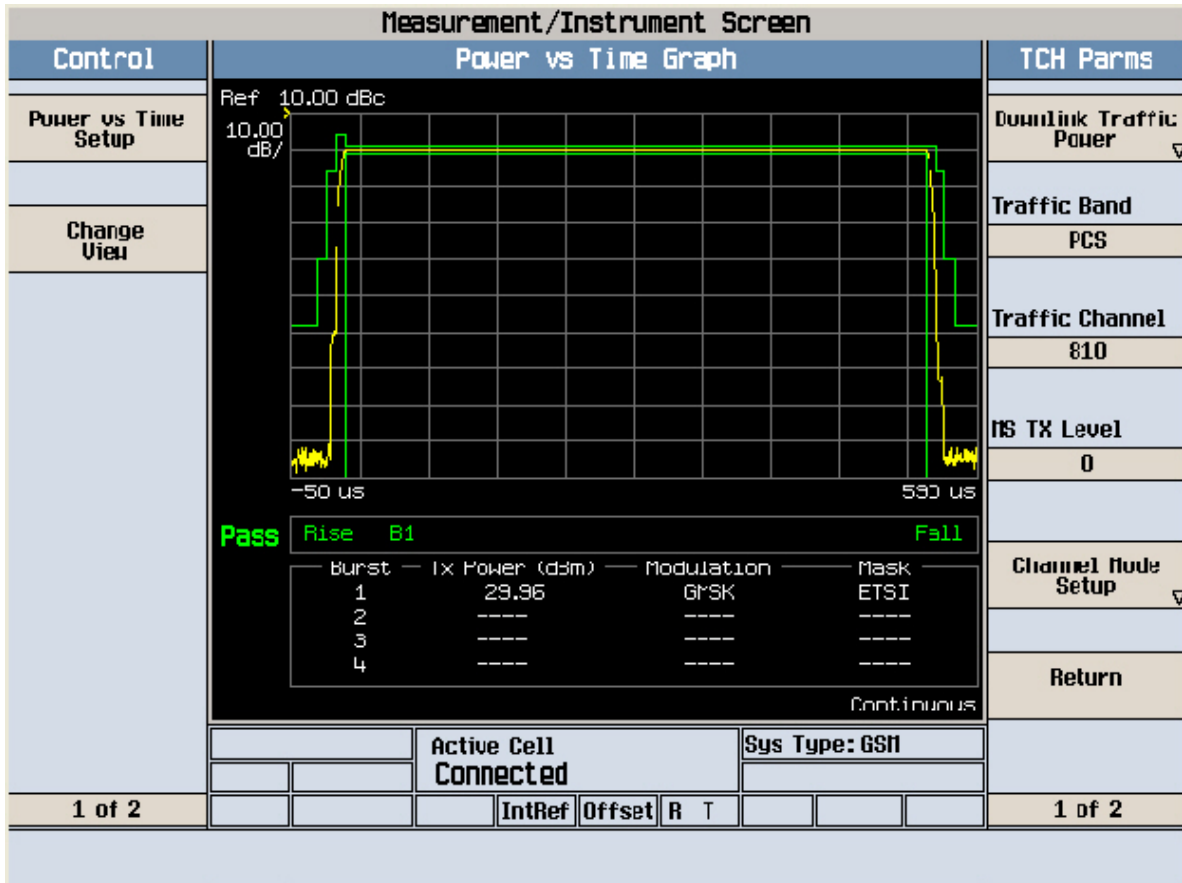


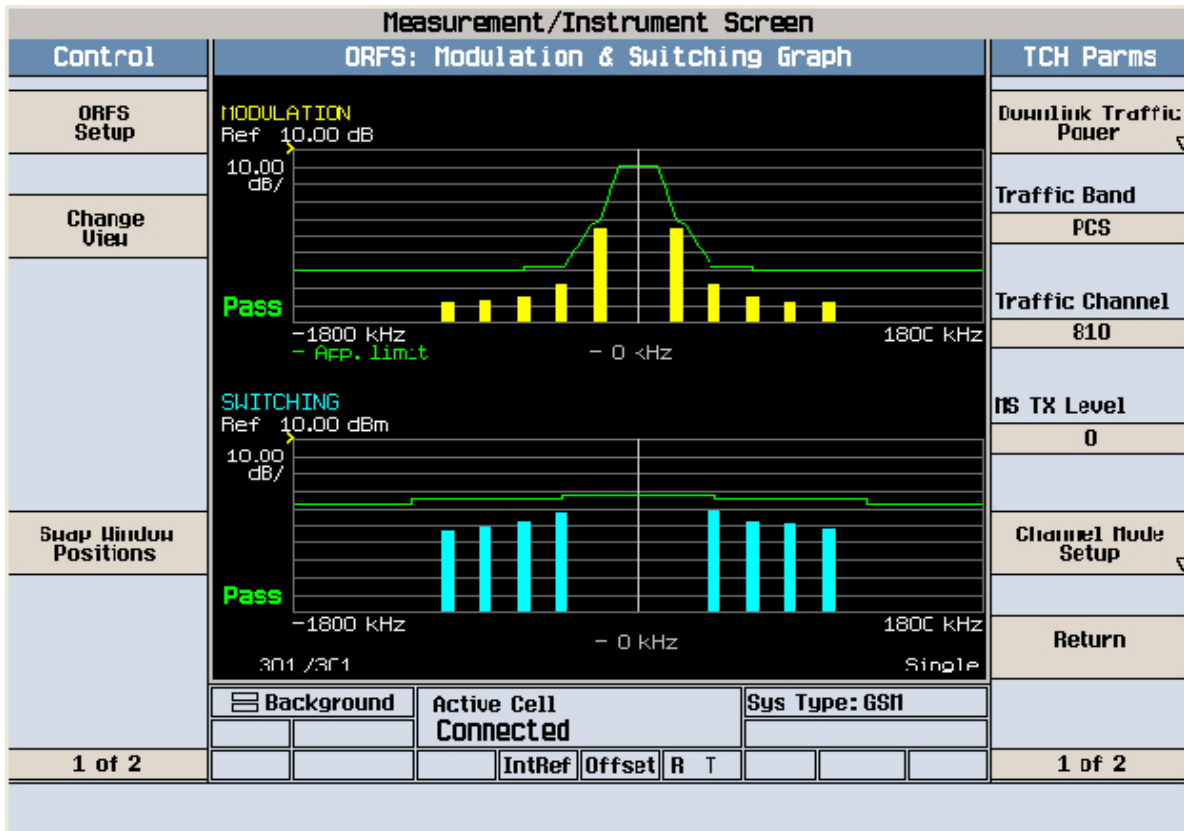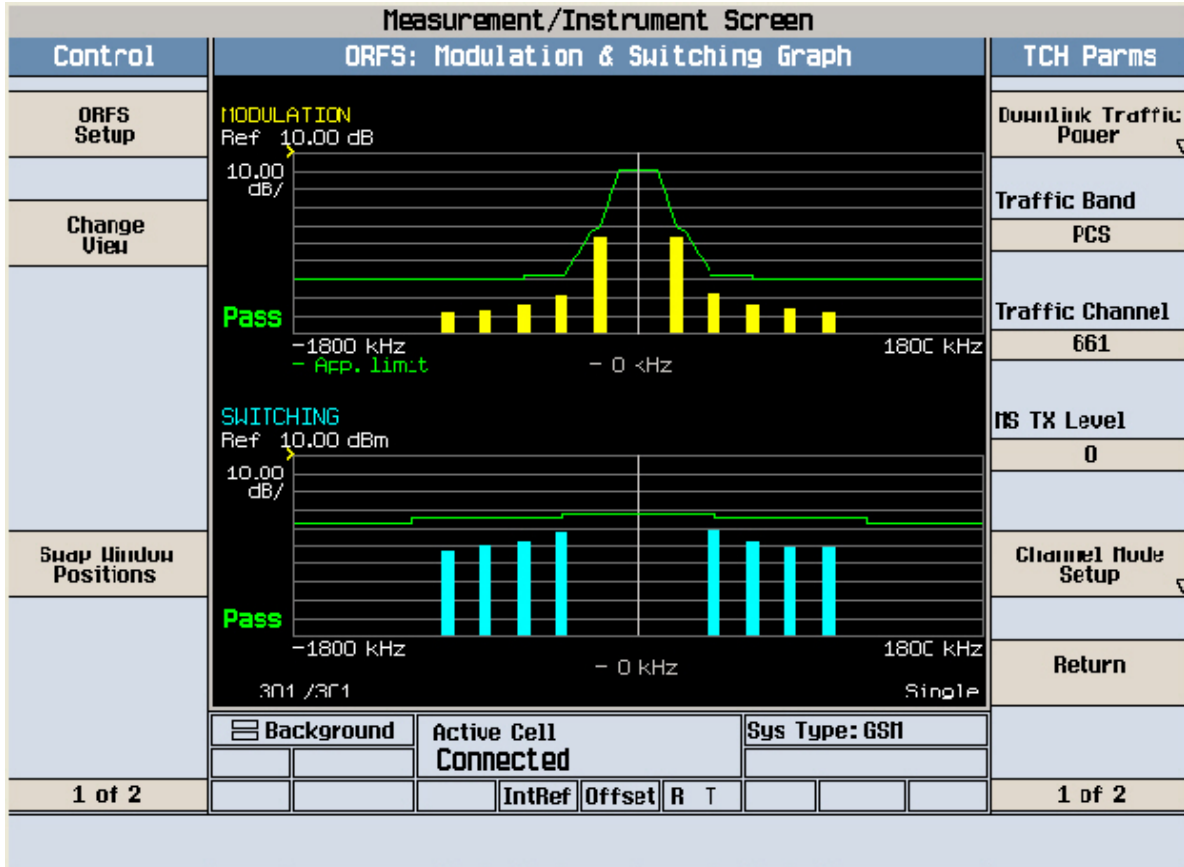

Agilent

R T

Freq/Channel

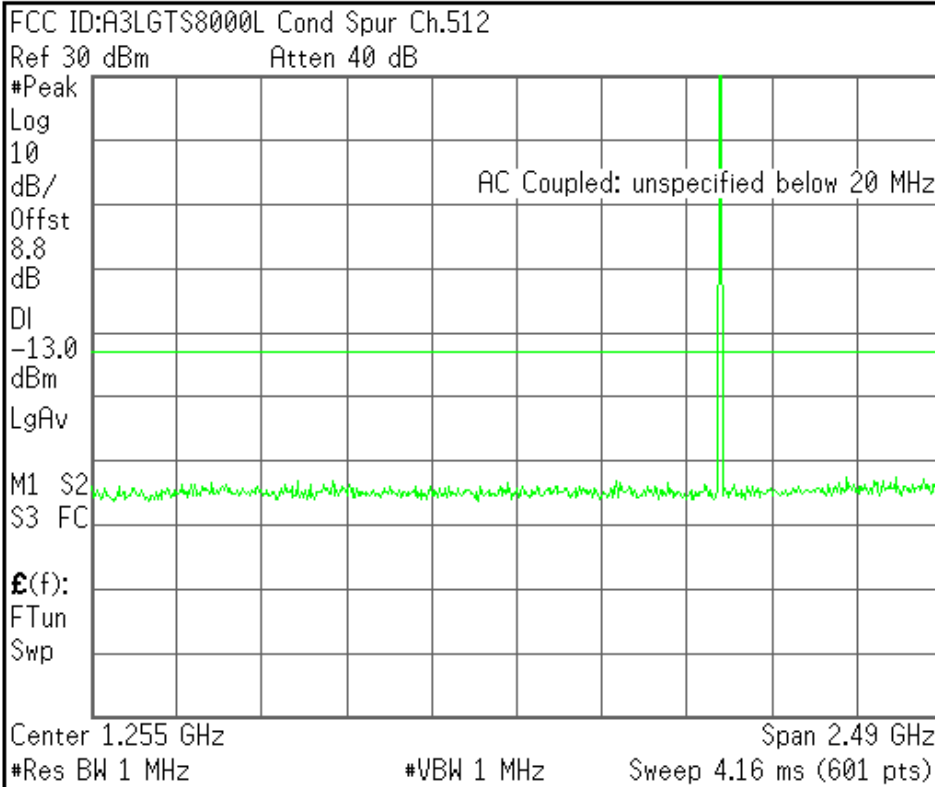


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

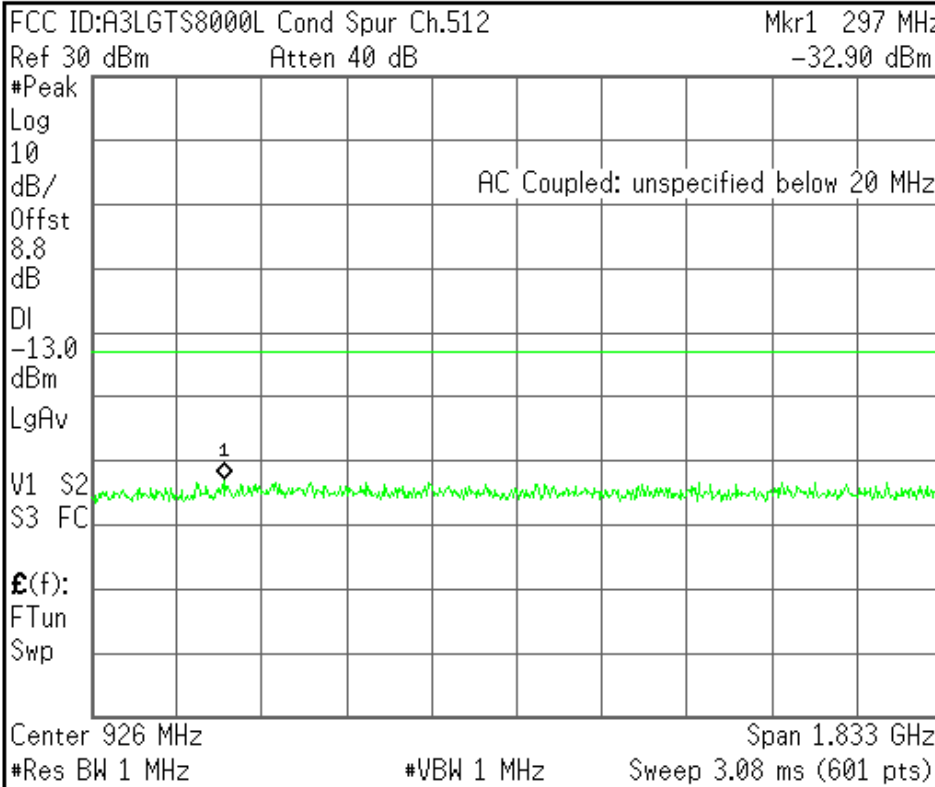


Center Freq 926.350000 MHz
Start Freq 10.0000000 MHz
Stop Freq 1.84270000 GHz
CF Step 183.270000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

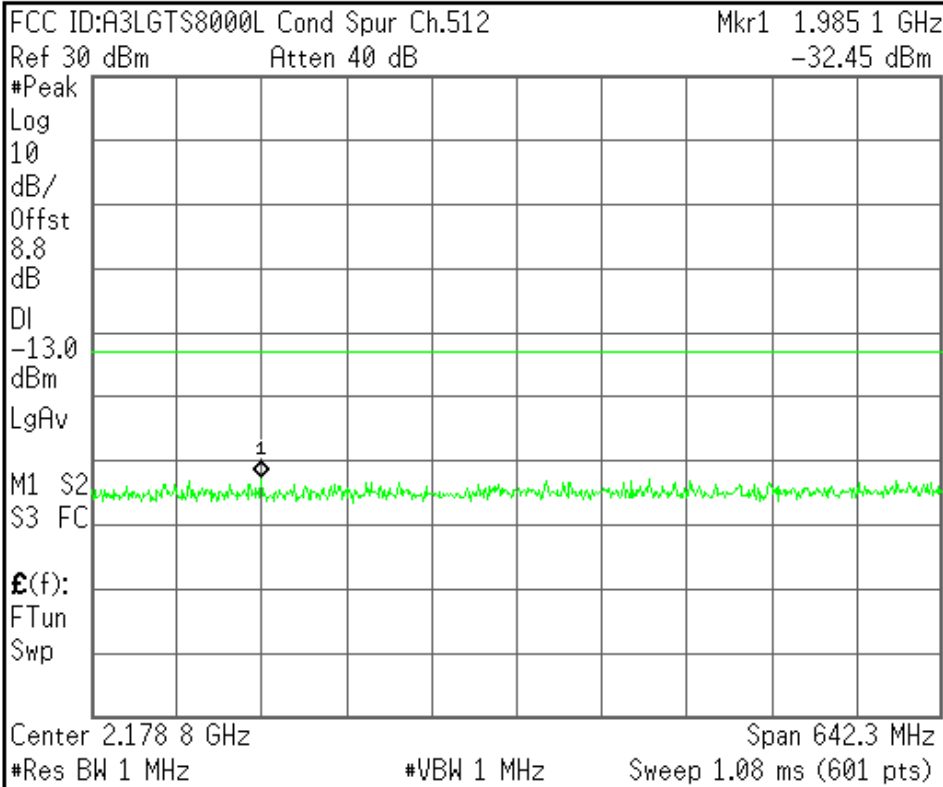


Center Freq 2.17885000 GHz
Start Freq 1.85770000 GHz
Stop Freq 2.50000000 GHz
CF Step Auto Man 64.2300000 MHz
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

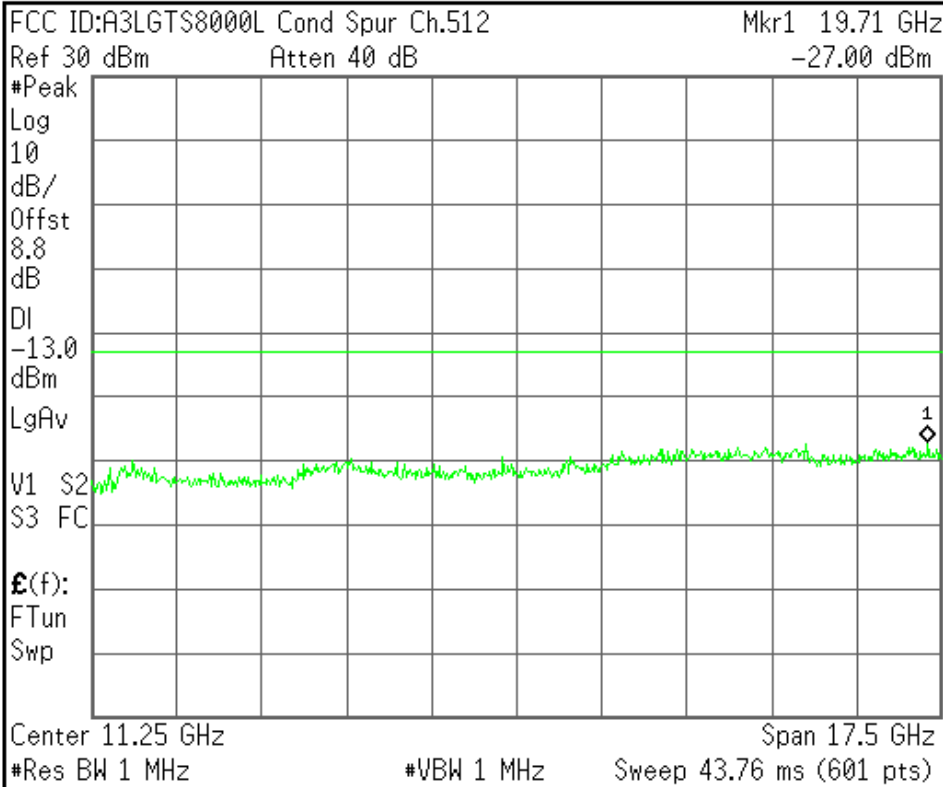


Center Freq 11.2500000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.0000000 GHz
CF Step Auto Man 1.75000000 GHz
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

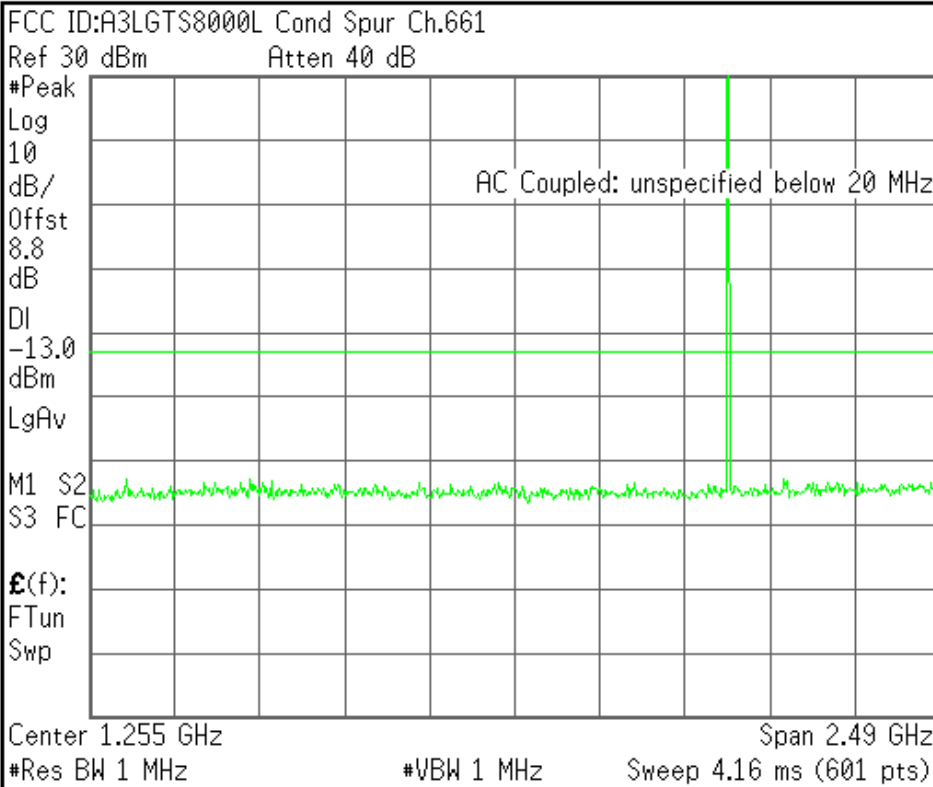


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

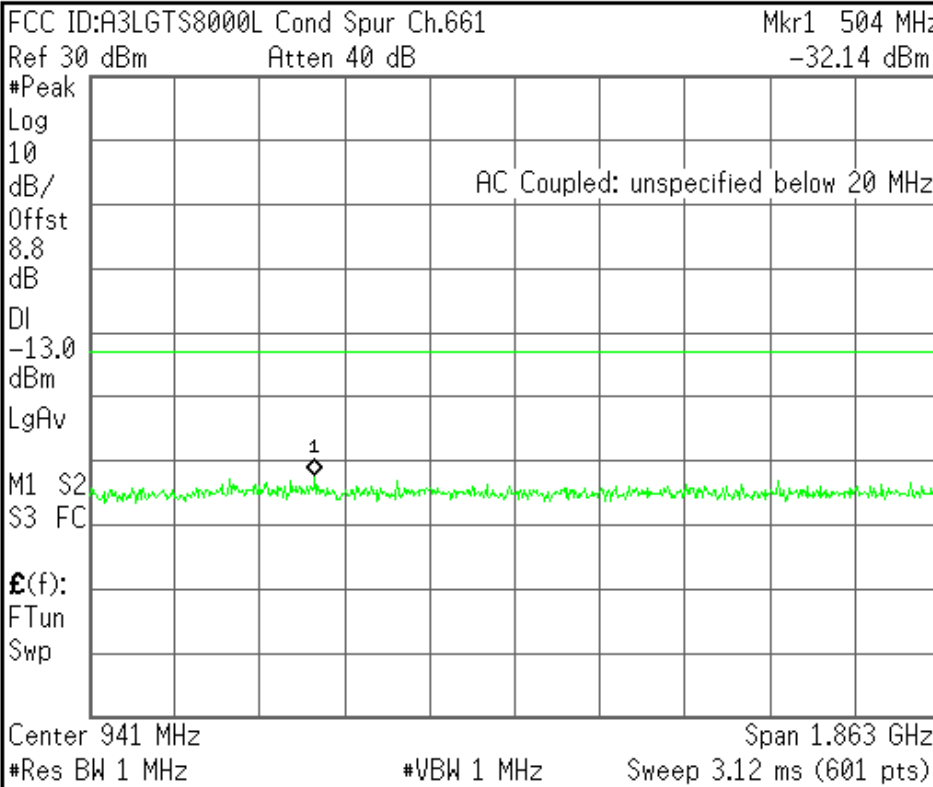


Center Freq 941.250000 MHz
Start Freq 10.0000000 MHz
Stop Freq 1.87250000 GHz
CF Step 186.250000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

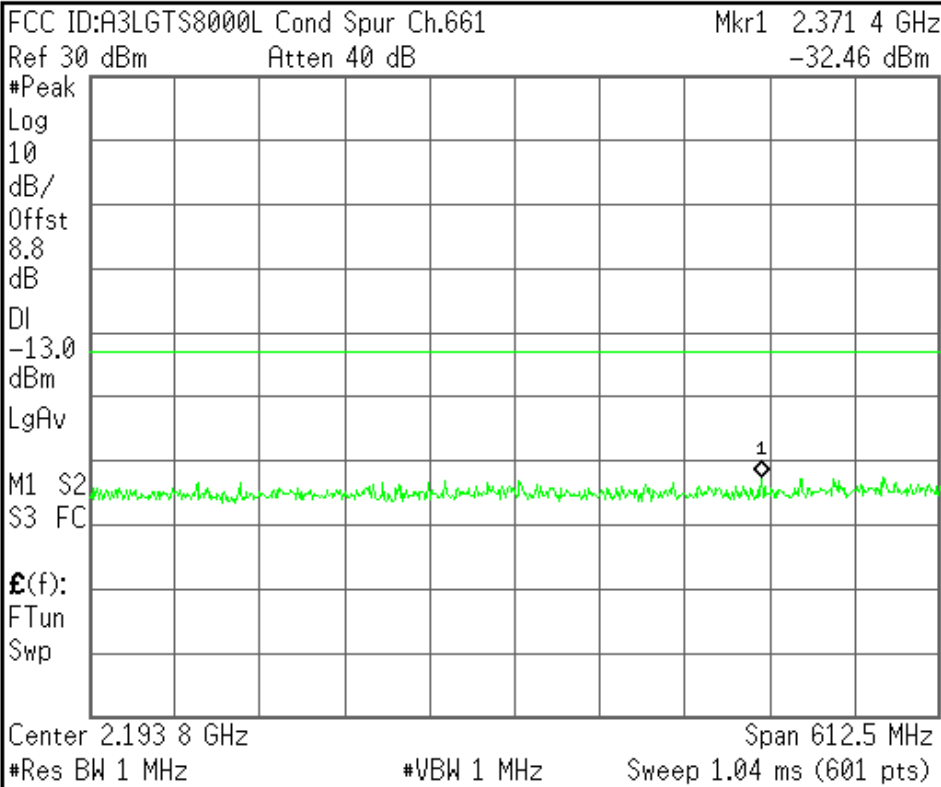


Center Freq 2.19375000 GHz
Start Freq 1.88750000 GHz
Stop Freq 2.50000000 GHz
CF Step 61.2500000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

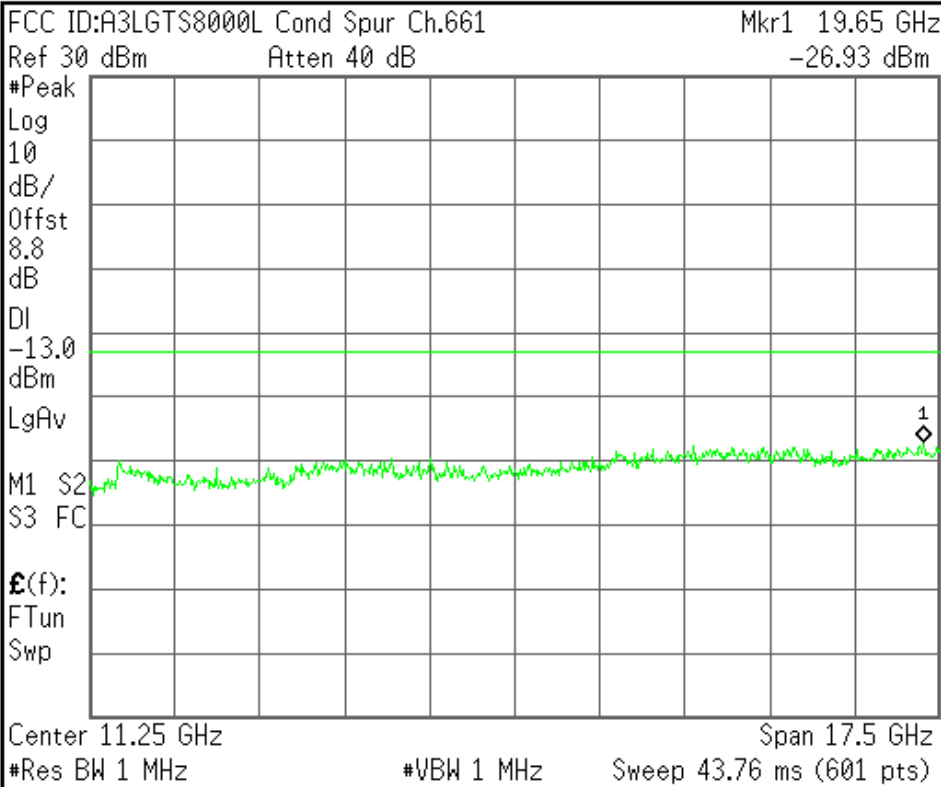


Center Freq 11.2500000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.0000000 GHz
CF Step 1.75000000 GHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

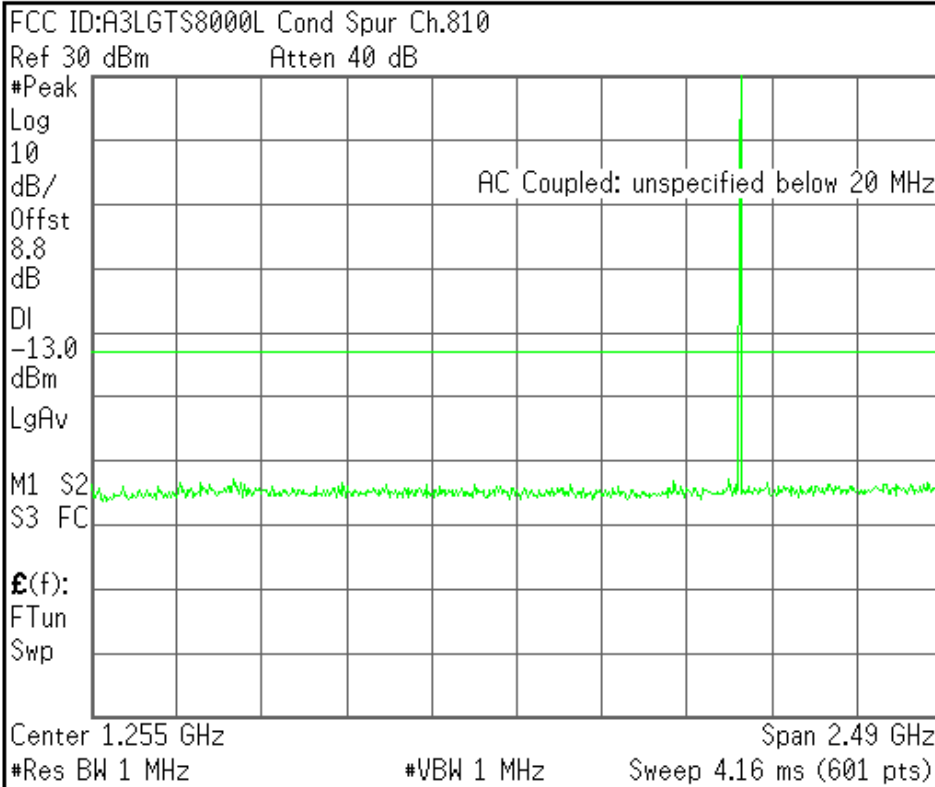


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

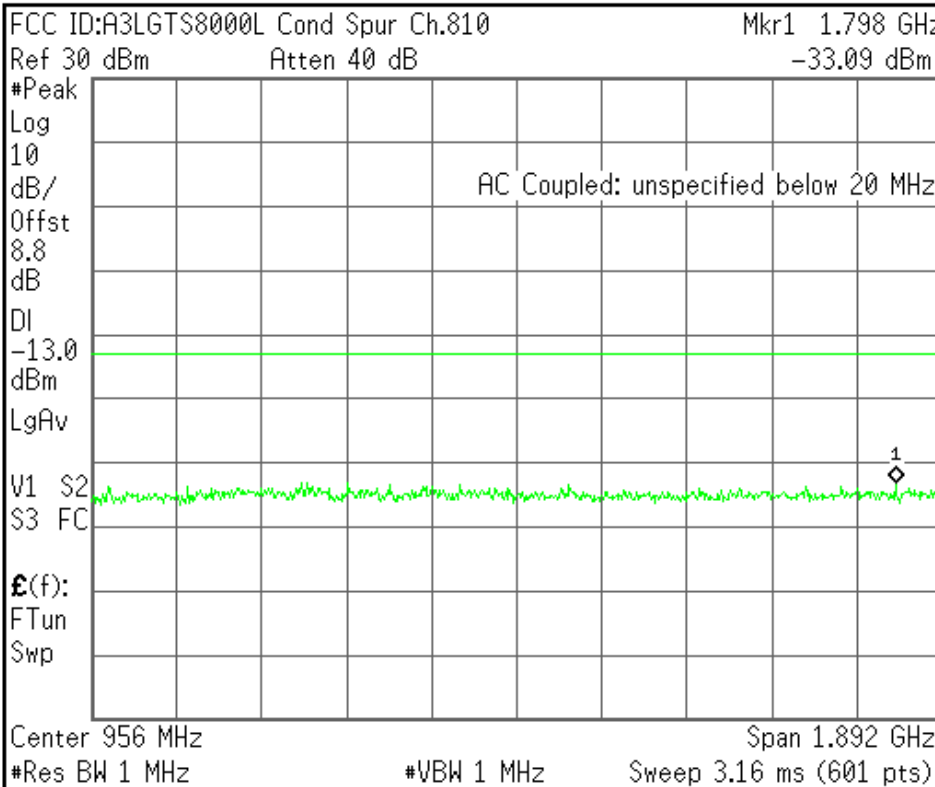


Center Freq 956.150000 MHz
Start Freq 10.0000000 MHz
Stop Freq 1.90230000 GHz
CF Step 189.230000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

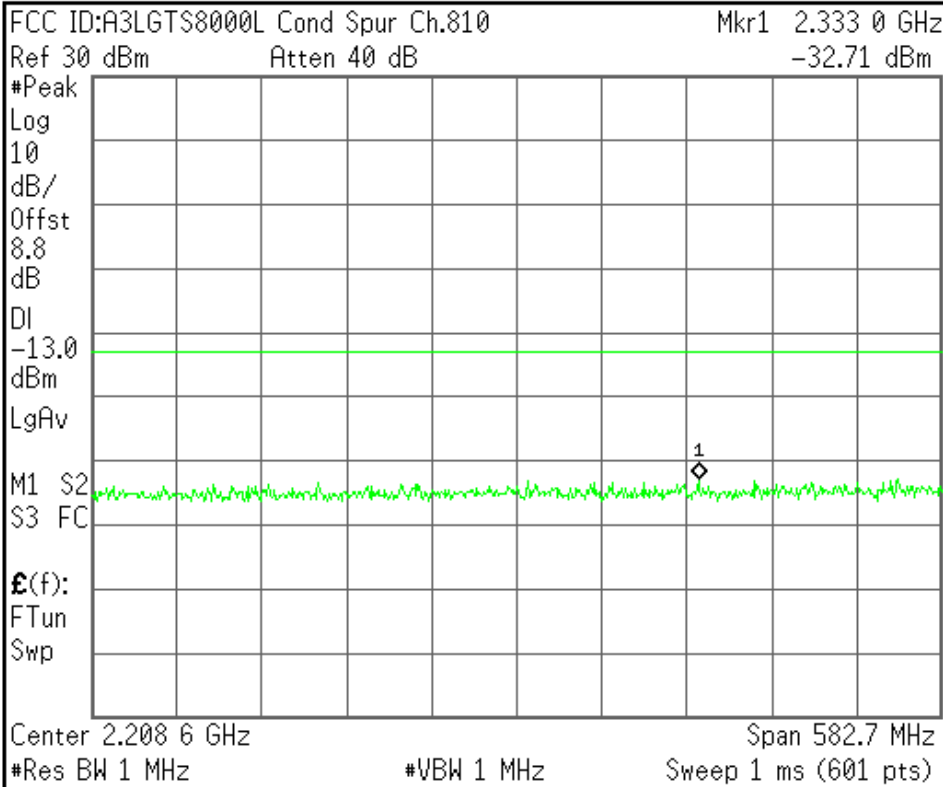


Center Freq 2.20865000 GHz
Start Freq 1.91730000 GHz
Stop Freq 2.50000000 GHz
CF Step 58.27000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

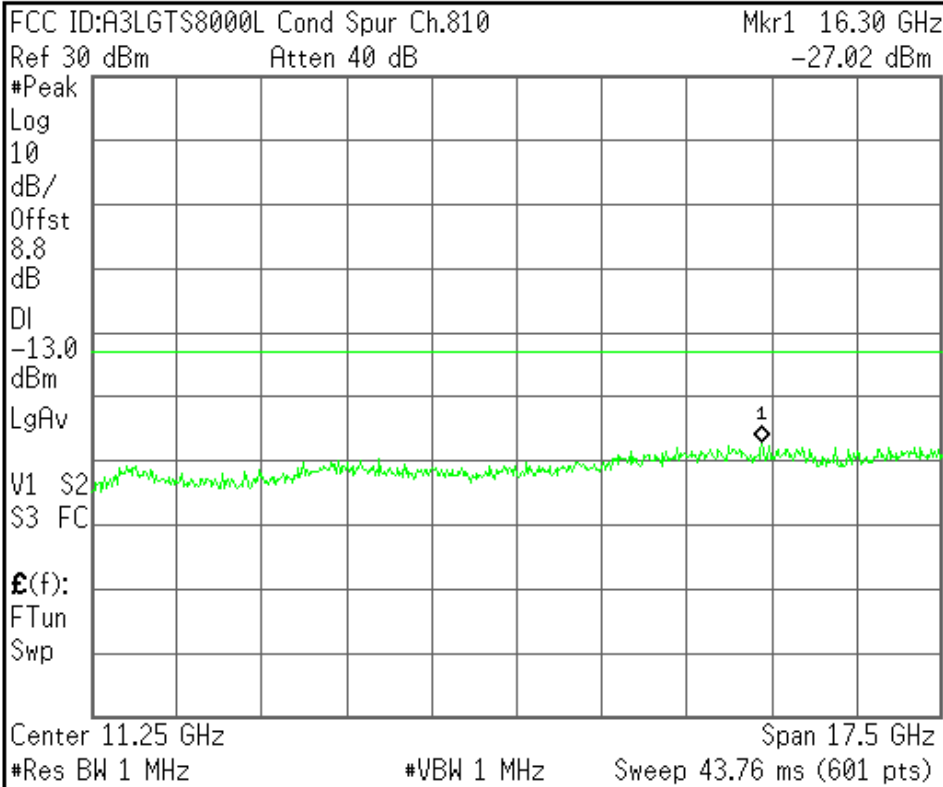

Center Freq 11.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.00000000 GHz
CF Step 1.75000000 GHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent


R T

Freq/Channel

FCC ID:A3LGT58000L Band Edge Ch.512

Ref 30 dBm Atten 40 dB

#Avg
Log
10
dB/
Offst
8.8
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

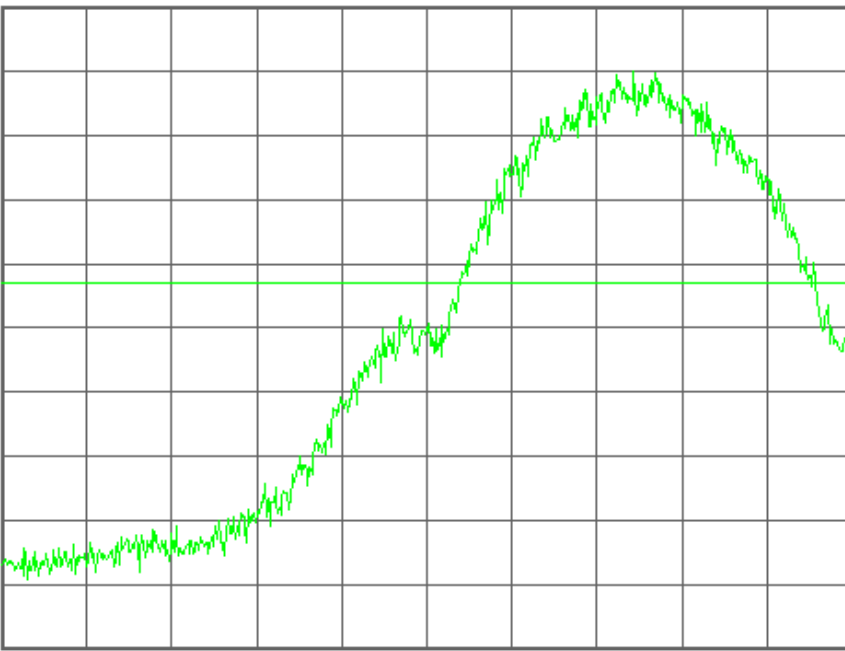

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel


FCC ID:A3LGT58000L Band Edge Ch.512

Mkr1 1.849 974 6 GHz

Ref 30 dBm Atten 40 dB

-18.18 dBm

#Avg
Log
10
dB/
Offst
8.8
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

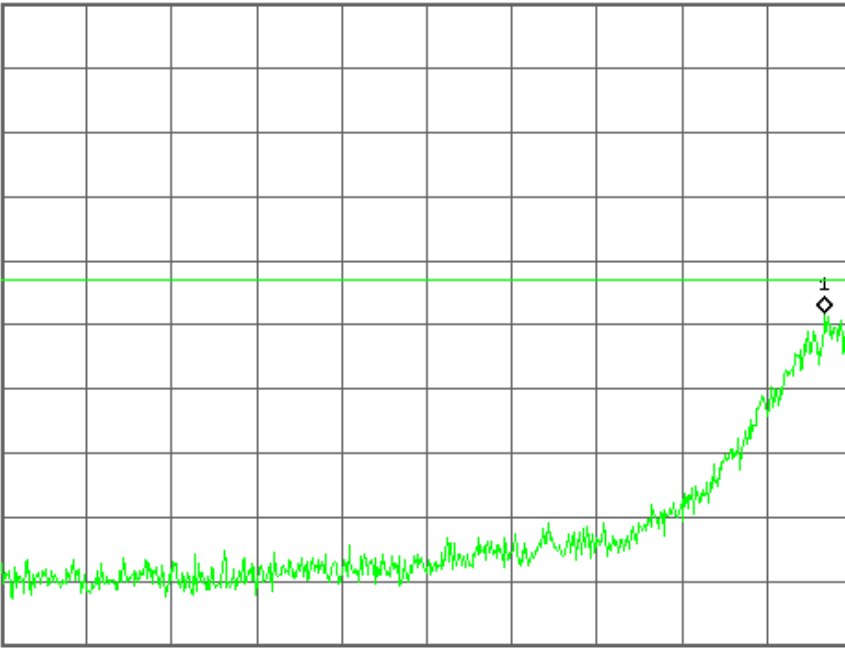

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.810

Ref 30 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

8.8

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

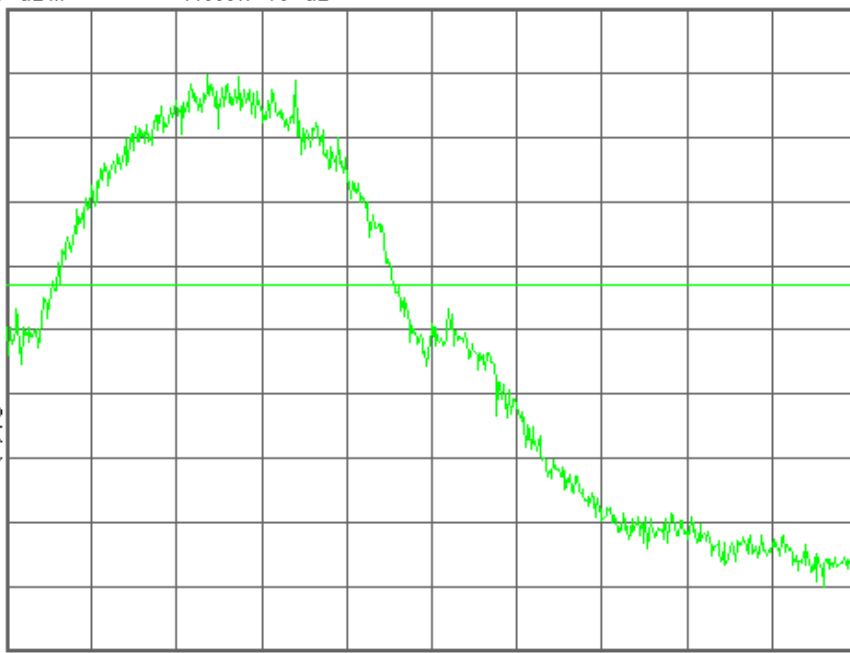

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.810

Mkr1 1.910 028 7 GHz

Ref 30 dBm Atten 40 dB

-18.83 dBm

#Avg

Log

10

dB/

Offst

8.8

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

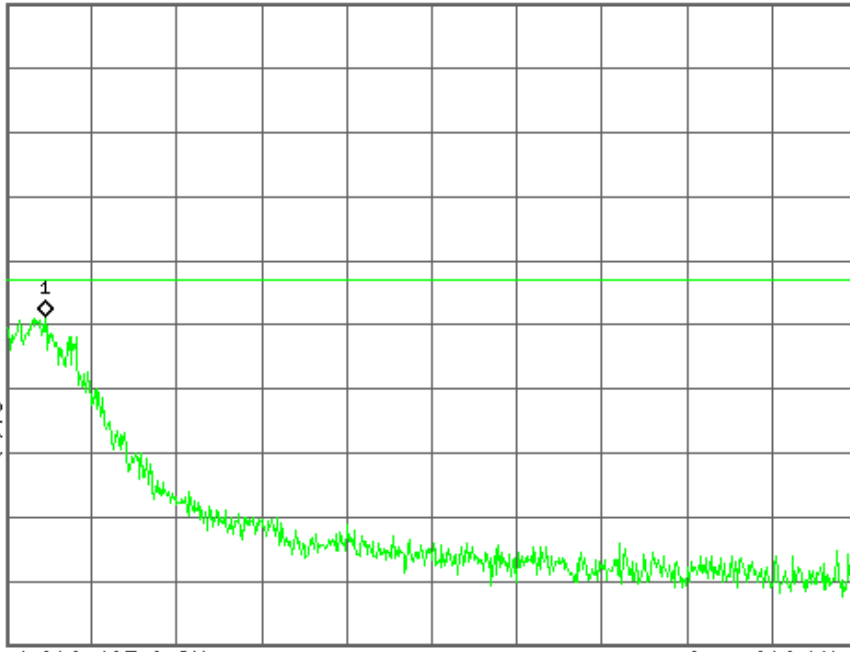

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

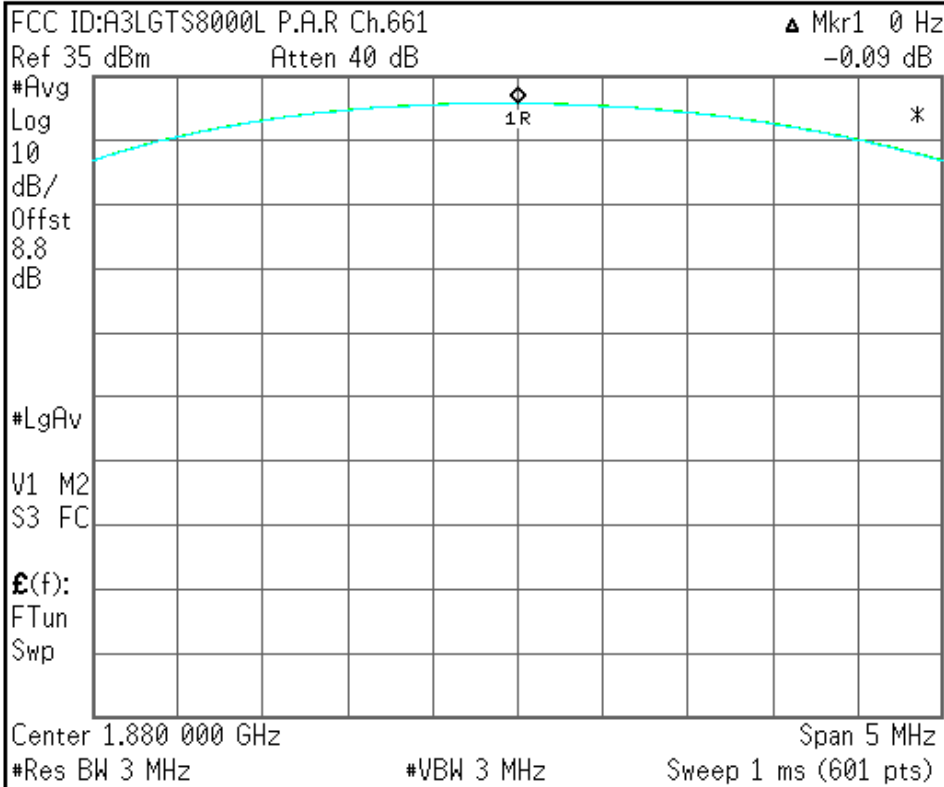

Center Freq 1.88000000 GHz
Start Freq 1.87750000 GHz
Stop Freq 1.88250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE850

Agilent

R T

Ch Freq 824.2 MHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTS8000L 0BW Ch.128 EDGE
Ref 27 dBm Atten 30 dB

Center 824.200 MHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
247.0710 kHz	x dB	-26.00 dB
Transmit Freq Error	-260.912 Hz	
x dB Bandwidth	304.074 kHz	

Freq/Channel

Center Freq
824.200000 MHz

Start Freq
823.700000 MHz

Stop Freq
824.700000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 836.6 MHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTS8000L 0BW Ch.190 EDGE
Ref 27 dBm Atten 30 dB

Center 836.600 MHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
244.8577 kHz	x dB	-26.00 dB
Transmit Freq Error	-437.946 Hz	
x dB Bandwidth	298.811 kHz	

Freq/Channel

Center Freq
836.600000 MHz

Start Freq
836.100000 MHz


Stop Freq
837.100000 MHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved
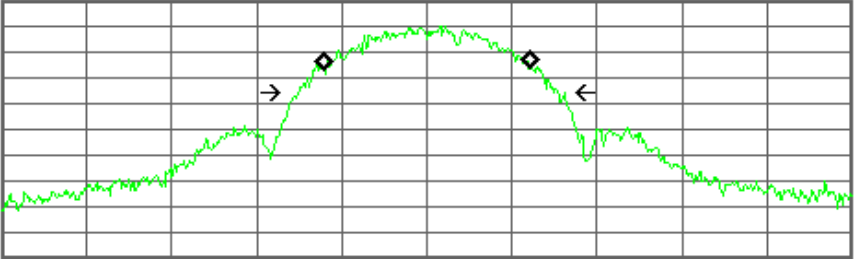
<p>Ch Freq 848.8 MHz Trig Free</p> <p>Occupied Bandwidth [] []</p> <hr/> <p>FCC ID:A3LGTS8000L 0BW Ch.251 EDGE Ref 27 dBm Atten 30 dB</p> <div style="border: 1px solid black; padding: 5px;"> <p>#Peak Log 10 dB/Offst 7.75 dB</p>  <p style="text-align: center;">Center 848.800 MHz Span 1 MHz</p> <p style="text-align: center;">#Res BW 3 kHz #VBW 3 kHz Sweep 134 ms (601 pts)</p> </div>	<p>Freq/Channel</p> <p>Center Freq 848.800000 MHz</p> <hr/> <p>Start Freq 848.300000 MHz</p> <hr/> <p>Stop Freq 849.300000 MHz</p> <hr/> <p>CF Step 100.000000 kHz Auto Man</p> <hr/> <p>Freq Offset 0.00000000 Hz</p> <hr/> <p>Signal Track On Off</p>
<p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p style="text-align: center; font-size: 1.2em;">246.8813 kHz x dB -26.00 dB</p> <p>Transmit Freq Error -13.228 Hz</p> <p>x dB Bandwidth 310.072 kHz</p>	
<p>File Operation Status, C:\TEMP.GIF file saved</p>	

FCC ID : A3LGTS8000L Transmit Power 128CH EDGE

Control	EGPRS Transmit Power	PDCH Parms																
<p>EGPRS Transmit Power Setup ▾</p>	<p>EPK Burst Power EPK Est Carrier Power</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">Minimum</td> <td style="text-align: center;">Maximum</td> <td style="text-align: center;">Minimum</td> <td style="text-align: center;">Maximum</td> </tr> <tr> <td style="text-align: center;">24.61 dBm</td> <td style="text-align: center;">25.82 dBm</td> <td style="text-align: center;">25.25 dBm</td> <td style="text-align: center;">25.28 dBm</td> </tr> <tr> <td style="text-align: center;">Average</td> <td style="text-align: center;">Std Dev</td> <td style="text-align: center;">Average</td> <td style="text-align: center;">Std Dev</td> </tr> <tr> <td style="text-align: center;">25.20 dBm</td> <td style="text-align: center;">0.22 dBm</td> <td style="text-align: center;">25.27 dBm</td> <td style="text-align: center;">0.00 dBm</td> </tr> </table> <p style="font-size: 0.8em;">200 /200 Single</p>	Minimum	Maximum	Minimum	Maximum	24.61 dBm	25.82 dBm	25.25 dBm	25.28 dBm	Average	Std Dev	Average	Std Dev	25.20 dBm	0.22 dBm	25.27 dBm	0.00 dBm	<p>Downlink Traffic Power ▾</p> <hr/> <p>Traffic Band GSM850</p> <hr/> <p>Traffic Channel 128</p> <hr/> <p>HS TX Level ▾</p> <hr/> <p>Modulation Coding Scheme ▾</p> <hr/> <p>Return</p>
Minimum	Maximum	Minimum	Maximum															
24.61 dBm	25.82 dBm	25.25 dBm	25.28 dBm															
Average	Std Dev	Average	Std Dev															
25.20 dBm	0.22 dBm	25.27 dBm	0.00 dBm															
	<p>Active Cell Transferring</p> <p>Sys Type: EGPRS</p>																	
1 of 2	<table style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <tr> <td style="border: 1px solid black;">IntRef</td> <td style="border: 1px solid black;">Offset</td> <td style="border: 1px solid black;">R</td> <td style="border: 1px solid black;">T</td> </tr> </table>	IntRef	Offset	R	T	1 of 2												
IntRef	Offset	R	T															

Control	EGPRS Transmit Power				PDCH Parms		
EGPRS Transmit Power Setup	EPSK Burst Power		EPSK Est Carrier Power		Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	24.45 dBm	25.84 dBm	25.26 dBm	25.29 dBm	GS1850		
	Average	Std Dev	Average	Std Dev	Traffic Channel		
25.21 dBm	0.24 dBm	25.28 dBm	0.01 dBm	190			
	200 /200				Single		
	Active Cell Transferring				NS TX Level		
					Sys Type: EGPRS		
					Modulation Coding Scheme		
					Return		
1 of 2			IntRef	Offset	R	T	1 of 2

Control	EGPRS Transmit Power				PDCH Parms		
EGPRS Transmit Power Setup	EPSK Burst Power		EPSK Est Carrier Power		Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	24.55 dBm	25.81 dBm	25.21 dBm	25.23 dBm	GS1850		
	Average	Std Dev	Average	Std Dev	Traffic Channel		
25.17 dBm	0.22 dBm	25.22 dBm	0.00 dBm	251			
	200 /200				Single		
	Active Cell Transferring				NS TX Level		
					Sys Type: EGPRS		
					Modulation Coding Scheme		
					Return		
1 of 2			IntRef	Offset	R	T	1 of 2

Agilent


R T

Freq/Channel

FCC ID:A3LGT\$8000L Band Edge Ch.128 EDGE

Ref 27 dBm Atten 30 dB

#Avg
Log
10
dB/
Offst
7.75
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

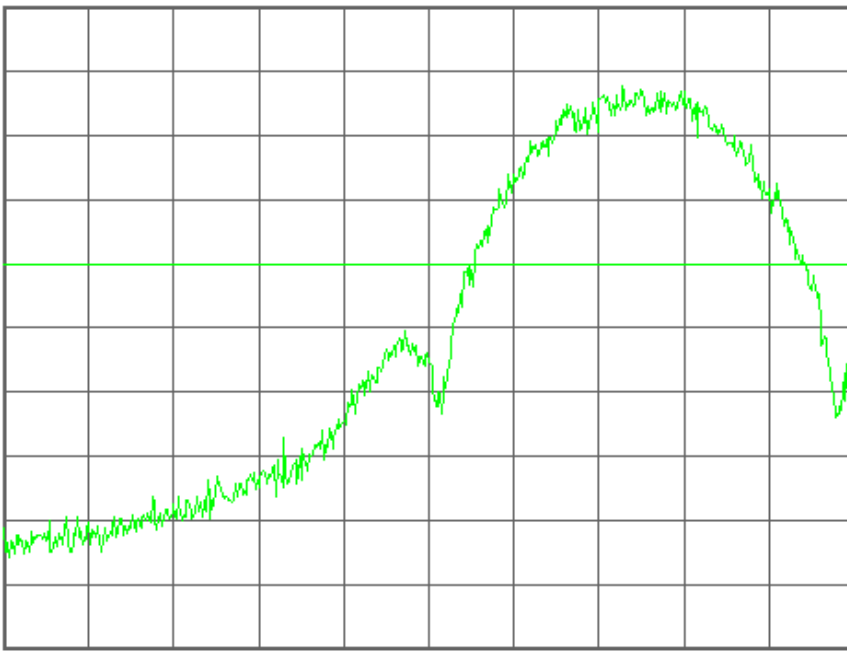

Center 824.000 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel


FCC ID:A3LGT\$8000L Band Edge Ch.128 EDGE

Mkr1 823.982 6 MHz

Ref 27 dBm Atten 30 dB

-22.94 dBm

#Avg
Log
10
dB/
Offst
7.75
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

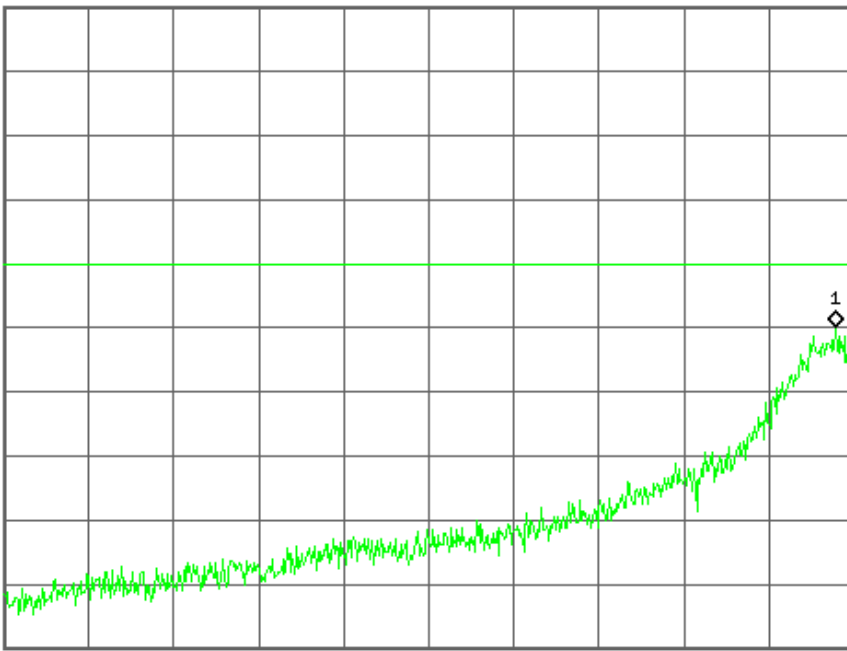

Center 823.595 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent


R T

Freq/Channel

FCC ID:A3LGTS8000L Band Edge Ch.251 EDGE

Ref 27 dBm Atten 30 dB

#Avg
Log
10
dB/
Offst
7.75
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

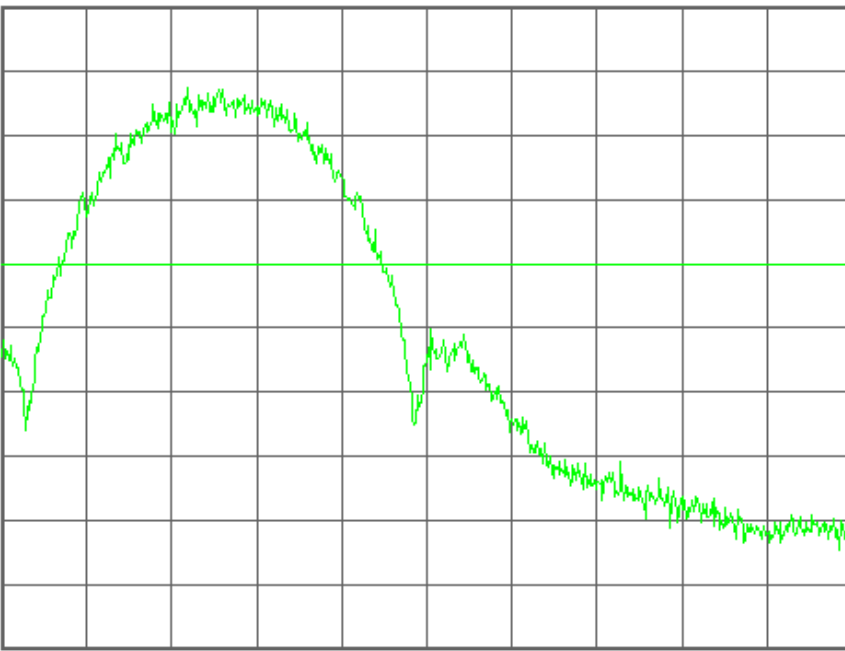

Center 849.000 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel


FCC ID:A3LGTS8000L Band Edge Ch.251 EDGE

Mkr1 849.024 1 MHz

Ref 27 dBm Atten 30 dB

-25.28 dBm

#Avg
Log
10
dB/
Offst
7.75
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

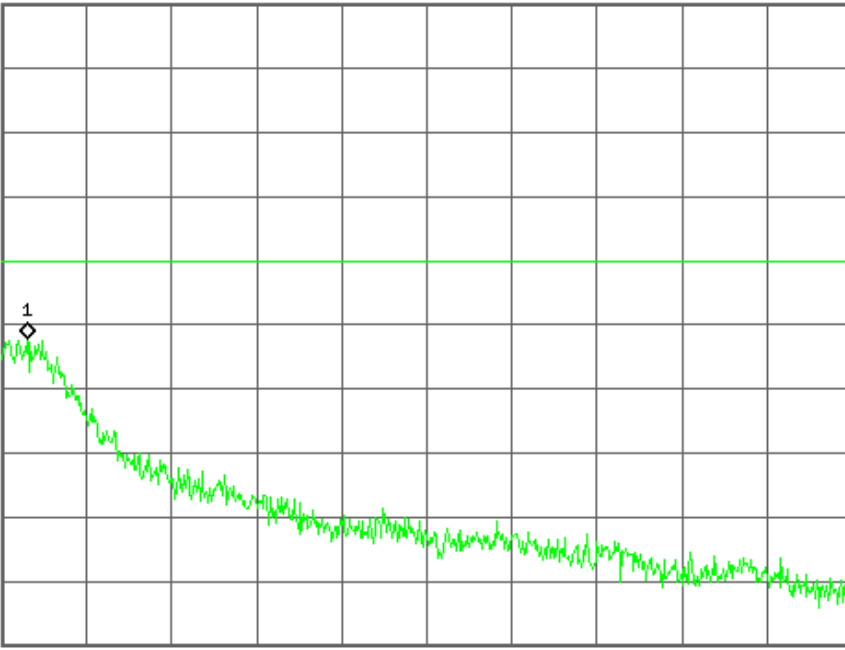

Center 849.405 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Ch Freq 1.8502 GHz	Trig Free
Occupied Bandwidth 	
FCC ID:A3LGTS8000L 0BW Ch.512 EDGE Ref 26 dBm Atten 30 dB	
Occupied Bandwidth 245.0568 kHz	Occ BW % Pwr 99.00 % x dB -26.00 dB
Transmit Freq Error 1.025 kHz	
x dB Bandwidth 308.006 kHz	

Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Ch Freq 1.88 GHz	Trig Free
Occupied Bandwidth 	
FCC ID:A3LGTS8000L 0BW Ch.661 EDGE Ref 26 dBm Atten 30 dB	
Occupied Bandwidth 243.1621 kHz	Occ BW % Pwr 99.00 % x dB -26.00 dB
Transmit Freq Error 48.503 Hz	
x dB Bandwidth 305.742 kHz	

Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Ch Freq 1.9098 GHz		Trig Free	
Occupied Bandwidth			
FCC ID:A3LGTS8000L 0BW Ch.810 EDGE Ref 26 dBm Atten 30 dB			
#Res BW 3 kHz		#VBW 3 kHz Sweep 134 ms (601 pts)	
Occupied Bandwidth		Occ BW % Pwr 99.00 %	
248.5914 kHz		x dB -26.00 dB	
Transmit Freq Error 638.760 Hz			
x dB Bandwidth 304.092 kHz			
File Operation Status, C:\TEMP.GIF file saved			

Freq/Channel
Center Freq 1.90980000 GHz
Start Freq 1.90930000 GHz
Stop Freq 1.91030000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

FCC ID : A3LGTS8000L Transmit Power 512CH EDGE

Control	EGPRS Transmit Power				PDCH Parms	
EGPRS Transmit Power Setup	EPsk Burst Power		EPsk Est Carrier Power		Downlink Traffic Power	
	Minimum	Maximum	Minimum	Maximum	Traffic Band	
	24.27 dBm	25.53 dBm	25.00 dBm	25.01 dBm	PCS	
	Average	Std Dev	Average	Std Dev	Traffic Channel	
	24.95 dBm	0.23 dBm	25.00 dBm	0.00 dBm	512	
	200 /200		Single		HS TX Level	
					Modulation Coding Scheme	
					Return	
	Active Cell Transferring			Sys Type: EGPRS		
1 of 2			IntRef	Offset	R T	1 of 2

Control	EGPRS Transmit Power				PDCH Parms		
EGPRS Transmit Power Setup	EPSK Burst Power		EPSK Est Carrier Power		Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	24.37 dBm	25.51 dBm	25.00 dBm	25.02 dBm	PCS		
	Average	Std Dev	Average	Std Dev	Traffic Channel		
24.98 dBm	0.22 dBm	25.01 dBm	0.00 dBm	661			
	200 /200				Single		
	Active Cell Transferring				NS TX Level		
					Sys Type: EGPRS		
					Modulation Coding Scheme		
					Return		
1 of 2			IntRef	Offset	R	T	1 of 2

Control	EGPRS Transmit Power				PDCH Parms		
EGPRS Transmit Power Setup	EPSK Burst Power		EPSK Est Carrier Power		Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	24.40 dBm	25.57 dBm	25.05 dBm	25.06 dBm	PCS		
	Average	Std Dev	Average	Std Dev	Traffic Channel		
24.99 dBm	0.23 dBm	25.06 dBm	0.00 dBm	810			
	200 /200				Single		
	Active Cell Transferring				NS TX Level		
					Sys Type: EGPRS		
					Modulation Coding Scheme		
					Return		
1 of 2			IntRef	Offset	R	T	1 of 2


Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.512 EDGE

Ref 26 dBm Atten 30 dB

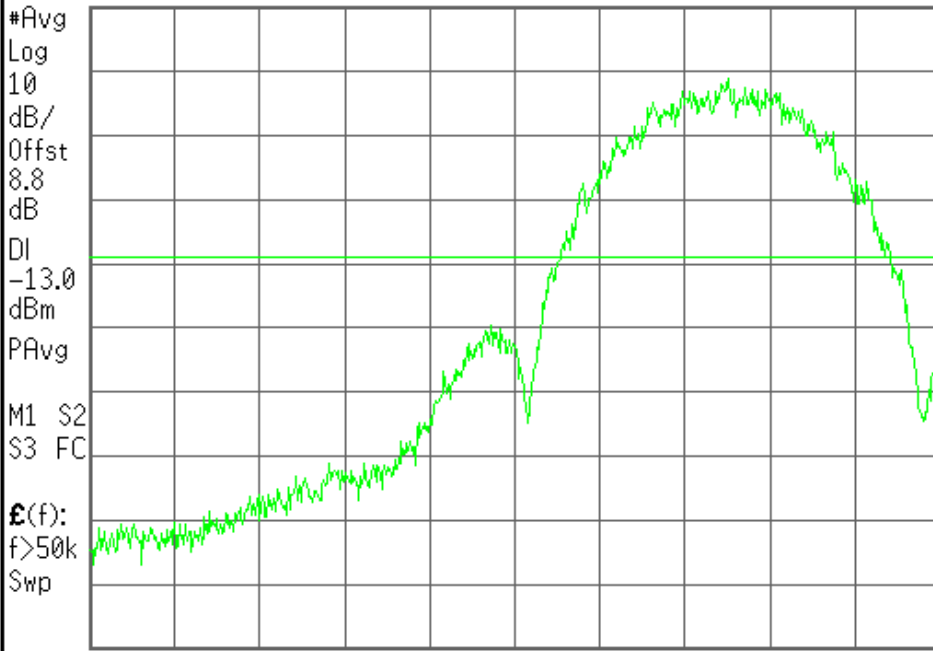

Center 1.850 000 0 GHz Span 810 kHz

#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T


Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.512 EDGE

Mkr1 1.849 985 3 GHz

Ref 26 dBm Atten 30 dB

-23.89 dBm

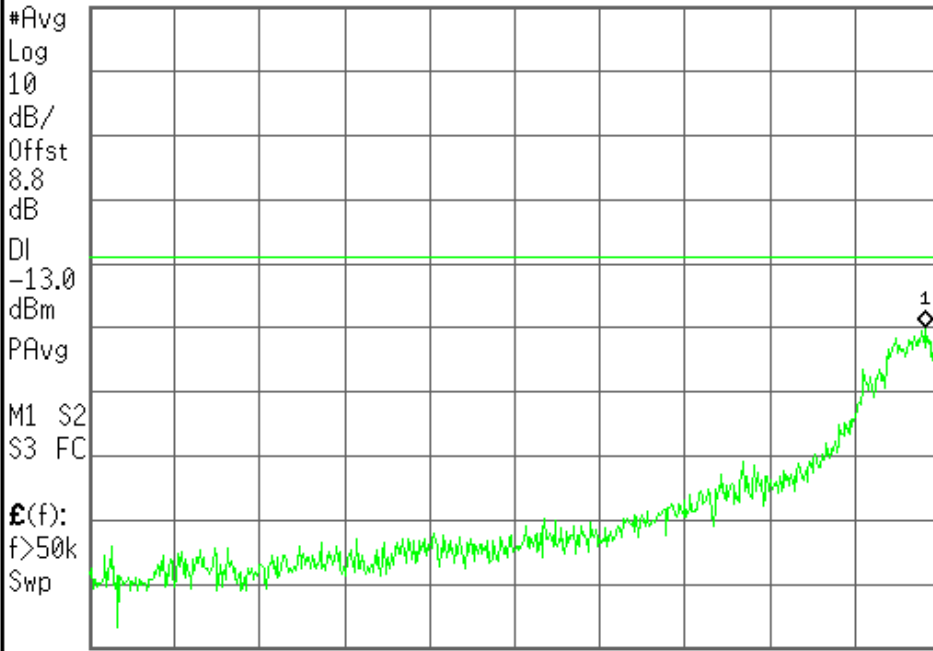

Center 1.849 595 0 GHz Span 810 kHz

#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.810 EDGE

Ref 26 dBm Atten 30 dB

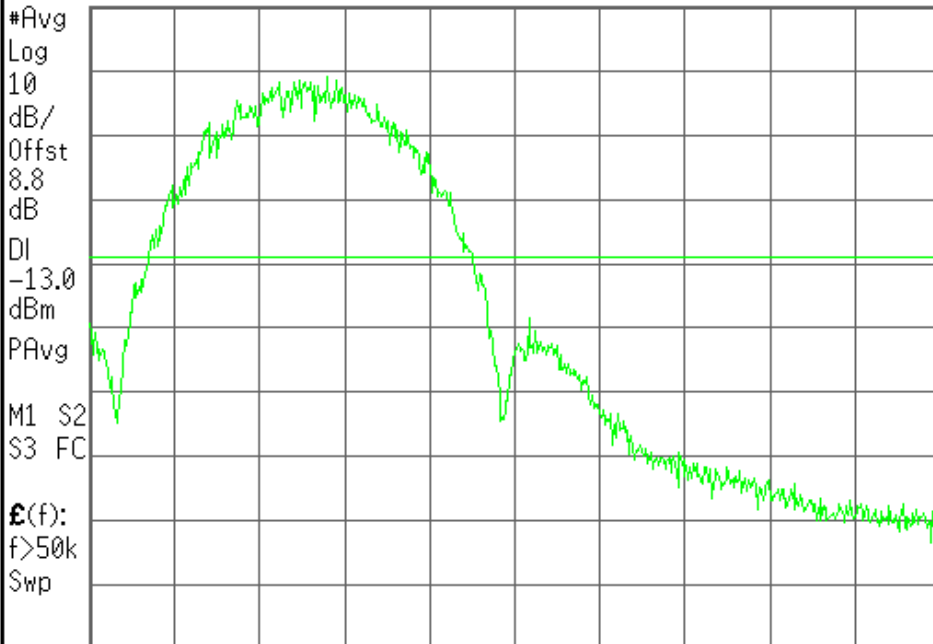

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.910 000 0 GHz Span 810 kHz

#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGT8000L Band Edge Ch.810 EDGE

Mkr1 1.910 012 0 GHz

Ref 26 dBm Atten 30 dB

-23.39 dBm

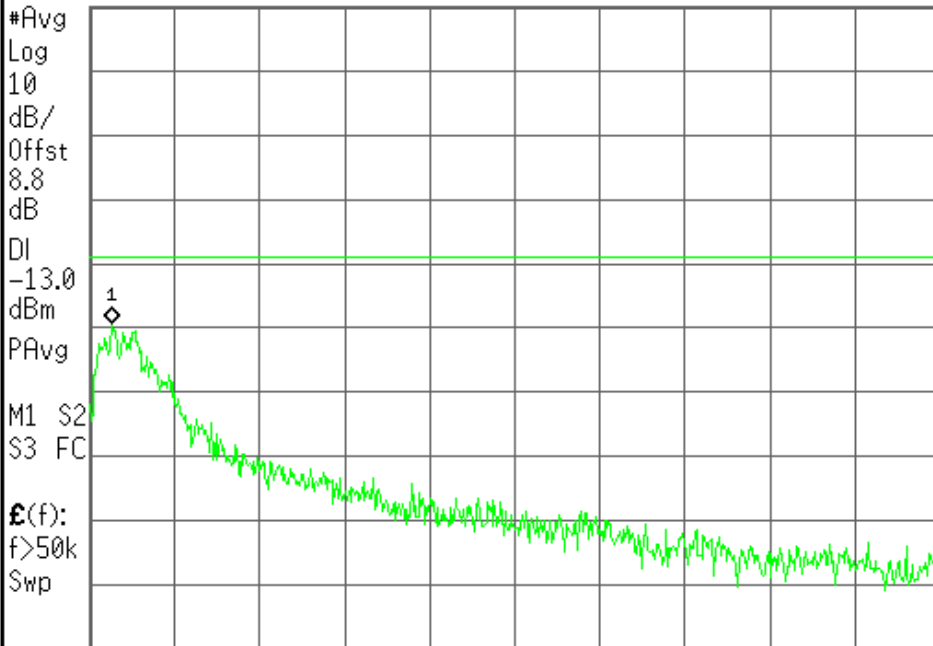

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.910 405 0 GHz Span 810 kHz


#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

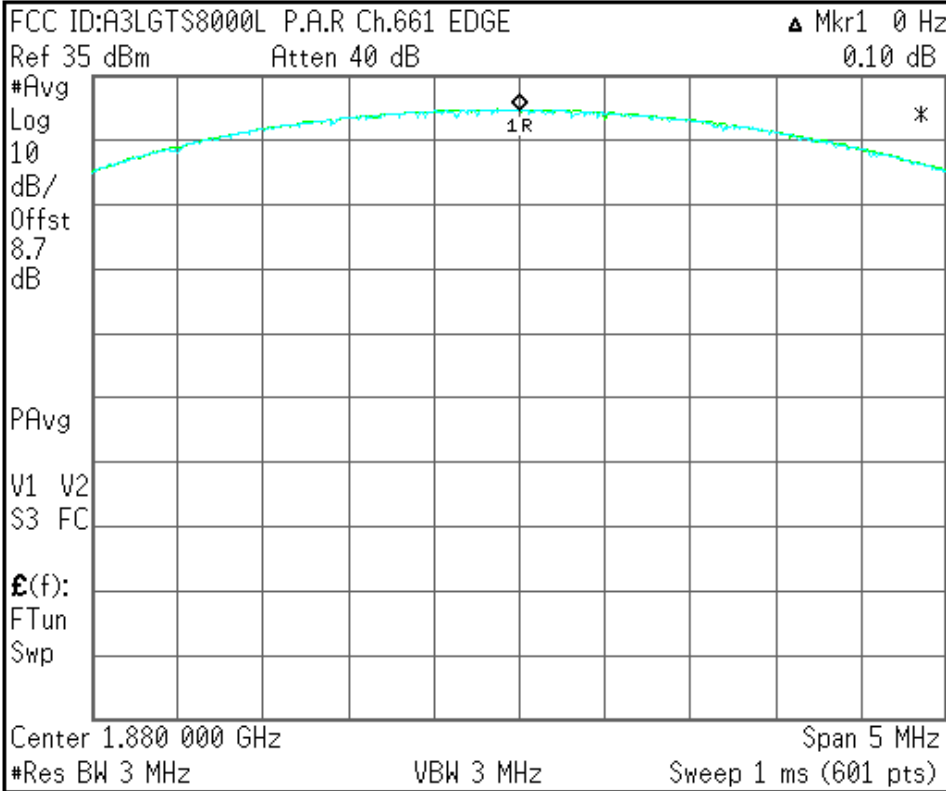

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2006 Agilent Technologies