



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S8500B
FCC ID (Requested) : A3LGTS8500B
Report No : FH-059-R1
Job No : FH-059
Date issued : April 19, 2010

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

JH HAN – Test Engineer

Authorized By

WT JANG – Technical Manager



TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)	16
6.4. GSM850 Radiated Spurious & Harmonic measurement	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph	25
7. CONCLUSION	27
8. TEST PLOTS	28



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC I : A3LGTS8500B
- Model : GT-S8500B
- Quantity : Quantity production is planned
- Emission Designators : 250KGXW(GSM850), 243KG7W(GSM850 EDGE)
248KGXW(GSM1900), 243KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.948 W ERP GSM850 (29.77 dBm)
1.393 W EIRP GSM1900 (31.44 dBm)
0.325 W ERP GSM850 EDGE(25.12dBm)
1.042 W EIRP GSM1900 EDGE(30.18dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE/GPRS and 850 WCDMA Phone with
Bluetooth and WLAN
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : April 5-6, 2010
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FH-059-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2010-10-20
	E4440A(3Hz~26.5GHz)	MY46187454	2011-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2011-04-13
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2010-12-15
Communication test set	8960	MY47510060	2011-03-08
	8960	GB42230535	2010-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	360306/011	2010-06-13
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2011-03-05
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2010-11-11
	SH-241	92000548	2010-11-11
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

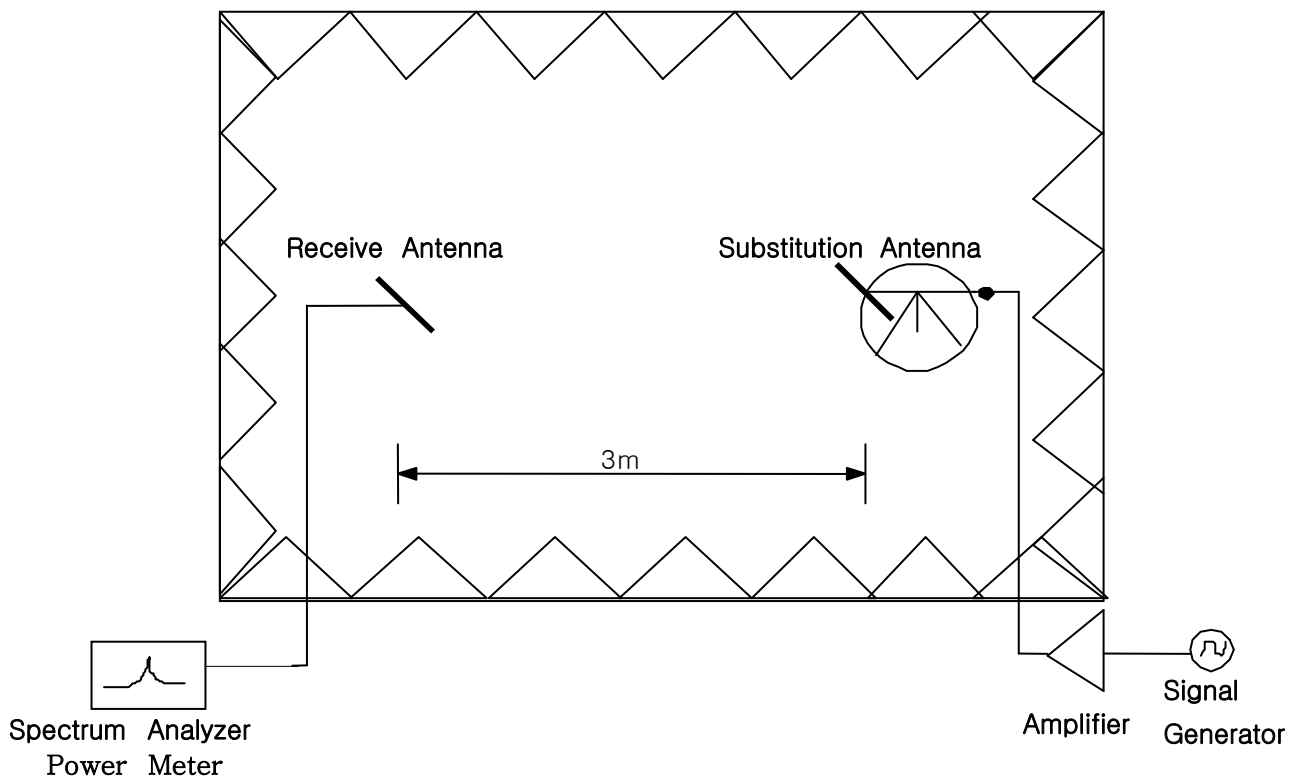


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

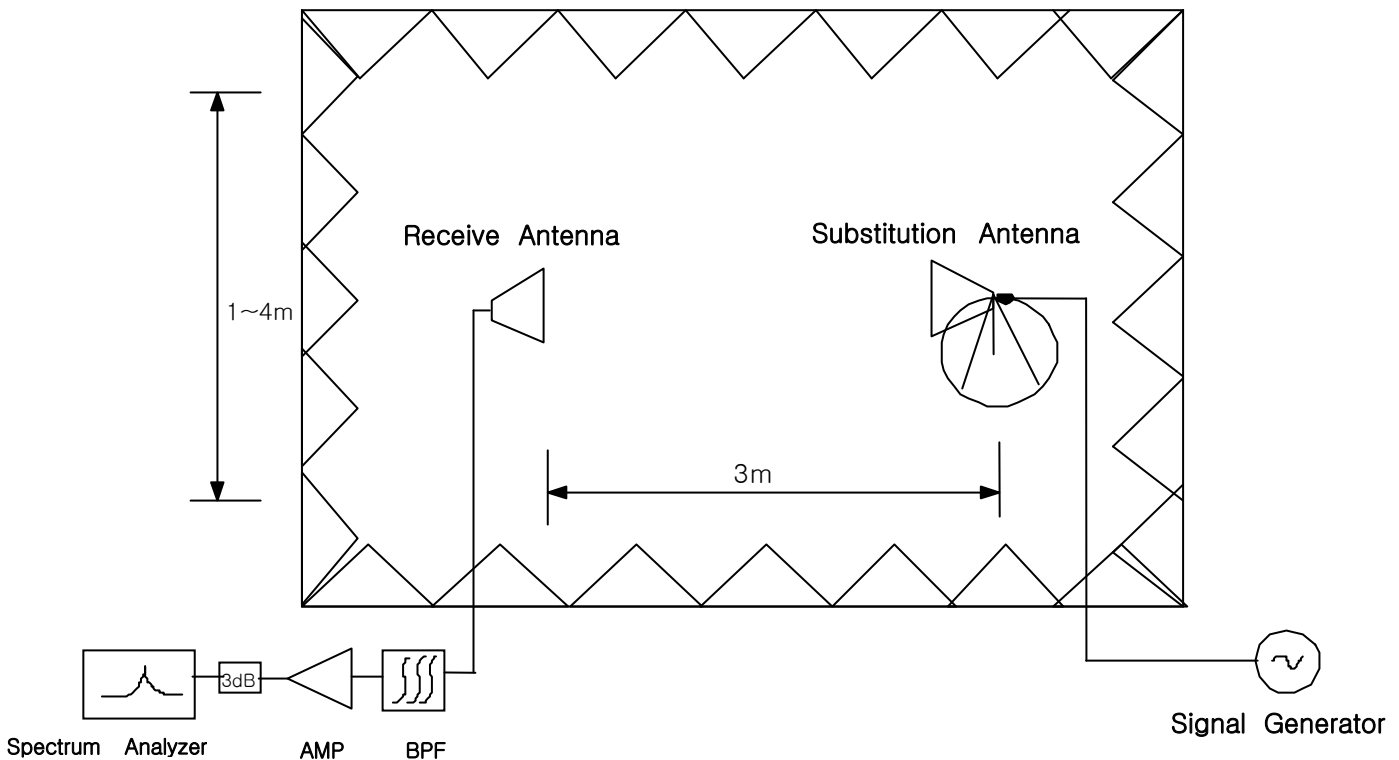


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (0.948 \text{ W}) = 42.77 \text{ dB}$$

$$29.77 \text{ dBm} - 42.77 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to $+60^{\circ}\text{C}$ using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to $+60^{\circ}\text{C}$ allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS and 850 WCDMA Phone with Bluetooth and WLAN FCC ID: A3LGTS8500B. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits all set to “1” and in GSM mode and using a Power Control Level of “0” in the PCS BAND and “5” in the Cellular Band. The GSM and WCDMA conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.19	28.93	28.98	25.81	24.49
	661	28.99	28.68	28.78	25.65	24.31
	810	29.17	28.84	28.94	25.78	24.47
Cellular	128	32.16	31.94	31.96	28.87	27.58
	190	32.07	31.88	31.9	28.8	27.51
	251	32.04	31.85	31.87	28.74	27.47

Table 6-1 GSM Conducted Output Powers

6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
824.20	28.00	H	-8.48	-0.67	-7.81
		V	-9.30	-0.67	-8.63
836.60	28.00	H	-8.97	-0.73	-8.24
		V	-9.24	-0.73	-8.51
848.80	30.00	H	-9.10	-0.79	-8.31
		V	-8.30	-0.79	-7.51

Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-8.19	H	285/100	27.62	0.578	Standard
836.60	-7.86	H	286/115	28.38	0.689	Standard
848.80	-8.54	H	85/25	29.77	0.948	Standard

EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-13.28	H	85/25	25.12	0.325	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method



6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	30.00	H	-9.32	9.60	-18.92
		V	-8.91	9.60	-18.51
1880.00	31.00	H	-7.95	9.60	-17.55
		V	-8.32	9.60	-17.92
1909.80	31.00	H	-8.49	9.60	-18.09
		V	-8.17	9.60	-17.77

Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.10	H	121/180	29.82	0.959	Standard
1880.00	-18.12	V	211/80	30.80	1.202	Standard
1909.80	-17.33	V	213/90	31.44	1.393	Standard

EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1909.80	-18.59	V	213/90	30.18	1.042	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 29.77 dBm = 0.948 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 42.77$ dBc

Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-62.22	V	80.03
	3	2472.60	-62.26	H	75.47
	4	3296.80	-66.90	H	76.42
	5	4121.00	-67.66	H	73.90
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-64.59	V	80.87
	3	2509.80	-62.51	V	75.78
	4	3346.40	-65.79	H	75.24
	5	4183.00	-67.66	V	73.46
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-62.09	V	79.25
	3	2546.40	-60.74	V	72.71
	4	3395.20	-66.73	V	76.18
	5	4244.00	-67.87	V	73.71
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 31.44 dBm = 1.393 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 44.44$ dBc

Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-66.78	V	74.65
	3	5550.60	-66.45	V	68.09
	4	7400.80	-68.13	V	65.61
	5	9251.00	-68.44	V	61.74
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-66.91	H	74.27
	3	5640.00	-66.06	H	67.77
	4	7520.00	-68.04	H	65.36
	5	9400.00	-68.88	V	61.10
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-65.20	H	71.33
	3	5729.40	-67.03	H	67.99
	4	7639.20	-68.75	V	65.75
	5	9549.00	-69.18	H	61.02
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method



6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2010. 04. 06

Test Engineer : JH HAN

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-63.61	-62.22	81.28	80.03
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-62.26	-65.50	75.47	78.96
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-66.90	-66.94	76.85	76.42
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-67.66	-67.89	73.97	73.90
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
	190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-65.37	-64.59	82.54
3		2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-62.97	-62.51	76.19	75.78
4		3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-65.79	-66.28	75.24	75.59
5		4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-67.67	-67.66	73.91	73.46
6		5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
7		5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251		2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-63.03	-62.09	79.99
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-62.07	-60.74	75.40	72.71
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-67.25	-66.73	76.99	76.18
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-68.15	-67.87	74.25	73.71
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-



6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2010. 04. 06

Test Engineer : JH HAN

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-67.71	-66.78	75.21	74.65
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-66.52	-66.45	68.28	68.09
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-68.59	-68.13	65.70	65.61
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-69.09	-68.44	61.74	62.43
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
	661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-66.91	-67.19	74.27
3		5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-66.06	-67.39	67.77	68.75
4		7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-68.04	-68.33	65.36	65.82
5		9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-68.91	-68.88	61.60	61.10
6		11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
7		13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810		2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-65.20	-65.57	71.62
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-67.03	-67.11	67.99	68.06
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-68.82	-68.75	65.97	65.75
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-69.18	-69.29	61.02	61.65
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-23.50	836,599,977	-0.000003	-0.028
100%		-30	-3.20	836,599,997	0.000000	-0.004
100%		-20	-33.20	836,599,967	-0.000004	-0.040
100%		-10	0.50	836,600,001	0.000000	0.001
100%		0	21.70	836,600,022	0.000003	0.026
100%		+10	-25.10	836,599,975	-0.000003	-0.030
100%		+20	-23.50	836,599,977	-0.000003	-0.028
100%		+30	-26.60	836,599,973	-0.000003	-0.032
100%		+40	27.80	836,600,028	0.000003	0.033
100%		+50	30.00	836,600,030	0.000004	0.036
100%		+60	-6.80	836,599,993	-0.000001	-0.008
85%		3.35	+20	27.50	836,600,028	0.000003
115%	4.26	+20	22.90	836,600,023	0.000003	0.027
Batt.Endpoint	3.35	+20	27.50	836,600,028	0.000003	0.033


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

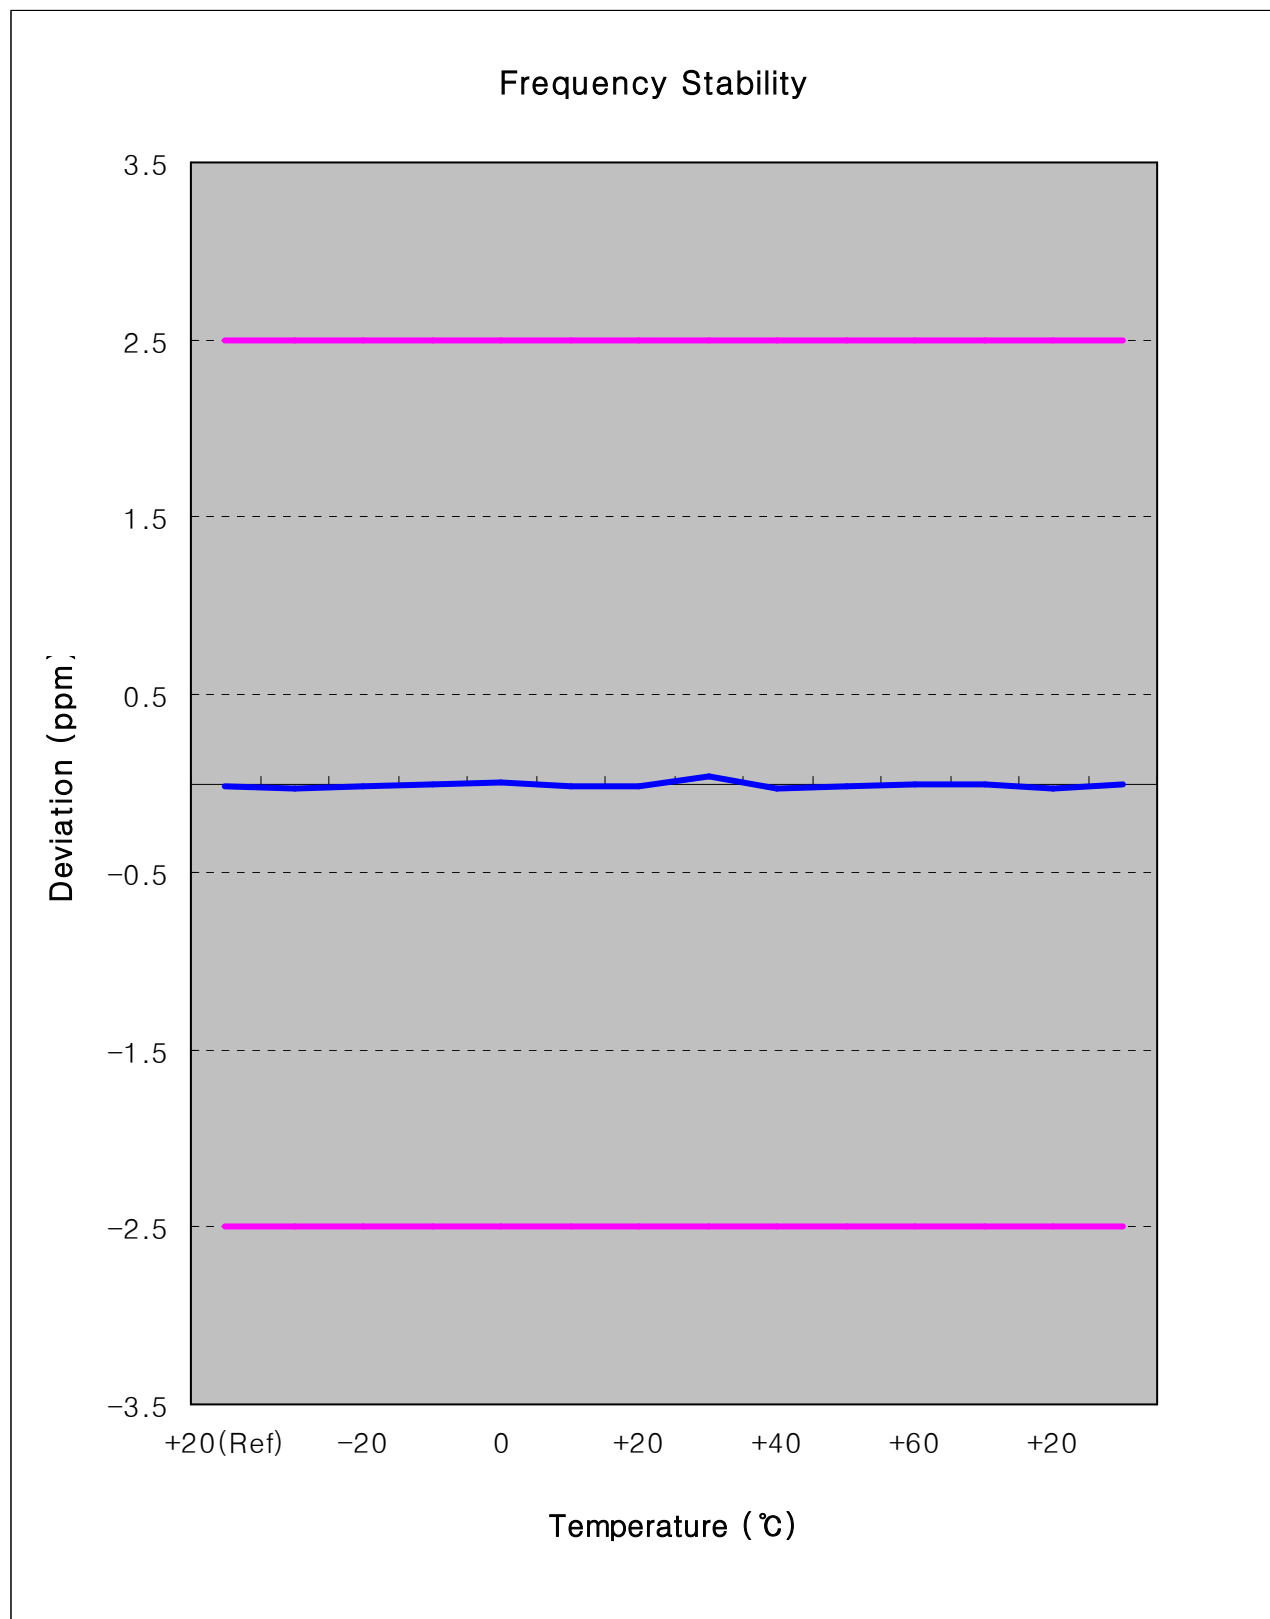

Zoom IN

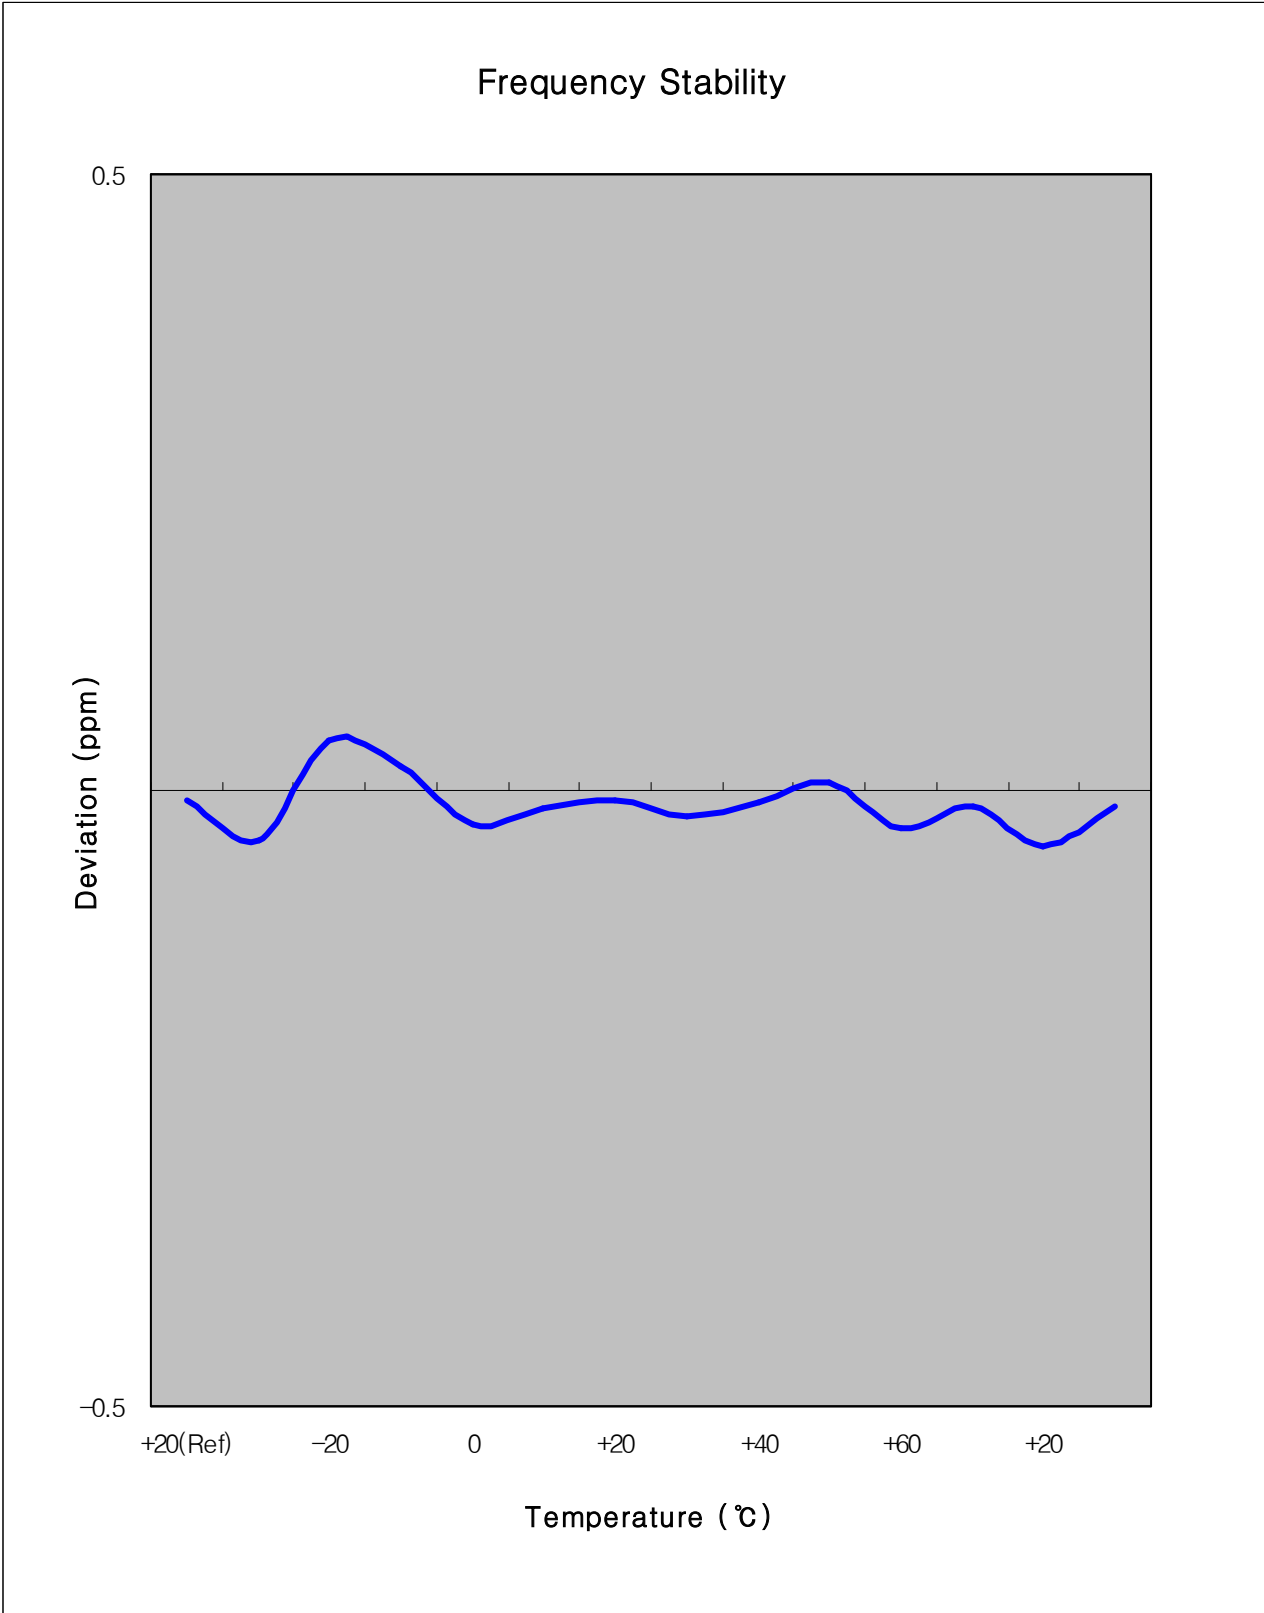



GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-23.90	1,879,999,976	-0.000001	-0.013
100%		-30	12.50	1,880,000,013	0.000001	0.007
100%		-20	-10.50	1,879,999,990	-0.000001	-0.006
100%		-10	-14.10	1,879,999,986	-0.000001	-0.008
100%		0	-37.70	1,879,999,962	-0.000002	-0.020
100%		+10	14.00	1,880,000,014	0.000001	0.007
100%		+20	-23.90	1,879,999,976	-0.000001	-0.013
100%		+30	-34.20	1,879,999,966	-0.000002	-0.018
100%		+40	12.00	1,880,000,012	0.000001	0.006
100%		+50	30.30	1,880,000,030	0.000002	0.016
100%		+60	15.30	1,880,000,015	0.000001	0.008
85%		3.35	+20	2.60	1,880,000,003	0.000000
115%	4.26	+20	39.00	1,880,000,039	0.000002	0.021
Batt.Endpoint	3.35	+20	2.60	1,880,000,003	0.000000	0.001


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.3. GSM1900 Frequency Stability Graph

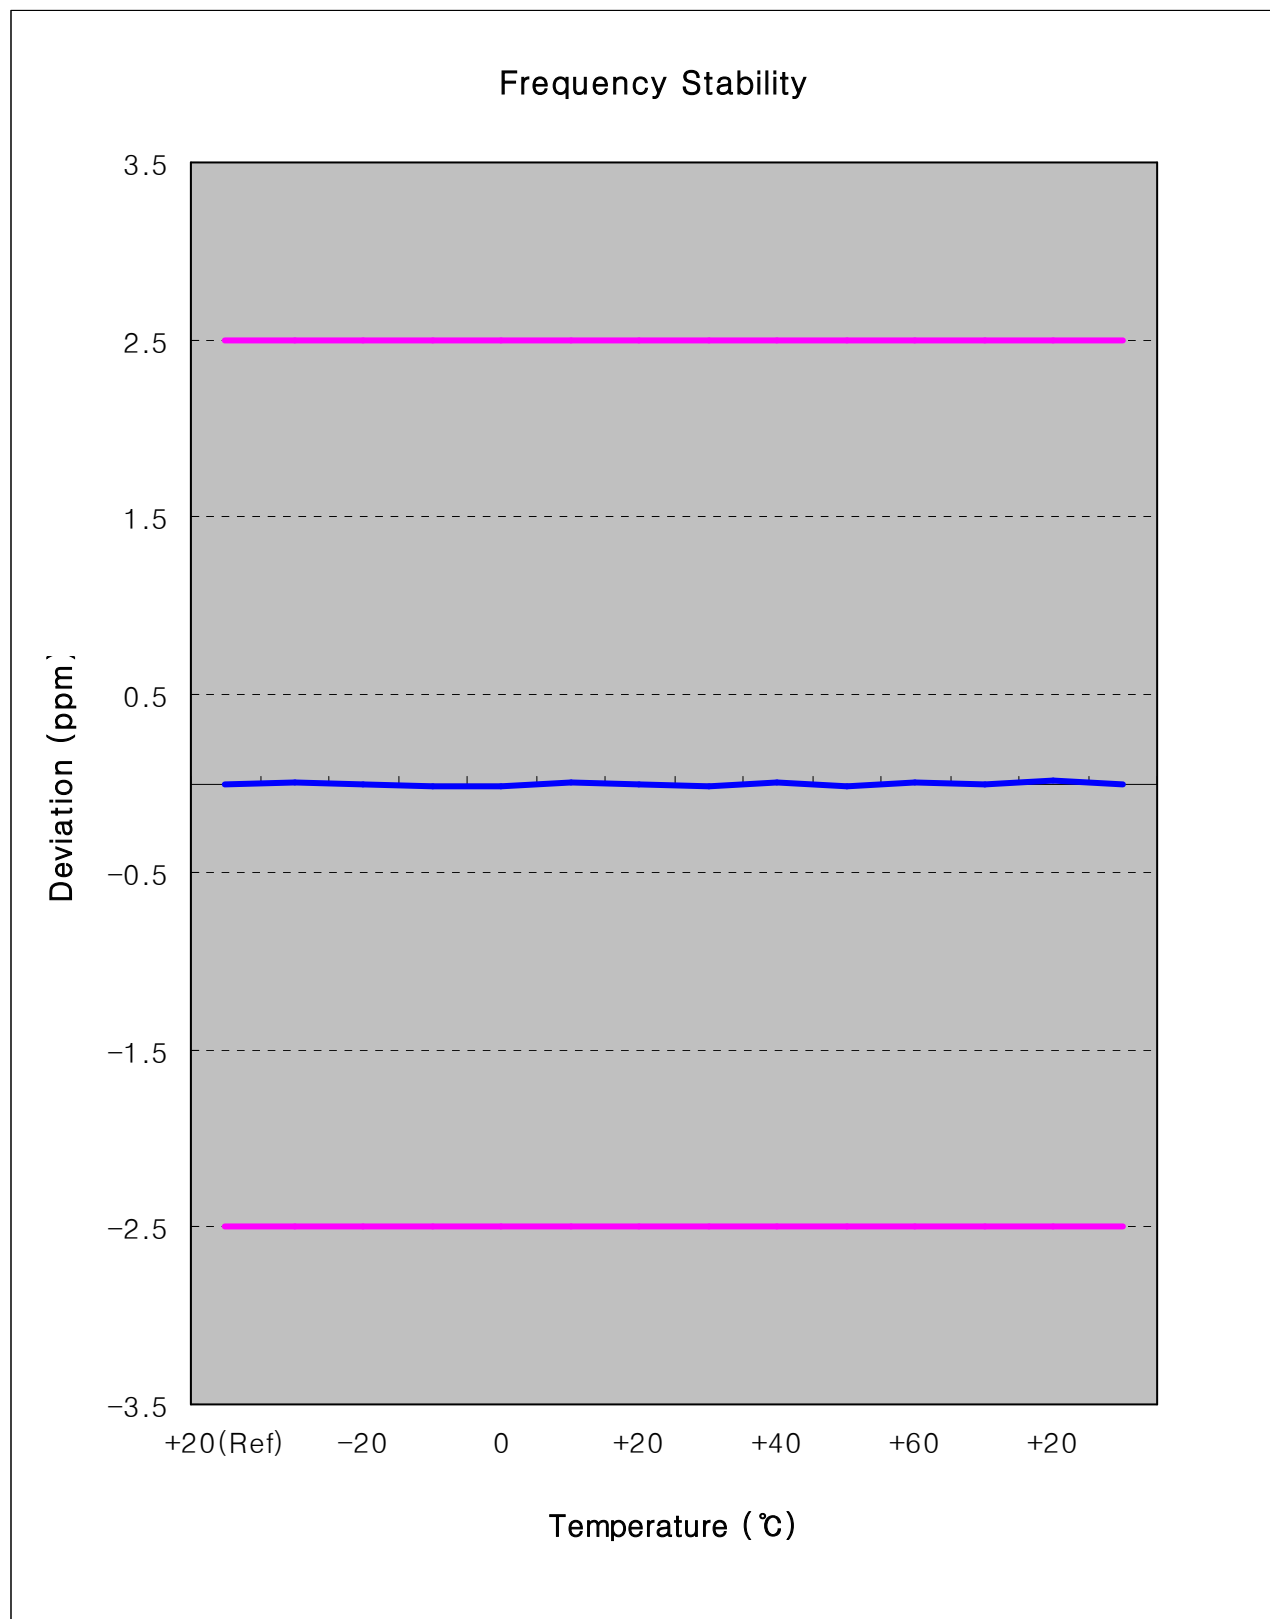

Zoom IN

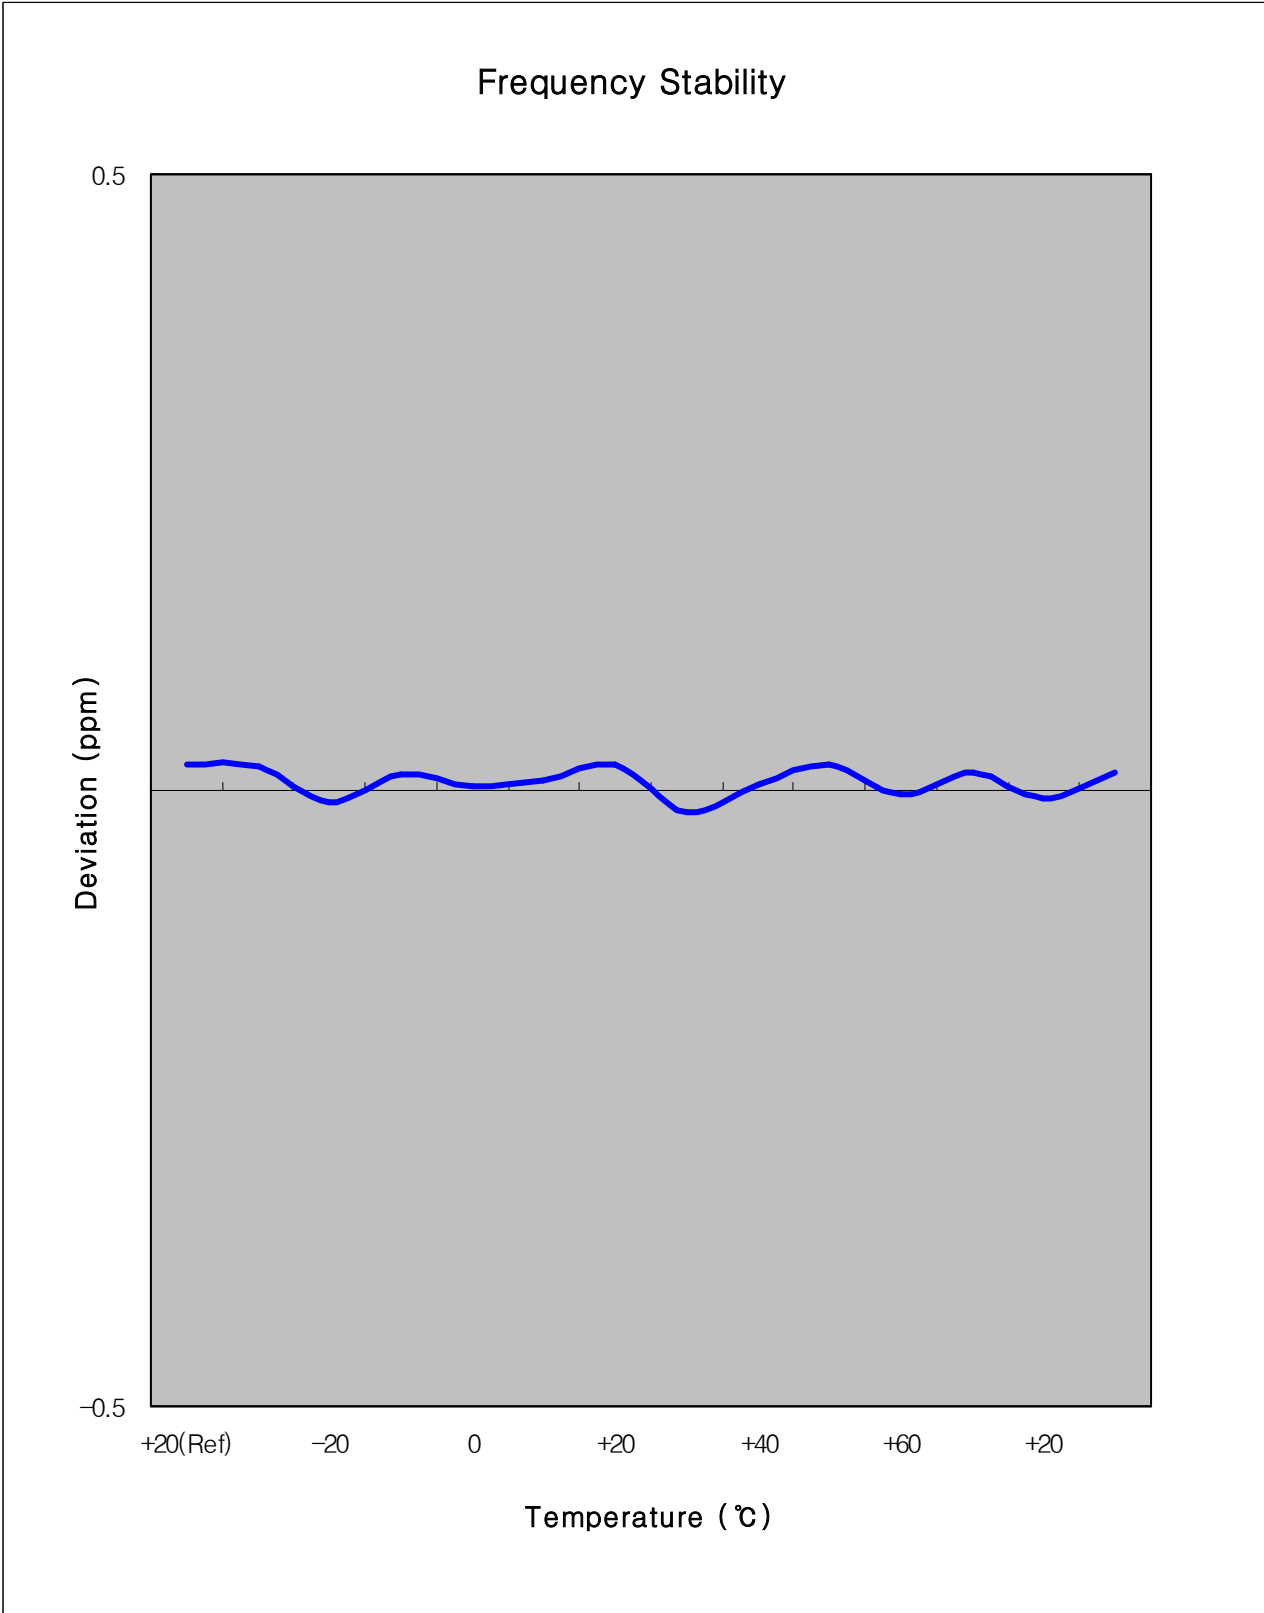



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS and 850 WCDMA Phone with Bluetooth and WLAN FCC ID : A3LGTS8500B complies with all the requirements of Parts 2,22,24 of the FCC Rules.



8. TEST PLOTS

Agilent

R T

Ch Freq 824.2 MHz		Trig Free	
Occupied Bandwidth			
FCC ID:A3LGTS8500B 0BW Ch.128			
Ref 33 dBm		Atten 40 dB	
#Peak			
Center	824.200 MHz	Span	1 MHz
#Res BW	3 kHz	#VBW	3 kHz
		#Sweep	1 s (601 pts)
Occupied Bandwidth		Occ BW % Pwr	99.00 %
250.3929 kHz		x dB	-26.00 dB
Transmit Freq Error	392.441 Hz		
x dB Bandwidth	314.021 kHz		

Center Freq	824.200000 MHz
Start Freq	823.700000 MHz
Stop Freq	824.700000 MHz
CF Step	100.000000 kHz
	Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 836.6 MHz		Trig Free	
Occupied Bandwidth			
FCC ID:A3LGTS8500B 0BW Ch.190			
Ref 33 dBm		Atten 40 dB	
#Peak			
Center	836.600 MHz	Span	1 MHz
#Res BW	3 kHz	#VBW	3 kHz
		#Sweep	1 s (601 pts)
Occupied Bandwidth		Occ BW % Pwr	99.00 %
242.5387 kHz		x dB	-26.00 dB
Transmit Freq Error	-1.166 kHz		
x dB Bandwidth	314.250 kHz		



Center Freq	836.600000 MHz
Start Freq	836.100000 MHz
Stop Freq	837.100000 MHz
CF Step	100.000000 kHz
	Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off


File Operation Status, C:\TEMP.GIF file saved



Ch Freq 848.8 MHz Trig Free		Freq/Channel	
Occupied Bandwidth [] []		Center Freq 848.800000 MHz	
FCC ID:A3LGTS8500B 0BW Ch.251 Ref 33 dBm Atten 40 dB		Start Freq 848.300000 MHz	
		Stop Freq 849.300000 MHz	
		CF Step 100.000000 kHz Auto Man	
Center 848.800 MHz Span 1 MHz #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)		Freq Offset 0.00000000 Hz	
Occupied Bandwidth Occ BW % Pwr 99.00 % 245.6221 kHz x dB -26.00 dB		Signal Track On Off	
Transmit Freq Error 1.638 kHz x dB Bandwidth 307.301 kHz			
File Operation Status, C:\TEMP.GIF file saved			


Measurement/Instrument Screen																																	
Control	Transmit Power							TCH Parms																									
Transmit Power Setup								Downlink Traffic Power																									
								Traffic Band																									
Swap Window Positions								GSN850																									
								Traffic Channel																									
							128																										
							MS TX Level																										
							5																										
							Channel Mode Setup																										
							Return																										
							1 of 2																										
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.92</td> <td>0.47</td> <td>2.67</td> </tr> <tr> <td>Maximum</td> <td>4.20</td> <td>0.60</td> <td>10.32</td> </tr> <tr> <td>Average</td> <td>3.21</td> <td>0.53</td> <td>6.21</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.92	0.47	2.67	Maximum	4.20	0.60	10.32	Average	3.21	0.53	6.21	Pass/Fail	Pass	Pass	Pass
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	1.92	0.47	2.67																														
Maximum	4.20	0.60	10.32																														
Average	3.21	0.53	6.21																														
Pass/Fail	Pass	Pass	Pass																														
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T													
Active Cell Connected			Sys Type: GSM																														
IntRef	Offset	R	T																														



Measurement/Instrument Screen																																	
Control	Transmit Power							TCH Parms																									
Transmit Power Setup								Downlink Traffic Power																									
								Traffic Band																									
Swap Window Positions								GSN850																									
								Traffic Channel																									
							190																										
							MS TX Level																										
							5																										
							Channel Mode Setup																										
							Return																										
							1 of 2																										
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>1.38</td> <td>0.40</td> <td>-15.28</td> </tr> <tr> <td>Maximum</td> <td>2.85</td> <td>0.59</td> <td>-6.56</td> </tr> <tr> <td>Average</td> <td>2.12</td> <td>0.51</td> <td>-11.11</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	1.38	0.40	-15.28	Maximum	2.85	0.59	-6.56	Average	2.12	0.51	-11.11	Pass/Fail	Pass	Pass	Pass
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	1.38	0.40	-15.28																														
Maximum	2.85	0.59	-6.56																														
Average	2.12	0.51	-11.11																														
Pass/Fail	Pass	Pass	Pass																														
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td></td> <td></td> <td></td> </tr> </table>										Active Cell Connected			Sys Type: GSM				IntRef	Offset	R	T													
Active Cell Connected			Sys Type: GSM																														
IntRef	Offset	R	T																														

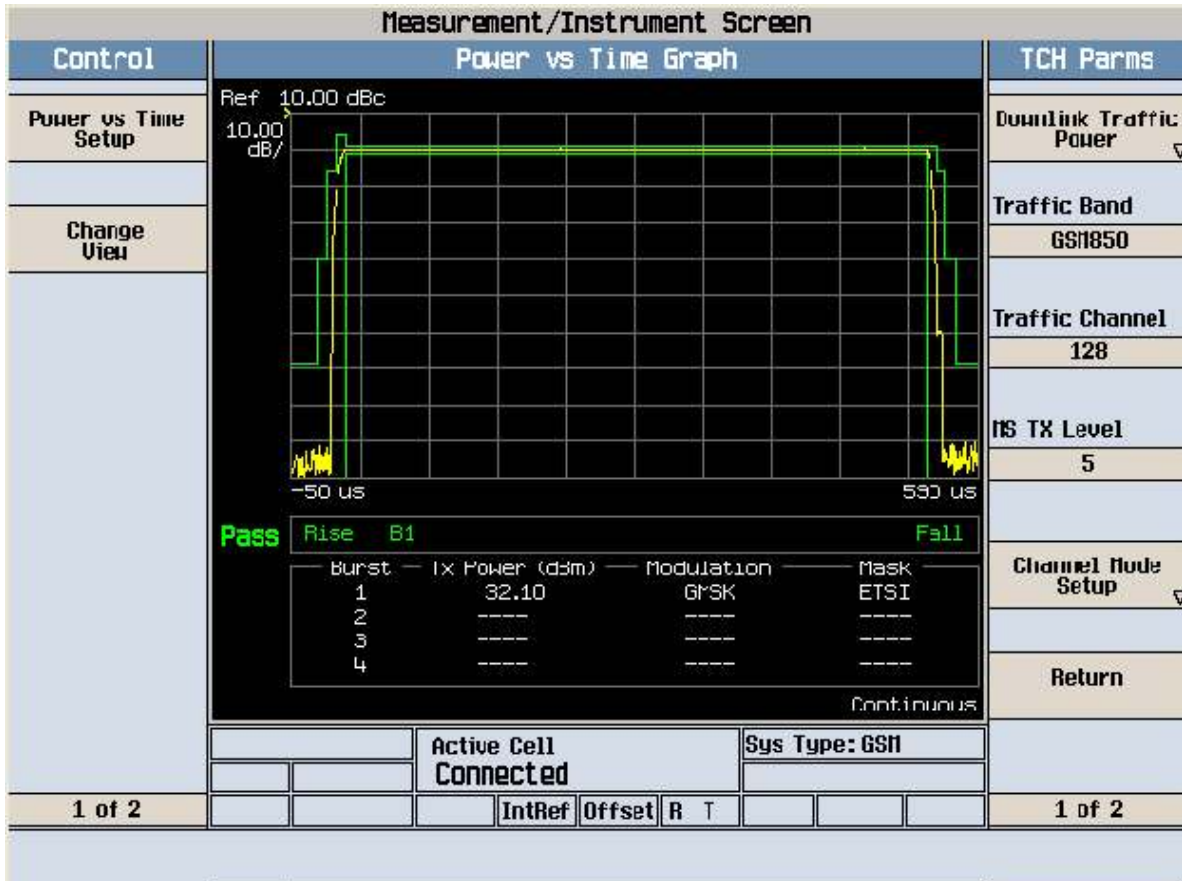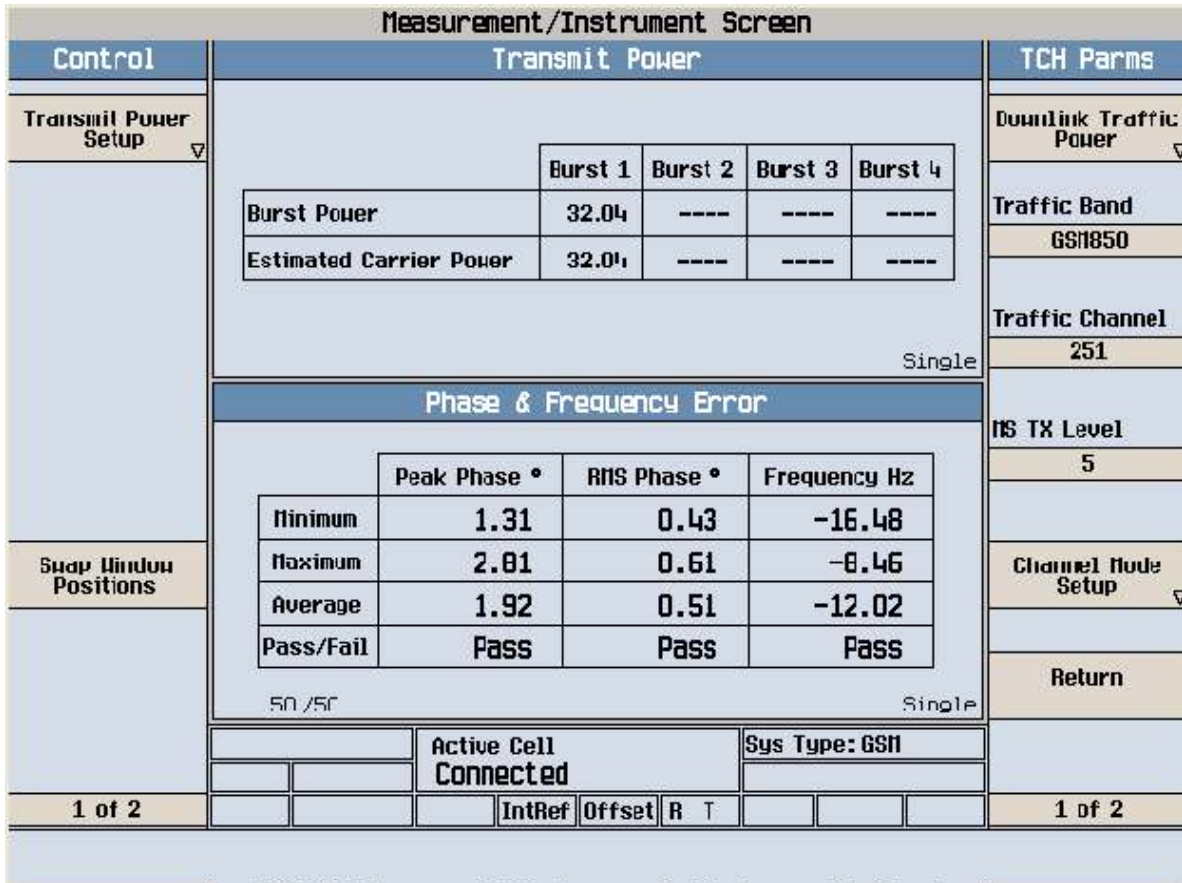

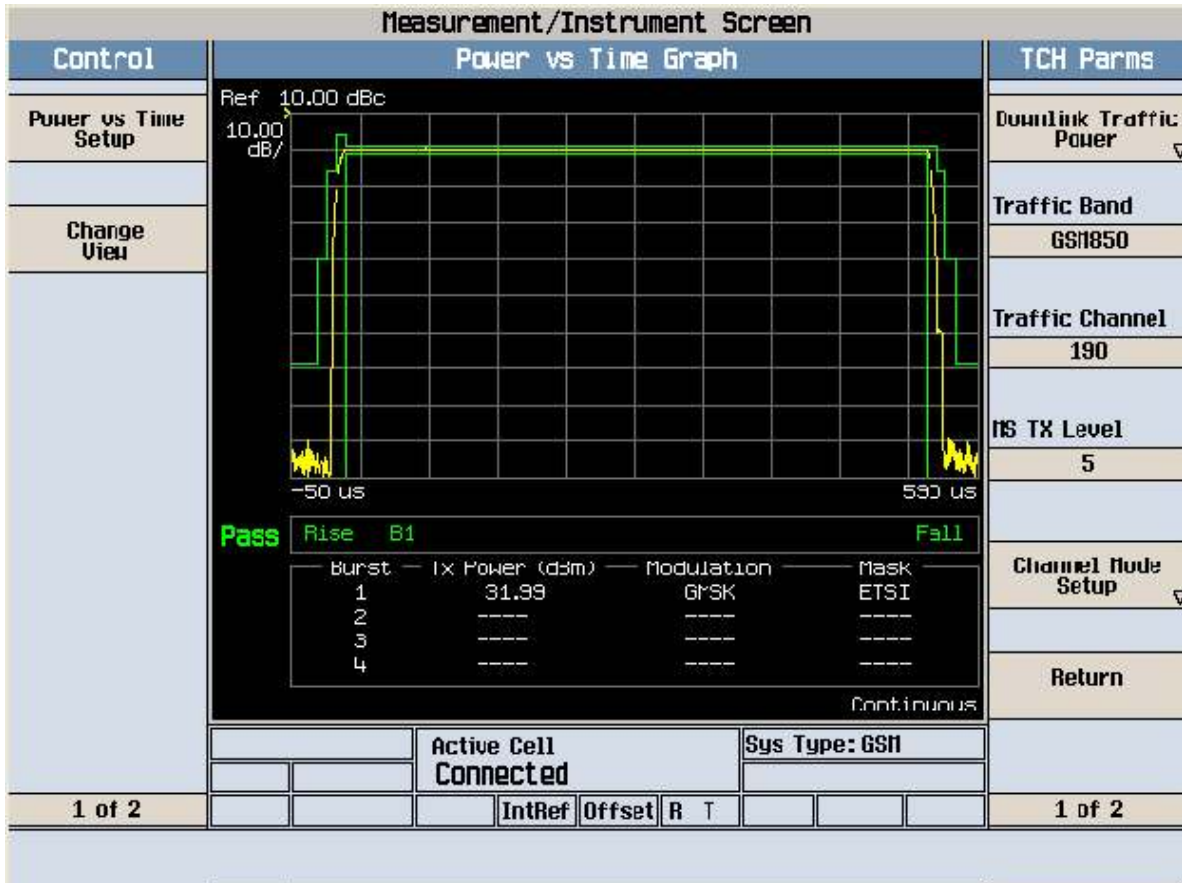

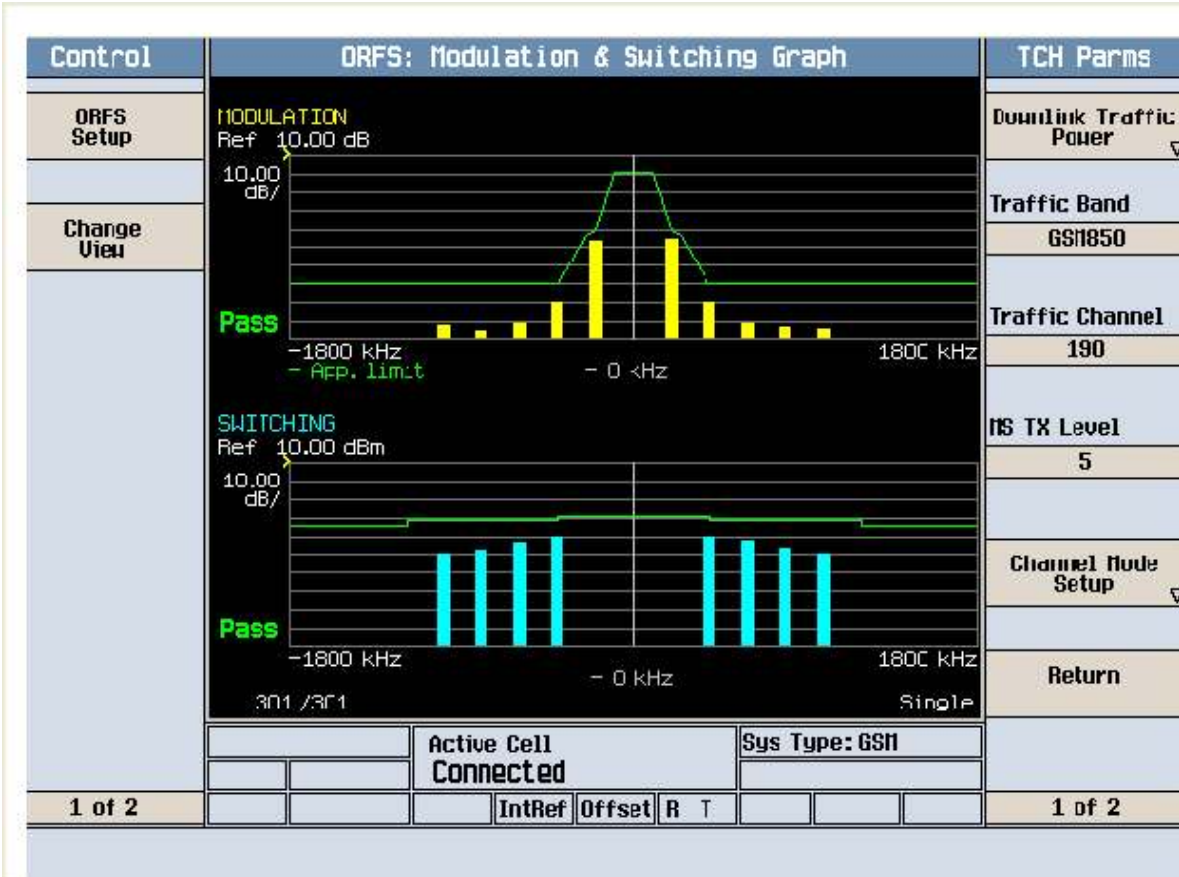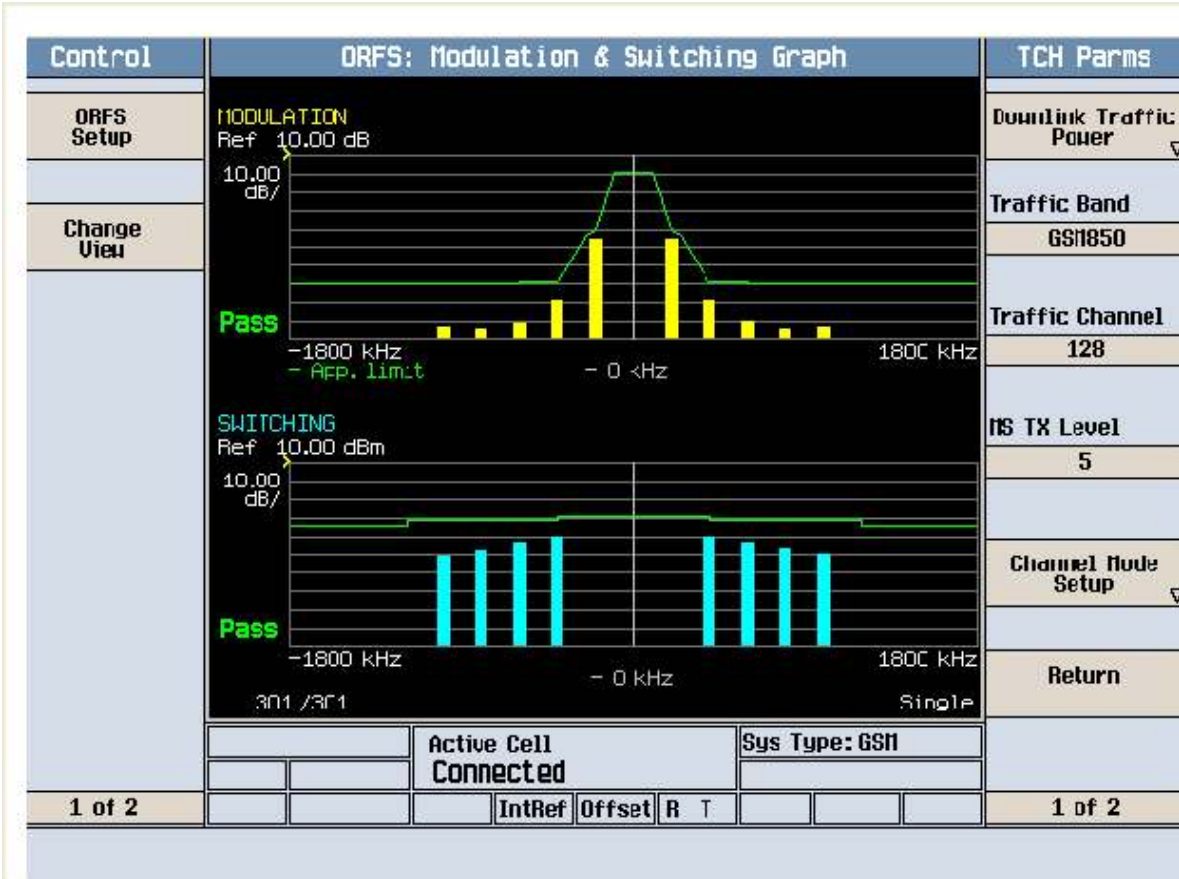

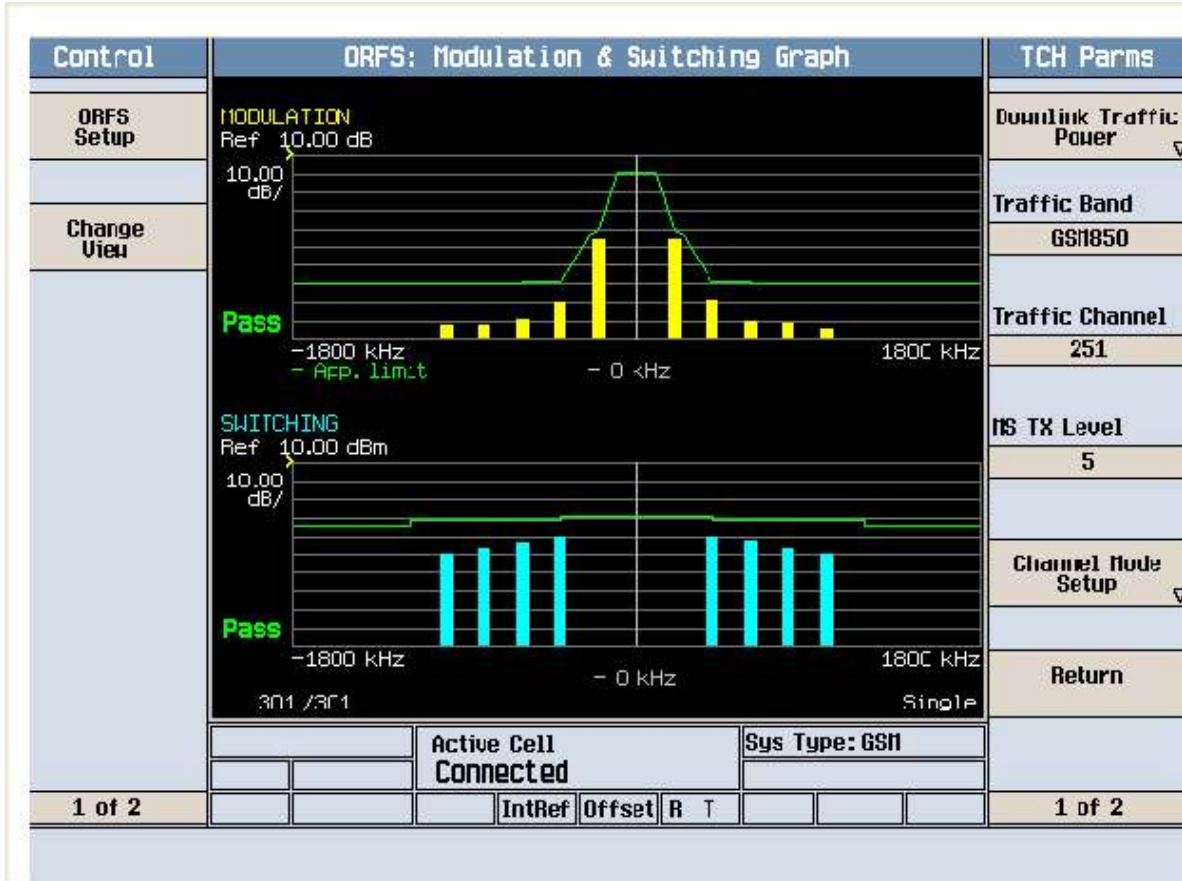


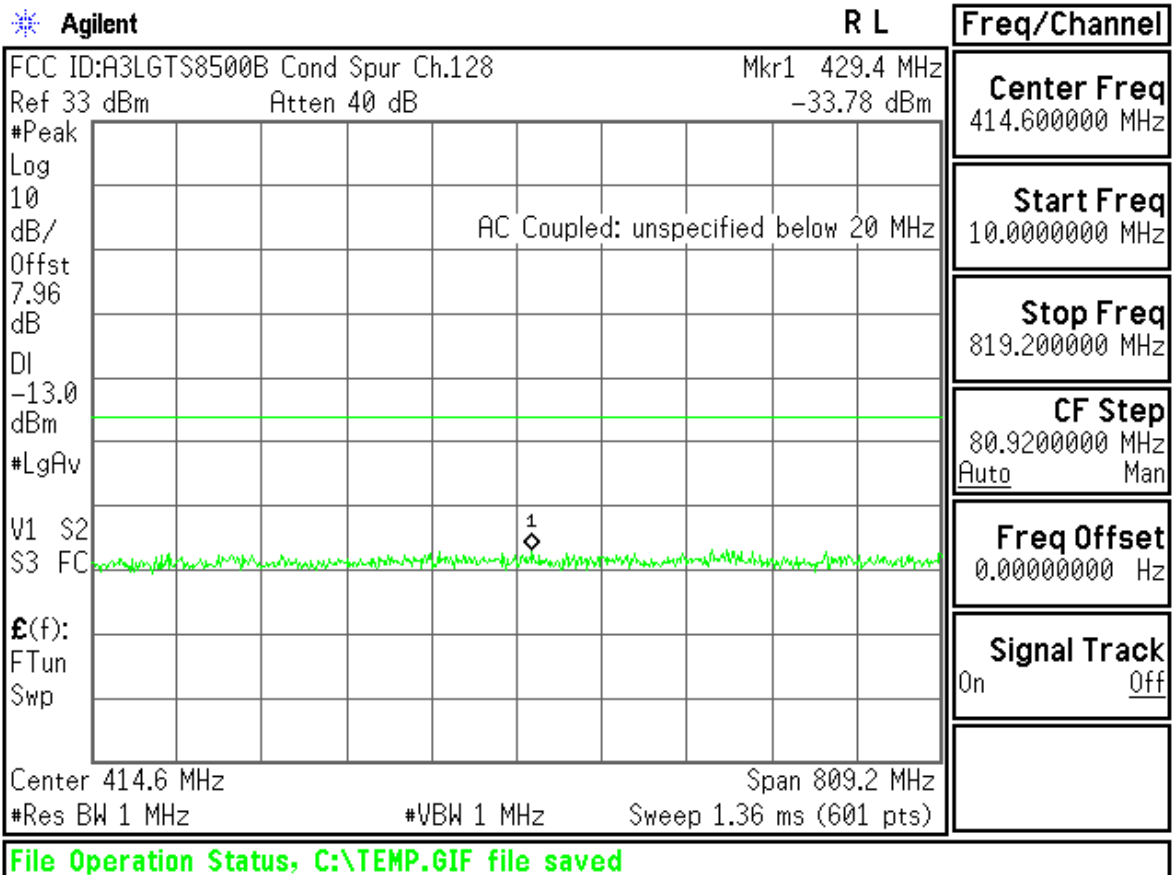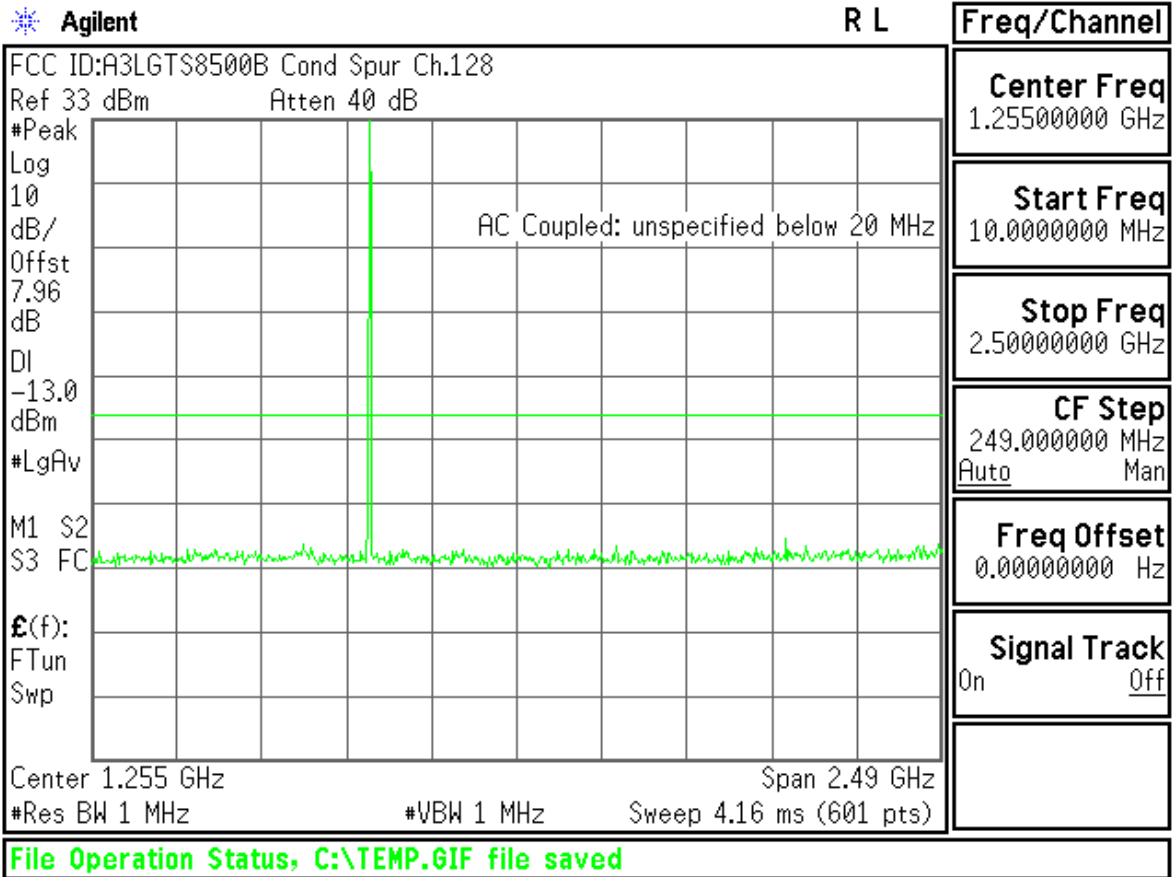

Agilent

R L

Freq/Channel

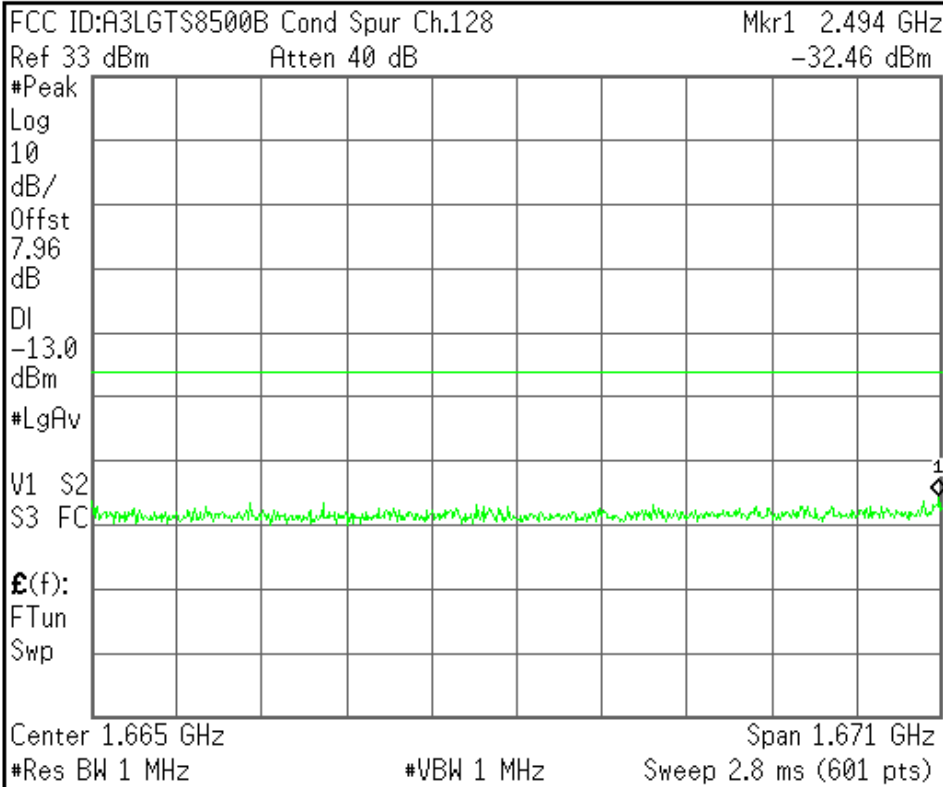


Center Freq 1.66460000 GHz
Start Freq 829.200000 MHz
Stop Freq 2.50000000 GHz
CF Step 167.080000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

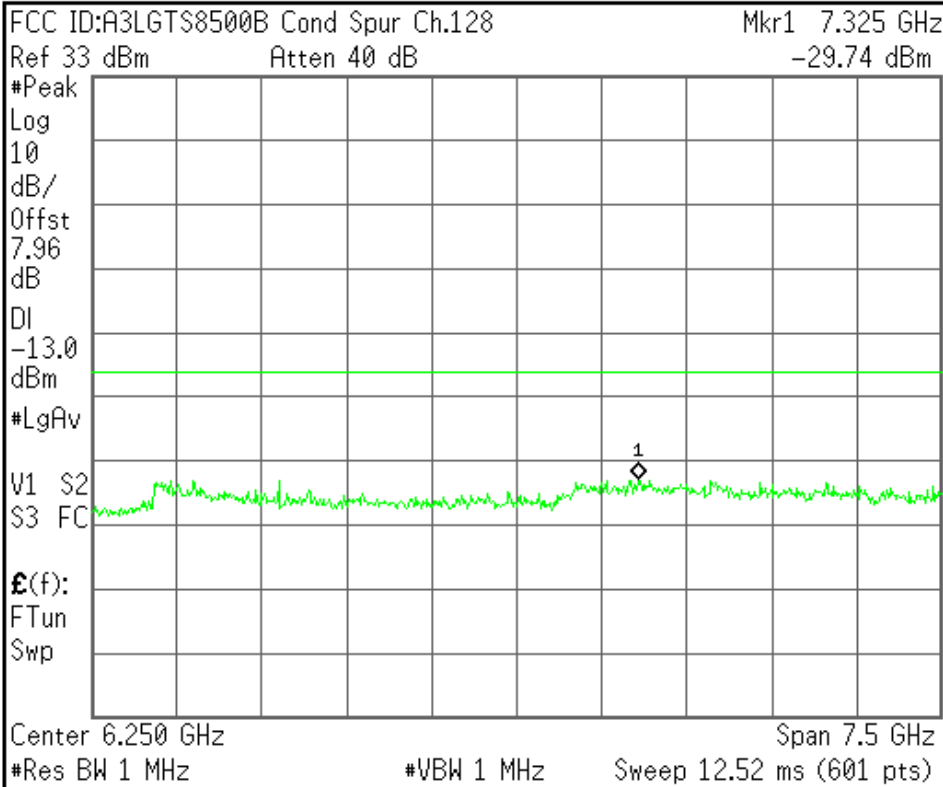


Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

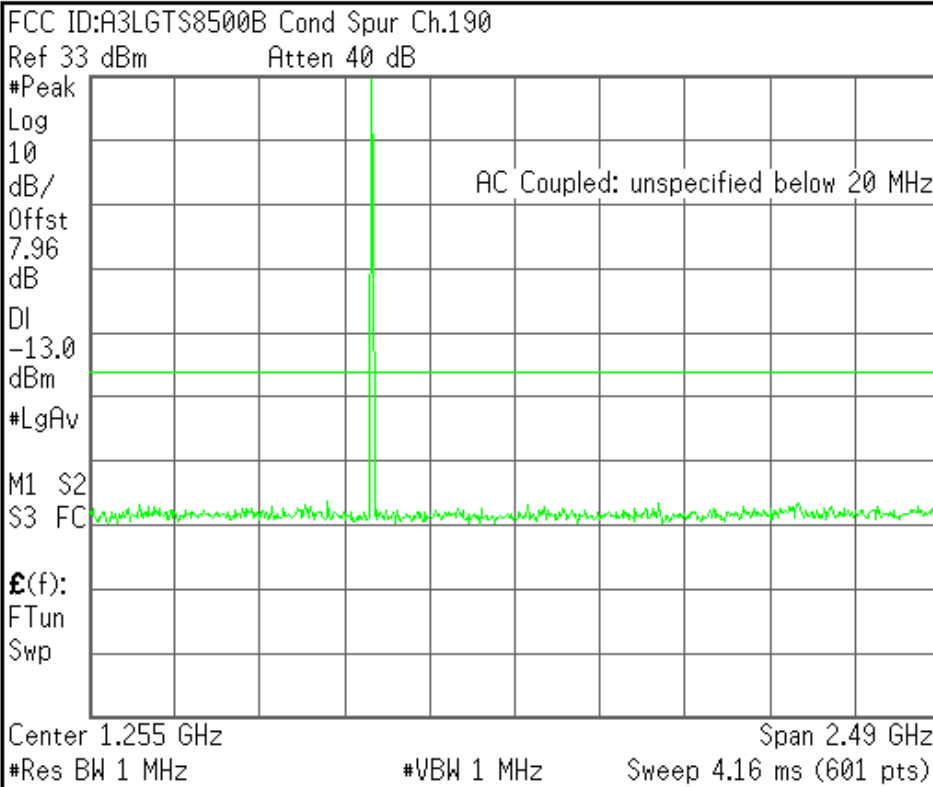


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

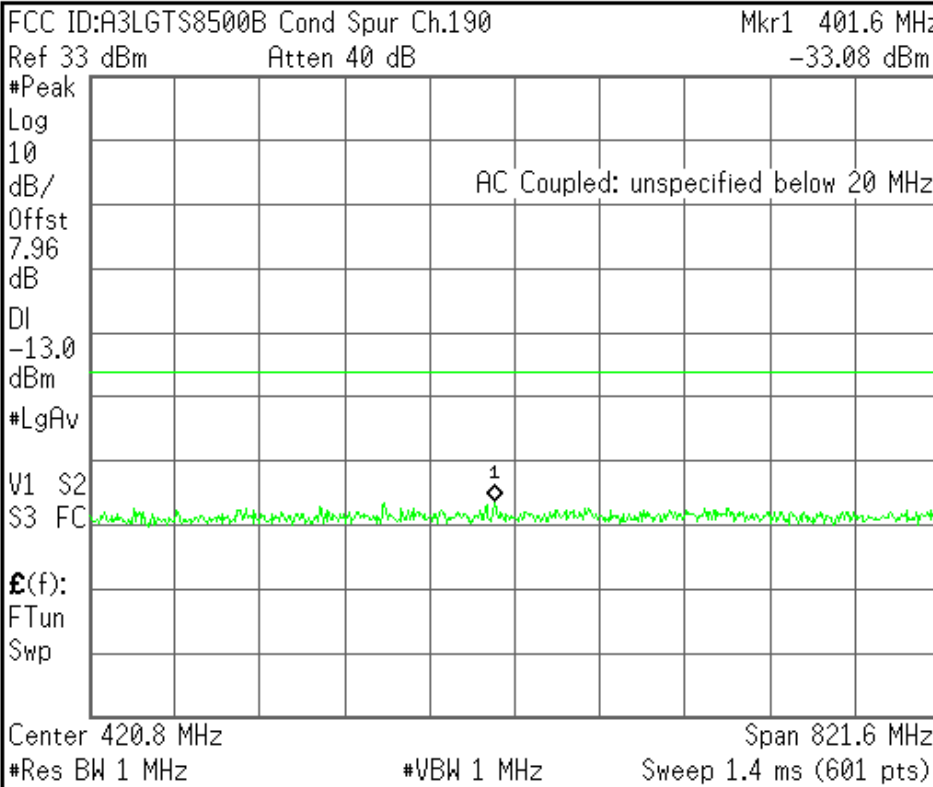


Center Freq 420.800000 MHz
Start Freq 10.0000000 MHz
Stop Freq 831.600000 MHz
CF Step 82.1600000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

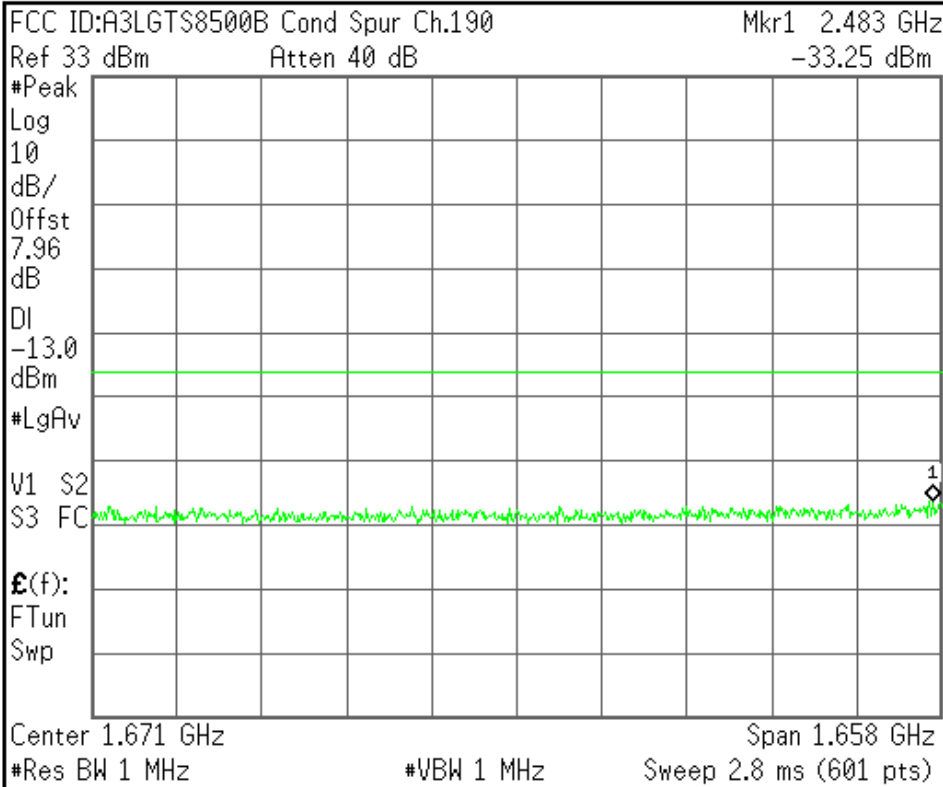


Center Freq 1.67080000 GHz
Start Freq 841.600000 MHz
Stop Freq 2.50000000 GHz
CF Step 165.840000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

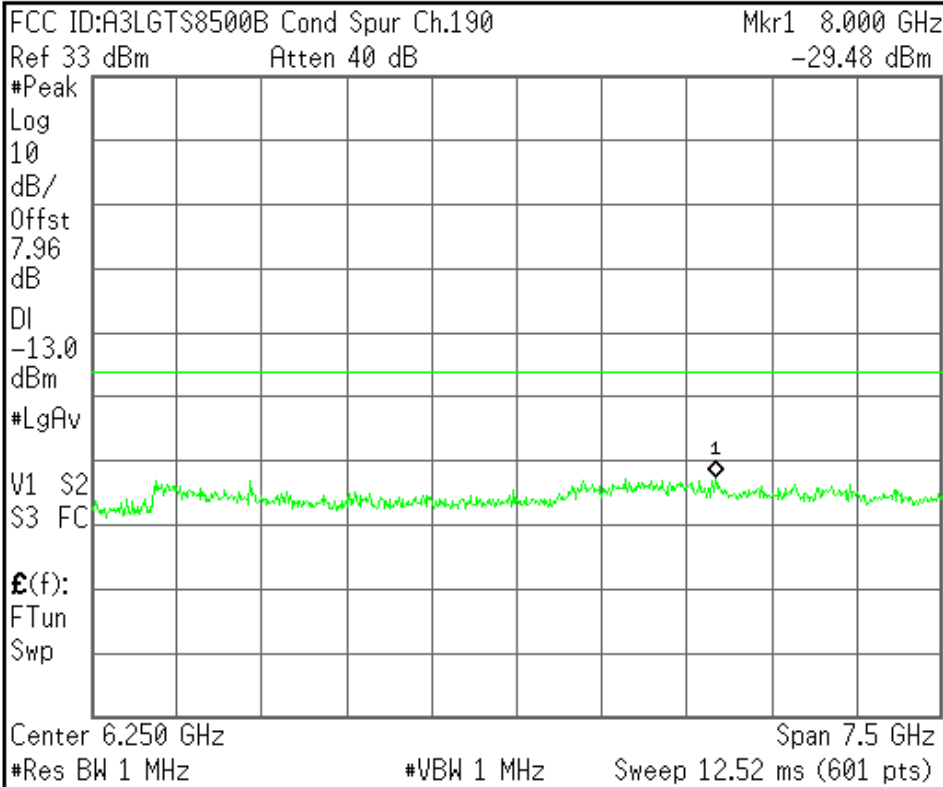


Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

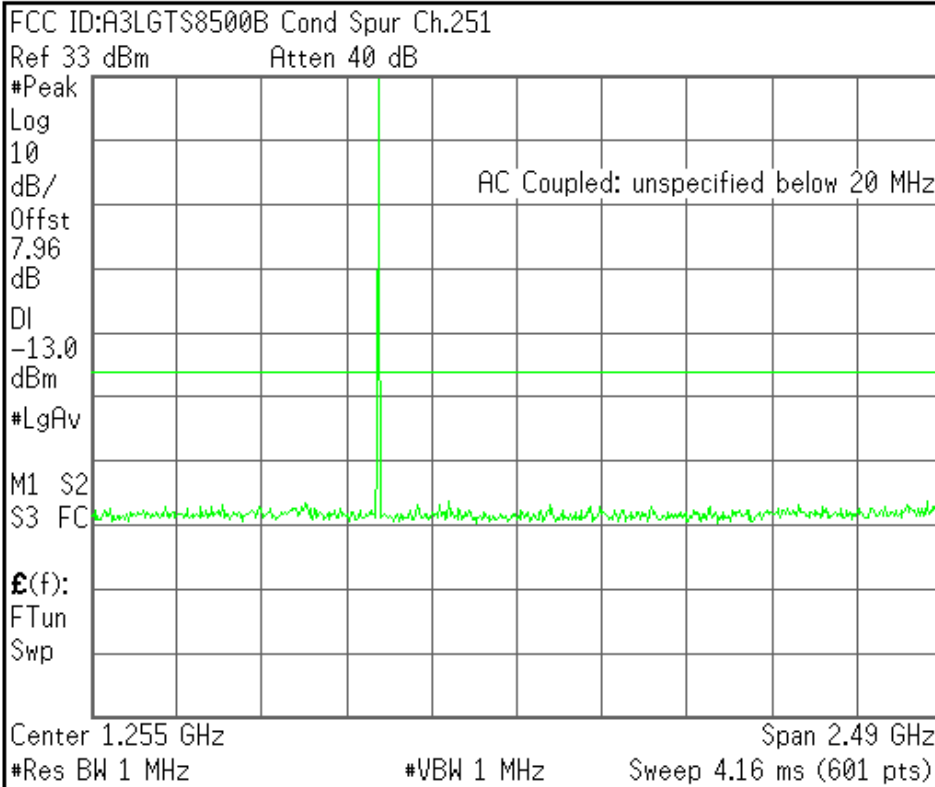


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

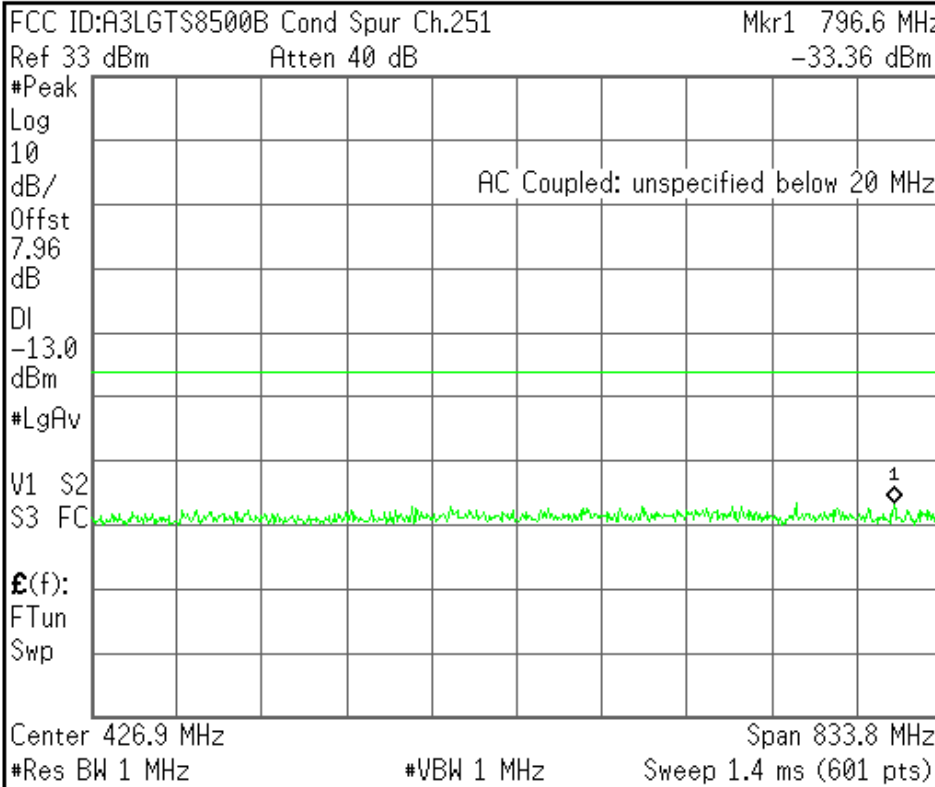


Center Freq 426.900000 MHz
Start Freq 10.0000000 MHz
Stop Freq 843.800000 MHz
CF Step 83.3800000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

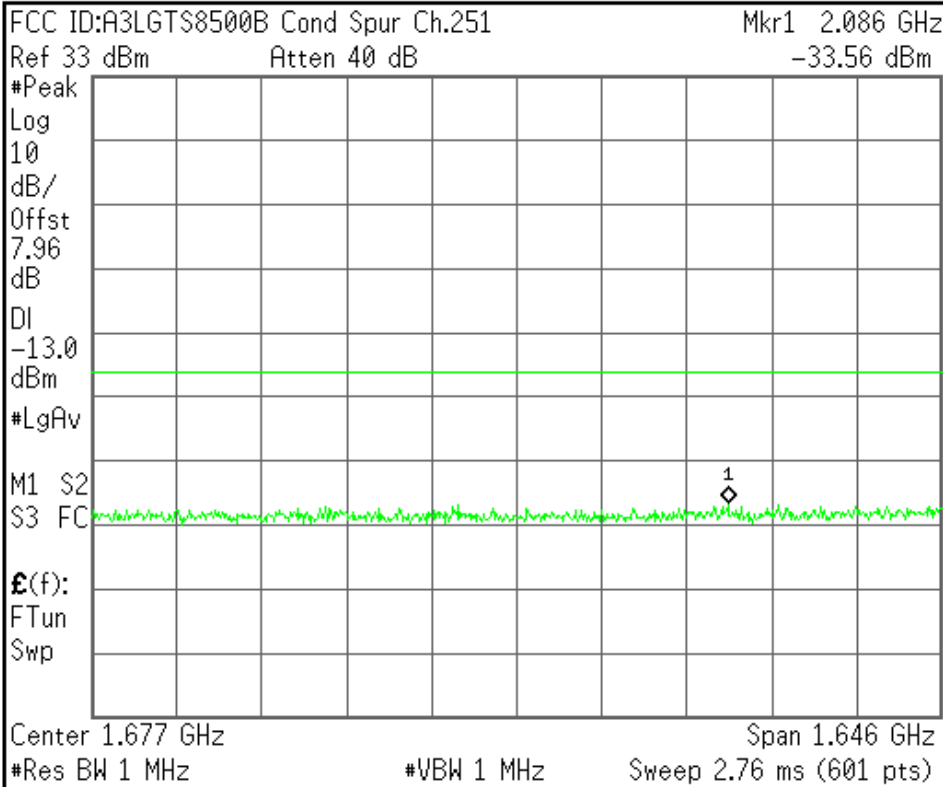


Center Freq 1.67690000 GHz
Start Freq 853.800000 MHz
Stop Freq 2.50000000 GHz
CF Step 164.620000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

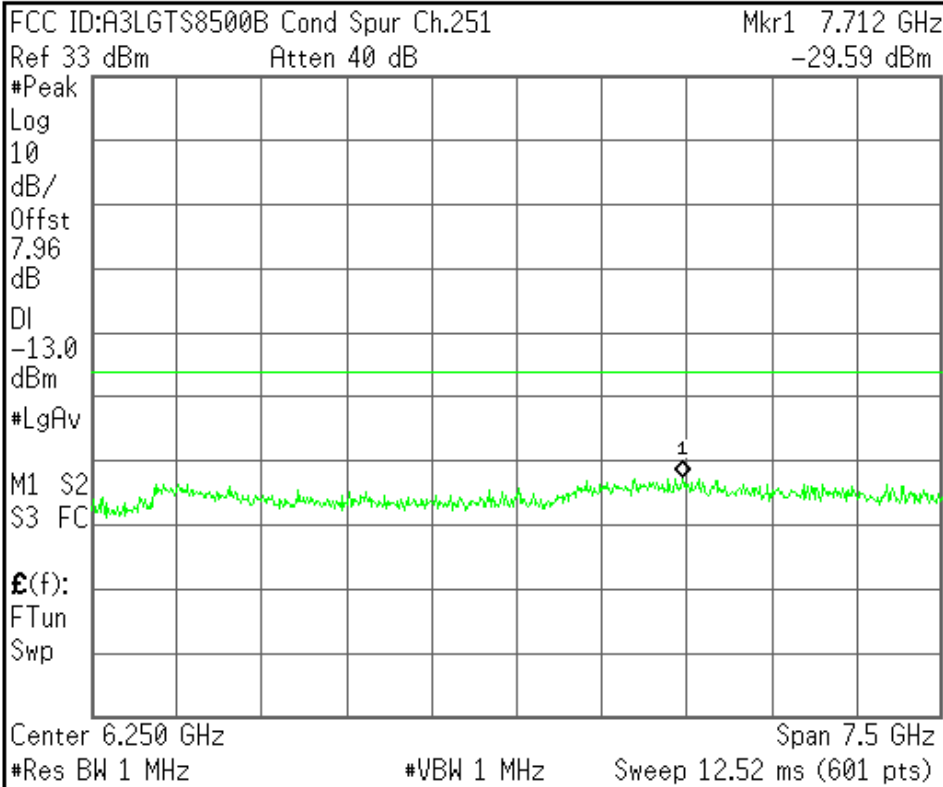

Center Freq 6.25000000 GHz
Start Freq 2.50000000 GHz
Stop Freq 10.00000000 GHz
CF Step 750.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$8500B Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

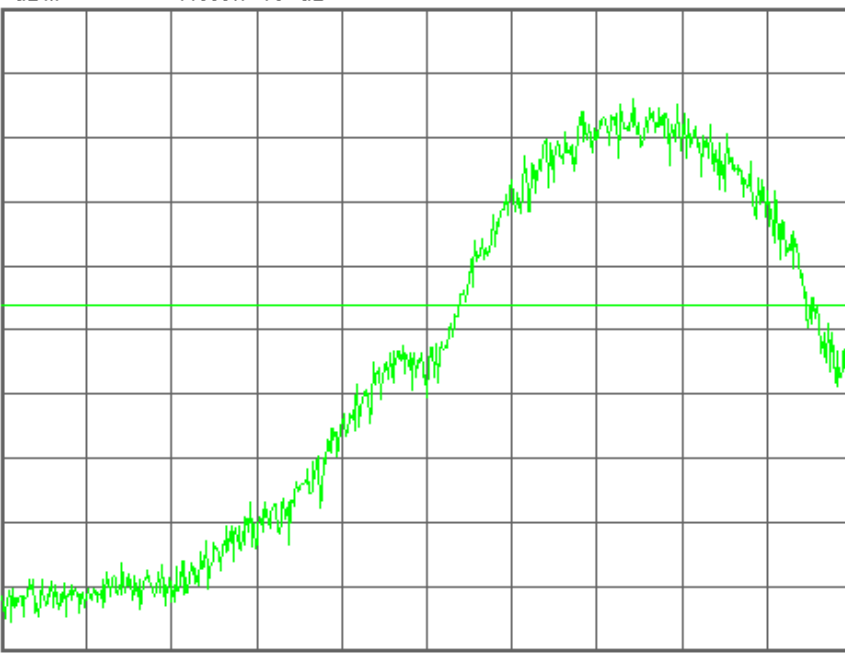

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$8500B Band Edge Ch.128

Mkr1 823.974 6 MHz

Ref 33 dBm

Atten 40 dB

-17.55 dBm

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

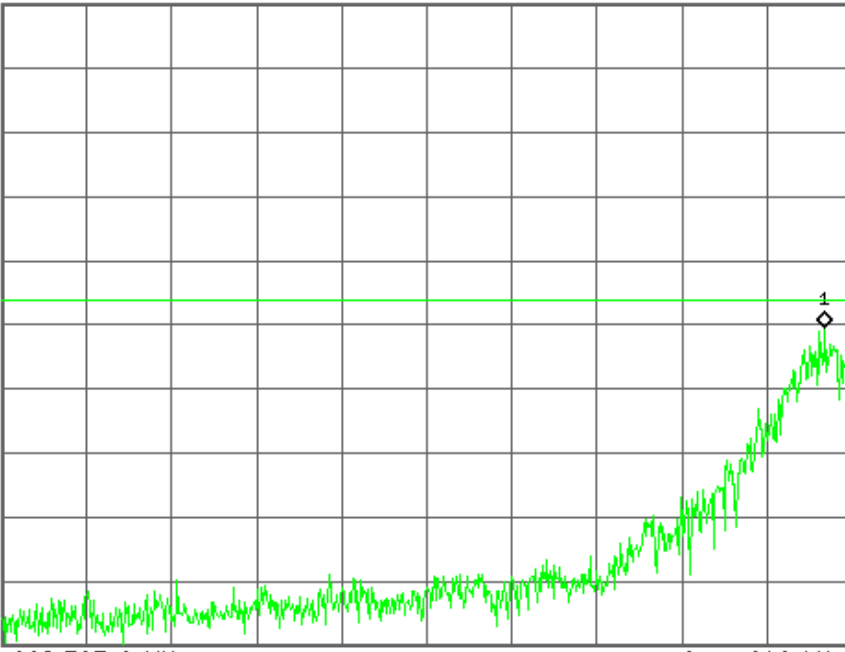

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.251

Ref 33 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

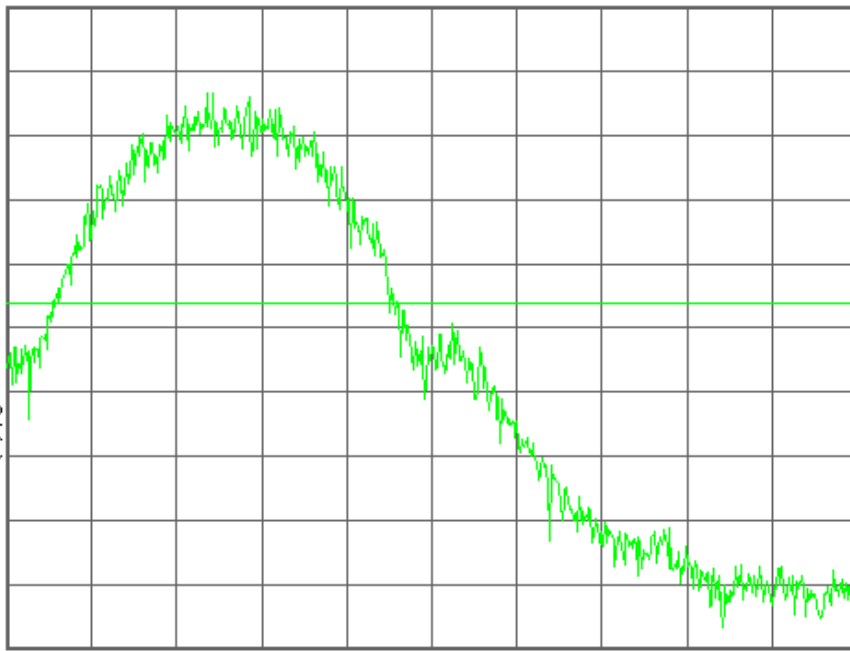

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.251

Mkr1 849.034 8 MHz

Ref 33 dBm

Atten 40 dB

-18.75 dBm

#Avg

Log

10

dB/

Offst

7.96

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

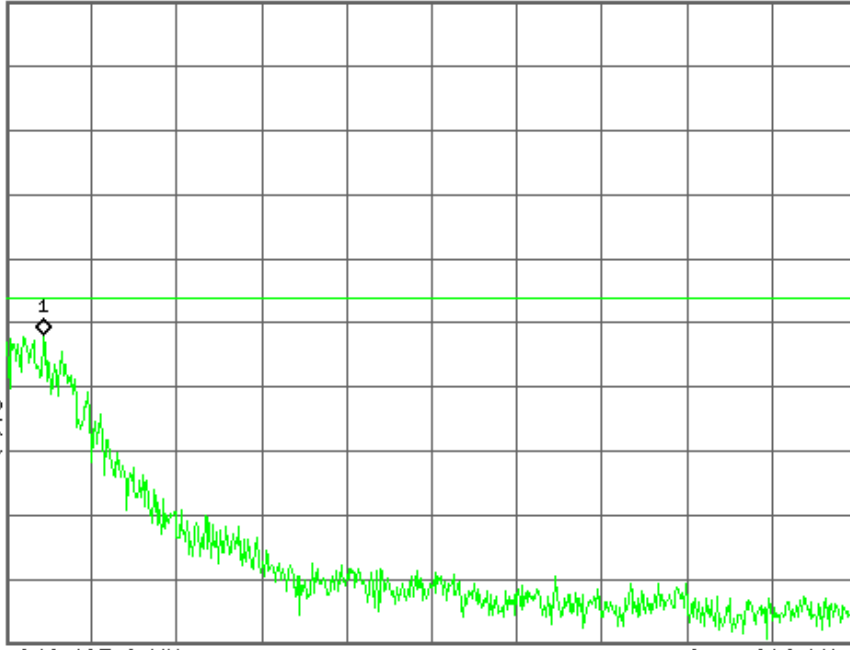

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent

R T

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTS8500B 0BW Ch.512
Ref 30 dBm Atten 40 dB

Center 1.850 200 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
247.6673 kHz	x dB	-26.00 dB
Transmit Freq Error	1.553 kHz	
x dB Bandwidth	307.623 kHz	

Freq/Channel

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

FCC ID:A3LGTS8500B 0BW Ch.661
Ref 30 dBm Atten 40 dB

Center 1.880 000 GHz Span 1 MHz
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
243.5474 kHz	x dB	-26.00 dB
Transmit Freq Error	-109.143 Hz	
x dB Bandwidth	303.753 kHz	

Freq/Channel

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz


Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


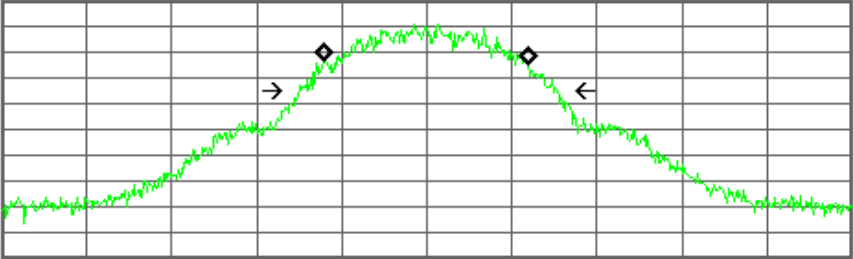
Ch Freq 1.9098 GHz Trig Free Occupied Bandwidth [] []	Freq/Channel Center Freq 1.90980000 GHz								
FCC ID: A3LGTS8500B 0BW Ch.810 Ref 30 dBm Atten 40 dB	Start Freq 1.90930000 GHz								
#Peak Log 10 dB/ Offst 8.95 dB 	Stop Freq 1.91030000 GHz								
	CF Step 100.000000 kHz Auto Man								
Center 1.909 800 GHz Span 1 MHz #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)	Freq Offset 0.00000000 Hz								
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Occupied Bandwidth</td> <td style="width: 50%;">Occ BW % Pwr 99.00 %</td> </tr> <tr> <td style="text-align: center;">243.8392 kHz</td> <td style="text-align: center;">x dB -26.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-997.082 Hz</td> </tr> <tr> <td>x dB Bandwidth</td> <td>308.316 kHz</td> </tr> </table>	Occupied Bandwidth	Occ BW % Pwr 99.00 %	243.8392 kHz	x dB -26.00 dB	Transmit Freq Error	-997.082 Hz	x dB Bandwidth	308.316 kHz	Signal Track On Off
Occupied Bandwidth	Occ BW % Pwr 99.00 %								
243.8392 kHz	x dB -26.00 dB								
Transmit Freq Error	-997.082 Hz								
x dB Bandwidth	308.316 kHz								
File Operation Status, C:\TEMP.GIF file saved									



FCC ID : A3LGTS8500B Transmit Power 512CH



Measurement/Instrument Screen																													
Control	Transmit Power						TCH Parms																						
Transmit Power Setup Swap Window Positions 1 of 2	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.19</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.19</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.19	----	----	----	Estimated Carrier Power	29.19	----	----	----	Downlink Traffic Power Traffic Band PCS Traffic Channel 512 TRS TX Level 0 Channel Mode Setup Return							
	Burst 1	Burst 2	Burst 3	Burst 4																									
Burst Power	29.19	----	----	----																									
Estimated Carrier Power	29.19	----	----	----																									
	Phase & Frequency Error																												
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.32</td> <td>0.92</td> <td>-14.18</td> </tr> <tr> <td>Maximum</td> <td>9.95</td> <td>1.42</td> <td>9.45</td> </tr> <tr> <td>Average</td> <td>7.15</td> <td>1.15</td> <td>-4.71</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.32	0.92	-14.18	Maximum	9.95	1.42	9.45	Average	7.15	1.15	-4.71	Pass/Fail	Pass	Pass	Pass			
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	4.32	0.92	-14.18																										
Maximum	9.95	1.42	9.45																										
Average	7.15	1.15	-4.71																										
Pass/Fail	Pass	Pass	Pass																										
	Active Cell Connected			Sys Type: GSM																									
			IntRef	Offset	R T																								



Measurement/Instrument Screen																																	
Control	Transmit Power							TCH Parms																									
Transmit Power Setup ▾								Downlink Traffic Power ▾																									
								Traffic Band																									
Swap Window Positions								PCS																									
								Traffic Channel																									
							661																										
							MS TX Level																										
							0																										
							Channel Mode Setup ▾																										
							Return																										
							1 of 2																										
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.95</td> <td>1.02</td> <td>-9.73</td> </tr> <tr> <td>Maximum</td> <td>9.08</td> <td>1.39</td> <td>8.22</td> </tr> <tr> <td>Average</td> <td>6.52</td> <td>1.20</td> <td>0.23</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.95	1.02	-9.73	Maximum	9.08	1.39	8.22	Average	6.52	1.20	0.23	Pass/Fail	Pass	Pass	Pass
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	3.95	1.02	-9.73																														
Maximum	9.08	1.39	8.22																														
Average	6.52	1.20	0.23																														
Pass/Fail	Pass	Pass	Pass																														
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td colspan="3"></td> <td colspan="4"></td> </tr> </table>										Active Cell Connected			Sys Type: GSM																				
Active Cell Connected			Sys Type: GSM																														
<table border="1"> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td colspan="6"></td> </tr> </table>										IntRef	Offset	R	T																				
IntRef	Offset	R	T																														

Measurement/Instrument Screen																																	
Control	Transmit Power							TCH Parms																									
Transmit Power Setup ▾								Downlink Traffic Power ▾																									
								Traffic Band																									
Swap Window Positions								PCS																									
								Traffic Channel																									
							810																										
							MS TX Level																										
							0																										
							Channel Mode Setup ▾																										
							Return																										
							1 of 2																										
<table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>4.23</td> <td>1.11</td> <td>-8.73</td> </tr> <tr> <td>Maximum</td> <td>8.36</td> <td>1.42</td> <td>11.73</td> </tr> <tr> <td>Average</td> <td>6.22</td> <td>1.25</td> <td>2.44</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>										Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	4.23	1.11	-8.73	Maximum	8.36	1.42	11.73	Average	6.22	1.25	2.44	Pass/Fail	Pass	Pass	Pass
Phase & Frequency Error																																	
	Peak Phase °	RMS Phase °	Frequency Hz																														
Minimum	4.23	1.11	-8.73																														
Maximum	8.36	1.42	11.73																														
Average	6.22	1.25	2.44																														
Pass/Fail	Pass	Pass	Pass																														
<table border="1"> <tr> <td colspan="3">Active Cell Connected</td> <td colspan="4">Sys Type: GSM</td> </tr> <tr> <td colspan="3"></td> <td colspan="4"></td> </tr> </table>										Active Cell Connected			Sys Type: GSM																				
Active Cell Connected			Sys Type: GSM																														
<table border="1"> <tr> <td>IntRef</td> <td>Offset</td> <td>R</td> <td>T</td> <td colspan="6"></td> </tr> </table>										IntRef	Offset	R	T																				
IntRef	Offset	R	T																														

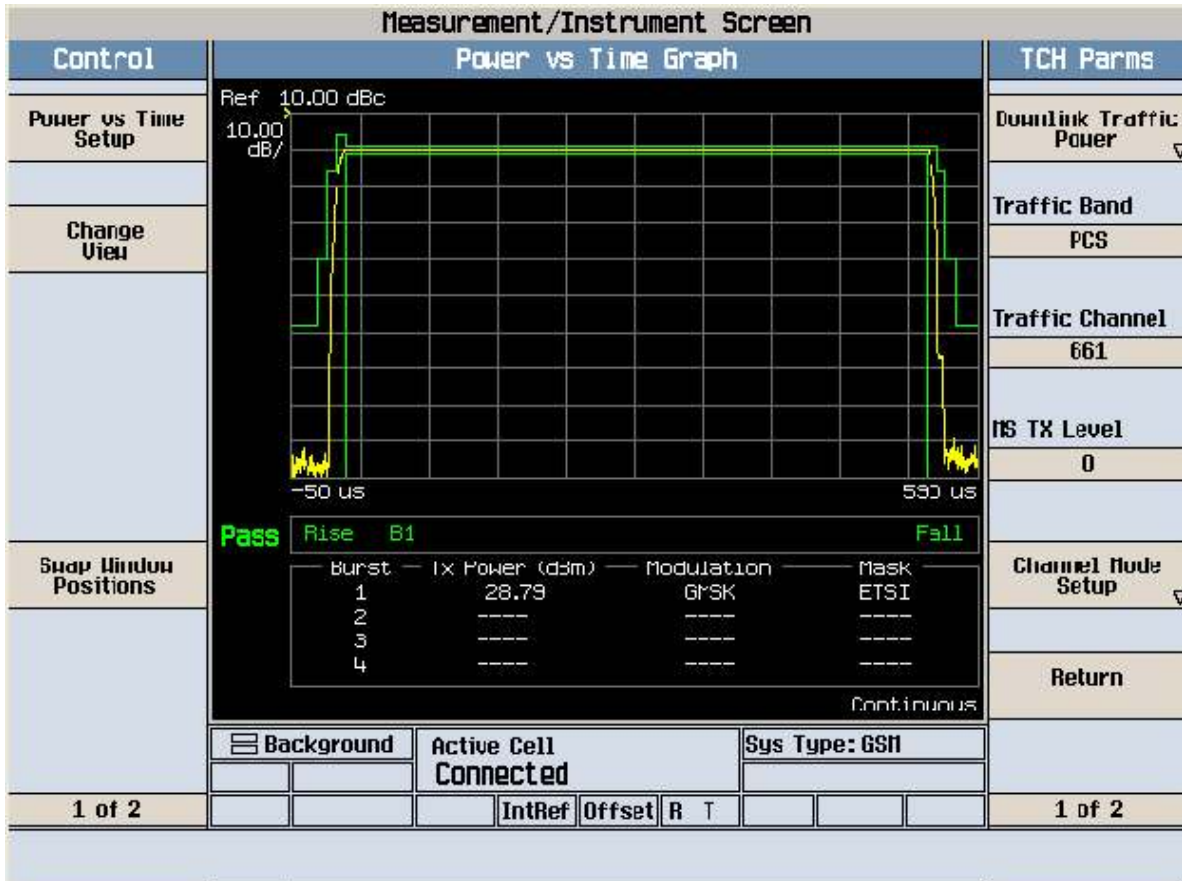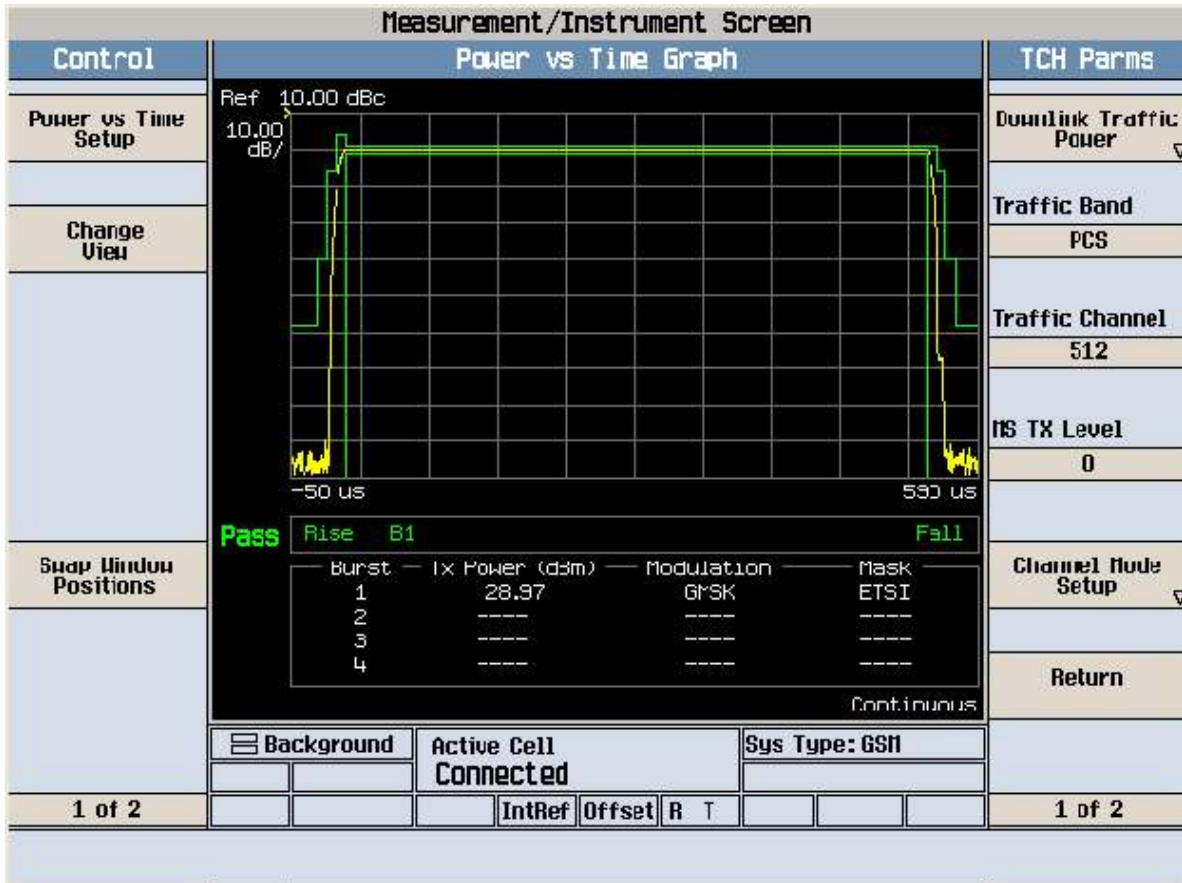

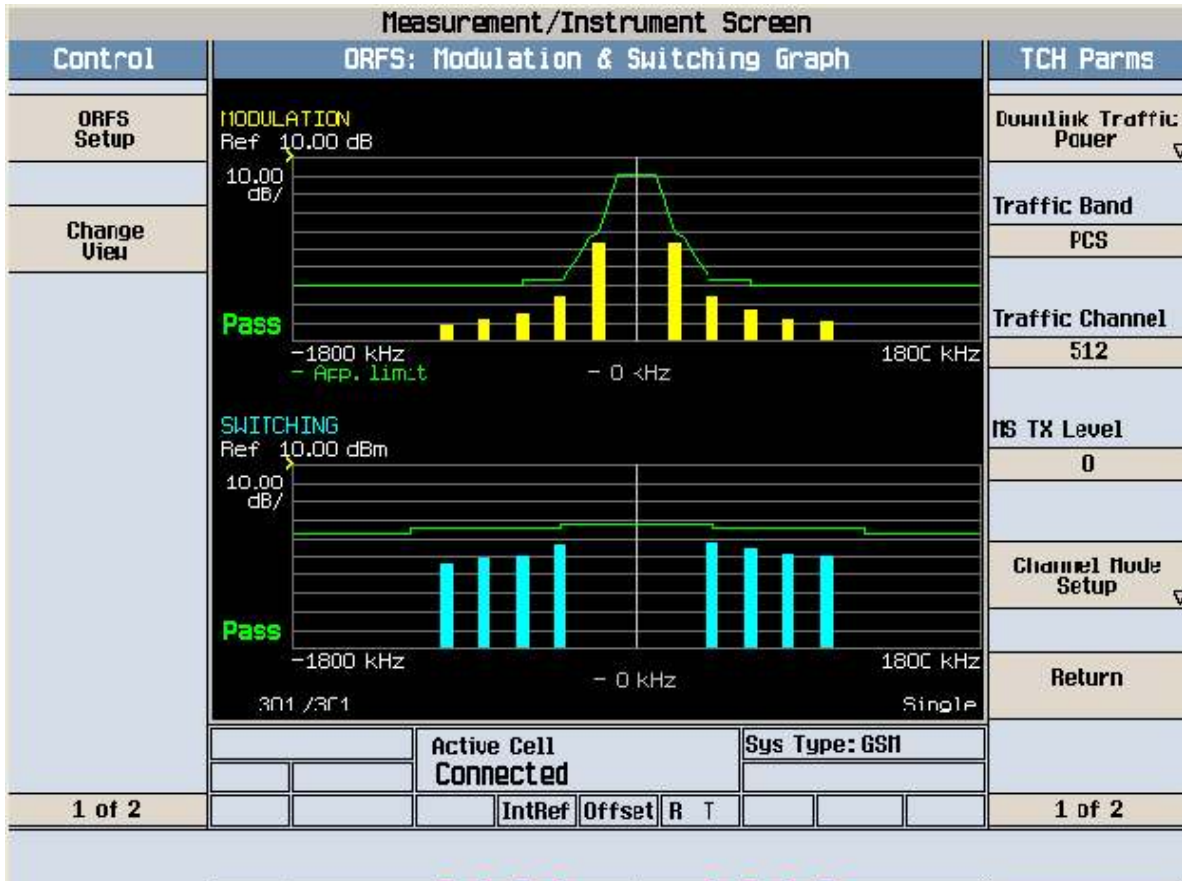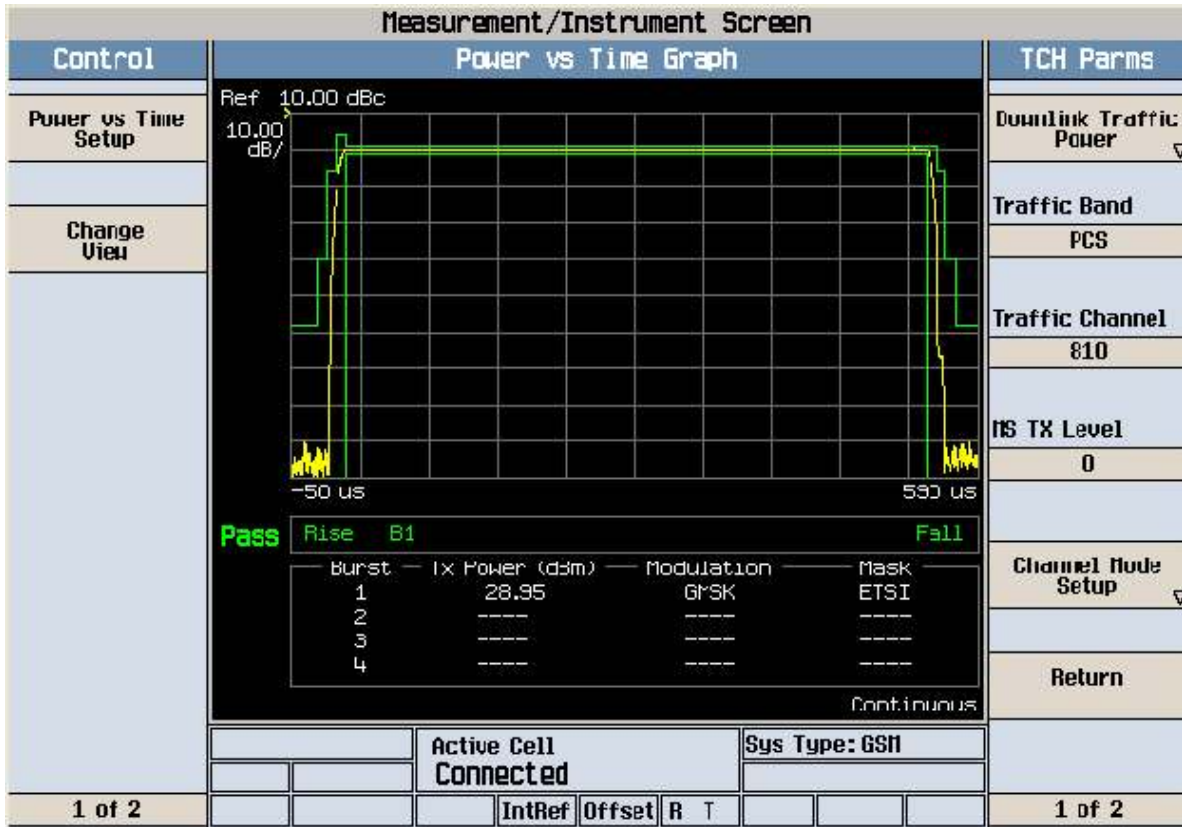

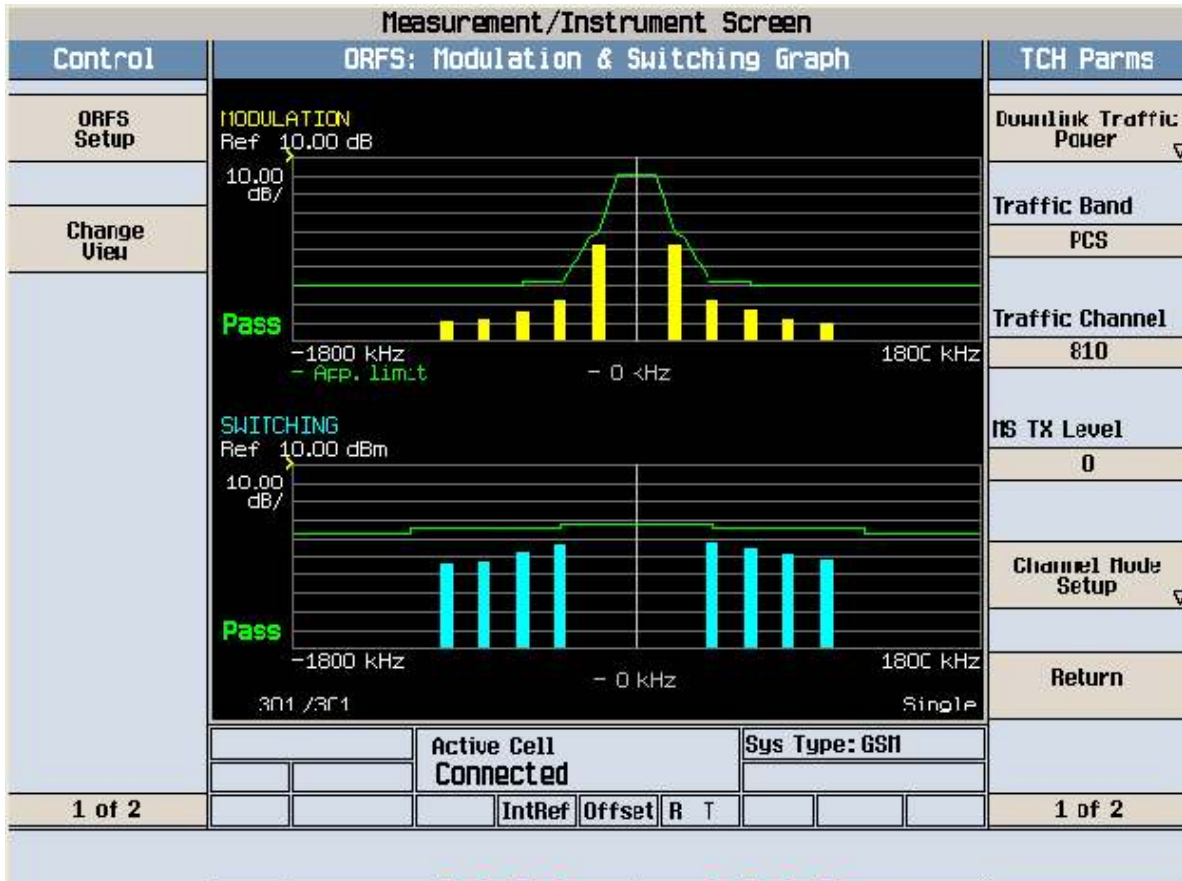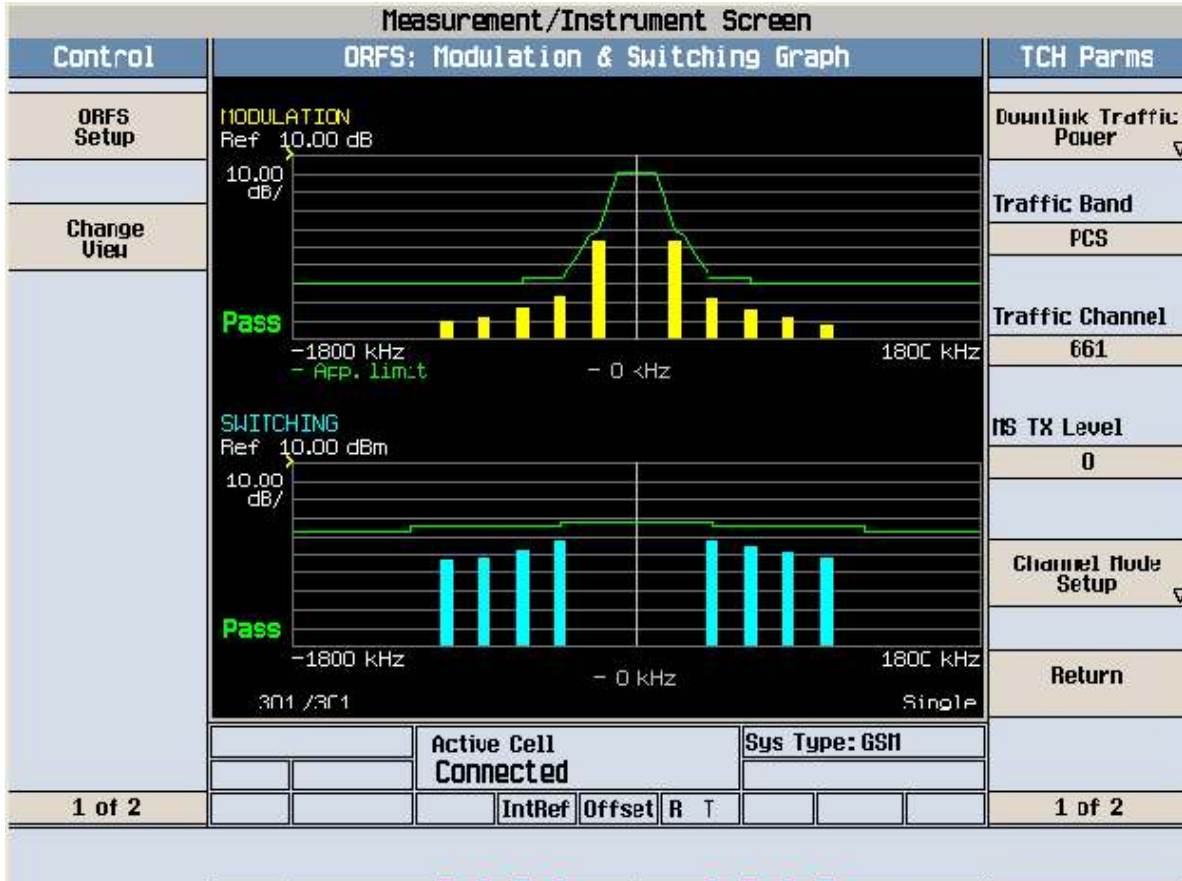


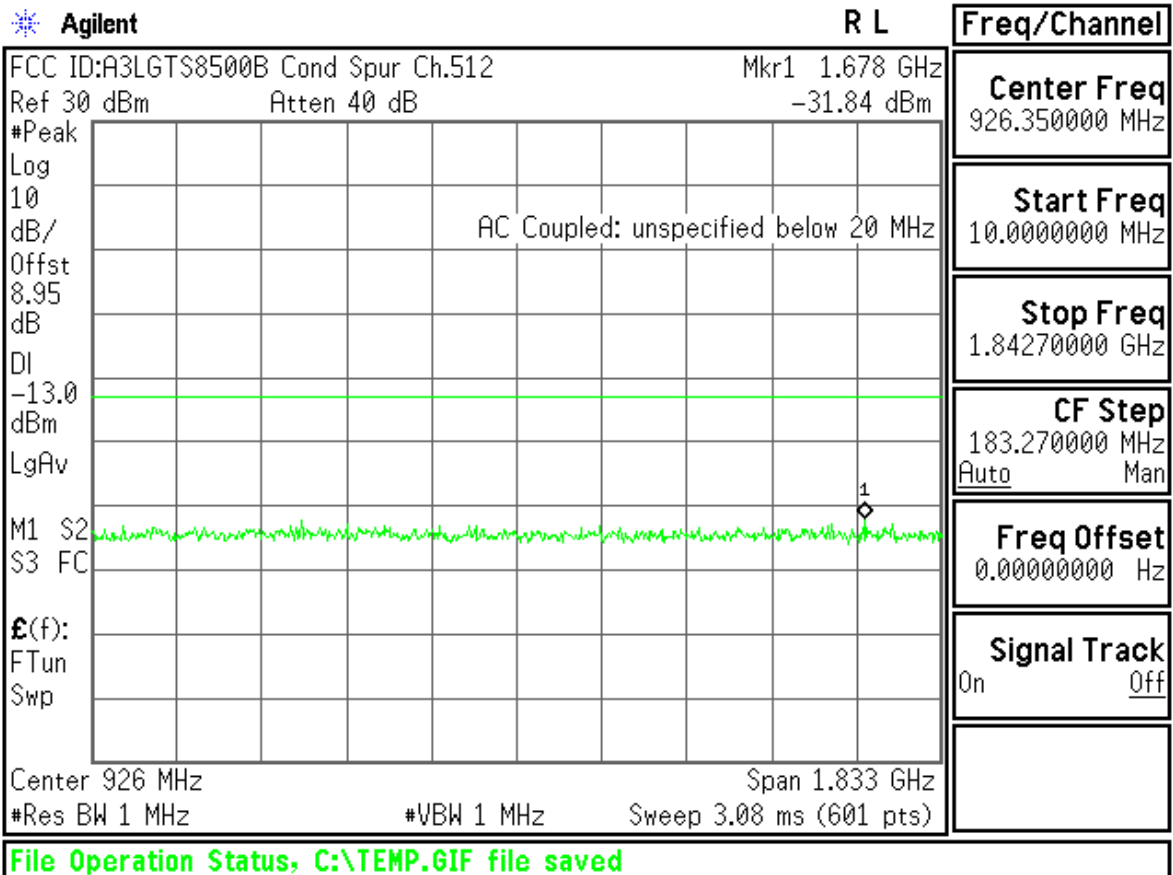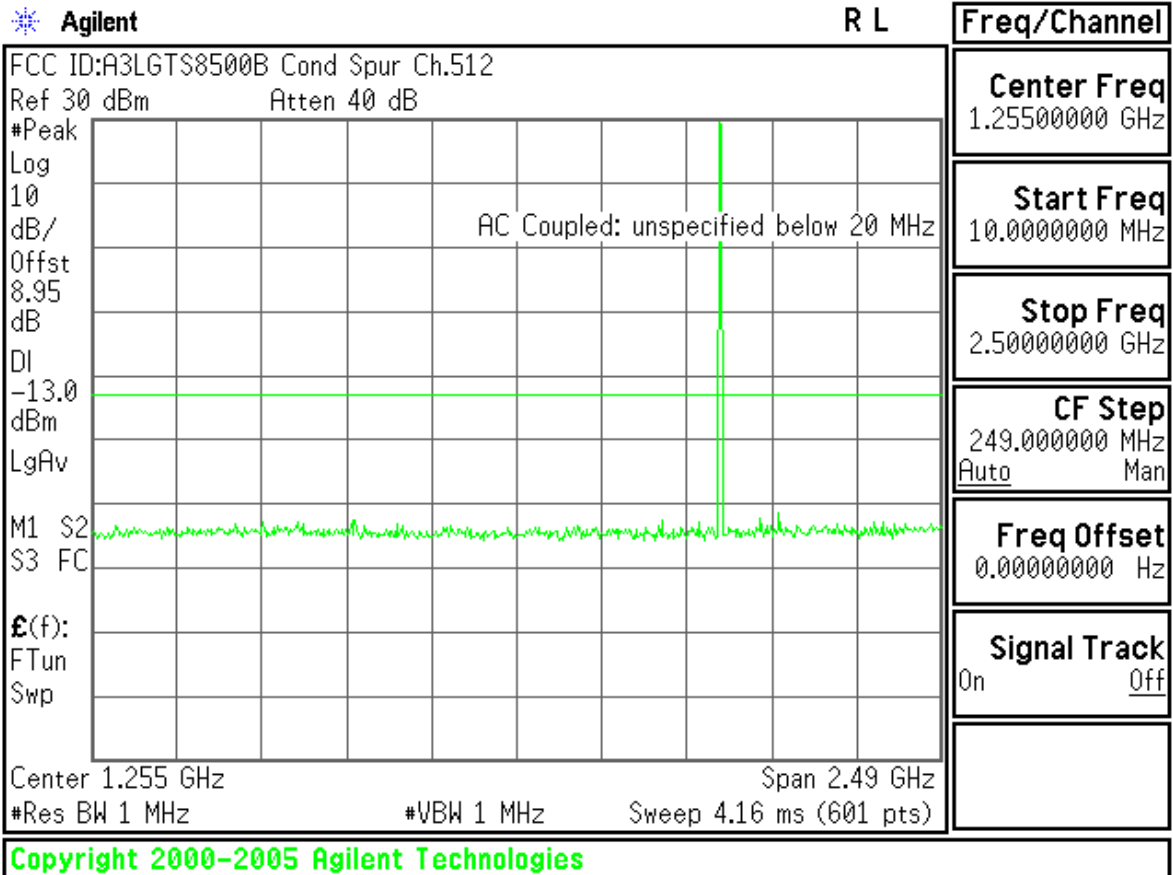

Agilent

R L

Freq/Channel

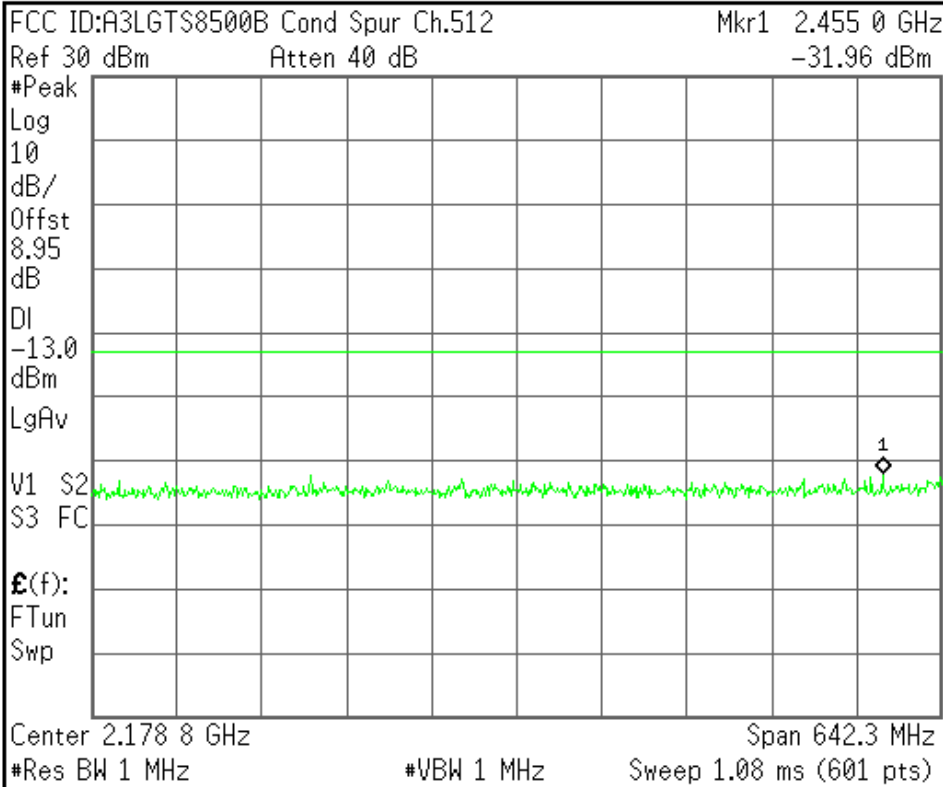


Center Freq 2.17885000 GHz
Start Freq 1.85770000 GHz
Stop Freq 2.50000000 GHz
CF Step 64.2300000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

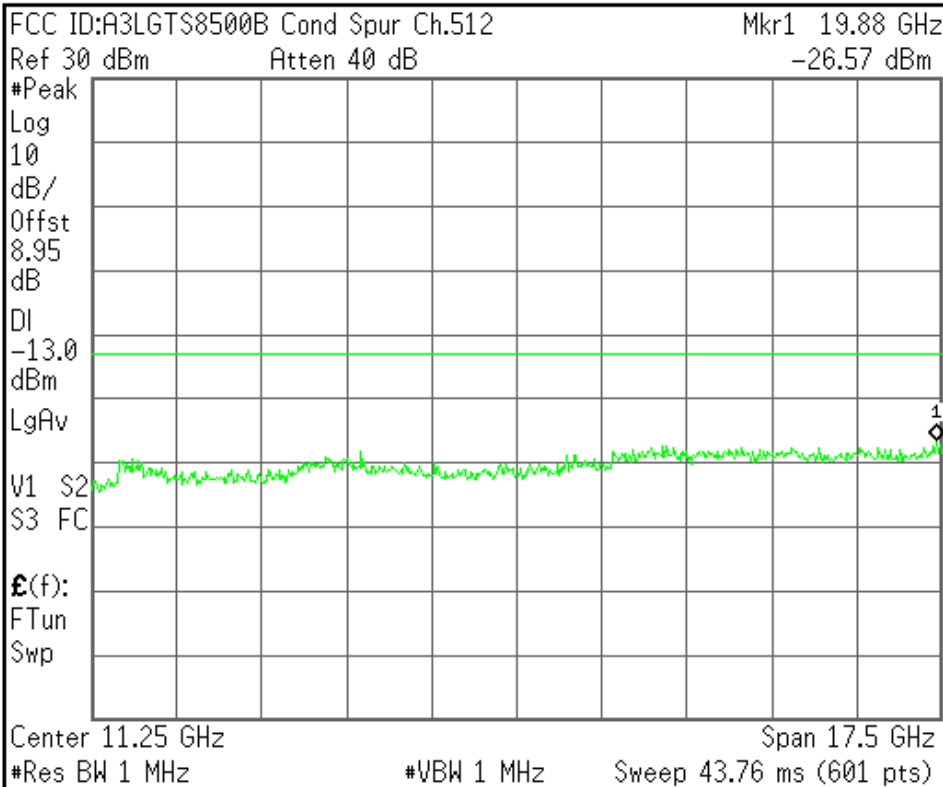


Center Freq 11.2500000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.0000000 GHz
CF Step 1.75000000 GHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

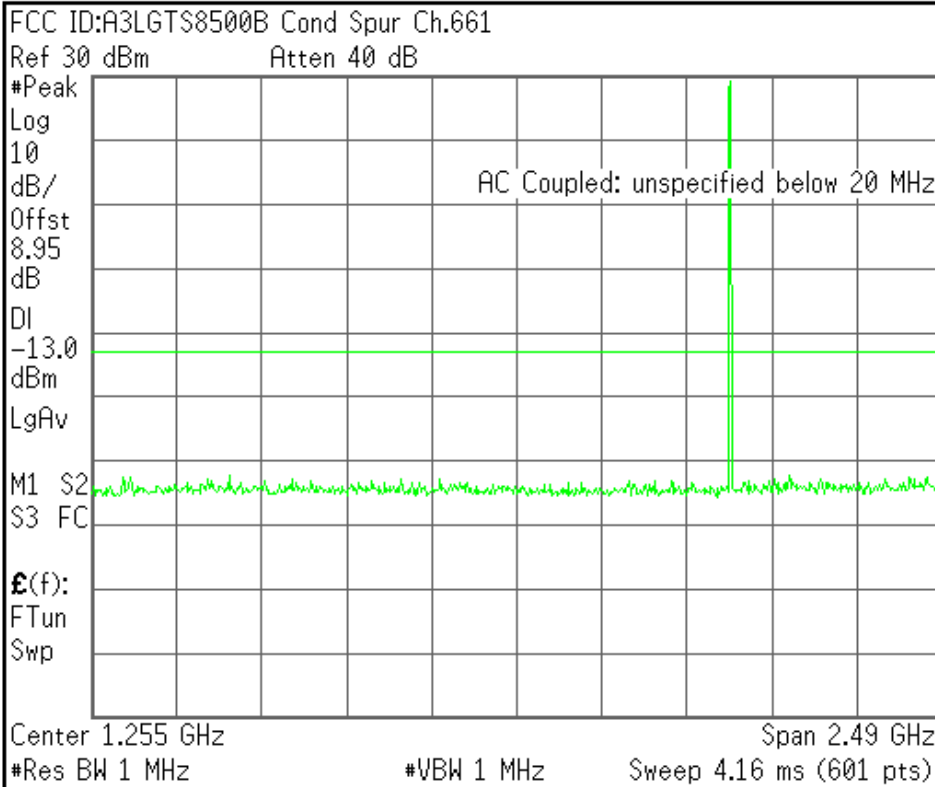


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

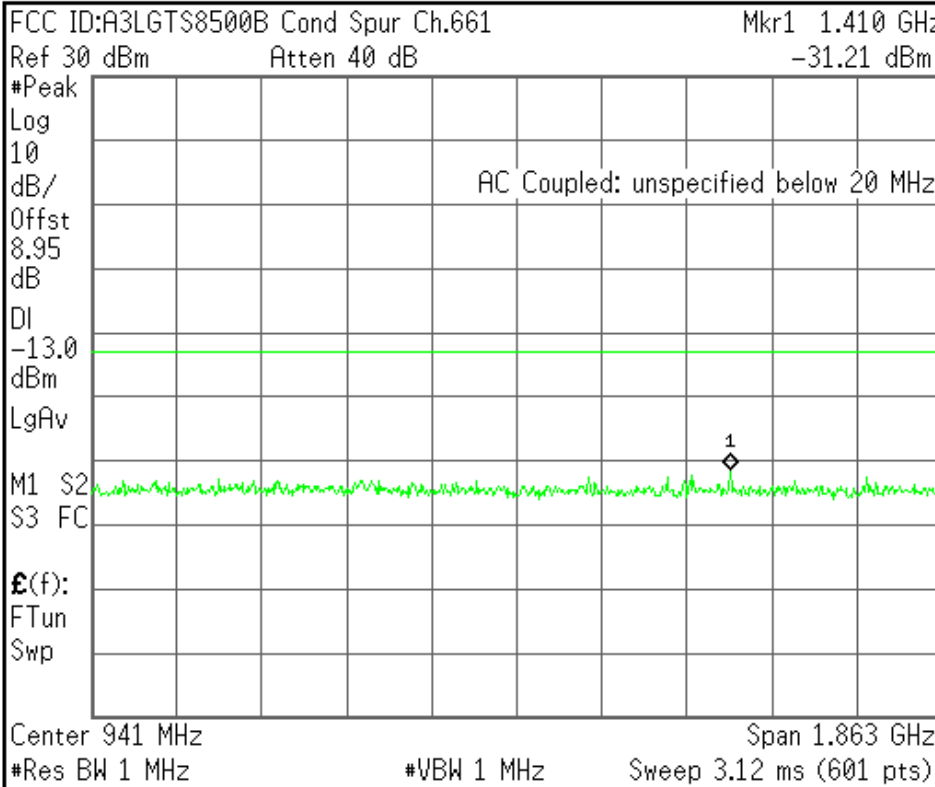


Center Freq 941.250000 MHz
Start Freq 10.0000000 MHz
Stop Freq 1.87250000 GHz
CF Step 186.250000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

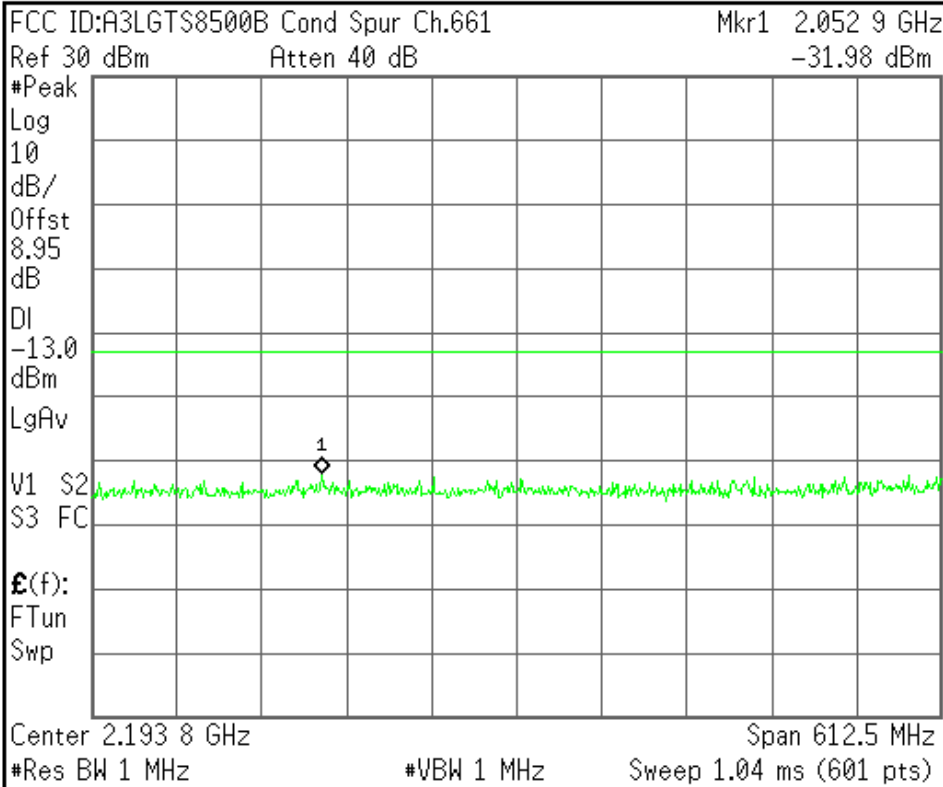


Center Freq 2.19375000 GHz
Start Freq 1.88750000 GHz
Stop Freq 2.50000000 GHz
CF Step Auto Man 61.2500000 MHz
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

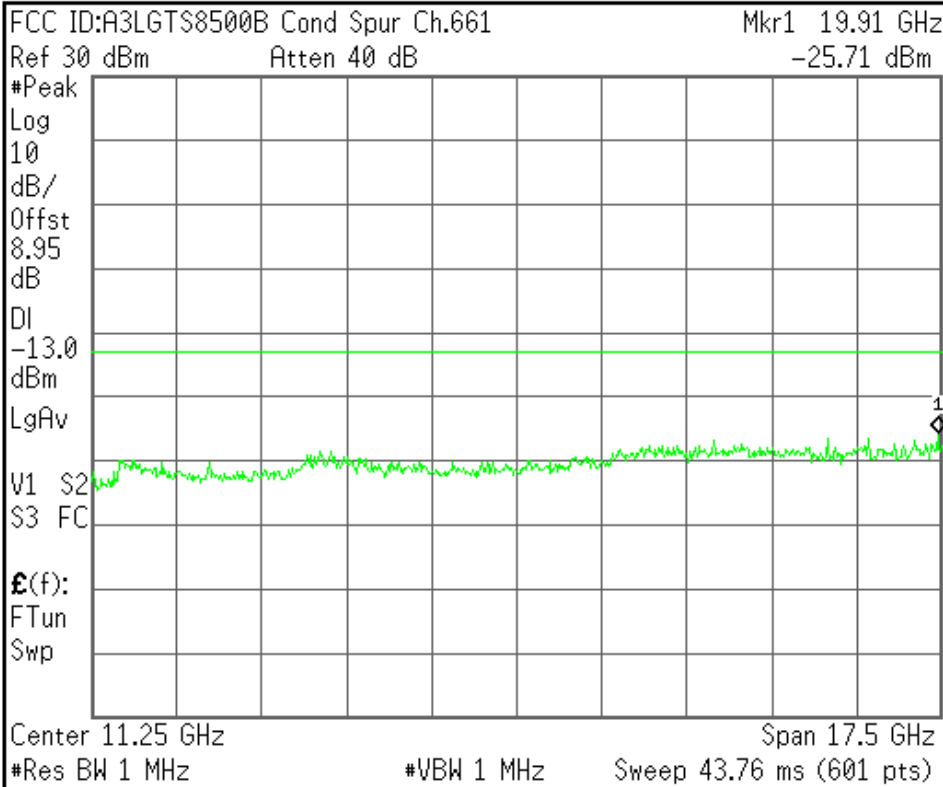


Center Freq 11.2500000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.0000000 GHz
CF Step Auto Man 1.75000000 GHz
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

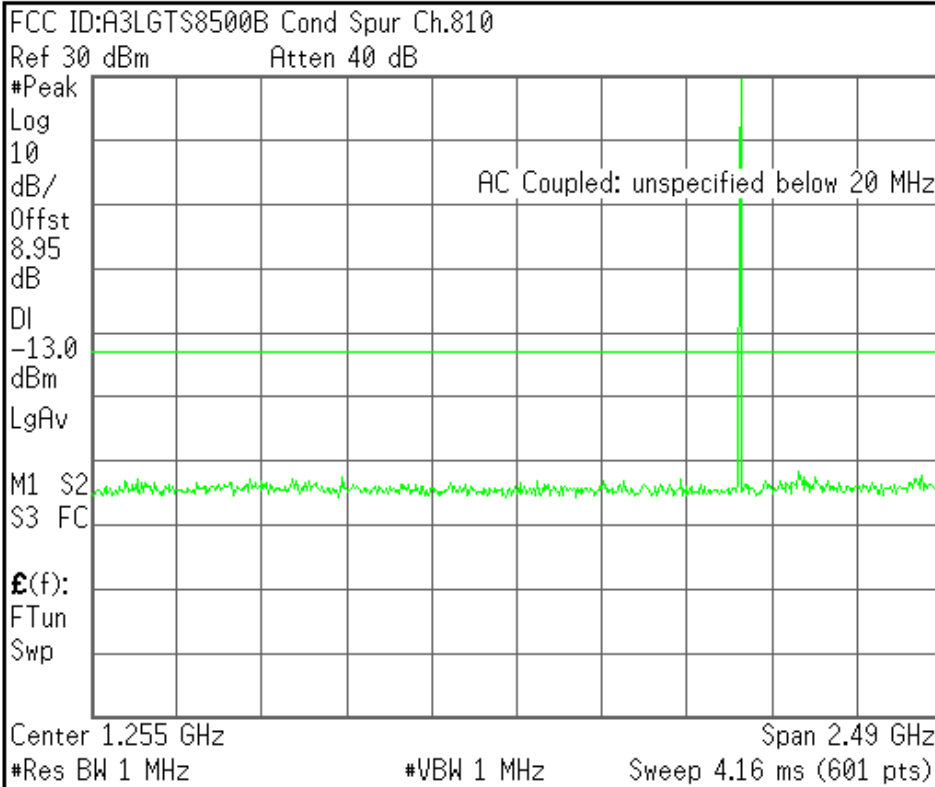


Center Freq 1.25500000 GHz
Start Freq 10.0000000 MHz
Stop Freq 2.50000000 GHz
CF Step 249.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

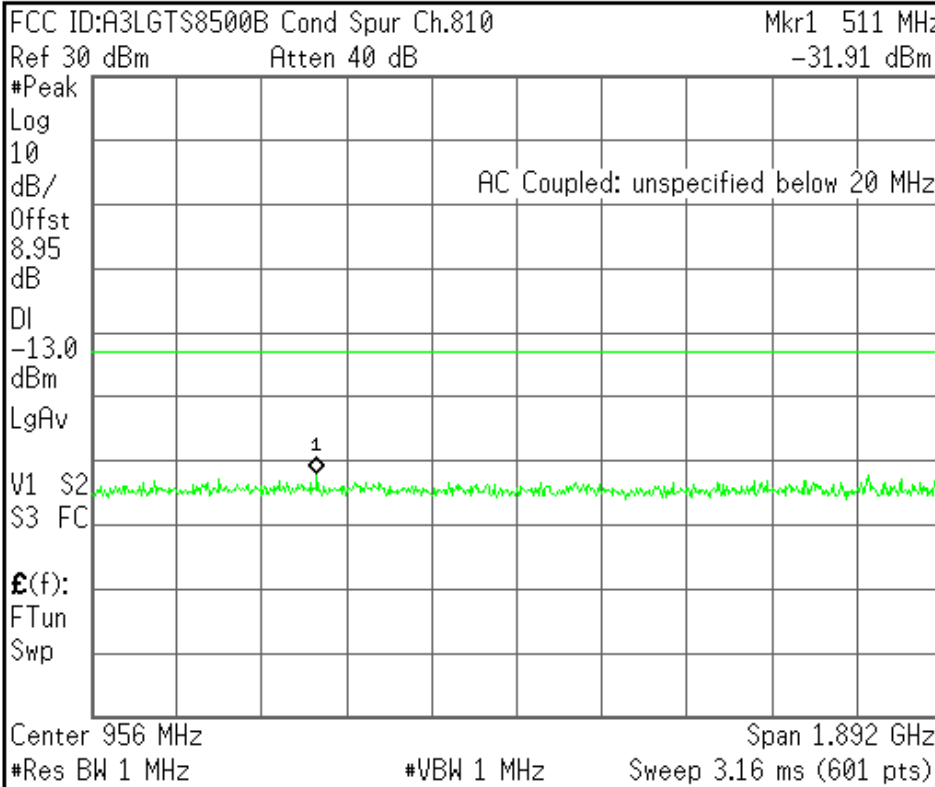


Center Freq 956.150000 MHz
Start Freq 10.0000000 MHz
Stop Freq 1.90230000 GHz
CF Step 189.230000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

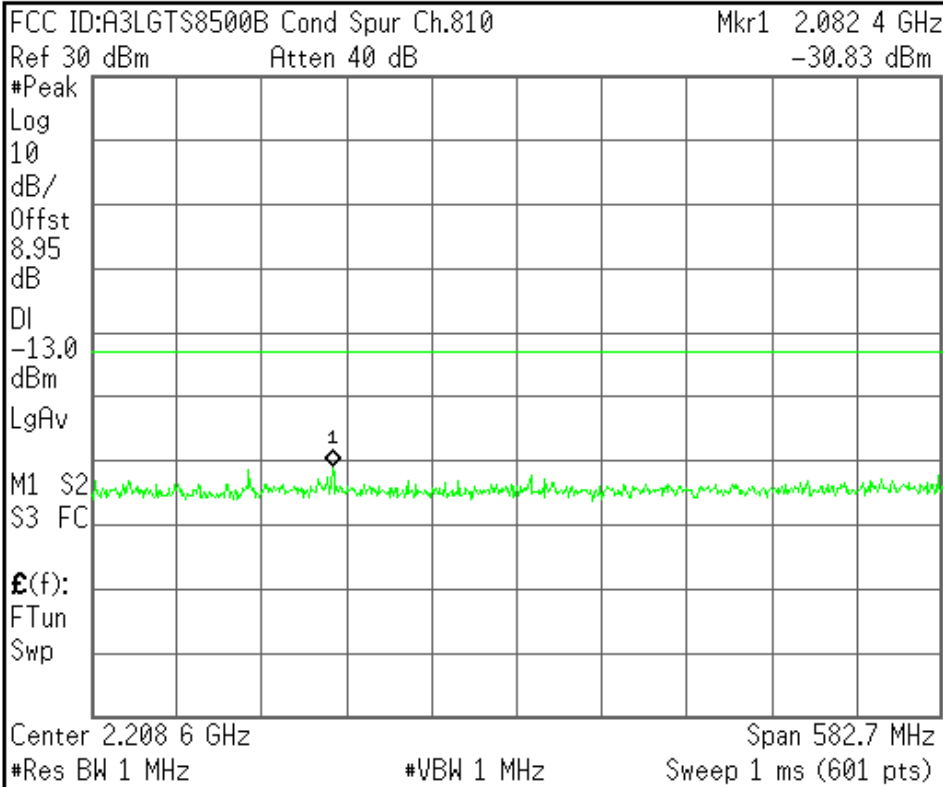


Center Freq 2.20865000 GHz
Start Freq 1.91730000 GHz
Stop Freq 2.50000000 GHz
CF Step Auto Man 58.2700000 MHz
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

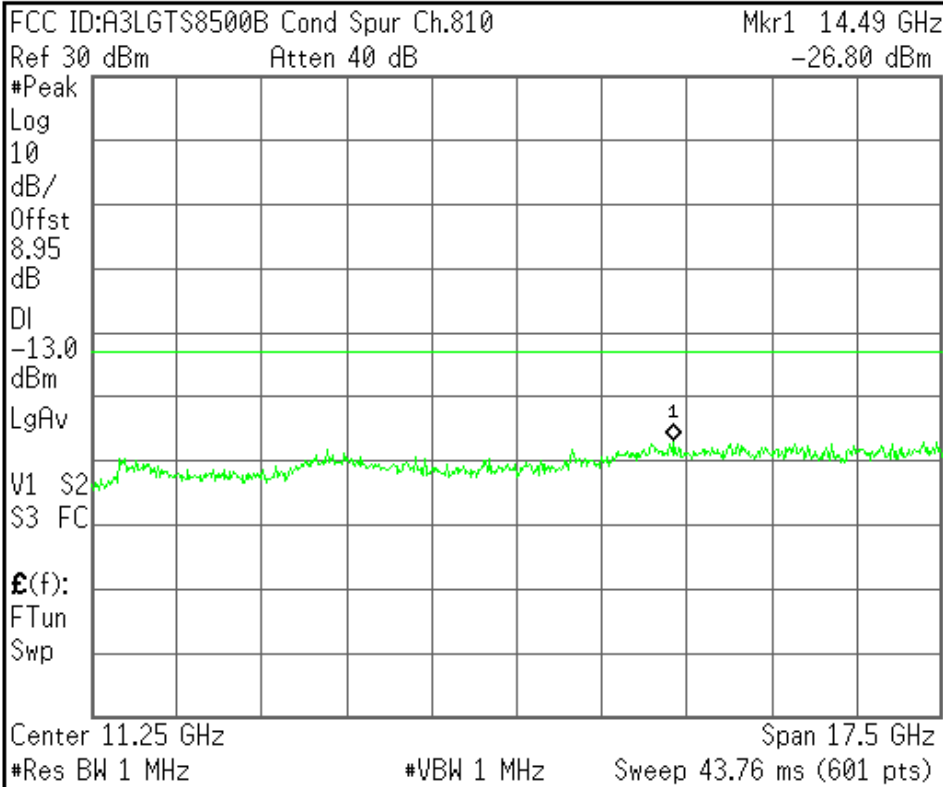

Center Freq 11.2500000 GHz
Start Freq 2.50000000 GHz
Stop Freq 20.0000000 GHz
CF Step Auto Man 1.75000000 GHz
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT58500B Band Edge Ch.512

Ref 30 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

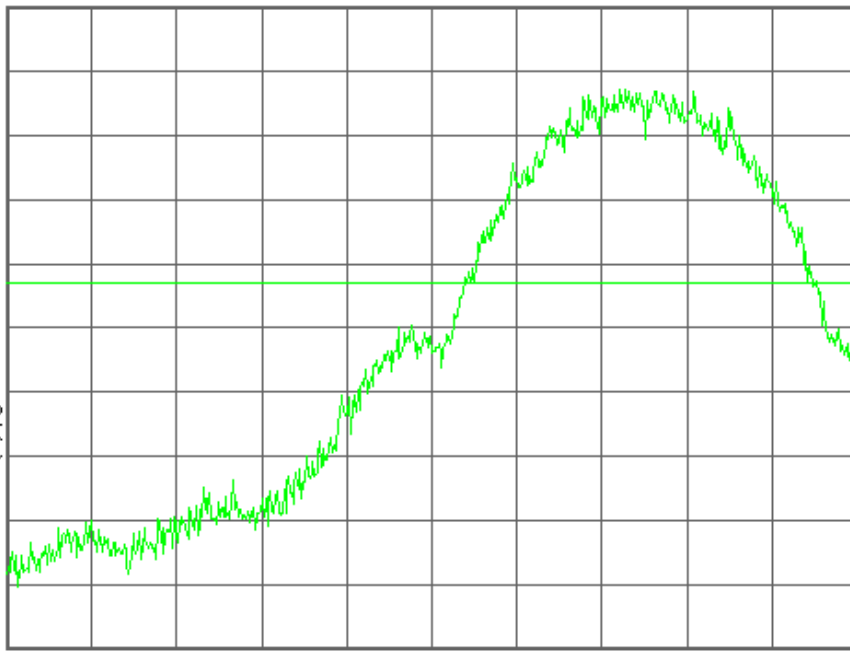

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT58500B Band Edge Ch.512

Mkr1 1.849 977 3 GHz

Ref 30 dBm

Atten 40 dB

-19.66 dBm

#Avg

Log

10

dB/

Offst

8.95

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

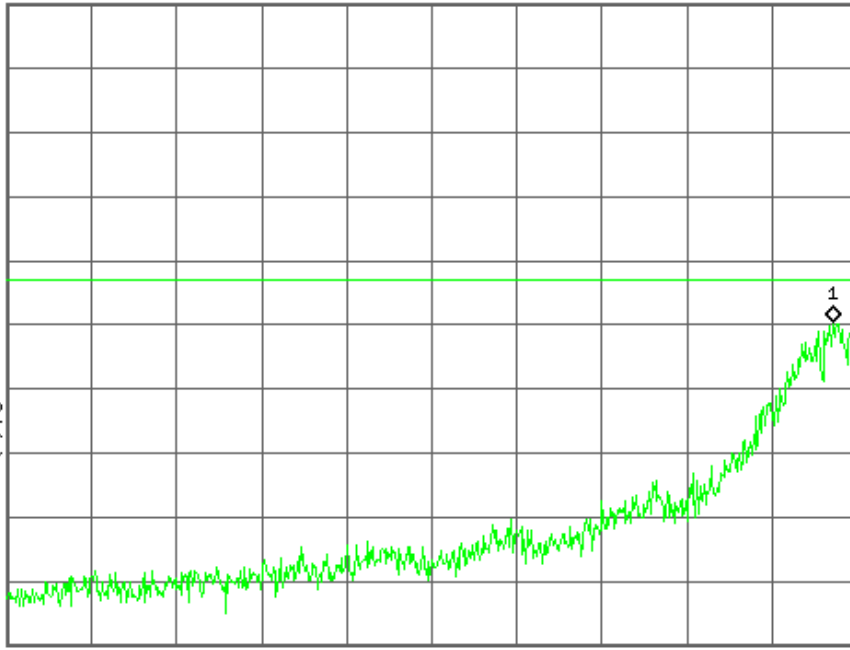

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R L

Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.810

Ref 30 dBm Atten 40 dB

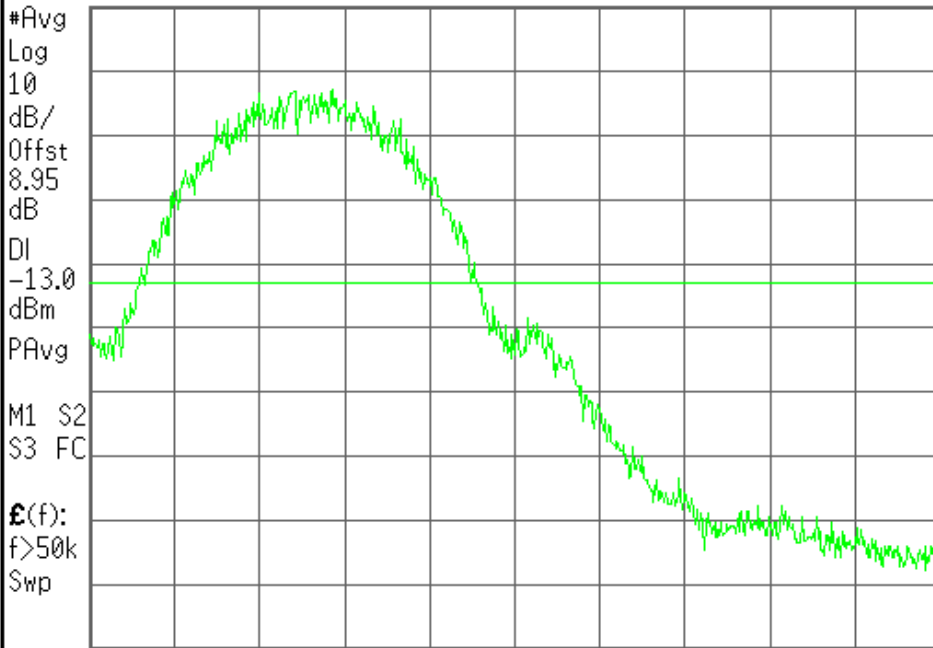

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.910 000 0 GHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.810

Mkr1 1.910 019 0 GHz

Ref 30 dBm Atten 40 dB

-19.67 dBm

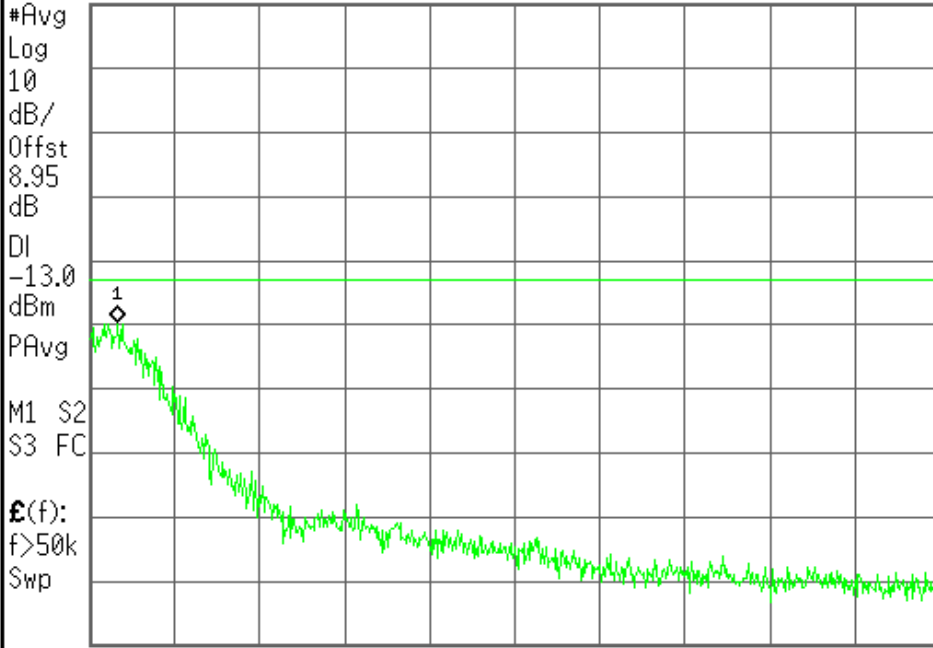

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

Center 1.910 405 0 GHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

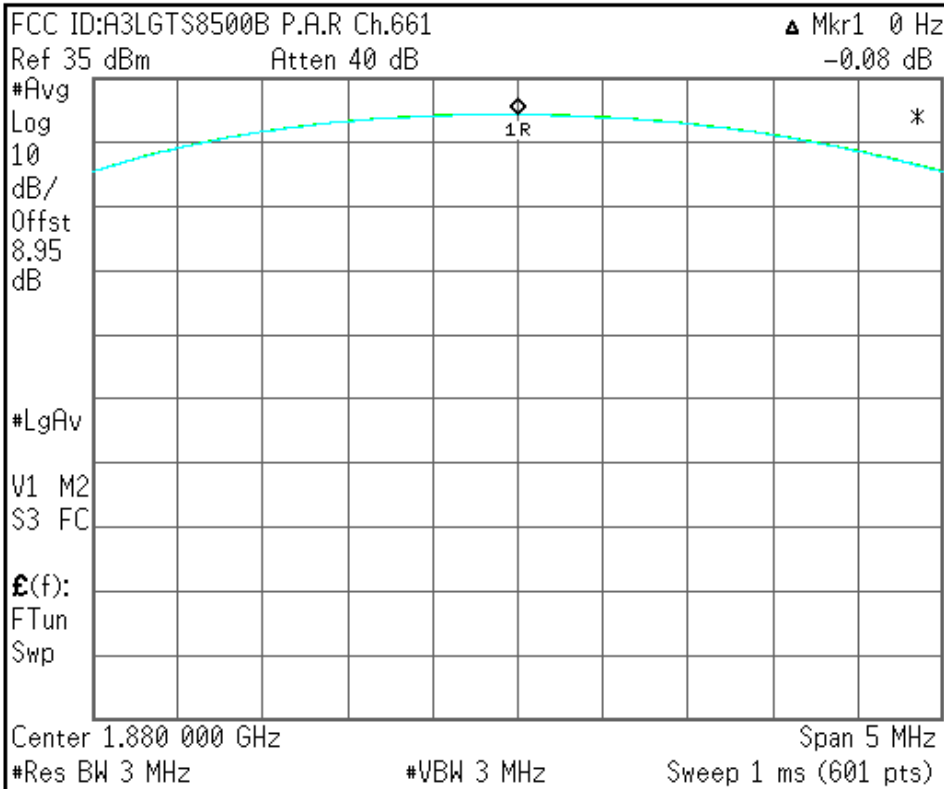

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87750000 GHz
Stop Freq 1.88250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 824.2 MHz		Trig Free	
Occupied Bandwidth			
FCC ID:A3LGTS8500B 0BW Ch.128 EDGE Ref 27 dBm Atten 30 dB			
#Peak			
Center	824.200 MHz	Span	1 MHz
#Res BW	3 kHz	#VBW	3 kHz
#Sweep	1 s (601 pts)		
Occupied Bandwidth		Occ BW % Pwr	99.00 %
241.2803 kHz		x dB	-26.00 dB
Transmit Freq Error		-386.788 Hz	
x dB Bandwidth		300.561 kHz	

Freq/Channel
Center Freq 824.200000 MHz
Start Freq 823.700000 MHz
Stop Freq 824.700000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R T

Ch Freq 836.6 MHz		Trig Free	
Occupied Bandwidth			
FCC ID:A3LGTS8500B 0BW Ch.190 EDGE Ref 27 dBm Atten 30 dB			
#Peak			
Center	836.600 MHz	Span	1 MHz
#Res BW	3 kHz	#VBW	3 kHz
#Sweep	1 s (601 pts)		
Occupied Bandwidth		Occ BW % Pwr	99.00 %
243.1198 kHz		x dB	-26.00 dB
Transmit Freq Error		1.272 kHz	
x dB Bandwidth		299.019 kHz	

Freq/Channel
Center Freq 836.600000 MHz
Start Freq 836.100000 MHz
Stop Freq 837.100000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

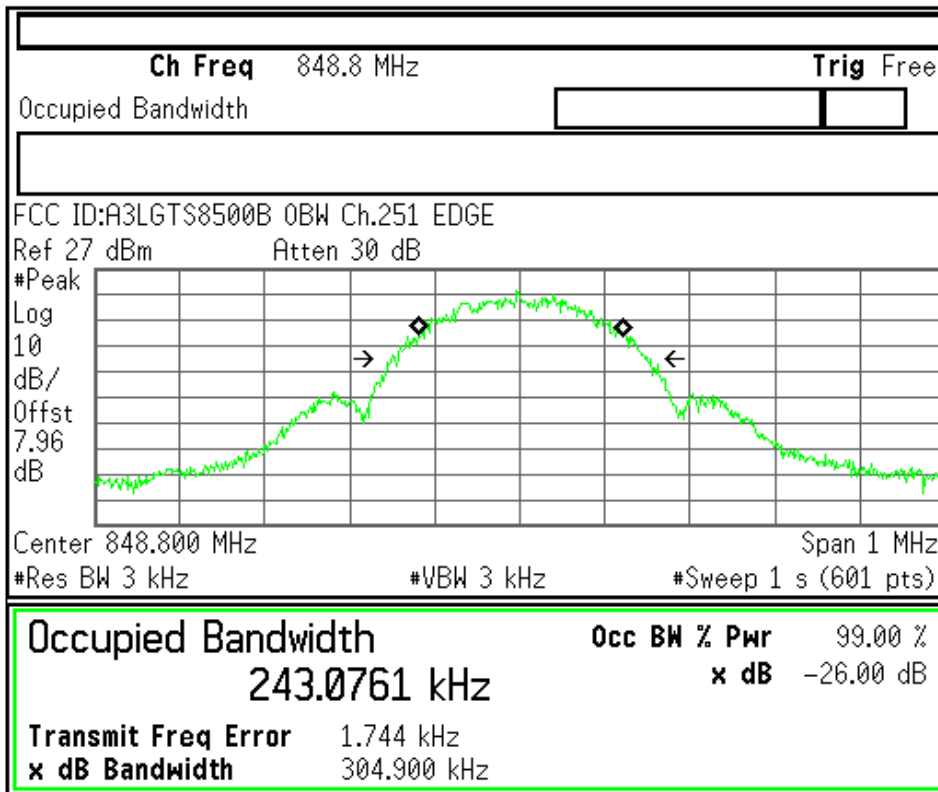

Freq/Channel
Center Freq 848.800000 MHz
Start Freq 848.300000 MHz
Stop Freq 849.300000 MHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved

FCC ID : A3LGTS8500B Transmit Power 128CH EDGE

Measurement/Instrument Screen									
Control		EGPRS Transmit Power						PDCH Parms	
EGPRS Transmit Power Setup	EPK Burst Power			EPK Est Carrier Power			Downlink Traffic Power		
	Minimum	Maximum		Minimum	Maximum		Traffic Band		
	24.71 dBm	26.17 dBm		25.52 dBm	25.64 dBm		GS1850		
	Average	Std Dev		Average	Std Dev		Traffic Channel		
	25.55 dBm	0.23 dBm		25.53 dBm	0.00 dBm		128		
	200 /200			Single			HS TX Level		
							Modulation Coding Scheme		
							Return		
	Active Cell Transferring				Sys Type: EGPRS				
1 of 2			IntRef	Offset	R T				1 of 2

Measurement/Instrument Screen									
Control	EGPRS Transmit Power							PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum	Maximum		Minimum	Maximum			Traffic Band	
	24.82 dBm	26.26 dBm		25.52 dBm	25.64 dBm			GSM850	
	Average	Std Dev		Average	Std Dev			Traffic Channel	
25.55 dBm	0.24 dBm		25.63 dBm	0.00 dBm			190		
	200 /200							Single	
				Active Cell Transferring			Sys Type: EGPRS		
1 of 2				IntRef	Offset	R T			1 of 2

Measurement/Instrument Screen									
Control	EGPRS Transmit Power							PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum	Maximum		Minimum	Maximum			Traffic Band	
	24.88 dBm	26.34 dBm		25.60 dBm	25.63 dBm			GSM850	
	Average	Std Dev		Average	Std Dev			Traffic Channel	
25.56 dBm	0.21 dBm		25.61 dBm	0.00 dBm			251		
	200 /200							Single	
				Active Cell Transferring			Sys Type: EGPRS		
1 of 2				IntRef	Offset	R T			1 of 2

Agilent


R L

Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.128 EDGE

Ref 27 dBm Atten 30 dB

#Avg
Log
10
dB/
Offst
7.96
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

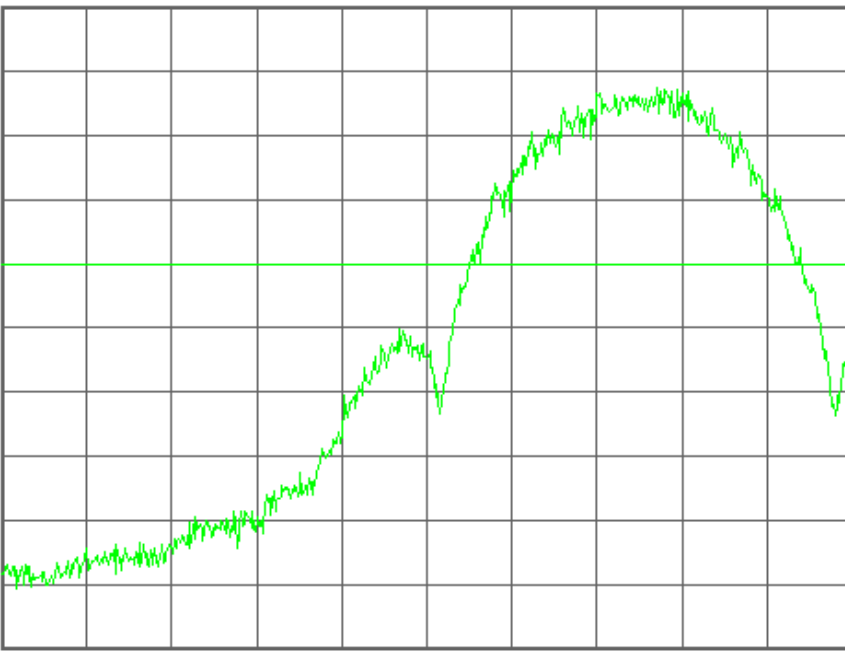

Center 824.000 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel


FCC ID:A3LGT8500B Band Edge Ch.128 EDGE

Mkr1 823.986 6 MHz

Ref 27 dBm Atten 30 dB

-22.30 dBm

#Avg
Log
10
dB/
Offst
7.96
dB
DI
-13.0
dBm
PAvg
M1 S2
S3 FC
£(f):
f>50k
Swp

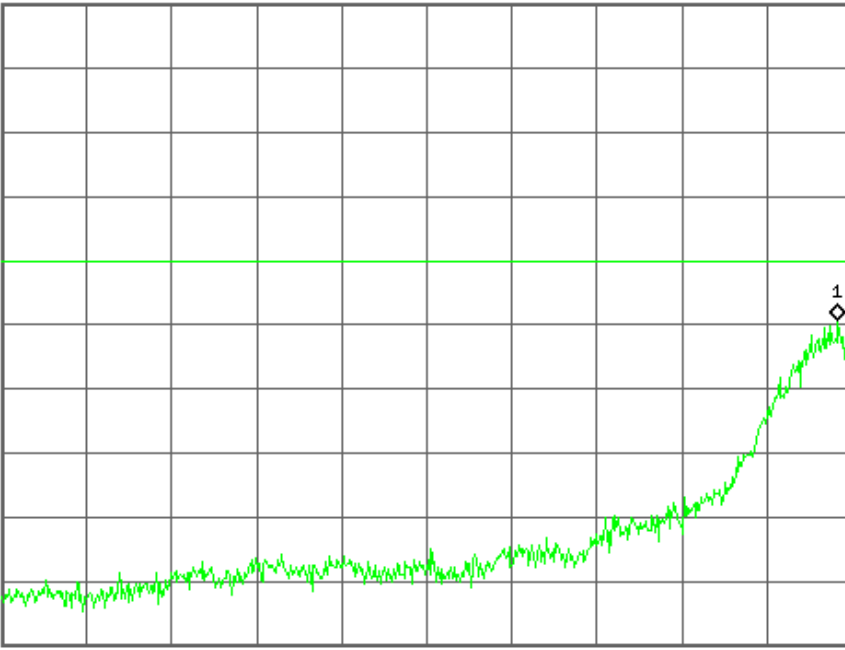

Center 823.595 0 MHz Span 810 kHz
#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz

Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R L

Freq/Channel

FCC ID:A3LGTS8500B Band Edge Ch.251 EDGE

Ref 27 dBm Atten 30 dB

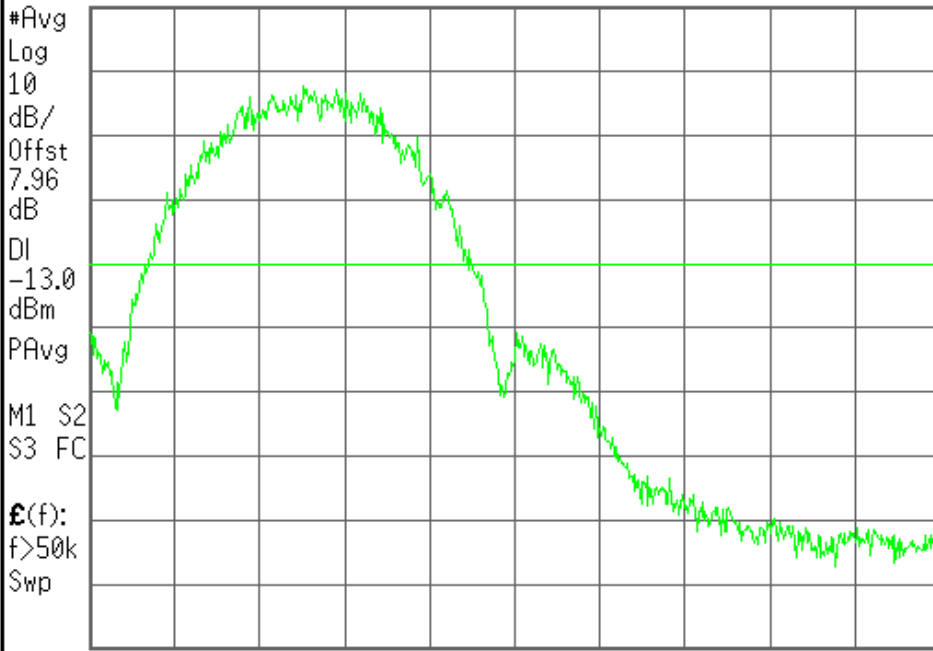

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 849.000 0 MHz Span 810 kHz

#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGTS8500B Band Edge Ch.251 EDGE

Mkr1 849.002 7 MHz

Ref 27 dBm Atten 30 dB

-23.76 dBm

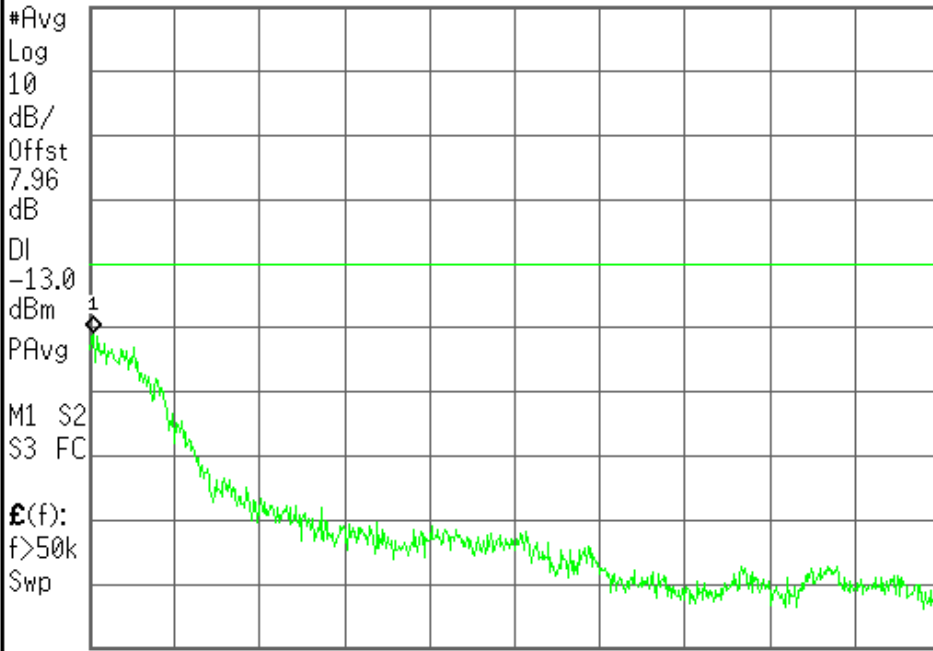

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 849.405 0 MHz Span 810 kHz

#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 1.8502 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LGTS8500B 0BW Ch.512 EDGE
 Ref 26 dBm Atten 30 dB

Center 1.850 200 GHz Span 1 MHz
 #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
242.5839 kHz	x dB	-26.00 dB
Transmit Freq Error	924.563 Hz	
x dB Bandwidth	311.295 kHz	

Freq/Channel

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Ch Freq 1.88 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LGTS8500B 0BW Ch.661 EDGE
 Ref 26 dBm Atten 30 dB

Center 1.880 000 GHz Span 1 MHz
 #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
243.2937 kHz	x dB	-26.00 dB
Transmit Freq Error	-883.231 Hz	
x dB Bandwidth	312.071 kHz	

Freq/Channel

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz

CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Ch Freq 1.9098 GHz		Trig Free	
Occupied Bandwidth			
FCC ID:A3LGTS8500B 0BW Ch.810 EDGE Ref 26 dBm Atten 30 dB			
#Res BW 3 kHz		#Sweep 1 s (601 pts)	
Occupied Bandwidth		Occ BW % Pwr 99.00 %	
241.4895 kHz		x dB -26.00 dB	
Transmit Freq Error 3.126 kHz			
x dB Bandwidth 307.306 kHz			
File Operation Status, C:\TEMP.GIF file saved			

Freq/Channel
Center Freq 1.90980000 GHz
Start Freq 1.90930000 GHz
Stop Freq 1.91030000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

FCC ID : A3LGTS8500B Transmit Power 512CH EDGE

Measurement/Instrument Screen						
Control	EGPRS Transmit Power				PDCH Parms	
EGPRS Transmit Power Setup	EPK Burst Power		EPK Est Carrier Power		Downlink Traffic Power	
	Minimum	Maximum	Minimum	Maximum	Traffic Band	
	25.18 dBm	26.50 dBm	25.99 dBm	26.02 dBm	PCS	
	Average	Std Dev	Average	Std Dev	Traffic Channel	
25.94 dBm	0.24 dBm	26.01 dBm	0.01 dBm	512		
	200 /200				Single	
	Active Cell Transferring				Sys Type: EGPRS	
1 of 2			IntRef	Offset	R T	1 of 2


Measurement/Instrument Screen									
Control		EGPRS Transmit Power						PDCH Parms	
EGPRS Transmit Power Setup ▾		EP SK Burst Power			EP SK Est Carrier Power			Downlink Traffic Power ▾	
		Minimum	Maximum	Minimum	Maximum			Traffic Band	
		25.10 dBm	26.44 dBm	25.82 dBm	25.84 dBm			PCS	
		Average	Std Dev	Average	Std Dev			Traffic Channel	
		25.77 dBm	0.22 dBm	25.83 dBm	0.00 dBm			661	
		200 /200			Single				
								HS TX Level ▾	
								Modulation Coding Scheme ▾	
								Return	
		Active Cell Transferring				Sys Type: EGPRS			
1 of 2				IntRef	Offset	R	T	1 of 2	

Measurement/Instrument Screen									
Control		EGPRS Transmit Power						PDCH Parms	
EGPRS Transmit Power Setup ▾		EP SK Burst Power			EP SK Est Carrier Power			Downlink Traffic Power ▾	
		Minimum	Maximum	Minimum	Maximum			Traffic Band	
		25.34 dBm	26.51 dBm	25.93 dBm	25.96 dBm			PCS	
		Average	Std Dev	Average	Std Dev			Traffic Channel	
		25.91 dBm	0.23 dBm	25.95 dBm	0.00 dBm			810	
		200 /200			Single				
								HS TX Level ▾	
								Modulation Coding Scheme ▾	
								Return	
		Active Cell Transferring				Sys Type: EGPRS			
1 of 2				IntRef	Offset	R	T	1 of 2	

Agilent

R L

Freq/Channel

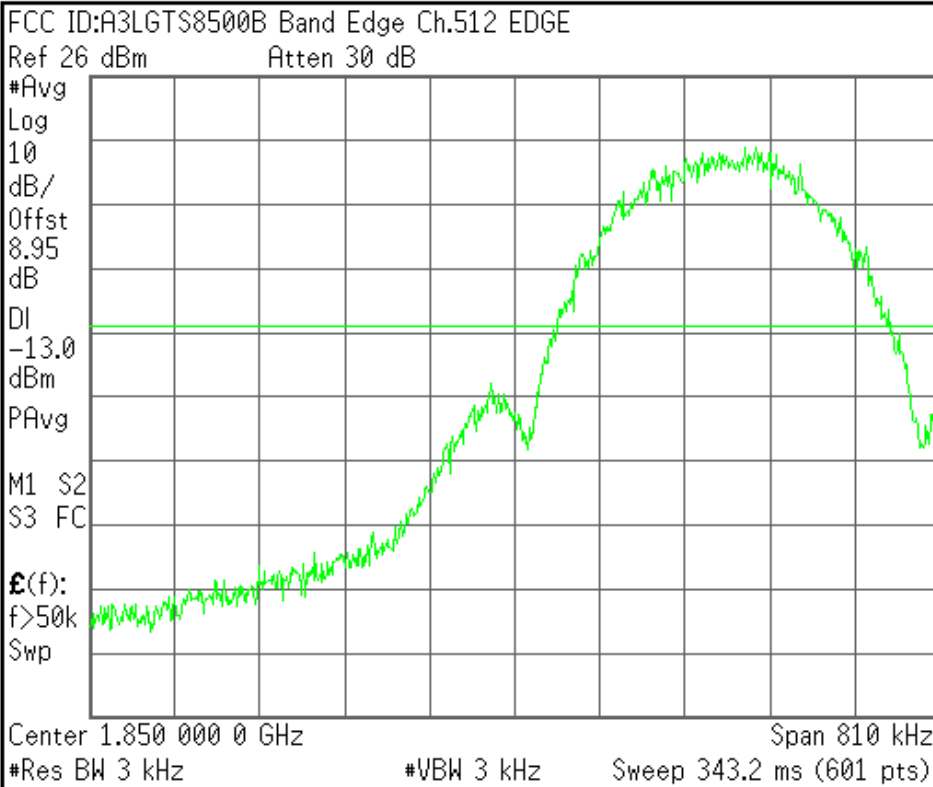


Center Freq 1.85000000 GHz
Start Freq 1.84959500 GHz
Stop Freq 1.85040500 GHz
CF Step 81.0000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2005 Agilent Technologies

Agilent

R T

Freq/Channel

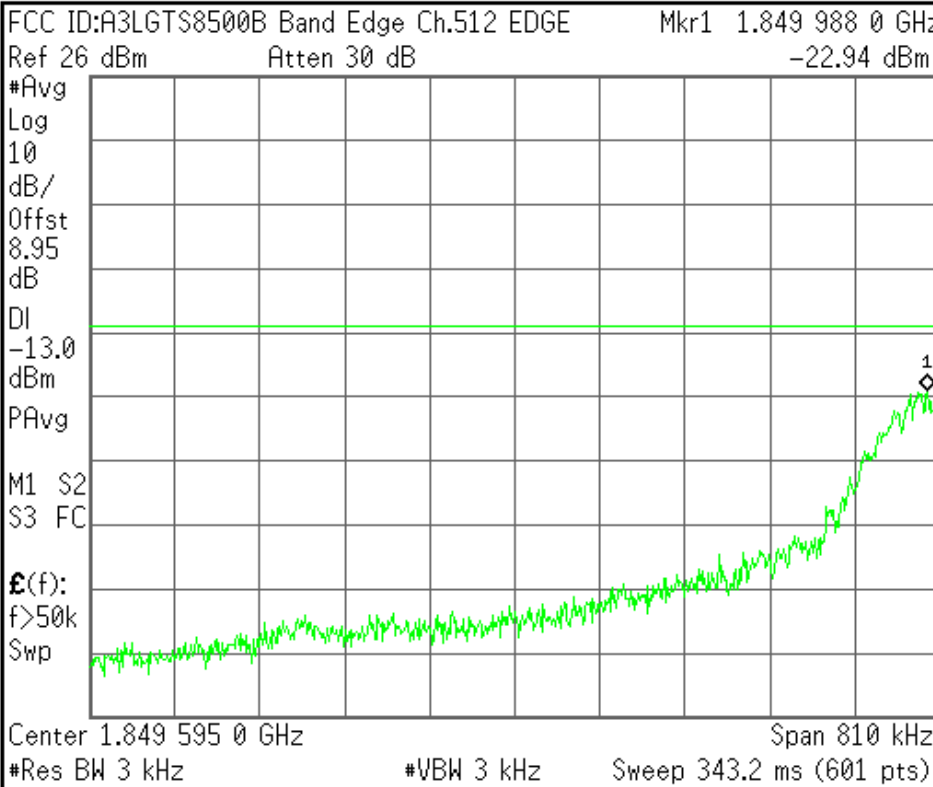

Center Freq 1.84959500 GHz
Start Freq 1.84919000 GHz
Stop Freq 1.85000000 GHz
CF Step 81.0000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

File Operation Status, C:\TEMP.GIF file saved


Agilent

R L

Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.810 EDGE

Ref 26 dBm Atten 30 dB

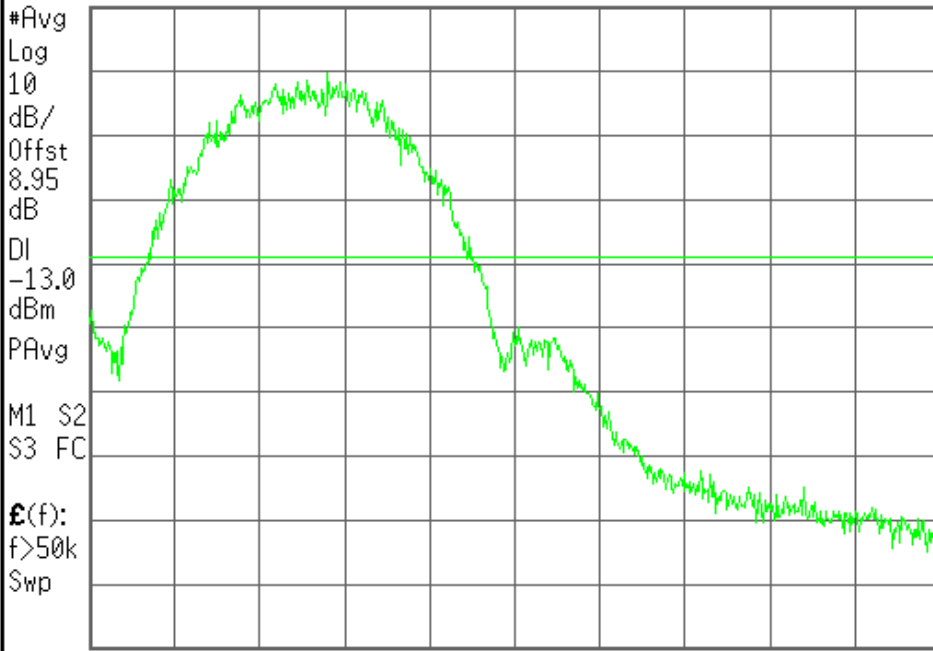

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.910 000 0 GHz Span 810 kHz

#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T


Freq/Channel

FCC ID:A3LGT8500B Band Edge Ch.810 EDGE

Mkr1 1.910 007 9 GHz

Ref 26 dBm Atten 30 dB

-24.32 dBm

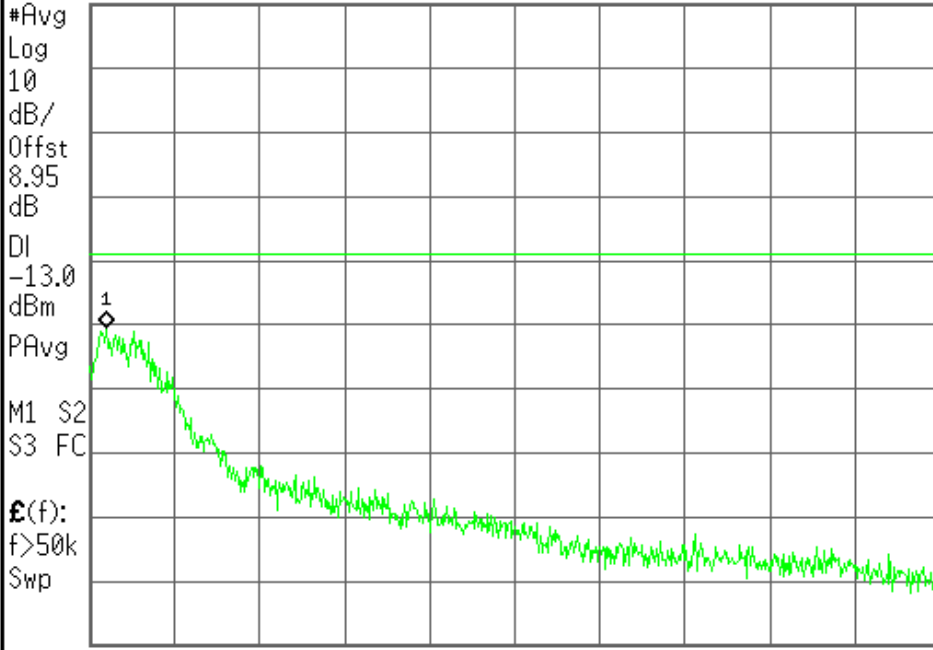

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.910 405 0 GHz Span 810 kHz


#Res BW 3 kHz #VBW 3 kHz Sweep 343.2 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R

Freq/Channel

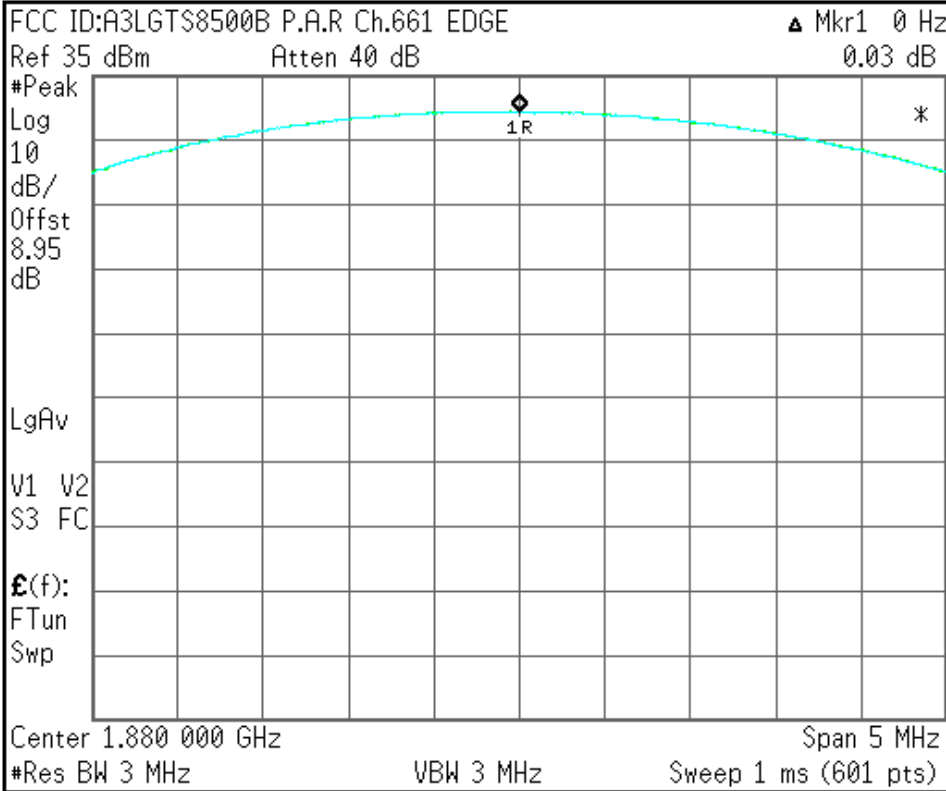

Center Freq 1.88000000 GHz
Start Freq 1.87750000 GHz
Stop Freq 1.88250000 GHz
CF Step 500.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2005 Agilent Technologies