

CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Giga Party Audio

MODEL NUMBER: MX-T40

FCC ID: A3LMXT40

REPORT NUMBER: 4789411785-2

ISSUE DATE: March 31, 2020

Prepared for

Samsung Electronics Co Ltd. 19 Chapin Rd., Building D Pine Brook New Jersey United States 07058

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, People's Republic of China Tel: +86 769 22038881 Fax: +86 769 33244054 Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	03/31/2020	Initial Issue	



Summary of Test Results				
Clause	Test Items	FCC Rules	Test Results	
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1)	Pass	
2	Conducted Output Power	FCC 15.247 (b) (1)	Pass	
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1)	Pass	
4	Number of Hopping Frequency	15.247 (a) (1) III	Pass	
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III	Pass	
6	Conducted Bandedge	FCC 15.247 (d)	Pass	
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass	
8	Conducted Emission Test For AC Power Port	FCC 15.207	Pass	
9	Antenna Requirement	FCC 15.203	Pass	
This test report is only published to and used by the applicant, and it is not for evidence purpose in China.				



TABLE OF CONTENTS

1.	AT	TESTATION OF TEST RESULTS	6
2.	TES	ST METHODOLOGY	7
3.	FA	CILITIES AND ACCREDITATION	7
4.	CA	LIBRATION AND UNCERTAINTY	8
4	1.1.	MEASURING INSTRUMENT CALIBRATION	8
4	[!] .2.	MEASUREMENT UNCERTAINTY	8
5.	EQ	UIPMENT UNDER TEST	9
5	5.1.	DESCRIPTION OF EUT	9
5	5.2.	MAXIMUM OUTPUT POWER	9
5	5.3.	PACKET TYPE CONFIGURATION	9
5	5.4.	CHANNEL LIST	
5	5.5.	TEST CHANNEL CONFIGURATION	
5	5.6.	THE WORSE CASE POWER SETTING PARAMETER	
5	5.7.	DESCRIPTION OF AVAILABLE ANTENNAS	11
5	5.8.	WORST-CASE CONFIGURATIONS	11
5	5.9.	TEST ENVIRONMENT	11
5	5.10.	DESCRIPTION OF TEST SETUP	
5	5.11.	MEASURING INSTRUMENT AND SOFTWARE USED	14
6.	AN	TENNA PORT TEST RESULTS	16
6	6.1.	ON TIME AND DUTY CYCLE	
6	5.2.	20dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	
6	6.3.	CONDUCTED OUTPUT POWER	20
6	6.4.	CARRIER HOPPING CHANNEL SEPARATION	
	6.4. 6.4	GFSK MODE BDPSK MODE	
6	6. 5.	NUMBER OF HOPPING FREQUENCY	
6	6.6.	TIME OF OCCUPANCY (DWELL TIME)	
	6.6	1. GFSK MODE	
~		2. 8DPSK MODE	
6	.7.	CONDUCTED SPURIOUS EMISSION	
		DIATED TEST RESULTS	
7	.1.	LIMITS AND PROCEDURE	35



7	7.2. RESTRICTED BANDEDGE	
	7.2.1. GFSK MODE	
_		
/	7.3. SPURIOUS EMISSIONS (1~3GHz) 7.3.1. GFSK MODE	
	7.3.2. 8DPSK MODE	
7	7.4. SPURIOUS EMISSIONS (3~18GHz)	65
	7.4.1. GFSK MODE	65
	7.4.2. 8DPSK MODE	71
7	7.5. SPURIOUS EMISSIONS 18G ~ 26GHz	
	7.5.1. GFSK MODE	77
7	7.6. SPURIOUS EMISSIONS 30M ~ 1 GHz	79
	7.6.1. GFSK MODE	79
7	7.7. SPURIOUS EMISSIONS BELOW 30M	81
	7.7.1. GFSK MODE	81
8.	AC POWER LINE CONDUCTED EMISSIONS	
	8.1.1. GFSK MODE	
		04
9.	ANTENNA REQUIREMENTS	86
	Appendix A): 20dB Bandwidth	87
	Appendix B): Hopping Channel Number	
	Appendix C): Conducted Peak Output Power	
	Appendix D): Band-edge for RF Conducted Emissions	
	Appendix E): RF Conducted Spurious Emissions	



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Address:	Samsung Electronics Co Ltd. 19 Chapin Rd., Building D Pine Brook New Jersey United States 07058
Manufacturer Information Company Name: Address:	Samsung Electronics Co Ltd. 19 Chapin Rd., Building D Pine Brook New Jersey United States 07058
EUT Information EUT Name: Model: Series Model: Model difference: Brand Name: Sample Status: Sample ID: Sample Received Date: Date of Tested:	Giga Party Audio MX-T40 MX-T40/** , MX-T40*** ("*" represents any alphanumeric character or blank) See section 5.1 of this report for detail SAMSUNG Normal 2956256 March 06, 2020– March 31, 2020

APPL	APPLICABLE STANDARDS			
STANDARD		TEST RESULTS		
CFR 47 FCC PART 15 S	UBPART C	PASS		
red By:	Checker	d By:		

Prepared By:

Jacky Jiang

Checked By: Shenn les

Jacky Jiang **Engineer Project Associate**

Approved By:

Aephenbuo

Shawn Wen Laboratory Leader

Stephen Guo Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 DTS Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	 A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Delcaration of Conformity (DoC) and Certification rules ISED(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004
	Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011

Note:

- All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
- The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
- 3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty		
Conduction emission	3.62dB		
Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.2dB		
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB		
Radiation Emission test	5.78dB (1GHz-18Gz)		
(1GHz to 26GHz)(include Fundamental emission)	5.23dB (18GHz-26Gz)		
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.			



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	Gigi Party Audio				
Model	MX-T40				
Series Model	MX-T40/** ,MX-T40*** ("*" blank)	MX-T40/** ,MX-T40*** ("*" represents any alphanumeric character or blank)			
Model difference	MX-T40/** ,MX-T40*** ("*" represents any alphanumeric character or blank) have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with MX-T40.The difference lies only model number and marketing purpose.				
	Operation Frequency 2402 MH		z ~ 2480 MHz		
Product	Modulation Type		Data Rate		
Description	GFSK		1Mbps		
(Bluetooth)	∏/4-DQPSK		2Mbps		
	8DPSK		3Mbps		
Bluetooth Version	BT5.0				
Rated Input	AC100-240V~50/60Hz 35W				

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Bluetooth Mode Frequency (MHz)		Max Output Power (dBm)	EIRP (dBm)
GFSK	2402-2480	0-78[79]	8.566	13.116
8DPSK	2402-2480	0-78[79]	11.42	15.97

5.3. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting(Packet Length)	
	DH1	27	
GFSK	DH3	183	
	DH5	339	
	2-DH1	54	
∏/4-DQPSK	2-DH3	367	
	2-DH5	679	
	3-DH1	83	
8DPSK	3-DH3	552	
	3-DH5	1021	



5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH0, CH39, CH78/	2402MHz, 2441MHz, 2480MHz
	Low, Middle, High	
∏/4-DQPSK	CH0, CH39, CH78/	2402MHz, 2441MHz, 2480MHz
	Low, Middle, High	
8DPSK	CH0, CH39, CH78/	2402MHz, 2441MHz, 2480MHz
	Low, Middle, High	

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software Bluetest3							
Modulation Type	Transmit Antenna	Test Channel Power Setting					
Modulation TypeNumberCH 00CH 39CH 7							



GFSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	4.55

Test Mode	Transmit and Receive Mode	Description
GFSK	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.
8DPSK	1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.8. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	8DPSK	3Mbit/s

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

5.9. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests				
Relative Humidity	45 ~ 70%				
Atmospheric Pressure:	1025Pa				
Temperature	TN 23 ~ 28 °C				
	VL	N/A			
Voltage :	VN	AC 120V/60Hz			
	VH	N/A			

Note: VL= Lower Extreme Test Voltage VN= Nominal Voltage. VH= Upper Extreme Test Voltage TN= Normal Temperature



5.10. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Dell	Vostro 3902	8KNDDB2
2	Mobile Phone	Apple	A1699	iPhone 6s
3	Mobile Phone	MEIZU	M2 note	N/A
4	DC Load	N/A	N/A	2.5 Ω
5	Micphone	N/A	N/A	N/A
6	Load Board	N/A	N/A	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/
2	Audio Cable	/	/	1.0	Audio Cable
3	Audio Cable	/	/	1.0	Audio Cable

ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	AC Cable	/	/	/

TEST SETUP

The EUT can keep working in an engineer mode after being set with a software through a Laptop.

SETUP DIAGRAM FOR TEST



USB cable DC Load
AC Power Audio cable
EUT Mobile Phone Mobile Phone



5.11. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions										
Instrument										
Used	Equipment	Manufacturer	Мос	lel No.	Serial No).	Last Cal.	Next Cal.		
	EMI Test Receiver	R&S	E	SR3	101961		Dec.05,2019	Dec.05,2020		
V	Two-Line V- Network	R&S	EN	V216	101983		Dec.05,2019	Dec.05,2020		
V	Artificial Mains Networks	Schwarzbeck	NSL	K 8126	8126465	6	Dec.05,2019	Dec.05,2020		
	Software									
Used	Des	cription		Ма	nufacturer		Name	Version		
	Test Software for C	onducted distu	rbanc	e	Farad		EZ-EMC	Ver. UL-3A1		
		Ra	diate	d Emiss	sions					
			Ins	trument						
Used	Equipment	Manufacturer	Мос	lel No.	Serial No).	Last Cal.	Next Cal.		
V	MXE EMI Receiver	KESIGHT	N9	038A	MY564000	36	Dec.06,2019	Dec.06,2020		
V	Hybrid Log Periodic Antenna	TDK	HLP-3003C		130960		Sep.17, 2018	Sep.17, 2021		
\checkmark	Preamplifier	HP	84	47D	2944A090	99	Dec.05,2019	Dec.05,2020		
V	EMI Measurement Receiver	R&S	ES	SR26	101377		Dec.05,2019	Dec.05,2020		
\checkmark	Horn Antenna	TDK	HRN	V-0118	130939		Sep.17, 2018	Sep.17, 2021		
V	High Gain Horn Antenna	Schwarzbeck	BBH	A-9170	691		Aug.11, 2018	Aug.11, 2021		
V	Preamplifier	TDK	PA-0	2-0118	TRS-305- 00066		Dec.05,2019	Dec.05,2020		
V	Preamplifier	TDK	PA	-02-2	TRS-307- 00003		Dec.05,2019	Dec.05,2020		
\checkmark	Loop antenna	Schwarzbeck	15	519B	00008		Jan.07, 2019	Jan.07, 2022		
V	Band Reject Filter	Wainwright	WRCJV8- 2350-2400- 2483.5- 2533.5- 40SS		4	_	Dec.05,2019	Dec.05,2020		
V	High Pass Filter	Wi	WHKX10- 2700-3000- 18000-40SS		23		Dec.05,2019	Dec.05,2020		
			Sc	oftware						
Used	Descr	•		Manufa	cturer		Name	Version		
V	Test Software disturb			Fara	d	E	Z-EMC	Ver. UL-3A1		



	Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.	
\checkmark	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020	



6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE


<u>LIMITS</u>

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2.880	3.750	0.768	76.8	1.146	0.347	0.5
8DPSK	2.895	3.750	0.772	77.2	1.124	0.345	0.5


Note:


Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

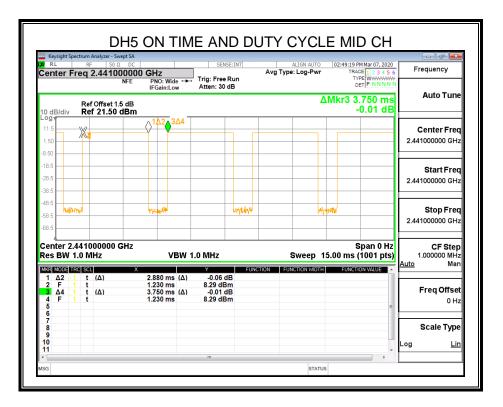

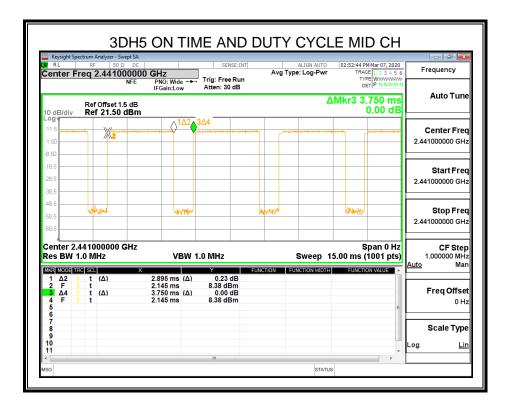



6.2. 20dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	
CFR 47 FCC 15.247 (a) (1)	20dB Occupied Bandwidth	/	2400-2483.5	


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the OBW
VBW	approximately 3×RBW
Span	approximately 2 to 3 times the OBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99% relative to the maximum level measured in the fundamental emission.

TEST SETUP





TEST ENVIRONMENT

Temperature	24.2°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

Please refer to appendix A.



6.3. CONDUCTED OUTPUT POWER

LIMITS

	CFR 47 FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)		
CFR 47 FCC 15.247 (b) (1)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel : 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two- thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm	2400-2483.5		

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	≥DTS bandwidth(e.g. 1 MHz for BLE)
VBW	≥3 × RBW
Span	≥3 x RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use peak marker function to determine the peak amplitude level.

TEST SETUP





TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60HZ

RESULTS

Please refer to appendix C.



6.4. CARRIER HOPPING CHANNEL SEPARATION

LIMITS

	CFR 47 FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)		
CFR 47 FCC 15.247 (a) (1)	Carrier Hopping Channel Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5		

TEST PROCEDURE


Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

TEST SETUP




TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

6.4.1. GFSK MODE


Channel	Carrier Hopping Channel Separation (MHz)	Limit (MHz)	Result
Middle	1.0	≥ two-thirds of the 20 dB Bandwidth Of The Hopping Channel	PASS

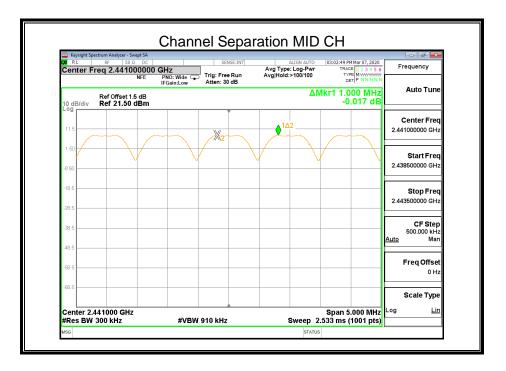

Note: For 20 dB Bandwidth of The Hopping Channel, please refer to clause 6.2.1.

6.4.2. 8DPSK MODE

Channel	Carrier Hopping Channel Separation (MHz)	Limit (MHz)	Result
Middle	1.0	≥ two-thirds of the 20 dB Bandwidth Of The Hopping Channel	PASS

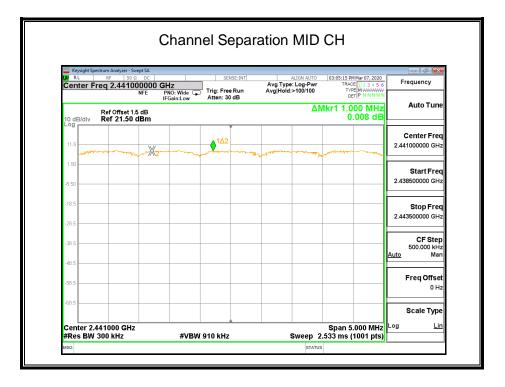

Note: For 20 dB Bandwidth of The Hopping Channel, please refer to clause 6.2.2.



6.5. NUMBER OF HOPPING FREQUENCY

<u>LIMITS</u>

CFR 47 FCC Part15 (15.247), Subpart C			
Section Test Item Limit			
CFR 47 15.247 (a) (1) III	Number of Hopping Frequency	at least 15 hopping channels	

TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple


Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.

FHSS Mode: 79 Channels observed.

AFHSS Mode: 20 Channels declared.

TEST SETUP



TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz



<u>RESULTS</u>

Please refer to appendix B.



6.6. TIME OF OCCUPANCY (DWELL TIME)

<u>LIMITS</u>

CFR 47 FCC Part15 (15.247), Subpart C			
Section Test Item Limit			
CFR 47 15.247 (a) (1) III	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.	

TEST PROCEDURE

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	zero span
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel

a. The transmitter output (antenna port) was connected to the spectrum analyzer

- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse. A Period Time = $(channel number)^*0.4$

For FHSS Mode (79 Channel):


DH1 Time Slot: Reading * (1600/2)*31.6/(channel number) DH3 Time Slot: Reading * (1600/4)*31.6/(channel number) DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

For AFHSS Mode (20 Channel): DH1 Time Slot: Reading * (800/2)*8/(channel number) DH3 Time Slot: Reading * (800/4)*8/(channel number)



DH5 Time Slot: Reading * (800/6)*8/(channel number)

TEST SETUP



TEST ENVIRONMENT


Temperature	26.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS


6.6.1. GFSK MODE


	FHSS Mode			
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [s]	Results
DH1	MCH	0.390	0.1248	PASS
DH3	MCH	1.635	0.2616	PASS
DH5	MCH	2.880	0.3072	PASS
	AFHSS Mode			
DH1	MCH	0.390	0.0624	PASS
DH3	MCH	1.635	0.1308	PASS
DH5	MCH	2.880	0.1536	PASS

Test Graph

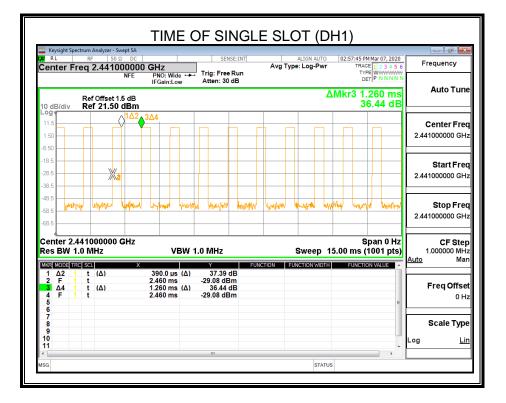



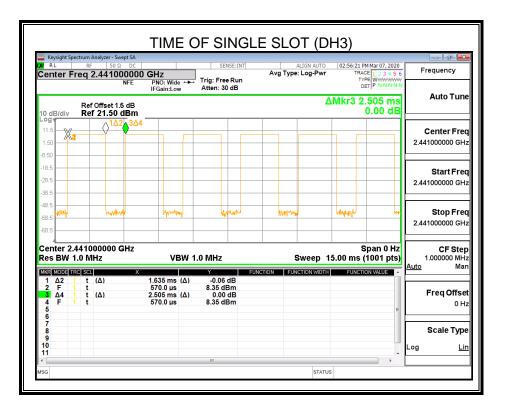

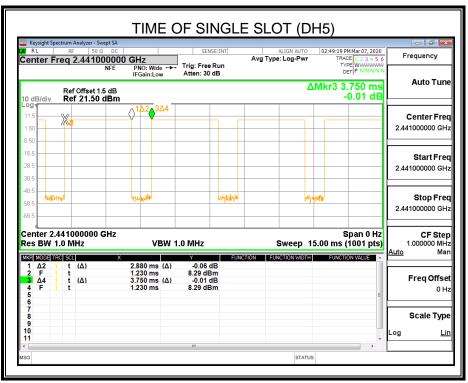






6.6.2. 8DPSK MODE

	FHSS Mode			
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [s]	Results
3DH1	MCH	0.405	0.128	PASS
3DH3	MCH	1.650	0.262	PASS
3DH5	MCH	2.895	0.309	PASS
		AFHSS Mo	ode	
3DH1	MCH	0.405	0.064	PASS
3DH3	MCH	1.650	0.131	PASS
3DH5	MCH	2.895	0.155	PASS

Test Graph

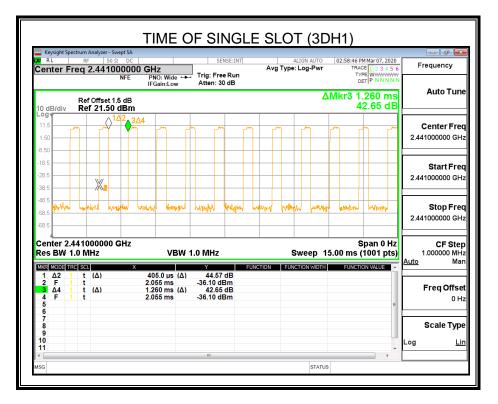

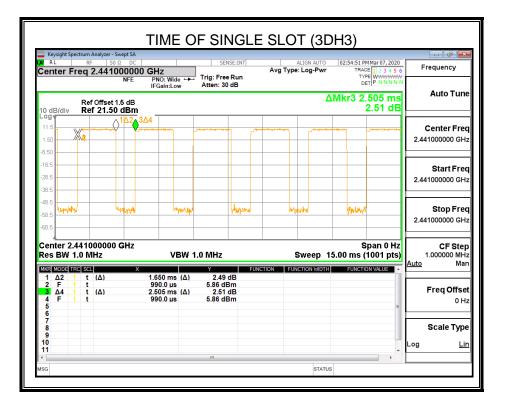

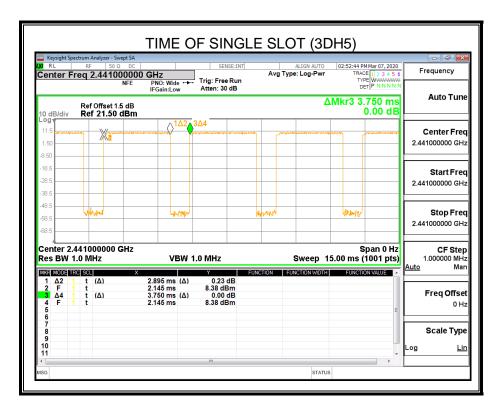



6.7. CONDUCTED SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247), Subpart C			
Section Test Item Limit			
CFR 47 FCC §15.247 (d) Conducted Spurious Emission		at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power	

TEST PROCEDURE

Please refer to the ANSI C63.10 section 6.10.

For Bandedge use the following settings:


Detector	Peak
RBW	100kHz
VBW	300kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak	
RBW	100kHz	
VBW	300kHz	
Span	wide enough to fully capture the emission being measured	
Trace	Max hold	
Sweep time	Auto couple.	

Use the peak marker function to determine the maximum amplitude level.

TEST SETUP



TEST ENVIRONMENT

Temperature	26.2°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz



<u>RESULTS</u>

Please refer to appendix D and E.

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54



IC Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{kas 1}				
MHz	MHz	GHz		
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2		
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5		
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7		
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4		
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5		
4.17725 - 4.17775	240 - 285	15.35 - 16.2		
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4		
5.677 - 5.683	399.9 - 410	22.01 - 23.12		
6.215 - 6.218	608 - 614	23.6 - 24.0		
6.26775 - 6.26825	960 - 1427	31.2 - 31.8		
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5		
8.291 - 8.294	1645.5 • 1646.5	Above 38.6		
8.362 - 8.366	1660 - 1710			
8.37625 - 8.38675	1718.B = 1722.2			
8.41425 - 8.41475	2200 - 2300			
12.29 - 12.293	2310 - 2390			
12.51975 - 12.52025	2483.5 - 2500			
12.57675 - 12.57725	2655 - 2900			
13.36 - 13.41	3260 - 3267			
16.42 - 16.423	3332 - 3339			
16.69475 - 16.69525	3345.8 - 3358			
16.80425 - 16.80475	3500 - 4400			
25.5 - 25.67	4500 - 5150			
37.5 - 38.25	5350 - 5460			
73 - 74.6	7250 - 7750			
74.8 - 75.2	8025 - 8500			
108 - 138				

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.




FCC Restricted bands of operation:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ²Above 38.6c



TEST SETUP AND PROCEDURE Below 30MHz

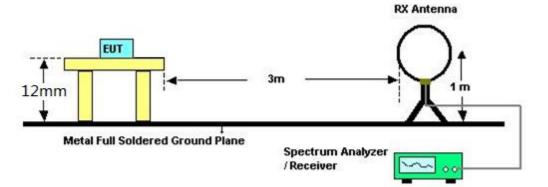

The setting of the spectrum Analyzer

RBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. All 3 polarizations (Horizontal, Face-on and Face-off) of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 12mm meter above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.


5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m OFS. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.



Below 1G and above 30MHz

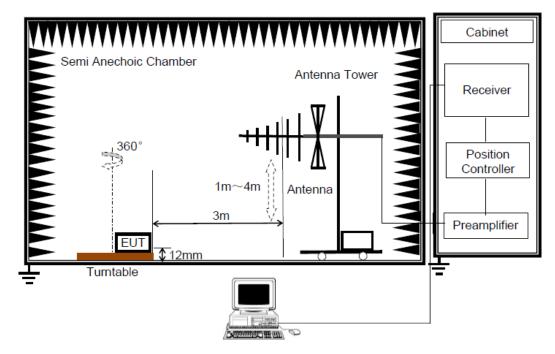

The setting of the spectrum Analyzer

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold


1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.


3. The EUT was placed on a turntable with 12mm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.



Above 1G

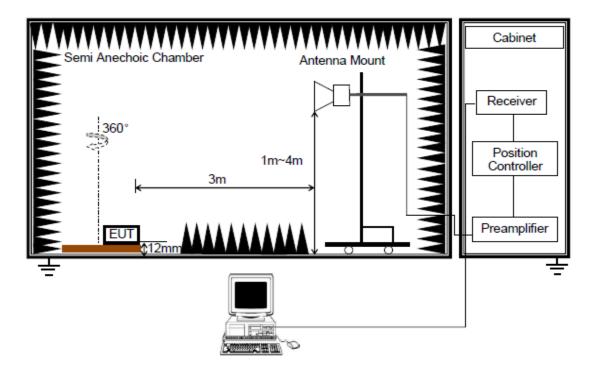

RBW	1M
IV B W	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 12mm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.


5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector. For the Duty Cycle please refer to clause 6.1.ON TIME AND DUTY CYCLE.

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch. FORM No.: 10-SL-F0035



X axis, Y axis, Z axis positions:

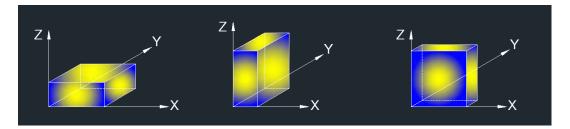

Note1: The manufacturer has recommended that the EUT only be used in the Floor-standing orientation; therefore, all radiated testing was performed in the orientation. The EUT was placed on normal orientation and all radiated emissions were performed with the EUT shown on the setup photo.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT


Temperature	24.3°C	Relative Humidity	61%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz



7.2. RESTRICTED BANDEDGE

7.2.1. GFSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

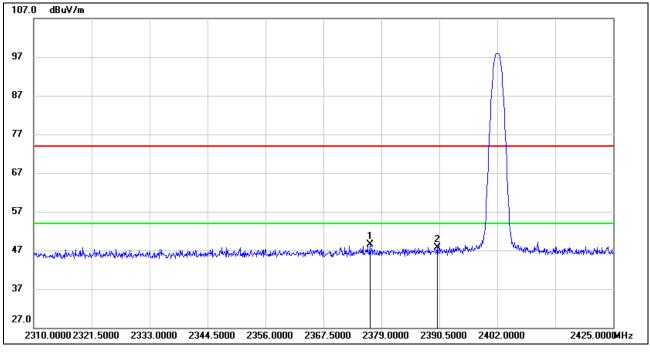


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2376.700	15.59	32.90	48.49	74.00	-25.51	peak
2	2390.000	14.85	32.94	47.79	74.00	-26.21	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



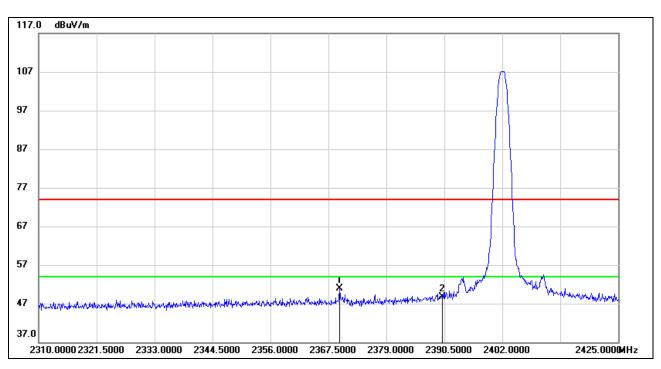

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2369.685	18.11	32.88	50.99	74.00	-23.01	peak
2	2390.000	15.81	32.94	48.75	74.00	-25.25	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

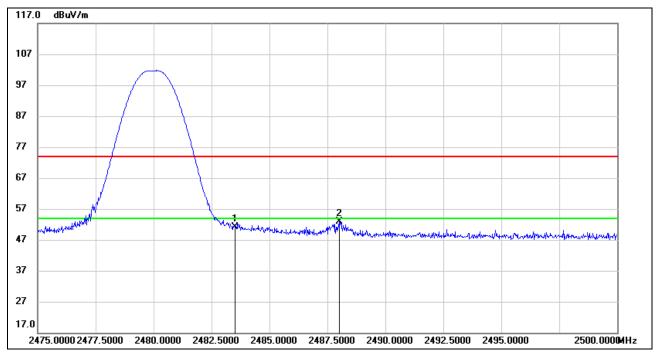

PEAK


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	17.65	33.58	51.23	74.00	-22.77	peak
2	2488.000	19.19	33.62	52.81	74.00	-21.19	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



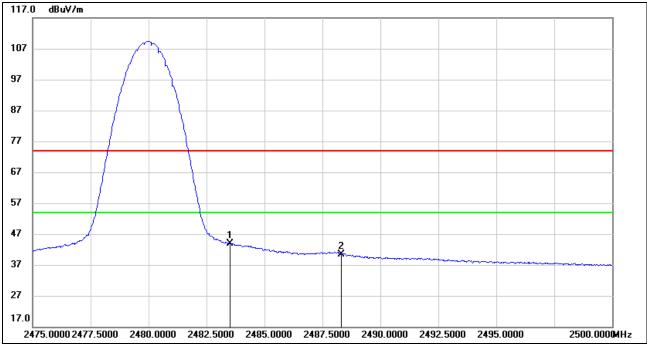

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	10.27	33.58	43.85	54.00	-10.15	AVG
2	2488.300	6.85	33.62	40.47	54.00	-13.53	AVG

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. AVG: VBW=1/Ton where: ton is transmit duration.

5. For duty cycle, please refer to clause 7.1.





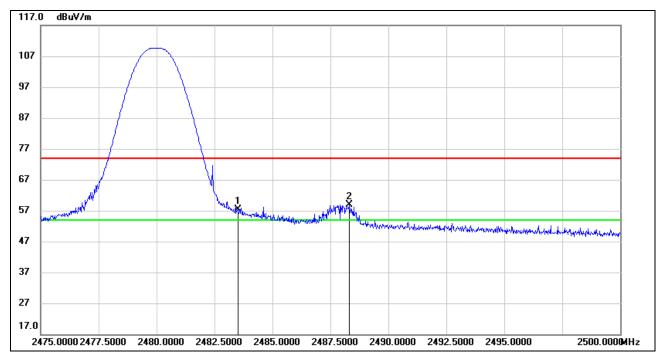

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	23.68	33.58	57.26	74.00	-16.74	peak
2	2488.300	25.25	33.62	58.87	74.00	-15.13	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



7.2.2 8DPSK MODE

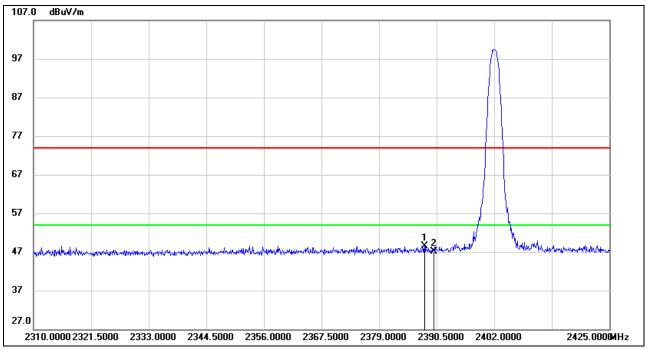

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.085	15.66	32.94	48.60	74.00	-25.40	peak
2	2390.000	14.15	32.94	47.09	74.00	-26.91	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



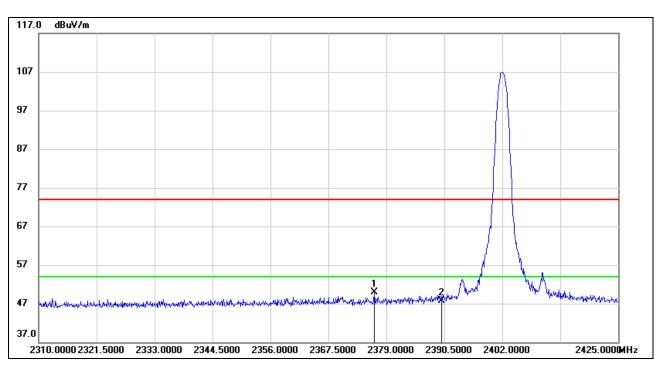

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2376.585	16.96	32.90	49.86	74.00	-24.14	peak
2	2390.000	14.68	32.94	47.62	74.00	-26.38	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

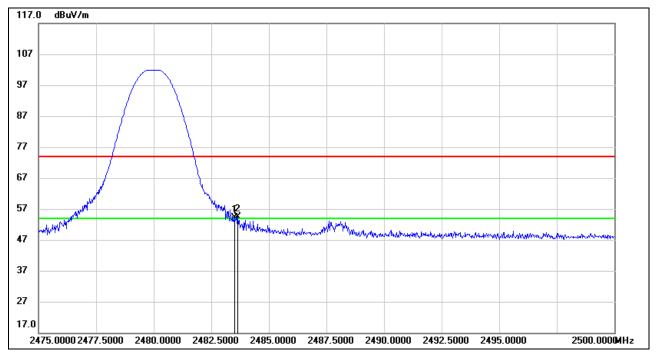

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	20.56	33.58	54.14	74.00	-19.86	peak
2	2483.650	20.80	33.58	54.38	74.00	-19.62	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



<u>AVG</u>

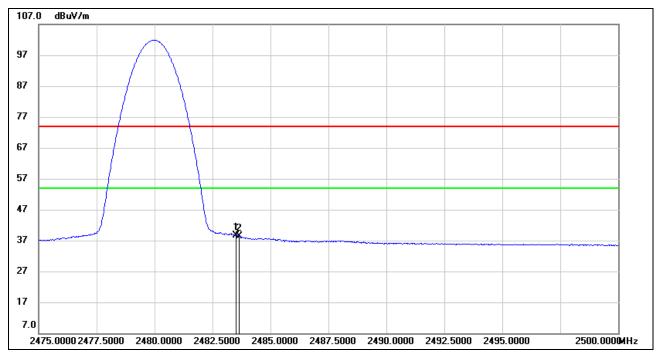

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	4.97	33.58	38.55	54.00	-15.45	AVG
2	2483.650	4.68	33.58	38.26	54.00	-15.74	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. AVG: VBW=1/Ton where: ton is transmit duration.

5. For duty cycle, please refer to clause 7.1.





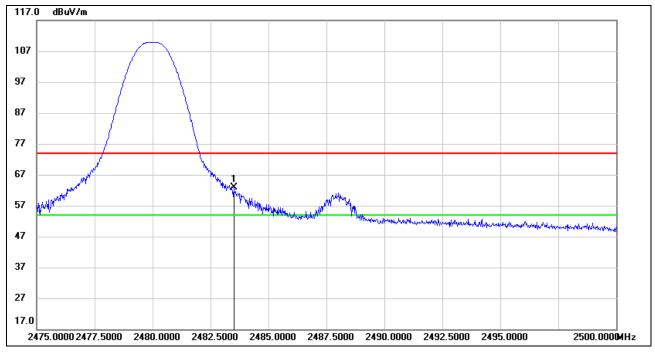

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	29.30	33.58	62.88	74.00	-11.12	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



<u>AVG</u>

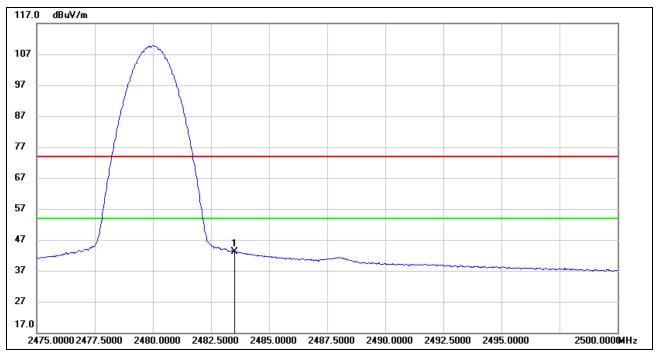

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	9.47	33.58	43.05	54.00	-10.95	AVG

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: VBW=1/Ton where: ton is transmit duration.

5. For duty cycle, please refer to clause 7.1.


peak



7.3. SPURIOUS EMISSIONS (1~3GHz)

7.3.1. GFSK MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

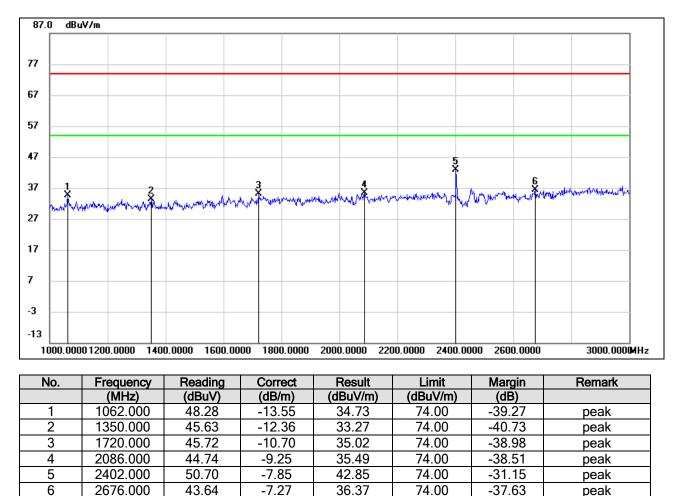

Note: 1. Peak Result = Reading Level + Correct Factor.

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



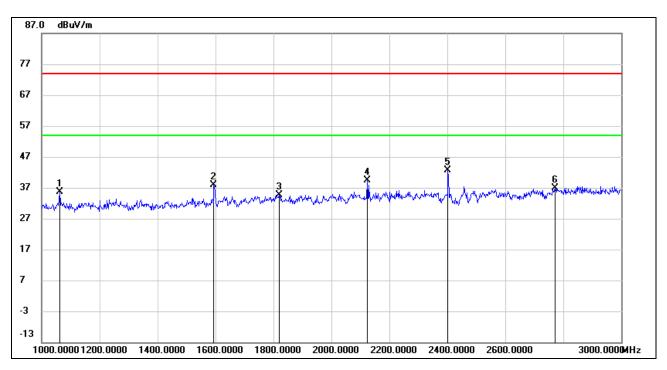


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	49.26	-13.55	35.71	74.00	-38.29	peak
2	1594.000	49.28	-11.45	37.83	74.00	-36.17	peak
3	1820.000	44.65	-9.92	34.73	74.00	-39.27	peak
4	2124.000	48.50	-9.04	39.46	74.00	-34.54	peak
5	2402.000	50.38	-7.85	42.53	74.00	-31.47	peak
6	2772.000	43.12	-6.35	36.77	74.00	-37.23	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



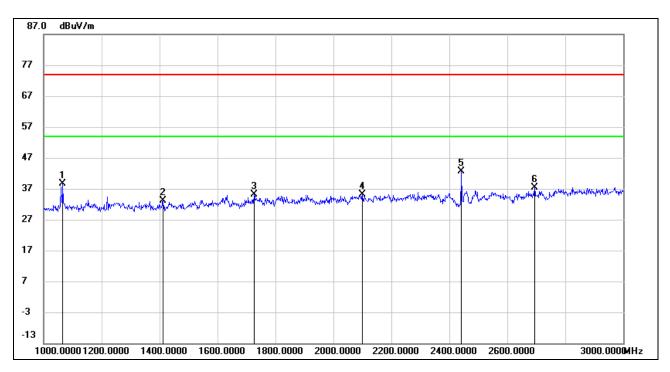


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1066.000	52.08	-13.54	38.54	74.00	-35.46	peak
2	1412.000	45.43	-12.36	33.07	74.00	-40.93	peak
3	1726.000	45.71	-10.65	35.06	74.00	-38.94	peak
4	2100.000	44.31	-9.16	35.15	74.00	-38.85	peak
5	2442.000	50.24	-7.57	42.67	74.00	-31.33	peak
6	2694.000	44.51	-7.16	37.35	74.00	-36.65	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



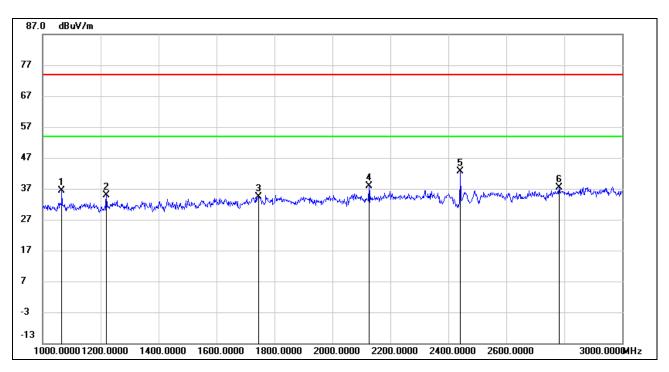


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1066.000	49.96	-13.54	36.42	74.00	-37.58	peak
2	1220.000	47.59	-12.61	34.98	74.00	-39.02	peak
3	1746.000	44.83	-10.45	34.38	74.00	-39.62	peak
4	2126.000	46.97	-9.02	37.95	74.00	-36.05	peak
5	2442.000	50.28	-7.57	42.71	74.00	-31.29	peak
6	2782.000	43.55	-6.25	37.30	74.00	-36.70	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



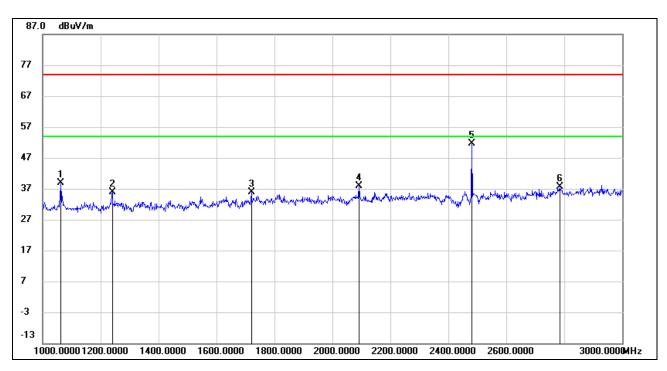


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	52.53	-13.55	38.98	74.00	-35.02	peak
2	1240.000	48.40	-12.54	35.86	74.00	-38.14	peak
3	1720.000	46.54	-10.70	35.84	74.00	-38.16	peak
4	2092.000	47.11	-9.20	37.91	74.00	-36.09	peak
5	2480.000	58.83	-7.31	51.52	74.00	-22.48	peak
6	2784.000	43.97	-6.23	37.74	74.00	-36.26	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



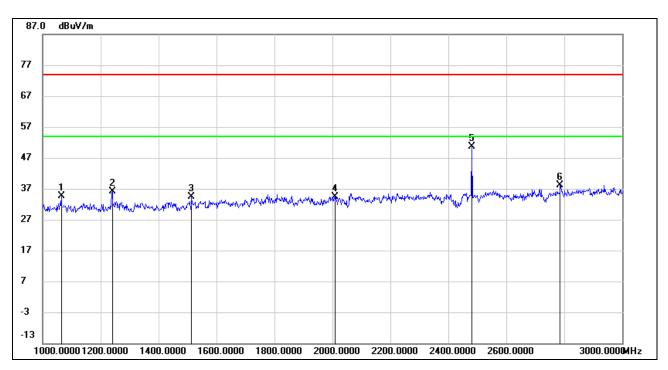


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1064.000	48.25	-13.54	34.71	74.00	-39.29	peak
2	1240.000	48.65	-12.54	36.11	74.00	-37.89	peak
3	1514.000	46.56	-12.10	34.46	74.00	-39.54	peak
4	2008.000	44.09	-9.78	34.31	74.00	-39.69	peak
5	2480.000	57.89	-7.31	50.58	74.00	-23.42	peak
6	2786.000	44.43	-6.20	38.23	74.00	-35.77	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.





7.3.2. 8DPSK MODE

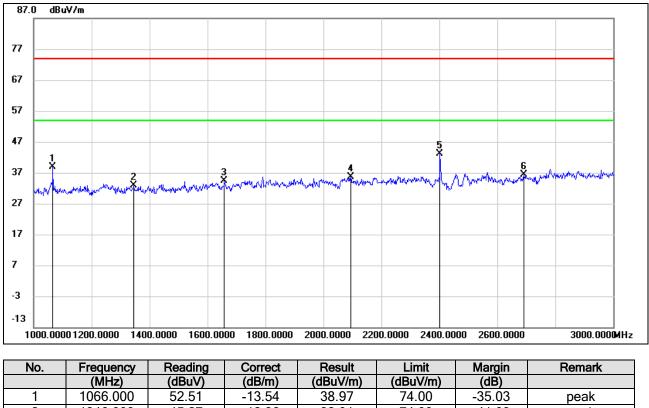


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1066.000	52.51	-13.54	38.97	74.00	-35.03	peak
2	1346.000	45.27	-12.36	32.91	74.00	-41.09	peak
3	1658.000	45.38	-11.11	34.27	74.00	-39.73	peak
4	2094.000	44.82	-9.20	35.62	74.00	-38.38	peak
5	2402.000	51.10	-7.85	43.25	74.00	-30.75	peak
6	2692.000	43.55	-7.17	36.38	74.00	-37.62	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



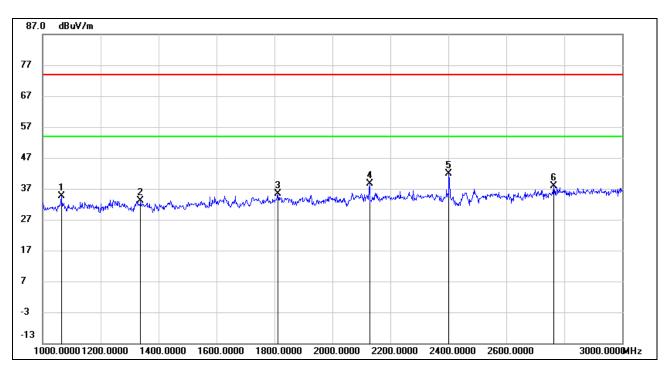


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1064.000	48.21	-13.54	34.67	74.00	-39.33	peak
2	1338.000	45.53	-12.36	33.17	74.00	-40.83	peak
3	1812.000	45.33	-9.92	35.41	74.00	-38.59	peak
4	2128.000	47.69	-9.02	38.67	74.00	-35.33	peak
5	2402.000	49.84	-7.85	41.99	74.00	-32.01	peak
6	2764.000	44.45	-6.45	38.00	74.00	-36.00	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



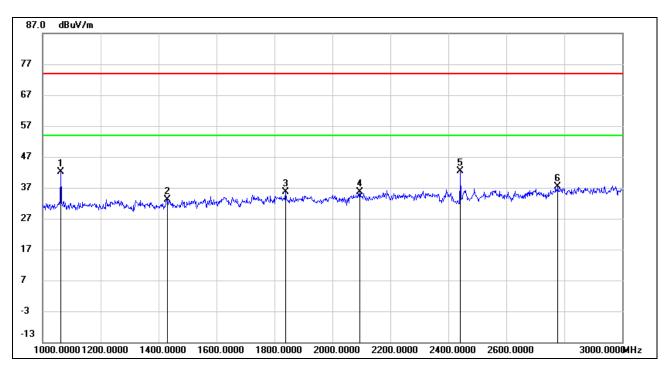


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	55.66	-13.55	42.11	74.00	-31.89	peak
2	1430.000	45.47	-12.34	33.13	74.00	-40.87	peak
3	1838.000	45.57	-9.93	35.64	74.00	-38.36	peak
4	2094.000	44.85	-9.20	35.65	74.00	-38.35	peak
5	2442.000	49.95	-7.57	42.38	74.00	-31.62	peak
6	2778.000	43.64	-6.30	37.34	74.00	-36.66	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



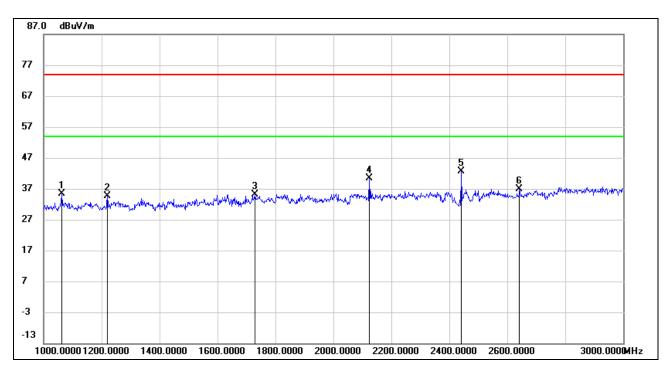


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1062.000	48.92	-13.55	35.37	74.00	-38.63	peak
2	1220.000	47.32	-12.61	34.71	74.00	-39.29	peak
3	1730.000	45.74	-10.61	35.13	74.00	-38.87	peak
4	2124.000	49.49	-9.04	40.45	74.00	-33.55	peak
5	2442.000	50.19	-7.57	42.62	74.00	-31.38	peak
6	2642.000	44.31	-7.46	36.85	74.00	-37.15	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



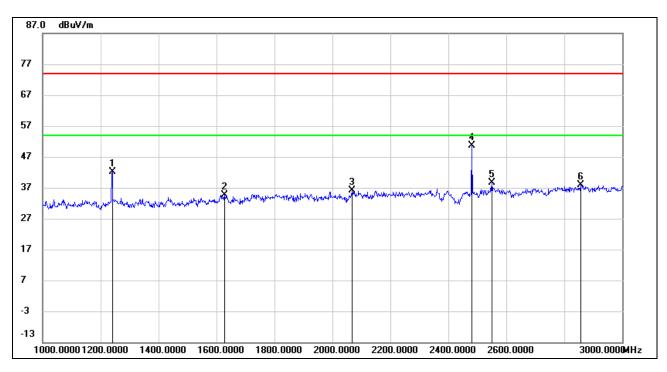


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1240.000	54.64	-12.54	42.10	74.00	-31.90	peak
2	1628.000	45.96	-11.25	34.71	74.00	-39.29	peak
3	2068.000	45.39	-9.37	36.02	74.00	-37.98	peak
4	2480.000	58.04	-7.31	50.73	74.00	-23.27	peak
5	2550.000	46.14	-7.44	38.70	74.00	-35.30	peak
6	2856.000	43.55	-5.76	37.79	74.00	-36.21	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



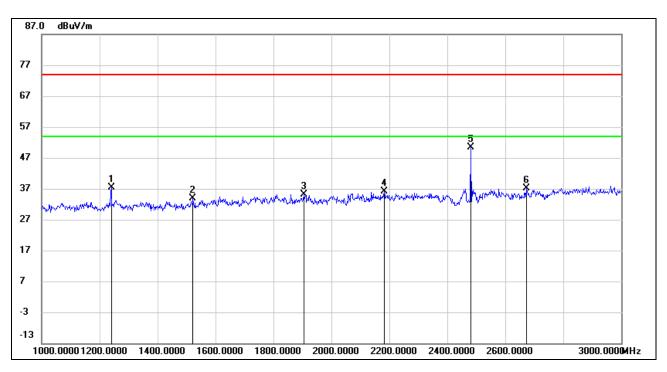

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1240.000	49.99	-12.54	37.45	74.00	-36.55	peak
2	1522.000	45.99	-12.03	33.96	74.00	-40.04	peak
3	1906.000	45.05	-9.94	35.11	74.00	-38.89	peak
4	2182.000	44.97	-8.75	36.22	74.00	-37.78	peak
5	2480.000	57.75	-7.31	50.44	74.00	-23.56	peak
6	2672.000	44.29	-7.28	37.01	74.00	-36.99	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

- 3. Peak: Peak detector.
- 4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for Band reject filter losses
- 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



7.4. SPURIOUS EMISSIONS (3~18GHz)

7.4.1. GFSK MODE

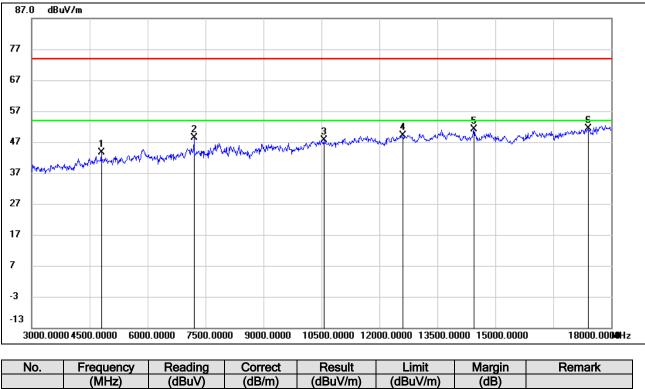

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	43.27	0.46	43.73	74.00	-30.27	peak
2	7200.000	42.44	5.82	48.26	74.00	-25.74	peak
3	10560.000	35.84	11.73	47.57	74.00	-26.43	peak
4	12615.000	35.09	14.03	49.12	74.00	-24.88	peak
5	14445.000	34.65	16.36	51.01	74.00	-22.99	peak
6	17400.000	29.95	21.41	51.36	74.00	-22.64	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



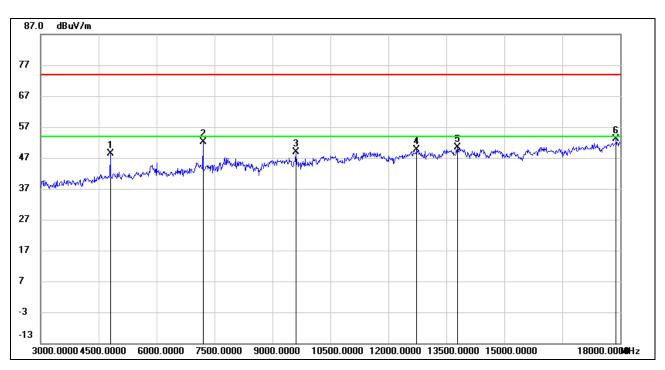

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	48.02	0.46	48.48	74.00	-25.52	peak
2	7200.000	46.23	5.82	52.05	74.00	-21.95	peak
3	9600.000	39.31	9.69	49.00	74.00	-25.00	peak
4	12735.000	34.91	14.77	49.68	74.00	-24.32	peak
5	13785.000	33.47	16.91	50.38	74.00	-23.62	peak
6	17895.000	29.69	23.34	53.03	74.00	-20.97	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



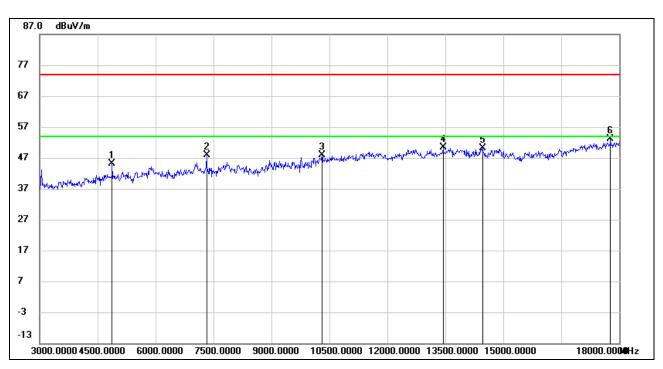

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	44.39	0.76	45.15	74.00	-28.85	peak
2	7320.000	41.70	6.14	47.84	74.00	-26.16	peak
3	10305.000	36.91	11.07	47.98	74.00	-26.02	peak
4	13440.000	34.50	15.98	50.48	74.00	-23.52	peak
5	14460.000	33.75	16.36	50.11	74.00	-23.89	peak
6	17775.000	30.12	23.09	53.21	74.00	-20.79	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



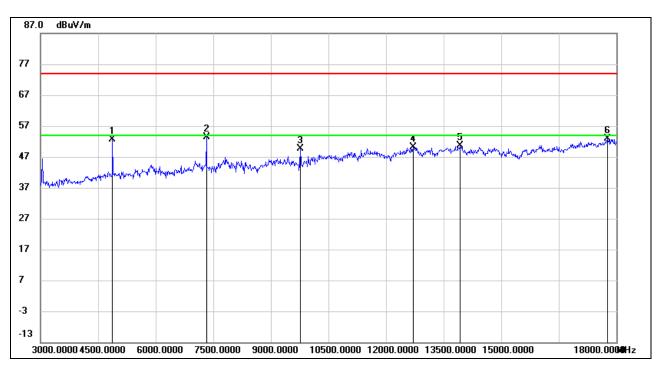

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	51.90	0.76	52.66	74.00	-21.34	peak
2	7320.000	47.31	6.14	53.45	74.00	-20.55	peak
3	9765.000	39.97	9.69	49.66	74.00	-24.34	peak
4	12705.000	35.69	14.35	50.04	74.00	-23.96	peak
5	13935.000	34.42	16.15	50.57	74.00	-23.43	peak
6	17760.000	29.85	22.95	52.80	74.00	-21.20	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



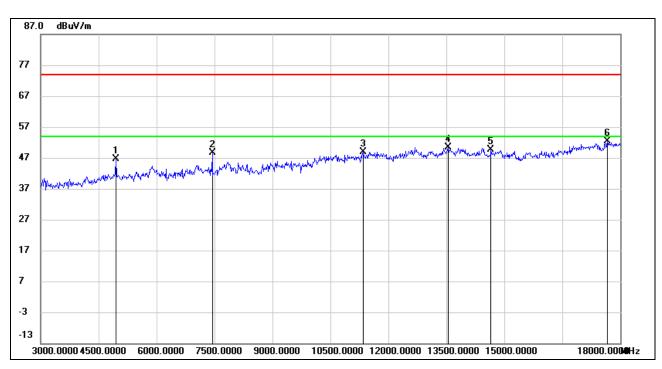

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	45.54	1.13	46.67	74.00	-27.33	peak
2	7440.000	42.24	6.32	48.56	74.00	-25.44	peak
3	11355.000	36.30	12.48	48.78	74.00	-25.22	peak
4	13545.000	34.50	15.89	50.39	74.00	-23.61	peak
5	14655.000	33.56	15.98	49.54	74.00	-24.46	peak
6	17670.000	30.02	22.24	52.26	74.00	-21.74	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



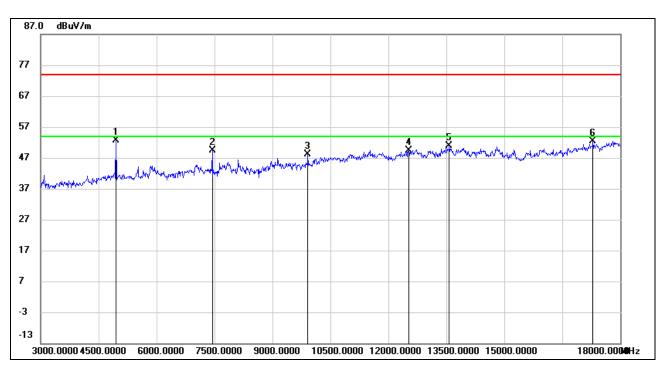

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	51.56	1.13	52.69	74.00	-21.31	peak
2	7440.000	43.17	6.32	49.49	74.00	-24.51	peak
3	9915.000	38.13	10.08	48.21	74.00	-25.79	peak
4	12525.000	34.97	14.41	49.38	74.00	-24.62	peak
5	13575.000	34.95	15.97	50.92	74.00	-23.08	peak
6	17295.000	30.55	21.71	52.26	74.00	-21.74	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit. 3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



7.4.2. 8DPSK MODE

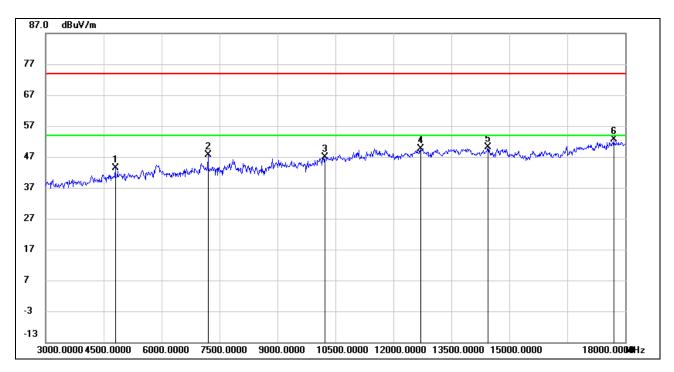

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	42.88	0.46	43.34	74.00	-30.66	peak
2	7200.000	41.79	5.82	47.61	74.00	-26.39	peak
3	10230.000	36.47	10.43	46.90	74.00	-27.10	peak
4	12705.000	35.23	14.35	49.58	74.00	-24.42	peak
5	14445.000	33.77	16.36	50.13	74.00	-23.87	peak
6	17700.000	30.30	22.43	52.73	74.00	-21.27	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



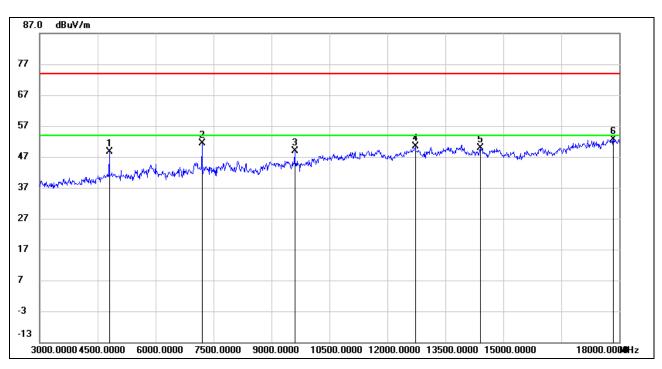

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4800.000	48.10	0.46	48.56	74.00	-25.44	peak
2	7200.000	45.61	5.82	51.43	74.00	-22.57	peak
3	9600.000	39.29	9.69	48.98	74.00	-25.02	peak
4	12720.000	35.92	14.57	50.49	74.00	-23.51	peak
5	14400.000	33.47	16.35	49.82	74.00	-24.18	peak
6	17850.000	29.37	23.32	52.69	74.00	-21.31	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



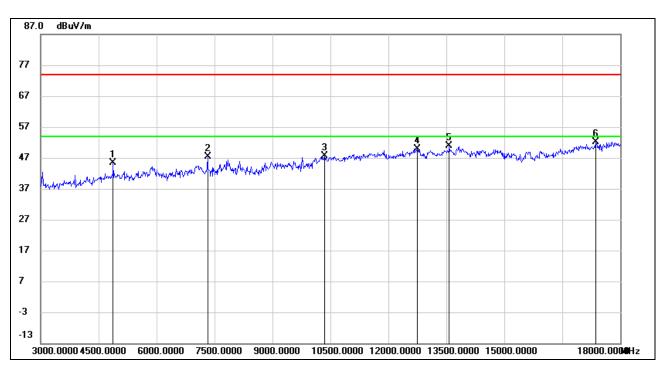

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	44.68	0.76	45.44	74.00	-28.56	peak
2	7320.000	41.35	6.14	47.49	74.00	-26.51	peak
3	10350.000	36.55	11.02	47.57	74.00	-26.43	peak
4	12750.000	34.82	14.98	49.80	74.00	-24.20	peak
5	13575.000	34.83	15.97	50.80	74.00	-23.20	peak
6	17370.000	30.68	21.52	52.20	74.00	-21.80	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



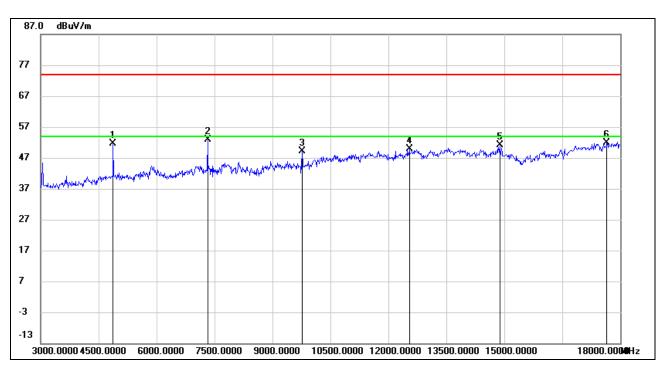

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4875.000	50.78	0.76	51.54	74.00	-22.46	peak
2	7320.000	46.79	6.14	52.93	74.00	-21.07	peak
3	9765.000	39.54	9.69	49.23	74.00	-24.77	peak
4	12540.000	35.58	14.33	49.91	74.00	-24.09	peak
5	14880.000	35.23	16.00	51.23	74.00	-22.77	peak
6	17655.000	29.62	22.15	51.77	74.00	-22.23	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



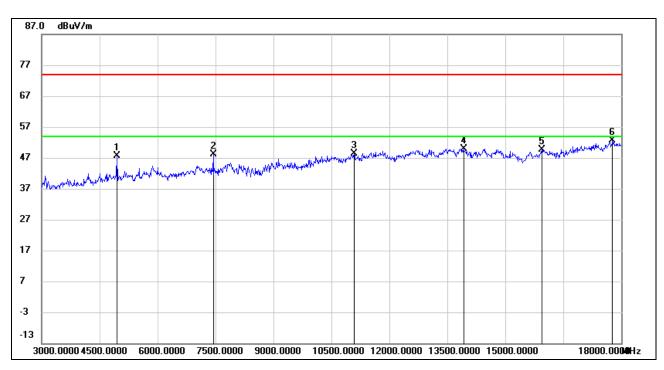

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	46.38	1.13	47.51	74.00	-26.49	peak
2	7440.000	41.72	6.32	48.04	74.00	-25.96	peak
3	11085.000	35.81	12.57	48.38	74.00	-25.62	peak
4	13920.000	33.73	16.17	49.90	74.00	-24.10	peak
5	15945.000	32.10	17.61	49.71	74.00	-24.29	peak
6	17775.000	29.64	23.09	52.73	74.00	-21.27	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.



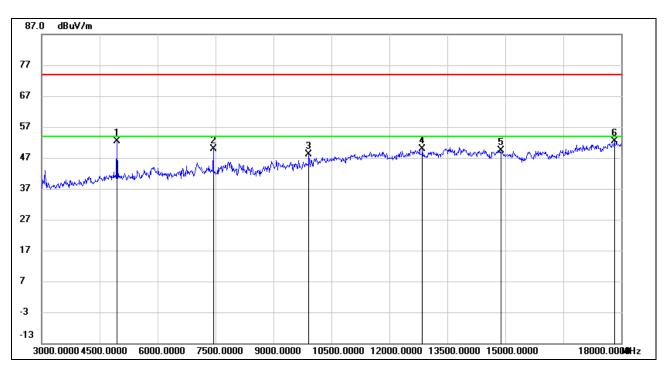


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4950.000	51.36	1.13	52.49	74.00	-21.51	peak
2	7440.000	43.51	6.32	49.83	74.00	-24.17	peak
3	9915.000	38.01	10.08	48.09	74.00	-25.91	peak
4	12855.000	34.54	15.23	49.77	74.00	-24.23	peak
5	14880.000	33.30	16.00	49.30	74.00	-24.70	peak
6	17820.000	29.01	23.30	52.31	74.00	-21.69	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit. 3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses had already added into the correct factor.





7.5. SPURIOUS EMISSIONS 18G ~ 26GHz

7.5.1. GFSK MODE

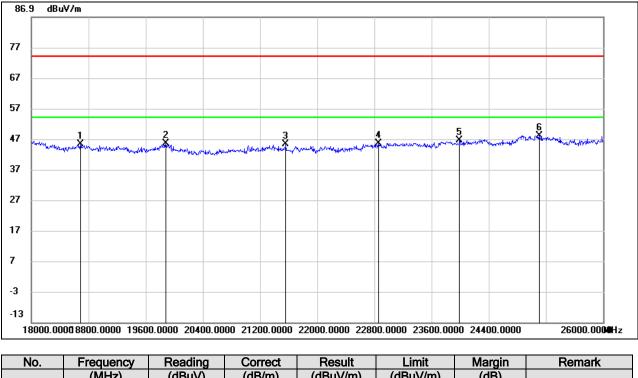

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18688.000	50.12	-4.72	45.40	74.00	-28.60	peak
2	19880.000	49.85	-4.36	45.49	74.00	-28.51	peak
3	21560.000	51.06	-5.77	45.29	74.00	-28.71	peak
4	22856.000	51.33	-5.68	45.65	74.00	-28.35	peak
5	23992.000	50.66	-4.03	46.63	74.00	-27.37	peak
6	25104.000	49.15	-1.12	48.03	74.00	-25.97	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

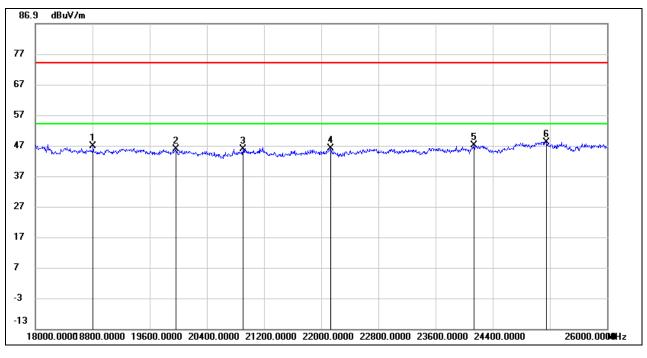

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18808.000	51.55	-4.85	46.70	74.00	-27.30	peak
2	19968.000	50.23	-4.36	45.87	74.00	-28.13	peak
3	20904.000	51.03	-5.21	45.82	74.00	-28.18	peak
4	22128.000	52.24	-6.15	46.09	74.00	-27.91	peak
5	24136.000	50.71	-3.78	46.93	74.00	-27.07	peak
6	25152.000	49.30	-1.15	48.15	74.00	-25.85	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Proper operation of the transmitter prior to adding the filter to the measurement chain. Note: All test mode has been tested, only the worst data record in the report.



7.6. SPURIOUS EMISSIONS 30M ~ 1 GHz

7.6.1. GFSK MODE

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

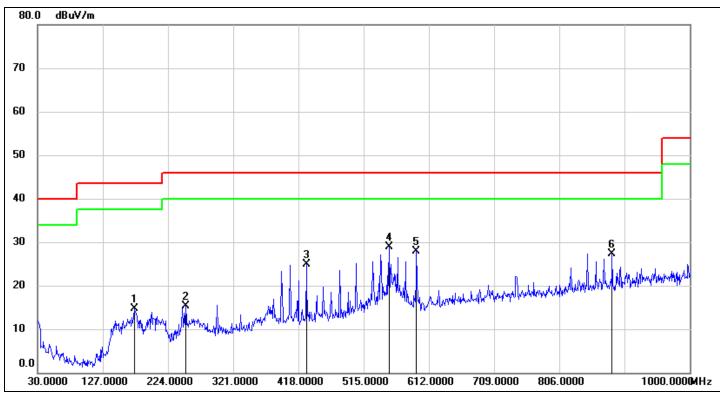

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	173.5600	31.93	-17.15	14.78	43.50	-28.72	QP
2	250.1900	31.68	-16.34	15.34	46.00	-30.66	QP
3	429.6400	37.04	-12.14	24.90	46.00	-21.10	QP
4	552.8300	38.79	-9.86	28.93	46.00	-17.07	QP
5	593.5700	37.05	-9.05	28.00	46.00	-18.00	QP
6	884.5700	31.71	-4.37	27.34	46.00	-18.66	QP


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

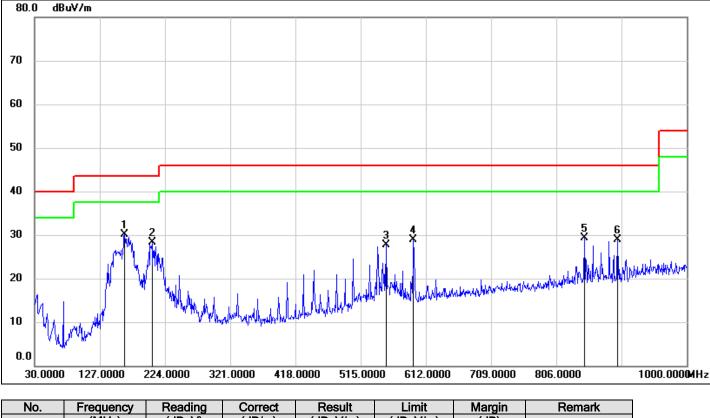

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	163.8600	47.75	-17.63	30.12	43.50	-13.38	QP
2	204.6000	44.41	-16.05	28.36	43.50	-15.14	QP
3	552.8300	37.65	-9.86	27.79	46.00	-18.21	QP
4	593.5700	38.00	-9.05	28.95	46.00	-17.05	QP
5	847.7100	34.03	-4.80	29.23	46.00	-16.77	QP
6	897.1800	33.15	-4.28	28.87	46.00	-17.13	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All test mode has been tested, only the worst data record in the report.



7.7. SPURIOUS EMISSIONS BELOW 30M

7.7.1. GFSK MODE

SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

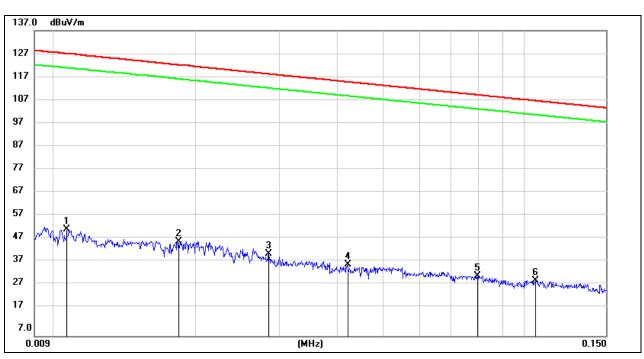

<u>9kHz~ 150kHz</u>

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.0106	31.98	20.22	52.20	127.09	-74.89	peak
2	0.0183	26.89	20.29	47.18	122.35	-75.17	peak
3	0.0285	21.56	20.31	41.87	118.51	-76.64	peak
4	0.0420	17.09	20.31	37.40	115.14	-77.74	peak
5	0.0796	12.27	20.29	32.56	109.58	-77.02	peak
6	0.1058	10.39	20.24	30.63	107.11	-76.48	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

(UL)

<u>150kHz ~ 30MHz</u>

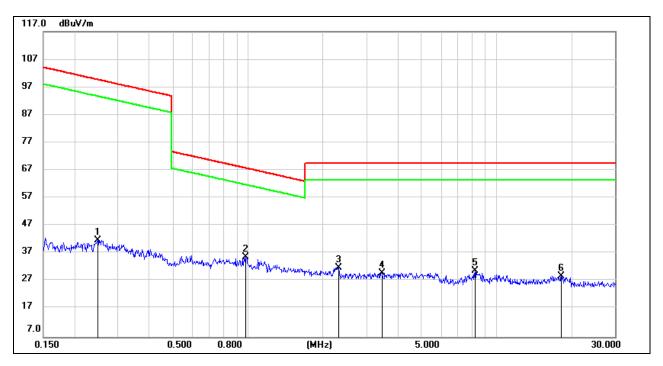

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.2479	21.41	20.32	41.73	99.72	-57.99	peak
2	0.9787	15.28	20.37	35.65	67.79	-32.14	peak
3	2.3212	11.22	20.78	32.00	69.54	-37.54	peak
4	3.4538	8.98	20.97	29.95	69.54	-39.59	peak
5	8.1913	9.72	20.97	30.69	69.54	-38.85	peak
6	18.2316	7.84	21.00	28.84	69.54	-40.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All test mode has been tested, only the worst data record in the report.




8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average		
0.15 -0.5	66 - 56 *	56 - 46 *		
0.50 -5.0	56.00	46.00		
5.0 -30.0	60.00	50.00		

TEST SETUP AND PROCEDURE

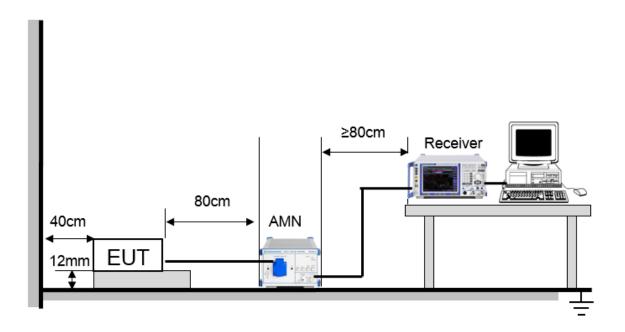


The EUT is put on a table of non-conducting material that is 12mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz. The arrangement of the equipment is installed to meet the standards and operating in a manner,

which tends to maximize its emission characteristics in a normal application.

8.1.1. GFSK MODE

TEST RESULTS (HIGH CHANNEL, WORST-CASE CONFIGURATION)

LINE N RESULTS

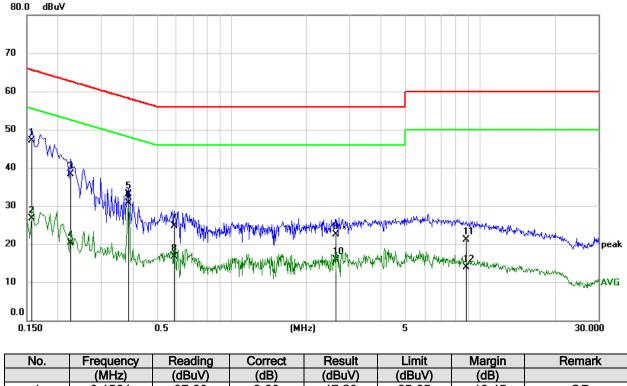

110.	Troquonoy	rtouding	0011000	rtooutt		margin	rtomant
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1564	37.60	9.60	47.20	65.65	-18.45	QP
2	0.1564	17.16	9.60	26.76	55.65	-28.89	AVG
3	0.2254	28.62	9.60	38.22	62.62	-24.40	QP
4	0.2254	10.76	9.60	20.36	52.62	-32.26	AVG
5	0.3839	23.59	9.60	33.19	58.19	-25.00	QP
6	0.3839	21.12	9.60	30.72	48.19	-17.47	AVG
7	0.5877	15.15	9.60	24.75	56.00	-31.25	QP
8	0.5877	7.08	9.60	16.68	46.00	-29.32	AVG
9	2.6437	12.82	9.64	22.46	56.00	-33.54	QP
10	2.6437	6.23	9.64	15.87	46.00	-30.13	AVG
11	8.8665	11.44	9.74	21.18	60.00	-38.82	QP
12	8.8665	4.12	9.74	13.86	50.00	-36.14	AVG


Note: 1. Result = Reading +Correct Factor.

- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch. FORM No.: 10-SL-F0035



LINE L RESULTS

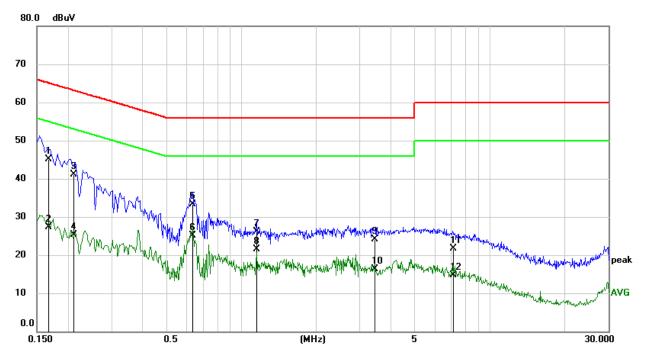

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1677	35.49	9.61	45.10	65.07	-19.97	QP
2	0.1677	17.72	9.61	27.33	55.07	-27.74	AVG
3	0.2112	31.57	9.60	41.17	63.16	-21.99	QP
4	0.2112	15.68	9.60	25.28	53.16	-27.88	AVG
5	0.6418	23.61	9.60	33.21	56.00	-22.79	QP
6	0.6418	15.46	9.60	25.06	46.00	-20.94	AVG
7	1.1520	16.47	9.61	26.08	56.00	-29.92	QP
8	1.1520	11.88	9.61	21.49	46.00	-24.51	AVG
9	3.4328	14.46	9.65	24.11	56.00	-31.89	QP
10	3.4328	6.64	9.65	16.29	46.00	-29.71	AVG
11	7.1934	11.91	9.71	21.62	60.00	-38.38	QP
12	7.1934	4.91	9.71	14.62	50.00	-35.38	AVG

Note: 1. Result = Reading +Correct Factor.

- 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
- 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All test mode has been tested, only the worst data record in the report.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies




Appendix A): 20dB Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	Verdict
GFSK	LCH	0.9414	PASS
GFSK	MCH	0.9417	PASS
GFSK	HCH	0.9405	PASS
8DPSK	LCH	1.315	PASS
8DPSK	MCH	1.313	PASS
8DPSK	HCH	1.311	PASS


Test Graph

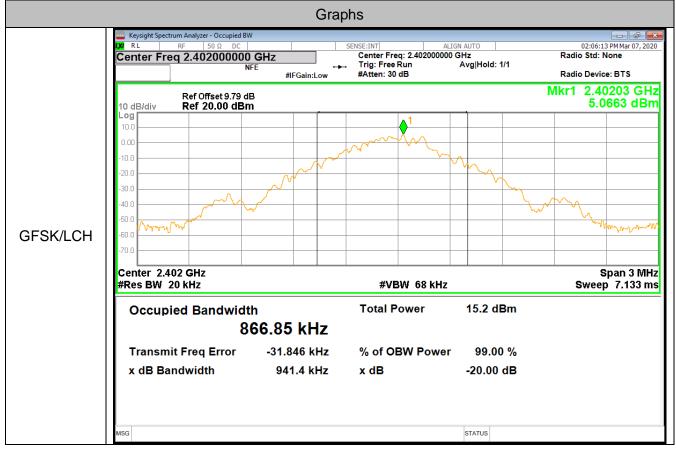




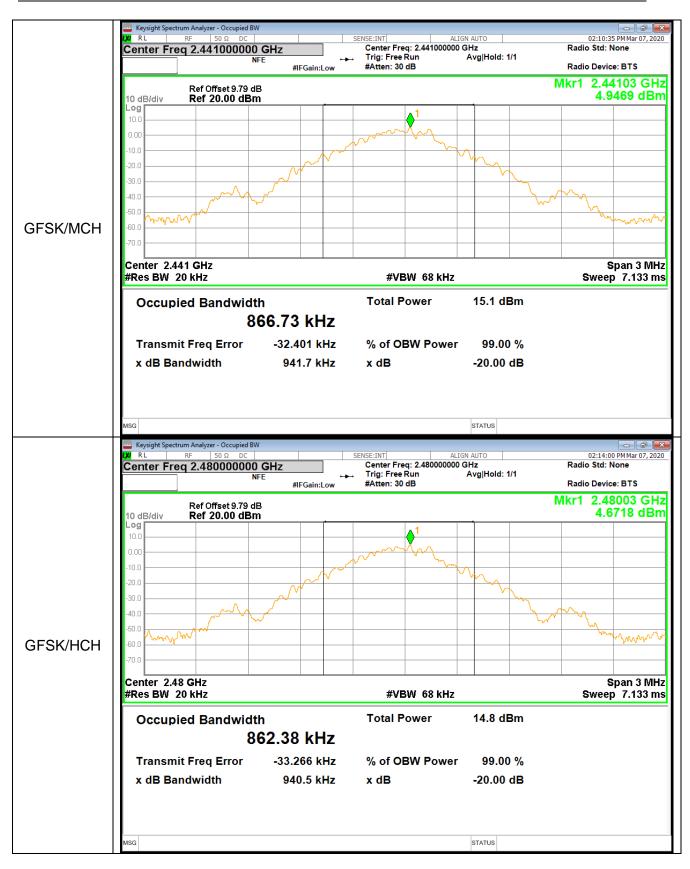



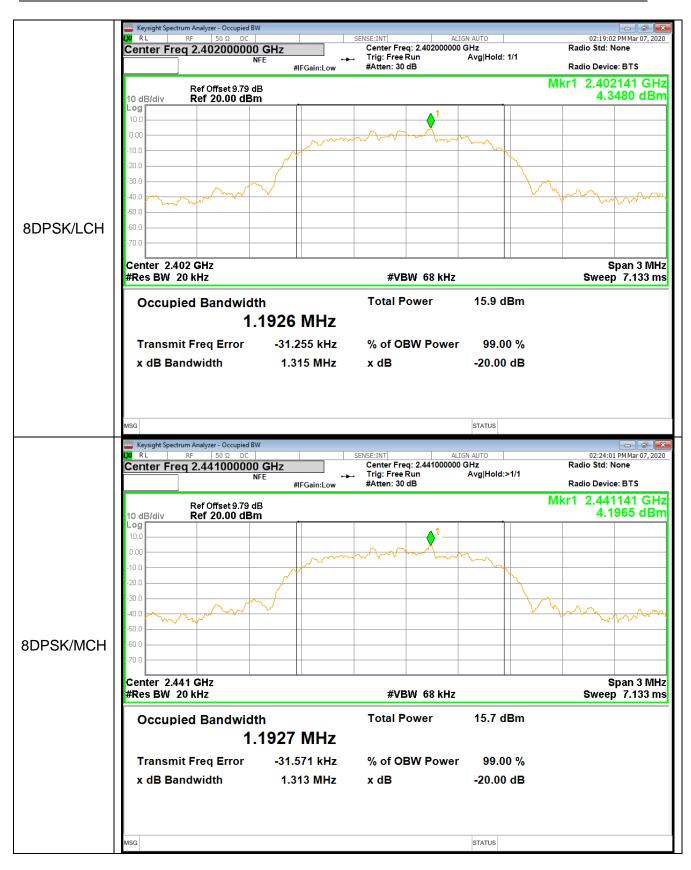



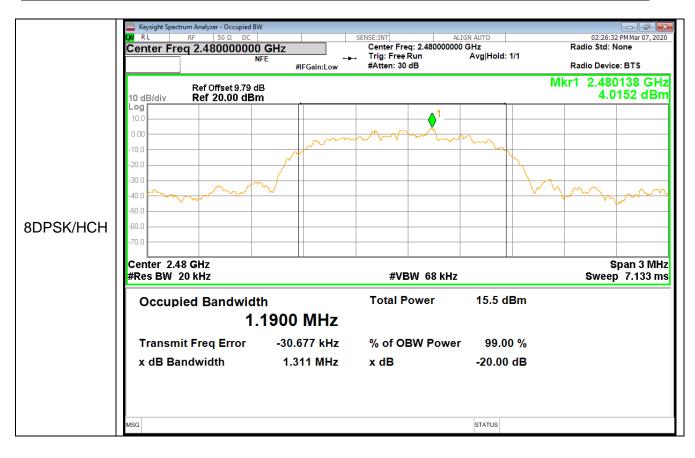



Appendix B): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Нор	79	PASS
8DPSK	Нор	79	PASS

Test Graph



REPORT No.: 4789411785-2 Page 92 of 111




	Keysight Spectrum Analyzer - Swept SA			
	ΙΧΙ RF 50 Ω DC	SENSE:INT	ALIGN AUTO	02:39:14 PM Mar 07, 2020
	Center Freq 2.441750000 GHz	PNO: Fast Grig: Free Run IFGain:Low #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold:>10/10	TRACE 1 2 3 4 5 6 TYPE M WWWW DET P P P P P P
	Ref Offset 9.79 dB 10 dB/div Ref 20.00 dBm		ΔΜ	kr1 77.822 0 MHz -0.569 dB
8DPSK/Hop	10.0 2000 .10.0			
	Start 2.40000 GHz #Res BW 200 kHz	#VBW 200 kHz	Sweep	Stop 2.48350 GHz 1.000 ms (1001 pts)
	MKR MODE TRC SGL X 1 Δ2 1 f (Δ) 77.822 0 M 2 F 1 f 2.402 087 5 G 3 4 5 6 6 7 8 9 10 11	Hz (Δ) -0.569 dB		
	MSG		STATUS	




Appendix C): Conducted Peak Output Power


Result Table				
Mode	Channel.	Level [dBm]	EIRP [dBm]	Verdict
GFSK	LCH	8.566	13.116	PASS
GFSK	MCH	8.509	13.059	PASS
GFSK	HCH	8.185	12.735	PASS
8DPSK	LCH	11.420	15.97	PASS
8DPSK	MCH	11.233	15.783	PASS
8DPSK	HCH	11.140	15.69	PASS

Test Graph

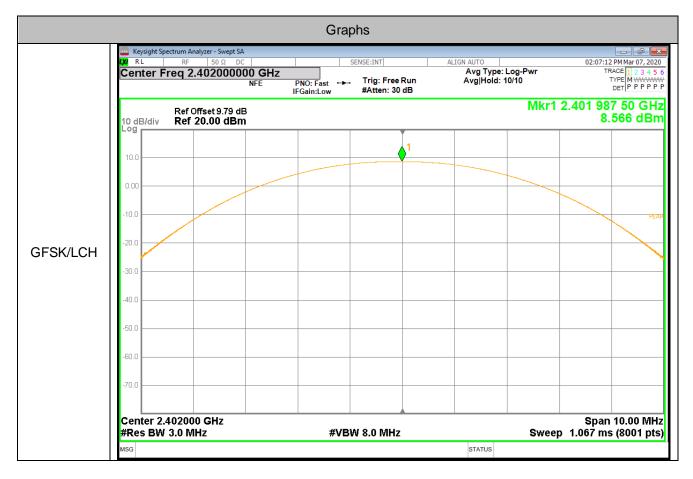






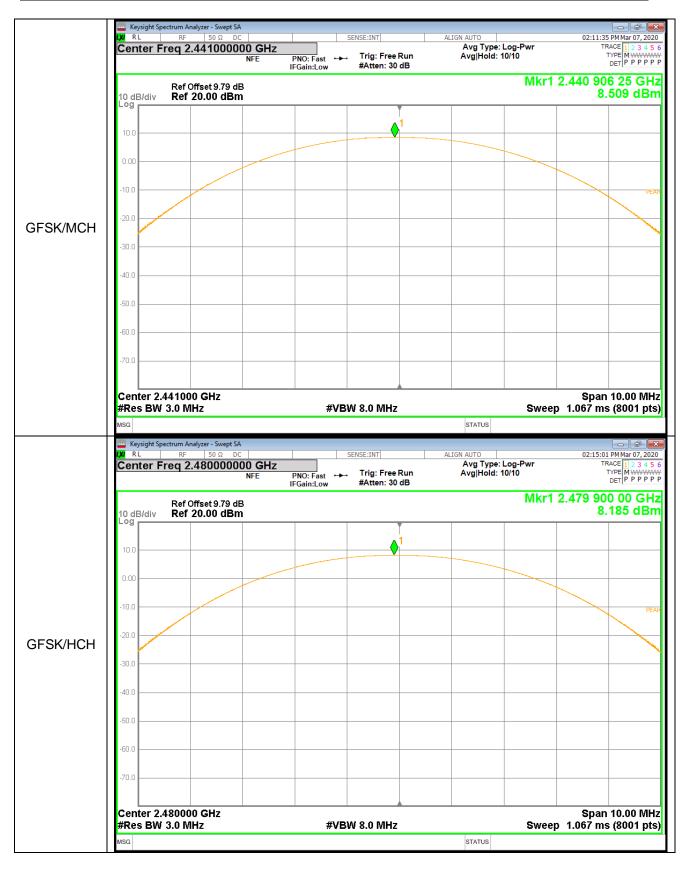




REPORT No.: 4789411785-2 Page 95 of 111

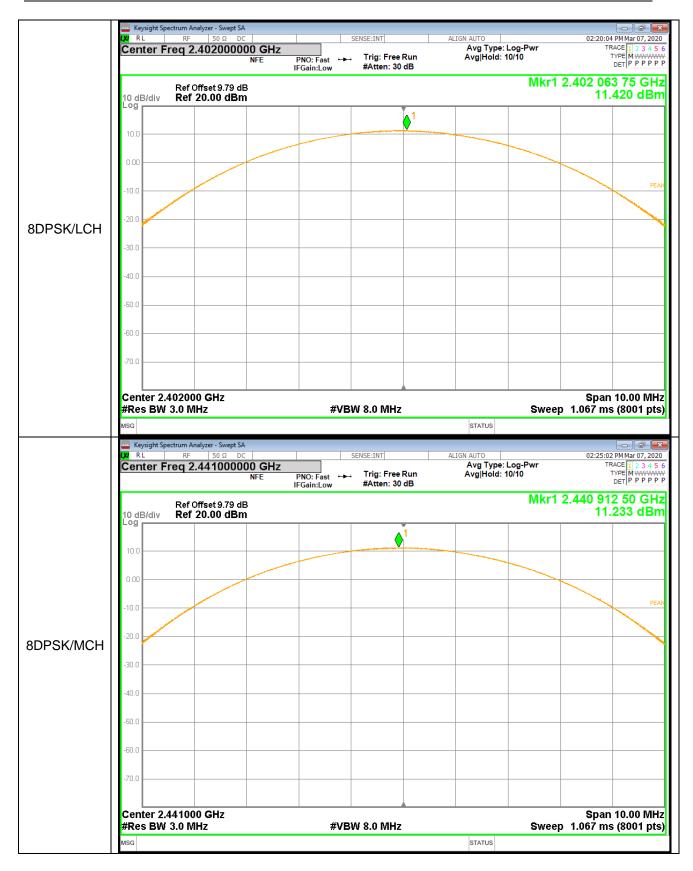



REPORT No.: 4789411785-2 Page 96 of 111

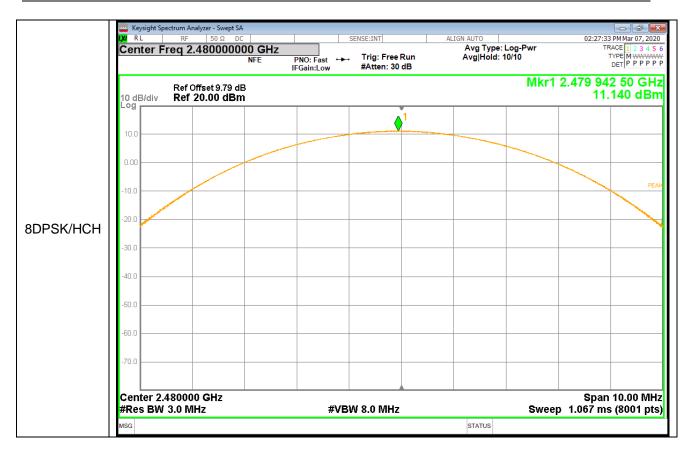




Appendix D): Band-edge for RF Conducted Emissions


Result T	able						
Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	8.486	Off	-45.754	-11.52	PASS
GFSK	LON	2402	8.488	On	-46.950	-11.51	PASS
GFSK	НСН	2480	8.086	Off	-46.602	-11.91	PASS
Gron	псп	2400	8.264	On	-47.741	-11.74	PASS
8DPSK	LCH	2402	8.496	Off	-39.967	-11.50	PASS
ODFSK	LCH	2402	8.473	On	-41.621	-11.53	PASS
8DPSK	НСН	2480	8.167	Off	-44.763	-11.83	PASS
ODESK	поп	2400	8.260	On	-47.470	-11.74	PASS

Test Graph

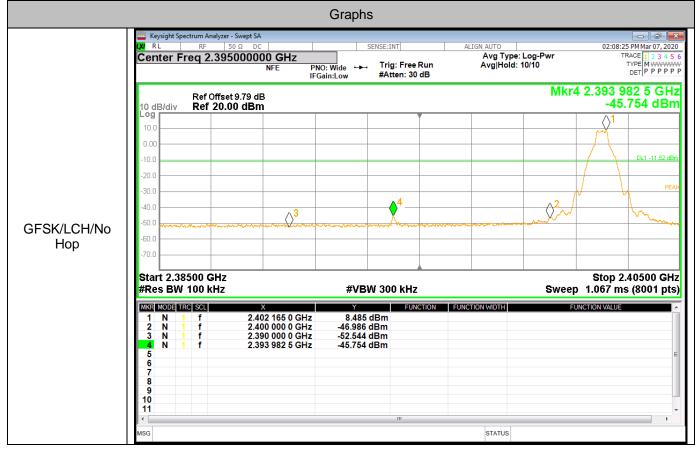


REPORT No.: 4789411785-2 Page 98 of 111



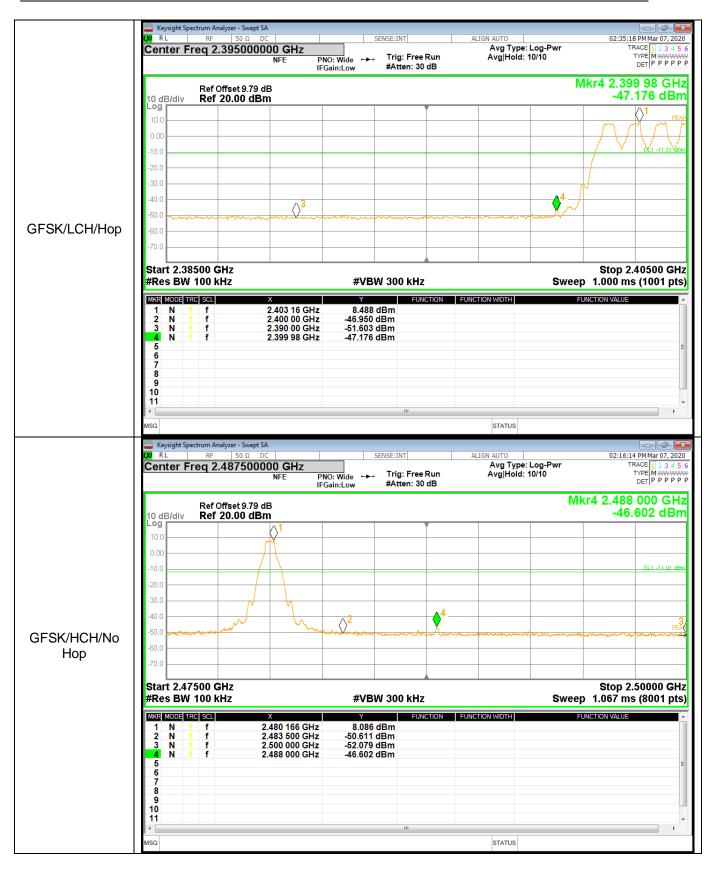


REPORT No.: 4789411785-2 Page 99 of 111



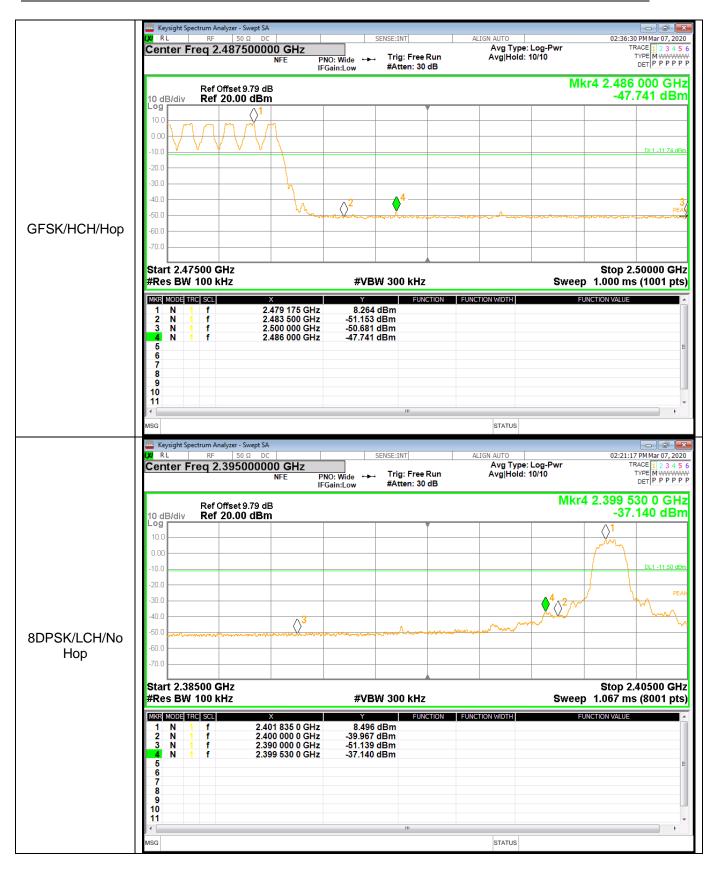


REPORT No.: 4789411785-2 Page 100 of 111



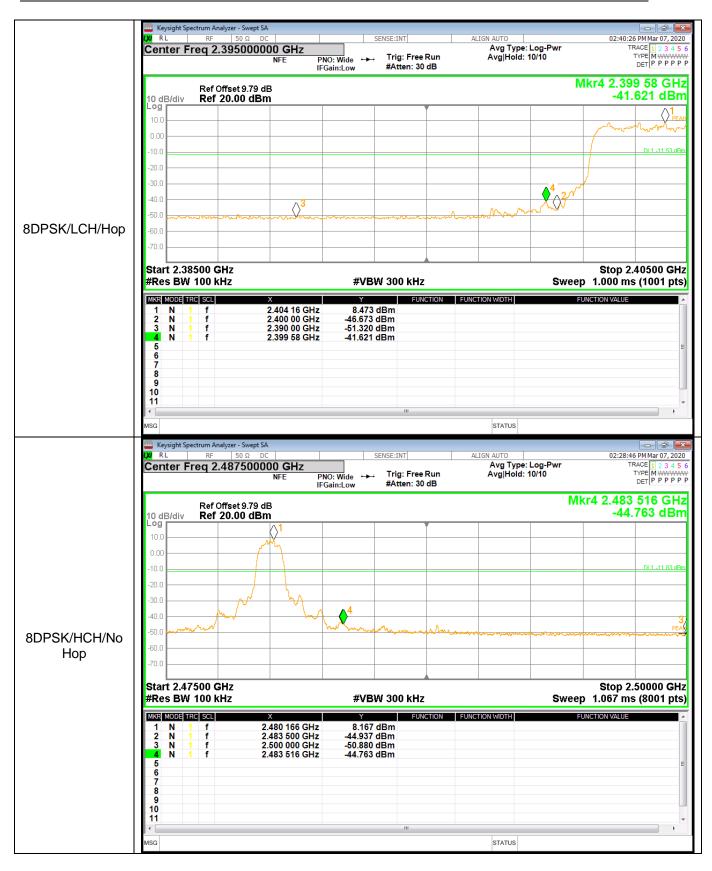

REPORT No.: 4789411785-2 Page 101 of 111



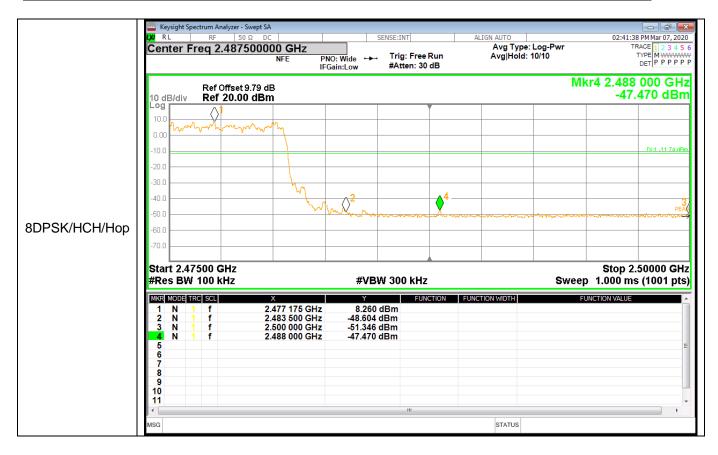




Appendix E): RF Conducted Spurious Emissions

Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	8.459	<limit< td=""><td>PASS</td></limit<>	PASS
GFSK	MCH	8.223	<limit< td=""><td>PASS</td></limit<>	PASS
GFSK	HCH	8.056	<limit< td=""><td>PASS</td></limit<>	PASS
8DPSK	LCH	8.410	<limit< td=""><td>PASS</td></limit<>	PASS
8DPSK	MCH	8.270	<limit< td=""><td>PASS</td></limit<>	PASS
8DPSK	HCH	9.029	<limit< td=""><td>PASS</td></limit<>	PASS


Test Graph

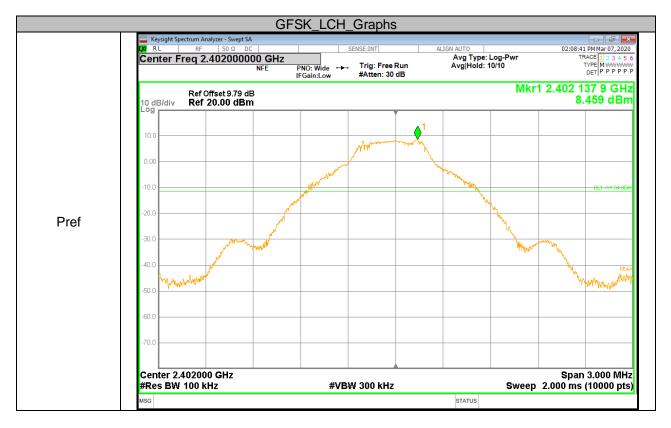


REPORT No.: 4789411785-2 Page 103 of 111



Center		000000 GHz		SENSE:INT	ALIGN AUTO	e: Log-Pwr	U2:U8:5 T	64 PM Mar (RACE 1 2
	•	NFE	PNO: Fast ++ IFGain:Low	 Trig: Free Ru #Atten: 20 dl 	un Avg Holo B	1: 10/10		TYPE M₩ DET P P
	Ref Offset	9.79 dB					Mkr2 1.2	201 6 .185 c
10 dB/div Log	Ref 10.0	0 dBm 1					-40	. 100 (
0.00								
0.00								
-10.0								DL1 -
-20.0								
-20.0								
0.0								
-40.0								
10.0	¢ ²							
-50.0								
-60.0		والعربي المراجع	and a line of the	AL MARANA PARA	Martin Martin La State State	والارون والمعالما المعالم	der Andersen wordigen	a dia dia m
tere la			discound the design of the	historia de la constante de la	And the second state of th	a de la stelenda y presidente.	and a set of the destruction of the	lle Martageachtly
-70.0								
-80.0								
-00.0								
Start 30	MH2						Stop	10.000
#Res BW				W 000 LUL-		Cwoor	32.66 ms	
	V 100 KHZ		#VE	W 300 kHz		oweeh	J JZ.00 IIIS	(1000
MSG	V 100 KHZ		#VE	W 300 KHZ	STATUS	aweep) J2.00 IIIS	(1000
MSG	Spectrum Analyzer -		#VE			Owee		
MSG Keysight S (X) R L	Spectrum Analyzer - RF 50	0 Ω DC 000000 GH	łz	SENSE:INT	ALIGN AUTO	e: Log-Pwr	02:09:0 T	06 PM Mar
MSG Keysight S LXI R L	Spectrum Analyzer - RF 50	0Ω DC		SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 T	06 PM Mar (RACE 1 2 TYPE M ₩ DET P P
MSG Keysight S Kar Kar Kar Kar Kar Kar Kar Kar Kar Kar	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	D6 PM Mar (RACE 1 2 TYPE M H DET P P
MSG Keysight S LXI R L	Spectrum Analyzer - RF 51 Freq 18.00	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mar (TRACE 1 2 TYPE M ¥ DET P P
MSG Keysight S MRL Center I 10 dB/div Log	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mar RACE 1 TYPE M DET P F 074 4
MSG Keysight S XX RL Center I 10 dB/div	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mar RACE 1 TYPE M DET P F
MSG Keysight S MRL Center I 10 dB/div Log	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mari RACE 1 TYPE M¥ DET P P 074 4 .815
MSG Keysight S (X) RL Center I Conter I 0.00 -10.0	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	16 PM Mar RACE 1 TYPE MY DET P F 074 4 .815
MSG Keysight S (X) RL Center I Conter I 0 dB/div 0.00	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mar (RACE 1 2 TYPE P P 074 4 .815
MSG Keysight S (X) RL Center I Conter I 0.00 -10.0	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mari RACE 1 TYPE M¥ DET P P 074 4 .815
Msg X RL Center 10 dB/div Log 0.00 -10.0 -20.0 -30.0	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mar RACE 1 TYPE M DET P F 074 4 .815
MSG (X) RL Center 1 Conter 1 0.00 -10.0 -20.0	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	16 PM Mar RACE 1 TYPE MY DET P F 074 4 .815
MSG Keysight S X RL Center 1 10 dB/div Log 0.00 -10.0 -20.0 -30.0	Spectrum Analyzer - RF 51 Freq 18.00 Ref Offset	0 Ω DC 0000000 GH NFE 9.79 dB	Hz PNO: Fast ↔	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	e: Log-Pwr i: 10/10	02:09:0 ⊤ 7 Mkr1 25.9	06 PM Mari RACE 1 TYPE M¥ DET P P 074 4 .815
MSG Keysight S (X) RL Center I 0.00 -10.0 -20.0 -30.0 -40.0 -50.0	Ref Offset Ref 18.00	9.79 dB 0 dBm	PNO: Fast IFGain:Low	SENSE:INT	Align AUTO Avg Typ an Avg Hol 3	- e: Log-Pwr i: 10/10	02:09:0 T Mkr1 25.5 -52	016 PM Marian 16 PM Marian 196 PM Marian 196 PM Marian 1974 4 8815
MSG Keysight S (X) RL Center I 0.00 -10.0 -20.0 -30.0 -40.0 -50.0	Ref Offset Ref 18.00	9.79 dB 0 dBm	PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Typ In Avg Holo	- e: Log-Pwr i: 10/10	02:09:0 T Mkr1 25.5 -52	016 PM Mar 1 16 PM Mar 1 17 PM M M M M M M M M M M M M M M M M M M
MSG Keysight S (X) RL Center I 0.00 -10.0 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0	Ref Offset Ref 18.00	9.79 dB 0 dBm	PNO: Fast IFGain:Low	SENSE:INT	Align AUTO Avg Typ an Avg Hol 3	- e: Log-Pwr i: 10/10	02:09:0 T Mkr1 25.5 -52	016 PMMar RACE [] 074 4 .815
MSG Keysight S (X) RL Center I 0.00 -10.0 -20.0 -30.0 -40.0 -50.0	Ref Offset Ref 18.00	9.79 dB 0 dBm	PNO: Fast IFGain:Low	SENSE:INT	Align AUTO Avg Typ an Avg Hol 3	- e: Log-Pwr i: 10/10	02:09:0 T Mkr1 25.5 -52	016 PM Mar 1 16 PM Mar 1 17 PM M M M M M M M M M M M M M M M M M M
MSG Keysight S (X) RL Center I 0.00 -10.0 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0	Ref Offset Ref 18.00	9.79 dB 0 dBm	PNO: Fast IFGain:Low	SENSE:INT	Align AUTO Avg Typ an Avg Hol 3	- e: Log-Pwr i: 10/10	02:09:0 T Mkr1 25.5 -52	06 PM Mar (12 CM A A A A A A A A A A A A A A A A A A
MSG Xeysight S XI RL Center I 10 dB/div Log 0.00 -10.0 -20.0 -20.0 -40.0 -40.0 -60.0 -60.0	Ref Offset Ref 18.00	9.79 dB 0 dBm	PNO: Fast IFGain:Low	SENSE:INT	Align AUTO Avg Typ an Avg Hol 3	- -: Log-Pwr -: 10/10	02:09:0 T Mkr1 25.5 -52	0 10 16 PM Mar 12 16 PM Mar 12 16 PM Mar 12 16 PM Mar 12 16 16 16 16 16 16 16 16 16 16 16 16 16
MSG Keysight S (V) RL Center I 10 dB/div Log 0.00 -10.0 -20.0 -30.0 -40.0 -5	Ref Offset Ref 18.00	9.79 dB 0 dBm	IFGain:Low	SENSE:INT	Align AUTO Avg Typ an Avg Hol 3		02:09:0 T Mkr1 25.5 -52	0 10 10 10 10 10 10 10 10 10 10 10 10 10






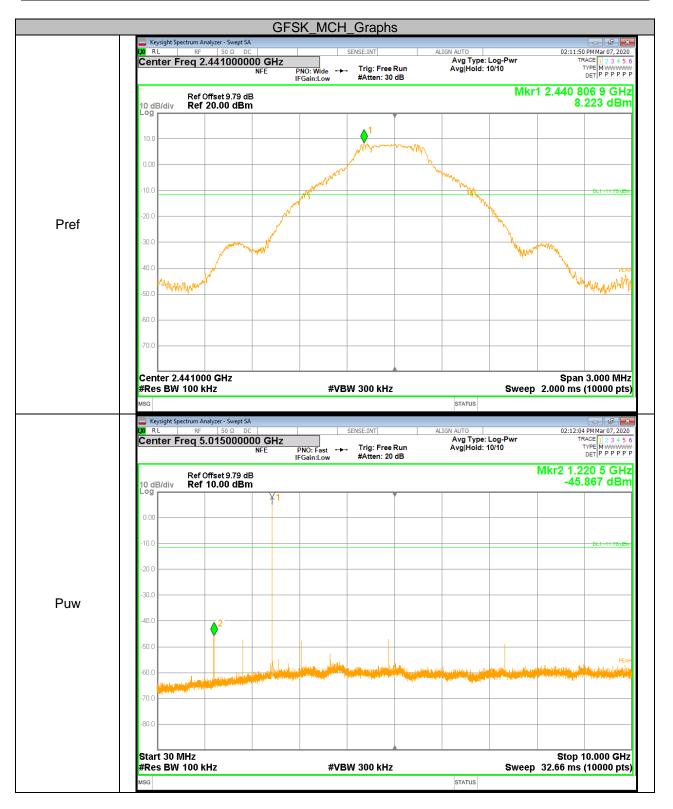

REPORT No.: 4789411785-2 Page 105 of 111




LXI RL	RF	50 Ω DC			SENSE:INT	AL	IGN AUTO			PM Mar 07
Cente	r Freq 18	.000000	NFE	PNO: Fast ↔ FGain:Low	. Trig: Free #Atten: 20		Avg Type: I Avg Hold: 1		TF	ACE 1 2 TYPE M W DET P P
10 dB/d Log		fset 9.79 di 0.00 dBm						N	lkr1 25.6 -52.	54 4 (308 c
0.00										
-10.0										DL1 -11.7
-20.0										
-30.0										
-40.0										
-50.0	I W ^A PROPILIZZZA DO	L.L.w		المتعادية المربية المعاد المعاد				engelerkungen "Atterförder		
-70.0				and a first admit they see it a	and the property of the local sector of the local sector of the local sector of the local sector of the local s	the particular in the second		and the second	np	
-70.0										
Start 1	0.000 GH:								Stop 2	6.000
#Res E	3W 100 kH	z		#VB	W 300 kHz			Sweep	51.99 ms	(10000

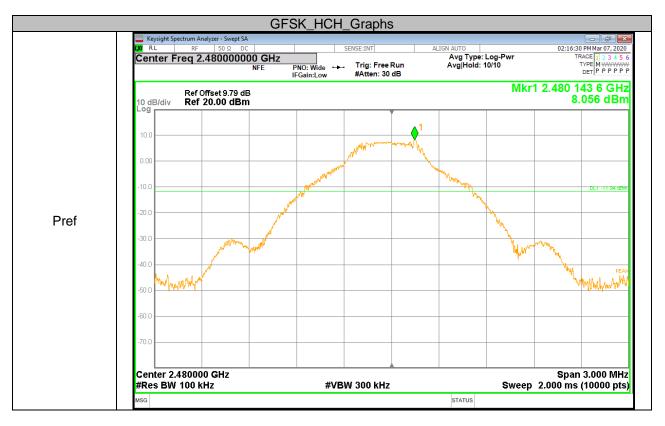


REPORT No.: 4789411785-2 Page 106 of 111



	109 5.0150	000000 GHz NFE	PNO: Fast		Avg Hold	:: Log-Pwr : 10/10		TRACE 1 TYPE M DET P
			IFGain:Low	#Atten: 20 dB			Mkr2 1	
10 dB/div	Ref Offset 9 Ref 10.00							4.889
		¥1						
).00								
10.0								
0.0								DL1 -1
-20.0								
-30.0								
-40.0	<u></u> 2-							
	📍							
-50.0								
-60.0		للمارين ا	and a state of the second	In the second	. Antifered address and the second	ويتقاورني والمتعاقر وراهم	و مراجعة السيماني	and described
Joseph Lando			the state of the s	Difference and the second second	A REAL PROPERTY OF THE PARTY OF	of Additional the	and the second	and the following the
-70.0								
-80.0								
Start 30	ivinz / 100 kHz		#1	3W 300 kHz		Current	sto p 32.66 m	p 10.000
MSG								
MSG					STATUS			
	pectrum Analyzer - S							
Keysight S LXI RL	RF 50	Swept SA Ω DC D000000 GH	Z	SENSE:INT	ALIGN AUTO	: Log-Pwr	02:1	6:55 PM Mar (
Keysight S LXI R L	RF 50	Ω DC	Z PNO: Fast IFGain:Low	Tain Free Dar	ALIGN AUTO	:: Log-Pwr : 10/10	02:1	6:55 PM Mar (TRACE 1 2 TYPE M H
Keysight S LXI R L	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M H DET P P
Keysight S LXI R L		Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M ₩ DET P P .982 4
Center F	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M H DET P P
Keysight S XI RL Center F	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M ¥ DET P P
10 dB/div	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M ¥ DET P F .982 4 2.459
Center F	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M H DET P P
10 dB/div	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M H DET P P
Keysight S X8 Center I 10 dB/div 0.00 -10.0 -20.0	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M H DET P P
Keysight Si X# RL Center I 10 dB/div Log 0.00 -10.0	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M ¥ DET P F .982 4 2.459
Keysight Si Keysight Si Center F Conter F 0 dB/div 0.00 -10.0 -20.0	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar TRACE 1 TYPE M DET P F .982 4 2.459
Keysight S X Keysight S X K Center I O	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB	PNO: Fast	_, Trig: Free Run	ALIGN AUTO	: 10/10	Mkr1 25	6:55 PM Mar (TRACE 1 2 TYPE M H DET P P
Keysight S X Keysight S X K Center I O	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	6:55 PM Mar (TRACE 12 TYPE M DET P P .982 4 2.459 (DET -1
Keysight S X Keysight S X K Center I O	RF 50 Freq 18.000 Ref Offset 3 Ref 0ffset 10.00	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	
Keysight Si XX RL Center I 10 dB/div 20.0 -10.0 -20.0 -30.0 -40.0	RF 50 Freq 18.000 Ref Offset 9	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO		Mkr1 25 -5	6:55 PM Mart TRACE 1 TYPE M DET P F .982 4 2.459 (
Keysight S XX RL Center I 10 dB/div 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0	RF 50 Freq 18.000 Ref Offset 3 Ref 0ffset 10.00	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	6:55 PM Mart TRACE 1 TYPE M DET P F .982 4 2.459 (
Keysight S X Keysight S X K Center I O	RF 50 Freq 18.000 Ref Offset 3 Ref 0ffset 10.00	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	6:55 PM Mar (TRACE 12 TYPE M DET P P .982 4 2.459 (DET -1
Keysight S XX RL Center I 10 dB/div 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0	RF 50 Freq 18.000 Ref Offset 3 Ref 0ffset 10.00	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	6:55 PM Mar C TRACE 12 TYPE IM DET P P .982 4 2.459 (
Keysight S XX RL Center I 10 dB/div 0.00 -10.0 -20.0 -30.0 -40.0 -50.0 -60.0 -70.0	RF 50 Freq 18.000 Ref Offset 3 Ref 0ffset 10.00	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	6:55 PM Mar C TRACE 12 TYPEIM DET P P .982 4 2.459 (
Keysight S XØ RL Center I 10 dB/div 0.00 -10.0 -20.0 -30.0 -30.0 -40.0 -50.0 -60.0 -70.0 -80.0 -80.0 Start 10.	RF 50 Freq 18.000 Ref Offset 3 Ref 0ffset 10.00	Ω DC 0000000 GH NFE 0.79 dB dBm	PNO: Fast	Trig: Free Run #Atten: 20 dB	ALIGN AUTO Avg Type Avg Hold		Mkr1 25 -5	6:55 PM Mar (TRACE] 2 TRACE] 2 .982 4 2.459 (DET -1 DET -1 .011 - 1 .011 -






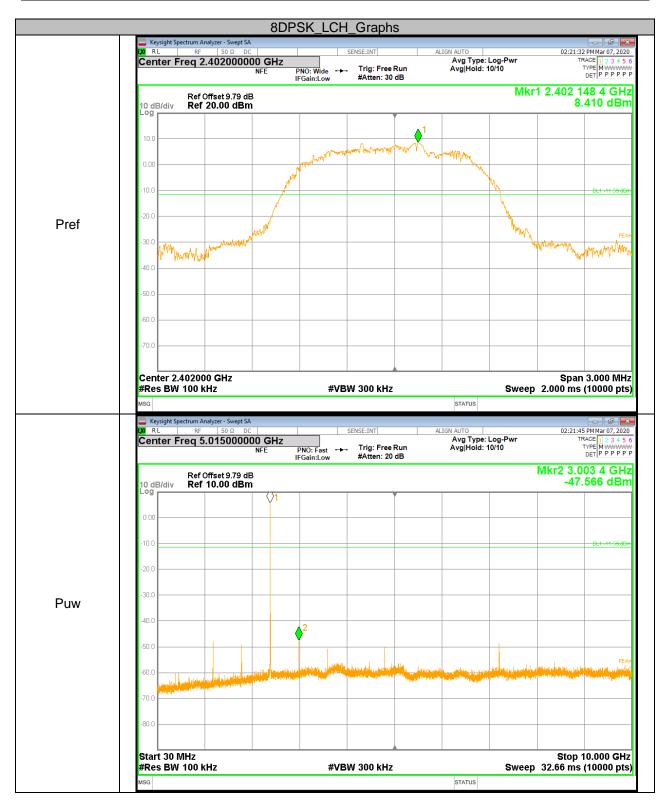



		SENSE:INT	ALIGN AUTO	02:21:58 PM Mar 0
Center Freq 18.000000	000 GHz NFE PNO: Fast ← IFGain:Low	► Trig: Free Run #Atten: 20 dB	Avg Type: Log-Pwr Avg Hold: 10/10	TRACE 1 2 TYPE MW DET P P
Ref Offset 9.79 dE 10 dB/div Ref 10.00 dBm Log				Mkr1 25.635 2 -52.675 (
0.00				
-10.0				DL1-11
-20.0				
-30.0				
-40.0				
-50.0	in the set list drives to set the set of the	In the second distribution in the second	ine and difficient part from providing the standard providence of the standard pro	
-50.0				
-80.0				
Start 10.000 GHz				Stop 26.000
#Res BW 100 kHz	#V	BW 300 kHz	Swee	p 51.99 ms (10000

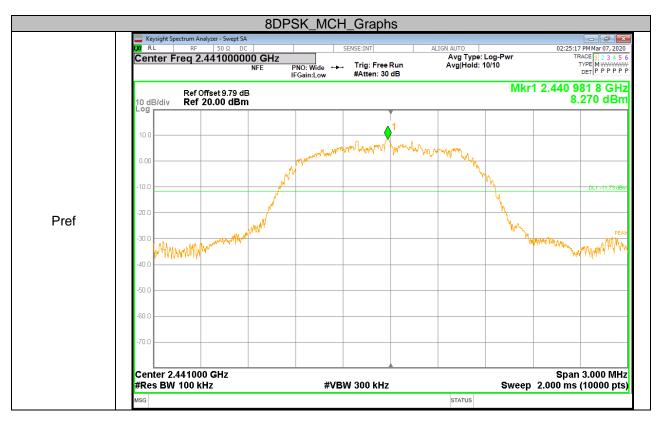

REPORT No.: 4789411785-2 Page 109 of 111




		50 Ω DC 5000000 GHz		SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10		31 PM Mar (TRACE 1 2 TYPE M ₩
		NFE	PNO: Fast ↔ IFGain:Low	#Atten: 20 dB	Arginold.			DET P P
(0. ID)		et 9.79 dB					Mkr2 1.2	220 5 .438 d
10 dB/c	iiv Ref 10.	00 dBm						.400 (
0.00								
-10.0								DL1 -1
-20.0								
-30.0								
-40.0		2						
-50.0								
-60.0			without the state of the state		ويجرب الجاليا والبالين البالاستعاد	a desta de la d	all ten de la guar	d stade
10		the particular states			and a state of the		and a second	an in the second
-70.0								
-80.0								
	80 MHz							10.000
	3WL 400 KU-							
MSG Keysig L <mark>XI</mark> RL		50 Ω DC		SENSE:INT	STATUS ALIGN AUTO		p 32.66 ms	43 PM Mar
MSG Keysig (X) R L	ht Spectrum Analyze		IZ PNO: Fast ↔	SENSE:INT		Log-Pwr	02:25:4	43 PM Mar
MSG Keysig L XI RL	ht Spectrum Analyze RF F Freq 18.0	50 Ω DC 00000000 GH NFE	Iz	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25:-	43 PM Mar (TRACE 1 2 TYPE M ¥ DET P P
MSG Keysig X RL Cente 10 dB/c	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC O000000 GH	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	43 PM Mar (TRACE 1 2 TYPE M ¥ DET P P
MSG Keysig KM RL Cente	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	H3 PM Mar (IRACE 1 2 TYPE M Y DET P F
MSG Keysig M RL Cente 10 dB/c Log	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	43 PM Mar IRACE 1 TYPE MY DET P F
MSG Keysig (X) RL Cente	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	43 PM Mar IRACE 1 TYPE M DET P 1 638 4
MSG Keysig XX RL Cente 10 dB/c Log 0.00	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar IRACE 1 TYPE M DET P 1 538 4 5.629
MSG Keysig Kaller Keysig Kaller Keysig	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar IRACE 1 TYPE M DET P 1 538 4 5.629
MSG Keysig M RL Cente	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar IRACE 1 TYPE M DET P F 538 4 5.629
SG RL Cente 0 dB/c 0 dB/c	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar IRACE 1 TYPE M DET P 1 538 4 5.629
MSG Keysig X RL Cente 10 dB/c Log 0.00 -10.0	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar IRACE 1 TYPE M DET P 1 538 4 5.629
MSG Keysig X RL Cente 10 dB/c Log -10.0 -20.0	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar TRACE 1 TYPE M DET P 638 4 6.629
мsg (X RL Cente 10 dB/c 10 dB/c 10 dB/c -10.0 — -20.0 —	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar TRACE 1 TYPE M DET P 638 4 629
MSG XX REVEIQ XX RL Cente 0.00 -10.0 -20.0 -30.0 -40.0 -40.0	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GH NFE et 9.79 dB	IZ PNO: Fast ↔	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.0	13 PM Mar TRACE 1 TYPE M DET P 638 4 6.629
MSG Cente 10 dB/c 10 dB/c 10 dB/c 10 dB/c -20.0	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Marana 13 PM Marana Det P P 3338 4 5629
MSG (X) RL (X) RL Cente 10 dB/c Log -10.0	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Mar 13 PM Mar 14 PM
MSG Cente 001 RL Cente 10 dB/c 10 dB/c 0.00 - -10.0 - -20.0 - -30.0 - -40.0 - -50.0 -	ht Spectrum Analyze	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Marana 13 PM Marana Det P P 3338 4 5629
MSG XX RL Cente 10 dB/c 10 dB/c 10 d -30.0 -30.0 -40.0 -50.0 -50.0 -50.0	ht Spectrum Analyze	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Mar 13 PM Mar 14 PM
MSG Keysig (X) RL Cente 10 dB/c Log -10.0 - -20.0 - -30.0 - -40.0 -	ht Spectrum Analyze	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Marana 13 PM Marana Det P P 3338 4 5629
MSG Keysig (X) RL Cente 10 dB/c 10 g 0.00 -10.0 -20.0 -20.0 -30.0 -40.0 -60.0 ()	ht Spectrum Analyze	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Marana 13 PM Marana Det P P 0 PT P 10 PT
MSG Keysig (X) RL Cente 10 dB/c 20 0 -10.0 -20.0 -30.0	ht Spectrum Analyze	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Marana 13 PM Marana Det P P 0 PT P 10 PT
MSG Cente 10 dB/c 9 10 dB/c 10 dB/c	ht Spectrum Analyze RF IT Freq 18.0 Ref Offse IV Ref 10.	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	13 PM Maran 13 PM Maran 13 PM Maran 14 PM
MSG X Reysing X Reserved Cente 10 dB/c 10 dB/c 10 d -30.0 -10.0 -20.0 -30.0	ht Spectrum Analyze	50 Ω DC 00000000 GF NFE et 9.79 dB 00 dBm	IZ PNO: Fast IFGain:Low	SENSE:INT	ALIGN AUTO Avg Type: Avg Hold:	Log-Pwr 10/10	02:25: Mkr1 25.6 -53	26.000

8DPSK_HCH_Graphs

REPORT No.: 4789411785-2 Page 110 of 111



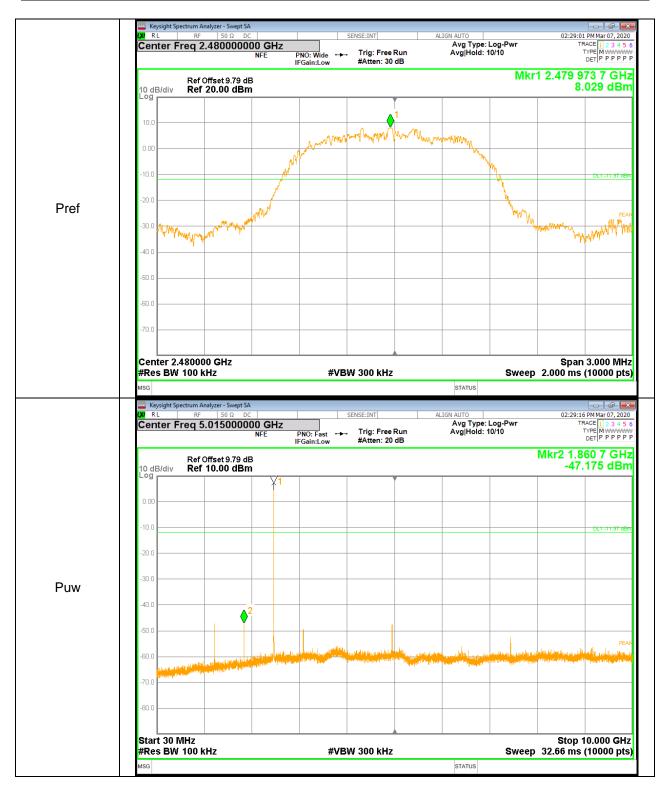



LXI F		m Analyzer - Swept S RF 50 Ω D			SENSE:INT	ΔΙ	IGN AUTO		02:29:2	B PM Mar 07, 2
		18.000000	0000 GHz				Avg Type: Avg Hold: 1		TI	RACE 1 2 3 4
			NFE	PNO: Fast ++ FGain:Low	#Atten: 20		Avginoid: 1	10/10		DET P P P
	R	ef Offset 9.79 c	IB					N	lkr1 25.9	
10 c Log	B/div R	ef 10.00 dB							-53.	244 dE
209										
0.00										
-10.0										DL1 -11.97
-20.0										
-30.0										
-40.0										
-50.0										
							de accelto a alter		وراق وأشفر ويدار وارديا	
-60.0	Allowed Allowed		and a state of the latest states	h Handha Historya da		and a state of the state of the	Internet of the local sector of the		al a constant and the state	^{ور} المحافظة وروانية وروانية وروانية وروانية
		a constraint contract	all the second se		Inter I Maria					
-70.0	<u> </u>									
-80.0										
	rt 10.000			<i>#</i>) (=	W 000 k''-			0	Stop 2	26.000 G
	s BW 10	U KHZ		#VB	W 300 kHz			Sweep	51.99 ms	(10000 p
MSG							STATUS			

END OF REPORT