



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : SGH-A437  
FCC ID(Requested) : A3LSGHA437  
Report No : FE-040-R1  
Job No : FE-040  
Date issued : March 16, 2007

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,  
Part22, Part24.

Prepared By

---

SH ONG – Test Engineer

Authorized By

---

WW JANG - Technical Manager



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC CERTIFICATION INFORMATION .....</b>	<b>3</b>
1.1. §2.1033 General Information .....	3
<b>2. INTRODUCTION .....</b>	<b>4</b>
2.1. General .....	4
<b>3. MEASURING INSTRUMENT CALIBRATION .....</b>	<b>5</b>
<b>4. TEST EQUIPMENT LIST .....</b>	<b>6</b>
<b>5. DESCRIPTION OF TESTS .....</b>	<b>7</b>
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power .....	7
5.2. Radiated Spurious & Harmonic Emission .....	8
5.3. Occupied Bandwidth .....	10
5.4. Spurious and Harmonic Emission at Antenna Terminal .....	10
5.4.1. Occupied Bandwidth Emission Limits .....	10
5.4.2. Conducted Spurious Emission .....	12
5.5. Frequency Stability / Temperature Variation .....	13
<b>6. TEST DATA .....</b>	<b>14</b>
6.1. Effective Radiated Power (E.R.P.) .....	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.) .....	15
6.3. GSM850 Radiated Spurious & Harmonic measurement .....	15
6.4. GSM1900 Radiated Spurious & Harmonic measurement .....	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table .....	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table .....	19
6.7. Frequency Stability .....	20
6.7.1. GSM850 Frequency Stability Table .....	20
6.7.2. GSM850 Frequency Stability Graph .....	21
6.7.3. GSM1900 Frequency Stability Table .....	23
6.7.4. GSM1900 Frequency Stability Graph .....	24
<b>7. CONCLUSION .....</b>	<b>26</b>
<b>8. TEST PLOTS .....</b>	<b>27</b>



# MEASUREMENT REPORT

## 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.


### 1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSGHA437
- Quantity : Quantity production is planned
- Emission Designators : 253KGXW(GSM850), 241KG7W(GSM850 EDGE)  
250KGXW(GSM1900), 257KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)  
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)  
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 1.563 W ERP GSM850 (31.94dBm)  
1.782 W EIRP GSM1900 (32.51dBm)  
0.355 W ERP GSM850 EDGE(25.50dBm)  
1.285 W EIRP GSM1900 EDGE(31.09dBm)
- FCC Classification(s) : Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Dual-Band GSM/EDGE 850/1900 Phone with Bluetooth
- Frequency Tolerance :  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : March 12 - 13, 2007
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FE-040-R1

## 2. INTRODUCTION

### 2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742 The site have 1 Fully-anechoic chamber and measurement facility.

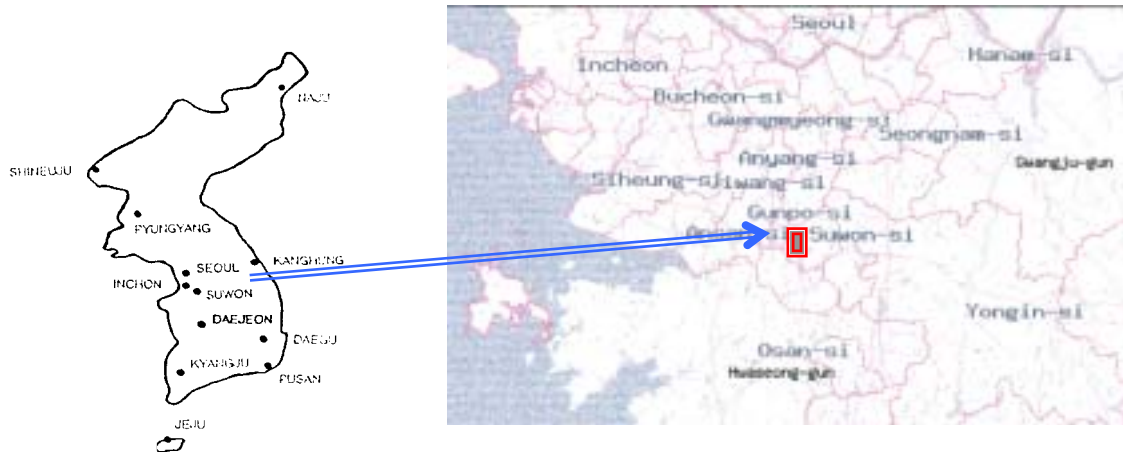


**Figure1. Map of the Suwon City area.**

### **Measurement Procedure**

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

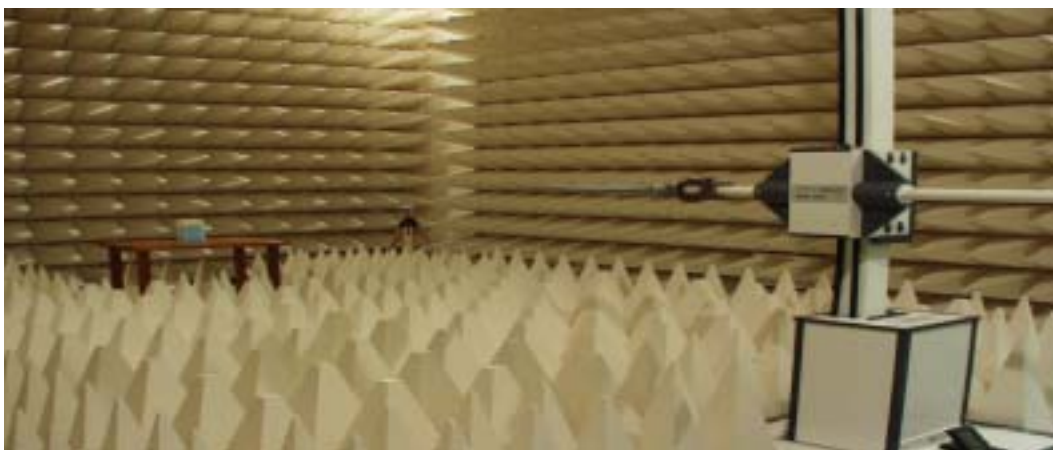

**Figure2. Photograph of 3m Fully-Anechoic Chamber**



### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

#### 4. TEST EQUIPMENT LIST


<b>Name Of Equipment</b>	<b>Model</b>	<b>Serial No.</b>	<b>Due Date</b>
Spectrum Analyzer	ESI26	836119/010	2007-10-01
	E4440A(3Hz~26.5GHz)	MY41000236	2007-04-14
	E4440A(3Hz~26.5GHz)	MY41000233	2007-07-21
Signal Generator	SMR20	835197/030	2008-01-11
Amplifier	5S1G4	304866	2007-10-19
Network Analyzer	8753E	JP38160590	2007-06-26
Power Sensor	8485A	3318A19924	2007-09-24
Power Meter	E4419B	GB41293846	2007-09-06
Pre-Amplifier	8449B	3008A00691	2008-01-02
Communication test set	8960	GB42230535	2008-01-02
	8960	GB42360886	2007-07-03
Antenna Master	MA240	240/618	Not Required
Controller	HD100	100/756	Not Required
Horn Antenna	HF906	100134	2007-05-04
	HF906	360306/011	2007-03-31
Communication test set	CMU200	109162	2007-10-17
Dipole Antenna	3121C-DB4	9007-588	2007-05-29
Receive Antenna	HL040	353255/020	2007-04-25
Power Supply	E3640A	MY40003594	2007-06-28
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2007-11-16
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. DESCRIPTION OF TESTS

### 5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

#### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004:

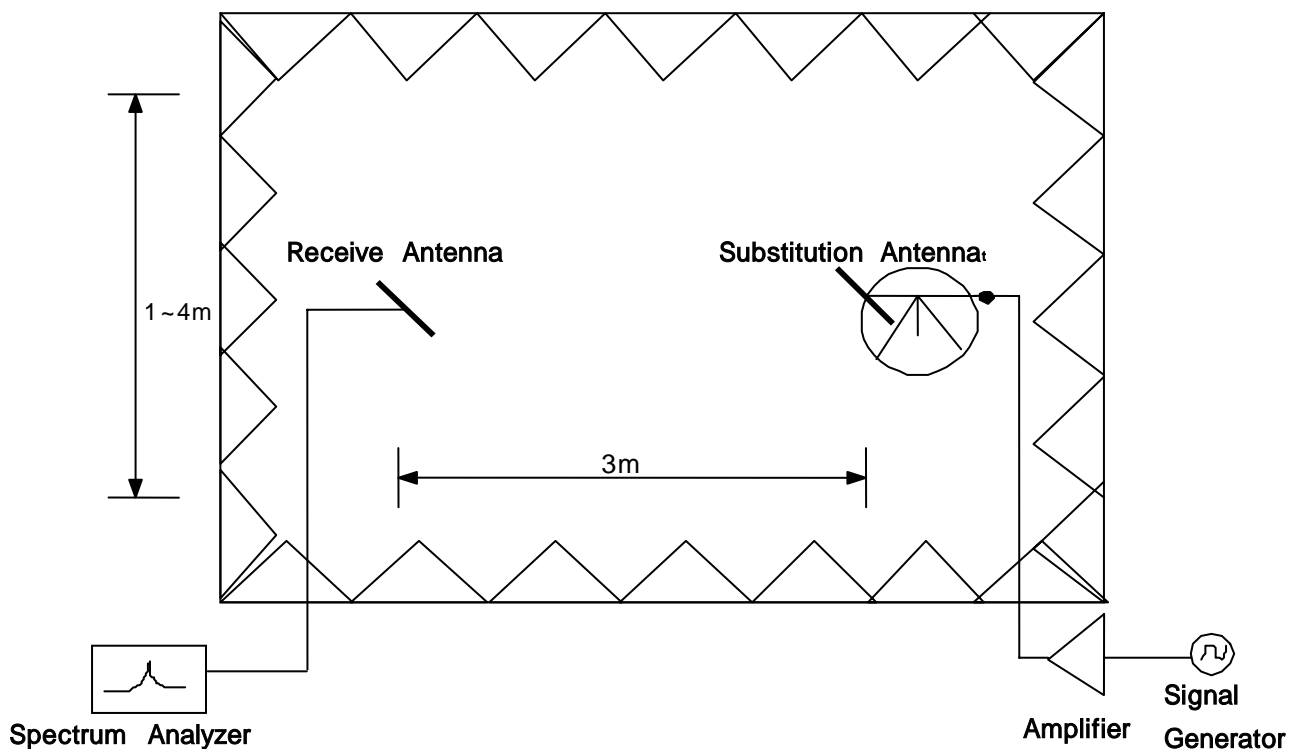


**Figure 3. Diagram of ERP/EIRP test Set-up**

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.2. Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

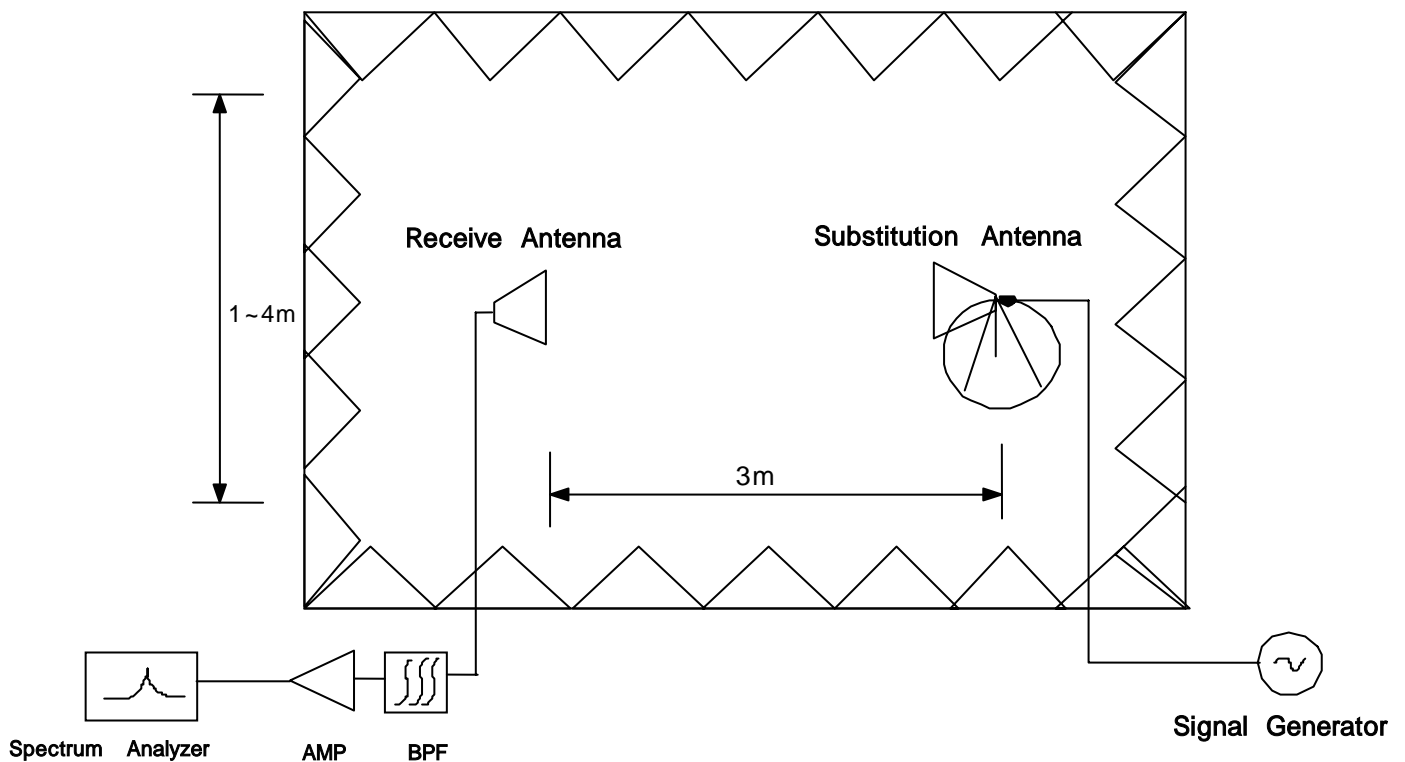

**Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up**

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.





## SAMPLE CALCULATION

### **Example: Channel 661 , Second Harmonic(3760.00MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3760.00\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.8\text{dBm}$ . The fundamental EIRP was  $25.5\text{dBm}$  so this harmonic was  $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$  .

### 5.3. Occupied Bandwidth

#### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

### 5.4. Spurious and Harmonic Emission at Antenna Terminal

#### 5.4.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.



<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks**

<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

**Table 2. Cellular Service Frequency Blocks**

## 5.4.2. Conducted Spurious Emission

### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log ( 1.563 \text{ W} ) = 44.94 \text{ dB}$$

$$31.94 \text{ dBm} - 44.94 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM :  $0.01 * 273\text{KHz} = 2.73\text{KHz}$   
A Resolution BW of 3KHz was used for measurement at the band edges.

### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.5. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5$ ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



## 6. TEST DATA

### 6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

#### Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
824.20	25.00	H	-13.69	0.00	-13.69
		V	-11.89	0.00	-11.89
836.60	25.00	H	-13.69	0.00	-13.69
		V	-11.89	0.00	-11.89
848.80	25.00	H	-13.69	0.00	-13.69
		V	-11.89	0.00	-11.89

#### Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-7.38	H2	1	31.31	1.352	Standard
836.60	-6.89	H1	185	31.80	1.514	Standard
848.80	-6.75	H1	186	31.94	1.563	Standard

#### EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-13.19	H1	180	25.50	0.355	Standard

**NOTE : Standard batteries are the only battery options for this phone**

**Radiated measurements at 3 meters by Substitution Method**



## 6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

### Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	27.00	H	-12.32	8.13	-20.45
		V	-12.64	8.13	-20.77
1880.00	27.00	H	-12.36	8.11	-20.47
		V	-12.32	8.11	-20.43
1909.80	27.00	H	-12.29	8.33	-20.62
		V	-11.89	8.33	-20.22

### Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-15.39	H1	178	32.06	1.607	Standard
1880.00	-14.96	H1	182	32.51	1.782	Standard
1909.80	-16.59	H1	183	31.03	1.268	Standard

### EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1880.00	-16.38	H1	180	31.09	1.285	Standard

**NOTE :** Standard batteries are the only battery options for this phone

**Radiated measurements at 3 meters by Substitution Method**

## 6.3. GSM850 Radiated Spurious & Harmonic measurement



Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 31.94 dBm = 1.563 W

Modulation Signal : GSM850

Limit :  $43 + 10\log_{10}(P) = 44.94$  dBc

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-46.95	H1	68.83
	3	2472.60	-58.51	H1	75.67
	4	3296.80	-56.51	H1	70.14
	5	4121.00	-59.08	H1	69.41
	6	4945.20	-66.13	H2	73.89
	7	5769.40	-67.32	H1	72.77
190	2	1673.20	-44.79	V	65.52
	3	2509.80	-52.33	H1	69.57
	4	3346.40	-52.52	H1	66.19
	5	4183.00	-60.05	H2	70.55
	6	5019.60	-66.21	H1	74.02
	7	5856.20	-64.82	H2	69.61
251	2	1697.60	-37.22	H1	57.34
	3	2546.40	-45.54	H1	62.28
	4	3395.20	-53.58	H2	66.77
	5	4244.00	-56.85	H2	67.79
	6	5092.80	-62.42	V	70.60
	7	5941.60	-64.09	H2	68.86

#### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and the worst-case emissions and reported.

### Radiated Spurious Emission measurements at 3 meters by Substitution Method





## 6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 32.51 dBm = 1.782 W

Modulation Signal : GSM1900

Limit :  $43 + 10\log_{10}(P) = 45.51$  dBc

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-61.64	H1	71.34
	3	5550.60	-60.67	H2	64.66
	4	7400.80	-69.1	H2	69.63
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-62.71	H1	72.47
	3	5640.00	-62.25	H2	66.87
	4	7520.00	-66.16	V	68.19
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-61.77	H2	70.75
	3	5729.40	-60.12	H1	63.70
	4	7639.20	-66.42	H1	67.60
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

### NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and the worst-case emissions and reported.

### Radiated Spurious Emission measurements at 3 meters by Substitution Method



## 6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2007. 03. 12

Test Engineer : SH ONG

Tx Cable loss  
 Tx Horn Ant Gain  
 Rx Cable loss + HPF Insertion loss + Attenuator  
 Pre- Amp gain  
 Air loss  
 Tested Level from EUT  
 = + + -  
 = ERP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	7.05	8.03	0.98	-46.95	-50.68	-34.75	-38.71	68.83	72.79
	3	2472.60	8.91	9.55	0.64	-58.51	-59.12	-41.59	-41.71	75.67	75.79
	4	3296.80	10.70	9.64	-1.06	-56.51	-59.49	-36.06	-38.26	70.14	72.34
	5	4121.00	11.99	10.67	-1.32	-59.08	-64.68	-35.33	-40.69	69.41	74.77
	6	4945.20	13.20	11.05	-2.15	-66.13	-67.29	-39.81	-40.56	73.89	74.64
	7	5769.40	14.67	11.23	-3.44	-67.32	-68.56	-38.69	-40.39	72.77	74.47
190	2	1673.20	7.12	8.03	0.91	-45.16	-44.79	-32.18	-31.44	66.26	65.52
	3	2509.80	9.02	9.55	0.53	-52.33	-55.62	-35.49	-38.02	69.57	72.10
	4	3346.40	10.54	9.64	-0.90	-52.52	-57.31	-32.11	-36.34	66.19	70.42
	5	4183.00	12.14	10.67	-1.47	-60.05	-62.51	-36.47	-38.91	70.55	72.99
	6	5019.60	13.62	11.05	-2.57	-66.21	-66.75	-39.94	-40.54	74.02	74.62
	7	5856.20	14.70	11.23	-3.47	-64.82	-68.23	-35.53	-39.10	69.61	73.18
251	2	1697.60	7.17	8.03	0.86	-37.22	-40.85	-23.26	-27.05	57.34	61.13
	3	2546.40	9.05	9.55	0.50	-45.54	-52.33	-28.20	-34.05	62.28	68.13
	4	3395.20	10.55	9.64	-0.91	-53.58	-55.92	-32.69	-34.15	66.77	68.23
	5	4244.00	12.07	10.67	-1.40	-56.85	-61.22	-33.71	-37.20	67.79	71.28
	6	5092.80	13.80	11.05	-2.75	-63.59	-62.42	-37.12	-36.52	71.20	70.60
	7	5941.60	14.93	11.23	-3.70	-64.09	-66.97	-34.78	-37.84	68.86	71.92



## 6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2007. 03. 12

Test Engineer : SH ONG

Tx Cable loss  
 Tx Horn Ant Gain  
 Rx Cable loss + HPF Insertion loss + Attenuator  
 Pre- Amp gain  
 Air loss  
 Tested Level from EUT  
 = + + -  
 = EIRP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	11.43	9.73	8.30	-61.64	-64.76	-38.83	-41.28	71.34	73.79
	3	5550.60	14.40	11.15	6.75	-60.67	-61.94	-32.15	-33.66	64.66	66.17
	4	7400.80	17.63	11.44	3.81	-69.10	-69.54	-37.12	-38.52	69.63	71.03
	5	9251.00	19.88	12.17	2.29	-	-	-	-	-	-
	6	11101.20	22.50	13.66	1.16	-	-	-	-	-	-
	7	12951.40	24.19	13.27	-0.92	-	-	-	-	-	-
661	2	3760.00	11.61	9.73	8.12	-62.71	-65.45	-39.96	-41.74	72.47	74.25
	3	5640.00	14.66	11.15	6.49	-62.25	-65.73	-34.36	-37.71	66.87	70.22
	4	7520.00	17.96	11.44	3.48	-68.05	-66.16	-36.86	-35.68	69.37	68.19
	5	9400.00	20.13	12.17	2.04	-	-	-	-	-	-
	6	11280.00	22.73	13.66	0.93	-	-	-	-	-	-
	7	13160.00	24.16	13.27	-0.89	-	-	-	-	-	-
810	2	3819.60	11.62	9.73	8.11	-61.77	-62.68	-38.24	-38.50	70.75	71.01
	3	5729.40	14.76	11.15	6.39	-60.12	-63.15	-31.19	-34.39	63.70	66.90
	4	7639.20	18.18	11.44	3.26	-66.42	-69.27	-35.09	-38.65	67.60	71.16
	5	9549.00	20.06	12.17	2.11	-	-	-	-	-	-
	6	11458.80	22.68	13.66	0.98	-	-	-	-	-	-
	7	13368.60	24.26	13.27	-0.99	-	-	-	-	-	-

## 6.7. Frequency Stability

### 6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit :  $\pm 0.00025\%$  or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	13.56	836,600,014	0.000002	0.016
100%		-30	12.77	836,600,013	0.000002	0.015
100%		-20	9.31	836,600,009	0.000001	0.011
100%		-10	-7.96	836,599,992	-0.000001	-0.010
100%		0	-13.51	836,599,986	-0.000002	-0.016
100%		+10	9.12	836,600,009	0.000001	0.011
100%		+20	13.56	836,600,014	0.000002	0.016
100%		+30	20.12	836,600,020	0.000002	0.024
100%		+40	17.46	836,600,017	0.000002	0.021
100%		+50	27.32	836,600,027	0.000003	0.033
100%		+60	11.25	836,600,011	0.000001	0.013
85%		3.25	+20	10.30	836,600,010	0.000001
115%	4.26	+20	21.61	836,600,022	0.000003	0.026
Batt.Endpoint	3.25	+20	10.30	836,600,010	0.000001	0.012


**Note :** The temperature is varied from -30 °C to +60 °C using an environmental chamber.

**The EUT is tested down to the battery end point.**

### 6.7.2. GSM850 Frequency Stability Graph

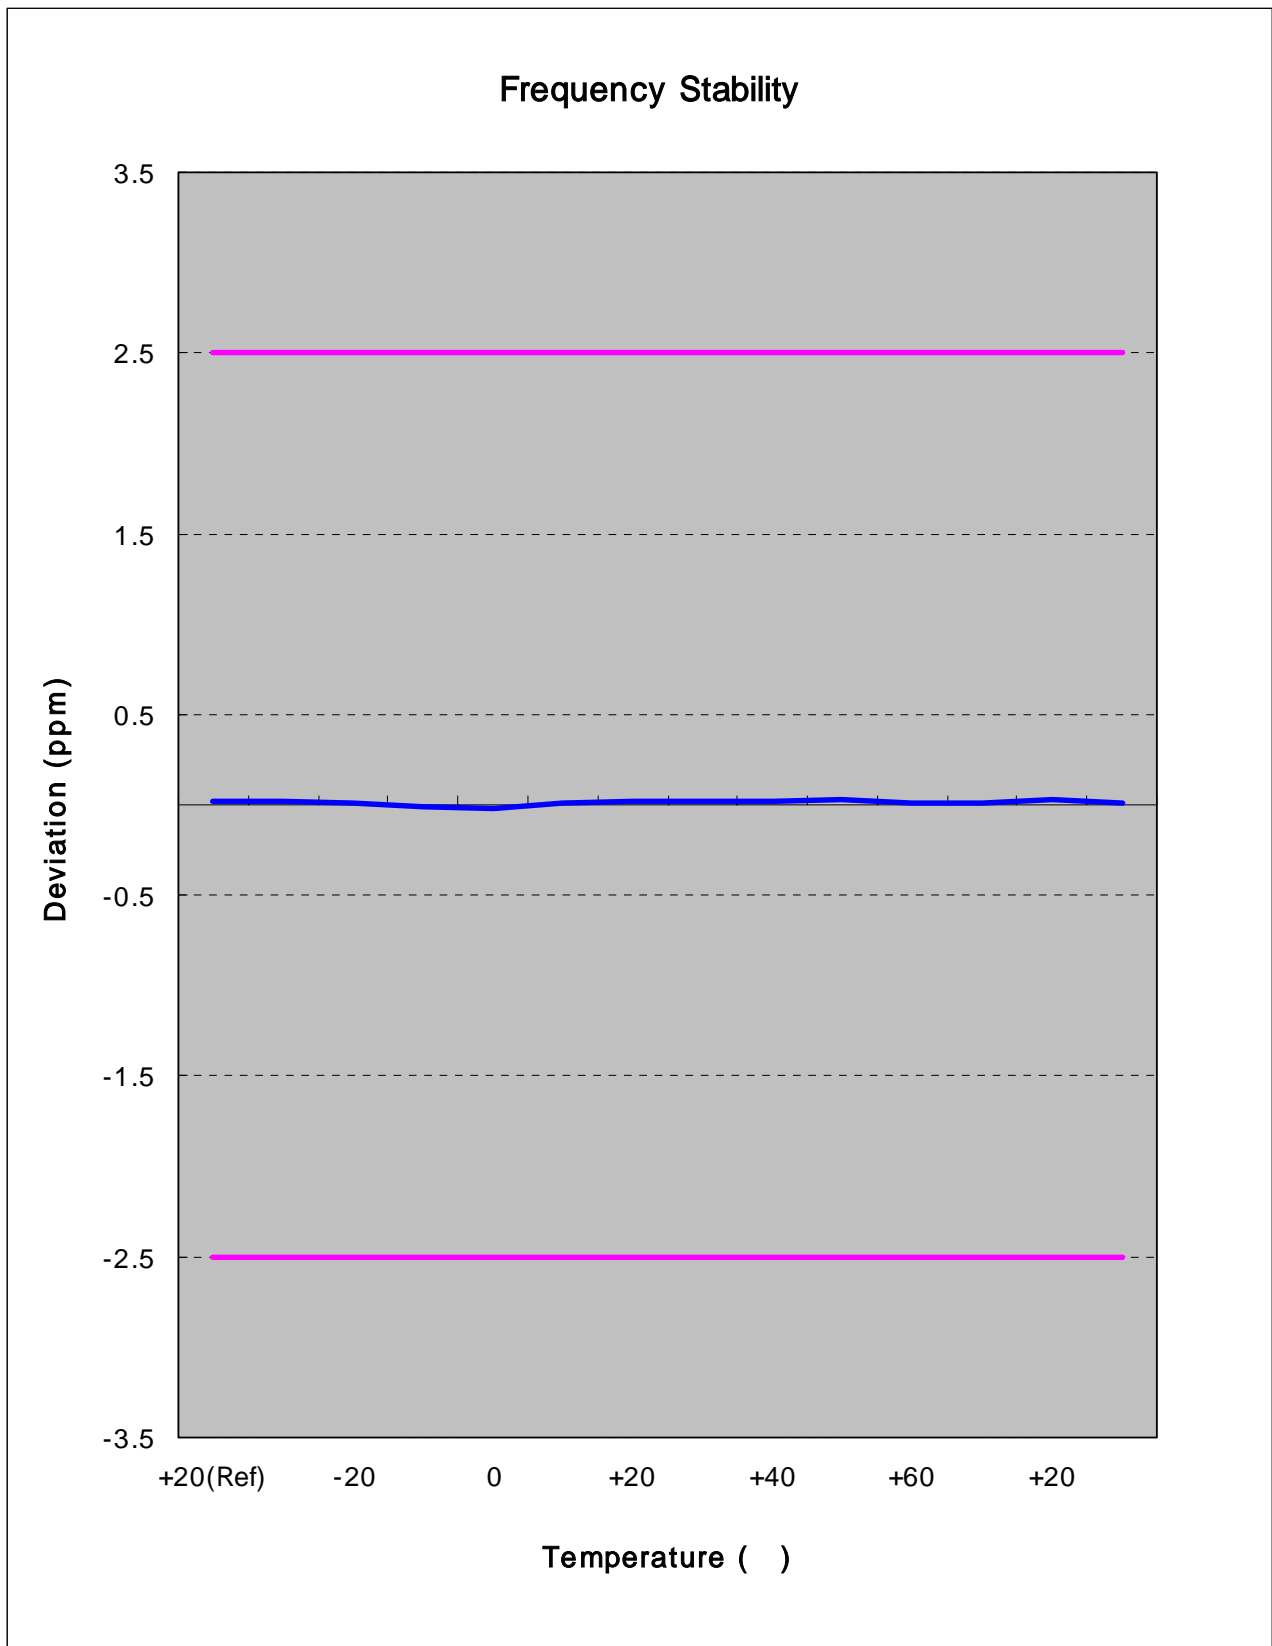

**Zoom IN**

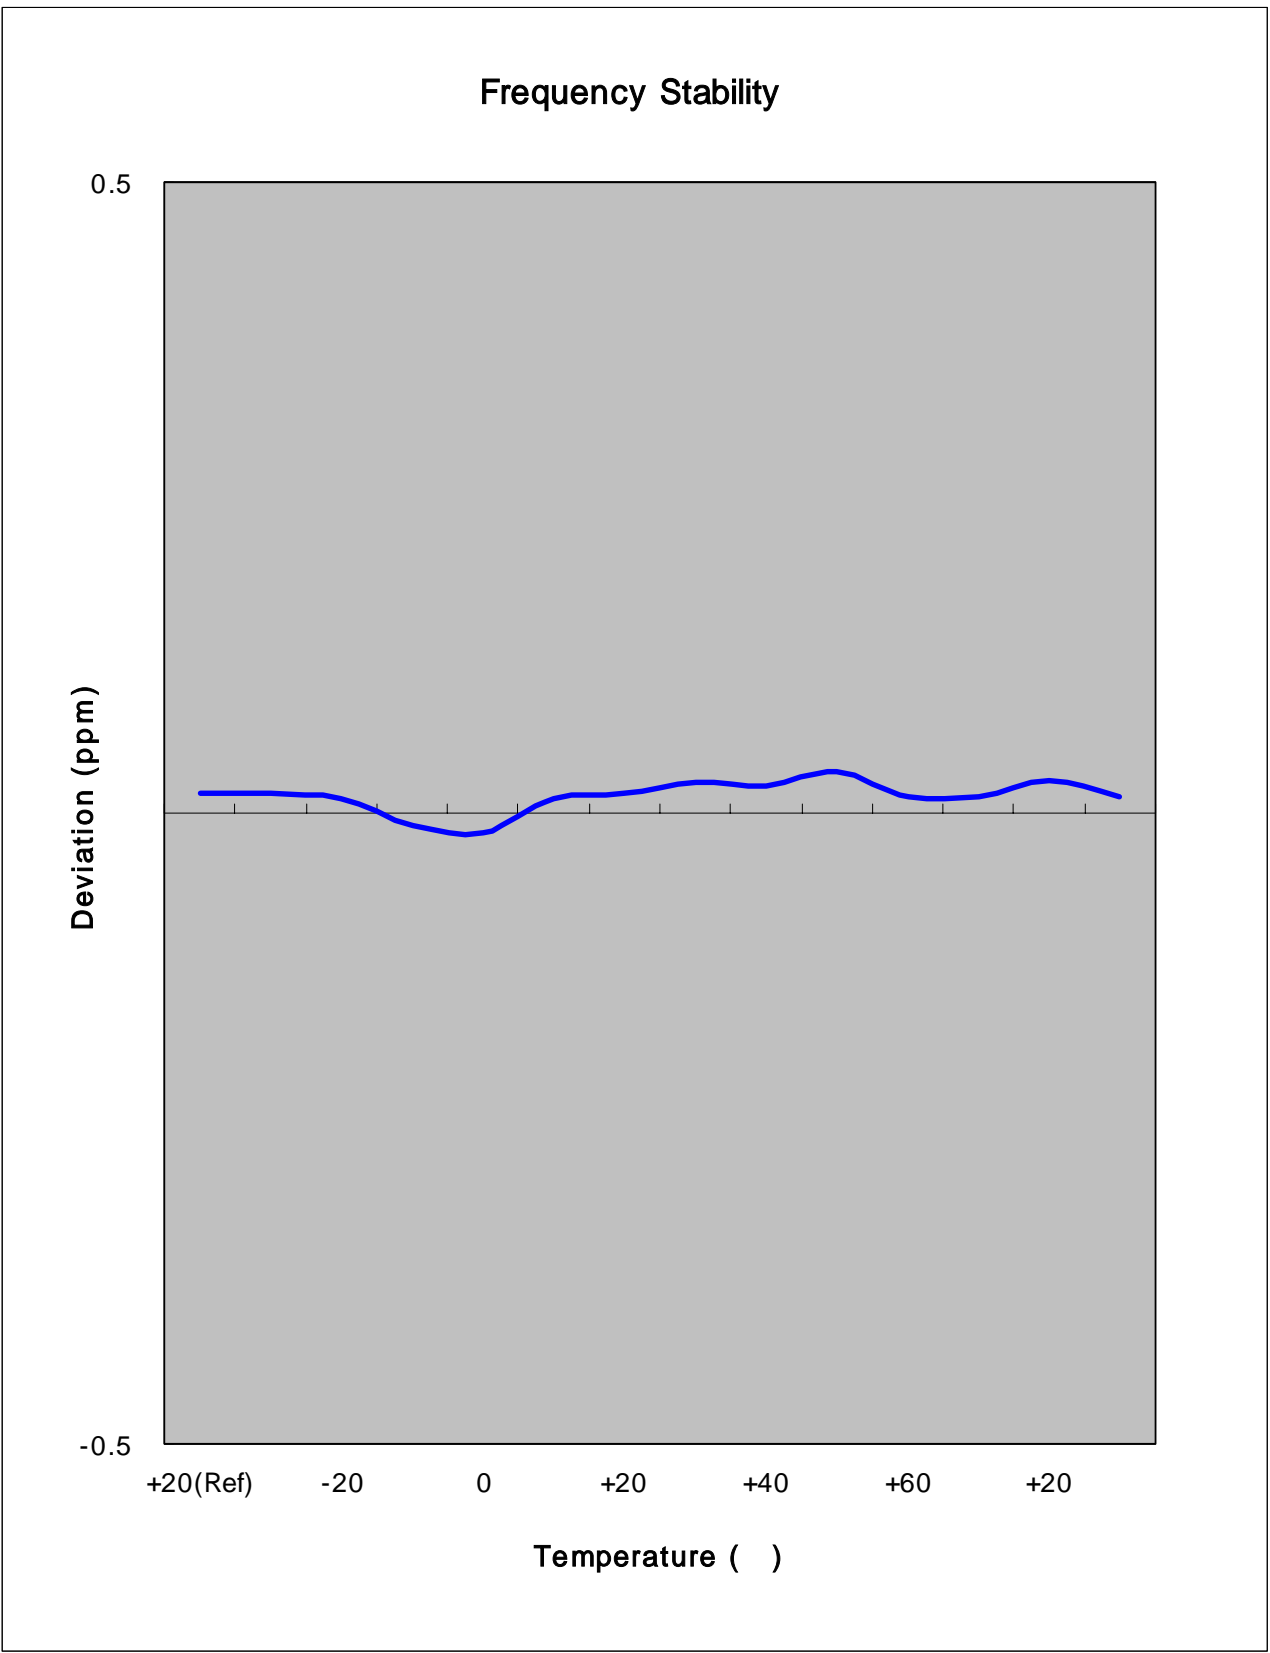

### 6.7.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit :  $\pm 0.00025$  % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-11.05	1,879,999,989	-0.000001	-0.006
100%		-30	-17.62	1,879,999,982	-0.000001	-0.009
100%		-20	-12.30	1,879,999,988	-0.000001	-0.007
100%		-10	-26.12	1,879,999,974	-0.000001	-0.014
100%		0	-8.43	1,879,999,992	0.000000	-0.004
100%		+10	10.50	1,880,000,011	0.000001	0.006
100%		+20	-11.05	1,879,999,989	-0.000001	-0.006
100%		+30	-14.71	1,879,999,985	-0.000001	-0.008
100%		+40	20.50	1,880,000,021	0.000001	0.011
100%		+50	24.72	1,880,000,025	0.000001	0.013
100%		+60	25.88	1,880,000,026	0.000001	0.014
85%		3.25	+20	-12.41	1,879,999,988	-0.000001
115%	4.26	+20	-20.59	1,879,999,979	-0.000001	-0.011
Batt.Endpoint	3.25	+20	-12.41	1,879,999,988	-0.000001	-0.007

Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.


The EUT is tested down to the battery end point.

**6.7.4. GSM1900 Frequency Stability Graph**

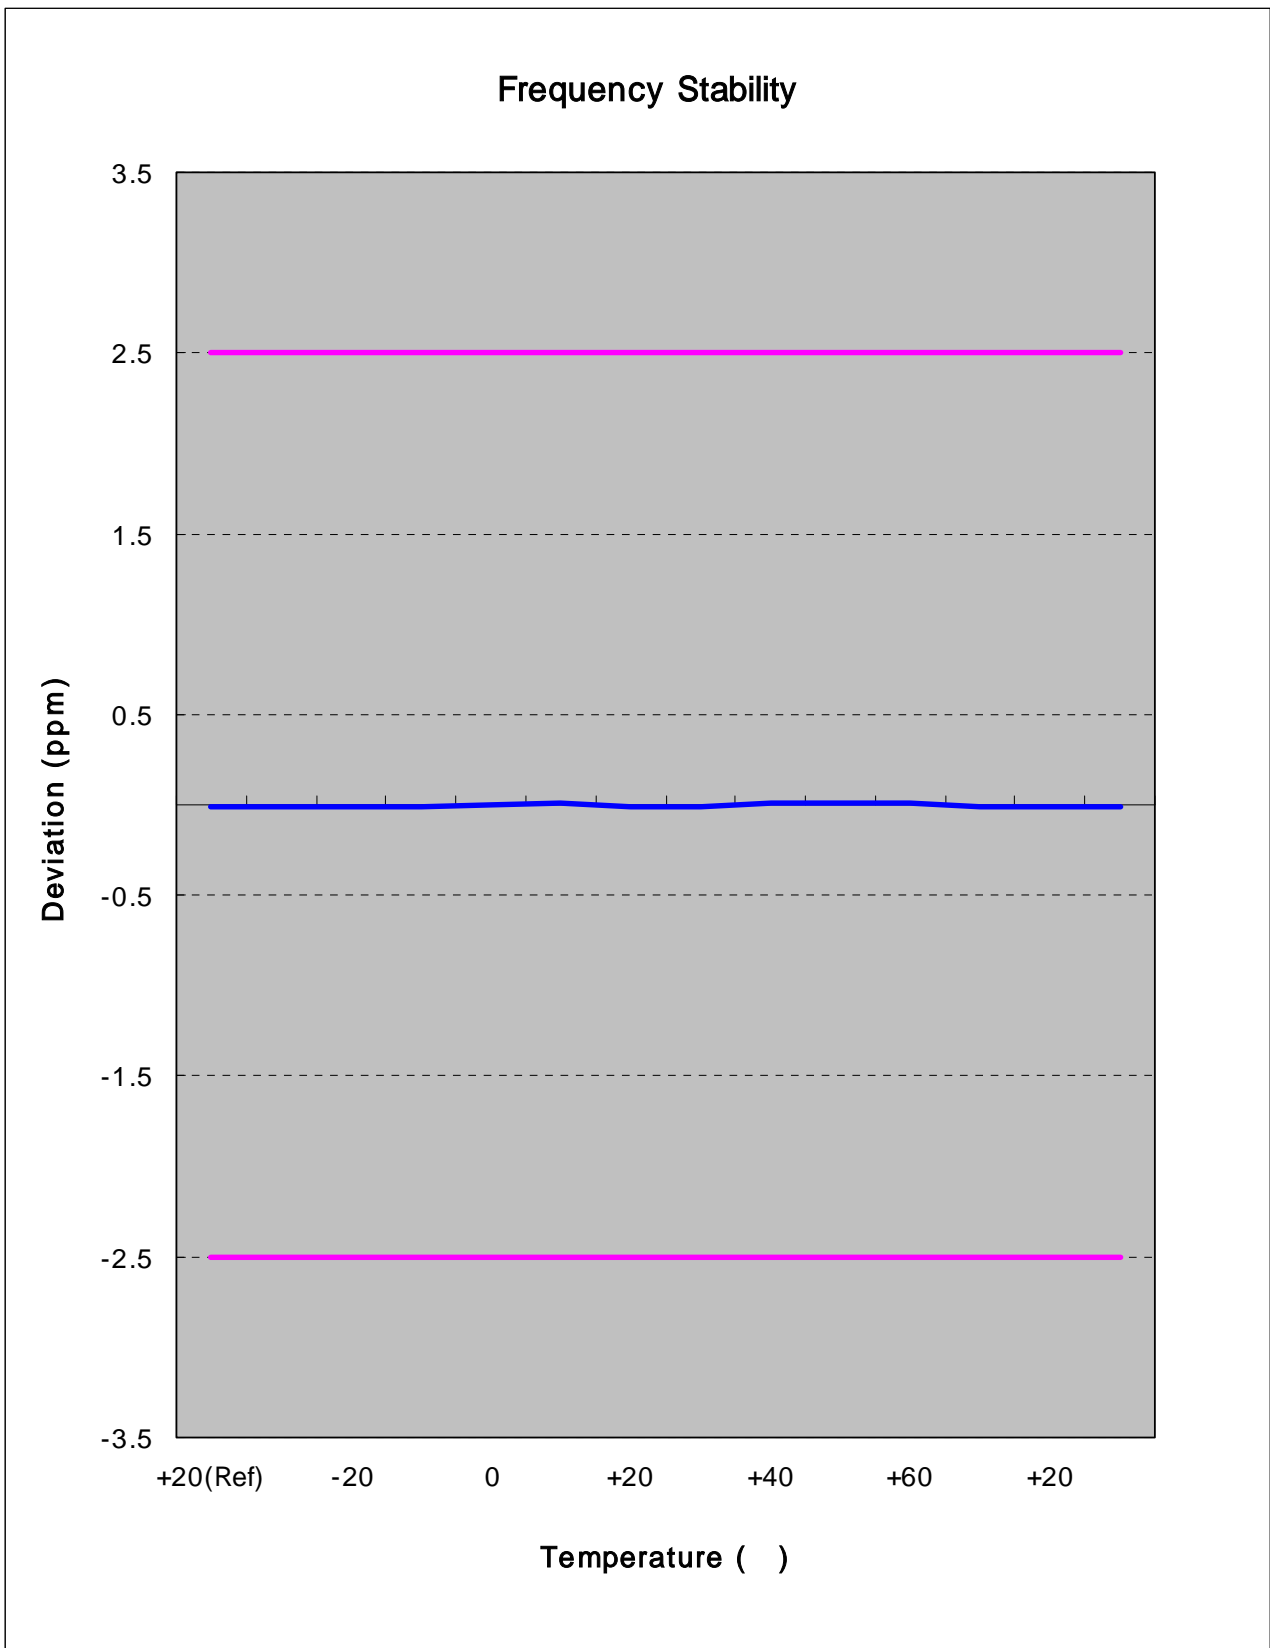



**Zoom IN**

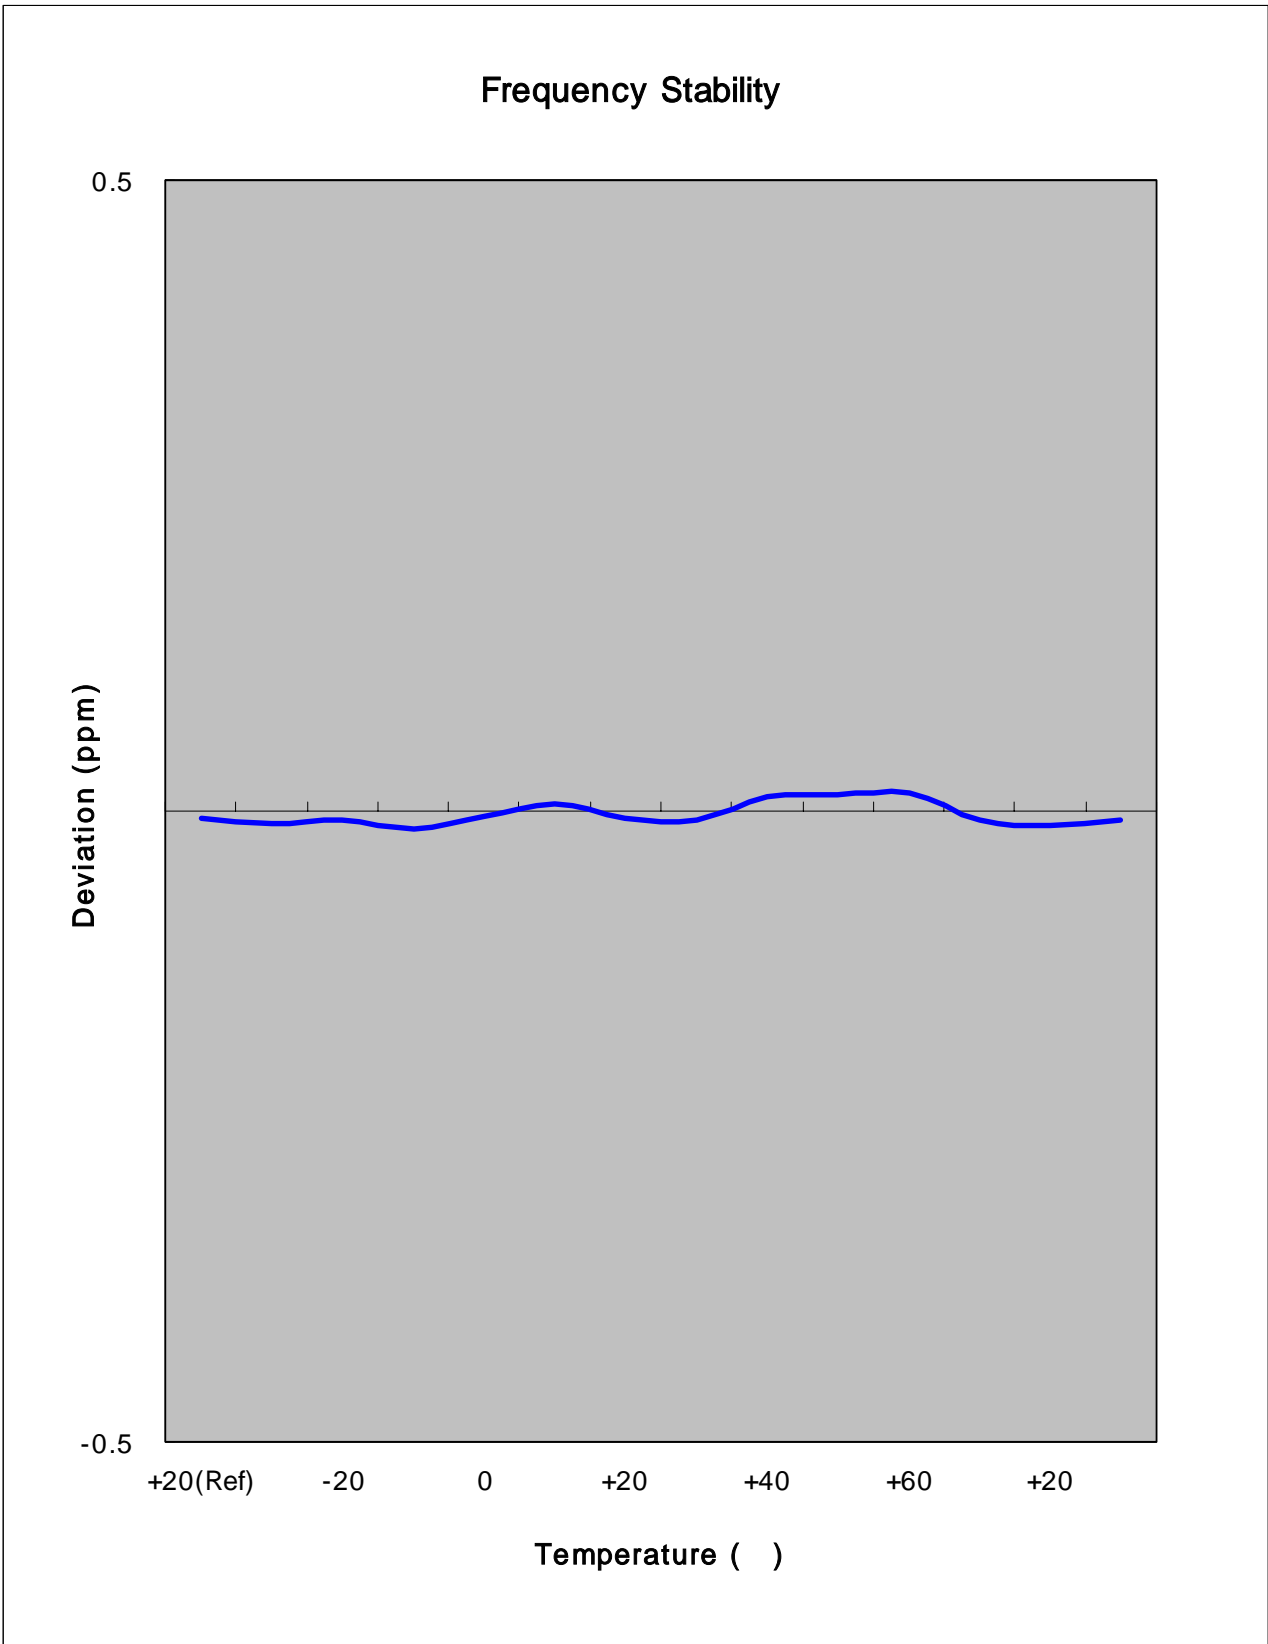



## 7. CONCLUSION

The data collected shows that the SAMSUNG Dual-Band GSM/EDGE 850/1900 Phone with Bluetooth.

FCC ID : A3LSGHA437 complies with all the requirements of Parts 2,22,24 of the FCC Rules.



## 8. TEST PLOTS

GSM850

Agilent

R T

**Ch Freq** 824.2 MHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSGHA437 0BW Ch.128  
Ref 33 dBm Atten 40 dB

#Peak  
Log  
10  
dB/  
Offst  
7.63  
dB

Center 824.200 MHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
253.2149 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		1.118 kHz
<b>x dB Bandwidth</b>		315.196 kHz

<b>Freq/Channel</b>
<b>Center Freq</b> 824.200000 MHz
<b>Start Freq</b> 823.700000 MHz
<b>Stop Freq</b> 824.700000 MHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

**Ch Freq** 836.6 MHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSGHA437 0BW Ch.190  
Ref 33 dBm Atten 40 dB

#Peak  
Log  
10  
dB/  
Offst  
7.63  
dB

Center 836.600 MHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
248.0788 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		-358.257 Hz
<b>x dB Bandwidth</b>		308.748 kHz

<b>Freq/Channel</b>
<b>Center Freq</b> 836.600000 MHz
<b>Start Freq</b> 836.100000 MHz
<b>Stop Freq</b> 837.100000 MHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

Ch Freq 848.8 MHz Trig Free

Occupied Bandwidth

Center Freq  
848.800000 MHz


Start Freq  
848.300000 MHz

Stop Freq  
849.300000 MHz

CF Step  
100.000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

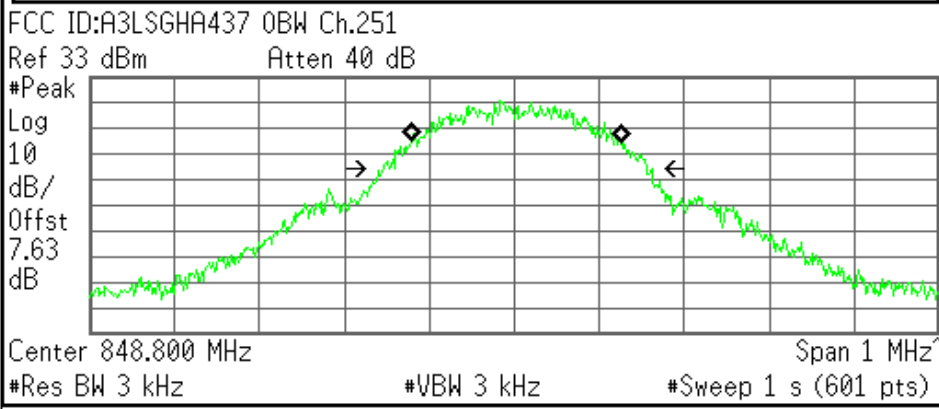


<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
250.2391 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	1.730 kHz	
<b>x dB Bandwidth</b>	313.222 kHz	

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

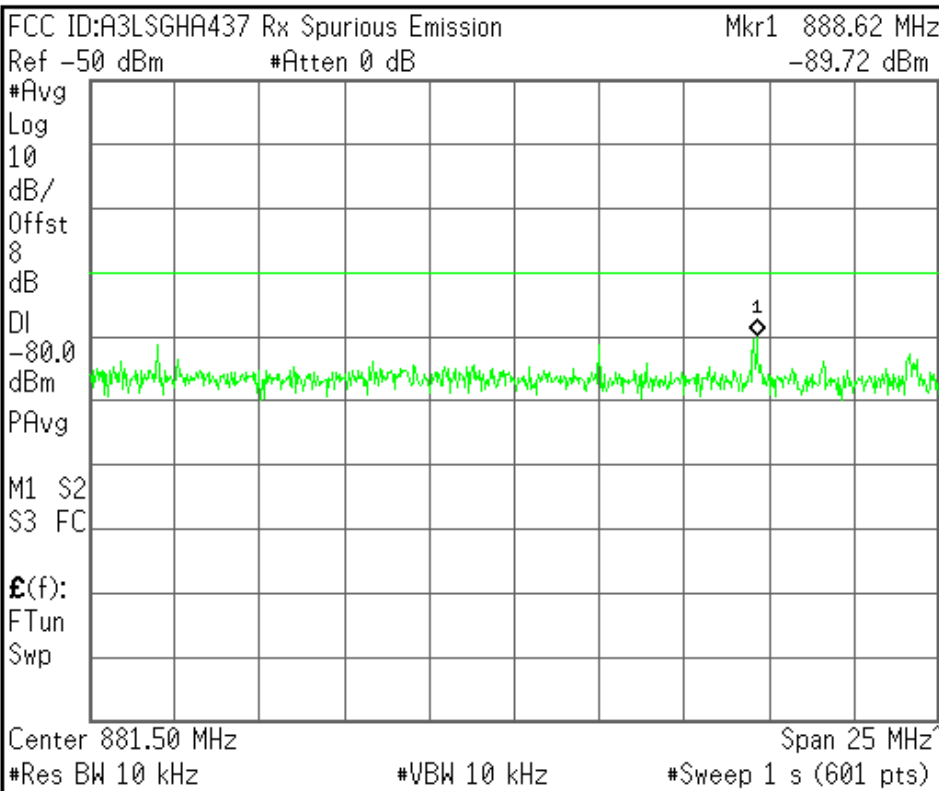

Center Freq  
881.500000 MHz

Start Freq  
869.000000 MHz

Stop Freq  
894.000000 MHz

CF Step  
2.50000000 MHz  
Auto Man



Freq Offset  
0.00000000 Hz



Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved



Measurement/Instrument Screen									
Control		GSM/GPRS Transmit Power						TCH Parms	
GSM/GPRS TX Power Setup ▾		GSMK Transmit Power <h1 style="text-align: center;">32.67</h1> dBm						Downlink Traffic Power ▾	
Swap Window Positions								Traffic Band	
		MS TX Level		5		Channel Mode Setup ▾		Return	
		Phase & Frequency Error		50 / 50		Single		1 of 2	
		Active Cell Connected		Sys Type: GSM		1 of 2			
1 of 2		IntRef		Offset		R T		1 of 2	


Measurement/Instrument Screen									
Control		GSM/GPRS Transmit Power						TCH Parms	
GSM/GPRS TX Power Setup ▾		GSMK Transmit Power <h1 style="text-align: center;">32.54</h1> dBm						Downlink Traffic Power ▾	
Swap Window Positions								Traffic Band	
		MS TX Level		5		Channel Mode Setup ▾		Return	
		Phase & Frequency Error		50 / 50		Single		1 of 2	
		Active Cell Connected		Sys Type: GSM		1 of 2			
1 of 2		IntRef		Offset		R T		1 of 2	

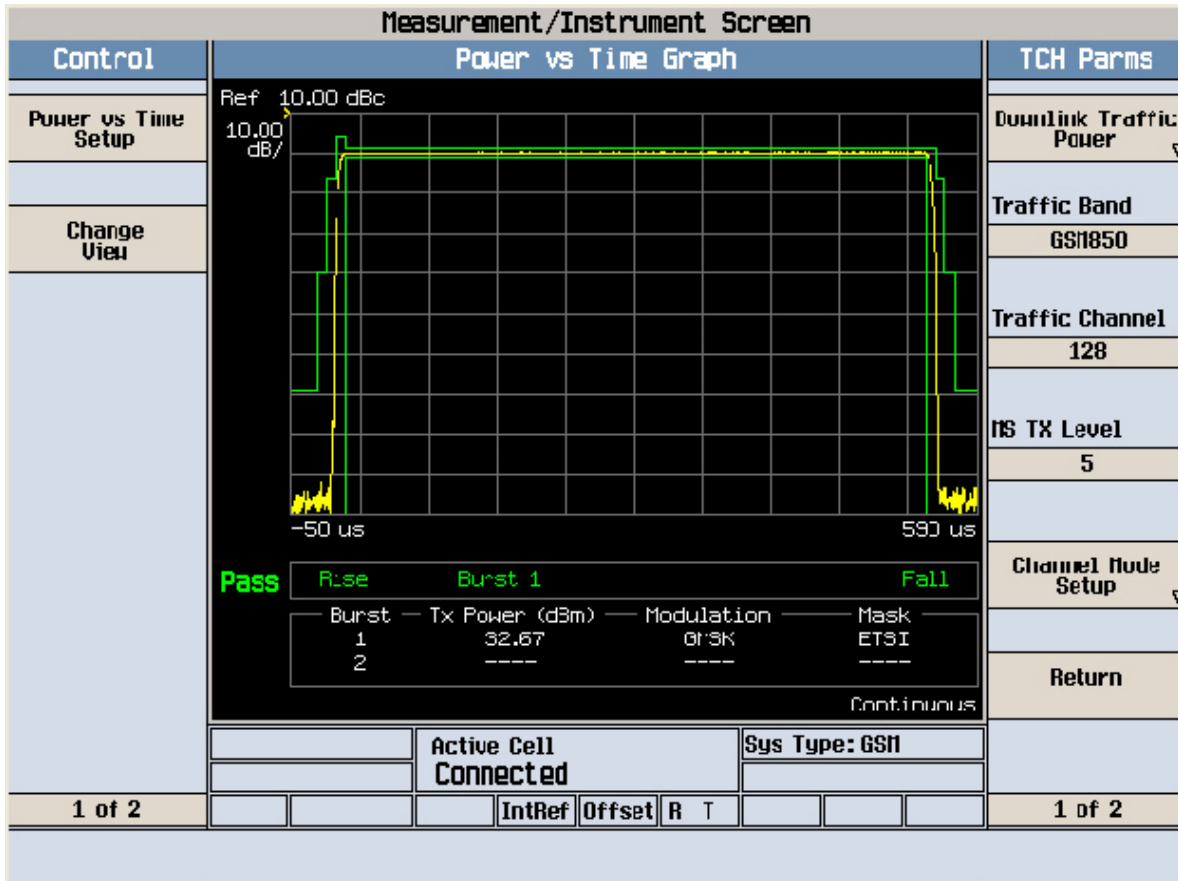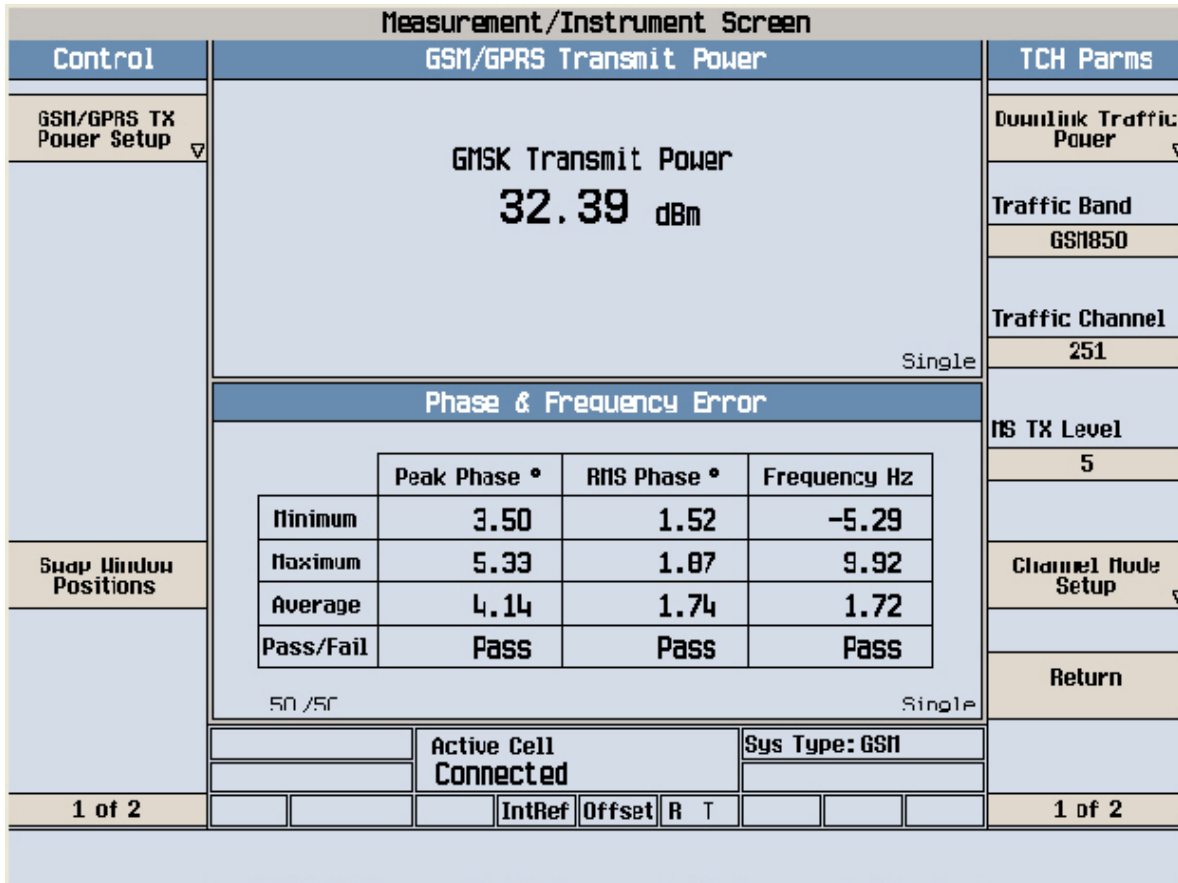

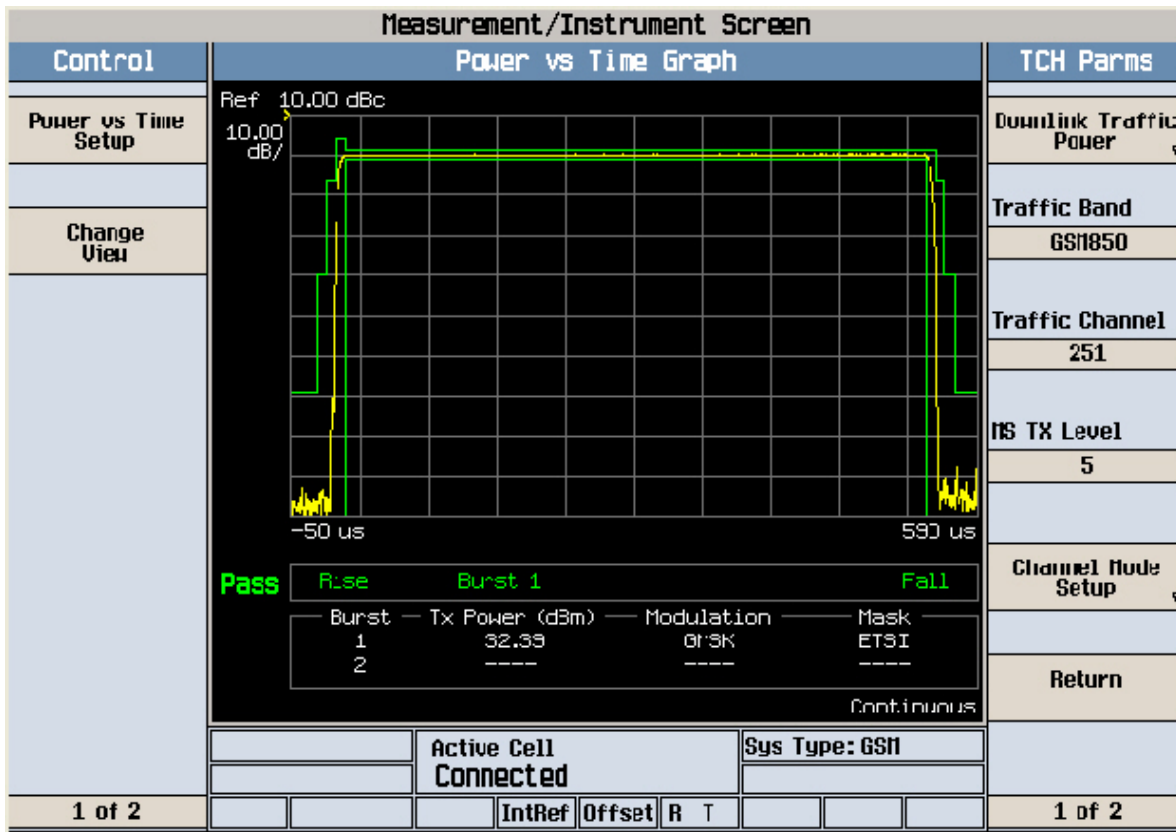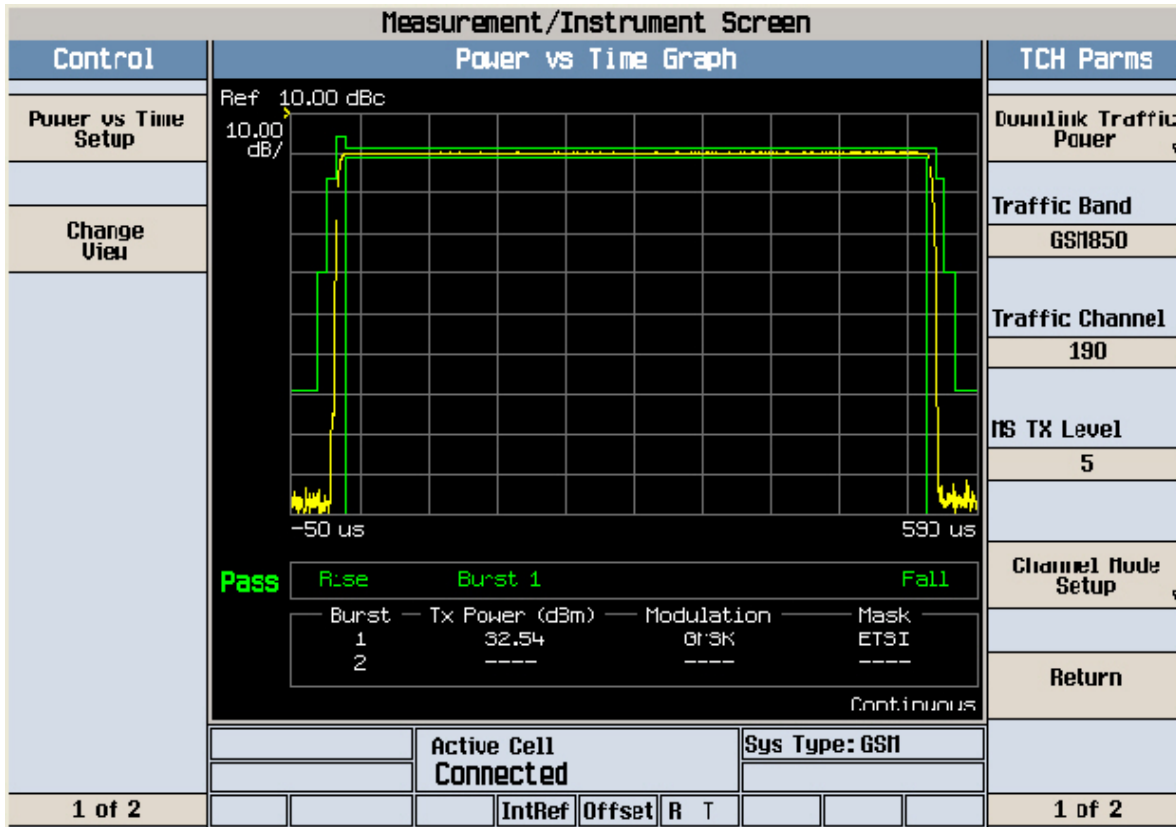



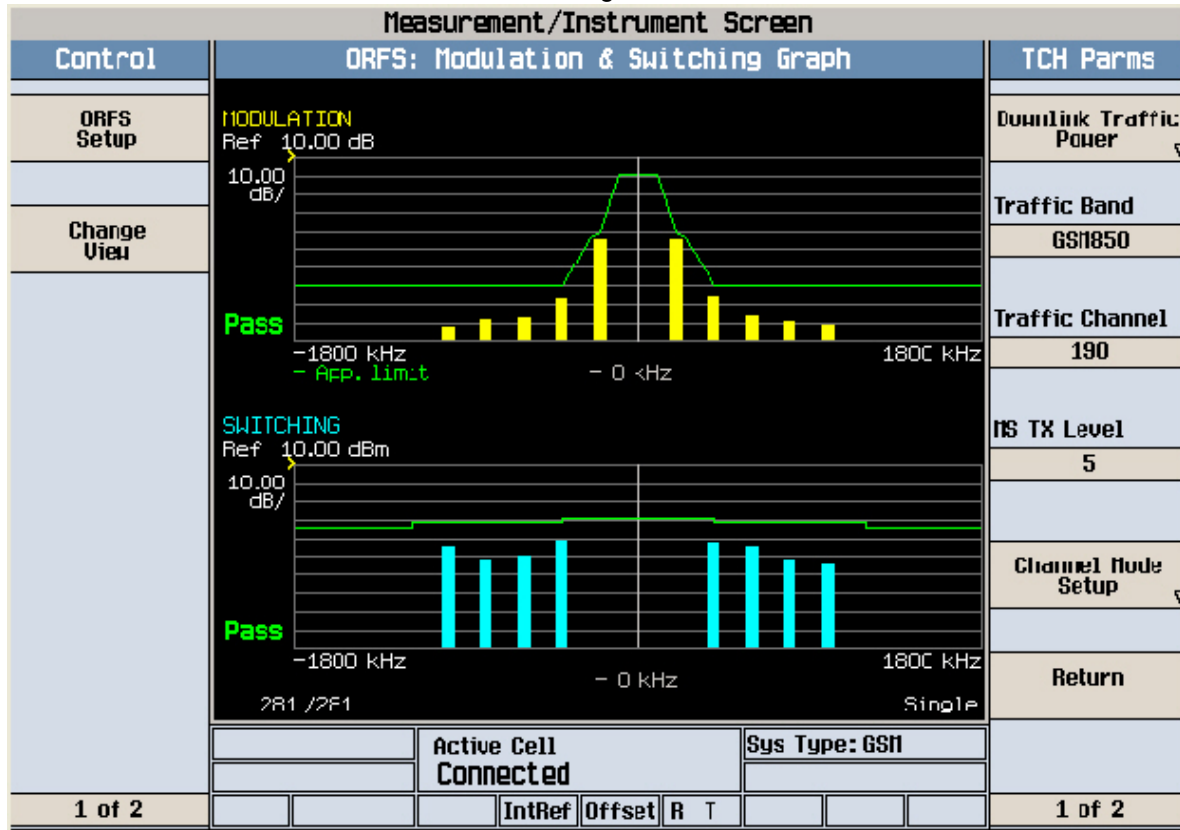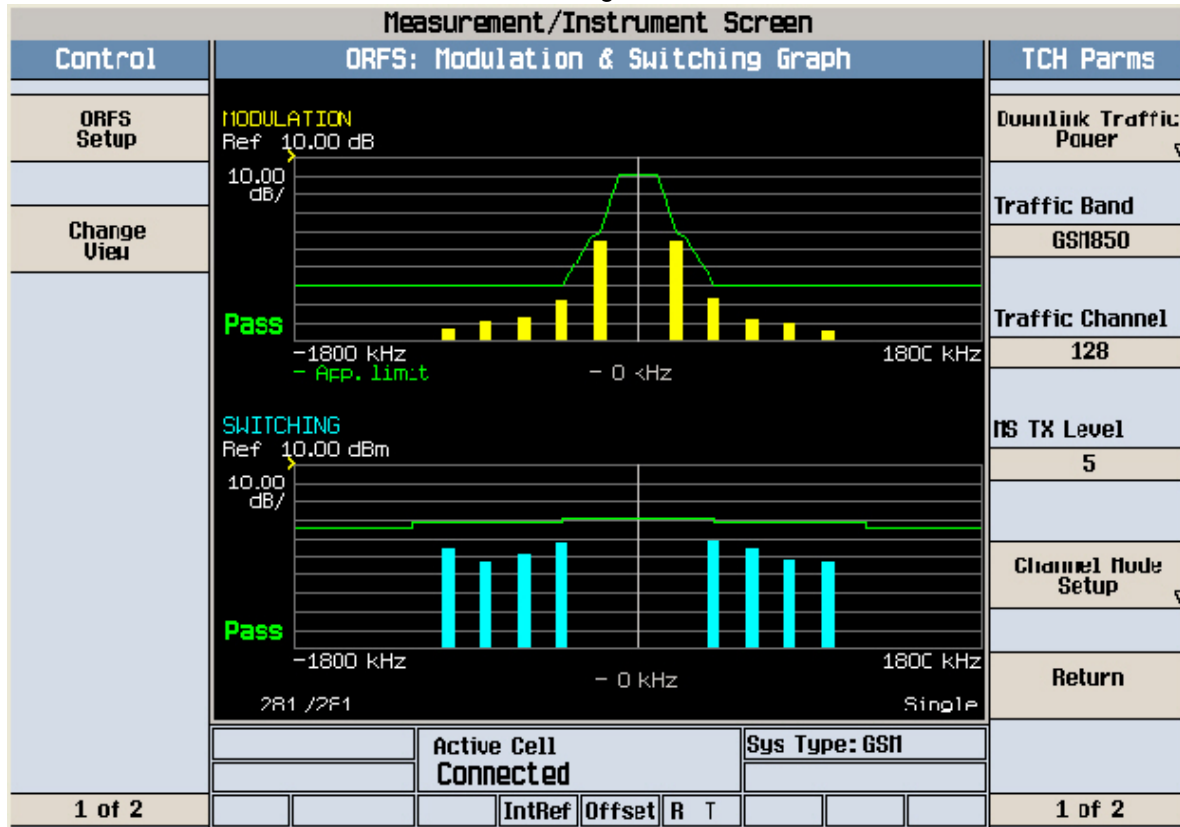


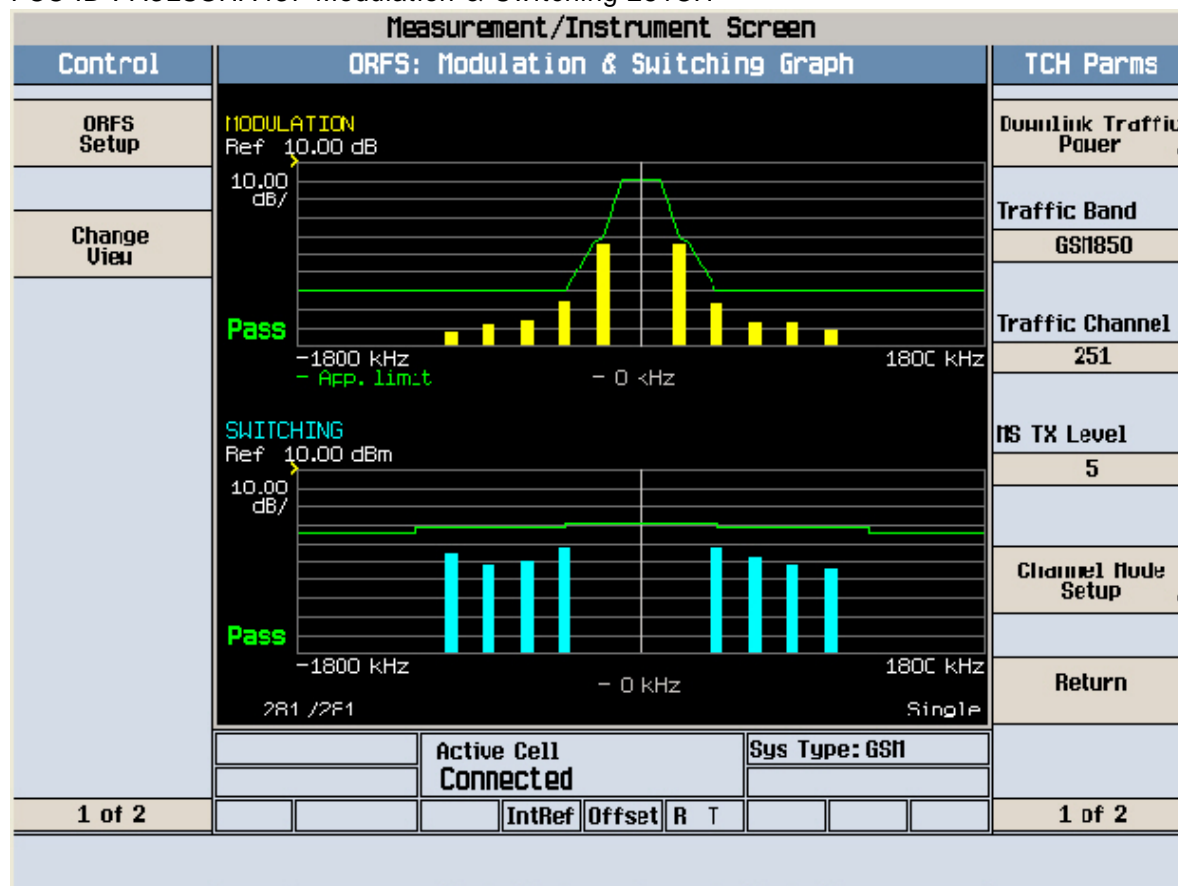

Agilent

R T

Freq/Channel

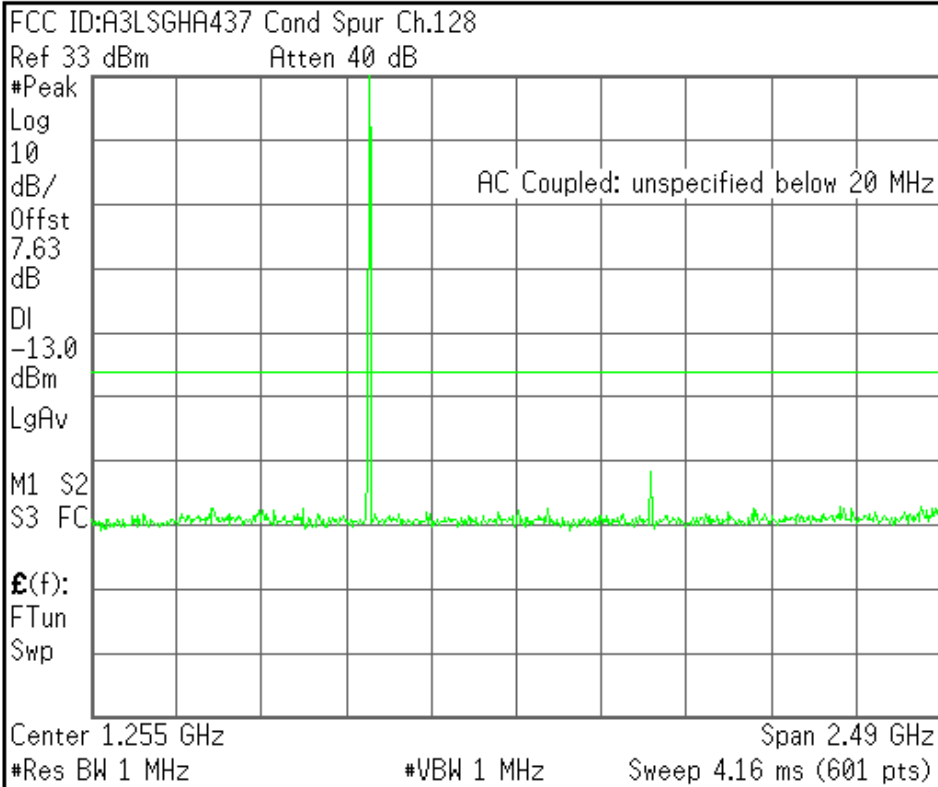


<b>Center Freq</b>	1.25500000 GHz
<b>Start Freq</b>	10.00000000 MHz
<b>Stop Freq</b>	2.50000000 GHz
<b>CF Step</b>	249.0000000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

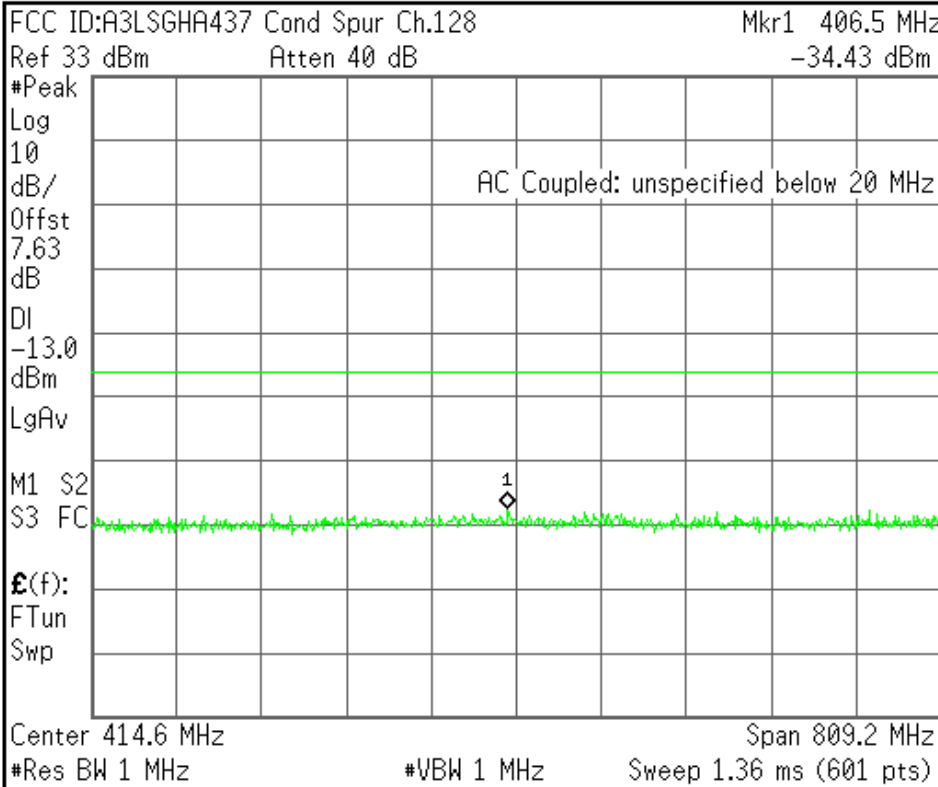


<b>Center Freq</b>	414.600000 MHz
<b>Start Freq</b>	10.00000000 MHz
<b>Stop Freq</b>	819.2000000 MHz
<b>CF Step</b>	80.9200000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

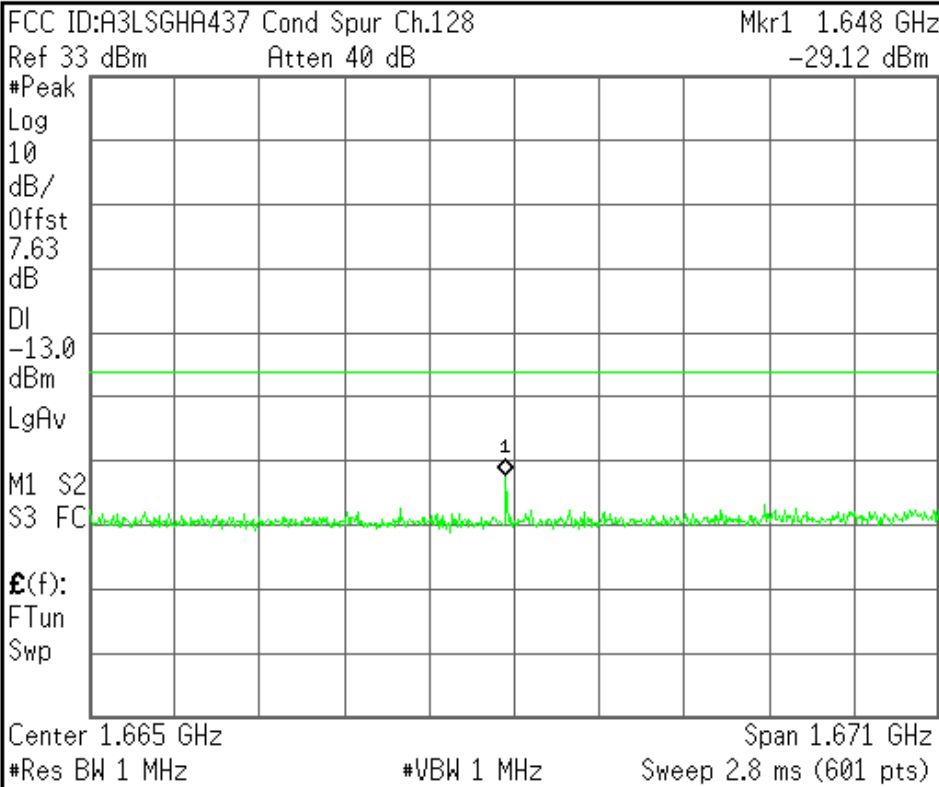


<b>Center Freq</b> 1.66460000 GHz
<b>Start Freq</b> 829.200000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 167.080000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

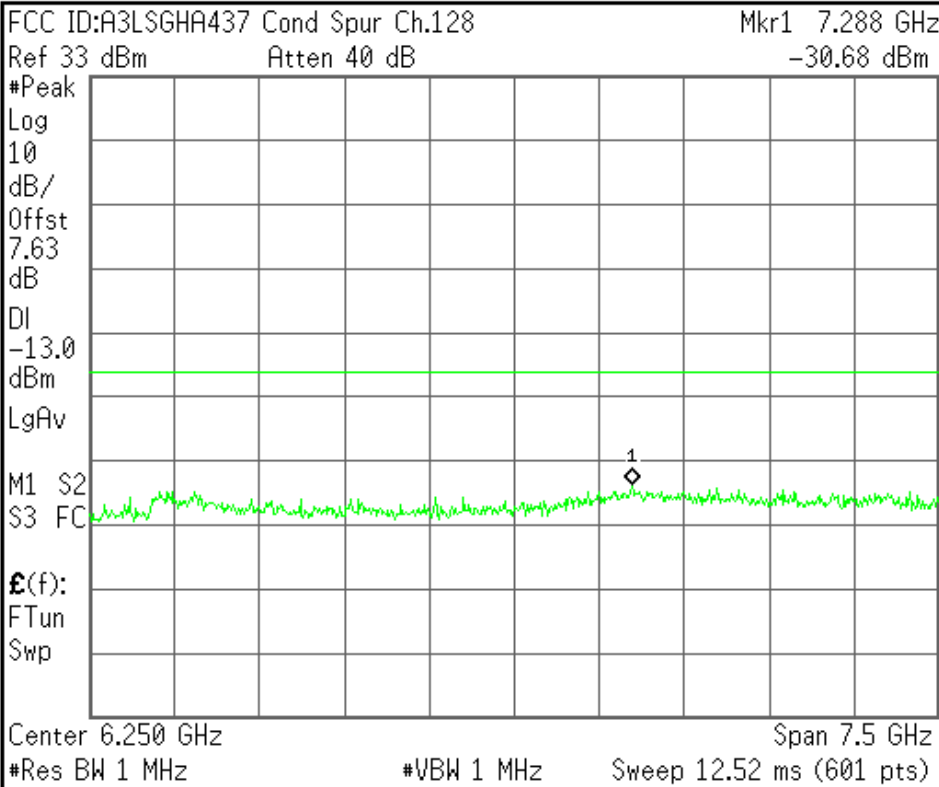


<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

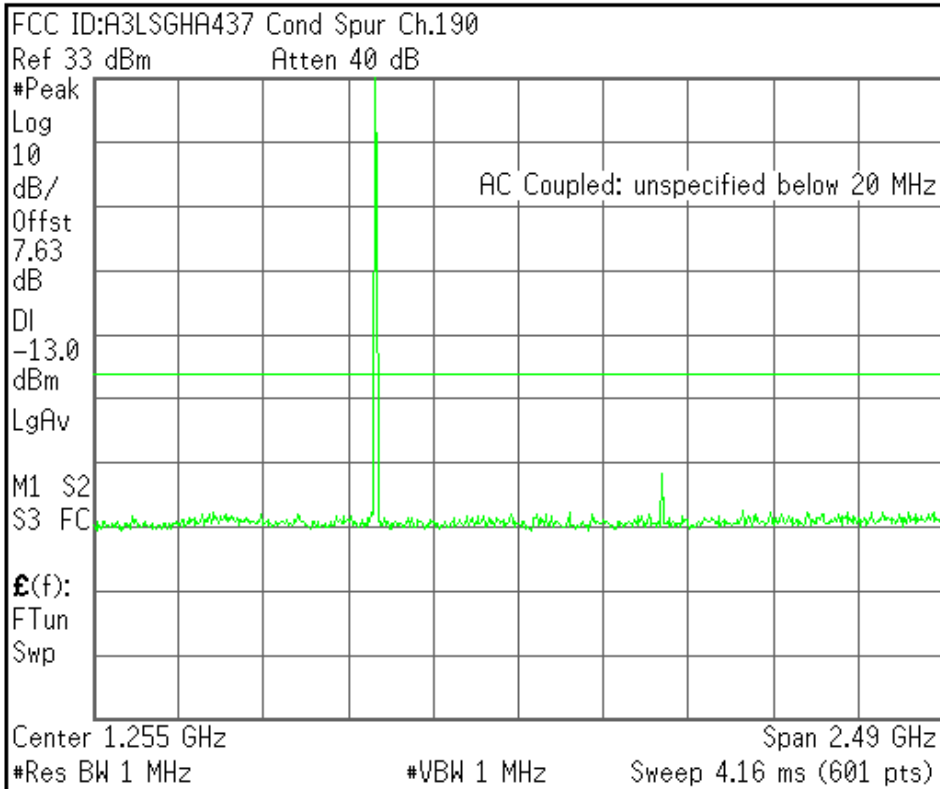


<b>Center Freq</b>	1.25500000 GHz
<b>Start Freq</b>	10.00000000 MHz
<b>Stop Freq</b>	2.50000000 GHz
<b>CF Step</b>	249.0000000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

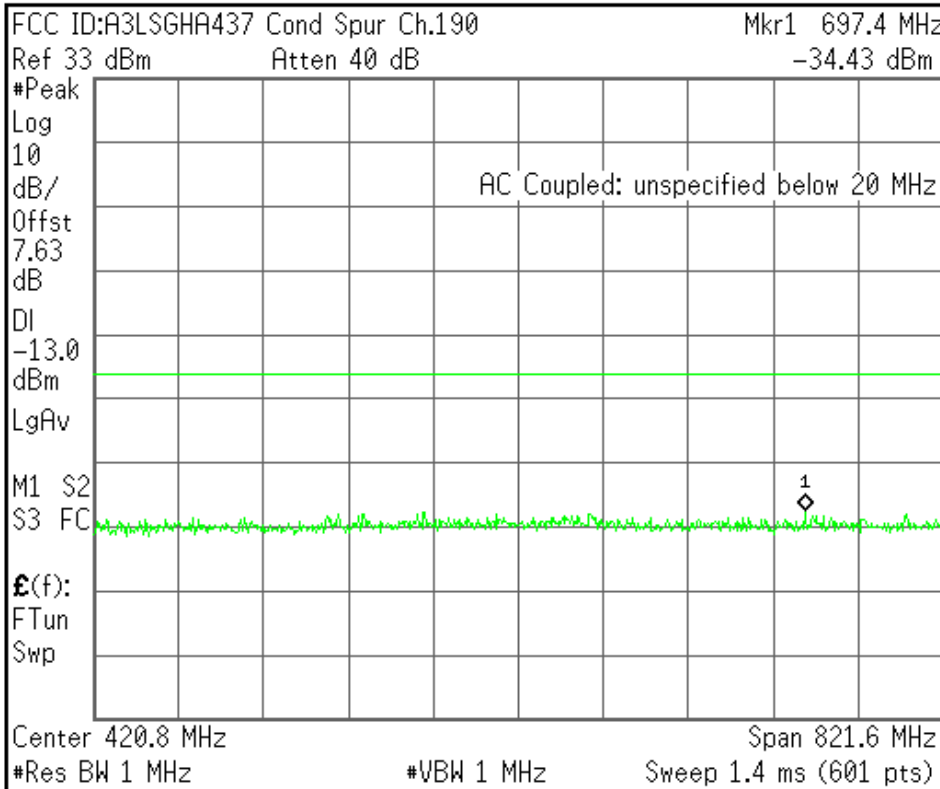


<b>Center Freq</b>	420.800000 MHz
<b>Start Freq</b>	10.00000000 MHz
<b>Stop Freq</b>	831.600000 MHz
<b>CF Step</b>	82.1600000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

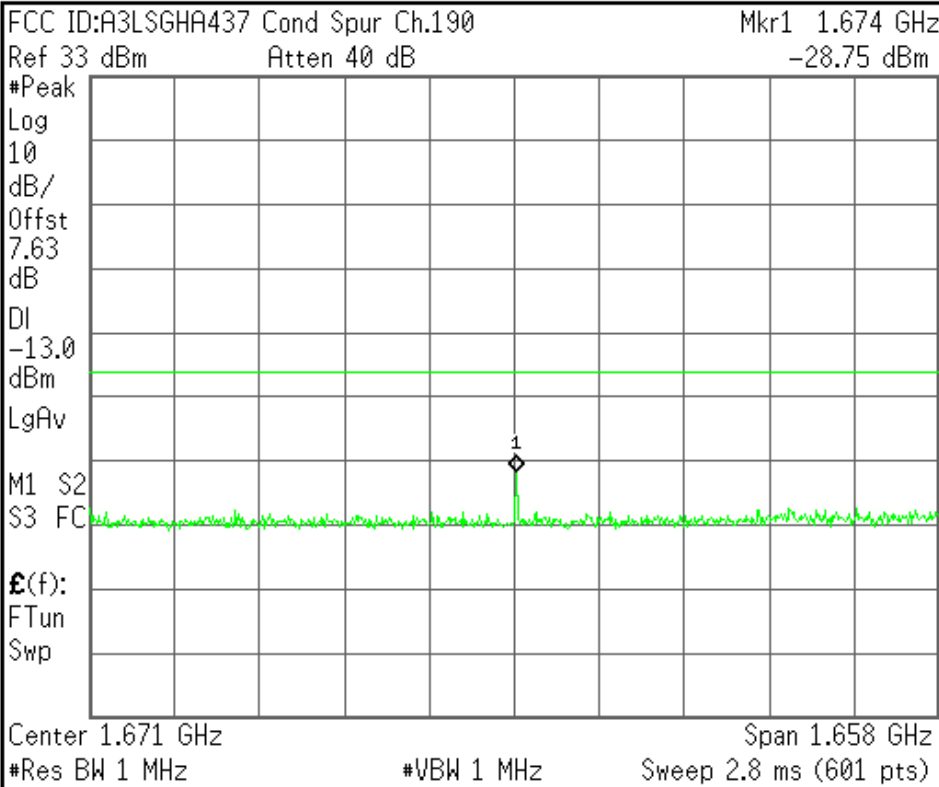


<b>Center Freq</b> 1.67080000 GHz
<b>Start Freq</b> 841.600000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 165.840000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

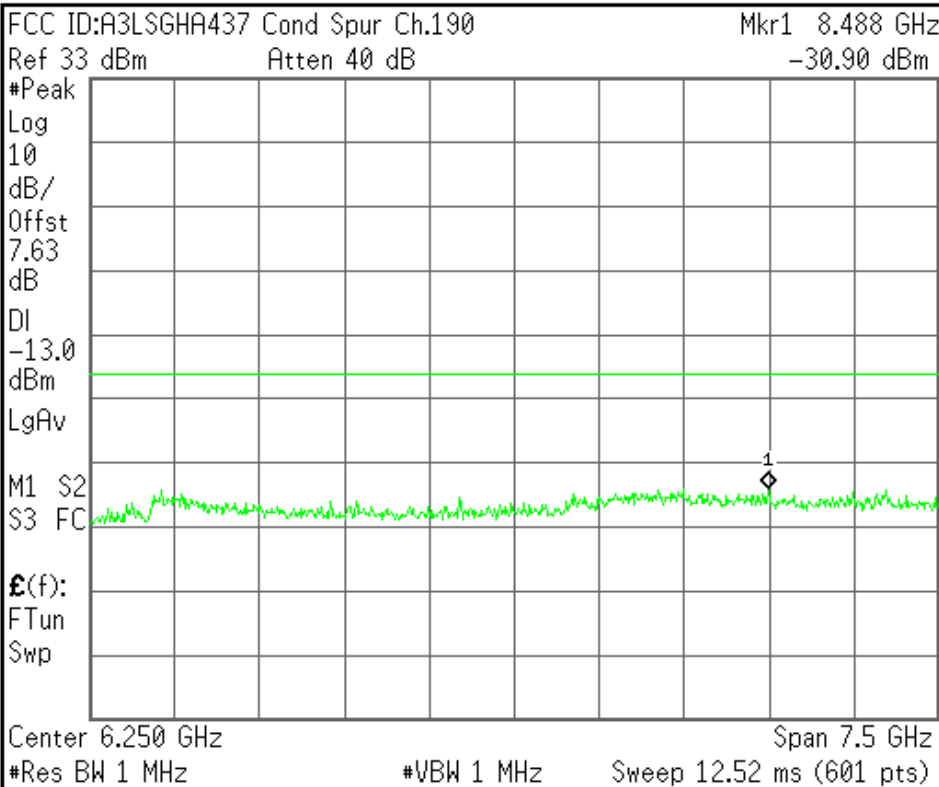

<b>Center Freq</b> 6.25000000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 10.00000000 GHz
<b>CF Step</b> 750.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA437 Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.63

dB

DI

-13.0

dBm

LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

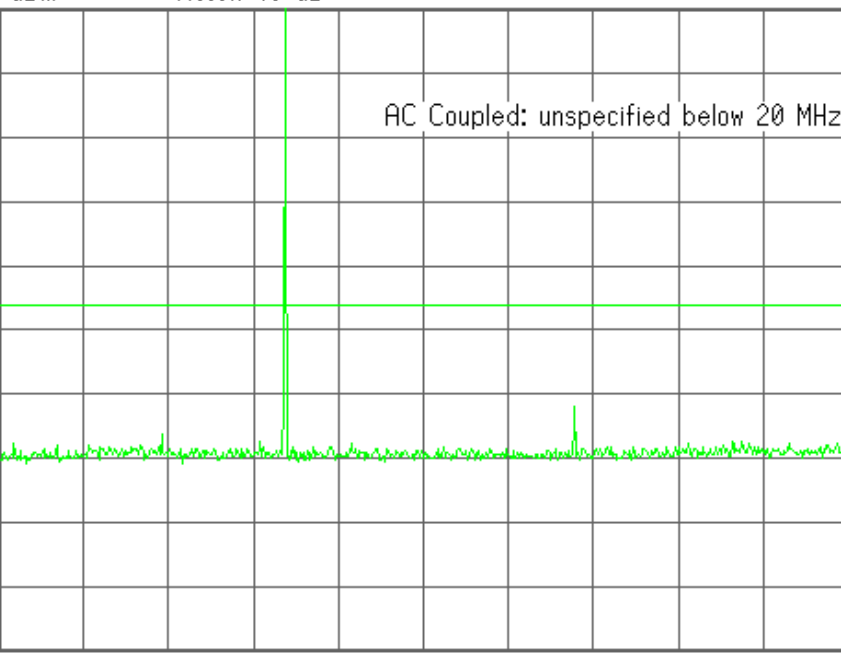

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA437 Cond Spur Ch.251

Mkr1 604.8 MHz

Ref 33 dBm

Atten 40 dB

-34.57 dBm

#Peak

Log

10

dB/

Offst

7.63

dB

DI

-13.0

dBm

LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

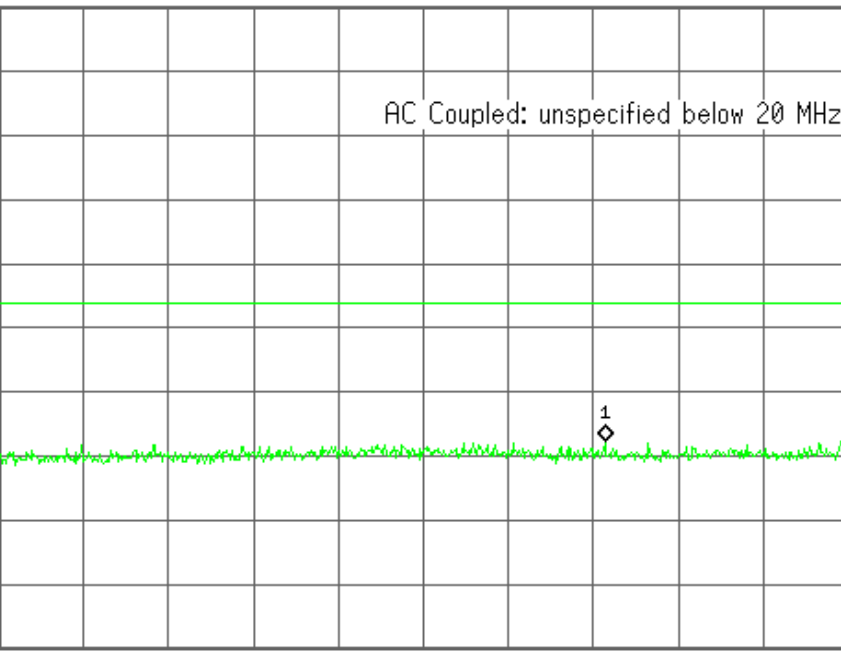

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.4 ms (601 pts)

Center Freq  
426.900000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
843.800000 MHz

CF Step  
83.3800000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

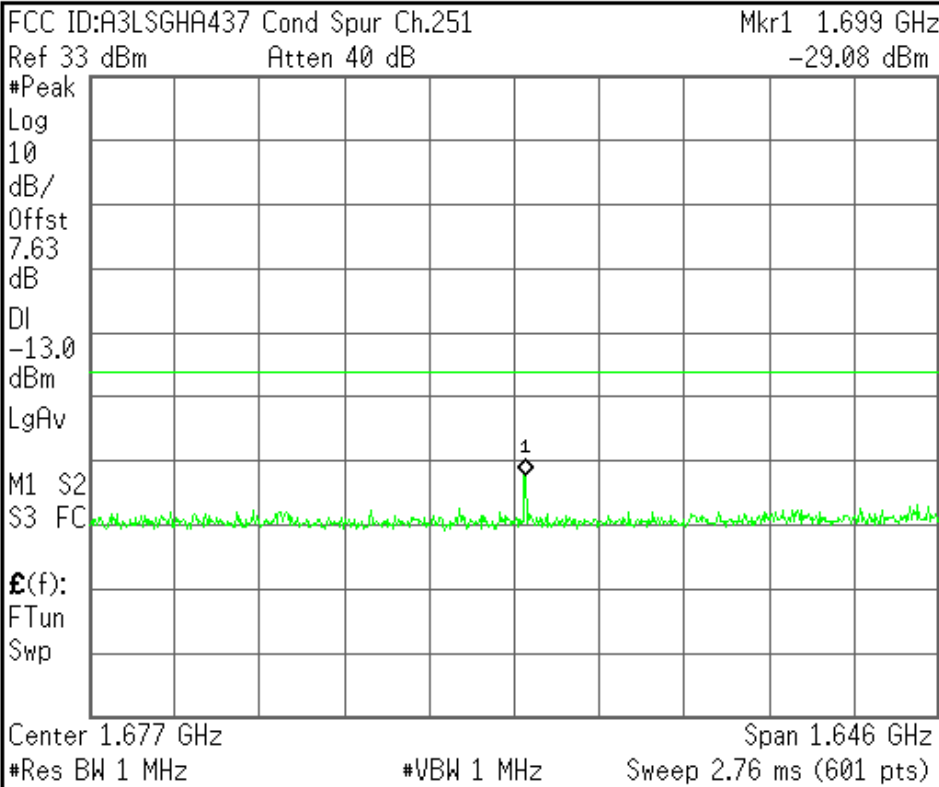


<b>Center Freq</b>	1.67690000 GHz
<b>Start Freq</b>	853.800000 MHz
<b>Stop Freq</b>	2.50000000 GHz
<b>CF Step</b>	164.620000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

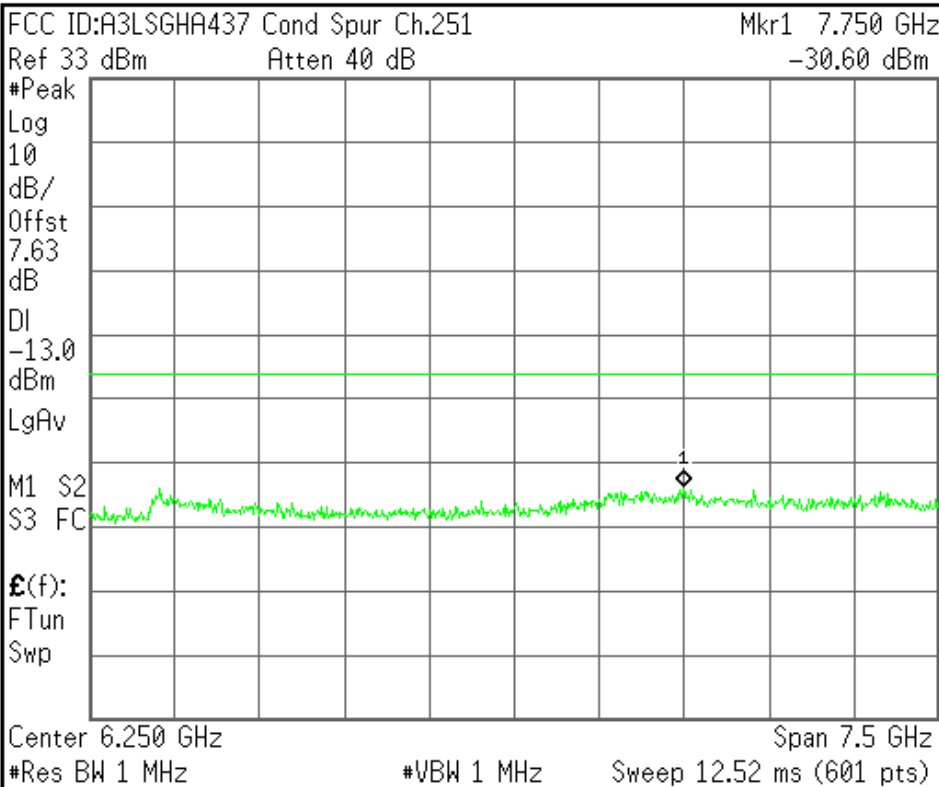

<b>Center Freq</b>	6.25000000 GHz
<b>Start Freq</b>	2.50000000 GHz
<b>Stop Freq</b>	10.00000000 GHz
<b>CF Step</b>	750.000000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off


File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

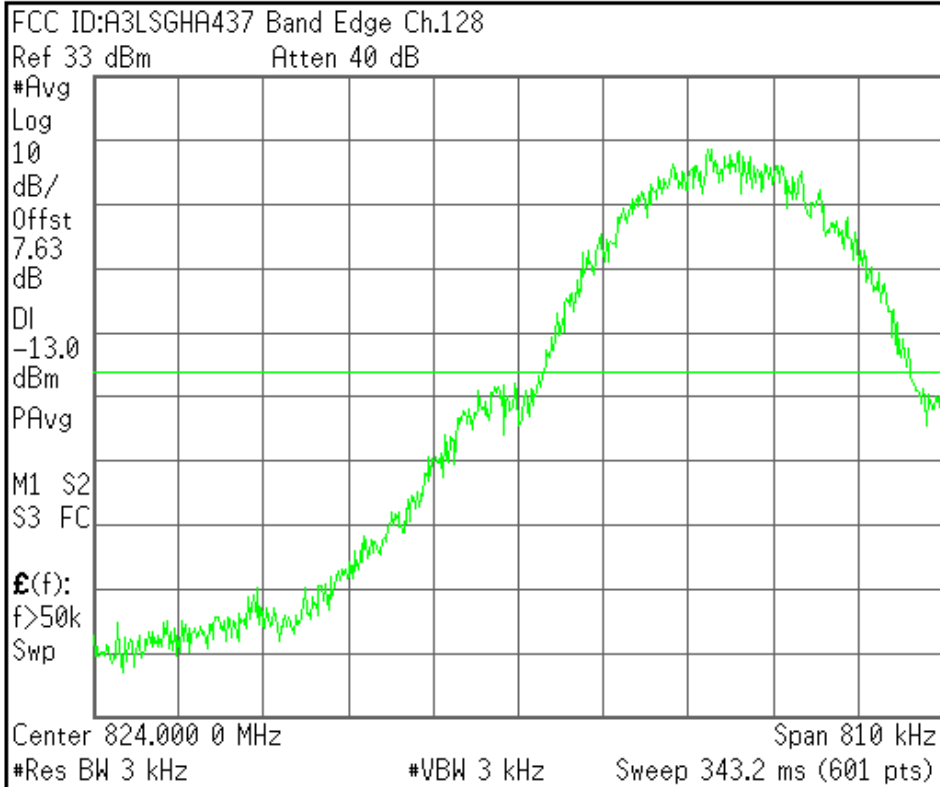


<b>Center Freq</b> 824.000000 MHz
<b>Start Freq</b> 823.595000 MHz
<b>Stop Freq</b> 824.405000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

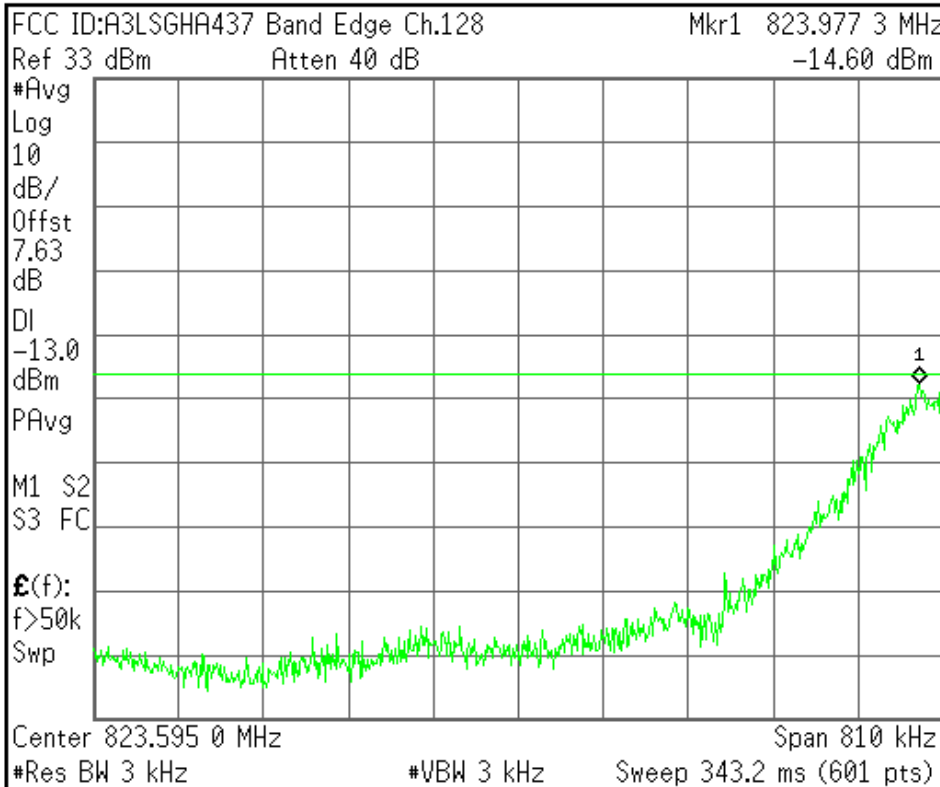

<b>Center Freq</b> 823.595000 MHz
<b>Start Freq</b> 823.190000 MHz
<b>Stop Freq</b> 824.000000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA437 Band Edge Ch.251

Ref 33 dBm Atten 40 dB

#Avg

Log

10

dB/

Offst

7.63

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$ :

f>50k

Swp

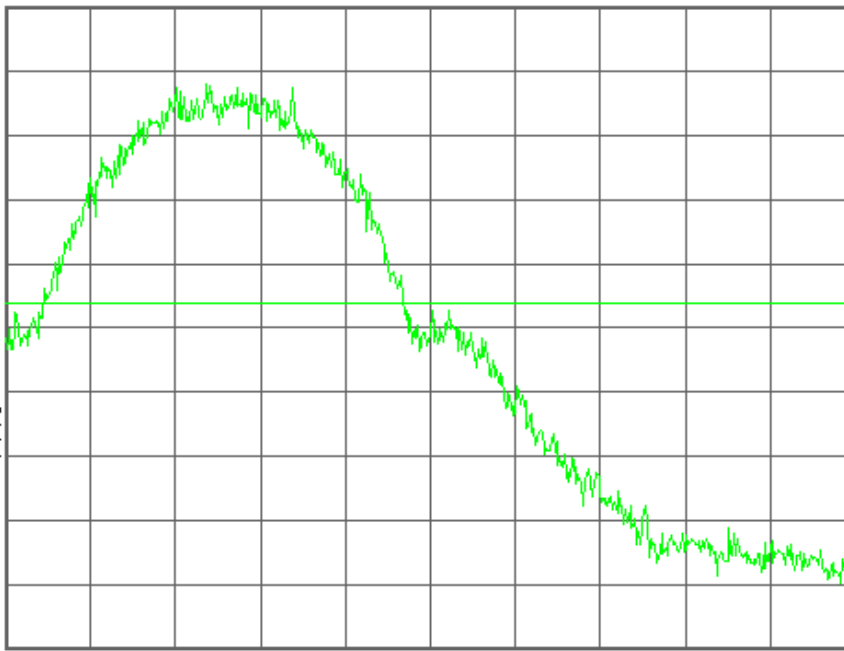

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
849.000000 MHz

Start Freq  
848.595000 MHz

Stop Freq  
849.405000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LSGHA437 Band Edge Ch.251

Mkr1 849.021 4 MHz

Ref 33 dBm Atten 40 dB

-15.53 dBm

#Avg

Log

10

dB/

Offst

7.63

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$ :

f>50k

Swp

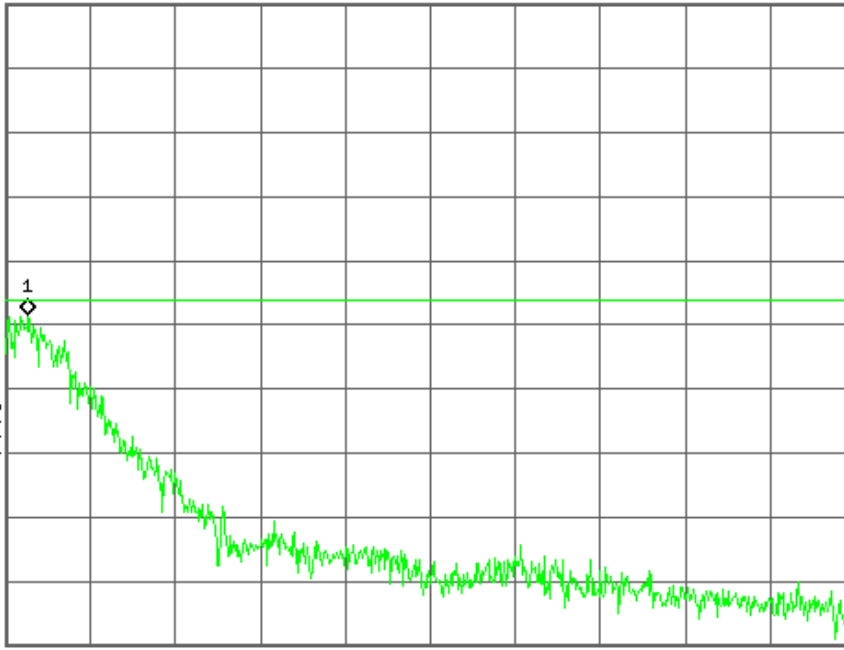

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq  
849.405000 MHz

Start Freq  
849.000000 MHz

Stop Freq  
849.810000 MHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

GSM1900

Agilent

R T

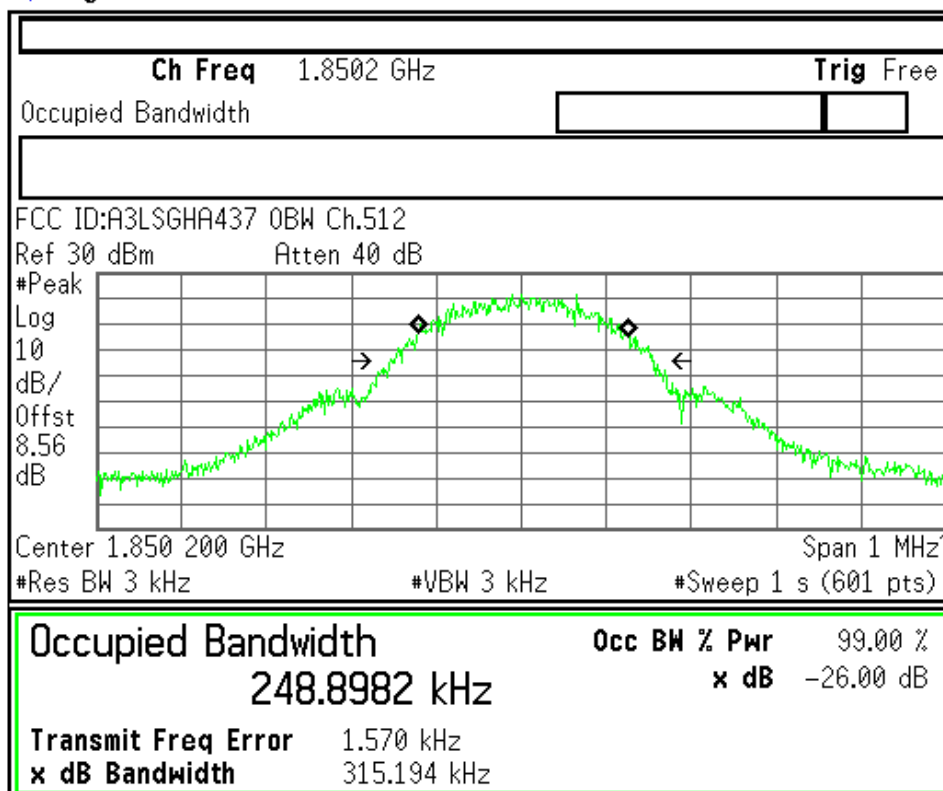


Freq/Channel	
Center Freq	1.85020000 GHz
Start Freq	1.84970000 GHz
Stop Freq	1.85070000 GHz
CF Step	100.000000 kHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

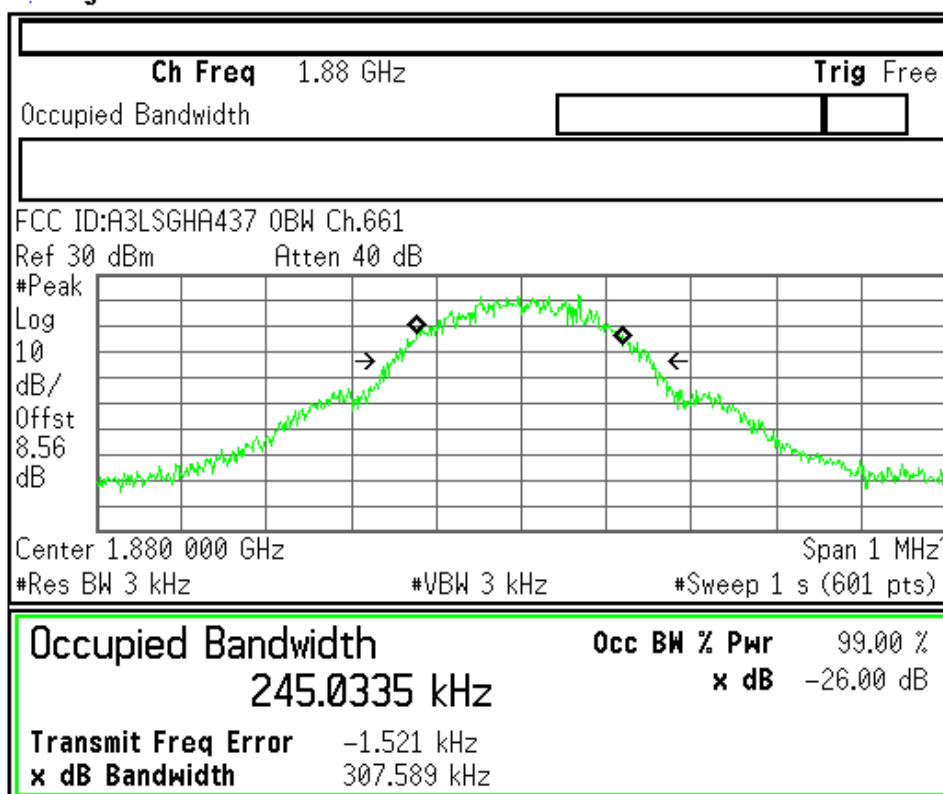

Freq/Channel	
Center Freq	1.88000000 GHz
Start Freq	1.87950000 GHz
Stop Freq	1.88050000 GHz
CF Step	100.000000 kHz Auto Man
Freq Offset	0.00000000 Hz
Signal Track	On Off

File Operation Status, C:\TEMP.GIF file saved

<b>Ch Freq</b> 1.9098 GHz		<b>Trig</b> Free
Occupied Bandwidth		
FCC ID:A3LSGHA437 0BW Ch.810 Ref 30 dBm Atten 40 dB		
Center 1.909 800 GHz		Span 1 MHz
#Res BW 3 kHz	#VBW 3 kHz	#Sweep 1 s (601 pts)
<b>Occupied Bandwidth</b> 250.0499 kHz		<b>Occ BW % Pwr</b> 99.00 % <b>x dB</b> -26.00 dB
<b>Transmit Freq Error</b> 1.921 kHz <b>x dB Bandwidth</b> 313.403 kHz		
<b>File Operation Status, C:\TEMP.GIF file saved</b>		

<b>Freq/Channel</b>
<b>Center Freq</b> 1.90980000 GHz
<b>Start Freq</b> 1.90930000 GHz
<b>Stop Freq</b> 1.91030000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

FCC ID : A3LSGHA437 Transmit Power 512CH



Measurement/Instrument Screen						
Control	GSM/GPRS Transmit Power				TCH Parms	
GSM/GPRS TX Power Setup Swap Window Positions	<b>GMSK Transmit Power</b> <span style="font-size: 24pt;"><b>30.07</b></span> dBm				Downlink Traffic Power Traffic Band: PCS Traffic Channel: 512 MS TX Level: 0	
	<b>Phase &amp; Frequency Error</b>				Channel Mode Setup Return	
		Peak Phase °	RMS Phase °	Frequency Hz		
	Minimum	4.27	1.78	-38.13		
	Maximum	7.27	2.25	2.07		
	Average	5.41	2.02	-20.10		
	Pass/Fail	Pass	Pass	Pass		
1 of 2	Active Cell Connected			Sys Type: GSM		1 of 2
	IntRef	Offset	R T			



Measurement/Instrument Screen									
Control		GSM/GPRS Transmit Power						TCH Parms	
GSM/GPRS TX Power Setup ▾		GSMK Transmit Power <b>30.02</b> dBm Single						Downlink Traffic Power ▾	
Swap Window Positions								Traffic Band	
		Phase & Frequency Error		MS TX Level		0		Channel Mode Setup ▾	
		Return		1 of 2		1 of 2		1 of 2	
		Active Cell Connected		Sys Type: GSM		IntRef		Offset	
1 of 2		50 / 50		Single		1 of 2		1 of 2	



Minimum	Peak Phase °	RMS Phase °	Frequency Hz
4.26	7.87	2.30	4.25
5.39	1.98	-33.99	Pass
Pass	Pass	Pass	Pass

Measurement/Instrument Screen									
Control		GSM/GPRS Transmit Power						TCH Parms	
GSM/GPRS TX Power Setup ▾		GSMK Transmit Power <b>30.05</b> dBm Single						Downlink Traffic Power ▾	
Swap Window Positions								Traffic Band	
		Phase & Frequency Error		MS TX Level		0		Channel Mode Setup ▾	
		Return		1 of 2		1 of 2		1 of 2	
		Active Cell Connected		Sys Type: GSM		IntRef		Offset	
1 of 2		50 / 50		Single		1 of 2		1 of 2	

Minimum	Peak Phase °	RMS Phase °	Frequency Hz
4.33	7.43	2.21	-16.17
5.39	1.93	-24.98	Pass
Pass	Pass	Pass	Pass

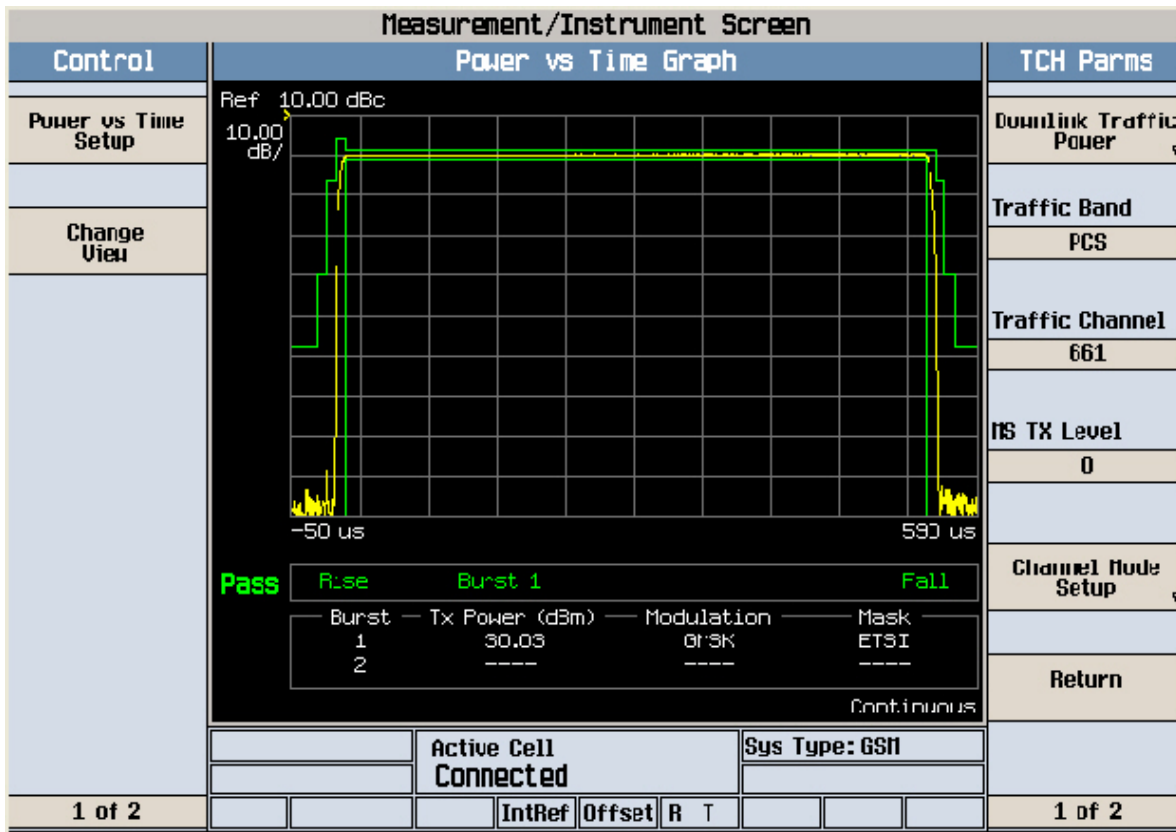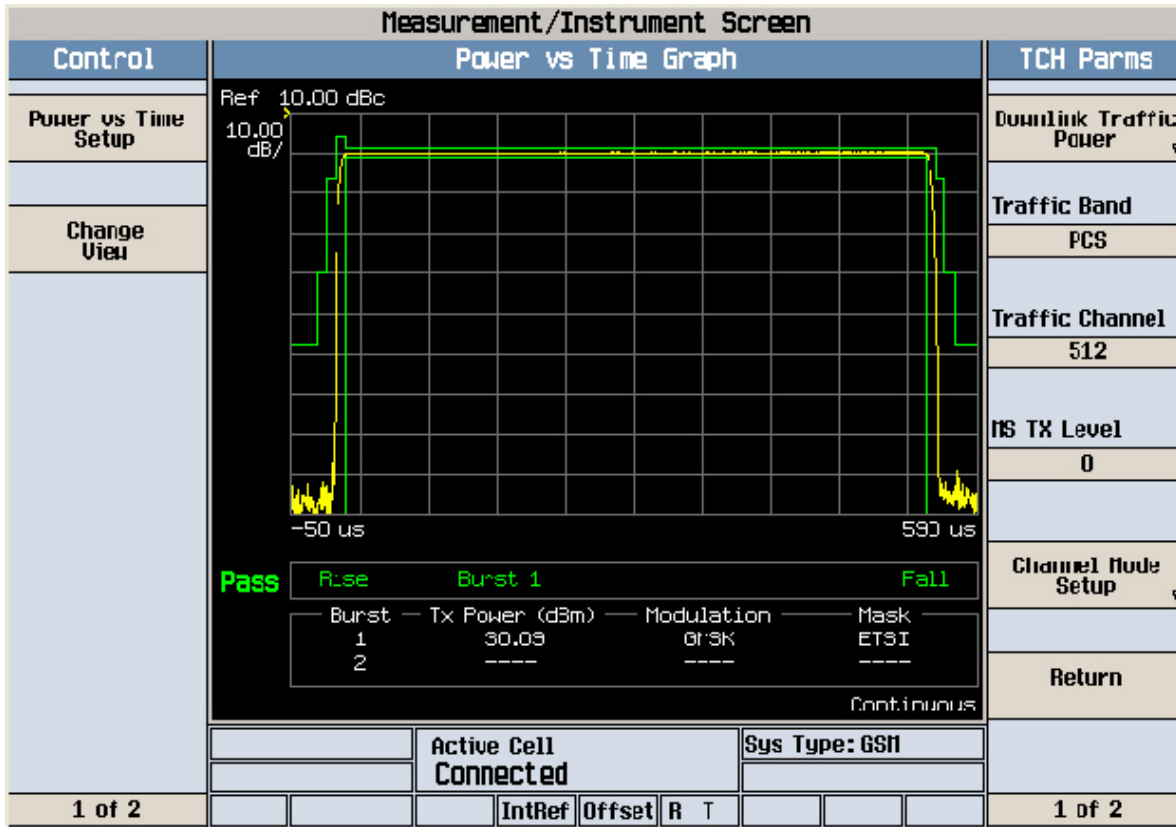

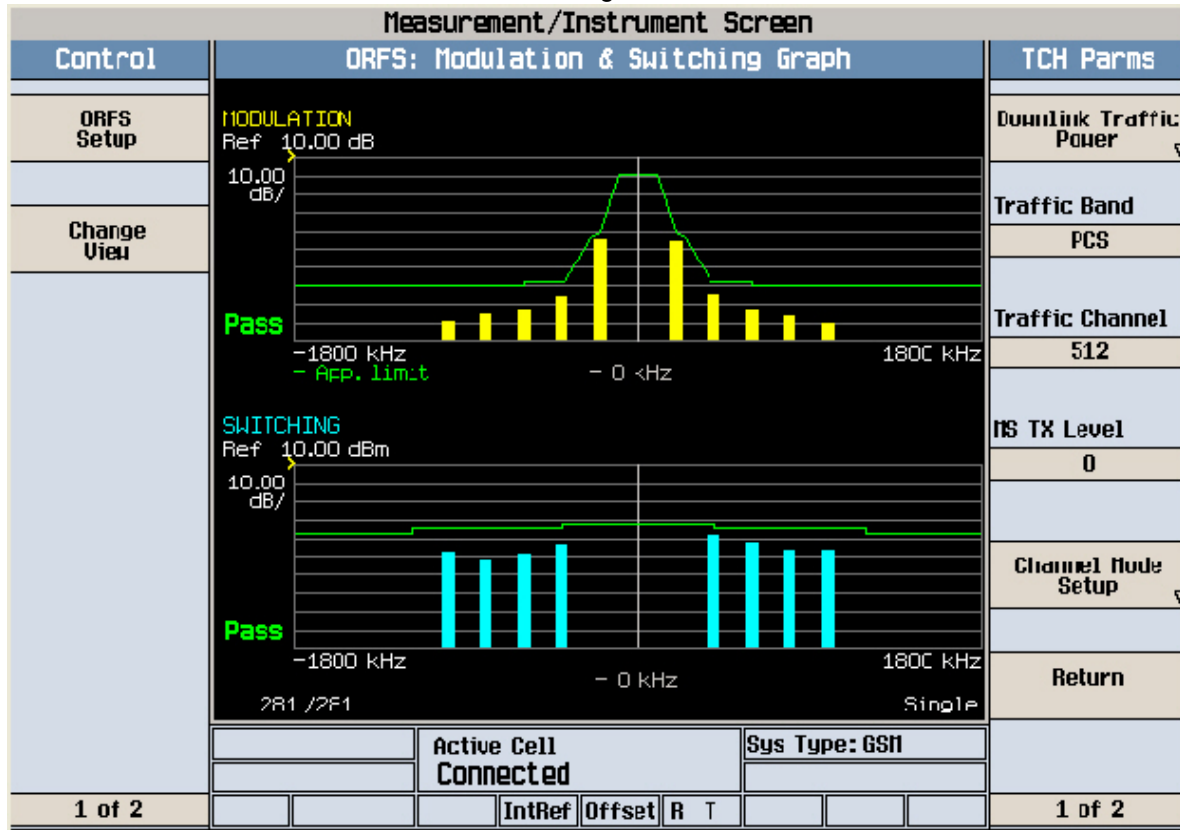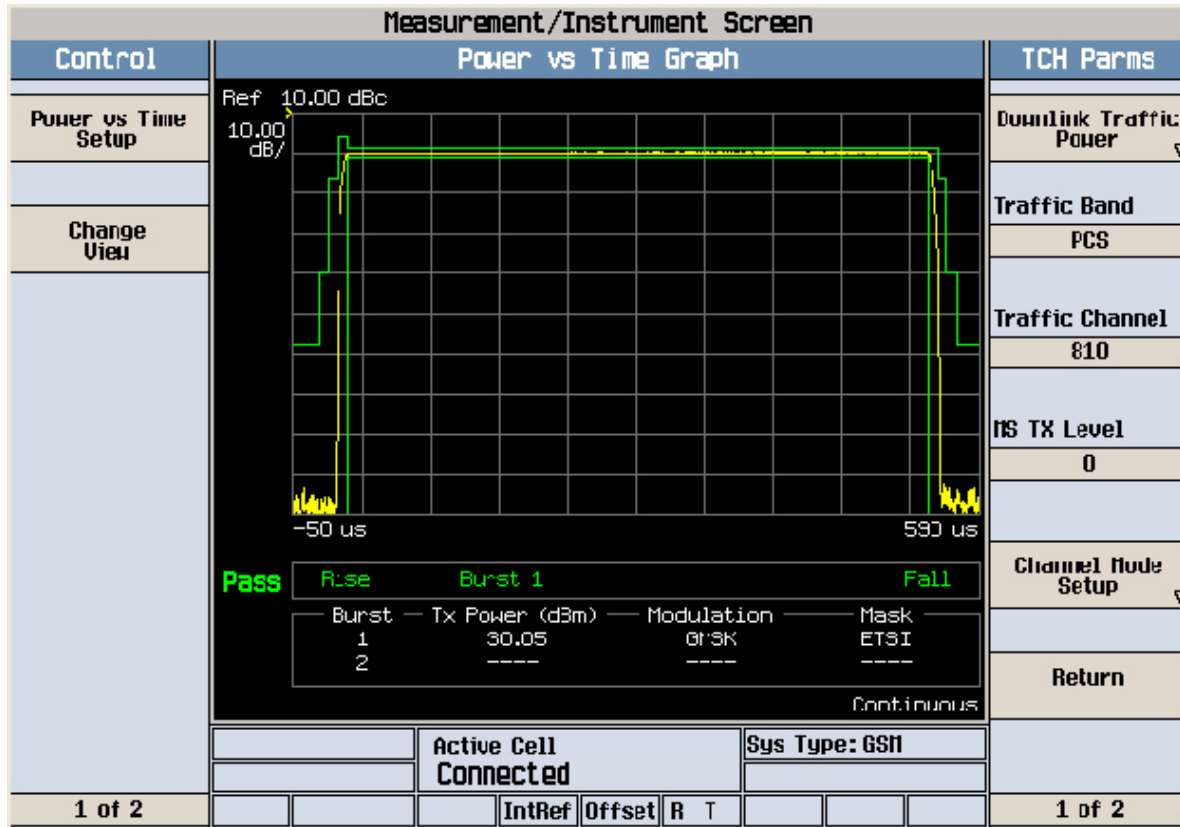

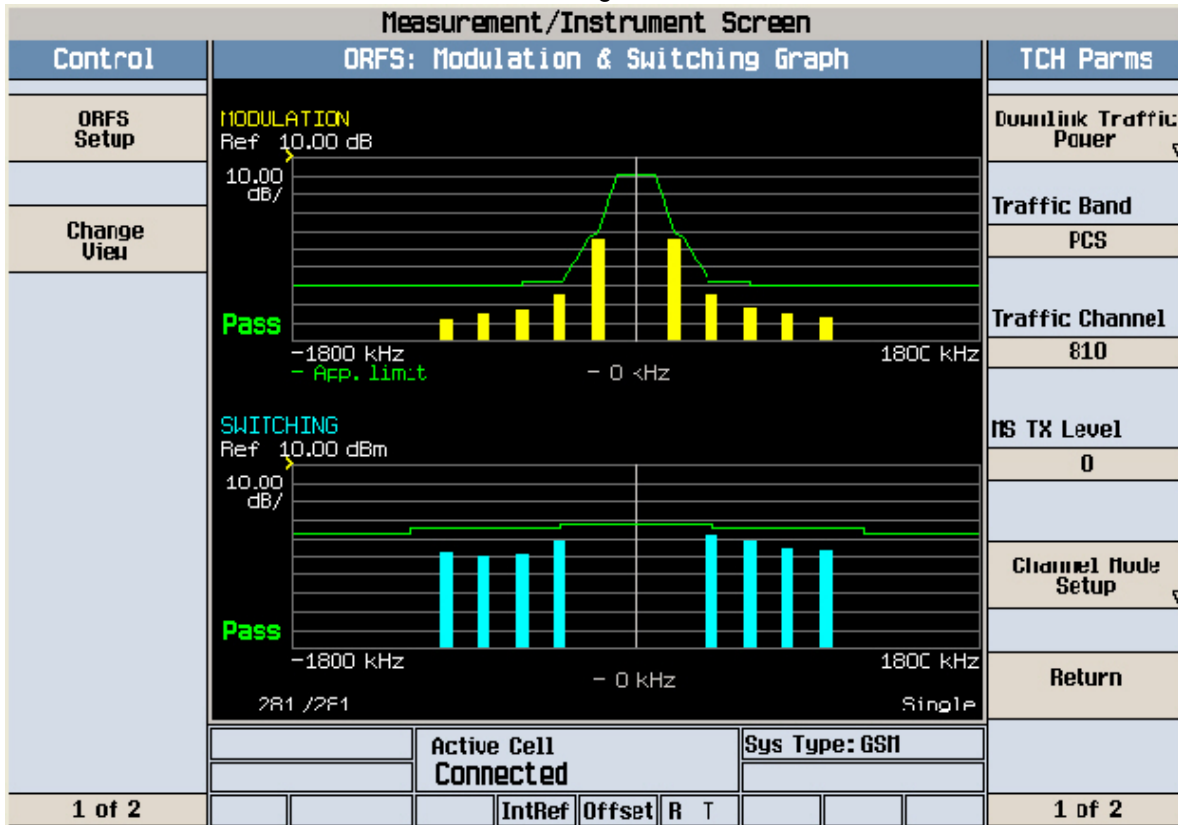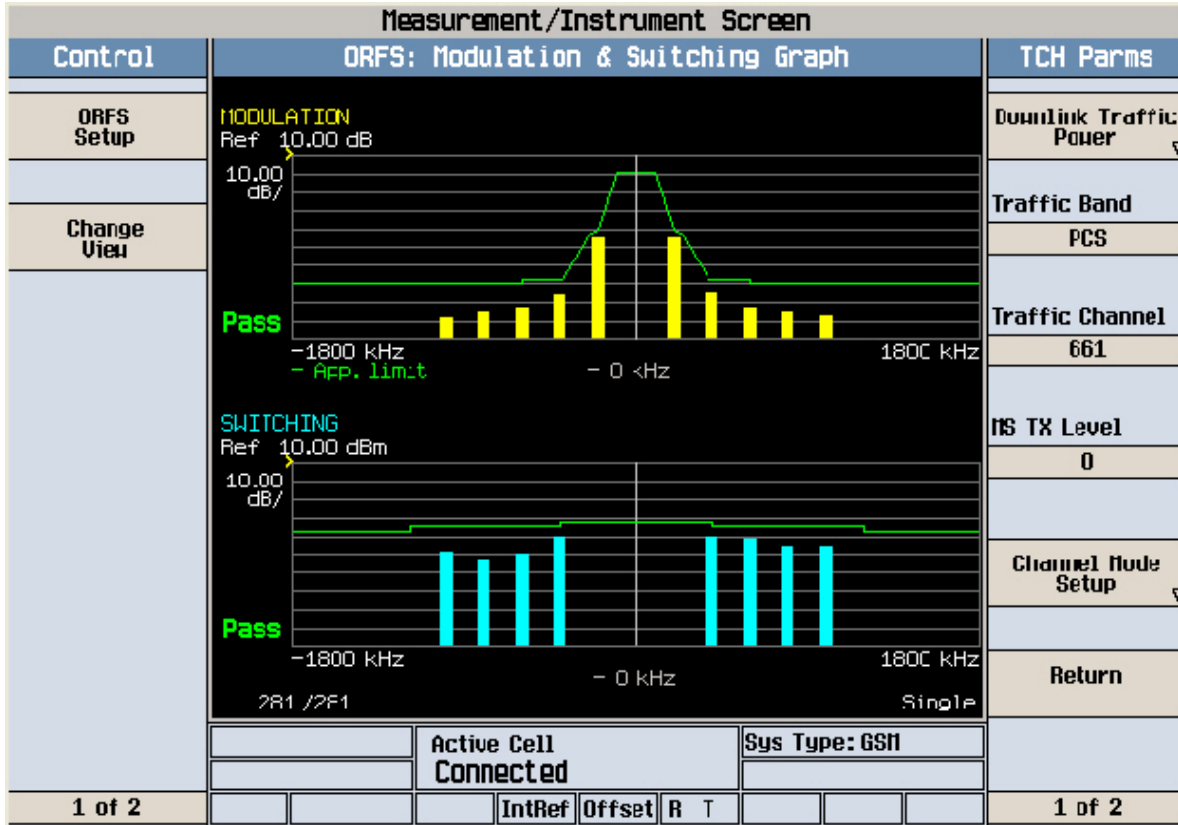




Agilent

R T

Freq/Channel

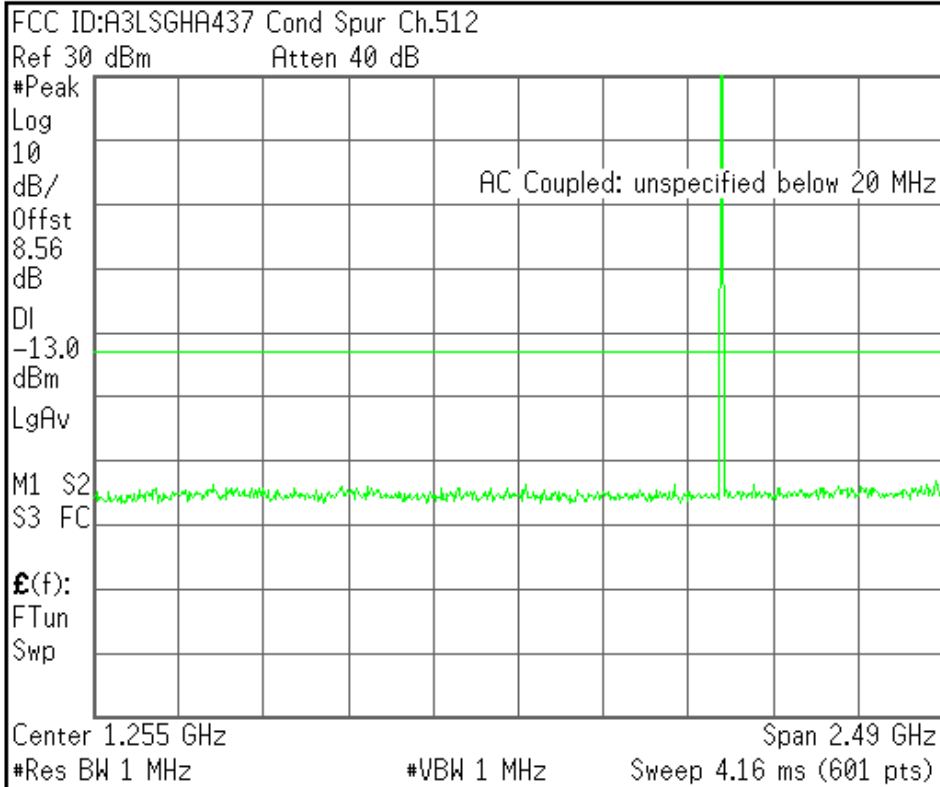

Center Freq  
1.25500000 GHz

Start Freq  
10.00000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.0000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

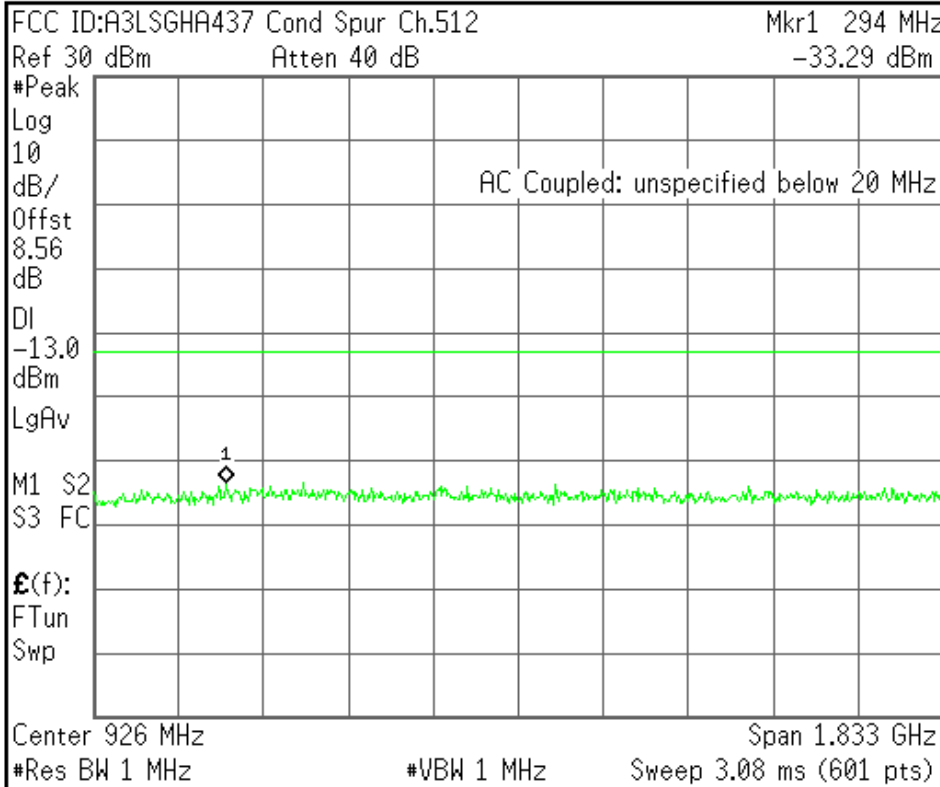

Center Freq  
926.350000 MHz

Start Freq  
10.00000000 MHz

Stop Freq  
1.84270000 GHz

CF Step  
183.270000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

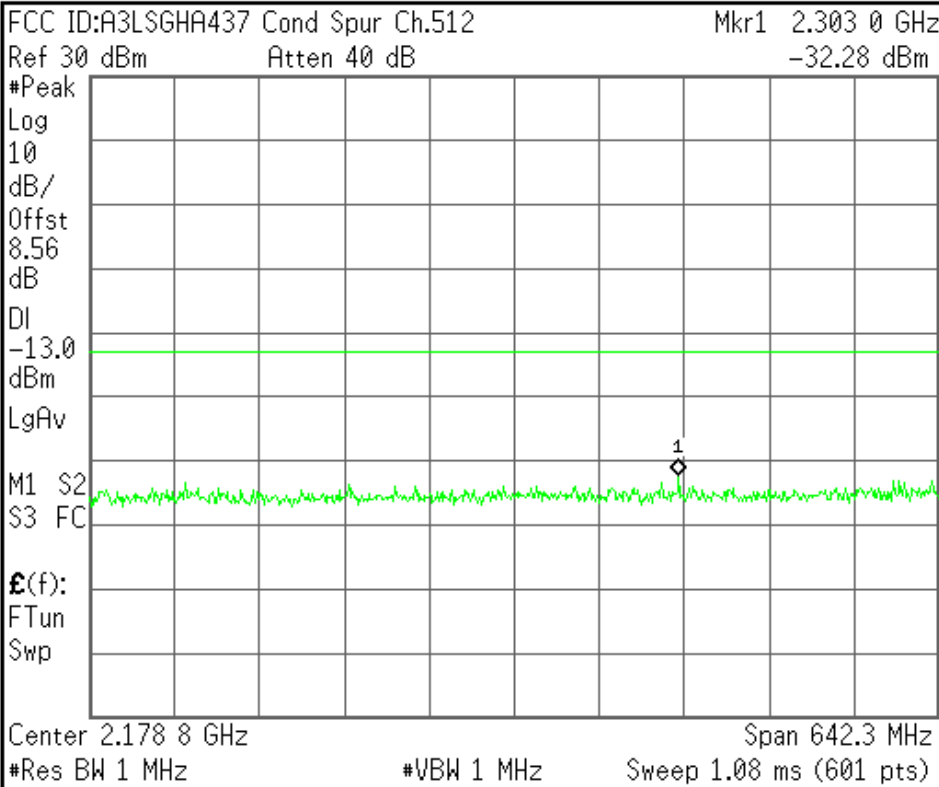


<b>Center Freq</b> 2.17885000 GHz
<b>Start Freq</b> 1.85770000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 64.2300000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

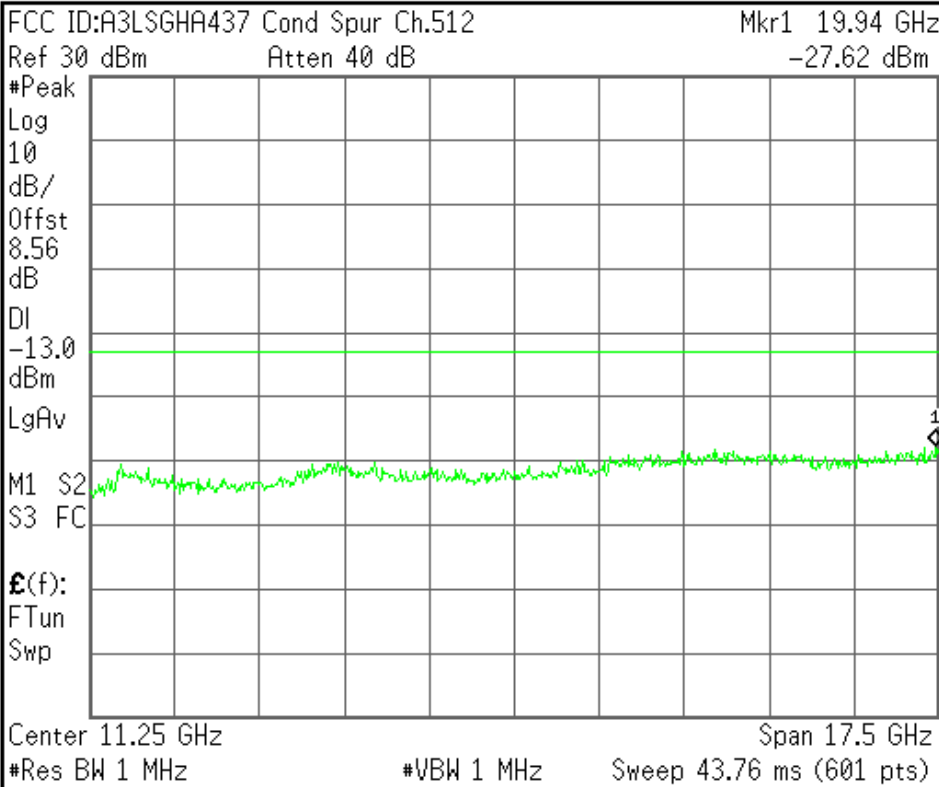


<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

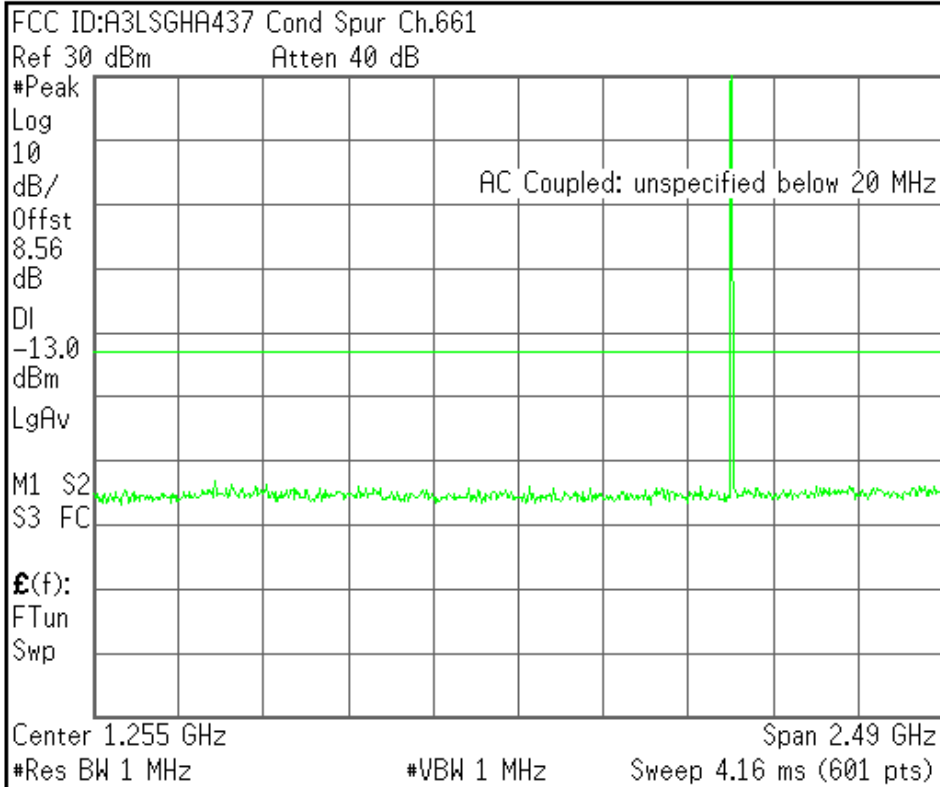

Center Freq  
1.25500000 GHz

Start Freq  
10.00000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.0000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

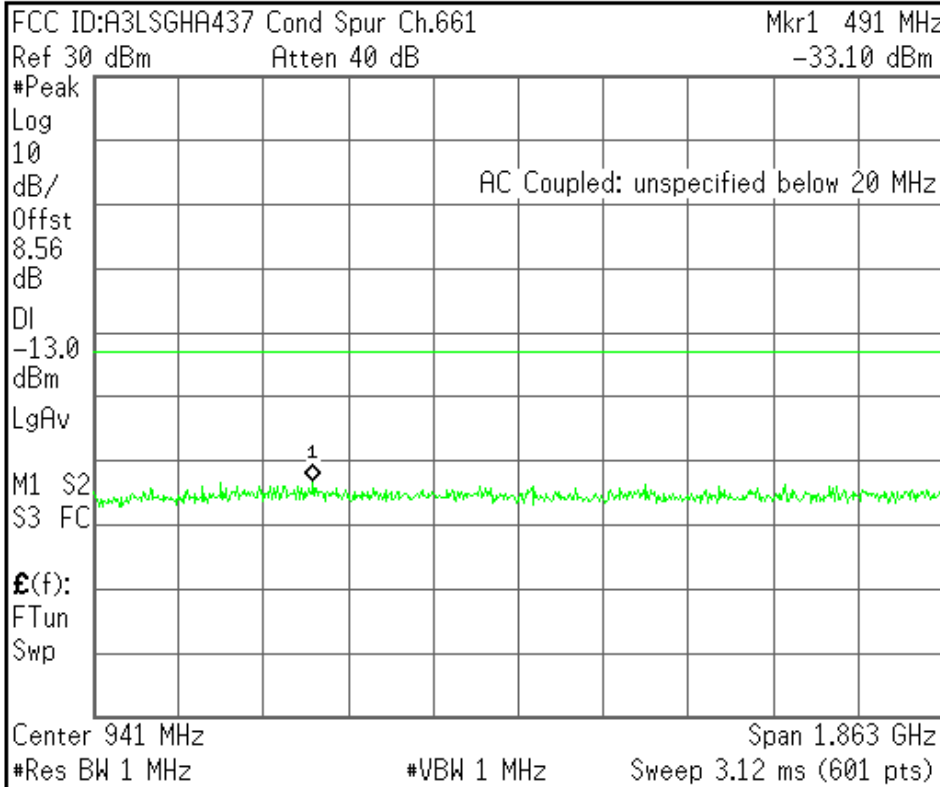

Mkr1 491 MHz  
-33.10 dBm

Center Freq  
941.250000 MHz

Start Freq  
10.00000000 MHz

Stop Freq  
1.87250000 GHz

CF Step  
186.250000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

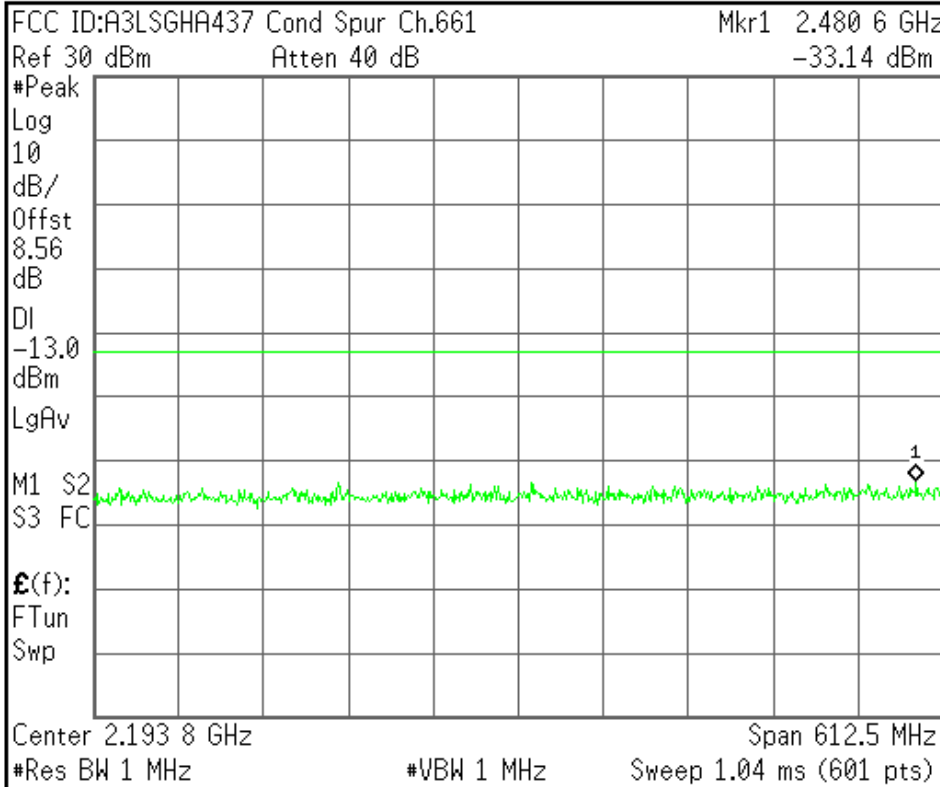

Center Freq  
2.19375000 GHz

Start Freq  
1.88750000 GHz

Stop Freq  
2.50000000 GHz

CF Step  
61.2500000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

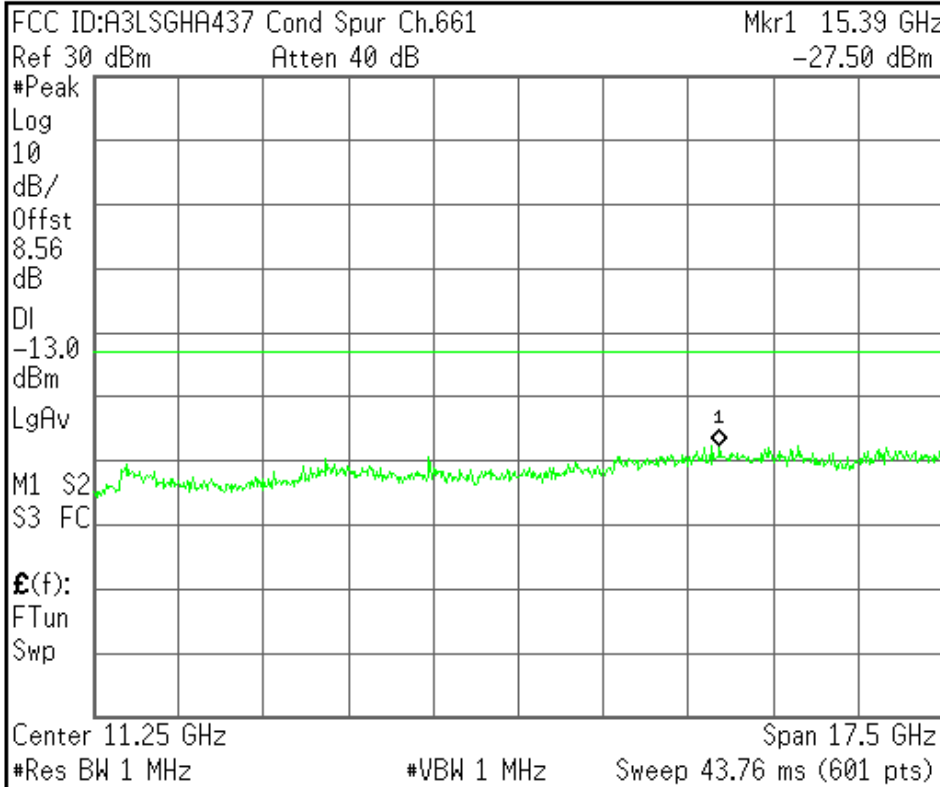

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

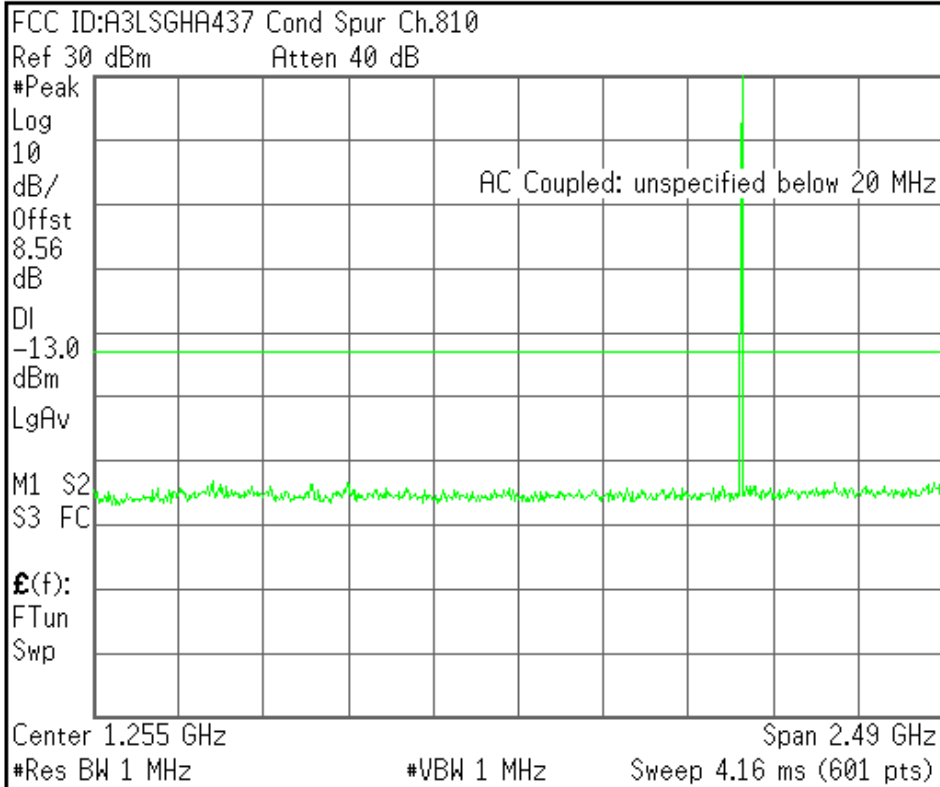


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.0000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

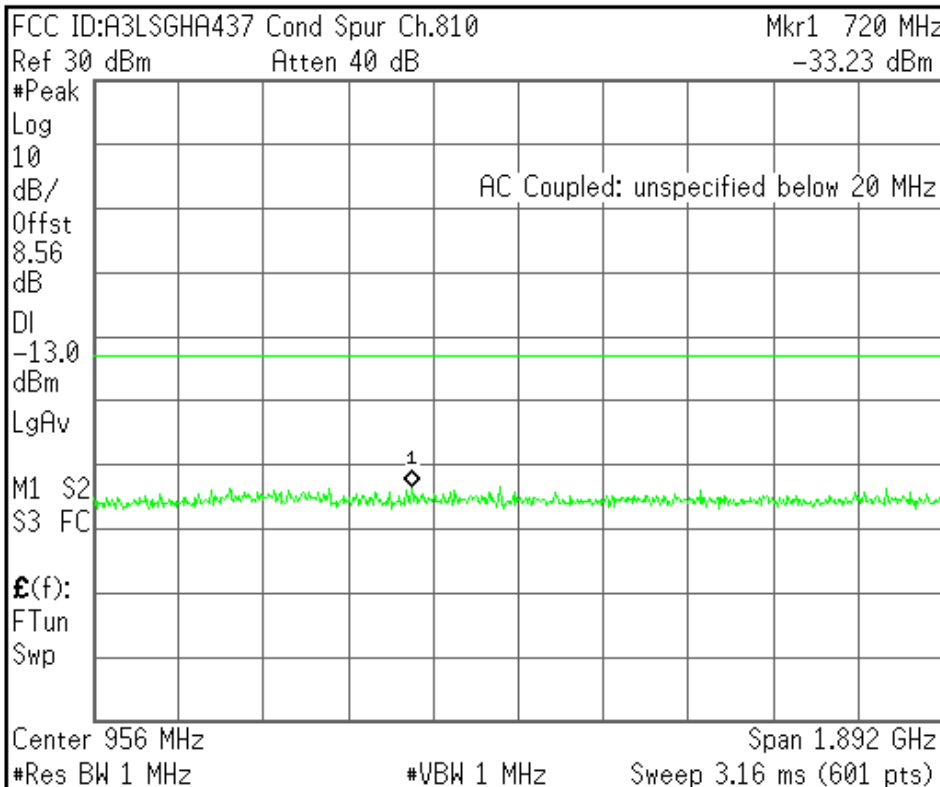


<b>Center Freq</b> 956.150000 MHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 1.90230000 GHz
<b>CF Step</b> 189.2300000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

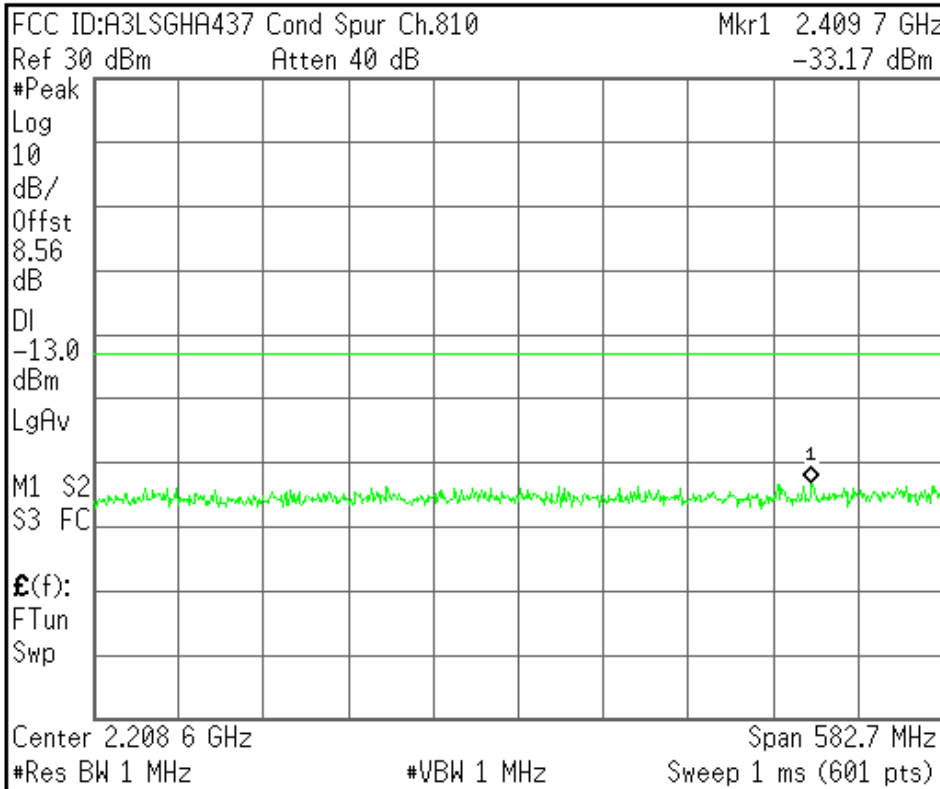

Center Freq  
2.20865000 GHz

Start Freq  
1.91730000 GHz

Stop Freq  
2.50000000 GHz

CF Step  
58.2700000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

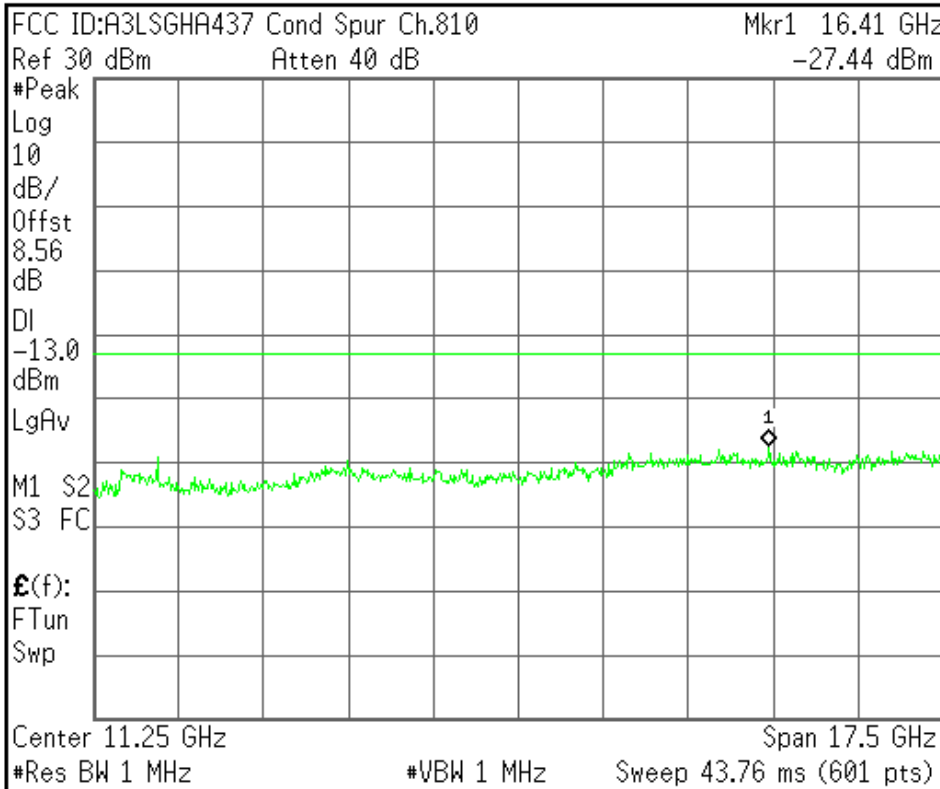

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

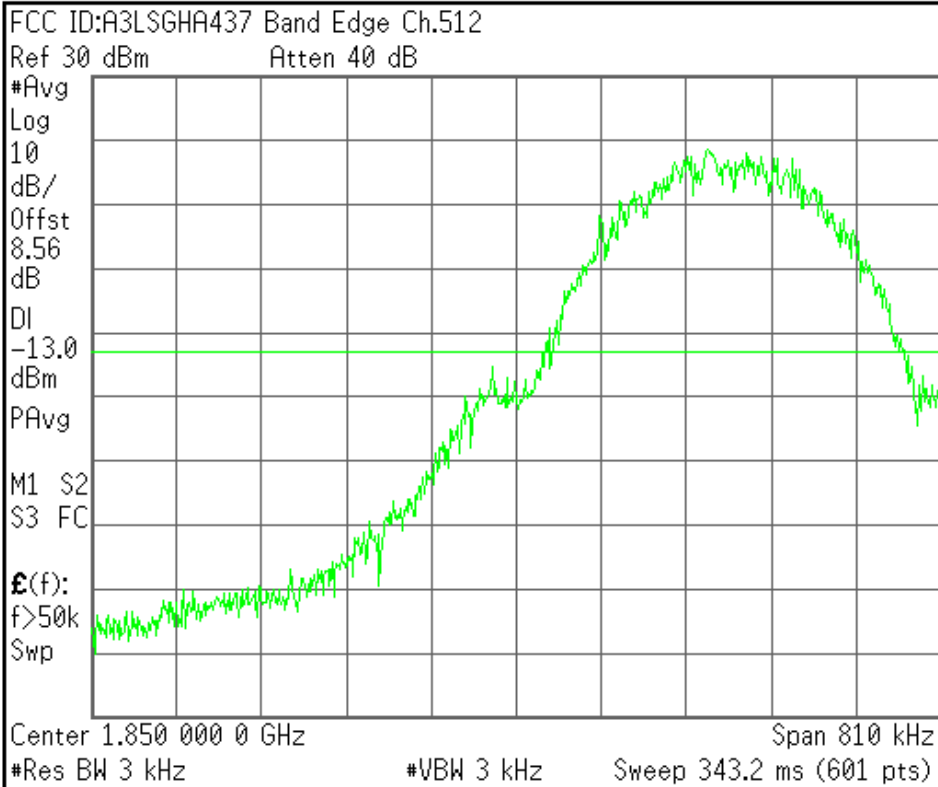

Center Freq  
1.85000000 GHz

Start Freq  
1.84959500 GHz

Stop Freq  
1.85040500 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

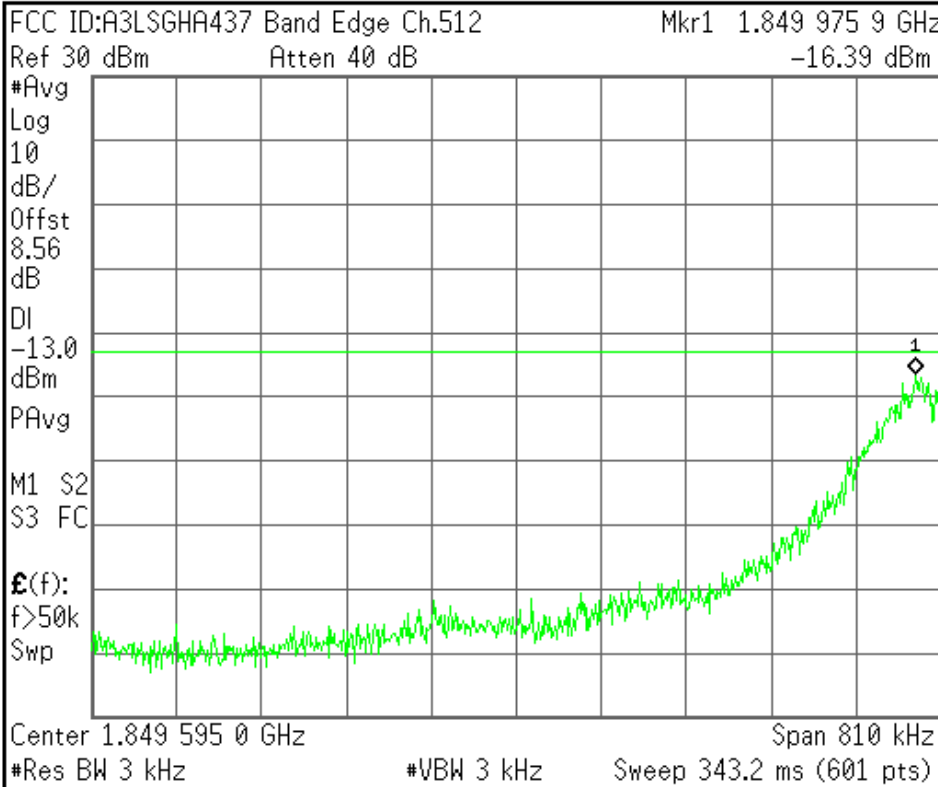

Center Freq  
1.84959500 GHz

Start Freq  
1.84919000 GHz

Stop Freq  
1.85000000 GHz

CF Step  
81.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

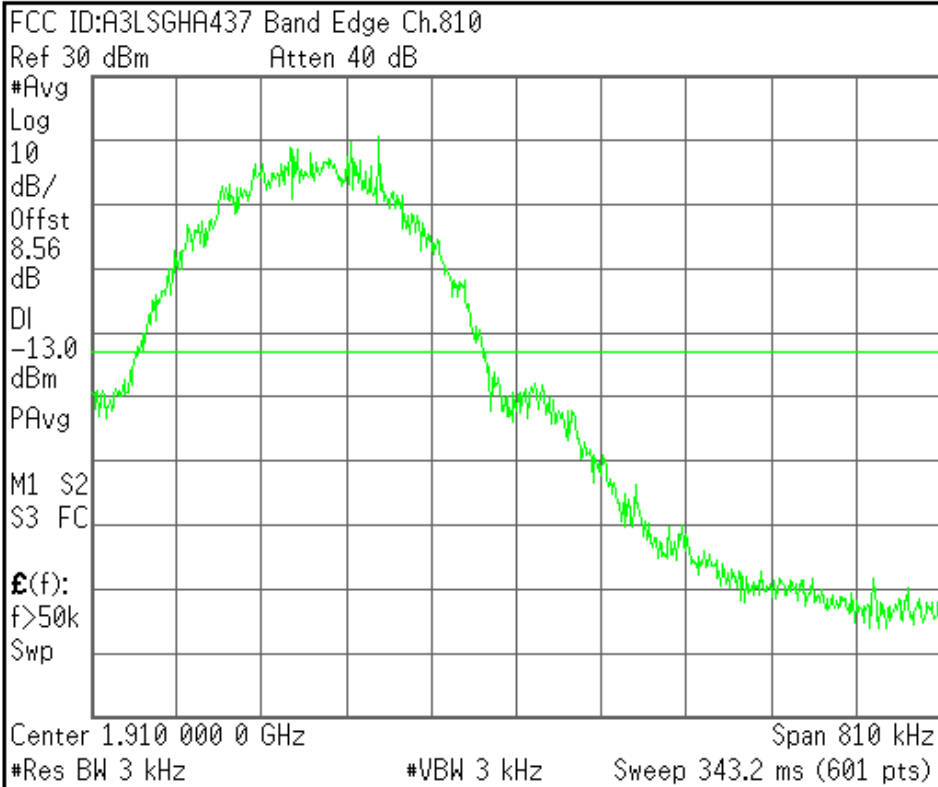


<b>Center Freq</b> 1.91000000 GHz
<b>Start Freq</b> 1.90959500 GHz
<b>Stop Freq</b> 1.91040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

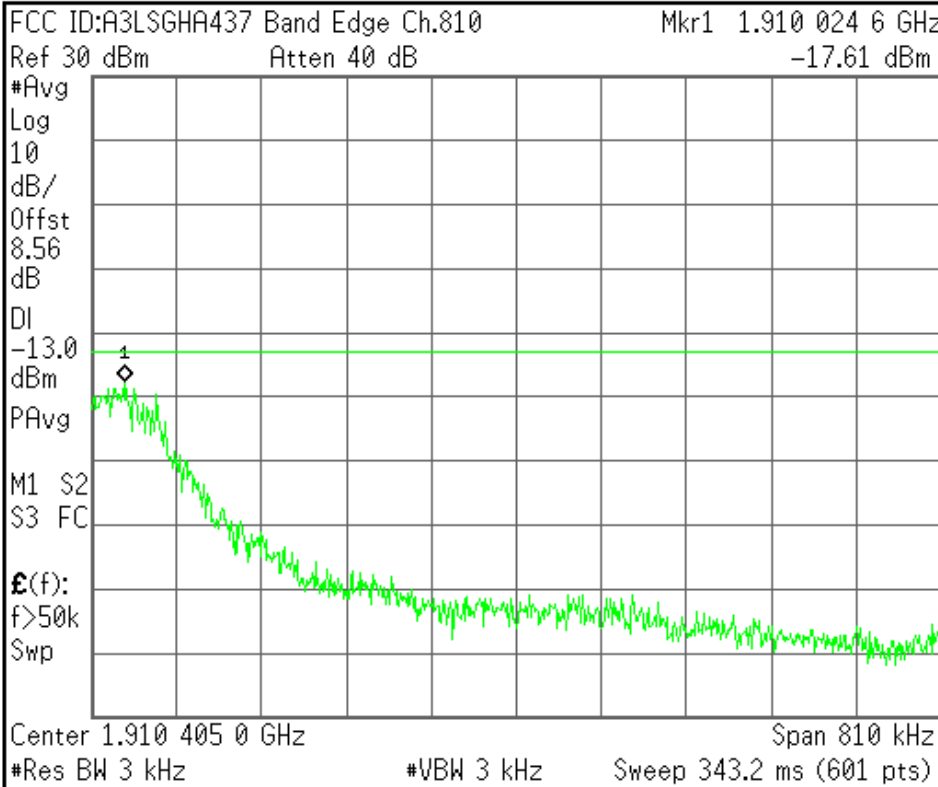

<b>Center Freq</b> 1.91040500 GHz
<b>Start Freq</b> 1.91000000 GHz
<b>Stop Freq</b> 1.91081000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved



EDGE850

Agilent

R T

**Ch Freq** 824.2 MHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSGHA437 0BW Ch.128 EDGE  
Ref 27 dBm Atten 30 dB

Center 824.200 MHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
238.0838 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	233.708 Hz	
<b>x dB Bandwidth</b>	296.742 kHz	

Freq/Channel	
<b>Center Freq</b>	824.200000 MHz
<b>Start Freq</b>	823.700000 MHz
<b>Stop Freq</b>	824.700000 MHz
<b>CF Step</b>	100.000000 kHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

**Ch Freq** 836.6 MHz **Trig** Free

Occupied Bandwidth


FCC ID:A3LSGHA437 0BW Ch.190 EDGE  
Ref 27 dBm Atten 30 dB

Center 836.600 MHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
240.6508 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	820.488 Hz	
<b>x dB Bandwidth</b>	299.329 kHz	

Freq/Channel	
<b>Center Freq</b>	836.600000 MHz
<b>Start Freq</b>	836.100000 MHz
<b>Stop Freq</b>	837.100000 MHz
<b>CF Step</b>	100.000000 kHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

File Operation Status, C:\TEMP.GIF file saved

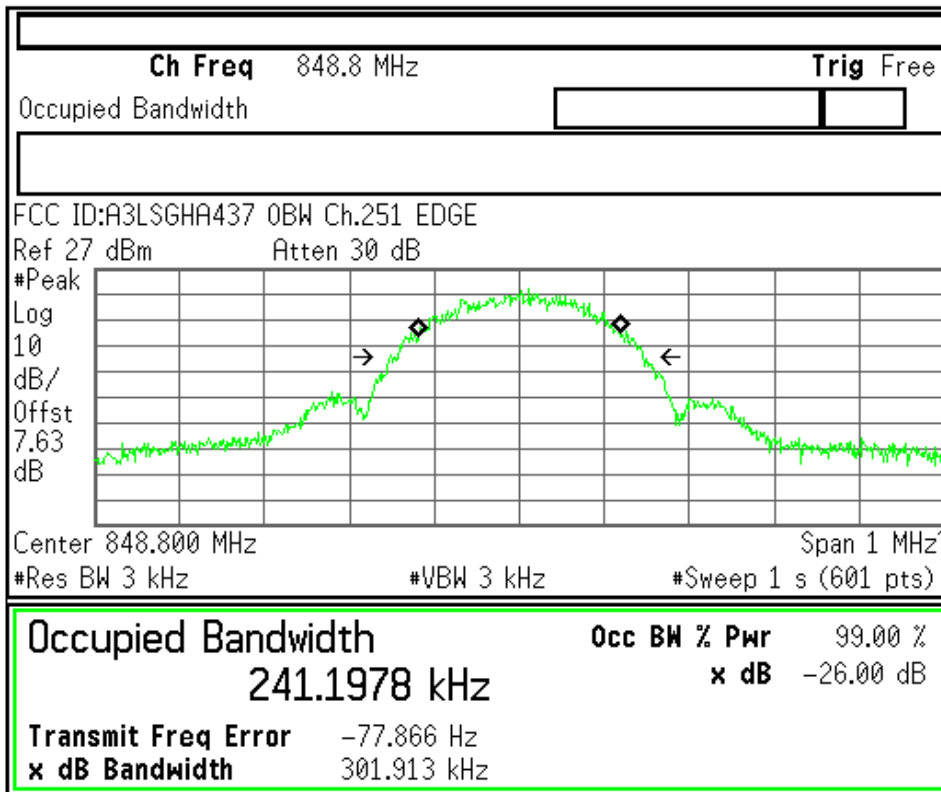

<b>Freq/Channel</b>
<b>Center Freq</b> 848.800000 MHz
<b>Start Freq</b> 848.300000 MHz
<b>Stop Freq</b> 849.300000 MHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

ID : A3LSGHA437 Transmit Power 128CH EDGE

Measurement/Instrument Screen									
Control		EGPRS Transmit Power						PDCH Parms	
EGPRS Transmit Power Setup		EPK Burst Power			EPK Est Carrier Power			Downlink Traffic Power	
		Minimum	Maximum	Minimum	Maximum			Traffic Band	
		25.38 dBm	27.09 dBm	26.26 dBm	26.33 dBm			GSM850	
		Average	Std Dev	Average	Std Dev			Traffic Channel	
		26.20 dBm	0.26 dBm	26.29 dBm	0.01 dBm			128	
		200 /200		Single				HS TX Level	
								Modulation Coding Scheme	
								Return	
		Active Cell Transferring				Sys Type: EGPRS			
1 of 2				IntRef	Offset	R T			1 of 2


Measurement/Instrument Screen									
Control	EGPRS Transmit Power							PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum	Maximum		Minimum	Maximum			Traffic Band	
	25.58 dBm	26.90 dBm		26.27 dBm	26.44 dBm			GSN850	
	Average	Std Dev		Average	Std Dev			Traffic Channel	
26.28 dBm	0.24 dBm		26.35 dBm	0.02 dBm			190		
	200 /200							Single	
				Active Cell Transferring			Sys Type: EGPRS		
1 of 2				IntRef	Offset	R T			1 of 2

Measurement/Instrument Screen									
Control	EGPRS Transmit Power							PDCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾	
	Minimum	Maximum		Minimum	Maximum			Traffic Band	
	25.60 dBm	27.03 dBm		26.31 dBm	26.39 dBm			GSN850	
	Average	Std Dev		Average	Std Dev			Traffic Channel	
26.30 dBm	0.25 dBm		26.35 dBm	0.01 dBm			251		
	200 /200							Single	
				Active Cell Transferring			Sys Type: EGPRS		
1 of 2				IntRef	Offset	R T			1 of 2

Agilent

R T

Freq/Channel

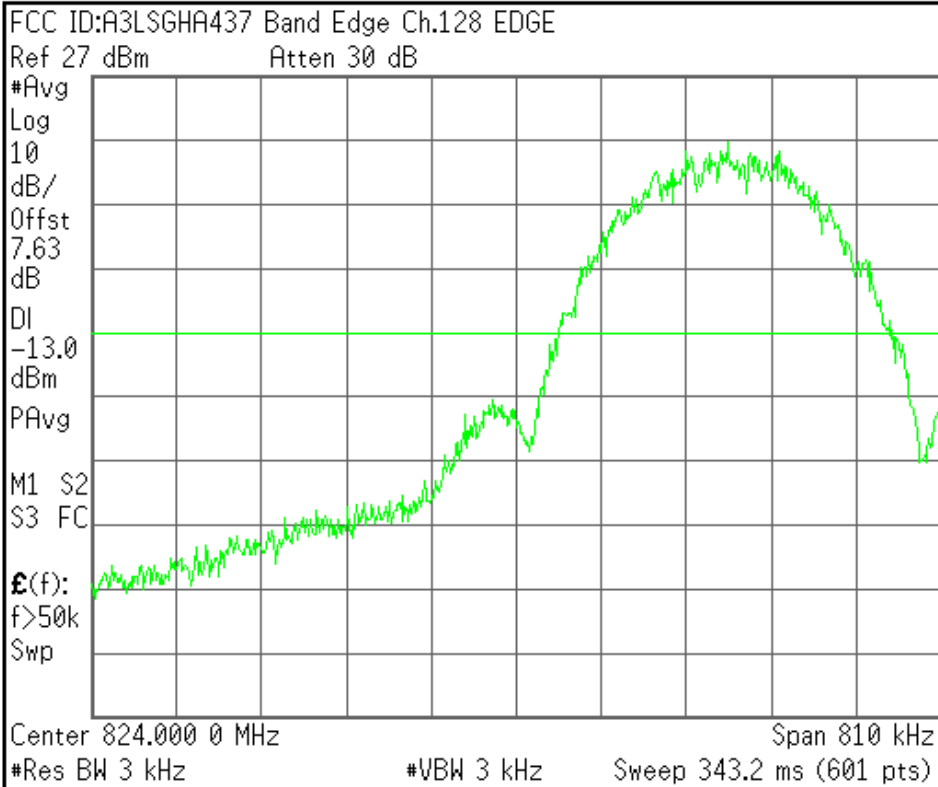


<b>Center Freq</b> 824.000000 MHz
<b>Start Freq</b> 823.595000 MHz
<b>Stop Freq</b> 824.405000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

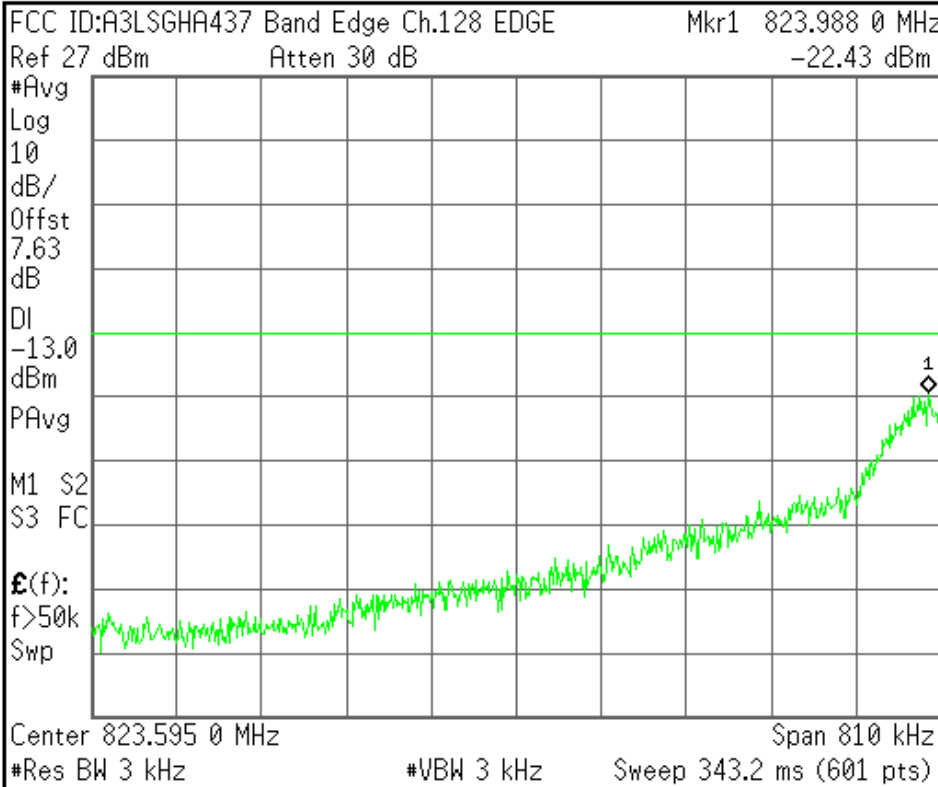


<b>Center Freq</b> 823.595000 MHz
<b>Start Freq</b> 823.190000 MHz
<b>Stop Freq</b> 824.000000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

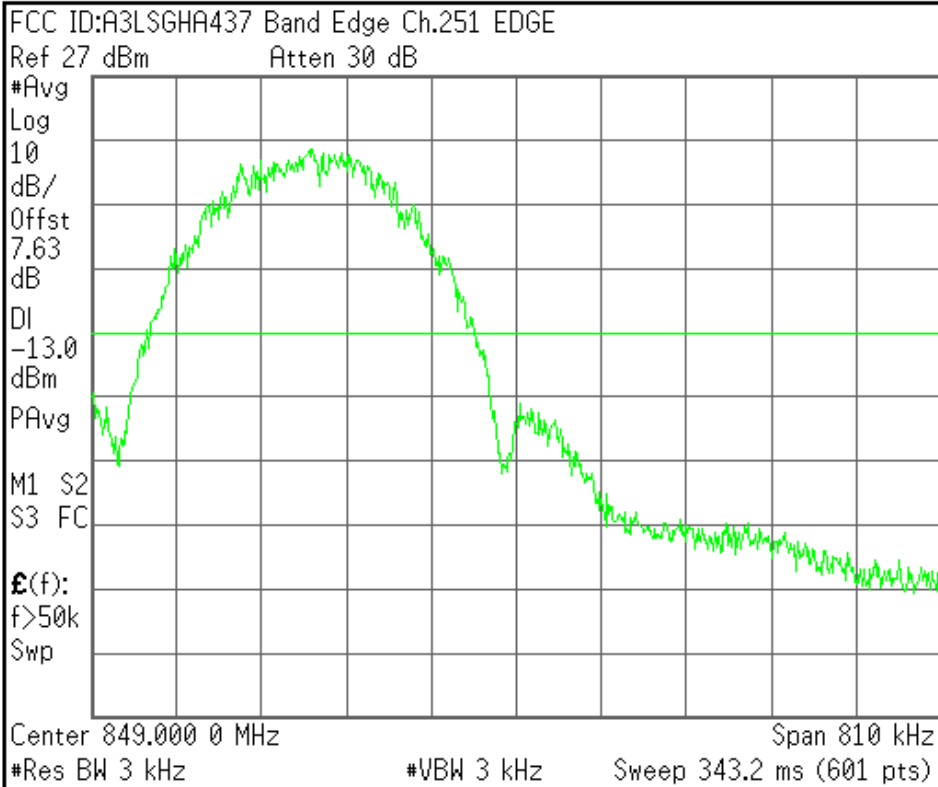


<b>Center Freq</b> 849.000000 MHz
<b>Start Freq</b> 848.595000 MHz
<b>Stop Freq</b> 849.405000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

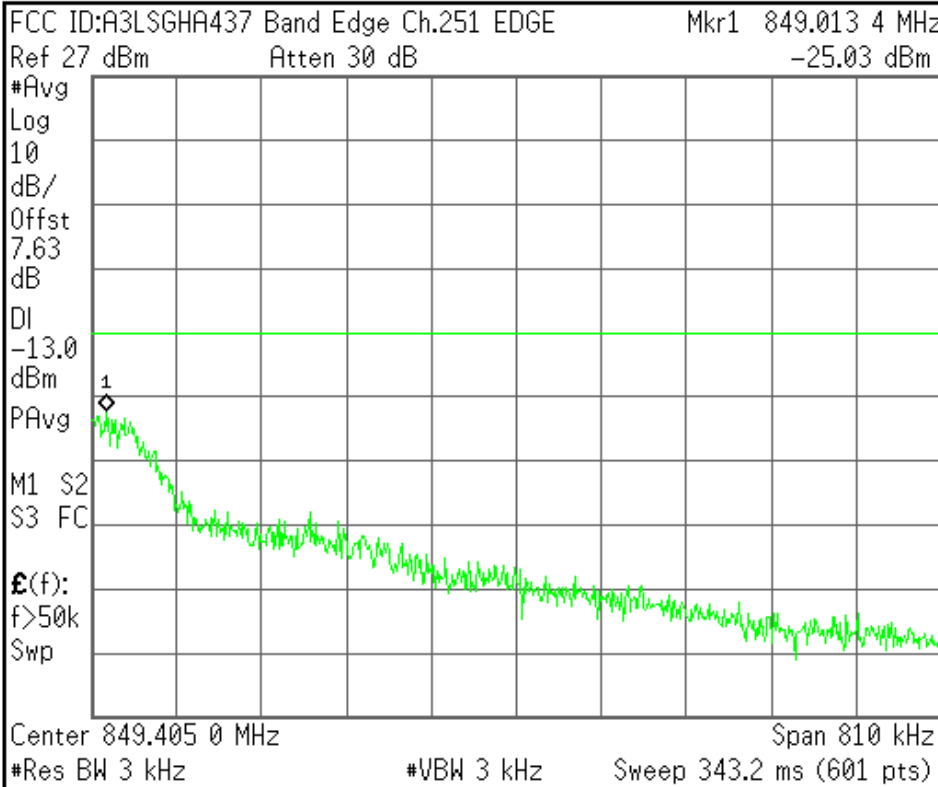

<b>Center Freq</b> 849.405000 MHz
<b>Start Freq</b> 849.000000 MHz
<b>Stop Freq</b> 849.810000 MHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE1900

Agilent

R T

**Ch Freq** 1.8502 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSGHA437 0BW Ch.512 EDGE  
Ref 26 dBm Atten 30 dB

Center 1.850 200 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
251.6941 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	749.787 Hz	
<b>x dB Bandwidth</b>	320.688 kHz	

**Freq/Channel**

**Center Freq**  
1.85020000 GHz

**Start Freq**  
1.84970000 GHz

**Stop Freq**  
1.85070000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

**Ch Freq** 1.88 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSGHA437 0BW Ch.661 EDGE  
Ref 26 dBm Atten 30 dB

Center 1.880 000 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
252.7688 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	-752.869 Hz	
<b>x dB Bandwidth</b>	313.461 kHz	

**Freq/Channel**

**Center Freq**  
1.88000000 GHz

**Start Freq**  
1.87950000 GHz


**Stop Freq**  
1.88050000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved

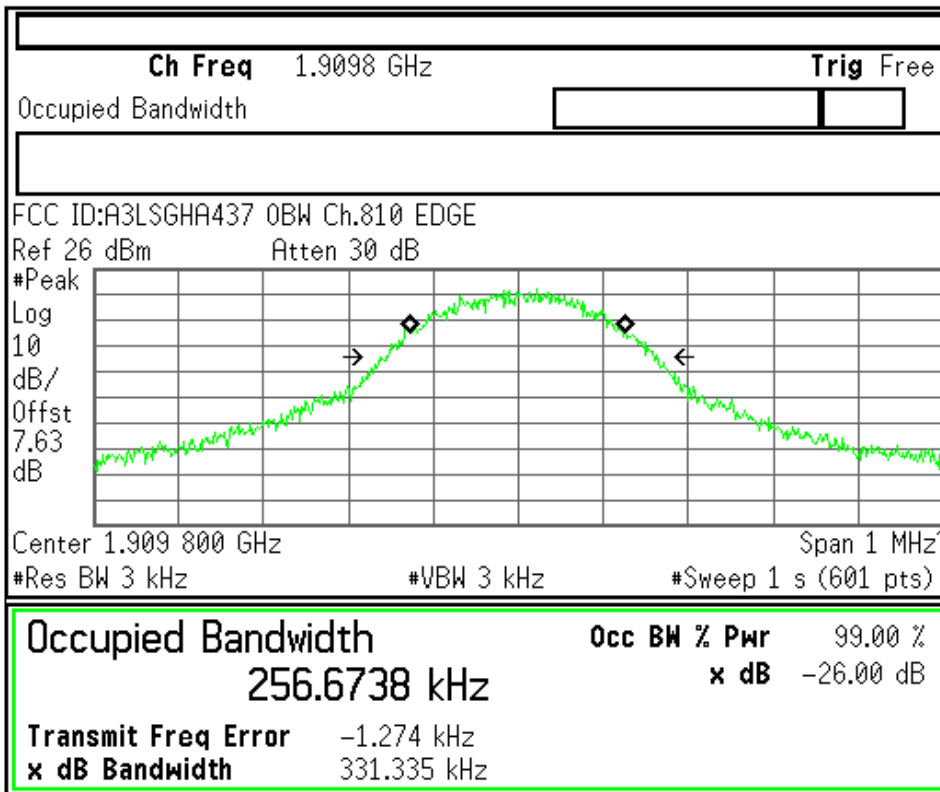

<b>Freq/Channel</b>
<b>Center Freq</b> 1.90980000 GHz
<b>Start Freq</b> 1.90930000 GHz
<b>Stop Freq</b> 1.91030000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

ID : A3LSGHA437 Transmit Power 512CH EDGE

Measurement/Instrument Screen									
Control	EGPRS Transmit Power						PDCH Parms		
EGPRS Transmit Power Setup	EPK Burst Power		EPK Est Carrier Power				Downlink Traffic Power		
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Traffic Band		
	25.54 dBm	26.91 dBm	26.17 dBm	26.41 dBm			PCS		
	Average	Std Dev	Average	Std Dev			Traffic Channel		
	26.23 dBm	0.24 dBm	26.30 dBm	0.05 dBm			512		
	200 /200		Single				HS TX Level		
							Modulation Coding Scheme		
							Return		
	Active Cell Transferring			Sys Type: EGPRS					
1 of 2			IntRef	Offset	R T		1 of 2		

Measurement/Instrument Screen															
Control	EGPRS Transmit Power							PDCH Parms							
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾							
	Minimum	Maximum		Minimum	Maximum			Traffic Band							
	25.60 dBm	26.87 dBm		26.17 dBm	26.42 dBm			PCS							
	Average	Std Dev		Average	Std Dev			Traffic Channel							
26.21 dBm	0.23 dBm		26.28 dBm	0.04 dBm			661								
	200 /200							Single							
	Active Cell Transferring							Sys Type: EGPRS							
								IntRef		Offset	R	T			
1 of 2															1 of 2


Measurement/Instrument Screen															
Control	EGPRS Transmit Power							PDCH Parms							
EGPRS Transmit Power Setup ▾	EP SK Burst Power			EP SK Est Carrier Power				Downlink Traffic Power ▾							
	Minimum	Maximum		Minimum	Maximum			Traffic Band							
	26.38 dBm	27.42 dBm		26.78 dBm	27.02 dBm			PCS							
	Average	Std Dev		Average	Std Dev			Traffic Channel							
26.84 dBm	0.19 dBm		26.91 dBm	0.05 dBm			810								
	200 /200							Single							
	Active Cell Transferring							Sys Type: EGPRS							
								IntRef		Offset	R	T			
1 of 2															1 of 2



Agilent

R T

Freq/Channel

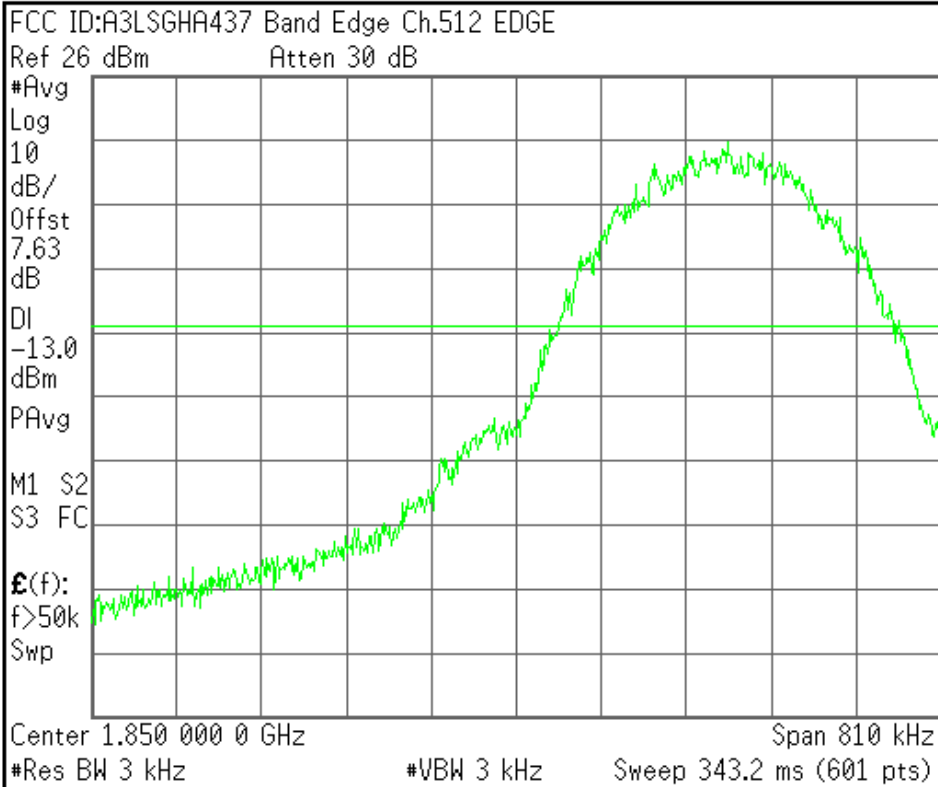


<b>Center Freq</b> 1.85000000 GHz
<b>Start Freq</b> 1.84959500 GHz
<b>Stop Freq</b> 1.85040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

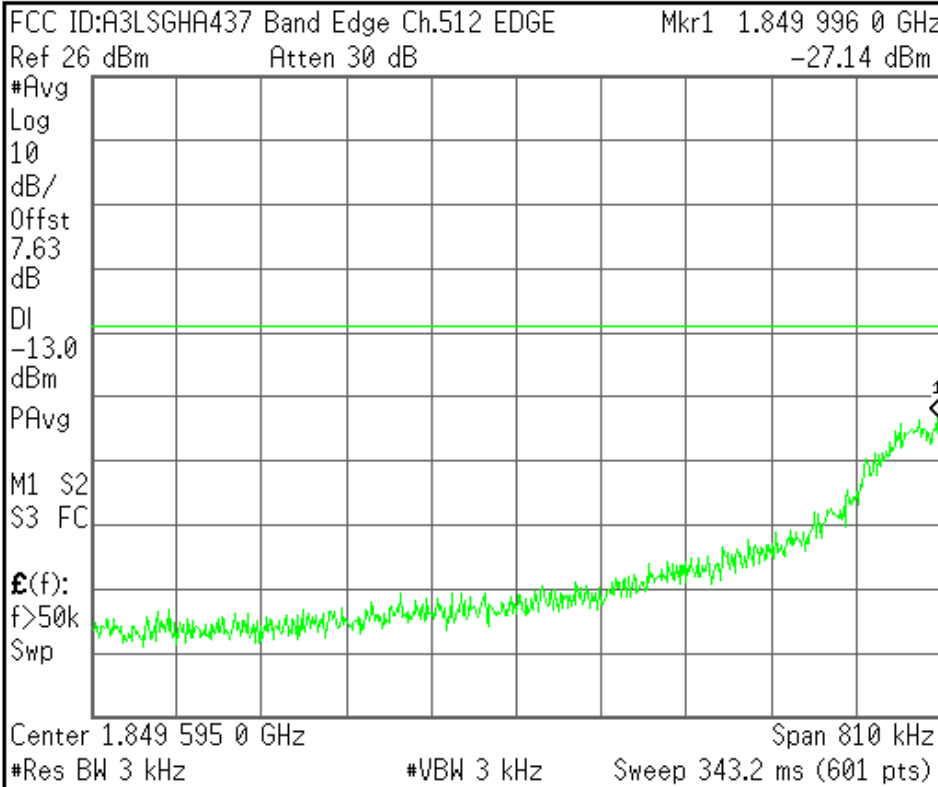


<b>Center Freq</b> 1.84959500 GHz
<b>Start Freq</b> 1.84919000 GHz
<b>Stop Freq</b> 1.85000000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

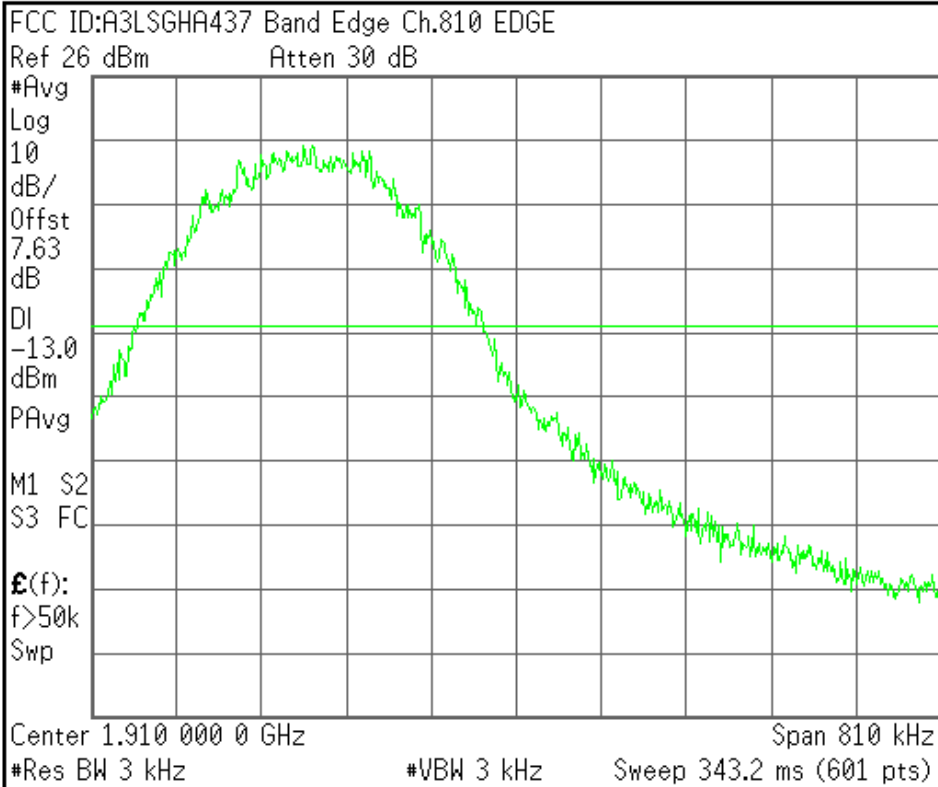


<b>Center Freq</b> 1.91000000 GHz
<b>Start Freq</b> 1.90959500 GHz
<b>Stop Freq</b> 1.91040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

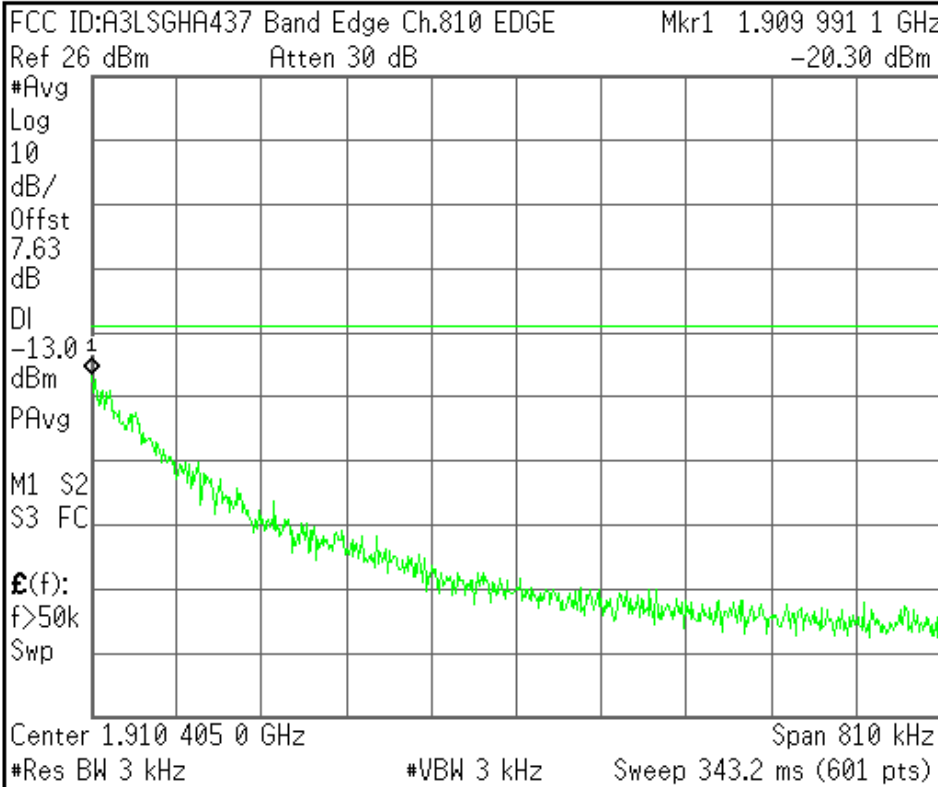

<b>Center Freq</b> 1.91040500 GHz
<b>Start Freq</b> 1.91000000 GHz
<b>Stop Freq</b> 1.91081000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved