



FCC PART 15.247

TEST REPORT

For

Brightway Innovation Intelligent Technology (Suzhou) Co., Ltd.

Building A2, Shangjinwan Headquarters Economic Park, No.2288, Wuzhong Avenue, Wuzhong Economic Development Zone, Suzhou Jiangsu P.R. China

FCC ID: 2A4GZ-NABE5

Report Type: Original Report	Product Name: IoT Device
Report Number: RKSA231222001-00B	
Report Date:	2024-06-07
Reviewed By:	Bard Liu 
Approved By:	Kyle Xu 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
TEST EQUIPMENT LIST	11
SUMMARY OF TEST RESULTS	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD	14
TEST SYSTEM SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
TEST RESULTS SUMMARY	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
TEST SYSTEM SETUP.....	16
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
TEST RESULTS SUMMARY	18
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
FCC §15.247(d) - BAND EDGE	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
FCC §15.247(e) - POWER SPECTRAL DENSITY	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
EUT PHOTOGRAPHS	23
TEST SETUP PHOTOGRAPHS	24
APPENDIX - TEST DATA.....	25

ENVIRONMENTAL CONDITIONS & TEST INFORMATION	25
AC LINE CONDUCTED EMISSIONS	26
SPURIOUS EMISSIONS.....	28
6 DB EMISSION BANDWIDTH	37
MAXIMUM CONDUCTED OUTPUT POWER.....	39
BAND EDGE.....	41
POWER SPECTRAL DENSITY	43

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA231222001-00B	R1V1	2024-06-07	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Brightway Innovation Intelligent Technology (Suzhou) Co., Ltd.
Tested Model:	NABE5-BL2
Product Name:	IoT Device
Power Supply:	DC 36V from DC power supply or DC 3.6V from battery
RF Function:	BLE (1Mbps)
Maximum Output Power:	7.72 dBm
Operating Band/Frequency:	2402-2480 MHz
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type	GFSK
Antenna Type:	PIFA Antenna
★Maximum Antenna Gain:	2.54 dBi

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA231222001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2023-12-22.)

Objective

This report is prepared for *Brightway Innovation Intelligent Technology (Suzhou) Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communications Commission rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emissions	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
18	2438	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

RF Test Tool: sscom

★Power level: Default


Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

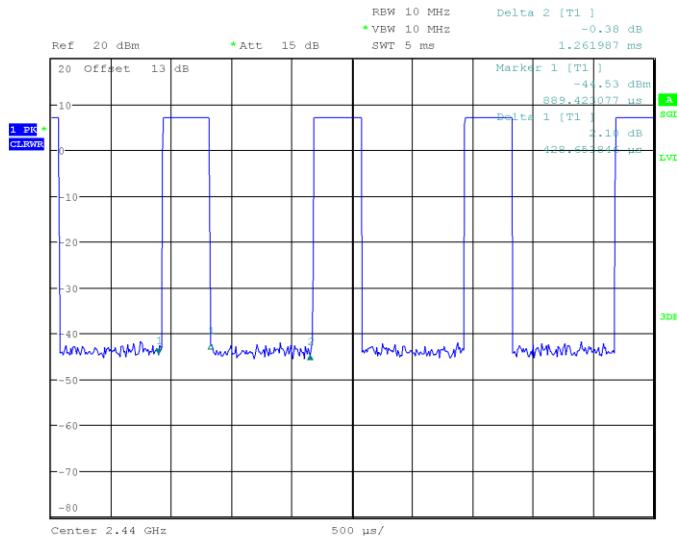Duty Cycle:**BLE (1Mbps): Middle Channel**

ProjectNo.:Rksa231222001 Tester:Bard Liu
Date: 11.APR.2024 19:31:45

Mode	Duty Cycle (%)	T _{on} (ms)	T _{on+off} (ms)	10log(1/x)
BLE (1Mbps)	33.99	0.429	2.33	4.69

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Shenzhen Zhaoxin Electronic Instrument Equipment Co., Ltd.	DC Source	PS-6005D	18P6005D10724
ZHAOXIN	DC Source	RXN-605D	/
Lenovo	Notebook	Y700P	PF2B7PL5

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable 1	1.0	DC Source	LISN/AC Source
Power Cable 2	1.5	EUT	DC Source
USB cable	0.3	EUT	Notebook
USB cable	8.0	EUT	Notebook

Block Diagram of Test Setup


For Conducted Emissions:

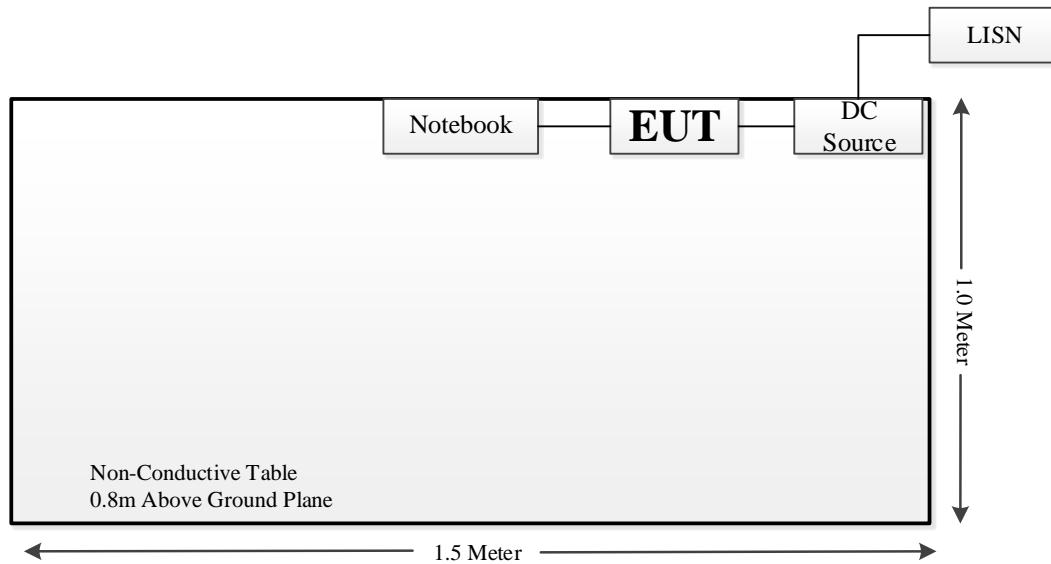

For Radiated Emissions (Below 1GHz):

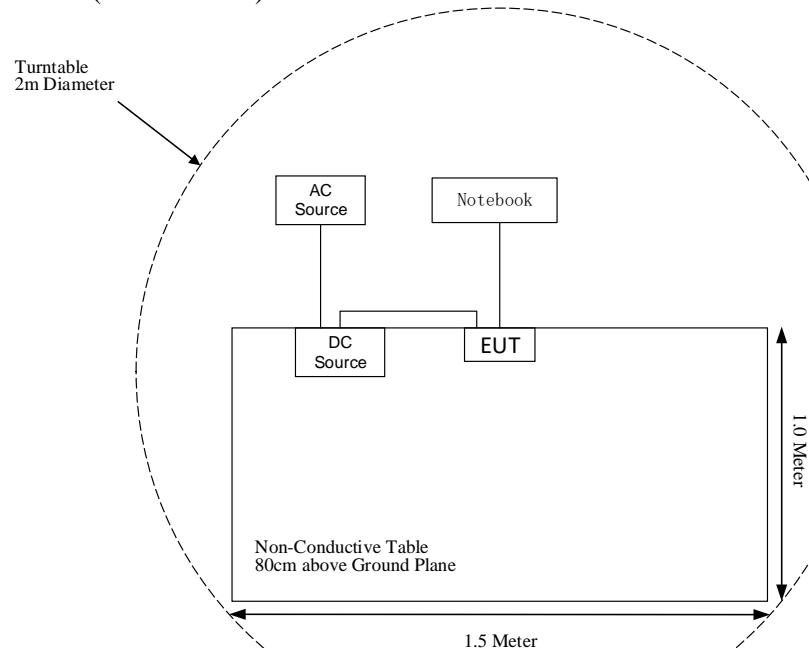

For Radiated Emissions (Above 1GHz):

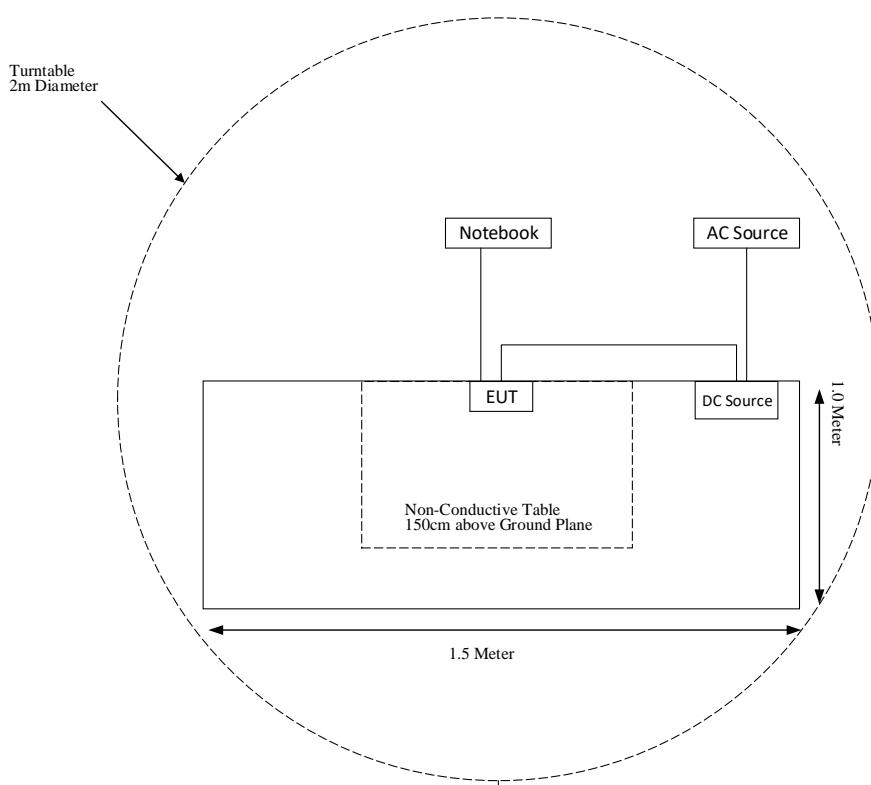

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2023-05-23	2024-05-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Narda	6dB Attenuator	7736	10690812-2-1	2023-11-11	2024-11-10
Sonoma Instrument	Pre-amplifier	310N	171205	2023-05-23	2024-05-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2023-05-23	2024-05-22
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2023-05-19	2024-05-18
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2023-12-02	2024-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2023-12-08	2024-12-07
A.H.Systems,inc	Amplifier	PAM-0118P	512	2023-05-23	2024-05-22
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2023-08-05	2024-08-04
Narda	Attenuator	10dB	010	2023-08-15	2024-08-14
SELECTOR	Amplifier	EM18G40G	60726	2023-05-23	2024-05-22
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-11	011	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-12	012	2023-05-23	2024-05-22
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2023-05-23	2024-05-22
Narda	Attenuator	10dB	010	2023-08-15	2024-08-14
Unknown	RF Cable	Unknown	C01	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	101746	2023-05-23	2024-05-22
Rohde & Schwarz	LISN	ENV216	101115	2023-05-23	2024-05-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	0357.8810.54	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2023-05-23	2024-05-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PIFA antenna for BLE, and the antenna gain is 2.54 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup

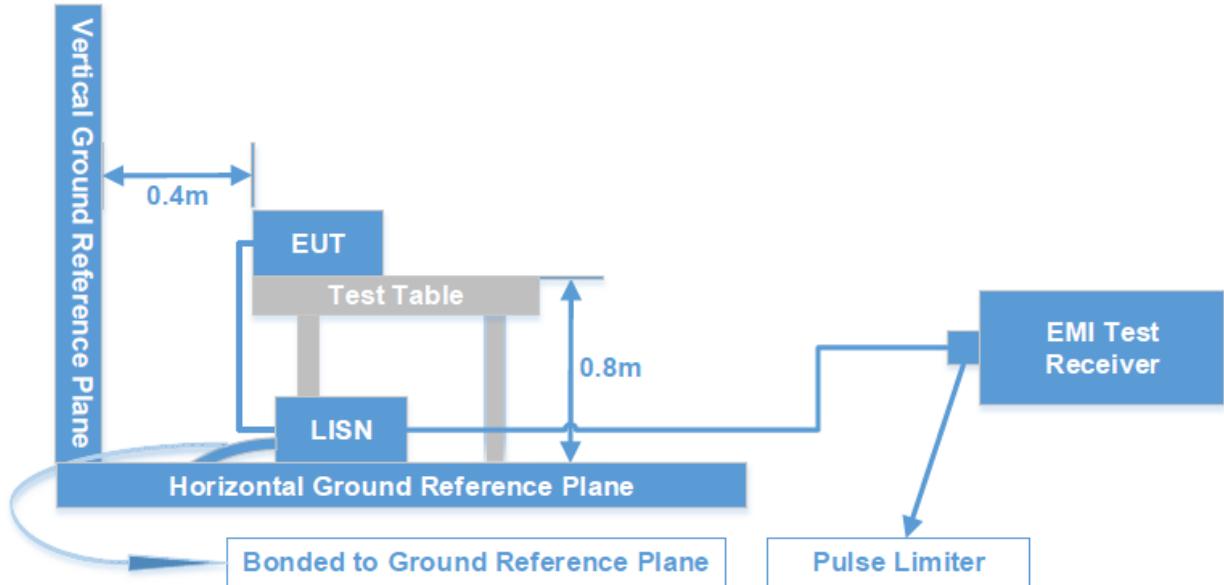

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz – 30 MHz	9 kHz	30 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

$$\text{Level (dB}\mu\text{V)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


Test System Setup

9 kHz - 30 MHz:

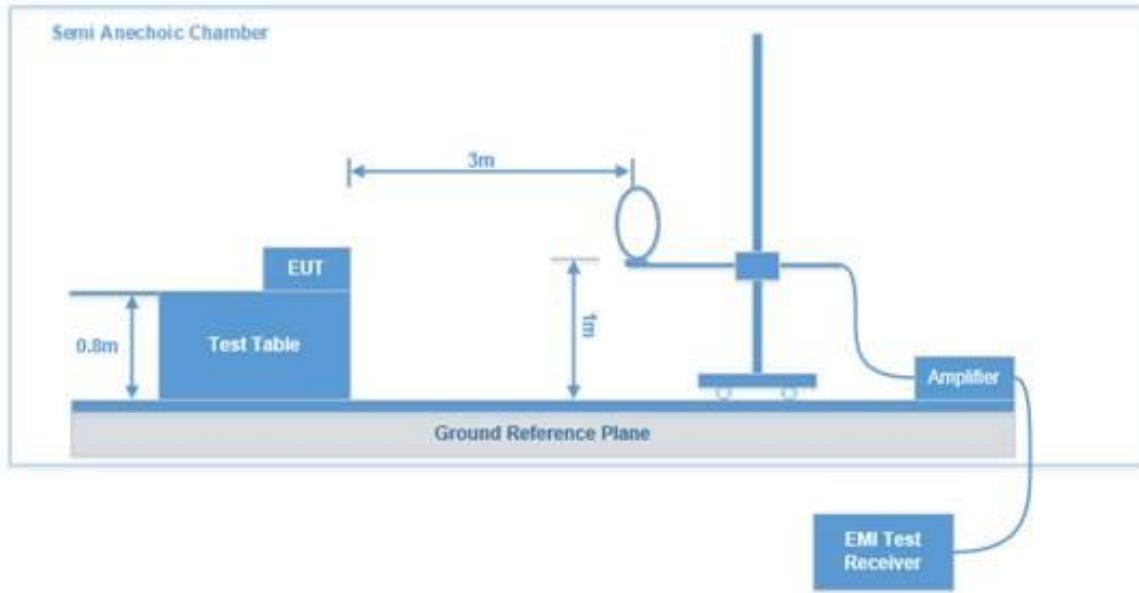

30 MHz - 1 GHz:

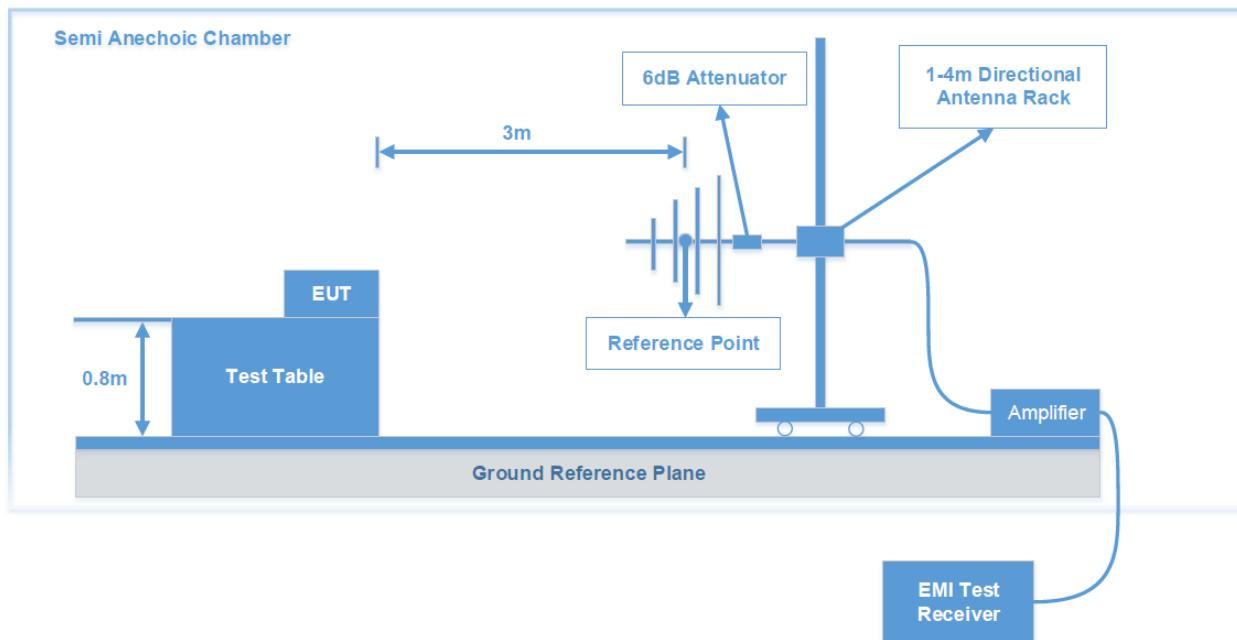

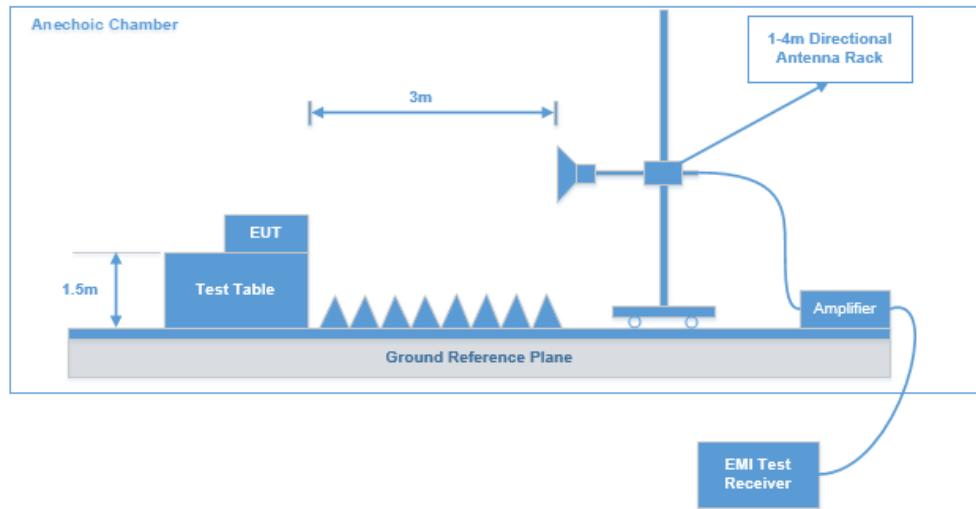Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V/m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Note: The QuasiPeak (dB μ V/m), MaxPeak (dB μ V/m), Average (dB μ V/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

Applicable Standard


Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: the offset= Attenuator (10dB) +Cable loss (3dB)



Test Data: See Appendix

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW \geq DTS bandwidth.
2. Set VBW $\geq 3 * \text{RBW}$.
3. Set span $\geq 3 * \text{RBW}$
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

Note: the offset= Attenuator (10dB) +Cable loss (3dB)



Test Data: See Appendix

FCC §15.247(d) - BAND EDGE

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Note: the offset= Attenuator (10dB) +Cable loss (3dB)



Test Data: See Appendix

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 * \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: the offset= Attenuator (10dB) +Cable loss (3dB)



Test Data: See Appendix

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B-EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT D - TEST SETUP PHOTOGRAPHS.

APPENDIX - TEST DATA**Environmental Conditions & Test Information**


Test Item:	AC LINE CONDUCTED EMISSIONS	SPURIOUS EMISSIONS			6 DB EMISSION BANDWIDTH
		9 kHz - 1 GHz	1 GHz - 18 GHz	18GHz-25GHz	
Test Date:	2024-03-12	2024-03-13	2024-03-11	2024-04-18	2024-04-11
Temperature:	16.1 °C	15.5 °C	20.3 °C	16.8 °C	17.5 °C
Relative Humidity:	50 %	45 %	52 %	48 %	50 %
ATM Pressure:	102.3 kPa	102.5 kPa	102.0 kPa	101.8 kPa	101.6 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Joe Zhang	Leah Li	Peter Wang	Peter Wang	Bard Liu

Test Item:	MAXIMUM CONDUCTED OUTPUT POWER	BAND EDGE	POWER SPECTRAL DENSITY	DUTY CYCLE
Test Date:	2024-04-11	2024-04-11	2024-04-11	2024-04-11
Temperature:	17.5 °C	17.5 °C	17.5 °C	17.5 °C
Relative Humidity:	50 %	50 %	50 %	50 %
ATM Pressure:	101.6 kPa	101.6 kPa	101.6 kPa	101.6 kPa
Test Result:	Pass	Pass	Pass	/
Test Engineer:	Bard Liu	Bard Liu	Bard Liu	Bard Liu

AC LINE CONDUCTED EMISSIONS

EUT operation mode: Transmitting in low channel (maximum output power)


Line

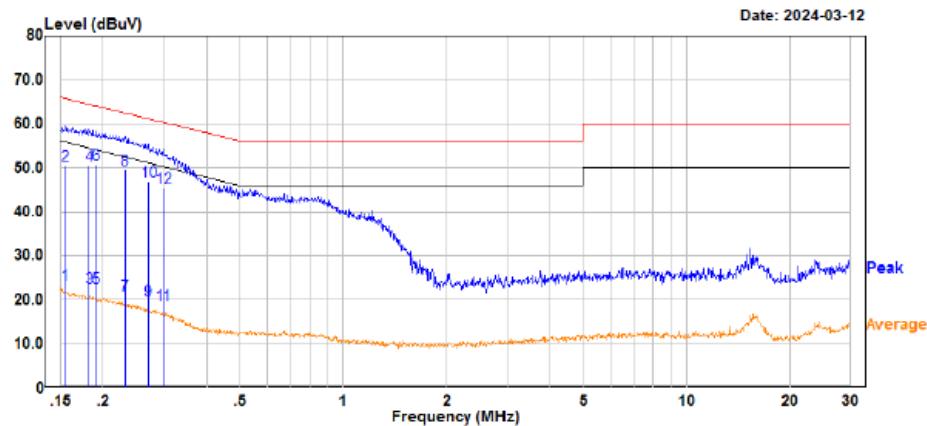

Trace: 1

Site : CE
 Condition : part 15.207
 : DET:Peak
 Project No. : Rksa231222001
 Model : NABE5-BL2
 Phase : L
 Voltage : AC 120V
 Mode : BLE 1M
 Test Equipment : ENV216, ESR
 Temperature : 16.1°C
 Humidity : 50%
 Atmospheric pressure: 102.3kPa
 Test Engineer : Joe Zhang

	Freq	Read Level	Factor	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	3.49	19.90	23.39	55.71	-32.32	Average
2	0.155	30.69	19.90	50.59	65.71	-15.12	QP
3	0.182	2.90	19.93	22.83	54.39	-31.56	Average
4	0.182	30.50	19.93	50.43	64.39	-13.96	QP
5	0.191	2.70	19.94	22.64	54.01	-31.37	Average
6	0.191	30.90	19.94	50.84	64.01	-13.17	QP
7	0.231	0.99	19.98	20.97	52.40	-31.43	Average
8	0.231	29.59	19.98	49.57	62.40	-12.83	QP
9	0.270	-0.19	19.99	19.80	51.11	-31.31	Average
10	0.270	26.91	19.99	46.90	61.11	-14.21	QP
11	0.298	-1.20	20.01	18.81	50.29	-31.48	Average
12	0.298	25.40	20.01	45.41	60.29	-14.88	QP

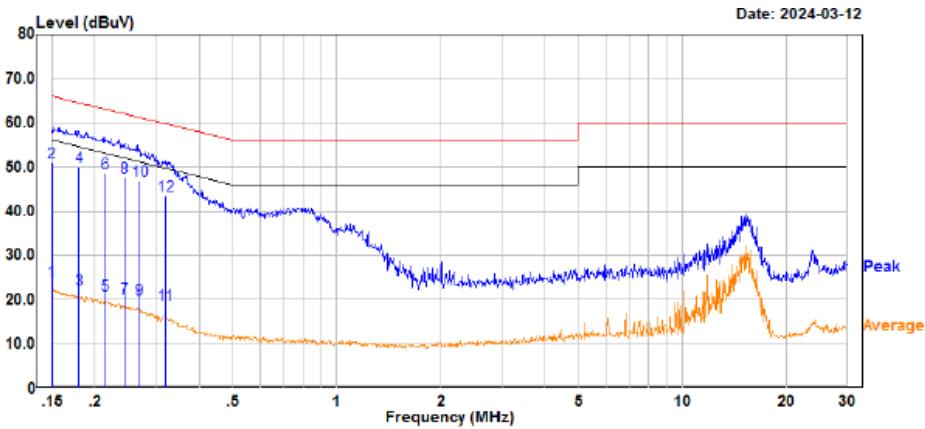Neutral

Site : CE
Condition : part 15.207
: DET:Peak
Project No. : RKSA231222001
Model : NABE5-BL2
Phase : N
Voltage : AC 120V
Mode : BLE 1M
Test Equipment : ENV216, ESR
Temperature : 16.1°C
Humidity : 50%
Atmospheric pressure: 102.3kPa
Test Engineer : Joe Zhang

	Freq	Read Level	Factor	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV		dBuV		dB	
1	0.150	4.20	19.89	24.09	56.00	-31.91	Average
2	0.150	31.20	19.89	51.09	66.00	-14.91	QP
3	0.179	2.29	19.93	22.22	54.51	-32.29	Average
4	0.179	29.99	19.93	49.92	64.51	-14.59	QP
5	0.214	1.18	19.96	21.06	53.06	-32.00	Average
6	0.214	28.70	19.96	48.66	63.06	-14.40	QP
7	0.243	0.48	19.98	20.38	51.98	-31.60	Average
8	0.243	27.60	19.98	47.58	61.98	-14.40	QP
9	0.269	0.01	19.99	20.00	51.16	-31.16	Average
10	0.269	26.91	19.99	46.90	61.16	-14.26	QP
11	0.318	-1.28	20.02	18.82	49.75	-30.93	Average
12	0.318	23.60	20.02	43.62	59.75	-16.13	QP

SPURIOUS EMISSIONS

Test Result: Compliant.

EUT operation mode: Transmitting

After pre-scan in the X, Y and Z axes of orientation, the worst case in X axes of orientation is below:

9 kHz - 30 MHz: (Transmitting in low channel (maximum output power))


The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.

30 MHz - 1 GHz:

Low Channel: 2402 MHz

Common Information

Project No:	RKSA231222001
EUT Model:	NABE5-BL2
Test Mode:	BLE 1M
Standard:	FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment:	ESCI, JB3, 310N
Temperature:	15.5°C
Humidity:	45%
Barometric Pressure:	102.5kPa
Test Engineer:	Leah Li
Test Date:	2024/3/13

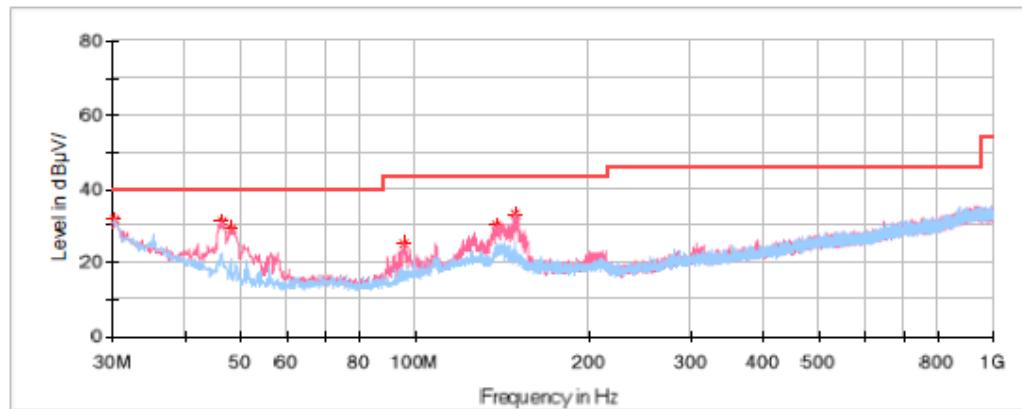


Critical Freqs

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.121250	31.57	40.00	8.43	H	-4.5
46.490000	30.95	40.00	9.05	V	-14.8
48.066250	29.08	40.00	10.92	V	-15.6
95.475000	25.24	43.50	18.26	V	-15.8
138.761250	30.13	43.50	13.37	V	-11.5
148.582500	33.20	43.50	10.30	V	-12.0

Middle Channel: 2440 MHz**Common Information**


Project No: RKSA231222001
EUT Model: NABE5-BL2
Test Mode: BLE 1M
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment: ESCI、JB3、310N
Temperature: 15.5°C
Humidity: 45%
Barometric Pressure: 102.5kPa
Test Engineer: Leah Li
Test Date: 2024/3/13

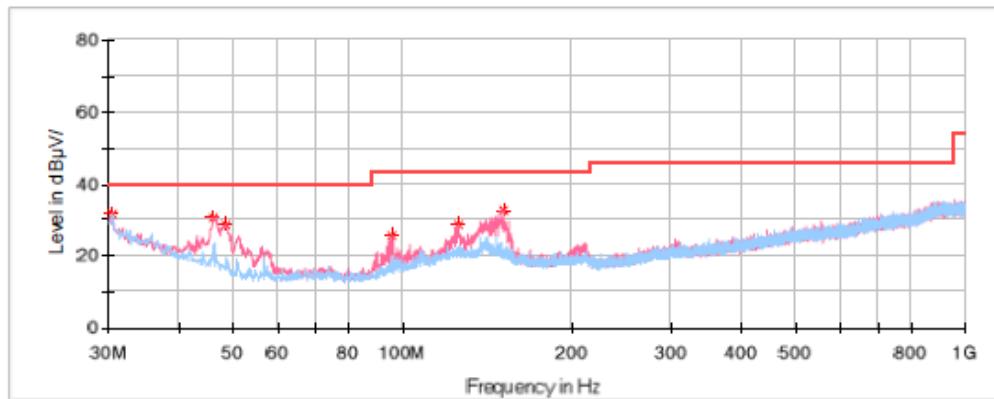**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.485000	31.50	40.00	8.50	H	-4.8
46.005000	30.81	40.00	9.19	V	-14.5
48.430000	28.58	40.00	11.42	V	-15.8
95.353750	25.59	43.50	17.91	V	-15.9
125.423750	28.66	43.50	14.84	V	-11.3
150.886250	32.70	43.50	10.80	V	-12.1

High Channel:2480 MHz**Common Information**


Project No: RKSA231222001
EUT Model: NABE5-BL2
Test Mode: BLE 1M
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment: ESCI, JB3, 310N
Temperature: 15.5°C
Humidity: 45%
Barometric Pressure: 102.5kPa
Test Engineer: Leah Li
Test Date: 2024/3/13

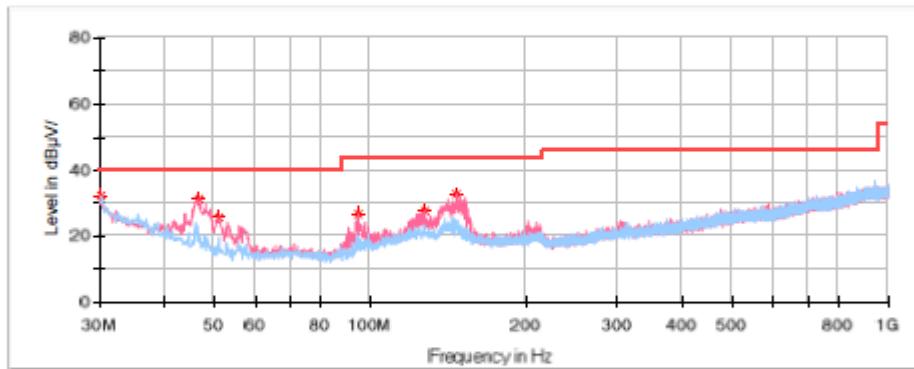**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
30.242500	32.32	40.00	7.68	H	-4.6
46.732500	31.07	40.00	8.93	V	-14.9
51.218750	25.45	40.00	14.55	V	-16.8
95.111250	26.45	43.50	17.05	V	-15.9
127.363750	27.74	43.50	15.76	V	-11.3
146.763750	32.46	43.50	11.04	V	-11.9

1 GHz - 18 GHz:**Low Channel: 2402 MHz****Common Information**

Project No: Rksa231222001
 EUT Model: NABE5-BL2
 Test Mode: BLE 1M
 Standard: FCC Part 15C
 Test Equipment: ESU40,3115,PAM-0118P
 Polarity: V+H
 Temperature: 20.3°C
 Humidity: 52%
 Atmospheric Pressure: 102.0kPa
 Test Engineer: Peter Wang
 Test Date: 2024/3/11

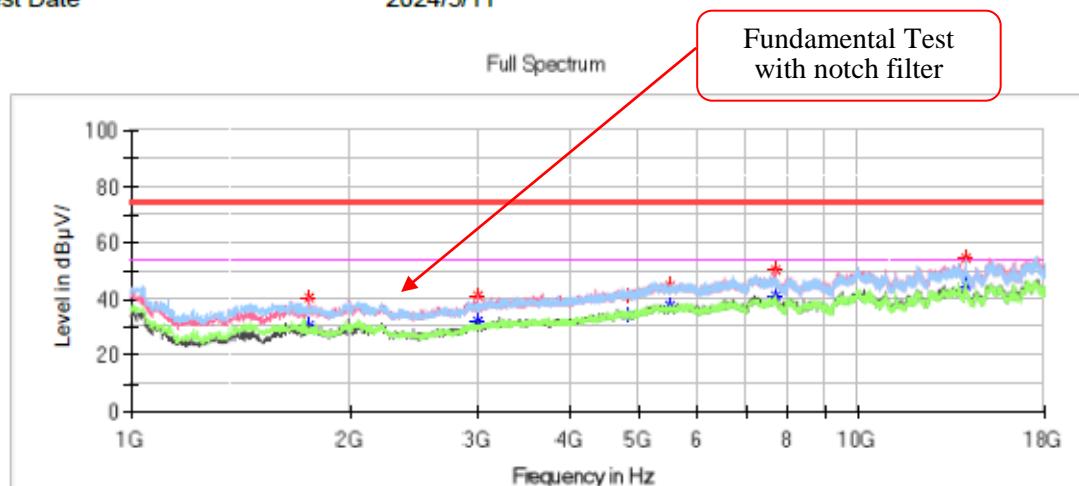
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1754.800000	40.76	---	74.00	33.24	V	-12.2
1754.800000	---	30.73	54.00	23.27	V	-12.2
2990.700000	---	32.28	54.00	21.72	V	-8.1
2990.700000	41.08	---	74.00	32.92	V	-8.1
4804.600000	41.51	---	74.00	32.49	V	-2.2
4804.600000	---	33.97	54.00	20.03	V	-2.2
5522.000000	44.69	---	74.00	29.31	H	0.8
5522.000000	---	37.88	54.00	16.12	H	0.8
7687.800000	---	41.10	54.00	12.90	V	4.1
7687.800000	50.05	---	74.00	23.95	V	4.1
14010.10000	---	45.00	54.00	9.00	V	10.5
14010.10000	54.24	---	74.00	19.76	V	10.5

Middle Channel: 2440 MHz**Common Information**

Project No: RKSA231222001
 EUT Model: NABE5-BL2
 Test Mode: BLE 1M
 Standard: FCC Part 15C
 Test Equipment: ESU40,3115,PAM-0118P
 Polarity: V+H
 Temperature: 20.3°C
 Humidity: 52%
 Atmospheric Pressure: 102.0kPa
 Test Engineer: Peter Wang
 Test Date: 2024/3/11

Fundamental Test with notch filter

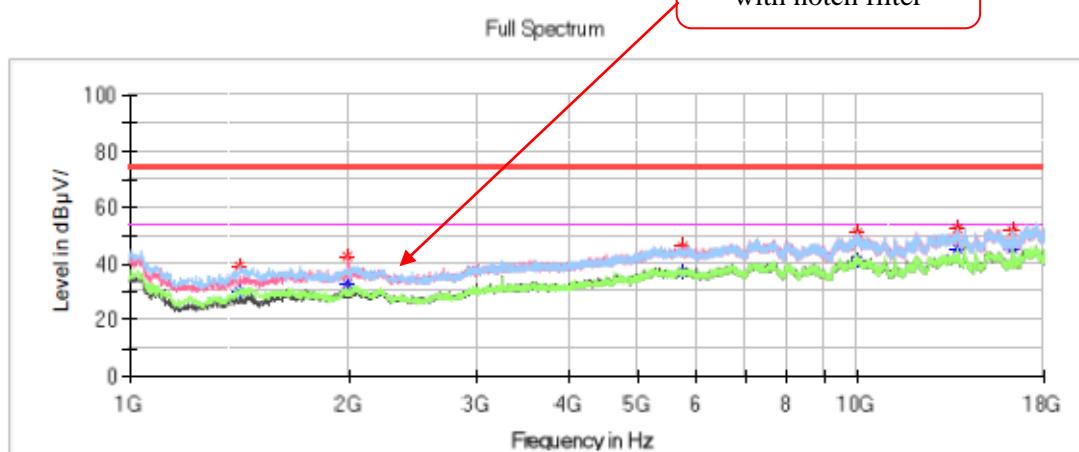
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1414.800000	39.04	---	74.00	34.96	H	-14.2
1414.800000	---	30.37	54.00	23.63	H	-14.2
1994.500000	---	32.81	54.00	21.19	V	-10.6
1994.500000	42.94	---	74.00	31.06	V	-10.6
5751.500000	---	37.33	54.00	16.67	H	0.5
5751.500000	46.04	---	74.00	27.96	H	0.5
9989.600000	---	41.47	54.00	12.53	H	7.8
9989.600000	50.97	---	74.00	23.03	H	7.8
13676.90000	52.22	---	74.00	21.78	V	10.8
13676.90000	---	45.20	54.00	8.80	V	10.8
16303.40000	51.52	---	74.00	22.48	V	9.7
16303.40000	---	45.74	54.00	8.26	V	9.7

High Channel: 2480 MHz**Common Information**

Project No: RKSA231222001
 EUT Model: NABE5-BL2
 Test Mode: BLE 1M
 Standard: FCC Part 15C
 Test Equipment: ESU40,3115,PAM-0118P
 Polarity: V+H
 Temperature: 20.3°C
 Humidity: 52%
 Atmospheric Pressure: 102.0kPa
 Test Engineer: Peter Wang
 Test Date: 2024/3/11


Fundamental Test
with notch filter

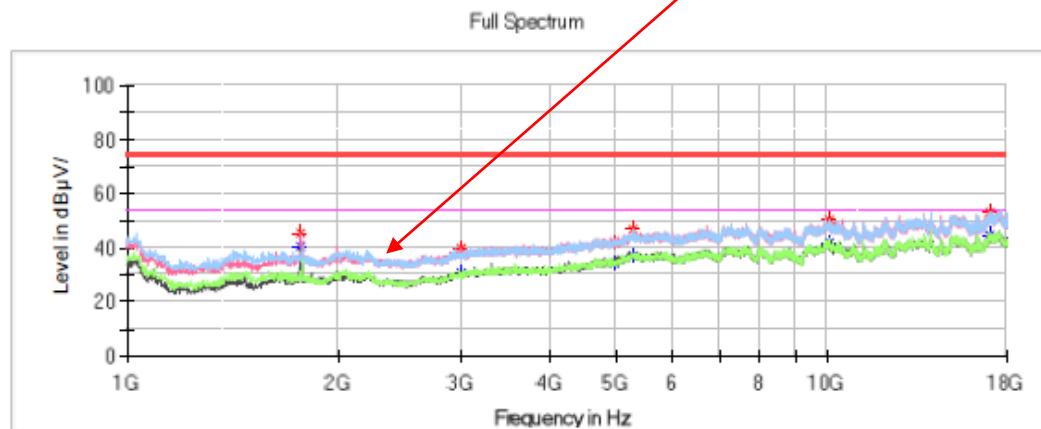**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1770.100000	--	40.82	54.00	13.18	V	-12.1
1770.100000	45.36	--	74.00	28.64	V	-12.1
2990.700000	--	30.95	54.00	23.05	V	-8.1
2990.700000	40.10	--	74.00	33.90	V	-8.1
4959.300000	--	34.50	54.00	19.50	H	-1.4
4959.300000	41.70	--	74.00	32.30	H	-1.4
5284.000000	--	37.14	54.00	16.86	H	0.0
5284.000000	46.56	--	74.00	27.44	H	0.0
10028.70000	--	41.97	54.00	12.03	H	7.8
10028.70000	50.54	--	74.00	23.46	H	7.8
17037.80000	--	44.44	54.00	9.56	V	12.4
17037.80000	53.17	--	74.00	20.83	V	12.4

Band Edge:**Left Side****Common Information**


Project No.: Rksa231222001
Test Mode: BLE 1M
Standard: FCC Part 15C
Test Engineer: Peter Wang

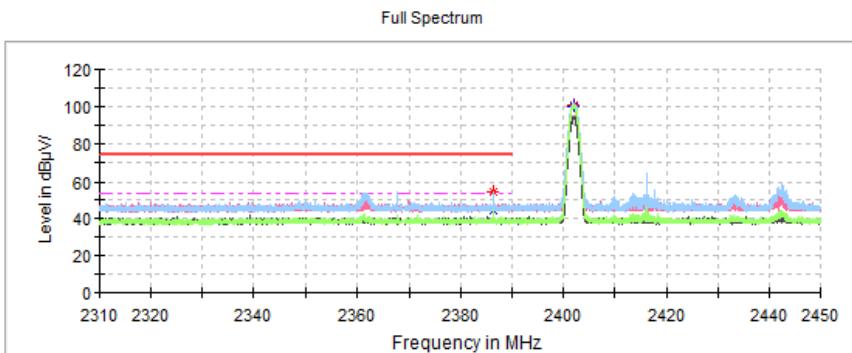**Critical_Freqs**



Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2386.468000	---	44.19	54.00	9.81	H	0.1
2386.468000	54.96	---	74.00	19.04	H	0.1
2402.078000	100.59	---	---	---	H	0.1
2402.078000	---	99.54	---	---	H	0.1

Right Side**Common Information**

Project No.: Rksa231222001
Test Mode: BLE 1M
Standard: FCC Part 15C
Test Engineer: Peter Wang

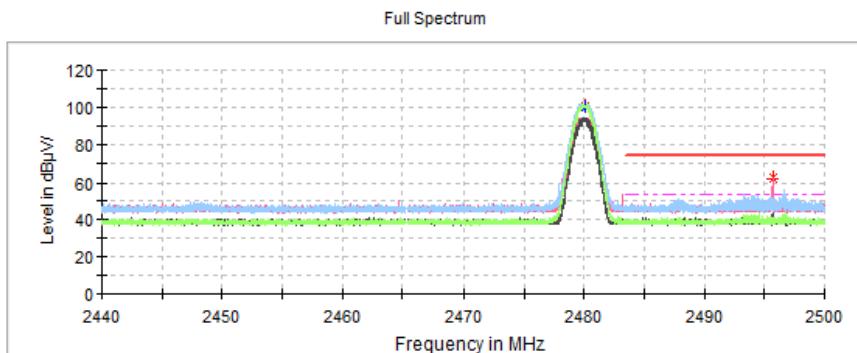**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2480.080000	100.96	---	---	---	H	0.2
2480.080000	---	99.84	---	---	H	0.2
2495.674000	---	47.95	54.00	6.05	V	0.2
2495.674000	62.36	---	74.00	11.64	V	0.2

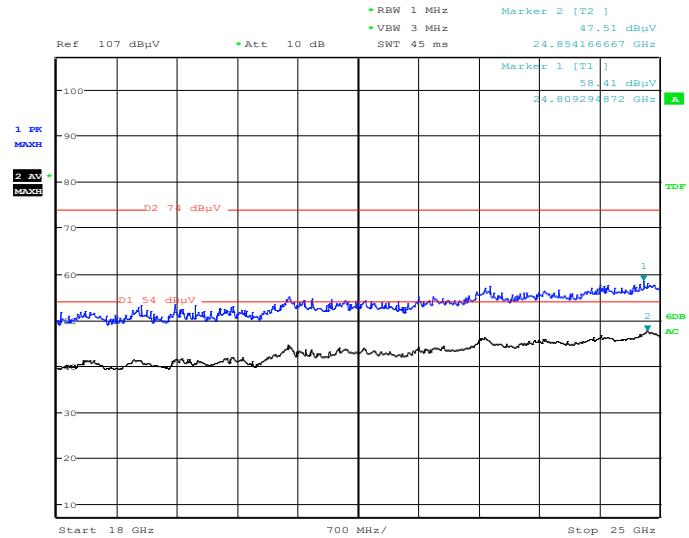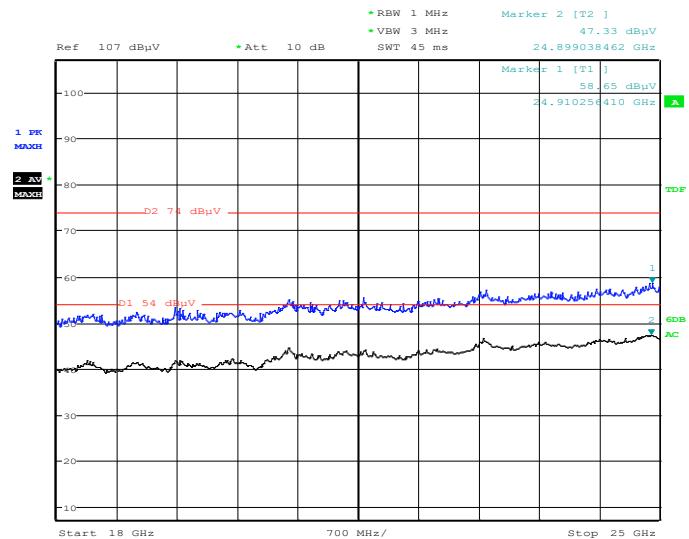
18 GHz - 25 GHz (low channel was worst):**Horizontal****Vertical**

Note: The test distance is 3m. The limit is 74dB μ V/m(Peak) and 54dB μ V/m(Average).

6 dB EMISSION BANDWIDTH


Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE (1Mbps)	Low	2402	0.676	≥0.5
	Middle	2440	0.672	≥0.5
	High	2480	0.672	≥0.5

Low Channel

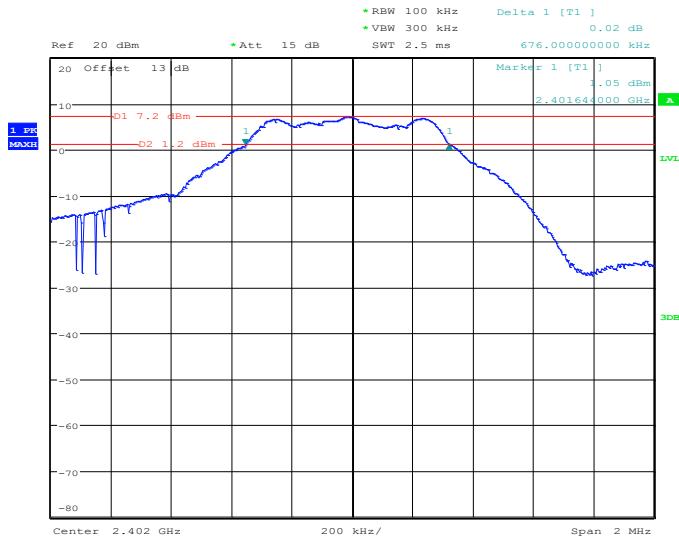


ProjectNo.:Rksa231222001 Tester:Bard Liu
Date: 11.APR.2024 19:26:34

Middle Channel

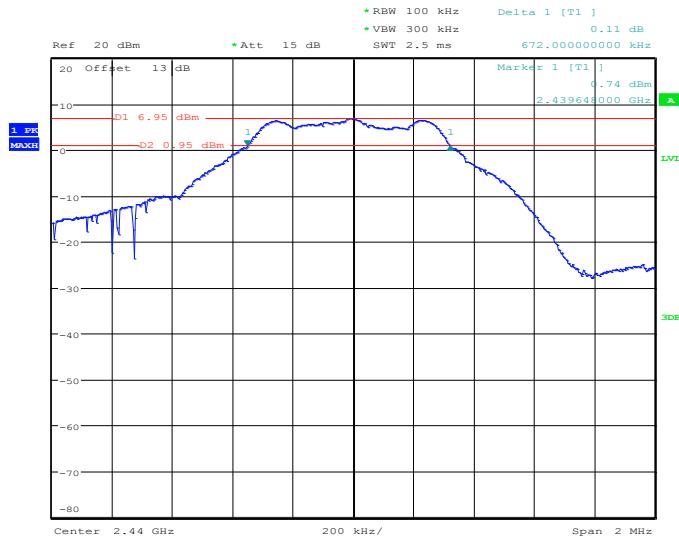

High Channel

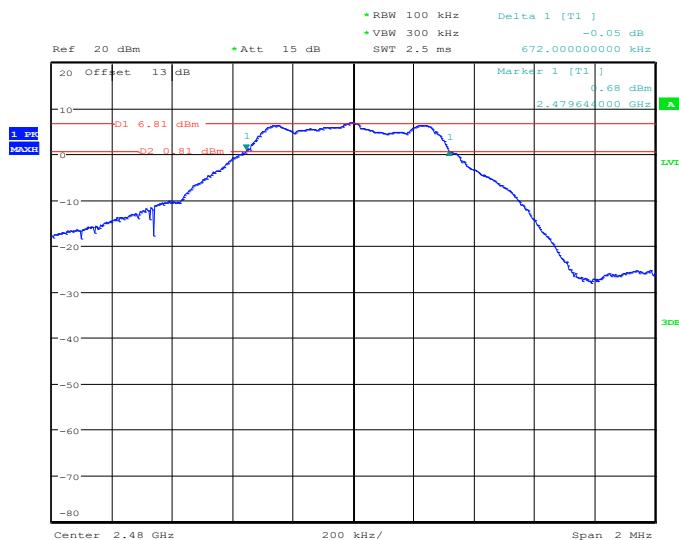


MAXIMUM CONDUCTED OUTPUT POWER

Test Result: Compliant.

EUT operation mode: Transmitting


Mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE (1Mbps)	Low	2402	7.72	30	Pass
	Middle	2440	7.43	30	Pass
	High	2480	7.32	30	Pass

Low Channel

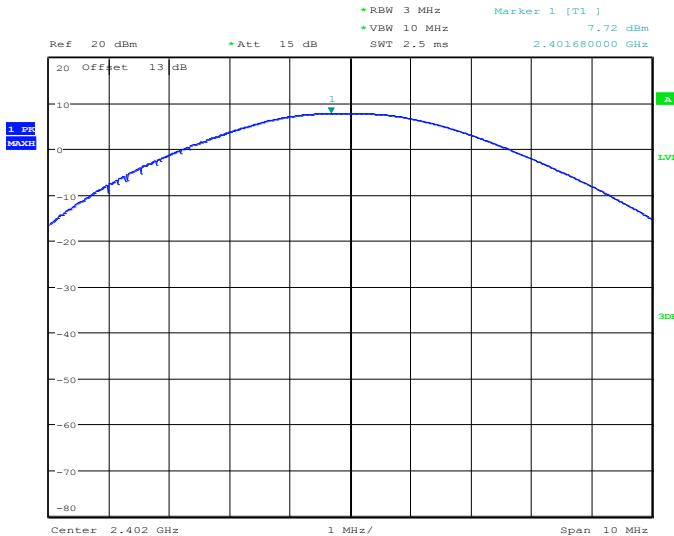


ProjectNo.:RKSA231222001 Tester:Bard Liu
Date: 11.APR.2024 19:27:02

Middle Channel

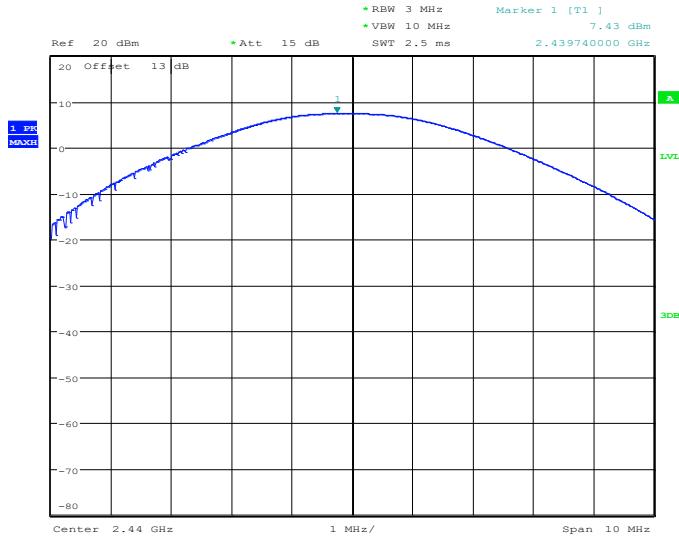

ProjectNo.:Rksa231222001 Tester:Bard Liu
Date: 11.APR.2024 19:24:48


High Channel

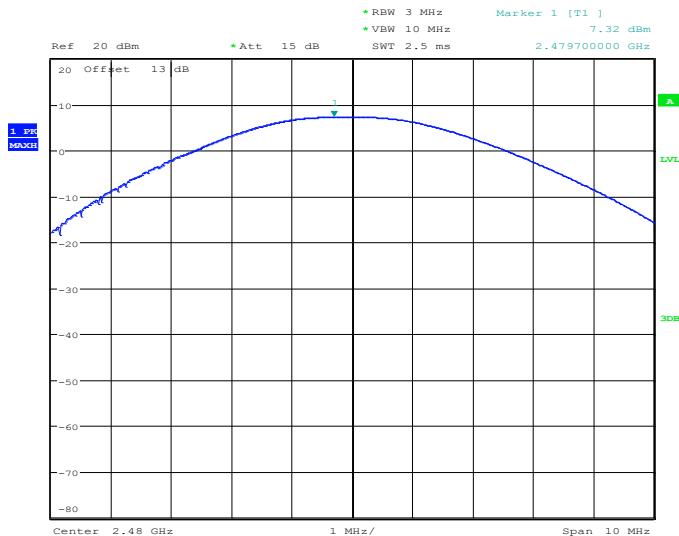


ProjectNo.:Rksa231222001 Tester:Bard Liu
Date: 11.APR.2024 19:22:04

BAND EDGE**Test Result:** Compliant.*EUT operation mode: Transmitting*

Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
BLE (1Mbps)	Low	2402	49.92	20
	High	2480	58.57	

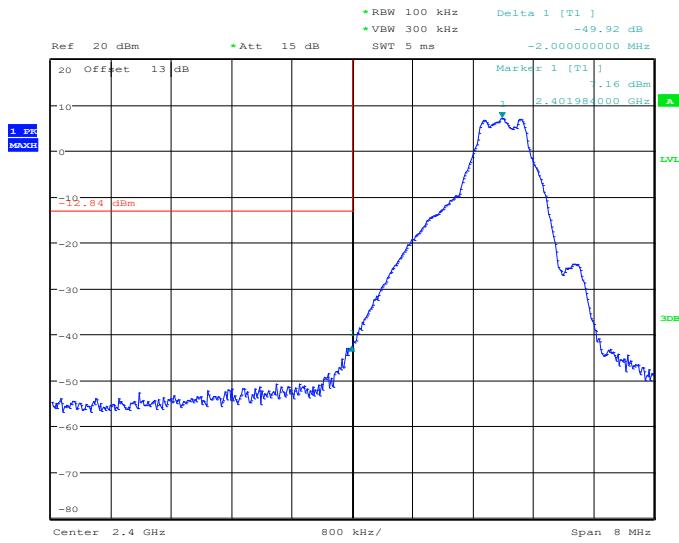
Left Side

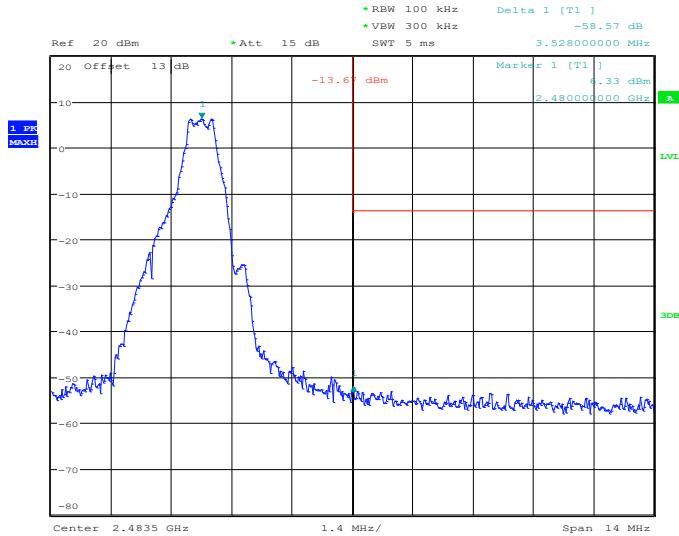Right Side


ProjectNo.:RKS231222001 Tester:Bard Liu
Date: 11.APR.2024 19:22:59

POWER SPECTRAL DENSITY**Test Result:** Compliant.*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE (1Mbps)	Low	2402	-7.11	≤8
	Middle	2440	-7.71	≤8
	High	2480	-7.61	≤8

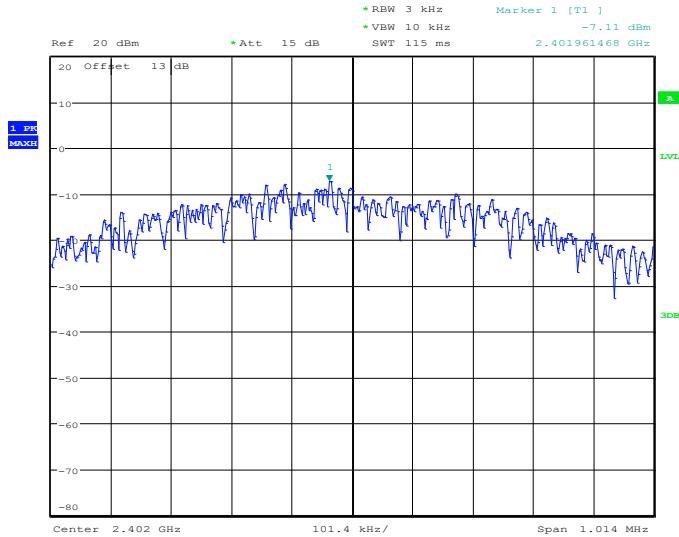Low Channel

ProjectNo.:RKS A231222001 Tester:Bard Liu
Date: 11.APR.2024 19:27:09

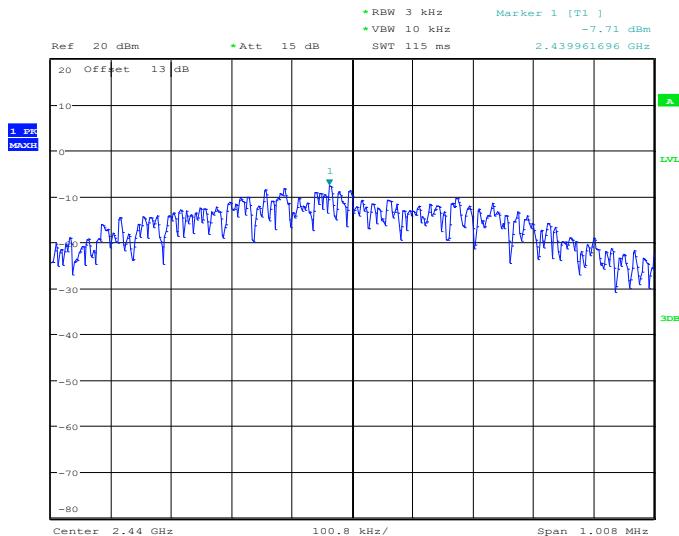Middle Channel

ProjectNo.:RKS A231222001 Tester:Bard Liu
Date: 11.APR.2024 19:24:56

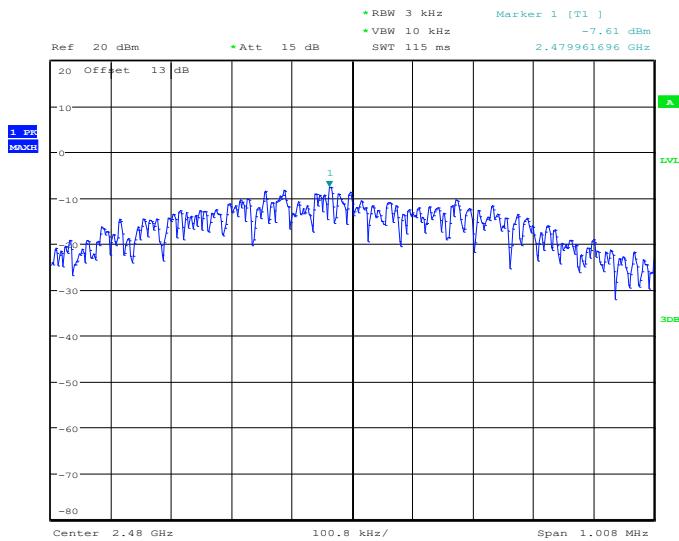High Channel

ProjectNo.:Rksa231222001 Tester:Bard Liu
Date: 11.APR.2024 19:22:15

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor k=2 with the 95.45% confidence interval.

******* END OF REPORT *******