



TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR19-SRF0016-A Page (1) of (279)</p>	
<p>1. Client</p> <ul style="list-style-type: none"> ◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2019-01-25 <p>2. Use of Report : -</p> <p>3. Name of Product and Model : Mobile Phone / SM-A105M/DS</p> <p>4. Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / Korea</p> <p>5. FCC ID : A3LSMA105M</p> <p>6. Date of Test : 2019-02-17 to 2019-03-04</p> <p>7. Test Standards : FCC Part 2 FCC Part 22 subpart H FCC Part 24 subpart E FCC Part 27 subpart C</p> <p>8. Test Results : Refer to the test result in the test report</p>		
Affirmation	<p>Tested by</p> <p>Name : Kwonse Kim (Signature)</p>	<p>Technical Manager</p> <p>Name : Bongok Ko (Signature)</p>
<p>2019-03-06</p>		
<p>KCTL Inc.</p> <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>		

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (2) of (279)

**Report revision history**

Date	Revision	Page No
2019-03-05	Initial report	-
2019-03-06	Updated a note	10

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	5
2.2.	Information about derivative model.....	5
2.3.	Frequency/channel operations.....	6
3.	Maximum ERP/EIRP power.....	8
4.	Summary of tests.....	10
5.	Measurement uncertainty	11
6.	Measurement results explanation example	12
7.	Test results	13
7.1.	99% Occupied Bandwidth & 26 dB Bandwidth.....	13
7.2.	Spurious Emissions at Antenna Terminal.....	59
7.3.	Band Edge Emissions at Antenna Terminal	120
7.4.	Peak to Average Power Ratio (PAPR)	142
7.5.	Frequency stability.....	159
7.6.	Radiated Power (ERP/EIRP)	166
7.7.	Radiated Spurious Emissions.....	175
8.	Geo-location mechanism	277
9.	Measurement equipment	279

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (4) of (279)

KCTL

1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,
Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,
Rep. of Korea
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-3327, G-198, C-3706, T-1849
Industry Canada Registration No. : 8035A-2
KOLAS No.: KT231

2. Device information

Equipment under test : Mobile Phone
Model : SM-A105M/DS
Derivative model : SM-A105M
Frequency range : Bluetooth(BDR/EDR/BLE), ANT+_2 402 MHz ~ 2 480 MHz
WIFI(802.11b/g/n20)_2 412 MHz ~ 2 472 MHz
LTE Band12_699.7 MHz ~ 715.3 MHz
LTE Band17_706.5 MHz ~ 713.5 MHz
LTE Band5_824.7 MHz ~ 848.3 MHz
LTE Band4_1 710.7 MHz ~ 1 754.3 MHz
LTE Band2_1 850.7 MHz ~ 1 909.3 MHz
GSM850_824.2 MHz ~ 848.8 MHz
GSM1900_1850.2 MHz ~ 1909.8 MHz
WCDMA850_826.4 MHz ~ 846.6 MHz
WCDMA1700_1 712.4 MHz ~ 1 752.6 MHz
WCDMA1900_1 852.4 MHz ~ 1 907.6 MHz
Modulation technique : Bluetooth(BDR/EDR)_ GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE), ANT+_GFSK
WIFI(802.11b/g/n20)_DSSS, OFDM
LTE_QPSK, 16QAM
GSM_GMSK, 8-PSK
WCDMA_QPSK

Number of channels : Bluetooth(BDR/EDR)_79ch
 Bluetooth(BLE)_40ch
 ANT+_79ch
 WIFI(802.11b/g/n20)_13ch
 Power source : DC 3.85 V
 Antenna specification : Internal Antenna
 Software version : A105M.001
 Hardware version : REV1.0
 Test device serial No. : R38M10M74PH, R38M10J386Z, R38M10J383Y
 Operation temperature : -30 °C ~ 50 °C

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Earphone information	ALMUS	EHS61ASFWE	-	-
Travel Adapter	Samsung Electronics Co., Ltd.	ETA0U84IWE	R37K9RC6DD3RC3	AC 100-240V 50-60 Hz, 0.15A
Micro USB Data Cable	Samsung Electronics Co., Ltd.	ECB-DU68WE	-	-

2.2. Information about derivative model

The difference between basic model and derivative models is:

For SM-A105M, it does not support Dual-Sim card, support Single-Sim card and changed from Dual SIM tray to Single SIM tray.

2.3. Frequency/channel operations

This device contains the following capabilities:

Bluetooth(BDR/EDR/BLE), ANT+, WIFI(802.11b/g/n20)

LTE Band12, LTE Band17, LTE Band4, LTE Band 5, LTE Band 2

GSM850, GSM1900

WCDMA850, WCDMA1700, WCDMA1900

LTE Band12

Ch.	Frequency (MHz)
23017	699.7
23095	707.5
23173	715.3

Table 2.3.1. 1.4M BW

Ch.	Frequency (MHz)
23025	700.5
23095	707.5
23165	714.5

Table 2.3.2. 3M BW

Ch.	Frequency (MHz)
23035	701.5
23095	707.5
23155	713.5

Table 2.3.3. 5M BW

Ch.	Frequency (MHz)
23060	704.0
23095	707.5
23130	711.0

Table 2.3.4. 10M BW

LTE Band17

Ch.	Frequency (MHz)
23755	706.5
23790	710.0
23825	713.5

Table 2.3.5. 5M BW

Ch.	Frequency (MHz)
23780	709.0
23790	710.0
23800	711.0

Table 2.3.6. 10M BW

LTE Band4

Ch.	Frequency (MHz)
19957	1 710.7
20175	1 732.5
20393	1 754.3

Table 2.3.7. 1.4M BW

Ch.	Frequency (MHz)
19965	1 711.5
20175	1 732.5
20385	1 753.5

Table 2.3.8. 3M BW

Ch.	Frequency (MHz)
19975	1 712.5
20175	1 732.5
20375	1 752.5

Table 2.3.9. 5M BW

Ch.	Frequency (MHz)
20000	1 715.0
20175	1 732.5
20350	1 750.0

Table 2.3.10. 10M BW

Ch.	Frequency (MHz)
20025	1 717.5
20175	1 732.5
20325	1 747.5

Table 2.3.11. 15M BW

Ch.	Frequency (MHz)
20050	1 720.0
20175	1 732.5
20300	1 745.0

Table 2.3.12. 20M BW

LTE Band5

Ch.	Frequency (MHz)
20407	824.7
20525	836.5
20643	848.3

Table 2.3.13. 1.4M BW

Ch.	Frequency (MHz)
20415	825.5
20525	836.5
20635	847.5

Table 2.3.14. 3M BW

Ch.	Frequency (MHz)
20425	826.5
20525	836.5
20625	846.5

Table 2.3.15. 5M BW

Ch.	Frequency (MHz)
20450	829.0
20525	836.5
20600	844.0

Table 2.3.16. 10M BW

LTE Band2

Ch.	Frequency (MHz)
18607	1 850.7
18900	1 880.0
19193	1 909.3

Table 2.3.17. 1.4M BW

Ch.	Frequency (MHz)
18615	1 851.5
18900	1 880.0
19185	1 908.5

Table 2.3.18. 3M BW

Ch.	Frequency (MHz)
18625	1 852.5
18900	1 880.0
19175	1 907.5

Table 2.3.19. 5M BW

Ch.	Frequency (MHz)
18650	1 855.0
18900	1 880.0
19150	1 905.0

Table 2.3.20. 10M BW

Ch.	Frequency (MHz)
18675	1 857.5
18900	1 880.0
19125	1 902.5

Table 2.3.21. 15M BW

Ch.	Frequency (MHz)
18700	1 860.0
18900	1 880.0
19100	1 900.0

Table 2.3.22. 20M BW

3. Maximum ERP/EIRP power**LTE Band12/17**

Mode	Tx frequency (MHz)	Emission designator	ERP	
			Max. power (dBm)	Max. power (W)
LTE Band12	699.7 ~ 715.3	1M10G7D	22.17	0.165
LTE Band12		1M10W7D	19.88	0.097
LTE Band12	700.5 ~ 714.5	2M72G7D	20.99	0.126
LTE Band12		2M71W7D	19.72	0.094
LTE Band12/17	701.5 ~ 713.5	4M56G7D	21.01	0.126
LTE Band12/17		4M57W7D	19.71	0.094
LTE Band12/17	704.0 ~ 711.0	9M06G7D	20.91	0.123
LTE Band12/17		9M08W7D	19.90	0.098

LTE Band5

Mode	Tx frequency (MHz)	Emission designator	ERP	
			Max. power (dBm)	Max. power (W)
LTE Band5	824.7 ~ 848.3	1M11G7D	22.67	0.185
LTE Band5		1M11W7D	20.90	0.123
LTE Band5	825.5 ~ 847.5	2M71G7D	22.56	0.180
LTE Band5		2M72W7D	20.35	0.108
LTE Band5	826.5 ~ 846.5	4M55G7D	22.62	0.183
LTE Band5		4M56W7D	20.28	0.107
LTE Band5	829.0 ~ 844.0	9M03G7D	22.58	0.181
LTE Band5		9M05W7D	21.40	0.138

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (9) of (279)

**LTE Band4**

Mode	Tx frequency (MHz)	Emission designator	EIRP	
			Max. power (dBm)	Max. power (W)
LTE Band4	1 710.7 ~ 1 754.3	1M10G7D	21.39	0.138
LTE Band4		1M11W7D	21.21	0.132
LTE Band4	1 711.5 ~ 1 753.5	2M71G7D	19.29	0.085
LTE Band4		2M70W7D	18.84	0.077
LTE Band4	1 712.5 ~ 1 752.5	4M55G7D	19.48	0.089
LTE Band4		4M54W7D	18.77	0.075
LTE Band4	1 715.0 ~ 1 750.0	9M03G7D	20.55	0.114
LTE Band4		9M01W7D	19.18	0.083
LTE Band4	1 717.5 ~ 1 747.5	13M6G7D	20.38	0.109
LTE Band4		13M5W7D	19.47	0.089
LTE Band4	1 720.0 ~ 1 745.0	18M1G7D	20.42	0.110
LTE Band4		18M2W7D	19.19	0.083

LTE Band2

Mode	Tx frequency (MHz)	Emission designator	EIRP	
			Max. power (dBm)	Max. power (W)
LTE Band2	1 850.7 ~ 1 909.3	1M11G7D	21.64	0.146
LTE Band2		1M11W7D	20.62	0.115
LTE Band2	1 851.5 ~ 1 908.5	2M71G7D	21.60	0.145
LTE Band2		2M72W7D	20.31	0.107
LTE Band2	1 852.5 ~ 1 907.5	4M55G7D	21.85	0.153
LTE Band2		4M56W7D	20.62	0.115
LTE Band2	1 855.0 ~ 1 905.0	9M03G7D	21.96	0.157
LTE Band2		9M05W7D	20.84	0.121
LTE Band2	1 857.5 ~ 1 902.5	13M6G7D	22.10	0.162
LTE Band2		13M5W7D	20.86	0.122
LTE Band2	1 860.0 ~ 1 900.0	18M1G7D	21.78	0.151
LTE Band2		18M2W7D	20.80	0.120

4. Summary of tests

FCC Part section(s)	Parameter	Test results
2.1046 22.913(a)(5) 24.232(c)	Conducted Output Power	N/A ^{Note1)}
2.1049	Occupied Bandwidth & 26 dB Bandwidth	Pass
2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h) 27.53(m)(4)	Band Edge Emissions at Antenna Terminal	Pass
	Spurious Emissions at Antenna Terminal	Pass
22.913(d) 24.232(d) 27.53(d)(5)	Peak to Average Power Ratio	Pass
2.1055 22.355 24.235 27.54	Frequency stability	Pass
22.913(a)(5) 24.232(c) 27.50(c)(10) 27.50(d)(4) 27.50(h)(2)	Effective Radiated Power & Equivalent Isotropic Radiated Power	Pass
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h) 27.53(m)(4)	Radiated Spurious Emissions	Pass

Notes:

1. Please refer to the conducted power of SAR test report.
2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
3. The fundamental of the EUT was tested in three orthogonal orientations X, Y and Z and in all possible test configurations and positioning.
4. The test procedure(s) in this report were performed in accordance as following.
 - ◆ ANSI C63.26-2015
 - ◆ ANSI/TIA-603-E-2016
 - ◆ KDB 971168 D01 v03r01
5. Per evaluation report, all of the data contained herein is reused from the reference FCC ID: A3LSMA105F report.
The reuse bands as following:
LTE Band 2/5
6. The test was fully perform for LTE Band 4/12/17.

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty(\pm dB)	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.28 dB
	30 MHz ~ 1 GHz	3.68 dB
	Above 1 GHz	5.72 dB



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	16.61	8 000	18.19
50	16.62	9 000	18.33
100	16.64	10 000	18.51
200	16.70	11 000	18.56
300	16.72	12 000	18.77
400	16.76	13 000	19.08
500	16.79	14 000	19.18
600	16.83	15 000	19.04
700	16.84	16 000	19.07
800	16.86	17 000	18.73
900	16.90	18 000	17.68
1 000	17.09	19 000	18.33
1 700	17.11	20 000	19.21
1 800	17.15	21 000	19.53
1 900	17.16	22 000	20.20
2 000	17.20	23 000	20.98
2 100	17.21	24 0 00	20.31
2 500	17.26	25 000	19.62
2 600	17.30	26 000	19.09
2 700	17.31	26 500	19.59
3 000	17.35	27 000	19.45
4 000	17.46	28 000	19.00
5 000	17.59	29 000	19.23
6 000	17.74	30 000	18.77
7 000	18.04		


Note.

Offset(dB) = RF cable loss(dB) + Divider (dB) + Attenuator (dB)

7. Test results

7.1. 99% Occupied Bandwidth & 26 dB Bandwidth

Test setup

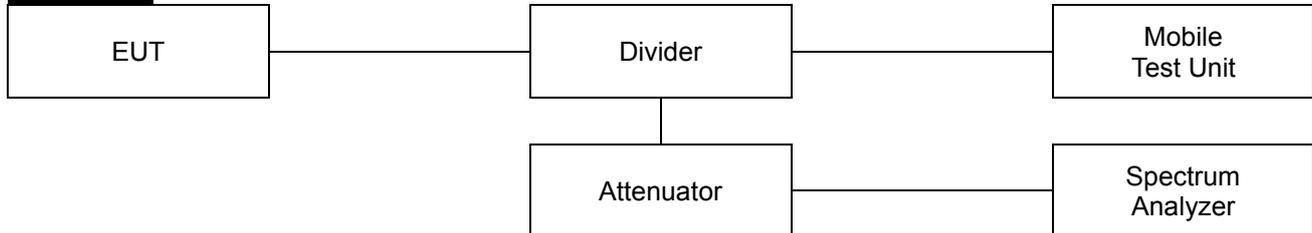

Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Test procedure

971168 D01 v03r01 – Section 4.2 and 4.3
ANSI C63.26-2015 – Section 5.4.3 and 5.4.4

Test settings

26dB Bandwidth

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- Determine the reference value by either of the following:
 - Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- If the reference value was determined using an unmodulated carrier, turn the EUT

modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).

- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- j) The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

99% Occupied Bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Notes:

1. All path loss of frequency range was investigated and compensated to spectrum analyzer as TDF function. Please refer to the page 12.
2. The EUT was setup to maximum output power as its lowest and highest channel with all bandwidth, Modulation.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (15) of (279)

**Test results**

Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 12	1.4	699.7	QPSK	1.35	1.10
			16QAM	1.37	1.11
		707.5	QPSK	1.35	1.10
			16QAM	1.33	1.10
		715.3	QPSK	1.34	1.10
			16QAM	1.33	1.10
	3	700.5	QPSK	3.11	2.71
			16QAM	3.10	2.71
		707.5	QPSK	3.15	2.72
			16QAM	3.13	2.71
		714.5	QPSK	3.09	2.71
			16QAM	3.09	2.72

Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 12/17	5	701.5	QPSK	5.34	4.51
			16QAM	5.37	4.54
		707.5	QPSK	5.40	4.56
			16QAM	5.52	4.57
		713.5	QPSK	5.45	4.53
			16QAM	5.28	4.53
	10	704.0	QPSK	10.21	9.01
			16QAM	10.29	9.01
		707.5	QPSK	10.61	9.06
			16QAM	10.61	9.08
		711.0	QPSK	10.37	9.01
			16QAM	10.42	9.03

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (16) of (279)

KCTL

Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 4	1.4	1 710.7	QPSK	1.38	1.10
			16QAM	1.36	1.11
		1 732.5	QPSK	1.39	1.11
			16QAM	1.43	1.11
		1 754.3	QPSK	1.38	1.10
			16QAM	1.40	1.11
	3	1 711.5	QPSK	3.16	2.72
			16QAM	3.11	2.70
		1 732.5	QPSK	3.24	2.73
			16QAM	3.15	2.72
		1 753.5	QPSK	3.18	2.71
			16QAM	3.15	2.71
	5	1 712.5	QPSK	5.47	4.55
			16QAM	5.31	4.55
		1 732.5	QPSK	5.59	4.55
			16QAM	5.51	4.56
		1 715.0	QPSK	5.51	4.56
			16QAM	5.50	4.54
	10	1 715.0	QPSK	10.44	9.03
			16QAM	10.37	9.01
		1 732.5	QPSK	10.71	9.04
			16QAM	10.51	9.03
		1 750.0	QPSK	10.44	9.02
			16QAM	10.49	9.03
	15	1 717.5	QPSK	15.55	13.53
			16QAM	15.47	13.53
		1 732.5	QPSK	15.47	13.57
			16QAM	15.36	13.52
		1 747.5	QPSK	15.73	13.55
			16QAM	15.58	13.58
20	1 720.0	QPSK	20.28	18.07	
		16QAM	20.28	18.00	
	1 732.5	QPSK	20.33	18.06	
		16QAM	20.28	18.06	
	1 745.0	QPSK	20.43	18.15	
		16QAM	20.18	18.17	

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (17) of (279)



Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 5	1.4	824.7	QPSK	1.34	1.10
			16QAM	1.35	1.11
		836.5	QPSK	1.35	1.11
			16QAM	1.34	1.10
		848.3	QPSK	1.37	1.10
			16QAM	1.36	1.10
	3	825.5	QPSK	3.10	2.71
			16QAM	3.15	2.72
		836.5	QPSK	3.09	2.71
			16QAM	3.12	2.71
		847.5	QPSK	3.12	2.71
			16QAM	3.12	2.72
	5	826.5	QPSK	5.41	4.55
			16QAM	5.43	4.56
		836.5	QPSK	5.40	4.53
			16QAM	5.46	4.53
		846.5	QPSK	5.43	4.54
			16QAM	5.41	4.54
	10	829.0	QPSK	10.46	9.02
			16QAM	10.44	9.05
		836.5	QPSK	10.37	9.01
			16QAM	10.44	9.02
		844.0	QPSK	10.59	9.03
			16QAM	10.44	9.02

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A

Page (18) of (279)



Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 2	1.4	1 850.7	QPSK	1.37	1.10
			16QAM	1.34	1.10
		1 880.0	QPSK	1.39	1.10
			16QAM	1.37	1.10
		1 909.3	QPSK	1.40	1.12
			16QAM	1.39	1.11
	3	1 851.5	QPSK	3.12	2.71
			16QAM	3.12	2.71
		1 880.0	QPSK	3.13	2.72
			16QAM	3.12	2.71
		1 908.5	QPSK	3.21	2.71
			16QAM	3.15	2.71
	5	1 852.5	QPSK	5.43	4.54
			16QAM	5.40	4.55
		1 880.0	QPSK	5.64	4.55
			16QAM	5.48	4.54
		1 907.5	QPSK	5.57	4.56
			16QAM	5.52	4.55
	10	1 855.0	QPSK	10.42	9.03
			16QAM	10.29	9.01
		1 880.0	QPSK	10.49	9.06
			16QAM	10.59	9.03
		1 905.0	QPSK	10.59	9.06
			16QAM	10.51	9.06
	15	1 857.5	QPSK	15.55	13.53
			16QAM	15.44	13.49
		1 880.0	QPSK	15.55	13.57
			16QAM	15.44	13.52
		1 902.5	QPSK	15.29	13.53
			16QAM	15.29	13.54
20	1 860.0	QPSK	20.33	18.05	
		16QAM	20.33	18.03	
	1 880.0	QPSK	20.63	18.13	
		16QAM	20.43	18.15	
	1 900.0	QPSK	19.98	18.03	
		16QAM	19.93	17.94	

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (19) of (279)




26dB Bandwidth

Test mode: LTE Band12


1.4M BW / QPSK / Low ch.

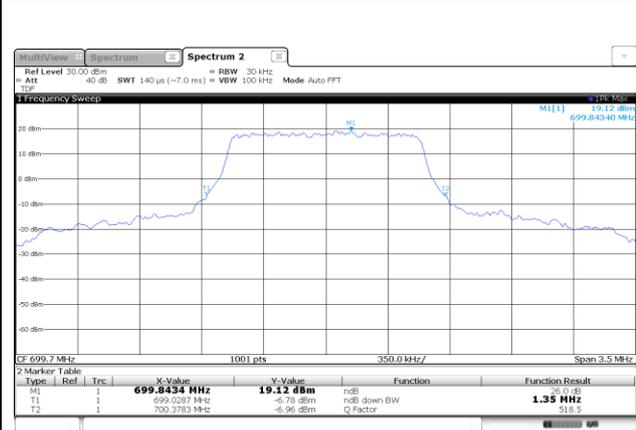


1.4M BW / 16QAM / Low ch.

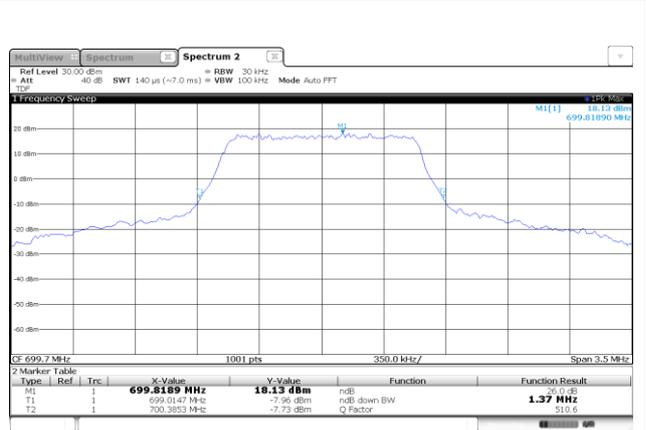


1.4M BW / QPSK / Mid ch.

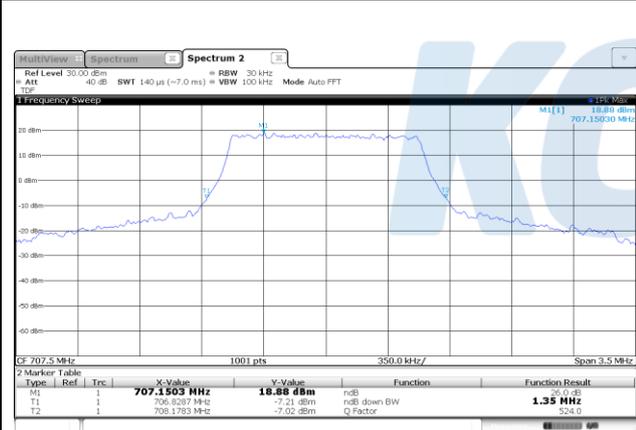


1.4M BW / 16QAM / Mid ch.

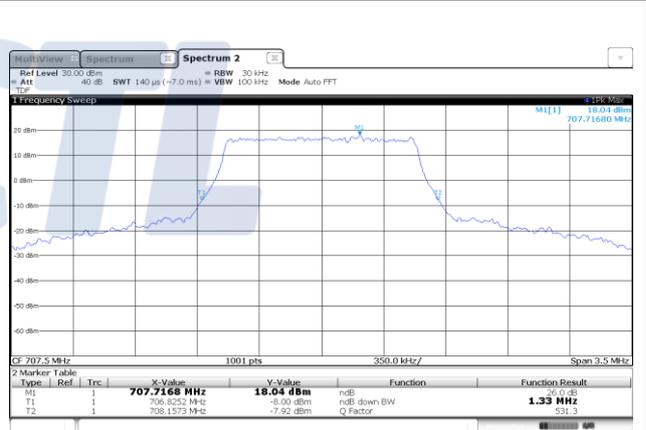

1.4M BW / QPSK / High ch.

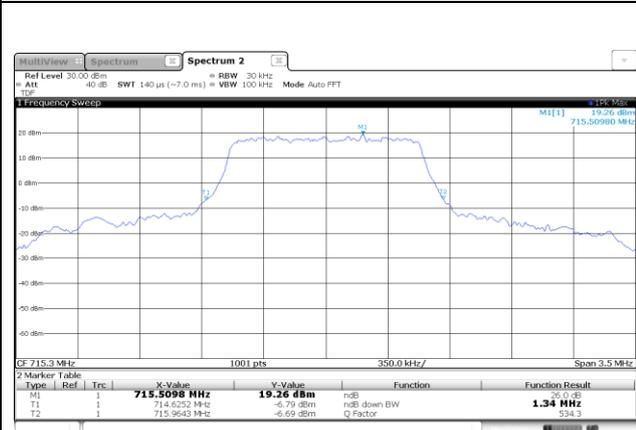

1.4M BW / 16QAM / High ch.

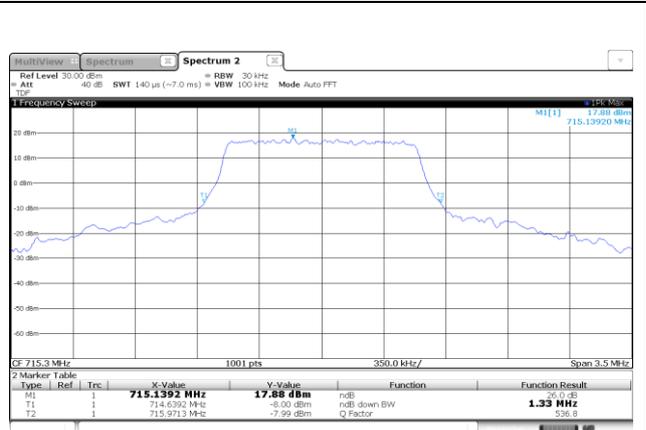

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (20) of (279)




3M BW / QPSK / Low ch.

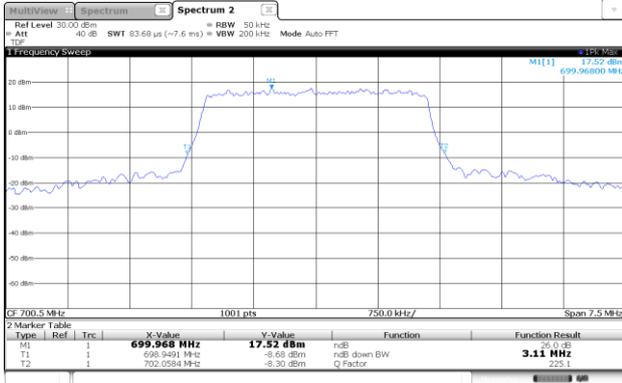

3M BW / 16QAM / Low ch.

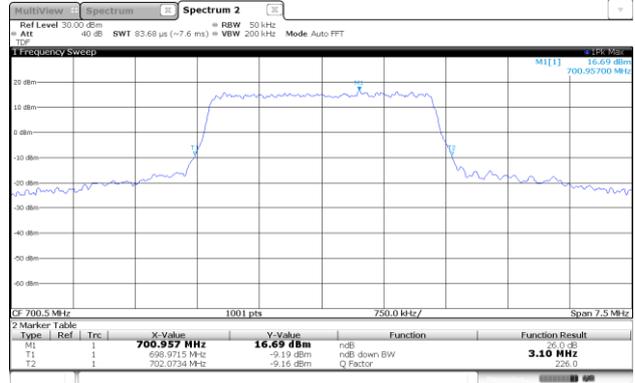


3M BW / QPSK / Mid ch.

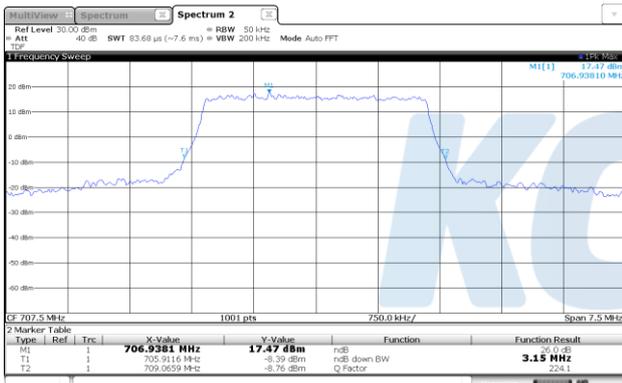


3M BW / 16QAM / Mid ch.



3M BW / QPSK / High ch.

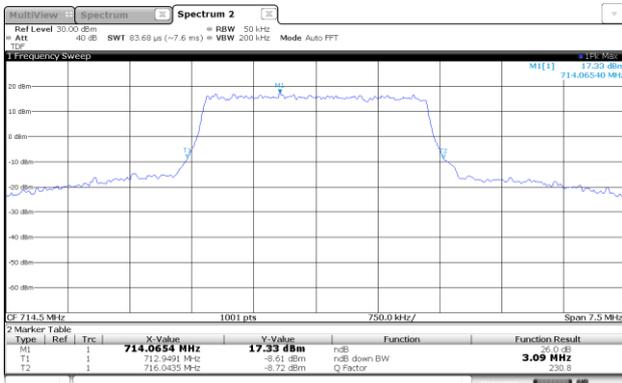

3M BW / 16QAM / High ch.

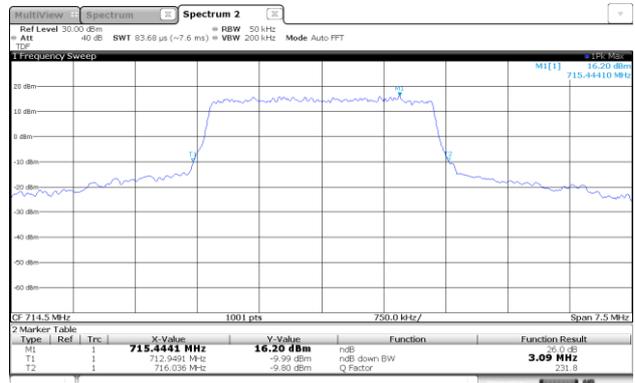

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0016-A

Page (21) of (279)




Test mode: LTE Band12/17


5M BW / QPSK / Low ch.

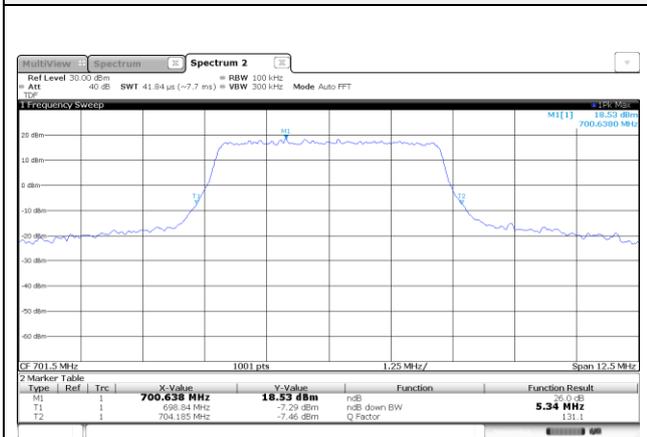


5M BW / 16QAM / Low ch.

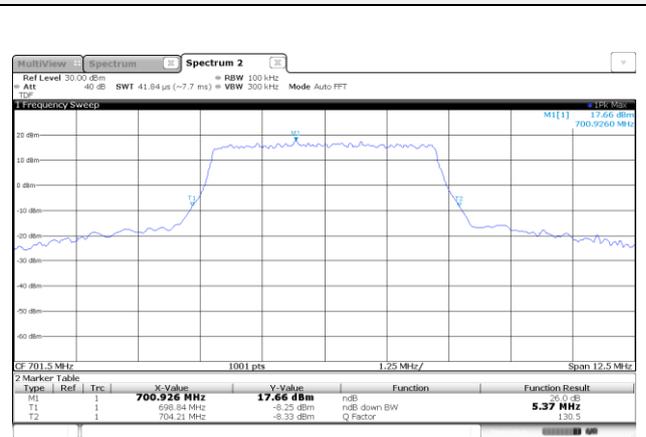


5M BW / QPSK / Mid ch.

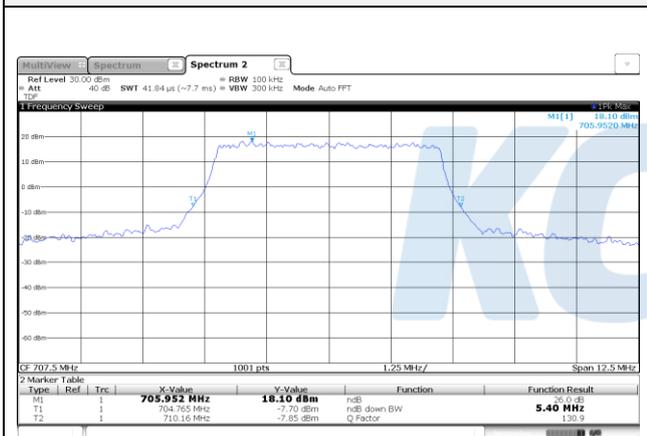


5M BW / 16QAM / Mid ch.

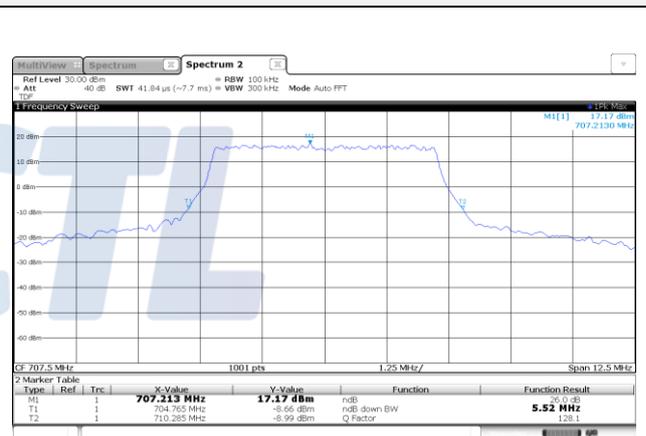

5M BW / QPSK / High ch.

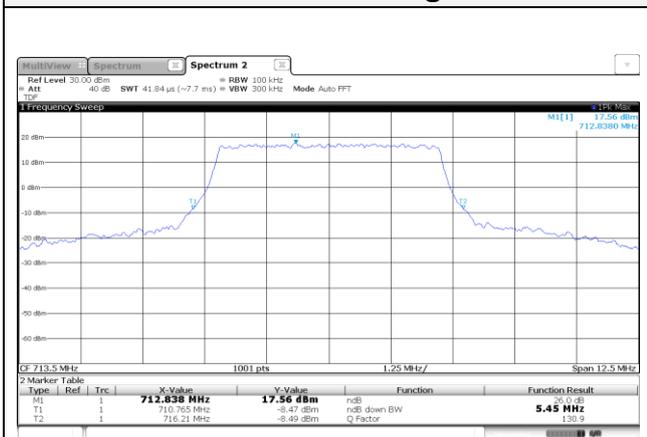

5M BW / 16QAM / High ch.

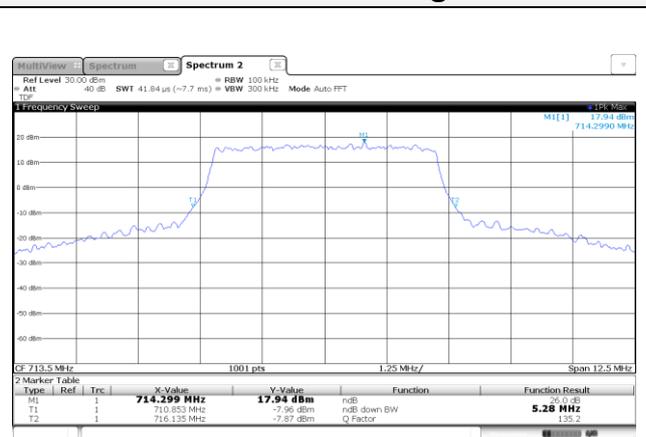

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (22) of (279)




10M BW / QPSK / Low ch.

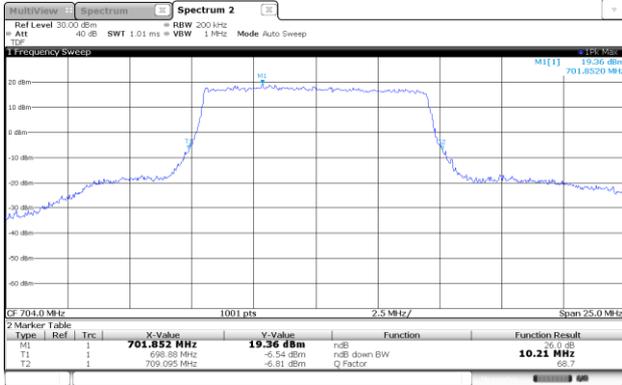


10M BW / 16QAM / Low ch.

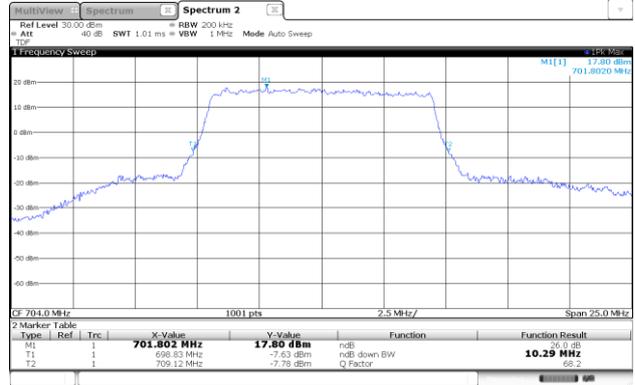


10M BW / QPSK / Mid ch.

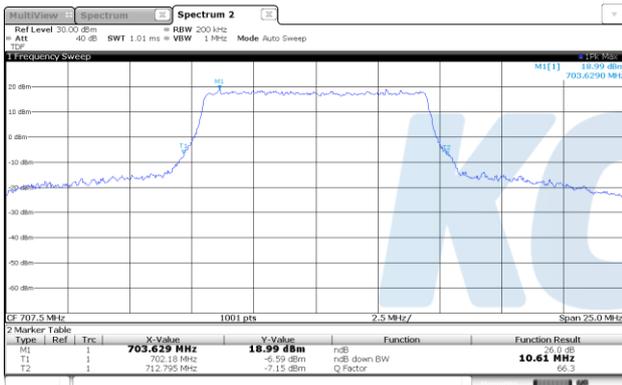


10M BW / 16QAM / Mid ch.

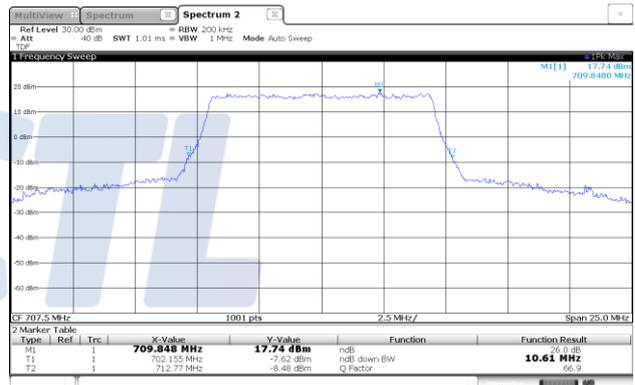

10M BW / QPSK / High ch.

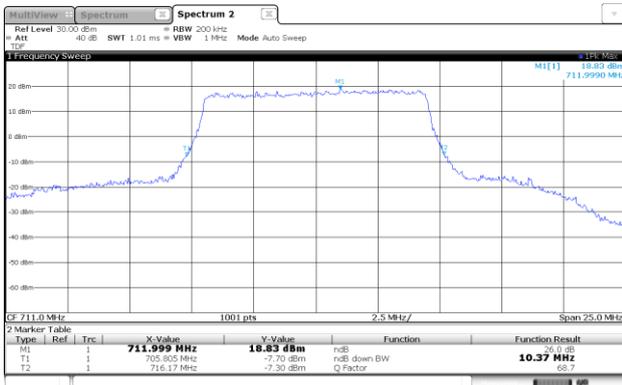


10M BW / 16QAM / High ch.

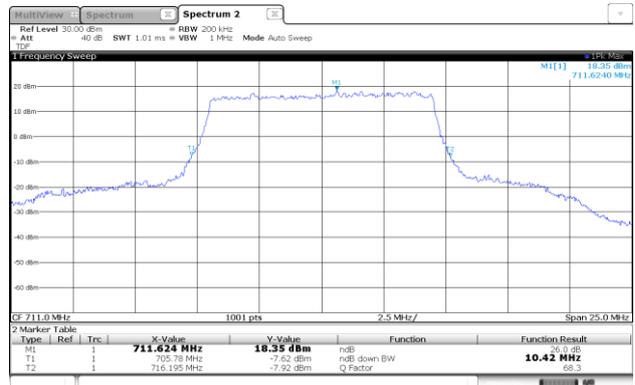


Test mode: LTE Band5


1.4M BW / QPSK / Low ch.

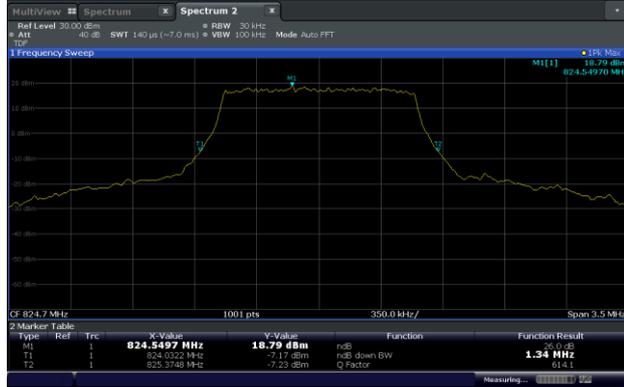

1.4M BW / 16QAM / Low ch.

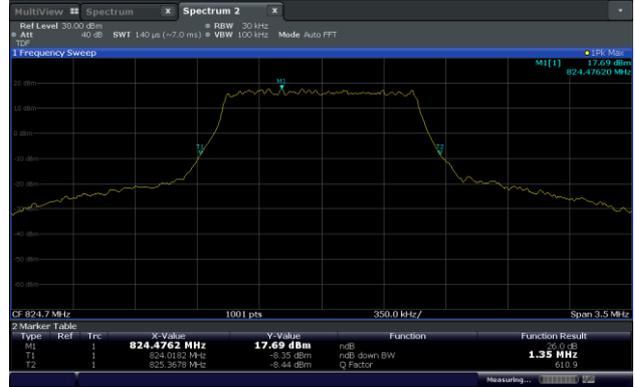


1.4M BW / QPSK / Mid ch.

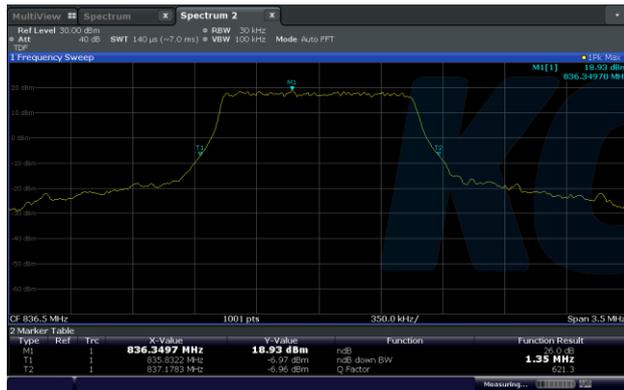


1.4M BW / 16QAM / Mid ch.



1.4M BW / QPSK / High ch.

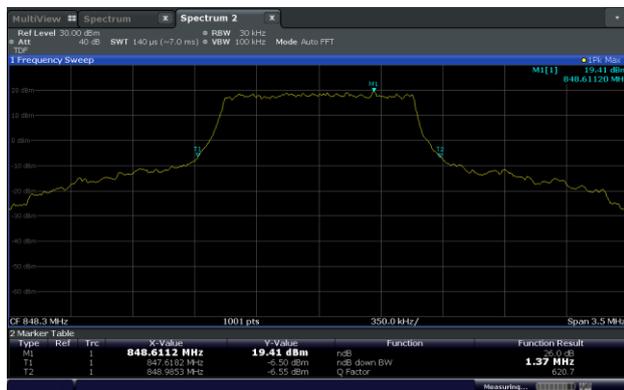

1.4M BW / 16QAM / High ch.

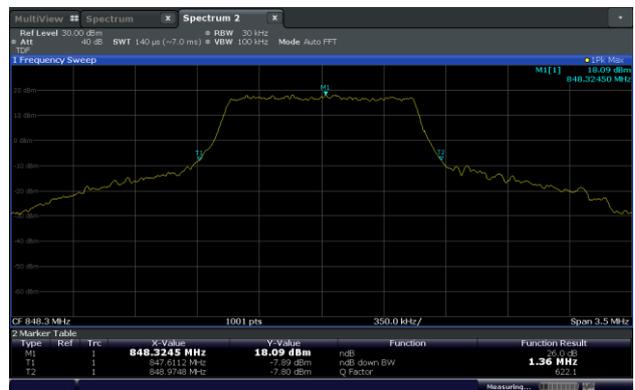

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (24) of (279)




3M BW / QPSK / Low ch.

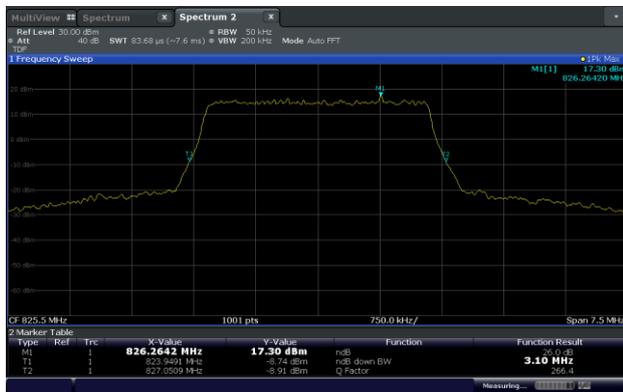


3M BW / 16QAM / Low ch.

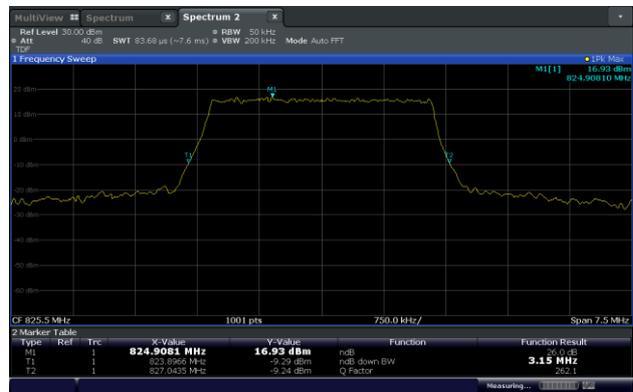


3M BW / QPSK / Mid ch.

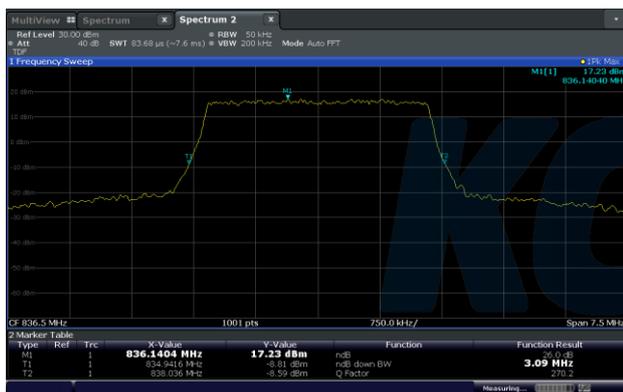


3M BW / 16QAM / Mid ch.

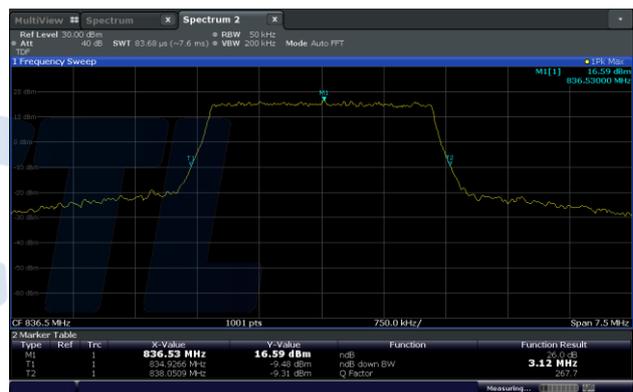

3M BW / QPSK / High ch.

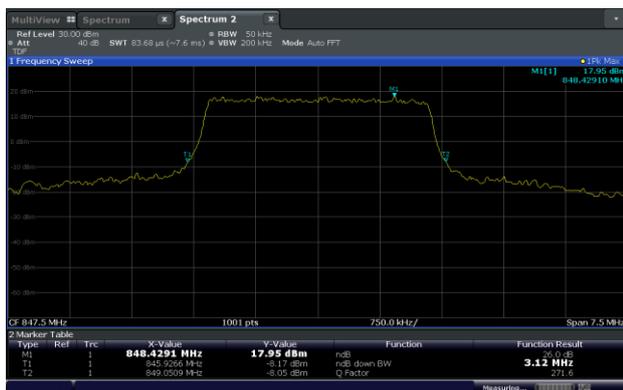

3M BW / 16QAM / High ch.

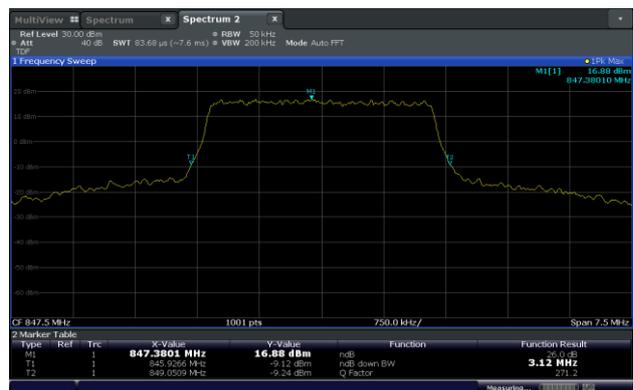

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (25) of (279)



5M BW / QPSK / Low ch.

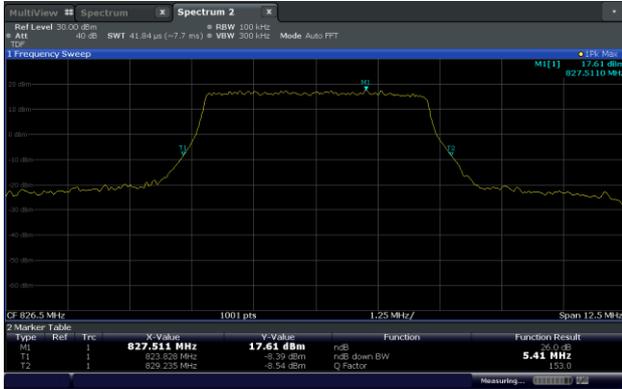

5M BW / 16QAM / Low ch.

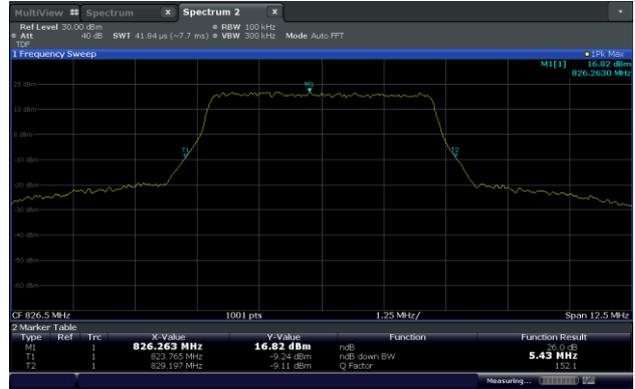


5M BW / QPSK / Mid ch.




5M BW / 16QAM / Mid ch.



5M BW / QPSK / High ch.

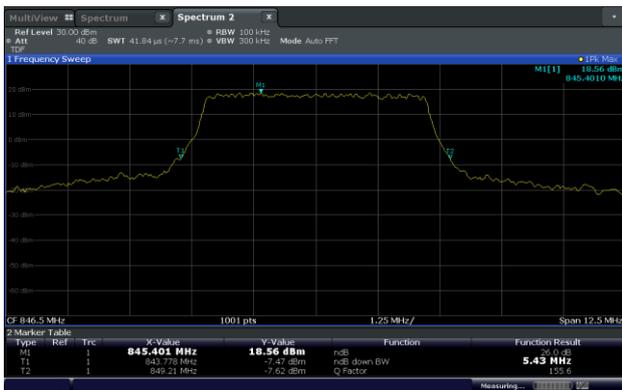

5M BW / 16QAM / High ch.

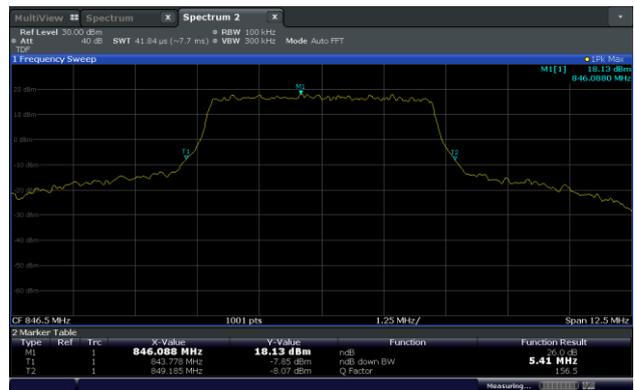

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (26) of (279)



10M BW / QPSK / Low ch.

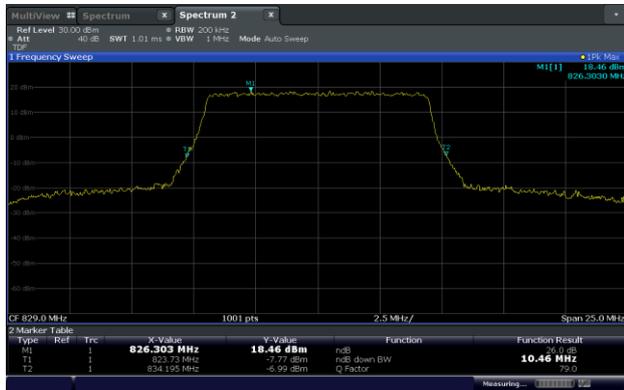

10M BW / 16QAM / Low ch.

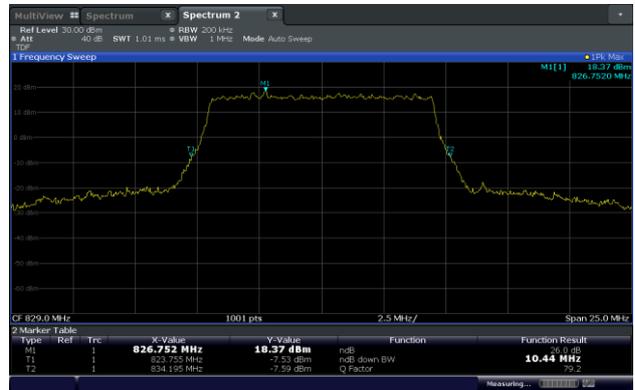


10M BW / QPSK / Mid ch.




10M BW / 16QAM / Mid ch.



10M BW / QPSK / High ch.

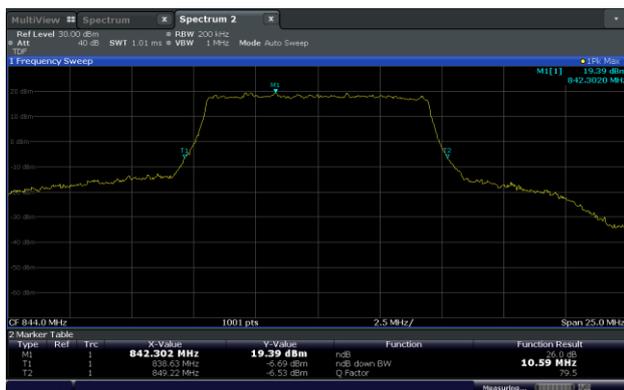


10M BW / 16QAM / High ch.

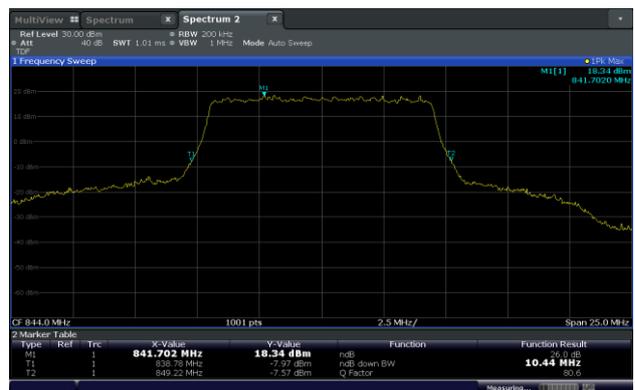


Test mode: LTE Band4


1.4M BW / QPSK / Low ch.

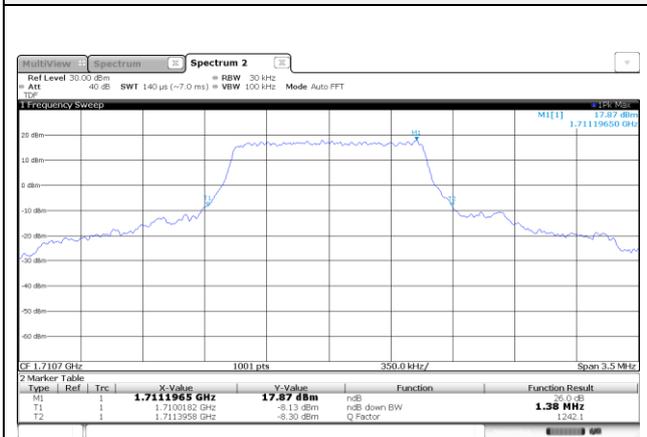

1.4M BW / 16QAM / Low ch.

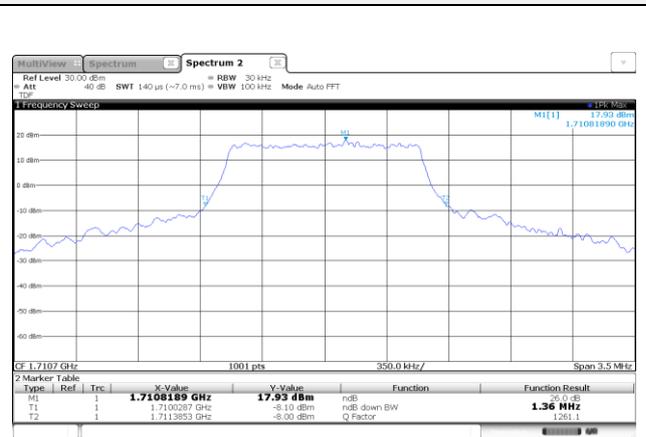


1.4M BW / QPSK / Mid ch.

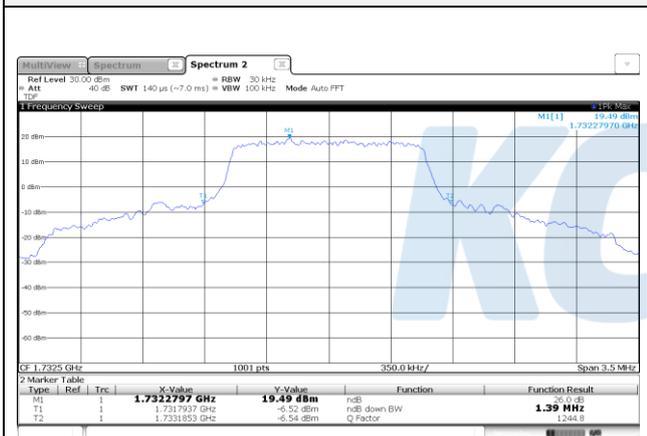


1.4M BW / 16QAM / Mid ch.



1.4M BW / QPSK / High ch.

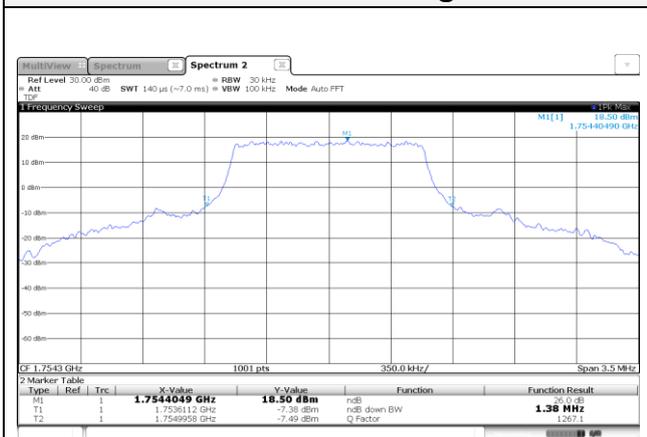

1.4M BW / 16QAM / High ch.

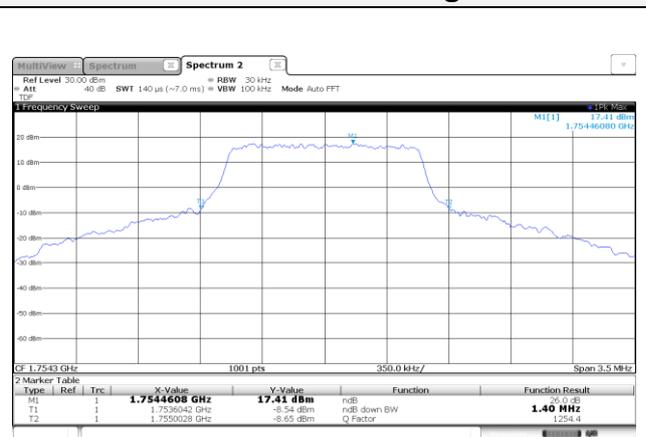

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (28) of (279)




3M BW / QPSK / Low ch.

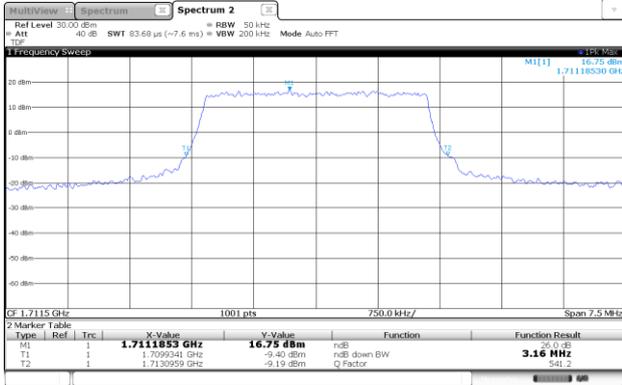

3M BW / 16QAM / Low ch.

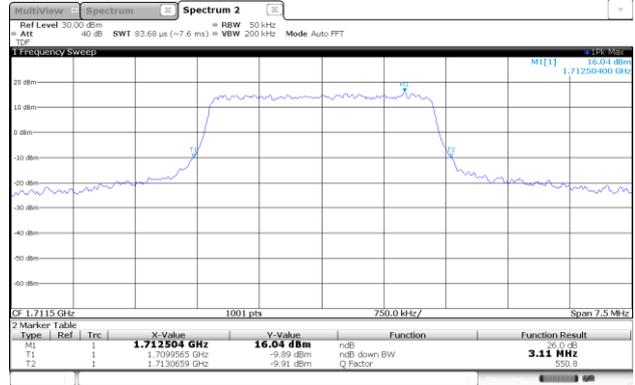

3M BW / QPSK / Mid ch.

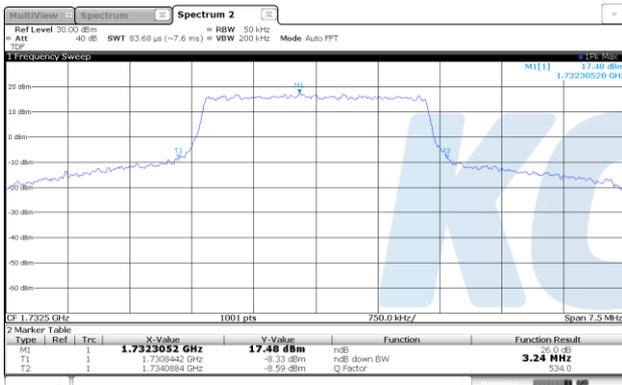

3M BW / 16QAM / Mid ch.



3M BW / QPSK / High ch.



3M BW / 16QAM / High ch.



KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (29) of (279)



5M BW / QPSK / Low ch.

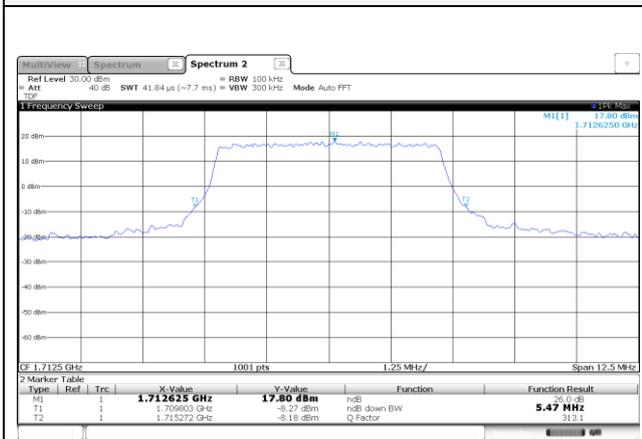


5M BW / 16QAM / Low ch.

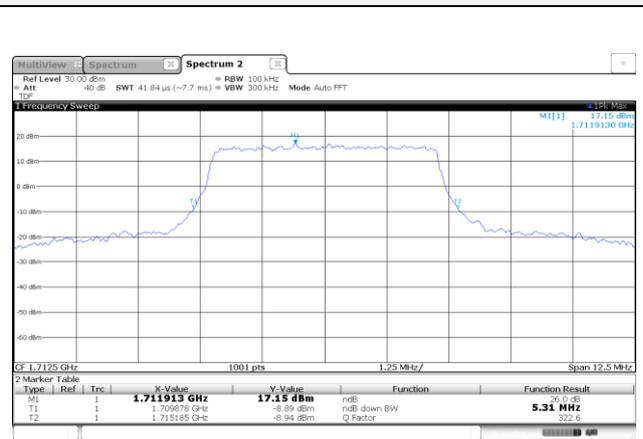


5M BW / QPSK / Mid ch.




5M BW / 16QAM / Mid ch.

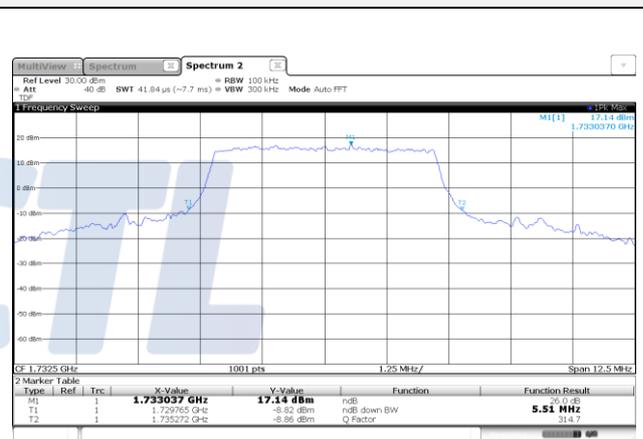

5M BW / QPSK / High ch.

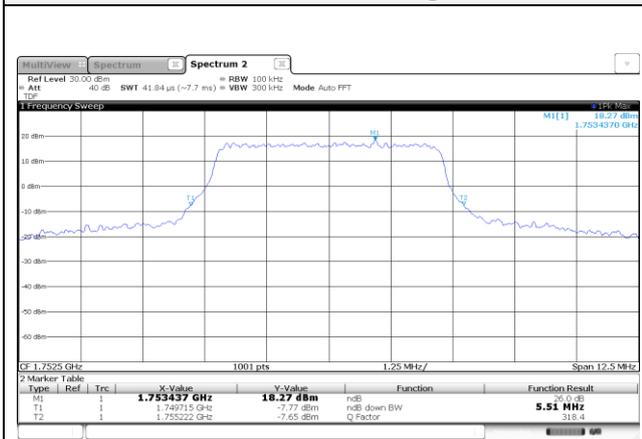

5M BW / 16QAM / High ch.

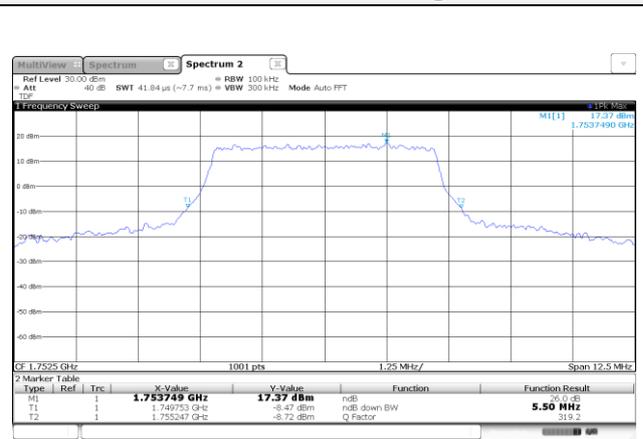

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (30) of (279)



10M BW / QPSK / Low ch.

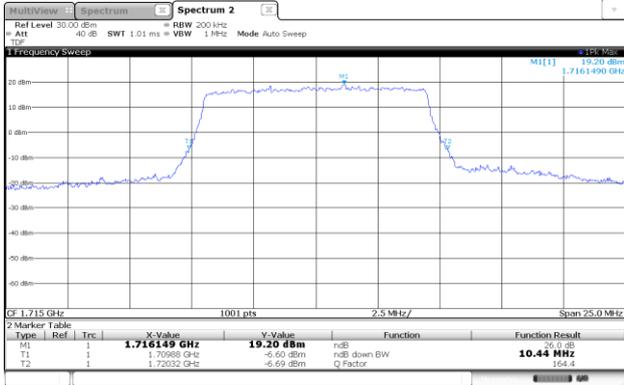

10M BW / 16QAM / Low ch.

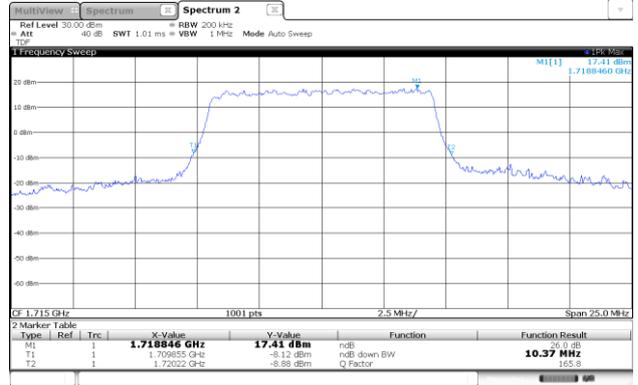

10M BW / QPSK / Mid ch.




10M BW / 16QAM / Mid ch.



10M BW / QPSK / High ch.



10M BW / 16QAM / High ch.

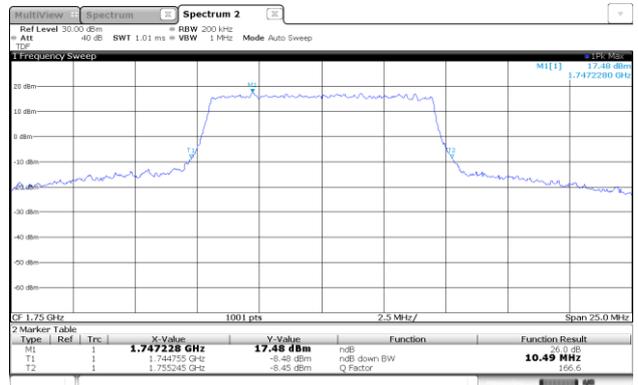

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (31) of (279)




15M BW / QPSK / Low ch.

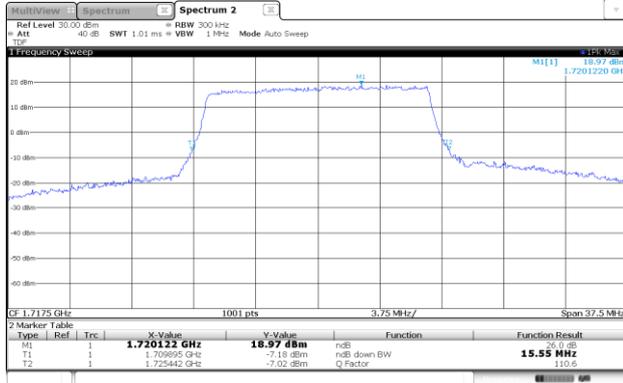

15M BW / 16QAM / Low ch.

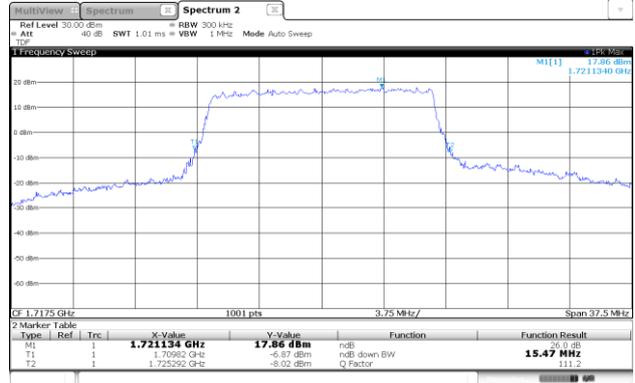


15M BW / QPSK / Mid ch.

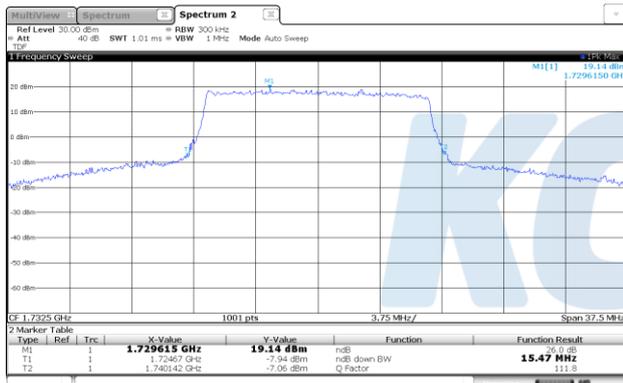


15M BW / 16QAM / Mid ch.



15M BW / QPSK / High ch.

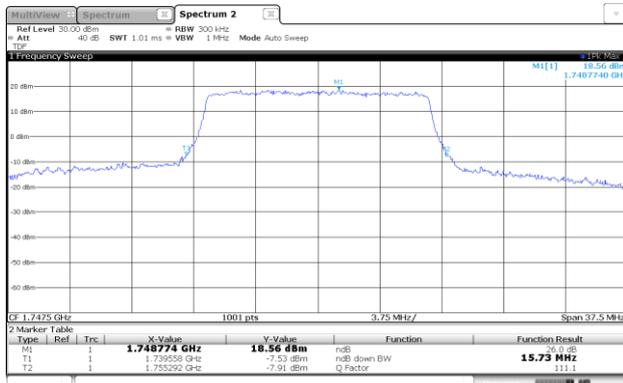

15M BW / 16QAM / High ch.

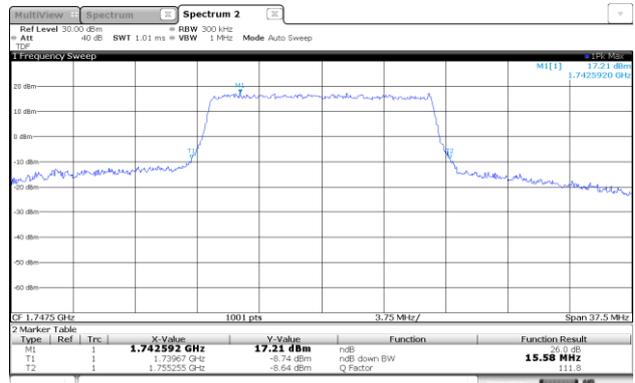

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (32) of (279)



20M BW / QPSK / Low ch.

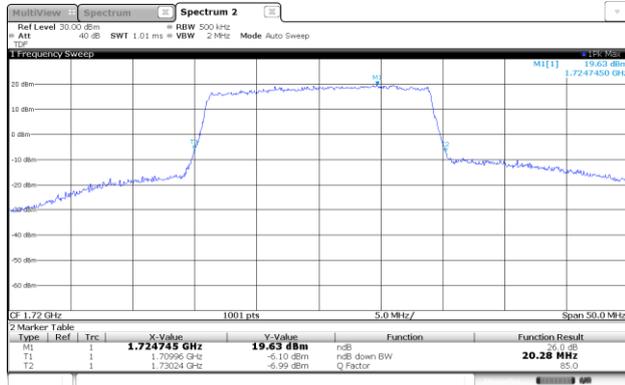

20M BW / 16QAM / Low ch.

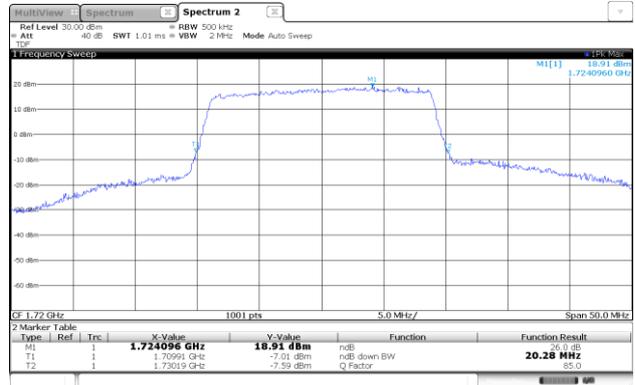


20M BW / QPSK / Mid ch.




20M BW / 16QAM / Mid ch.



20M BW / QPSK / High ch.

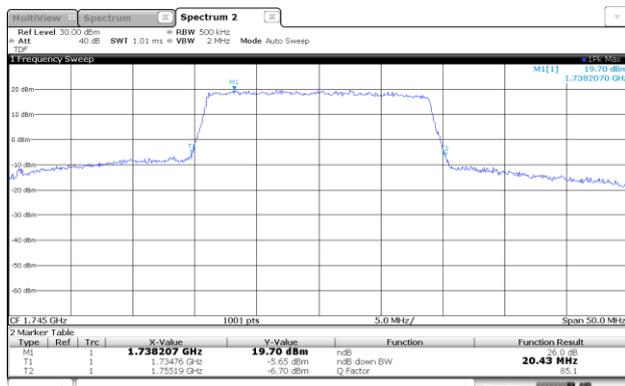


20M BW / 16QAM / High ch.

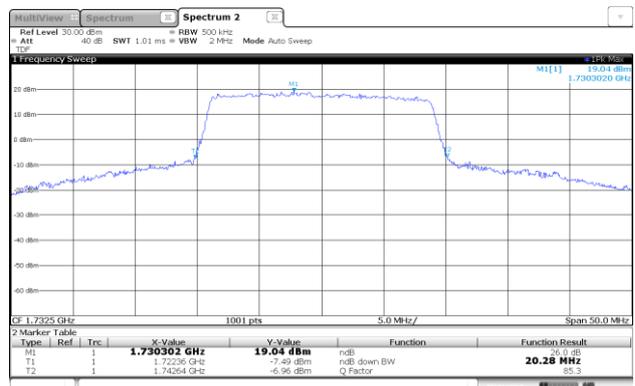


Test mode: LTE Band2


1.4M BW / QPSK / Low ch.

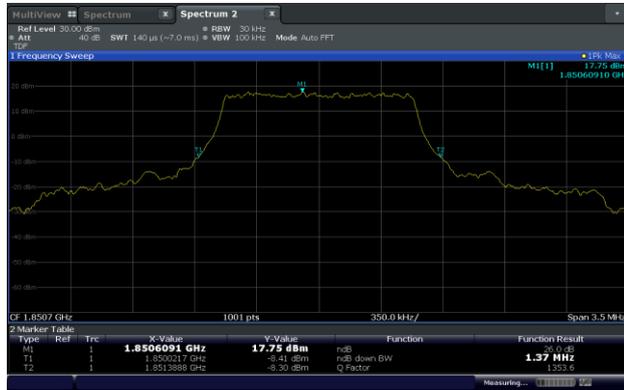

1.4M BW / 16QAM / Low ch.

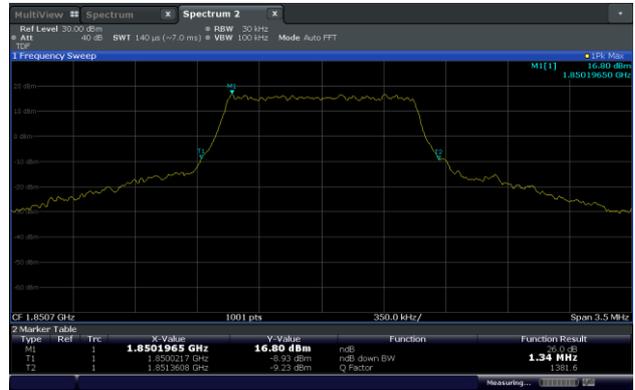


1.4M BW / QPSK / Mid ch.

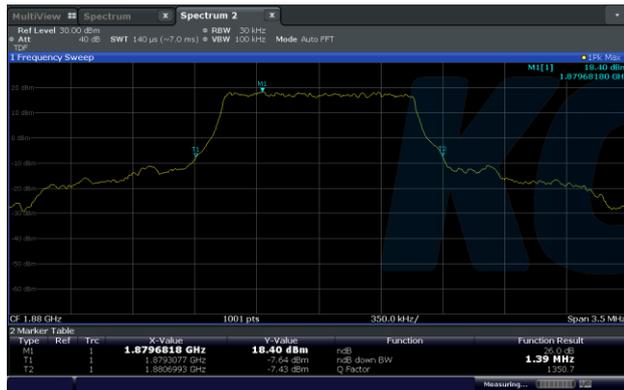


1.4M BW / 16QAM / Mid ch.



1.4M BW / QPSK / High ch.

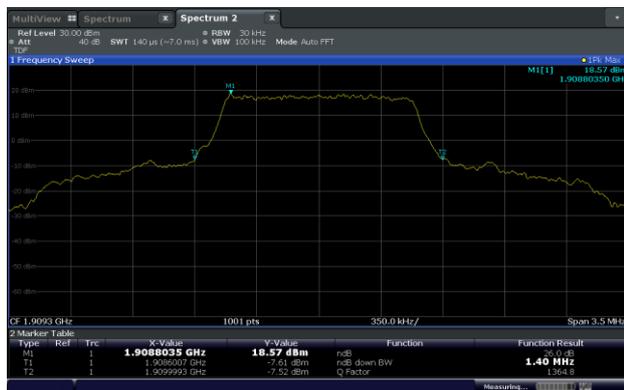

1.4M BW / 16QAM / High ch.

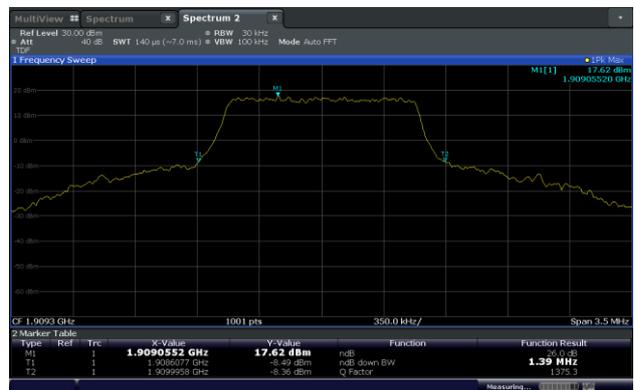

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (34) of (279)




3M BW / QPSK / Low ch.

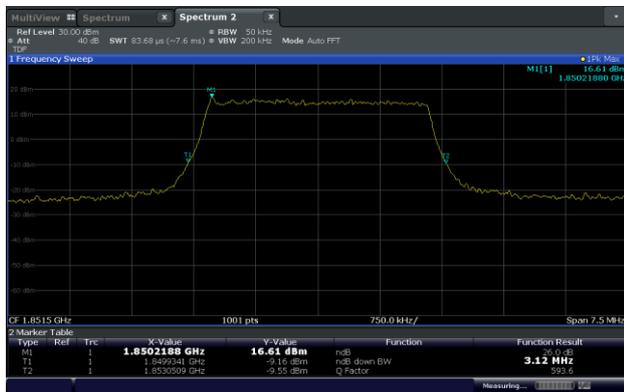


3M BW / 16QAM / Low ch.

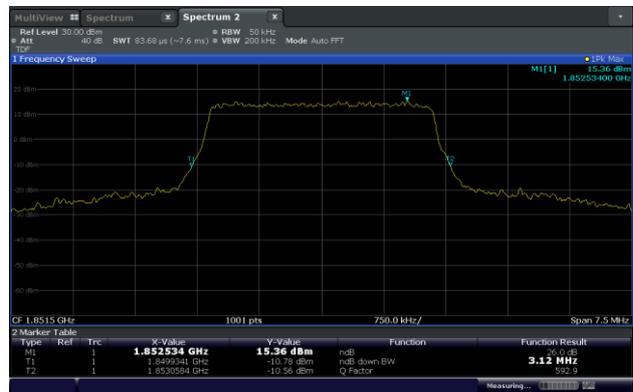


3M BW / QPSK / Mid ch.

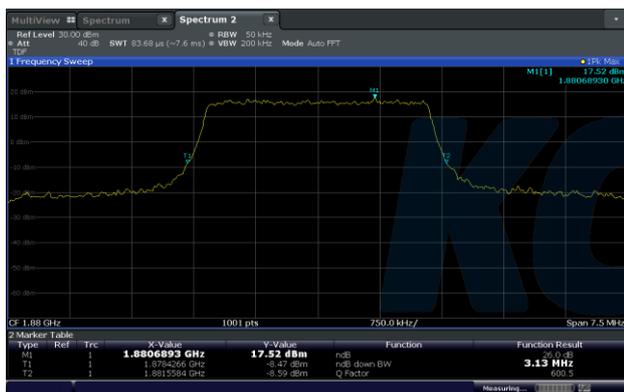


3M BW / 16QAM / Mid ch.

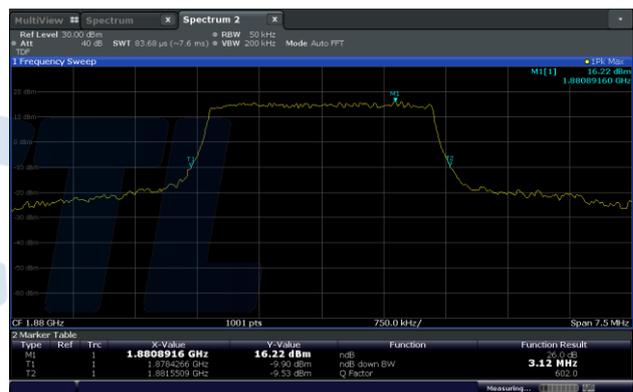

3M BW / QPSK / High ch.

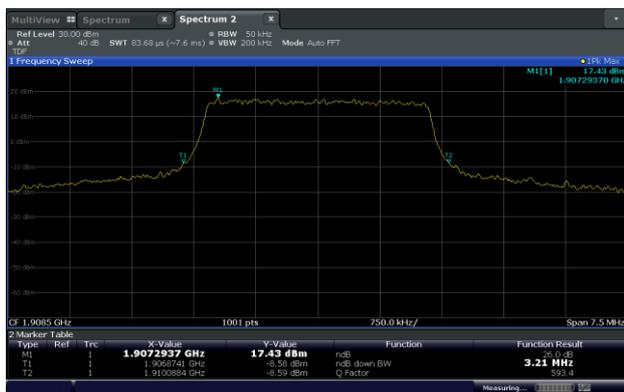

3M BW / 16QAM / High ch.

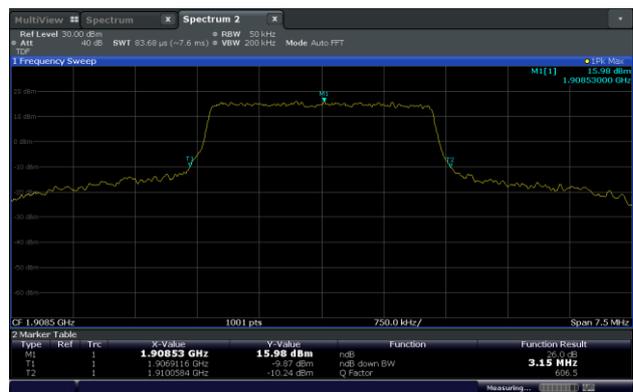

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0016-A


Page (35) of (279)



5M BW / QPSK / Low ch.

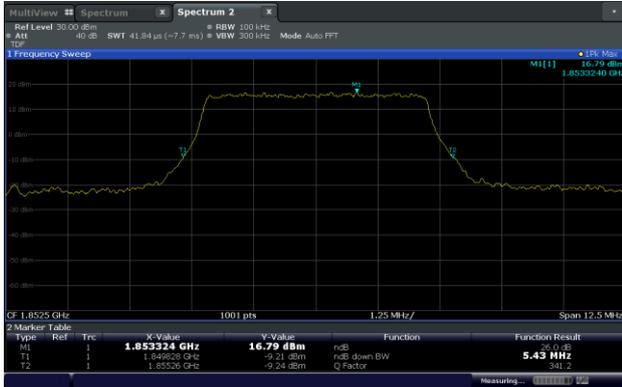


5M BW / 16QAM / Low ch.

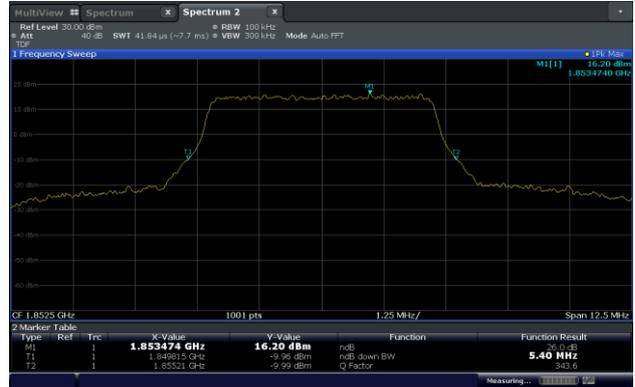


5M BW / QPSK / Mid ch.



5M BW / 16QAM / Mid ch.

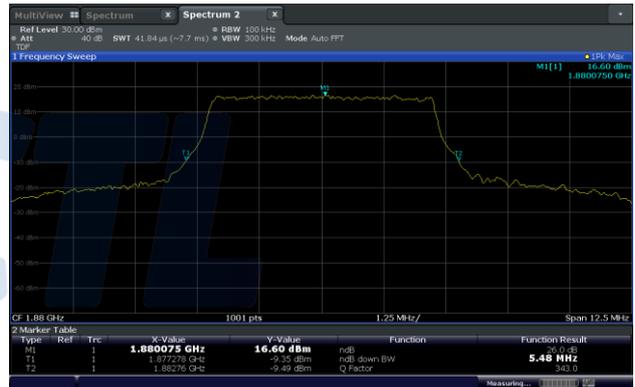

5M BW / QPSK / High ch.

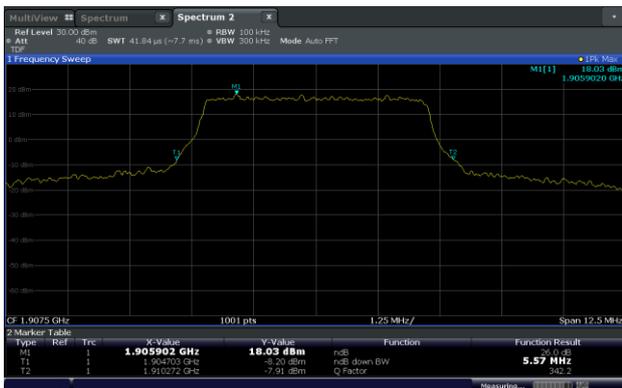

5M BW / 16QAM / High ch.

