



UNII 5.5 GHz IEEE 802.11ac VHT80 mode





UNII 5.8 GHz IEEE 802.11a mode

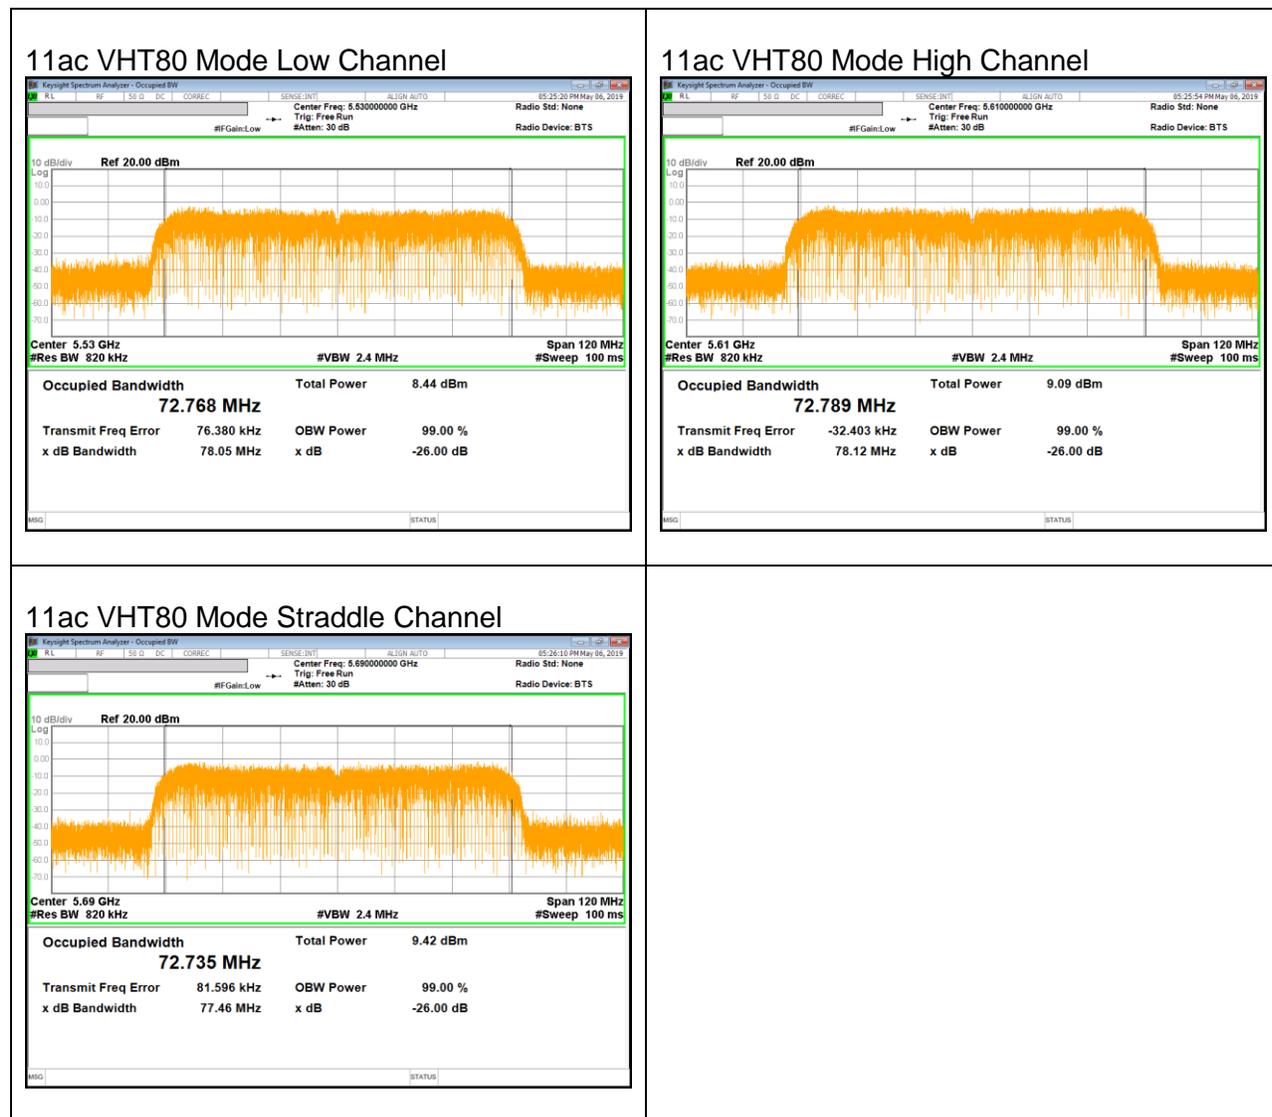


UNII 5.8 GHz IEEE 802.11n HT20 mode

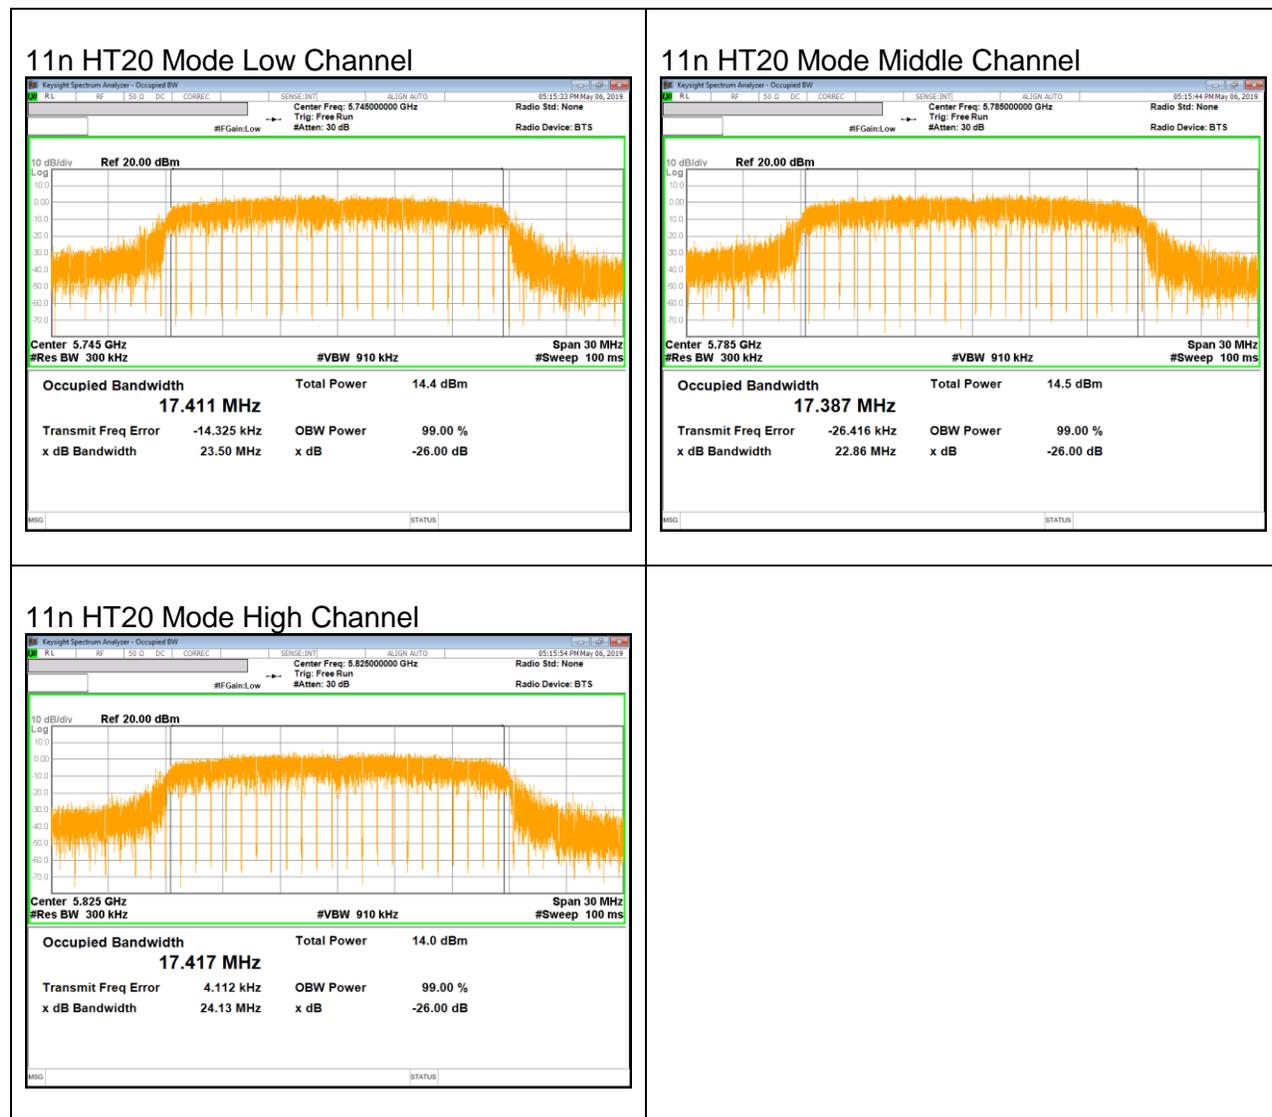

UNII 5.8 GHz IEEE 802.11n HT40 mode

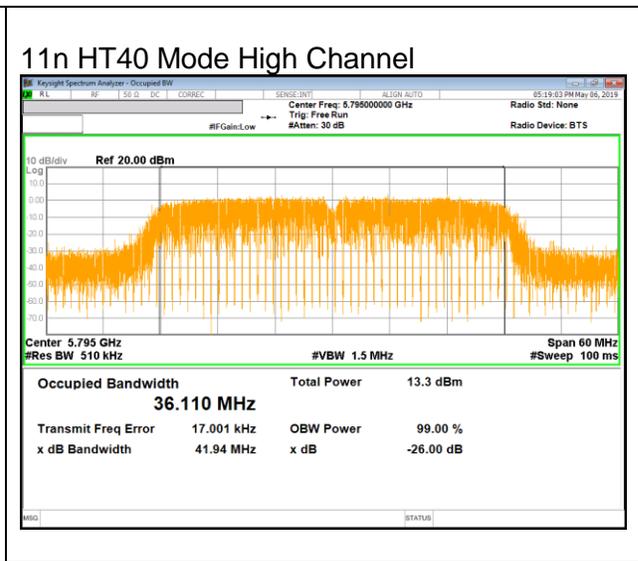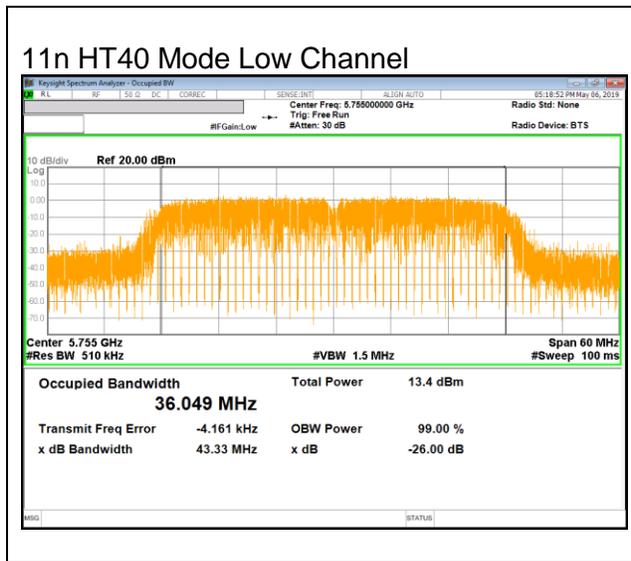

UNII 5.8 GHz IEEE 802.11ac VHT80 mode

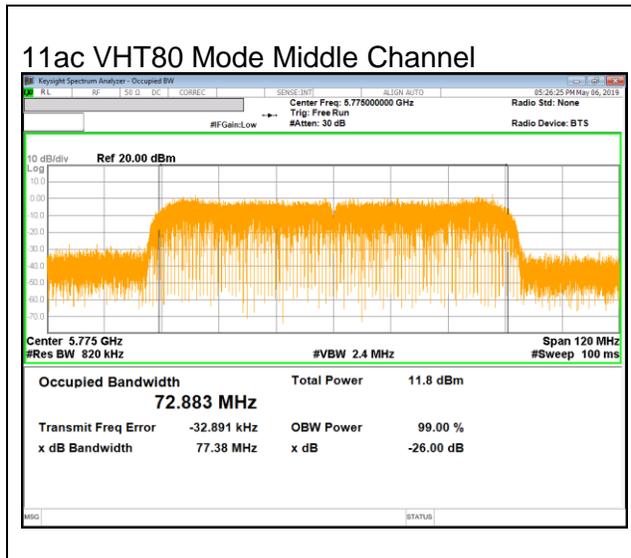

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e) / RSS-247 §6.2.4.1

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

NOTE

- Calculation for 6dB Bandwidth of UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 6dB BW : 16.350MHz
- Starting Frequency of UNII-3 band : 5725MHz
- 6dB Bandwidth of UNII-3 band Portion
 $= (5720 + (16.350 / 2) - 5725) = 3.175$ MHz

RESULTS

10.1.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5720	2.63	0.5
Low	5745	14.45	
Mid	5785	14.46	
High	5825	14.01	
Worst		2.63	

10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5720	2.00	0.5
Low	5745	15.11	
Mid	5785	14.10	
High	5825	14.91	
Worst		2.00	

10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND


Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5710	2.21	0.5
Low	5755	35.09	
High	5795	34.42	
Worst		2.21	

10.1.4. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND


Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Straddle	5690	0.64	0.5
Middle	5775	70.11	
Worst		0.64	

10.1.5. 6 dB BANDWIDTH PLOTS

UNII 5.8 GHz IEEE 802.11a mode

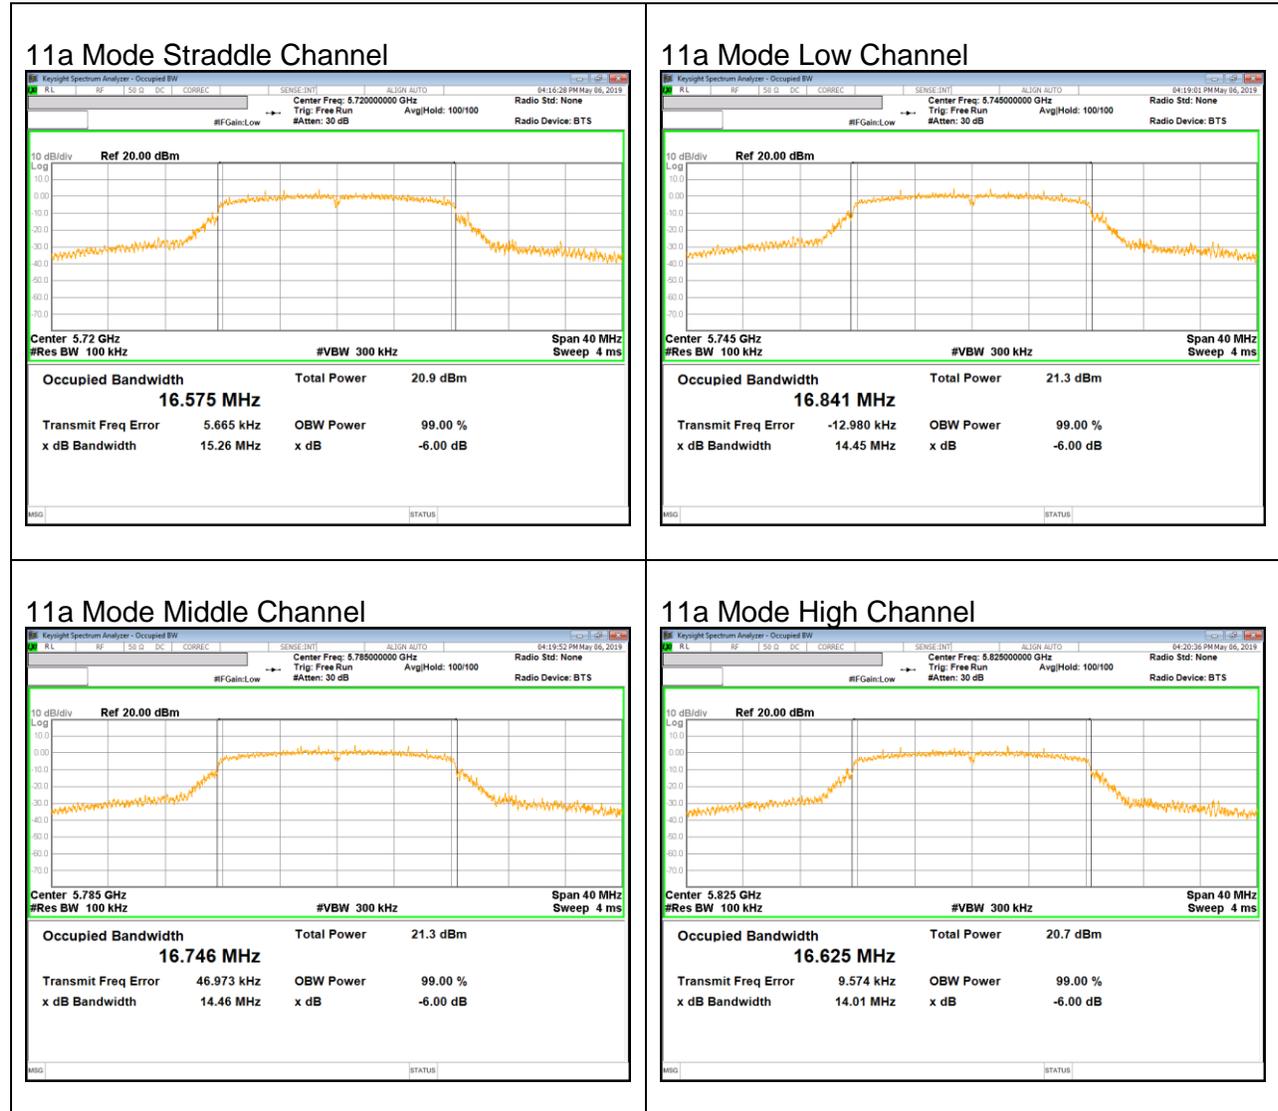


UNII 5.8 GHz IEEE 802.11n HT20 mode

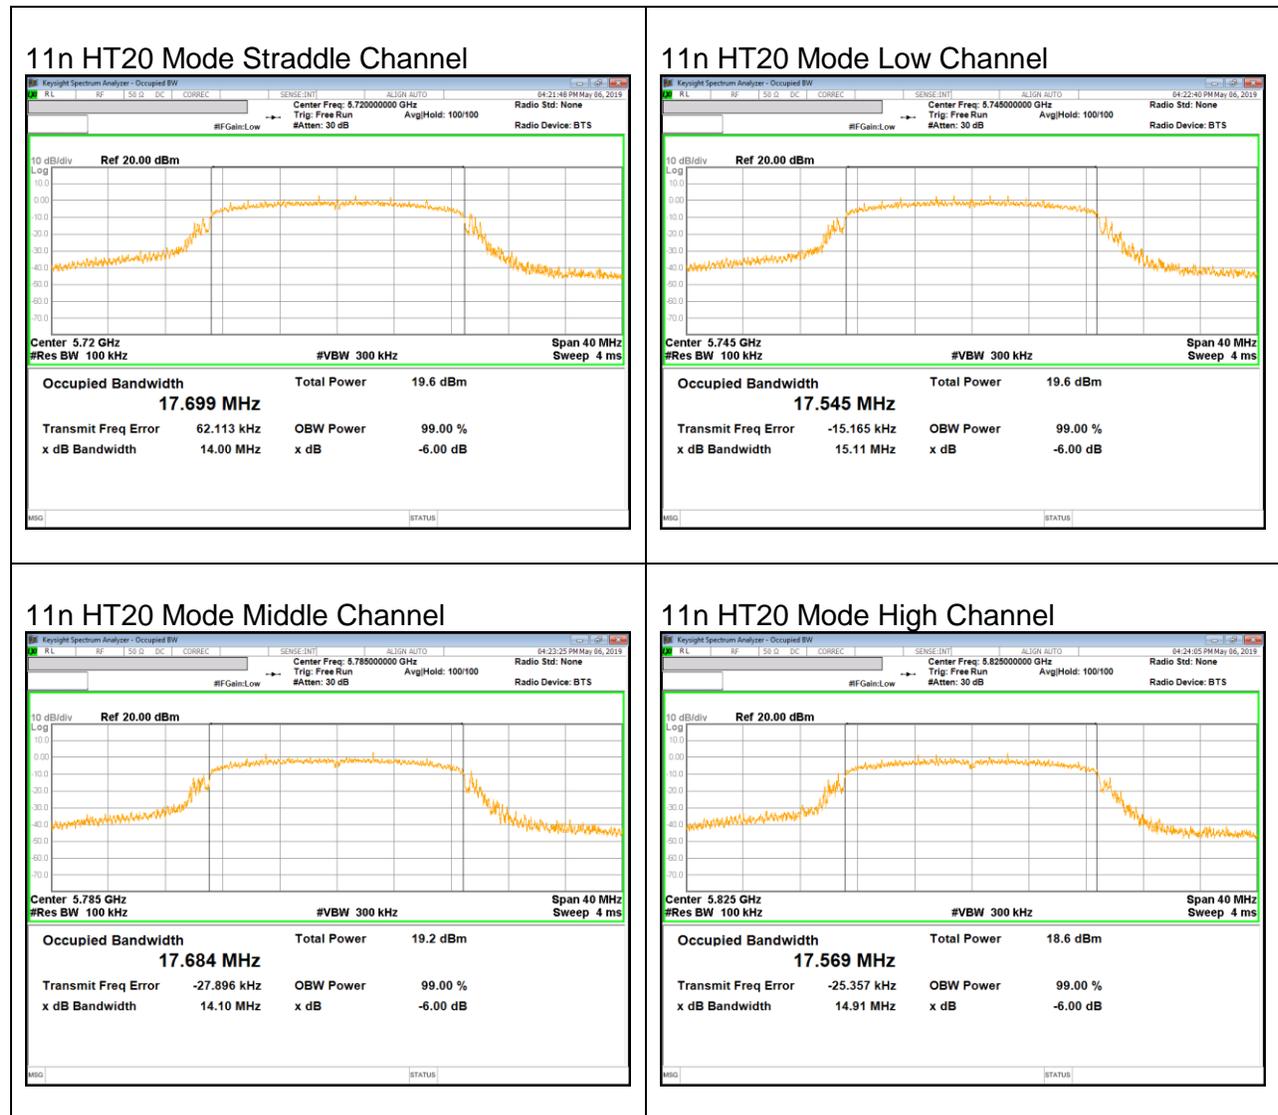

UNII 5.8 GHz IEEE 802.11n HT40 mode



UNII 5.8 GHz IEEE 802.11ac VHT80 mode

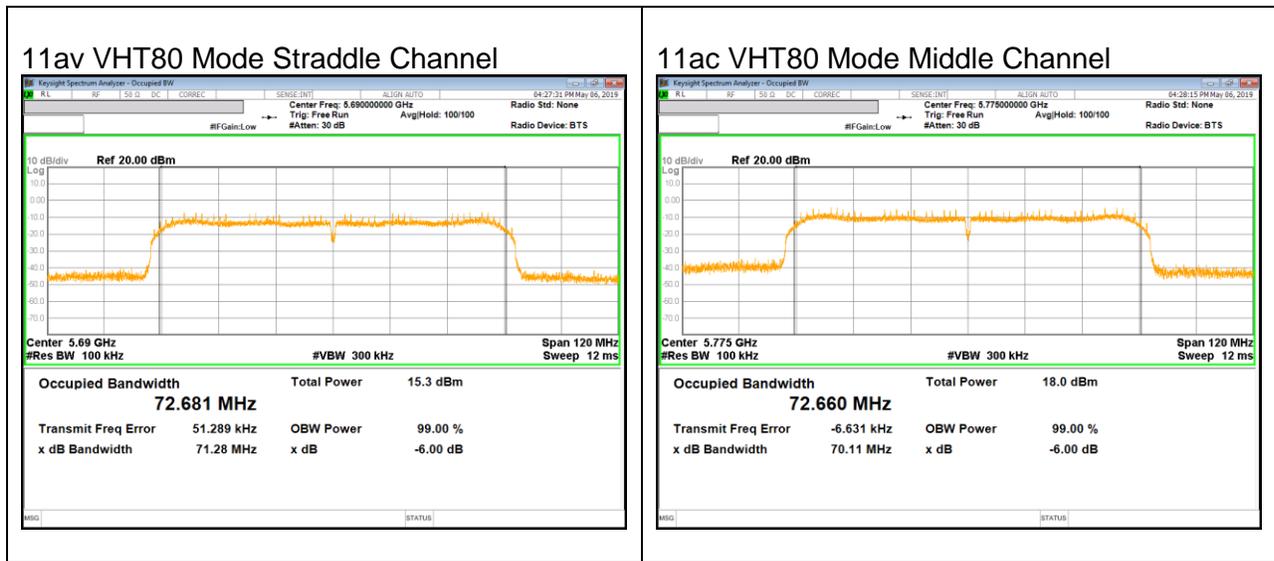

10.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3) / RSS-247 §6.2

FCC

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

IC

Frequency band 5150-5250 MHz

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

Devices, other than devices installed in vehicles, shall comply with the following:

- a. The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability cooperate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

TEST PROCEDURE

KDB 789033 Method PM is used for output power.

KDB 789033 Method SA-2 is used for only power of straddle Ch. and PPSD. RBW set to 1MHz(500kHz for the band 5.725-5.85 GHz, the VBW $\geq 3 \times$ RBW, RMS detector and trace averaging). Band power function used for power and peak marker value of the spectrum is used for PSD.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Frequency Band [MHz]	Antenna Gain [dBi]
5150 - 5250	-2.57
5250 - 5350	-2.02
5470 - 5725	-2.76
5725 - 5850	-1.55

RESULTS

10.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	22.22	16.37	-2.57	-2.57
Mid	5200	21.03	16.38	-2.57	-2.57
High	5240	22.26	16.39	-2.57	-2.57

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC E.I.R.P. Limit [dBm]	Max IC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC E.I.R.P. PSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5180	24.00	22.14	24.71	22.14	11.00	12.57	11.00
Mid	5200	24.00	22.14	24.71	22.14	11.00	12.57	11.00
High	5240	24.00	22.15	24.72	22.15	11.00	12.57	11.00

Duty Cycle CF [dB]	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	15.90	16.10	22.14	-6.05
Mid	5200	15.83	16.03	22.14	-6.12
High	5240	15.61	15.81	22.15	-6.34

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5180	5.73	5.93	11.00	-5.07
Mid	5200	6.22	6.41	11.00	-4.59
High	5240	5.42	5.62	11.00	-5.38

10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5180	23.68	17.39	-2.57	-2.57
Mid	5200	21.20	17.44	-2.57	-2.57
High	5240	22.96	17.42	-2.57	-2.57

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC E.I.R.P. Limit [dBm]	Max IC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC E.I.R.P. PSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5180	24.00	22.40	24.97	22.40	11.00	12.57	11.00
Mid	5200	24.00	22.42	24.99	22.42	11.00	12.57	11.00
High	5240	24.00	22.41	24.98	22.41	11.00	12.57	11.00

Duty Cycle CF [dB]	0.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5180	14.77	14.96	22.40	-7.44
Mid	5200	14.63	14.82	22.42	-7.59
High	5240	14.44	14.63	22.41	-7.78

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5180	4.50	4.70	11.00	-6.30
Mid	5200	4.83	5.02	11.00	-5.98
High	5240	4.30	4.50	11.00	-6.50

10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5190	55.61	36.13	-2.57	-2.57
High	5230	48.88	36.08	-2.57	-2.57

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC E.I.R.P. Limit [dBm]	Max IC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC E.I.R.P. PSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5190	24.00	23.00	25.57	23.00	11.00	12.57	11.00
High	5230	24.00	23.00	25.57	23.00	11.00	12.57	11.00

Duty Cycle CF [dB]	0.41	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5190	12.90	13.31	23.00	-9.69
High	5230	12.64	13.05	23.00	-9.95

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5190	0.41	0.82	11.00	-10.18
High	5230	0.32	0.74	11.00	-10.26

10.2.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Mid	5210	78.43	72.69	-2.57	-2.57

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC E.I.R.P. Limit [dBm]	Max IC Power Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC E.I.R.P. PSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Mid	5210	24.00	23.00	25.57	23.00	11.00	12.57	11.00

Duty Cycle CF [dB]	0.17	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Mid	5210	11.25	11.42	23.00	-11.58

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Mid	5210	-5.14	-4.96	11.00	-15.96

10.2.5. 802.11a MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	22.70	16.35	-2.02	-2.02
Mid	5300	22.87	16.37	-2.02	-2.02
High	5320	21.21	16.37	-2.02	-2.02

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5260	24.00	23.14	29.14	23.14	11.00	11.00	11.00
Mid	5300	24.00	23.14	29.14	23.14	11.00	11.00	11.00
High	5320	24.00	23.14	29.14	23.14	11.00	11.00	11.00

Duty Cycle CF [dB]	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	15.70	15.90	23.14	-7.24
Mid	5300	15.50	15.70	23.14	-7.44
High	5320	15.48	15.68	23.14	-7.46

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5260	5.78	5.98	11.00	-5.02
Mid	5300	5.47	5.67	11.00	-5.33
High	5320	5.39	5.58	11.00	-5.42

10.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5260	22.35	17.39	-2.02	-2.02
Mid	5300	21.69	17.41	-2.02	-2.02
High	5320	20.93	17.39	-2.02	-2.02

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5260	24.00	23.40	29.40	23.40	11.00	11.00	11.00
Mid	5300	24.00	23.41	29.41	23.41	11.00	11.00	11.00
High	5320	24.00	23.40	29.40	23.40	11.00	11.00	11.00

Duty Cycle CF [dB]	0.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5260	14.64	14.83	23.40	-8.57
Mid	5300	14.52	14.71	23.41	-8.69
High	5320	14.39	14.58	23.40	-8.82

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5260	4.63	4.82	11.00	-6.18
Mid	5300	4.21	4.40	11.00	-6.60
High	5320	4.59	4.78	11.00	-6.22

10.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5270	42.38	36.14	-2.02	-2.02
High	5310	42.08	36.02	-2.02	-2.02

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5270	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5310	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF [dB]	0.41	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5270	11.35	11.76	24.00	-12.24
High	5310	11.20	11.61	24.00	-12.39

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5270	-1.78	-1.37	11.00	-12.37
High	5310	-2.05	-1.64	11.00	-12.64

10.2.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Mid	5290	78.52	72.76	-2.02	-2.02

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Mid	5290	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF [dB]	0.17	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Mid	5290	10.85	11.02	24.00	-12.98

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Mid	5290	-5.34	-5.17	11.00	-16.17

10.2.9. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5500	20.62	16.37	-2.76	-2.76
Mid	5580	20.84	16.32	-2.76	-2.76
High	5700	20.81	16.33	-2.76	-2.76

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5500	24.00	23.14	29.14	23.14	11.00	11.00	11.00
Mid	5580	24.00	23.13	29.13	23.13	11.00	11.00	11.00
High	5700	24.00	23.13	29.13	23.13	11.00	11.00	11.00

Duty Cycle CF [dB]	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	15.48	15.68	23.14	-7.46
Mid	5580	15.50	15.70	23.13	-7.43
High	5700	15.52	15.72	23.13	-7.41

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5500	5.34	5.54	11.00	-5.46
Mid	5580	5.81	6.01	11.00	-4.99
High	5700	6.28	6.48	11.00	-4.52

10.2.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5500	21.02	17.39	-2.76	-2.76
Mid	5580	20.97	17.42	-2.76	-2.76
High	5700	21.04	17.40	-2.76	-2.76

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5500	24.00	23.40	29.40	23.40	11.00	11.00	11.00
Mid	5580	24.00	23.41	29.41	23.41	11.00	11.00	11.00
High	5700	24.00	23.41	29.41	23.41	11.00	11.00	11.00

Duty Cycle CF [dB]	0.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5500	13.84	14.03	23.40	-9.37
Mid	5580	13.83	14.02	23.41	-9.39
High	5700	13.82	14.01	23.41	-9.39

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5500	3.71	3.90	11.00	-7.10
Mid	5580	3.80	4.00	11.00	-7.00
High	5700	3.71	3.90	11.00	-7.10

10.2.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5510	41.65	36.07	-2.76	-2.76
Mid	5590	42.28	36.12	-2.76	-2.76
High	5670	41.95	36.02	-2.76	-2.76

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5590	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF [dB]	0.41	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5510	11.75	12.16	24.00	-11.84
Mid	5590	11.61	12.02	24.00	-11.98
High	5670	11.75	12.16	24.00	-11.84

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5510	-2.40	-1.98	11.00	-12.98
Mid	5590	-2.26	-1.85	11.00	-12.85
High	5670	-1.25	-0.84	11.00	-11.84

10.2.12. 802.11ac VHT80 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5530	78.34	72.77	-2.76	-2.76
High	5610	78.36	72.79	-2.76	-2.76

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5610	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF [dB]	0.17	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5530	8.84	9.01	24.00	-14.99
High	5610	9.31	9.48	24.00	-14.52

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
Low	5530	-7.88	-7.71	11.00	-18.71
High	5610	-7.13	-6.96	11.00	-17.96

10.2.13. 802.11a MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5745	22.08	16.34	-1.55	-1.55
Mid	5785	22.08	16.37	-1.55	-1.55
High	5825	20.31	16.33	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/500 kHz]	IC PPSD Limit [dBm/500 kHz]	PPSD Limit [dBm/500 kHz]
Low	5745	30.00	30.00	31.55	30.00	30.00	30.00	30.00
Mid	5785	30.00	30.00	31.55	30.00	30.00	30.00	30.00
High	5825	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	15.91	16.11	30.00	-13.89
Mid	5785	15.84	16.04	30.00	-13.96
High	5825	15.77	15.97	30.00	-14.03

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/500kHz]	Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]	PPSD Margin [dB]
Low	5745	2.80	3.00	30.00	-27.00
Mid	5785	2.90	3.10	30.00	-26.90
High	5825	3.05	3.25	30.00	-26.75

10.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5745	21.92	17.41	-1.55	-1.55
Mid	5785	21.41	17.39	-1.55	-1.55
High	5825	22.21	17.42	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/500 kHz]	IC PPSD Limit [dBm/500 kHz]	PPSD Limit [dBm/500 kHz]
Low	5745	30.00	30.00	31.55	30.00	30.00	30.00	30.00
Mid	5785	30.00	30.00	31.55	30.00	30.00	30.00	30.00
High	5825	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5745	14.84	15.03	30.00	-14.97
Mid	5785	14.61	14.80	30.00	-15.20
High	5825	14.53	14.72	30.00	-15.28

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/500kHz]	Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]	PPSD Margin [dB]
Low	5745	1.96	2.16	30.00	-27.84
Mid	5785	2.06	2.25	30.00	-27.75
High	5825	1.41	1.60	30.00	-28.40

10.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Low	5755	42.77	36.05	-1.55	-1.55
High	5795	41.84	36.11	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/500 kHz]	IC PPSD Limit [dBm/500 kHz]	PPSD Limit [dBm/500 kHz]
Low	5755	30.00	30.00	31.55	30.00	30.00	30.00	30.00
High	5795	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.41	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Low	5755	12.99	13.40	30.00	-16.60
High	5795	12.96	13.37	30.00	-16.63

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/500kHz]	Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]	PPSD Margin [dB]
Low	5755	-2.86	-2.44	30.00	-32.44
High	5795	-2.86	-2.45	30.00	-32.45

10.2.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
Mid	5775	78.54	72.88	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/500 kHz]	IC PPSD Limit [dBm/500 kHz]	PPSD Limit [dBm/500 kHz]
Mid	5775	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.17	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
Mid	5775	12.43	12.60	30.00	-17.40

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/500kHz]	Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]	PPSD Margin [dB]
Mid	5775	-6.20	-6.03	30.00	-36.03

10.2.17. 802.11a MODE IN THE STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
UNII-2C	5720	15.95	13.17	-2.76	-2.76
UNII-3	5720	5.95	3.17	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2C	5720	23.03	22.20	28.20	22.20	11.00	11.00	11.00
UNII-3	5720	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5720	14.98	15.17	22.20	-7.02
UNII-3	5720	7.35	7.55	30.00	-22.45

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
UNII-2C	5720	5.98	6.18	11.00	-4.82
UNII-3*	5720	1.77	1.97	30.00	-28.03

* For UNII-3, the unit of PPSD is [dBm/500kHz].

10.2.18. 802.11n HT20 MODE IN THE STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
UNII-2C	5720	15.37	13.70	-2.76	-2.76
UNII-3	5720	5.37	3.70	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2C	5720	22.87	22.37	28.37	22.37	11.00	11.00	11.00
UNII-3	5720	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5720	13.00	13.20	22.37	-9.17
UNII-3	5720	5.82	6.02	30.00	-23.98

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
UNII-2C	5720	3.59	3.79	11.00	-7.21
UNII-3*	5720	-0.34	-0.15	30.00	-30.15

* For UNII-3, the unit of PPSD is [dBm/500kHz].

10.2.19. 802.11n HT40 MODE IN THE STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
UNII-2C	5710	35.75	33.03	-2.76	-2.76
UNII-3	5710	5.75	3.03	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2C	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00
UNII-3	5710	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.41	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5710	11.59	12.01	24.00	-11.99
UNII-3	5710	-0.17	0.24	30.00	-29.76

PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
UNII-2C	5710	-1.37	-0.96	11.00	-11.96
UNII-3*	5710	-5.74	-5.33	30.00	-35.33

* For UNII-3, the unit of PPSD is [dBm/500kHz].

10.2.20. 802.11ac VHT80 MODE IN THE STRADDLE CHANNEL

Bandwidth and Antenna Gain

Portion	Frequency [MHz]	Min 26 dB BW [MHz]	Min 99% BW [MHz]	Directional Gain for Power [dBi]	Directional Gain for PPSD [dBi]
UNII-2C	5690	74.29	71.37	-2.76	-2.76
UNII-3	5690	4.29	1.37	-1.55	-1.55

Limits

Portion	Frequency [MHz]	FCC Power Limit [dBm]	IC Power Limit [dBm]	Max IC E.I.R.P. Limit [dBm]	Power Limit [dBm]	FCC PPSD Limit [dBm/MHz]	IC PPSD Limit [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2C	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00
UNII-3	5690	30.00	30.00	31.55	30.00	30.00	30.00	30.00

Duty Cycle CF [dB]	0.17	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Portion	Frequency [MHz]	Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Power Margin [dB]
UNII-2C	5690	9.40	9.57	24.00	-14.43
UNII-3	5690	-8.82	-8.65	30.00	-38.65


PPSD Results

Channel	Frequency [MHz]	Meas PPSD [dBm/MHz]	Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]	PPSD Margin [dB]
UNII-2C	5690	-6.49	-6.31	11.00	-17.31
UNII-3*	5690	-12.71	-12.53	30.00	-42.53


* For UNII-3, the unit of PPSD is [dBm/500kHz].

10.2.21. OUTPUT POWER AND PSD PLOTS


UNII 5.2 GHz IEEE 802.11a mode PSD

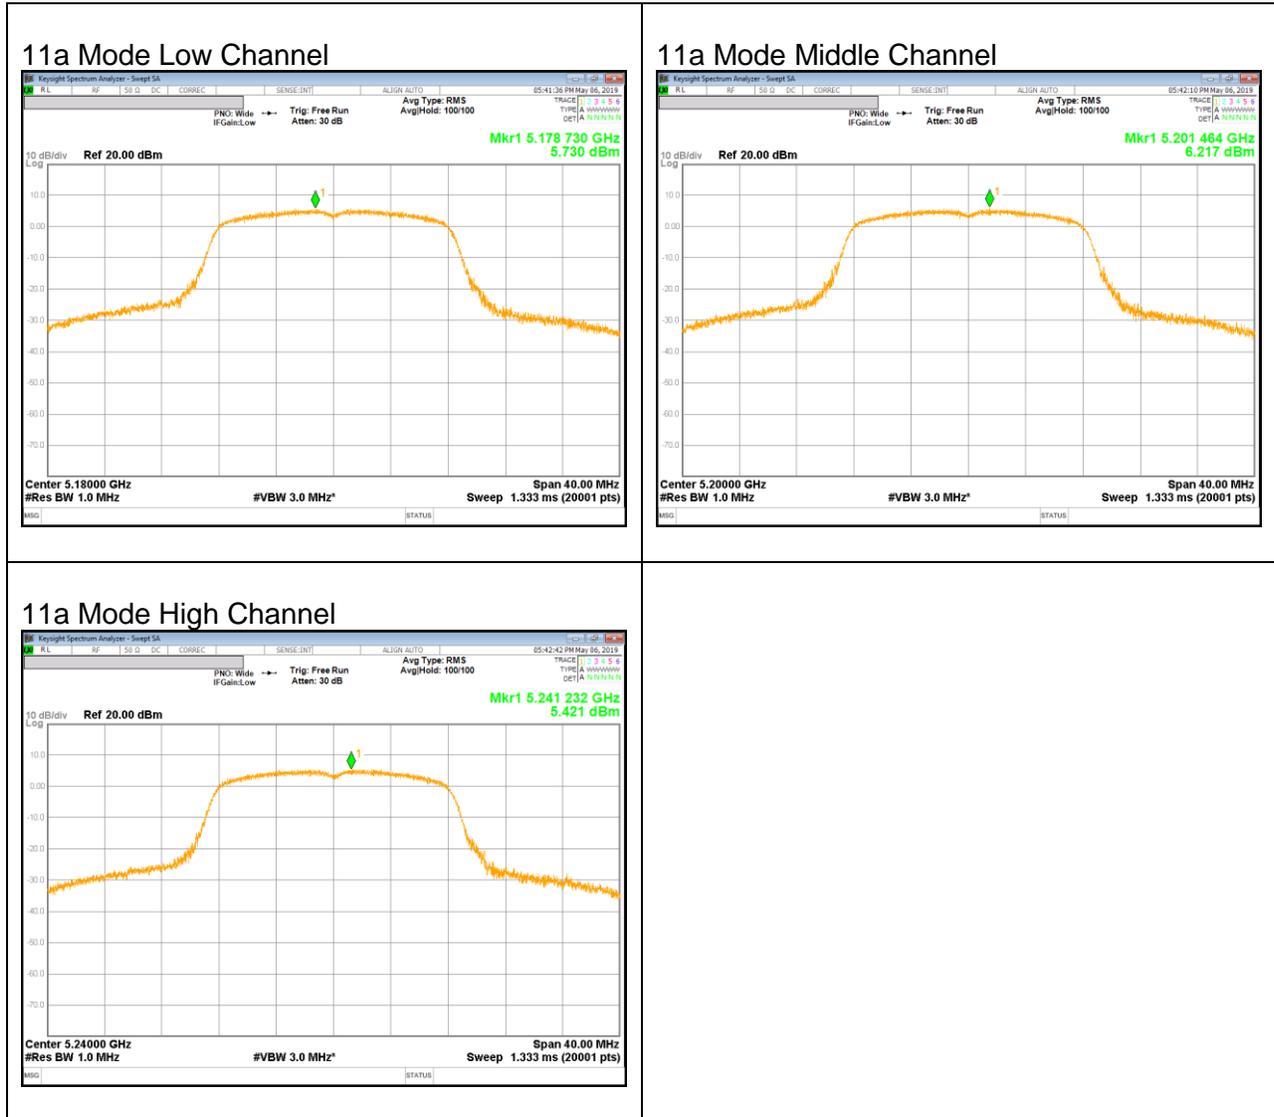


UNII 5.2 GHz IEEE 802.11n HT20 mode PSD

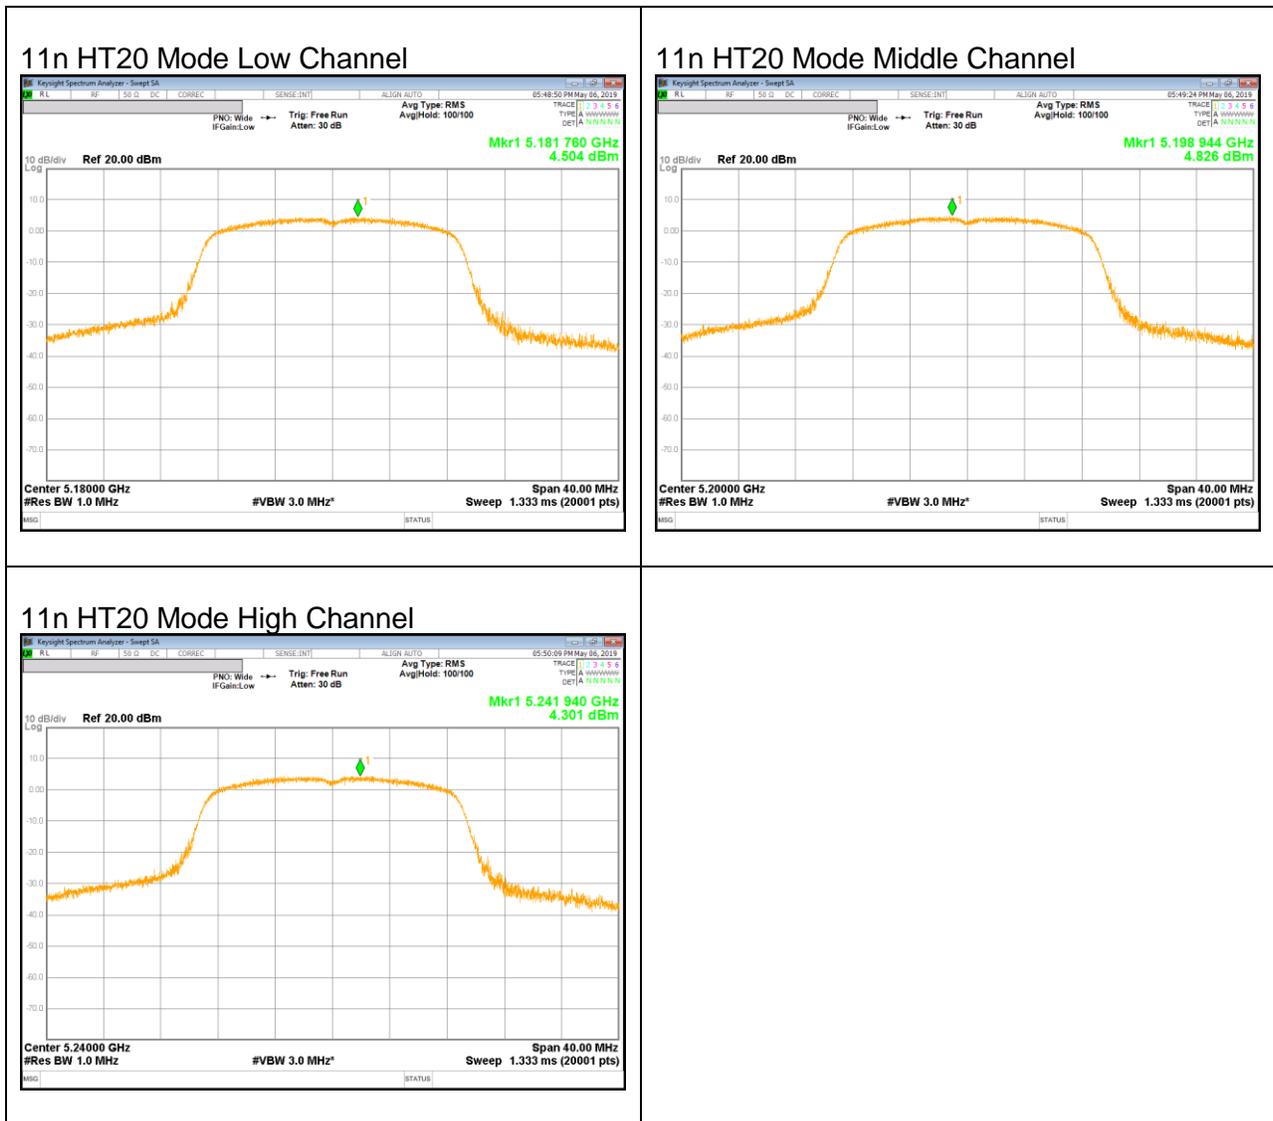


UNII 5.2 GHz IEEE 802.11n HT40 mode PSD

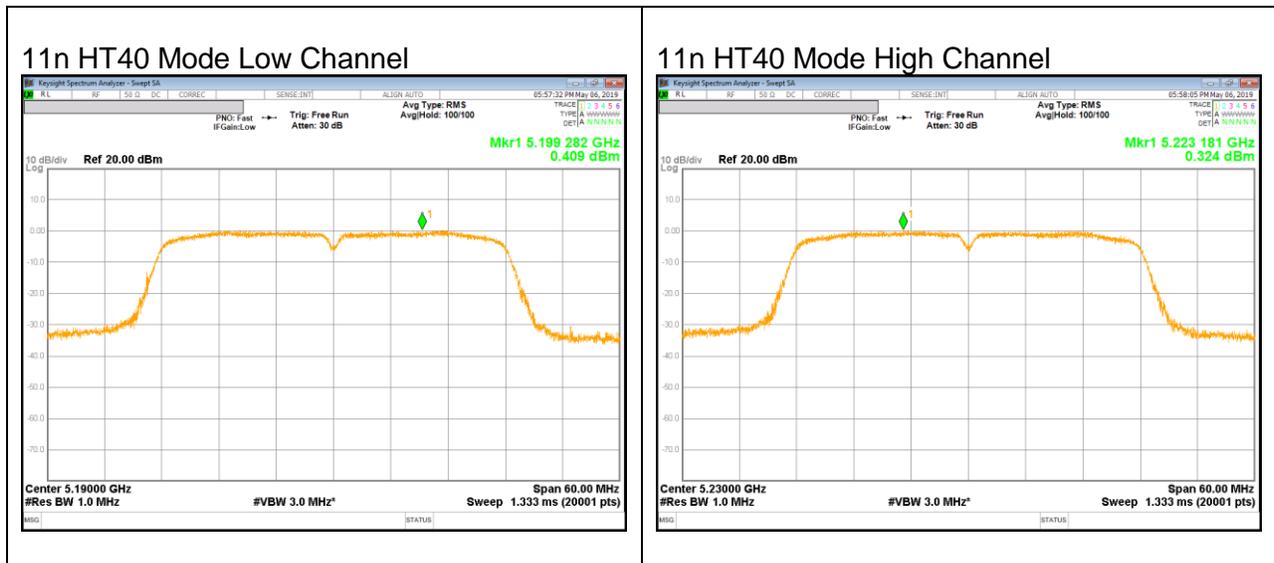


UNII 5.2 GHz IEEE 802.11ac VHT80 mode PSD

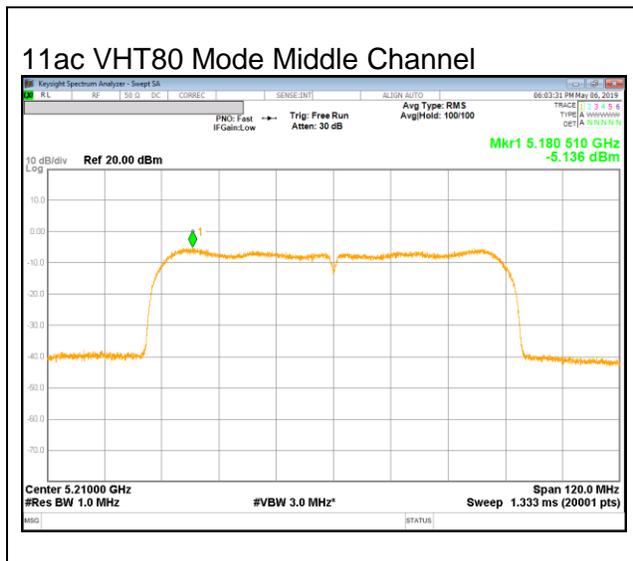


UNII 5.3 GHz IEEE 802.11a mode PSD

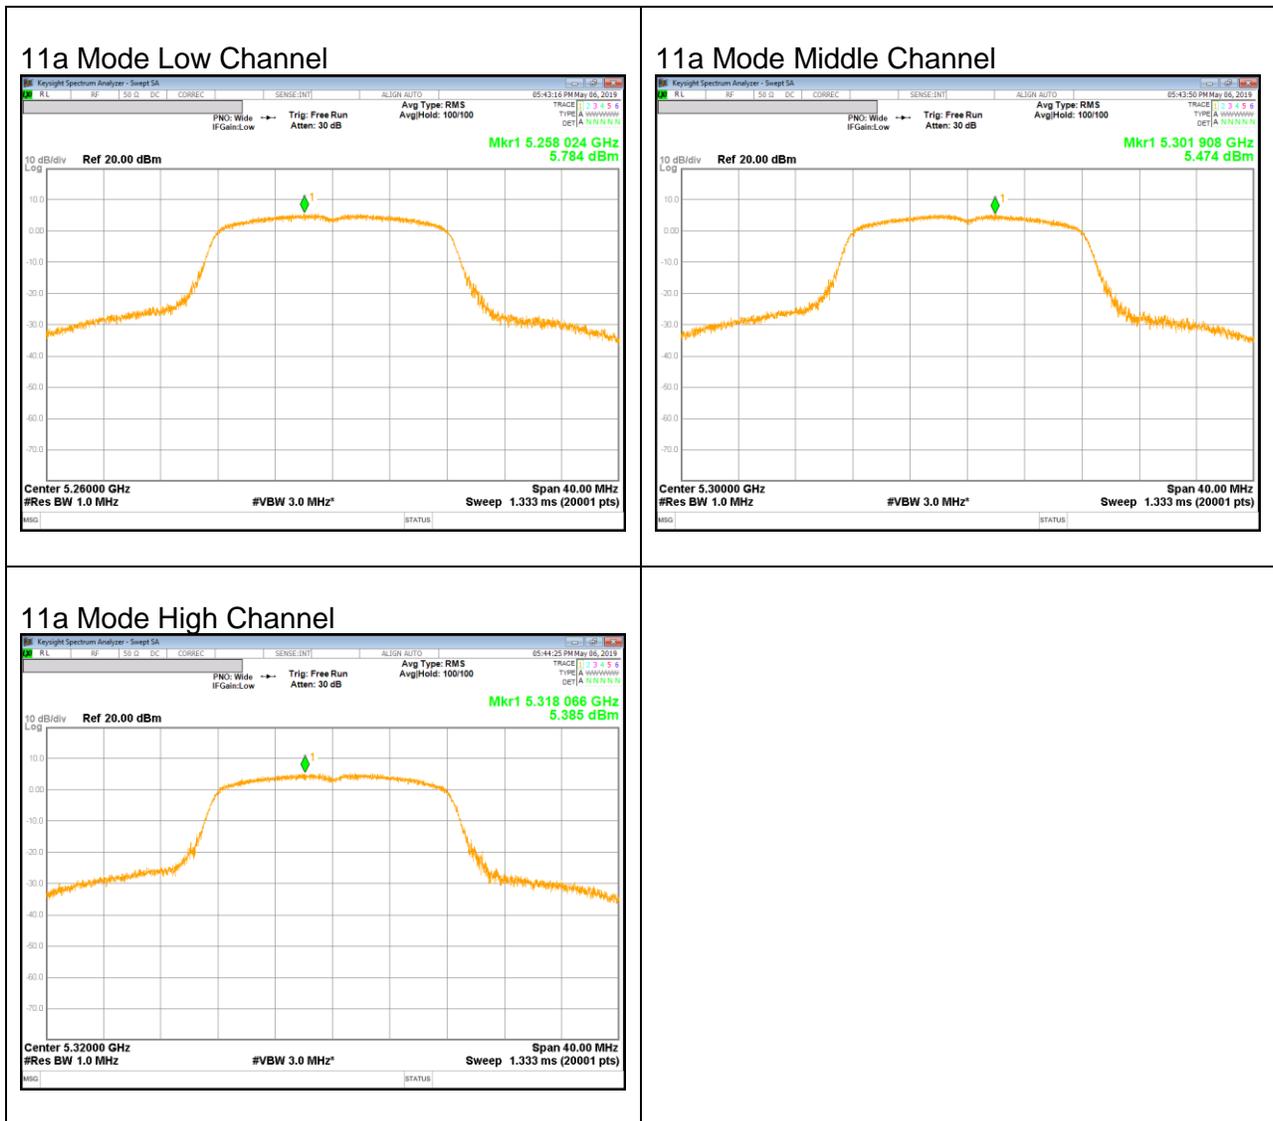


UNII 5.3 GHz IEEE 802.11n HT20 mode PSD

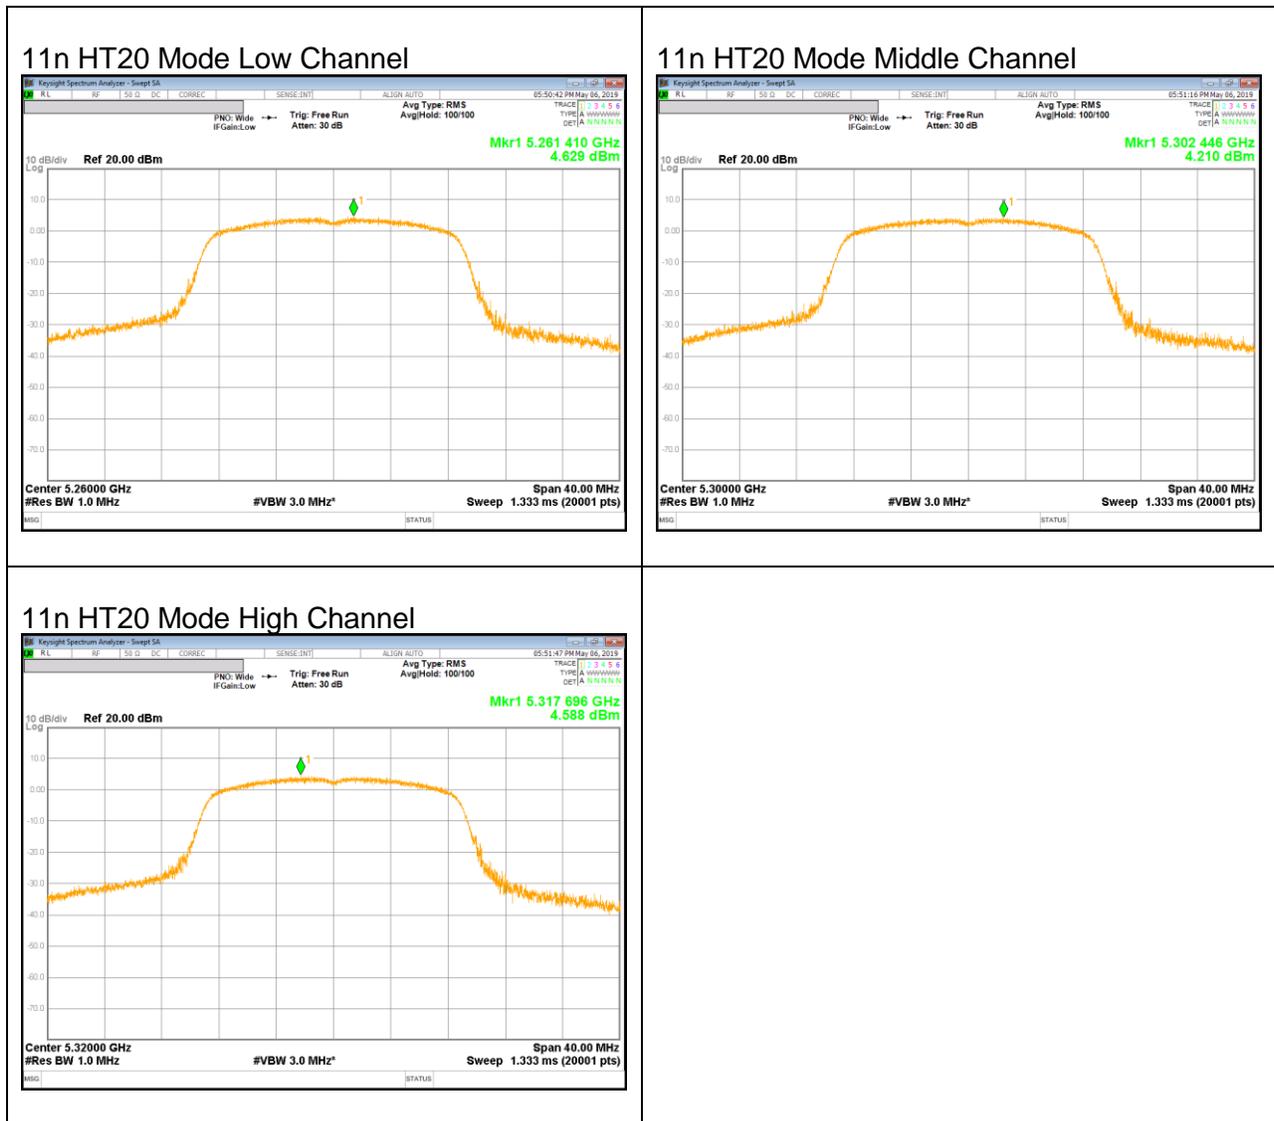


UNII 5.3 GHz IEEE 802.11n HT40 mode PSD

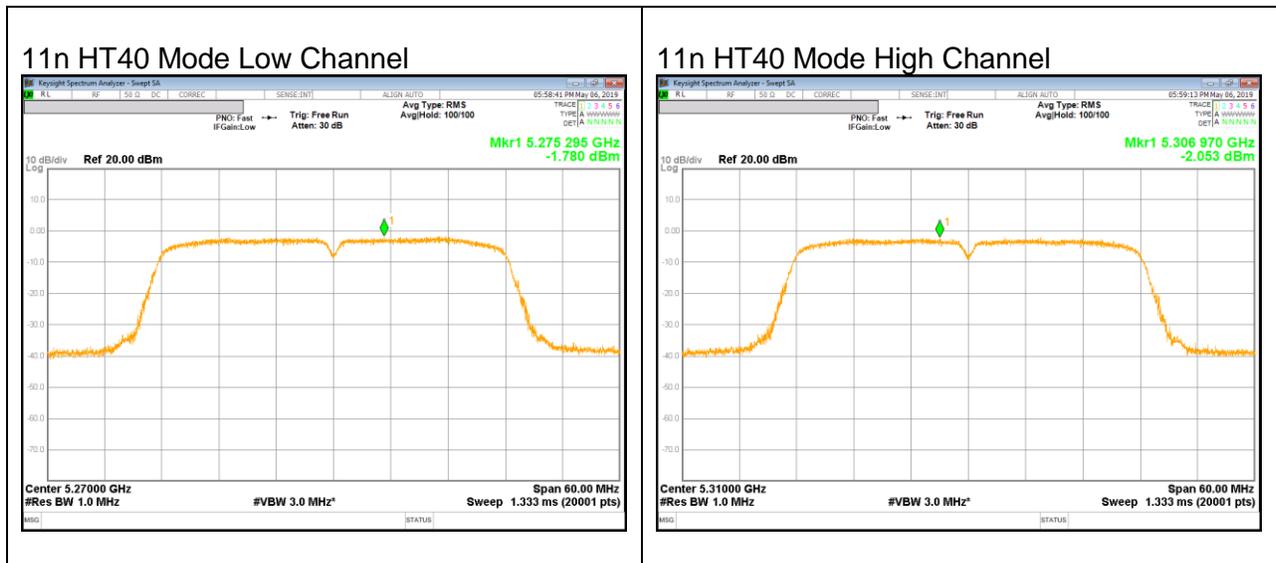


UNII 5.3 GHz IEEE 802.11ac VHT80 mode PSD

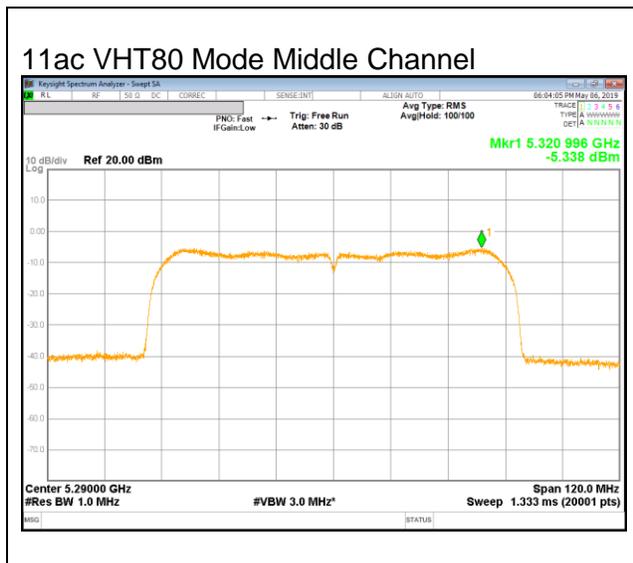


UNII 5.5 GHz IEEE 802.11a mode PSD

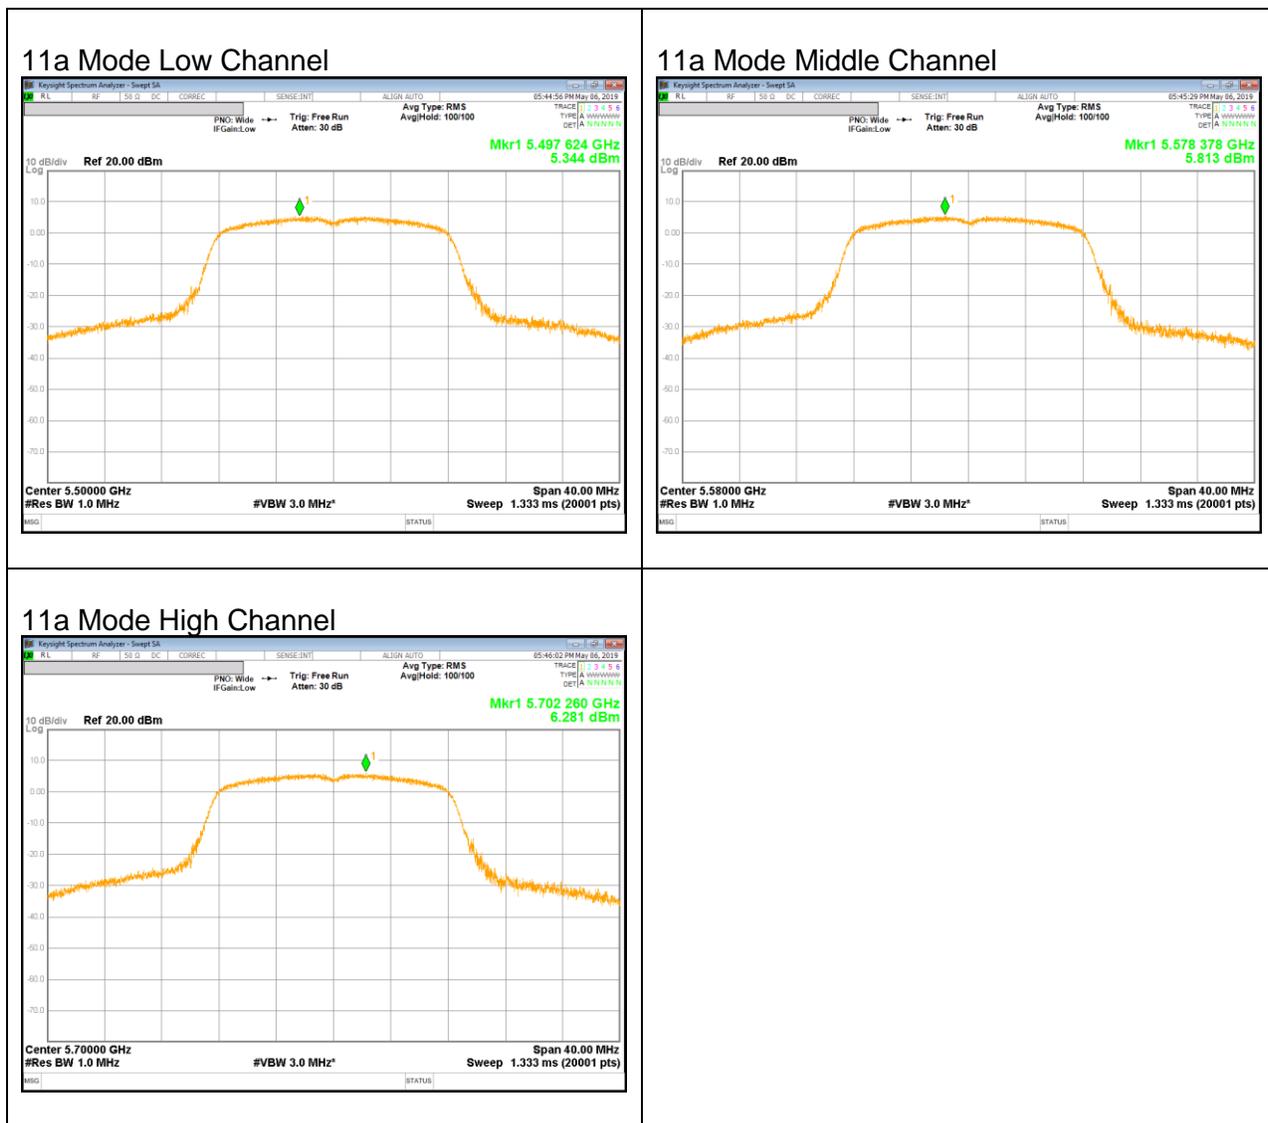


UNII 5.5 GHz IEEE 802.11n HT20 mode PSD

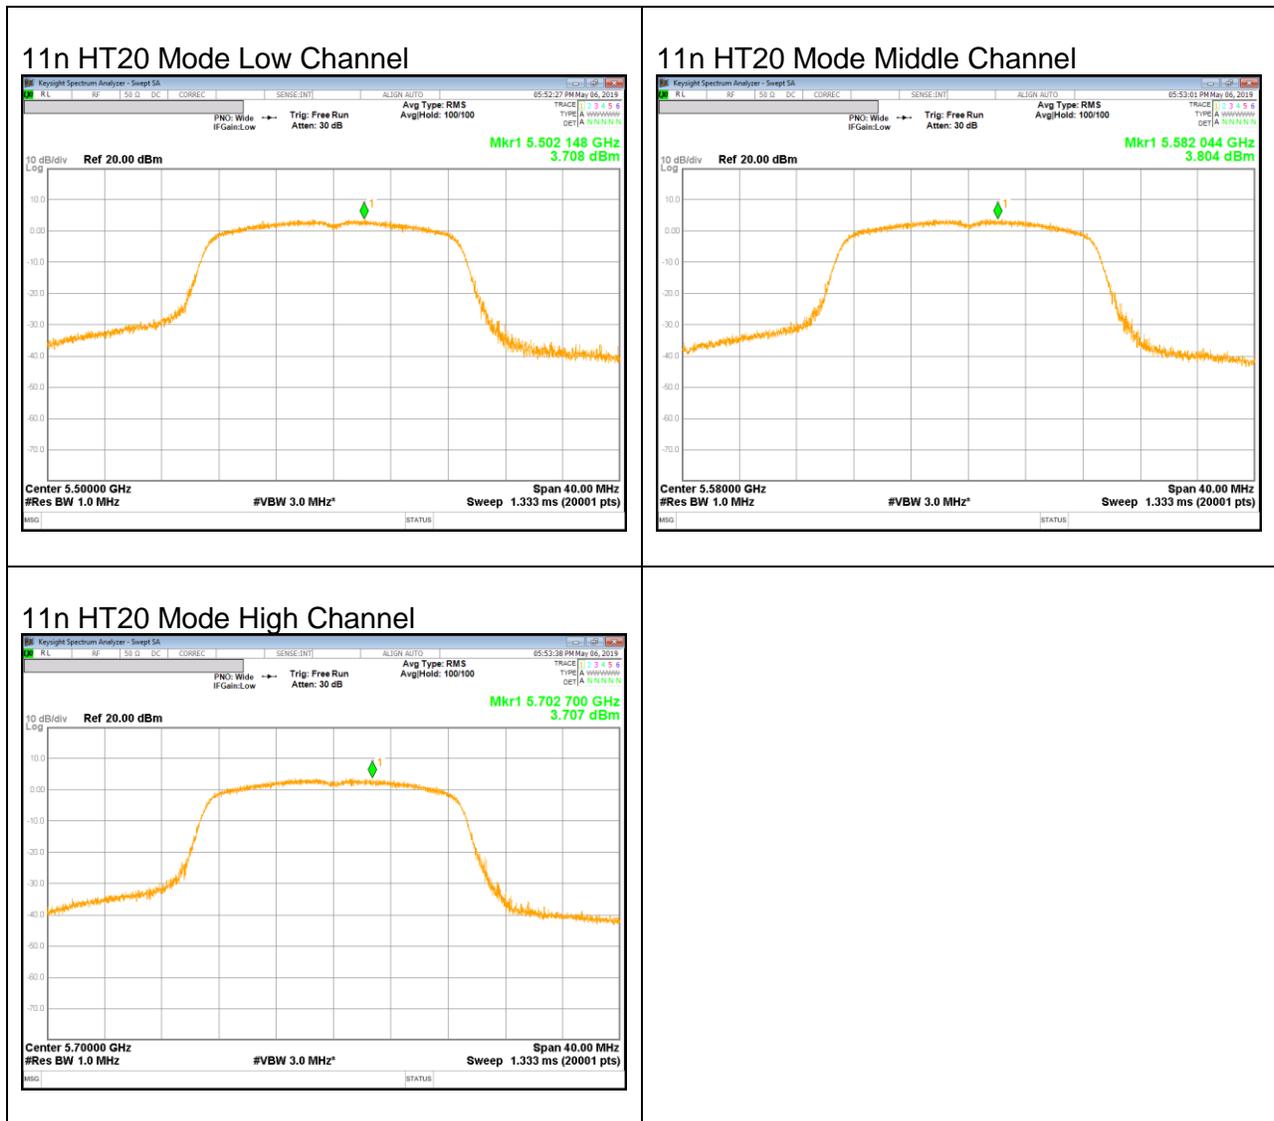


UNII 5.5 GHz IEEE 802.11n HT40 mode PSD

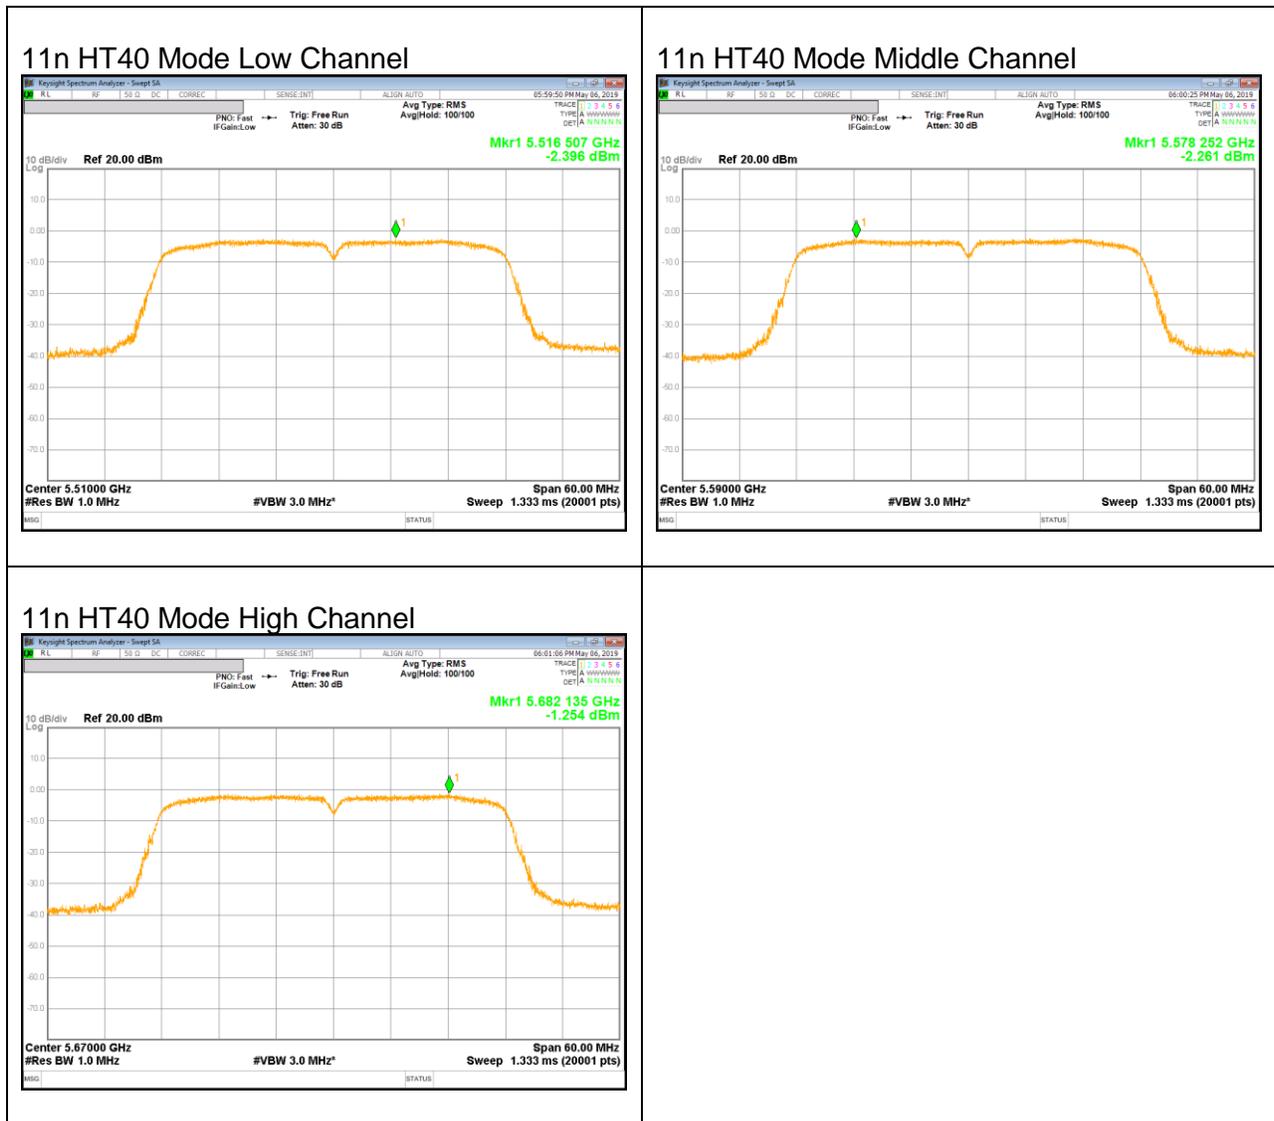


UNII 5.5 GHz IEEE 802.11ac VHT80 mode PSD

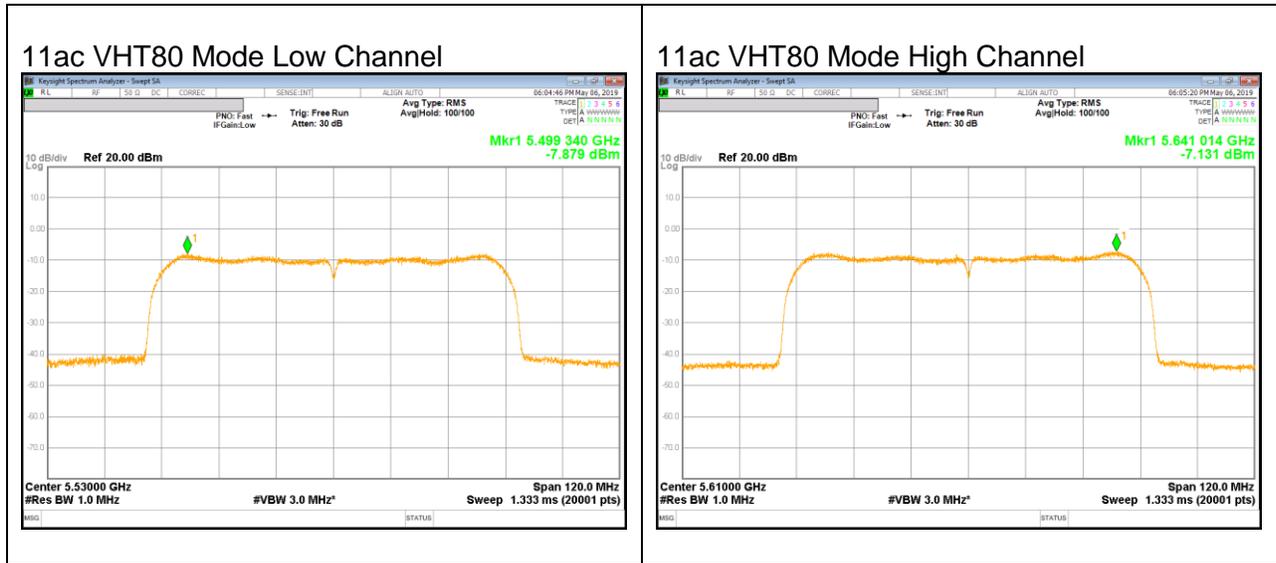




UNII Straddle Ch. IEEE 802.11a mode Ourput Power and PSD

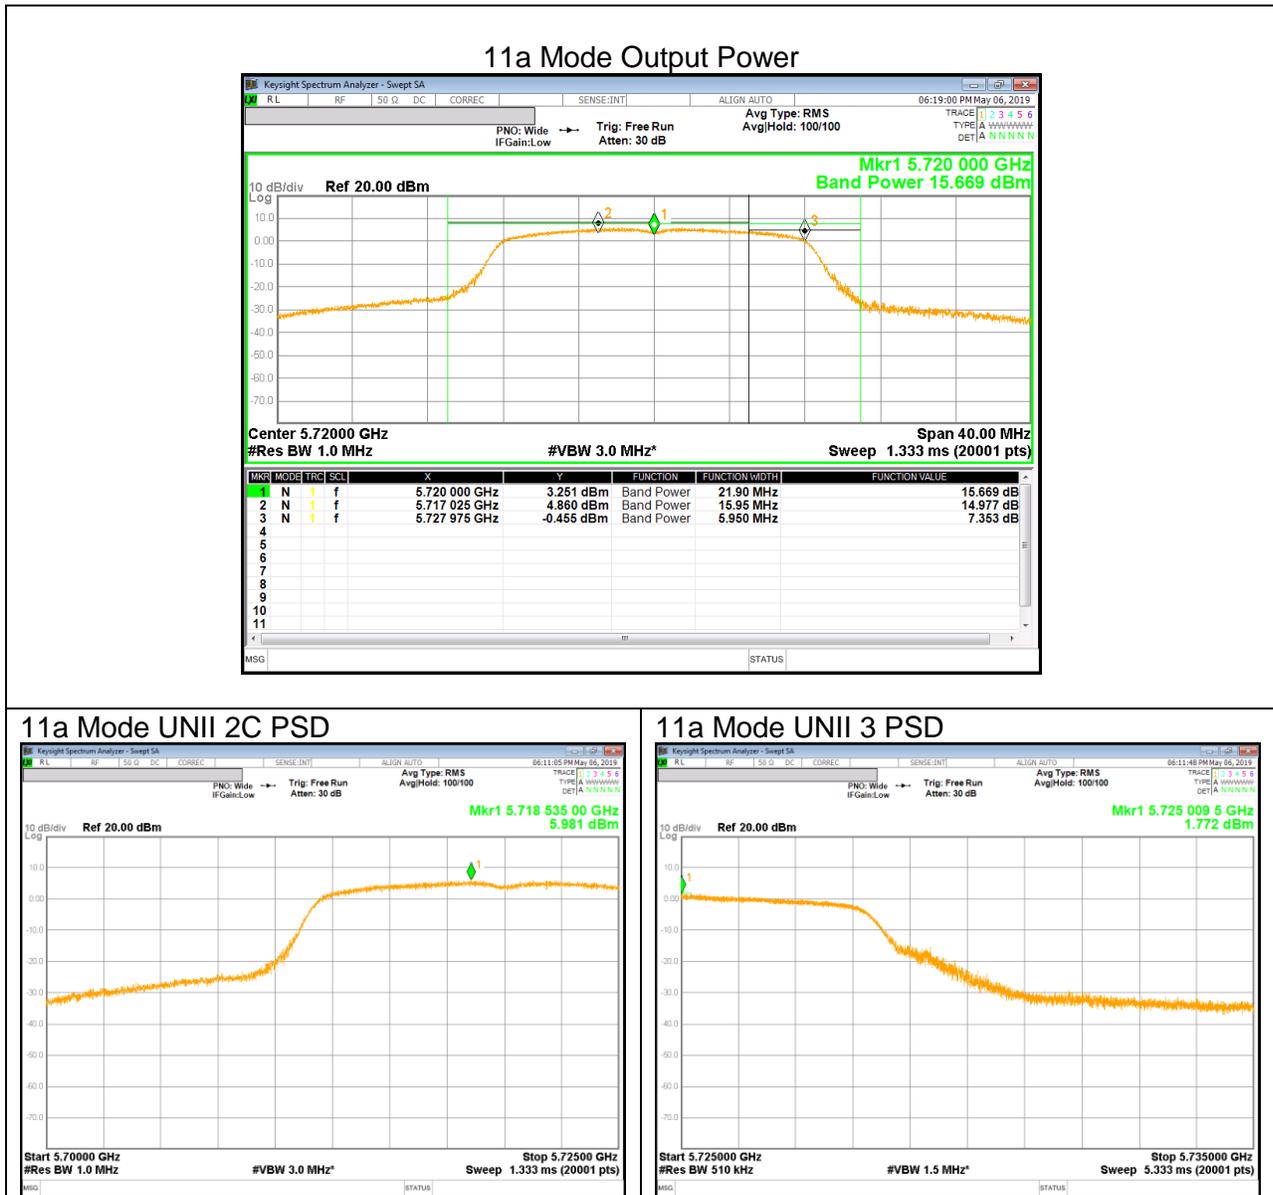


UNII Straddle Ch. IEEE 802.11n HT20 mode Ourput Power and PSD

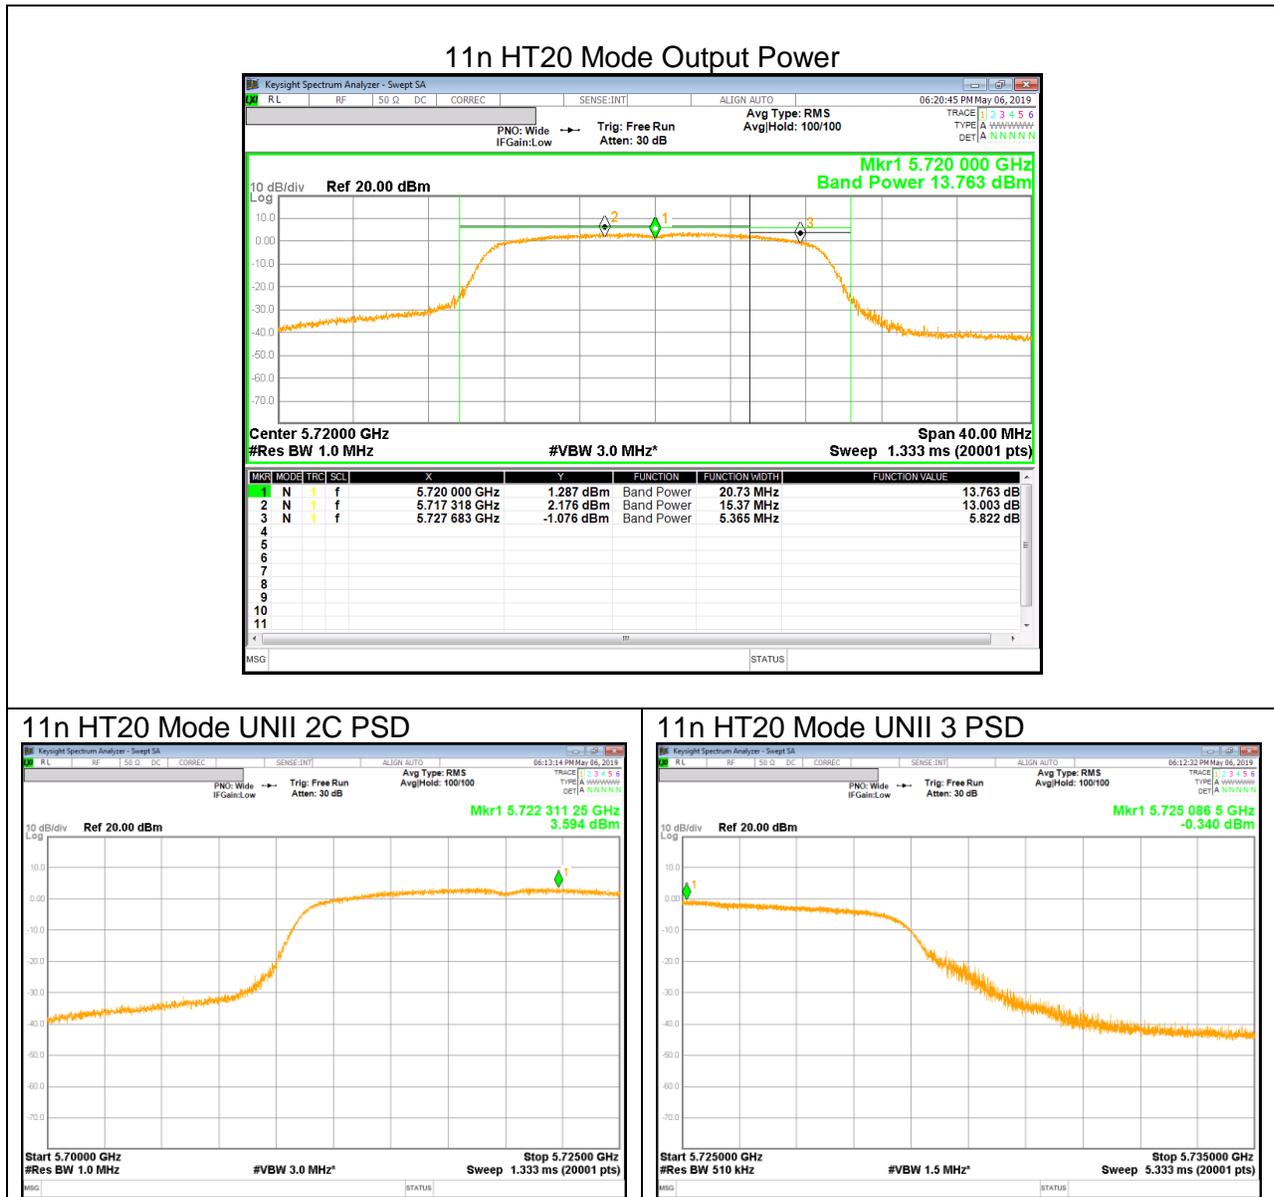


UNII Straddle Ch. IEEE 802.11n HT40 mode Ourput Power and PSD

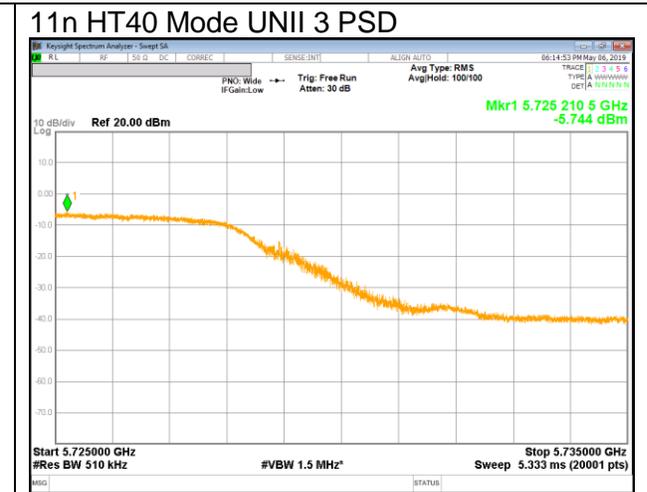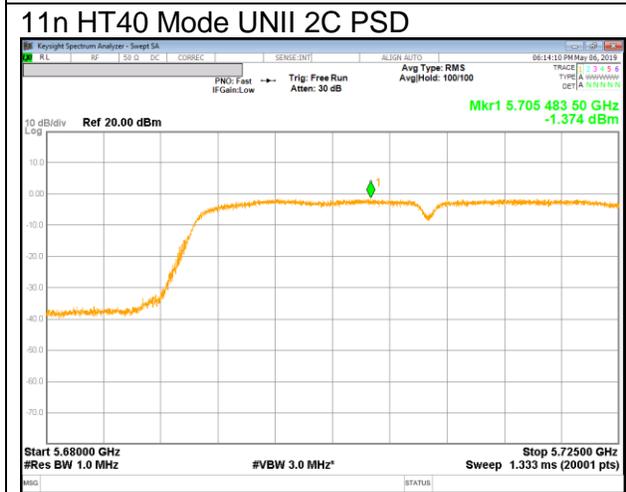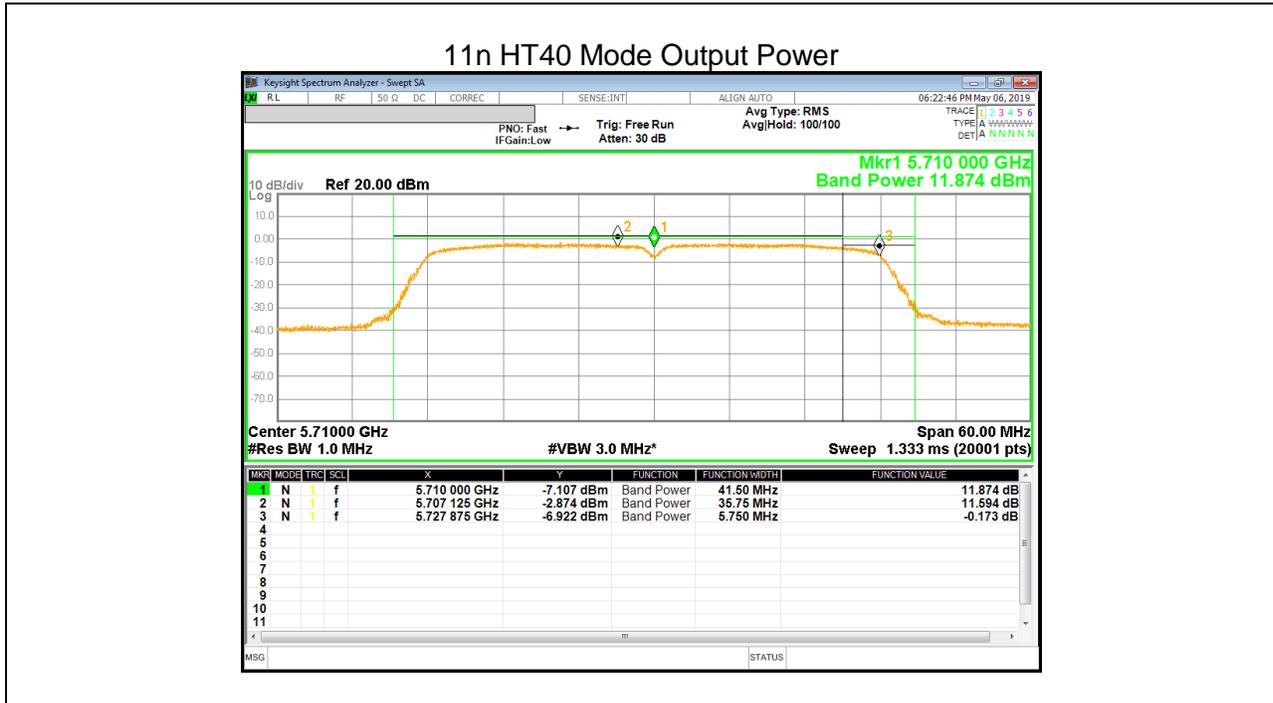


UNII Straddle Ch. IEEE 802.11ac VHT80 mode Ourput Power and PSD

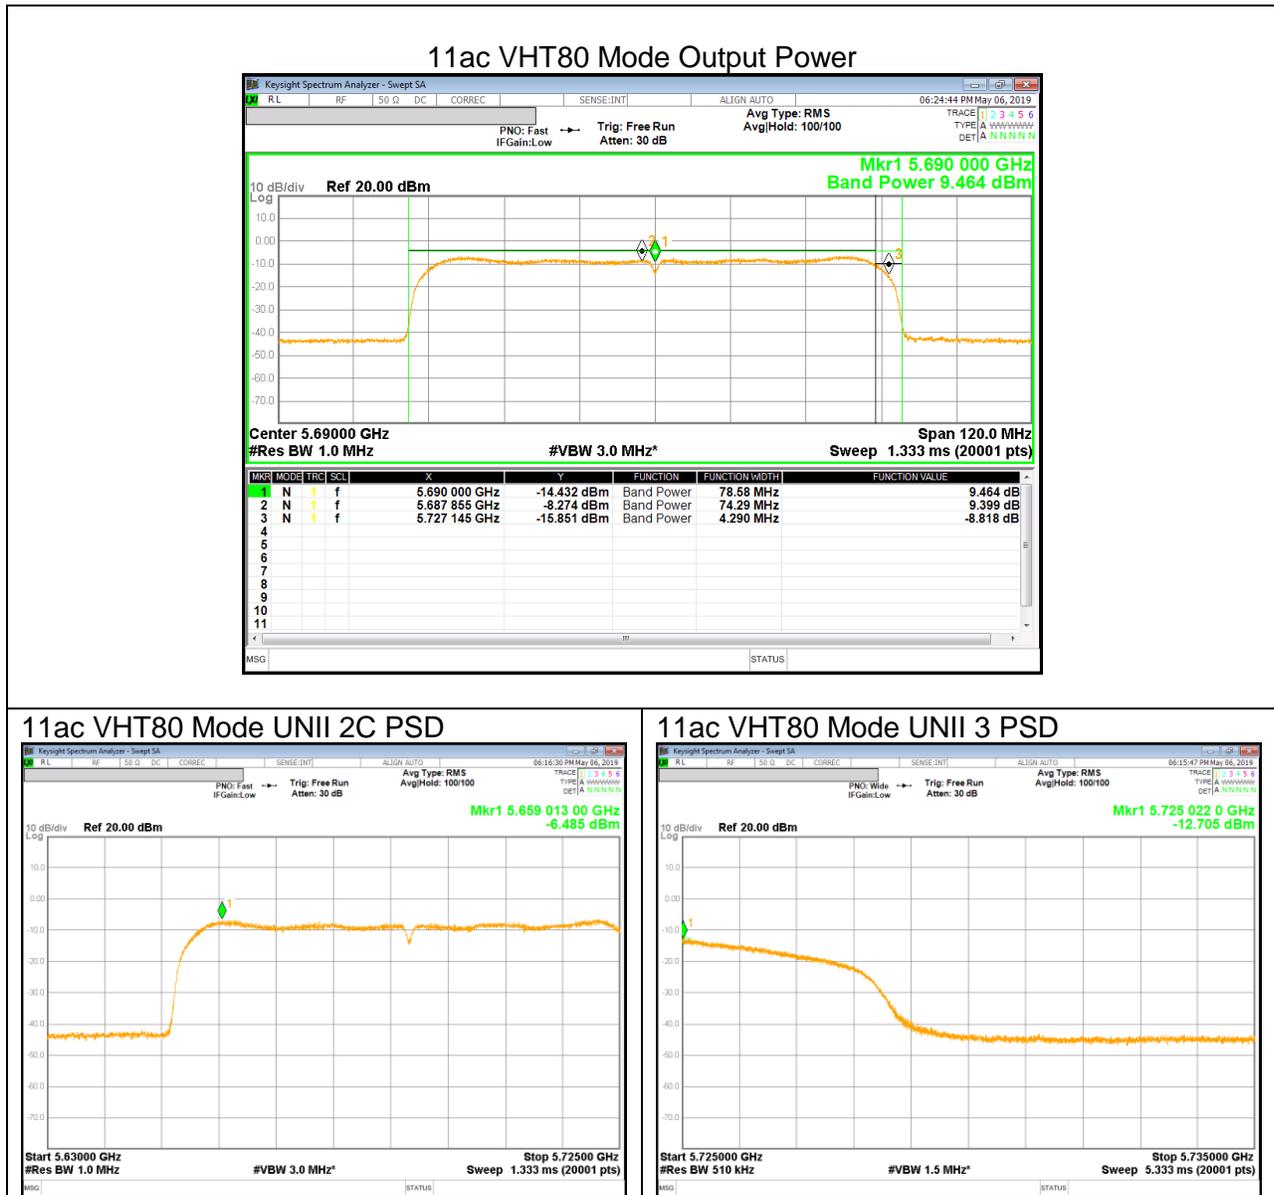


UNII 5.8 GHz IEEE 802.11a mode PSD

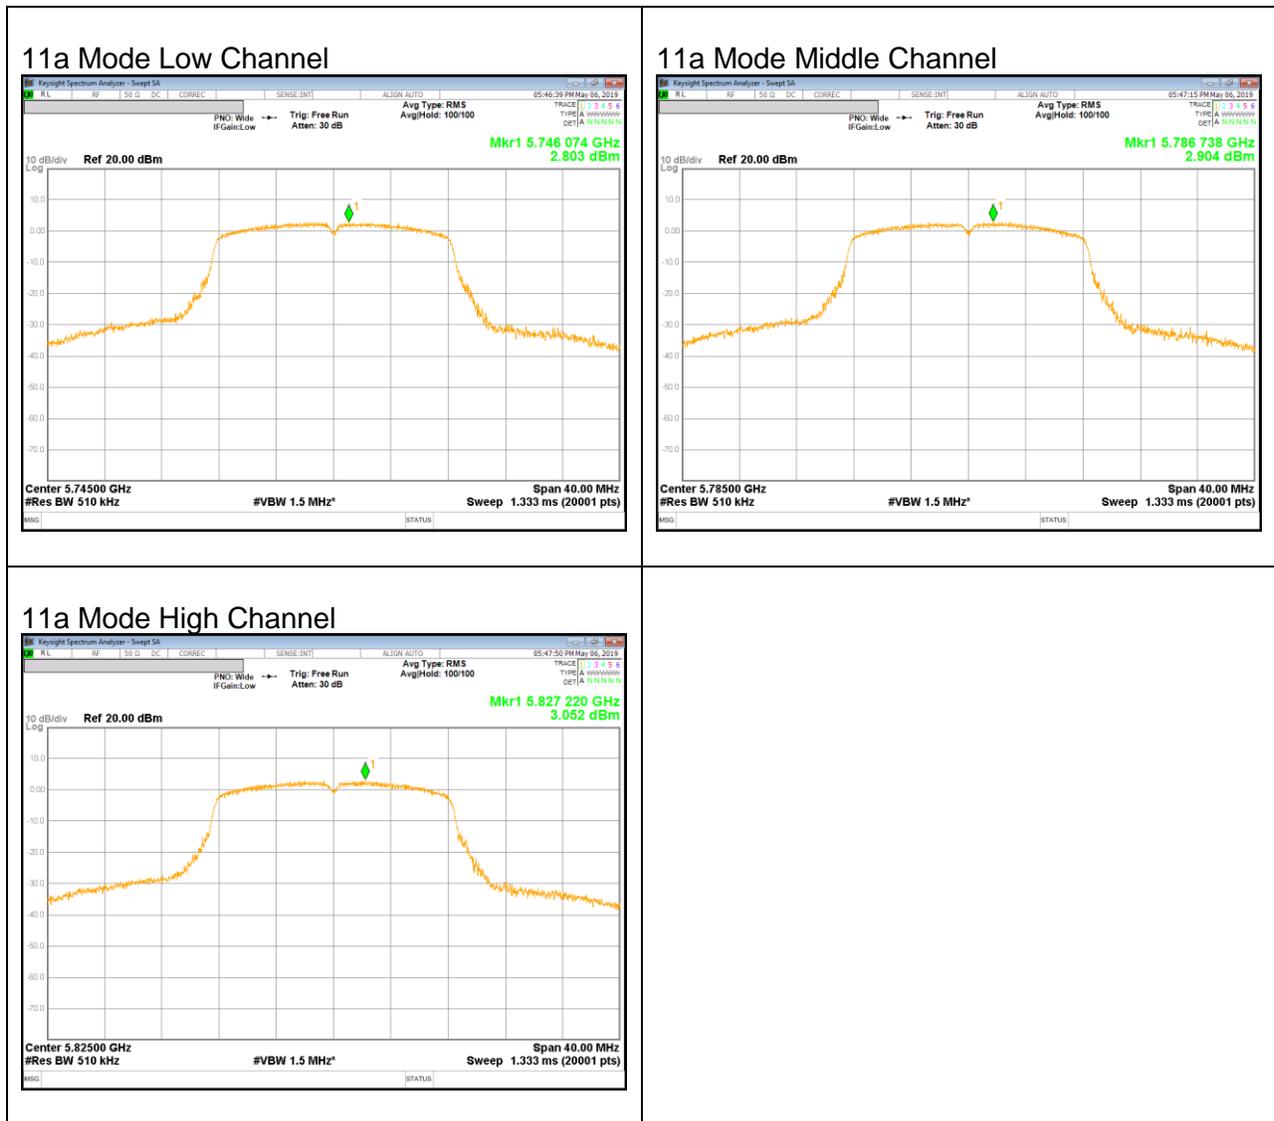


UNII 5.8 GHz IEEE 802.11n HT20 mode PSD

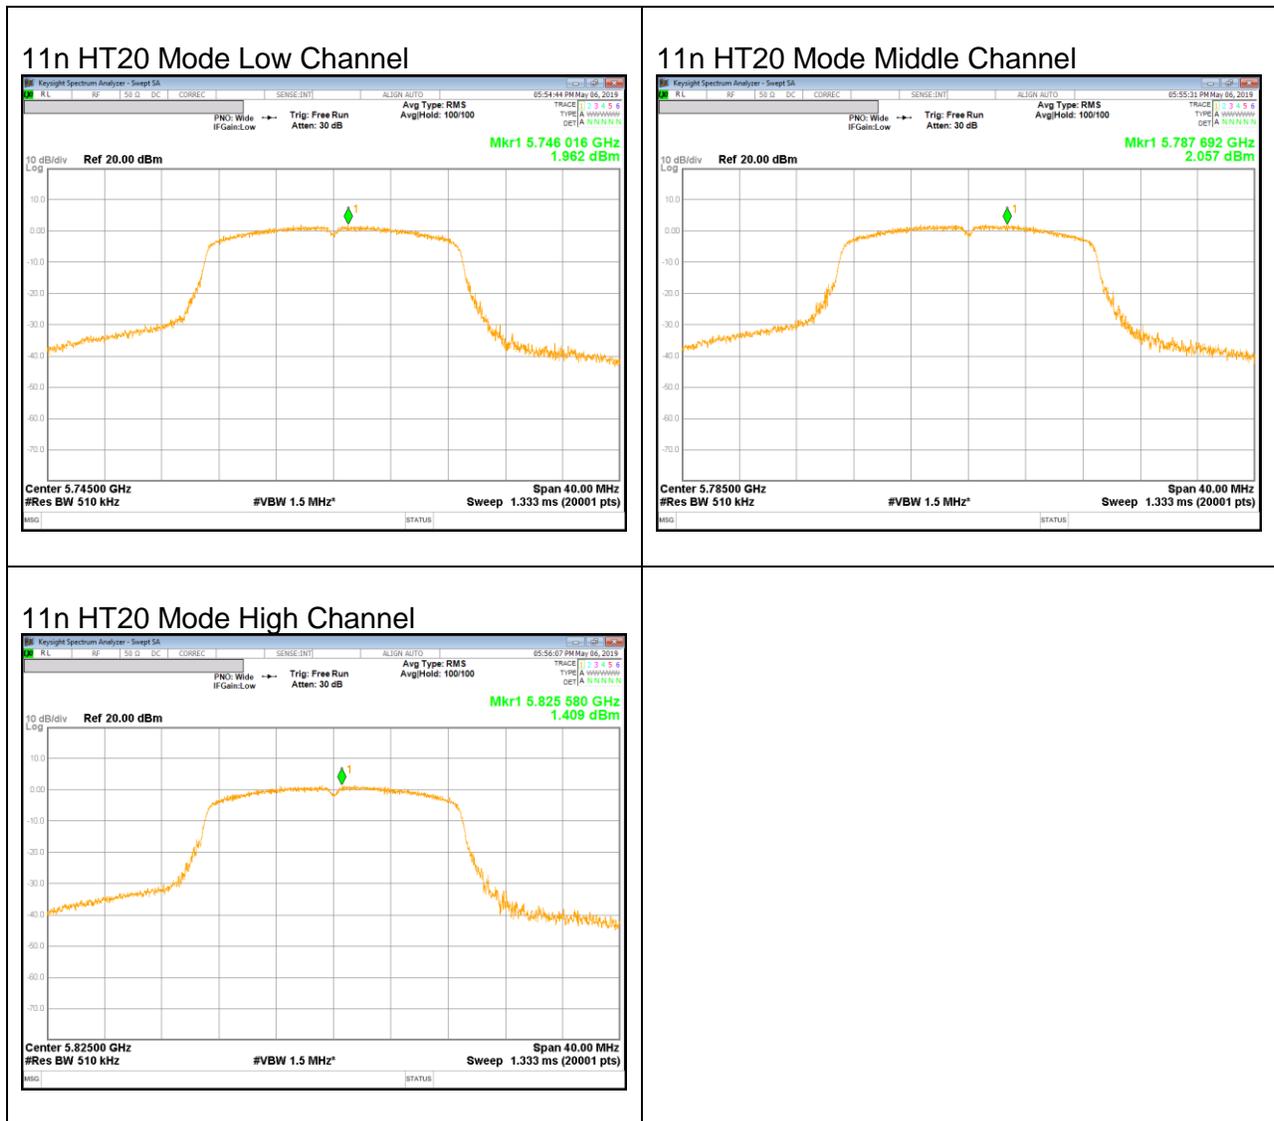

UNII 5.8 GHz IEEE 802.11n HT40 mode PSD

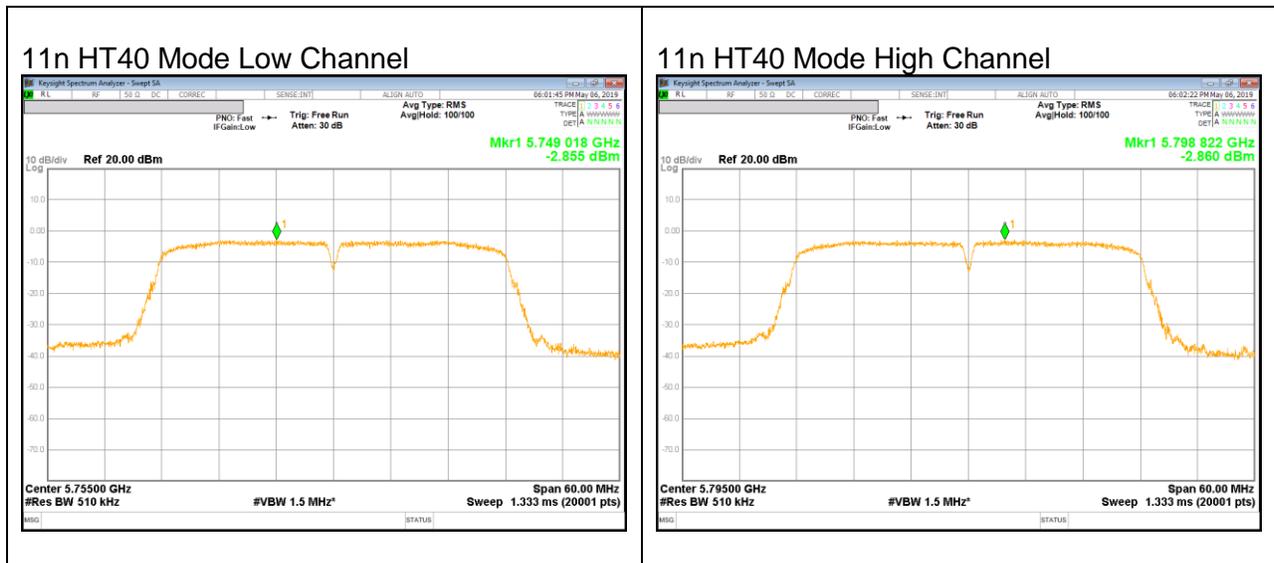

UNII 5.8 GHz IEEE 802.11ac VHT80 mode PSD

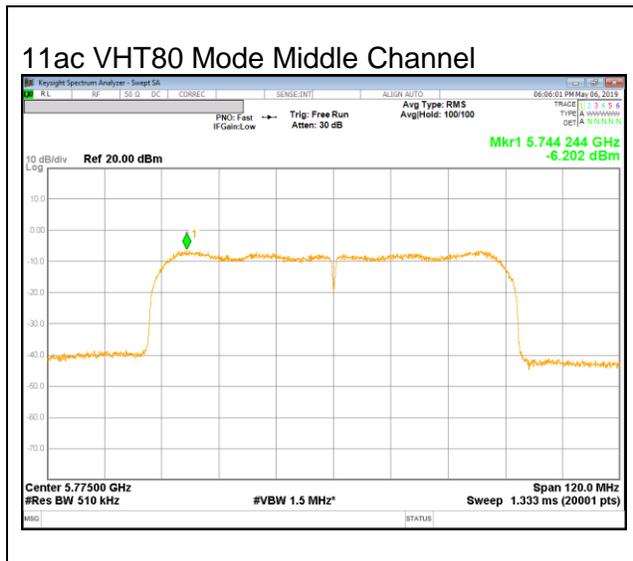

11. TRANSMITTER ABOVE 1 GHz

LIMITS

FCC §15.205 and §15.209
 RSS-247 §6.2.1.1, §6.2.2.1, §6.2.3.1, §6.2.4.1

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC §15.407 (b)

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary,

provided the measured energy is integrated to show the total power over 1 MHz.

- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Note

- Limit translation to field strength level (FCC §15.407)

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 = -27\text{dBm} + 95.2 = 68.2\text{dBuV/m}$$

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 = -17\text{dBm} + 95.2 = 78.2\text{dBuV/m}$$

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Reference to KDB 789033 D02 v02r01 UNII part G) 6) c) Method AD:

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor to the reading offset for average measurements.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).

Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

11.1. 5.2 GHz

11.1.1. TX Above 1GHz 802.11a MODE IN THE 5.2GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL)

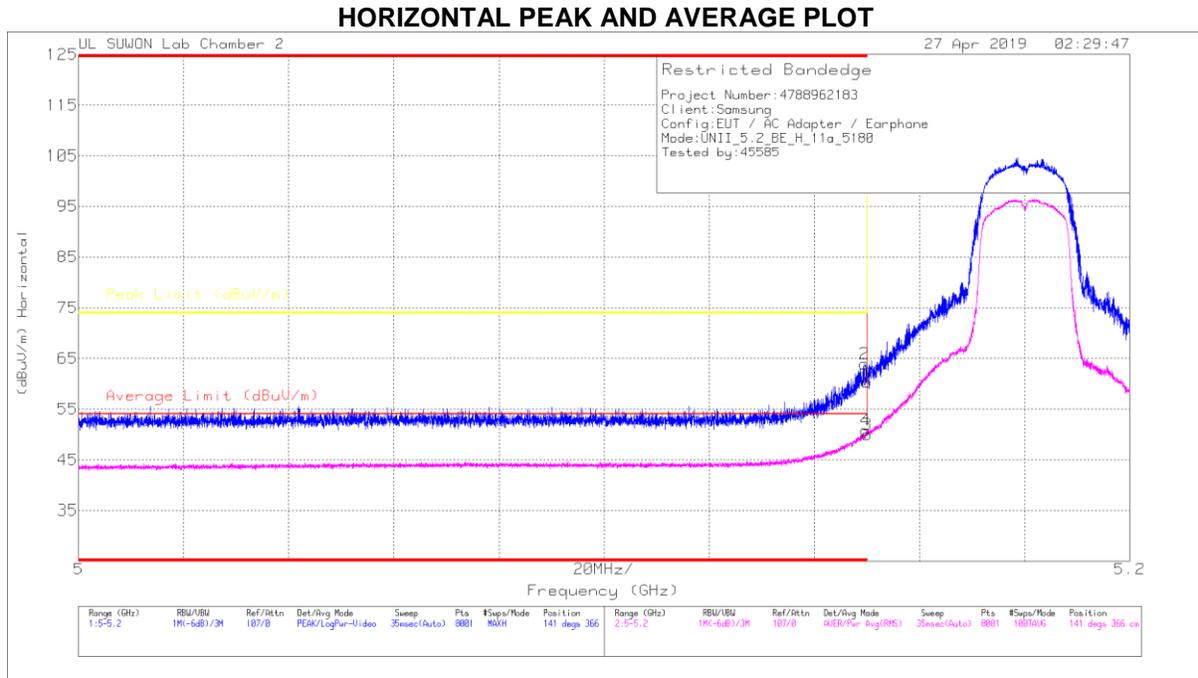

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	5.15	44.31	Pk	34.3	-18.2	0	60.41	-	-	74	-13.59	141	366	H
2	* 5.15	47.8	Pk	34.3	-18.2	0	63.9	-	-	74	-10.1	141	366	H
3	5.15	32.76	RMS	34.3	-17.3	.2	49.96	54	-4.04	-	-	141	366	H
4	* 5.15	33.58	RMS	34.3	-17.3	.2	50.78	54	-3.22	-	-	141	366	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

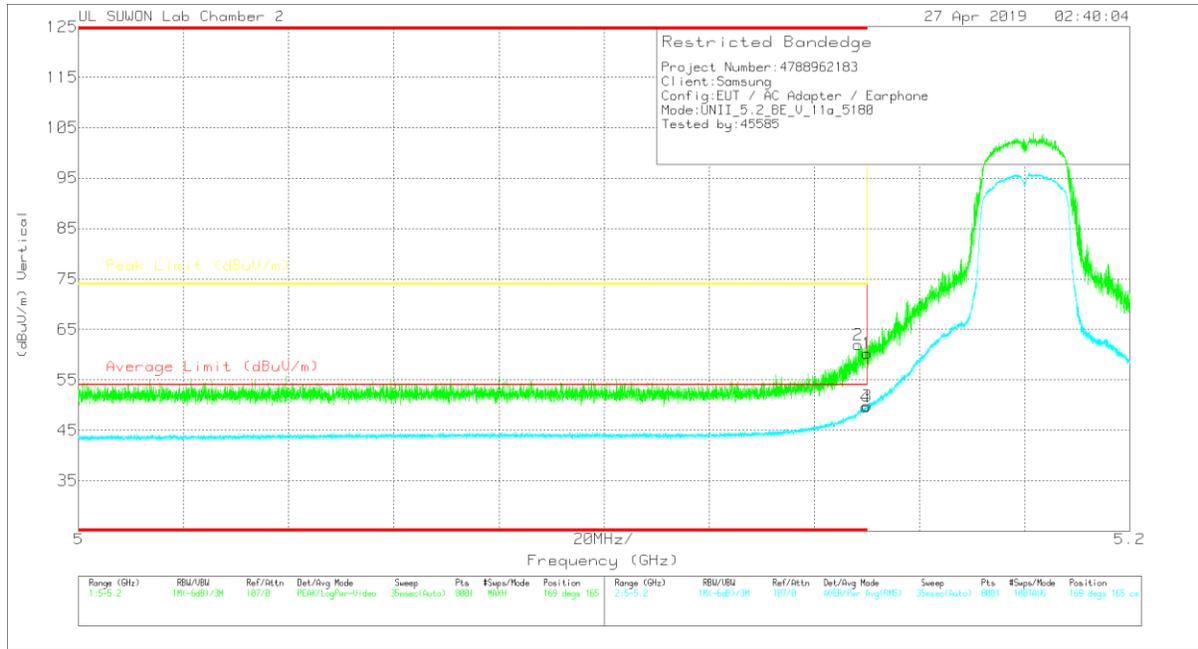

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	44.16	Pk	34.3	-18.2	0	60.26	-	-	74	-13.74	169	165	V
2	* 5.148	45.75	Pk	34.3	-18.1	0	61.95	-	-	74	-12.05	169	165	V
3	5.15	32.65	RMS	34.3	-17.3	.2	49.85	54	-4.15	-	-	169	165	V
4	* 5.15	32.42	RMS	34.3	-17.3	.2	49.62	54	-4.38	-	-	169	165	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

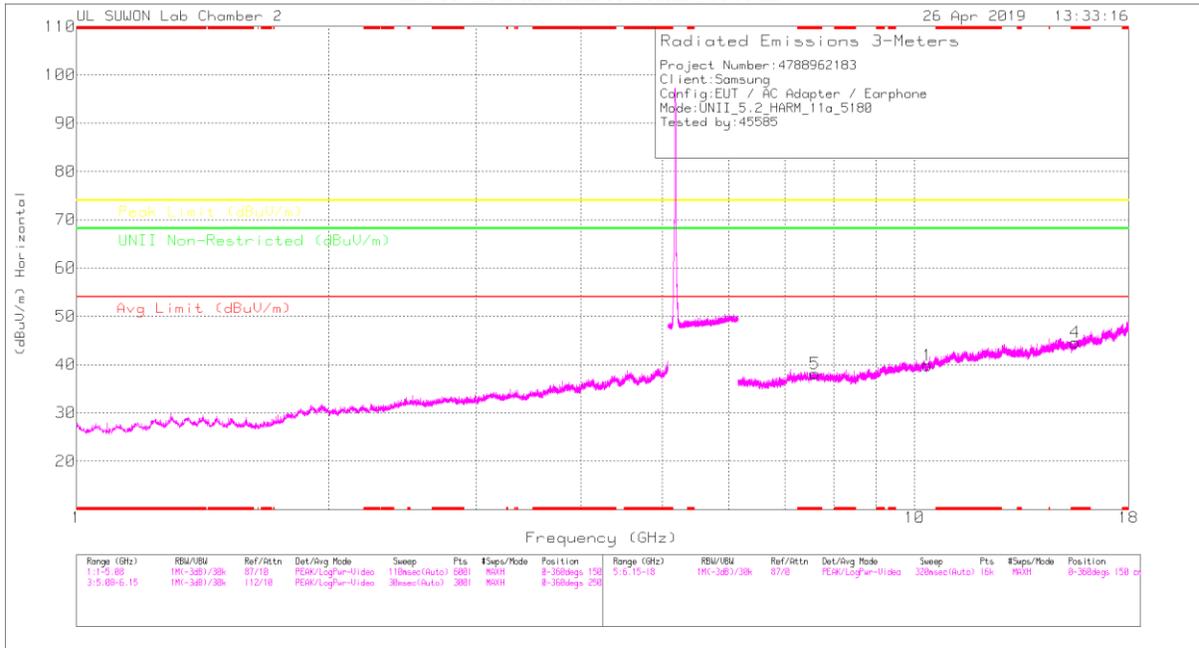

LOW CHANNEL VERTICAL

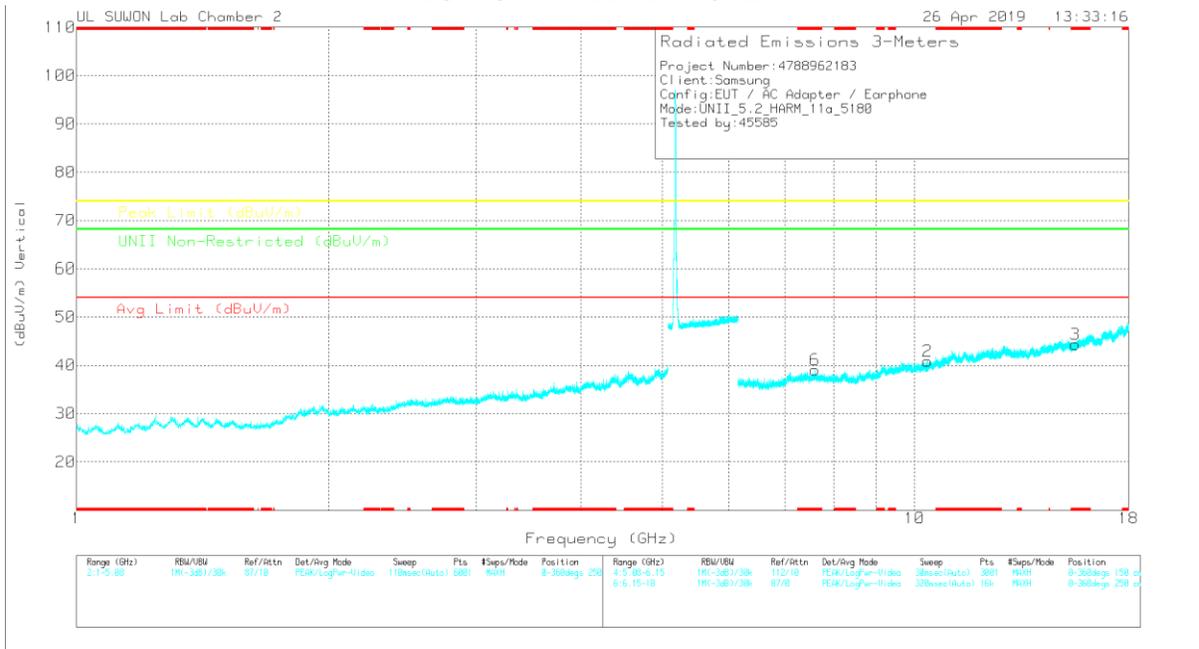

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0018724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.359	23.37	PK	37.5	-21	0	39.87	-	-	-	-	68.2	-28.33	0-360	150	H
4	* 15.544	24.44	PK	39.9	-19.7	0	44.64	-	-	74	-29.36	-	-	0-360	250	H
5	* 7.602	25.99	PK	36.1	-24	0	38.09	-	-	74	-35.91	-	-	0-360	150	H
2	10.36	24.4	PK	37.5	-21	0	40.9	-	-	-	-	68.2	-27.3	0-360	150	V
3	* 15.543	24.16	PK	39.9	-19.7	0	44.36	-	-	74	-29.64	-	-	0-360	150	V
6	* 7.607	26.99	PK	36.1	-24	0	39.09	-	-	74	-34.91	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

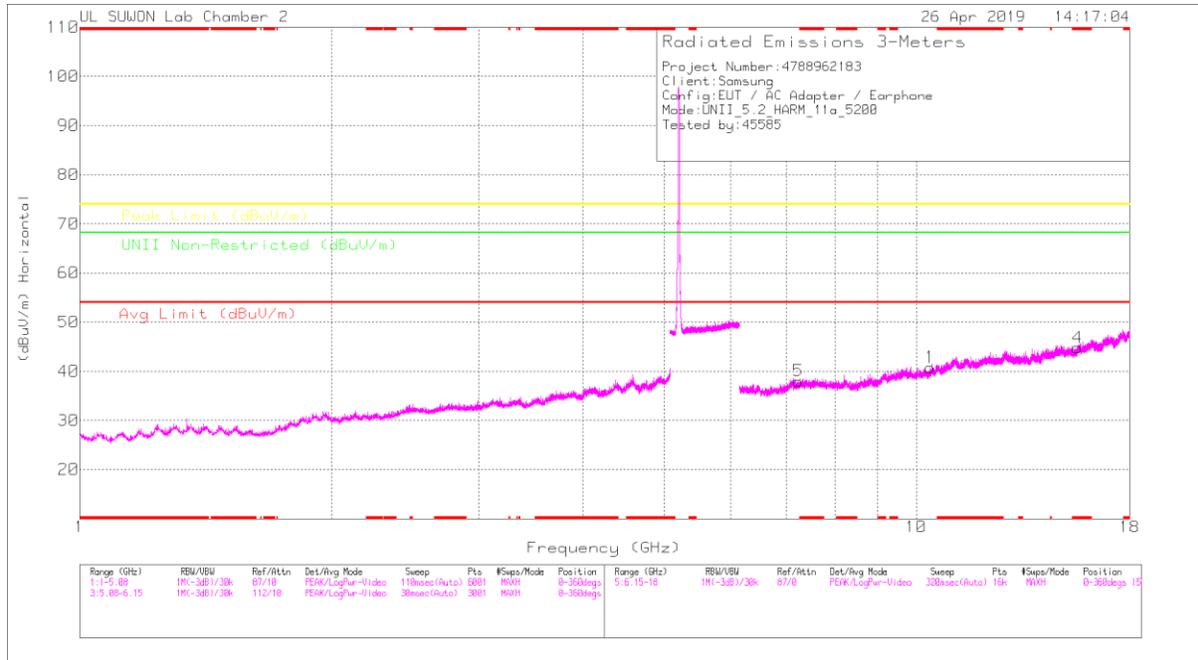

MID CHANNEL VERTICAL

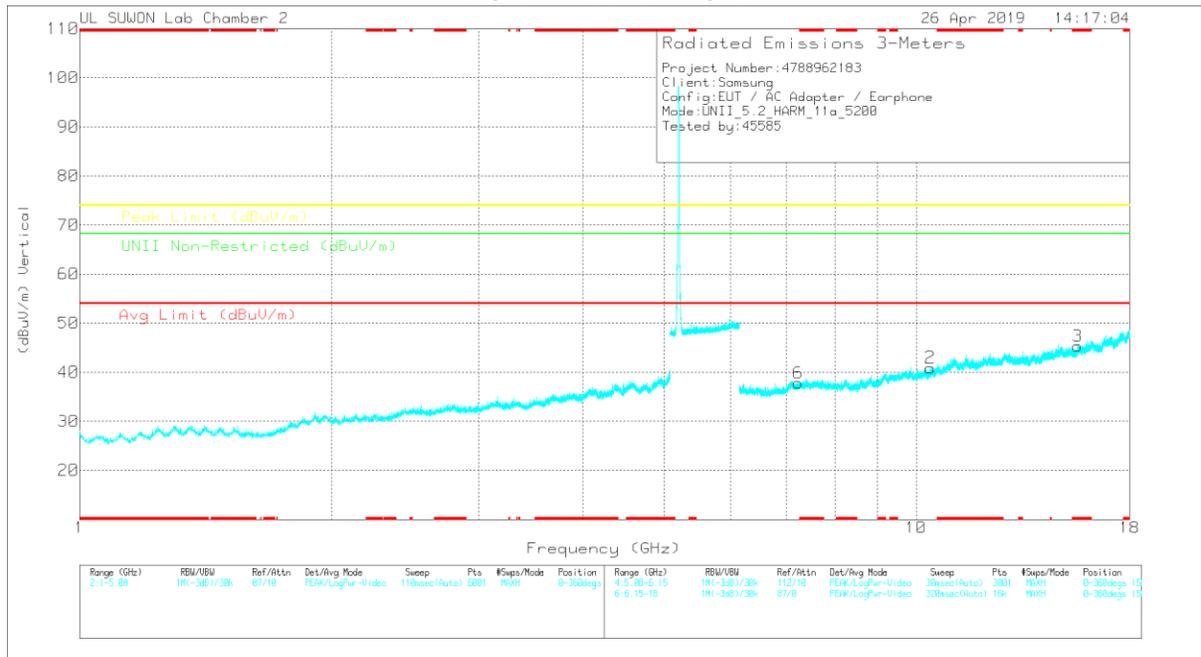

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00188724	66Hz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Agc Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	10.399	24.09	PK	37.6	-20.9	0	40.79	-	-	-	-	68.2	-27.41	0-360	150	H
4	* 15.603	24.62	PK	40	-19.8	0	44.82	-	-	74	-29.18	-	-	0-360	150	H
5	7.224	27.3	PK	36.1	-25.4	0	38	-	-	-	-	68.2	-30.2	0-360	250	H
2	10.4	24.32	PK	37.6	-21	0	40.92	-	-	-	-	68.2	-27.28	0-360	150	V
3	* 15.606	25.11	PK	40	-19.8	0	45.31	-	-	74	-28.69	-	-	0-360	250	V
6	7.223	27.09	PK	36.1	-25.4	0	37.79	-	-	-	-	68.2	-30.41	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

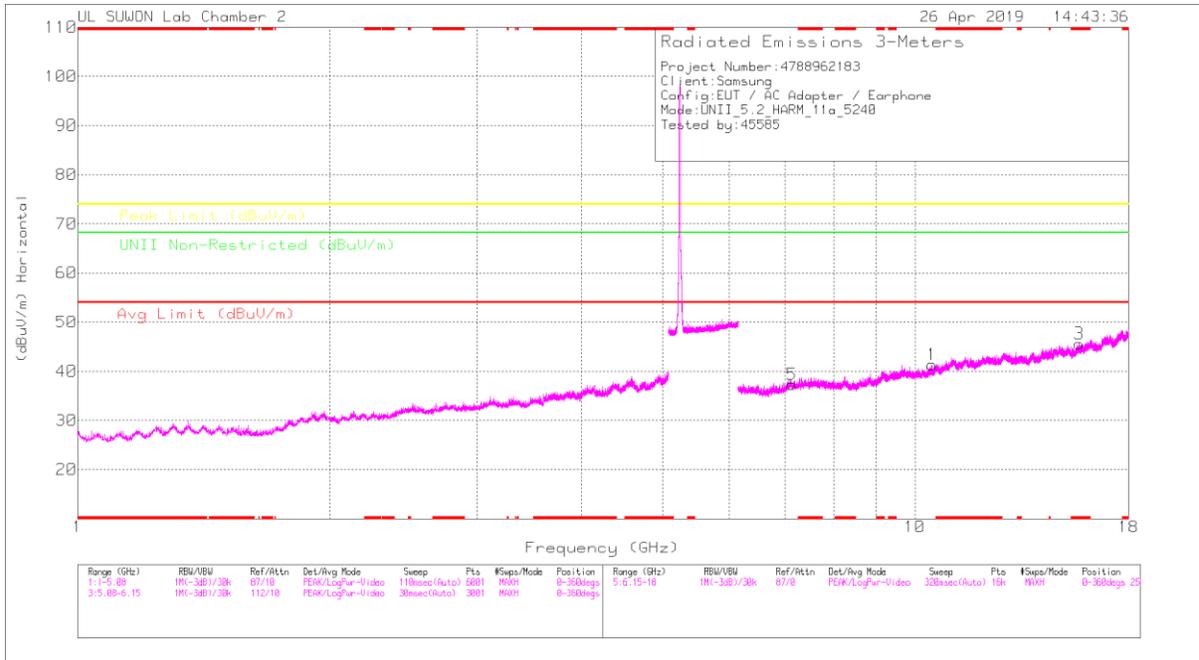

HIGH CHANNEL VERTICAL

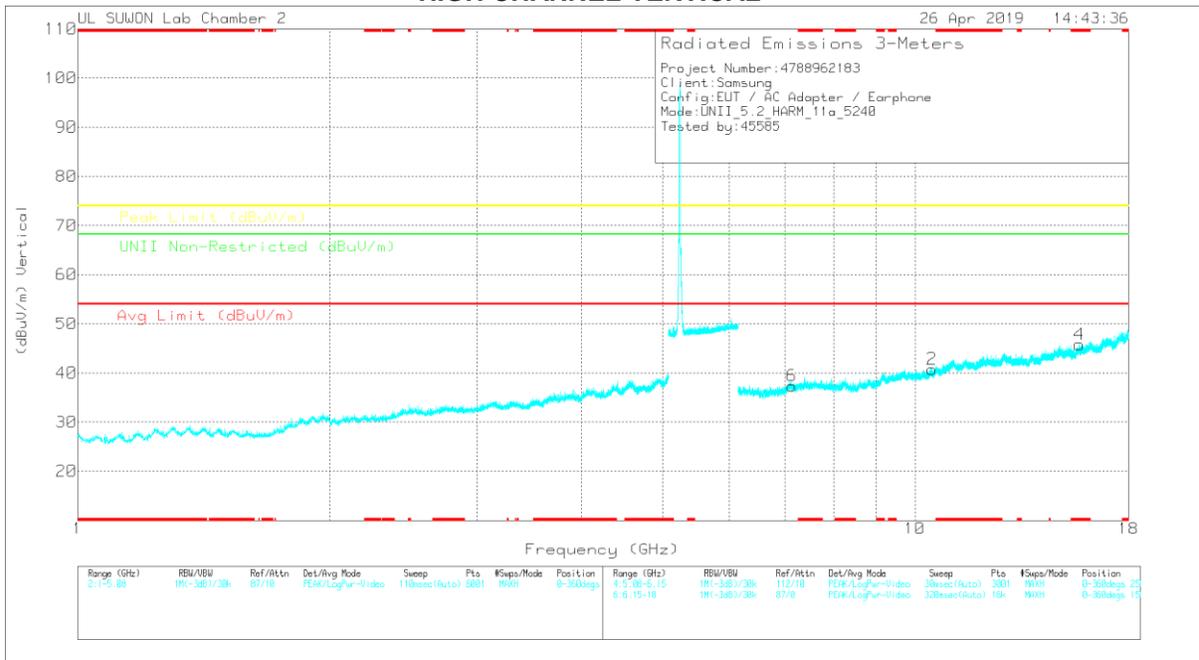

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00188724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.48	24.42	PK	37.7	-20.8	0	41.32	-	-	-	-	68.2	-26.88	0-360	250	H
3	* 15.719	25	PK	40.2	-19.6	0	45.6	-	-	74	-28.4	-	-	0-360	250	H
5	7.125	25.08	PK	36	-23.8	0	37.28	-	-	-	-	68.2	-30.92	0-360	150	H
2	10.482	23.98	PK	37.7	-20.9	0	40.78	-	-	-	-	68.2	-27.42	0-360	150	V
4	* 15.721	25.19	PK	40.2	-19.6	0	45.79	-	-	74	-28.21	-	-	0-360	250	V
6	7.125	25.17	PK	36	-23.8	0	37.37	-	-	-	-	68.2	-30.83	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.1.2.TX Above 1GHz 802.11n HT20 MODE IN THE 5.2GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

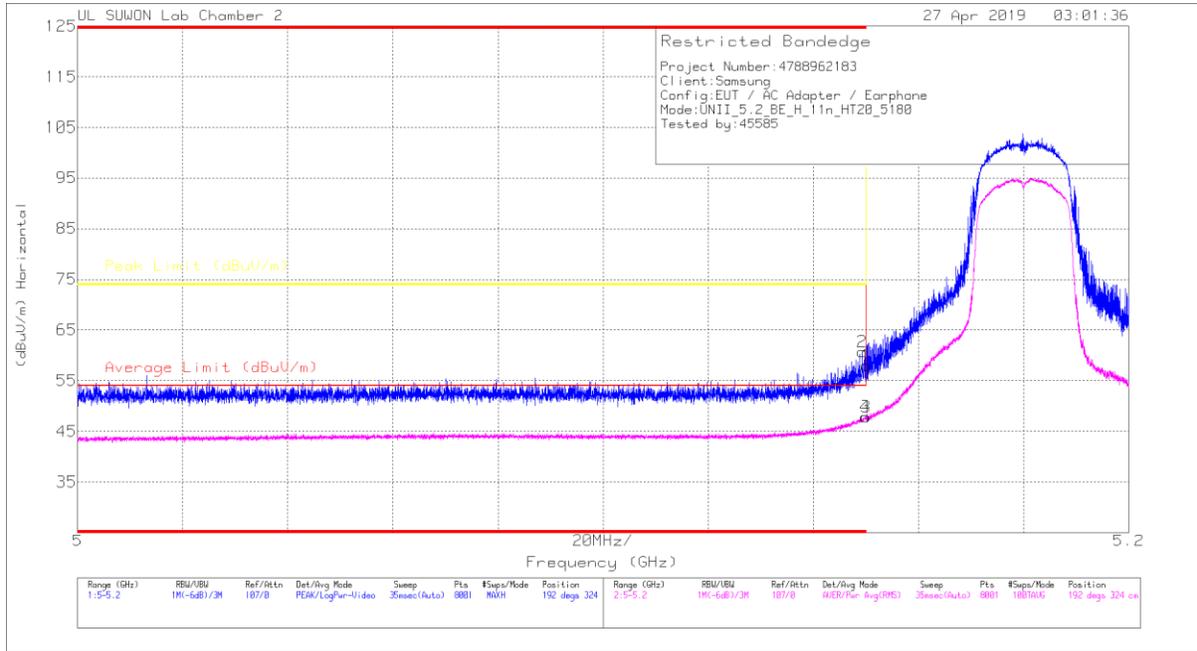

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	41.86	Pk	34.3	-18.2	0	57.96	-	-	74	-16.04	192	324	H
2	* 5.149	44.64	Pk	34.3	-18.2	0	60.74	-	-	74	-13.26	192	324	H
3	5.15	30.61	RMS	34.3	-17.3	.19	47.8	54	-6.2	-	-	192	324	H
4	* 5.15	30.7	RMS	34.3	-17.3	.19	47.89	54	-6.11	-	-	192	324	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

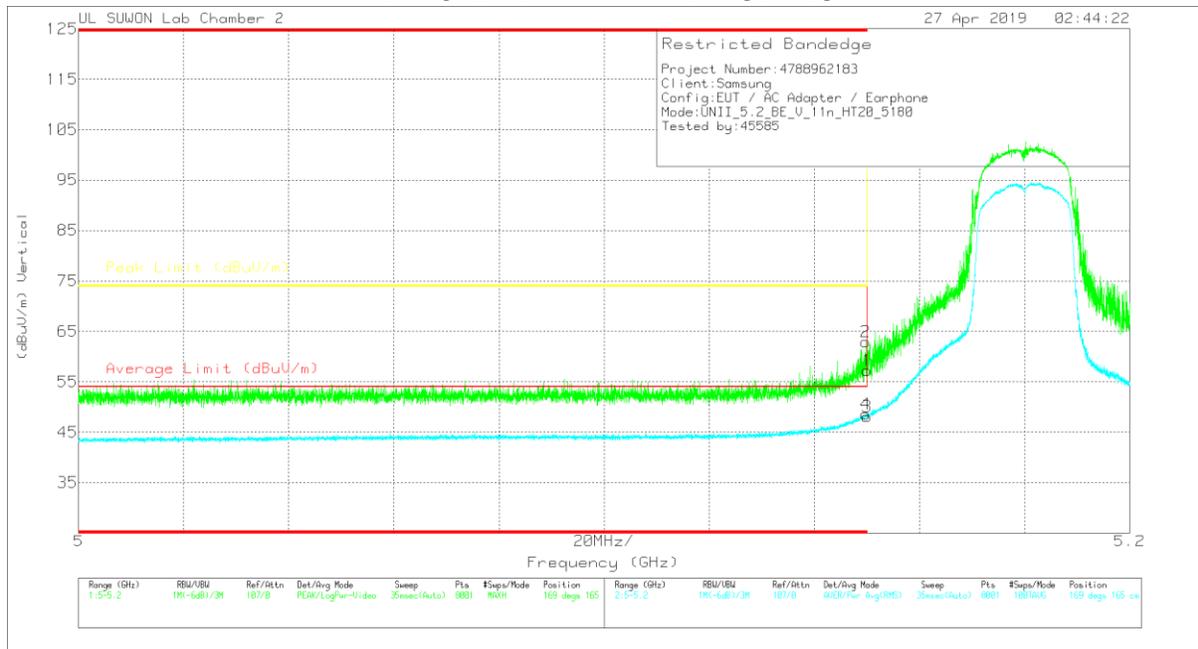

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBu/m)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	5.15	41.17	Pk	34.3	-18.2	0	57.27	-	-	74	-16.73	169	165	V
2	* 5.15	46.86	Pk	34.3	-18.2	0	62.96	-	-	74	-11.04	169	165	V
3	5.15	30.88	RMS	34.3	-17.3	-19	48.07	54	-5.93	-	-	169	165	V
4	* 5.15	31.35	RMS	34.3	-17.3	-19	48.54	54	-5.46	-	-	169	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection