


Test Report

Report No.:	MTi240221015-01E1
Date of issue:	2024-03-26
Applicant:	OPSMEN Tech Co., Ltd.
Product:	ELECTRONIC HEARING PROTECTOR
Model(s):	M300T, M300T-BK, M300T-CB, M300T-FG
FCC ID:	2A4IK-M300T

Shenzhen Microtest Co., Ltd. http://www.mtitest.com

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.







Instructions

- 1. This test report shall not be partially reproduced without the written consent of the laboratory.
- 2. The test results in this test report are only responsible for the samples submitted
- 3. This test report is invalid without the seal and signature of the laboratory.
- 4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
- 5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.



Table of contents

1	Gene	ral Description	5
	1.1 1.2 1.3 1.4 1.5	Description of the EUT Description of test modes Environmental Conditions Description of support units Measurement uncertainty	5 7 7
2	Sumr	mary of Test Result	8
3	Test I	Facilities and accreditations	9
	3.1	Test laboratory	9
4	List c	of test equipment	10
5	Evalu	ation Results (Evaluation)	11
	5.1	Antenna requirement	11
6	Radio	o Spectrum Matter Test Results (RF)	12
	6.1 6.2 6.3 6.4 6.5 6.6 6.7 6.8 6.9	Occupied Bandwidth Maximum Conducted Output Power Channel Separation Number of Hopping Frequencies Dwell Time RF conducted spurious emissions and band edge measurement Band edge emissions (Radiated) Radiated emissions (below 1GHz) Radiated emissions (above 1GHz)	
	-	phs of the test setup	
	-	phs of the EUT	
		A: 20dB Emission Bandwidth	
Ар	pendix	R B: Maximum conducted output power	42
Ар	pendix	c C: Carrier frequency separation	45
Ар	pendix	c D: Time of occupancy	47
Ар	oendix	E: Number of hopping channels	52
Ар	oendix	K F: Band edge measurements	54
Ар	pendix	c G: Conducted Spurious Emission	57

Test Result Certification				
Applicant:	OPSMEN Tech Co., Ltd.			
Address:	Room 601, Building A, No.94 Liwan Road, Liwan District, Guangzhou, Guangdong Province, China			
Manufacturer:	OPSMEN Tech Co., Ltd.			
Address:	Room 601, Building A, No.94 Liwan Road, Liwan District, Guangzhou, Guangdong Province, China			
Factory:	GUANGZHOU OPSMEN TECH CO., LTD. Huadu Branch			
Address:	6th Floor, Building 1, No. 7, Pingshan Private Industrial Park, Huashan Town, Huadu District, Guangzhou City, Guangdong Province, China			
Product description				
Product name:	ELECTRONIC HEARING PROTECTOR			
Trademark:	EARMOR			
Model name:	M300T			
Series Model(s):	M300T-BK, M300T-CB, M300T-FG			
Standards:	47 CFR Part 15.247			
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02			
Date of Test				
Date of test:	2024-03-19 to 2024-03-26			
Test result:	Pass			

Test Engineer	:	Letter. Lon.		
		(Letter Lan)		
Reviewed By	••	leon chen		
		(Leon Chen)		
Approved By	••	Tom Xue		
		(Tom Xue)		



1 General Description

1.1 Description of the EUT

•				
Product name:	ELECTRONIC HEARING PROTECTOR			
Model name:	М300Т			
Series Model(s):	M300T-BK, M300T-CB, M300T-FG			
Model difference:	All the models are the same circuit and module, except the model name and color.			
Electrical rating:	Input: 3V Battery: 3V			
Accessories:	N/A			
Hardware version:	V2			
Software version:	V02			
Test sample(s) number:	MTi240221015-01S1001			
RF specification				
Bluetooth version:	V5.3			
Operating frequency range:	2402-2480MHz			
Channel number:	79			
Modulation type:	GFSK, π/4-DQPSK			
Antenna(s) type:	Ceramic antenna			
Antenna(s) gain:	3.54dBi			

1.2 Description of test modes

No.	Emission test modes	
Mode1	TX-GFSK	
Mode2	TX-π/4-DQPSK	

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470



Page 6 of 62

Report No.: MTi240221015-01E1

9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-

Test Channel List Operation Band: 2400-2483.5 MHz

Γ	Bandwidth	Lowest Channel (LCH)	Middle Channel (MCH)	Highest Channel (HCH)
	(MHz)	(MHz)	(MHz)	(MHz)
	1	2402	2441	2480

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software: FCC ssist 1.0.2.2

For power setting, refer to below table.

Mode	2402MHz	2441MHz	2480MHz
GFSK	0	0	0
π/4-DQPSK	0	0	0



1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

Support equipment list						
DescriptionModelSerial No.Manufacturer						
/ / /						
Support cable list						
Description	Length (m)	From	То			
/	/	/	/			

1.5 Measurement uncertainty

Measurement	Uncertainty
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Time	±1 %
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
3	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(1)	Pass
4	Channel Separation	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
5	Number of Hopping Frequencies	47 CFR Part 15.247	47 CFR 15.247(a)(1)(iii)	Pass
6	Dwell Time	47 CFR Part 15.247	47 CFR 15.247(a)(1)(iii)	Pass
7	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
10	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

Note: The device is a DC power supply and does not apply to conducted emissions.



3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093



4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due			
	Maximum Conducted Output Power Channel Separation Number of Hopping Frequencies Dwell Time Emissions in non-restricted frequency bands Occupied Bandwidth								
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25			
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24			
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24			
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24			
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25			
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25			
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04			
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24			
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04			
		Band edge Emissions in frequ	emissions (Radi uency bands (ab	,					
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25			
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16			
3	Amplifier	Agilent	8449B	3008A01120	2023-06-26	2024-06-25			
4	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03			
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-06-01	2024-05-31			
		Emissions in freq	uency bands (be	elow 1GHz)					
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25			
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10			
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10			
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-25	2024-04-24			
5	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03			



5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be
	considered sufficient to comply with the provisions of this section.

5.1.1 Conclusion:

The antenna of the EUT is permanently attached. The EUT complies with the requirement of FCC PART 15.203.



6 Radio Spectrum Matter Test Results (RF)

6.1 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(1)
Test Limit:	Refer to 47 CFR 15.247(a)(1), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	ANSI C63.10-2013, section 7.8.7, For occupied bandwidth measurements, use the procedure in 6.9.2. KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	 a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target "-xx dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the "-xx dB down amplitude" using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument. j) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slight




measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the
plot(s).

6.1.1 E.U.T. Operation:

Operating Environment:							
Temperature:	23 °C		Humidity:	59 %	Atmospheric Pressure:	99 kPa	
Pre test mode:	Mode	e1, Mode2					
Final test mode:		Mode	e1, Mode2				

6.1.2 Test Setup Diagram:

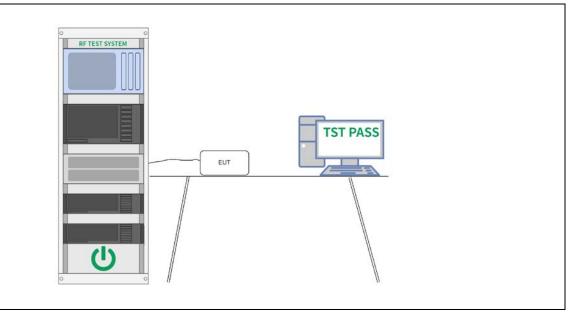

6.1.3 Test Data:



6.2 Maximum Conducted Output Power


Test Requirement:	47 CFR 15.247(b)(1)
Test Limit:	Refer to 47 CFR 15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Method:	ANSI C63.10-2013, section 7.8.5 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	 This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test: a) Use the following spectrum analyzer settings: 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel. 2) RBW > 20 dB bandwidth of the emission being measured. 3) VBW >= RBW. 4) Sweep: Auto. 5) Detector function: Peak. 6) Trace: Max hold. b) Allow trace to stabilize. c) Use the marker-to-peak function to set the marker to the peak of the emission. d) The indicated level is the peak output power, after any corrections for external attenuators and cables. e) A plot of the test results and setup description shall be included in the test report. NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

6.2.1 E.U.T. Operation:

Operating Environment:							
Temperature:	mperature: 23 °C Humidity: 59 % Atmospheric Pressure: 99 kPa					99 kPa	
Pre test mode: Mod			e1, Mode2				
Final test mode: Mod		e1, Mode2					

6.2.2 Test Setup Diagram:



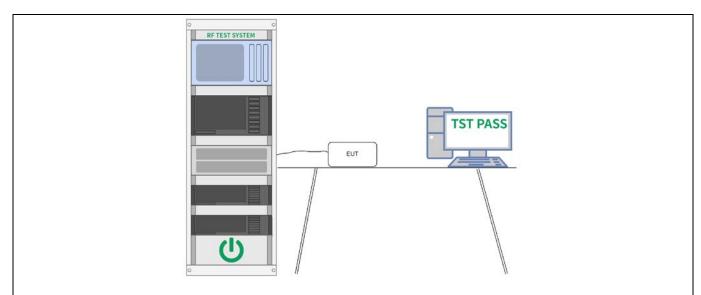

6.2.3 Test Data:




6.3 Channel Separation

Test Requirement:	47 CFR 15.247(a)(1)
Test Limit:	Refer to 47 CFR 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Method:	ANSI C63.10-2013, section 7.8.2 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	 The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) ≥ RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

6.3.1 E.U.T. Operation:

Operating Environment:							
Temperature:	Temperature: 23 °C Humidity: 59 % Atmospheric Pressure: 99 kPa					99 kPa	
Pre test mode:			e1, Mode2				
Final test mode: N		Mode	e1, Mode2				

6.3.2 Test Setup Diagram:

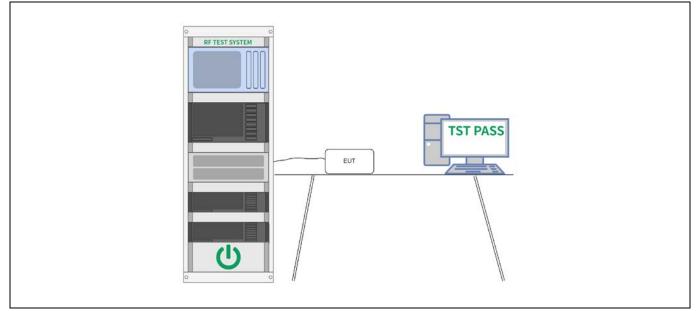

6.3.3 Test Data:




6.4 Number of Hopping Frequencies

Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Limit:	Refer to 47 CFR 15.247(a)(1)(iii), Fequency hopping systems in the 2400- 2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Method:	ANSI C63.10-2013, section 7.8.3 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	 The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen. b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. c) VBW ≥ RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

6.4.1 E.U.T. Operation:

Operating Envi	ronment:					
Temperature:	23 °C		Humidity:	59 %	Atmospheric Pressure:	99 kPa
Pre test mode:		Mode	e1, Mode2			
Final test mode	e:	Mode	e1, Mode2			

6.4.2 Test Setup Diagram:

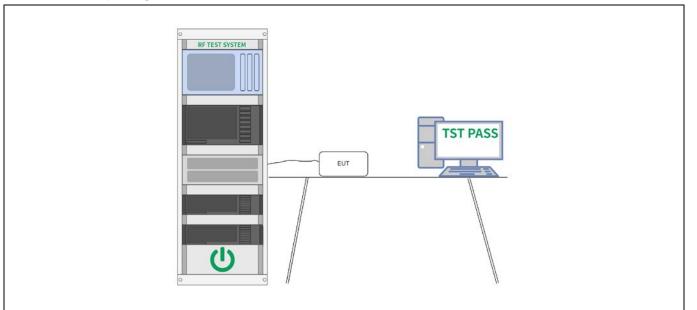

6.4.3 Test Data:



6.5 Dwell Time


Test Limit: Refer to 47 CFR 15.247(a)(1)(iii), Fequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. Test Method: ANSI C63.10-2013, section 7.8.4 KDB 558074 D01 15.247 Meas Guidance v05r02 Procedure: The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: Zero span, centered on a hopping channel. b) RBW shall be <= channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel: a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function: Peak. e) Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hops over the period specified in the requirements, using the following equation: (Number of hops in the period specified in the requirements, using the following equation: (Number of hops in the period specified in the requirements, using the following equation: (Number of hops in a spectrum analyzer) (period specified in the requirements,	Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Memod: KDB 558074 D01 15.247 Meas Guidance v05r02 Procedure: The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: Zero span, centered on a hopping channel. b) RBW shall be <= channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel. c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function: Peak. e) Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. Repeat the measurement using a longer sweep time to determine the number of hops over the specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements, using the following equation:	Test Limit:	2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels
 analyzer settings: a) Span: Zero span, centered on a hopping channel. b) RBW shall be <= channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel. c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function: Peak. e) Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements, using the following equation: (Number of hops in the period specified in the requirements, using the following equation: (Number of hops on spectrum analyzer) × (period specified in the requirements. If the number of hops in the period specified in the requirements. If the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hops in the period specified in the requirements, using the following equation: 	Test Method:	
651 EUT Operation:		 analyzer settings: a) Span: Zero span, centered on a hopping channel. b) RBW shall be <= channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel. c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function: Peak. e) Trace: Max hold. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements, using the following equation: (Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) × (period specified in the requirements. If the analyzer sweep time) The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hops in the period specified in the requirements.

6.5.1 E.U.T. Operation:

Operating Envi	ronment:					
Temperature:	23 °C		Humidity:	59 %	Atmospheric Pressure:	99 kPa
Pre test mode:		Mode	e1, Mode2			
Final test mode	e:	Mode	e1, Mode2			
6.5.2 Test Setu	p Diagra	m:				

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Tel: (86-755)88850135Fax: (86-755) 88850136Web: www.mtitest.comE-mail: mti@51mti.com



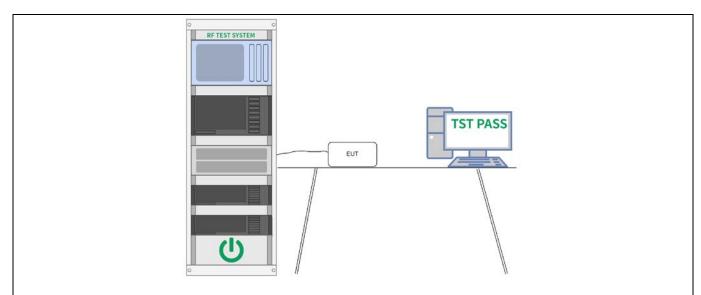

6.5.3 Test Data:




6.6 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 7.8.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers. Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

6.6.1 E.U.T. Operation:

Operating Envi	ronment:					
Temperature:	23 °C		Humidity:	59 %	Atmospheric Pressure:	99 kPa
Pre test mode:		Mode	e1, Mode2			
Final test mode	e:	Mode	e1, Mode2			

6.6.2 Test Setup Diagram:

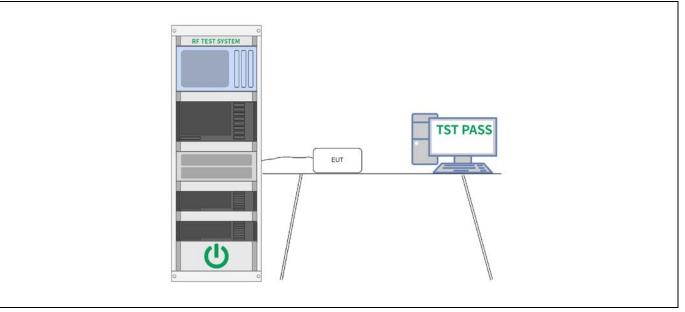

6.6.3 Test Data:



6.7 Band edge emissions (Radiated)


Test Requirement:	restricted bands, as de	7(d), In addition, radiated en fined in § 15.205(a), must al s specified in § 15.209(a)(se	so comply with the
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measuremen t distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	intentional radiators op frequency bands 54-72 However, operation wit sections of this part, e. In the emission table a The emission limits sho employing a CISPR qu kHz, 110–490 kHz and	n paragraph (g), fundamenta erating under this section sh 2 MHz, 76-88 MHz, 174-216 thin these frequency bands is g., §§ 15.231 and 15.241. bove, the tighter limit applies own in the above table are ba asi-peak detector except for above 1000 MHz. Radiated on measurements employin	all not be located in the MHz or 470-806 MHz. s permitted under other as at the band edges. ased on measurements the frequency bands 9–90 emission limits in these
Test Method:	ANSI C63.10-2013 sec KDB 558074 D01 15.2	ction 6.10 47 Meas Guidance v05r02	
Procedure:	ANSI C63.10-2013 sec	ction 6.10.5.2	

6.7.1 E.U.T. Operation:

Operating Env	ironment:					
Temperature:	26.3 °C		Humidity:	54.8 %	Atmospheric Pressure:	99 kPa
Pre test mode:		Mode	e1, Mode2			
Final test mode	e:			re-test mode w ded in the repo	ere tested, only the data or rt	of the worst mode
Note:			•			

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

6.7.2 Test Setup Diagram:

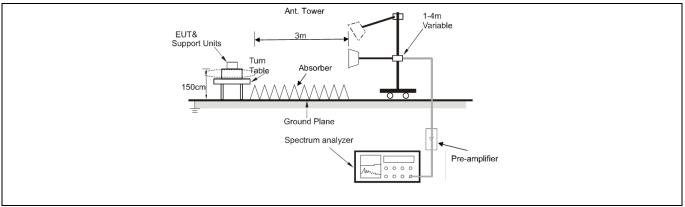



6.7.3 Test Data:

Mode2 /	Polari	zatio	n: Horizonta	al / CH: L					
	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		2310.000	52.35	-12.83	39.52	74.00	-34.48	peak
	2	*	2310.000	42.53	-12.83	29.70	54.00	-24.30	AVG
	3		2390.000	51.30	-12.42	38.88	74.00	-35.12	peak
	4		2390.000	41.24	-12.42	28.82	54.00	-25.18	AVG



Page 23 of 62

Mode2 / Polarization: Vertical / CH: L

	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		2310.000	52.74	-12.83	39.91	74.00	-34.09	peak
-	2	*	2310.000	42.69	-12.83	29.86	54.00	-24.14	AVG
	3		2390.000	51.81	-12.42	39.39	74.00	-34.61	peak
	4		2390.000	41.41	-12.42	28.99	54.00	-25.01	AVG



No	. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	51.30	-12.44	38.86	74.00	-35.14	peak
2		2483.500	41.70	-12.44	29.26	54.00	-24.74	AVG
3		2500.000	52.00	-12.35	39.65	74.00	-34.35	peak
4	*	2500.000	42.17	-12.35	29.82	54.00	-24.18	AVG



Page 25 of 62

Mode2 / Polarization: Vertical / CH: H

No).	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	I		2483.500	54.31	-12.44	41.87	74.00	-32.13	peak
2	2		2483.500	41.69	-12.44	29.25	54.00	-24.75	AVG
3	3		2500.000	52.27	-12.35	39.92	74.00	-34.08	peak
4	1	*	2500.000	42.18	-12.35	29.83	54.00	-24.17	AVG



6.8 Radiated emissions (below 1GHz)

Test Requirement:	restricted bands, as de	7(d), In addition, radiated em fined in § 15.205(a), must als s specified in § 15.209(a)(se	so comply with the
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measuremen t distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	intentional radiators op frequency bands 54-72 However, operation wi sections of this part, e. In the emission table a The emission limits sh employing a CISPR qu kHz, 110–490 kHz and	in paragraph (g), fundamenta berating under this section sh 2 MHz, 76-88 MHz, 174-216 thin these frequency bands is .g., §§ 15.231 and 15.241. bove, the tighter limit applies own in the above table are ba uasi-peak detector except for above 1000 MHz. Radiated I on measurements employin	all not be located in the MHz or 470-806 MHz. s permitted under other s at the band edges. ased on measurements the frequency bands 9–90 emission limits in these
Test Method:	ANSI C63.10-2013 see KDB 558074 D01 15.2	ction 6.6.4 247 Meas Guidance v05r02	
Procedure:	ANSI C63.10-2013 see	ction 6.6.4	

6.8.1 E.U.T. Operation:


Operating Envi	ironment:							
Temperature:	emperature: 32.7 °C		Humidity: 53.3 % Atmospheric Pressure: 100 kPa					
Pre test mode:		Mode	e1, Mode2					
Final test mode	e:			re-test mode w ded in the repo	vere tested, only the data	of the worst mode		
Nata								

Note:


The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.

6.8.2 Test Setup Diagram:

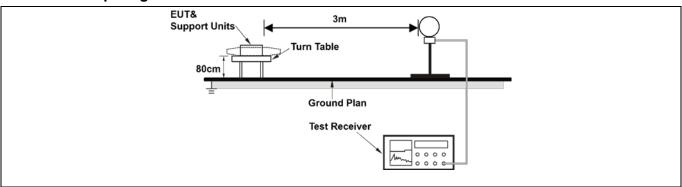




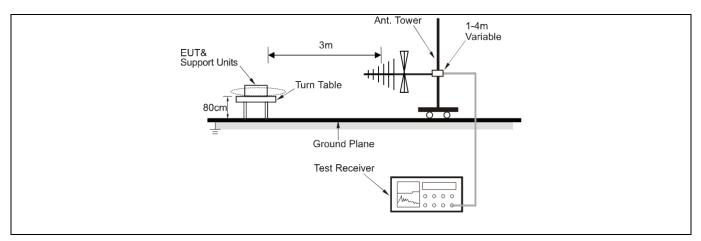




6.8.3 Test Data:

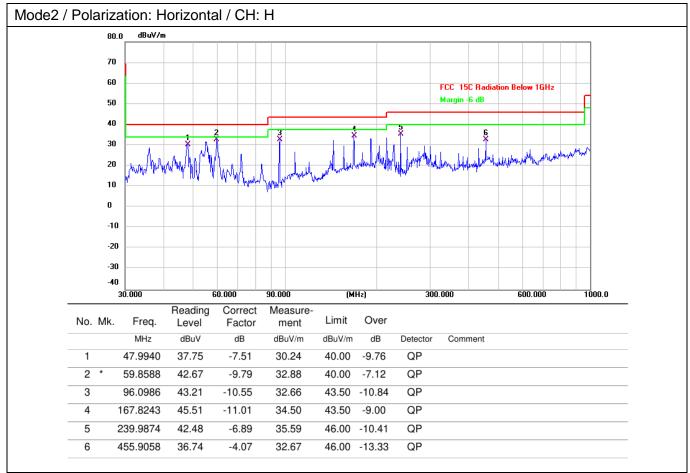



Mode2 / Polarization: Vertical /CH: H

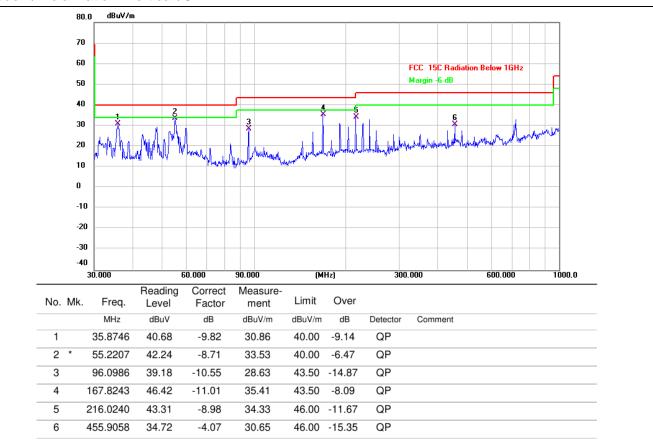




6.9 Radiated emissions (above 1GHz)

Test Requirement:		nissions which fall in the rest comply with the radiated em 5(c)).`	
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measuremen t distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	intentional radiators op frequency bands 54-72 However, operation wit sections of this part, e. In the emission table a The emission limits sho employing a CISPR qu kHz, 110–490 kHz and	n paragraph (g), fundamenta erating under this section sh 2 MHz, 76-88 MHz, 174-216 hin these frequency bands is g., §§ 15.231 and 15.241. bove, the tighter limit applies own in the above table are ba asi-peak detector except for above 1000 MHz. Radiated on measurements employin	all not be located in the MHz or 470-806 MHz. s permitted under other at the band edges. ased on measurements the frequency bands 9–90 emission limits in these
Test Method:	ANSI C63.10-2013 sec KDB 558074 D01 15.2	tion 6.6.4 47 Meas Guidance v05r02	
Procedure:	ANSI C63.10-2013 sec	ction 6.6.4	

6.9.1 E.U.T. Operation:

Operating Env	ironment:								
Temperature:	32.7 °C		Humidity: 53.3 % Atmospheric Pressure: 100 kPa						
Pre test mode:		Mode	e1, Mode2		·				
Final test mode	ə:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode2) is recorded in the report							
attenuated mo	re than 20) dB b	elow the lim	nits are not repo	itude of spurious emission orted. d only the worst-case resu				

6.9.2 Test Setup Diagram:

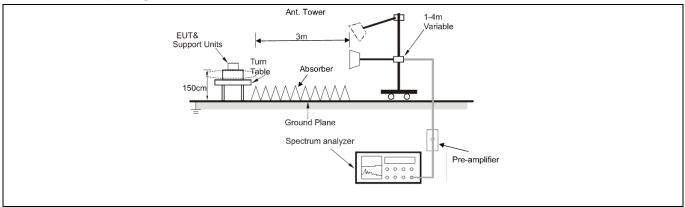



6.9.3 Test Data:

No. I	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4804.000	51.30	-7.40	43.90	74.00	-30.10	peak
2		4804.000	45.05	-7.40	37.65	54.00	-16.35	AVG
3		7206.000	47.26	0.96	48.22	74.00	-25.78	peak
4		7206.000	41.19	0.96	42.15	54.00	-11.85	AVG
5		9608.000	51.17	2.16	53.33	74.00	-20.67	peak
6	*	9608.000	44.96	2.16	47.12	54.00	-6.88	AVG



Mode2 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4804.000	52.02	-7.40	44.62	74.00	-29.38	peak
2		4804.000	46.05	-7.40	38.65	54.00	-15.35	AVG
3		7206.000	46.56	0.96	47.52	74.00	-26.48	peak
4		7206.000	40.40	0.96	41.36	54.00	-12.64	AVG
5		9608.000	51.58	2.16	53.74	74.00	-20.26	peak
6	*	9608.000	45.16	2.16	47.32	54.00	-6.68	AVG



No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4882.000	49.11	-7.44	41.67	74.00	-32.33	peak
2	4882.000	42.80	-7.44	35.36	54.00	-18.64	AVG
3	7323.000	46.92	0.79	47.71	74.00	-26.29	peak
4	7323.000	40.46	0.79	41.25	54.00	-12.75	AVG
5	9764.000	50.83	3.14	53.97	74.00	-20.03	peak
6 *	9764.000	44.12	3.14	47.26	54.00	-6.74	AVG



Page 34 of 62

No	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4882.000	52.01	-7.44	44.57	74.00	-29.43	peak
2		4882.000	45.70	-7.44	38.26	54.00	-15.74	AVG
3		7323.000	47.03	0.79	47.82	74.00	-26.18	peak
4		7323.000	40.47	0.79	41.26	54.00	-12.74	AVG
5		9764.000	51.25	3.14	54.39	74.00	-19.61	peak
6	*	9764.000	45.18	3.14	48.32	54.00	-5.68	AVG



No. M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4960.000	50.47	-7.20	43.27	74.00	-30.73	peak
2	4960.000	44.46	-7.20	37.26	54.00	-16.74	AVG
3	7440.000	46.25	0.98	47.23	74.00	-26.77	peak
4	7440.000	39.37	0.98	40.35	54.00	-13.65	AVG
5	9920.000	54.75	3.02	57.77	74.00	-16.23	peak
6 *	9920.000	47.98	3.02	51.00	54.00	-3.00	AVG



Page 36 of 62

Mode2 / Polarization: Vertical / CH: H

	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
_	1		4960.000	51.33	-7.20	44.13	74.00	-29.87	peak
_	2		4960.000	45.85	-7.20	38.65	54.00	-15.35	AVG
_	3		7440.000	46.84	0.98	47.82	74.00	-26.18	peak
-	4		7440.000	40.27	0.98	41.25	54.00	-12.75	AVG
-	5		9920.000	53.51	3.02	56.53	74.00	-17.47	peak
	6	*	9920.000	47.28	3.02	50.30	54.00	-3.70	AVG



Photographs of the test setup

Refer to Appendix - Test Setup Photos



Photographs of the EUT

Refer to Appendix - EUT Photos

Page 38 of 62



Appendix

Appendix A: 20dB Emission Bandwidth


Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]
		2402	0.954
DH5	Ant1	2441	0.951
		2480	0.957
		2402	1.284
2DH5	Ant1	2441	1.317
		2480	1.323







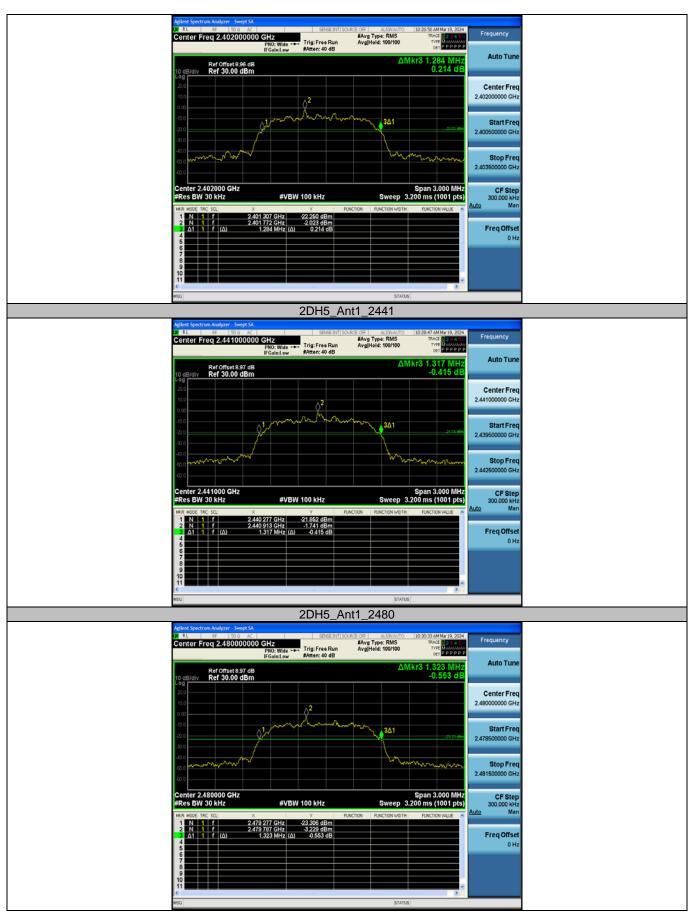




Appendix B: Maximum conducted output power


Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
		2402	-15.32	≤20.97	PASS
DH5	Ant1	2441	-15.17	≤20.97	PASS
		2480	-15.75	≤20.97	PASS
		2402	-15.16	≤20.97	PASS
2DH5	Ant1	2441	-14.67	≤20.97	PASS
	248	2480	-15.49	≤20.97	PASS



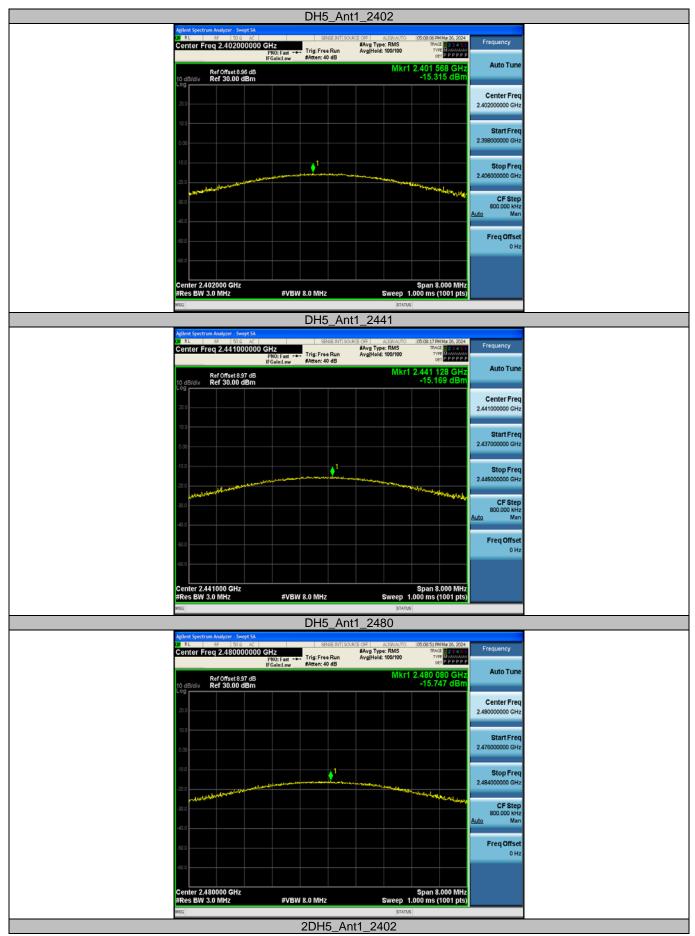



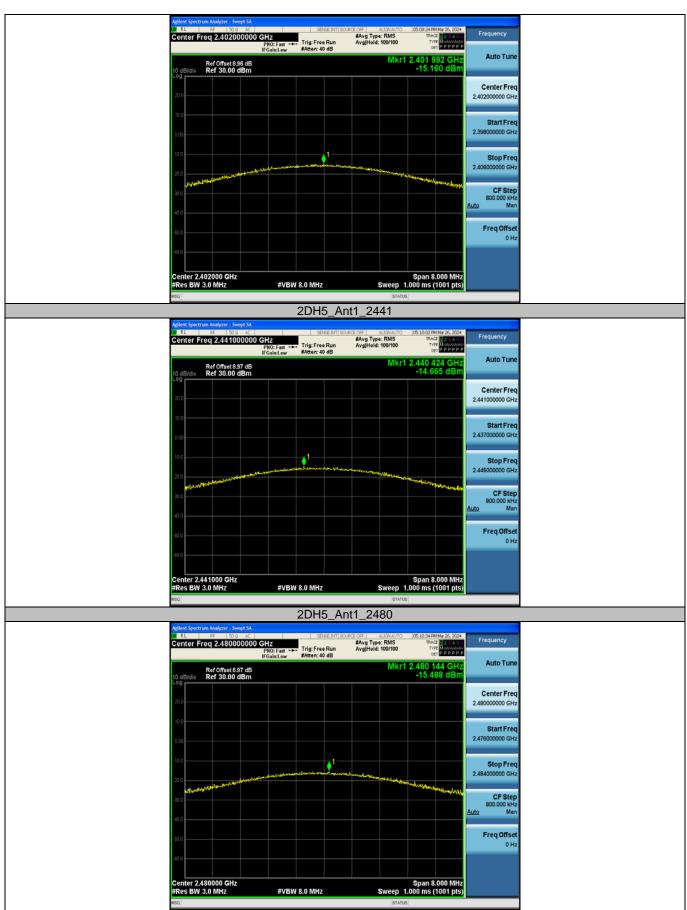



Appendix C: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Нор	0.99	≥0.957	PASS
2DH5	Ant1	Нор	1.004	≥0.882	PASS







Appendix D: Time of occupancy

Test Result

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	Hops in 31.6s [Num]	Result [s]	Limit [s]	Verdict
DH1	Ant1	Нор	0.380	318	0.121	≤0.4	PASS
DH3	Ant1	Нор	1.638	150	0.246	≤0.4	PASS
DH5	Ant1	Нор	2.885	94	0.271	≤0.4	PASS
2DH1	Ant1	Нор	0.389	320	0.124	≤0.4	PASS
2DH3	Ant1	Нор	1.642	167	0.274	≤0.4	PASS
2DH5	Ant1	Нор	2.891	108	0.312	≤0.4	PASS

Notes:


1. Period time = 0.4s * 79 = 31.6s

2. Result (Time of occupancy) = BurstWidth[ms] * Hops in 31.6s [Num]



DH1_Ant1_Hop	
Aglient Spectrum Analyzer - Swipt SA W RL B5 - 100 - 202 - 1 State Brill SOLART GET - ALDRUBTIO - 10.22559 AMMur 10, 2024 Center Freq 2.441000000 GHz Trig Delay-2.000 ms Edwar Type: RMS Briddler -	Frequency
PND: Fast Trig: Video Tvre Watten: 40 dB ter PPPPP	
Ref Offset8 97 dB ΔMkr2 380.0 μs 10 dB/div Ref 30.00 dBm 0.82 dB 0.9	Addition
230	Center Freq 2.441000000 GHz
100 δ1 ₆ 2Δ1	Start Freq
	2.441000000 GHz
	Stop Freq 2.44100000 GHz
	CF Step 1.000000 MHz Auto Man
200 i a ta da kata kana 🗖 ang panaharan lakar can punah wa ang ina ang panaharan ing panaharan kanaka dikumata	Auto Man Freq Offset
	0 Hz
Center 2.441000000 GHz Span 0 Hz	
 Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8000 pts) MSG [STATUS]	
Aglient Spectrum Analyzer - Swipt SA. UR RL 85 500 AC SPICE OFF ALIONAUTO 10:28:37 AMM/s 19, 2024 Center Freq 2.441000000 GHz PR0: Fast → Trig Delay0.000 s #Avg Type: RMS TMAC 22 a s c Trig: Video Trig: Video Trig: Video	Frequency
IFGaind.ow #Atten: 40 dB	Auto Tune
10 dB/div Ref 30.00 dBm	Center Freq
10.0	2.441000000 GHz
	Start Freq 2.441000000 GHz
	Stop Freq 2.441000000 GHz
200 state grant and provide a state of the	CF Step 510.000 kHz
	<u>Auto</u> Man
400	Freq Offset 0 Hz
Center 2.441000000 GHz Span 0 Hz	
Center 3.441000000 01/2 Span Virz Span Virz </td <td></td>	
DH3_Ant1_Hop Agilent Spectrum Analyzer - Sweyt SA	
M RL BF 50.9 AC SR452ml Source OFF ALIBANUTO 103733 AMMs19, 2024 Center Freq 2.4410000000 GHz PN0: Fast +++ Trig Delay-2.000 ms #Avg Type: RMS RMc/19, 2024 Trig: Video Trig: Video Trig: Video RMC Recommendation	requency
IFGaind.ow #Atten: 40 dB certipreperior Ref Offset8 97 dB ΔMkr2 1.638 ms 10 dBidiv 16.42 dB	
200	Center Freq 2.44100000 GHz
100	Start Freg
0.00 2 <u>01</u>	2.441000000 GHz
100	Stop Freq 2.441000000 GHz
ann Malaiseach (Miteria) (aiteriaite de the the the the the the the the the th	CF Step 1.000000 MHz
and a second second and a second second and a second second and a second second and a second second and a second second and second secon	Auto Man
	Freq Offset 0 Hz
Center 2.441000000 GHz Span 0 Hz	
Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8000 pts) MBG [STATUS] [STATUS]	




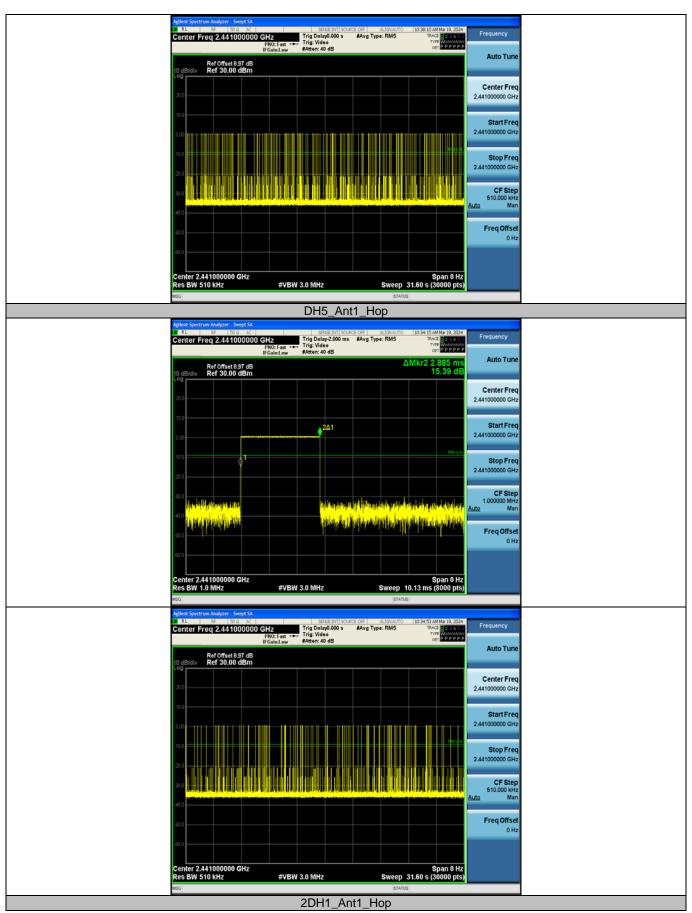



-		
Agilent Spectrum Analyzer - Swept SA		
DO RL RF 50.0 AC SENSEINT SOURCE OFF ALIGN A	NUTO 10:42:48 AM Mar 19, 2024 Frequer	quency
Center Freq 2.441000000 GHz Trip Delay-2000 ms #Avg Type: RM: PR0: Fraint-w #Mater: 40 dB #R0: Avg Type: RM:	S TRACE 23456 TYPE WILLIAM DET P P P P P P	
		Auto Tune
Ref Offiset 8 37 dB 10 dB/div Ref 30.00 dBm	0.50 dB	
		enter Freq
20.0	2.4410000	000000 GHz
10.0	Pta Pta	Start Freq
οο φ1 ^{2Δ1}		000000 GHz
	TROLVL	
-100		Stop Freq
-20.0	2.4410000	
30.0	C	CF Step
👘 data bilana (napipati)) 🔤 (na mbalana (napipatin)) pana ina (napira) napi (napi hara)	Auto Auto	Man
ta bana ka	Freq	
-50.0	Freq	req Offset 0 Hz
40.0		
Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Swee	Span 0 Hz ep 10.13 ms (8000 pts)	
	STATUS	
Agilent Spectrum Analyzer - Swept SA		
Center Freq 2.441000000 GHz Trig Delay000 s #Avg Type: RM	S TRACE 2 3 4 5 6 Frequer	quency
PN0: Fast ↔ Trig: Video IFGaint.ow #Atten: 40 dB	DETPPPPP	Auto Tune
Ref Offset 8.97 dB	Auto	ato i une
	Canto	enter Freq
20.0		000000 GHz
		Start Freq
	2.4410000	000000 GHz
	Sto	Stop Freq
		000000 GHz
		CE Olan
	510.0	CF Step 510.000 kHz
	Auto Auto	Man
son	Freq	req Offset
		0 Hz
400.0		
Center 2.441000000 GHz	Span 0 Hz	
Res BW 510 kHz #VBW 3.0 MHz Swe	eep 31.60 s (30000 pts)	
	STATUS	
2DH3_Ant1_Hop Agilent Spectrum Analyzer - Swept SA		_
DIRL RF 500 AC SENSERVT SOURCE OFF ALIGNA CONTOR FROM 2 441000000 CH2 Trip Delay 2000 ms # #Avg Type: BM	NJTO 10:43:53 AM Mar 19, 2024	quency
Center Freq 2,441000000 GH2 Trig Delay-2000 ms #Avg Type:RM: PNO: Fast →→→ Trig:Video IFGainLow #Atten:40 dB	S TRACE 23450 TYPE WARMAN OCT PPPPP	
	Auto	Auto Tune
Ref Offset8.97 dB 10 dBldiv Ref 30.00 dBm Log	2.32 dB	
		enter Freq
200	2.4410000	000000 GHz
	Cto.	Start Freq
		Start Freq
	TROLVL	
100		Stop Freq
	2.4410000	JUUUUU GHZ
-300	с	CF Step
ta i shike a ki je ba a na je ba a na je ba ka ka na se je ba k	Auto 1.0000	000000 MHz Man
1-000 <mark>dagadika je grupe ina se </mark>	in in the Freq	
	Freq	req Offset 0 Hz
400		
	Span 0 Hz	
Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Swee	ep 10.13 ms (8000 pts)	
Res BW 1.0 MHz #VBW 3.0 MHz Swee	ep 10.13 ms (8000 pts) status	



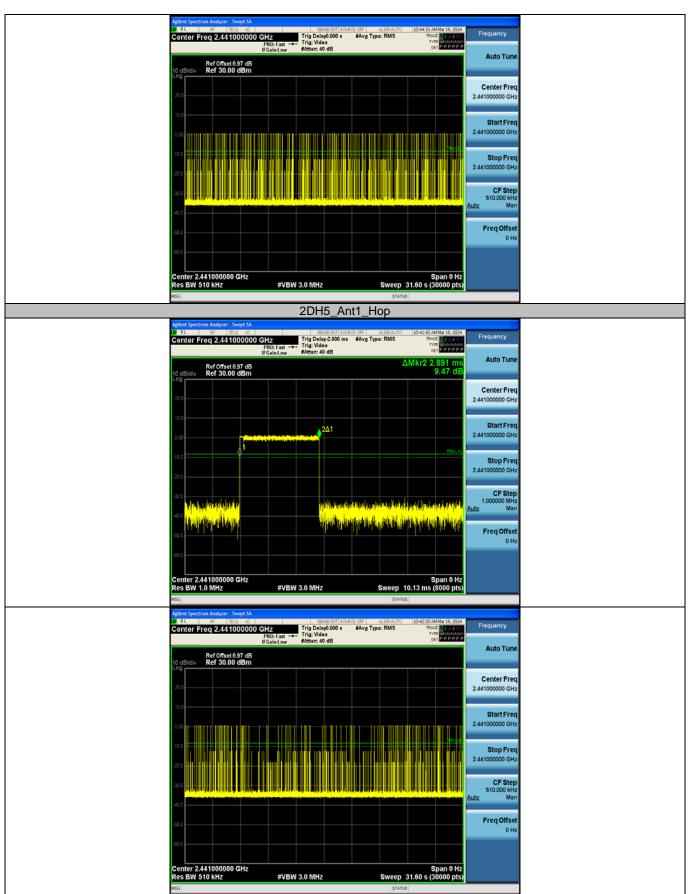



Appendix E: Number of hopping channels

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Нор	79	≥15	PASS
2DH5	Ant1	Нор	79	≥15	PASS



Aglient Spectrum Analyzer - Swigt SA 18 RL BF 50 ≥ AC Center Freq 2.441750000 GHz FR0: Fast →→ IFGainstow FR0: Fast →→ Faster: 40 dB Frequency Fr
Ref Offset8.96 dB Auto Tune Log Center Freq 20.0 2.44175000 GHz
100 Start Freq 240000000 GHz
1000 Stop Freq 2.483500000 GHz
30.0 CF Step 8.35000 MHz 40.0 Man
600 FreqOffset 0 Hz
Start 2.40000 GHz Stop 2.48350 GHz #Res BW 300 kHz #VBW 300 kHz Sweep 1.133 ms (1001 pts) #sol startus
2DH5_Ant1_Hop
Agilent Spectrum Analyzer - Swept SA DI RL RF 150 0 AC SENSERT[SURGEGRE] ALIONAUTO [2041:20 AM Mer 19, 2024 Center Freq 2.441750000 GHZ PNO: Fast IFGainLow IFGainLow Aug Hold> 5000/5000 Tree Aug Hold> 5000/5000 Tree Aug Hold> 5000/5000 Tree Aug Phole
10 dB/div Ref 30.00 dBm
200 2.441750000 GHz 100 40 000 40 000 0 Hz 444 0 10 0 0 444 0 10 0 10 0 10 0 10 0
0.00 Mr/Me/W/Me/Min/Je/sr/Jnj/wr/Me/W/Mr/Min/Min/Min/Min/Min/Min/Min/Min/Min/Min
30.0 CF Step 3.55000 MHz Auto Man
50 0 Freq Offset 0 Hz
Start 2.40000 GHz Stop 2.48350 GHz #Res BW 300 kHz #VBW 300 kHz Sweep 1.133 ms (1001 pts) #So Instruct Instruct



Appendix F: Band edge measurements

Test Graphs



Address: 101, No. 7, Zone 2, XinxingIndustrial Park, Fuhai Avenue, XinheCommunity, Fuhai Street, Bao'an District, Shenzhen, Guangdong, ChinaTel: (86-755)88850135Fax: (86-755) 88850136Web: www.mitiest.comE-mail: mti@51mti.com







Agitent Spectrum Analyz UM R.L RF	50.0 AC SENSE INT SOURCE OF	F ALIGN AUTO 05:06:38 PM Mar 26, 2024		
Center Freq 2.3	2500000 GHz PNO: Fast IFGain:Low #Atten: 30 dB	vg Type: RMS TRACE 23456 g Hold>100/100 Type Masses Det P P P P P	Frequency	
Ref Or	et 8.9 dB 00 dBm	Mkr5 2.364 050 GHz -48.314 dBm	Auto Tune	
10 dB/div Ref 2			Center Freq	
0.00		2	352500000 GHz	
-10.0				
-30.0		-33.3, 650	Start Freq .300000000 GHz	
-40.0		$\langle 3 \rangle \langle 2 \rangle$		
60.0		2	Stop Freq 405000000 GHz	
Start 2.30000 GH		Stop 2.40500 GHz	CF Step	
#Res BW 100 kH	#VBW 300 kHz	Sweep 10.07 ms (1001 pts)	10.500000 MHz	
MRR MODE TRC SCI 1 N 1 F 2 N 1 F	X Y FUNCTION 2.404 895 GHz -18.297 dBm 2.400 000 GHz -50.606 dBm	FUNCTION WIDTH FUNCTION VALUE		
3 N 1 F 4 N 1 F	2.404 895 GHz -18.297 dBm 2.400 000 GHz -50 806 dBm 2.390 000 GHz -50,744 dBm 2.310 000 GHz -50 503 dBm 2.356 050 GHz -48.314 dBm		Freq Offset 0 Hz	
6 N 1 F 6				
8 9 10				
11		×		
MSG	ODUE Anti Linh	STATUS		_
Agilent Spectrum Analyz	2DH5_Ant1_High_	_пор_2460		
Center Freq 2.5	0000000 GHz #A	F ALIGNAUTO 05:07:45 PM Mar 26, 2024 vg Type: RMS TRACE 2234 517 g Hold>100/100 TVPE	Frequency	
	IFGain:Low #Atten: 30 dB	DETPPPPP	Auto Tune	
10 dB/div Ref 2	et 8.97 dB 00 dBm	Mkr4 2.516 16 GHz -47.991 dBm		
10.0			Center Freq	
-10.0		2	.51000000 GHz	
200 Minut			Start Freq	
40.0		-38.19.65	.47000000 GHz	
-60.0	Manterson and wear and an and a second a second a second a	******	Stop Freq	
70.0			.55000000 GHz	
Start 2.47000 GH #Res BW 100 kH	#VBW 300 kHz	Stop 2.55000 GHz Sweep 7.667 ms (1001 pts)	CF Step 8.000000 MHz	
MKR MODE TRC SCL	X Y FUNCTION	0.0		
1 N 1 F 2 N 1 F 3 N 1 F	2,478 80 GHz -19,185 dBm 2,483 50 GHz -50,098 dBm 2,500 00 GHz -49,540 dBm 2,516 16 GHz -47,991 dBm		FreqOffset	
4 N 1 F	2.516 16 GHz _47.991 dBm		0 Hz	
5				
5 6 7 8				
5 6 7 8 9 9 10				



Appendix G: Conducted Spurious Emission

Test Graphs




Address: 101, No. 7, Zone 2, XinxingIndustrial Park, Fuhai Avenue, XinheCommunity, Fuhai Street, Bao'an District, Shenzhen, Guangdong, ChinaTel: (86-755)88850135Fax: (86-755) 88850136Web: www.mitiest.comE-mail: mti@51mti.com









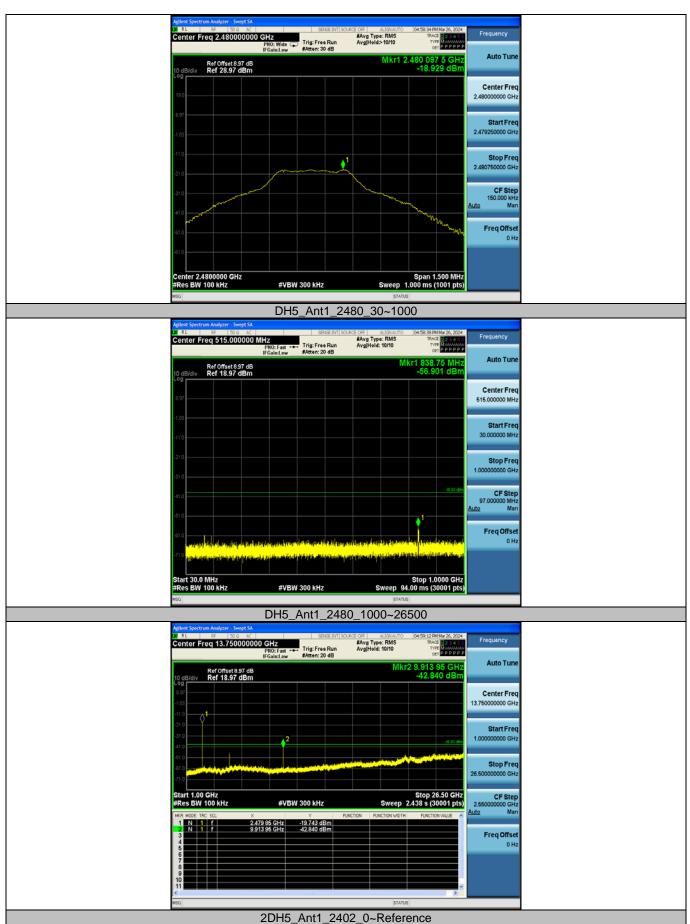



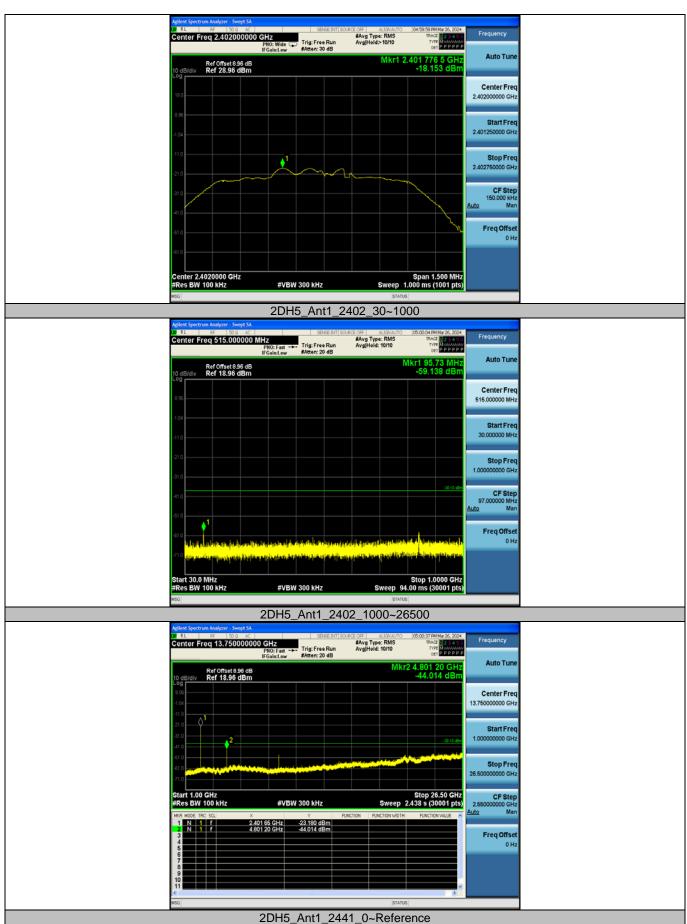



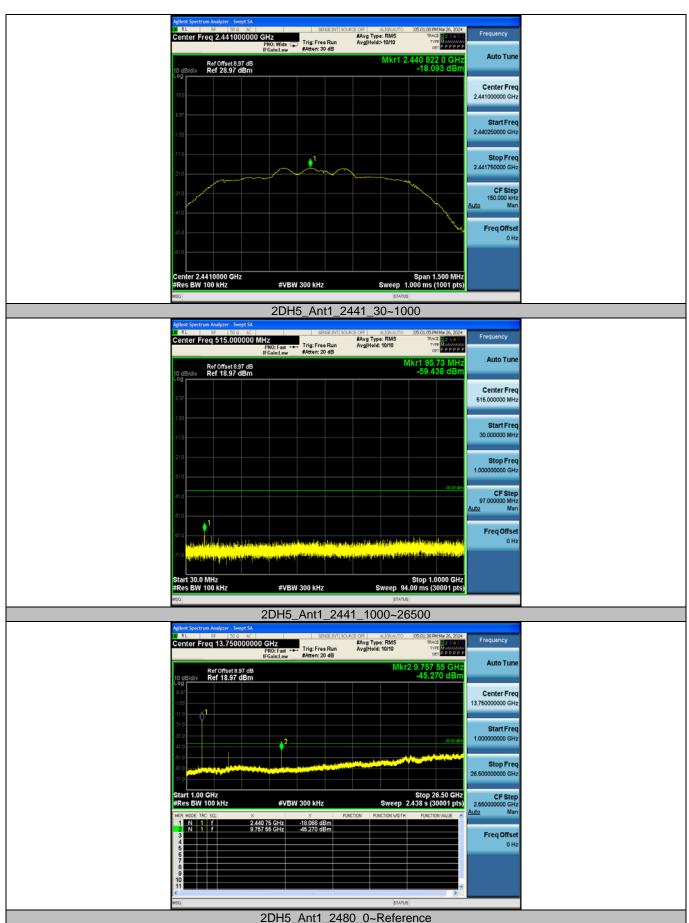





----End of Report----