

FCC Test Report

Report No.: AGC13808220302FE03

FCC ID : 2A4IR-RF01

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: RF Remote Control

BRAND NAME : N/A

MODEL NAME : RF01

APPLICANT ShenZhen Suncent Auto Parts Technology Company

Limited

DATE OF ISSUE : Apr. 07, 2022

STANDARD(S) : FCC Part 15 Rules

REPORT VERSION : V1.0

Attestation of Global Editionse (Shenzhen) Co., Ltd





Page 2 of 26

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 07, 2022	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. RELATED SUBMITTAL(S) / GRANT (S)	6
2.3. TEST METHODOLOGY	6
2.4. SPECIAL ACCESSORIES	6
2.5. EQUIPMENT MODIFICATIONS	6
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	7
5.1. EQUIPMENT USED IN EUT SYSTEM	7
5.2. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	8
7. ANTENNA REQUIREMENT	9
8. PROVISION FOR MOMENTARY OPERATION	10
8.1 MEASUREMENT PROCEDURE	10
8.2 TEST SETUP	10
8.3 TEST RESULT	11
9. DUTY CYCLE CORRECTION FACTOR	12
9.1 MEASUREMENT PROCEDURE	12
9.2 TEST SETUP	12
9.3 TEST RESULT	
10. RADIATED EMISSION	15
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SETUP	17
10.3. TEST RESULT	18
11. BANDWIDTH	22
11.1. MEASUREMENT PROCEDURE	22
11.2. TEST SETUP	22
11.3. TEST RESULT	23
12. FCC LINE CONDUCTED EMISSION TEST	24
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	24
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	24
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	25
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	25



Report No.: AGC13808220302FE03 Page 4 of 26

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	25
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	26
APPENDIX B: PHOTOGRAPHS OF EUT	26





1. VERIFICATION OF CONFORMITY

Applicant	ShenZhen Suncent Auto Parts Technology Company Limited	
Address 5A1, Building C, Qingchuangcheng, Zhangkeng Community, Minzhi Street, Longhua District, Shenzhen		
Manufacturer	ShenZhen Suncent Auto Parts Technology Company Limited	
Address 5A1, Building C, Qingchuangcheng, Zhangkeng Community, Minzhi Street, Longhua District, Shenzhen		
Factory	ShenZhen Suncent Auto Parts Technology Company Limited	
Address 5A1, Building C, Qingchuangcheng, Zhangkeng Community, Minzhi Street, Longhua District, Shenzhen		
Product Designation	RF Remote Control	
Brand Name N/A		
Test Model RF01		
Date of test	test Mar. 31, 2022 to Apr. 06, 2022	
Deviation	None	
Condition of Test Sample Normal		
Report Template AGCRT-US-SRD/RF (2013-03-01)		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.231.

Prepared By	Thea Yuang	
	Thea Huang (Project Engineer)	Apr. 07, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Apr. 07, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Apr. 07, 2022



Page 6 of 26

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

7 triager teerminear decomplicar of Learne accompany		
Operation Frequency	433.92MHz	
Field Strength(3m)	433.92MHz: 78.25dBuV/m(PK)@3m	
Field Streligth(Sill)	433.92MHz: 69.56dBuV/m(AV)@3m	
Modulation	ASK	
Number of channels	1	
Hardware Version	RF.01	
Software Version	RF.1	
Antenna Designation	Internal Antenna	
Antenna Gain	0dBi	
Power Supply	DC 3.0V by battery	

2.2. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A4IR-RF01** filling to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

2.3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.4. SPECIAL ACCESSORIES

Refer to section 5.1.

2.5. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant



Page 7 of 26

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.8 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB
- Uncertainty of Occupied Channel Bandwidth, Uc = ±2 %

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting mode
Note:	

- 1. EUT is only 120V/60Hz powered.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	RF Remote Control	RF01	2A4IR-RF01	EUT

5.2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.231(a)(1)	Activated Manually	Compliant
§15.231(b)	Average Factor	Compliant
§15.231(b) & §15.209	Field Strength of Fundamental and Spurious Emission	Compliant
15.207 Conducted Emission		Not applicable

Note: The device under test is battery-powered and does not require evaluation of AC Power Line Conducted Emission.




Page 8 of 26

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Comm Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259	
FCC Test Firm Registration Number	1 475837	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Apr. 14, 2021	Apr. 13, 2022
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Preamplifier Assembly	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
Wideband Antenna	SCHWARZBEC K	VULB9168	VULB9168-49 4	Jan. 08, 2021	Jan. 07, 2023
Test software	FARA	EZ-EMC(Ver.RA- 03A)	N/A	N/A	N/A






7. ANTENNA REQUIREMENT

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has Fixed antenna, which accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EUT photo for details.

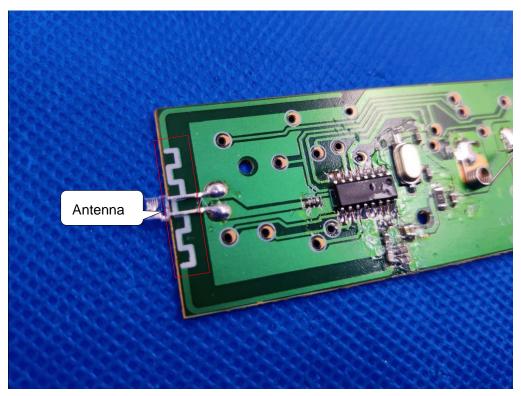

The requirements of section 15.203 are FULFILLED.



Page 10 of 26

8. PROVISION FOR MOMENTARY OPERATION

8.1 MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency


RBW=1MHz, VBW=3MHz


Span: 0Hz

Sweep time: 10S

- 2. Set the EUT to transmit by manually operated. Use the "View" function of SPA to find the transmission time of being released.
- 3. Record the data and Reported.

8.2 TEST SETUP

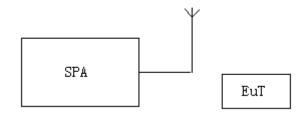






8.3 TEST RESULT

Test Mode: EUT @ 433.92MHz for RF Transmitter

EUT is a manually activated transmitter – so release time	Limit (s)
(button no longer pressed) is test case(s)	
0.3	5.00

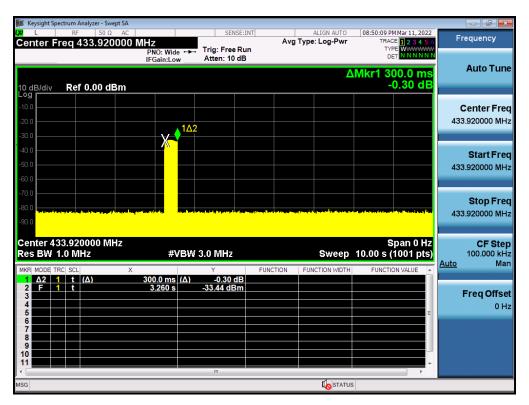

RESULT: PASS



Page 12 of 26

9. DUTY CYCLE CORRECTION FACTOR

9.1 MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency


RBW=1MHz, VBW=3MHz


Span: 0Hz

Sweep time: more than two pulse trains or more than each type of pulse occupancy time

- 2. Set the EUT to transmit by manually operated. Use the "Delta mark" function of SPA to find the period time between two pulse trains and each type of pulse occupancy time.
- 3. Record the plots and Reported.

9.2 TEST SETUP

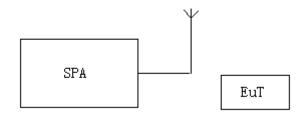







9.3 TEST RESULT


Test Mode: EUT @ 433.92MHz for RF Transmitter

Duty Cycle:	(0.42*14+1.08*11)ms/50.4ms=0.3274
Duty Cycle Correction Factor:	20lg(0.3274)= -9.69dB

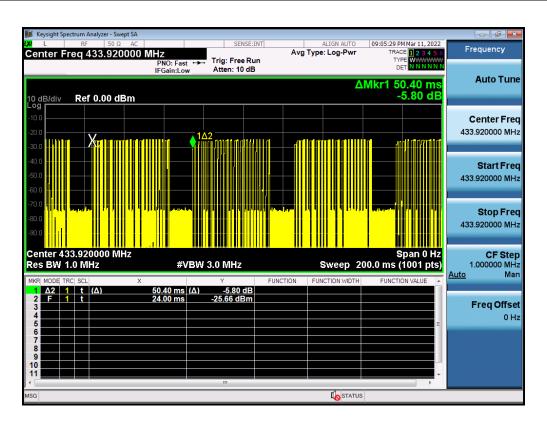



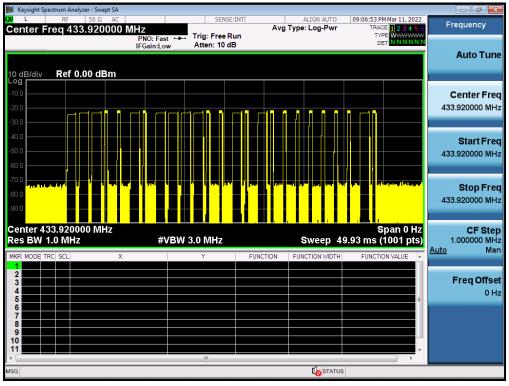

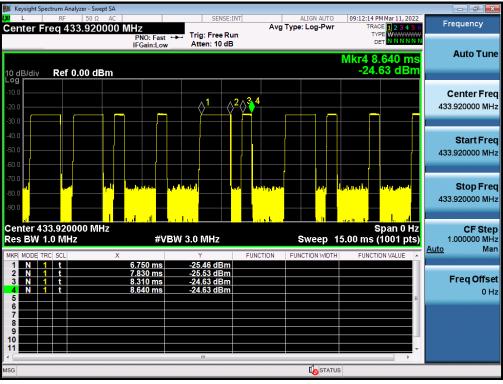

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 15 of 26

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 7. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 8. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 9.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 12. Only the worst case is reported.



Page 16 of 26

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Citate Group Frequency	1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP




10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

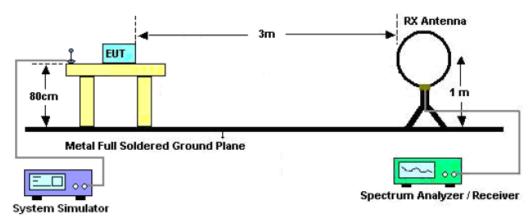

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

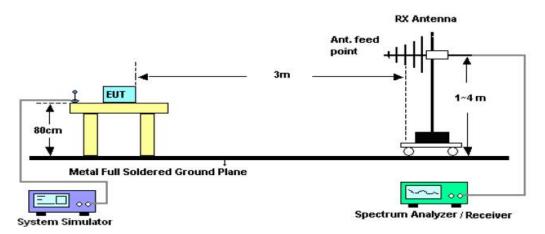

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

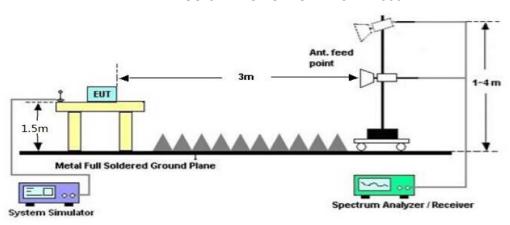




10.3. TEST RESULT

Test Mode: EUT @ 433.92MHz for RF Transmitter RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ-Horizontal

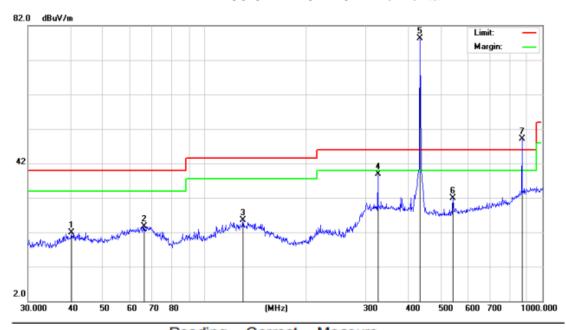


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		40.4172	5.90	16.03	21.93	40.00	-18.07	peak
2		66.2662	5.80	17.87	23.67	40.00	-16.33	peak
3		129.9226	6.66	18.81	25.47	43.50	-18.03	peak
4		325.5958	14.63	24.25	38.88	46.00	-7.12	peak
5	*	434.0651	55.14	23.11	78.25	46.00	32.25	peak
6		543.2742	9.47	22.42	31.89	46.00	-14.11	peak
7	Х	869.1302	21.31	27.80	49.11	46.00	3.11	peak

AV data list

Freq.	Peak Level	Duty cycle	AV Level	Limit	Margin	Polarization
[MHz]	(dBuV/m)	factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	Folanzation
433.9200	78.25	-9.69	68.56	80.82	-12.06	Horizontal
868.0800	49.11	-9.69	39.42	60.82	-21.38	Horizontal




RADIATED EMISSION BELOW 1GHZ-Vertical

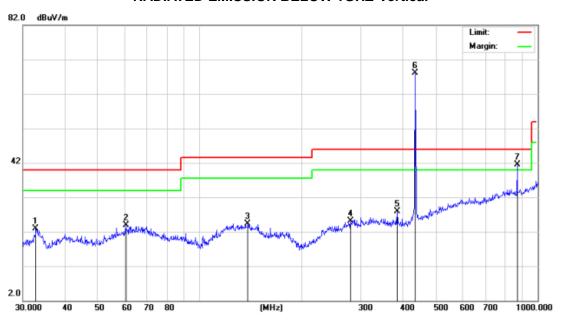

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		32.7486	9.59	13.25	22.84	40.00	-17.16	peak
2		60.4919	6.07	17.88	23.95	40.00	-16.05	peak
3		138.8735	5.03	19.22	24.25	43.50	-19.25	peak
4		279.0436	4.31	20.86	25.17	46.00	-20.83	peak
5		383.9318	7.88	20.06	27.94	46.00	-18.06	peak
6	*	434.0650	47.16	21.01	68.17	46.00	22.17	peak
7	!	869.1301	13.00	28.57	41.57	46.00	-4.43	peak


AV data list

Freq.	Peak Level	Duty cycle	AV Level	Limit	Margin	Polarization
[MHz]	(dBuV/m)	factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	Folanzation
433.4900	68.17	-9.69	58.48	80.82	-22.34	Vertical
868.0800	41.57	-9.69	31.88	60.82	-28.94	Vertical






RADIATED EMISSION ABOVE 1GHZ-Horizontal

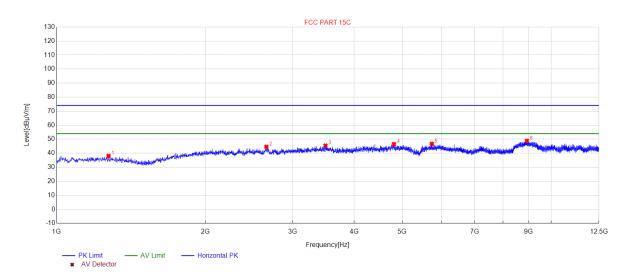

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1273.7274	38.02	-16.91	74.00	35.98	150	170	Horizontal
2	2656.1656	44.52	-9.60	74.00	29.48	150	340	Horizontal
3	3496.8997	45.39	-7.61	74.00	28.61	150	160	Horizontal
4	4810.331	46.42	-4.90	74.00	27.58	150	350	Horizontal
5	5738.4738	46.68	-4.53	74.00	27.32	150	220	Horizontal
6	8935.7936	48.74	1.16	74.00	25.26	150	170	Horizontal


AV data list

Freq.	Peak Level	Duty cycle	AV Level	Limit	Margin	Polarization
[MHz]	(dBuV/m)	factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	Polarization
1273.7274	38.02	-9.69	28.33	60.82	32.49	Horizontal
2656.1656	44.52	-9.69	34.83	60.82	25.99	Horizontal
3496.8997	45.39	-9.69	35.70	60.82	25.12	Horizontal
4810.331	46.42	-9.69	36.73	54.00	17.27	Horizontal
5738.4738	46.68	-9.69	36.99	60.82	23.83	Horizontal
8935.7936	48.74	-9.69	39.05	60.82	21.77	Horizontal





RADIATED EMISSION ABOVE 1GHZ-Vertical

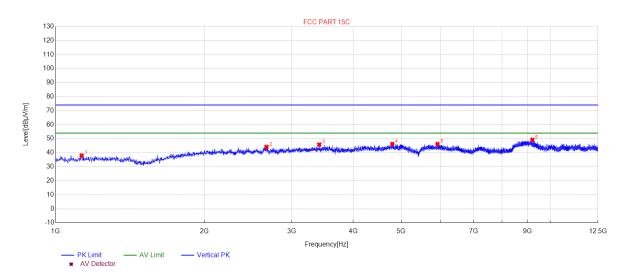

NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Dolority
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	1128.8129	37.99	-16.77	74.00	36.01	150	330	Vertical
2	2669.967	44.15	-9.59	74.00	29.85	150	150	Vertical
3	3412.9413	45.79	-7.90	74.00	28.21	150	40	Vertical
4	4797.6798	46.21	-4.91	74.00	27.79	150	20	Vertical
5	5920.192	46.17	-3.94	74.00	27.83	150	150	Vertical
6	9207.2207	49.18	0.88	74.00	24.82	150	300	Vertical

AV data list

Freq. [MHz]	Peak Level (dBuV/m)	Duty cycle factor(dB)	AV Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
1128.8129	37.99	-9.69	28.3	54.00	25.70	Vertical
2669.967	44.15	-9.69	34.46	60.82	26.36	Vertical
3412.9413	45.79	-9.69	36.10	60.82	24.72	Vertical
4797.6798	46.21	-9.69	36.52	54.00	17.48	Vertical
5920.192	46.17	-9.69	36.48	60.82	24.34	Vertical
9207.2207	49.18	-9.69	39.49	60.82	21.33	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 22 of 26

11. BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency

RBW=3KHz


VBW=10KHz


Span: 100kHz

Sweep time: Auto

- 2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 3. Record the plots and Reported.

11.2. TEST SETUP

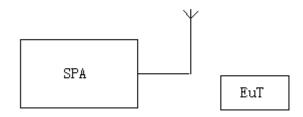





11.3. TEST RESULT

Test Mode: EUT @ 433.92MHz for RF Transmitter

-20dB bandwidth	LIMIT	RESULT
36.35KHz	1084.8KHz	Pass
Note: Limit= Operation Frequency ×	0.25%	





Page 24 of 26

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

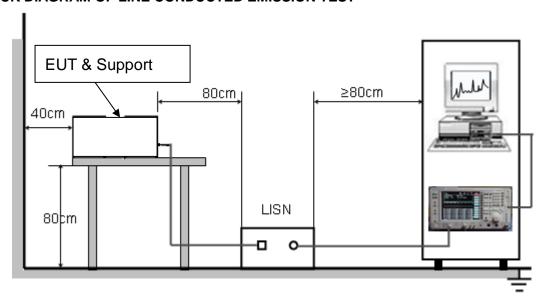



Report No.: AGC13808220302FE03 Page 25 of 26

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received power from control board which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Note: The device under test is battery-powered and does not require evaluation of AC Power Line Conducted Emission.



Page 26 of 26

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13808220302AP01

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC13808220302AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.