




25M BW QPSK Low ch.

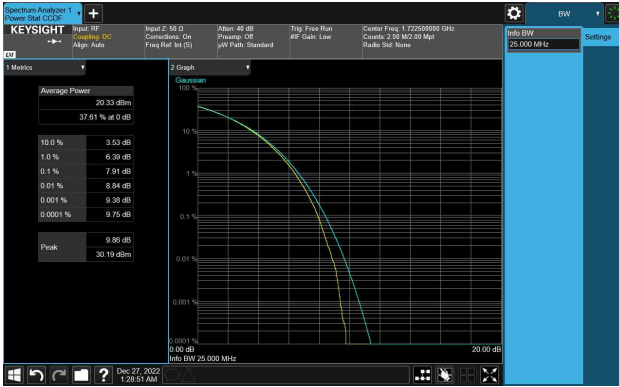


25M BW 256QAM Low ch.

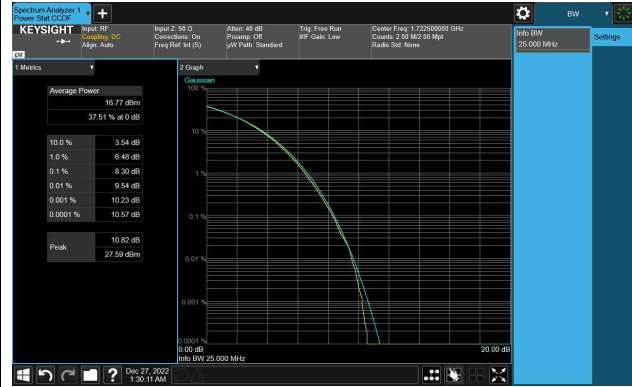


25M BW QPSK Mid ch.

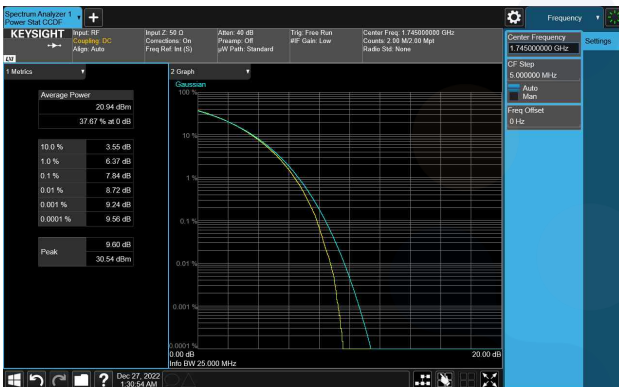


25M BW 256QAM Mid ch.

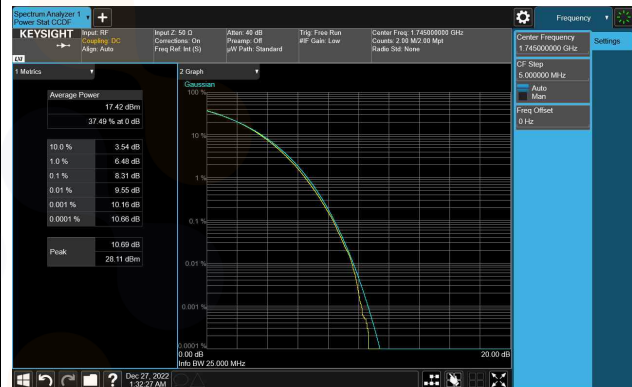


25M BW QPSK High ch.

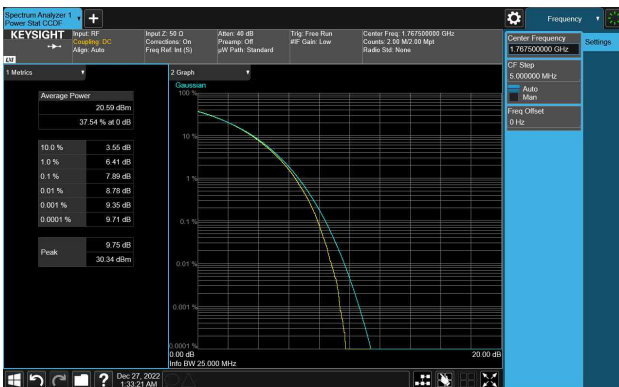


25M BW 256QAM High ch.

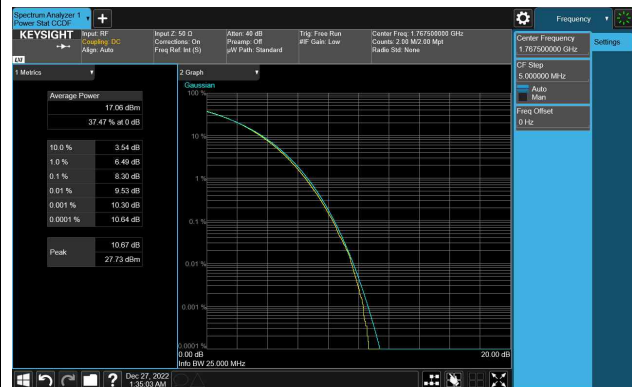


30M BW QPSK Low ch.

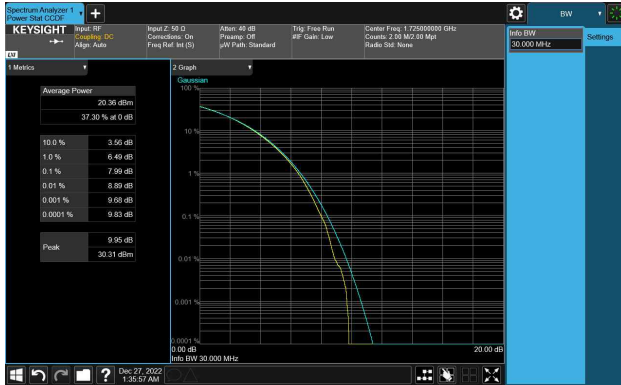


30M BW 256QAM Low ch.

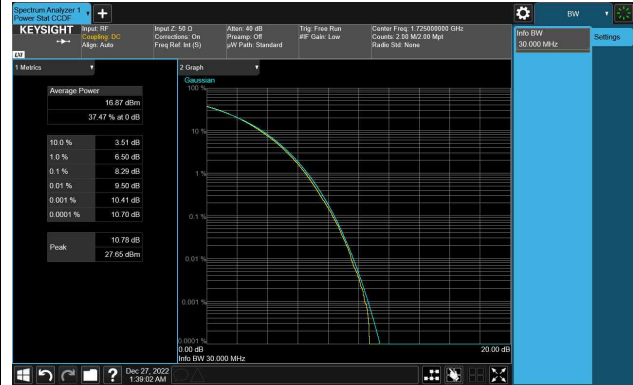


30M BW QPSK Mid ch.

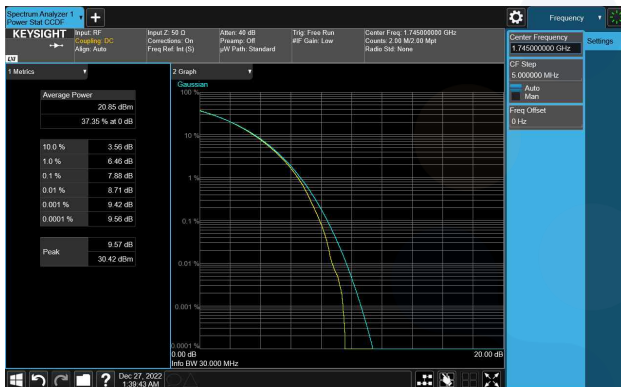


30M BW 256QAM Mid ch.

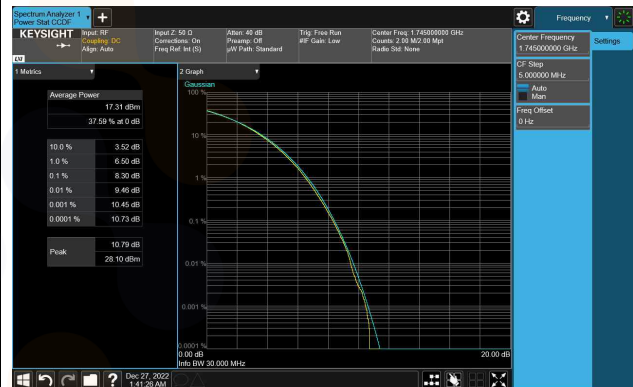


30M BW QPSK High ch.

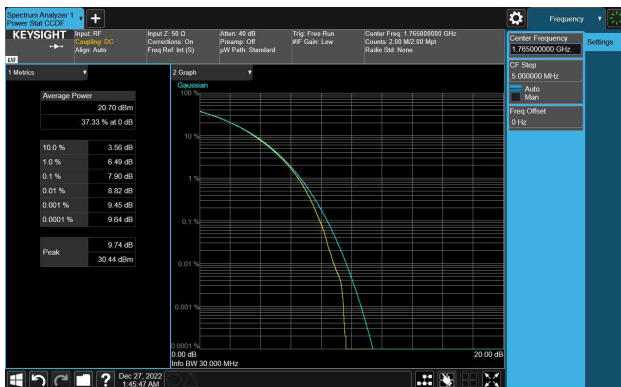


30M BW 256QAM High ch.

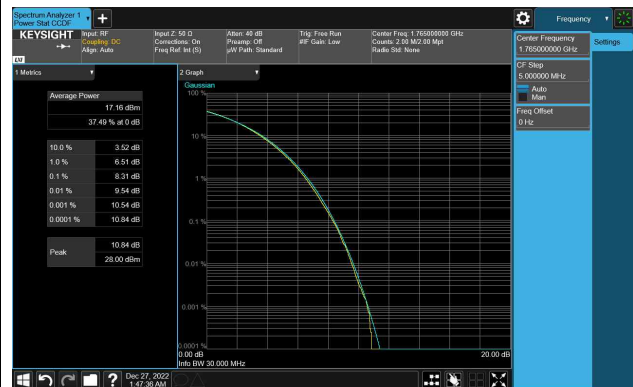


40M BW QPSK Low ch.

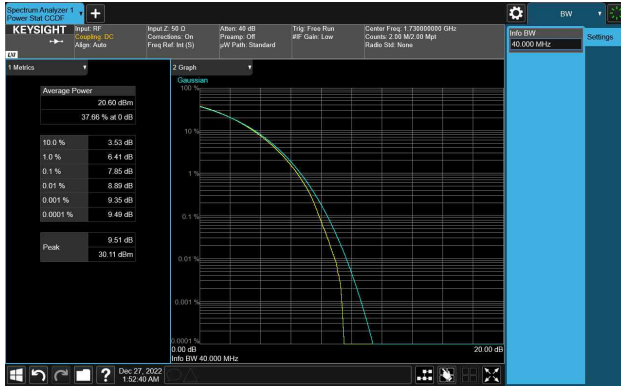


40M BW 256QAM Low ch.

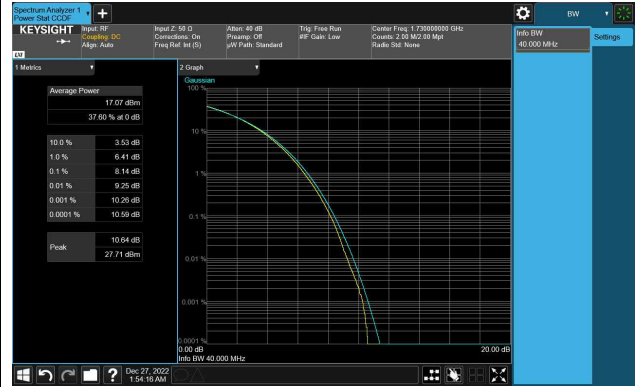


40M BW QPSK Mid ch.

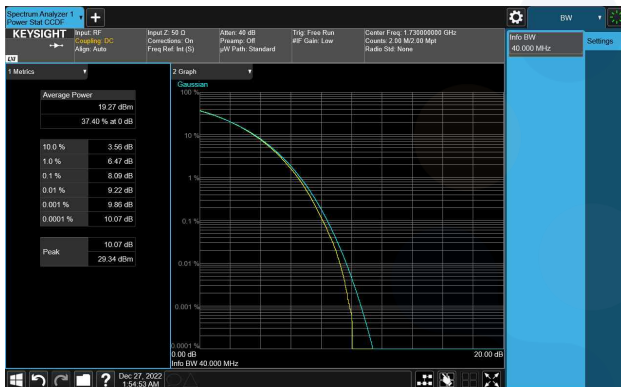


40M BW 256QAM Mid ch.

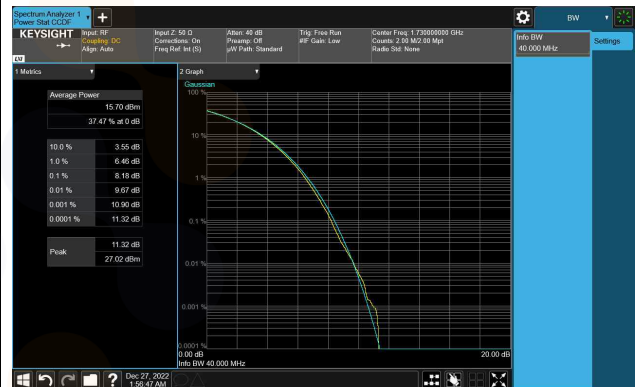

40M BW QPSK High ch.

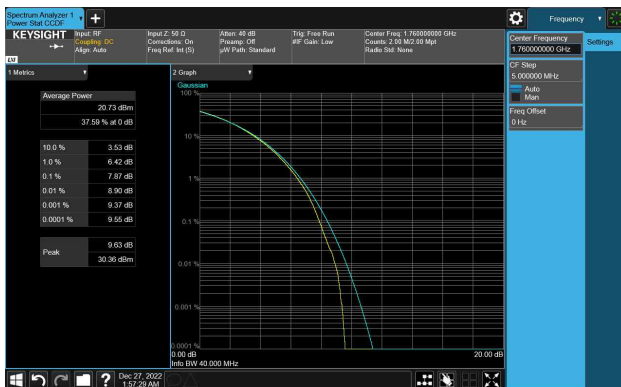


40M BW 256QAM High ch.

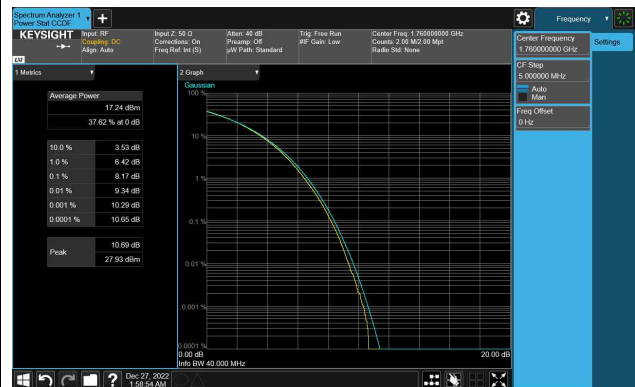

7.6. Frequency stability

Test setup

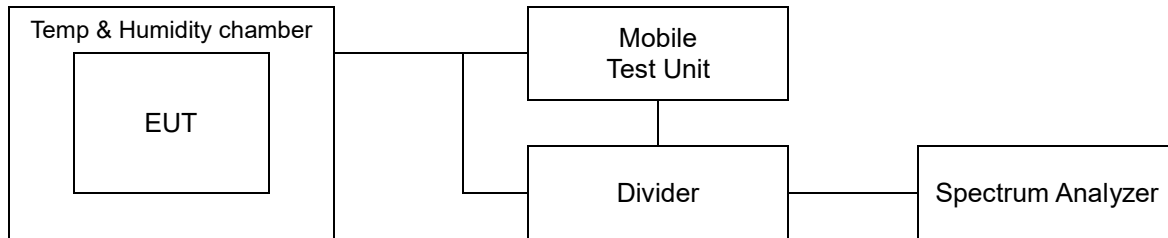

Limit

According to §2.1055(a),

The frequency stability shall be measured with variation of ambient temperature as follows:

- 1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- 2) From -20° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the maritime services under part 80 of this chapter, except for class A, B, and S emergency position indicating radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the local television transmission service and point-to-point microwave radio service under part 21 of this chapter, equipment licensed for use aboard aircraft in the aviation services under part 87 of this chapter, and equipment authorized for use in the family radio service under part 95 of this chapter.
- 3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the radio broadcast Services under part 73 of this chapter.

According to §2.1055(d),



The frequency stability shall be measured with variation of primary supply Voltage as follows:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- 3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

According to §22.355,

The carrier frequency of each transmitter in the public mobile services must be maintained within the tolerances given in Table of this section.

For mobile devices operating in the 824 to 849 MHz band at a power level than or equal to 3 Watts, the limit specified in Table C-1 is ± 2.5 ppm.

<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR23-SRF0011-A Page (81) of (96)</p>	<p> </p>
---	---	--

According to §27.54,

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block (bands of operation).

Test procedure

ANSI 63.26-2015 – Section 5.6

Test settings


- 1) The carrier frequency of the transmitter is measured at room temperature.
(20°C to provide a reference)
- 2) The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3) Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each Temperature level.



Test results


Test mode : 5G NR N5
 Waveform : DFT-s OFDM
 SCS (kHz) : 15
 Frequency (Hz) : 836 500 000
 Channel : 167300
 Deviation limit : ±0.00025% or 2.5ppm

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.88	+22(Ref)	836,500,000	-0.0000036	0.0	0.000000
		-30	836,500,000	0.0000173	0.0	0.000000
		-20	836,500,000	0.0000146	0.0	0.000000
		-10	836,500,000	0.0000130	0.0	0.000000
		0	836,500,000	0.0000033	0.0	0.000000
		+10	836,500,000	-0.0000015	0.0	0.000000
		+20	836,500,000	-0.0000045	0.0	0.000000
		+30	836,500,000	-0.0000095	0.0	0.000000
		+40	836,500,000	-0.0000135	0.0	0.000000
		+50	836,500,000	-0.0000124	0.0	0.000000
115%	4.46	+22(Ref)	836,500,000	-0.0000051	0.0	0.000000
End point	3.40	+22(Ref)	836,500,000	-0.0000053	0.0	0.000000

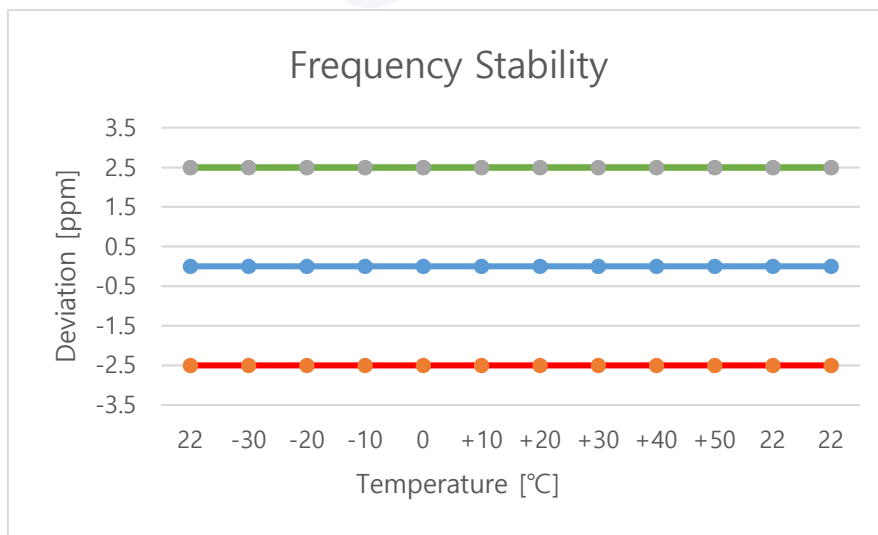

Test mode : 5GNR N66
 Waveform : DFT-s OFDM
 SCS (kHz) : 15
 Frequency (Hz) : 1 745 000 000
 Channel : 349000
 Deviation limit : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized bands of operation.


Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.88	+22(Ref)	1,745,000,000	0.0000037	0.0	0.000000
		-30	1,745,000,000	0.0000076	0.0	0.000000
		-20	1,745,000,000	0.0000040	0.0	0.000000
		-10	1,745,000,000	0.0000018	0.0	0.000000
		0	1,745,000,000	0.0000024	0.0	0.000000
		+10	1,745,000,000	0.0000008	0.0	0.000000
		+20	1,745,000,000	-0.0000013	0.0	0.000000
		+30	1,745,000,000	-0.0000022	0.0	0.000000
		+40	1,745,000,000	-0.0000055	0.0	0.000000
		+50	1,745,000,000	-0.0000034	0.0	0.000000
115%	4.46	+22(Ref)	1,745,000,000	0.0000033	0.0	0.000000
End point	3.40	+22(Ref)	1,745,000,000	0.0000002	0.0	0.000000

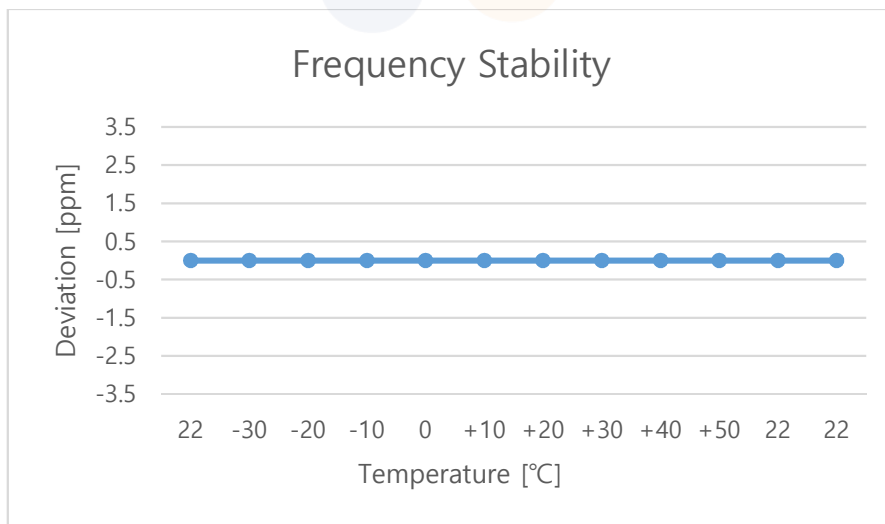


7.7. Radiated Power (ERP/EIRP)

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

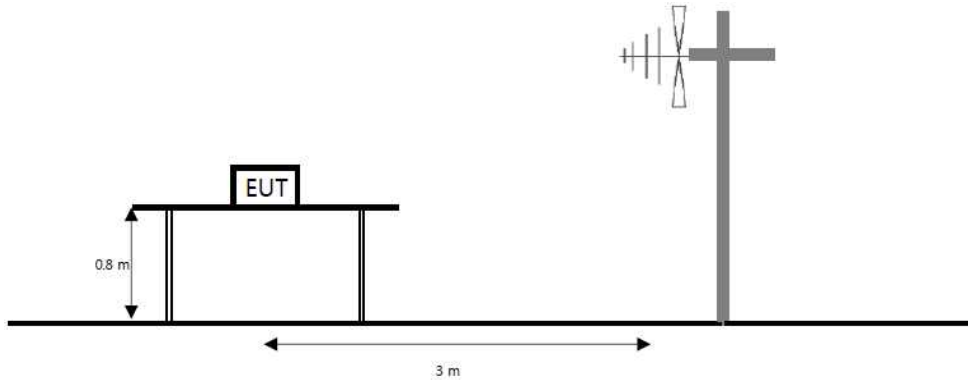

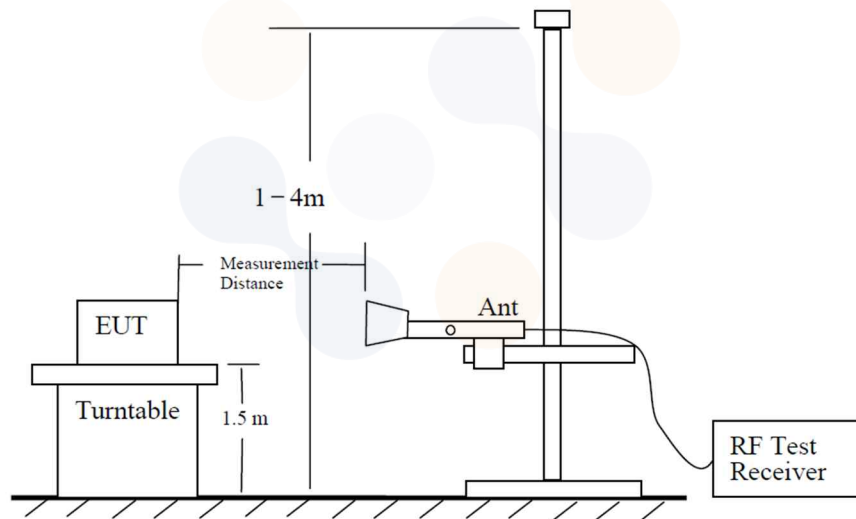

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

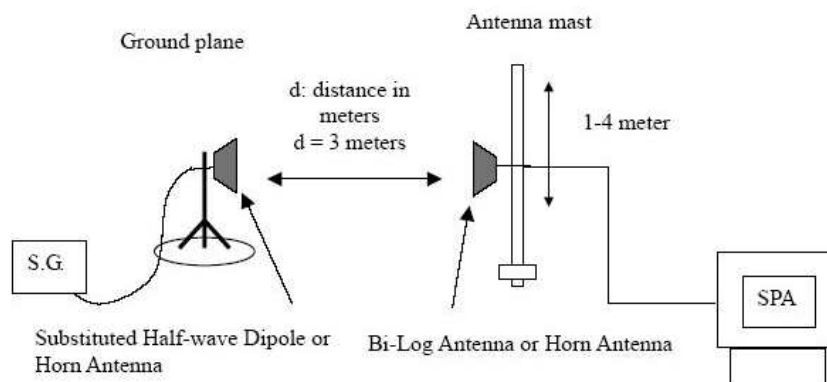

The diagram below shows the test setup for substituted method.



<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR23-SRF0011-A Page (85) of (96)</p>	 
---	---	---

Limit

According to §22.913(a)(5), the ERP of transmitters in the cellular radiotelephone service must not exceed the limits in this section. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to §27.50(d)(4), Fixed, mobile and portable (hand-held) stations operating in the 1710-1755 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test procedure



971168 D01 v03r01 - Section 5.2 and 5.8, 412172 D01 v01r01

ANSI 63.26-2015 – Section 5.2

ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 \times to 3 \times the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

<p>Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR23-SRF0011-A Page (86) of (96)</p>	 
---	---	---

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
The power is calculated by the following formula;

$$Pd(\text{dBm}) = Pg(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$
Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

Test results

Main Antenna

Test mode: 5GNR N5

Bandwidth	Waveform	SCS (kHz)	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP		
				[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]	
5 M	DFT-s OFDM	15	QPSK	826.5	H	0.13	4.89	25.36	20.60	0.115	
				836.5	H	-0.32	4.97	25.64	20.35	0.108	
				846.5	H	-0.73	5.03	24.90	19.14	0.082	
			16QAM	826.5	H	0.13	4.89	24.47	19.71	0.094	
				836.5	H	-0.32	4.97	24.72	19.43	0.088	
				846.5	H	-0.73	5.03	23.77	18.01	0.063	
10 M			QPSK	829.0	H	0.18	4.91	25.31	20.58	0.114	
				836.5	H	-0.32	4.97	25.25	19.96	0.099	
				844.0	H	-0.68	5.03	24.46	18.75	0.075	
				16QAM	829.0	H	0.18	4.91	24.32	19.59	0.091
					836.5	H	-0.32	4.97	24.41	19.12	0.082
					844.0	H	-0.68	5.03	23.75	18.04	0.064
15 M			QPSK	831.5	H	0.08	4.92	25.57	20.73	0.118	
				836.5	H	-0.32	4.97	25.46	20.17	0.104	
				841.5	H	-0.63	5.02	25.03	19.38	0.087	
				16QAM	831.5	H	0.08	4.92	24.48	19.64	0.092
					836.5	H	-0.32	4.97	24.63	19.34	0.086
					841.5	H	-0.63	5.02	24.05	18.40	0.069
20 M	QPSK	834.0	H	-0.12	4.95	25.23	20.16	0.104			
		836.5	H	-0.32	4.97	25.55	20.26	0.106			
		839.0	H	-0.52	4.99	25.85	20.34	0.108			
		16QAM	834.0	H	-0.12	4.95	24.34	19.27	0.085		
			836.5	H	-0.32	4.97	24.58	19.29	0.085		
			839.0	H	-0.52	4.99	25.17	19.66	0.092		

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

Test mode: 5GNR N66

Bandwidth	Waveform	SCS (kHz)	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP		
				[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]	
5 M	DFT-s OFDM	15	QPSK	1 712.5	V	5.41	6.88	21.67	20.19	0.104	
				1 745.0	V	5.31	6.93	18.13	16.51	0.045	
				1 777.5	V	5.22	7.02	20.27	18.47	0.070	
			16QAM	1 712.5	V	5.41	6.88	20.65	19.17	0.083	
				1 745.0	V	5.31	6.93	17.16	15.54	0.036	
				1 777.5	V	5.22	7.02	19.47	17.67	0.058	
10 M			QPSK	1 715.0	V	5.40	6.87	21.33	19.86	0.097	
				1 745.0	V	5.31	6.93	17.99	16.37	0.043	
				1 775.0	V	5.23	7.00	20.93	19.16	0.082	
				16QAM	1 715.0	V	5.40	6.87	20.45	18.98	0.079
					1 745.0	V	5.31	6.93	17.02	15.40	0.035
					1 775.0	V	5.23	7.00	19.83	18.06	0.064
15 M			QPSK	1 717.5	V	5.39	6.89	21.22	19.72	0.094	
				1 745.0	V	5.31	6.93	18.09	16.47	0.044	
				1 772.5	V	5.24	7.00	20.96	19.20	0.083	
			16QAM	1 717.5	V	5.39	6.89	20.48	18.98	0.079	
				1 745.0	V	5.31	6.93	17.18	15.56	0.036	
				1 772.5	V	5.24	7.00	20.12	18.36	0.069	
20 M	QPSK	1 720.0	V	5.38	6.89	21.23	19.72	0.094			
		1 745.0	V	5.31	6.93	17.97	16.35	0.043			
		1 770.0	V	5.24	7.00	20.88	19.12	0.082			
	16QAM	1 720.0	V	5.38	6.89	20.40	18.89	0.077			
		1 745.0	V	5.31	6.93	17.36	15.74	0.037			
		1 770.0	V	5.24	7.00	19.93	18.17	0.066			
25 M	QPSK	1 722.5	V	5.38	6.90	20.46	18.94	0.078			
		1 745.0	V	5.31	6.93	18.57	16.95	0.050			
		1 767.5	V	5.25	6.98	20.35	18.62	0.073			
	16QAM	1 722.5	V	5.38	6.90	19.69	18.17	0.066			
		1 745.0	V	5.31	6.93	17.88	16.26	0.042			
		1 767.5	V	5.25	6.98	19.44	17.71	0.059			
30 M	QPSK	1 725.0	V	5.37	6.90	20.05	18.52	0.071			
		1 745.0	V	5.31	6.93	18.03	16.41	0.044			
		1 765.0	V	5.26	6.97	20.10	18.39	0.069			
	16QAM	1 725.0	V	5.37	6.90	18.94	17.41	0.055			
		1 745.0	V	5.31	6.93	17.42	15.80	0.038			
		1 765.0	V	5.26	6.97	19.28	17.57	0.057			
40 M	QPSK	1 730.0	V	5.36	6.91	18.77	17.21	0.053			
		1 745.0	V	5.31	6.93	17.86	16.24	0.042			
		1 760.0	V	5.27	6.96	20.07	18.38	0.069			
	16QAM	1 730.0	V	5.36	6.91	18.01	16.45	0.044			
		1 745.0	V	5.31	6.93	17.07	15.45	0.035			
		1 760.0	V	5.27	6.96	19.15	17.46	0.056			

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

Sub Antenna
Test mode: 5GNR N66

Bandwidth	Waveform	SCS (kHz)	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP		
				[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]	
5 M	DFT-s OFDM	15	QPSK	1 712.5	V	5.41	6.88	21.07	19.59	0.091	
				1 745.0	V	5.31	6.93	17.41	15.79	0.038	
				1 777.5	V	5.22	7.02	18.98	17.18	0.052	
			16QAM	1 712.5	V	5.41	6.88	20.36	18.88	0.077	
				1 745.0	V	5.31	6.93	16.77	15.15	0.033	
				1 777.5	V	5.22	7.02	18.27	16.47	0.044	
10 M			QPSK	1 715.0	V	5.40	6.87	20.80	19.33	0.086	
				1 745.0	V	5.31	6.93	17.51	15.89	0.039	
				1 775.0	V	5.23	7.00	18.88	17.11	0.051	
				16QAM	1 715.0	V	5.40	6.87	20.18	18.71	0.074
					1 745.0	V	5.31	6.93	16.63	15.01	0.032
					1 775.0	V	5.23	7.00	18.12	16.35	0.043
15 M			QPSK	1 717.5	V	5.39	6.89	20.94	19.44	0.088	
				1 745.0	V	5.31	6.93	17.53	15.91	0.039	
				1 772.5	V	5.24	7.00	18.99	17.23	0.053	
			16QAM	1 717.5	V	5.39	6.89	20.27	18.77	0.075	
				1 745.0	V	5.31	6.93	16.63	15.01	0.032	
				1 772.5	V	5.24	7.00	17.99	16.23	0.042	
20 M	QPSK	1 720.0	V	5.38	6.89	21.06	19.55	0.090			
		1 745.0	V	5.31	6.93	17.40	15.78	0.038			
		1 770.0	V	5.24	7.00	19.06	17.30	0.054			
		16QAM	1 720.0	V	5.38	6.89	20.18	18.67	0.074		
			1 745.0	V	5.31	6.93	16.44	14.82	0.030		
			1 770.0	V	5.24	7.00	18.08	16.32	0.043		
25 M	QPSK	1 722.5	V	5.38	6.90	20.36	18.84	0.077			
		1 745.0	V	5.31	6.93	17.51	15.89	0.039			
		1 767.5	V	5.25	6.98	19.36	17.63	0.058			
	16QAM	1 722.5	V	5.38	6.90	19.28	17.76	0.060			
		1 745.0	V	5.31	6.93	16.75	15.13	0.033			
		1 767.5	V	5.25	6.98	18.31	16.58	0.045			
30 M	QPSK	1 725.0	V	5.37	6.90	19.16	17.63	0.058			
		1 745.0	V	5.31	6.93	17.60	15.98	0.040			
		1 765.0	V	5.26	6.97	19.46	17.75	0.060			
	16QAM	1 725.0	V	5.37	6.90	18.23	16.70	0.047			
		1 745.0	V	5.31	6.93	16.65	15.03	0.032			
		1 765.0	V	5.26	6.97	18.46	16.75	0.047			
40 M	QPSK	1 730.0	V	5.36	6.91	19.19	17.63	0.058			
		1 745.0	V	5.31	6.93	17.35	15.73	0.037			
		1 760.0	V	5.27	6.96	18.99	17.30	0.054			
	16QAM	1 730.0	V	5.36	6.91	18.78	17.22	0.053			
		1 745.0	V	5.31	6.93	16.52	14.90	0.031			
		1 760.0	V	5.27	6.96	18.24	16.55	0.045			


Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)


7.8. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

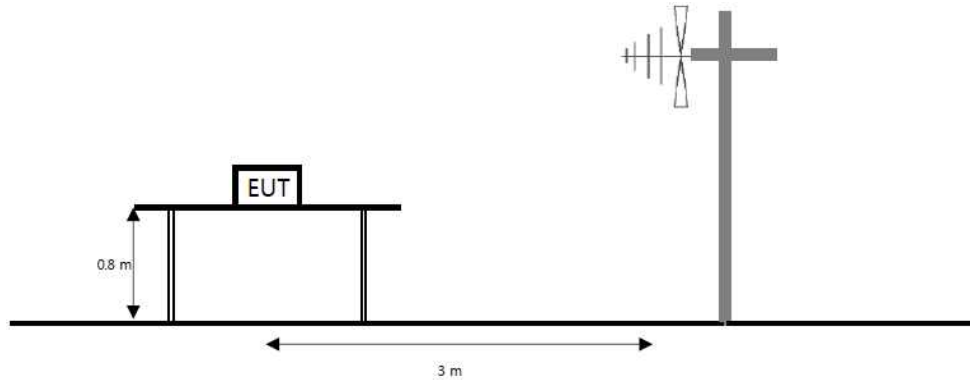


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

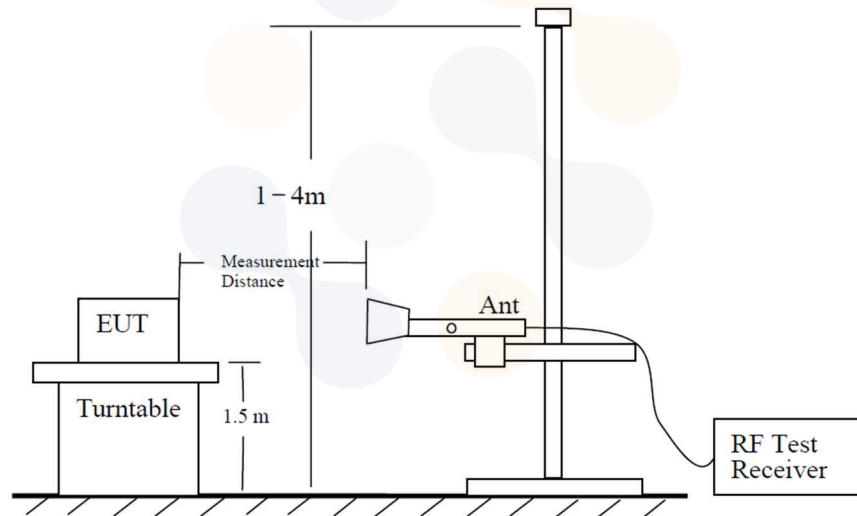

The diagram below shows the test setup for substituted method.

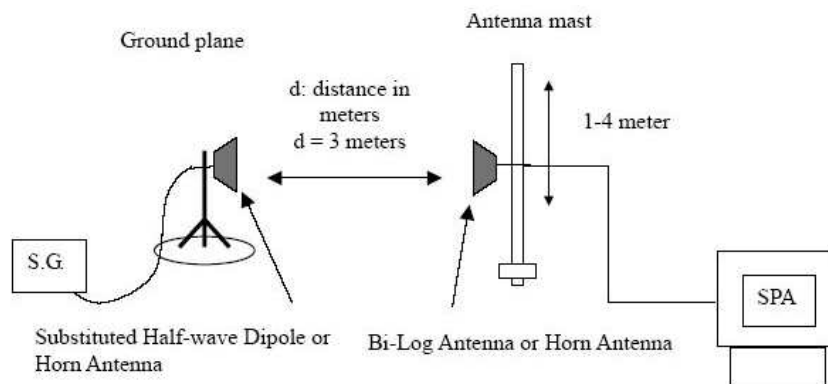

<p align="center">Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p align="center">Report No.: KR23-SRF0011-A Page (91) of (96)</p>	
--	--	---

Limit

According to §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P_{\text{[Watts]}})$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log(P_{\text{[Watts]}})$ dB.

Test procedure

971168 D01 v03r01 - Section 6.2

ANSI 63.26-2015 – Section 5.5

ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

- 1) RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times$ span / RBW
- 7) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring corrected for the change of input attenuator setting of the measuring receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

Test results (Above 1 000 MHz)

Main Antenna

Test mode : 5G NR N5
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 831.5
Channel : 166300
Bandwidth(MHz) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 648.80	V	5.58	6.76	-59.62	-60.80	-13.00	47.80
	2 474.40	H	6.02	8.34	-54.18	-56.50	-13.00	43.50
	3 298.40	H	7.70	10.12	-55.68	-58.10	-13.00	45.10
	4 121.60	H	8.97	11.61	-54.86	-57.50	-13.00	44.50

Test mode : 5G NR N5
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 836.5
Channel : 167300
Bandwidth(MHz) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 659.20	V	5.55	6.69	-57.16	-58.30	-13.00	45.30
	2 489.20	V	6.07	8.37	-55.40	-57.70	-13.00	44.70
	3 315.20	H	7.73	10.15	-56.48	-58.90	-13.00	45.90
	4 145.60	H	8.99	11.66	-57.23	-59.90	-13.00	46.90

Test mode : 5G NR N5
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 841.5
Channel : 168300
Bandwidth(MHz) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 669.20	V	5.53	6.72	-54.51	-55.70	-13.00	42.70
	2 503.20	H	6.11	8.36	-56.55	-58.80	-13.00	45.80
	3 334.80	H	7.77	10.20	-56.37	-58.80	-13.00	45.80
	4 172.00	V	9.00	11.41	-55.59	-58.00	-13.00	45.00

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

Test mode : 5GNR N66
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1712.5
Channel : 342500
Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 420.75	V	7.94	10.39	-56.55	-59.00	-13.00	46.00
	5 129.25	H	9.93	13.09	-57.04	-60.20	-13.00	47.20
	6 839.25	V	11.44	15.26	-52.08	-55.90	-13.00	42.90
	8 552.25	H	12.90	16.90	-41.90	-45.90	-13.00	32.90

Test mode : 5GNR N66
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1745.0
Channel : 349000
Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 486.00	H	8.07	10.53	-56.64	-59.10	-13.00	46.10
	5 226.75	H	10.03	13.04	-55.59	-58.60	-13.00	45.60
	6 971.25	V	11.57	15.33	-51.34	-55.10	-13.00	42.10
	8 714.25	H	12.90	17.30	-41.40	-45.80	-13.00	32.80

Test mode : 5GNR N66
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1777.5
Channel : 355500
Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 550.50	V	8.18	10.68	-56.40	-58.90	-13.00	45.90
	5 327.25	H	10.13	13.25	-54.98	-58.10	-13.00	45.10
	7 101.75	H	11.62	15.32	-52.50	-56.20	-13.00	43.20
	8 877.00	H	12.90	17.03	-40.67	-44.80	-13.00	31.80

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

Sub Antenna

Test mode : 5G NR N66
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1712.5
Channel : 342500
Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 420.75	V	7.94	10.39	-56.15	-58.60	-13.00	45.60
	5 130.00	V	9.93	13.09	-56.44	-59.60	-13.00	46.60
	6 840.75	V	11.44	15.26	-51.28	-55.10	-13.00	42.10
	8 552.25	V	12.90	16.90	-50.30	-54.30	-13.00	41.30

Test mode : 5G NR N66
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1745.0
Channel : 349000
Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 486.00	V	8.07	10.53	-55.64	-58.10	-13.00	45.10
	5 227.50	V	10.03	13.04	-54.79	-57.80	-13.00	44.80
	6 969.75	H	11.57	15.33	-53.14	-56.90	-13.00	43.90
	8 715.00	V	12.90	17.30	-49.90	-54.30	-13.00	41.30

Test mode : 5G NR N66
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1777.5
Channel : 355500
Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 550.50	V	8.18	10.68	-56.90	-59.40	-13.00	46.40
	5 322.75	H	10.12	13.25	-54.27	-57.40	-13.00	44.40
	7 100.25	V	11.62	15.32	-51.70	-55.40	-13.00	42.40
	8 873.25	V	12.90	17.03	-50.67	-54.80	-13.00	41.80

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

EN-DC Mode (Worst case)

Test mode : 2A-n5A
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 831.5
Channel : 166300
Bandwidth(MHz) : 20 (LTE), 15 (NR)

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 647.20	V	5.59	6.75	-61.94	-63.10	-13.00	50.10
	2 474.00	V	6.02	8.34	-55.68	-58.00	-13.00	45.00
	3 296.40	H	7.69	10.11	-55.98	-58.40	-13.00	45.40
	4 120.00	V	8.97	11.60	-55.77	-58.40	-13.00	45.40

Test mode : 2A-n66A
Waveform / SCS(kHz) : DFT-s OFDM / 15
Frequency(MHz) : 1712.5
Channel : 342500
Bandwidth(MHz) : 20 (LTE), 5 (NR)

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 422.25	V	7.94	10.39	-57.25	-59.70	-13.00	46.70
	5 130.00	H	9.93	13.09	-55.74	-58.90	-13.00	45.90
	6 839.25	H	11.44	15.26	-52.08	-55.90	-13.00	42.90
	8 553.75	V	12.90	16.90	-50.70	-54.70	-13.00	41.70

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
PXA Signal Analyzer	KEYSIGHT	N9040B	US55230151	23.07.11
Spectrum Analyzer	AGILENT	N9040B	MY57010132	23.10.14
DC Power Supply	AGILENT	E3632A	MY40016393	23.07.11
Divider	Marki Microwave, Inc.	PD-0040	D0003	23.08.10
Radio Communication Analyzer	ANRITSU	MT8821C	6201807233	23.01.19
Radio Communication Analyzer	ANRITSU	MT8000A	6261923085	23.06.24
Radio Communication Analyzer	ANRITSU	MT8000A	6262093278	23.05.13
Temp & Humid Chamber	ESPEC CORP.	SH-642	93016978	23.03.02
Vector Signal Generator	R&S	SMBV100A	257566	23.07.04
Signal Generator	R&S	SMB100A	176206	23.01.19
Bilog Antenna	Teseq GmbH	CBL 6143A	35039	23.05.12
Bilog Antenna	ETS.LINDGREN	'3143B	00228420	23.09.28
Horn Antenna	ETS.LINDGREN	3117	161225	23.05.04
Horn Antenna	ETS.LINDGREN	3117	00227509	23.09.20
Horn Antenna	ETS.lindgren	3116	00086632	23.01.25
Horn Antenna	Steatite Antennas	QMS-00225	17790	23.07.14
Horn Antenna	Steatite Antennas	QMS-00238	17791	23.07.14
Band Reject Filter	Wainwright Instruments GmbH	WRCGV1805/1880-1785/1900-50/10SS	2	23.01.19
Band Reject Filter	Wainwright Instruments GmbH	WRCG 824/849-814/859-60/10SS	32	23.07.11
Band Reject Filter	Wainwright Instruments GmbH	WRCG 1710/1785-1690/1805-60/12SS	43	23.01.19
High Pass Filter	Wainwright Instruments GmbH	WHKX10-900-1000-15000-40SS	11	23.08.10
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40SS	32	23.08.10
Broadband Amplifier	SONOMA INSTRUMENT	315	300314	23.01.19
Low Noise Amplifier	TESTEK	TK-PA18H	220123-L	23.12.02*
Amplifier	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	23.01.21
Antenna Stand	innco systems GmbH	AS1500-EP-10kg	N/A	-
Antenna Stand	innco systems GmbH	AS1500-EP-10kg	N/A	-
Compact Table	innco systems GmbH	CT1000	N/A	-

* Tests related to this equipment were progressed after the calibration was completed

End of test report