



RF Exposure Evaluation Report

1. Product Information

FCC ID:	2A4IT-CR025
Number of tested samples	2
Sample number	220211036A-1(Engineer sample), 220211036A-2(Normal sample)
Product Name	Three-in-one wireless charger
Model Number	CR-023
Power Supply	Input:cellphone:9V/3A 12V/2.5A earphone:5V/2A Apple watch:5V/1A Output:cellphone:5W/7.5W/10W/15W earphone:5W Apple watch:3W
Modulation Type	Continuous Wave
Frequency Range	110.0~205.0KHz
Operation Frequency	125.0 KHz
Antenna Type	Coil Antenna
Hardware version	/
Software version	/
Accessories	/
Exposure category	General population/uncontrolled environment
EUT Type	Production Unit
Device Type	Mobile Device

Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	ADAPTER	THX-120050KB	--	FCC
HONOR	Mobile phone	V30Pro	66B0219C25014679	FCC
--	Earphone	A1602	--	
--	Watch	E8	--	

Note: Auxiliary equipment is provided by the laboratory.

2. Evaluation Method

Per KDB 680106 D01 Section 3. RF Exposure Requirements;

- 1) Consumer wireless power transfer devices approved under Part 18 in some cases have to demonstrate compliance with RF exposure requirements. The potential for exposure must be assessed according to the operating configurations of the wireless system and the exposure conditions of users and bystanders. RF exposure must be evaluated with the client device(s) being charged by the primary at maximum output power. The RF exposure requirements must be determined in conjunction with the device operating characteristics, according to the mobile and portable exposure requirements in Section 2.1091 and Section 2.1093 of the rules. SAR and MPE limits do not cover the frequency range for wireless power transfer applications which operate below 100 kHz and 300 kHz respectively; therefore, RF exposure compliance needs to be determined with respect to 1.1307 (c) and (d) of the FCC rules.



- 2) Based on the design and implementation of the power transfer application, it must be clearly identified if mobile or portable RF exposure conditions apply. Devices that are installed to provide separation of at least 20 cm from users and bystanders may qualify for mobile exposure conditions. For some conditions where users and bystanders may be exposed at closer than 20 cm, section 2.1091(d) (4) of the rules may apply.
- 3) For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.
- 4) Portable exposure conditions from 100 kHz to 6 GHz are determined with respect to SAR requirements. Existing SAR systems and test procedures are generally intended for measurements above 100 MHz. While numerical modeling can be an alternative, the constraints of substantial computational resources at low frequencies could introduce further limitations. Under these circumstances, including operations below 100 kHz, the Commission may consider a combination of analytical analysis, field strength, radiated and conducted power measurements, in conjunction with some limited numerical modeling to assess compliance.
- 5) Depending on the operating frequency, existing SAR and MPE measurement procedures may be adapted to evaluate wireless power transfer devices for compliance with respect to mobile or portable exposure conditions. If the grantee or its test lab have any questions regarding RF exposure evaluation they should contact the FCC Laboratory with sufficient system operating configuration details to determine if RF exposure evaluation is necessary and, if required, how to apply specific test procedures. Below 100 MHz, when SAR testing is required and the device is operating at close proximity to persons, information on device design, implementation, operating configurations, exposure conditions of users and bystanders are needed to determine the evaluation and testing requirements. In addition, the influence of nearby objects may also need consideration according to the wireless power transfer system implementation; for example, the effects of placing the device, its coils or radiating elements on or near metallic surfaces

3. Evaluation Limit

3.1 Refer evaluation method

[ANSI C95.1–1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v03](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

[FCC CFR 47 part1 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part2 2.1091](#): Radiofrequency radiation exposure evaluation: mobile devices

[FCC CFR 47 part 18.107](#): Industrial, Scientific, and Medical Equipment



3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz


*=Plane-wave equivalent power density

According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

4. Test Setup Diagram

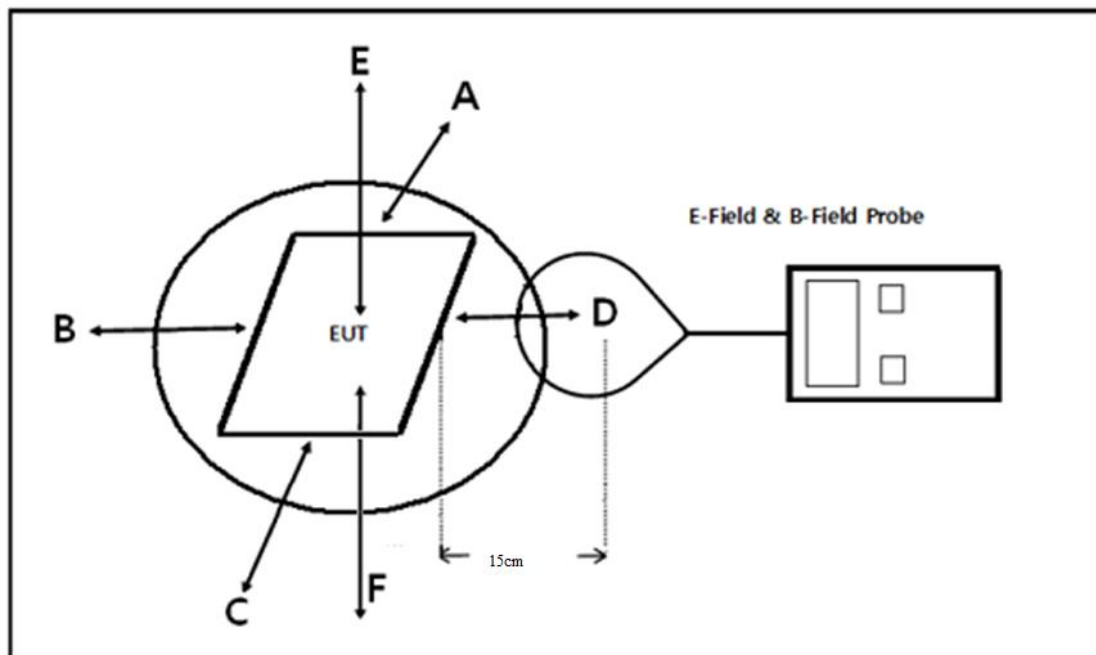

5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2021-06-21	2022-06-20
B-Field Probe	Narda	ELT-400	M-1154	2021-06-21	2022-06-20

6. Measurement Procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm and 20cm) which is between the edges of the charger and the geometric center of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.



7. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v03 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110.0 KHz - 205 KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power of the primary coil is less than 15W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	No	The transfer system includes Three coils that is able to detect receiver device.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

In all other cases, unless excluded above, an RF exposure evaluation report must be reviewed and accepted through a KDB or PBA inquiry to enable authorization of the equipment. When evaluation is required to show compliance; for example, using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation.

8. E and H field Strength

Test Modes		
Mode 1	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A)+ EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter1 (9V/3A) + AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A)+ EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter1 (9V/3A) + AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A)+ EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter 1(9V/3A) + AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter1 (12V/2.5A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record



Mode 8	AC/DC Adapter1 (12V/2.5A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 9	AC/DC Adapter1 (9V/3A)+ EUT + Mobile Phone +Earphone + Watch (Battery Status: <100%)	Record
Mode 10	AC/DC Adapter1(9V/3A)+ EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Pre-tested
Mode 11	AC/DC Adapter1 (9V/3A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Pre-tested
Mode 12	AC/DC Adapter1 (9V/3A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <100%)	Pre-tested
Mode 13	AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record
Mode 14	AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 15	AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Record
Mode 16	AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record
Mode 17	AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 18	AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Record
Mode 19	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record
Mode 20	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 21	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Record
Mode 22	AC/DC Adapter1 (9V/3A) + AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Pre-tested
Mode 23	AC/DC Adapter1 (9V/3A) + AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Pre-tested
Mode 24	AC/DC Adapter1 (9V/3A)+ AC/DC Adapter2 (5V/2A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Pre-tested
Mode 25	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record
Mode 26	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 27	AC/DC Adapter1 (12V/2.5A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Record
Mode 28	AC/DC Adapter1 (9V/3A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Pre-tested
Mode 29	AC/DC Adapter1 (9V/3A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Pre-tested



Mode 30	AC/DC Adapter1 (9V/3A)+ AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: 100%)	Pre-tested
Mode 31	AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <1%)	Record
Mode 32	AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <50%)	Record
Mode 33	AC/DC Adapter2 (5V/2A) + AC/DC Adapter3 (5V/1A) + EUT + Mobile Phone +Earphone + Watch (Battery Status: <100%)	Record
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 1	0.125	uT	0.156	0.175	0.184	0.168	0.198	--	--
Mode 1	0.125	A/m	0.125	0.140	0.147	0.134	0.158	0.815	1.63
Mode 1	0.125	V/m	46.875	52.502	55.125	50.251	59.254	307.0	614.0
Mode 2	0.125	uT	0.169	0.172	0.189	0.193	0.186	--	--
Mode 2	0.125	A/m	0.135	0.138	0.151	0.154	0.149	0.815	1.63
Mode 2	0.125	V/m	50.625	51.75	56.625	57.75	55.875	307.0	614.0
Mode 3	0.125	uT	0.186	0.158	0.194	0.157	0.158	--	--
Mode 3	0.125	A/m	0.149	0.126	0.155	0.126	0.126	0.815	1.63
Mode 3	0.125	V/m	55.875	47.25	58.125	47.25	47.25	307.0	614.0

Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 7	0.125	uT	0.057	0.068	0.069	0.071	0.068	--	--
Mode 7	0.125	A/m	0.046	0.054	0.055	0.057	0.054	0.815	1.63
Mode 7	0.125	V/m	17.25	20.25	20.625	21.375	20.25	307.0	614.0
Mode 8	0.125	uT	0.055	0.065	0.059	0.047	0.056	--	--
Mode 8	0.125	A/m	0.044	0.052	0.047	0.038	0.045	0.815	1.63
Mode 8	0.125	V/m	16.5	19.5	17.625	14.25	16.875	307.0	614.0
Mode 9	0.125	uT	0.054	0.058	0.054	0.065	0.084	--	--
Mode 9	0.125	A/m	0.043	0.046	0.043	0.052	0.067	0.815	1.63
Mode 9	0.125	V/m	16.125	17.25	16.125	19.5	25.125	307.0	614.0



Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 13	0.125	uT	0.075	0.072	0.071	0.069	0.066	--	--
Mode 13	0.125	A/m	0.060	0.058	0.057	0.055	0.053	0.815	1.63
Mode 13	0.125	V/m	22.5	21.75	21.375	20.625	19.875	307.0	614.0
Mode 14	0.125	uT	0.069	0.071	0.063	0.066	0.061	--	--
Mode 14	0.125	A/m	0.055	0.057	0.050	0.053	0.049	0.815	1.63
Mode 14	0.125	V/m	20.625	21.375	18.75	19.875	18.375	307.0	614.0
Mode 15	0.125	uT	0.068	0.071	0.068	0.066	0.062	--	--
Mode 15	0.125	A/m	0.054	0.057	0.054	0.053	0.050	0.815	1.63
Mode 15	0.125	V/m	20.25	21.375	20.25	19.875	18.75	307.0	614.0

Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 16	0.125	uT	0.041	0.043	0.051	0.066	0.035	--	--
Mode 16	0.125	A/m	0.033	0.034	0.041	0.053	0.028	0.815	1.63
Mode 16	0.125	V/m	12.375	12.75	15.375	19.875	10.5	307.0	614.0
Mode 17	0.125	uT	0.039	0.054	0.065	0.062	0.044	--	--
Mode 17	0.125	A/m	0.031	0.043	0.052	0.050	0.035	0.815	1.63
Mode 17	0.125	V/m	11.625	16.125	19.5	18.75	13.125	307.0	614.0
Mode 18	0.125	uT	0.054	0.056	0.055	0.039	0.041	--	--
Mode 18	0.125	A/m	0.043	0.045	0.044	0.031	0.033	0.815	1.63
Mode 18	0.125	V/m	16.125	16.875	16.5	11.625	12.375	307.0	614.0

Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 19	0.125	uT	0.121	0.123	0.112	0.108	0.128	--	--
Mode 19	0.125	A/m	0.097	0.098	0.090	0.086	0.102	0.815	1.63
Mode 19	0.125	V/m	36.375	36.75	33.75	32.25	38.25	307.0	614.0
Mode 20	0.125	uT	0.131	0.128	0.141	0.105	0.112	--	--
Mode 20	0.125	A/m	0.105	0.102	0.113	0.084	0.090	0.815	1.63
Mode 20	0.125	V/m	39.375	38.25	42.375	31.5	33.75	307.0	614.0
Mode 21	0.125	uT	0.131	0.125	0.111	0.108	0.103	--	--
Mode 21	0.125	A/m	0.105	0.100	0.089	0.086	0.082	0.815	1.63
Mode 21	0.125	V/m	39.375	37.5	33.375	32.25	30.75	307.0	614.0



Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 25	0.125	uT	0.122	0.128	0.131	0.122	0.104	--	--
Mode 25	0.125	A/m	0.098	0.102	0.105	0.098	0.083	0.815	1.63
Mode 25	0.125	V/m	36.75	38.25	39.375	36.75	31.125	307.0	614.0
Mode 26	0.125	uT	0.111	0.110	0.105	0.103	0.112	--	--
Mode 26	0.125	A/m	0.089	0.088	0.084	0.082	0.090	0.815	1.63
Mode 26	0.125	V/m	33.375	33	31.5	30.75	33.75	307.0	614.0
Mode 27	0.125	uT	0.126	0.122	0.134	0.105	0.119	--	--
Mode 27	0.125	A/m	0.101	0.098	0.107	0.084	0.095	0.815	1.63
Mode 27	0.125	V/m	37.875	36.75	40.125	31.5	35.625	307.0	614.0

Load mode	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 31	0.125	uT	0.114	0.121	0.113	0.120	0.117	--	--
Mode 31	0.125	A/m	0.091	0.097	0.090	0.096	0.094	0.815	1.63
Mode 31	0.125	V/m	34.125	36.375	33.75	36	35.25	307.0	614.0
Mode 32	0.125	uT	0.106	0.121	0.112	0.104	0.119	--	--
Mode 32	0.125	A/m	0.085	0.097	0.090	0.083	0.095	0.815	1.63
Mode 32	0.125	V/m	31.875	36.375	33.75	31.125	35.625	307.0	614.0
Mode 33	0.125	uT	0.124	0.102	0.130	0.128	0.124	--	--
Mode 33	0.125	A/m	0.099	0.082	0.104	0.102	0.099	0.815	1.63
Mode 33	0.125	V/m	37.125	30.75	39	38.25	37.125	307.0	614.0



Field Strength at 20cm from the top surface of the EUT

Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 1	0.125	uT	0.193	--	--
Mode 1	0.125	A/m	0.154	0.815	1.63
Mode 1	0.125	V/m	57.751	307.0	614.0
Mode 2	0.125	uT	0.176	--	--
Mode 2	0.125	A/m	0.141	0.815	1.63
Mode 2	0.125	V/m	52.875	307.0	614.0
Mode 3	0.125	uT	0.169	--	--
Mode 3	0.125	A/m	0.135	0.815	1.63
Mode 3	0.125	V/m	50.625	307.0	614.0

Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 7	0.125	uT	0.039	--	--
Mode 7	0.125	A/m	0.031	0.815	1.63
Mode 7	0.125	V/m	11.625	307.0	614.0
Mode 8	0.125	uT	0.042	--	--
Mode 8	0.125	A/m	0.034	0.815	1.63
Mode 8	0.125	V/m	12.75	307.0	614.0
Mode 9	0.125	uT	0.045	--	--
Mode 9	0.125	A/m	0.036	0.815	1.63
Mode 9	0.125	V/m	13.5	307.0	614.0

Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 13	0.125	uT	0.039	--	--
Mode 13	0.125	A/m	0.031	0.815	1.63
Mode 13	0.125	V/m	11.625	307.0	614.0
Mode 14	0.125	uT	0.046	--	--
Mode 14	0.125	A/m	0.037	0.815	1.63
Mode 14	0.125	V/m	13.875	307.0	614.0
Mode 15	0.125	uT	0.048	--	--
Mode 15	0.125	A/m	0.038	0.815	1.63
Mode 15	0.125	V/m	14.25	307.0	614.0



Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 16	0.125	uT	0.041	--	--
Mode 16	0.125	A/m	0.033	0.815	1.63
Mode 16	0.125	V/m	12.375	307.0	614.0
Mode 17	0.125	uT	0.039	--	--
Mode 17	0.125	A/m	0.031	0.815	1.63
Mode 17	0.125	V/m	11.625	307.0	614.0
Mode 18	0.125	uT	0.025	--	--
Mode 18	0.125	A/m	0.020	0.815	1.63
Mode 18	0.125	V/m	7.50	307.0	614.0

Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 19	0.125	uT	0.116	--	--
Mode 19	0.125	A/m	0.093	0.815	1.63
Mode 19	0.125	V/m	34.875	307.0	614.0
Mode 20	0.125	uT	0.121	--	--
Mode 20	0.125	A/m	0.097	0.815	1.63
Mode 20	0.125	V/m	36.375	307.0	614.0
Mode 21	0.125	uT	0.136	--	--
Mode 21	0.125	A/m	0.109	0.815	1.63
Mode 21	0.125	V/m	40.875	307.0	614.0

Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 25	0.125	uT	0.124	--	--
Mode 25	0.125	A/m	0.099	0.815	1.63
Mode 25	0.125	V/m	37.125	307.0	614.0
Mode 26	0.125	uT	0.110	--	--
Mode 26	0.125	A/m	0.088	0.815	1.63
Mode 26	0.125	V/m	33	307.0	614.0
Mode 27	0.125	uT	0.120	--	--
Mode 27	0.125	A/m	0.096	0.815	1.63
Mode 27	0.125	V/m	36	307.0	614.0




Charging Battery Level	Frequency Range (MHz)	Field Strength	Measured E-Field Strength Values (V/m) Measured H-Field Strength Values (A/m)	50% Limits	Limits
			Test Position		
Mode 31	0.125	uT	0.131	--	--
Mode 31	0.125	A/m	0.154	0.815	1.63
Mode 31	0.125	V/m	57.751	307.0	614.0
Mode 32	0.125	uT	0.124	--	--
Mode 32	0.125	A/m	0.141	0.815	1.63
Mode 32	0.125	V/m	52.875	307.0	614.0
Mode 33	0.125	uT	0.132	--	--
Mode 33	0.125	A/m	0.135	0.815	1.63
Mode 33	0.125	V/m	50.625	307.0	614.0

Note: $V/m = 10^{(((20 \lg(A/m * 10^6) + 51.5) - 120) / 20)}$


Note: $A/m = uT / 1.25$

9. Test Setup Photos


9.1. Test Position A - Exposure photo from side edge surface-Rear

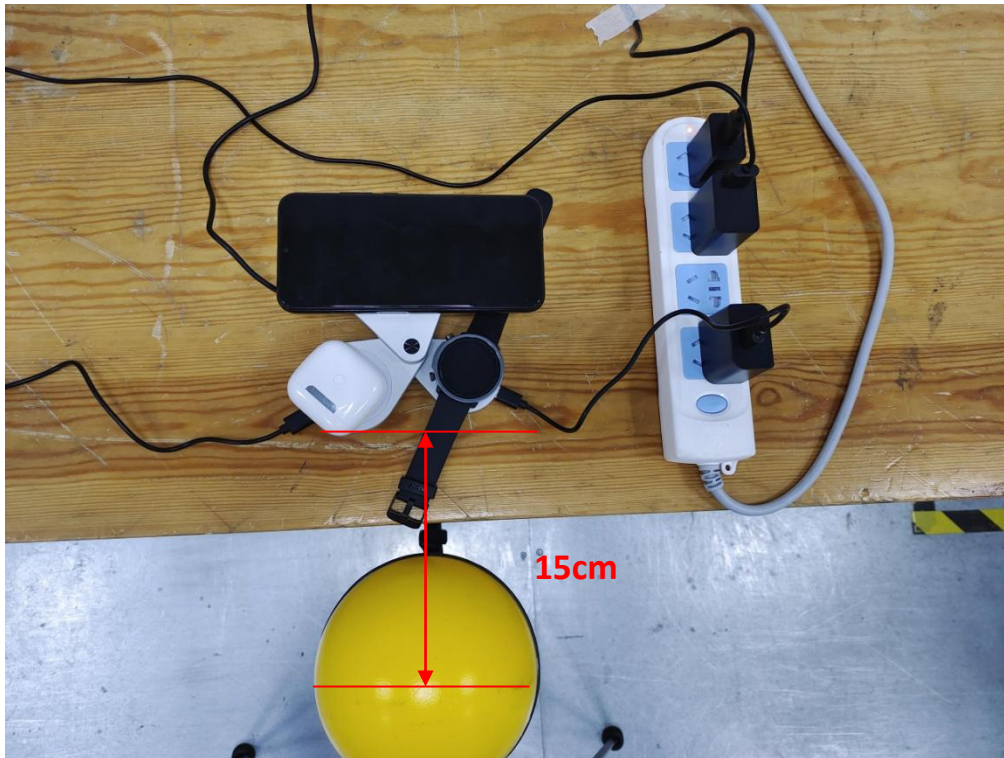


(TM1)

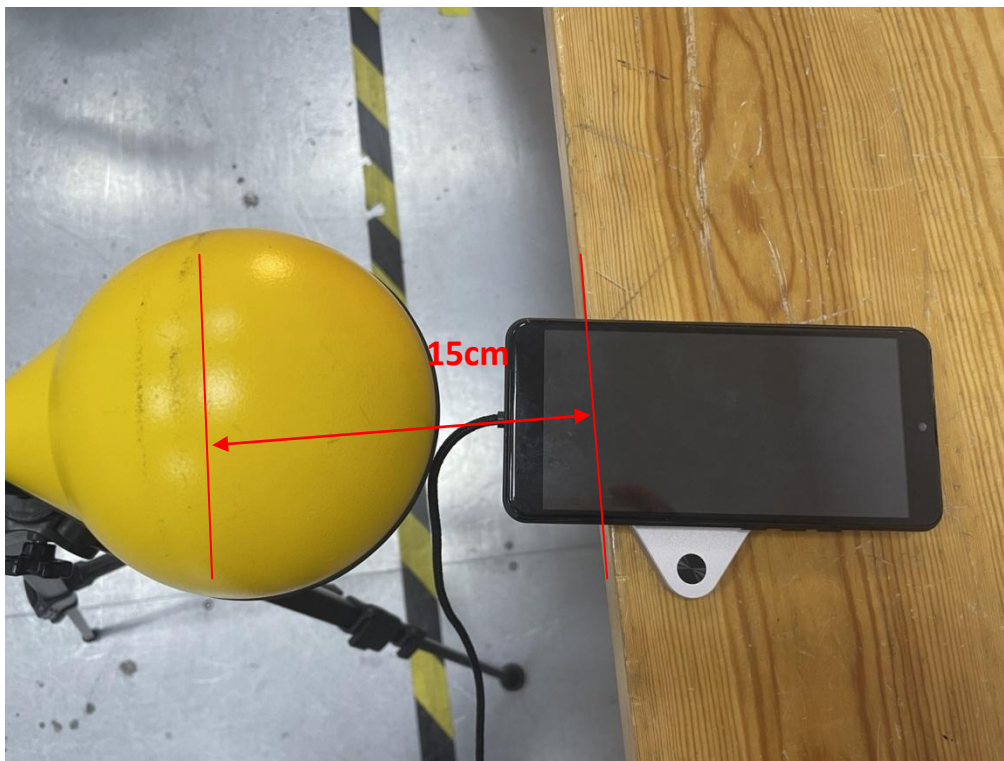


(TM7)

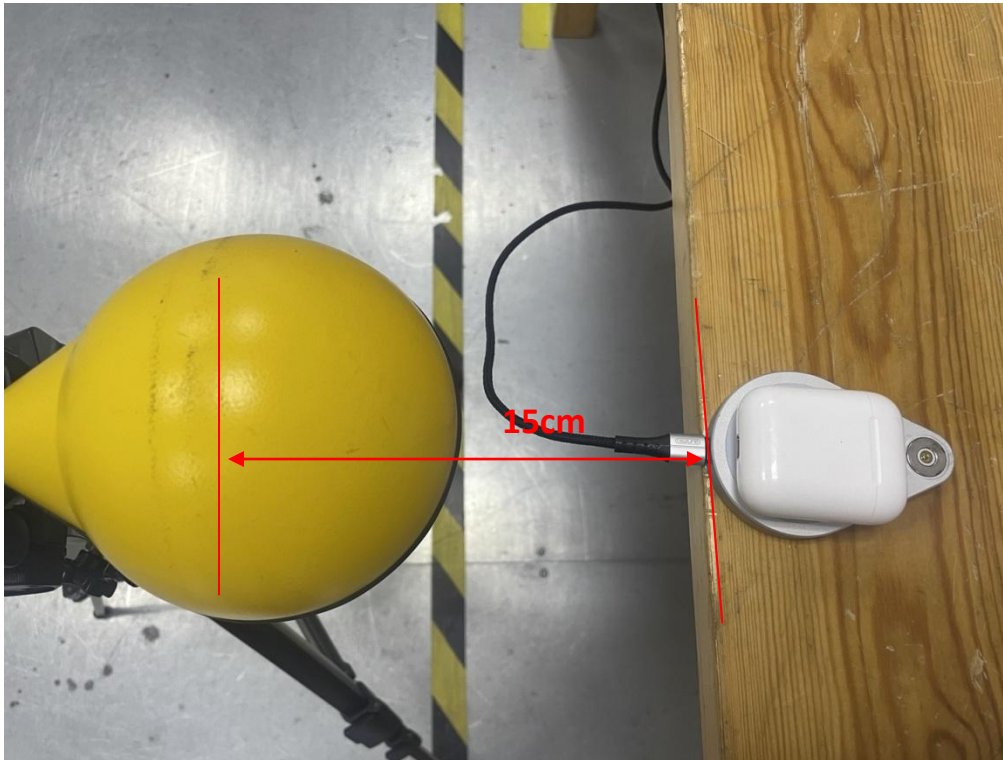


(TM13)

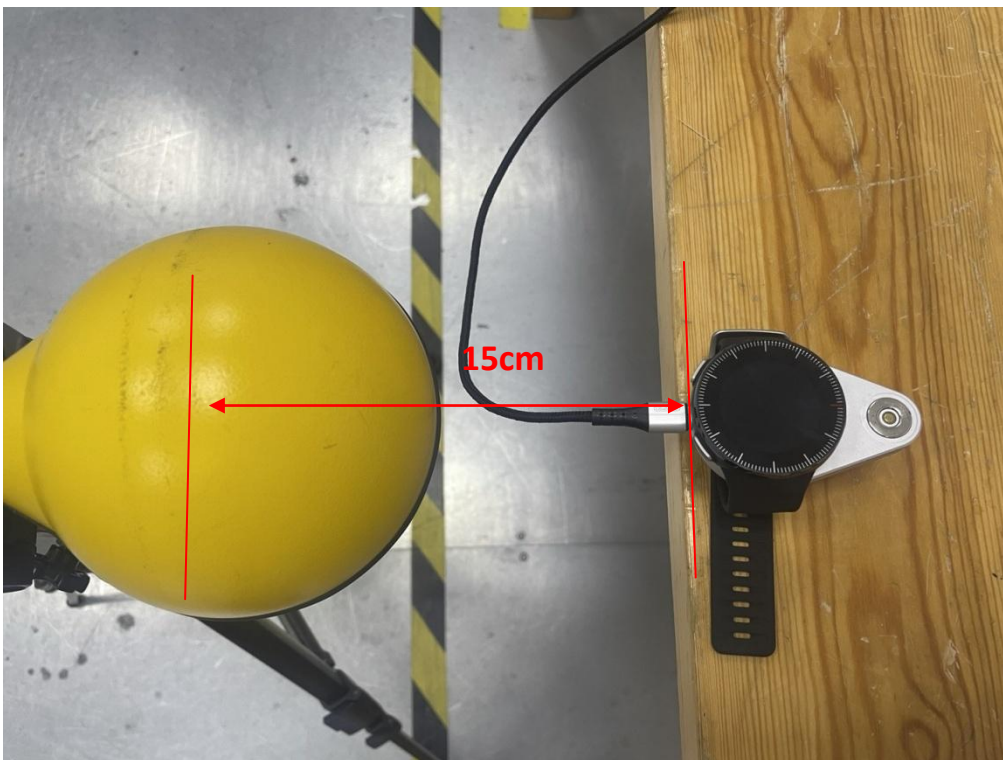


(TM16)

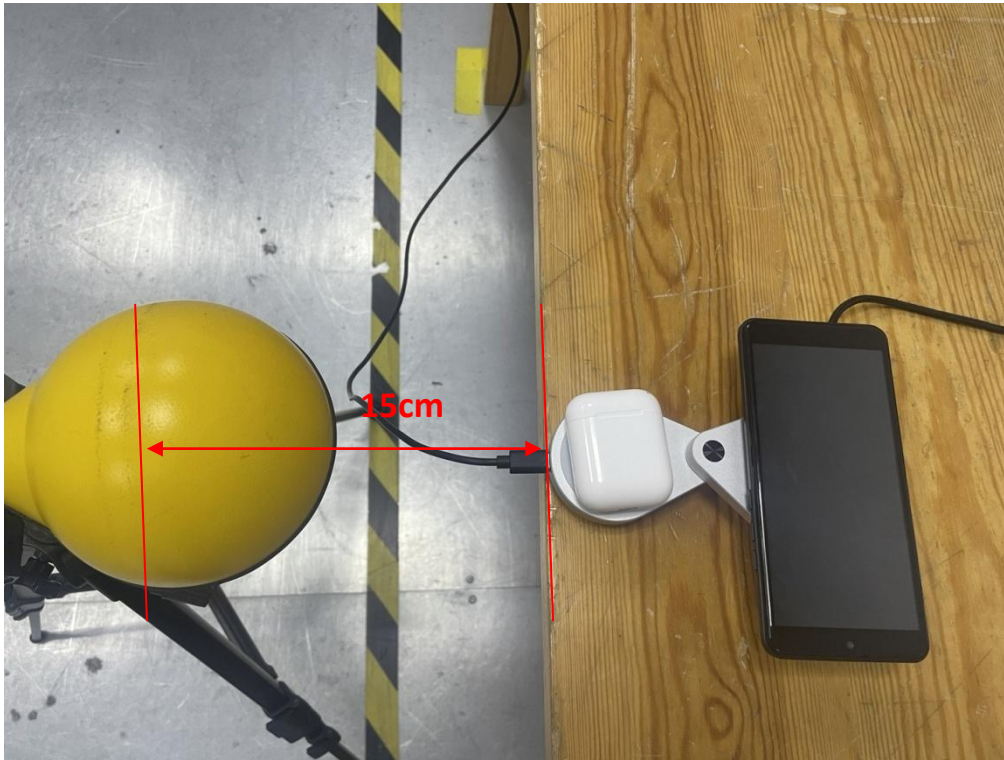

(TM19)

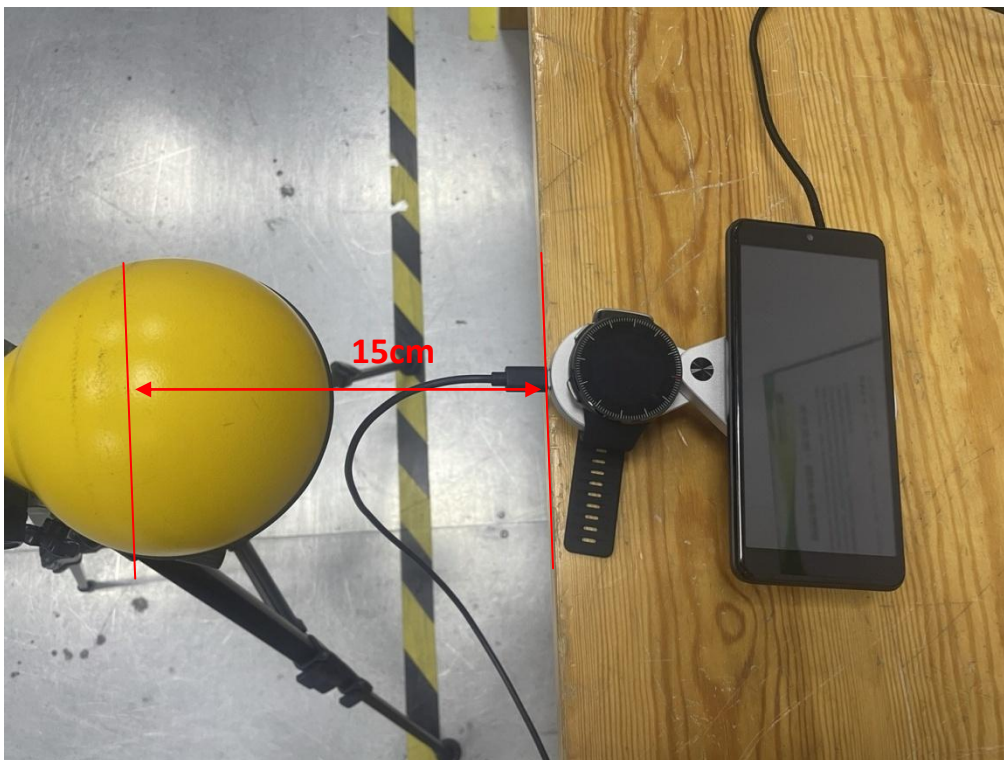


(TM25)

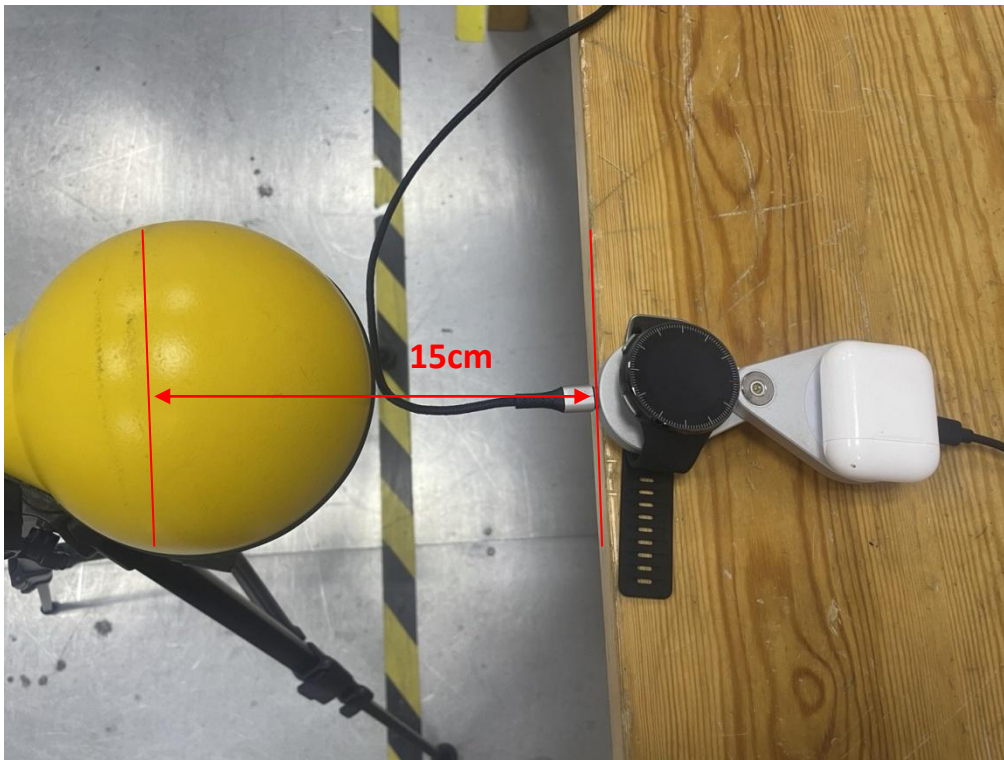


(TM31)


9.2. Test Position B - Exposure photo from side edge surface-Left

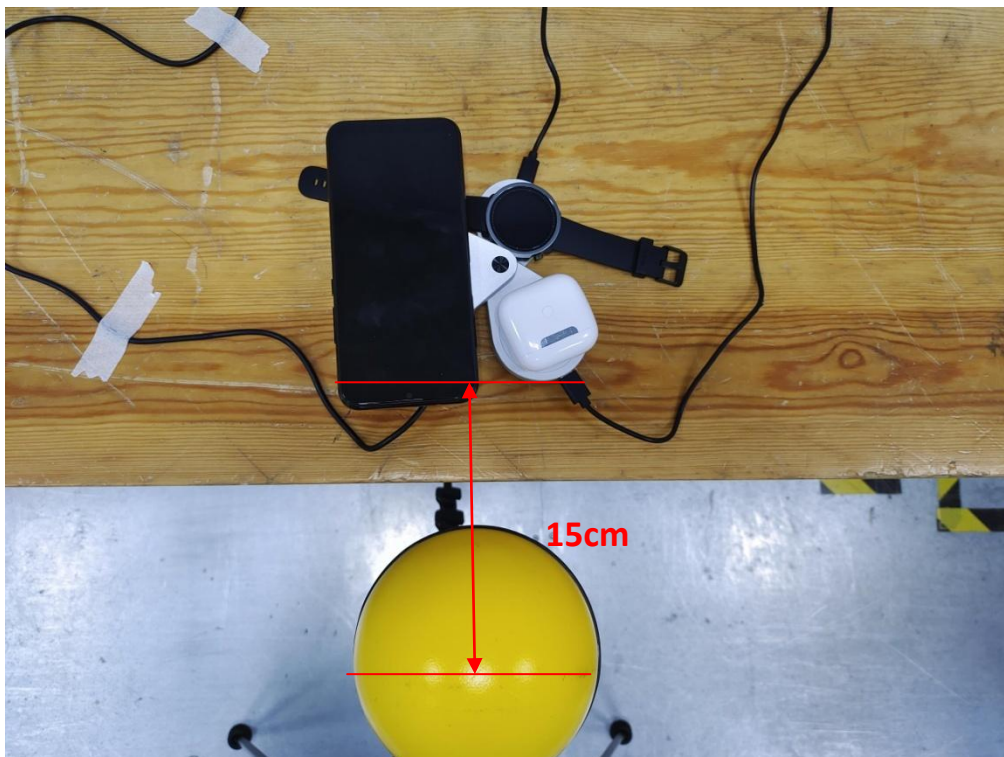


(TM1)

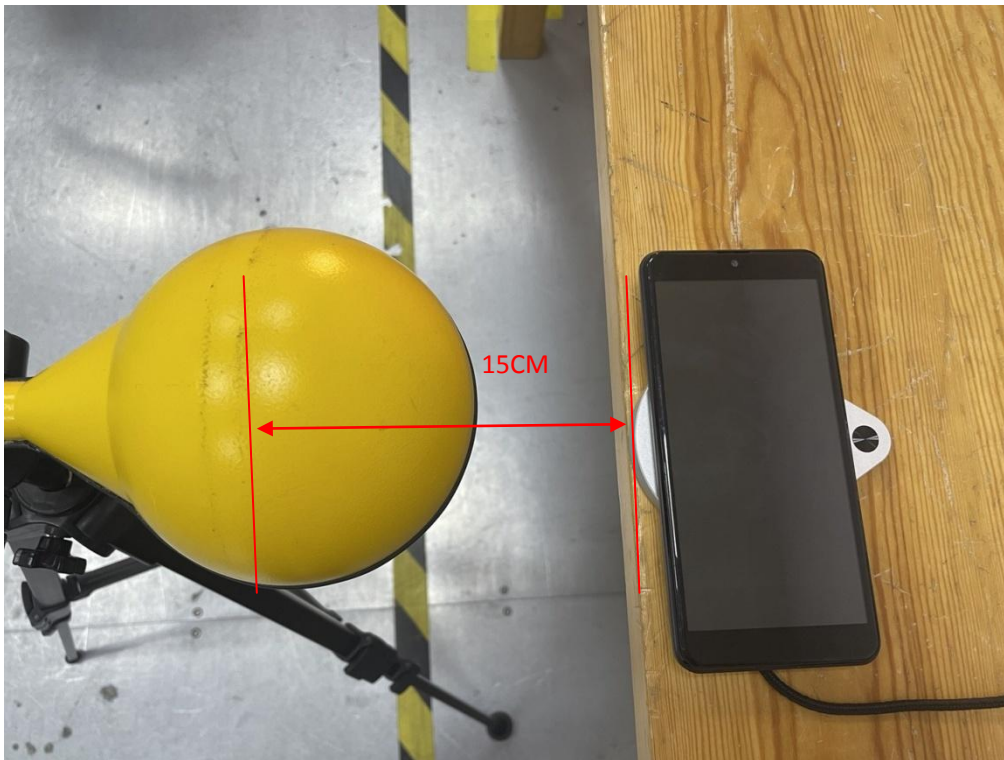


(TM7)

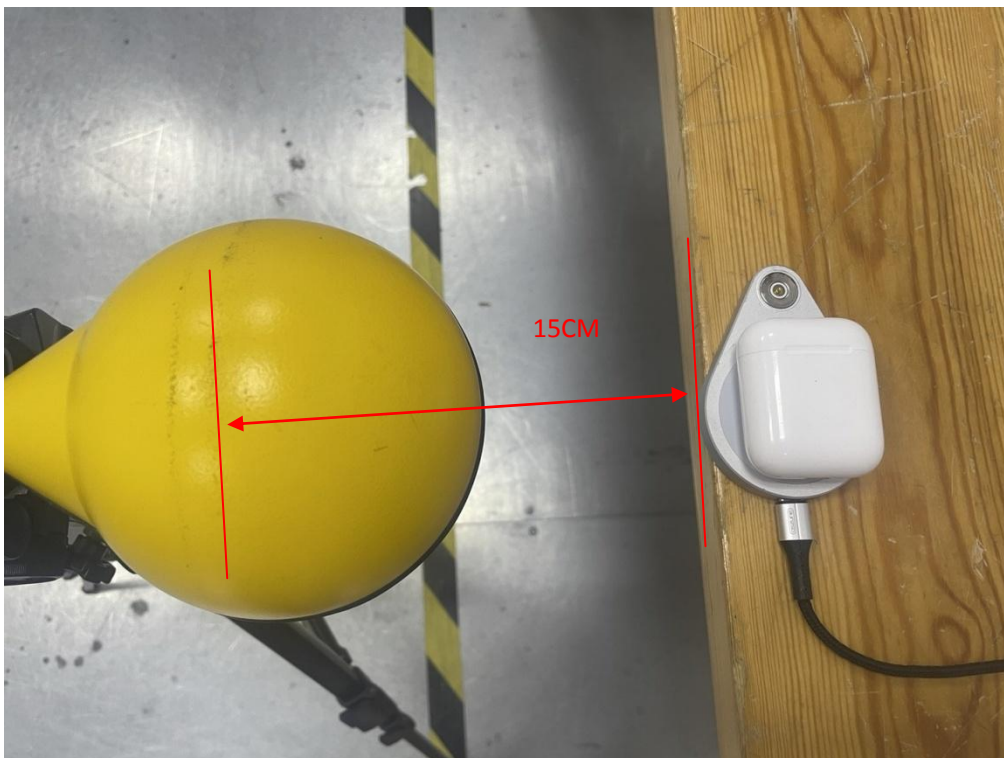


(TM13)

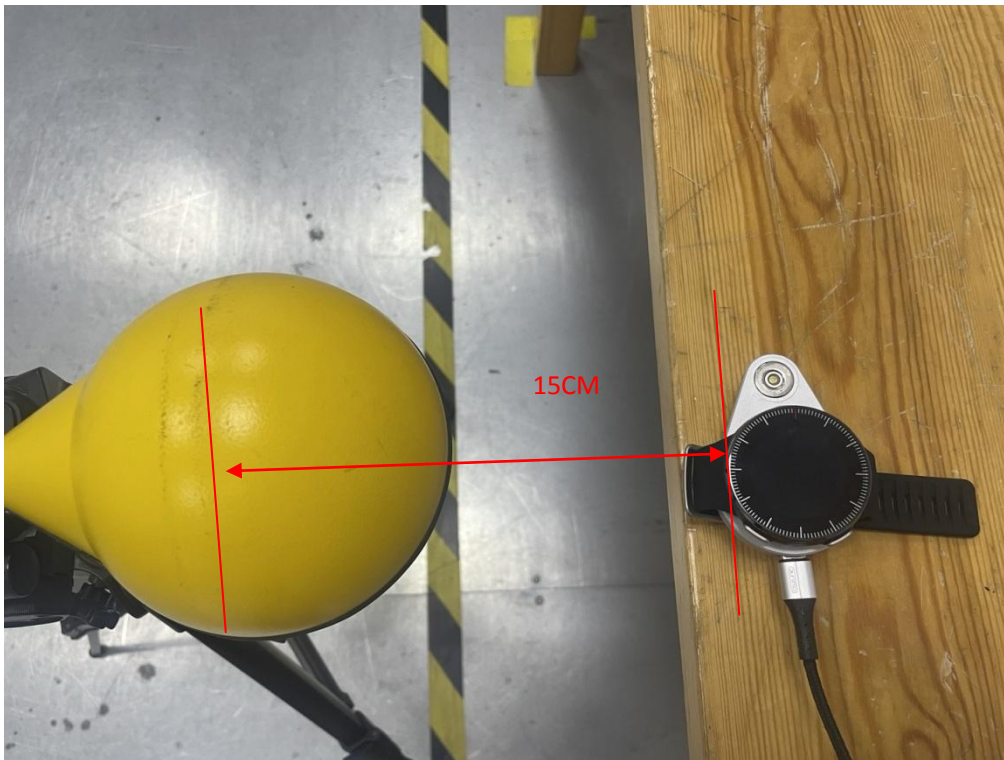


(TM16)

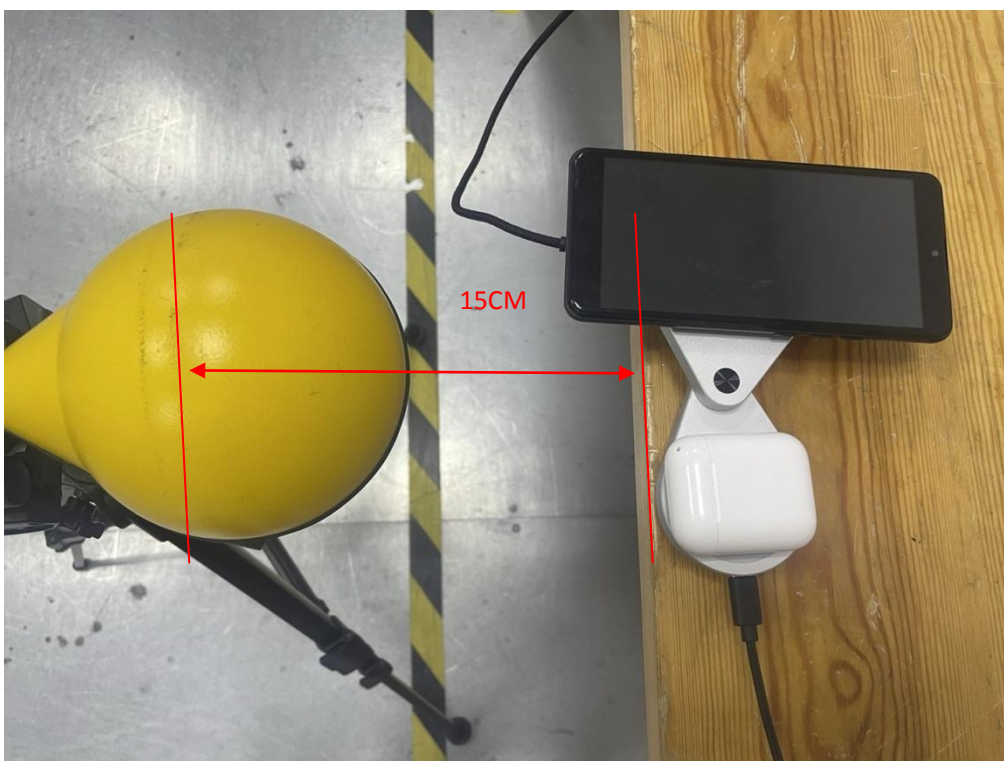

(TM19)

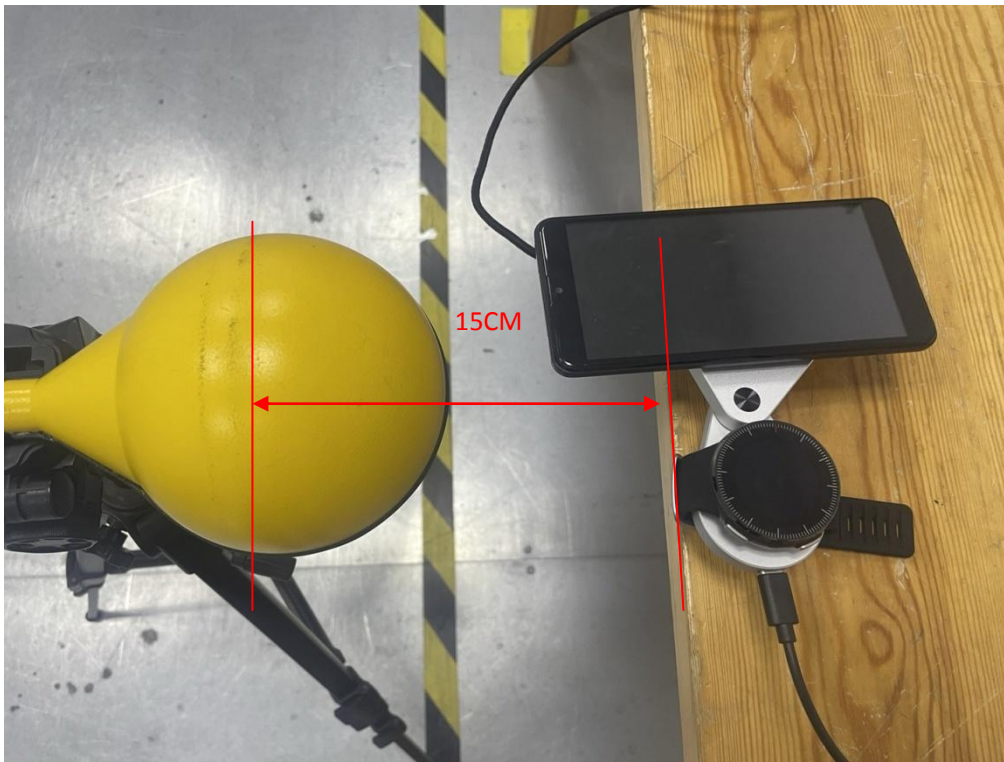


(TM25)

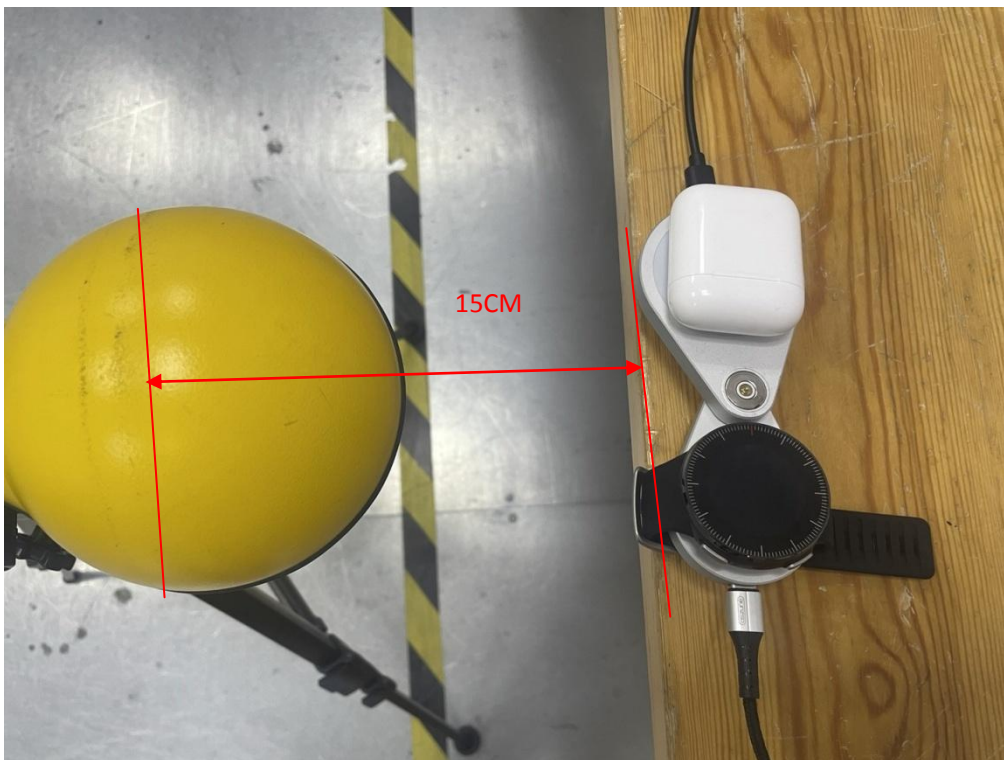


(TM31)


9.3. Test Position C - Exposure photo from side edge surface-Front

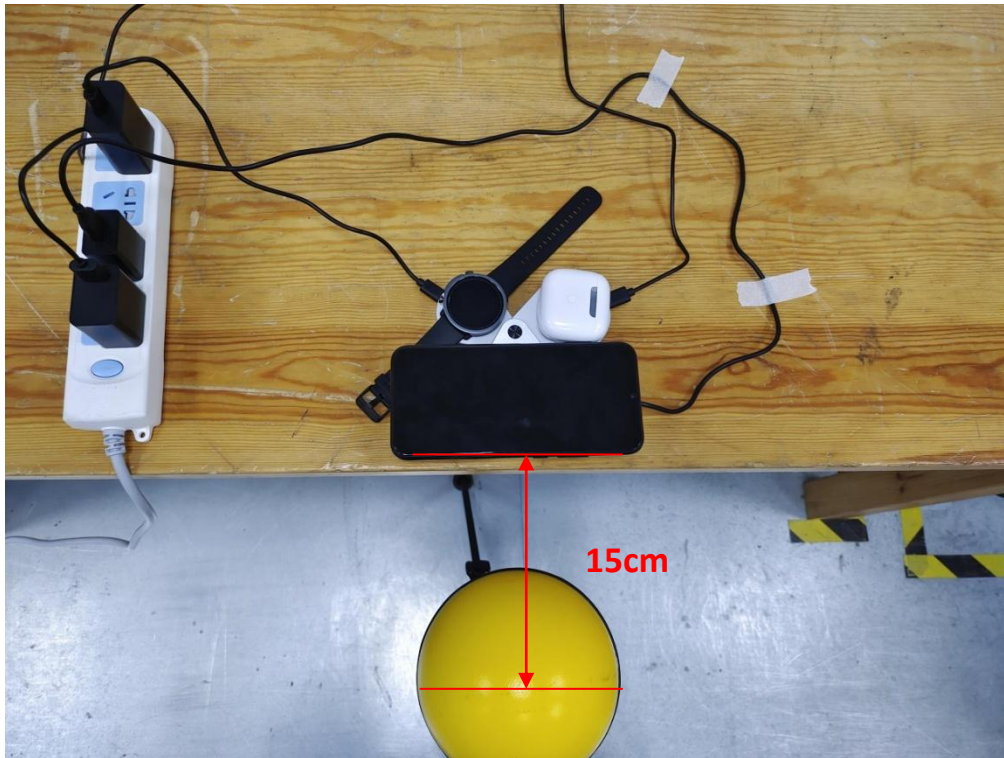


(TM1)

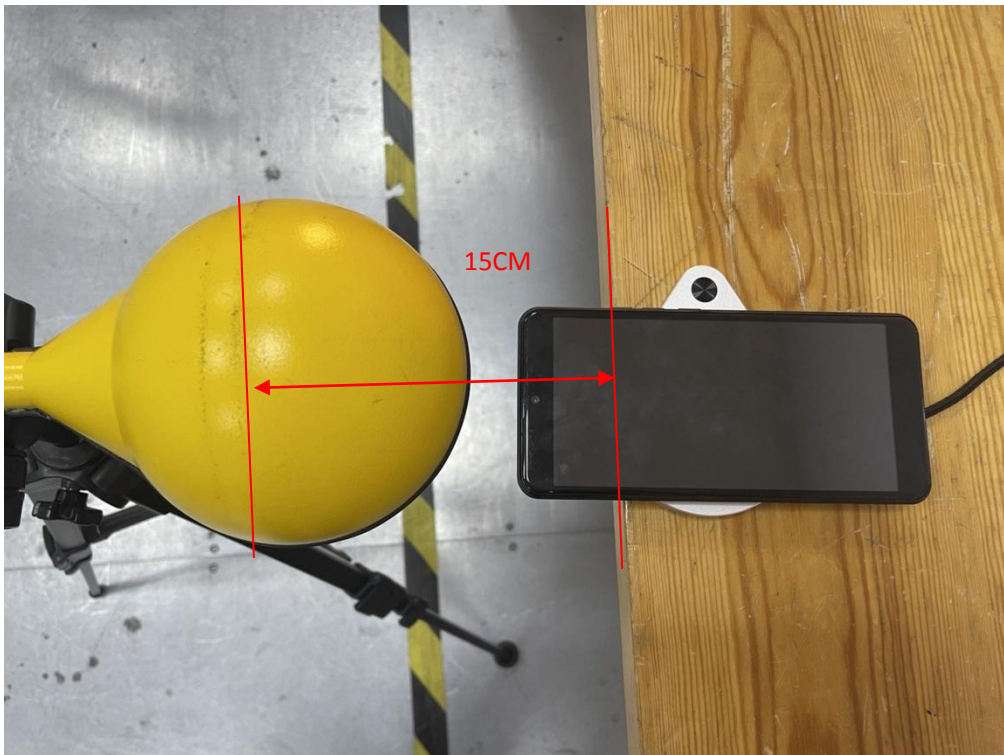


(TM7)

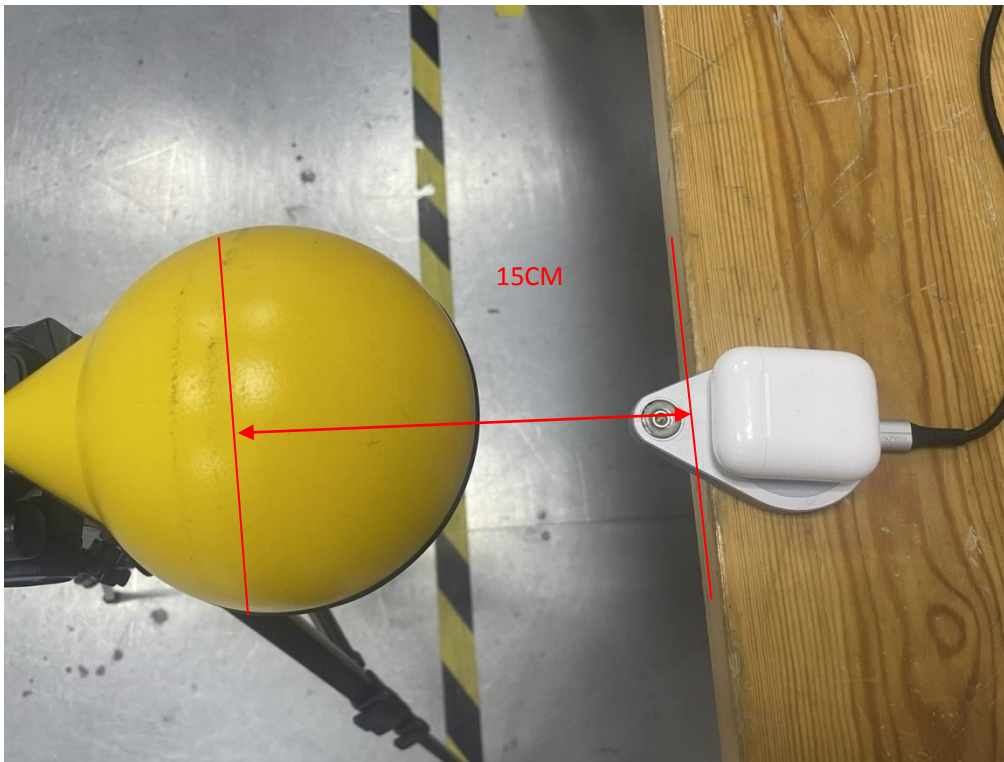


(TM13)

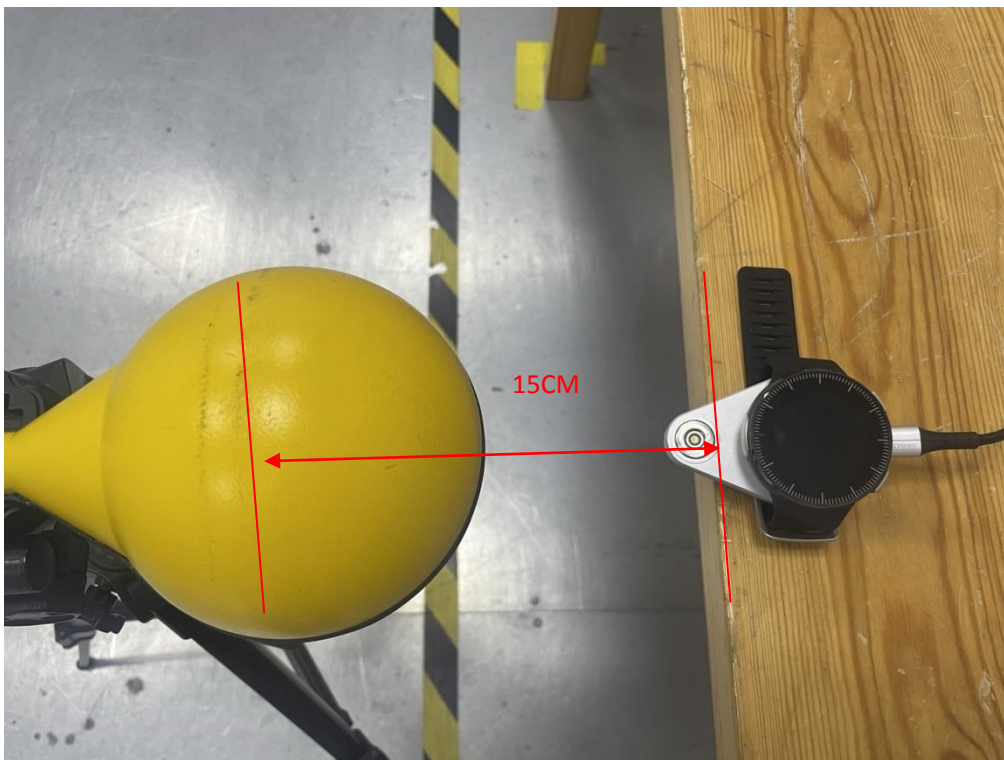


(TM16)

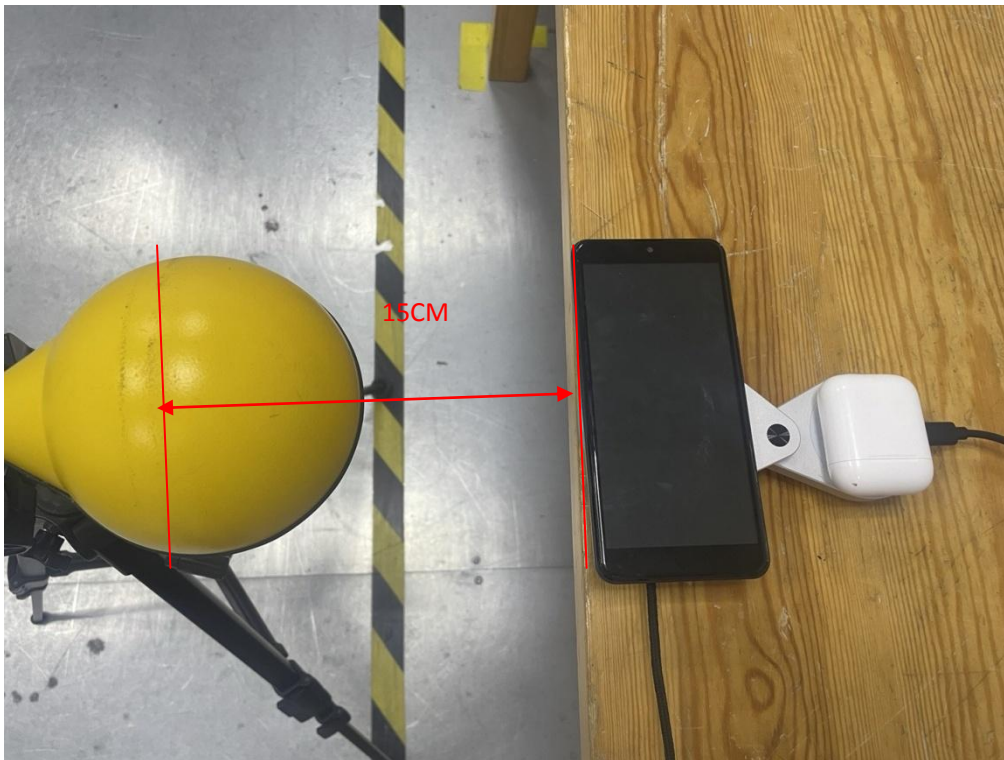

(TM19)

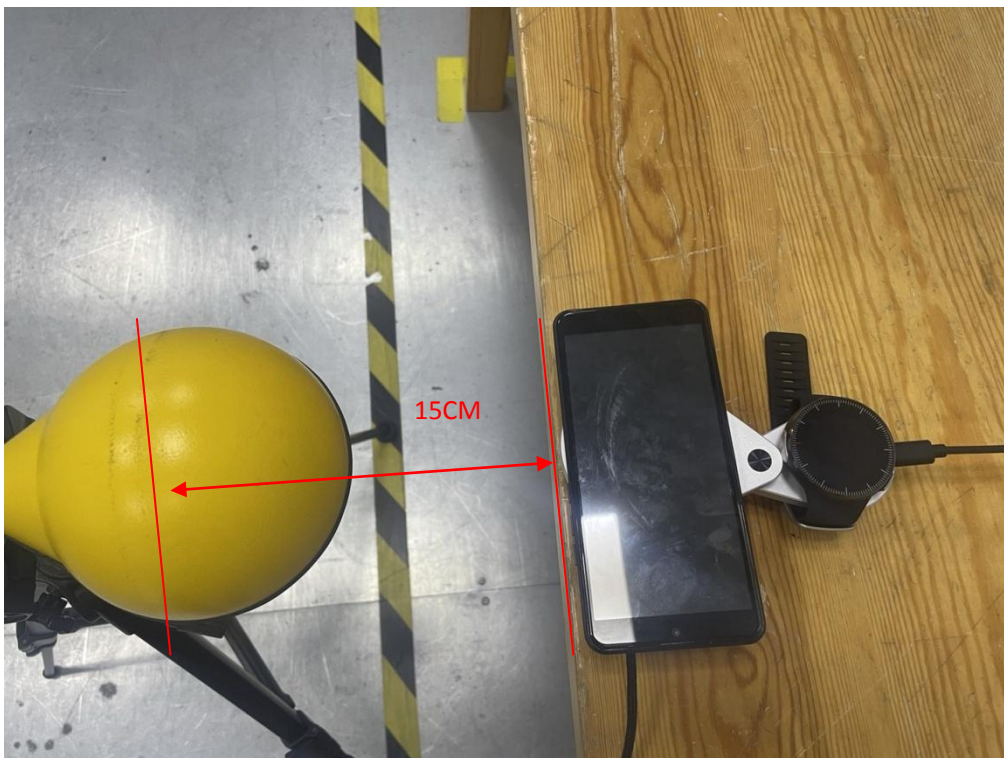


(TM25)

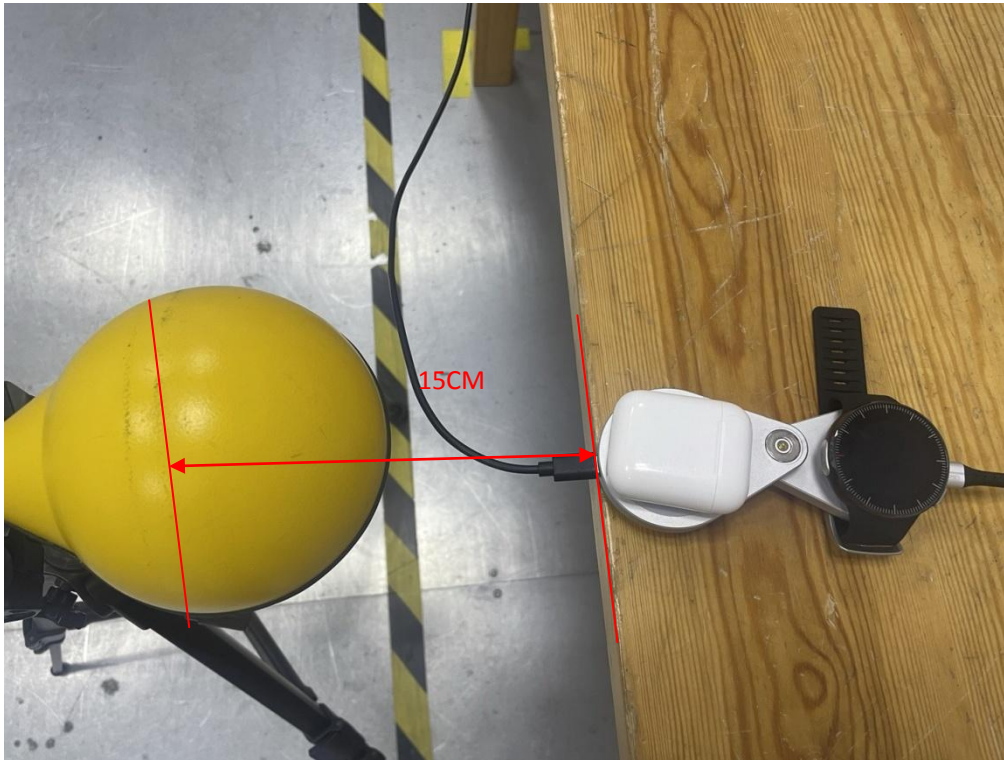


(TM31)


9.4. Test Position D - Exposure photo from side edge surface-Right

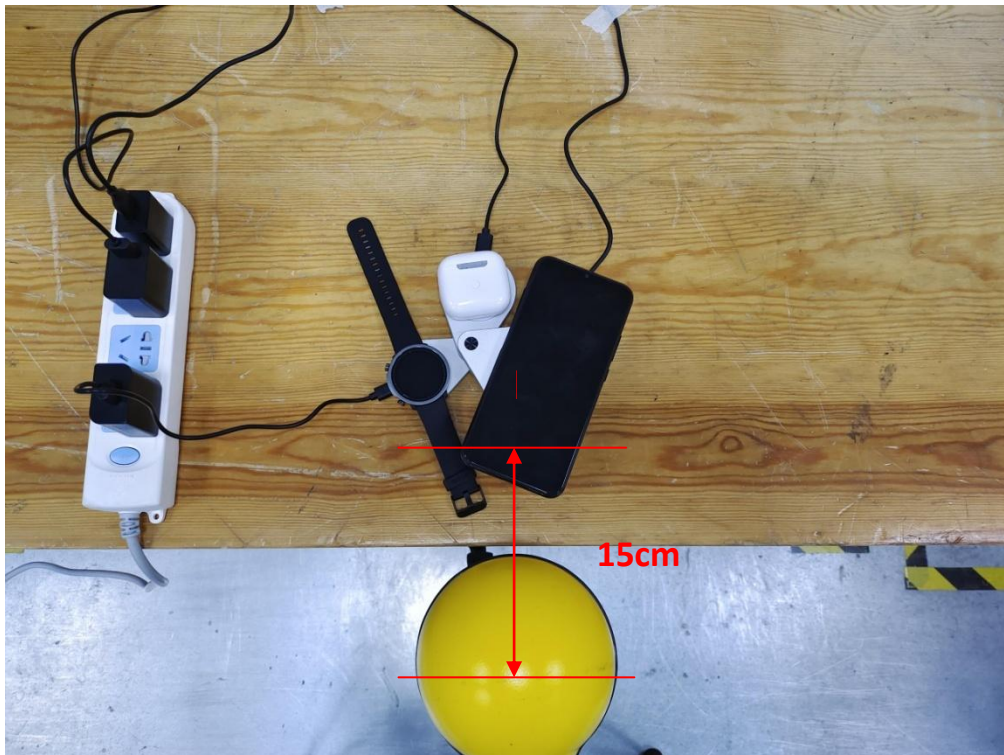


(TM1)

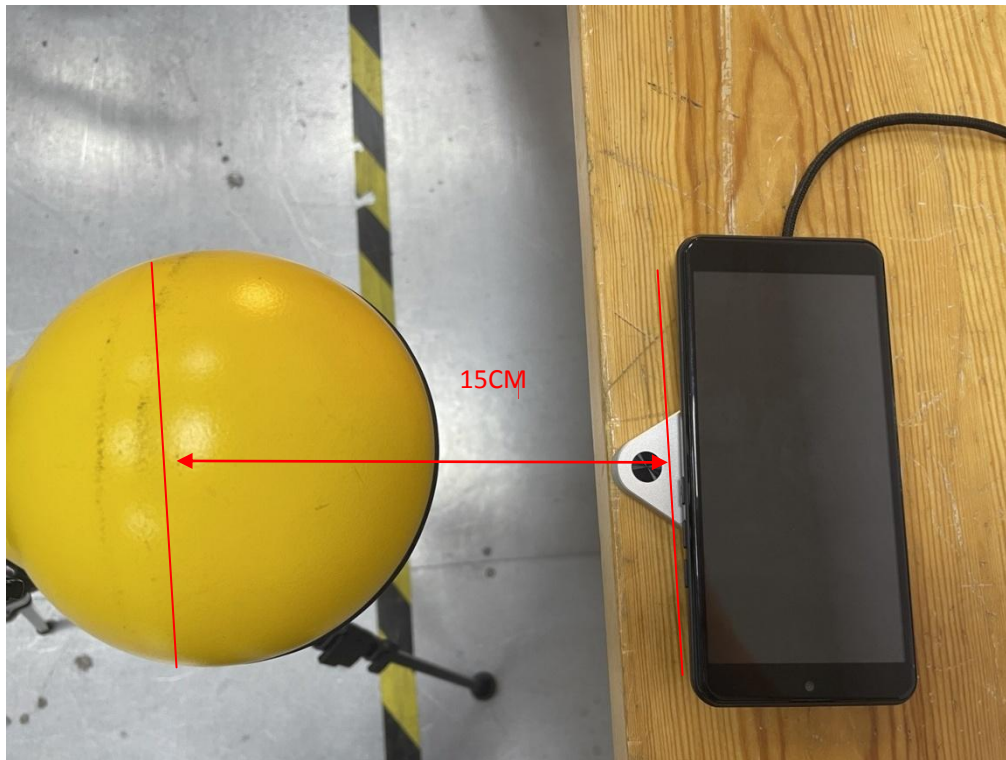


(TM7)

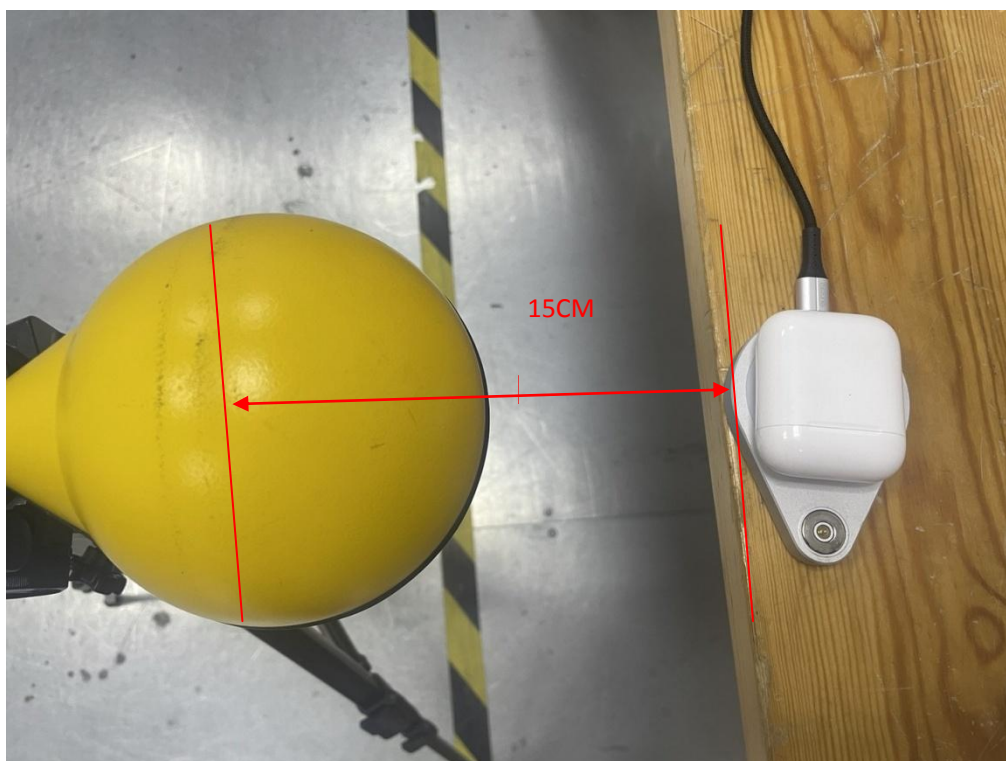


(TM13)

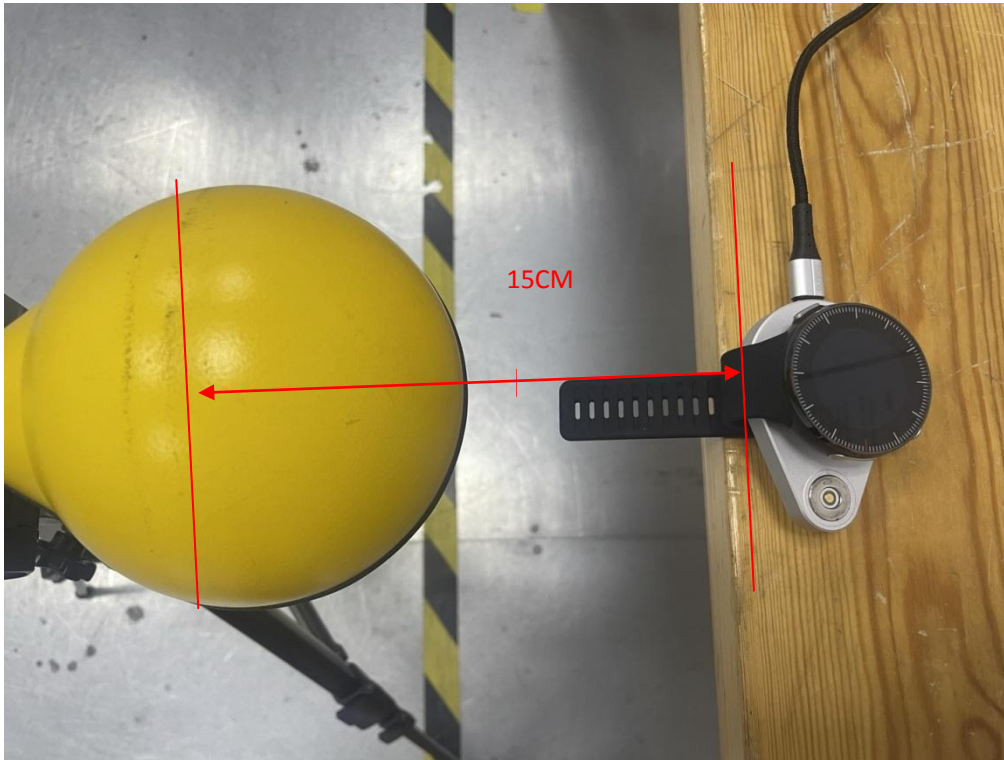


(TM16)

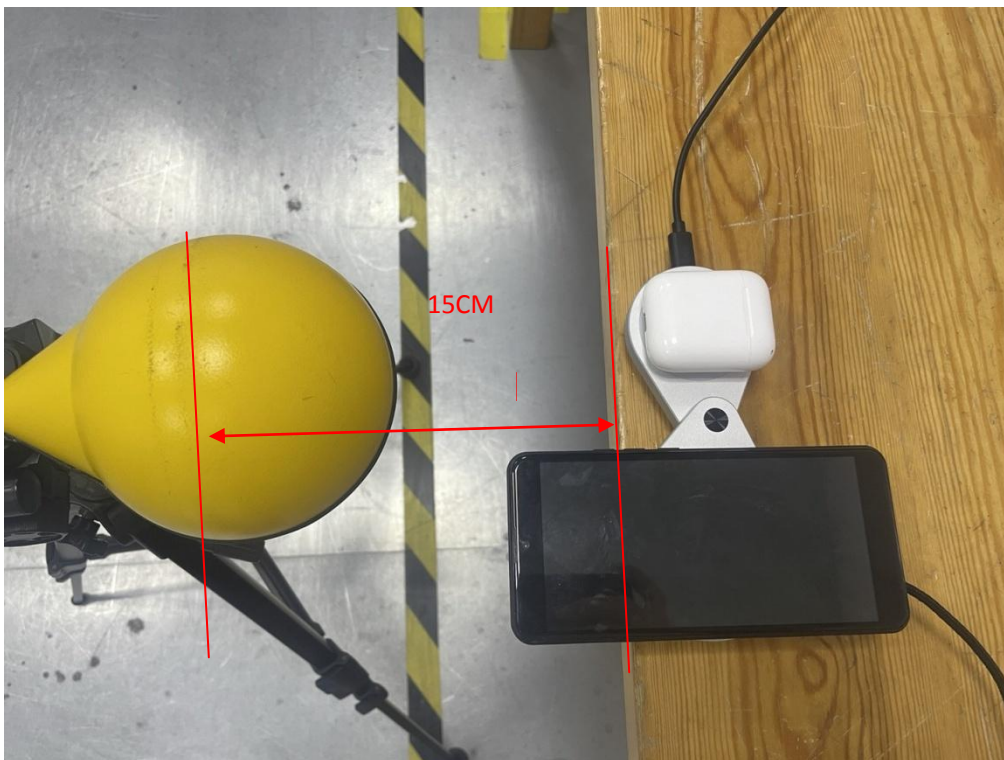



(TM19)

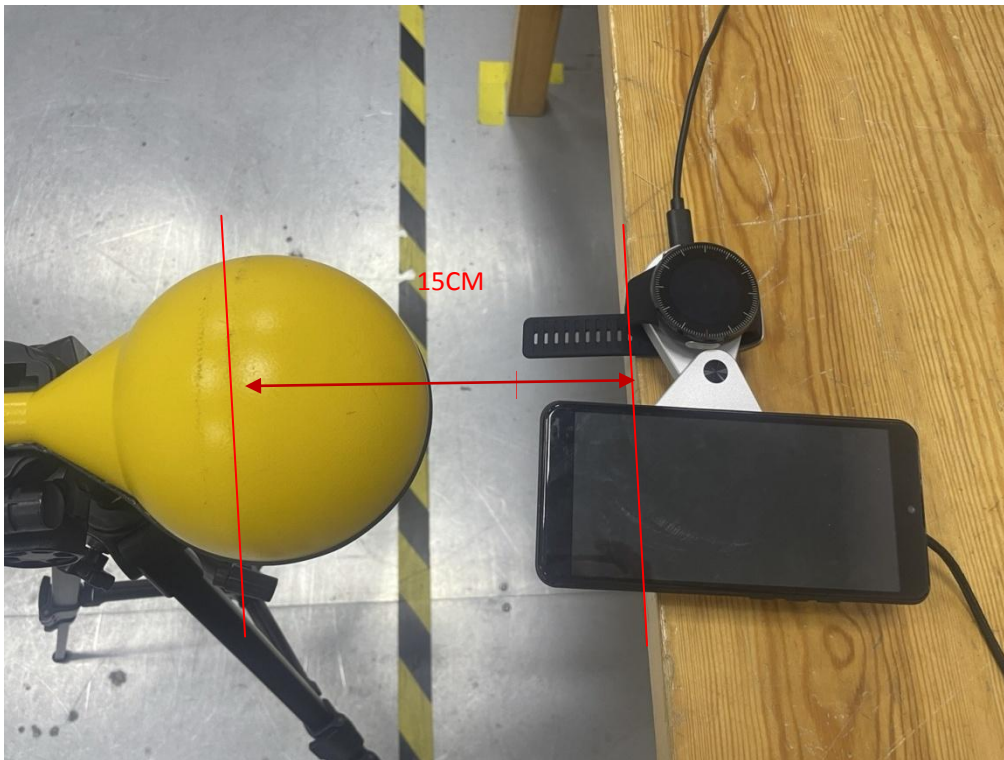


(TM25)

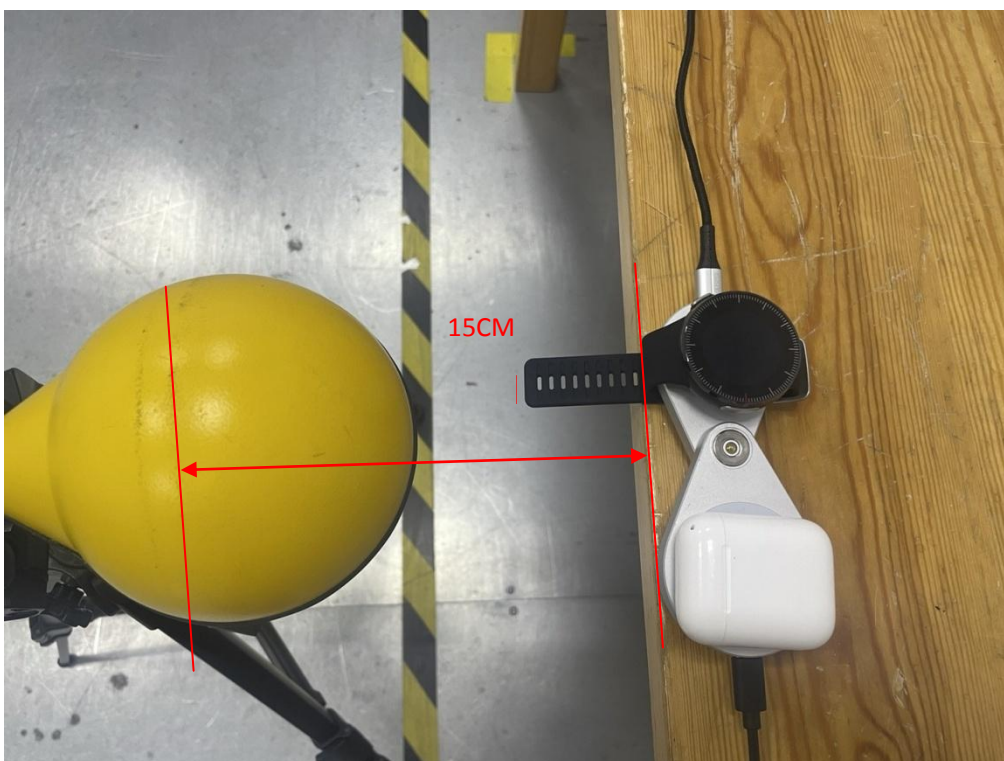


(TM31)

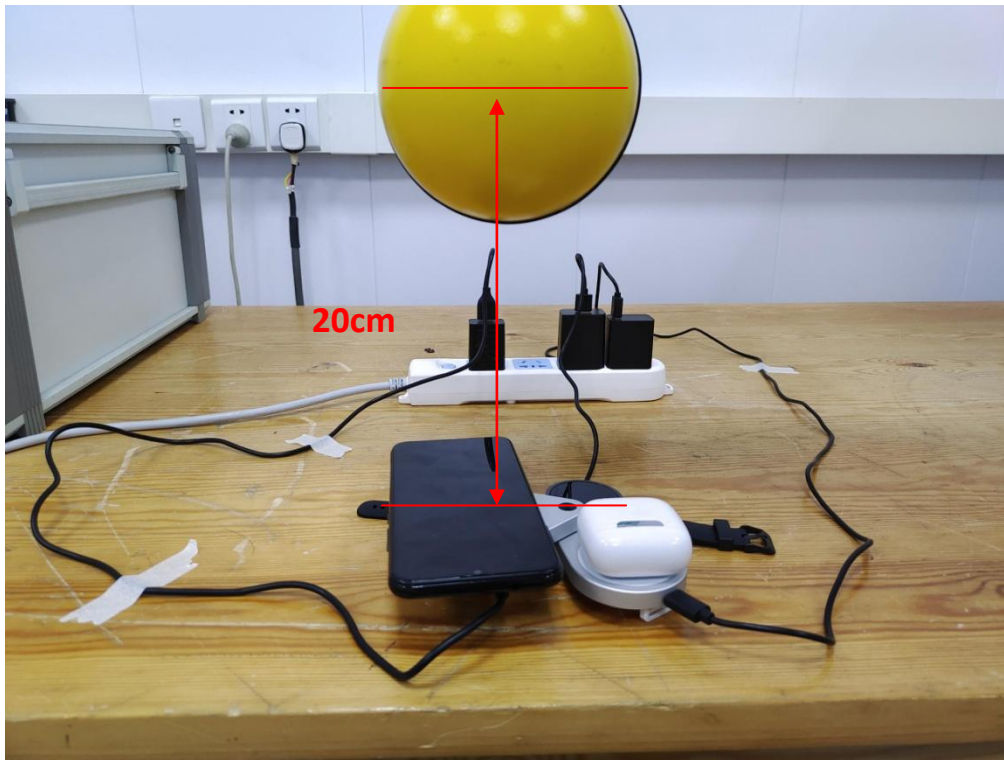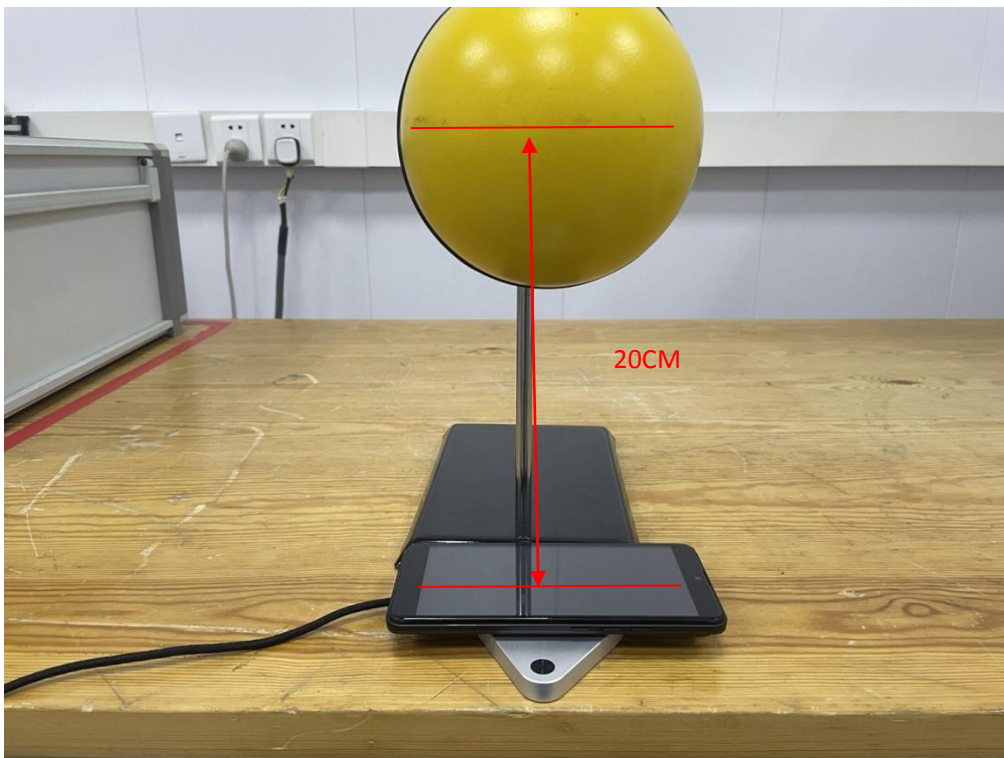
9.5. Test Position E - Exposure photo from top surface (20cm)**(TM1)****(TM7)**

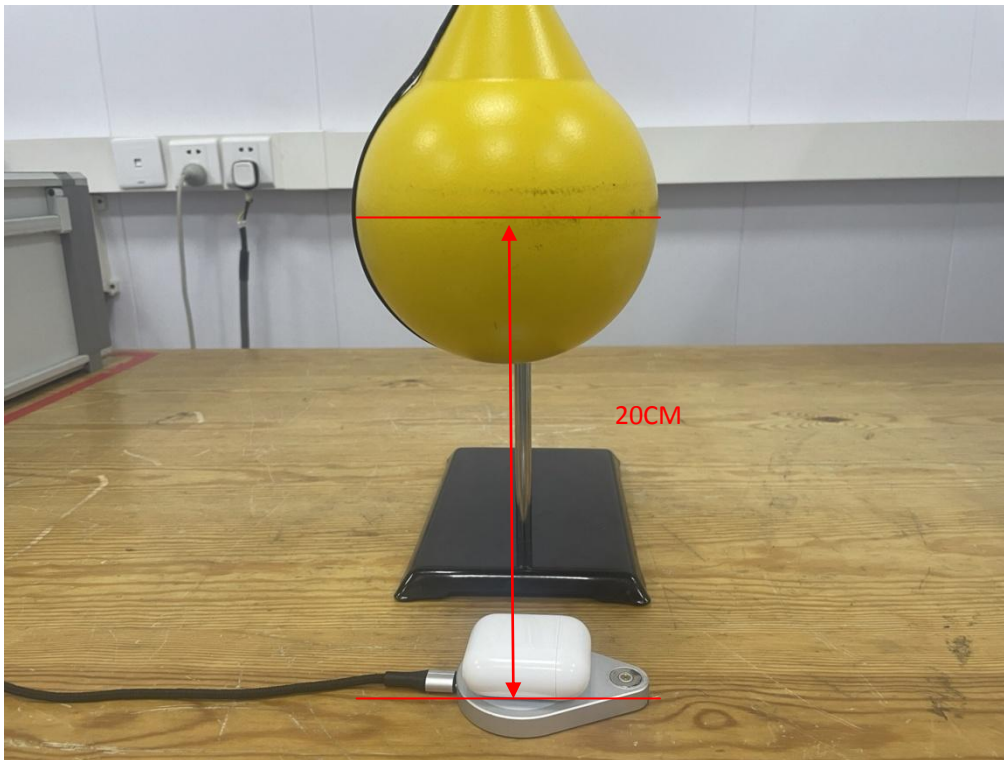


(TM13)

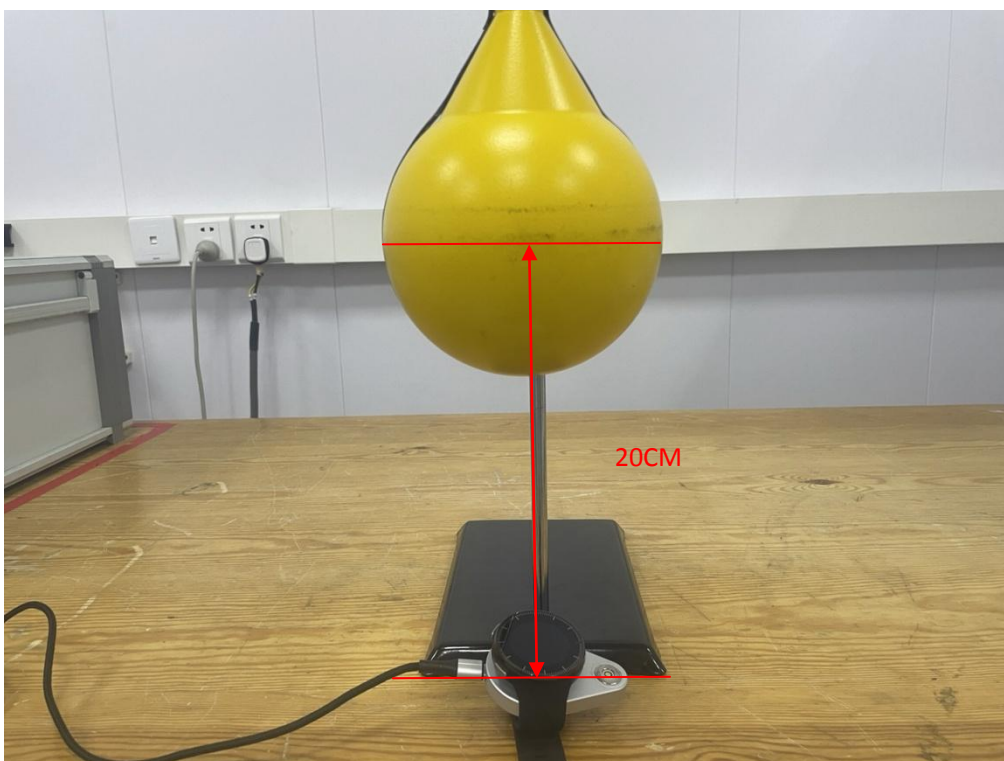


(TM16)

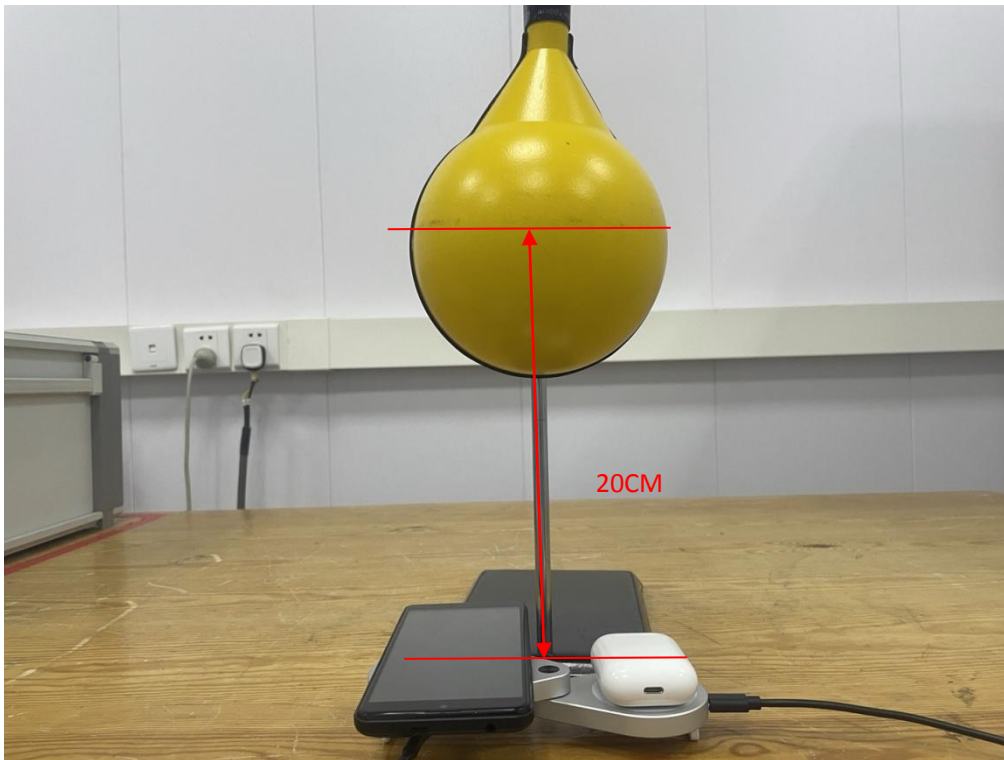


(TM19)

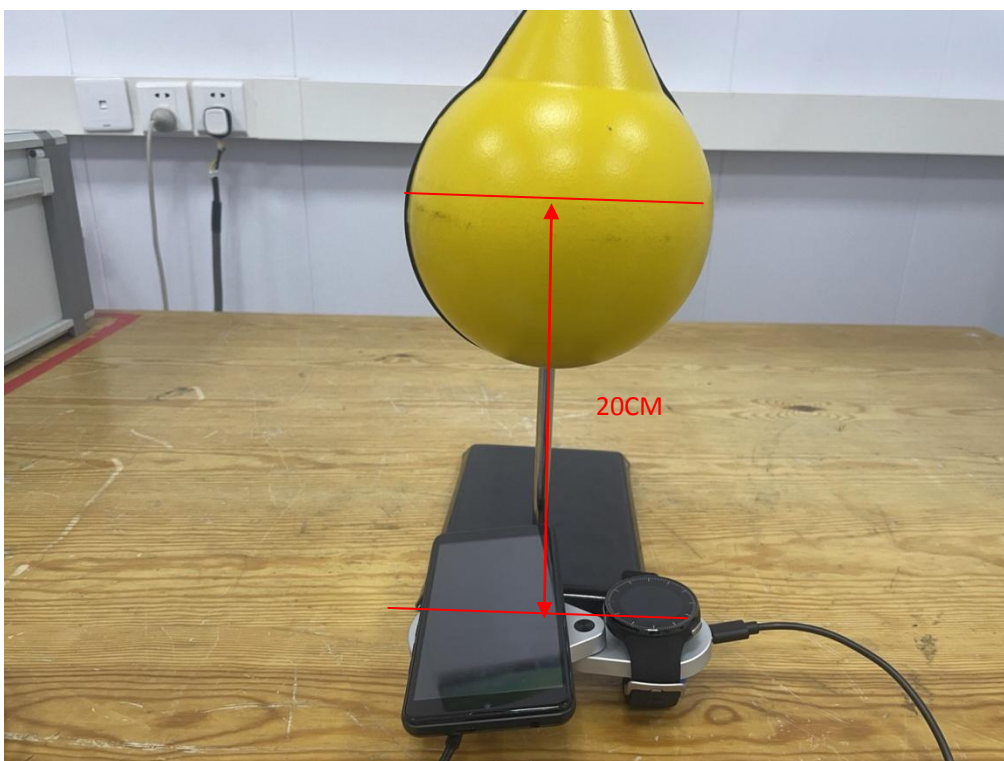


(TM25)

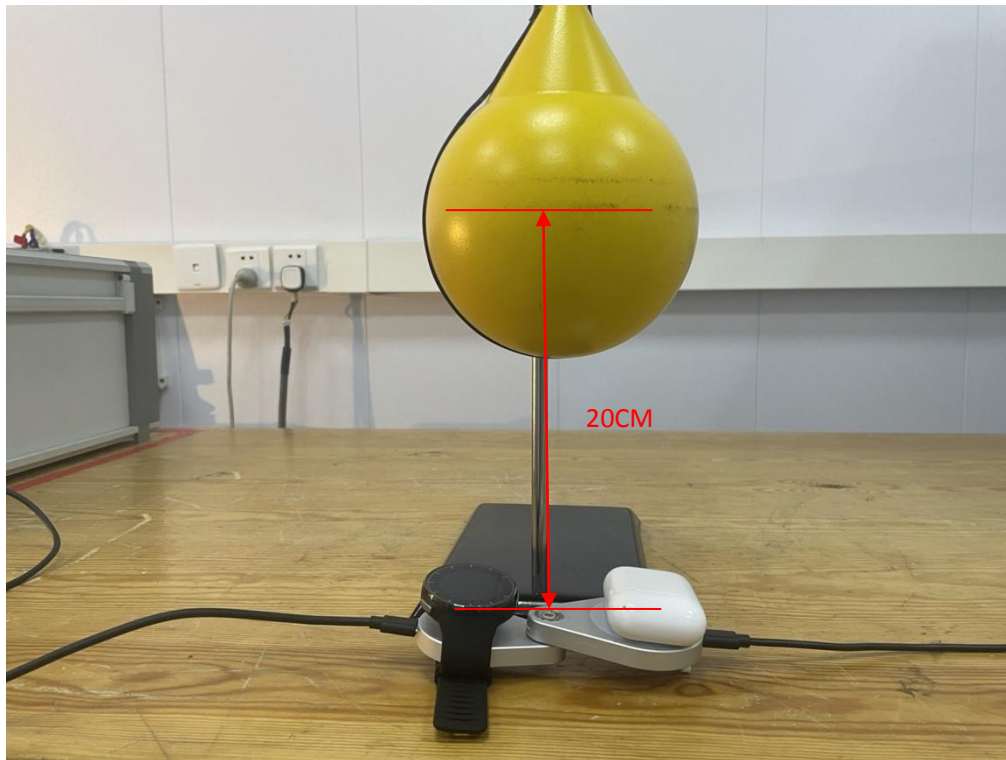


(TM31)

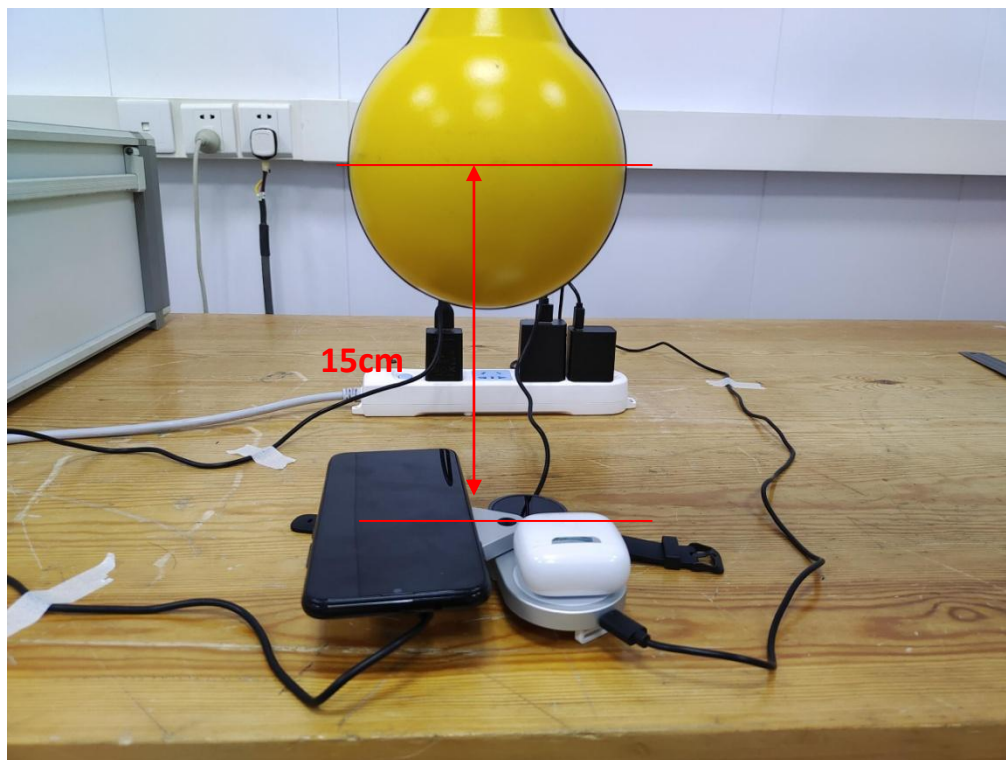9.6. Test Position E- Exposure photo from top surface (15cm)


(TM1)

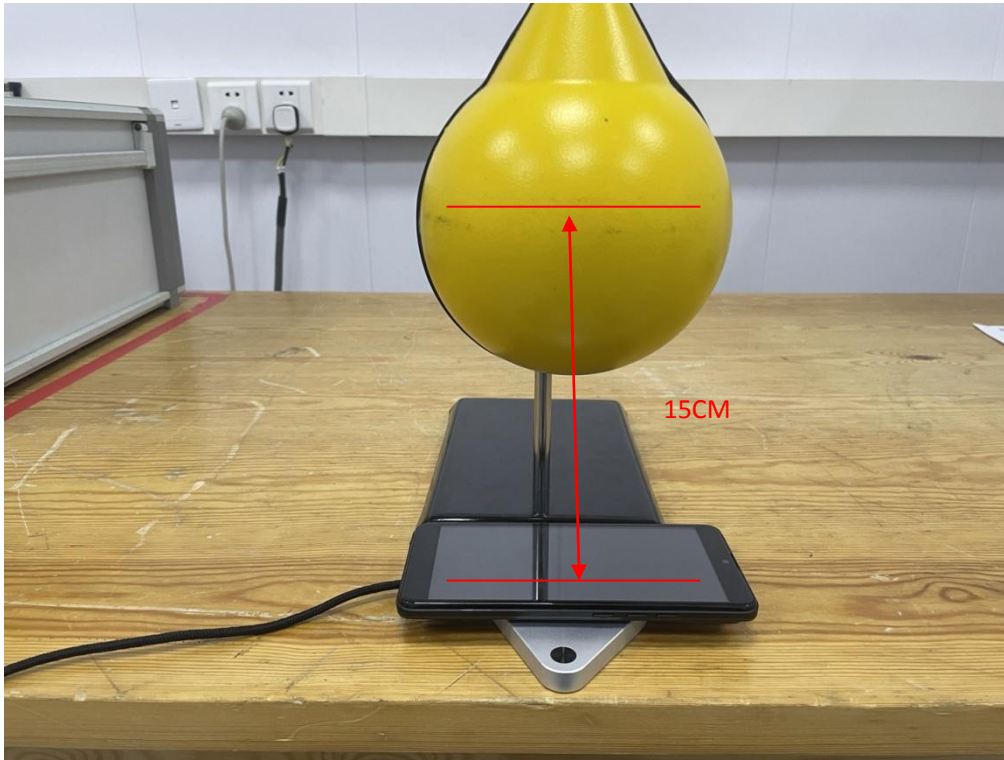


(TM7)

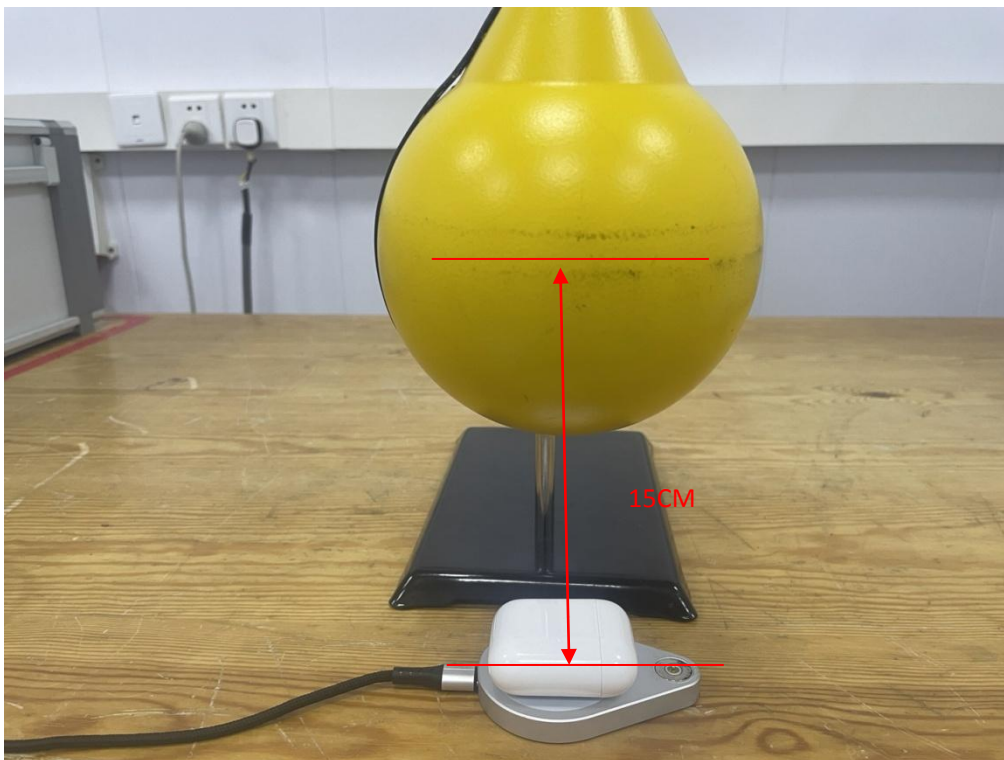


(TM13)

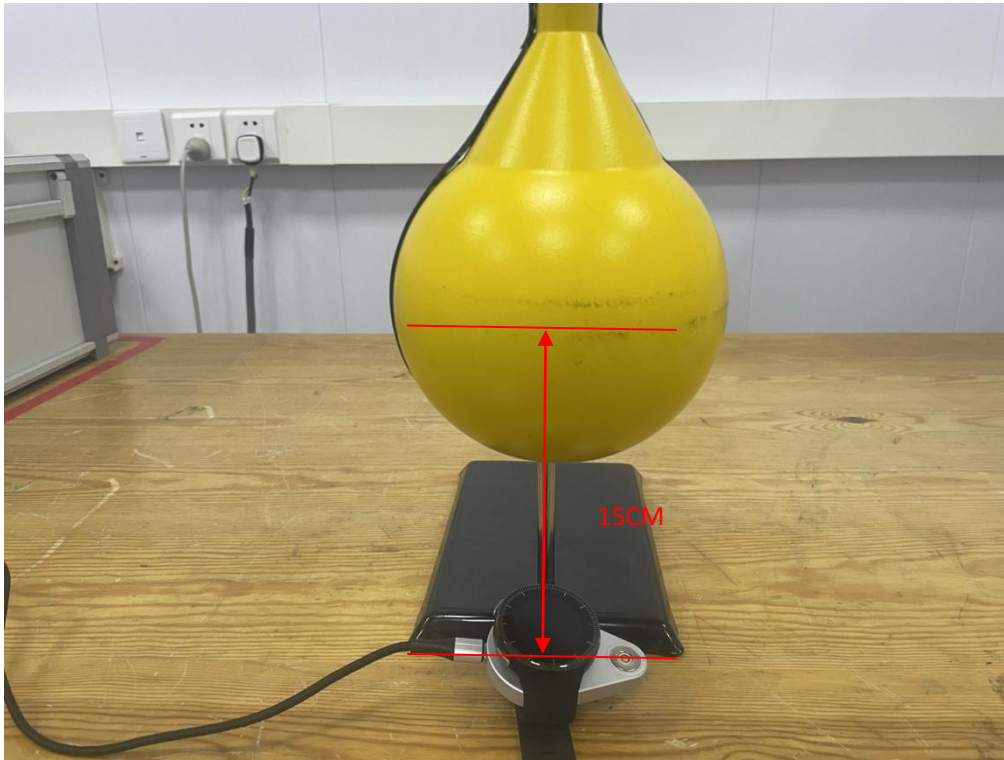


(TM16)

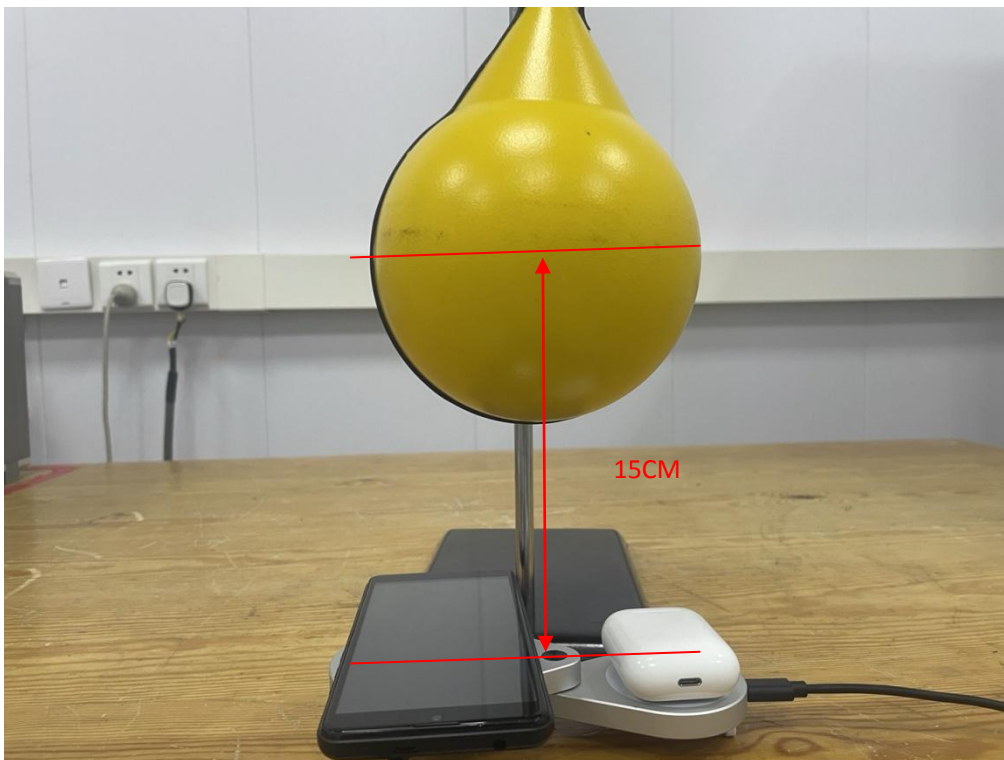

(TM19)

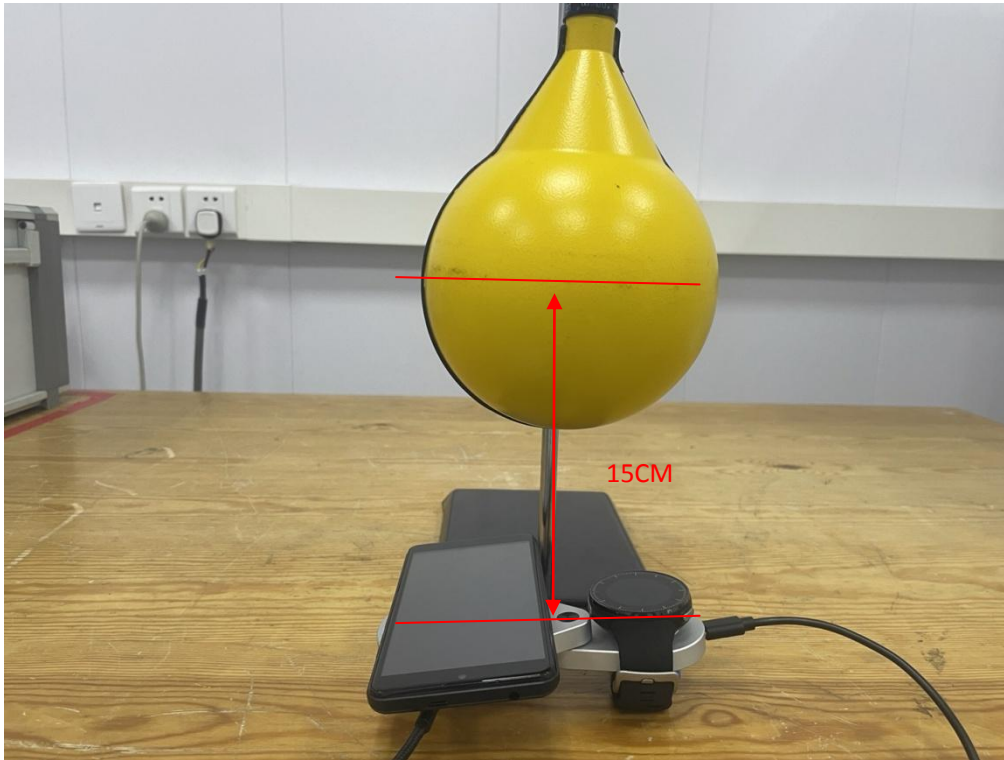

(TM25)

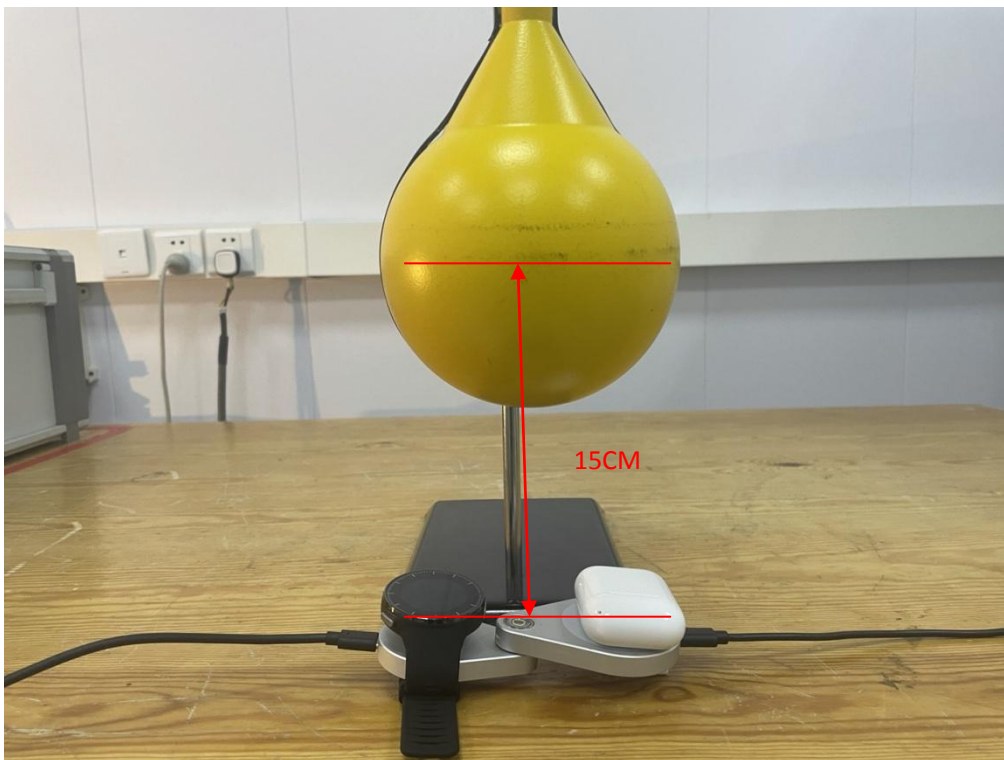

(TM31)

10. Conclusion

A minimum safety distance of at 15 cm surrounding the device and 20 cm above the top surface of the device is required when the device is charging a smart phone. The detected emissions with a distance of 15 cm surrounding the device and 20 cm above the top surface of the device are below the limitations according to FCC KDB 680106 D01 Section 3. RF Exposure Requirement Clause 3.



Revision History

Revision	Issue Date	Revisions	Revised By
000	April 15, 2022	Initial Issue	Gavin Liang

.....END OF REPORT.....