

Appendix H. – Power reduction verification

Per the May 2017 TCBC Workshop notes, demonstration of proper functioning of the power reduction mechanism is required to support the corresponding SAR Configurations.

The verification process was divided into two parts:

- 1) Evaluation of output power levels for individual triggering mechanism
- 2) Evaluation of the triggering distances for proximity-based sensors.

1. Power Reduction Verification for Main Ant

The Power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and output power was monitored. The Power measurements were conformed to be within expected tolerances for all states before and after a power reduction mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Step 1 and 2 were repeated for all individual power reduction mechanism and combinations thereof. For the combination cases, one mechanism was switched to a “triggered” state at a time; powers were conformed to be within tolerance after each additional mechanism was activated.

Main Antenna Verification Summary

Mechanism(s)	Mode/Band	Power reduction Mechanism		
		Un-triggered (Max Power)	Triggered (Reduced Power)	Triggered (Reduced Power)
Grip	UMTS Band 2	23.81		21.75
Grip	UMTS Band 4	23.43		21.69
Grip	LTE Band 2	24.56		22.68
Grip	LTE Band 4	23.50		22.60
Grip	LTE Band 66	24.63		22.81
Hotspot On	UMTS Band 2	23.81	21.77	
Hotspot On	UMTS Band 4	23.43	21.67	
Hotspot On	LTE Band 2	24.56	22.68	
Hotspot On	LTE Band 4	23.50	22.60	
Hotspot On	LTE Band 66	24.63	22.81	
Hotspot On, Then Grip	UMTS Band 2	23.81	21.77	21.77
Hotspot On, Then Grip	UMTS Band 4	23.43	21.67	21.67
Hotspot On, Then Grip	LTE Band 2	24.56	22.68	22.68
Hotspot On, Then Grip	LTE Band 4	23.50	22.60	22.60
Hotspot On, Then Grip	LTE Band 66	24.63	22.81	22.81
Grip Then Hotspot on	UMTS Band 2	23.81	21.77	21.75
Grip Then Hotspot on	UMTS Band 4	23.43	21.67	21.69
Grip Then Hotspot on	LTE Band 2	24.56	22.68	22.68
Grip Then Hotspot on	LTE Band 4	23.50	22.60	22.60
Grip Then Hotspot on	LTE Band 66	24.63	22.81	22.81

1.1. Distance Verification Procedure

Procedures for determining proximity sensor triggering distances

(KDB 616217D04v01r02§6.2)

The distance verification procedure was performed according to the following procedure:

1. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
2. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02. Each applicable test position was evaluated. The distance was conformed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
3. Step 1 and 2 were repeated for the relevant modes, as appropriate.
4. Steps 1 through 3 were repeated for all distance-based power reduction mechanisms.

For detailed measurement conducted power results, please refer to the Section .11



Proximity Sensor Trigger Distance Assessment KDB 616217 D04§6.2 (Rear / Front / Bottom side)

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Tissue simulating liquid	Trigger distance - Rear		Trigger distance - Front		Trigger distance - Bottom	
	Moving toward phantom [mm]	Moving away from phantom [mm]	Moving toward phantom [mm]	Moving away from phantom [mm]	Moving toward phantom [mm]	Moving away from phantom [mm]
1800MHz Tissue	11	12	7	8	13	14
1900MHz Tissue	11	12	7	8	13	14

Distance Measurement verification for Proximity sensor

Rear side – EUT Moving toward (Trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	16[mm]	15[mm]	14[mm]	13[mm]	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]
UMTS Band 2	23.73	23.72	23.71	23.74	23.70	21.41	21.43	21.43	21.40	21.39
UMTS Band 4	23.35	23.40	23.36	23.37	23.35	21.57	21.60	21.57	21.56	21.56
LTE 2	24.63	24.62	24.62	24.63	24.61	22.54	22.54	22.51	22.50	22.53
LTE 4	23.38	23.40	23.41	23.38	23.42	22.53	22.54	22.50	22.52	22.51
LTE 66	24.49	24.51	24.52	24.51	24.49	22.39	22.40	22.39	22.37	22.40

Rear side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]	14[mm]	15[mm]	16[mm]	17[mm]
UMTS Band 2	21.44	21.40	21.39	21.39	21.39	23.73	23.75	23.71	23.72	23.70
UMTS Band 4	21.59	21.57	21.56	21.58	21.58	23.36	23.37	23.38	23.36	23.38
LTE 2	22.52	22.53	22.49	22.50	22.50	24.61	24.59	24.64	24.61	24.63
LTE 4	22.50	22.50	22.54	22.50	22.49	23.41	23.37	23.39	23.37	23.41
LTE 66	22.37	22.41	22.37	22.40	22.39	24.49	24.48	24.48	24.52	24.51

Based on the most conservative measured triggering distance of 11mm, additional Phablet SAR measurements were required at 10mm from rear side for the above modes

Front side – EUT Moving toward (Trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]	6[mm]	5[mm]	4[mm]	3[mm]
UMTS Band 2	23.70	23.72	23.71	23.73	23.75	21.43	21.42	21.42	21.43	21.41
UMTS Band 4	23.37	23.38	23.40	23.38	23.35	21.59	21.59	21.60	21.58	21.59
LTE 2	24.64	24.63	24.62	24.61	24.64	22.49	22.49	22.51	22.51	22.53
LTE 4	23.38	23.40	23.38	23.37	23.38	22.51	22.52	22.53	22.54	22.54
LTE 66	24.52	24.52	24.51	24.50	24.50	22.36	22.40	22.39	22.41	22.36

Front side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	4[mm]	5[mm]	6[mm]	7[mm]	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]
UMTS Band 2	21.40	21.39	21.43	21.44	21.41	23.71	23.73	23.71	23.72	23.73
UMTS Band 4	21.57	21.57	21.57	21.60	21.59	23.40	23.39	23.37	23.37	23.35
LTE 2	22.52	22.49	22.51	22.52	22.50	24.60	24.60	24.61	24.61	24.61
LTE 4	22.52	22.49	22.53	22.54	22.51	23.39	23.39	23.39	23.40	23.41
LTE 66	22.36	22.37	22.39	22.38	22.37	24.48	24.51	24.48	24.51	24.51

Based on the most conservative measured triggering distance of 7mm, additional Phablet SAR measurements were required at 6mm from Front side for the above modes

Bottom side – EUT Moving toward (Trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	18[mm]	17[mm]	16[mm]	15[mm]	14[mm]	13[mm]	12[mm]	11[mm]	10[mm]	9[mm]
UMTS Band 2	23.74	23.71	23.70	23.75	23.73	21.43	21.41	21.43	21.41	21.39
UMTS Band 4	23.36	23.37	23.38	23.37	23.37	21.58	21.61	21.56	21.60	21.61
LTE 2	24.64	24.64	24.64	24.60	24.59	22.54	22.53	22.52	22.53	22.53
LTE 4	23.38	23.37	23.39	23.39	23.38	22.50	22.53	22.50	22.52	22.52
LTE 66	24.51	24.50	24.51	24.52	24.51	22.38	22.40	22.38	22.40	22.37

Bottom side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	10[mm]	11[mm]	12[mm]	13[mm]	14[mm]	15[mm]	16[mm]	17[mm]	18[mm]	19[mm]
UMTS Band 2	21.41	21.41	21.41	21.42	21.42	23.71	23.70	23.72	23.72	23.74
UMTS Band 4	21.60	21.58	21.57	21.59	21.60	23.38	23.39	23.37	23.36	23.37
LTE 2	22.51	22.53	22.53	22.52	22.50	24.63	24.59	24.59	24.64	24.61
LTE 4	22.50	22.52	22.54	22.51	22.52	23.40	23.39	23.41	23.38	23.42
LTE 66	22.36	22.38	22.37	22.39	22.37	24.53	24.49	24.50	24.52	24.51

Based on the most conservative measured triggering distance of 13mm, additional Phablet SAR measurements were required at 12mm from Bottom side for the above modes

1.2 Proximity Sensor Coverage for SAR measurements


(KDB 616217 D04v01r02§6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

1.3 Proximity Sensor Tilt Angle Assessment

(KDB 616217 D04v01r02 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band. The EUT was rotated about Bottom side for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

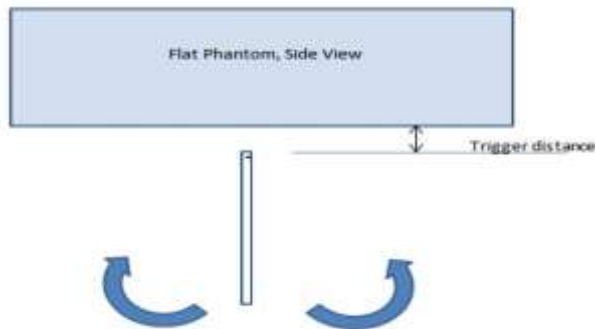

Proximity sensor tilt angle assessment (Bottom side) KDB 616217 §6.4

Summary of Tablet Tilt Angle influence to Proximity Sensor Triggering (Bottom side)

Tissue	Minimum distance At which power reduction was maintained over- 45°	Power reduction status											
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
1800 MHz Tissue	13 mm	On	On	On	On	On	On	On	On	On	On	On	On
1900 MHz Tissue	13 mm	On	On	On	On	On	On	On	On	On	On	On	On

1.5 Resulting test positions for Phablet SAR measurements

Wireless technologies	Position	§6.2 Triggering Distance [mm]	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for Phablet SAR [mm]
WWAN (UMTS B2/B4 /LTE B2/B4/B66)	Rear	11	N/A	N/A	10
	Front	7	N/A	N/A	6
	Bottom	13	N/A	N/A	12

Note: FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions

2. Power reduction Verification for Sub Antenna 2

This device uses a power reduction mechanism for SAR compliance for operations during voice or VoIP held to ear scenarios.

When a user makes or receives a voice call or VoIP call for Main Antenna the audio of the call is sent through the Receiver at the top of the device will trigger the Power reduction for Sub Antenna 2 (i.e. reducing output power for Head SAR compliance)

Detailed descriptions of the power reduction mechanism are included in the Main operational description document

Condition For Power reduction	Wireless Technologies	Conducted Power[dBm]	
		Un-Triggered (Max Power)	Triggered (Reduced Power)
RCV-on	LTE 2 (ULCA, Upper)	19.85	18.80
RCV-on	LTE 4 (ULCA, Upper)	20.03	18.01

3. Power reduction Verification for WLAN Ant

This device uses a power reduction mechanism for SAR compliance for WLAN operations during voice or VoIP held to ear scenarios.

When a user makes or receives a WLAN voice or WLAN VOIP call for WLAN Ant the audio of the call is sent through the Receiver at the top of the device will trigger the Power reduction for WLAN Ant (i.e. reducing output power for Head SAR compliance)

Detailed descriptions of the power reduction mechanism are included in the Main operational description document

Power Measurement Verification for WLAN

Condition For Power reduction	Wireless Technologies	Conducted Power[dBm]					
		Un-Triggered (Max Power)			Triggered (Reduced Power)		
		Ant1	Ant2	MIMO	Ant1	Ant2	MIMO
RCV-on	2.4GHz 802.11b	18.37		21.46	12.41		15.34
RCV-on	2.4GHz 802.11g	16.08		19.43	12.41		15.27
RCV-on	2.4GHz 802.11n	16.03		19.52	12.41		15.33
RCV-on	2.4GHz 802.11ax20	16.76		19.92	12.50		15.24
RCV-on	5GHz 802.11a		16.47	19.42		10.68	13.27
RCV-on	5GHz 802.11n 20MHz		16.23	19.34		10.49	13.39
RCV-on	5GHz 802.11n 40MHz		14.14	16.55		9.89	12.51
RCV-on	5GHz 802.11ac 20MHz		16.34	19.04		10.73	13.52
RCV-on	5GHz 802.11ac 40MHz		13.91	16.51		9.94	12.63
RCV-on	5GHz 802.11ac 80MHz		10.57	13.63		10.54	13.21
RCV-on	5GHz 802.11ax 20MHz		16.49	19.44		10.59	13.45
RCV-on	5GHz 802.11ax 40MHz		14.07	17.03		10.03	12.59
RCV-on	5GHz 802.11ax 80MHz		10.94	13.33		10.94	13.33