



SAR EVALUATION REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 11/14/17
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 1M1711130296-01.A3L

FCC ID: **A3LSMA730F**

APPLICANT: **SAMSUNG ELECTRONICS CO., LTD.**


DUT Type: Portable Handset
Application Type: Class II Permissive Change
FCC Rule Part(s): CFR §2.1093
Model: SM-A730F/DS
Additional Model(s): SM-A730F
Permissive Change(s): See FCC Change Document
Date of Original Certification: 11/09/2017

| Equipment Class | Band & Mode | Tx Frequency | SAR | | | |
|---|-------------------|---------------------|----------------|---------------------|-------------------|--------------------|
| | | | 1g Head (W/kg) | 1g Body-Worn (W/kg) | 1g Hotspot (W/kg) | 10g Phablet (W/kg) |
| PCE | GSM/GPRS/EDGE 850 | 824.20 - 848.80 MHz | 0.12 | 0.24 | 0.93 | N/A |
| Simultaneous SAR per KDB 690783 D01v01r03: | | | 1.21 | 0.74 | 1.34 | N/A |

The table above shows test data evaluated for the current test report. Please refer to RF Exposure Technical Report S/N 1M1710050266-01.A3L for original compliance evaluation

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


 Randy Ortanez
 President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.





| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 1 of 28 | |

TABLE OF CONTENTS

| | | |
|--|--|----|
| 1 | DEVICE UNDER TEST | 3 |
| 2 | INTRODUCTION | 6 |
| 3 | DOSIMETRIC ASSESSMENT | 7 |
| 4 | DEFINITION OF REFERENCE POINTS..... | 8 |
| 5 | TEST CONFIGURATION POSITIONS..... | 9 |
| 6 | RF EXPOSURE LIMITS | 12 |
| 7 | FCC MEASUREMENT PROCEDURES..... | 13 |
| 8 | RF CONDUCTED POWERS..... | 14 |
| 9 | SYSTEM VERIFICATION..... | 15 |
| 10 | SAR DATA SUMMARY | 16 |
| 11 | FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS..... | 18 |
| 12 | SAR MEASUREMENT VARIABILITY | 23 |
| 13 | EQUIPMENT LIST..... | 24 |
| 14 | MEASUREMENT UNCERTAINTIES..... | 25 |
| 15 | CONCLUSION..... | 26 |
| 16 | REFERENCES | 27 |
| APPENDIX A: SAR TEST PLOTS | | |
| APPENDIX B: SAR DIPOLE VERIFICATION PLOTS | | |
| APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES | | |
| APPENDIX D: SAR TISSUE SPECIFICATIONS | | |
| APPENDIX E: SAR SYSTEM VALIDATION | | |
| APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS | | |

| | | | | |
|---|--|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  <small>ENGINEERING LABORATORY, INC.</small> | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 2 of 28 | |

1 DEVICE UNDER TEST

1.1 Device Overview



| Band & Mode | Operating Modes | Tx Frequency |
|--------------------|-----------------|-----------------------|
| GSM/GPRS/EDGE 850 | Voice/Data | 824.20 - 848.80 MHz |
| GSM/GPRS/EDGE 1900 | Voice/Data | 1850.20 - 1909.80 MHz |
| UMTS 850 | Voice/Data | 826.40 - 846.60 MHz |
| UMTS 1750 | Voice/Data | 1712.4 - 1752.6 MHz |
| UMTS 1900 | Voice/Data | 1852.4 - 1907.6 MHz |
| LTE Band 12 | Voice/Data | 699.7 - 715.3 MHz |
| LTE Band 17 | Voice/Data | 706.5 - 713.5 MHz |
| LTE Band 13 | Voice/Data | 779.5 - 784.5 MHz |
| LTE Band 5 (Cell) | Voice/Data | 824.7 - 848.3 MHz |
| LTE Band 26 (Cell) | Voice/Data | 814.7 - 848.3 MHz |
| LTE Band 66 (AWS) | Voice/Data | 1710.7 - 1779.3 MHz |
| LTE Band 4 (AWS) | Voice/Data | 1710.7 - 1754.3 MHz |
| LTE Band 2 (PCS) | Voice/Data | 1850.7 - 1909.3 MHz |
| LTE Band 41 | Voice/Data | 2498.5 - 2687.5 MHz |
| 2.4 GHz WLAN | Voice/Data | 2412 - 2472 MHz |
| U-NII-1 | Voice/Data | 5180 - 5240 MHz |
| U-NII-2A | Voice/Data | 5260 - 5320 MHz |
| U-NII-2C | Voice/Data | 5500 - 5720 MHz |
| U-NII-3 | Voice/Data | 5745 - 5825 MHz |
| Bluetooth | Data | 2402 - 2480 MHz |
| NFC | Data | 13.56 MHz |
| ANT+ | Data | 2402 - 2480 MHz |
| MST | Data | 555 Hz - 8.33 kHz |

1.2 Power Reduction for SAR

This device utilizes a single step power reduction mechanism for SAR compliance under portable hotspot conditions for some wireless modes and bands. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 3 of 28 | |

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power

| Mode / Band | | Voice (dBm) | Burst Average GMSK (dBm) | | | | Burst Average 8-PSK (dBm) | | | |
|-------------------|---------|-------------|--------------------------|------------|------------|------------|---------------------------|------------|------------|------------|
| | | 1 TX Slot | 1 TX Slots | 2 TX Slots | 3 TX Slots | 4 TX Slots | 1 TX Slots | 2 TX Slots | 3 TX Slots | 4 TX Slots |
| GSM/GPRS/EDGE 850 | Maximum | 33.5 | 33.5 | 30.5 | 29.0 | 27.5 | 27.5 | 25.5 | 24.0 | 22.0 |
| | Nominal | 33.0 | 33.0 | 30.0 | 28.5 | 27.0 | 27.0 | 25.0 | 23.5 | 21.5 |

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1
Device Edges/Sides for SAR Testing**

| Mode | Back | Front | Top | Bottom | Right | Left |
|----------|------|-------|-----|--------|-------|------|
| GPRS 850 | Yes | Yes | No | Yes | Yes | Yes |

Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.



1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2
Simultaneous Transmission Scenarios**

| No. | Capable Transmit Configuration | Head | Body-Worn Accessory | Wireless Router | Phablet | Notes |
|-----|--------------------------------|------|---------------------|-----------------|---------|------------------------------------|
| 1 | GSM voice + 2.4 GHz W-I-F-I | Yes | Yes | N/A | Yes | |
| 2 | GSM voice + 5 GHz W-I-F-I | Yes | Yes | N/A | Yes | |
| 3 | GSM voice + 2.4 GHz Bluetooth | Yes^ | Yes | N/A | Yes | ^Bluetooth Tethering is considered |
| 4 | UMTS + 2.4 GHz W-I-F-I | Yes | Yes | Yes | Yes | |
| 5 | UMTS + 5 GHz W-I-F-I | Yes | Yes | Yes | Yes | |
| 6 | UMTS + 2.4 GHz Bluetooth | Yes^ | Yes | Yes^ | Yes | ^Bluetooth Tethering is considered |
| 7 | LTE + 2.4 GHz W-I-F-I | Yes | Yes | Yes | Yes | |
| 8 | LTE + 5 GHz W-I-F-I | Yes | Yes | Yes | Yes | |
| 9 | LTE + 2.4 GHz Bluetooth | Yes^ | Yes | Yes^ | Yes | ^Bluetooth Tethering is considered |
| 10 | GPRS/EDGE + 2.4 GHz W-I-F-I | N/A | N/A | Yes | Yes | |
| 11 | GPRS/EDGE + 5 GHz W-I-F-I | N/A | N/A | Yes | Yes | |
| 12 | GPRS/EDGE + 2.4 GHz Bluetooth | N/A | N/A | Yes^ | Yes | |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 4 of 28 | |

1. 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
6. This device supports VOLTE.
7. This device supports VoWIFI.

1.7 Miscellaneous SAR Test Considerations

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Phablet SAR was not evaluated for licensed technologies since wireless router 1g SAR was < 1.2 W/kg for these modes.



Only modes relevant to this change were evaluated for SAR compliance. For complete SAR test data please refer to RF Exposure Technical Report S/N 1M1710050266-01.A3L.

1.8 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D06v02r01 (2G and Hotspot)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 5 of 28 | |

2 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 6 of 28 |

3 DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






Figure 3-1
Sample SAR Area Scan

Table 3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

| Frequency | Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$) | Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$) | Maximum Zoom Scan Spatial Resolution (mm) | | | Minimum Zoom Scan Volume (mm) (x,y,z) |
|-----------|---|---|---|------------------------|-------------------------------|--|
| | | | Uniform Grid | Graded Grid | | |
| | | | $\Delta z_{zoom}(n)$ | $\Delta z_{zoom}(1)^*$ | $\Delta z_{zoom}(n>1)^*$ | |
| ≤ 2 GHz | ≤ 15 | ≤ 8 | ≤ 5 | ≤ 4 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 30 |
| 2-3 GHz | ≤ 12 | ≤ 5 | ≤ 5 | ≤ 4 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 30 |
| 3-4 GHz | ≤ 12 | ≤ 5 | ≤ 4 | ≤ 3 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 28 |
| 4-5 GHz | ≤ 10 | ≤ 4 | ≤ 3 | ≤ 2.5 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 25 |
| 5-6 GHz | ≤ 10 | ≤ 4 | ≤ 2 | ≤ 2 | ≤ 1.5* $\Delta z_{zoom}(n-1)$ | ≥ 22 |

*Also compliant to IEEE 1528-2013 Table 6

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 7 of 28 |

4.1 EAR REFERENCE POINT

Figure 4-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 4-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 4-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 4-1
Close-Up Side view of ERP

4.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 4-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 4-2
Front, back and side view of SAM Twin Phantom

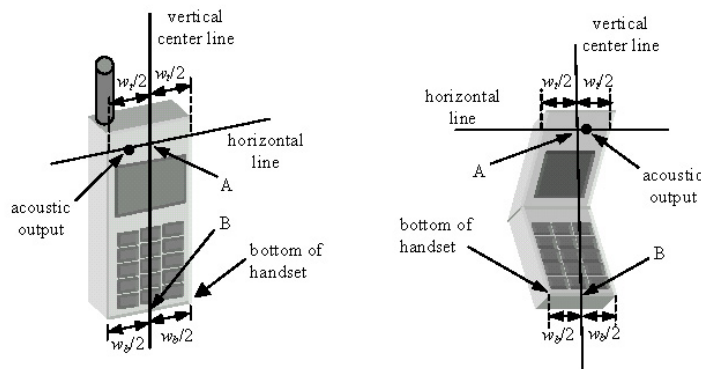




Figure 4-3
Handset Vertical Center & Horizontal Line Reference Points

| | | | | |
|--------------------------------------|--|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 8 of 28 |

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 5-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

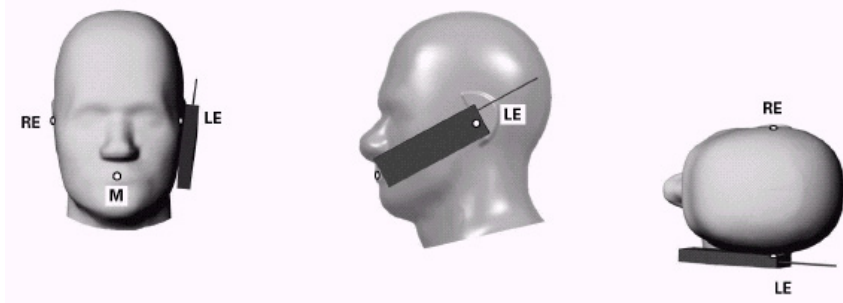




Figure 5-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 5-2).

5.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 5-2).

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 9 of 28 |

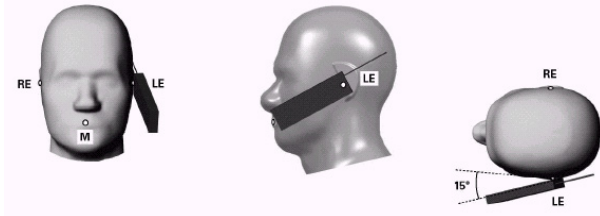


Figure 5-2

Front, Side and Top View of Ear/15° Tilt Position




Figure 5-3

Side view w/ relevant markings

5.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

5.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

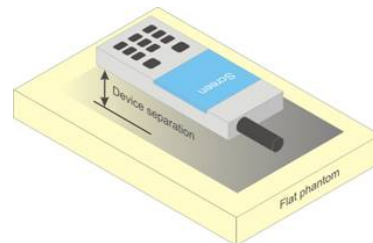


Figure 6-4
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

| | | | | |
|--------------------------------------|-------------------------|-------------------------------|--|---------------------------------|
| FCC ID: A3LSMA730F | | SAR EVALUATION REPORT | | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 10 of 28 |

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

5.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



5.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

5.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 11 of 28 |

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

| HUMAN EXPOSURE LIMITS | | |
|---|---|---|
| | UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g) | CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g) |
| Peak Spatial Average SAR Head | 1.6 | 8.0 |
| Whole Body SAR | 0.08 | 0.4 |
| Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc. | 4.0 | 20 |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 12 of 28 | |

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.



7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 13 of 28 |

8 RF CONDUCTED POWERS


8.1 GSM Conducted Powers

| Maximum Burst-Averaged Output Power | | | | | | | | | | |
|--|--------------------|-----------------------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Band | Channel | Voice | GPRS/EDGE Data (GMSK) | | | | EDGE Data (8-PSK) | | | |
| | | GSM [dBm] CS (1 Slot) | GPRS [dBm] 1 Tx Slot | GPRS [dBm] 2 Tx Slot | GPRS [dBm] 3 Tx Slot | GPRS [dBm] 4 Tx Slot | EDGE [dBm] 1 Tx Slot | EDGE [dBm] 2 Tx Slot | EDGE [dBm] 3 Tx Slot | EDGE [dBm] 4 Tx Slot |
| GSM 850 | 128 | 33.03 | 33.15 | 29.02 | 27.62 | 26.89 | 25.93 | 24.93 | 23.11 | 20.70 |
| | 190 | 33.35 | 33.33 | 29.28 | 27.87 | 27.06 | 26.35 | 24.94 | 23.42 | 20.95 |
| | 251 | 33.31 | 33.39 | 29.31 | 28.05 | 27.13 | 26.46 | 25.00 | 23.52 | 20.92 |
| Calculated Maximum Frame-Averaged Output Power | | | | | | | | | | |
| Band | Channel | Voice | GPRS/EDGE Data (GMSK) | | | | EDGE Data (8-PSK) | | | |
| | | GSM [dBm] CS (1 Slot) | GPRS [dBm] 1 Tx Slot | GPRS [dBm] 2 Tx Slot | GPRS [dBm] 3 Tx Slot | GPRS [dBm] 4 Tx Slot | EDGE [dBm] 1 Tx Slot | EDGE [dBm] 2 Tx Slot | EDGE [dBm] 3 Tx Slot | EDGE [dBm] 4 Tx Slot |
| GSM 850 | 128 | 24.00 | 24.12 | 23.00 | 23.36 | 23.88 | 16.90 | 18.91 | 18.85 | 17.69 |
| | 190 | 24.32 | 24.30 | 23.26 | 23.61 | 24.05 | 17.32 | 18.92 | 19.16 | 17.94 |
| | 251 | 24.28 | 24.36 | 23.29 | 23.79 | 24.12 | 17.43 | 18.98 | 19.26 | 17.91 |
| GSM 850 | Frame Avg.Targets: | 23.97 | 23.97 | 23.98 | 24.24 | 23.99 | 17.97 | 18.98 | 19.24 | 18.49 |



Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

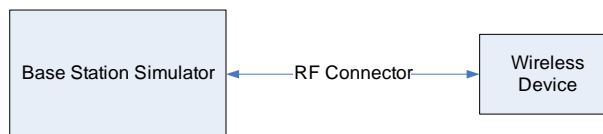GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



**Figure 8-1
Power Measurement Setup**

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 14 of 28 | |

9 SYSTEM VERIFICATION

9.1 Tissue Verification

**Table 9-1
Measured Tissue Properties**

| Calibrated for Tests Performed on: | Tissue Type | Tissue Temp During Calibration (°C) | Measured Frequency (MHz) | Measured Conductivity, σ (S/m) | Measured Dielectric Constant, ϵ | TARGET Conductivity, σ (S/m) | TARGET Dielectric Constant, ϵ | % dev σ | % dev ϵ |
|------------------------------------|-------------|-------------------------------------|--------------------------|---------------------------------------|--|-------------------------------------|--|----------------|------------------|
| 11/14/2017 | 835H | 22.1 | 820 | 0.878 | 40.600 | 0.899 | 41.578 | -2.34% | -2.35% |
| | | | 835 | 0.891 | 40.419 | 0.900 | 41.500 | -1.00% | -2.60% |
| | | | 850 | 0.906 | 40.233 | 0.916 | 41.500 | -1.09% | -3.05% |
| 11/14/2017 | 835B | 21.1 | 820 | 0.987 | 54.370 | 0.969 | 55.258 | 1.86% | -1.61% |
| | | | 835 | 1.001 | 54.237 | 0.970 | 55.200 | 3.20% | -1.74% |
| | | | 850 | 1.015 | 54.098 | 0.988 | 55.154 | 2.73% | -1.91% |


The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 9-2
System Verification Results**

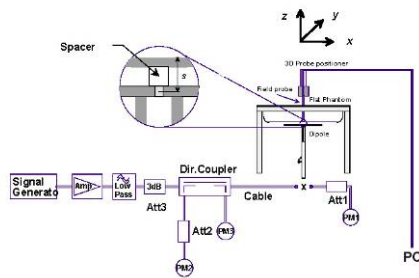

| System Verification TARGET & MEASURED | | | | | | | | | | | | | |
|--|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|-----------------------------------|-------------------------------------|---|-----------------------------|--|
| SAR System # | Tissue Frequency (MHz) | Tissue Type | Date: | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Source SN | Probe SN | Measured SAR _{1g} (W/kg) | 1 W Target SAR _{1g} (W/kg) | 1 W Normalized SAR _{1g} (W/kg) | Deviation _{1g} (%) | |
| K | 835 | HEAD | 11/14/2017 | 22.4 | 22.1 | 0.200 | 4d132 | 7406 | 1.910 | 9.520 | 9.550 | 0.32% | |
| G | 835 | BODY | 11/14/2017 | 23.1 | 21.2 | 0.200 | 4d047 | 3332 | 2.020 | 9.570 | 10.100 | 5.54% | |



**Figure 9-1
System Verification Setup Diagram**



**Figure 9-2
System Verification Setup Photo**

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 15 of 28 |

10 SAR DATA SUMMARY

10.1 Standalone Head SAR Data

**Table 10-1
GSM 850 Head SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | |
|---|-----|-----------|---------|-----------------------------|-----------------------|------------------|---|---------------|----------------------|-----------------|------------|----------|----------------|-------------------|--------|
| FREQUENCY | | Mode/Band | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Side | Test Position | Device Serial Number | # of Time Slots | Duty Cycle | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |
| MHz | Ch. | | | | | | | | | | | (W/kg) | | (W/kg) | |
| 836.60 | 190 | GSM 850 | GSM | 33.5 | 33.35 | -0.01 | Right | Cheek | 12531 | 1 | 1:8.3 | 0.106 | 1.035 | 0.110 | |
| 836.60 | 190 | GSM 850 | GSM | 33.5 | 33.35 | 0.15 | Right | Tilt | 12531 | 1 | 1:8.3 | 0.110 | 1.035 | 0.114 | |
| 836.60 | 190 | GSM 850 | GSM | 33.5 | 33.35 | 0.13 | Left | Cheek | 12531 | 1 | 1:8.3 | 0.075 | 1.035 | 0.078 | |
| 836.60 | 190 | GSM 850 | GSM | 33.5 | 33.35 | 0.01 | Left | Tilt | 12531 | 1 | 1:8.3 | 0.114 | 1.035 | 0.118 | A1 |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Head 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | |

10.2 Standalone Body-Worn SAR Data



**Table 10-2
GSM Body-Worn SAR Data**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | |
|---|-----|---------|---------|-----------------------------|-----------------------|------------------|---|----------------------|-----------------|------------|------|----------|----------------|-------------------|--------|
| FREQUENCY | | Mode | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | # of Time Slots | Duty Cycle | Side | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |
| MHz | Ch. | | | | | | | | | | | (W/kg) | | (W/kg) | |
| 836.60 | 190 | GSM 850 | GSM | 33.5 | 33.35 | -0.01 | 15 mm | 12531 | 1 | 1:8.3 | back | 0.229 | 1.035 | 0.237 | A2 |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | |

10.3 Standalone Hotspot SAR Data

**Table 10-3
GPRS Hotspot SAR Data**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | |
|---|-----|---------|---------|-----------------------------|-----------------------|------------------|---|----------------------|-----------------|------------|--------|----------|----------------|-------------------|--------|
| FREQUENCY | | Mode | Service | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Power Drift [dB] | Spacing | Device Serial Number | # of GPRS Slots | Duty Cycle | Side | SAR (1g) | Scaling Factor | Reported SAR (1g) | Plot # |
| MHz | Ch. | | | | | | | | | | | (W/kg) | | (W/kg) | |
| 824.20 | 128 | GSM 850 | GPRS | 29.0 | 27.62 | -0.03 | 10 mm | 12531 | 3 | 1:2.76 | back | 0.581 | 1.374 | 0.798 | |
| 836.60 | 190 | GSM 850 | GPRS | 29.0 | 27.87 | 0.04 | 10 mm | 12531 | 3 | 1:2.76 | back | 0.713 | 1.297 | 0.925 | A3 |
| 848.80 | 251 | GSM 850 | GPRS | 29.0 | 28.05 | 0.00 | 10 mm | 12531 | 3 | 1:2.76 | back | 0.707 | 1.245 | 0.880 | |
| 836.60 | 190 | GSM 850 | GPRS | 29.0 | 27.87 | -0.09 | 10 mm | 12531 | 3 | 1:2.76 | front | 0.500 | 1.297 | 0.649 | |
| 836.60 | 190 | GSM 850 | GPRS | 29.0 | 27.87 | -0.17 | 10 mm | 12531 | 3 | 1:2.76 | bottom | 0.353 | 1.297 | 0.458 | |
| 836.60 | 190 | GSM 850 | GPRS | 29.0 | 27.87 | 0.05 | 10 mm | 12531 | 3 | 1:2.76 | right | 0.280 | 1.297 | 0.363 | |
| 836.60 | 190 | GSM 850 | GPRS | 29.0 | 27.87 | 0.00 | 10 mm | 12531 | 3 | 1:2.76 | left | 0.067 | 1.297 | 0.087 | |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | | | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | | | | | | |

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 16 of 28 | |



10.4 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg. Please see Section 12 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 5.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 17 of 28 | |

11 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

11.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

11.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$



**Table 11-1
Estimated SAR**

| Mode | Frequency | Maximum Allowed Power | Separation Distance (Body-Worn) | Estimated SAR (Body-Worn) | Separation Distance (Hotspot) | Estimated SAR (Hotspot) |
|-----------|-----------|-----------------------|---------------------------------|---------------------------|-------------------------------|-------------------------|
| | [MHz] | [dBm] | [mm] | [W/kg] | [mm] | [W/kg] |
| Bluetooth | 2480 | 8.50 | 15 | 0.098 | 10 | 0.147 |

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Main antenna SAR testing was not required for phablet exposure conditions per FCC KDB 648474 D04v01r03. Therefore, no further analysis was required to determine that possible simultaneous scenarios would not exceed the SAR limit.

WLAN and Bluetooth worst case SAR data is referenced from the original compliance evaluation. Please refer to RF Exposure Technical Report S/N 1M17110050266-01.A3L for complete SAR test data.

| | | | | |
|--------------------------------------|--|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 18 of 28 |

11.3 Head SAR Simultaneous Transmission Analysis

Table 11-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)



| Exposure Condition | Mode | 2G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|---------|---------------|-------------------------|--------------|
| Head SAR | GSM 850 | 0.118 | 1.060 | 1.178 |

Table 11-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

| Exposure Condition | Mode | 2G SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|---------|---------------|-----------------------|--------------|
| Head SAR | GSM 850 | 0.118 | 1.088 | 1.206 |

Table 11-4
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

| Exposure Condition | Mode | 2G SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|---------|---------------|----------------------|--------------|
| Head SAR | GSM 850 | 0.118 | 0.199 | 0.317 |

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 19 of 28 | |

11.4 Body-Worn Simultaneous Transmission Analysis

Table 11-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

| Exposure Condition | Mode | 2G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|---------|---------------|-------------------------|---------------------|
| Body-Worn | GSM 850 | 0.237 | 0.177 | 0.414 |



Table 11-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

| Exposure Condition | Mode | 2G SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|---------|---------------|-----------------------|---------------------|
| Body-Worn | GSM 850 | 0.237 | 0.507 | 0.744 |

Table 11-7
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

| Exposure Condition | Mode | 2G SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|---------|---------------|----------------------|---------------------|
| Body-Worn | GSM 850 | 0.237 | 0.098 | 0.335 |

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 20 of 28 | |

11.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

Table 11-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

| Exposure Condition | Mode | 2G SAR (W/kg) | 2.4 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|----------|---------------|-------------------------|--------------|
| Hotspot SAR | GPRS 850 | 0.925 | 0.406 | 1.331 |

Table 11-9
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

| Exposure Condition | Mode | 2G SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|----------|---------------|-----------------------|-----------------|
| Hotspot SAR | GPRS 850 | 0.925 | 0.694 | See Table Below |



| Simult Tx | Configuration | GPRS 850 SAR (W/kg) | 5 GHz WLAN SAR (W/kg) | Σ SAR (W/kg) | SPLSR |
|-------------|---------------|---------------------|-----------------------|--------------|-------|
| Hotspot SAR | Back | 0.925 | 0.694 | See Note 1 | 0.01 |
| | Front | 0.649 | 0.694* | 1.343 | N/A |
| | Top | - | 0.694* | 0.694 | N/A |
| | Bottom | 0.458 | - | 0.458 | N/A |
| | Right | 0.363 | - | 0.363 | N/A |
| | Left | 0.087 | 0.074 | 0.161 | N/A |

Table 11-10
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

| Exposure Condition | Mode | 2G SAR (W/kg) | Bluetooth SAR (W/kg) | Σ SAR (W/kg) |
|--------------------|----------|---------------|----------------------|--------------|
| Hotspot SAR | GPRS 850 | 0.925 | 0.147 | 1.072 |

Notes:

- No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 11.6 for detailed SPLS ratio analysis.

| | | | | |
|--------------------------------------|--|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  PCTEST ENGINEERING LABORATORY, INC. | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 21 of 28 |

11.6 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

11.6.1 Back Side SPLSR Evaluation and Analysis


Table 11-11
Peak SAR Locations for Body Back Side

| Mode/Band | x (mm) | y (mm) | Reported SAR (W/kg) |
|------------|--------|--------|---------------------|
| 5 GHz WLAN | 7.00 | 61.00 | 0.694 |
| GPRS 850 | -6.50 | -85.50 | 0.925 |

Table 11-12
Back Side SAR to Peak Location Separation Ratio Calculations



| Antenna Pair | | Standalone 1g SAR (W/kg) | | Standalone SAR Sum (W/kg) | Peak SAR Separation Distance (mm) | SPLS Ratio | Plot Number |
|--------------|------------|--------------------------|-------|---------------------------|-----------------------------------|-----------------------|-------------|
| Ant "a" | Ant "b" | a | b | a+b | D_{a-b} | $(a+b)^{1.5}/D_{a-b}$ | |
| GPRS 850 | 5 GHz WLAN | 0.925 | 0.694 | 1.619 | 147.12 | 0.01 | 1 |

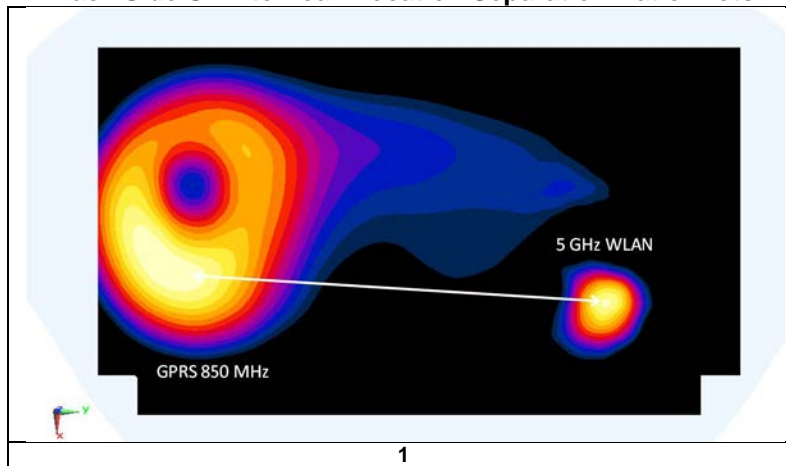Table 11-13
Back Side SAR to Peak Location Separation Ratio Plots



11.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 22 of 28 |



12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was not assessed for each frequency band since all measured SAR values are < 0.80 W/kg for 1 g SAR.

12.2 Measurement Uncertainty



The measured SAR was < 1.5 W/kg and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | | Page 23 of 28 |

13 EQUIPMENT LIST



| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|-----------|---|------------|--------------|------------|---------------|
| Agilent | 8594A | (9kHz-2.9GHz) Spectrum Analyzer | N/A | N/A | N/A | 3051A00187 |
| Agilent | 8753ES | S-Parameter Vector Network Analyzer | 8/17/2017 | Annual | 8/17/2018 | MY40003841 |
| Agilent | 8753ES | S-Parameter Network Analyzer | 9/14/2017 | Annual | 9/14/2018 | US39170118 |
| Agilent | E4432B | ESG-D Series Signal Generator | 3/24/2017 | Annual | 3/24/2018 | US40053896 |
| Agilent | E4438C | ESG Vector Signal Generator | 3/24/2017 | Biennial | 3/24/2019 | MY42082385 |
| Agilent | E5515C | Wireless Communications Test Set | 1/8/2015 | Triennial | 1/8/2018 | GB43163447 |
| Agilent | E8257D | (250kHz-20GHz) Signal Generator | 3/22/2017 | Annual | 3/22/2018 | MY45470194 |
| Agilent | N5182A | MXG Vector Signal Generator | 2/28/2017 | Annual | 2/28/2018 | MY47420800 |
| Amplifier Research | 15S1G6 | Amplifier | CBT | N/A | CBT | 433971 |
| Amplifier Research | 15S1G6 | Amplifier | CBT | N/A | CBT | 433972 |
| Anritsu | MA24106A | USB Power Sensor | 6/7/2017 | Annual | 6/7/2018 | 1231535 |
| Anritsu | MA24106A | USB Power Sensor | 6/7/2017 | Annual | 6/7/2018 | 1231538 |
| Anritsu | ML2495A | Power Meter | 10/22/2017 | Annual | 10/22/2018 | 941001 |
| COMTech | AR85729-5 | Solid State Amplifier | CBT | N/A | CBT | M155A00-009 |
| Control Company | 4040 | Therm./Clock/Humidity Monitor | 3/31/2017 | Biennial | 3/31/2019 | 170232394 |
| Control Company | 4352 | Ultra Long Stem Thermometer | 3/8/2016 | Biennial | 3/8/2018 | 160261694 |
| Keysight | 772D | Dual Directional Coupler | CBT | N/A | CBT | MY52180215 |
| Keysight Technologies | 85033E | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017 | Annual | 6/1/2018 | MY53401181 |
| MCL | BW-N6W5+ | 6dB Attenuator | CBT | N/A | CBT | 1139 |
| Mini-Circuits | BW-N20W5 | Power Attenuator | CBT | N/A | CBT | 1226 |
| Mini-Circuits | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator | CBT | N/A | CBT | N/A |
| Mini-Circuits | NLP-1200+ | Low Pass Filter DC to 1000 MHz | CBT | N/A | CBT | N/A |
| Mitutoyo | CD-6"CSX | Digital Caliper | 3/2/2016 | Biennial | 3/2/2018 | 13264162 |
| Narda | 4014C-6 | 4 - 8 GHz SMA 6 dB Directional Coupler | CBT | N/A | CBT | N/A |
| Narda | 4772-3 | Attenuator (3dB) | CBT | N/A | CBT | 9406 |
| Pasternack | NC-100 | Torque Wrench | 3/8/2017 | Annual | 3/8/2018 | N/A |
| Pasternack | PE2208-6 | Bidirectional Coupler | CBT | CBT | CBT | N/A |
| Pasternack | PE2209-10 | Bidirectional Coupler | CBT | CBT | CBT | N/A |
| Rohde & Schwarz | CMU200 | Base Station Simulator | 12/12/2016 | Annual | 12/12/2017 | 833855/0010 |
| Rohde & Schwarz | CMW500 | Radio Communication Tester | 5/4/2017 | Annual | 5/4/2018 | 101699 |
| SPEAG | D835V2 | 835 MHz SAR Dipole | 7/13/2016 | Biennial | 7/13/2018 | 4d047 |
| SPEAG | D835V2 | 835 MHz SAR Dipole | 1/11/2017 | Annual | 1/11/2018 | 4d132 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 8/9/2017 | Annual | 8/9/2018 | 1323 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 4/11/2017 | Annual | 4/11/2018 | 1407 |
| SPEAG | DAK-3.5 | Dielectric Assessment Kit | 5/10/2017 | Annual | 5/10/2018 | 1070 |
| SPEAG | ES3DV3 | SAR Probe | 8/14/2017 | Annual | 8/14/2018 | 3332 |
| SPEAG | EX3DV4 | SAR Probe | 4/18/2017 | Annual | 4/18/2018 | 7406 |

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

| | | | | |
|--------------------------------------|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 24 of 28 | |

14 MEASUREMENT UNCERTAINTIES

| a | c | d | e= f(d,k) | f | g | h = c x f/e | i = c x g/e | k |
|---|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty Component | Tol. (± %) | Prob. Dist. | Div. | c _i 1gm | c _i 10 gms | 1gm u _i (± %) | 10gms u _i (± %) | v _i |
| Measurement System | | | | | | | | |
| Probe Calibration | 6.55 | N | 1 | 1.0 | 1.0 | 6.6 | 6.6 | ∞ |
| Axial Isotropy | 0.25 | N | 1 | 0.7 | 0.7 | 0.2 | 0.2 | ∞ |
| Hemishperical Isotropy | 1.3 | N | 1 | 0.7 | 0.7 | 0.9 | 0.9 | ∞ |
| Boundary Effect | 2.0 | R | 1.73 | 1.0 | 1.0 | 1.2 | 1.2 | ∞ |
| Linearity | 0.3 | N | 1 | 1.0 | 1.0 | 0.3 | 0.3 | ∞ |
| System Detection Limits | 0.25 | R | 1.73 | 1.0 | 1.0 | 0.1 | 0.1 | ∞ |
| Readout Electronics | 0.3 | N | 1 | 1.0 | 1.0 | 0.3 | 0.3 | ∞ |
| Response Time | 0.8 | R | 1.73 | 1.0 | 1.0 | 0.5 | 0.5 | ∞ |
| Integration Time | 2.6 | R | 1.73 | 1.0 | 1.0 | 1.5 | 1.5 | ∞ |
| RF Ambient Conditions - Noise | 3.0 | R | 1.73 | 1.0 | 1.0 | 1.7 | 1.7 | ∞ |
| RF Ambient Conditions - Reflections | 3.0 | R | 1.73 | 1.0 | 1.0 | 1.7 | 1.7 | ∞ |
| Probe Positioner Mechanical Tolerance | 0.4 | R | 1.73 | 1.0 | 1.0 | 0.2 | 0.2 | ∞ |
| Probe Positioning w/ respect to Phantom | 6.7 | R | 1.73 | 1.0 | 1.0 | 3.9 | 3.9 | ∞ |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | 4.0 | R | 1.73 | 1.0 | 1.0 | 2.3 | 2.3 | ∞ |
| Test Sample Related | | | | | | | | |
| Test Sample Positioning | 2.7 | N | 1 | 1.0 | 1.0 | 2.7 | 2.7 | 35 |
| Device Holder Uncertainty | 1.67 | N | 1 | 1.0 | 1.0 | 1.7 | 1.7 | 5 |
| Output Power Variation - SAR drift measurement | 5.0 | R | 1.73 | 1.0 | 1.0 | 2.9 | 2.9 | ∞ |
| SAR Scaling | 0.0 | R | 1.73 | 1.0 | 1.0 | 0.0 | 0.0 | ∞ |
| Phantom & Tissue Parameters | | | | | | | | |
| Phantom Uncertainty (Shape & Thickness tolerances) | 7.6 | R | 1.73 | 1.0 | 1.0 | 4.4 | 4.4 | ∞ |
| Liquid Conductivity - measurement uncertainty | 4.2 | N | 1 | 0.78 | 0.71 | 3.3 | 3.0 | 10 |
| Liquid Permittivity - measurement uncertainty | 4.1 | N | 1 | 0.23 | 0.26 | 1.0 | 1.1 | 10 |
| Liquid Conductivity - Temperature Uncertainty | 3.4 | R | 1.73 | 0.78 | 0.71 | 1.5 | 1.4 | ∞ |
| Liquid Permittivity - Temperature Uncertainty | 0.6 | R | 1.73 | 0.23 | 0.26 | 0.1 | 0.1 | ∞ |
| Liquid Conductivity - deviation from target values | 5.0 | R | 1.73 | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| Liquid Permittivity - deviation from target values | 5.0 | R | 1.73 | 0.60 | 0.49 | 1.7 | 1.4 | ∞ |
| Combined Standard Uncertainty (k=1) | RSS | | | | | 11.5 | 11.3 | 60 |
| Expanded Uncertainty (95% CONFIDENCE LEVEL) | k=2 | | | | | 23.0 | 22.6 | |



| | | | | |
|--------------------------------------|---|-------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 25 of 28 | |

15 CONCLUSION

15.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 26 of 28 | |

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 27 of 28 | |

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Document S/N: 1M1711130296-01.A3L | Test Dates: 11/14/17 | DUT Type: Portable Handset | Page 28 of 28 | |

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA730F; Type: Portable Handset; Serial: 12531

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 40.399$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 11-14-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7406; ConvF(9.97, 9.97, 9.97); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 850, Left Head, Tilt, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.78 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.114 W/kg

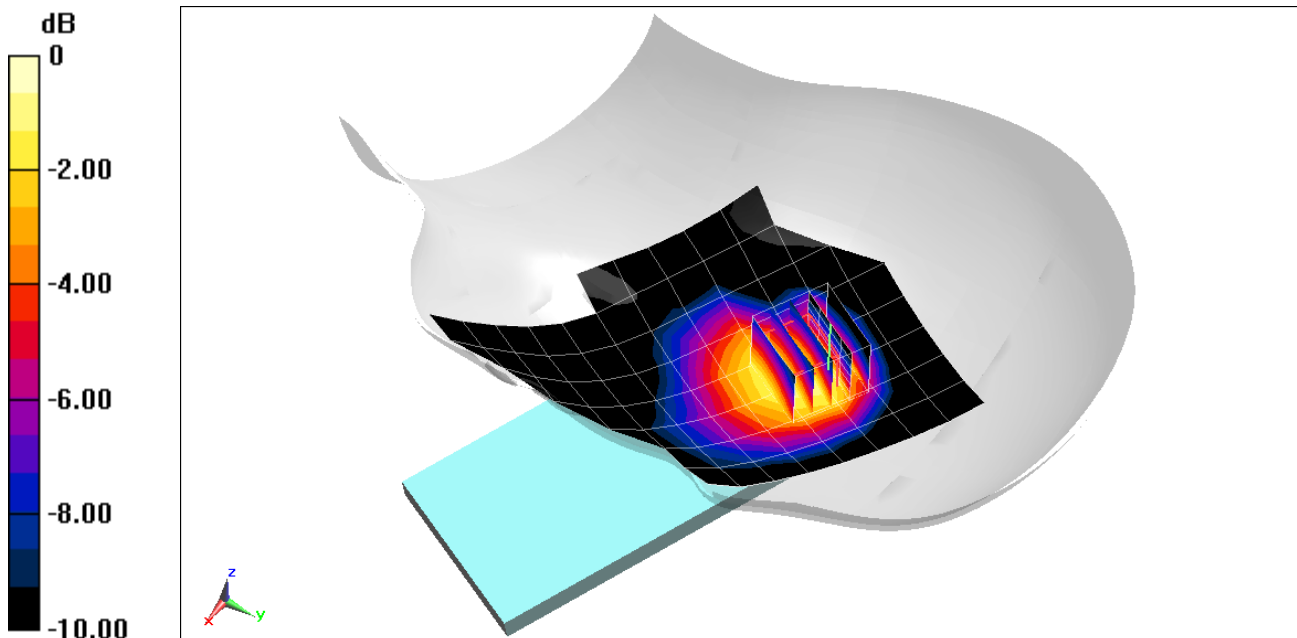

0 dB = 0.143 W/kg = -8.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA730F; Type: Portable Handset; Serial: 12531

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 54.222$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-14-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(6.47, 6.47, 6.47); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 850, Body SAR, Back Side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.05 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.229 W/kg

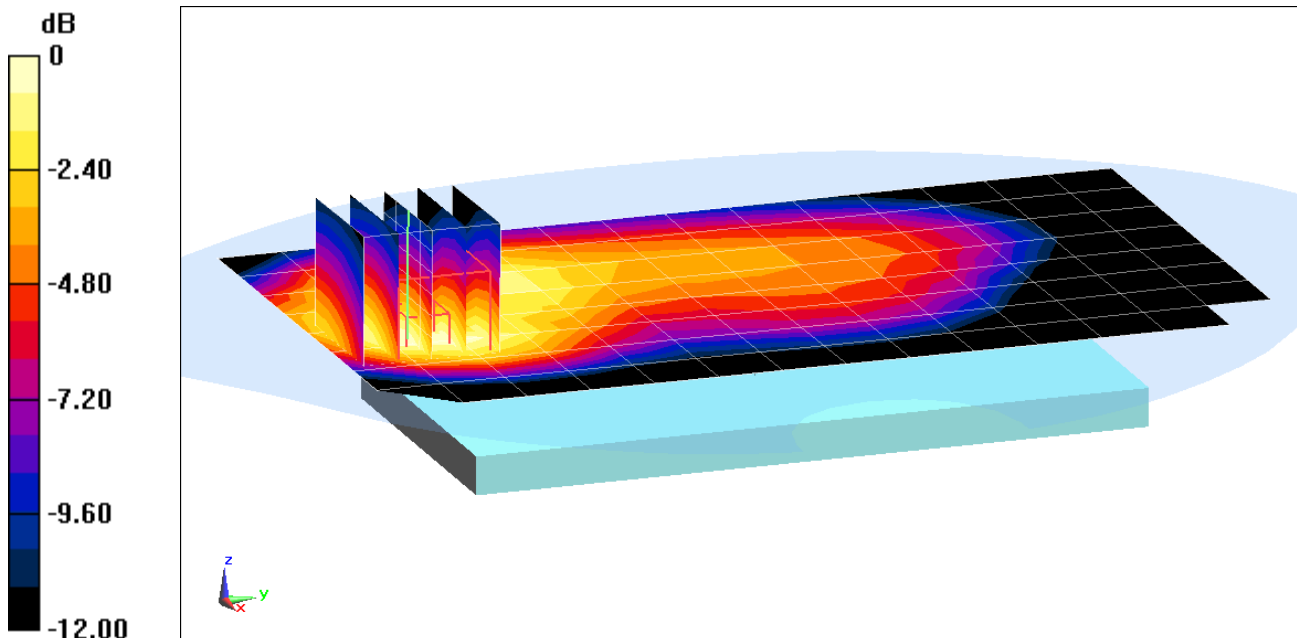

0 dB = 0.272 W/kg = -5.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMA730F; Type: Portable Handset; Serial: 12531


Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 54.222$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-14-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(6.47, 6.47, 6.47); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Body SAR, Back Side, Mid.ch, 3 Tx Slots

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.25 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.713 W/kg

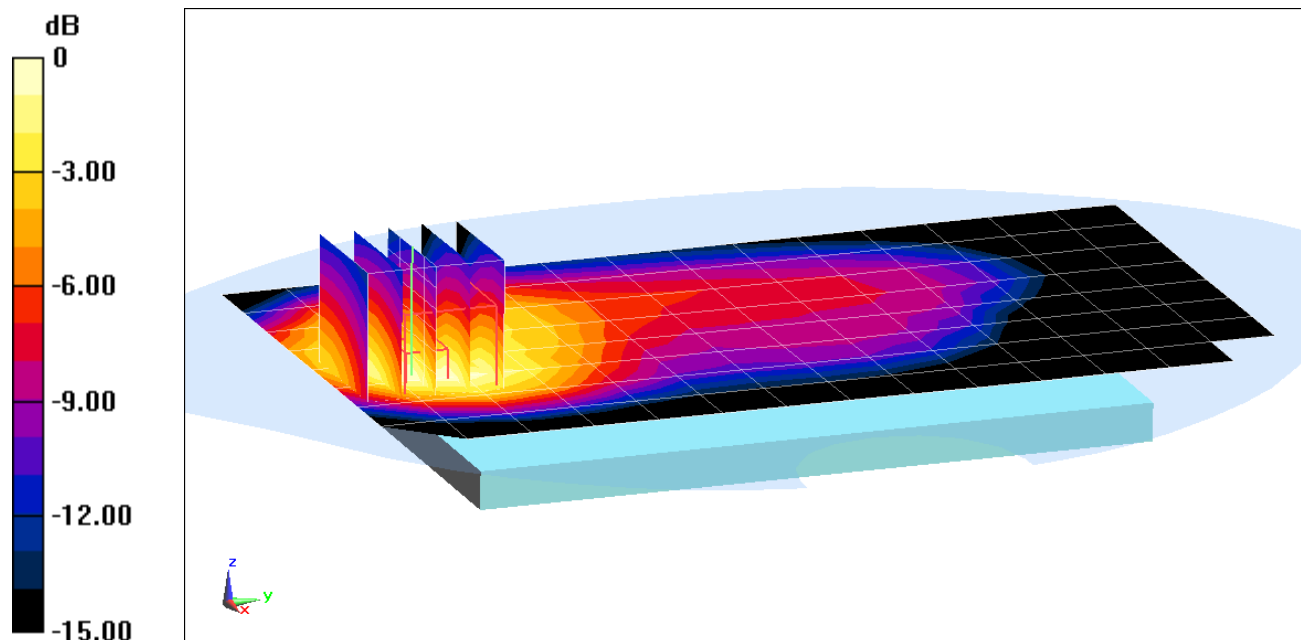

0 dB = 0.861 W/kg = -0.65 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.891 \text{ S/m}$; $\epsilon_r = 40.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-14-2017; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7406; ConvF(9.97, 9.97, 9.97); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.91 W/kg

Deviation(1 g) = 0.32%

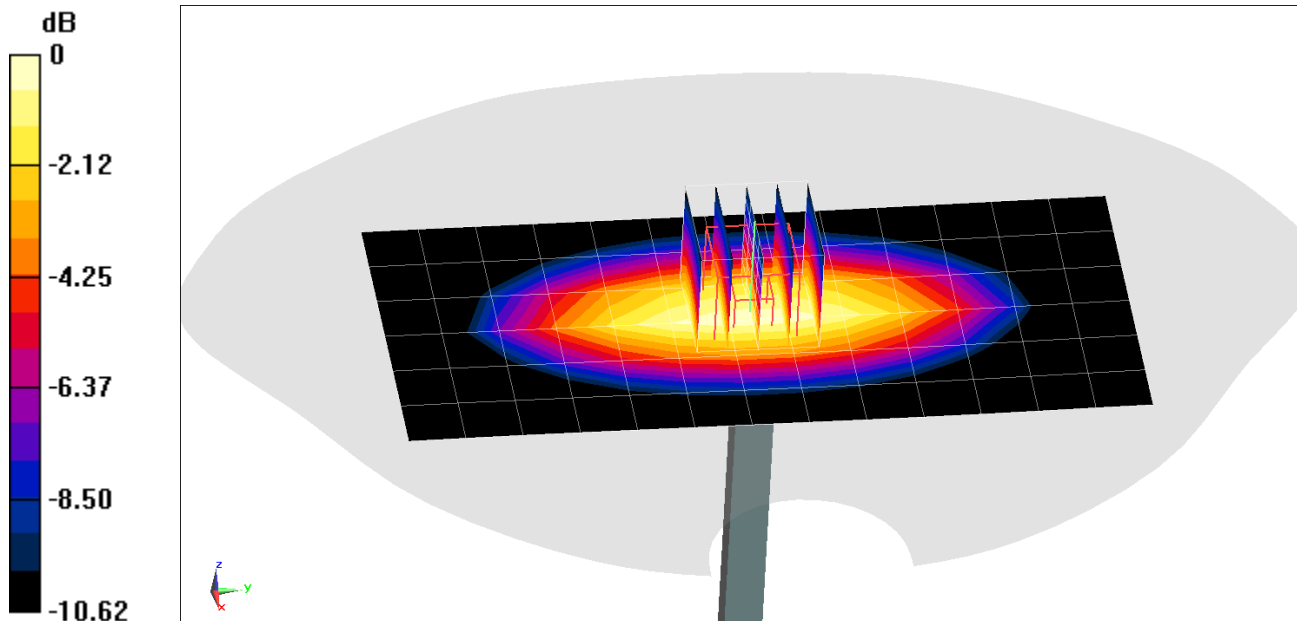

0 dB = 2.55 W/kg = 4.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047


Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used:
 $f = 835 \text{ MHz}$; $\sigma = 1.001 \text{ S/m}$; $\epsilon_r = 54.237$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-14-2017; Ambient Temp: 23.1°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(6.47, 6.47, 6.47); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.92 W/kg
SAR(1 g) = 2.02 W/kg
Deviation(1 g) = 5.54%

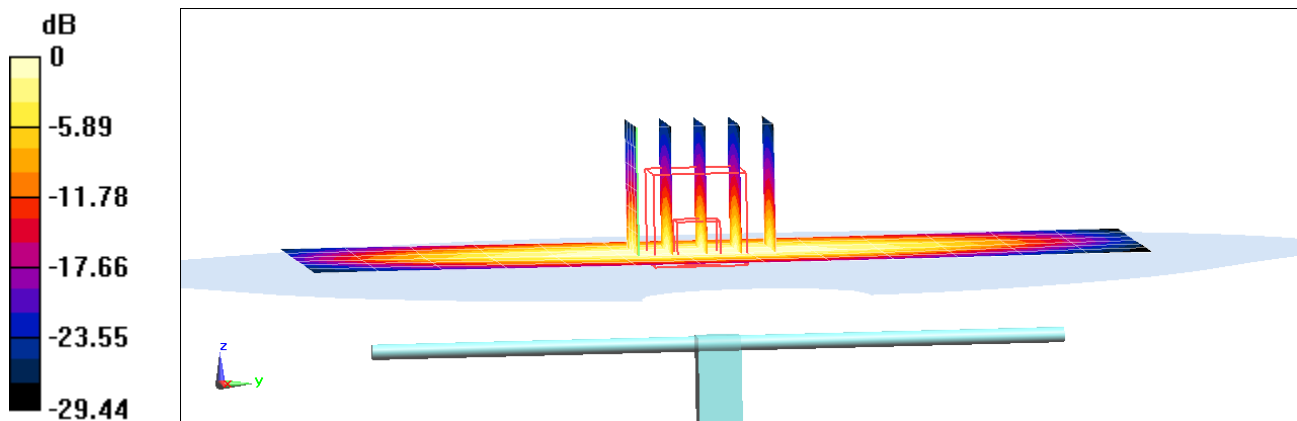

0 dB = 2.15 W/kg = 3.33 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan17**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

BN ✓
01/26/2017

Calibration date: **January 11, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP | SN: 104778 | 06-Apr-16 (No. 217-02288/02289) | Apr-17 |
| Power sensor NRP-Z91 | SN: 103244 | 06-Apr-16 (No. 217-02288) | Apr-17 |
| Power sensor NRP-Z91 | SN: 103245 | 06-Apr-16 (No. 217-02289) | Apr-17 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 05-Apr-16 (No. 217-02292) | Apr-17 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295) | Apr-17 |
| Reference Probe EX3DV4 | SN: 7349 | 31-Dec-16 (No. EX3-7349_Dec16) | Dec-17 |
| DAE4 | SN: 601 | 04-Jan-17 (No. DAE4-601_Jan17) | Jan-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

Calibrated by: **Jeton Kastrati** Name: **Jeton Kastrati** Function: **Laboratory Technician**

Signature: *[Handwritten Signature]*

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature: *[Handwritten Signature]*

Issued: January 12, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 41.4 \pm 6 % | 0.92 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 2.42 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.52 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 1.56 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.16 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 54.0 \pm 6 % | 0.99 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 2.50 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.80 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 1.64 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.46 W/kg \pm 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.1 Ω - 2.6 j Ω |
| Return Loss | - 29.7 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.3 Ω - 6.1 j Ω |
| Return Loss | - 23.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.386 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 22, 2011 |

DASY5 Validation Report for Head TSL

Date: 11.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.72, 9.72, 9.72); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 62.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 3.27 W/kg

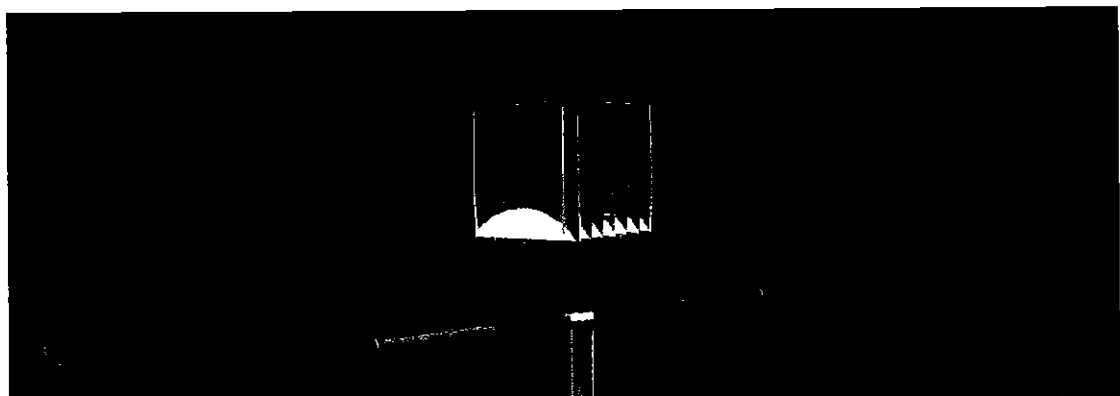

0 dB = 3.27 W/kg = 5.15 dBW/kg

Impedance Measurement Plot for Head TSL


11 Jan 2017 10:41:45

[CH1] S11 1 U FS

Z: 52.078 Ω -2.6191 Ω 72.774 pF

835.000 000 MHz

*
De l
CA

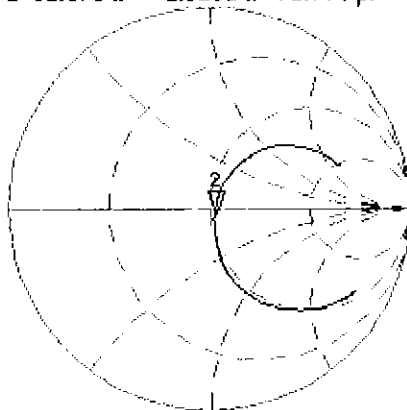

Avg
16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB Z: -29.688 dB 835.000 000 MHz

CA

Avg
16

H1 d

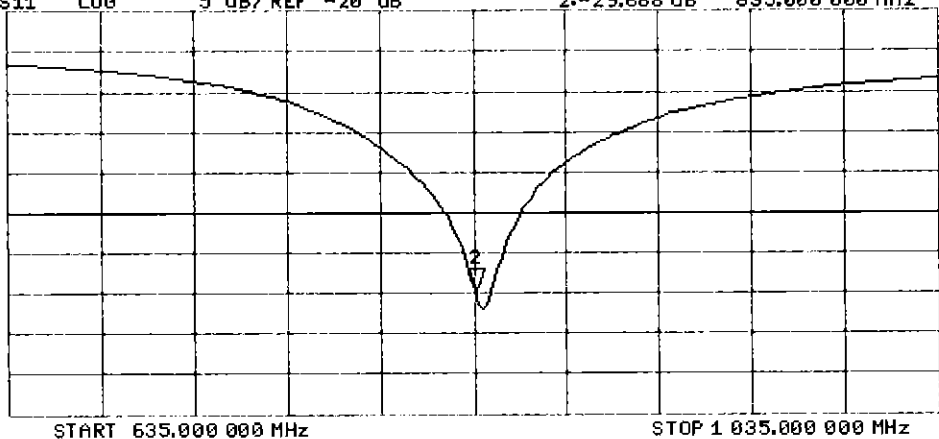

DASY5 Validation Report for Body TSL

Date: 10.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 61.28 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 3.32 W/kg

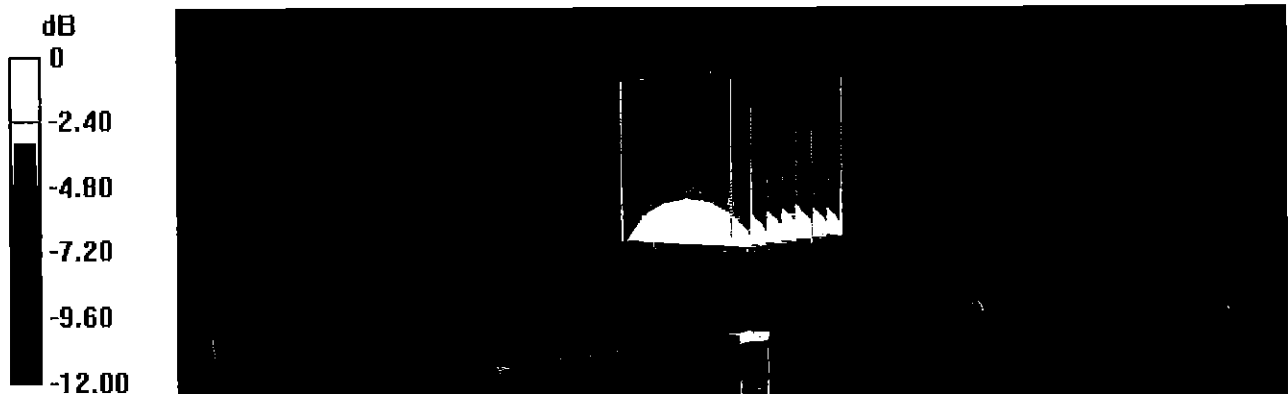


0 dB = 3.32 W/kg = 5.21 dBW/kg

Impedance Measurement Plot for Body TSL

10 Jan 2017 14:59:41
[CH1] S11 1 U FS 1: 47.332 Ω -6.0742 Ω 31.379 pF 835.000 000 MHz

*
Del
CA

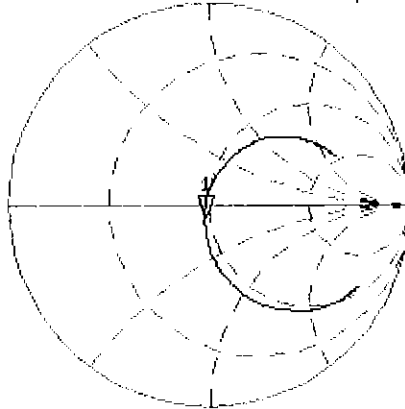

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.349 dB 835.000 000 MHz

CA

Avg
16

H1d

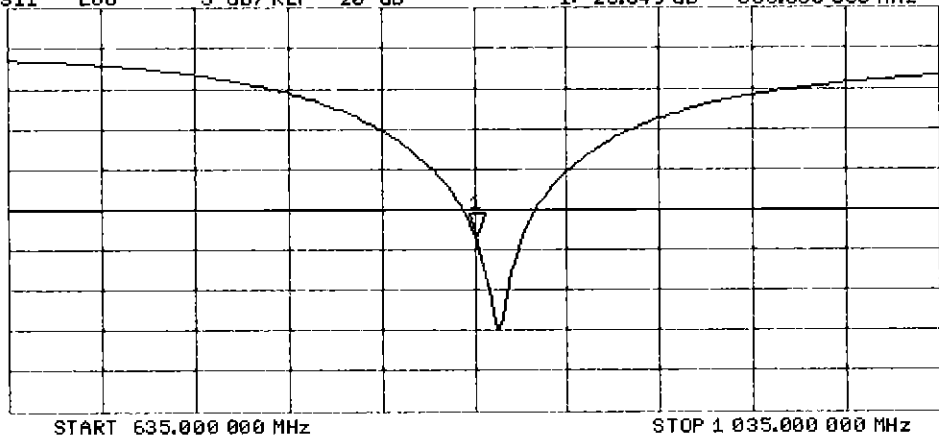



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d047_Jul16**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d047**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 13, 2016**

*BNV
7/16/2016
Extended
7/2017
SCV*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 06-Apr-16 (No. 217-02288/02289) | Apr-17 |
| Power sensor NRP-Z91 | SN: 103244 | 06-Apr-16 (No. 217-02288) | Apr-17 |
| Power sensor NRP-Z91 | SN: 103245 | 06-Apr-16 (No. 217-02289) | Apr-17 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 05-Apr-16 (No. 217-02292) | Apr-17 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295) | Apr-17 |
| Reference Probe EX3DV4 | SN: 7349 | 15-Jun-16 (No. EX3-7349_Jun16) | Jun-17 |
| DAE4 | SN: 601 | 30-Dec-15 (No. DAE4-601_Dec15) | Dec-16 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (No. 217-02222) | In house check: Oct-16 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (No. 217-02222) | In house check: Oct-16 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (No. 217-02223) | In house check: Oct-16 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Jeton Kastrati** (Name) **Laboratory Technician** (Function) *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) **Technical Manager** (Function) *[Signature]* (Signature)

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.8 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 40.6 \pm 6 % | 0.94 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 2.37 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.13 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 1.53 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 5.95 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 54.9 \pm 6 % | 1.01 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 2.47 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.57 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|------------------------------|
| SAR measured | 250 mW input power | 1.60 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.24 W/kg \pm 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.8 Ω - 5.9 j Ω |
| Return Loss | - 24.5 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 45.8 Ω - 8.2 j Ω |
| Return Loss | - 20.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|---------|
| Electrical Delay (one direction) | None ns |
|----------------------------------|---------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-----------------|
| Manufactured by | SPEAG |
| Manufactured on | August 16, 2006 |

DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d047

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.72, 9.72, 9.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.98 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 3.17 W/kg

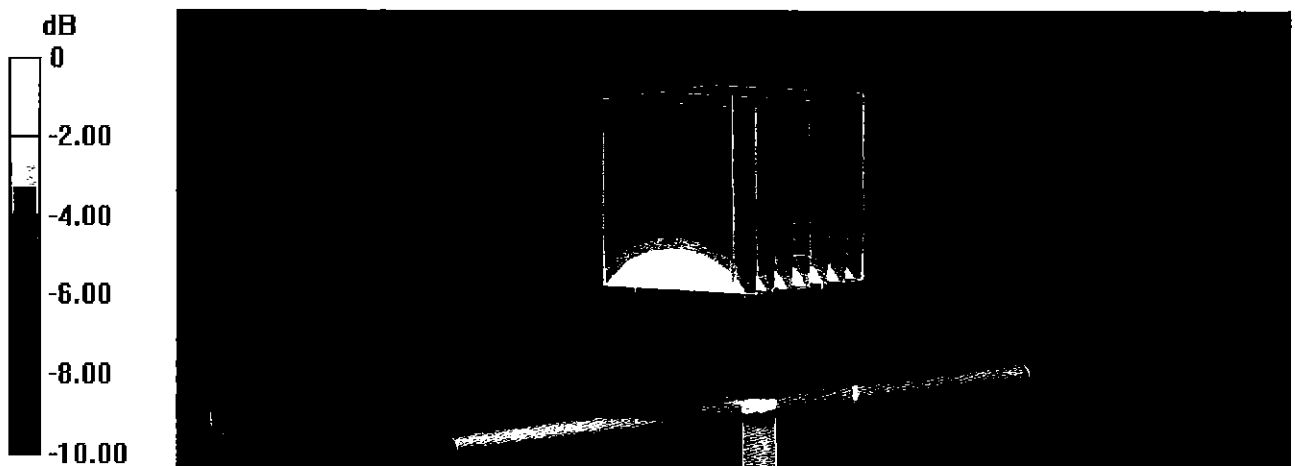

0 dB = 3.17 W/kg = 5.01 dBW/kg

Impedance Measurement Plot for Head TSL


13 Jul 2016 12:00:27

CH1 S11 1 U FS

1: 49.820 Ω -5.9316 Ω 32.134 pF

835.000 000 MHz

*
De1
CA

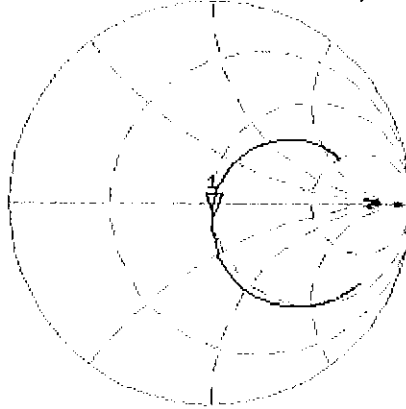

Avg
16

H1d


CH2 S11 LOG

5 dB/REF -20 dB

1:-24.525 dB

835.000 000 MHz

CA

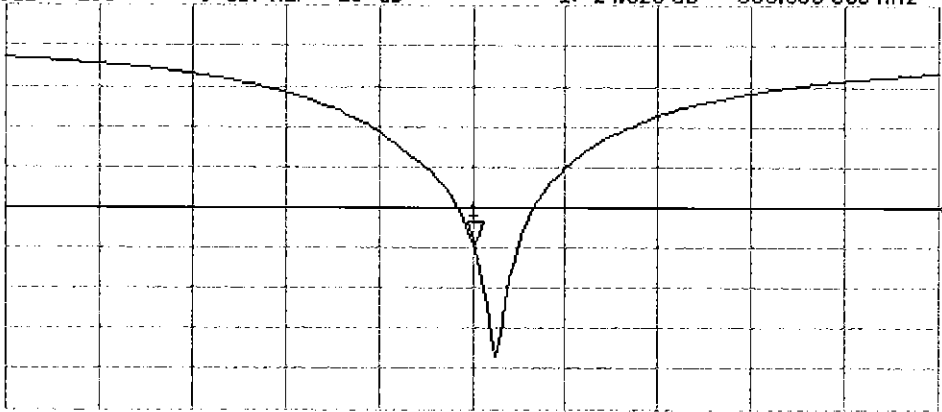

Avg
16

H1d

START 635.000 000 MHz

STOP 1 035.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d047

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.88 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 3.27 W/kg

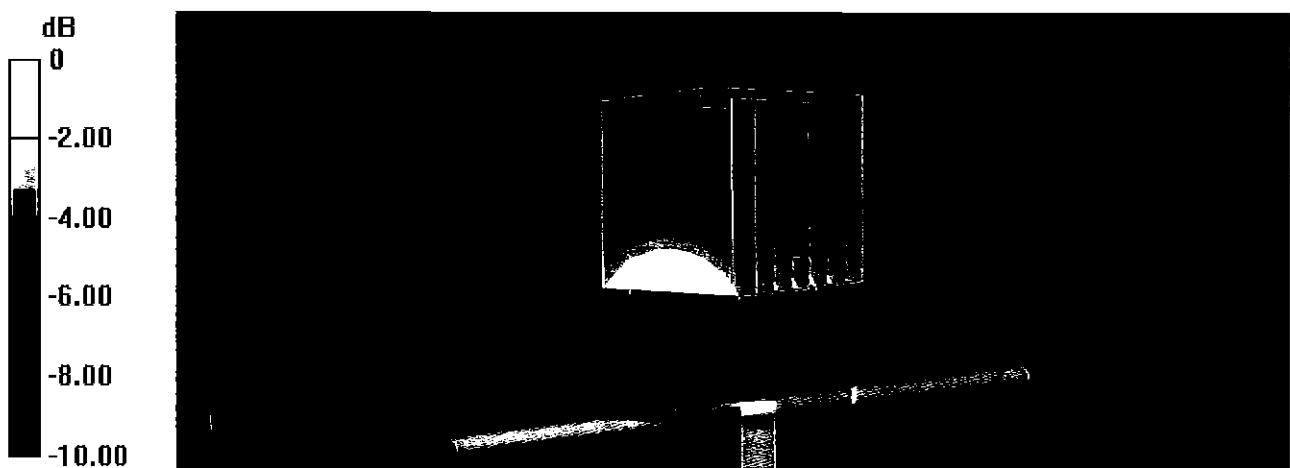

0 dB = 3.27 W/kg = 5.15 dBW/kg

Impedance Measurement Plot for Body TSL


13 Jul 2016 13:35:41
CH1 S11 1 U FS 1: 45.793 Ω -8.1777 Ω 23.308 pF 835.000 000 MHz

*
Del

CA

Avg
16


H1 d

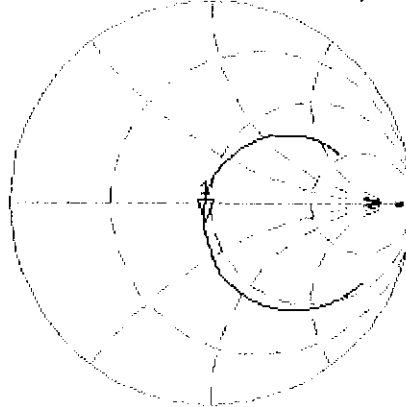

CH2 S11 LOG 5 dB/ REF -20 dB 1: -20.332 dB 835.000 000 MHz

CA

H1 d

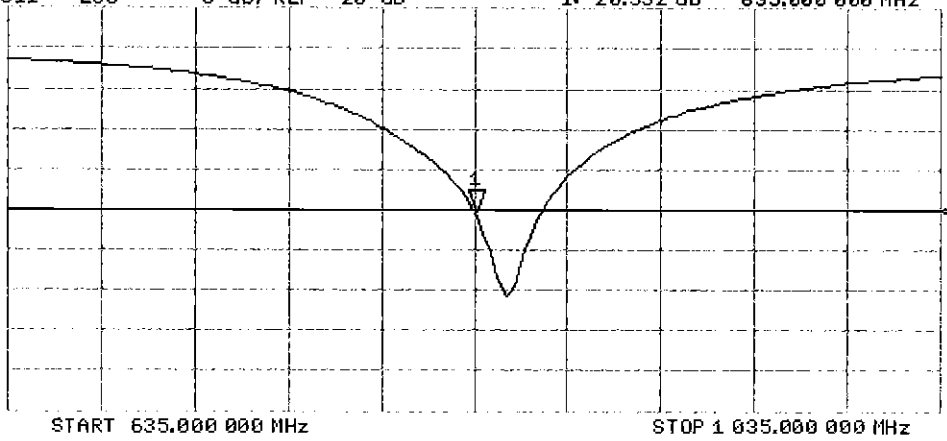

Certification of Calibration

Object D835V2 – SN: 4d047

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 13, 2017

Description: SAR Validation Dipole at 835 MHz.

Calibration Equipment used:

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|-----------|---|------------|--------------|------------|---------------|
| Control Company | 4040 | Therm./Clock/Humidity Monitor | 3/31/2017 | Biennial | 3/31/2019 | 170232394 |
| Control Company | 4352 | Ultra Long Stem Thermometer | 5/2/2017 | Biennial | 5/2/2019 | 170330156 |
| Amplifier Research | 1551G6 | Amplifier | CBT | N/A | CBT | 433971 |
| Narda | 4772-3 | Attenuator (3dB) | CBT | N/A | CBT | 9406 |
| Keysight Technologies | 85033E | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017 | Annual | 6/1/2018 | MY53401181 |
| Agilent | 8753ES | S-Parameter Network Analyzer | 10/26/2016 | Annual | 10/26/2017 | US39170118 |
| Mini-Circuits | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator | CBT | N/A | CBT | N/A |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 3/8/2017 | Annual | 3/8/2018 | 1368 |
| SPEAG | DAE4 | Dasy Data Acquisition Electronics | 3/13/2017 | Annual | 3/13/2018 | 1415 |
| SPEAG | DAK-3.5 | Dielectric Assessment Kit | 5/10/2017 | Annual | 5/10/2018 | 1070 |
| SPEAG | ES3DV3 | SAR Probe | 3/14/2017 | Annual | 3/14/2018 | 3209 |
| SPEAG | ES3DV3 | SAR Probe | 3/14/2017 | Annual | 3/14/2018 | 3319 |
| Anritsu | MA2411B | Pulse Power Sensor | 2/10/2017 | Annual | 2/10/2018 | 1207364 |
| Anritsu | MA2411B | Pulse Power Sensor | 2/10/2017 | Annual | 2/10/2018 | 1339018 |
| Anritsu | ML2495A | Power Meter | 10/16/2015 | Biennial | 10/16/2017 | 941001 |
| Agilent | N5182A | MXG Vector Signal Generator | 2/28/2017 | Annual | 2/28/2018 | MY47420800 |
| Seekonk | NC-100 | Torque Wrench | 11/6/2015 | Biennial | 11/6/2017 | N/A |
| Mini-Circuits | NLP-2950+ | Low Pass Filter DC to 2700 MHz | CBT | N/A | CBT | N/A |
| Pasternack | PE2208-6 | Bidirectional Coupler | CBT | N/A | CBT | N/A |

Measurement Uncertainty = $\pm 23\%$ (k=2)

| | Name | Function | Signature |
|----------------|------------------|--------------------------|--------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer | <i>BRODIE HALBFOSTER</i> |
| Approved By: | Kaitlin O'Keefe | Senior Technical Manager | <i>KOK</i> |

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 23.0 dBm | Measured Head SAR (1g) W/kg @ 23.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 23.0 dBm | Measured Head SAR (10g) W/kg @ 23.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--|--|------------------|---|---|-------------------|---------------------------------------|------------------------------------|-----------------------|--|---|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 7/13/2016 | 7/13/2017 | 0 | 1.83 | 1.95 | 6.79% | 1.19 | 1.28 | 7.56% | 49.8 | 50.8 | 1 | -5.0 | -2.3 | 3.6 | -24.5 | -25.2 | -15.10% | PASS |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 23.0 dBm | Measured Body SAR (1g) W/kg @ 23.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 23.0 dBm | Measured Body SAR (10g) W/kg @ 23.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 7/13/2016 | 7/13/2017 | 0 | 1.91 | 1.99 | 3.97% | 1.25 | 1.31 | 4.97% | 45.8 | 46.3 | 0.5 | -8.2 | -6.7 | 1.5 | -20.3 | -22.5 | -10.80% | PASS |

Impedance & Return-Loss Measurement Plot for Head TSL

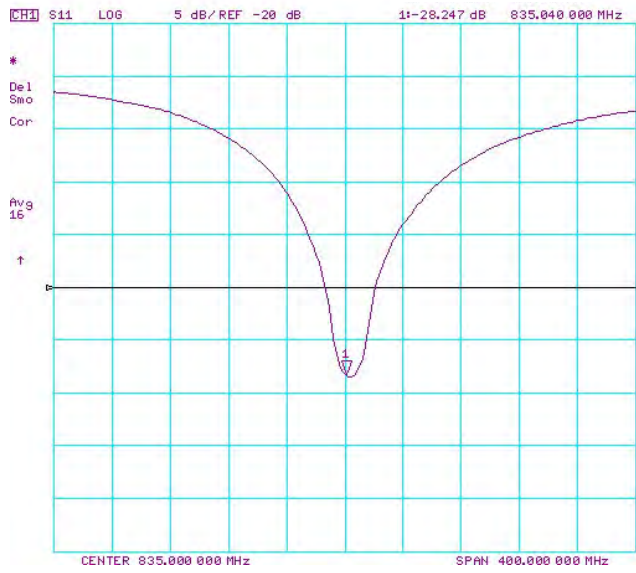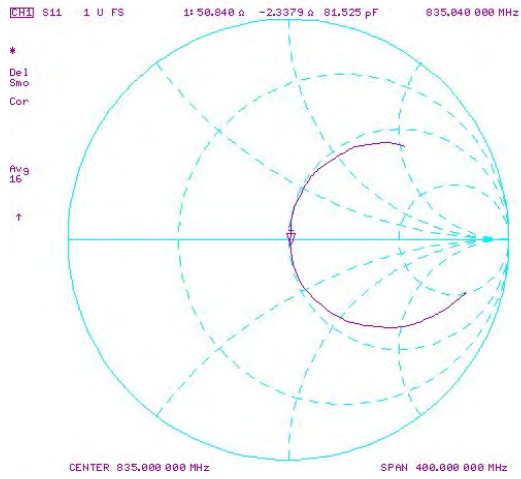

Impedance & Return-Loss Measurement Plot for Body TSL

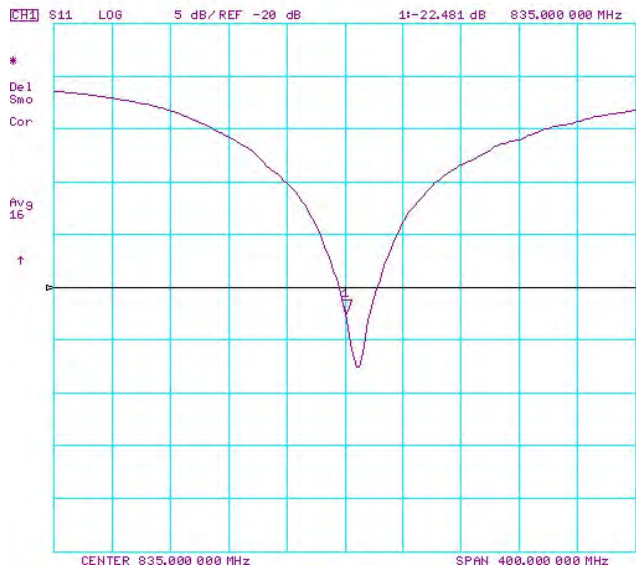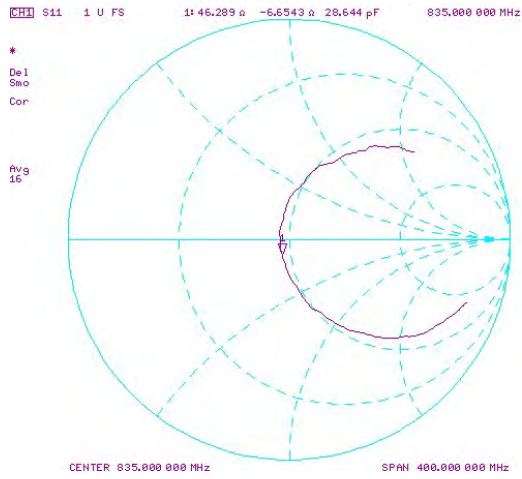



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7406_Apr17**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:7406**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-12.v9, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **April 18, 2017**

BNW
5-3-2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02525) | Apr-18 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-16 (No. ES3-3013_Dec16) | Dec-17 |
| DAE4 | SN: 660 | 7-Dec-16 (No. DAE4-660_Dec16) | Dec-17 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | | | |
|----------------|------------------------------|--|---------------|
| Calibrated by: | Name Michael Weber | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | |

Issued: April 18, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:7406

Manufactured: November 24, 2015
Calibrated: April 18, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7406

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.47 | 0.42 | 0.45 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 99.5 | 98.3 | 95.1 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 138.9 | $\pm 2.5 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 129.6 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 128.2 | |

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

| | C1 fF | C2 fF | α V ⁻¹ | T1 ms.V ⁻² | T2 ms.V ⁻¹ | T3 ms | T4 V ⁻² | T5 V ⁻¹ | T6 |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|-------|
| X | 48.83 | 366.9 | 36.13 | 15.06 | 1.101 | 4.968 | 0.251 | 0.437 | 1.003 |
| Y | 19.57 | 145.7 | 35.6 | 3.888 | 0.704 | 4.934 | 0 | 0.021 | 1.004 |
| Z | 45.42 | 343.9 | 36.58 | 10.69 | 0.846 | 4.98 | 0 | 0.36 | 1.004 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7406

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 600 | 42.7 | 0.88 | 10.42 | 10.42 | 10.42 | 0.10 | 1.20 | ± 13.3 % |
| 750 | 41.9 | 0.89 | 10.26 | 10.26 | 10.26 | 0.52 | 0.80 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.97 | 9.97 | 9.97 | 0.53 | 0.81 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.88 | 8.88 | 8.88 | 0.42 | 0.80 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.40 | 8.40 | 8.40 | 0.26 | 0.87 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 8.04 | 8.04 | 8.04 | 0.25 | 0.80 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.68 | 7.68 | 7.68 | 0.38 | 0.80 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.44 | 7.44 | 7.44 | 0.40 | 0.83 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7406

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 600 | 56.1 | 0.95 | 10.82 | 10.82 | 10.82 | 0.10 | 1.20 | ± 13.3 % |
| 750 | 55.5 | 0.96 | 9.90 | 9.90 | 9.90 | 0.51 | 0.83 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.77 | 9.77 | 9.77 | 0.46 | 0.80 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 8.08 | 8.08 | 8.08 | 0.41 | 0.85 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.81 | 7.81 | 7.81 | 0.44 | 0.80 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.65 | 7.65 | 7.65 | 0.38 | 0.84 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.60 | 7.60 | 7.60 | 0.33 | 0.89 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 7.31 | 7.31 | 7.31 | 0.31 | 0.94 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

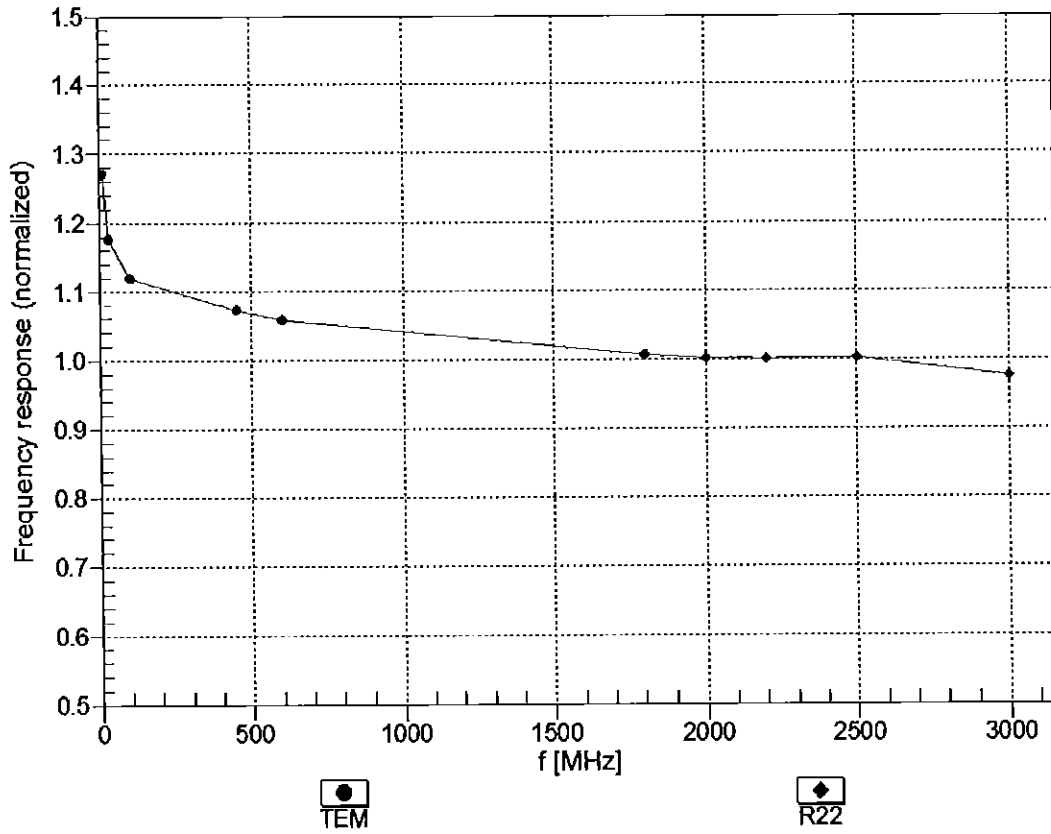



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz, TEM


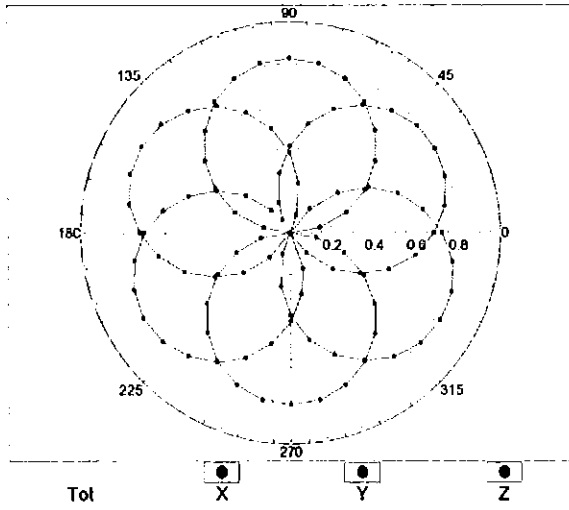


f=1800 MHz, R22

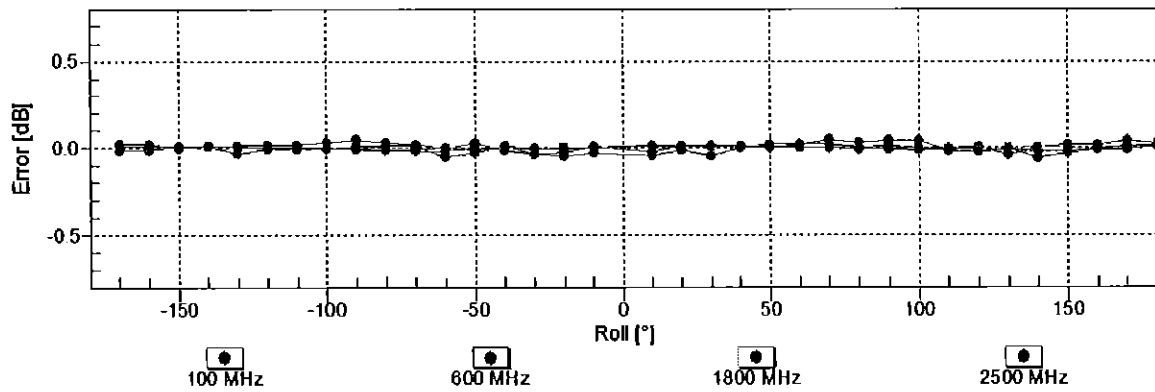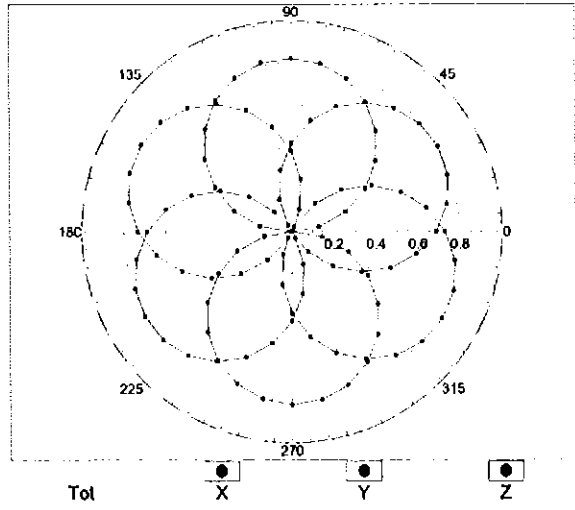


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

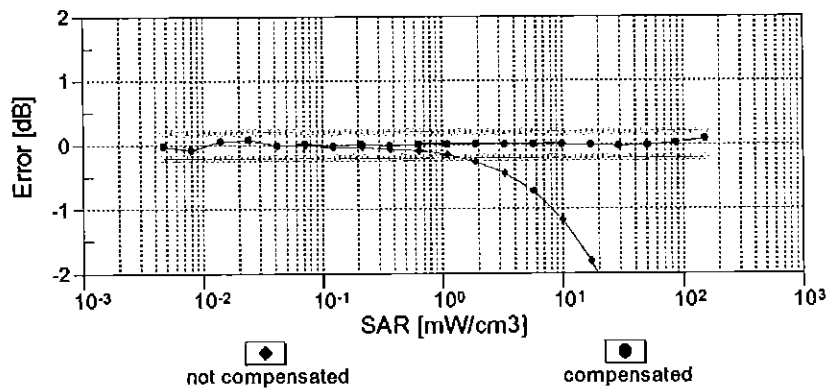
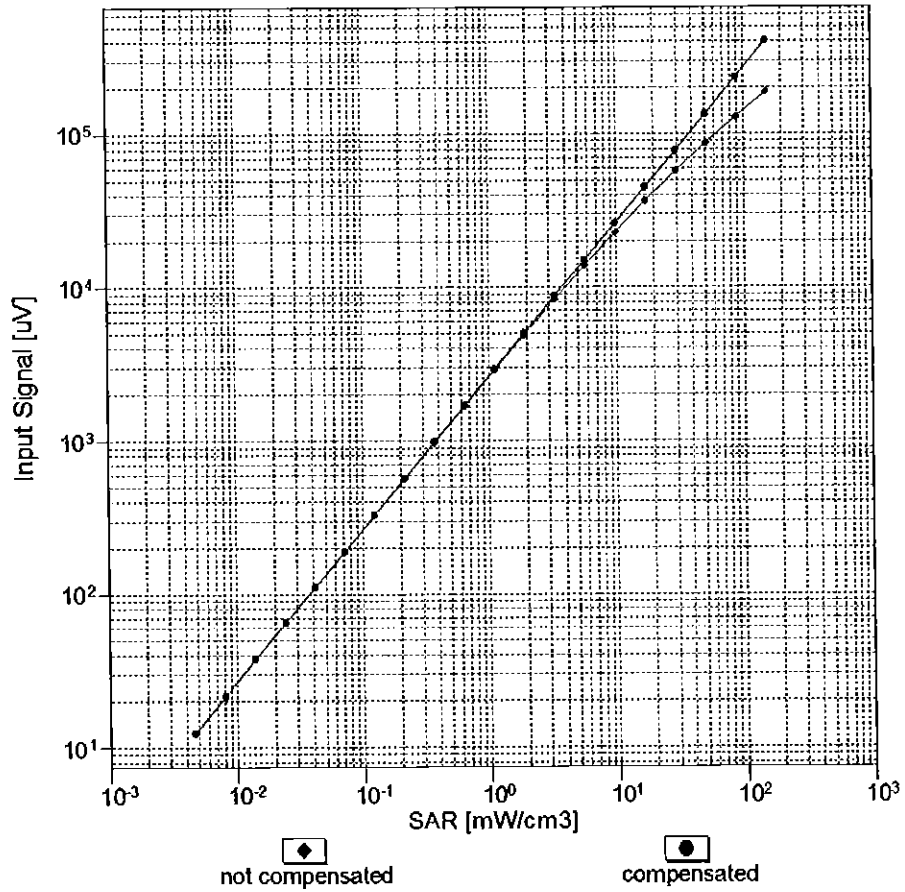


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

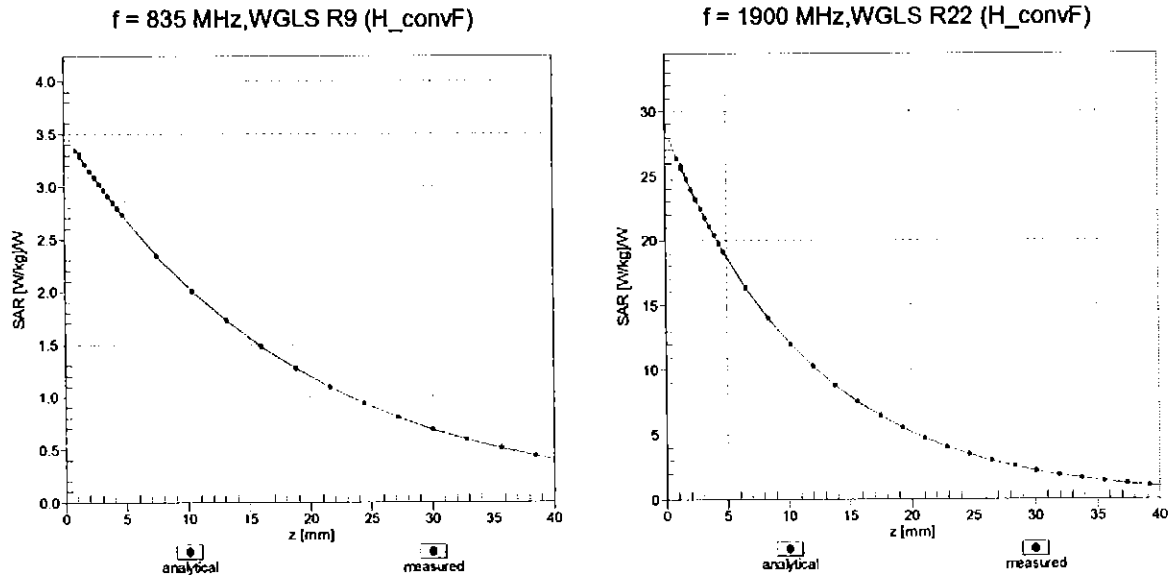

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

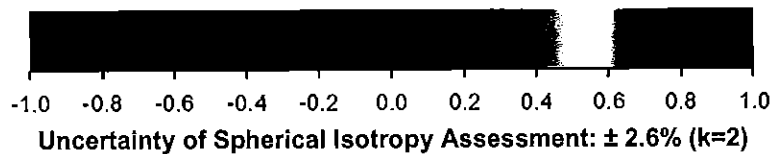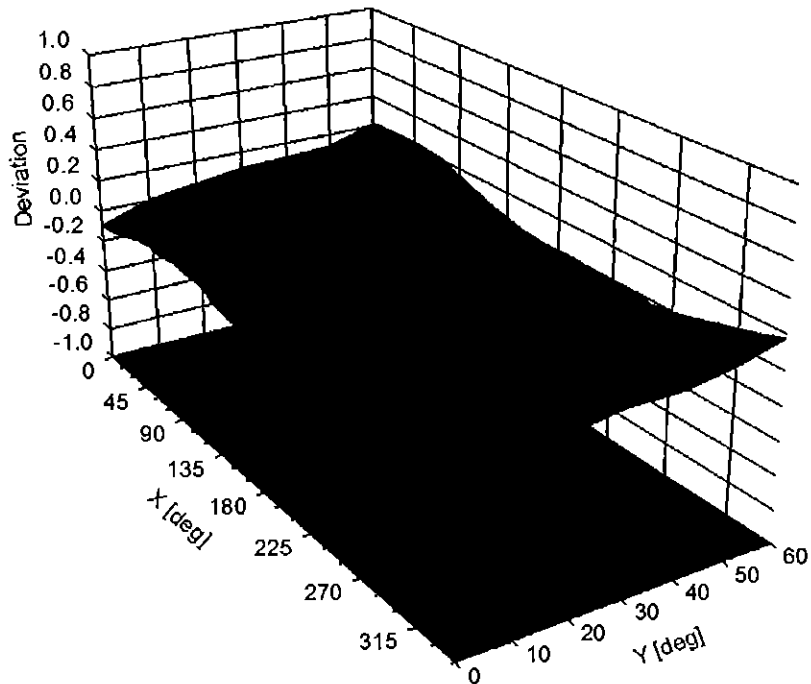

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7406

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 0 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu V}$ | C | D dB | VR mV | Max Unc ^E (k=2) |
|---------------|---|---|---------|------------------------|-------|---------|----------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 138.9 | $\pm 2.5\%$ |
| | | Y | 0.00 | 0.00 | 1.00 | | 129.6 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 128.2 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.73 | 66.22 | 10.89 | 10.00 | 20.0 | $\pm 9.6\%$ |
| | | Y | 2.50 | 65.91 | 10.39 | | 20.0 | |
| | | Z | 2.53 | 65.90 | 10.54 | | 20.0 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 1.16 | 69.53 | 16.71 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.55 | 76.79 | 19.47 | | 150.0 | |
| | | Z | 1.09 | 68.24 | 15.96 | | 150.0 | |
| 10012- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.21 | 64.38 | 15.70 | 0.41 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.20 | 65.37 | 16.13 | | 150.0 | |
| | | Z | 1.18 | 63.82 | 15.33 | | 150.0 | |
| 10013- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.87 | 66.56 | 16.98 | 1.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.34 | 67.27 | 16.96 | | 150.0 | |
| | | Z | 4.83 | 66.50 | 16.95 | | 150.0 | |
| 10021- DAC | GSM-FDD (TDMA, GMSK) | X | 9.99 | 82.36 | 18.50 | 9.39 | 50.0 | $\pm 9.6\%$ |
| | | Y | 13.63 | 85.86 | 18.88 | | 50.0 | |
| | | Z | 18.22 | 90.00 | 20.60 | | 50.0 | |
| 10023- DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 8.49 | 80.16 | 17.78 | 9.57 | 50.0 | $\pm 9.6\%$ |
| | | Y | 7.32 | 78.16 | 16.31 | | 50.0 | |
| | | Z | 12.47 | 85.19 | 19.17 | | 50.0 | |
| 10024- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 18.19 | 89.55 | 19.31 | 6.56 | 60.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 107.67 | 23.01 | | 60.0 | |
| | | Z | 100.00 | 108.36 | 23.76 | | 60.0 | |
| 10025- DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 5.54 | 75.78 | 27.74 | 12.57 | 50.0 | $\pm 9.6\%$ |
| | | Y | 8.76 | 92.32 | 36.08 | | 50.0 | |
| | | Z | 4.44 | 70.37 | 25.26 | | 50.0 | |
| 10026- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 9.90 | 90.96 | 31.21 | 9.56 | 60.0 | $\pm 9.6\%$ |
| | | Y | 5.70 | 81.99 | 28.84 | | 60.0 | |
| | | Z | 7.85 | 86.95 | 30.11 | | 60.0 | |
| 10027- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 100.00 | 106.69 | 22.59 | 4.80 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 110.45 | 23.34 | | 80.0 | |
| | | Z | 100.00 | 108.23 | 22.93 | | 80.0 | |
| 10028- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 107.01 | 22.11 | 3.55 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 117.41 | 25.54 | | 100.0 | |
| | | Z | 100.00 | 109.42 | 22.79 | | 100.0 | |
| 10029- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 6.41 | 81.80 | 26.70 | 7.80 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.86 | 73.74 | 24.21 | | 80.0 | |
| | | Z | 5.17 | 78.18 | 25.56 | | 80.0 | |
| 10030- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 13.75 | 86.21 | 17.68 | 5.30 | 70.0 | $\pm 9.6\%$ |
| | | Y | 8.41 | 82.76 | 15.88 | | 70.0 | |
| | | Z | 100.00 | 106.60 | 22.49 | | 70.0 | |
| 10031- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 100.00 | 106.42 | 20.68 | 1.88 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 120.98 | 25.51 | | 100.0 | |
| | | Z | 100.00 | 108.89 | 21.35 | | 100.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 100.00 | 113.18 | 22.62 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 160.14 | 39.75 | | 100.0 | |
| | | Z | 100.00 | 117.70 | 24.05 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | X | 6.02 | 81.27 | 20.17 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 2.18 | 67.67 | 12.00 | | 70.0 | |
| | | Z | 5.24 | 80.63 | 20.08 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | X | 2.82 | 75.11 | 17.10 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 0.75 | 61.82 | 7.32 | | 100.0 | |
| | | Z | 2.29 | 73.13 | 16.28 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | X | 2.17 | 73.18 | 16.32 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 0.59 | 61.24 | 6.75 | | 100.0 | |
| | | Z | 1.79 | 71.19 | 15.39 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 7.12 | 83.90 | 21.15 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 2.26 | 68.25 | 12.32 | | 70.0 | |
| | | Z | 6.24 | 83.43 | 21.13 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 2.66 | 74.41 | 16.79 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 0.71 | 61.41 | 7.10 | | 100.0 | |
| | | Z | 2.15 | 72.41 | 15.96 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 2.20 | 73.62 | 16.61 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 0.60 | 61.36 | 6.93 | | 100.0 | |
| | | Z | 1.80 | 71.51 | 15.64 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 2.76 | 78.09 | 18.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.37 | 60.00 | 5.64 | | 150.0 | |
| | | Z | 2.22 | 74.97 | 16.93 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 7.43 | 78.80 | 16.12 | 7.78 | 50.0 | ± 9.6 % |
| | | Y | 8.26 | 80.71 | 16.15 | | 50.0 | |
| | | Z | 12.01 | 84.59 | 17.75 | | 50.0 | |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | X | 0.00 | 100.49 | 0.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.04 | 60.00 | 50.13 | | 150.0 | |
| | | Z | 0.00 | 96.59 | 0.05 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 6.27 | 73.35 | 16.78 | 13.80 | 25.0 | ± 9.6 % |
| | | Y | 5.47 | 69.78 | 14.42 | | 25.0 | |
| | | Z | 7.09 | 74.59 | 16.89 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 6.62 | 76.07 | 16.59 | 10.79 | 40.0 | ± 9.6 % |
| | | Y | 5.50 | 73.13 | 14.63 | | 40.0 | |
| | | Z | 7.47 | 77.74 | 16.92 | | 40.0 | |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 8.73 | 81.97 | 20.70 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 5.30 | 74.02 | 15.71 | | 50.0 | |
| | | Z | 9.70 | 84.35 | 21.49 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 4.93 | 77.02 | 24.10 | 6.55 | 100.0 | ± 9.6 % |
| | | Y | 3.18 | 70.36 | 21.96 | | 100.0 | |
| | | Z | 4.10 | 73.99 | 23.08 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.26 | 65.49 | 16.19 | 0.61 | 110.0 | ± 9.6 % |
| | | Y | 1.20 | 65.95 | 16.36 | | 110.0 | |
| | | Z | 1.20 | 64.67 | 15.74 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 13.21 | 104.87 | 27.26 | 1.30 | 110.0 | ± 9.6 % |
| | | Y | 4.90 | 96.93 | 26.57 | | 110.0 | |
| | | Z | 4.52 | 91.43 | 23.95 | | 110.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 2.92 | 78.86 | 20.97 | 2.04 | 110.0 | ± 9.6 % |
| | | Y | 1.70 | 73.25 | 19.05 | | 110.0 | |
| | | Z | 2.19 | 75.27 | 19.88 | | 110.0 | |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 4.70 | 66.68 | 16.55 | 0.49 | 100.0 | ± 9.6 % |
| | | Y | 4.18 | 67.42 | 16.56 | | 100.0 | |
| | | Z | 4.65 | 66.61 | 16.51 | | 100.0 | |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 4.70 | 66.73 | 16.62 | 0.72 | 100.0 | ± 9.6 % |
| | | Y | 4.18 | 67.49 | 16.63 | | 100.0 | |
| | | Z | 4.66 | 66.66 | 16.57 | | 100.0 | |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 4.99 | 66.98 | 16.82 | 0.86 | 100.0 | ± 9.6 % |
| | | Y | 4.36 | 67.60 | 16.75 | | 100.0 | |
| | | Z | 4.94 | 66.90 | 16.78 | | 100.0 | |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 4.85 | 66.84 | 16.87 | 1.21 | 100.0 | ± 9.6 % |
| | | Y | 4.23 | 67.25 | 16.71 | | 100.0 | |
| | | Z | 4.80 | 66.75 | 16.83 | | 100.0 | |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 4.86 | 66.83 | 16.99 | 1.46 | 100.0 | ± 9.6 % |
| | | Y | 4.21 | 67.08 | 16.71 | | 100.0 | |
| | | Z | 4.80 | 66.72 | 16.95 | | 100.0 | |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 5.14 | 66.93 | 17.36 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 4.40 | 67.10 | 16.99 | | 100.0 | |
| | | Z | 5.08 | 66.86 | 17.34 | | 100.0 | |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 5.19 | 66.98 | 17.55 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 4.52 | 67.37 | 17.35 | | 100.0 | |
| | | Z | 5.12 | 66.84 | 17.50 | | 100.0 | |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 5.27 | 66.95 | 17.72 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 4.52 | 67.17 | 17.38 | | 100.0 | |
| | | Z | 5.20 | 66.85 | 17.69 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 4.96 | 66.60 | 17.22 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 4.44 | 67.29 | 17.20 | | 100.0 | |
| | | Z | 4.91 | 66.53 | 17.19 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 4.94 | 66.90 | 17.40 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 4.35 | 67.27 | 17.25 | | 100.0 | |
| | | Z | 4.87 | 66.79 | 17.36 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 4.99 | 67.03 | 17.67 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 4.41 | 67.49 | 17.58 | | 100.0 | |
| | | Z | 4.92 | 66.90 | 17.63 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 4.97 | 66.91 | 17.78 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 4.49 | 67.70 | 17.84 | | 100.0 | |
| | | Z | 4.90 | 66.77 | 17.74 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.02 | 67.05 | 18.08 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 4.55 | 67.83 | 18.12 | | 90.0 | |
| | | Z | 4.94 | 66.85 | 18.01 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.03 | 66.84 | 18.17 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 4.61 | 67.72 | 18.28 | | 90.0 | |
| | | Z | 4.95 | 66.65 | 18.12 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.06 | 66.90 | 18.26 | 4.30 | 90.0 | ± 9.6 % |
| | | Y | 4.65 | 67.85 | 18.42 | | 90.0 | |
| | | Z | 4.98 | 66.71 | 18.21 | | 90.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 1.05 | 69.26 | 14.55 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.28 | 60.00 | 5.33 | | 150.0 | |
| | | Z | 0.92 | 67.44 | 13.36 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 0.71 | 58.22 | 3.69 | 4.77 | 80.0 | ± 9.6 % |
| | | Y | 0.41 | 56.78 | 1.87 | | 80.0 | |
| | | Z | 0.54 | 57.53 | 2.88 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 17.35 | 89.03 | 19.19 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 107.61 | 23.00 | | 60.0 | |
| | | Z | 100.00 | 108.37 | 23.77 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 1.96 | 68.94 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.57 | 76.20 | 18.23 | | 150.0 | |
| | | Z | 1.90 | 68.41 | 16.17 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.92 | 68.91 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.54 | 76.26 | 18.30 | | 150.0 | |
| | | Z | 1.86 | 68.36 | 16.14 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 9.94 | 91.01 | 31.21 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 5.73 | 82.09 | 28.86 | | 60.0 | |
| | | Z | 7.90 | 87.03 | 30.13 | | 60.0 | |
| 10100-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 3.32 | 71.40 | 17.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.95 | 71.83 | 18.07 | | 150.0 | |
| | | Z | 3.20 | 70.72 | 17.06 | | 150.0 | |
| 10101-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.33 | 67.99 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.00 | 68.42 | 16.63 | | 150.0 | |
| | | Z | 3.27 | 67.68 | 16.15 | | 150.0 | |
| 10102-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.43 | 67.94 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.10 | 68.46 | 16.71 | | 150.0 | |
| | | Z | 3.37 | 67.66 | 16.24 | | 150.0 | |
| 10103-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.02 | 73.90 | 19.30 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.68 | 73.18 | 19.41 | | 65.0 | |
| | | Z | 5.62 | 73.49 | 19.33 | | 65.0 | |
| 10104-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 6.42 | 73.34 | 19.91 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.72 | 70.79 | 18.81 | | 65.0 | |
| | | Z | 5.88 | 72.35 | 19.63 | | 65.0 | |
| 10105-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 6.34 | 73.01 | 20.09 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.65 | 70.25 | 18.83 | | 65.0 | |
| | | Z | 5.51 | 70.92 | 19.28 | | 65.0 | |
| 10108-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 2.90 | 70.63 | 17.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.58 | 72.09 | 18.15 | | 150.0 | |
| | | Z | 2.79 | 69.99 | 16.90 | | 150.0 | |
| 10109-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 2.99 | 67.94 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.69 | 69.27 | 16.60 | | 150.0 | |
| | | Z | 2.93 | 67.61 | 16.08 | | 150.0 | |
| 10110-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.37 | 69.82 | 16.91 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.17 | 72.66 | 17.66 | | 150.0 | |
| | | Z | 2.27 | 69.17 | 16.53 | | 150.0 | |
| 10111-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.75 | 69.14 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.72 | 72.65 | 17.00 | | 150.0 | |
| | | Z | 2.68 | 68.77 | 16.52 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10112-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 3.11 | 67.90 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.81 | 69.41 | 16.67 | | 150.0 | |
| | | Z | 3.05 | 67.61 | 16.14 | | 150.0 | |
| 10113-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 2.91 | 69.24 | 16.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 72.45 | 16.91 | | 150.0 | |
| | | Z | 2.83 | 68.91 | 16.64 | | 150.0 | |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 5.18 | 67.36 | 16.63 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 67.54 | 16.80 | | 150.0 | |
| | | Z | 5.15 | 67.30 | 16.59 | | 150.0 | |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.48 | 67.50 | 16.70 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 67.76 | 16.85 | | 150.0 | |
| | | Z | 5.42 | 67.37 | 16.64 | | 150.0 | |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.28 | 67.57 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.76 | 67.79 | 16.84 | | 150.0 | |
| | | Z | 5.24 | 67.47 | 16.61 | | 150.0 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 5.14 | 67.22 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.68 | 67.44 | 16.77 | | 150.0 | |
| | | Z | 5.11 | 67.13 | 16.53 | | 150.0 | |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.56 | 67.71 | 16.81 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.92 | 67.65 | 16.80 | | 150.0 | |
| | | Z | 5.51 | 67.59 | 16.75 | | 150.0 | |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 5.26 | 67.51 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 67.71 | 16.81 | | 150.0 | |
| | | Z | 5.23 | 67.43 | 16.60 | | 150.0 | |
| 10140-CAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.47 | 67.94 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.08 | 68.53 | 16.60 | | 150.0 | |
| | | Z | 3.41 | 67.65 | 16.15 | | 150.0 | |
| 10141-CAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.59 | 68.02 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.23 | 68.87 | 16.85 | | 150.0 | |
| | | Z | 3.53 | 67.77 | 16.33 | | 150.0 | |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 2.17 | 70.14 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.93 | 72.39 | 15.85 | | 150.0 | |
| | | Z | 2.06 | 69.38 | 16.26 | | 150.0 | |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.69 | 70.39 | 16.77 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.77 | 67.88 | 12.65 | | 150.0 | |
| | | Z | 2.58 | 69.83 | 16.31 | | 150.0 | |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 2.37 | 67.50 | 14.86 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.24 | 63.02 | 9.52 | | 150.0 | |
| | | Z | 2.27 | 66.99 | 14.42 | | 150.0 | |
| 10145-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 1.43 | 67.32 | 13.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.41 | 60.00 | 4.04 | | 150.0 | |
| | | Z | 1.25 | 65.61 | 11.99 | | 150.0 | |
| 10146-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 1.83 | 65.71 | 11.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 19.01 | 355.37 | 40.53 | | 150.0 | |
| | | Z | 1.52 | 64.01 | 10.27 | | 150.0 | |
| 10147-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 2.14 | 67.65 | 12.55 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 123.11 | 63.95 | 2.67 | | 150.0 | |
| | | Z | 1.70 | 65.34 | 11.08 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10149-CAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 3.00 | 68.01 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.71 | 69.38 | 16.67 | | 150.0 | |
| | | Z | 2.94 | 67.68 | 16.14 | | 150.0 | |
| 10150-CAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 3.12 | 67.96 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.83 | 69.51 | 16.73 | | 150.0 | |
| | | Z | 3.06 | 67.68 | 16.19 | | 150.0 | |
| 10151-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.55 | 76.73 | 20.51 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.65 | 75.11 | 19.92 | | 65.0 | |
| | | Z | 5.91 | 75.87 | 20.37 | | 65.0 | |
| 10152-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 5.92 | 73.14 | 19.51 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.14 | 70.22 | 17.64 | | 65.0 | |
| | | Z | 5.38 | 72.11 | 19.20 | | 65.0 | |
| 10153-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 6.32 | 74.15 | 20.32 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.49 | 71.52 | 18.62 | | 65.0 | |
| | | Z | 5.75 | 73.14 | 20.03 | | 65.0 | |
| 10154-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.44 | 70.37 | 17.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.24 | 73.24 | 17.96 | | 150.0 | |
| | | Z | 2.32 | 69.67 | 16.83 | | 150.0 | |
| 10155-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.75 | 69.15 | 16.81 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.75 | 72.83 | 17.10 | | 150.0 | |
| | | Z | 2.68 | 68.79 | 16.53 | | 150.0 | |
| 10156-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 2.05 | 70.60 | 16.74 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.46 | 69.42 | 13.50 | | 150.0 | |
| | | Z | 1.92 | 69.63 | 16.11 | | 150.0 | |
| 10157-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 2.25 | 68.47 | 15.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.93 | 61.53 | 7.91 | | 150.0 | |
| | | Z | 2.13 | 67.76 | 14.53 | | 150.0 | |
| 10158-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 2.91 | 69.31 | 16.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.84 | 72.68 | 17.03 | | 150.0 | |
| | | Z | 2.84 | 68.99 | 16.70 | | 150.0 | |
| 10159-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 2.39 | 69.07 | 15.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.94 | 61.44 | 7.84 | | 150.0 | |
| | | Z | 2.25 | 68.30 | 14.85 | | 150.0 | |
| 10160-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 2.87 | 69.48 | 16.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.53 | 71.06 | 17.44 | | 150.0 | |
| | | Z | 2.80 | 69.08 | 16.66 | | 150.0 | |
| 10161-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 3.02 | 67.94 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.72 | 69.68 | 16.46 | | 150.0 | |
| | | Z | 2.96 | 67.65 | 16.13 | | 150.0 | |
| 10162-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 3.13 | 68.07 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.84 | 70.03 | 16.63 | | 150.0 | |
| | | Z | 3.07 | 67.81 | 16.24 | | 150.0 | |
| 10166-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 3.48 | 69.00 | 18.84 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.37 | 66.02 | 18.17 | | 150.0 | |
| | | Z | 3.30 | 68.39 | 18.62 | | 150.0 | |
| 10167-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 4.17 | 71.58 | 19.19 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.29 | 67.15 | 18.12 | | 150.0 | |
| | | Z | 3.79 | 70.56 | 18.83 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10168-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 4.66 | 74.00 | 20.63 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.48 | 69.25 | 19.67 | | 150.0 | |
| | | Z | 4.22 | 72.96 | 20.30 | | 150.0 | |
| 10169-CAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 2.83 | 68.21 | 18.52 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.98 | 64.24 | 17.28 | | 150.0 | |
| | | Z | 2.57 | 66.84 | 17.97 | | 150.0 | |
| 10170-CAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 3.78 | 73.87 | 20.84 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.95 | 66.56 | 18.68 | | 150.0 | |
| | | Z | 3.16 | 71.49 | 20.02 | | 150.0 | |
| 10171-AAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 3.08 | 69.63 | 17.94 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.72 | 64.21 | 16.34 | | 150.0 | |
| | | Z | 2.64 | 67.80 | 17.26 | | 150.0 | |
| 10172-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 5.42 | 80.62 | 23.60 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.15 | 69.85 | 20.42 | | 65.0 | |
| | | Z | 4.45 | 78.76 | 23.36 | | 65.0 | |
| 10173-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 8.97 | 86.28 | 23.79 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.26 | 72.00 | 19.72 | | 65.0 | |
| | | Z | 6.61 | 83.59 | 23.38 | | 65.0 | |
| 10174-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 7.82 | 83.09 | 22.18 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 1.97 | 69.58 | 18.06 | | 65.0 | |
| | | Z | 5.22 | 78.89 | 21.15 | | 65.0 | |
| 10175-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 2.79 | 67.90 | 18.26 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.97 | 64.07 | 17.08 | | 150.0 | |
| | | Z | 2.54 | 66.56 | 17.72 | | 150.0 | |
| 10176-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 3.78 | 73.89 | 20.85 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.95 | 66.57 | 18.69 | | 150.0 | |
| | | Z | 3.16 | 71.52 | 20.03 | | 150.0 | |
| 10177-CAF | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 2.82 | 68.06 | 18.36 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.98 | 64.12 | 17.12 | | 150.0 | |
| | | Z | 2.56 | 66.70 | 17.81 | | 150.0 | |
| 10178-CAD | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 3.74 | 73.65 | 20.71 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.95 | 66.53 | 18.65 | | 150.0 | |
| | | Z | 3.13 | 71.32 | 19.91 | | 150.0 | |
| 10179-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 3.39 | 71.59 | 19.23 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.82 | 65.39 | 17.45 | | 150.0 | |
| | | Z | 2.87 | 69.52 | 18.50 | | 150.0 | |
| 10180-CAD | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 3.08 | 69.55 | 17.88 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.72 | 64.21 | 16.33 | | 150.0 | |
| | | Z | 2.64 | 67.75 | 17.21 | | 150.0 | |
| 10181-CAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 2.81 | 68.04 | 18.35 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.97 | 64.11 | 17.12 | | 150.0 | |
| | | Z | 2.56 | 66.68 | 17.80 | | 150.0 | |
| 10182-CAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 3.73 | 73.62 | 20.70 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.95 | 66.51 | 18.64 | | 150.0 | |
| | | Z | 3.13 | 71.29 | 19.90 | | 150.0 | |
| 10183-AAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 3.07 | 69.53 | 17.87 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.72 | 64.19 | 16.32 | | 150.0 | |
| | | Z | 2.64 | 67.72 | 17.20 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 2.82 | 68.08 | 18.37 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.98 | 64.13 | 17.13 | | 150.0 | |
| | | Z | 2.56 | 66.72 | 17.83 | | 150.0 | |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 3.75 | 73.70 | 20.74 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.96 | 66.56 | 18.67 | | 150.0 | |
| | | Z | 3.14 | 71.36 | 19.94 | | 150.0 | |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 3.09 | 69.60 | 17.91 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.73 | 64.23 | 16.35 | | 150.0 | |
| | | Z | 2.65 | 67.78 | 17.23 | | 150.0 | |
| 10187-CAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 2.83 | 68.13 | 18.43 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.99 | 64.22 | 17.23 | | 150.0 | |
| | | Z | 2.57 | 66.77 | 17.89 | | 150.0 | |
| 10188-CAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 3.88 | 74.41 | 21.15 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.98 | 66.86 | 18.93 | | 150.0 | |
| | | Z | 3.23 | 71.97 | 20.32 | | 150.0 | |
| 10189-AAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 3.15 | 70.02 | 18.19 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 1.74 | 64.44 | 16.55 | | 150.0 | |
| | | Z | 2.70 | 68.15 | 17.50 | | 150.0 | |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.57 | 66.79 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.14 | 67.99 | 16.59 | | 150.0 | |
| | | Z | 4.54 | 66.72 | 16.28 | | 150.0 | |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.75 | 67.11 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.22 | 68.00 | 16.68 | | 150.0 | |
| | | Z | 4.70 | 67.02 | 16.41 | | 150.0 | |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.79 | 67.14 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 67.92 | 16.65 | | 150.0 | |
| | | Z | 4.74 | 67.05 | 16.43 | | 150.0 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.58 | 66.86 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 67.92 | 16.54 | | 150.0 | |
| | | Z | 4.54 | 66.78 | 16.30 | | 150.0 | |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 4.76 | 67.13 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 68.00 | 16.69 | | 150.0 | |
| | | Z | 4.71 | 67.04 | 16.42 | | 150.0 | |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 4.79 | 67.15 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.22 | 67.91 | 16.64 | | 150.0 | |
| | | Z | 4.74 | 67.07 | 16.44 | | 150.0 | |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.53 | 66.88 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.08 | 68.06 | 16.58 | | 150.0 | |
| | | Z | 4.49 | 66.80 | 16.27 | | 150.0 | |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 4.76 | 67.10 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.22 | 67.96 | 16.67 | | 150.0 | |
| | | Z | 4.71 | 67.01 | 16.41 | | 150.0 | |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 4.80 | 67.08 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.25 | 67.92 | 16.65 | | 150.0 | |
| | | Z | 4.75 | 67.00 | 16.42 | | 150.0 | |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 5.12 | 67.23 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 67.48 | 16.77 | | 150.0 | |
| | | Z | 5.09 | 67.14 | 16.52 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.42 | 67.42 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 67.57 | 16.77 | | 150.0 | |
| | | Z | 5.40 | 67.40 | 16.67 | | 150.0 | |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.17 | 67.35 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 67.68 | 16.79 | | 150.0 | |
| | | Z | 5.13 | 67.25 | 16.51 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 2.87 | 66.58 | 15.73 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.38 | 67.09 | 13.98 | | 150.0 | |
| | | Z | 2.82 | 66.38 | 15.50 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 9.50 | 87.34 | 24.24 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.34 | 72.67 | 20.10 | | 65.0 | |
| | | Z | 6.98 | 84.60 | 23.83 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 8.72 | 84.77 | 22.80 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.21 | 71.55 | 18.95 | | 65.0 | |
| | | Z | 6.78 | 83.00 | 22.65 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 7.70 | 87.24 | 26.02 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.35 | 71.63 | 21.26 | | 65.0 | |
| | | Z | 5.43 | 82.72 | 24.92 | | 65.0 | |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 9.03 | 86.38 | 23.83 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.27 | 72.06 | 19.75 | | 65.0 | |
| | | Z | 6.67 | 83.69 | 23.42 | | 65.0 | |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 8.29 | 83.90 | 22.43 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.13 | 70.90 | 18.60 | | 65.0 | |
| | | Z | 6.44 | 82.12 | 22.26 | | 65.0 | |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 7.38 | 86.38 | 25.64 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.30 | 71.12 | 20.95 | | 65.0 | |
| | | Z | 5.24 | 81.97 | 24.56 | | 65.0 | |
| 10232-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 9.02 | 86.36 | 23.83 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.27 | 72.05 | 19.75 | | 65.0 | |
| | | Z | 6.65 | 83.67 | 23.41 | | 65.0 | |
| 10233-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 8.28 | 83.89 | 22.42 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.13 | 70.87 | 18.59 | | 65.0 | |
| | | Z | 6.43 | 82.09 | 22.25 | | 65.0 | |
| 10234-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 7.10 | 85.54 | 25.23 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.26 | 70.79 | 20.68 | | 65.0 | |
| | | Z | 5.08 | 81.30 | 24.19 | | 65.0 | |
| 10235-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 9.02 | 86.38 | 23.84 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.27 | 72.05 | 19.76 | | 65.0 | |
| | | Z | 6.65 | 83.69 | 23.42 | | 65.0 | |
| 10236-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 8.34 | 83.99 | 22.45 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.15 | 70.97 | 18.63 | | 65.0 | |
| | | Z | 6.48 | 82.21 | 22.28 | | 65.0 | |
| 10237-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 7.38 | 86.43 | 25.66 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.30 | 71.11 | 20.95 | | 65.0 | |
| | | Z | 5.24 | 82.00 | 24.57 | | 65.0 | |
| 10238-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 9.00 | 86.33 | 23.82 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.26 | 72.03 | 19.74 | | 65.0 | |
| | | Z | 6.63 | 83.64 | 23.40 | | 65.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|---------|
| 10239-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 8.25 | 83.86 | 22.41 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.13 | 70.85 | 18.59 | | 65.0 | |
| | | Z | 6.41 | 82.06 | 22.24 | | 65.0 | |
| 10240-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 7.36 | 86.38 | 25.64 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.30 | 71.11 | 20.95 | | 65.0 | |
| | | Z | 5.22 | 81.96 | 24.56 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 7.65 | 78.90 | 23.86 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 4.15 | 74.63 | 23.03 | | 65.0 | |
| | | Z | 6.65 | 77.23 | 23.41 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 7.40 | 78.25 | 23.51 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 3.84 | 73.21 | 22.33 | | 65.0 | |
| | | Z | 6.07 | 75.38 | 22.52 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 6.13 | 75.50 | 23.22 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 3.68 | 71.24 | 22.18 | | 65.0 | |
| | | Z | 5.17 | 72.72 | 22.17 | | 65.0 | |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 4.96 | 71.78 | 16.23 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.47 | 60.59 | 6.86 | | 65.0 | |
| | | Z | 4.27 | 70.57 | 15.63 | | 65.0 | |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 4.90 | 71.39 | 16.01 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.47 | 60.48 | 6.73 | | 65.0 | |
| | | Z | 4.22 | 70.14 | 15.39 | | 65.0 | |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 4.94 | 75.03 | 17.94 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.46 | 62.04 | 8.51 | | 65.0 | |
| | | Z | 4.23 | 73.72 | 17.40 | | 65.0 | |
| 10247-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 4.94 | 72.43 | 17.57 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.10 | 63.24 | 9.90 | | 65.0 | |
| | | Z | 4.38 | 71.34 | 17.07 | | 65.0 | |
| 10248-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 4.96 | 72.03 | 17.39 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.10 | 62.93 | 9.72 | | 65.0 | |
| | | Z | 4.40 | 70.92 | 16.87 | | 65.0 | |
| 10249-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 6.07 | 78.35 | 20.13 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.33 | 67.19 | 12.94 | | 65.0 | |
| | | Z | 5.28 | 77.21 | 19.80 | | 65.0 | |
| 10250-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 5.95 | 75.24 | 20.37 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.82 | 70.93 | 16.95 | | 65.0 | |
| | | Z | 5.33 | 74.14 | 20.02 | | 65.0 | |
| 10251-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 5.69 | 73.28 | 19.20 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.45 | 68.36 | 15.25 | | 65.0 | |
| | | Z | 5.13 | 72.25 | 18.83 | | 65.0 | |
| 10252-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.58 | 78.88 | 21.28 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.11 | 75.12 | 18.99 | | 65.0 | |
| | | Z | 5.80 | 77.80 | 21.07 | | 65.0 | |
| 10253-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 5.80 | 72.65 | 19.29 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.01 | 69.64 | 16.98 | | 65.0 | |
| | | Z | 5.29 | 71.67 | 18.98 | | 65.0 | |
| 10254-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 6.17 | 73.58 | 20.02 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.31 | 70.68 | 17.76 | | 65.0 | |
| | | Z | 5.63 | 72.60 | 19.71 | | 65.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|------|---------|
| 10255-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.29 | 76.23 | 20.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.41 | 74.27 | 19.43 | | 65.0 | |
| | | Z | 5.67 | 75.30 | 20.34 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 3.88 | 68.28 | 13.63 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.05 | 58.86 | 4.54 | | 65.0 | |
| | | Z | 3.28 | 66.95 | 12.85 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 3.85 | 67.85 | 13.35 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.05 | 58.75 | 4.36 | | 65.0 | |
| | | Z | 3.25 | 66.51 | 12.54 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 3.78 | 70.85 | 15.35 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.11 | 60.00 | 5.99 | | 65.0 | |
| | | Z | 3.18 | 69.35 | 14.58 | | 65.0 | |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 5.33 | 73.49 | 18.59 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.60 | 65.55 | 12.14 | | 65.0 | |
| | | Z | 4.76 | 72.43 | 18.16 | | 65.0 | |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 5.38 | 73.29 | 18.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.62 | 65.36 | 12.01 | | 65.0 | |
| | | Z | 4.80 | 72.23 | 18.08 | | 65.0 | |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 6.02 | 77.89 | 20.37 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 2.87 | 69.70 | 14.96 | | 65.0 | |
| | | Z | 5.26 | 76.76 | 20.06 | | 65.0 | |
| 10262-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 5.94 | 75.19 | 20.32 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.80 | 70.83 | 16.88 | | 65.0 | |
| | | Z | 5.32 | 74.09 | 19.98 | | 65.0 | |
| 10263-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 5.68 | 73.26 | 19.19 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.45 | 68.35 | 15.24 | | 65.0 | |
| | | Z | 5.12 | 72.23 | 18.82 | | 65.0 | |
| 10264-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 6.52 | 78.70 | 21.19 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.06 | 74.89 | 18.86 | | 65.0 | |
| | | Z | 5.75 | 77.62 | 20.97 | | 65.0 | |
| 10265-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 5.92 | 73.14 | 19.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.14 | 70.23 | 17.64 | | 65.0 | |
| | | Z | 5.38 | 72.12 | 19.20 | | 65.0 | |
| 10266-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 6.31 | 74.13 | 20.31 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.49 | 71.50 | 18.60 | | 65.0 | |
| | | Z | 5.75 | 73.12 | 20.02 | | 65.0 | |
| 10267-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.54 | 76.70 | 20.49 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.64 | 75.05 | 19.89 | | 65.0 | |
| | | Z | 5.90 | 75.83 | 20.35 | | 65.0 | |
| 10268-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 6.58 | 73.24 | 19.99 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.89 | 71.06 | 18.92 | | 65.0 | |
| | | Z | 6.05 | 72.29 | 19.72 | | 65.0 | |
| 10269-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 6.56 | 72.88 | 19.90 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.96 | 70.94 | 18.86 | | 65.0 | |
| | | Z | 6.05 | 71.95 | 19.63 | | 65.0 | |
| 10270-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.52 | 74.64 | 19.85 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.97 | 73.67 | 19.72 | | 65.0 | |
| | | Z | 5.98 | 73.87 | 19.71 | | 65.0 | |

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.66 | 67.03 | 15.70 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.34 | 68.55 | 14.63 | | 150.0 | |
| | | Z | 2.62 | 66.83 | 15.48 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.75 | 69.41 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.02 | 74.91 | 18.12 | | 150.0 | |
| | | Z | 1.67 | 68.59 | 16.06 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 2.57 | 62.13 | 7.82 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 1.60 | 59.68 | 4.94 | | 50.0 | |
| | | Z | 2.26 | 61.44 | 7.11 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 4.26 | 69.41 | 14.02 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 2.29 | 61.84 | 7.55 | | 50.0 | |
| | | Z | 3.87 | 68.64 | 13.41 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 4.37 | 69.66 | 14.18 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 2.31 | 61.88 | 7.61 | | 50.0 | |
| | | Z | 3.97 | 68.90 | 13.58 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 1.85 | 72.31 | 15.88 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.36 | 60.00 | 5.29 | | 150.0 | |
| | | Z | 1.58 | 70.17 | 14.63 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 1.02 | 68.88 | 14.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.28 | 60.00 | 5.31 | | 150.0 | |
| | | Z | 0.90 | 67.15 | 13.20 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 1.80 | 77.95 | 18.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.38 | 62.69 | 7.21 | | 150.0 | |
| | | Z | 1.39 | 74.03 | 16.69 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 5.83 | 95.82 | 25.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 100.00 | 107.50 | 20.43 | | 150.0 | |
| | | Z | 3.54 | 87.74 | 22.15 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 7.34 | 78.85 | 20.80 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 17.07 | 85.10 | 19.02 | | 50.0 | |
| | | Z | 7.80 | 80.40 | 21.29 | | 50.0 | |
| 10297-AAB | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 2.92 | 70.76 | 17.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.60 | 72.27 | 18.25 | | 150.0 | |
| | | Z | 2.80 | 70.10 | 16.98 | | 150.0 | |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 1.81 | 69.98 | 15.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.52 | 60.00 | 6.04 | | 150.0 | |
| | | Z | 1.63 | 68.52 | 14.51 | | 150.0 | |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 2.47 | 68.97 | 14.03 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.58 | 60.00 | 4.73 | | 150.0 | |
| | | Z | 2.10 | 67.38 | 13.05 | | 150.0 | |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 1.87 | 64.64 | 11.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.56 | 60.00 | 4.04 | | 150.0 | |
| | | Z | 1.64 | 63.62 | 10.41 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 4.64 | 64.99 | 17.32 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 3.97 | 66.09 | 16.87 | | 50.0 | |
| | | Z | 4.63 | 65.19 | 17.38 | | 50.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.19 | 65.93 | 18.20 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 4.41 | 66.55 | 17.60 | | 50.0 | |
| | | Z | 5.08 | 65.68 | 18.02 | | 50.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 4.95 | 65.59 | 18.05 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 4.26 | 66.62 | 17.49 | | 50.0 | |
| | | Z | 4.83 | 65.30 | 17.84 | | 50.0 | |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 4.75 | 65.47 | 17.56 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.05 | 66.34 | 16.93 | | 50.0 | |
| | | Z | 4.65 | 65.23 | 17.38 | | 50.0 | |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 4.49 | 67.73 | 19.78 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 3.71 | 67.28 | 16.67 | | 35.0 | |
| | | Z | 4.28 | 66.94 | 19.23 | | 35.0 | |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 4.75 | 66.48 | 19.22 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.04 | 67.06 | 17.49 | | 35.0 | |
| | | Z | 4.60 | 65.99 | 18.86 | | 35.0 | |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 4.67 | 66.74 | 19.24 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 3.93 | 66.99 | 17.33 | | 35.0 | |
| | | Z | 4.50 | 66.15 | 18.83 | | 35.0 | |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 4.65 | 66.96 | 19.39 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 3.96 | 67.42 | 17.62 | | 35.0 | |
| | | Z | 4.47 | 66.34 | 18.96 | | 35.0 | |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 4.80 | 66.69 | 19.36 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.07 | 67.23 | 17.68 | | 35.0 | |
| | | Z | 4.64 | 66.17 | 18.98 | | 35.0 | |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 4.70 | 66.58 | 19.22 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.03 | 67.27 | 17.61 | | 35.0 | |
| | | Z | 4.55 | 66.06 | 18.84 | | 35.0 | |
| 10311-AAB | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 3.29 | 69.98 | 16.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.90 | 70.63 | 17.62 | | 150.0 | |
| | | Z | 3.17 | 69.35 | 16.60 | | 150.0 | |
| 10313-AAA | iDEN 1:3 | X | 3.28 | 70.39 | 14.65 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 2.53 | 71.17 | 15.80 | | 70.0 | |
| | | Z | 2.85 | 70.12 | 14.78 | | 70.0 | |
| 10314-AAA | iDEN 1:6 | X | 4.28 | 75.46 | 19.37 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 4.79 | 80.62 | 22.06 | | 30.0 | |
| | | Z | 4.09 | 76.26 | 19.99 | | 30.0 | |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.12 | 64.41 | 15.77 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.15 | 65.92 | 16.47 | | 150.0 | |
| | | Z | 1.10 | 63.89 | 15.39 | | 150.0 | |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 4.61 | 66.72 | 16.37 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 67.47 | 16.39 | | 150.0 | |
| | | Z | 4.56 | 66.65 | 16.32 | | 150.0 | |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.61 | 66.72 | 16.37 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 67.47 | 16.39 | | 150.0 | |
| | | Z | 4.56 | 66.65 | 16.32 | | 150.0 | |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 4.74 | 67.15 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 67.65 | 16.48 | | 150.0 | |
| | | Z | 4.69 | 67.06 | 16.40 | | 150.0 | |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 5.44 | 67.31 | 16.60 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.84 | 67.31 | 16.60 | | 150.0 | |
| | | Z | 5.42 | 67.27 | 16.57 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.69 | 67.61 | 16.60 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.24 | 67.76 | 16.80 | | 150.0 | |
| | | Z | 5.65 | 67.50 | 16.56 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 1.85 | 72.31 | 15.88 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 0.36 | 60.00 | 5.29 | | 115.0 | |
| | | Z | 1.58 | 70.17 | 14.63 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 1.85 | 72.31 | 15.88 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 0.36 | 60.00 | 5.29 | | 115.0 | |
| | | Z | 1.58 | 70.17 | 14.63 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 53.12 | 115.17 | 29.24 | 0.00 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 124.65 | 27.76 | | 100.0 | |
| | | Z | 28.83 | 109.13 | 27.97 | | 100.0 | |
| 10410-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 6.68 | 83.50 | 19.17 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.37 | 73.33 | 16.57 | | 80.0 | |
| | | Z | 5.13 | 82.70 | 19.33 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 1.04 | 63.68 | 15.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.11 | 65.66 | 16.32 | | 150.0 | |
| | | Z | 1.04 | 63.32 | 15.03 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.58 | 66.83 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 67.78 | 16.58 | | 150.0 | |
| | | Z | 4.54 | 66.76 | 16.35 | | 150.0 | |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.58 | 66.83 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 67.78 | 16.58 | | 150.0 | |
| | | Z | 4.54 | 66.76 | 16.35 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble) | X | 4.57 | 67.00 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 68.01 | 16.69 | | 150.0 | |
| | | Z | 4.53 | 66.93 | 16.39 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.59 | 66.94 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 67.93 | 16.65 | | 150.0 | |
| | | Z | 4.55 | 66.87 | 16.38 | | 150.0 | |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.71 | 66.93 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.19 | 67.82 | 16.64 | | 150.0 | |
| | | Z | 4.66 | 66.86 | 16.39 | | 150.0 | |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 4.87 | 67.25 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.27 | 68.04 | 16.70 | | 150.0 | |
| | | Z | 4.82 | 67.16 | 16.50 | | 150.0 | |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 4.79 | 67.20 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.21 | 67.94 | 16.67 | | 150.0 | |
| | | Z | 4.74 | 67.12 | 16.47 | | 150.0 | |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.39 | 67.48 | 16.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.86 | 67.72 | 16.85 | | 150.0 | |
| | | Z | 5.35 | 67.38 | 16.64 | | 150.0 | |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.40 | 67.51 | 16.70 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.89 | 67.85 | 16.91 | | 150.0 | |
| | | Z | 5.37 | 67.47 | 16.68 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.41 | 67.49 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.87 | 67.71 | 16.83 | | 150.0 | |
| | | Z | 5.37 | 67.41 | 16.64 | | 150.0 | |
| 10430-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.48 | 71.93 | 18.89 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.16 | 77.88 | 19.19 | | 150.0 | |
| | | Z | 4.43 | 71.96 | 18.79 | | 150.0 | |
| 10431-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 4.27 | 67.46 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.63 | 68.54 | 16.11 | | 150.0 | |
| | | Z | 4.21 | 67.36 | 16.35 | | 150.0 | |
| 10432-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.56 | 67.28 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.98 | 68.25 | 16.55 | | 150.0 | |
| | | Z | 4.51 | 67.19 | 16.43 | | 150.0 | |
| 10433-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 4.81 | 67.24 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.24 | 68.00 | 16.70 | | 150.0 | |
| | | Z | 4.76 | 67.15 | 16.49 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.67 | 73.09 | 18.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.20 | 74.62 | 16.81 | | 150.0 | |
| | | Z | 4.61 | 73.09 | 18.84 | | 150.0 | |
| 10435-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 6.37 | 82.80 | 18.90 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.33 | 72.76 | 16.26 | | 80.0 | |
| | | Z | 4.91 | 82.00 | 19.05 | | 80.0 | |
| 10447-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.58 | 67.63 | 15.88 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.52 | 66.35 | 12.95 | | 150.0 | |
| | | Z | 3.50 | 67.43 | 15.64 | | 150.0 | |
| 10448-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 4.11 | 67.25 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.54 | 68.41 | 16.05 | | 150.0 | |
| | | Z | 4.05 | 67.14 | 16.22 | | 150.0 | |
| 10449-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.38 | 67.12 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.87 | 68.13 | 16.50 | | 150.0 | |
| | | Z | 4.33 | 67.03 | 16.33 | | 150.0 | |
| 10450-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.57 | 67.02 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 67.80 | 16.59 | | 150.0 | |
| | | Z | 4.53 | 66.93 | 16.35 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 3.49 | 67.88 | 15.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.00 | 64.08 | 10.79 | | 150.0 | |
| | | Z | 3.38 | 67.58 | 15.21 | | 150.0 | |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.26 | 68.00 | 16.81 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.16 | 68.95 | 17.43 | | 150.0 | |
| | | Z | 6.24 | 67.94 | 16.79 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.82 | 65.46 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.61 | 66.92 | 16.42 | | 150.0 | |
| | | Z | 3.81 | 65.40 | 16.06 | | 150.0 | |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 3.29 | 67.12 | 14.89 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.44 | 60.53 | 7.42 | | 150.0 | |
| | | Z | 3.18 | 66.78 | 14.49 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 4.43 | 65.51 | 15.86 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.62 | 61.35 | 10.29 | | 150.0 | |
| | | Z | 4.37 | 65.53 | 15.72 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 1.04 | 71.02 | 17.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.96 | 84.00 | 22.92 | | 150.0 | |
| | | Z | 0.97 | 69.34 | 16.98 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.48 | 77.15 | 17.91 | 3.29 | 80.0 | ± 9.6 % |
| | | Y | 0.97 | 69.25 | 15.91 | | 80.0 | |
| | | Z | 2.58 | 75.48 | 17.77 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.03 | 60.33 | 8.14 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.21 | 55.42 | 3.53 | | 80.0 | |
| | | Z | 0.84 | 60.00 | 7.93 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.01 | 60.00 | 7.51 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 28.36 | 203.22 | 3.05 | | 80.0 | |
| | | Z | 0.86 | 60.00 | 7.39 | | 80.0 | |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.64 | 73.32 | 15.98 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.75 | 66.12 | 13.77 | | 80.0 | |
| | | Z | 2.03 | 72.11 | 15.91 | | 80.0 | |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.99 | 60.00 | 7.91 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 29.96 | 194.97 | 5.15 | | 80.0 | |
| | | Z | 0.84 | 60.00 | 7.86 | | 80.0 | |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.01 | 60.00 | 7.46 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 30.98 | 196.96 | 1.83 | | 80.0 | |
| | | Z | 0.86 | 60.00 | 7.34 | | 80.0 | |
| 10467-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.77 | 73.96 | 16.25 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.77 | 66.65 | 14.10 | | 80.0 | |
| | | Z | 2.12 | 72.73 | 16.19 | | 80.0 | |
| 10468-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.99 | 60.08 | 7.96 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.21 | 55.39 | 3.50 | | 80.0 | |
| | | Z | 0.84 | 60.00 | 7.88 | | 80.0 | |
| 10469-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.01 | 60.00 | 7.46 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 30.66 | 197.41 | 1.31 | | 80.0 | |
| | | Z | 0.86 | 60.00 | 7.34 | | 80.0 | |
| 10470-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.76 | 73.94 | 16.23 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.77 | 66.67 | 14.10 | | 80.0 | |
| | | Z | 2.11 | 72.72 | 16.18 | | 80.0 | |
| 10471-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.99 | 60.05 | 7.93 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 29.34 | 196.18 | 6.49 | | 80.0 | |
| | | Z | 0.84 | 60.00 | 7.87 | | 80.0 | |
| 10472-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.01 | 60.00 | 7.45 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 30.49 | 197.73 | 1.27 | | 80.0 | |
| | | Z | 0.86 | 60.00 | 7.33 | | 80.0 | |
| 10473-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.76 | 73.90 | 16.22 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.77 | 66.63 | 14.08 | | 80.0 | |
| | | Z | 2.11 | 72.69 | 16.16 | | 80.0 | |
| 10474-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.99 | 60.03 | 7.93 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 29.25 | 196.25 | 6.42 | | 80.0 | |
| | | Z | 0.84 | 60.00 | 7.87 | | 80.0 | |
| 10475-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.01 | 60.00 | 7.45 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 30.47 | 197.62 | 1.42 | | 80.0 | |
| | | Z | 0.86 | 60.00 | 7.33 | | 80.0 | |

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|------|---------|
| 10477-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.98 | 60.00 | 7.89 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 29.49 | 195.72 | 5.56 | | 80.0 | |
| | | Z | 0.84 | 60.00 | 7.84 | | 80.0 | |
| 10478-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.01 | 60.00 | 7.44 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 30.62 | 197.39 | 1.80 | | 80.0 | |
| | | Z | 0.86 | 60.00 | 7.32 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.88 | 74.90 | 18.39 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.49 | 77.92 | 19.26 | | 80.0 | |
| | | Z | 3.49 | 74.59 | 18.40 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.37 | 69.78 | 14.78 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.68 | 60.27 | 8.31 | | 80.0 | |
| | | Z | 2.92 | 69.11 | 14.47 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.92 | 67.65 | 13.55 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.66 | 60.00 | 7.51 | | 80.0 | |
| | | Z | 2.50 | 66.84 | 13.14 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.52 | 68.86 | 15.13 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 0.83 | 60.00 | 6.91 | | 80.0 | |
| | | Z | 2.14 | 67.39 | 14.41 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.86 | 67.07 | 13.71 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.05 | 60.00 | 5.62 | | 80.0 | |
| | | Z | 2.44 | 65.81 | 13.01 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.80 | 66.60 | 13.51 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.07 | 60.00 | 5.60 | | 80.0 | |
| | | Z | 2.40 | 65.34 | 12.79 | | 80.0 | |
| 10485-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.96 | 70.85 | 16.91 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.17 | 62.58 | 10.56 | | 80.0 | |
| | | Z | 2.58 | 69.54 | 16.39 | | 80.0 | |
| 10486-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.96 | 67.72 | 15.13 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.13 | 60.00 | 7.87 | | 80.0 | |
| | | Z | 2.66 | 66.76 | 14.61 | | 80.0 | |
| 10487-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.97 | 67.43 | 14.99 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.16 | 60.00 | 7.81 | | 80.0 | |
| | | Z | 2.67 | 66.49 | 14.47 | | 80.0 | |
| 10488-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.38 | 70.90 | 17.67 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.25 | 69.00 | 16.17 | | 80.0 | |
| | | Z | 3.02 | 69.76 | 17.29 | | 80.0 | |
| 10489-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.39 | 68.12 | 16.57 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.32 | 66.16 | 14.18 | | 80.0 | |
| | | Z | 3.13 | 67.37 | 16.26 | | 80.0 | |
| 10490-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.49 | 68.02 | 16.54 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.33 | 65.79 | 13.96 | | 80.0 | |
| | | Z | 3.23 | 67.30 | 16.25 | | 80.0 | |
| 10491-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.68 | 69.90 | 17.42 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.62 | 68.57 | 16.67 | | 80.0 | |
| | | Z | 3.36 | 68.97 | 17.13 | | 80.0 | |
| 10492-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.77 | 67.68 | 16.72 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.84 | 66.78 | 15.53 | | 80.0 | |
| | | Z | 3.53 | 67.02 | 16.47 | | 80.0 | |

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|------|---------|
| 10493-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.84 | 67.59 | 16.70 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.87 | 66.60 | 15.40 | | 80.0 | |
| | | Z | 3.60 | 66.95 | 16.45 | | 80.0 | |
| 10494-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.93 | 71.14 | 17.78 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.77 | 69.47 | 17.23 | | 80.0 | |
| | | Z | 3.56 | 70.11 | 17.48 | | 80.0 | |
| 10495-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.80 | 68.03 | 16.89 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.91 | 67.12 | 16.06 | | 80.0 | |
| | | Z | 3.55 | 67.32 | 16.64 | | 80.0 | |
| 10496-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.89 | 67.83 | 16.85 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.99 | 66.99 | 16.00 | | 80.0 | |
| | | Z | 3.64 | 67.16 | 16.61 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.81 | 64.83 | 12.37 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 0.97 | 60.00 | 4.80 | | 80.0 | |
| | | Z | 1.52 | 63.38 | 11.47 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.56 | 60.98 | 9.46 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 19.60 | 209.65 | 15.97 | | 80.0 | |
| | | Z | 1.35 | 60.00 | 8.64 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.53 | 60.58 | 9.11 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 17.31 | 229.94 | 5.52 | | 80.0 | |
| | | Z | 1.37 | 60.00 | 8.51 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.10 | 70.67 | 17.16 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.60 | 65.48 | 12.91 | | 80.0 | |
| | | Z | 2.73 | 69.49 | 16.71 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.16 | 67.97 | 15.73 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.34 | 60.72 | 9.33 | | 80.0 | |
| | | Z | 2.88 | 67.15 | 15.31 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.22 | 67.87 | 15.63 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.33 | 60.43 | 9.07 | | 80.0 | |
| | | Z | 2.93 | 67.06 | 15.21 | | 80.0 | |
| 10503-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.34 | 70.72 | 17.57 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.22 | 68.78 | 16.06 | | 80.0 | |
| | | Z | 2.98 | 69.59 | 17.20 | | 80.0 | |
| 10504-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.37 | 68.03 | 16.51 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.30 | 66.01 | 14.09 | | 80.0 | |
| | | Z | 3.11 | 67.28 | 16.20 | | 80.0 | |
| 10505-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.47 | 67.93 | 16.49 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.31 | 65.66 | 13.87 | | 80.0 | |
| | | Z | 3.21 | 67.21 | 16.19 | | 80.0 | |
| 10506-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.90 | 71.01 | 17.71 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.75 | 69.34 | 17.15 | | 80.0 | |
| | | Z | 3.53 | 69.98 | 17.41 | | 80.0 | |
| 10507-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.78 | 67.97 | 16.85 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.90 | 67.04 | 16.01 | | 80.0 | |
| | | Z | 3.53 | 67.26 | 16.61 | | 80.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10508-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.87 | 67.76 | 16.81 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.97 | 66.90 | 15.95 | | 80.0 | |
| | | Z | 3.63 | 67.09 | 16.57 | | 80.0 | |
| 10509-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.29 | 70.13 | 17.39 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.19 | 68.68 | 17.10 | | 80.0 | |
| | | Z | 3.96 | 69.31 | 17.16 | | 80.0 | |
| 10510-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.29 | 67.87 | 16.94 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.35 | 66.74 | 16.37 | | 80.0 | |
| | | Z | 4.04 | 67.22 | 16.73 | | 80.0 | |
| 10511-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.35 | 67.67 | 16.90 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.43 | 66.67 | 16.35 | | 80.0 | |
| | | Z | 4.11 | 67.05 | 16.70 | | 80.0 | |
| 10512-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.41 | 71.37 | 17.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.20 | 69.31 | 17.29 | | 80.0 | |
| | | Z | 4.03 | 70.41 | 17.47 | | 80.0 | |
| 10513-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.17 | 68.08 | 17.01 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.27 | 66.70 | 16.44 | | 80.0 | |
| | | Z | 3.92 | 67.38 | 16.78 | | 80.0 | |
| 10514-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.20 | 67.73 | 16.93 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.34 | 66.53 | 16.38 | | 80.0 | |
| | | Z | 3.96 | 67.07 | 16.71 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 1.01 | 63.92 | 15.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.07 | 66.05 | 16.52 | | 150.0 | |
| | | Z | 1.00 | 63.52 | 15.11 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 0.80 | 76.03 | 20.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.63 | 90.26 | 26.95 | | 150.0 | |
| | | Z | 0.67 | 72.14 | 18.59 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.88 | 66.52 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.99 | 69.72 | 18.29 | | 150.0 | |
| | | Z | 0.86 | 65.67 | 15.91 | | 150.0 | |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.57 | 66.91 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.10 | 67.98 | 16.63 | | 150.0 | |
| | | Z | 4.53 | 66.84 | 16.34 | | 150.0 | |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.75 | 67.14 | 16.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.20 | 68.09 | 16.69 | | 150.0 | |
| | | Z | 4.70 | 67.05 | 16.44 | | 150.0 | |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.61 | 67.11 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.07 | 67.97 | 16.60 | | 150.0 | |
| | | Z | 4.56 | 67.01 | 16.37 | | 150.0 | |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.54 | 67.11 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.00 | 67.83 | 16.53 | | 150.0 | |
| | | Z | 4.49 | 67.00 | 16.36 | | 150.0 | |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.60 | 67.20 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.00 | 67.82 | 16.53 | | 150.0 | |
| | | Z | 4.55 | 67.12 | 16.45 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.49 | 67.08 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.01 | 68.16 | 16.68 | | 150.0 | |
| | | Z | 4.44 | 67.01 | 16.31 | | 150.0 | |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.54 | 67.12 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.97 | 67.92 | 16.63 | | 150.0 | |
| | | Z | 4.49 | 67.03 | 16.42 | | 150.0 | |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.54 | 66.18 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 67.26 | 16.38 | | 150.0 | |
| | | Z | 4.50 | 66.10 | 16.02 | | 150.0 | |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.71 | 66.55 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.14 | 67.37 | 16.43 | | 150.0 | |
| | | Z | 4.65 | 66.45 | 16.16 | | 150.0 | |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.63 | 66.51 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 67.44 | 16.42 | | 150.0 | |
| | | Z | 4.58 | 66.41 | 16.10 | | 150.0 | |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.64 | 66.53 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.10 | 67.35 | 16.39 | | 150.0 | |
| | | Z | 4.59 | 66.42 | 16.13 | | 150.0 | |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.64 | 66.53 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.10 | 67.35 | 16.39 | | 150.0 | |
| | | Z | 4.59 | 66.42 | 16.13 | | 150.0 | |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.64 | 66.64 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.06 | 67.36 | 16.37 | | 150.0 | |
| | | Z | 4.58 | 66.51 | 16.14 | | 150.0 | |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.50 | 66.50 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.98 | 67.28 | 16.33 | | 150.0 | |
| | | Z | 4.44 | 66.37 | 16.07 | | 150.0 | |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.65 | 66.58 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.11 | 67.58 | 16.46 | | 150.0 | |
| | | Z | 4.60 | 66.49 | 16.13 | | 150.0 | |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 5.17 | 66.59 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 66.96 | 16.45 | | 150.0 | |
| | | Z | 5.13 | 66.48 | 16.18 | | 150.0 | |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 5.24 | 66.77 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 67.00 | 16.48 | | 150.0 | |
| | | Z | 5.20 | 66.68 | 16.26 | | 150.0 | |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 5.11 | 66.73 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.62 | 67.02 | 16.47 | | 150.0 | |
| | | Z | 5.07 | 66.63 | 16.22 | | 150.0 | |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 5.17 | 66.69 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 67.16 | 16.55 | | 150.0 | |
| | | Z | 5.13 | 66.59 | 16.20 | | 150.0 | |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 5.26 | 66.70 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.72 | 66.92 | 16.45 | | 150.0 | |
| | | Z | 5.21 | 66.59 | 16.24 | | 150.0 | |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 5.19 | 66.73 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.66 | 66.87 | 16.46 | | 150.0 | |
| | | Z | 5.14 | 66.60 | 16.27 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 5.16 | 66.59 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 66.90 | 16.44 | | 150.0 | |
| | | Z | 5.12 | 66.48 | 16.19 | | 150.0 | |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.31 | 66.65 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.80 | 66.97 | 16.49 | | 150.0 | |
| | | Z | 5.27 | 66.55 | 16.25 | | 150.0 | |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.39 | 66.68 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 67.01 | 16.54 | | 150.0 | |
| | | Z | 5.34 | 66.57 | 16.28 | | 150.0 | |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.48 | 66.68 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.09 | 66.77 | 16.36 | | 150.0 | |
| | | Z | 5.46 | 66.59 | 16.17 | | 150.0 | |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.68 | 67.10 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.20 | 67.11 | 16.51 | | 150.0 | |
| | | Z | 5.65 | 67.02 | 16.33 | | 150.0 | |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.55 | 66.89 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.10 | 66.84 | 16.37 | | 150.0 | |
| | | Z | 5.51 | 66.77 | 16.22 | | 150.0 | |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.62 | 66.93 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.22 | 67.15 | 16.53 | | 150.0 | |
| | | Z | 5.58 | 66.82 | 16.24 | | 150.0 | |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.87 | 67.85 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.13 | 67.04 | 16.46 | | 150.0 | |
| | | Z | 5.82 | 67.71 | 16.65 | | 150.0 | |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.58 | 66.91 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.24 | 67.42 | 16.68 | | 150.0 | |
| | | Z | 5.55 | 66.83 | 16.27 | | 150.0 | |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.58 | 66.96 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.07 | 66.77 | 16.33 | | 150.0 | |
| | | Z | 5.54 | 66.84 | 16.23 | | 150.0 | |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.50 | 66.76 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.09 | 66.99 | 16.43 | | 150.0 | |
| | | Z | 5.47 | 66.66 | 16.15 | | 150.0 | |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.58 | 66.78 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.11 | 66.82 | 16.35 | | 150.0 | |
| | | Z | 5.54 | 66.67 | 16.18 | | 150.0 | |
| 10554-AAA | IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.89 | 67.03 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.55 | 66.98 | 16.39 | | 150.0 | |
| | | Z | 5.87 | 66.94 | 16.25 | | 150.0 | |
| 10555-AAA | IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 6.02 | 67.33 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.61 | 67.17 | 16.48 | | 150.0 | |
| | | Z | 5.99 | 67.24 | 16.37 | | 150.0 | |
| 10556-AAA | IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.04 | 67.38 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.65 | 67.28 | 16.52 | | 150.0 | |
| | | Z | 6.02 | 67.29 | 16.39 | | 150.0 | |
| 10557-AAA | IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 6.01 | 67.28 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.60 | 67.14 | 16.47 | | 150.0 | |
| | | Z | 5.97 | 67.17 | 16.35 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10558-AAA | IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 6.05 | 67.44 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.55 | 67.02 | 16.43 | | 150.0 | |
| | | Z | 6.02 | 67.33 | 16.45 | | 150.0 | |
| 10560-AAA | IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 6.05 | 67.29 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.59 | 67.02 | 16.46 | | 150.0 | |
| | | Z | 6.01 | 67.17 | 16.41 | | 150.0 | |
| 10561-AAA | IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 5.97 | 67.26 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.53 | 66.98 | 16.46 | | 150.0 | |
| | | Z | 5.94 | 67.16 | 16.44 | | 150.0 | |
| 10562-AAA | IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 6.09 | 67.63 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.59 | 67.19 | 16.57 | | 150.0 | |
| | | Z | 6.05 | 67.48 | 16.60 | | 150.0 | |
| 10563-AAA | IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 6.29 | 67.85 | 16.73 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.86 | 67.78 | 16.84 | | 150.0 | |
| | | Z | 6.16 | 67.47 | 16.55 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 4.89 | 66.92 | 16.50 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.37 | 67.73 | 16.65 | | 150.0 | |
| | | Z | 4.84 | 66.85 | 16.44 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.12 | 67.38 | 16.83 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 68.17 | 16.98 | | 150.0 | |
| | | Z | 5.07 | 67.30 | 16.78 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.95 | 67.23 | 16.64 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.37 | 67.89 | 16.75 | | 150.0 | |
| | | Z | 4.90 | 67.13 | 16.58 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.98 | 67.65 | 17.02 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.44 | 68.37 | 17.19 | | 150.0 | |
| | | Z | 4.94 | 67.56 | 16.97 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.85 | 66.96 | 16.38 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.20 | 67.26 | 16.25 | | 150.0 | |
| | | Z | 4.80 | 66.87 | 16.32 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.94 | 67.75 | 17.08 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.45 | 68.76 | 17.43 | | 150.0 | |
| | | Z | 4.90 | 67.68 | 17.04 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.98 | 67.59 | 17.02 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.39 | 68.33 | 17.21 | | 150.0 | |
| | | Z | 4.93 | 67.52 | 16.97 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.19 | 64.81 | 15.85 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.17 | 65.59 | 16.16 | | 130.0 | |
| | | Z | 1.15 | 64.12 | 15.44 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.21 | 65.43 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.18 | 66.27 | 16.61 | | 130.0 | |
| | | Z | 1.17 | 64.67 | 15.80 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 2.73 | 90.43 | 24.99 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 2.86 | 95.55 | 28.03 | | 130.0 | |
| | | Z | 1.51 | 81.07 | 21.85 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.39 | 72.10 | 19.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.35 | 73.36 | 20.46 | | 130.0 | |
| | | Z | 1.26 | 70.26 | 18.73 | | 130.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.65 | 66.62 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.13 | 67.33 | 16.45 | | 130.0 | |
| | | Z | 4.61 | 66.55 | 16.40 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.68 | 66.80 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.17 | 67.68 | 16.63 | | 130.0 | |
| | | Z | 4.64 | 66.73 | 16.48 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.88 | 67.09 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.28 | 67.86 | 16.75 | | 130.0 | |
| | | Z | 4.83 | 67.01 | 16.65 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.78 | 67.27 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.22 | 68.05 | 16.92 | | 130.0 | |
| | | Z | 4.73 | 67.18 | 16.77 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.53 | 66.48 | 16.08 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 3.91 | 66.80 | 15.89 | | 130.0 | |
| | | Z | 4.48 | 66.37 | 16.01 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.58 | 66.51 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 3.89 | 66.66 | 15.78 | | 130.0 | |
| | | Z | 4.53 | 66.42 | 16.03 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.68 | 67.30 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.14 | 68.18 | 16.94 | | 130.0 | |
| | | Z | 4.63 | 67.21 | 16.71 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.47 | 66.23 | 15.85 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 3.80 | 66.45 | 15.61 | | 130.0 | |
| | | Z | 4.42 | 66.12 | 15.78 | | 130.0 | |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.65 | 66.62 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.13 | 67.33 | 16.45 | | 130.0 | |
| | | Z | 4.61 | 66.55 | 16.40 | | 130.0 | |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.68 | 66.80 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.17 | 67.68 | 16.63 | | 130.0 | |
| | | Z | 4.64 | 66.73 | 16.48 | | 130.0 | |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 4.88 | 67.09 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.28 | 67.86 | 16.75 | | 130.0 | |
| | | Z | 4.83 | 67.01 | 16.65 | | 130.0 | |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.78 | 67.27 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.22 | 68.05 | 16.92 | | 130.0 | |
| | | Z | 4.73 | 67.18 | 16.77 | | 130.0 | |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.53 | 66.48 | 16.08 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 3.91 | 66.80 | 15.89 | | 130.0 | |
| | | Z | 4.48 | 66.37 | 16.01 | | 130.0 | |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.58 | 66.51 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 3.89 | 66.66 | 15.78 | | 130.0 | |
| | | Z | 4.53 | 66.42 | 16.03 | | 130.0 | |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 4.68 | 67.30 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.14 | 68.18 | 16.94 | | 130.0 | |
| | | Z | 4.63 | 67.21 | 16.71 | | 130.0 | |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.47 | 66.23 | 15.85 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 3.80 | 66.45 | 15.61 | | 130.0 | |
| | | Z | 4.42 | 66.12 | 15.78 | | 130.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.80 | 66.69 | 16.56 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.29 | 67.48 | 16.65 | | 130.0 | |
| | | Z | 4.76 | 66.62 | 16.52 | | 130.0 | |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.96 | 67.02 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.35 | 67.66 | 16.74 | | 130.0 | |
| | | Z | 4.91 | 66.95 | 16.65 | | 130.0 | |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.87 | 66.92 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.28 | 67.58 | 16.60 | | 130.0 | |
| | | Z | 4.82 | 66.84 | 16.52 | | 130.0 | |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.93 | 67.10 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.32 | 67.69 | 16.75 | | 130.0 | |
| | | Z | 4.88 | 67.02 | 16.68 | | 130.0 | |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.90 | 67.04 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.28 | 67.67 | 16.66 | | 130.0 | |
| | | Z | 4.85 | 66.97 | 16.57 | | 130.0 | |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.83 | 67.04 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.19 | 67.48 | 16.58 | | 130.0 | |
| | | Z | 4.78 | 66.95 | 16.57 | | 130.0 | |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.78 | 66.93 | 16.50 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.17 | 67.42 | 16.44 | | 130.0 | |
| | | Z | 4.73 | 66.84 | 16.44 | | 130.0 | |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.77 | 67.20 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.23 | 67.87 | 16.85 | | 130.0 | |
| | | Z | 4.72 | 67.09 | 16.72 | | 130.0 | |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.48 | 67.23 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.11 | 68.05 | 17.18 | | 130.0 | |
| | | Z | 5.44 | 67.15 | 16.74 | | 130.0 | |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.60 | 67.61 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.02 | 67.79 | 17.02 | | 130.0 | |
| | | Z | 5.57 | 67.57 | 16.91 | | 130.0 | |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.49 | 67.38 | 16.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.99 | 67.77 | 17.04 | | 130.0 | |
| | | Z | 5.46 | 67.31 | 16.81 | | 130.0 | |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.59 | 67.40 | 16.75 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.00 | 67.54 | 16.84 | | 130.0 | |
| | | Z | 5.57 | 67.40 | 16.76 | | 130.0 | |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.67 | 67.72 | 17.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.02 | 67.69 | 17.07 | | 130.0 | |
| | | Z | 5.64 | 67.68 | 17.04 | | 130.0 | |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.49 | 67.21 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.00 | 67.56 | 16.96 | | 130.0 | |
| | | Z | 5.49 | 67.27 | 16.82 | | 130.0 | |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.59 | 67.50 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.95 | 67.41 | 16.89 | | 130.0 | |
| | | Z | 5.56 | 67.47 | 16.92 | | 130.0 | |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.33 | 66.83 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.96 | 67.58 | 16.81 | | 130.0 | |
| | | Z | 5.28 | 66.72 | 16.40 | | 130.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10607-AAA | IIEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.64 | 66.02 | 16.19 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.16 | 66.91 | 16.36 | | 130.0 | |
| | | Z | 4.60 | 65.95 | 16.15 | | 130.0 | |
| 10608-AAA | IIEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.83 | 66.42 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.22 | 67.08 | 16.44 | | 130.0 | |
| | | Z | 4.78 | 66.34 | 16.31 | | 130.0 | |
| 10609-AAA | IIEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.71 | 66.26 | 16.19 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.14 | 66.94 | 16.27 | | 130.0 | |
| | | Z | 4.67 | 66.17 | 16.14 | | 130.0 | |
| 10610-AAA | IIEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.77 | 66.42 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.18 | 67.09 | 16.43 | | 130.0 | |
| | | Z | 4.72 | 66.34 | 16.31 | | 130.0 | |
| 10611-AAA | IIEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.68 | 66.22 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.10 | 66.87 | 16.26 | | 130.0 | |
| | | Z | 4.63 | 66.13 | 16.14 | | 130.0 | |
| 10612-AAA | IIEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.69 | 66.36 | 16.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.03 | 66.77 | 16.18 | | 130.0 | |
| | | Z | 4.63 | 66.26 | 16.18 | | 130.0 | |
| 10613-AAA | IIEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.69 | 66.24 | 16.12 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.05 | 66.68 | 16.06 | | 130.0 | |
| | | Z | 4.63 | 66.13 | 16.05 | | 130.0 | |
| 10614-AAA | IIEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.64 | 66.46 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.09 | 67.10 | 16.44 | | 130.0 | |
| | | Z | 4.59 | 66.36 | 16.31 | | 130.0 | |
| 10615-AAA | IIEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.68 | 66.02 | 15.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.06 | 66.66 | 15.97 | | 130.0 | |
| | | Z | 4.62 | 65.94 | 15.90 | | 130.0 | |
| 10616-AAA | IIEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.29 | 66.48 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.78 | 66.74 | 16.52 | | 130.0 | |
| | | Z | 5.26 | 66.40 | 16.35 | | 130.0 | |
| 10617-AAA | IIEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.36 | 66.65 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.78 | 66.75 | 16.51 | | 130.0 | |
| | | Z | 5.33 | 66.60 | 16.42 | | 130.0 | |
| 10618-AAA | IIEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.25 | 66.67 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 66.85 | 16.58 | | 130.0 | |
| | | Z | 5.21 | 66.61 | 16.44 | | 130.0 | |
| 10619-AAA | IIEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.26 | 66.46 | 16.29 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.77 | 66.81 | 16.49 | | 130.0 | |
| | | Z | 5.22 | 66.38 | 16.26 | | 130.0 | |
| 10620-AAA | IIEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.35 | 66.50 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.78 | 66.60 | 16.41 | | 130.0 | |
| | | Z | 5.31 | 66.41 | 16.33 | | 130.0 | |
| 10621-AAA | IIEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.35 | 66.65 | 16.56 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.83 | 66.85 | 16.68 | | 130.0 | |
| | | Z | 5.32 | 66.59 | 16.54 | | 130.0 | |
| 10622-AAA | IIEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.37 | 66.81 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.79 | 66.84 | 16.68 | | 130.0 | |
| | | Z | 5.33 | 66.74 | 16.61 | | 130.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 5.24 | 66.32 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 66.50 | 16.34 | | 130.0 | |
| | | Z | 5.20 | 66.24 | 16.22 | | 130.0 | |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.43 | 66.52 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.88 | 66.72 | 16.52 | | 130.0 | |
| | | Z | 5.40 | 66.45 | 16.39 | | 130.0 | |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 5.79 | 67.47 | 16.94 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.00 | 67.06 | 16.76 | | 130.0 | |
| | | Z | 5.70 | 67.26 | 16.85 | | 130.0 | |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.59 | 66.53 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.18 | 66.57 | 16.44 | | 130.0 | |
| | | Z | 5.56 | 66.46 | 16.31 | | 130.0 | |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 5.83 | 67.09 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.32 | 67.03 | 16.66 | | 130.0 | |
| | | Z | 5.81 | 67.05 | 16.57 | | 130.0 | |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.62 | 66.61 | 16.26 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.14 | 66.45 | 16.28 | | 130.0 | |
| | | Z | 5.58 | 66.50 | 16.22 | | 130.0 | |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 5.69 | 66.66 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.30 | 66.90 | 16.51 | | 130.0 | |
| | | Z | 5.66 | 66.57 | 16.25 | | 130.0 | |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 6.12 | 68.14 | 17.02 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.23 | 66.85 | 16.50 | | 130.0 | |
| | | Z | 6.06 | 67.97 | 16.95 | | 130.0 | |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 6.03 | 67.99 | 17.15 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.35 | 67.44 | 17.00 | | 130.0 | |
| | | Z | 5.98 | 67.84 | 17.09 | | 130.0 | |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 5.80 | 67.18 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.50 | 67.84 | 17.20 | | 130.0 | |
| | | Z | 5.78 | 67.15 | 16.76 | | 130.0 | |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 5.68 | 66.78 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.16 | 66.59 | 16.40 | | 130.0 | |
| | | Z | 5.65 | 66.69 | 16.35 | | 130.0 | |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 5.67 | 66.82 | 16.47 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.24 | 66.99 | 16.65 | | 130.0 | |
| | | Z | 5.63 | 66.72 | 16.43 | | 130.0 | |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.54 | 66.10 | 15.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.01 | 65.92 | 15.79 | | 130.0 | |
| | | Z | 5.50 | 65.99 | 15.78 | | 130.0 | |
| 10636-AAA | IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.00 | 66.89 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.65 | 66.81 | 16.48 | | 130.0 | |
| | | Z | 5.98 | 66.82 | 16.39 | | 130.0 | |
| 10637-AAA | IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.16 | 67.27 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.75 | 67.13 | 16.64 | | 130.0 | |
| | | Z | 6.14 | 67.21 | 16.57 | | 130.0 | |
| 10638-AAA | IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.15 | 67.24 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.76 | 67.17 | 16.64 | | 130.0 | |
| | | Z | 6.13 | 67.17 | 16.53 | | 130.0 | |

| | | | | | | | | |
|-----------|--|---|-------|-------|-------|------|-------|---------|
| 10639-AAA | IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 6.13 | 67.20 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.71 | 67.01 | 16.60 | | 130.0 | |
| | | Z | 6.11 | 67.11 | 16.54 | | 130.0 | |
| 10640-AAA | IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 6.13 | 67.19 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.60 | 66.69 | 16.38 | | 130.0 | |
| | | Z | 6.11 | 67.10 | 16.47 | | 130.0 | |
| 10641-AAA | IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 6.18 | 67.10 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.73 | 66.87 | 16.49 | | 130.0 | |
| | | Z | 6.17 | 67.05 | 16.47 | | 130.0 | |
| 10642-AAA | IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 6.23 | 67.38 | 16.79 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.75 | 67.07 | 16.76 | | 130.0 | |
| | | Z | 6.20 | 67.30 | 16.77 | | 130.0 | |
| 10643-AAA | IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 6.06 | 67.04 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.58 | 66.67 | 16.43 | | 130.0 | |
| | | Z | 6.04 | 66.97 | 16.50 | | 130.0 | |
| 10644-AAA | IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.22 | 67.52 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.68 | 67.01 | 16.62 | | 130.0 | |
| | | Z | 6.17 | 67.37 | 16.71 | | 130.0 | |
| 10645-AAA | IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.52 | 68.03 | 16.98 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.07 | 67.95 | 17.07 | | 130.0 | |
| | | Z | 6.34 | 67.53 | 16.76 | | 130.0 | |
| 10646-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 13.12 | 97.57 | 31.83 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 3.90 | 78.39 | 26.30 | | 60.0 | |
| | | Z | 9.88 | 93.63 | 31.05 | | 60.0 | |
| 10647-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 12.04 | 96.40 | 31.56 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 3.54 | 76.66 | 25.68 | | 60.0 | |
| | | Z | 8.93 | 92.04 | 30.63 | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 0.77 | 65.21 | 11.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.27 | 60.00 | 4.67 | | 150.0 | |
| | | Z | 0.71 | 64.17 | 11.12 | | 150.0 | |

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3332_Aug17**

CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3332**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 14, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

PHY
8/27/17

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02525) | Apr-18 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-16 (No. ES3-3013_Dec16) | Dec-17 |
| DAE4 | SN: 660 | 7-Dec-16 (No. DAE4-660_Dec16) | Dec-17 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | | | |
|----------------|-------------------------------|--|---------------|
| Calibrated by: | Name Jeton Kastrati | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature |

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: *PAR* is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*; *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF* and *Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

Probe ES3DV3

SN:3332

Manufactured: January 24, 2012
Calibrated: August 14, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.00 | 0.93 | 0.88 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 104.0 | 103.0 | 103.0 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 192.0 | $\pm 3.5 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 194.3 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 179.9 | |

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

| | C1 fF | C2 fF | α V ⁻¹ | T1 ms.V ⁻² | T2 ms.V ⁻¹ | T3 ms | T4 V ⁻² | T5 V ⁻¹ | T6 |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|-------|
| X | 76.72 | 548.9 | 35.46 | 56.44 | 4.600 | 5.1 | 0.000 | 0.903 | 1.011 |
| Y | 44.78 | 323.3 | 35.85 | 29.01 | 2.529 | 5.1 | 0.000 | 0.546 | 1.009 |
| Z | 38.01 | 268.3 | 34.56 | 26.38 | 1.777 | 5.1 | 0.096 | 0.424 | 1.004 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750 | 41.9 | 0.89 | 6.81 | 6.81 | 6.81 | 0.72 | 1.31 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 6.64 | 6.64 | 6.64 | 0.80 | 1.21 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 5.56 | 5.56 | 5.56 | 0.80 | 1.20 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 5.33 | 5.33 | 5.33 | 0.76 | 1.26 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 4.99 | 4.99 | 4.99 | 0.70 | 1.36 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 4.68 | 4.68 | 4.68 | 0.63 | 1.48 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 4.56 | 4.56 | 4.56 | 0.80 | 1.23 | ± 12.0 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750 | 55.5 | 0.96 | 6.54 | 6.54 | 6.54 | 0.55 | 1.43 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.47 | 6.47 | 6.47 | 0.71 | 1.27 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 5.16 | 5.16 | 5.16 | 0.80 | 1.22 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.95 | 4.95 | 4.95 | 0.54 | 1.56 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 4.74 | 4.74 | 4.74 | 0.80 | 1.30 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.55 | 4.55 | 4.55 | 0.80 | 1.17 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.43 | 4.43 | 4.43 | 0.80 | 1.12 | ± 12.0 % |


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

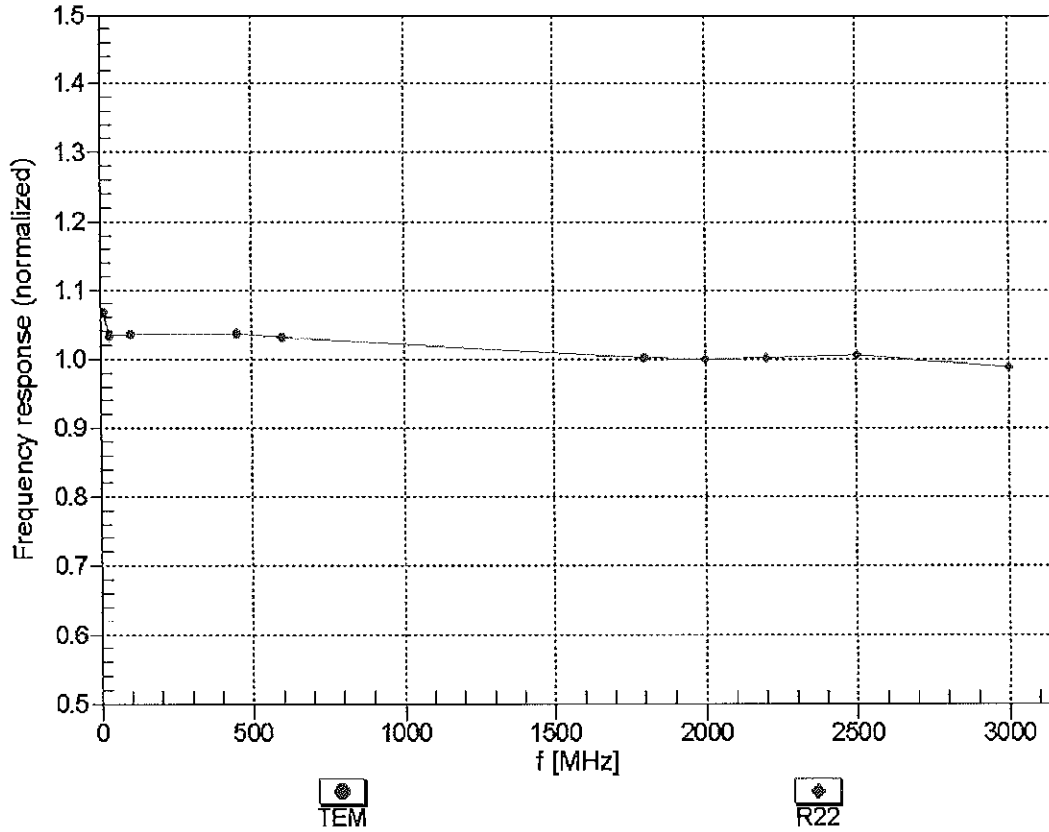



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


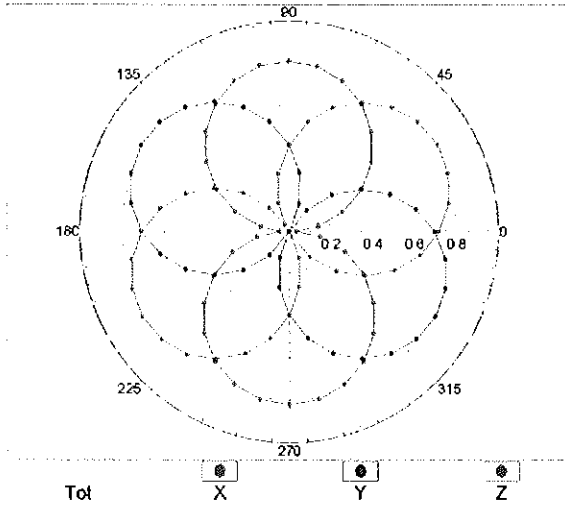


f=1800 MHz,R22

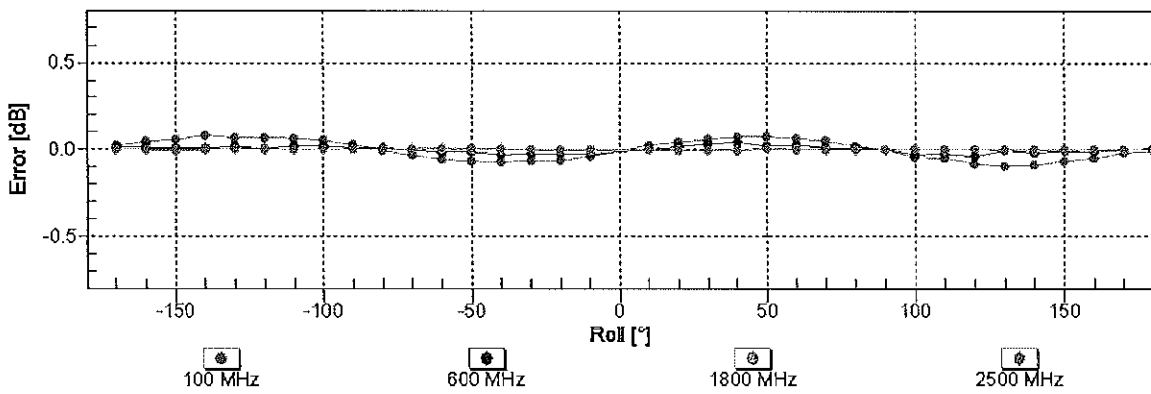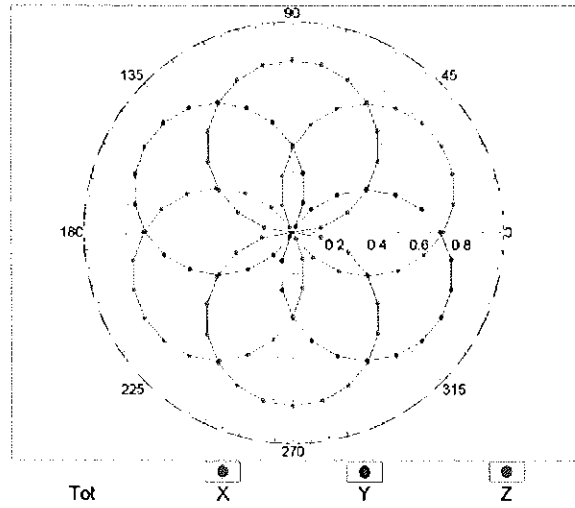


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

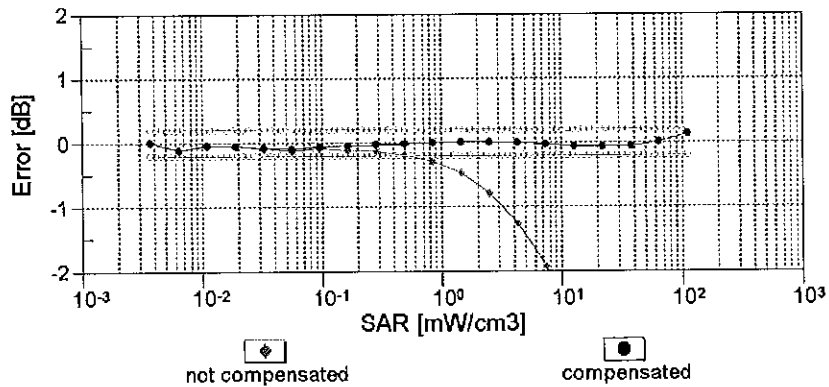
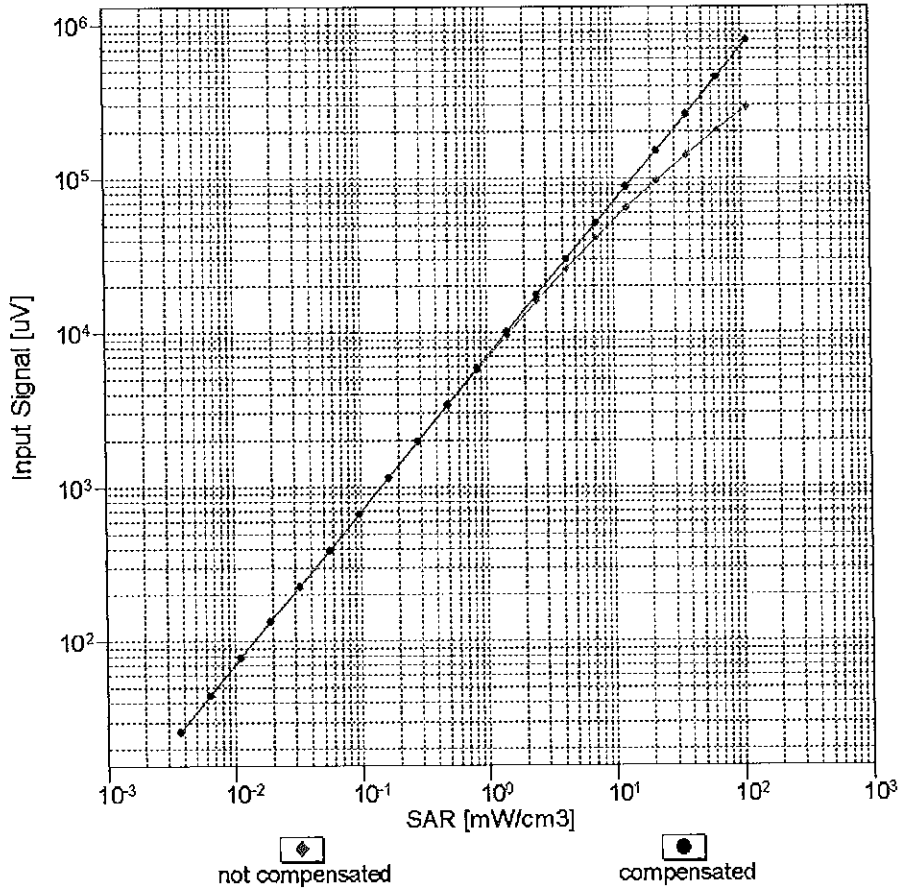


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

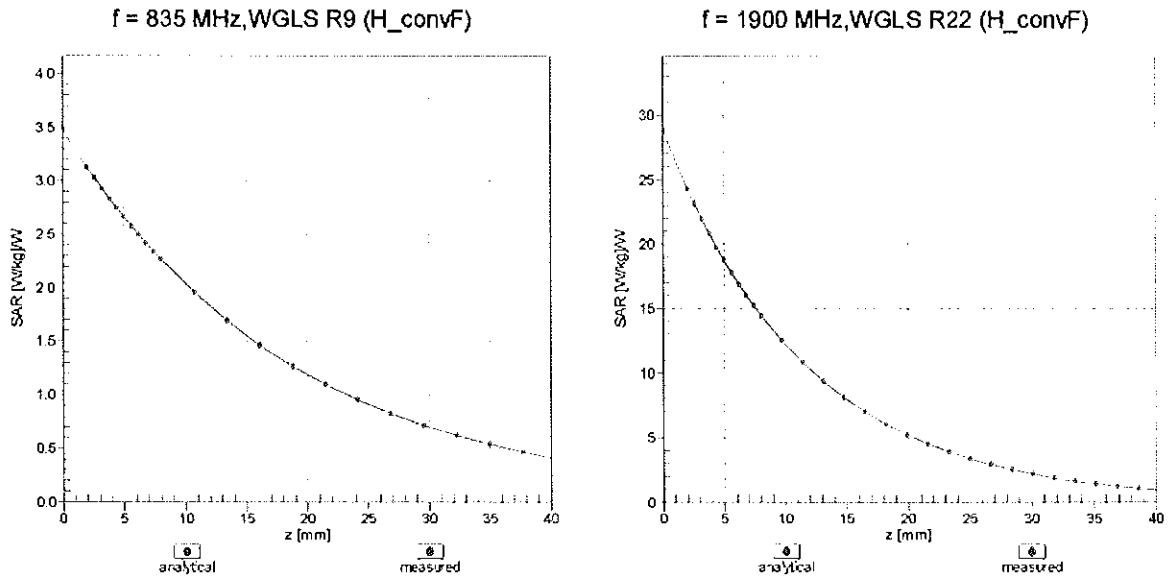

Deviation from Isotropy in Liquid Error (ϕ, ϑ), f = 900 MHz

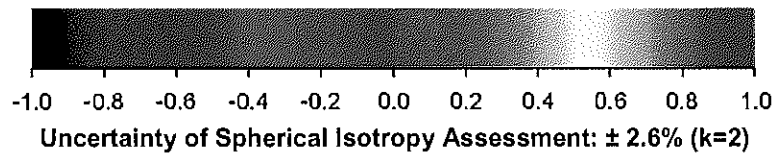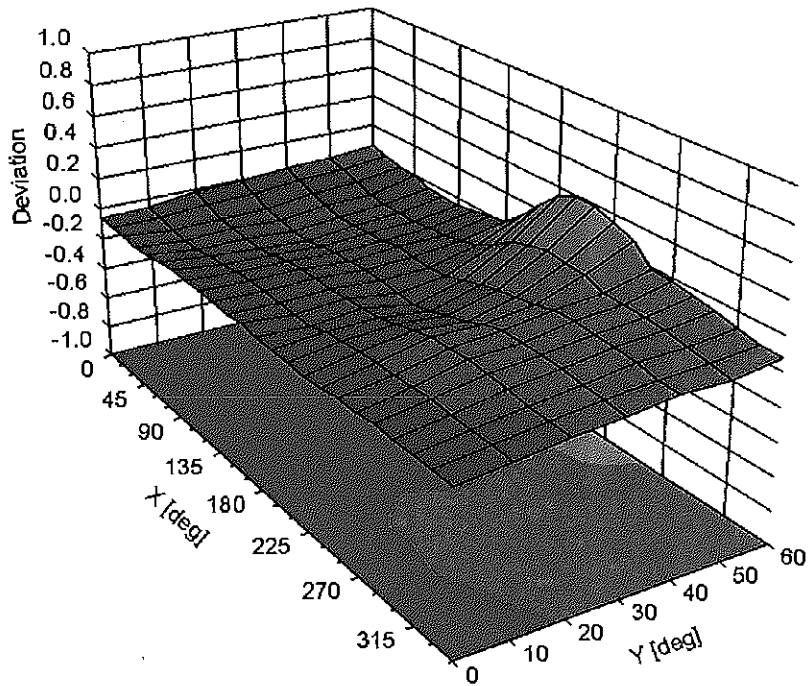

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 50 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu V}$ | C | D dB | VR mV | Max Unc ^E (k=2) |
|---------------|---|---|---------|------------------------|-------|---------|----------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 192.0 | $\pm 3.5\%$ |
| | | Y | 0.00 | 0.00 | 1.00 | | 194.3 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 179.9 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 9.02 | 77.08 | 18.94 | 10.00 | 25.0 | $\pm 9.6\%$ |
| | | Y | 12.19 | 85.73 | 21.41 | | 25.0 | |
| | | Z | 23.02 | 95.31 | 23.86 | | 25.0 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 1.60 | 76.05 | 19.77 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.08 | 68.15 | 15.73 | | 150.0 | |
| | | Z | 1.25 | 71.36 | 17.60 | | 150.0 | |
| 10012- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.52 | 68.53 | 17.98 | 0.41 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.33 | 65.39 | 16.06 | | 150.0 | |
| | | Z | 1.37 | 66.35 | 16.79 | | 150.0 | |
| 10013- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.37 | 67.71 | 17.82 | 1.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.07 | 67.50 | 17.57 | | 150.0 | |
| | | Z | 4.99 | 67.81 | 17.71 | | 150.0 | |
| 10021- DAC | GSM-FDD (TDMA, GMSK) | X | 11.16 | 81.48 | 22.11 | 9.39 | 50.0 | $\pm 9.6\%$ |
| | | Y | 61.59 | 115.23 | 32.13 | | 50.0 | |
| | | Z | 100.00 | 122.78 | 33.35 | | 50.0 | |
| 10023- DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 11.07 | 81.20 | 22.06 | 9.57 | 50.0 | $\pm 9.6\%$ |
| | | Y | 43.11 | 109.07 | 30.52 | | 50.0 | |
| | | Z | 100.00 | 122.63 | 33.33 | | 50.0 | |
| 10024- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 12.88 | 85.34 | 22.06 | 6.56 | 60.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 120.15 | 31.36 | | 60.0 | |
| | | Z | 100.00 | 120.25 | 30.99 | | 60.0 | |
| 10025- DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 19.49 | 99.22 | 36.41 | 12.57 | 50.0 | $\pm 9.6\%$ |
| | | Y | 15.67 | 100.74 | 38.44 | | 50.0 | |
| | | Z | 29.43 | 124.69 | 47.97 | | 50.0 | |
| 10026- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 18.92 | 96.32 | 32.19 | 9.56 | 60.0 | $\pm 9.6\%$ |
| | | Y | 17.33 | 101.02 | 35.08 | | 60.0 | |
| | | Z | 24.89 | 113.23 | 39.81 | | 60.0 | |
| 10027- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 24.19 | 95.70 | 24.33 | 4.80 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 119.30 | 30.03 | | 80.0 | |
| | | Z | 100.00 | 120.36 | 30.17 | | 80.0 | |
| 10028- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 115.36 | 28.49 | 3.55 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 119.83 | 29.45 | | 100.0 | |
| | | Z | 100.00 | 122.10 | 30.18 | | 100.0 | |
| 10029- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 16.27 | 93.78 | 30.32 | 7.80 | 80.0 | $\pm 9.6\%$ |
| | | Y | 11.67 | 92.24 | 30.90 | | 80.0 | |
| | | Z | 13.37 | 97.80 | 33.46 | | 80.0 | |
| 10030- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 15.68 | 88.86 | 22.54 | 5.30 | 70.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 118.49 | 29.99 | | 70.0 | |
| | | Z | 100.00 | 118.88 | 29.80 | | 70.0 | |
| 10031- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 100.00 | 116.01 | 27.12 | 1.88 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 121.13 | 28.42 | | 100.0 | |
| | | Z | 100.00 | 126.03 | 30.32 | | 100.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|--------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 100.00 | 119.38 | 27.36 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 126.54 | 29.58 | | 100.0 | |
| | | Z | 100.00 | 136.16 | 33.43 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | X | 13.27 | 88.21 | 24.10 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 20.91 | 99.02 | 27.13 | | 70.0 | |
| | | Z | 58.05 | 115.59 | 31.27 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | X | 16.18 | 96.67 | 25.44 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 10.83 | 91.57 | 22.94 | | 100.0 | |
| | | Z | 52.78 | 113.06 | 28.24 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | X | 12.45 | 95.04 | 24.79 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 5.49 | 83.70 | 20.10 | | 100.0 | |
| | | Z | 18.62 | 100.06 | 24.56 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 14.34 | 89.63 | 24.62 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 26.79 | 103.24 | 28.41 | | 70.0 | |
| | | Z | 95.10 | 123.67 | 33.30 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 15.98 | 96.45 | 25.32 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 9.62 | 89.98 | 22.43 | | 100.0 | |
| | | Z | 37.04 | 108.35 | 27.08 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 13.91 | 96.94 | 25.41 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 5.69 | 84.50 | 20.47 | | 100.0 | |
| | | Z | 19.52 | 101.18 | 25.01 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 3.28 | 80.46 | 20.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.92 | 73.09 | 15.89 | | 150.0 | |
| | | Z | 3.08 | 80.13 | 18.22 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 11.60 | 82.51 | 21.10 | 7.78 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 118.83 | 31.00 | | 50.0 | |
| | | Z | 100.00 | 118.47 | 30.39 | | 50.0 | |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | X | 0.02 | 128.88 | 9.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.00 | 96.92 | 0.26 | | 150.0 | |
| | | Z | 0.02 | 60.00 | 140.78 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 10.75 | 78.30 | 22.86 | 13.80 | 25.0 | ± 9.6 % |
| | | Y | 15.61 | 90.30 | 26.65 | | 25.0 | |
| | | Z | 32.75 | 104.57 | 30.45 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 10.92 | 80.23 | 22.15 | 10.79 | 40.0 | ± 9.6 % |
| | | Y | 20.87 | 96.36 | 27.22 | | 40.0 | |
| | | Z | 64.62 | 115.72 | 32.06 | | 40.0 | |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 11.51 | 81.76 | 22.84 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 15.28 | 90.93 | 25.77 | | 50.0 | |
| | | Z | 25.94 | 101.11 | 28.65 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 14.19 | 91.88 | 29.00 | 6.55 | 100.0 | ± 9.6 % |
| | | Y | 8.68 | 86.53 | 28.09 | | 100.0 | |
| | | Z | 9.12 | 89.51 | 29.70 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 2.01 | 72.72 | 19.70 | 0.61 | 110.0 | ± 9.6 % |
| | | Y | 1.51 | 67.62 | 17.16 | | 110.0 | |
| | | Z | 1.56 | 68.78 | 17.99 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 100.00 | 126.29 | 32.07 | 1.30 | 110.0 | ± 9.6 % |
| | | Y | 100.00 | 132.71 | 34.39 | | 110.0 | |
| | | Z | 100.00 | 137.07 | 36.21 | | 110.0 | |

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 36.66 | 112.50 | 30.92 | 2.04 | 110.0 | ± 9.6 % |
| | | Y | 11.07 | 98.15 | 27.76 | | 110.0 | |
| | | Z | 22.12 | 112.16 | 32.18 | | 110.0 | |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 5.03 | 67.33 | 17.05 | 0.49 | 100.0 | ± 9.6 % |
| | | Y | 4.77 | 67.19 | 16.82 | | 100.0 | |
| | | Z | 4.70 | 67.51 | 16.97 | | 100.0 | |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 5.09 | 67.56 | 17.23 | 0.72 | 100.0 | ± 9.6 % |
| | | Y | 4.81 | 67.36 | 16.96 | | 100.0 | |
| | | Z | 4.74 | 67.68 | 17.11 | | 100.0 | |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 5.47 | 67.93 | 17.49 | 0.86 | 100.0 | ± 9.6 % |
| | | Y | 5.10 | 67.63 | 17.20 | | 100.0 | |
| | | Z | 5.00 | 67.90 | 17.32 | | 100.0 | |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 5.40 | 68.08 | 17.70 | 1.21 | 100.0 | ± 9.6 % |
| | | Y | 5.02 | 67.68 | 17.39 | | 100.0 | |
| | | Z | 4.92 | 67.92 | 17.50 | | 100.0 | |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 5.49 | 68.31 | 17.98 | 1.46 | 100.0 | ± 9.6 % |
| | | Y | 5.08 | 67.82 | 17.62 | | 100.0 | |
| | | Z | 4.97 | 68.04 | 17.73 | | 100.0 | |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 5.84 | 68.47 | 18.45 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 5.42 | 68.13 | 18.14 | | 100.0 | |
| | | Z | 5.31 | 68.42 | 18.28 | | 100.0 | |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 6.07 | 69.08 | 18.91 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 5.53 | 68.32 | 18.44 | | 100.0 | |
| | | Z | 5.39 | 68.51 | 18.54 | | 100.0 | |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 6.13 | 68.90 | 19.06 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 5.61 | 68.37 | 18.66 | | 100.0 | |
| | | Z | 5.48 | 68.58 | 18.76 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 5.56 | 68.08 | 18.26 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 5.22 | 67.75 | 17.96 | | 100.0 | |
| | | Z | 5.14 | 68.03 | 18.10 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.71 | 68.87 | 18.66 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 5.28 | 68.28 | 18.29 | | 100.0 | |
| | | Z | 5.18 | 68.53 | 18.42 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.93 | 69.43 | 19.17 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 5.43 | 68.68 | 18.74 | | 100.0 | |
| | | Z | 5.32 | 68.95 | 18.89 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 6.04 | 69.75 | 19.56 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 5.49 | 68.80 | 18.99 | | 100.0 | |
| | | Z | 5.38 | 69.07 | 19.15 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 6.35 | 70.65 | 20.23 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 5.63 | 69.18 | 19.44 | | 90.0 | |
| | | Z | 5.49 | 69.37 | 19.56 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 6.37 | 70.50 | 20.38 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 5.68 | 69.10 | 19.63 | | 90.0 | |
| | | Z | 5.56 | 69.34 | 19.78 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 6.43 | 70.65 | 20.50 | 4.30 | 90.0 | ± 9.6 % |
| | | Y | 5.73 | 69.22 | 19.75 | | 90.0 | |
| | | Z | 5.61 | 69.48 | 19.91 | | 90.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 1.62 | 75.66 | 18.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.87 | 66.71 | 12.69 | | 150.0 | |
| | | Z | 1.13 | 71.02 | 14.45 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 3.53 | 66.20 | 10.93 | 4.77 | 80.0 | ± 9.6 % |
| | | Y | 2.19 | 64.40 | 9.18 | | 80.0 | |
| | | Z | 1.96 | 64.15 | 8.74 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 12.79 | 85.25 | 22.06 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 120.23 | 31.42 | | 60.0 | |
| | | Z | 100.00 | 120.31 | 31.04 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 2.06 | 70.06 | 17.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.88 | 68.31 | 15.96 | | 150.0 | |
| | | Z | 2.04 | 70.38 | 16.98 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 2.02 | 70.12 | 17.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.84 | 68.27 | 15.94 | | 150.0 | |
| | | Z | 2.00 | 70.37 | 16.98 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 18.80 | 96.14 | 32.13 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 17.28 | 100.91 | 35.04 | | 60.0 | |
| | | Z | 24.81 | 113.10 | 39.77 | | 60.0 | |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 3.84 | 73.61 | 18.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.15 | 70.58 | 16.91 | | 150.0 | |
| | | Z | 3.25 | 71.69 | 17.61 | | 150.0 | |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.58 | 69.11 | 16.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.26 | 67.74 | 16.10 | | 150.0 | |
| | | Z | 3.26 | 68.29 | 16.47 | | 150.0 | |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.66 | 68.88 | 16.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.36 | 67.71 | 16.19 | | 150.0 | |
| | | Z | 3.36 | 68.23 | 16.52 | | 150.0 | |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 9.75 | 77.78 | 20.81 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.78 | 79.16 | 21.83 | | 65.0 | |
| | | Z | 9.34 | 81.38 | 22.82 | | 65.0 | |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 9.87 | 77.22 | 21.49 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.42 | 77.09 | 21.77 | | 65.0 | |
| | | Z | 8.44 | 78.16 | 22.31 | | 65.0 | |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 9.19 | 75.82 | 21.15 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.07 | 76.20 | 21.66 | | 65.0 | |
| | | Z | 8.27 | 77.70 | 22.41 | | 65.0 | |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 3.37 | 72.69 | 18.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.75 | 69.90 | 16.77 | | 150.0 | |
| | | Z | 2.82 | 71.09 | 17.51 | | 150.0 | |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 3.26 | 68.97 | 16.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.91 | 67.66 | 16.01 | | 150.0 | |
| | | Z | 2.92 | 68.36 | 16.42 | | 150.0 | |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.79 | 71.81 | 17.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.23 | 69.12 | 16.39 | | 150.0 | |
| | | Z | 2.31 | 70.62 | 17.23 | | 150.0 | |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.96 | 69.58 | 17.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 68.64 | 16.31 | | 150.0 | |
| | | Z | 2.69 | 69.84 | 16.85 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 3.36 | 68.71 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.03 | 67.66 | 16.06 | | 150.0 | |
| | | Z | 3.04 | 68.35 | 16.45 | | 150.0 | |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 3.10 | 69.46 | 17.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.78 | 68.78 | 16.44 | | 150.0 | |
| | | Z | 2.83 | 69.92 | 16.93 | | 150.0 | |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 5.34 | 67.65 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.17 | 67.50 | 16.64 | | 150.0 | |
| | | Z | 5.08 | 67.64 | 16.74 | | 150.0 | |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.80 | 68.17 | 17.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.44 | 67.60 | 16.69 | | 150.0 | |
| | | Z | 5.33 | 67.71 | 16.77 | | 150.0 | |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.47 | 67.90 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.25 | 67.68 | 16.65 | | 150.0 | |
| | | Z | 5.17 | 67.85 | 16.77 | | 150.0 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 5.34 | 67.65 | 16.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.12 | 67.32 | 16.56 | | 150.0 | |
| | | Z | 5.07 | 67.59 | 16.73 | | 150.0 | |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.79 | 68.04 | 16.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 67.82 | 16.81 | | 150.0 | |
| | | Z | 5.42 | 67.93 | 16.89 | | 150.0 | |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 5.44 | 67.84 | 16.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.24 | 67.66 | 16.65 | | 150.0 | |
| | | Z | 5.17 | 67.84 | 16.77 | | 150.0 | |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.72 | 68.86 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.39 | 67.72 | 16.10 | | 150.0 | |
| | | Z | 3.39 | 68.26 | 16.45 | | 150.0 | |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.82 | 68.79 | 16.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.51 | 67.83 | 16.27 | | 150.0 | |
| | | Z | 3.51 | 68.36 | 16.60 | | 150.0 | |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 2.57 | 71.96 | 17.88 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.01 | 69.21 | 16.02 | | 150.0 | |
| | | Z | 2.13 | 71.18 | 16.95 | | 150.0 | |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.89 | 70.53 | 17.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.49 | 69.45 | 15.95 | | 150.0 | |
| | | Z | 2.62 | 71.11 | 16.52 | | 150.0 | |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 2.69 | 68.52 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.23 | 66.92 | 14.20 | | 150.0 | |
| | | Z | 2.23 | 67.85 | 14.42 | | 150.0 | |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 2.07 | 72.06 | 16.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.17 | 64.90 | 11.31 | | 150.0 | |
| | | Z | 1.08 | 64.84 | 10.72 | | 150.0 | |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 4.64 | 77.66 | 18.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.89 | 66.33 | 11.57 | | 150.0 | |
| | | Z | 1.28 | 62.78 | 8.70 | | 150.0 | |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 5.86 | 81.36 | 20.54 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.26 | 68.50 | 12.73 | | 150.0 | |
| | | Z | 1.39 | 63.59 | 9.24 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|-------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 3.27 | 69.03 | 16.89 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.92 | 67.72 | 16.06 | | 150.0 | |
| | | Z | 2.93 | 68.43 | 16.47 | | 150.0 | |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 3.37 | 68.76 | 16.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.04 | 67.71 | 16.11 | | 150.0 | |
| | | Z | 3.05 | 68.41 | 16.50 | | 150.0 | |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 9.88 | 78.98 | 21.39 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.54 | 82.00 | 22.98 | | 65.0 | |
| | | Z | 10.52 | 85.01 | 24.21 | | 65.0 | |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 9.59 | 77.49 | 21.44 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.05 | 77.33 | 21.53 | | 65.0 | |
| | | Z | 8.15 | 78.63 | 22.11 | | 65.0 | |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 9.88 | 78.01 | 21.96 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.51 | 78.32 | 22.28 | | 65.0 | |
| | | Z | 8.64 | 79.68 | 22.87 | | 65.0 | |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.88 | 72.43 | 18.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.28 | 69.53 | 16.65 | | 150.0 | |
| | | Z | 2.36 | 71.01 | 17.47 | | 150.0 | |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.96 | 69.57 | 17.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 68.66 | 16.33 | | 150.0 | |
| | | Z | 2.70 | 69.87 | 16.88 | | 150.0 | |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 2.50 | 72.75 | 18.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.86 | 69.32 | 15.77 | | 150.0 | |
| | | Z | 2.00 | 71.53 | 16.72 | | 150.0 | |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 2.58 | 69.56 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.07 | 67.52 | 14.21 | | 150.0 | |
| | | Z | 2.11 | 68.66 | 14.46 | | 150.0 | |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 3.11 | 69.51 | 17.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.79 | 68.85 | 16.49 | | 150.0 | |
| | | Z | 2.84 | 70.00 | 16.99 | | 150.0 | |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 2.70 | 69.94 | 16.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.17 | 67.94 | 14.47 | | 150.0 | |
| | | Z | 2.21 | 69.05 | 14.68 | | 150.0 | |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 3.17 | 70.70 | 17.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 69.22 | 16.63 | | 150.0 | |
| | | Z | 2.84 | 70.27 | 17.24 | | 150.0 | |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 3.25 | 68.62 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.93 | 67.68 | 16.03 | | 150.0 | |
| | | Z | 2.94 | 68.43 | 16.42 | | 150.0 | |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 3.34 | 68.54 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.04 | 67.85 | 16.15 | | 150.0 | |
| | | Z | 3.05 | 68.62 | 16.54 | | 150.0 | |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 4.29 | 71.19 | 20.11 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.58 | 69.86 | 19.45 | | 150.0 | |
| | | Z | 3.34 | 69.55 | 19.26 | | 150.0 | |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 5.65 | 74.34 | 20.64 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 72.64 | 19.86 | | 150.0 | |
| | | Z | 3.97 | 72.28 | 19.65 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.08 | 75.90 | 21.58 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.83 | 75.01 | 21.26 | | 150.0 | |
| | | Z | 4.38 | 74.50 | 20.98 | | 150.0 | |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.41 | 74.54 | 21.42 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.96 | 68.83 | 19.02 | | 150.0 | |
| | | Z | 2.72 | 67.99 | 18.57 | | 150.0 | |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 6.70 | 80.82 | 23.44 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.91 | 74.17 | 21.18 | | 150.0 | |
| | | Z | 3.42 | 72.70 | 20.49 | | 150.0 | |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 5.50 | 76.54 | 20.93 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.29 | 70.45 | 18.57 | | 150.0 | |
| | | Z | 2.94 | 69.58 | 18.14 | | 150.0 | |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 25.76 | 101.07 | 30.32 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 18.45 | 102.75 | 32.10 | | 65.0 | |
| | | Z | 20.86 | 107.70 | 33.85 | | 65.0 | |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 19.21 | 92.24 | 26.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 26.29 | 105.14 | 31.12 | | 65.0 | |
| | | Z | 28.49 | 108.55 | 32.12 | | 65.0 | |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 17.46 | 89.68 | 25.13 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 21.35 | 100.13 | 29.12 | | 65.0 | |
| | | Z | 22.92 | 103.28 | 30.05 | | 65.0 | |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.34 | 74.12 | 21.15 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.93 | 68.55 | 18.79 | | 150.0 | |
| | | Z | 2.70 | 67.77 | 18.36 | | 150.0 | |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 6.71 | 80.84 | 23.45 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.92 | 74.20 | 21.19 | | 150.0 | |
| | | Z | 3.42 | 72.72 | 20.50 | | 150.0 | |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 4.38 | 74.32 | 21.26 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.95 | 68.69 | 18.87 | | 150.0 | |
| | | Z | 2.71 | 67.87 | 18.43 | | 150.0 | |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 6.59 | 80.50 | 23.29 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.89 | 74.02 | 21.09 | | 150.0 | |
| | | Z | 3.41 | 72.61 | 20.43 | | 150.0 | |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 6.03 | 78.45 | 22.01 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.58 | 72.24 | 19.76 | | 150.0 | |
| | | Z | 3.16 | 71.11 | 19.23 | | 150.0 | |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 5.47 | 76.42 | 20.86 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.28 | 70.40 | 18.53 | | 150.0 | |
| | | Z | 2.94 | 69.55 | 18.12 | | 150.0 | |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.38 | 74.30 | 21.25 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.95 | 68.67 | 18.87 | | 150.0 | |
| | | Z | 2.71 | 67.86 | 18.43 | | 150.0 | |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 6.58 | 80.48 | 23.29 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.88 | 74.00 | 21.08 | | 150.0 | |
| | | Z | 3.40 | 72.59 | 20.42 | | 150.0 | |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 5.46 | 76.40 | 20.85 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.28 | 70.38 | 18.52 | | 150.0 | |
| | | Z | 2.93 | 69.53 | 18.11 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 4.39 | 74.34 | 21.27 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.96 | 68.71 | 18.89 | | 150.0 | |
| | | Z | 2.72 | 67.89 | 18.44 | | 150.0 | |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 6.61 | 80.55 | 23.32 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.90 | 74.06 | 21.11 | | 150.0 | |
| | | Z | 3.42 | 72.64 | 20.45 | | 150.0 | |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 5.49 | 76.46 | 20.88 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.29 | 70.44 | 18.55 | | 150.0 | |
| | | Z | 2.95 | 69.59 | 18.14 | | 150.0 | |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 4.40 | 74.38 | 21.31 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.97 | 68.77 | 18.95 | | 150.0 | |
| | | Z | 2.73 | 67.95 | 18.51 | | 150.0 | |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 6.86 | 81.30 | 23.70 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.01 | 74.64 | 21.46 | | 150.0 | |
| | | Z | 3.49 | 73.09 | 20.74 | | 150.0 | |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 5.63 | 76.95 | 21.16 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.36 | 70.82 | 18.81 | | 150.0 | |
| | | Z | 3.00 | 69.90 | 18.37 | | 150.0 | |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.76 | 66.98 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 66.89 | 16.29 | | 150.0 | |
| | | Z | 4.48 | 67.27 | 16.46 | | 150.0 | |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.98 | 67.40 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 67.19 | 16.42 | | 150.0 | |
| | | Z | 4.63 | 67.53 | 16.59 | | 150.0 | |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 5.02 | 67.38 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 67.22 | 16.44 | | 150.0 | |
| | | Z | 4.67 | 67.55 | 16.61 | | 150.0 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.79 | 67.12 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 66.94 | 16.30 | | 150.0 | |
| | | Z | 4.47 | 67.29 | 16.46 | | 150.0 | |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 5.00 | 67.41 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 67.21 | 16.43 | | 150.0 | |
| | | Z | 4.64 | 67.54 | 16.60 | | 150.0 | |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 5.02 | 67.39 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 67.23 | 16.45 | | 150.0 | |
| | | Z | 4.67 | 67.55 | 16.61 | | 150.0 | |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.75 | 67.15 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 66.96 | 16.27 | | 150.0 | |
| | | Z | 4.43 | 67.33 | 16.43 | | 150.0 | |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 5.00 | 67.42 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 67.17 | 16.42 | | 150.0 | |
| | | Z | 4.63 | 67.50 | 16.58 | | 150.0 | |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 5.03 | 67.33 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 67.16 | 16.44 | | 150.0 | |
| | | Z | 4.68 | 67.49 | 16.60 | | 150.0 | |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 5.32 | 67.70 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.10 | 67.32 | 16.56 | | 150.0 | |
| | | Z | 5.04 | 67.57 | 16.71 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.69 | 67.90 | 16.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.41 | 67.62 | 16.73 | | 150.0 | |
| | | Z | 5.32 | 67.79 | 16.83 | | 150.0 | |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.40 | 67.86 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.14 | 67.44 | 16.54 | | 150.0 | |
| | | Z | 5.08 | 67.68 | 16.69 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 3.04 | 66.91 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 66.45 | 15.40 | | 150.0 | |
| | | Z | 2.79 | 67.13 | 15.62 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 19.62 | 92.68 | 26.54 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 28.14 | 106.53 | 31.60 | | 65.0 | |
| | | Z | 30.74 | 110.09 | 32.63 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 17.31 | 89.65 | 25.20 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 25.62 | 103.45 | 30.17 | | 65.0 | |
| | | Z | 27.71 | 106.63 | 31.05 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 25.12 | 101.14 | 30.46 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 22.85 | 107.40 | 33.58 | | 65.0 | |
| | | Z | 23.56 | 110.42 | 34.69 | | 65.0 | |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 19.21 | 92.22 | 26.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 26.37 | 105.18 | 31.14 | | 65.0 | |
| | | Z | 28.56 | 108.58 | 32.13 | | 65.0 | |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 16.99 | 89.27 | 25.02 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 24.08 | 102.25 | 29.76 | | 65.0 | |
| | | Z | 25.76 | 105.25 | 30.60 | | 65.0 | |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 24.47 | 100.57 | 30.23 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 21.54 | 106.10 | 33.13 | | 65.0 | |
| | | Z | 22.10 | 109.02 | 34.22 | | 65.0 | |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 19.21 | 92.23 | 26.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 26.35 | 105.17 | 31.13 | | 65.0 | |
| | | Z | 28.56 | 108.59 | 32.14 | | 65.0 | |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 16.99 | 89.29 | 25.03 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 24.05 | 102.24 | 29.76 | | 65.0 | |
| | | Z | 25.73 | 105.25 | 30.60 | | 65.0 | |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 23.75 | 99.87 | 29.94 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 20.44 | 104.88 | 32.66 | | 65.0 | |
| | | Z | 20.94 | 107.73 | 33.73 | | 65.0 | |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 19.23 | 92.26 | 26.34 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 26.43 | 105.24 | 31.16 | | 65.0 | |
| | | Z | 28.68 | 108.68 | 32.16 | | 65.0 | |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 17.05 | 89.34 | 25.04 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 24.28 | 102.38 | 29.79 | | 65.0 | |
| | | Z | 26.05 | 105.43 | 30.64 | | 65.0 | |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 24.65 | 100.72 | 30.28 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 21.67 | 106.26 | 33.17 | | 65.0 | |
| | | Z | 22.28 | 109.22 | 34.28 | | 65.0 | |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 19.21 | 92.24 | 26.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 26.34 | 105.18 | 31.13 | | 65.0 | |
| | | Z | 28.55 | 108.60 | 32.14 | | 65.0 | |

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 17.00 | 89.31 | 25.04 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 24.00 | 102.22 | 29.75 | | 65.0 | |
| | | Z | 25.68 | 105.23 | 30.60 | | 65.0 | |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 24.60 | 100.69 | 30.26 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 21.61 | 106.21 | 33.16 | | 65.0 | |
| | | Z | 22.24 | 109.18 | 34.27 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 14.83 | 87.15 | 27.43 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 11.87 | 87.25 | 27.69 | | 65.0 | |
| | | Z | 12.27 | 89.81 | 28.71 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 14.03 | 85.86 | 26.85 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 11.07 | 85.73 | 27.03 | | 65.0 | |
| | | Z | 11.88 | 89.15 | 28.39 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 12.50 | 85.61 | 27.61 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 8.91 | 82.53 | 26.67 | | 65.0 | |
| | | Z | 9.40 | 85.62 | 28.06 | | 65.0 | |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 10.84 | 80.28 | 21.46 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.60 | 79.06 | 19.82 | | 65.0 | |
| | | Z | 7.30 | 76.79 | 18.14 | | 65.0 | |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 10.80 | 80.00 | 21.33 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.32 | 78.30 | 19.47 | | 65.0 | |
| | | Z | 7.01 | 75.95 | 17.75 | | 65.0 | |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 10.19 | 81.67 | 21.72 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.19 | 82.92 | 21.40 | | 65.0 | |
| | | Z | 10.28 | 85.26 | 21.82 | | 65.0 | |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 9.24 | 78.33 | 20.99 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.42 | 77.41 | 19.87 | | 65.0 | |
| | | Z | 7.44 | 78.18 | 19.81 | | 65.0 | |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 9.29 | 78.02 | 20.88 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.28 | 76.69 | 19.57 | | 65.0 | |
| | | Z | 7.17 | 77.21 | 19.40 | | 65.0 | |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 10.52 | 82.18 | 22.29 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 10.94 | 86.37 | 23.51 | | 65.0 | |
| | | Z | 13.59 | 90.89 | 24.82 | | 65.0 | |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 9.84 | 79.38 | 22.27 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.59 | 80.24 | 22.59 | | 65.0 | |
| | | Z | 8.91 | 81.95 | 23.17 | | 65.0 | |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 9.48 | 77.77 | 21.45 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.96 | 77.76 | 21.28 | | 65.0 | |
| | | Z | 8.06 | 79.03 | 21.69 | | 65.0 | |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 10.35 | 81.23 | 22.32 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 10.67 | 85.75 | 24.25 | | 65.0 | |
| | | Z | 12.80 | 90.26 | 25.85 | | 65.0 | |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 9.41 | 77.10 | 21.37 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.89 | 76.83 | 21.30 | | 65.0 | |
| | | Z | 7.98 | 78.11 | 21.82 | | 65.0 | |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 9.73 | 77.64 | 21.86 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.31 | 77.74 | 21.96 | | 65.0 | |
| | | Z | 8.42 | 79.03 | 22.48 | | 65.0 | |

| | | | | | | | | |
|-----------|---|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 9.76 | 78.98 | 21.63 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.21 | 81.58 | 22.99 | | 65.0 | |
| | | Z | 10.10 | 84.50 | 24.17 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 10.36 | 79.33 | 20.55 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.89 | 75.10 | 17.29 | | 65.0 | |
| | | Z | 5.38 | 71.84 | 15.02 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 10.33 | 78.98 | 20.36 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.60 | 74.15 | 16.79 | | 65.0 | |
| | | Z | 5.14 | 70.90 | 14.50 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 9.84 | 80.89 | 21.06 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.93 | 77.80 | 18.67 | | 65.0 | |
| | | Z | 6.67 | 77.68 | 18.06 | | 65.0 | |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 9.48 | 78.65 | 21.42 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.89 | 78.48 | 20.85 | | 65.0 | |
| | | Z | 8.05 | 79.67 | 21.05 | | 65.0 | |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 9.52 | 78.48 | 21.39 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.84 | 78.08 | 20.70 | | 65.0 | |
| | | Z | 7.93 | 79.11 | 20.83 | | 65.0 | |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 10.28 | 81.56 | 22.27 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 10.28 | 85.25 | 23.51 | | 65.0 | |
| | | Z | 12.40 | 89.51 | 24.85 | | 65.0 | |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 9.83 | 79.35 | 22.25 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.56 | 80.18 | 22.55 | | 65.0 | |
| | | Z | 8.88 | 81.87 | 23.12 | | 65.0 | |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 9.48 | 77.78 | 21.46 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.94 | 77.74 | 21.28 | | 65.0 | |
| | | Z | 8.05 | 79.01 | 21.68 | | 65.0 | |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 10.32 | 81.15 | 22.28 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 10.57 | 85.55 | 24.15 | | 65.0 | |
| | | Z | 12.63 | 90.00 | 25.74 | | 65.0 | |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 9.59 | 77.50 | 21.45 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.04 | 77.33 | 21.54 | | 65.0 | |
| | | Z | 8.14 | 78.63 | 22.11 | | 65.0 | |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 9.89 | 78.01 | 21.96 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.50 | 78.31 | 22.27 | | 65.0 | |
| | | Z | 8.64 | 79.67 | 22.86 | | 65.0 | |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 9.88 | 78.96 | 21.38 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.52 | 81.96 | 22.96 | | 65.0 | |
| | | Z | 10.50 | 84.95 | 24.19 | | 65.0 | |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 9.95 | 76.96 | 21.54 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.52 | 76.88 | 21.79 | | 65.0 | |
| | | Z | 8.53 | 77.92 | 22.30 | | 65.0 | |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 9.89 | 76.68 | 21.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.46 | 76.46 | 21.67 | | 65.0 | |
| | | Z | 8.45 | 77.44 | 22.15 | | 65.0 | |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 9.66 | 77.24 | 20.86 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.81 | 78.78 | 21.90 | | 65.0 | |
| | | Z | 9.16 | 80.58 | 22.73 | | 65.0 | |

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.74 | 67.26 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 66.92 | 15.38 | | 150.0 | |
| | | Z | 2.66 | 67.94 | 15.80 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 2.05 | 72.21 | 18.03 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.65 | 68.50 | 15.87 | | 150.0 | |
| | | Z | 1.80 | 70.74 | 17.08 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 8.03 | 72.61 | 16.76 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 5.31 | 69.07 | 13.45 | | 50.0 | |
| | | Z | 4.52 | 67.70 | 12.08 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 10.53 | 79.27 | 21.29 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 8.21 | 77.64 | 19.35 | | 50.0 | |
| | | Z | 7.62 | 76.93 | 18.36 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 10.71 | 79.48 | 21.37 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 8.29 | 77.74 | 19.41 | | 50.0 | |
| | | Z | 7.68 | 77.01 | 18.42 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 2.46 | 75.92 | 18.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.45 | 69.17 | 13.90 | | 150.0 | |
| | | Z | 1.74 | 72.52 | 15.01 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 1.54 | 75.02 | 18.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.85 | 66.46 | 12.55 | | 150.0 | |
| | | Z | 1.09 | 70.54 | 14.22 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 2.85 | 86.00 | 22.76 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.20 | 72.00 | 15.52 | | 150.0 | |
| | | Z | 3.37 | 86.48 | 20.58 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 6.08 | 98.98 | 27.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.38 | 81.80 | 19.81 | | 150.0 | |
| | | Z | 91.77 | 132.75 | 32.89 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 11.42 | 82.00 | 23.75 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 13.54 | 88.04 | 25.23 | | 50.0 | |
| | | Z | 20.14 | 95.71 | 27.34 | | 50.0 | |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 3.39 | 72.81 | 18.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.76 | 70.00 | 16.84 | | 150.0 | |
| | | Z | 2.84 | 71.20 | 17.58 | | 150.0 | |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 2.33 | 72.89 | 17.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.54 | 67.89 | 13.96 | | 150.0 | |
| | | Z | 1.61 | 69.51 | 14.40 | | 150.0 | |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 4.61 | 76.96 | 19.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.70 | 70.48 | 14.61 | | 150.0 | |
| | | Z | 1.96 | 66.96 | 12.10 | | 150.0 | |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 3.49 | 71.59 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.91 | 65.24 | 11.36 | | 150.0 | |
| | | Z | 1.47 | 63.13 | 9.40 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 6.59 | 70.34 | 20.04 | 4.17 | 80.0 | ± 9.6 % |
| | | Y | 5.68 | 68.74 | 18.85 | | 80.0 | |
| | | Z | 5.70 | 69.67 | 19.26 | | 80.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 7.28 | 71.73 | 21.22 | 4.96 | 80.0 | ± 9.6 % |
| | | Y | 6.10 | 69.04 | 19.43 | | 80.0 | |
| | | Z | 6.04 | 69.77 | 19.77 | | 80.0 | |

| | | | | | | | | |
|-----------|---|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 7.35 | 72.51 | 21.62 | 4.96 | 80.0 | ± 9.6 % |
| | | Y | 5.94 | 69.06 | 19.41 | | 80.0 | |
| | | Z | 5.89 | 69.82 | 19.76 | | 80.0 | |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 6.69 | 70.97 | 20.39 | 4.17 | 80.0 | ± 9.6 % |
| | | Y | 5.59 | 68.42 | 18.66 | | 80.0 | |
| | | Z | 5.56 | 69.20 | 19.00 | | 80.0 | |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 14.75 | 90.64 | 29.58 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 10.18 | 84.38 | 26.41 | | 50.0 | |
| | | Z | 10.30 | 85.54 | 26.72 | | 50.0 | |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 9.44 | 79.58 | 25.56 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 7.33 | 75.98 | 23.40 | | 50.0 | |
| | | Z | 6.44 | 73.04 | 21.64 | | 50.0 | |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 10.22 | 81.50 | 26.08 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 7.67 | 77.32 | 23.80 | | 50.0 | |
| | | Z | 7.49 | 77.77 | 23.93 | | 50.0 | |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 10.67 | 82.66 | 26.55 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 7.93 | 78.29 | 24.23 | | 50.0 | |
| | | Z | 7.77 | 78.85 | 24.42 | | 50.0 | |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 9.59 | 79.83 | 25.67 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 7.43 | 76.26 | 23.57 | | 50.0 | |
| | | Z | 6.50 | 73.23 | 21.79 | | 50.0 | |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 9.69 | 80.24 | 25.70 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 7.48 | 76.59 | 23.59 | | 50.0 | |
| | | Z | 7.35 | 77.19 | 23.79 | | 50.0 | |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 3.76 | 71.88 | 17.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.12 | 69.22 | 16.46 | | 150.0 | |
| | | Z | 3.20 | 70.27 | 17.11 | | 150.0 | |
| 10313-AAA | IDEN 1:3 | X | 8.04 | 75.55 | 17.71 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 8.89 | 81.65 | 20.17 | | 70.0 | |
| | | Z | 12.54 | 87.83 | 22.26 | | 70.0 | |
| 10314-AAA | IDEN 1:6 | X | 10.06 | 79.94 | 21.38 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 12.66 | 89.89 | 25.48 | | 30.0 | |
| | | Z | 20.06 | 99.62 | 28.65 | | 30.0 | |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.30 | 67.68 | 17.69 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.18 | 64.90 | 15.80 | | 150.0 | |
| | | Z | 1.23 | 65.94 | 16.59 | | 150.0 | |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 4.90 | 67.26 | 16.78 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.64 | 67.10 | 16.54 | | 150.0 | |
| | | Z | 4.58 | 67.43 | 16.69 | | 150.0 | |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.90 | 67.26 | 16.78 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.64 | 67.10 | 16.54 | | 150.0 | |
| | | Z | 4.58 | 67.43 | 16.69 | | 150.0 | |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 5.01 | 67.47 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.68 | 67.24 | 16.42 | | 150.0 | |
| | | Z | 4.61 | 67.58 | 16.60 | | 150.0 | |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 5.58 | 67.43 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.46 | 67.62 | 16.70 | | 150.0 | |
| | | Z | 5.29 | 67.47 | 16.64 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.90 | 68.07 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.66 | 67.67 | 16.59 | | 150.0 | |
| | | Z | 5.60 | 67.87 | 16.71 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 2.46 | 75.92 | 18.53 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.45 | 69.17 | 13.90 | | 115.0 | |
| | | Z | 1.74 | 72.52 | 15.01 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 2.46 | 75.92 | 18.53 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.45 | 69.17 | 13.90 | | 115.0 | |
| | | Z | 1.74 | 72.52 | 15.01 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 38.96 | 111.40 | 30.01 | 0.00 | 100.0 | ± 9.6 % |
| | | Y | 96.63 | 125.46 | 32.24 | | 100.0 | |
| | | Z | 100.00 | 123.89 | 30.87 | | 100.0 | |
| 10410-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 79.33 | 113.95 | 29.40 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 123.80 | 32.02 | | 80.0 | |
| | | Z | 100.00 | 124.20 | 31.74 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 1.01 | 64.64 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.03 | 63.36 | 14.90 | | 150.0 | |
| | | Z | 1.08 | 64.37 | 15.69 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.76 | 67.00 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 66.92 | 16.37 | | 150.0 | |
| | | Z | 4.48 | 67.28 | 16.53 | | 150.0 | |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.76 | 67.00 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 66.92 | 16.37 | | 150.0 | |
| | | Z | 4.48 | 67.28 | 16.53 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble) | X | 4.74 | 67.14 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 67.10 | 16.40 | | 150.0 | |
| | | Z | 4.48 | 67.49 | 16.59 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.77 | 67.10 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.55 | 67.04 | 16.39 | | 150.0 | |
| | | Z | 4.49 | 67.42 | 16.58 | | 150.0 | |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.90 | 67.10 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.66 | 67.03 | 16.41 | | 150.0 | |
| | | Z | 4.60 | 67.38 | 16.58 | | 150.0 | |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 5.14 | 67.54 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.81 | 67.33 | 16.51 | | 150.0 | |
| | | Z | 4.74 | 67.65 | 16.67 | | 150.0 | |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 5.04 | 67.47 | 16.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 67.28 | 16.49 | | 150.0 | |
| | | Z | 4.66 | 67.61 | 16.65 | | 150.0 | |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.61 | 67.86 | 16.86 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.36 | 67.59 | 16.69 | | 150.0 | |
| | | Z | 5.29 | 67.80 | 16.81 | | 150.0 | |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.62 | 67.87 | 16.86 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.40 | 67.74 | 16.76 | | 150.0 | |
| | | Z | 5.31 | 67.91 | 16.86 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.65 | 67.92 | 16.88 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.39 | 67.63 | 16.70 | | 150.0 | |
| | | Z | 5.28 | 67.70 | 16.75 | | 150.0 | |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.50 | 70.33 | 18.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.28 | 71.46 | 18.38 | | 150.0 | |
| | | Z | 4.28 | 72.32 | 18.56 | | 150.0 | |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 4.56 | 67.66 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.19 | 67.51 | 16.33 | | 150.0 | |
| | | Z | 4.12 | 67.97 | 16.50 | | 150.0 | |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.83 | 67.55 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.50 | 67.35 | 16.43 | | 150.0 | |
| | | Z | 4.43 | 67.74 | 16.61 | | 150.0 | |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 5.06 | 67.54 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 67.32 | 16.51 | | 150.0 | |
| | | Z | 4.68 | 67.64 | 16.67 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.58 | 70.97 | 18.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.39 | 72.38 | 18.32 | | 150.0 | |
| | | Z | 4.42 | 73.36 | 18.48 | | 150.0 | |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 73.07 | 112.66 | 29.06 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 123.60 | 31.93 | | 80.0 | |
| | | Z | 100.00 | 123.98 | 31.64 | | 80.0 | |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.91 | 67.87 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.47 | 67.50 | 15.53 | | 150.0 | |
| | | Z | 3.41 | 68.08 | 15.62 | | 150.0 | |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 4.36 | 67.43 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.04 | 67.29 | 16.20 | | 150.0 | |
| | | Z | 3.99 | 67.77 | 16.38 | | 150.0 | |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.59 | 67.37 | 16.63 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 67.18 | 16.33 | | 150.0 | |
| | | Z | 4.27 | 67.58 | 16.51 | | 150.0 | |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.75 | 67.29 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.52 | 67.08 | 16.36 | | 150.0 | |
| | | Z | 4.47 | 67.43 | 16.54 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 3.88 | 68.25 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.34 | 67.60 | 15.06 | | 150.0 | |
| | | Z | 3.25 | 68.08 | 15.03 | | 150.0 | |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.45 | 68.48 | 17.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.28 | 68.20 | 16.88 | | 150.0 | |
| | | Z | 6.24 | 68.43 | 17.01 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.87 | 65.68 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.81 | 65.57 | 16.07 | | 150.0 | |
| | | Z | 3.81 | 65.98 | 16.26 | | 150.0 | |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 3.63 | 67.17 | 15.82 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.13 | 66.82 | 14.32 | | 150.0 | |
| | | Z | 2.97 | 66.93 | 13.99 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 4.79 | 65.36 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.24 | 65.27 | 15.46 | | 150.0 | |
| | | Z | 4.13 | 65.72 | 15.38 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 1.54 | 79.74 | 21.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.95 | 69.06 | 16.64 | | 150.0 | |
| | | Z | 1.16 | 73.20 | 19.00 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 118.00 | 30.59 | 3.29 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 127.27 | 33.69 | | 80.0 | |
| | | Z | 100.00 | 128.13 | 33.61 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.76 | 26.18 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 111.69 | 26.26 | | 80.0 | |
| | | Z | 100.00 | 109.78 | 24.92 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 61.06 | 101.21 | 23.94 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 108.45 | 24.70 | | 80.0 | |
| | | Z | 9.38 | 82.48 | 17.38 | | 80.0 | |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 116.66 | 29.84 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 125.35 | 32.64 | | 80.0 | |
| | | Z | 100.00 | 125.94 | 32.43 | | 80.0 | |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.47 | 26.02 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 111.17 | 26.01 | | 80.0 | |
| | | Z | 44.16 | 100.58 | 22.73 | | 80.0 | |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 42.58 | 96.75 | 22.75 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 42.99 | 98.93 | 22.41 | | 80.0 | |
| | | Z | 5.89 | 77.61 | 15.84 | | 80.0 | |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 116.79 | 29.90 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 125.60 | 32.75 | | 80.0 | |
| | | Z | 100.00 | 126.22 | 32.56 | | 80.0 | |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.56 | 26.07 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 111.35 | 26.09 | | 80.0 | |
| | | Z | 61.74 | 104.33 | 23.64 | | 80.0 | |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 43.83 | 97.08 | 22.83 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 46.06 | 99.70 | 22.59 | | 80.0 | |
| | | Z | 6.04 | 77.89 | 15.93 | | 80.0 | |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 116.81 | 29.90 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 125.63 | 32.76 | | 80.0 | |
| | | Z | 100.00 | 126.25 | 32.56 | | 80.0 | |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.53 | 26.05 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 111.31 | 26.07 | | 80.0 | |
| | | Z | 61.64 | 104.26 | 23.61 | | 80.0 | |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 44.10 | 97.14 | 22.84 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 46.39 | 99.73 | 22.59 | | 80.0 | |
| | | Z | 6.02 | 77.83 | 15.90 | | 80.0 | |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 116.79 | 29.89 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 125.60 | 32.74 | | 80.0 | |
| | | Z | 100.00 | 126.23 | 32.55 | | 80.0 | |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.54 | 26.05 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 111.32 | 26.07 | | 80.0 | |
| | | Z | 60.20 | 104.02 | 23.55 | | 80.0 | |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 43.66 | 97.03 | 22.81 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 44.87 | 99.39 | 22.51 | | 80.0 | |
| | | Z | 5.94 | 77.72 | 15.87 | | 80.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.43 | 26.00 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 111.14 | 25.99 | | 80.0 | |
| | | Z | 48.11 | 101.47 | 22.92 | | 80.0 | |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 43.04 | 96.84 | 22.76 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 43.24 | 98.94 | 22.39 | | 80.0 | |
| | | Z | 5.86 | 77.55 | 15.80 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 18.43 | 95.26 | 26.62 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 47.63 | 113.17 | 30.89 | | 80.0 | |
| | | Z | 79.42 | 120.84 | 32.18 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 15.38 | 87.90 | 23.16 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 35.80 | 101.51 | 25.84 | | 80.0 | |
| | | Z | 33.10 | 99.76 | 24.57 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 14.20 | 86.14 | 22.35 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 23.64 | 94.76 | 23.60 | | 80.0 | |
| | | Z | 17.83 | 90.68 | 21.64 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 11.00 | 86.13 | 22.59 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.54 | 80.66 | 19.81 | | 80.0 | |
| | | Z | 10.00 | 86.91 | 21.46 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 11.81 | 84.53 | 22.26 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 9.59 | 82.56 | 20.08 | | 80.0 | |
| | | Z | 5.79 | 75.74 | 16.81 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 11.16 | 83.50 | 21.93 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 8.15 | 80.18 | 19.27 | | 80.0 | |
| | | Z | 5.05 | 73.86 | 16.10 | | 80.0 | |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 11.03 | 86.44 | 23.15 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.87 | 82.16 | 21.41 | | 80.0 | |
| | | Z | 9.87 | 88.59 | 23.41 | | 80.0 | |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.95 | 77.02 | 19.85 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.98 | 74.27 | 17.96 | | 80.0 | |
| | | Z | 5.53 | 76.50 | 18.48 | | 80.0 | |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.82 | 76.43 | 19.65 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.85 | 73.54 | 17.65 | | 80.0 | |
| | | Z | 5.25 | 75.41 | 18.04 | | 80.0 | |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.46 | 82.96 | 22.30 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.99 | 78.96 | 21.12 | | 80.0 | |
| | | Z | 6.82 | 82.33 | 22.47 | | 80.0 | |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.62 | 75.52 | 19.96 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.91 | 73.20 | 18.90 | | 80.0 | |
| | | Z | 5.11 | 74.84 | 19.54 | | 80.0 | |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.56 | 74.88 | 19.76 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.94 | 72.82 | 18.76 | | 80.0 | |
| | | Z | 5.10 | 74.33 | 19.33 | | 80.0 | |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 7.98 | 78.75 | 20.93 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.56 | 75.73 | 20.09 | | 80.0 | |
| | | Z | 5.84 | 77.68 | 21.00 | | 80.0 | |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.52 | 73.74 | 19.47 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.01 | 71.66 | 18.63 | | 80.0 | |
| | | Z | 5.04 | 72.68 | 19.10 | | 80.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.52 | 73.38 | 19.36 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.05 | 71.42 | 18.55 | | 80.0 | |
| | | Z | 5.05 | 72.38 | 18.97 | | 80.0 | |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.30 | 81.16 | 21.56 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.19 | 77.55 | 20.65 | | 80.0 | |
| | | Z | 6.63 | 79.81 | 21.68 | | 80.0 | |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.75 | 74.54 | 19.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.09 | 72.10 | 18.86 | | 80.0 | |
| | | Z | 5.10 | 73.07 | 19.34 | | 80.0 | |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.67 | 73.87 | 19.53 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.11 | 71.66 | 18.72 | | 80.0 | |
| | | Z | 5.11 | 72.57 | 19.16 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.58 | 84.00 | 21.43 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.27 | 74.12 | 16.39 | | 80.0 | |
| | | Z | 5.12 | 76.54 | 16.66 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.19 | 75.19 | 17.72 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.33 | 64.39 | 11.23 | | 80.0 | |
| | | Z | 1.83 | 62.54 | 9.68 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.08 | 74.60 | 17.40 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.20 | 63.55 | 10.68 | | 80.0 | |
| | | Z | 1.70 | 61.64 | 9.07 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.69 | 83.97 | 22.50 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.26 | 80.30 | 21.12 | | 80.0 | |
| | | Z | 7.99 | 85.23 | 22.80 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.73 | 76.14 | 19.79 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.97 | 73.89 | 18.33 | | 80.0 | |
| | | Z | 5.41 | 76.03 | 18.94 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.66 | 75.65 | 19.59 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.97 | 73.54 | 18.13 | | 80.0 | |
| | | Z | 5.36 | 75.51 | 18.67 | | 80.0 | |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.33 | 82.74 | 22.21 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.90 | 78.70 | 21.01 | | 80.0 | |
| | | Z | 6.71 | 82.03 | 22.35 | | 80.0 | |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.59 | 75.44 | 19.92 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.88 | 73.08 | 18.84 | | 80.0 | |
| | | Z | 5.07 | 74.71 | 19.47 | | 80.0 | |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.52 | 74.79 | 19.72 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.91 | 72.71 | 18.70 | | 80.0 | |
| | | Z | 5.07 | 74.21 | 19.27 | | 80.0 | |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.21 | 81.00 | 21.50 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.13 | 77.37 | 20.57 | | 80.0 | |
| | | Z | 6.56 | 79.62 | 21.60 | | 80.0 | |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.72 | 74.48 | 19.71 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.07 | 72.03 | 18.82 | | 80.0 | |
| | | Z | 5.08 | 73.01 | 19.31 | | 80.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.65 | 73.80 | 19.50 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.09 | 71.58 | 18.67 | | 80.0 | |
| | | Z | 5.09 | 72.48 | 19.12 | | 80.0 | |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 8.15 | 77.43 | 20.26 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.99 | 74.82 | 19.62 | | 80.0 | |
| | | Z | 6.17 | 76.24 | 20.35 | | 80.0 | |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.94 | 73.36 | 19.32 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.42 | 71.16 | 18.60 | | 80.0 | |
| | | Z | 5.37 | 71.81 | 18.97 | | 80.0 | |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.87 | 72.87 | 19.19 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.44 | 70.83 | 18.50 | | 80.0 | |
| | | Z | 5.39 | 71.45 | 18.85 | | 80.0 | |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.41 | 80.22 | 21.09 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.52 | 76.83 | 20.24 | | 80.0 | |
| | | Z | 6.84 | 78.58 | 21.10 | | 80.0 | |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 7.03 | 74.19 | 19.61 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.36 | 71.56 | 18.76 | | 80.0 | |
| | | Z | 5.31 | 72.21 | 19.14 | | 80.0 | |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.85 | 73.42 | 19.39 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.32 | 71.03 | 18.59 | | 80.0 | |
| | | Z | 5.27 | 71.61 | 18.94 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.98 | 65.05 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.00 | 63.56 | 14.97 | | 150.0 | |
| | | Z | 1.05 | 64.66 | 15.82 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 100.00 | 168.11 | 45.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.67 | 71.83 | 18.15 | | 150.0 | |
| | | Z | 1.04 | 80.65 | 22.82 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.96 | 70.11 | 18.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.85 | 65.61 | 15.70 | | 150.0 | |
| | | Z | 0.93 | 67.57 | 17.12 | | 150.0 | |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.76 | 67.10 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 67.01 | 16.35 | | 150.0 | |
| | | Z | 4.47 | 67.38 | 16.53 | | 150.0 | |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 5.02 | 67.44 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 67.22 | 16.46 | | 150.0 | |
| | | Z | 4.63 | 67.55 | 16.62 | | 150.0 | |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.86 | 67.45 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.55 | 67.17 | 16.38 | | 150.0 | |
| | | Z | 4.48 | 67.50 | 16.54 | | 150.0 | |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.79 | 67.47 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 67.16 | 16.36 | | 150.0 | |
| | | Z | 4.42 | 67.48 | 16.53 | | 150.0 | |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.82 | 67.32 | 16.63 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.55 | 67.29 | 16.46 | | 150.0 | |
| | | Z | 4.47 | 67.62 | 16.63 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.69 | 67.31 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.44 | 67.17 | 16.32 | | 150.0 | |
| | | Z | 4.39 | 67.59 | 16.54 | | 150.0 | |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.78 | 67.32 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.49 | 67.20 | 16.43 | | 150.0 | |
| | | Z | 4.42 | 67.57 | 16.62 | | 150.0 | |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.72 | 66.35 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.49 | 66.26 | 16.02 | | 150.0 | |
| | | Z | 4.45 | 66.66 | 16.22 | | 150.0 | |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.95 | 66.78 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.64 | 66.60 | 16.16 | | 150.0 | |
| | | Z | 4.58 | 66.96 | 16.34 | | 150.0 | |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.86 | 66.80 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.57 | 66.56 | 16.10 | | 150.0 | |
| | | Z | 4.51 | 66.93 | 16.29 | | 150.0 | |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.89 | 66.82 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.58 | 66.57 | 16.13 | | 150.0 | |
| | | Z | 4.52 | 66.94 | 16.32 | | 150.0 | |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.89 | 66.82 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.58 | 66.57 | 16.13 | | 150.0 | |
| | | Z | 4.52 | 66.94 | 16.32 | | 150.0 | |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.92 | 67.00 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.57 | 66.66 | 16.14 | | 150.0 | |
| | | Z | 4.49 | 66.99 | 16.31 | | 150.0 | |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.76 | 66.93 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.43 | 66.51 | 16.07 | | 150.0 | |
| | | Z | 4.37 | 66.85 | 16.25 | | 150.0 | |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.90 | 66.82 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.59 | 66.64 | 16.13 | | 150.0 | |
| | | Z | 4.53 | 67.03 | 16.33 | | 150.0 | |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 5.38 | 66.99 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.14 | 66.65 | 16.20 | | 150.0 | |
| | | Z | 5.08 | 66.89 | 16.34 | | 150.0 | |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 5.47 | 67.13 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.21 | 66.87 | 16.30 | | 150.0 | |
| | | Z | 5.13 | 67.05 | 16.42 | | 150.0 | |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 5.32 | 67.12 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.08 | 66.81 | 16.25 | | 150.0 | |
| | | Z | 5.02 | 67.06 | 16.40 | | 150.0 | |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 5.39 | 67.07 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.13 | 66.76 | 16.23 | | 150.0 | |
| | | Z | 5.08 | 67.03 | 16.39 | | 150.0 | |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 5.52 | 67.19 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.21 | 66.77 | 16.27 | | 150.0 | |
| | | Z | 5.14 | 66.99 | 16.41 | | 150.0 | |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 5.40 | 67.10 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.15 | 66.79 | 16.30 | | 150.0 | |
| | | Z | 5.07 | 66.96 | 16.41 | | 150.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 5.41 | 67.10 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.12 | 66.64 | 16.21 | | 150.0 | |
| | | Z | 5.05 | 66.85 | 16.34 | | 150.0 | |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.53 | 67.02 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.28 | 66.73 | 16.27 | | 150.0 | |
| | | Z | 5.21 | 66.95 | 16.40 | | 150.0 | |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.65 | 67.09 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.35 | 66.75 | 16.31 | | 150.0 | |
| | | Z | 5.28 | 67.01 | 16.46 | | 150.0 | |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.63 | 67.05 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.46 | 66.75 | 16.19 | | 150.0 | |
| | | Z | 5.42 | 66.95 | 16.31 | | 150.0 | |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.85 | 67.43 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.67 | 67.24 | 16.39 | | 150.0 | |
| | | Z | 5.61 | 67.44 | 16.52 | | 150.0 | |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.76 | 67.40 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 66.93 | 16.25 | | 150.0 | |
| | | Z | 5.45 | 67.09 | 16.35 | | 150.0 | |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.86 | 67.50 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.59 | 67.00 | 16.28 | | 150.0 | |
| | | Z | 5.54 | 67.20 | 16.40 | | 150.0 | |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 6.21 | 68.68 | 17.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.87 | 68.02 | 16.76 | | 150.0 | |
| | | Z | 5.72 | 67.95 | 16.76 | | 150.0 | |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.77 | 67.31 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.57 | 67.05 | 16.32 | | 150.0 | |
| | | Z | 5.52 | 67.30 | 16.47 | | 150.0 | |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.80 | 67.45 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.55 | 67.00 | 16.26 | | 150.0 | |
| | | Z | 5.45 | 67.07 | 16.32 | | 150.0 | |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.69 | 67.19 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.47 | 66.81 | 16.17 | | 150.0 | |
| | | Z | 5.43 | 67.06 | 16.31 | | 150.0 | |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.78 | 67.21 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.54 | 66.82 | 16.20 | | 150.0 | |
| | | Z | 5.48 | 67.01 | 16.32 | | 150.0 | |
| 10554-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 6.03 | 67.43 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.89 | 67.12 | 16.28 | | 150.0 | |
| | | Z | 5.84 | 67.28 | 16.38 | | 150.0 | |
| 10555-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 6.22 | 67.88 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.02 | 67.44 | 16.43 | | 150.0 | |
| | | Z | 5.95 | 67.54 | 16.50 | | 150.0 | |
| 10556-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.20 | 67.79 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.04 | 67.49 | 16.44 | | 150.0 | |
| | | Z | 5.99 | 67.66 | 16.55 | | 150.0 | |
| 10557-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 6.21 | 67.81 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.99 | 67.35 | 16.39 | | 150.0 | |
| | | Z | 5.93 | 67.50 | 16.49 | | 150.0 | |

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10558-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 6.28 | 68.03 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.04 | 67.52 | 16.49 | | 150.0 | |
| | | Z | 5.95 | 67.59 | 16.55 | | 150.0 | |
| 10560-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 6.28 | 67.87 | 16.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.03 | 67.35 | 16.44 | | 150.0 | |
| | | Z | 5.96 | 67.49 | 16.53 | | 150.0 | |
| 10561-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 6.18 | 67.80 | 16.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.96 | 67.36 | 16.48 | | 150.0 | |
| | | Z | 5.90 | 67.49 | 16.57 | | 150.0 | |
| 10562-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 6.37 | 68.38 | 17.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.06 | 67.66 | 16.63 | | 150.0 | |
| | | Z | 5.96 | 67.67 | 16.66 | | 150.0 | |
| 10563-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 6.58 | 68.54 | 17.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.18 | 67.65 | 16.59 | | 150.0 | |
| | | Z | 6.05 | 67.62 | 16.60 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 5.11 | 67.26 | 16.76 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.86 | 67.10 | 16.52 | | 150.0 | |
| | | Z | 4.80 | 67.44 | 16.68 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.41 | 67.77 | 17.08 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 5.08 | 67.53 | 16.83 | | 150.0 | |
| | | Z | 5.00 | 67.82 | 16.97 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 5.23 | 67.67 | 16.93 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.92 | 67.38 | 16.66 | | 150.0 | |
| | | Z | 4.84 | 67.67 | 16.80 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 5.26 | 68.03 | 17.24 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.95 | 67.77 | 17.01 | | 150.0 | |
| | | Z | 4.87 | 68.04 | 17.15 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 5.14 | 67.36 | 16.67 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.84 | 67.19 | 16.45 | | 150.0 | |
| | | Z | 4.75 | 67.49 | 16.60 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 5.19 | 68.02 | 17.24 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.92 | 67.92 | 17.11 | | 150.0 | |
| | | Z | 4.86 | 68.27 | 17.29 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 5.23 | 67.81 | 17.17 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 67.74 | 17.02 | | 150.0 | |
| | | Z | 4.86 | 68.06 | 17.18 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.68 | 70.36 | 18.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.37 | 66.32 | 16.49 | | 130.0 | |
| | | Z | 1.41 | 67.39 | 17.29 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.75 | 71.47 | 19.28 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.40 | 67.01 | 16.89 | | 130.0 | |
| | | Z | 1.45 | 68.17 | 17.74 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 100.00 | 142.31 | 37.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.69 | 99.12 | 27.30 | | 130.0 | |
| | | Z | 66.26 | 143.73 | 39.41 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 3.57 | 87.71 | 25.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.70 | 74.22 | 20.29 | | 130.0 | |
| | | Z | 1.88 | 76.94 | 21.86 | | 130.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.95 | 67.19 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.69 | 67.03 | 16.64 | | 130.0 | |
| | | Z | 4.63 | 67.35 | 16.80 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.98 | 67.35 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 67.20 | 16.72 | | 130.0 | |
| | | Z | 4.66 | 67.55 | 16.88 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 5.24 | 67.69 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.90 | 67.46 | 16.87 | | 130.0 | |
| | | Z | 4.82 | 67.76 | 17.01 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 5.14 | 67.89 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.81 | 67.63 | 16.98 | | 130.0 | |
| | | Z | 4.73 | 67.92 | 17.12 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.94 | 67.39 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.58 | 66.91 | 16.29 | | 130.0 | |
| | | Z | 4.50 | 67.21 | 16.45 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.98 | 67.29 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.62 | 66.97 | 16.32 | | 130.0 | |
| | | Z | 4.54 | 67.27 | 16.48 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 5.07 | 68.07 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 67.70 | 16.95 | | 130.0 | |
| | | Z | 4.65 | 68.04 | 17.12 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.90 | 67.13 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.51 | 66.68 | 16.07 | | 130.0 | |
| | | Z | 4.43 | 67.00 | 16.24 | | 130.0 | |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.95 | 67.19 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.69 | 67.03 | 16.64 | | 130.0 | |
| | | Z | 4.63 | 67.35 | 16.80 | | 130.0 | |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.98 | 67.35 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 67.20 | 16.72 | | 130.0 | |
| | | Z | 4.66 | 67.55 | 16.88 | | 130.0 | |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 5.24 | 67.69 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.90 | 67.46 | 16.87 | | 130.0 | |
| | | Z | 4.82 | 67.76 | 17.01 | | 130.0 | |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 5.14 | 67.89 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.81 | 67.63 | 16.98 | | 130.0 | |
| | | Z | 4.73 | 67.92 | 17.12 | | 130.0 | |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.94 | 67.39 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.58 | 66.91 | 16.29 | | 130.0 | |
| | | Z | 4.50 | 67.21 | 16.45 | | 130.0 | |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.98 | 67.29 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.62 | 66.97 | 16.32 | | 130.0 | |
| | | Z | 4.54 | 67.27 | 16.48 | | 130.0 | |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 5.07 | 68.07 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 67.70 | 16.95 | | 130.0 | |
| | | Z | 4.65 | 68.04 | 17.12 | | 130.0 | |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.90 | 67.13 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.51 | 66.68 | 16.07 | | 130.0 | |
| | | Z | 4.43 | 67.00 | 16.24 | | 130.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 5.10 | 67.21 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.84 | 67.07 | 16.74 | | 130.0 | |
| | | Z | 4.77 | 67.39 | 16.89 | | 130.0 | |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.29 | 67.56 | 17.07 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.98 | 67.40 | 16.87 | | 130.0 | |
| | | Z | 4.90 | 67.69 | 17.01 | | 130.0 | |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 5.23 | 67.57 | 17.01 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.90 | 67.30 | 16.75 | | 130.0 | |
| | | Z | 4.82 | 67.59 | 16.88 | | 130.0 | |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 5.28 | 67.68 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.96 | 67.47 | 16.91 | | 130.0 | |
| | | Z | 4.88 | 67.75 | 17.04 | | 130.0 | |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 5.27 | 67.71 | 17.06 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.93 | 67.44 | 16.81 | | 130.0 | |
| | | Z | 4.85 | 67.75 | 16.96 | | 130.0 | |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 5.21 | 67.70 | 17.06 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.86 | 67.44 | 16.81 | | 130.0 | |
| | | Z | 4.78 | 67.74 | 16.97 | | 130.0 | |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 5.16 | 67.68 | 17.00 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.81 | 67.32 | 16.68 | | 130.0 | |
| | | Z | 4.73 | 67.61 | 16.83 | | 130.0 | |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 5.15 | 67.96 | 17.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.80 | 67.55 | 16.95 | | 130.0 | |
| | | Z | 4.72 | 67.82 | 17.08 | | 130.0 | |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.77 | 67.84 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.52 | 67.58 | 16.96 | | 130.0 | |
| | | Z | 5.45 | 67.81 | 17.10 | | 130.0 | |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 6.05 | 68.67 | 17.52 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.68 | 68.13 | 17.21 | | 130.0 | |
| | | Z | 5.58 | 68.26 | 17.30 | | 130.0 | |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.85 | 68.16 | 17.28 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.55 | 67.80 | 17.06 | | 130.0 | |
| | | Z | 5.46 | 67.98 | 17.17 | | 130.0 | |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.99 | 68.30 | 17.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.68 | 67.95 | 17.06 | | 130.0 | |
| | | Z | 5.60 | 68.17 | 17.19 | | 130.0 | |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 6.09 | 68.64 | 17.55 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.74 | 68.19 | 17.31 | | 130.0 | |
| | | Z | 5.66 | 68.42 | 17.44 | | 130.0 | |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.79 | 67.86 | 17.16 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.59 | 67.76 | 17.08 | | 130.0 | |
| | | Z | 5.54 | 68.06 | 17.25 | | 130.0 | |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.90 | 68.15 | 17.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.67 | 68.01 | 17.21 | | 130.0 | |
| | | Z | 5.56 | 68.12 | 17.28 | | 130.0 | |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.65 | 67.59 | 16.91 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.37 | 67.19 | 16.65 | | 130.0 | |
| | | Z | 5.33 | 67.51 | 16.83 | | 130.0 | |

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10607-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.92 | 66.49 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.68 | 66.39 | 16.37 | | 130.0 | |
| | | Z | 4.62 | 66.76 | 16.54 | | 130.0 | |
| 10608-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 5.16 | 66.93 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.85 | 66.77 | 16.53 | | 130.0 | |
| | | Z | 4.77 | 67.10 | 16.69 | | 130.0 | |
| 10609-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 5.06 | 66.87 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.74 | 66.62 | 16.36 | | 130.0 | |
| | | Z | 4.67 | 66.96 | 16.53 | | 130.0 | |
| 10610-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 5.11 | 67.01 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.79 | 66.78 | 16.53 | | 130.0 | |
| | | Z | 4.72 | 67.11 | 16.69 | | 130.0 | |
| 10611-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 5.05 | 66.92 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.71 | 66.59 | 16.38 | | 130.0 | |
| | | Z | 4.64 | 66.93 | 16.55 | | 130.0 | |
| 10612-AAA | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 5.07 | 67.04 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 66.76 | 16.43 | | 130.0 | |
| | | Z | 4.64 | 67.09 | 16.61 | | 130.0 | |
| 10613-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 5.09 | 66.98 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.71 | 66.61 | 16.29 | | 130.0 | |
| | | Z | 4.63 | 66.91 | 16.45 | | 130.0 | |
| 10614-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 5.02 | 67.21 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 66.81 | 16.53 | | 130.0 | |
| | | Z | 4.59 | 67.11 | 16.69 | | 130.0 | |
| 10615-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 5.05 | 66.70 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.71 | 66.43 | 16.16 | | 130.0 | |
| | | Z | 4.64 | 66.79 | 16.34 | | 130.0 | |
| 10616-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.58 | 67.10 | 16.74 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.33 | 66.79 | 16.55 | | 130.0 | |
| | | Z | 5.25 | 67.00 | 16.67 | | 130.0 | |
| 10617-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.66 | 67.25 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.41 | 67.04 | 16.65 | | 130.0 | |
| | | Z | 5.31 | 67.19 | 16.74 | | 130.0 | |
| 10618-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.54 | 67.29 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.29 | 67.03 | 16.66 | | 130.0 | |
| | | Z | 5.22 | 67.24 | 16.78 | | 130.0 | |
| 10619-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.56 | 67.09 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.30 | 66.81 | 16.48 | | 130.0 | |
| | | Z | 5.23 | 67.05 | 16.63 | | 130.0 | |
| 10620-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.71 | 67.30 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.38 | 66.84 | 16.54 | | 130.0 | |
| | | Z | 5.30 | 67.04 | 16.67 | | 130.0 | |
| 10621-AAA | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.66 | 67.28 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.39 | 66.98 | 16.73 | | 130.0 | |
| | | Z | 5.30 | 67.12 | 16.82 | | 130.0 | |
| 10622-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.65 | 67.37 | 16.94 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.40 | 67.13 | 16.80 | | 130.0 | |
| | | Z | 5.30 | 67.22 | 16.87 | | 130.0 | |

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 5.58 | 67.14 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.28 | 66.65 | 16.43 | | 130.0 | |
| | | Z | 5.18 | 66.78 | 16.52 | | 130.0 | |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.72 | 67.10 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.47 | 66.85 | 16.60 | | 130.0 | |
| | | Z | 5.38 | 67.03 | 16.70 | | 130.0 | |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 6.05 | 67.87 | 17.19 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.77 | 67.66 | 17.06 | | 130.0 | |
| | | Z | 5.49 | 67.24 | 16.87 | | 130.0 | |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.80 | 67.08 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.63 | 66.82 | 16.50 | | 130.0 | |
| | | Z | 5.57 | 66.99 | 16.60 | | 130.0 | |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 6.05 | 67.56 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.90 | 67.51 | 16.81 | | 130.0 | |
| | | Z | 5.83 | 67.67 | 16.91 | | 130.0 | |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.89 | 67.33 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.66 | 66.90 | 16.43 | | 130.0 | |
| | | Z | 5.58 | 67.01 | 16.51 | | 130.0 | |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 6.01 | 67.46 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.74 | 67.00 | 16.48 | | 130.0 | |
| | | Z | 5.68 | 67.19 | 16.60 | | 130.0 | |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 6.66 | 69.52 | 17.74 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.23 | 68.64 | 17.29 | | 130.0 | |
| | | Z | 5.99 | 68.32 | 17.17 | | 130.0 | |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 6.51 | 69.16 | 17.72 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.05 | 68.21 | 17.27 | | 130.0 | |
| | | Z | 5.91 | 68.16 | 17.27 | | 130.0 | |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 6.07 | 67.76 | 17.04 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.87 | 67.57 | 16.97 | | 130.0 | |
| | | Z | 5.81 | 67.79 | 17.10 | | 130.0 | |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 6.04 | 67.71 | 16.86 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.71 | 67.04 | 16.54 | | 130.0 | |
| | | Z | 5.62 | 67.14 | 16.61 | | 130.0 | |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 6.01 | 67.64 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.69 | 67.06 | 16.60 | | 130.0 | |
| | | Z | 5.63 | 67.23 | 16.71 | | 130.0 | |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.88 | 66.99 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.57 | 66.39 | 16.00 | | 130.0 | |
| | | Z | 5.49 | 66.55 | 16.11 | | 130.0 | |
| 10636-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.20 | 67.47 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.06 | 67.19 | 16.58 | | 130.0 | |
| | | Z | 6.01 | 67.33 | 16.67 | | 130.0 | |
| 10637-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.43 | 68.00 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.23 | 67.63 | 16.79 | | 130.0 | |
| | | Z | 6.14 | 67.69 | 16.84 | | 130.0 | |
| 10638-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.38 | 67.82 | 16.85 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.23 | 67.59 | 16.75 | | 130.0 | |
| | | Z | 6.16 | 67.71 | 16.83 | | 130.0 | |

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10639-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 6.40 | 67.91 | 16.95 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.18 | 67.47 | 16.73 | | 130.0 | |
| | | Z | 6.11 | 67.58 | 16.80 | | 130.0 | |
| 10640-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 6.45 | 68.06 | 16.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.19 | 67.49 | 16.68 | | 130.0 | |
| | | Z | 6.09 | 67.54 | 16.73 | | 130.0 | |
| 10641-AAB | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 6.42 | 67.72 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.26 | 67.48 | 16.70 | | 130.0 | |
| | | Z | 6.18 | 67.60 | 16.78 | | 130.0 | |
| 10642-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 6.51 | 68.09 | 17.16 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.27 | 67.64 | 16.94 | | 130.0 | |
| | | Z | 6.19 | 67.74 | 17.01 | | 130.0 | |
| 10643-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 6.33 | 67.78 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.13 | 67.39 | 16.71 | | 130.0 | |
| | | Z | 6.05 | 67.49 | 16.79 | | 130.0 | |
| 10644-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.62 | 68.66 | 17.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.24 | 67.74 | 16.91 | | 130.0 | |
| | | Z | 6.11 | 67.69 | 16.91 | | 130.0 | |
| 10645-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.82 | 68.76 | 17.37 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.42 | 67.94 | 16.97 | | 130.0 | |
| | | Z | 6.29 | 67.89 | 16.97 | | 130.0 | |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 22.37 | 99.45 | 32.18 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 34.93 | 118.52 | 39.50 | | 60.0 | |
| | | Z | 65.31 | 137.01 | 45.15 | | 60.0 | |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 23.87 | 101.54 | 32.95 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 35.03 | 119.53 | 39.96 | | 60.0 | |
| | | Z | 61.92 | 136.93 | 45.35 | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 1.11 | 70.04 | 15.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.68 | 63.85 | 10.64 | | 150.0 | |
| | | Z | 0.72 | 65.39 | 11.21 | | 150.0 | |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 5.43 | 70.91 | 18.53 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.44 | 69.41 | 17.59 | | 80.0 | |
| | | Z | 4.46 | 70.35 | 17.94 | | 80.0 | |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 5.75 | 69.79 | 18.37 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.85 | 68.29 | 17.59 | | 80.0 | |
| | | Z | 4.80 | 68.81 | 17.83 | | 80.0 | |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 5.63 | 69.47 | 18.36 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.81 | 67.88 | 17.59 | | 80.0 | |
| | | Z | 4.76 | 68.31 | 17.81 | | 80.0 | |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 5.69 | 69.55 | 18.41 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.87 | 67.81 | 17.62 | | 80.0 | |
| | | Z | 4.82 | 68.18 | 17.82 | | 80.0 | |

^F Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:



- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho' \cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

**Table D-I
Composition of the Tissue Equivalent Matter**

| Frequency (MHz) | 835 | 835 |
|---------------------------|-------|-------|
| Tissue | Head | Body |
| Ingredients (% by weight) | | |
| Bactericide | 0.1 | 0.1 |
| HEC | 1 | 1 |
| NaCl | 1.45 | 0.94 |
| Sucrose | 57 | 44.9 |
| Water | 40.45 | 53.06 |

| | | | | |
|--------------------------------|---|------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Test Dates: 11/14/17 | DUT Type: Portable Handset | | | APPENDIX D: Page 1 of 1 |

APPENDIX E: SAR SYSTEM VALIDATION



Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-1
SAR System Validation Summary

| SAR SYSTEM # | FREQ. [MHz] | DATE | PROBE SN | PROBE TYPE | PROBE CAL. POINT | | COND. | PERM. | CW VALIDATION | | | MOD. VALIDATION | | |
|--------------|-------------|------------|----------|------------|------------------|------|--------------|------------------|---------------|-----------------|----------------|-----------------|-------------|-----|
| | | | | | | | (σ) | (ϵ_r) | SENSITIVITY | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE | DUTY FACTOR | PAR |
| K | 835 | 5/2/2017 | 7406 | EX3DV4 | 835 | Head | 0.896 | 40.478 | PASS | PASS | PASS | GMSK | PASS | N/A |
| G | 835 | 10/11/2017 | 3332 | ES3DV3 | 835 | Body | 0.999 | 52.814 | PASS | PASS | PASS | GMSK | PASS | N/A |

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

| | | | | |
|--------------------------------|---|------------------------------|---|--|
| FCC ID: A3LSMA730F |  | SAR EVALUATION REPORT |  | Approved by: Quality Manager |
| Test Dates: 11/14/17 | DUT Type: Portable Handset | APPENDIX E: Page 1 of 1 | | |