

FCC 2G, 3G REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: November 26, 2018
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-1811-FC027

FCC ID:	A3LSMA920N
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-A920N
EUT Type: Smart Phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §24, §27, §2

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M17F9W	0.040	16.00

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	246 KGXW	0.644	28.09
GSM1900 EDGE			245 KG7W	0.176	22.46
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M14F9W	0.141	21.50
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M15F9W	0.121	20.84

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)




Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1811-FC027	November 26, 2018	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 PEAK- TO- AVERAGE RATIO	9
3.5 OCCUPIED BANDWIDTH.	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.7 BAND EDGE	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
3.9 WORST CASE(CONDUCTED TEST)	15
3.10 WORST CASE(RADIATED TEST)	16
4. LIST OF TEST EQUIPMENT	17
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION	20
8. TEST DATA	22
8.1 EFFECTIVE RADIATED POWER	22
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	22
8.3 RADIATED SPURIOUS EMISSIONS	23
8.4 PEAK-TO-AVERAGE RATIO	27
8.5 OCCUPIED BANDWIDTH	28
8.6 CONDUCTED SPURIOUS EMISSIONS	29
8.7 BAND EDGE	29
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	30
9. TEST PLOTS.....	40
10. ANNEX A_ TEST SETUP PHOTO	107

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA920N
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §27, §2
EUT Type:	Smart Phone
Model(s):	SM-A920N
Tx Frequency:	826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 – 1 907.6 MHz (WCDMA1900) 1 712.4 – 1 752.6 MHz (WCDMA1700)
Rx Frequency:	871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 – 1 987.6 MHz (WCDMA1900) 2 112.4 – 2 152.6 MHz (WCDMA1700)
Date(s) of Tests:	November 12, 2018 ~ November 26, 2018

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Smart Phone with GSM/GPRS/EGPRS/UMTS and LTE.
It also supports IEEE 802.11 a/b/g/n/ac, Bluetooth, BTLE, NFC & ANT+.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat

3.4 PEAK- TO- AVERAGE RATIO

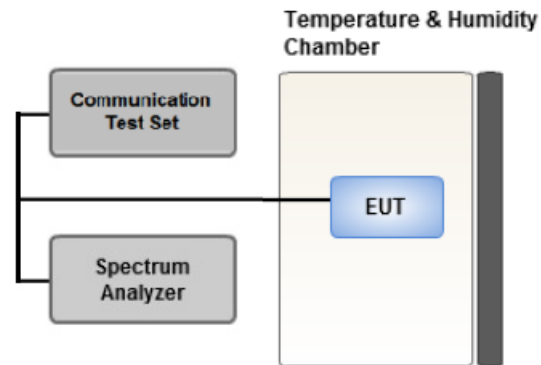

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

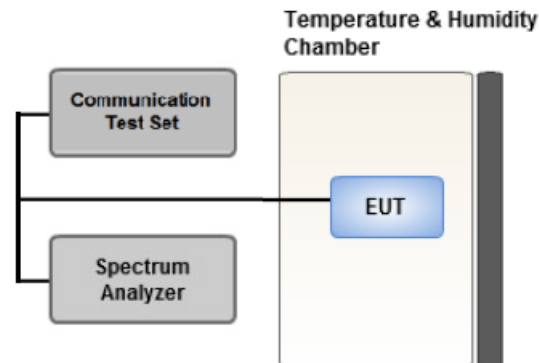

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

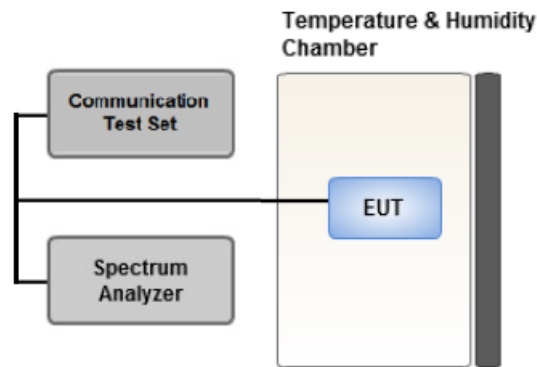

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.7 BAND EDGE

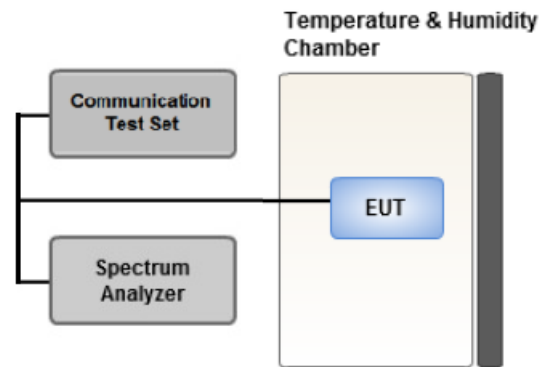

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

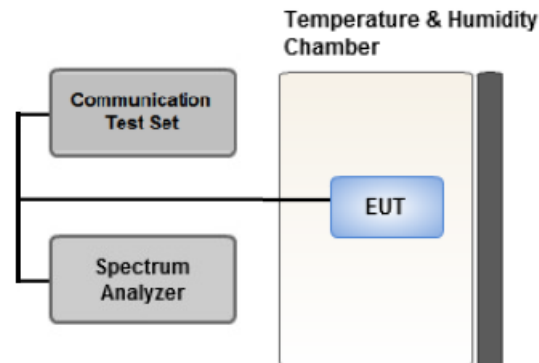

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, Mid, High
	2G : EDGE(1 TX Slot)	Low, Mid, High
Band Edge	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	2G : Voice 3G : QPSK	Low, Mid, High

[Test Channel]

	UplinkChannel			
	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	512	9262	1312	4132
Mid	661	9400	1412	4183
High	810	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : X WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : Z WCDMA B5 : Y	Low, Mid, High

[Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Isotropic Radiated Power	Voice	GSM1900 : X	Low, Mid, High
	EDGE(1 TX Slot)	GSM1900 : X	GSM1900 : Low
Radiated Spurious and Harmonic Emissions	Voice	GSM1900 : Z	Low, Mid, High

[Test Channel]

	UplinkChannel			
	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	512	9262	1312	4132
Mid	661	9400	1412	4183
High	810	9538	1513	4233

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pmdB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	See Note1
Peak- to- Average Ratio	§24.232(d), §27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	< 2.5 ppm	PASS
	§24.235, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-36.78	24.63	-10.26	0.86	H	< 7.00	0.022	13.51
	4183	836.6	-36.11	26.19	-10.21	0.87	H		0.032	15.11
	4233	846.6	-35.30	27.04	-10.17	0.87	H		0.040	16.00

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
GSM1900	512	1850.2	-12.88	19.16	10.27	1.34	H	< 2.00	0.644	28.09
	661	1880.0	-14.10	18.03	10.29	1.36	H		0.497	26.96
	810	1909.8	-15.51	17.02	10.31	1.37	H		0.394	25.96
EDGE	512	1850.2	-18.51	13.53	10.27	1.34	H		0.176	22.46

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
WCDMA1900	9262	1852.4	-19.47	12.57	10.27	1.34	V	< 2.00	0.141	21.50
	9400	1880.0	-20.61	11.52	10.29	1.36	V		0.111	20.45
	9538	1907.6	-21.08	11.45	10.31	1.37	V		0.109	20.39

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
WCDMA1700	1312	1712.4	-19.58	12.21	9.92	1.29	H	< 1.00	0.121	20.84
	1412	1732.4	-20.03	11.79	10.00	1.28	H		0.113	20.51
	1513	1752.6	-20.22	11.60	10.10	1.29	H		0.110	20.41

8.3 RADIATED SPURIOUS EMISSIONS

- MEASURED OUTPUT POWER: 28.09 dBm = 0.644 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10} (W) =$ 41.09 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	Result (dBm)	dBc
512 (1850.2)	3,700.40	-56.79	12.51	-63.59	1.98	V	-53.06	81.15
	5,550.60	-56.87	13.62	-58.15	2.72	H	-47.25	75.34
	7,400.80	-57.13	11.50	-52.12	2.92	V	-43.54	71.63
661 (1880.0)	3,760.00	-57.02	12.40	-63.46	2.00	H	-53.06	81.15
	5,640.00	-56.71	13.78	-57.54	2.70	V	-46.46	74.55
	7,520.00	-58.13	11.57	-52.92	2.93	H	-44.28	72.37
810 (1909.8)	3,819.60	-56.05	12.52	-62.29	2.05	H	-51.82	79.91
	5,729.40	-56.90	13.69	-56.85	2.72	V	-45.88	73.97
	7,639.20	-56.91	11.99	-52.11	2.93	V	-43.05	71.14

- MEASURED OUTPUT POWER: 16.00 dBm = 0.040 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.00 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
4,132 (826.4)	1,652.80	-57.14	7.46	-66.03	1.27	H	-61.99	77.99
	2,479.20	-57.32	8.71	-63.69	1.60	H	-58.73	74.73
	3,305.60	-57.05	10.32	-63.08	1.87	H	-56.78	72.78
4,183 (836.6)	1,673.20	-55.56	7.53	-64.55	1.28	H	-60.45	76.45
	2,509.80	-56.12	8.83	-62.44	1.62	H	-57.38	73.38
	3,346.40	-56.49	10.51	-62.81	1.91	V	-56.36	72.36
4,233 (846.6)	1,693.20	-57.19	7.67	-66.22	1.28	V	-61.98	77.98
	2,539.80	-54.69	8.85	-60.47	1.61	V	-55.38	71.38
	3,386.40	-56.84	10.56	-63.12	1.93	V	-56.64	72.64

- MEASURED OUTPUT POWER: 21.50 dBm = 0.141 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 34.50 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
9262 (1852.4)	3,704.80	-57.27	12.50	-63.90	1.99	H	-53.39	74.89
	5,557.20	-55.52	13.64	-56.76	2.71	V	-45.83	67.33
	7,409.60	-56.77	11.50	-51.48	2.93	H	-42.91	64.41
9400 (1880.0)	3,760.00	-57.65	12.40	-64.09	2.00	H	-53.69	75.19
	5,640.00	-58.09	13.78	-58.92	2.70	H	-47.84	69.34
	7,520.00	-56.52	11.57	-51.31	2.93	V	-42.67	64.17
9538 (1907.6)	3,815.20	-56.07	12.52	-62.44	2.06	V	-51.97	73.47
	5,722.80	-56.33	13.70	-56.02	2.72	V	-45.04	66.54
	7,630.40	-57.10	11.95	-52.29	2.98	V	-43.32	64.82

- MEASURED OUTPUT POWER: 20.84 dBm = 0.121 W
- MODULATION SIGNAL: WCDMA1700
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 33.84 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
1312 (1712.4)	3,424.80	-53.51	12.69	-61.51	1.90	V	-50.72	71.56
	5,137.20	-55.76	12.75	-57.47	2.52	V	-47.24	68.08
	6,849.60	-55.34	12.52	-52.58	2.81	H	-42.87	63.71
1412 (1732.4)	3,464.80	-56.60	12.60	-64.19	1.97	V	-53.56	74.40
	5,197.20	-57.49	13.17	-59.40	2.54	V	-48.77	69.61
	6,929.60	-56.32	12.46	-52.99	2.83	H	-43.36	64.20
1513 (1752.6)	3,505.20	-57.10	12.44	-64.36	1.92	H	-53.84	74.68
	5,257.80	-57.12	13.48	-59.93	2.59	H	-49.04	69.88
	7,010.40	-57.26	12.24	-54.28	2.84	V	-44.88	65.72

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)			
GSM1900	661	30.147	20.28	4.616	0.5475	9.26	0.61	13	Pass
GSM1900 EDGE	661	28.498	15.29	4.616	0.5475	9.26	3.95		
WCDMA1900	9400	CCDF Procedure					3.10		
WCDMA1700	1412						2.98		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 54 ~ 61.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \log (1/x), \quad x = Tx_{On} / Tx_{Total}$$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM1900	512	1,850.20	245.63
	661	1,880.00	241.08
	810	1,909.80	242.52
GSM1900 EDGE	512	1,850.20	244.19
	661	1,880.00	245.34
	810	1,909.80	245.42
WCDMA850	4132	826.40	4.1704
	4183	836.60	4.1623
	4233	846.60	4.1487
WCDMA1900	9262	1852.40	4.1382
	9400	1880.00	4.1381
	9538	1907.60	4.1339
WCDMA1700	1312	1712.40	4.1477
	1412	1732.40	4.1264
	1513	1752.60	4.1472

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 41 ~ 53.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM1900	512	18.62497	29.489	-52.999	-23.510	-13.00
	661	16.65992	29.489	-52.479	-22.990	
	810	18.91847	29.489	-52.808	-23.319	
WCDMA850	4132	2.4826	27.976	-75.680	-47.704	
	4183	2.5075	27.976	-76.025	-48.049	
	4233	2.5434	27.976	-75.737	-47.761	
WCDMA1900	9262	18.91597	29.489	-72.753	-43.264	
	9400	18.92447	29.489	-72.806	-43.317	
	9538	18.94397	29.489	-73.076	-43.587	
WCDMA1700	1712.4	18.90747	29.489	-72.872	-43.383	
	1732.4	18.93247	29.489	-72.949	-43.460	
	1752.6	18.91622	29.489	-73.012	-43.523	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 86 ~ 106.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 62 ~ 85.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- Mode: GSM1900
- OPERATING FREQUENCY: 1850,200,000 Hz
- CHANNEL: 512
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1850 200 024	0.0	0.000 000	0.0000
100%		-30	1850 200 037	12.4	0.000 001	0.0067
100%		-20	1850 200 042	17.5	0.000 001	0.0095
100%		-10	1850 200 044	20.1	0.000 001	0.0109
100%		0	1850 200 036	11.7	0.000 001	0.0063
100%		+10	1850 200 039	14.4	0.000 001	0.0078
100%		+30	1850 200 047	23.3	0.000 001	0.0126
100%		+40	1850 200 050	26.2	0.000 001	0.0141
100%		+50	1850 200 040	15.9	0.000 001	0.0086
Batt. Endpoint		3.50	+20	1850 200 049	24.6	0.000 001

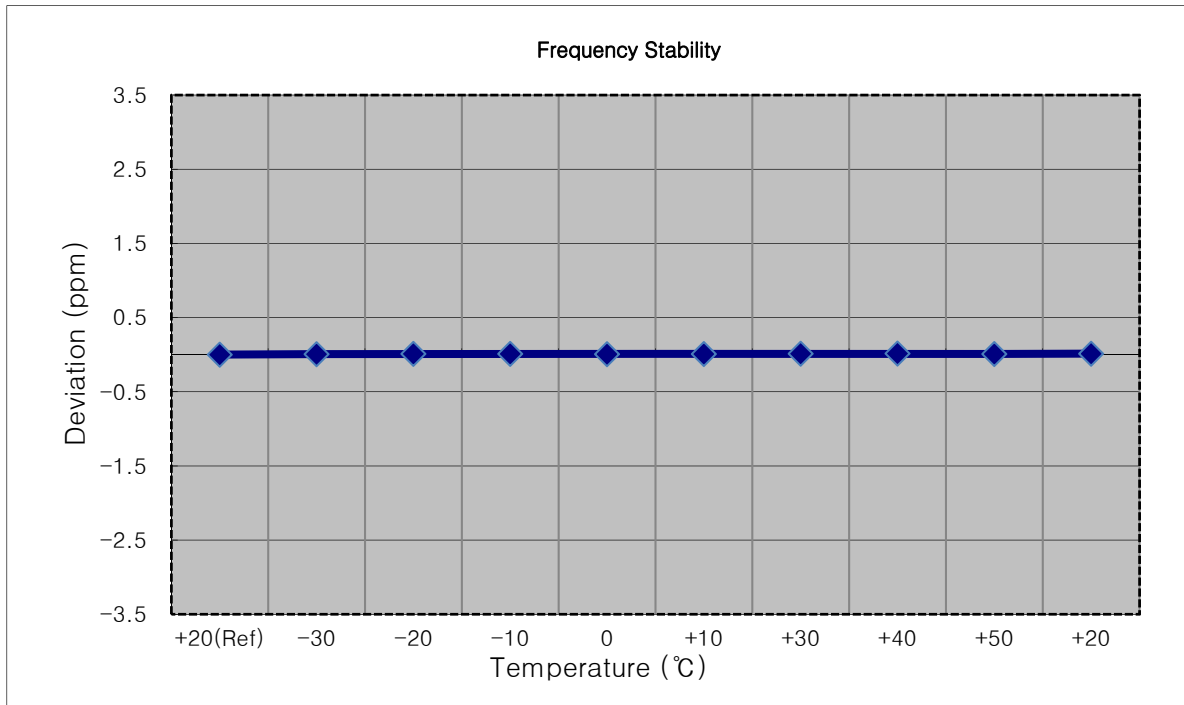


- Mode: GSM1900
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 661
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1879 999 994	0.0	0.000 000	0.000
100%		-30	1880 000 002	7.6	0.000 000	0.004
100%		-20	1880 000 005	11.4	0.000 001	0.006
100%		-10	1880 000 007	13.0	0.000 001	0.007
100%		0	1879 999 987	-6.9	0.000 000	-0.004
100%		+10	1879 999 986	-8.1	0.000 000	-0.004
100%		+30	1880 000 006	12.1	0.000 001	0.006
100%		+40	1879 999 982	-12.4	-0.000 001	-0.007
100%		+50	1879 999 982	-11.7	-0.000 001	-0.006
Batt. Endpoint	3.50	+20	1880 000 000	5.8	0.000 000	0.003

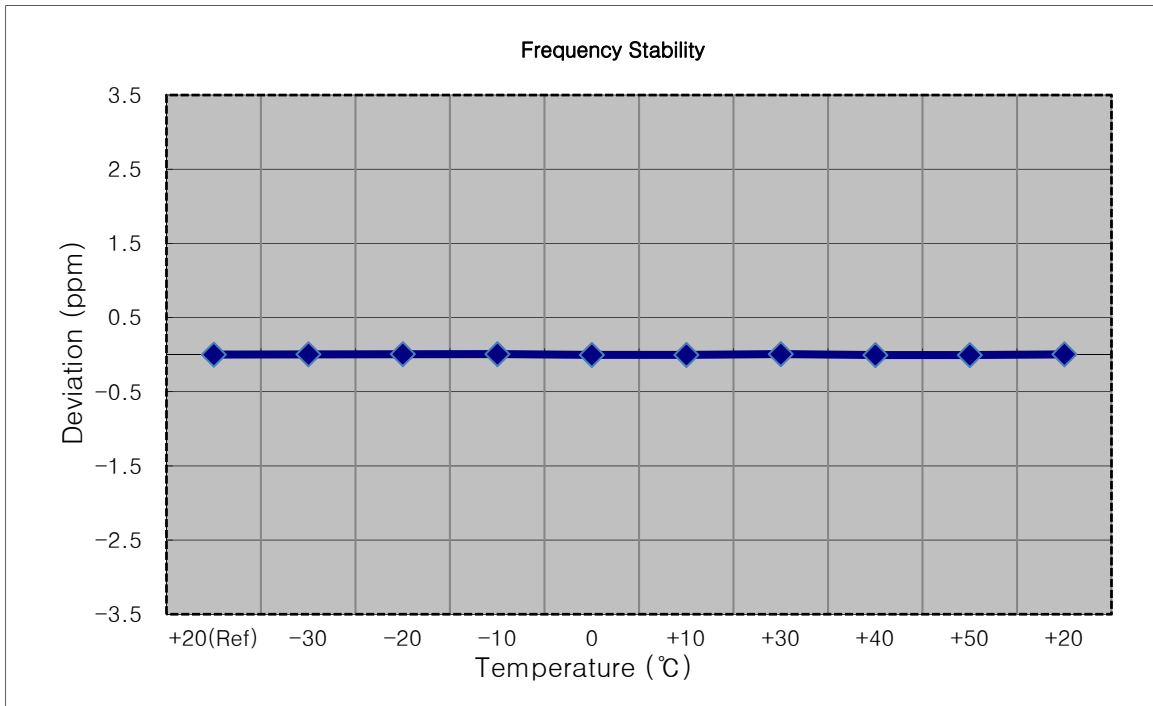


- Mode: GSM1900
- OPERATING FREQUENCY: 1909,800,000 Hz
- CHANNEL: 810
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1909 800 018	0.0	0.000 000	0.000
100%		-30	1909 800 039	21.2	0.000 001	0.011
100%		-20	1909 800 025	6.6	0.000 000	0.003
100%		-10	1909 800 027	8.7	0.000 000	0.005
100%		0	1909 800 030	12.0	0.000 001	0.006
100%		+10	1909 800 034	15.4	0.000 001	0.008
100%		+30	1909 800 036	17.9	0.000 001	0.009
100%		+40	1909 800 042	24.2	0.000 001	0.013
100%		+50	1909 800 027	8.7	0.000 000	0.005
Batt. Endpoint	3.50	+20	1909 800 031	12.9	0.000 001	0.007

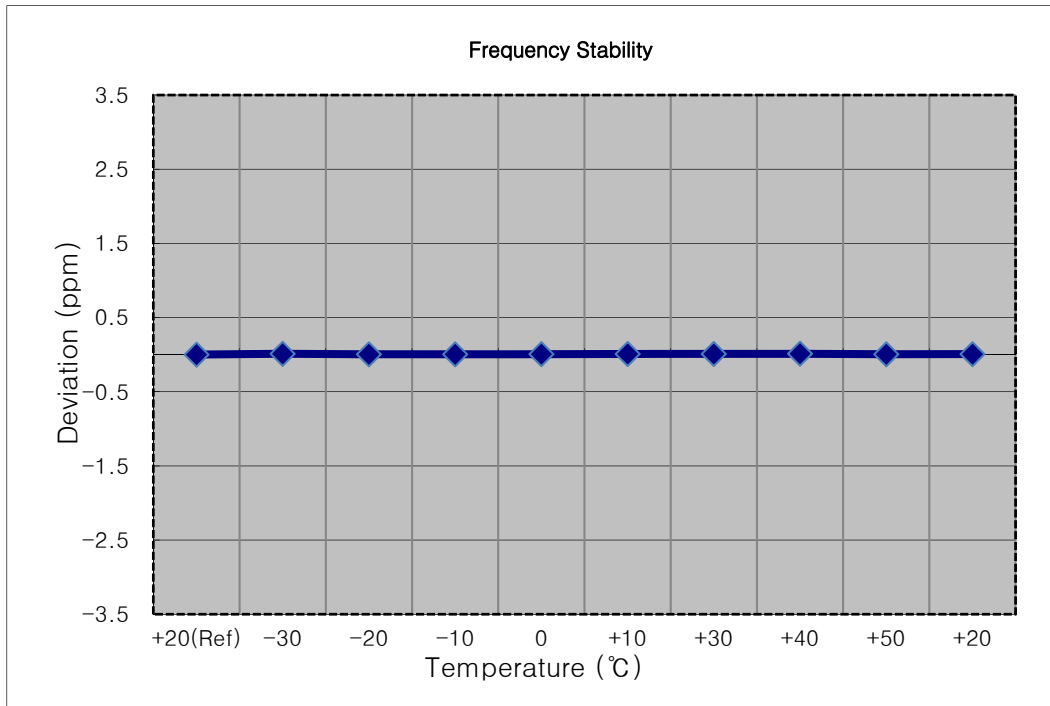


- Mode: WCDMA850
- OPERATING FREQUENCY: 836.600.000 Hz
- CHANNEL: 4183
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	836 599 999	0.0	0.000 000	0.0000
100%		-30	836 599 998	-0.8	0.000 000	-0.0009
100%		-20	836 600 000	0.9	0.000 000	0.0011
100%		-10	836 599 997	-2.2	0.000 000	-0.0026
100%		0	836 599 998	-1.2	0.000 000	-0.0014
100%		+10	836 600 000	1.3	0.000 000	0.0015
100%		+30	836 600 000	1.2	0.000 000	0.0014
100%		+40	836 599 997	-1.5	0.000 000	-0.0018
100%		+50	836 599 997	-1.7	0.000 000	-0.0020
Batt. Endpoint	3.50	+20	836 599 998	-1.3	0.000 000	-0.0015

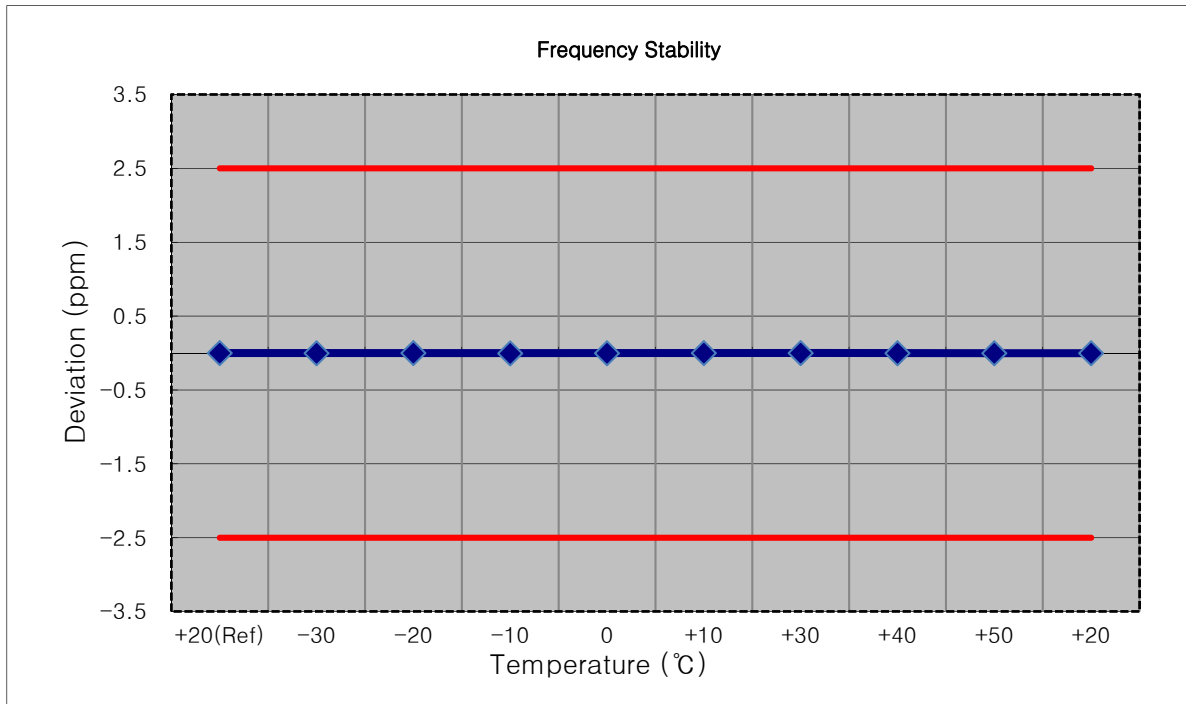


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,852,400,000 Hz
- CHANNEL: 9262
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1852 400 018	0.0	0.000 000	0.0000
100%		-30	1852 400 034	17.0	0.000 001	0.0092
100%		-20	1852 400 035	17.0	0.000 001	0.0092
100%		-10	1852 400 035	17.5	0.000 001	0.0095
100%		0	1852 400 034	16.9	0.000 001	0.0091
100%		+10	1852 400 036	18.3	0.000 001	0.0099
100%		+30	1852 400 035	17.1	0.000 001	0.0092
100%		+40	1852 400 036	18.4	0.000 001	0.0099
100%		+50	1852 400 035	17.5	0.000 001	0.0094
Batt. Endpoint		3.50	+20	1852 400 034	16.3	0.000 001

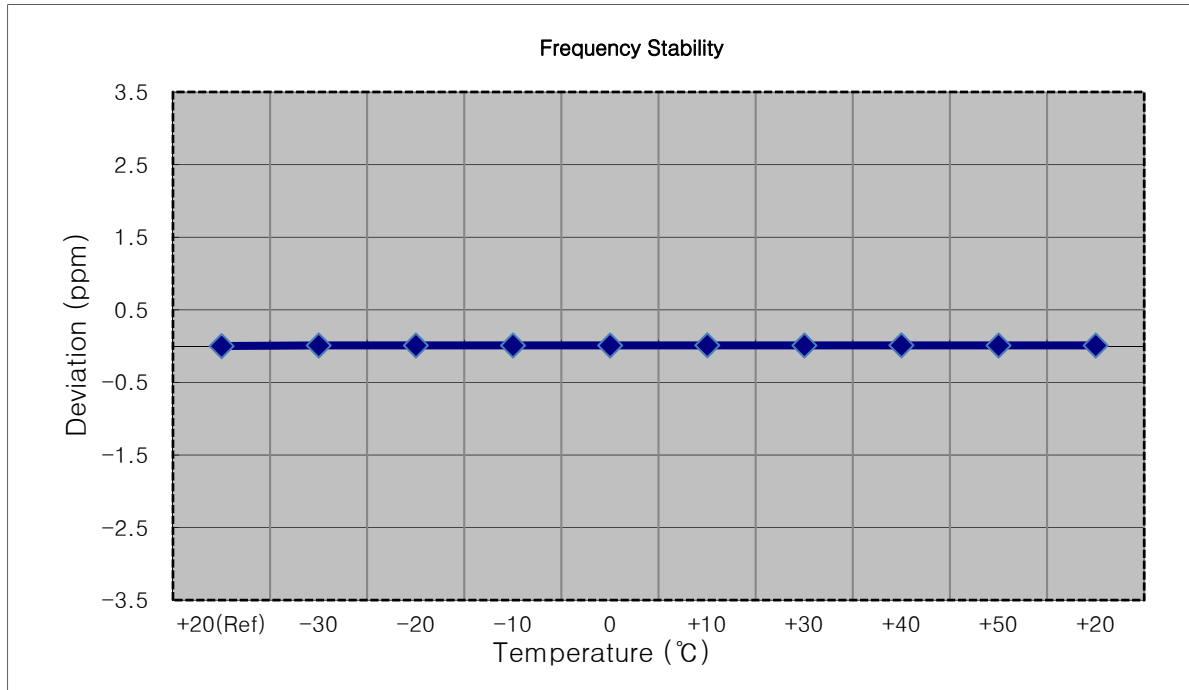


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,880,000,000 Hz
- CHANNEL: 9400
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1880 000 013	0.0	0.000 000	0.0000
100%		-30	1880 000 027	13.6	0.000 001	0.0072
100%		-20	1880 000 026	12.8	0.000 001	0.0068
100%		-10	1880 000 028	14.6	0.000 001	0.0078
100%		0	1880 000 026	12.5	0.000 001	0.0066
100%		+10	1880 000 027	13.4	0.000 001	0.0071
100%		+30	1880 000 026	13.2	0.000 001	0.0070
100%		+40	1880 000 027	13.8	0.000 001	0.0073
100%		+50	1880 000 028	14.5	0.000 001	0.0077
Batt. Endpoint		3.50	+20	1880 000 027	13.8	0.000 001

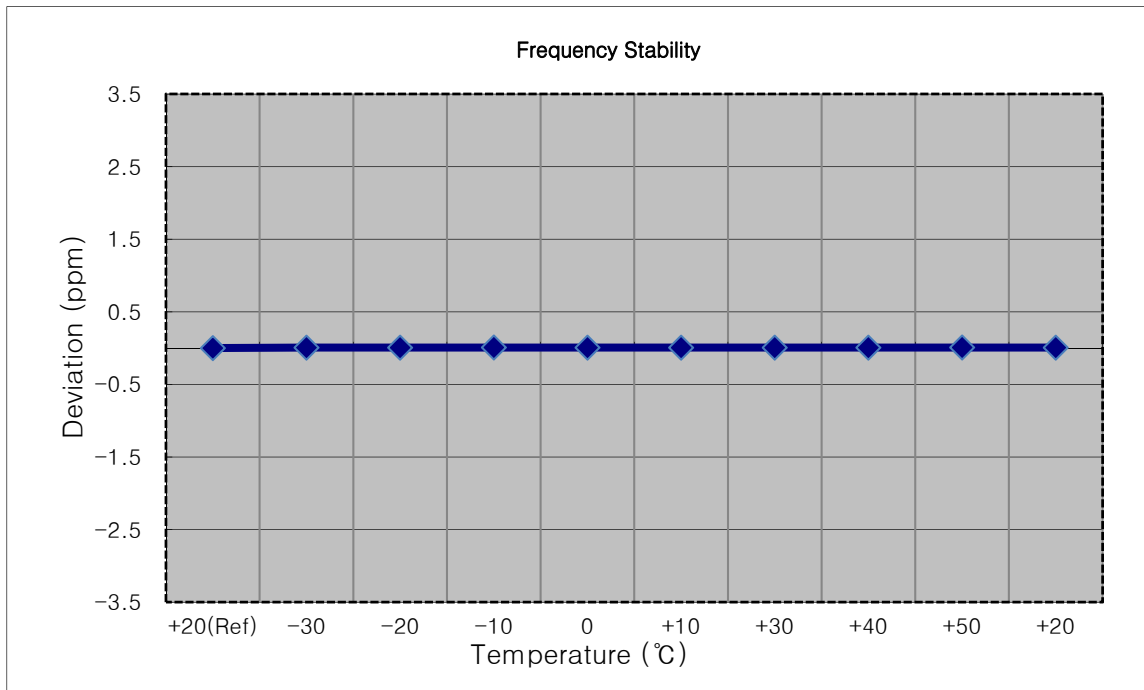


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,907,600,000 Hz
- CHANNEL: 9538
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1907 600 009	0.0	0.000 000	0.0000
100%		-30	1907 600 018	9.6	0.000 001	0.0050
100%		-20	1907 600 018	9.1	0.000 000	0.0048
100%		-10	1907 600 017	8.8	0.000 000	0.0046
100%		0	1907 600 018	9.2	0.000 000	0.0048
100%		+10	1907 600 017	8.7	0.000 000	0.0045
100%		+30	1907 600 017	8.9	0.000 000	0.0047
100%		+40	1907 600 018	9.1	0.000 000	0.0048
100%		+50	1907 600 017	8.3	0.000 000	0.0044
Batt. Endpoint	3.50	+20	1907 600 017	8.2	0.000 000	0.0043

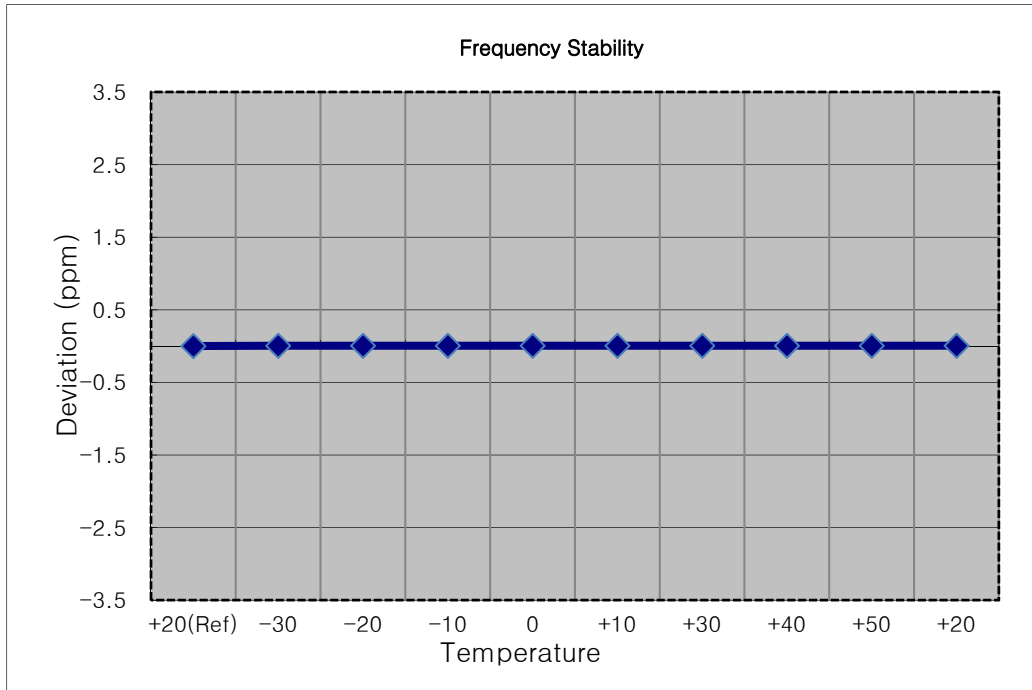


- Mode: WCDMA1700
- OPERATING FREQUENCY: 1,712,400,000 Hz
- CHANNEL: 1312
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1712 400 021	0.0	0.000 000	0.0000
100%		-30	1712 400 041	20.3	0.000 001	0.0119
100%		-20	1712 400 042	21.2	0.000 001	0.0124
100%		-10	1712 400 042	21.6	0.000 001	0.0126
100%		0	1712 400 041	20.4	0.000 001	0.0119
100%		+10	1712 400 041	20.1	0.000 001	0.0118
100%		+30	1712 400 041	20.1	0.000 001	0.0118
100%		+40	1712 400 042	20.8	0.000 001	0.0122
100%		+50	1712 400 042	20.7	0.000 001	0.0121
Batt. Endpoint	3.50	+20	1712 400 041	20.2	0.000 001	0.0118

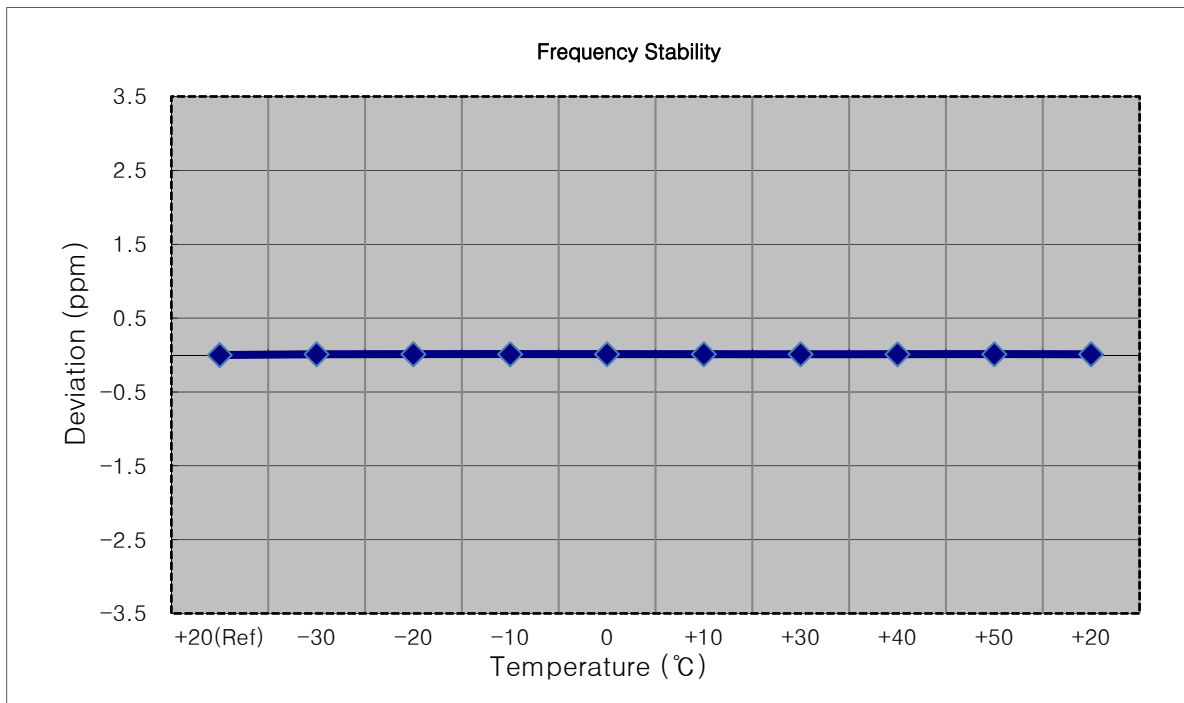


- Mode: WCDMA1700
- OPERATING FREQUENCY: 1,732,400,000 Hz
- CHANNEL: 1412
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 400 008	0.0	0.000 000	0.0000
100%		-30	1732 400 014	6.0	0.000 000	0.0035
100%		-20	1732 400 015	7.1	0.000 000	0.0041
100%		-10	1732 400 014	6.1	0.000 000	0.0035
100%		0	1732 400 015	6.8	0.000 000	0.0039
100%		+10	1732 400 015	6.8	0.000 000	0.0039
100%		+30	1732 400 014	6.3	0.000 000	0.0037
100%		+40	1732 400 015	7.5	0.000 000	0.0043
100%		+50	1732 400 015	7.2	0.000 000	0.0041
Batt. Endpoint	3.50	+20	1732 400 015	6.8	0.000 000	0.0039

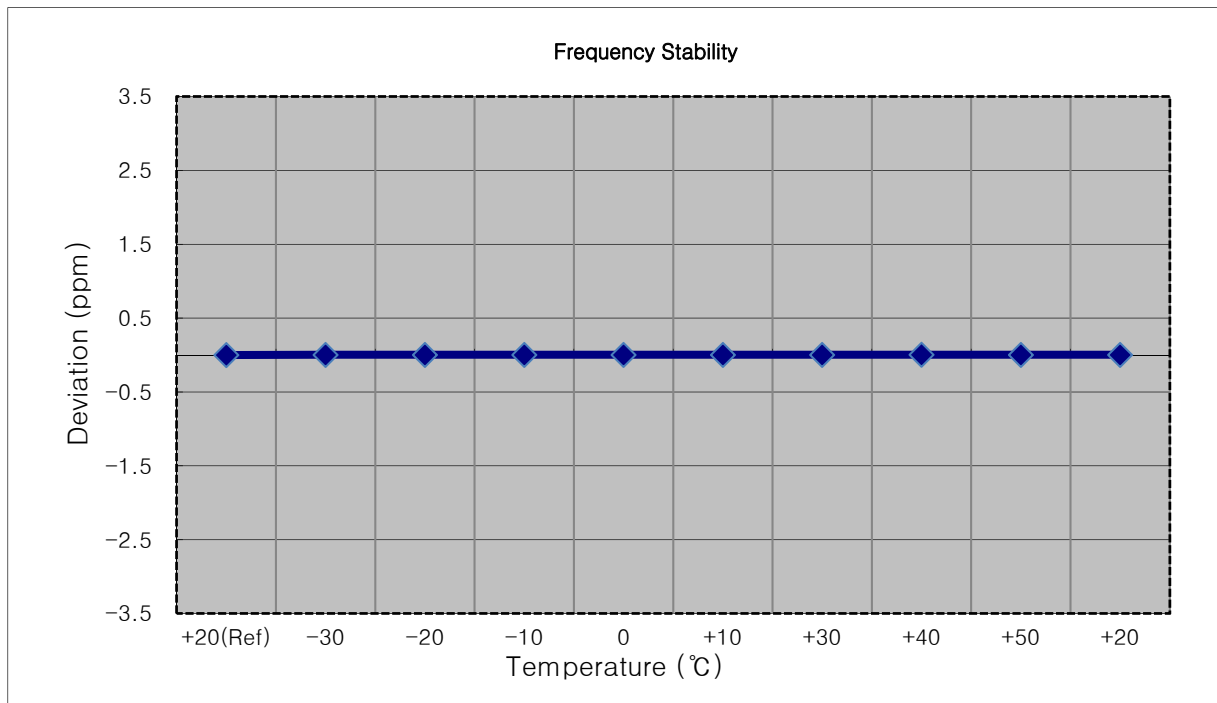


- Mode: WCDMA1700
- OPERATING FREQUENCY: 1,752,600,000 Hz
- CHANNEL: 1513
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1752 599 988	0.0	0.000 000	0.0000
100%		-30	1752 599 976	-12.2	-0.000 001	-0.0070
100%		-20	1752 599 977	-11.2	-0.000 001	-0.0064
100%		-10	1752 599 976	-12.3	-0.000 001	-0.0070
100%		0	1752 599 977	-10.9	-0.000 001	-0.0062
100%		+10	1752 599 976	-11.7	-0.000 001	-0.0067
100%		+30	1752 599 976	-12.1	-0.000 001	-0.0069
100%		+40	1752 599 977	-11.3	-0.000 001	-0.0065
100%		+50	1752 599 975	-12.6	-0.000 001	-0.0072
Batt. Endpoint	3.50	+20	1752 599 975	-12.9	-0.000 001	-0.0074

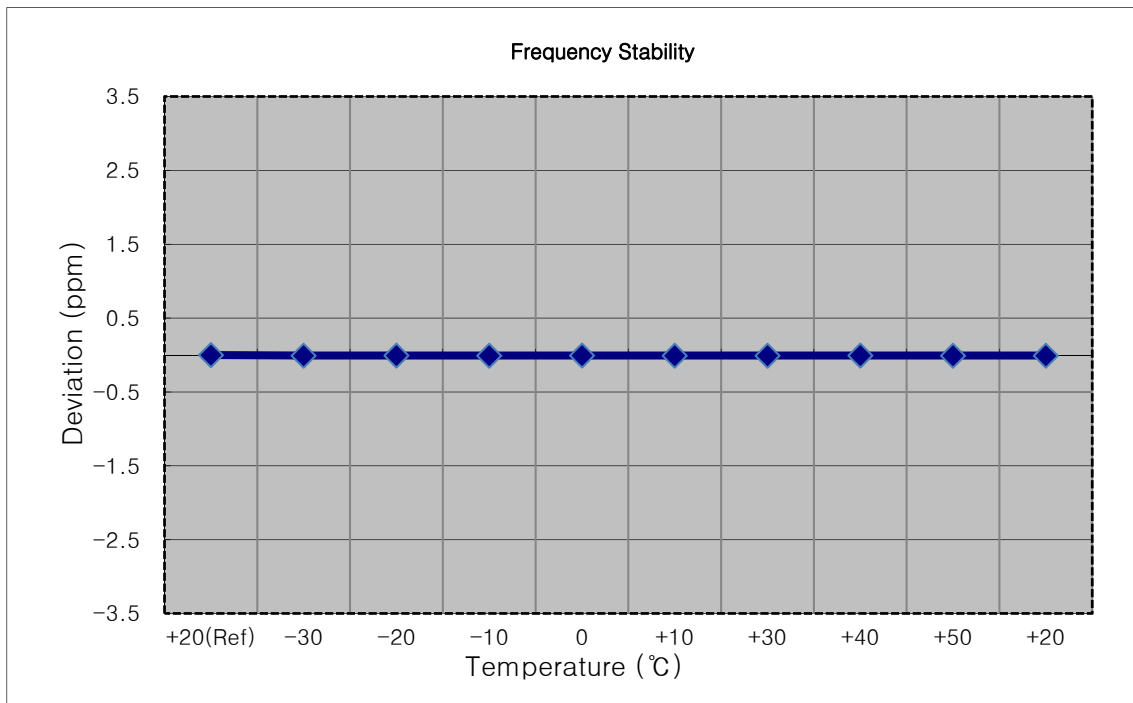


9. TEST PLOTS


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

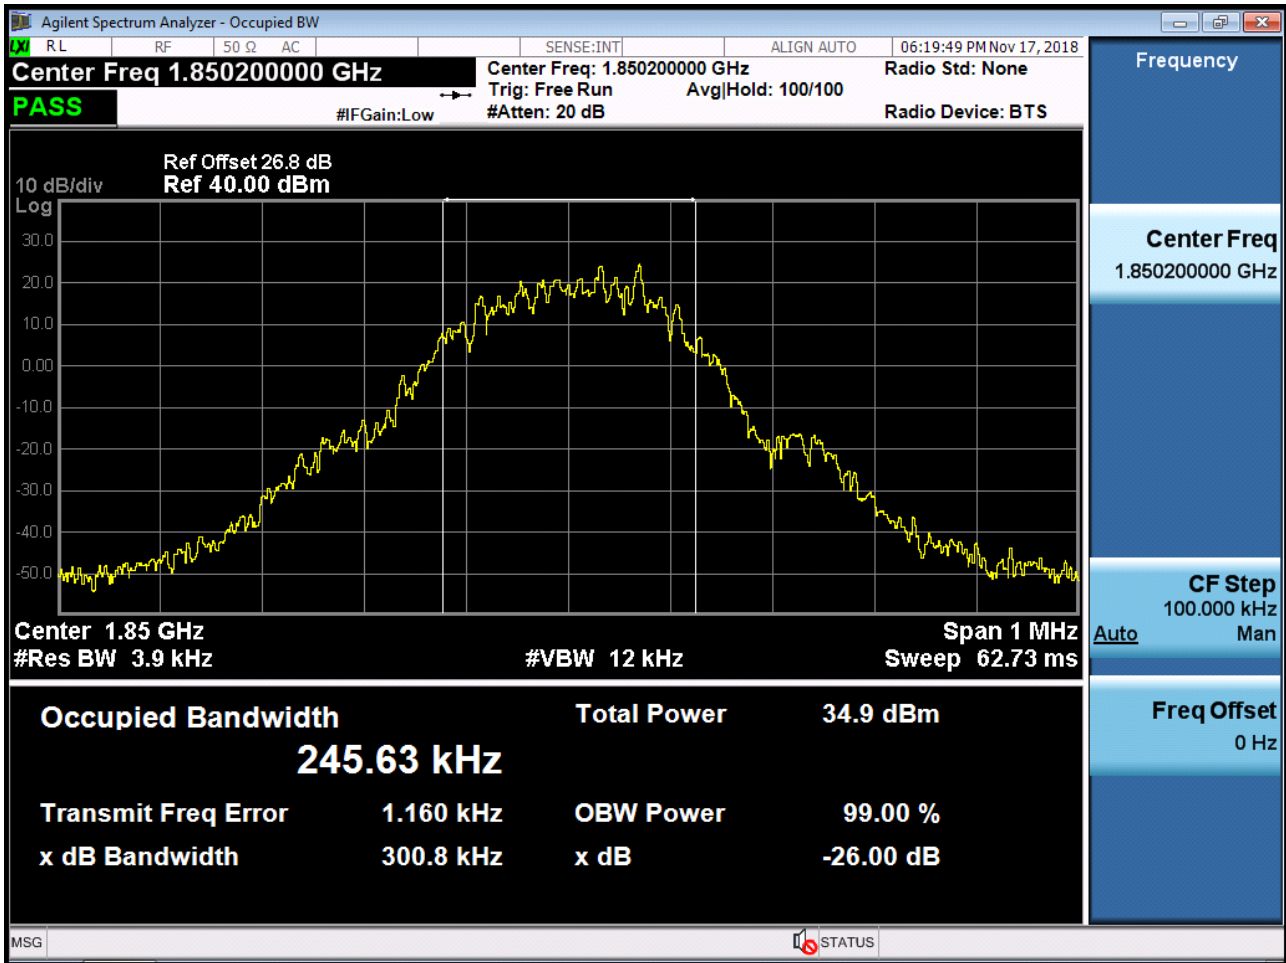


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

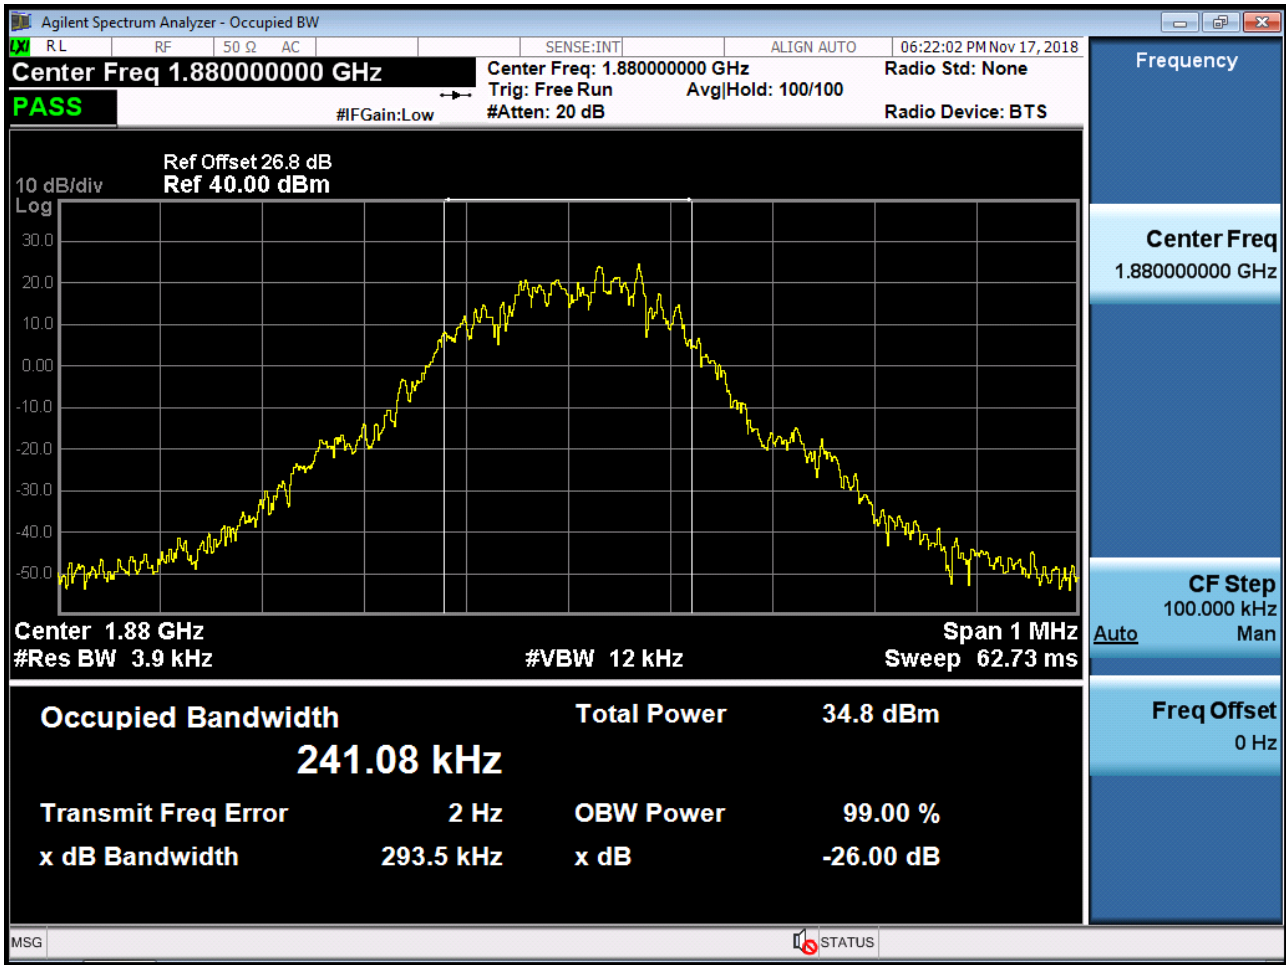


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

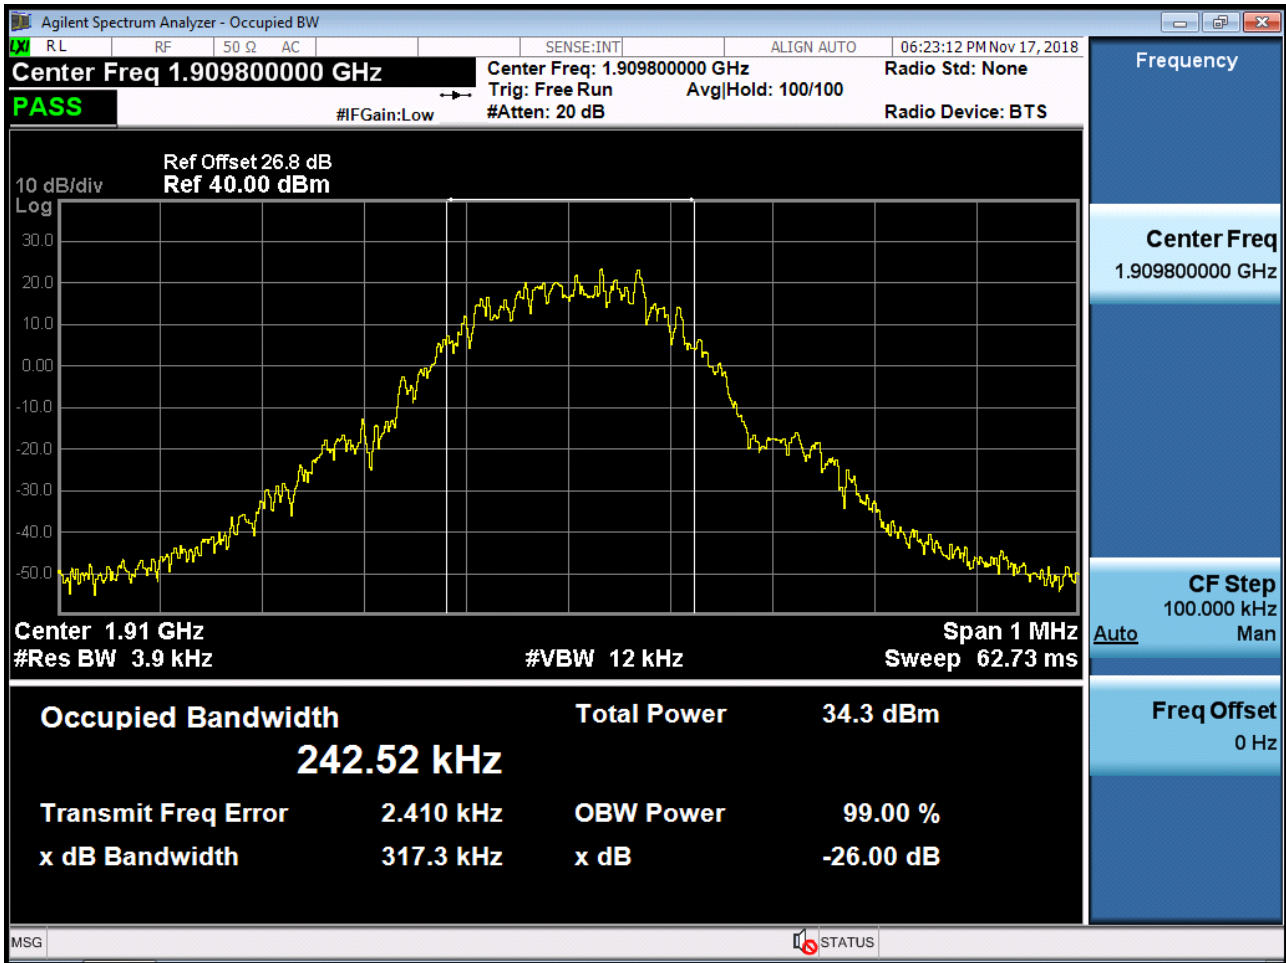


■ GSM1900 EDGE (810 CH.) Occupied Bandwidth

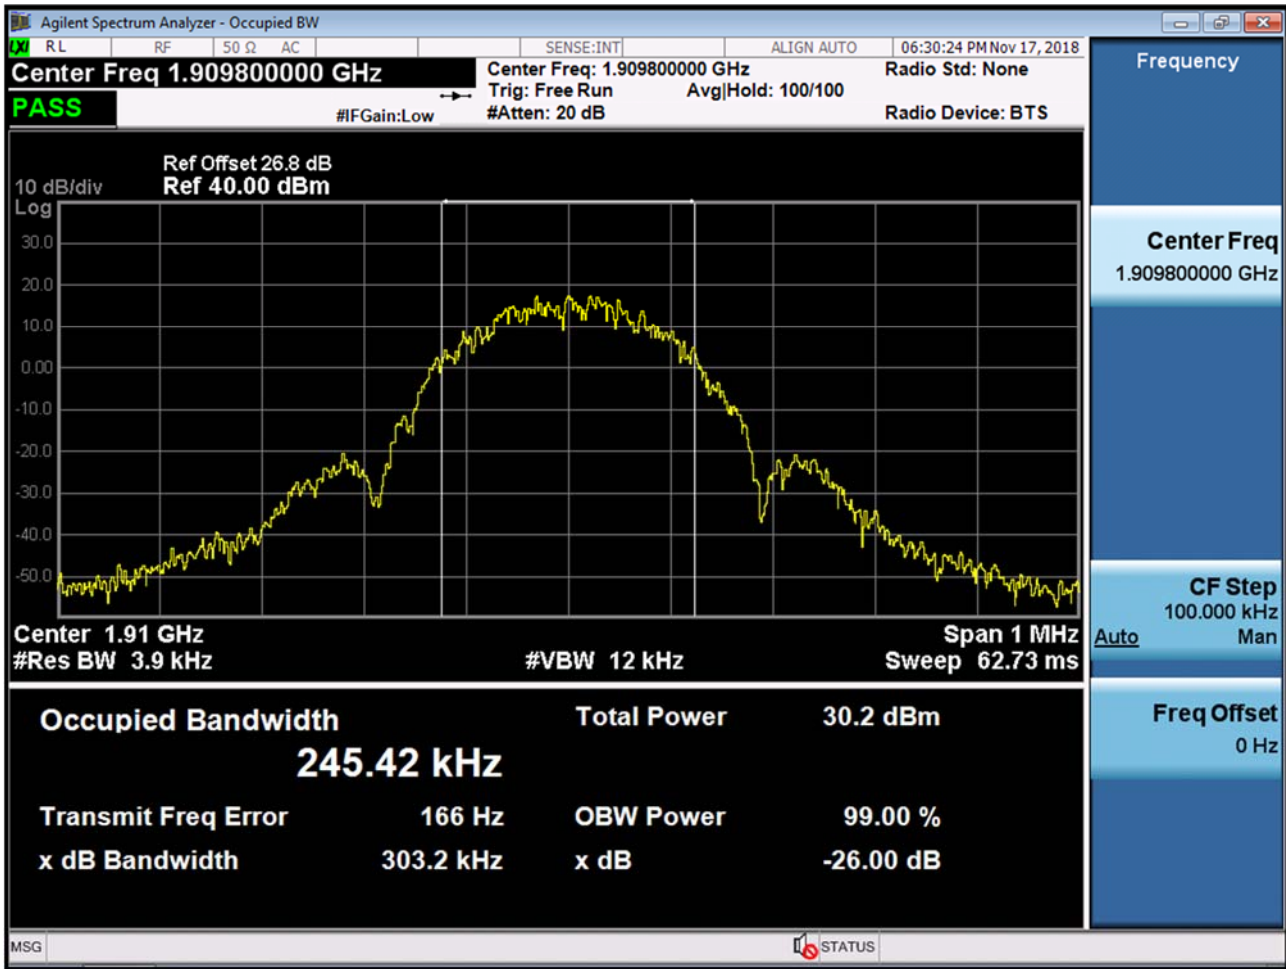


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

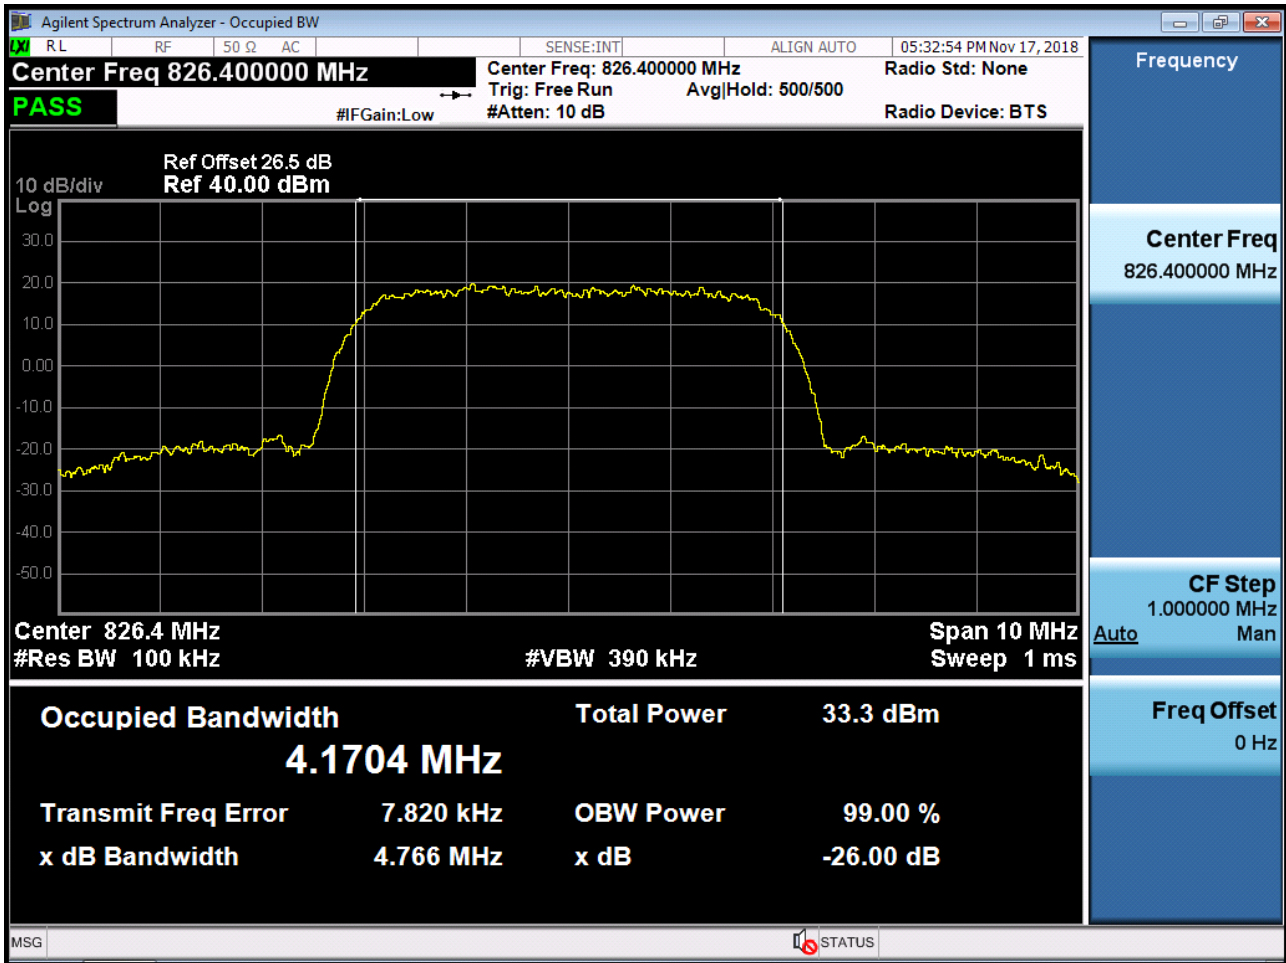


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

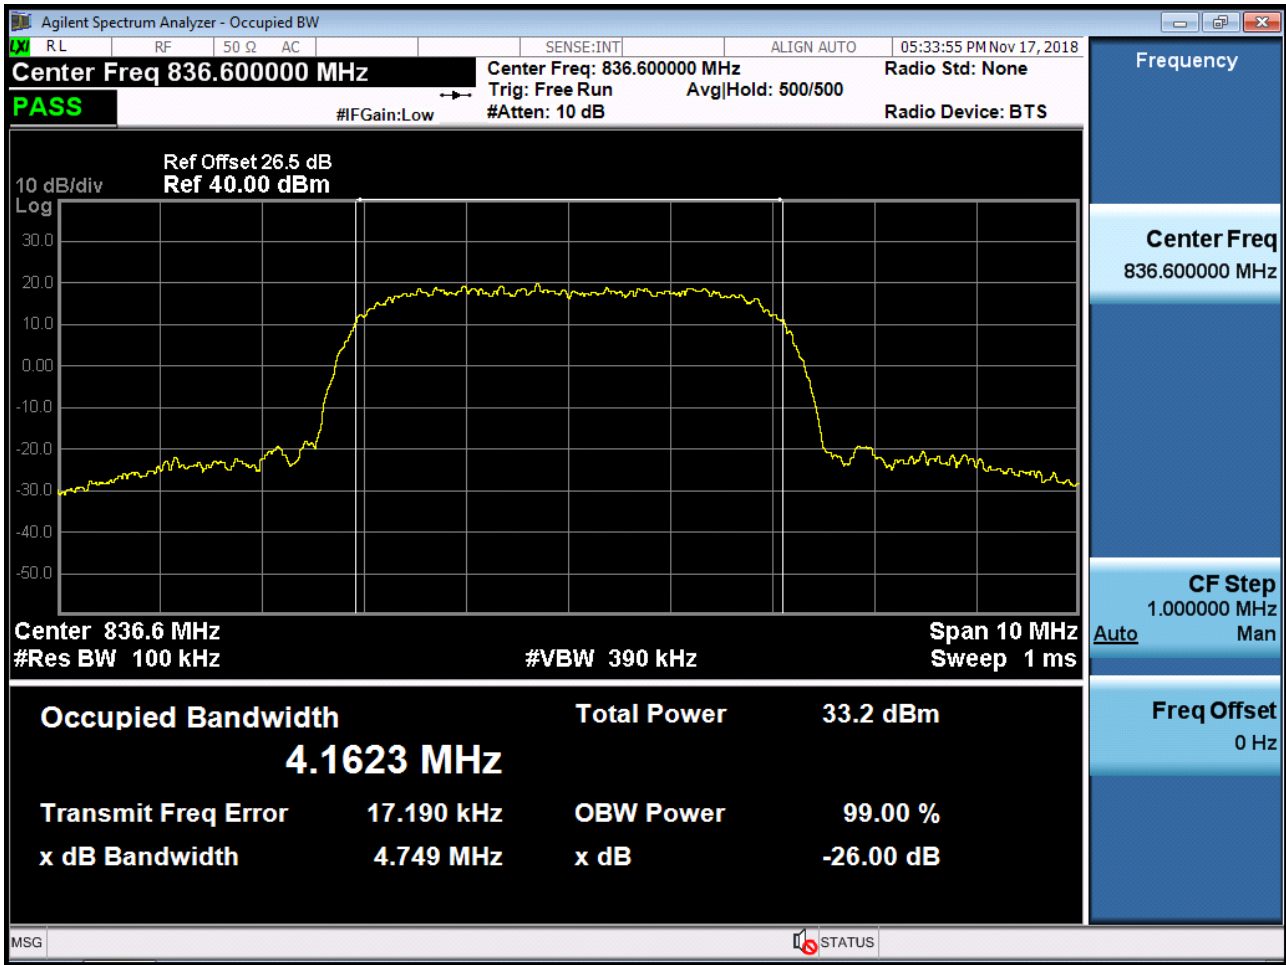


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

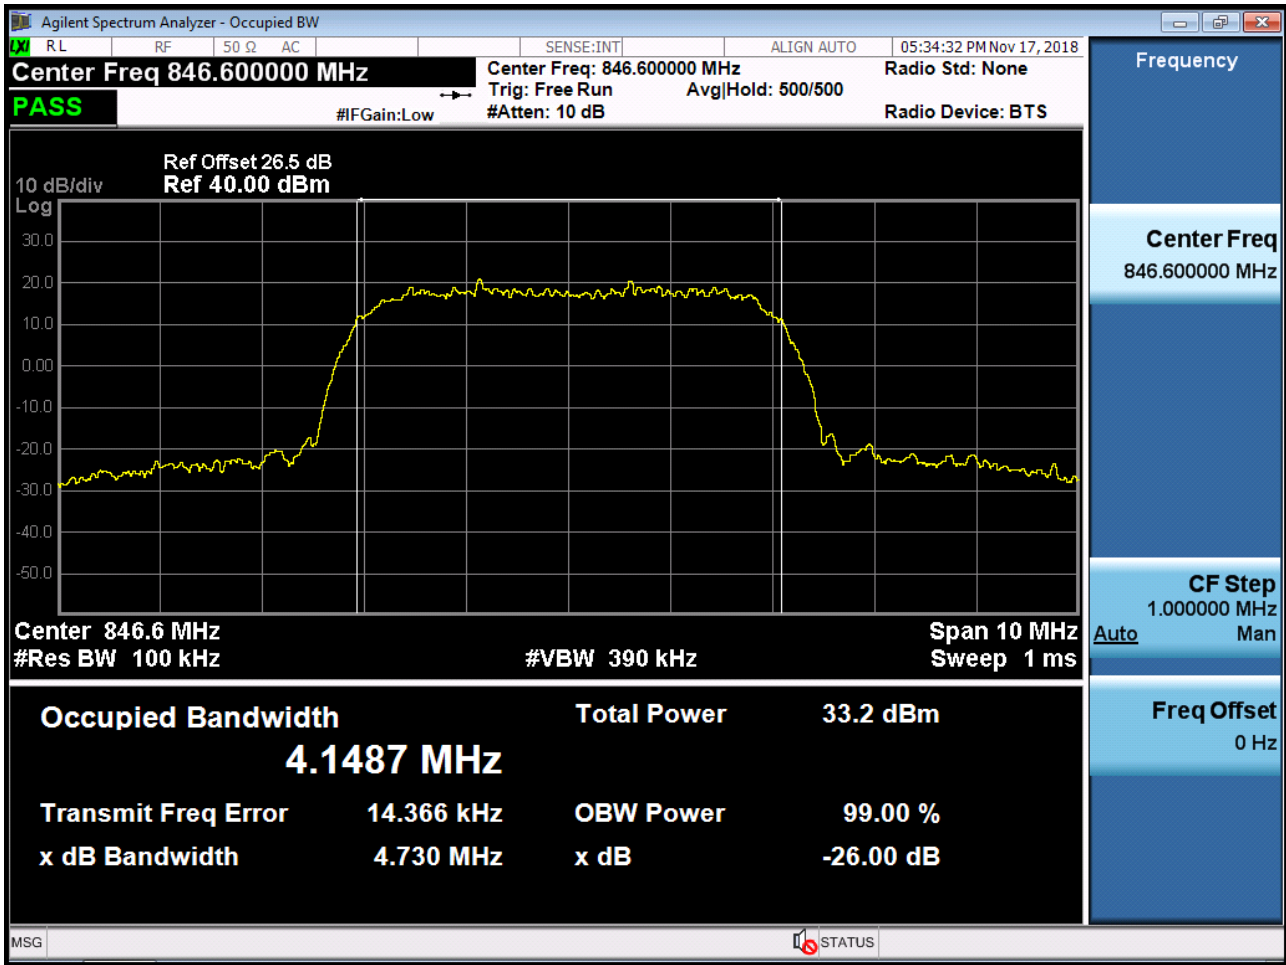


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

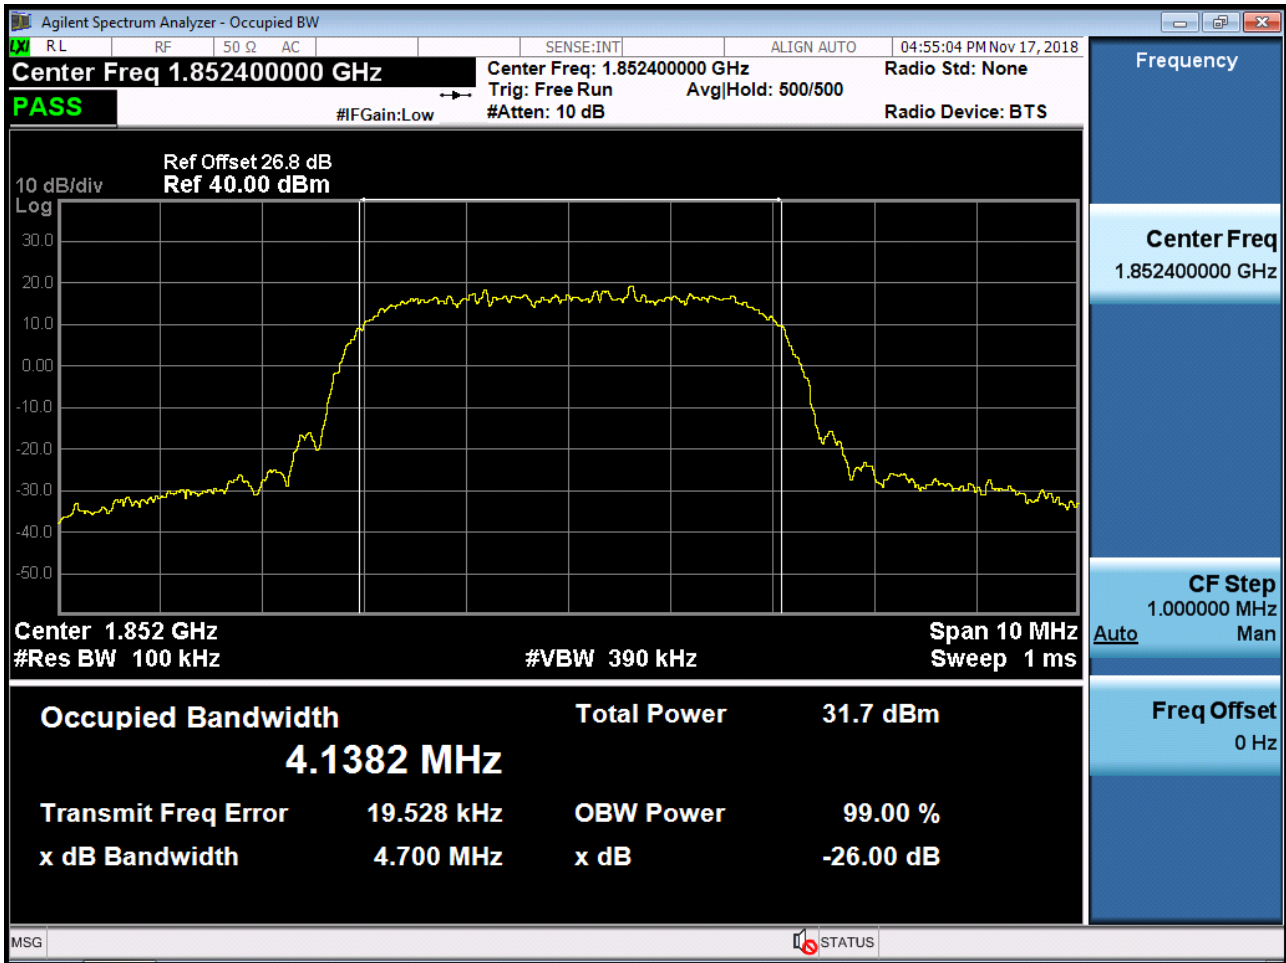


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

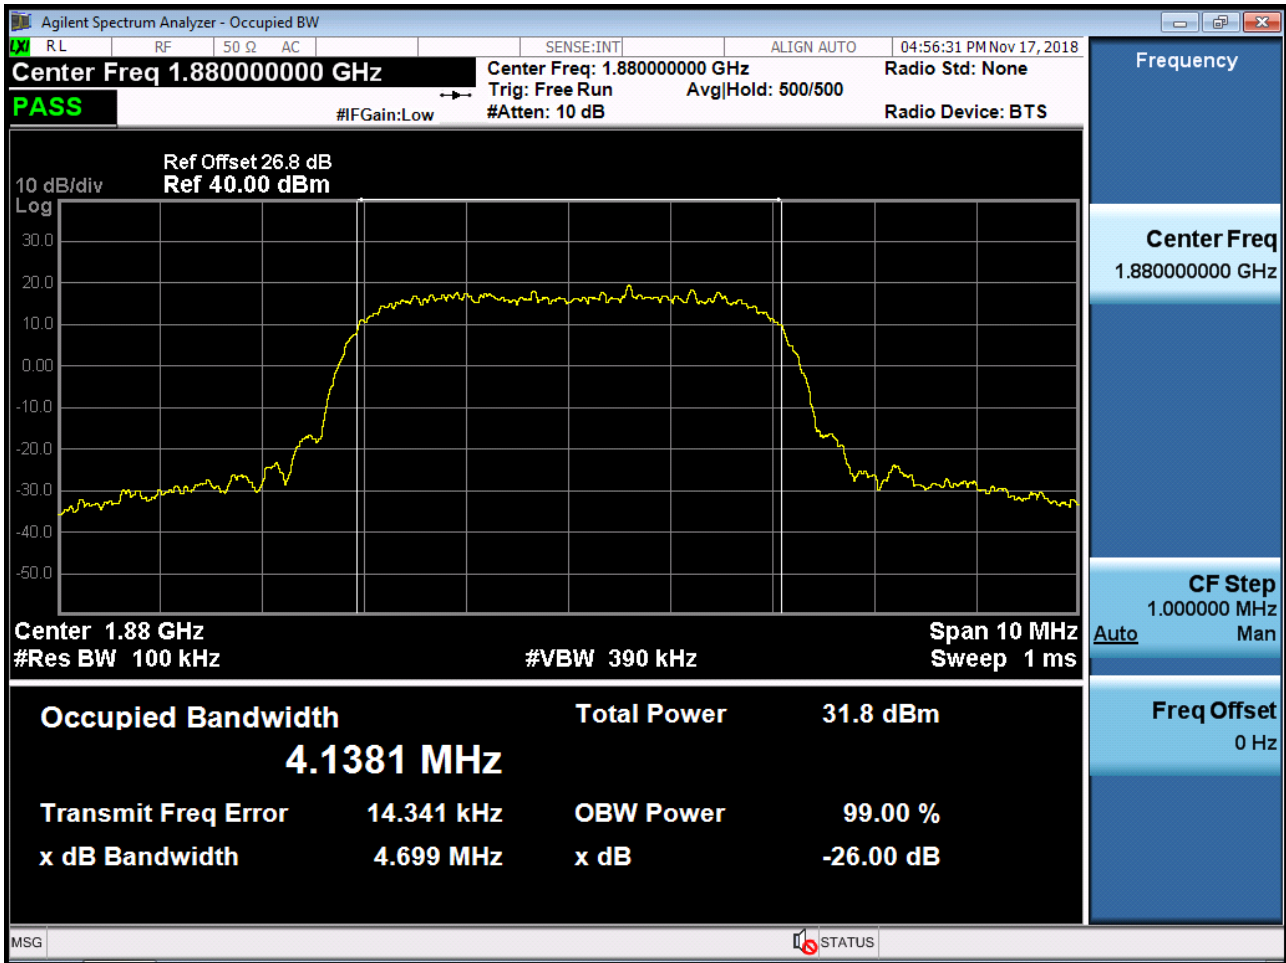


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

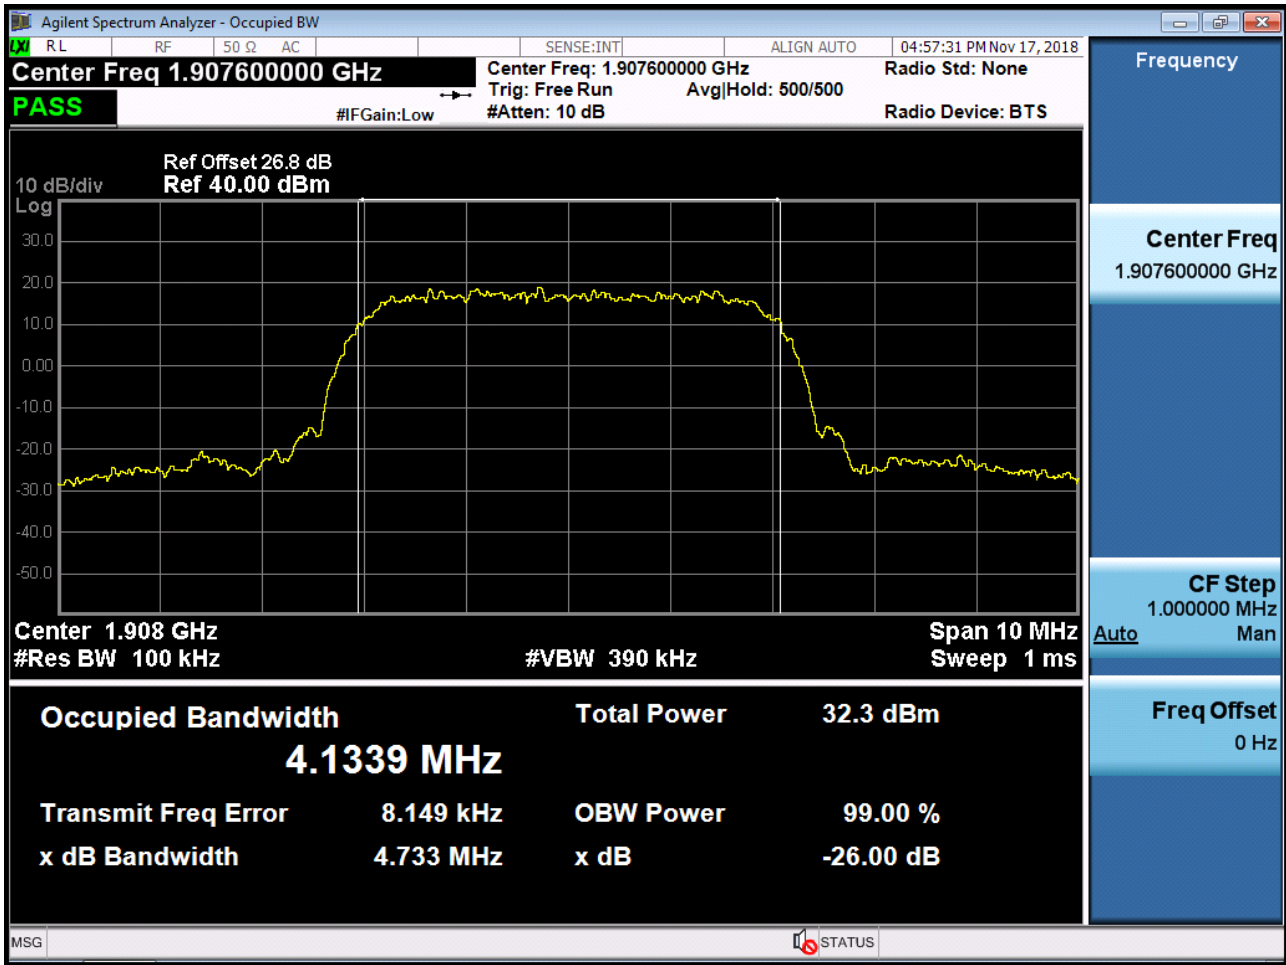


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

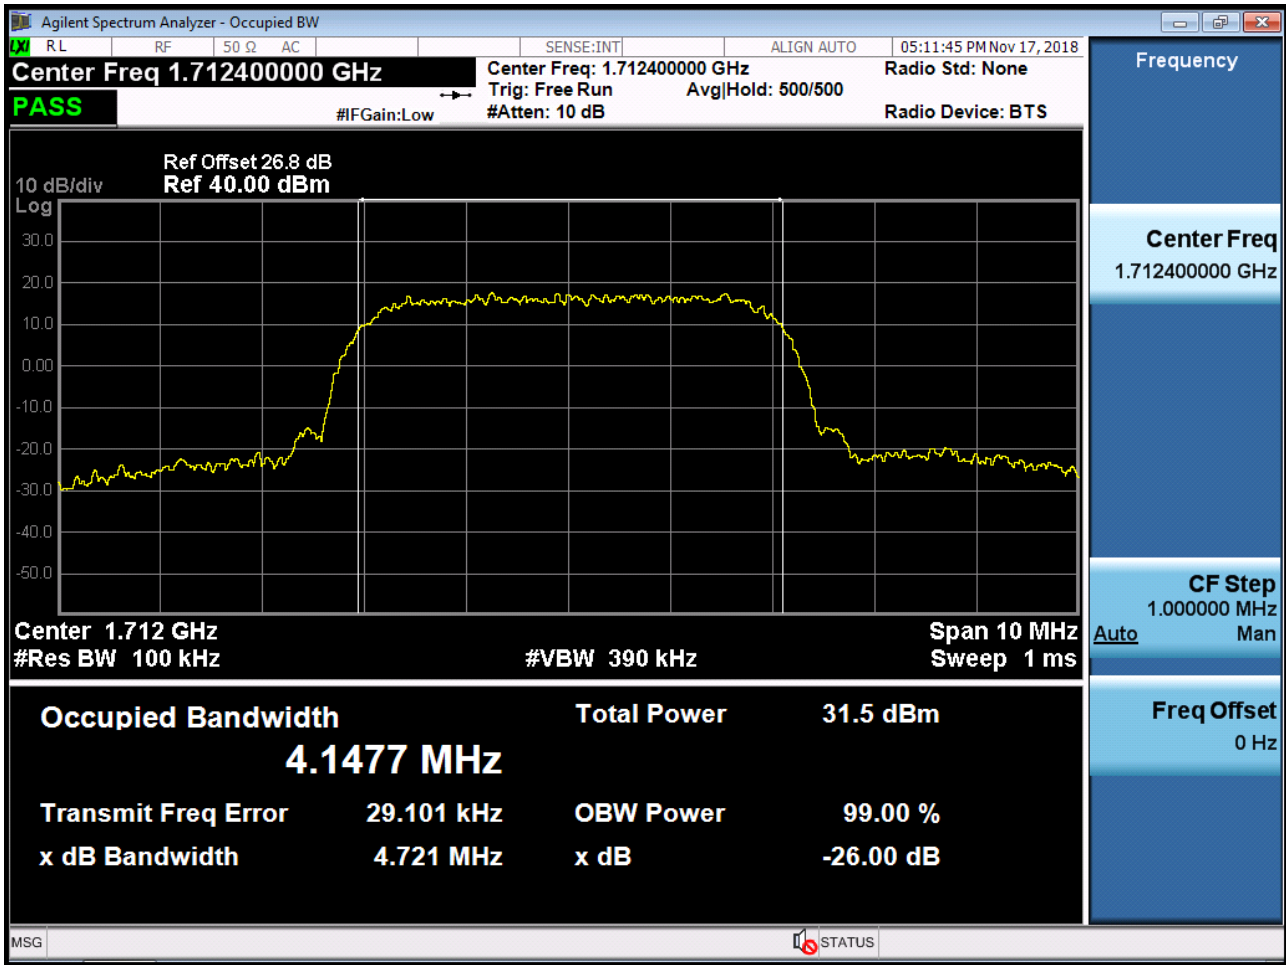

■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

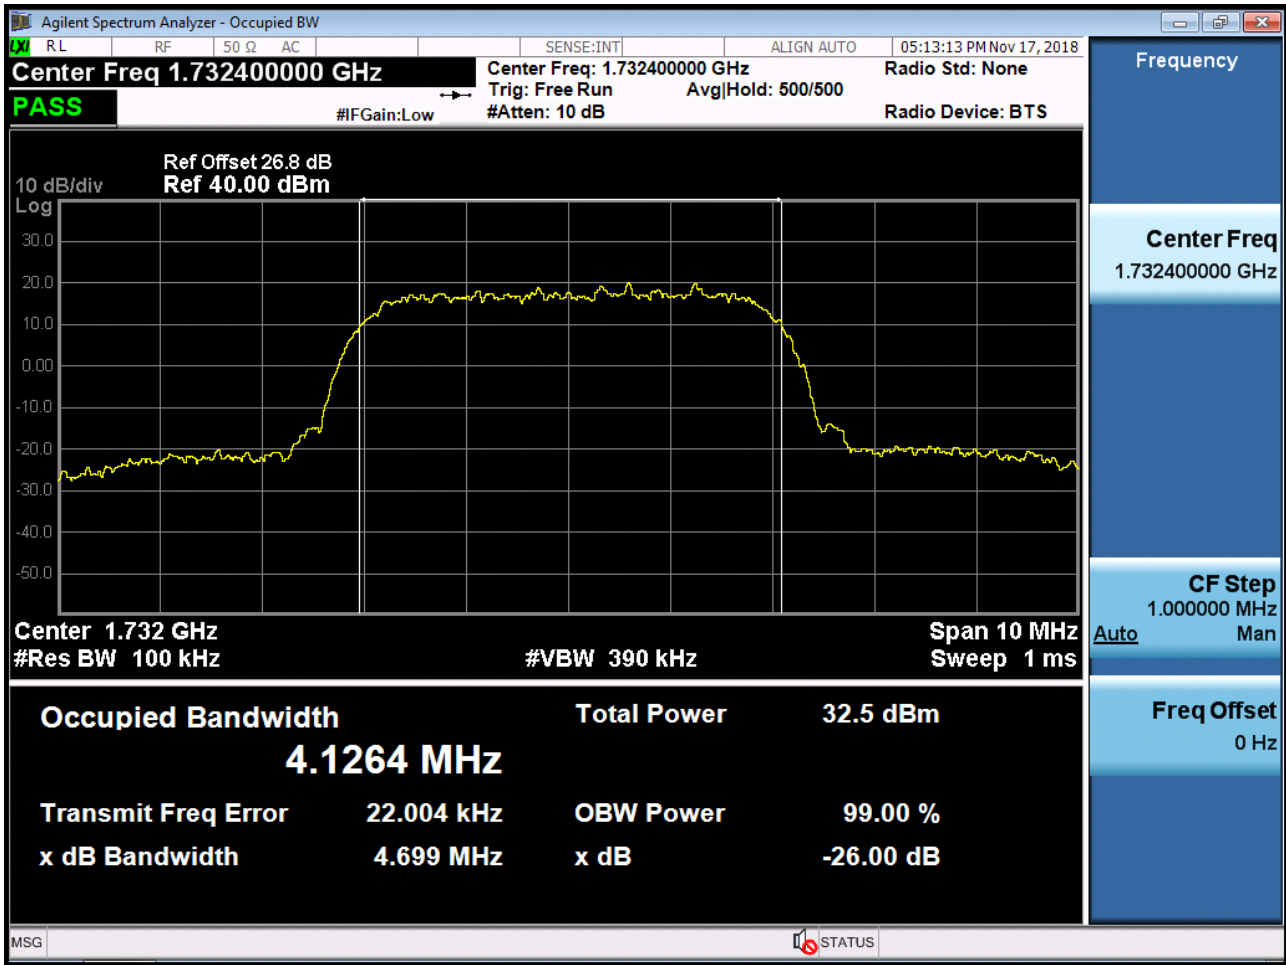


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

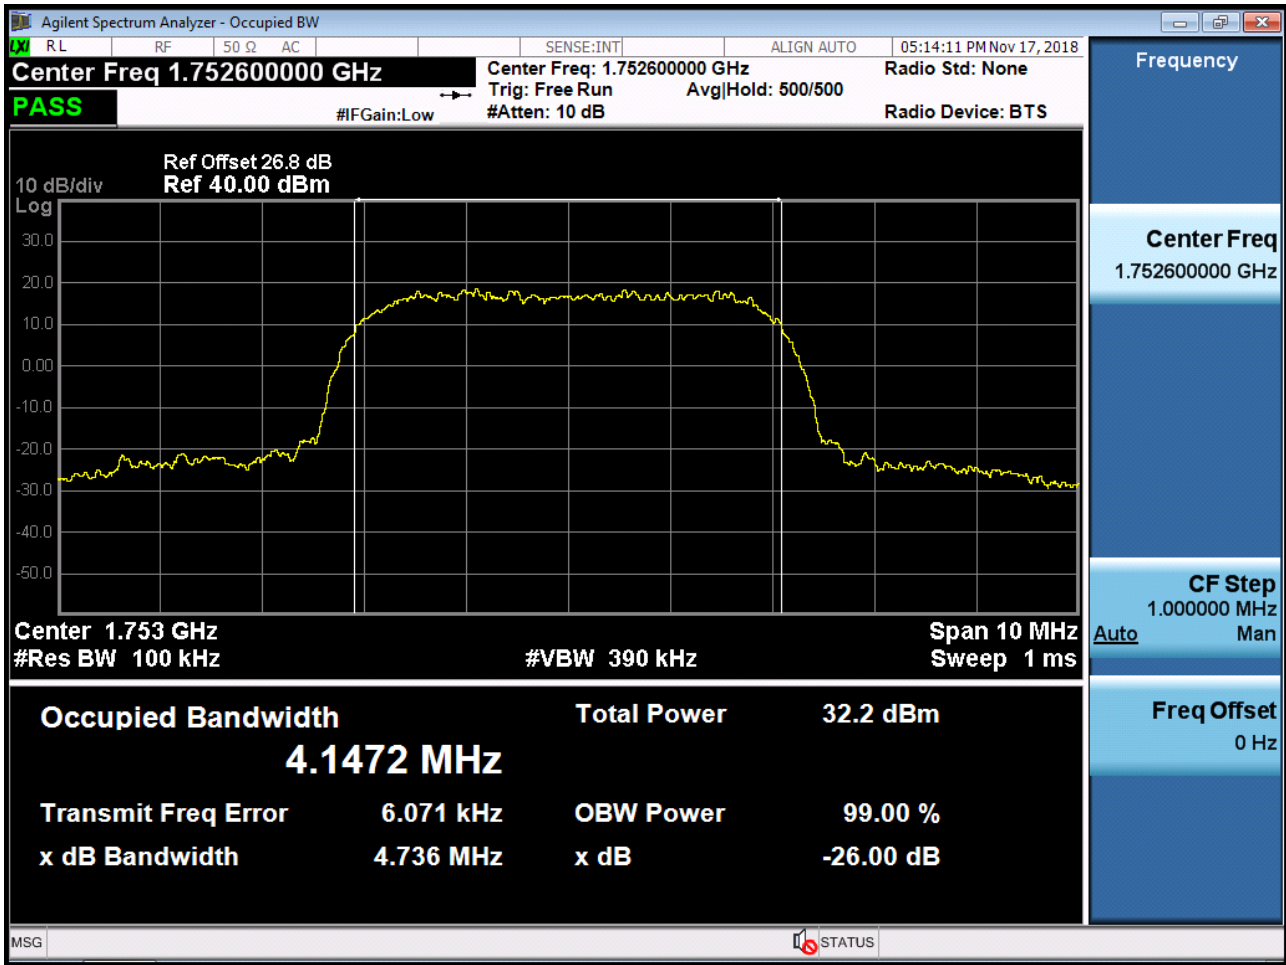


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{pk}




■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

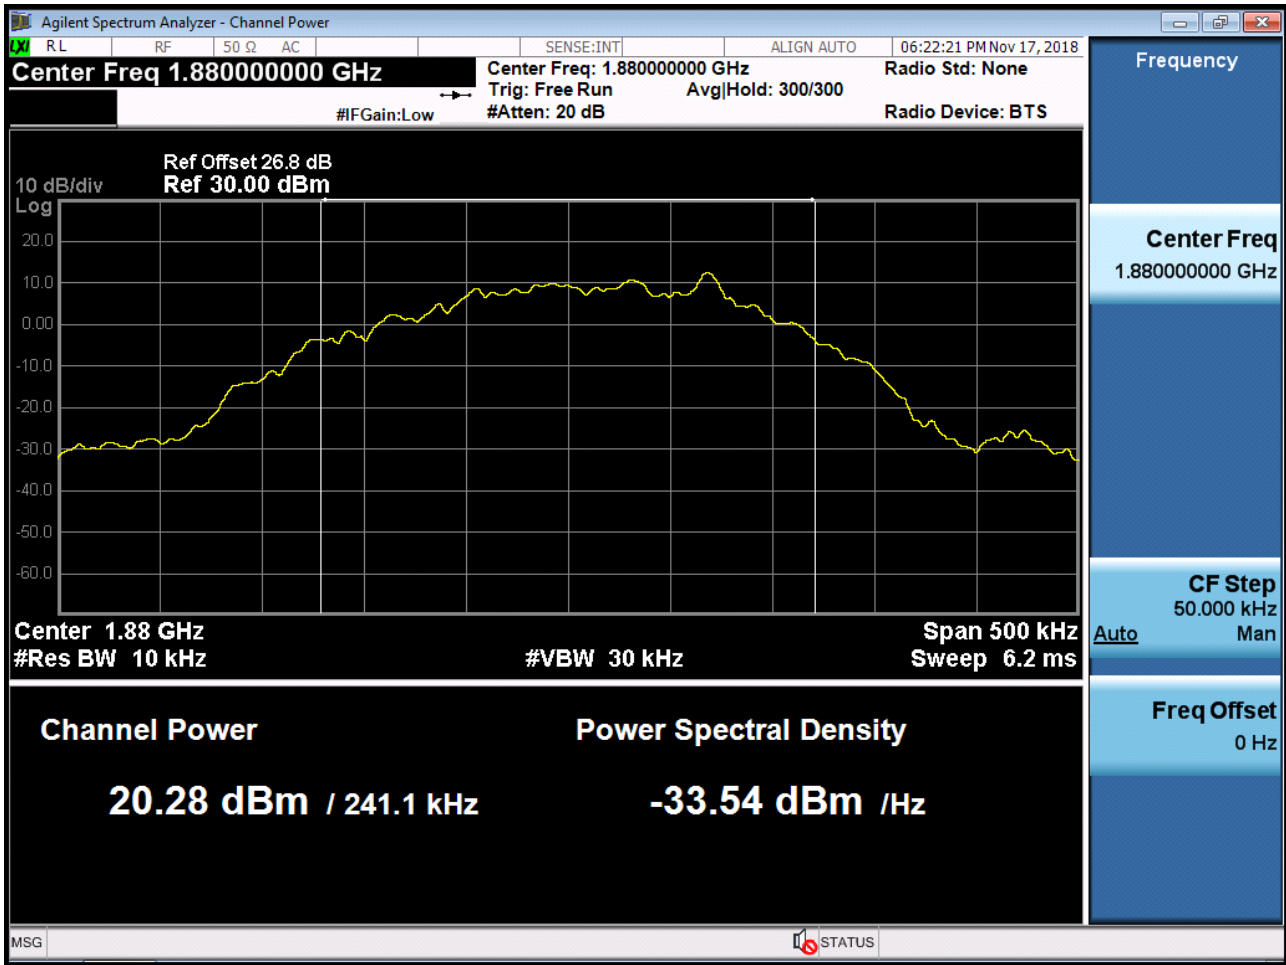

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

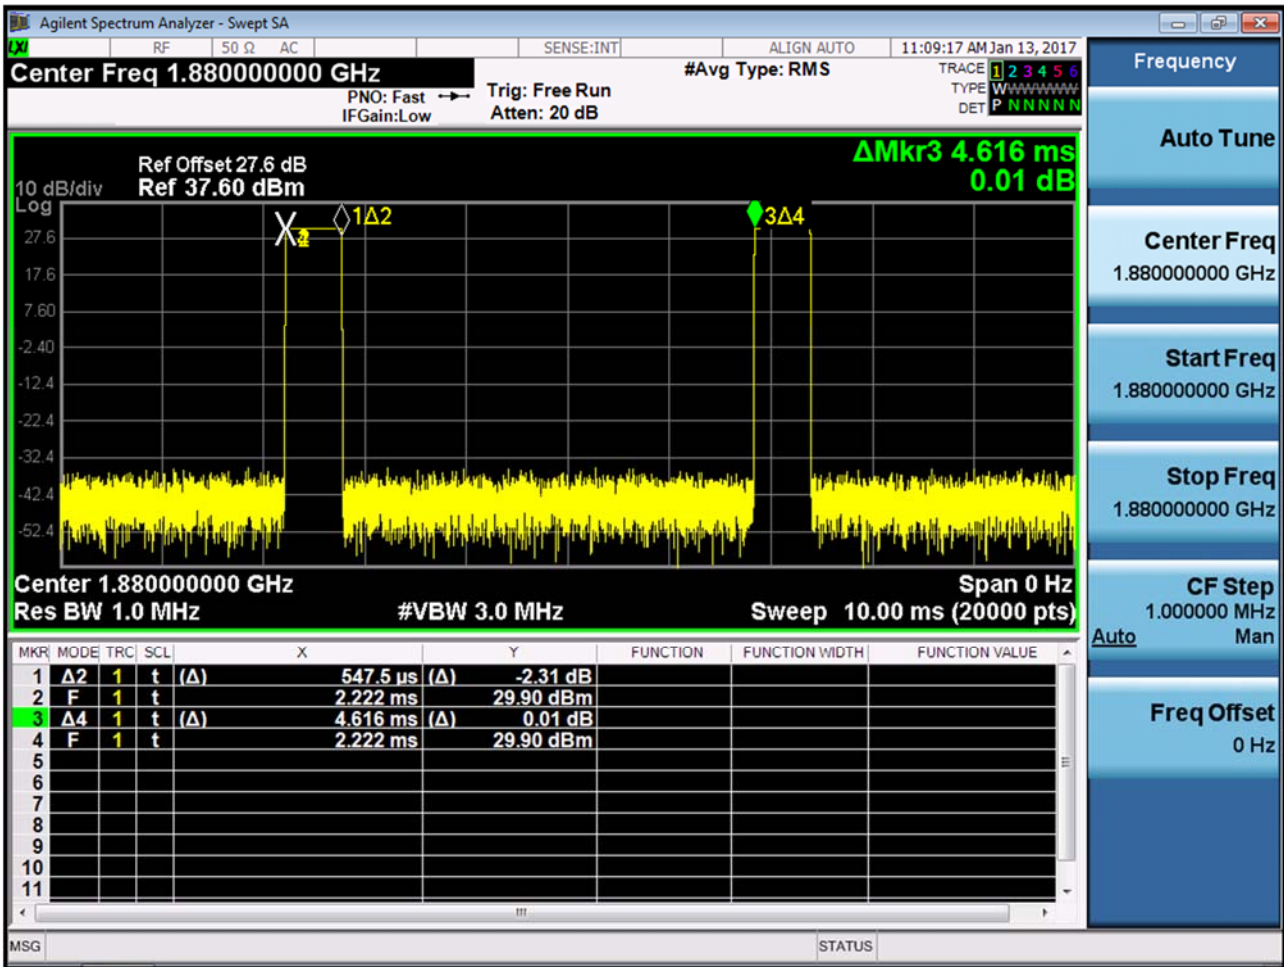


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

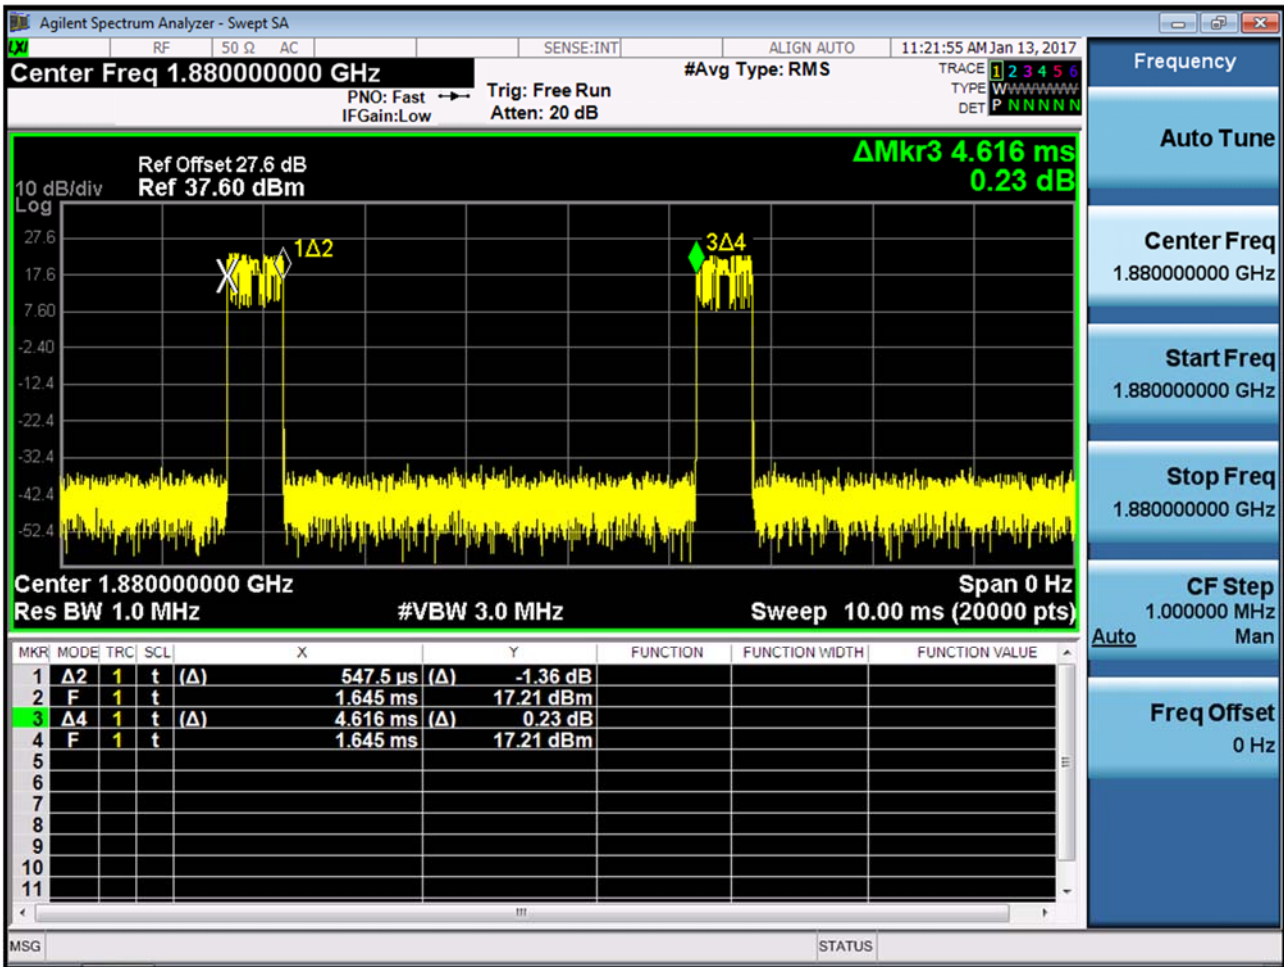


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{PK}




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

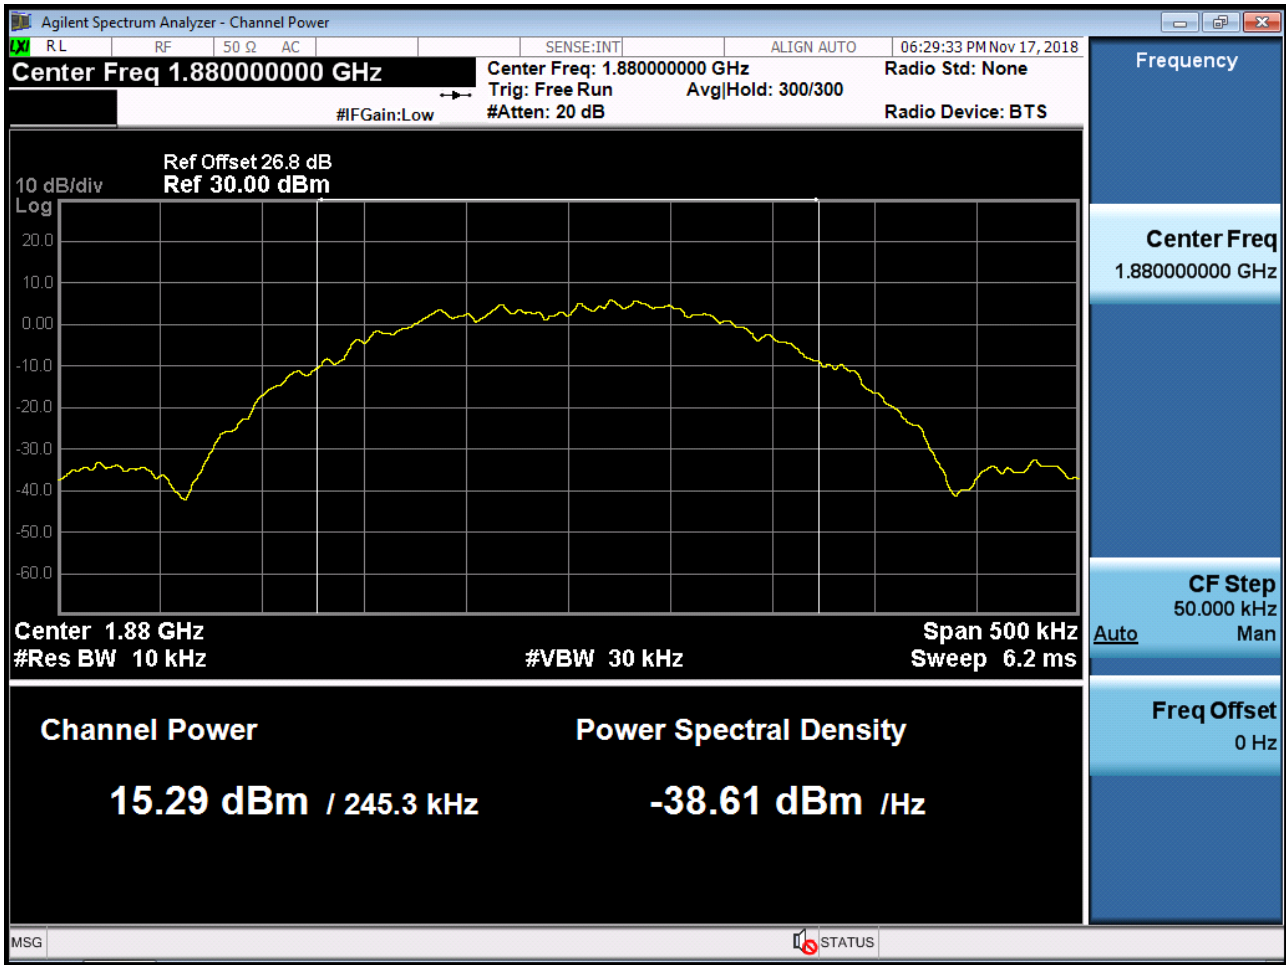


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

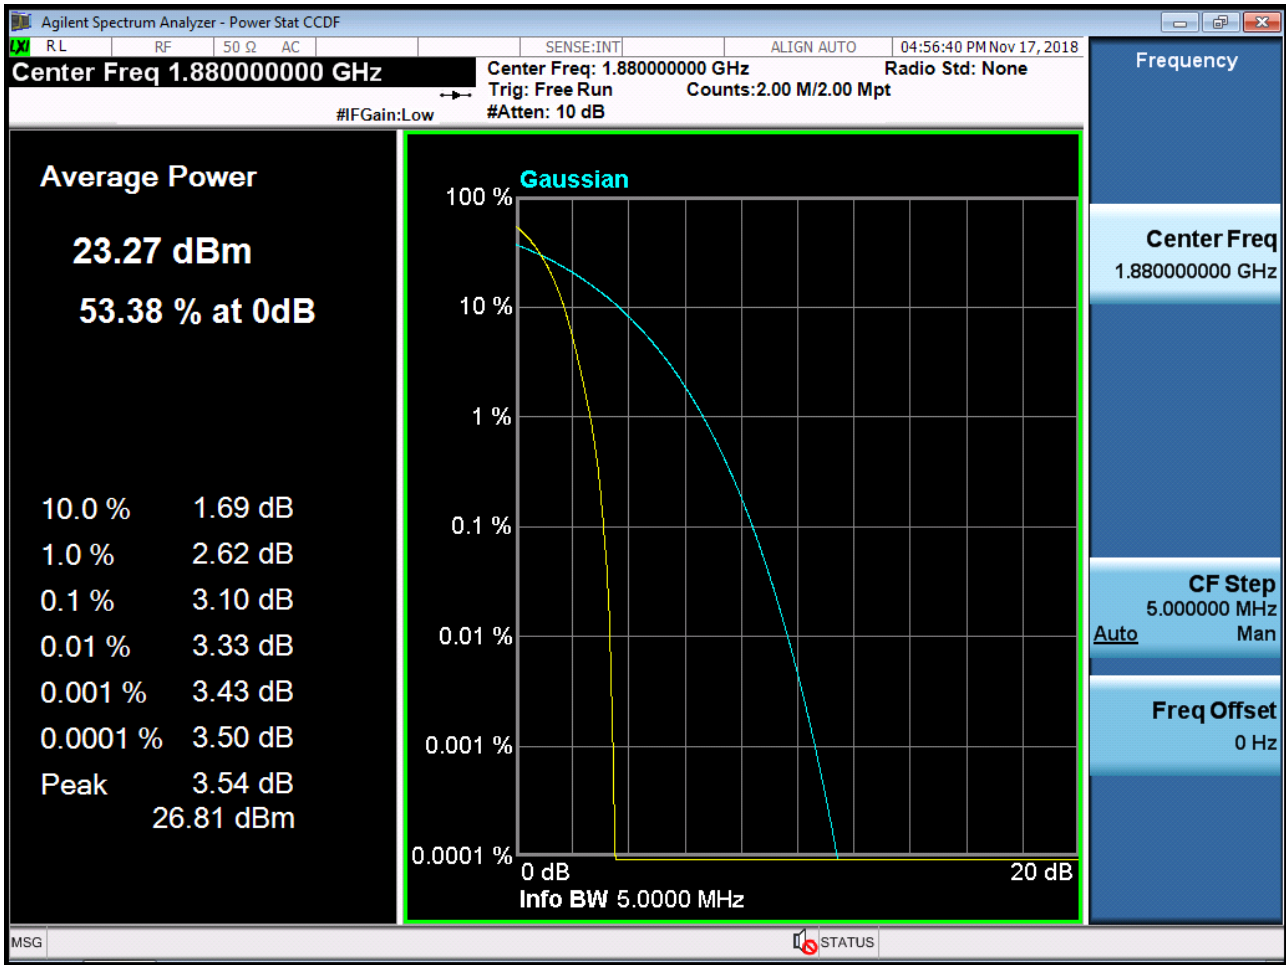


■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

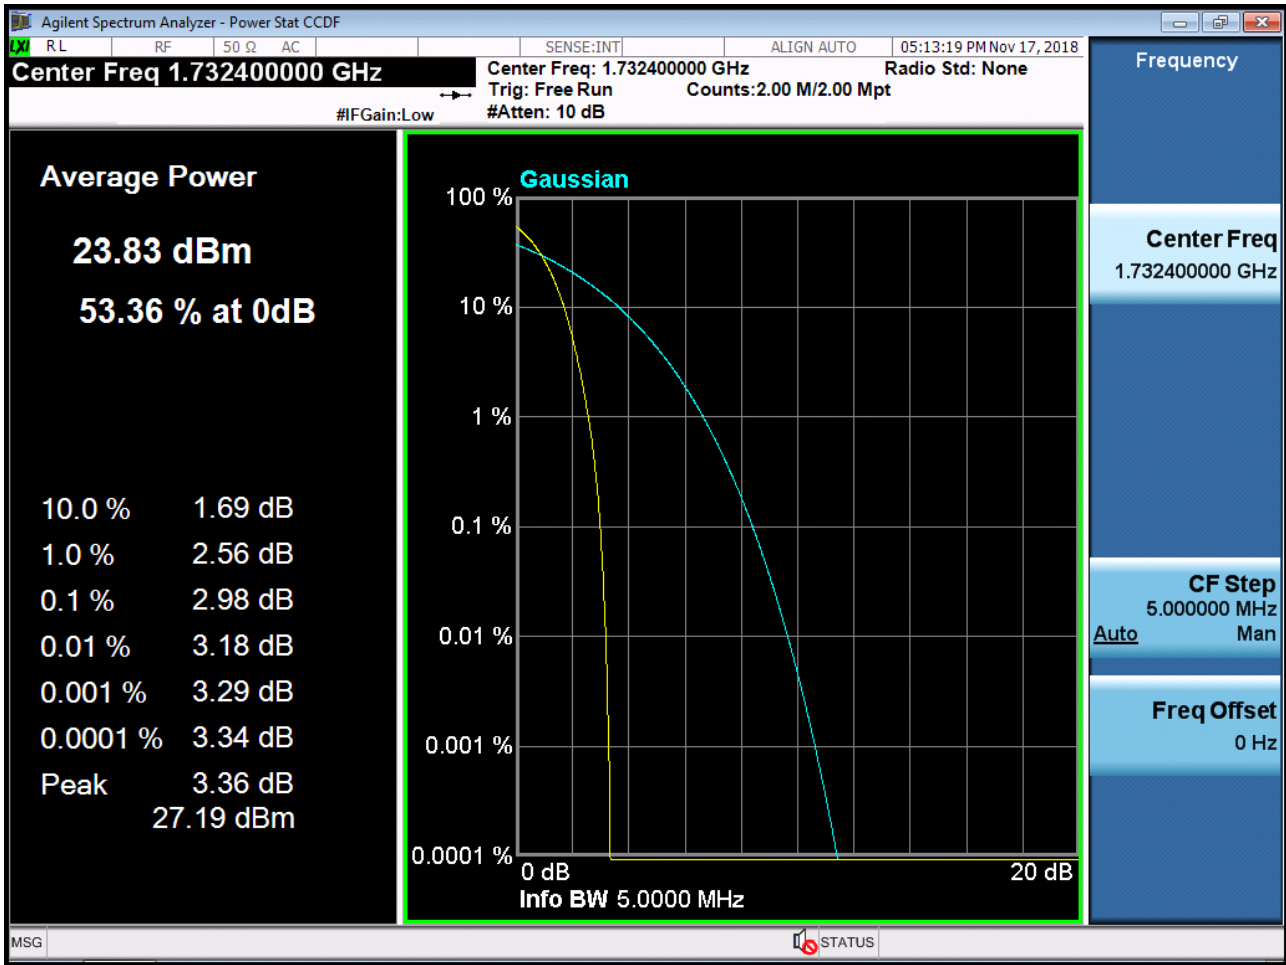

■ GSM1900 MODE (512 CH.) Block Edge 1

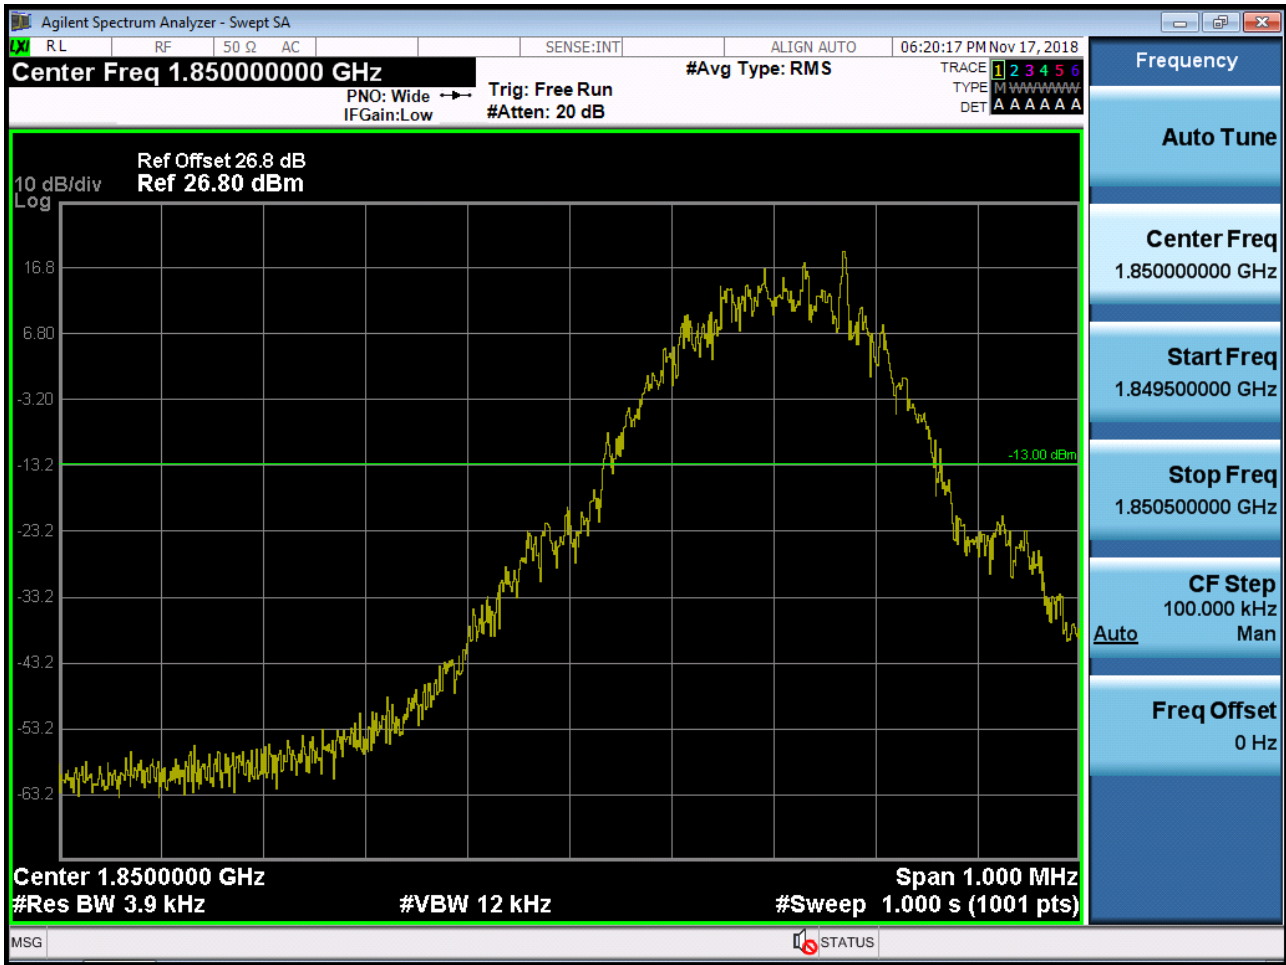


■ GSM1900 MODE (512 CH.) Block Edge 3

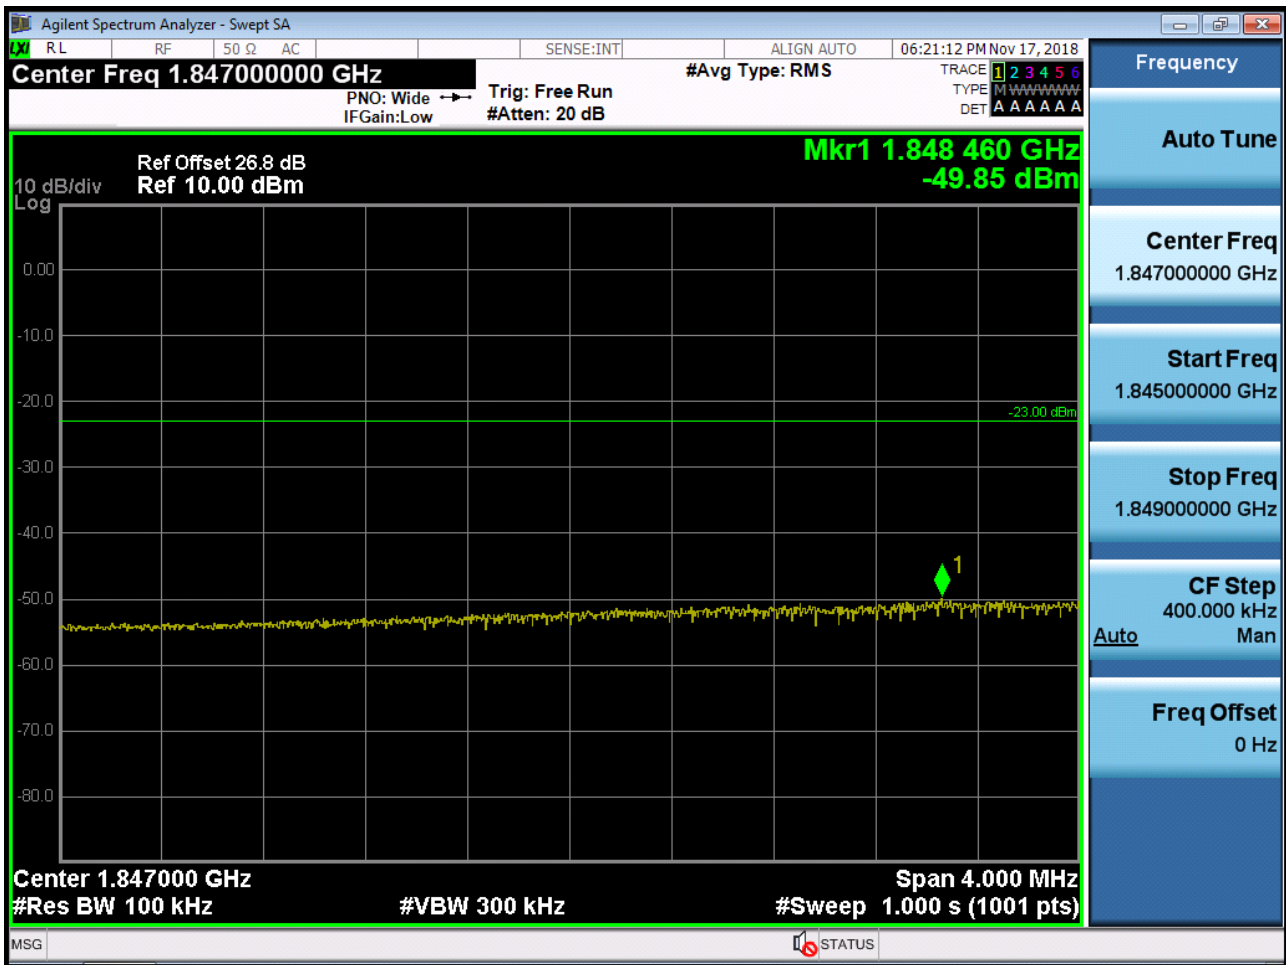


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -49.85 \text{ dBm} + 10 \text{ dB} = -39.85 \text{ dBm}$

■ GSM1900 MODE (810 CH.) Block Edge 2

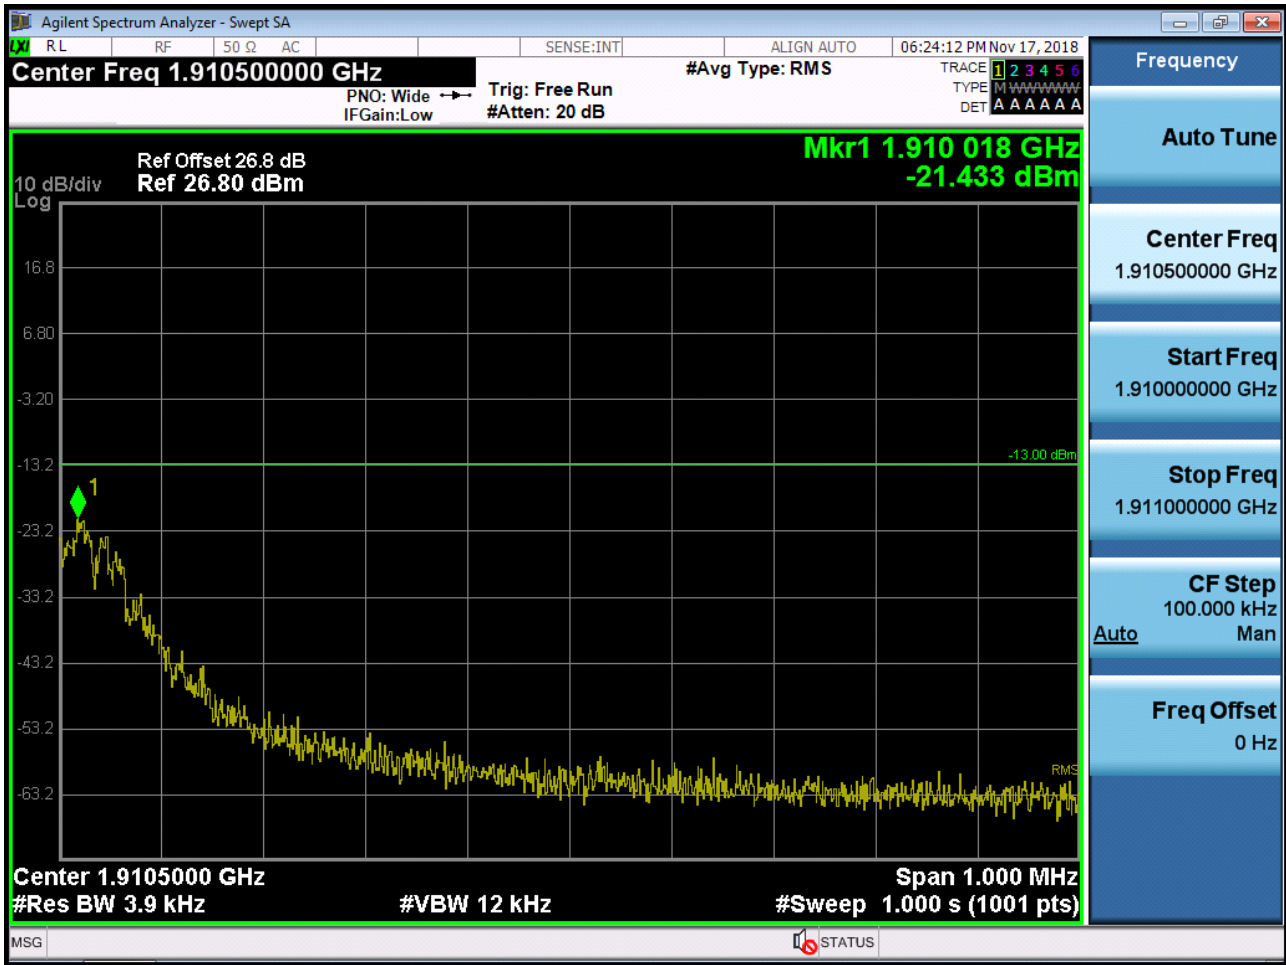


■ GSM1900 MODE (810 CH.) Block Edge 3

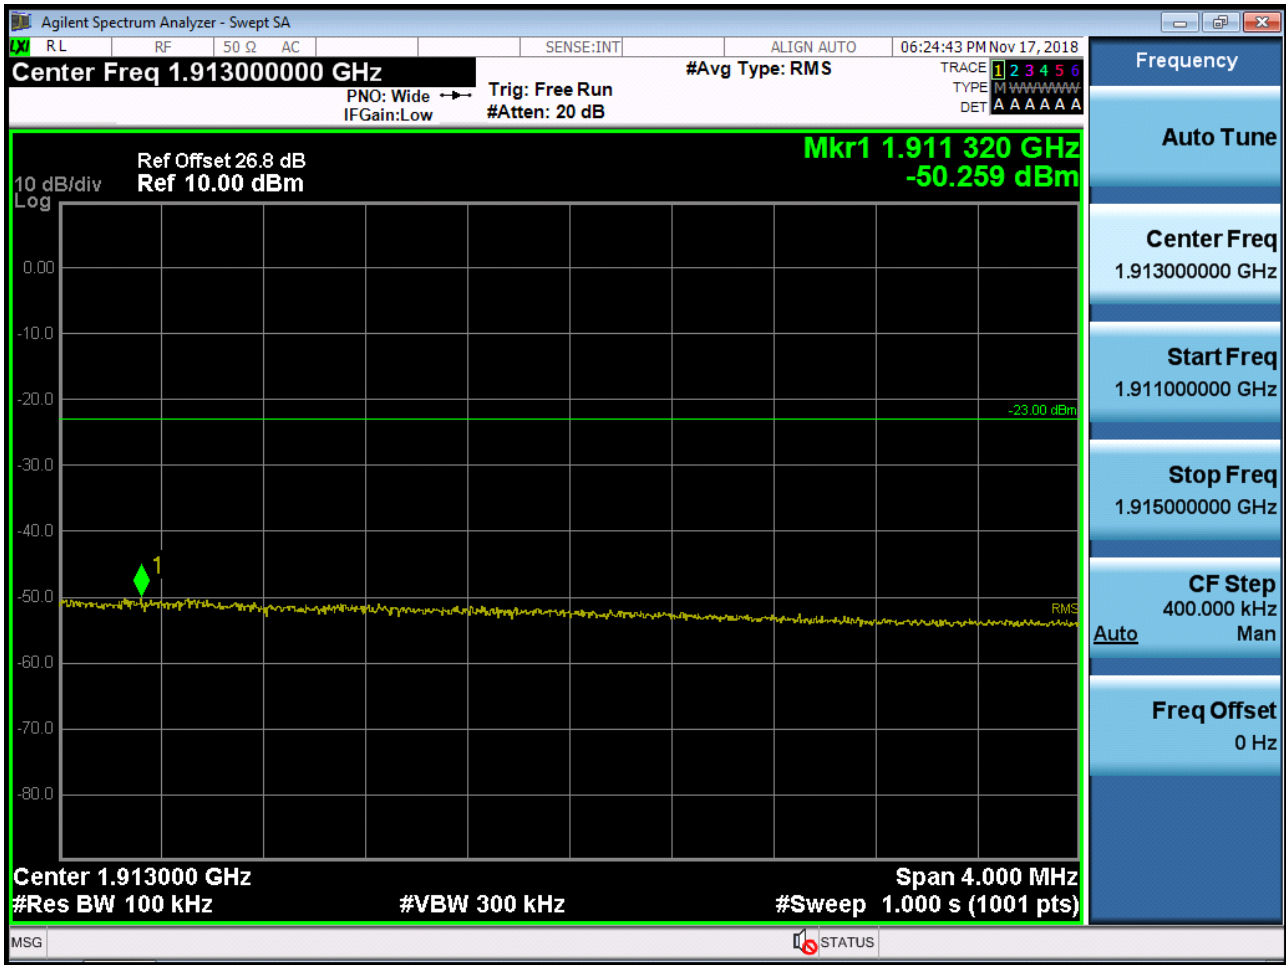

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -50.259 \text{ dBm} + 10 \text{ dB} = -40.259 \text{ dBm}$

■ EDGE MODE (512 CH.) Block Edge 2

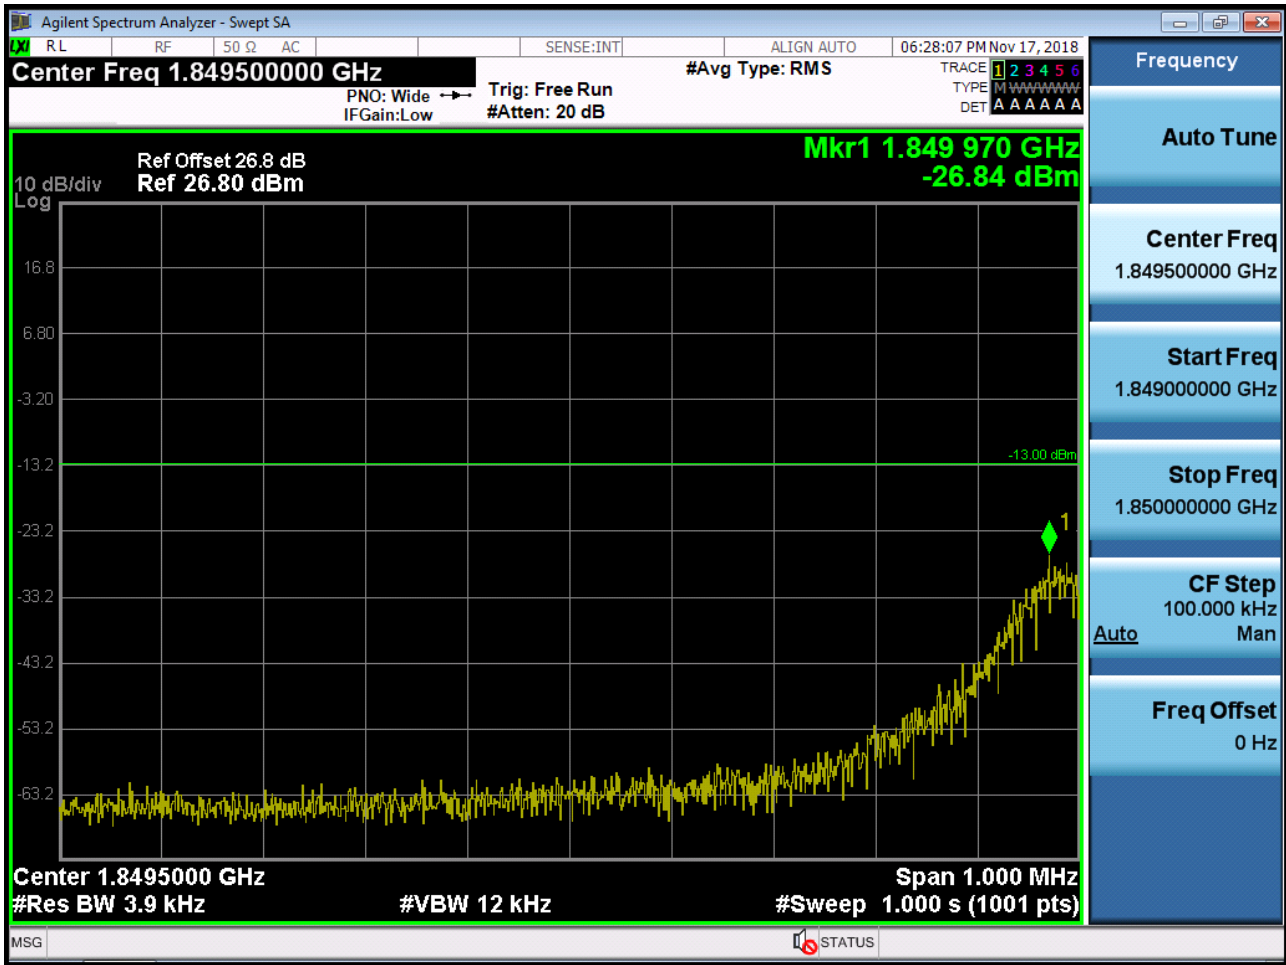


■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.89 \text{ dBm} + 10 \text{ dB} = -41.89 \text{ dBm}$

■ EDGE MODE (810 CH.) Block Edge 1

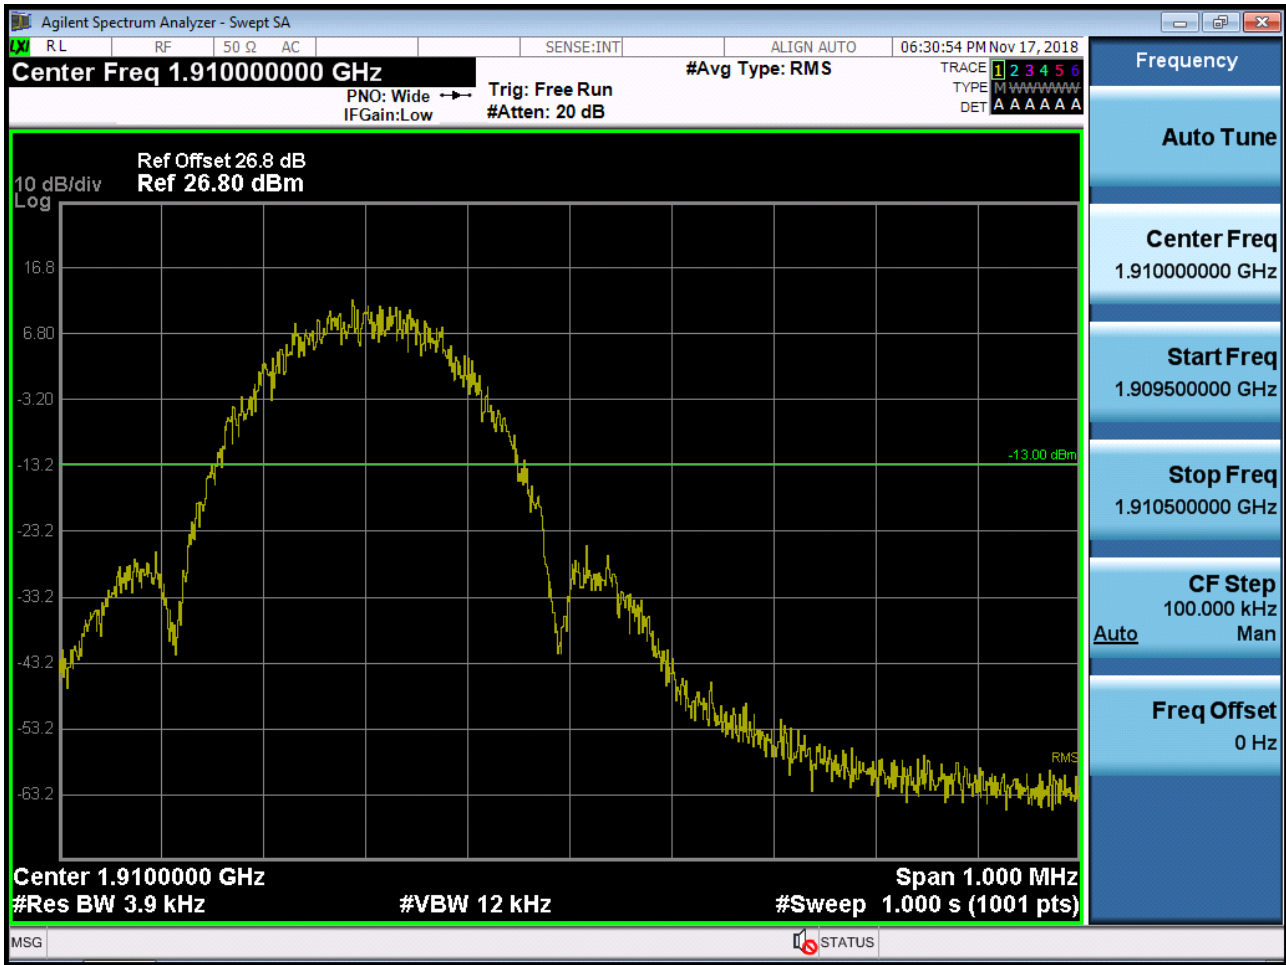

■ EDGE MODE (810 CH.) Block Edge 2

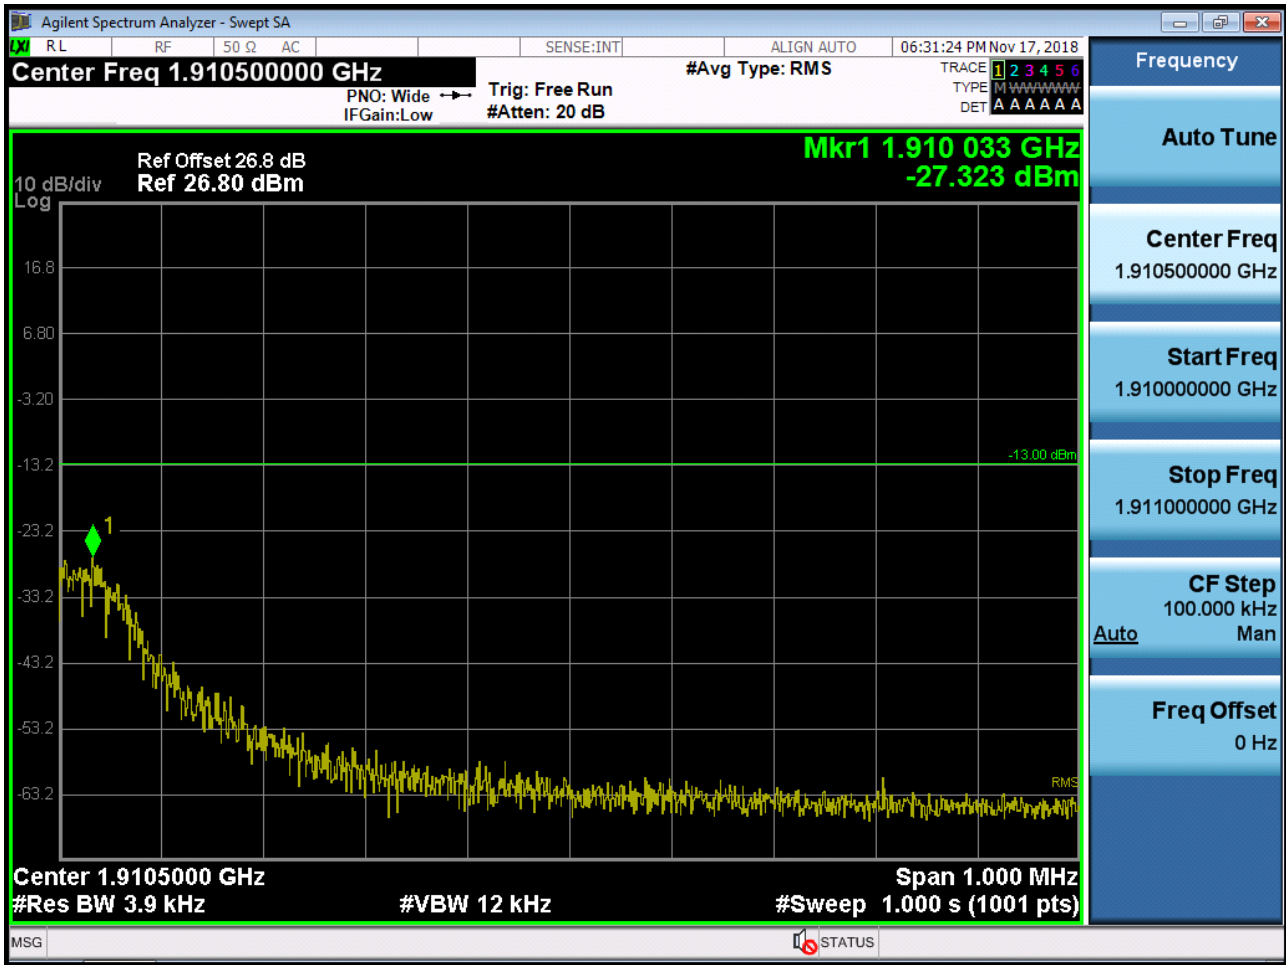

■ EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.584 \text{ dBm} + 10 \text{ dB} = -41.584 \text{ dBm}$


■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span




■ WCDMA850MODE (4233 CH.) Block Edge

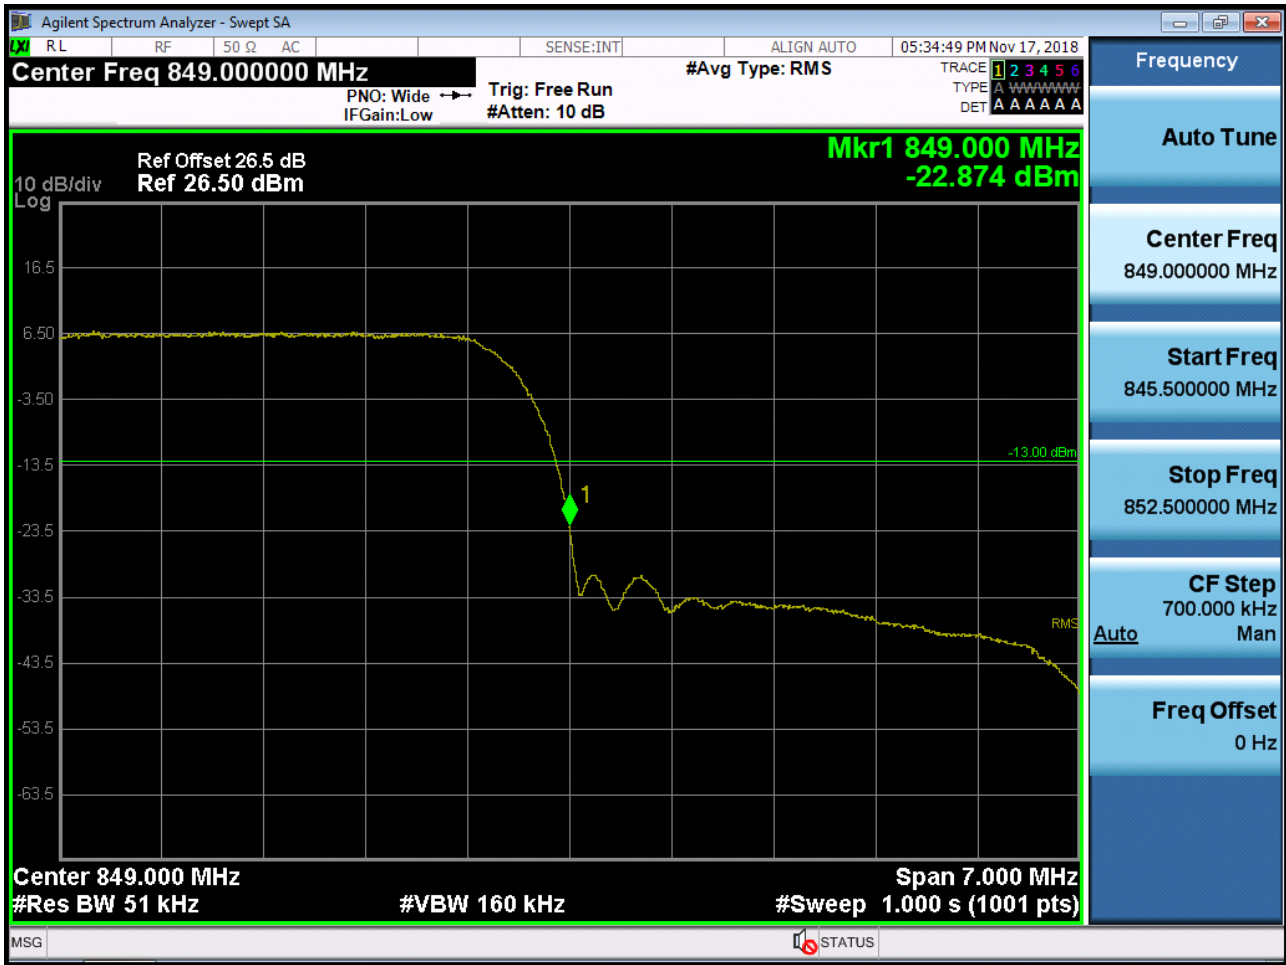

■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge

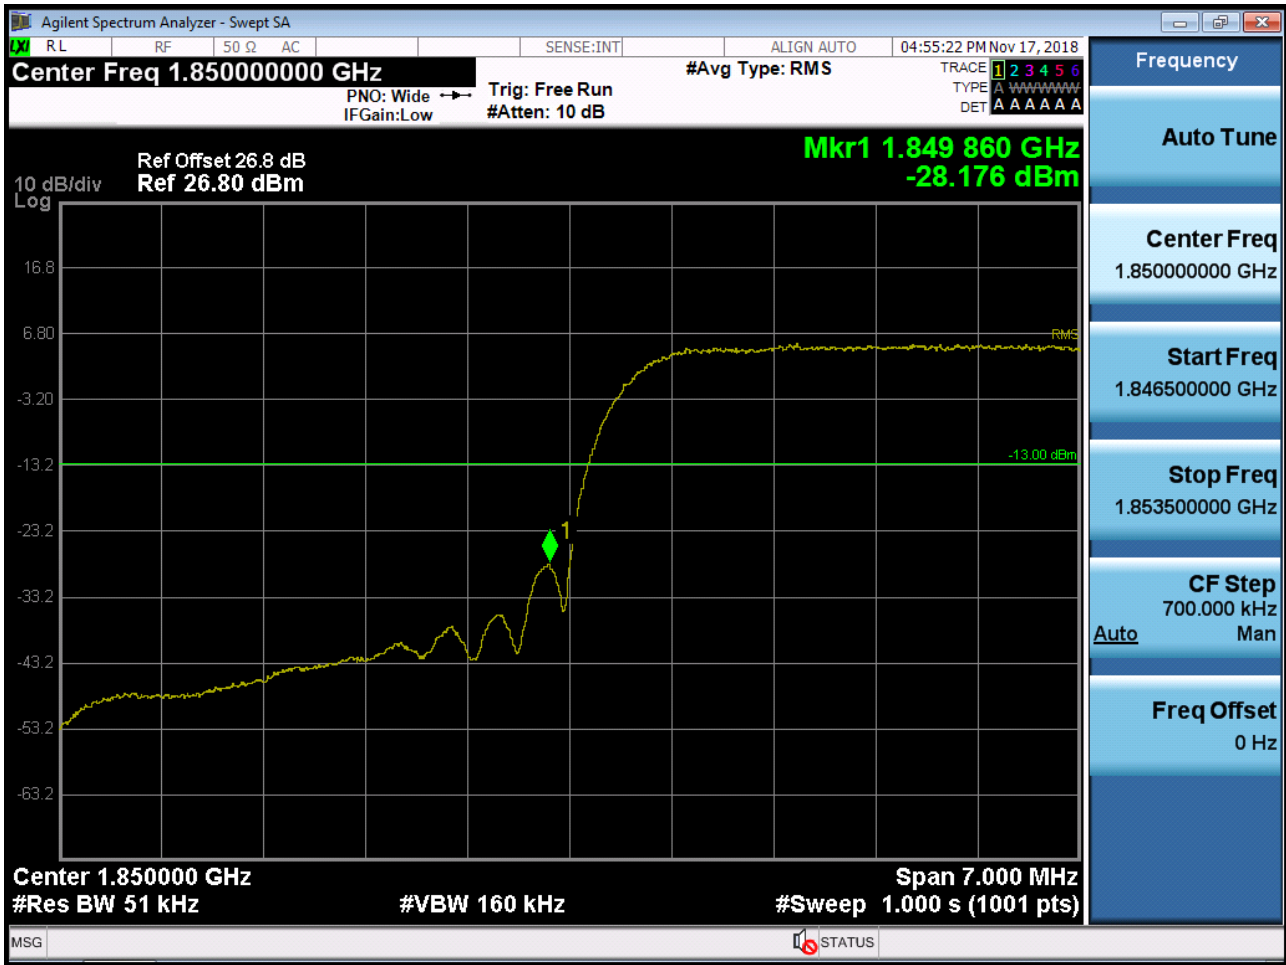

■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Block Edge



■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span



■ WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




■ WCDMA1700 MODE (1513 CH.) Block Edge




■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

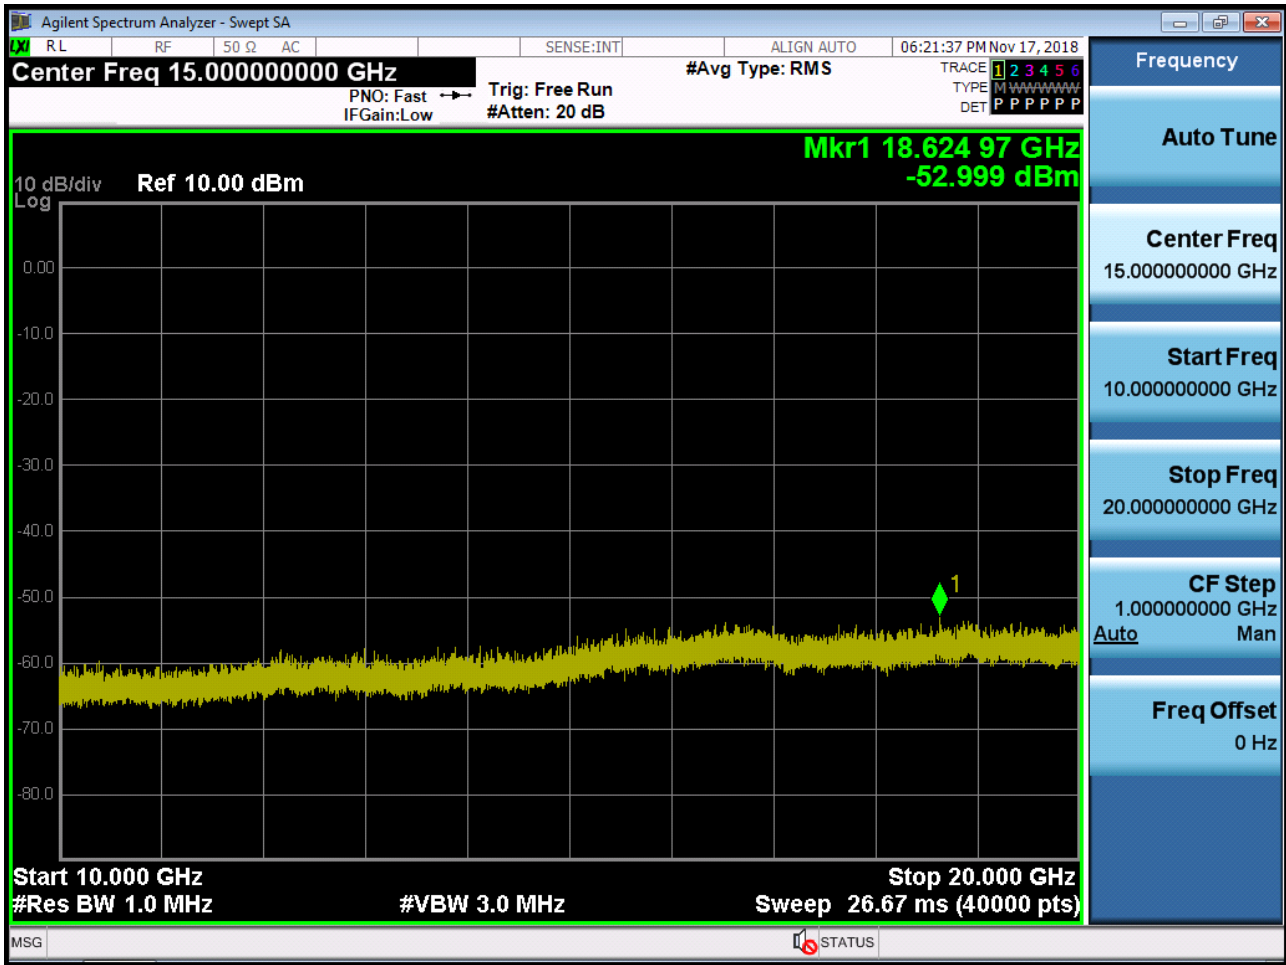


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

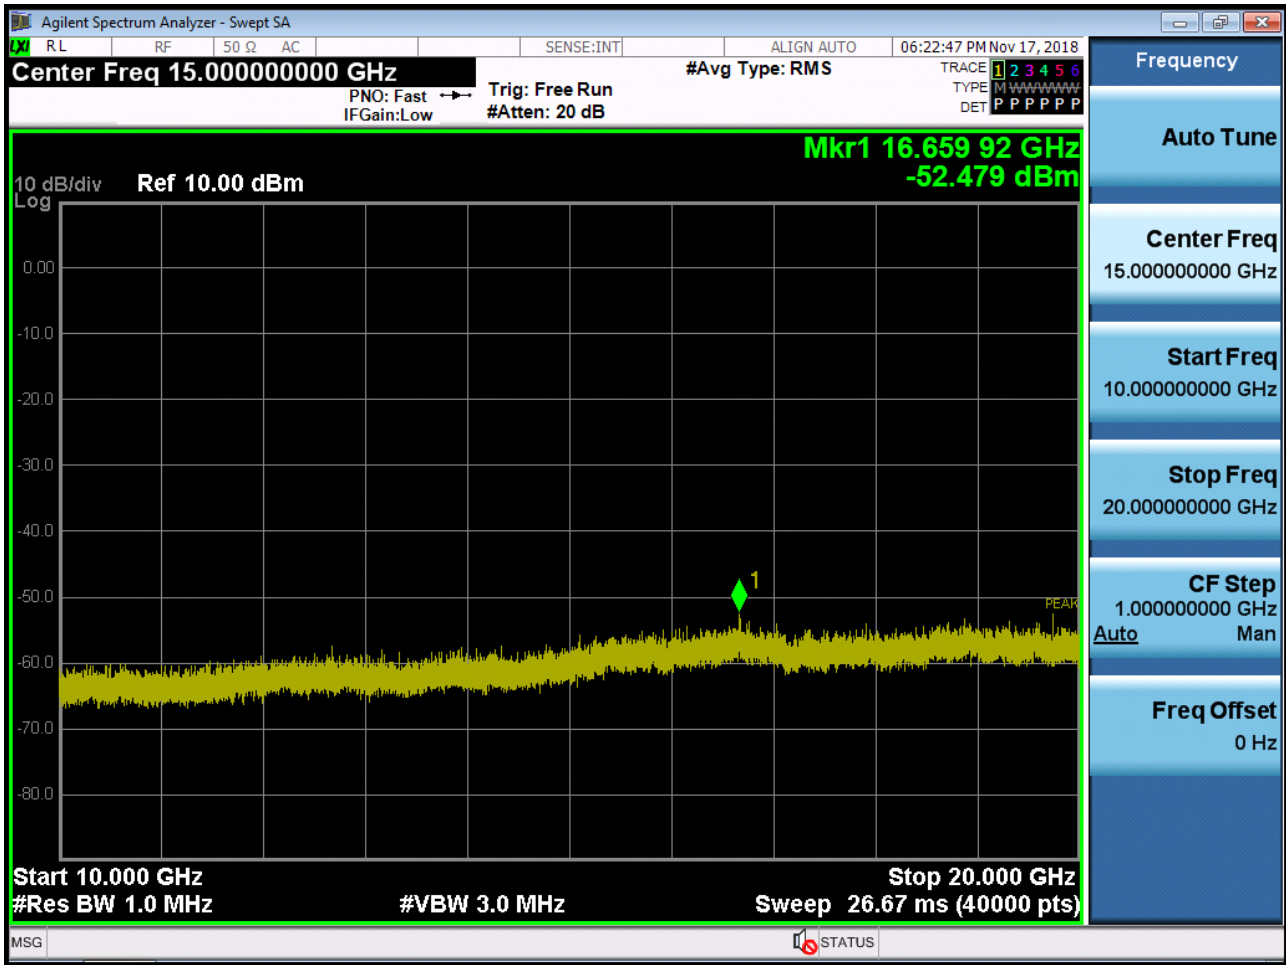


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

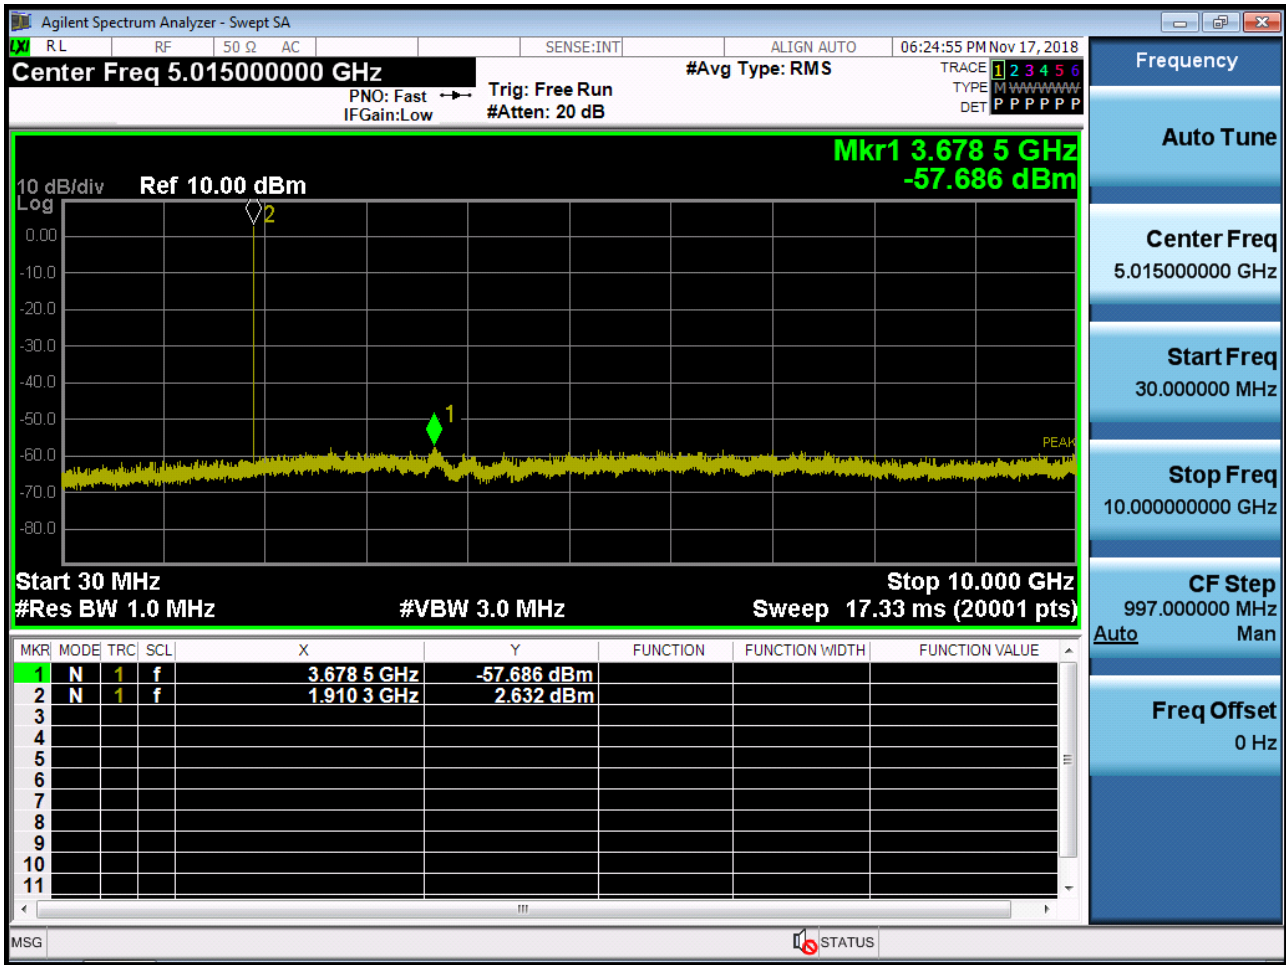


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

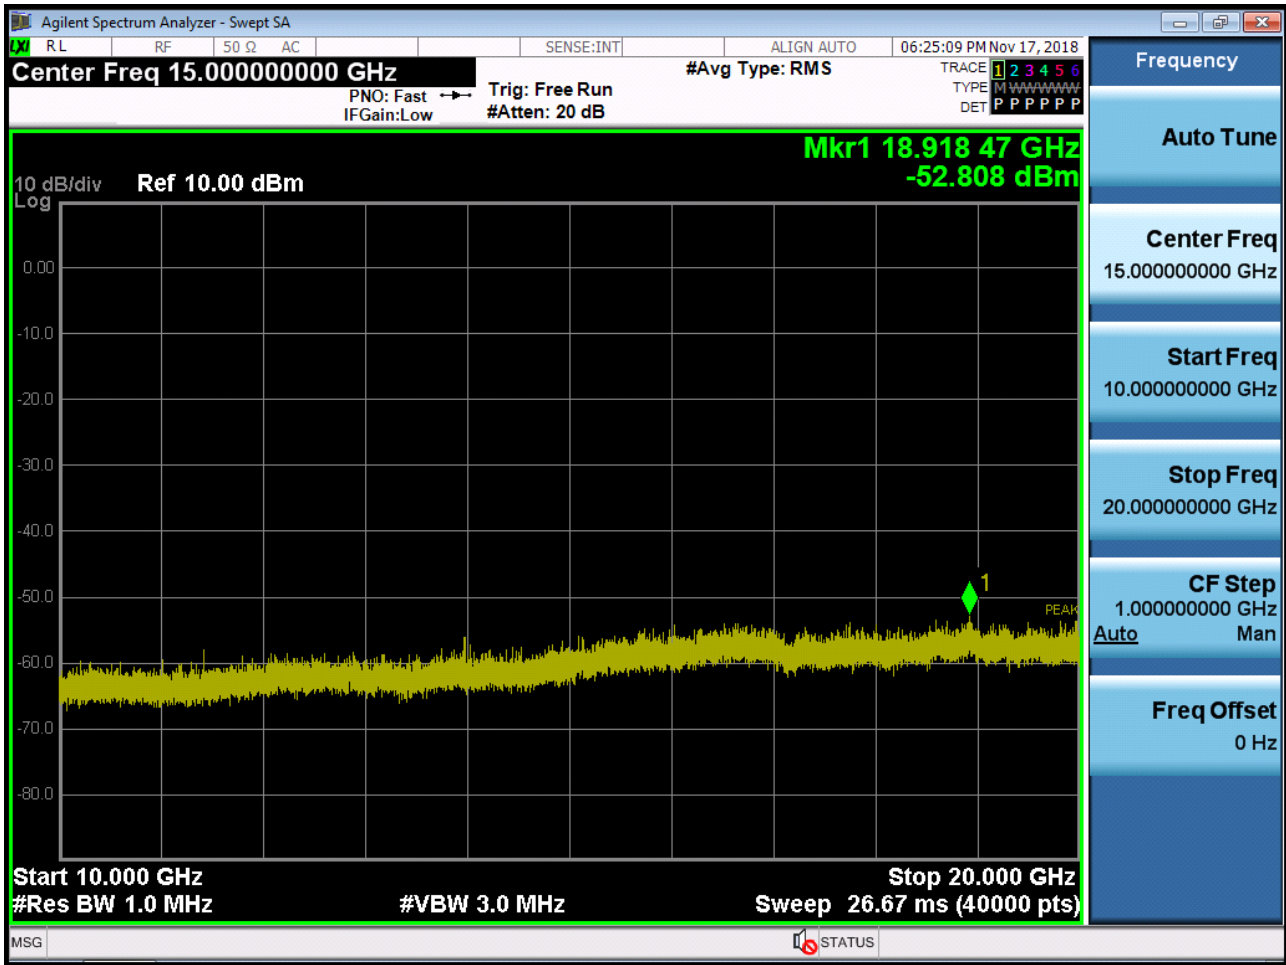


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

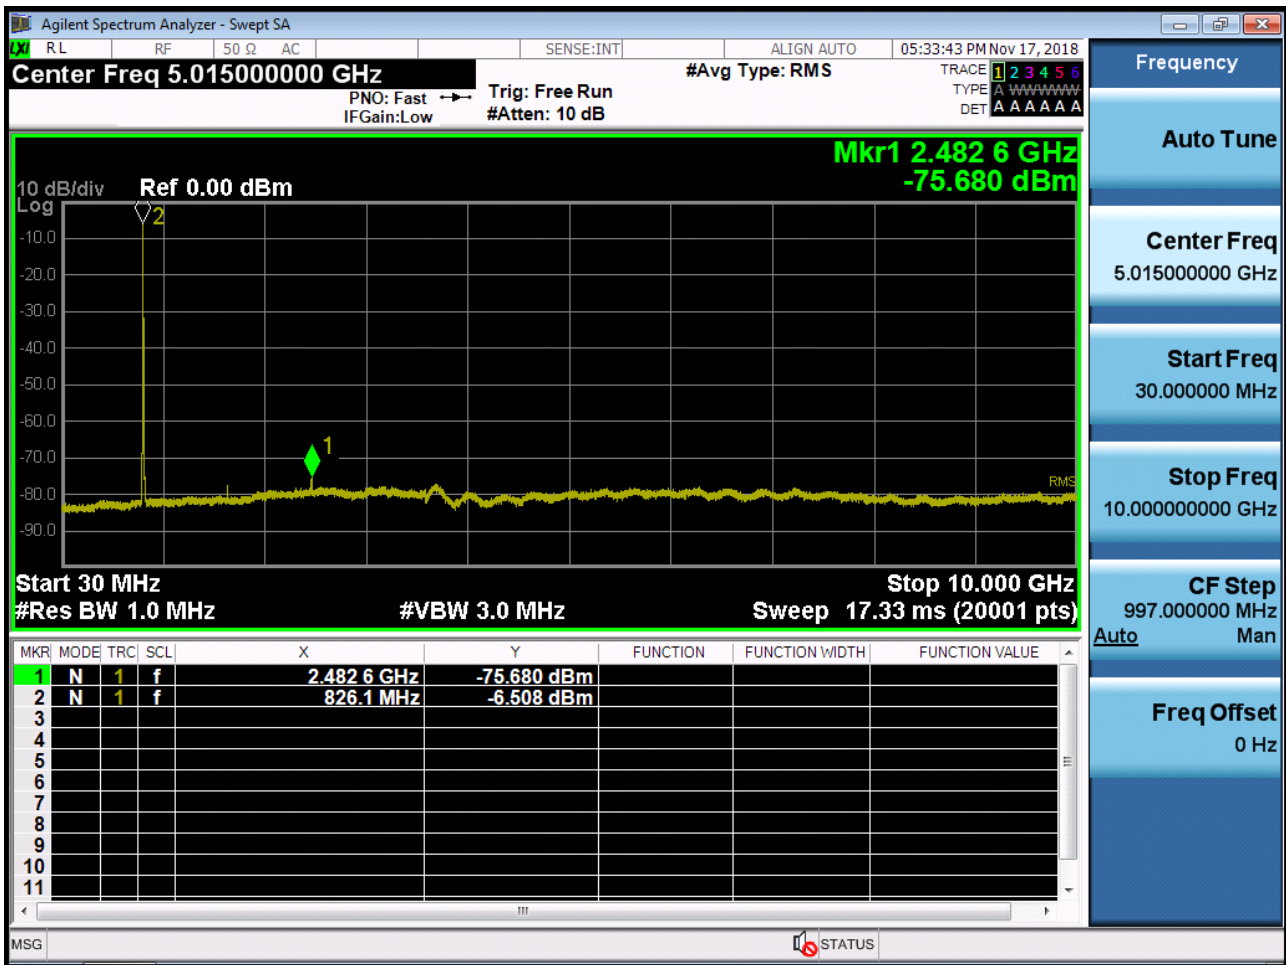


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

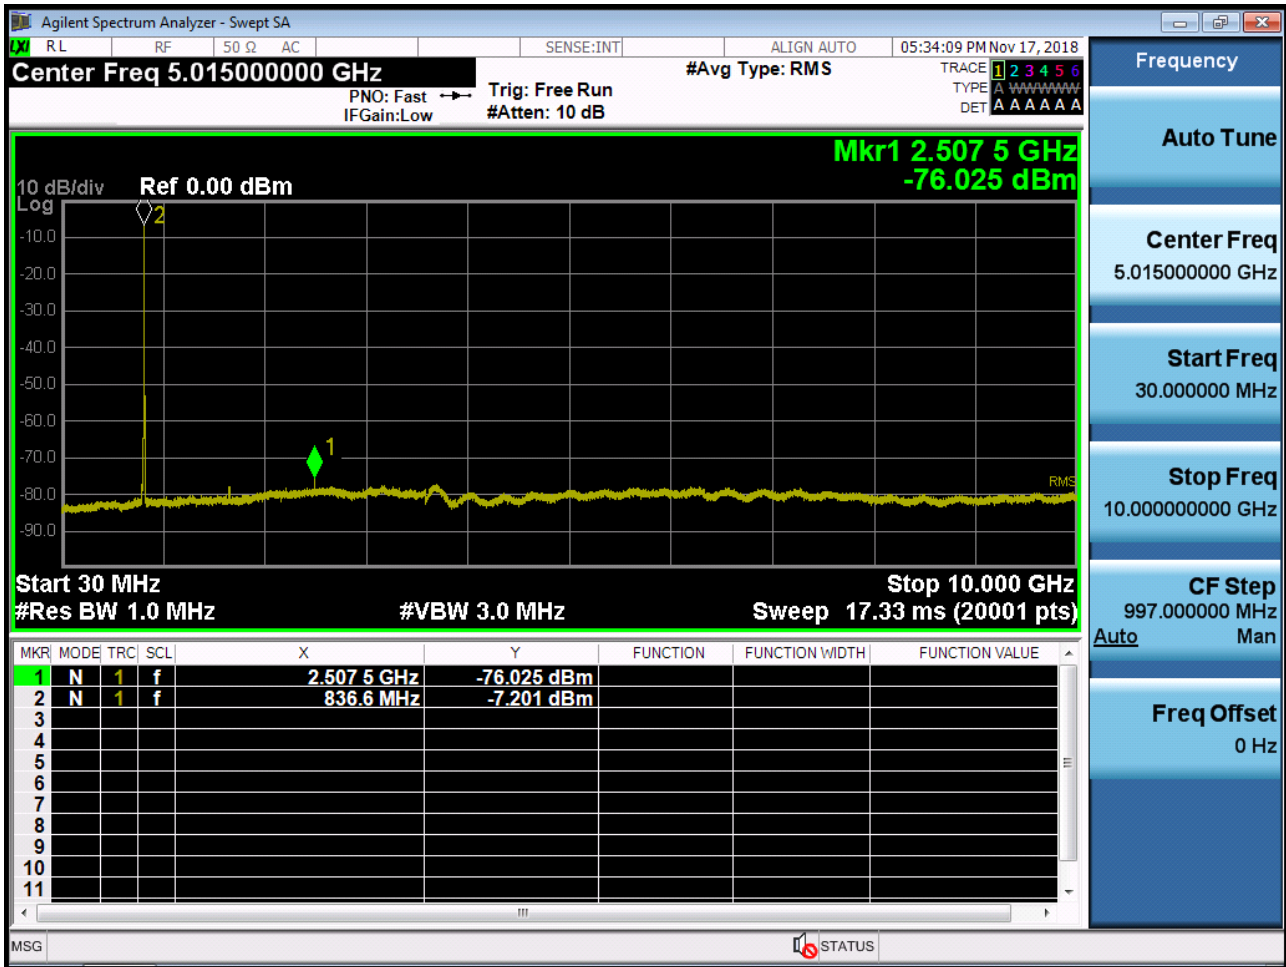

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

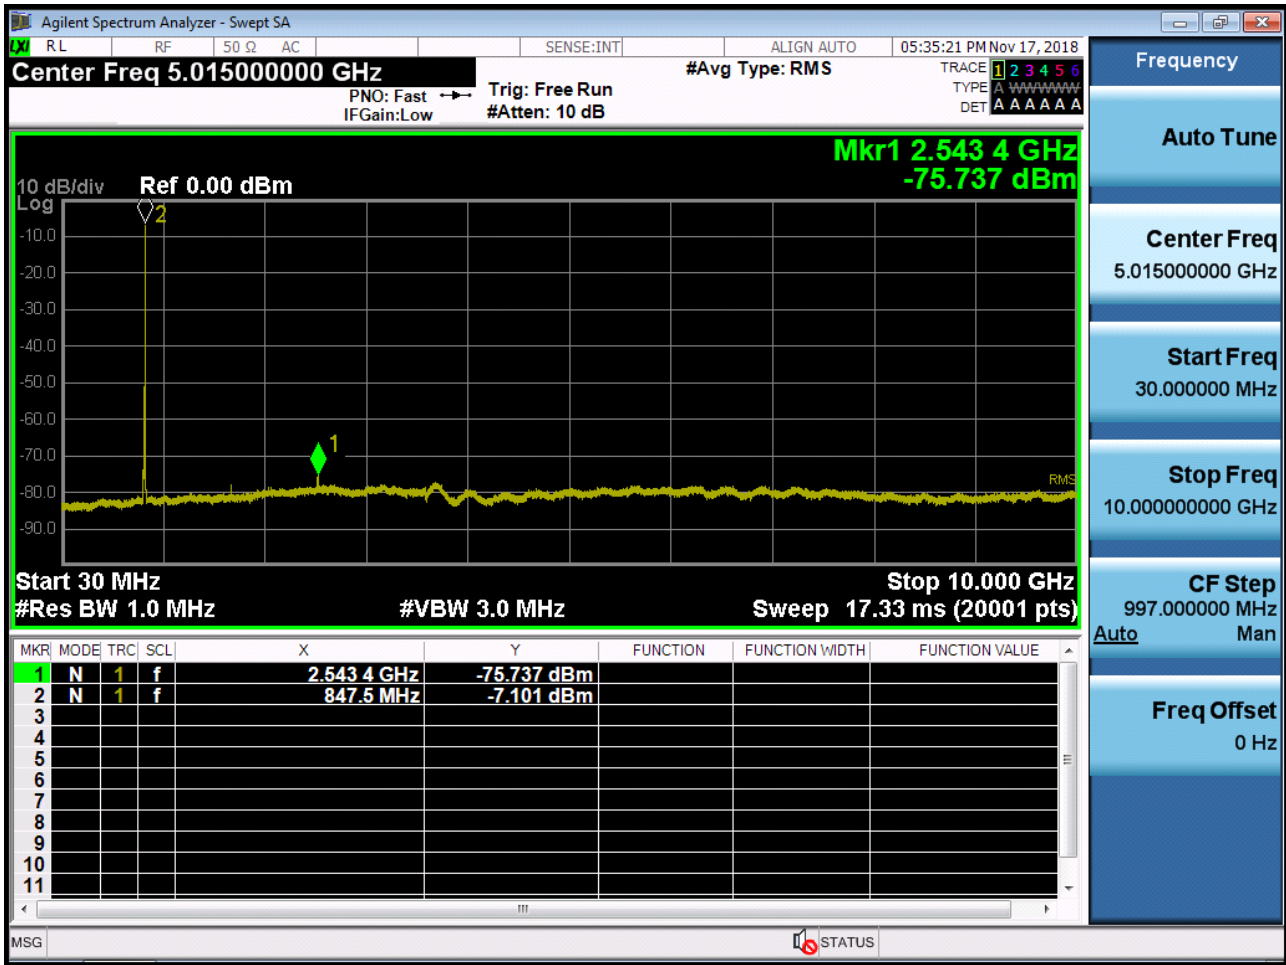


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

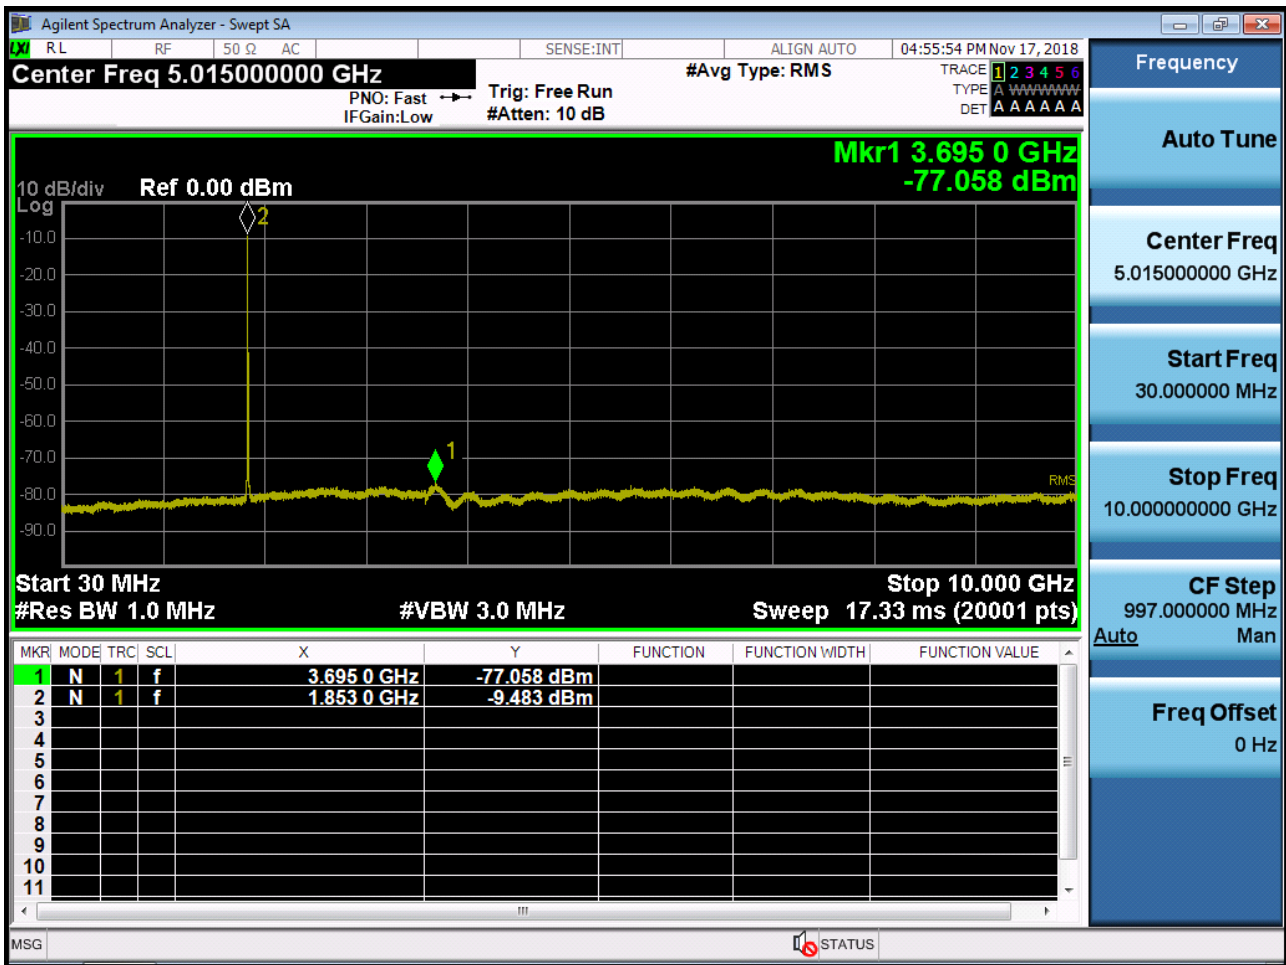

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

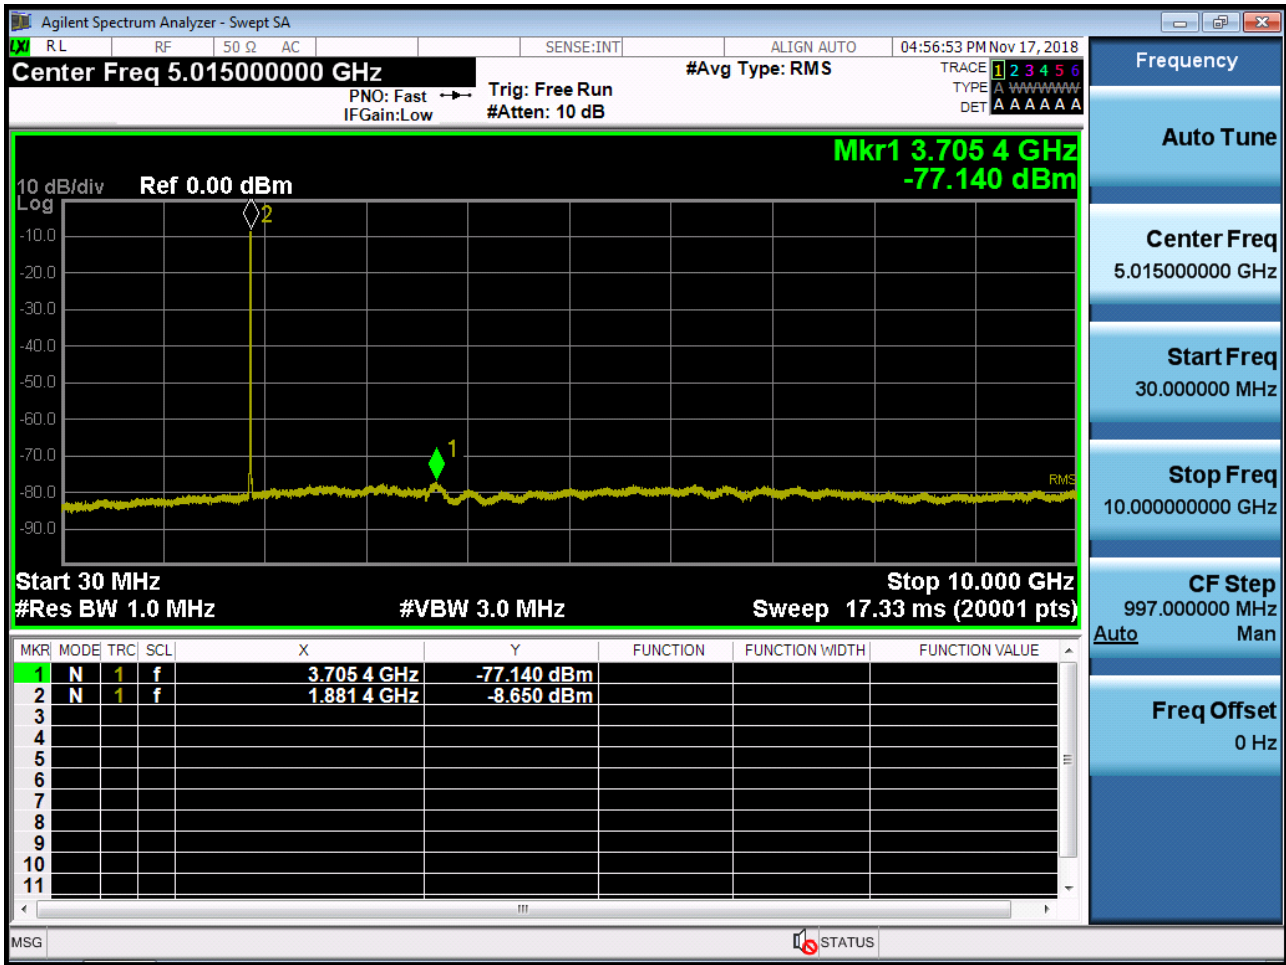

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

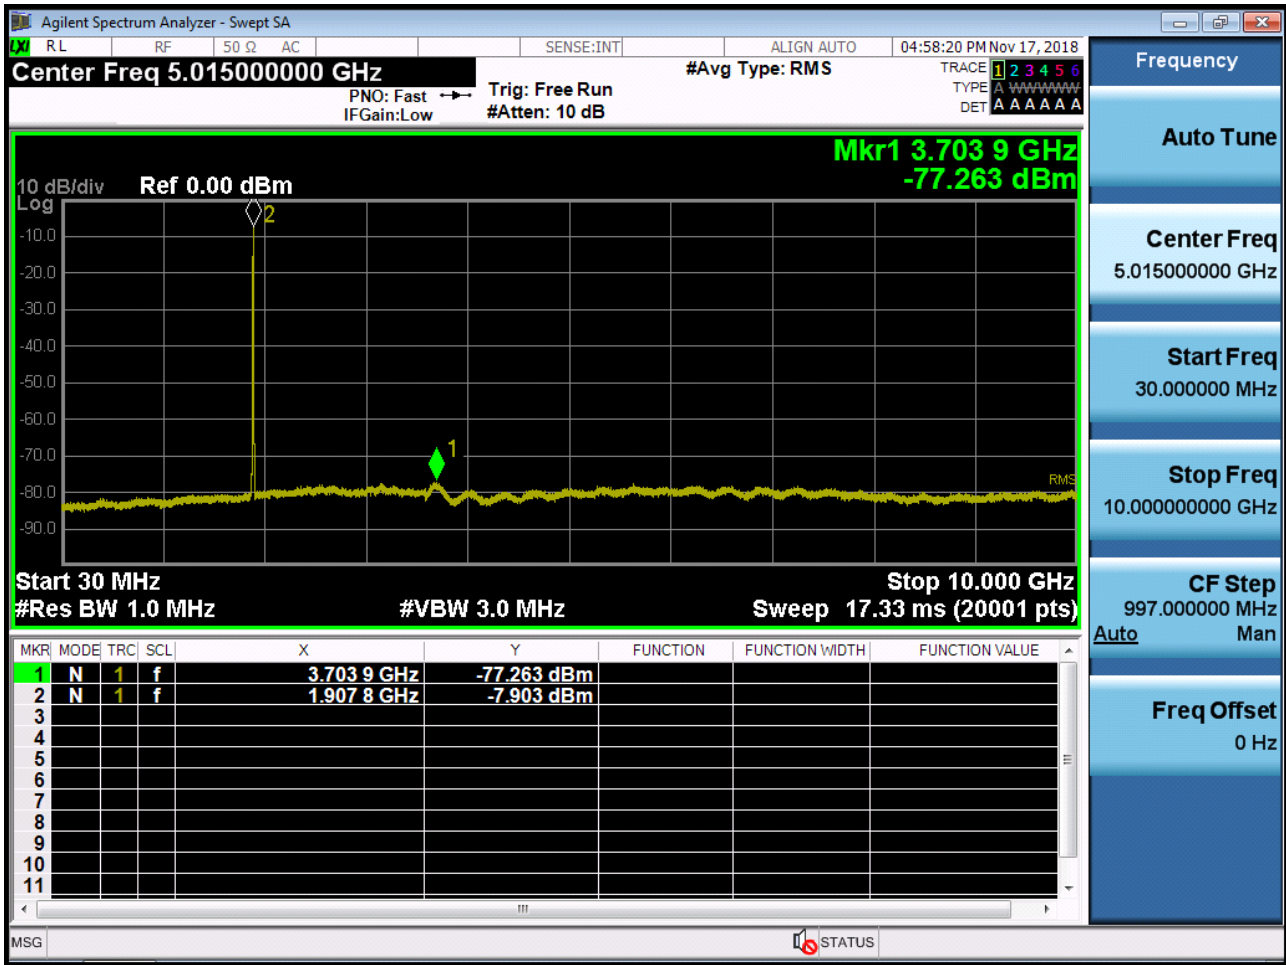

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

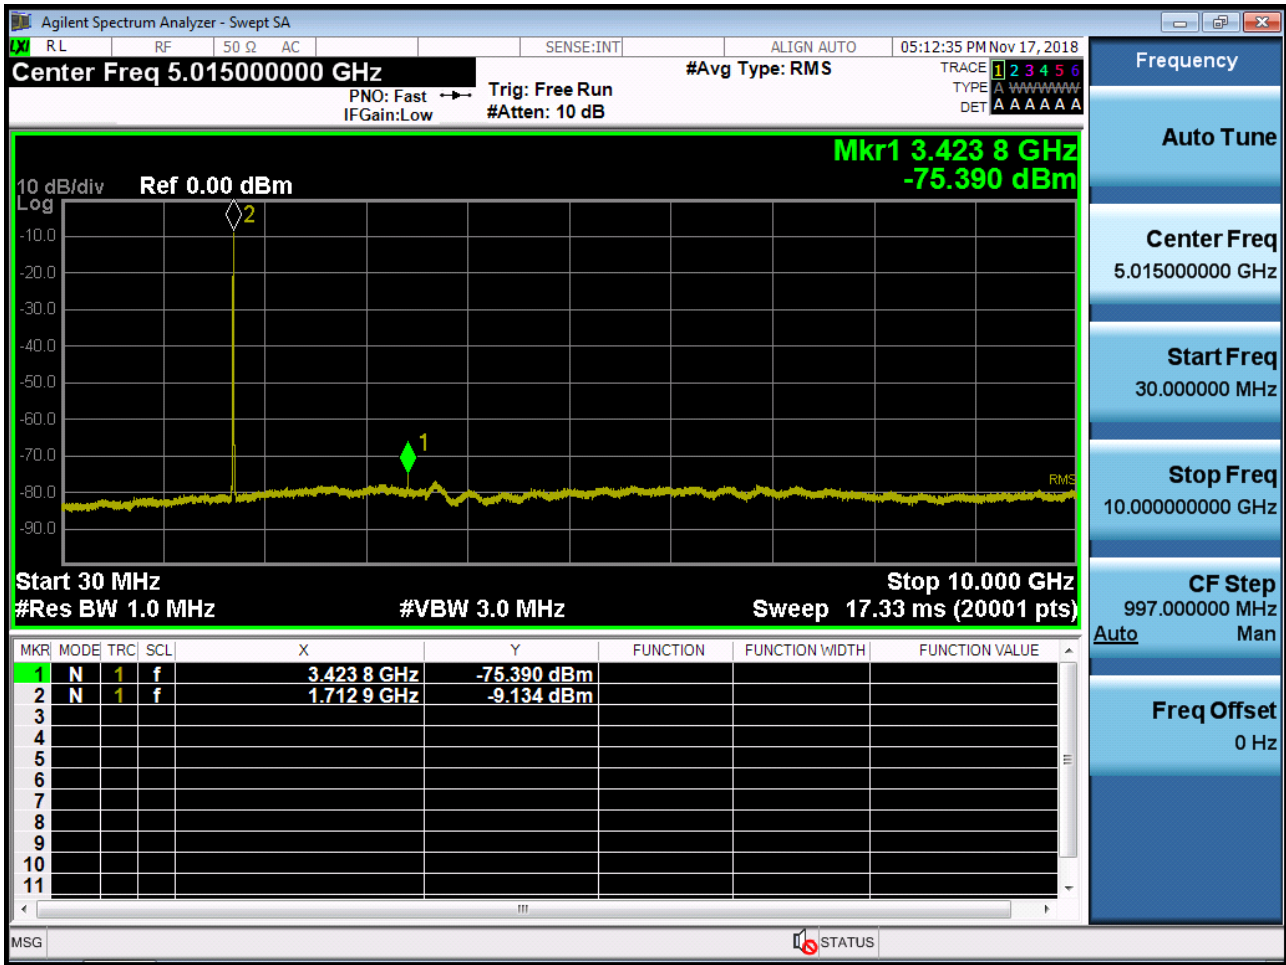

■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

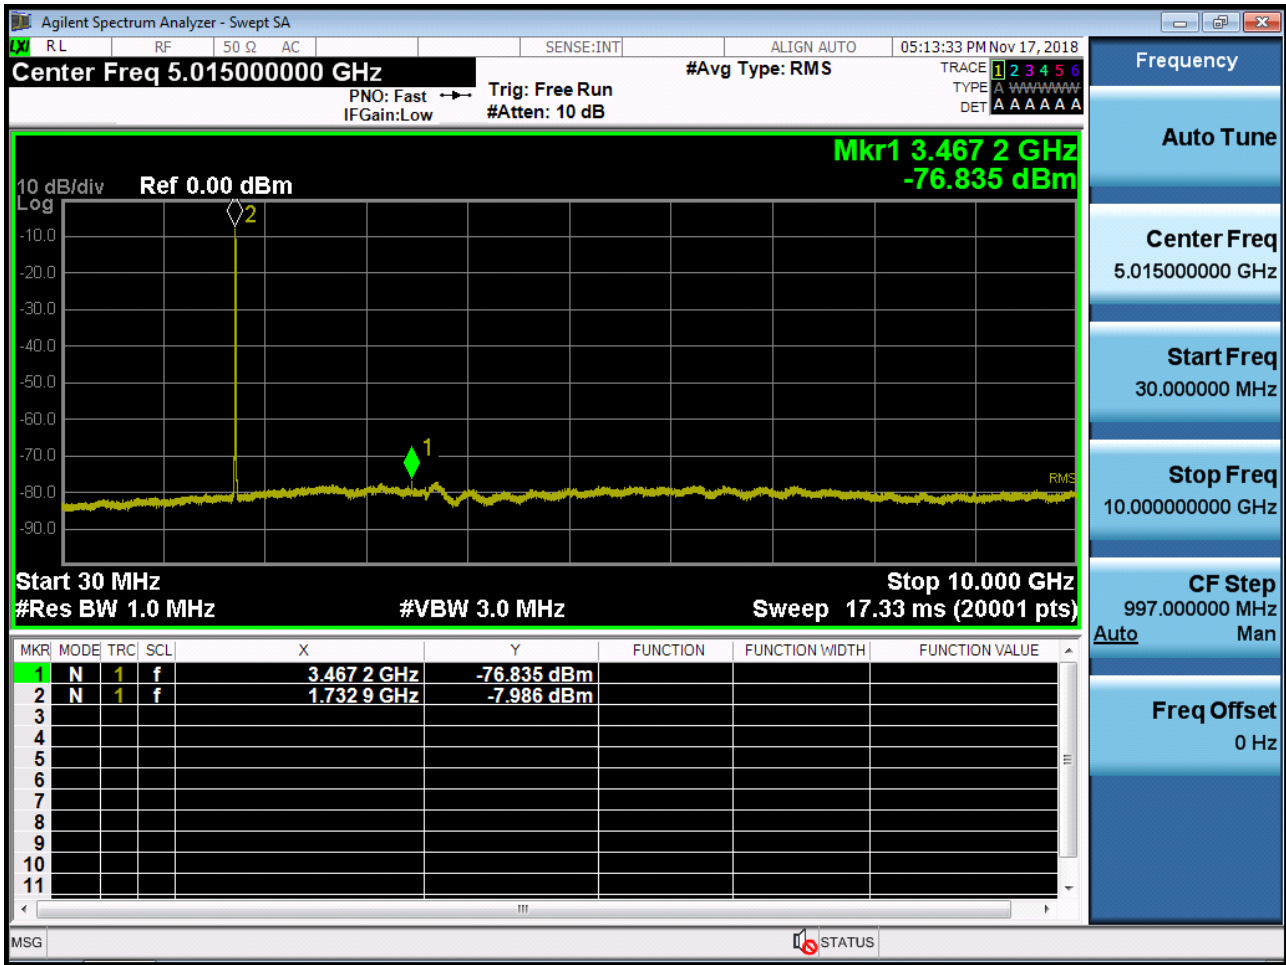

■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2



■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

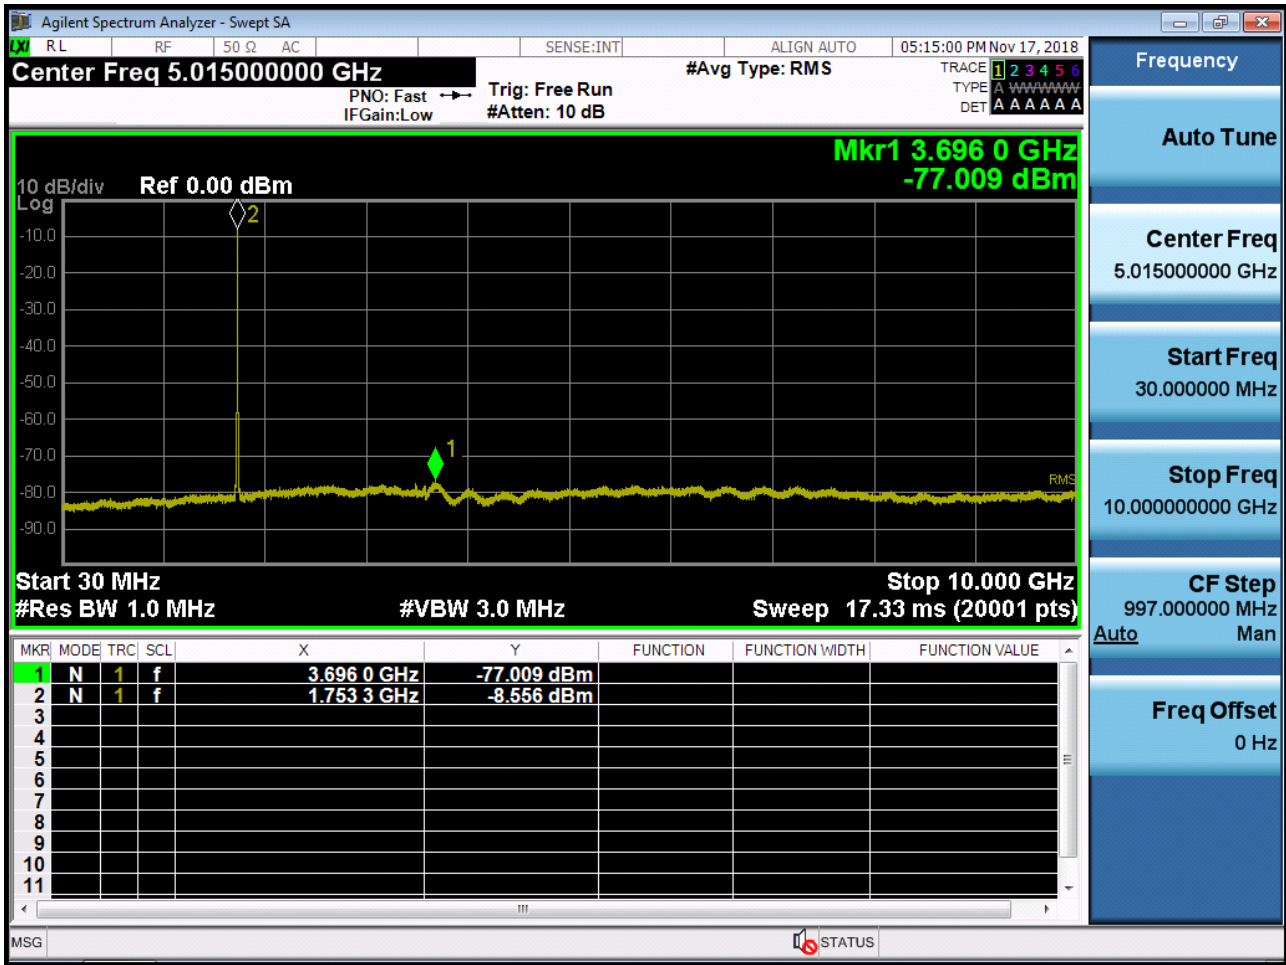

■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1811-FC023-P
2	HCT-RF-1811-FC024-P
3	HCT-RF-1811-FC025-P
4	HCT-RF-1811-FC026-P
5	HCT-RF-1811-FC027-P
6	HCT-RF-1811-FC028-P