

TEST REPORT

FCC UNII ax Test for SM-F741B
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2405-FC028

DATE OF ISSUE
May 3, 2024

Tested by
Chang Hee Hwang



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST
REPORT**

REPORT NO.
HCT-RF-2405-FC028

DATE OF ISSUE
May 03, 2024

| | |
|--|--|
| Applicant | SAMSUNG Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea |
| Product Name Model Name | Mobile Phone SM-F741B |
| FCC ID | A3LSMF741B |
| Date of Test | February 23, 2024 ~ April 26, 2024 |
| FCC Classification | Unlicensed National Information Infrastructure(NII) |
| Test Standard Used | FCC Rule Part(s): Part 15.407 |
| Test Results | PASS |
| Location of Test | <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing Lab (Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea) |

REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue | Description |
|--------------|---------------|-----------------|
| 0 | May 03, 2024 | Initial Release |

Notice

Content

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : A3LSMF741U report.

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

| | |
|--|-----|
| 1. GENERAL INFORMATION | 5 |
| EUT DESCRIPTION | 5 |
| ANTENNA CONFIGURATIONS | 6 |
| 2. MAXIMUM OUTPUT POWER | 8 |
| 3. TEST METHODOLOGY | 9 |
| EUT CONFIGURATION | 9 |
| EUT EXERCISE | 9 |
| GENERAL TEST PROCEDURES | 9 |
| DESCRIPTION OF TEST MODES | 10 |
| 4. INSTRUMENT CALIBRATION | 10 |
| 5. FACILITIES AND ACCREDITATIONS | 10 |
| 5.1 FACILITIES | 10 |
| 5.2 EQUIPMENT | 10 |
| 6. ANTENNA REQUIREMENTS | 11 |
| 7. MEASUREMENT UNCERTAINTY | 11 |
| 8. DESCRIPTION OF TESTS | 12 |
| 9. SUMMARY OF TEST RESULTS | 31 |
| 10. TEST RESULT | 32 |
| 10.1 DUTY CYCLE | 32 |
| 10.2 26 dB BANDWIDTH & 99% BANDWIDTH | 39 |
| 10.2.1 Ant.1 | 39 |
| 10.2.2 Ant.2 | 47 |
| 10.3 6 dB BANDWIDTH | 57 |
| 10.3.1 Ant.1 | 57 |
| 10.3.2 Ant.2 | 60 |
| 10.4 OUTPUT POWER MEASUREMENT | 65 |
| 10.4.1 MIMO_CDD(Ant.1+ Ant.2) | 66 |
| 10.5 POWER SPECTRAL DENSITY | 74 |
| 10.5.1 MIMO_CDD(Ant.1+Ant.2) | 75 |
| 10.6 STRADDLE CHANNEL | 89 |
| 10.6.1 Ant.1 | 90 |
| 10.6.2 Ant.2 | 92 |
| 10.7 RADIATED SPURIOUS EMISSIONS (9 kHz - 1 GHz) | 102 |
| 10.8 RADIATED SPURIOUS EMISSIONS (Above 1 GHz) | 103 |
| 10.9 RADIATED RESTRICTED BAND EDGE | 172 |
| 11. LIST OF TESTEQUIPMENT | 320 |
| 12. ANNEX A_ TEST SETUP PHOTO | 322 |

1. GENERAL INFORMATION

EUT DESCRIPTION

| | | |
|------------------------------------|--|--|
| Model | SM-F741B | |
| Additional Model | - | |
| EUT Type | Mobile Phone | |
| Power Supply | DC 3.88 V | |
| Modulation Type | OFDMA,OFDM | |
| Frequency Range (MHz) | U-NII-1 | 20 MHz BW : 5180 - 5240 40 MHz BW : 5190 - 5230 80 MHz BW : 5210 160 MHz BW : 5250 |
| | U-NII-2A | 20 MHz BW : 5260 - 5320 40 MHz BW : 5270 - 5310 80 MHz BW : 5290 160 MHz BW : 5250 |
| | U-NII-2C | 20 MHz BW : 5500 - 5720 40 MHz BW : 5510 - 5710 80 MHz BW : 5530 - 5690 160 MHz BW : 5570 |
| | U-NII-3 | 20 MHz BW : 5745 - 5825 40 MHz BW : 5755 - 5795 80 MHz BW : 5775 160 MHz BW : 5815 |
| | U-NII-4 | 20 MHz BW : 5845 - 5885 40 MHz BW : 5835 - 5875 80 MHz BW : 5855 160 MHz BW : 5815 |
| Straddle channel | Supported | |
| TDWR Band | Supported | |
| Dynamic Frequency Selection | Slave without radar detection | |
| Antenna Specification | Type: Metal | |
| Serial number | Conducted : 7b5599bda4507ece Radiated : R3CX20KJSND | |

ANTENNA CONFIGURATIONS

1. Antenna configuration

| Configurations | SISO | | MIMO | |
|------------------------------|-------|-------|------|-----|
| | Ant.1 | Ant.2 | CDD | SDM |
| 802.11ax (HE20/40/80/160) | O | O | O | O |

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

| RSDB Scenario | 2.4 GHz WiFi Ant.1 | 2.4 GHz WiFi Ant.2 | 5 GHz WiFi Ant.1 | 5 GHz WiFi Ant.2 | 6 GHz WiFi Ant.1 | 6 GHz WiFi Ant.2 | Bluetooth Ant.1 | Bluetooth Ant.2 | Test Case |
|--|--------------------|--------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|-----------|
| 2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO | on | on | | | on | on | | | |
| 2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO | on | on | on | on | | | | | Scenario1 |
| Dual Bluetooth + 5 GHz WiFi MIMO | | | on | on | | | on | on | Scenario2 |
| Dual Bluetooth + 6 GHz WiFi MIMO | | | | | on | on | on | on | Scenario3 |
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO | | on | on | on | | | on | | Scenario4 |
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO | | on | | | on | on | on | | |

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

| Band | Ant Gain (dBi) | | N _{ANT} / N _{SS} | Directional Gain (dBi) | |
|---------|----------------|-------|------------------------------------|------------------------|-------|
| | ANT1 | ANT2 | | CDD | SDM |
| UNII 1 | -4.60 | -6.32 | 2 / 2 | -2.41 | -4.60 |
| UNII 2A | -5.10 | -6.19 | | -2.62 | -5.10 |
| UNII 2C | -5.43 | -6.37 | | -2.88 | -5.43 |
| UNII 3 | -6.22 | -7.11 | | -3.64 | -6.22 |
| UNII 4 | -5.58 | -7.08 | | -3.29 | -5.58 |

Note

According to ANSI C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional gain(CDD)} = 10 \cdot \log \left(\frac{(10^{(ANT1 \text{ Gain}/20)} + 10^{(ANT2 \text{ Gain}/20)})^2}{2} \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Sample Calculation (Conducted Power, MIMO):

Ex) ANT1 : 11.58 dBm ANT2 : 12.08 dBm

$$\text{ANT1} + \text{ANT 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

| Band | Mode | MIMO_CDD(Ant.1+ Ant.2) | | | | | |
|----------|-----------------|------------------------|-------|-------------|-------|-----------------------|-------|
| | | Ant.1 Power | | Ant.2 Power | | (Ant.1 + Ant.2) Power | |
| | | (dBm) | W | (dBm) | W | (dBm) | W |
| UNII1 | 802.11ax(HE20) | 15.21 | 0.033 | 14.85 | 0.031 | 18.05 | 0.064 |
| | 802.11ax(HE40) | 13.98 | 0.025 | 14.23 | 0.027 | 17.12 | 0.051 |
| | 802.11ax(HE80) | 13.99 | 0.025 | 14.37 | 0.027 | 17.19 | 0.052 |
| UNII2A | 802.11ax(HE20) | 14.82 | 0.030 | 15.29 | 0.034 | 18.07 | 0.064 |
| | 802.11ax(HE40) | 13.40 | 0.022 | 14.06 | 0.025 | 16.75 | 0.047 |
| | 802.11ax(HE80) | 13.65 | 0.023 | 14.76 | 0.030 | 17.25 | 0.053 |
| UNII1&2A | 802.11ax(HE160) | 13.87 | 0.024 | 14.12 | 0.026 | 17.01 | 0.050 |
| UNII2C | 802.11ax(HE20) | 15.02 | 0.032 | 15.16 | 0.033 | 18.10 | 0.065 |
| | 802.11ax(HE40) | 13.82 | 0.024 | 14.47 | 0.028 | 17.17 | 0.052 |
| | 802.11ax(HE80) | 13.71 | 0.024 | 14.47 | 0.028 | 17.12 | 0.052 |
| | 802.11ax(HE160) | 13.26 | 0.021 | 14.71 | 0.030 | 17.06 | 0.051 |
| UNII3 | 802.11ax(HE20) | 15.18 | 0.033 | 14.45 | 0.028 | 17.84 | 0.061 |
| | 802.11ax(HE40) | 13.98 | 0.025 | 13.75 | 0.024 | 16.88 | 0.049 |
| | 802.11ax(HE80) | 13.79 | 0.024 | 13.71 | 0.024 | 16.76 | 0.047 |
| UNII4 | 802.11ax(HE20) | 15.47 | 0.035 | 14.48 | 0.028 | 18.01 | 0.063 |
| | 802.11ax(HE40) | 14.38 | 0.027 | 13.73 | 0.024 | 17.08 | 0.051 |
| | 802.11ax(HE80) | 14.30 | 0.027 | 13.83 | 0.024 | 17.08 | 0.051 |
| UNII3&4 | 802.11ax(HE160) | 14.16 | 0.026 | 14.05 | 0.025 | 17.12 | 0.051 |

| Band | Mode | MIMO_CDD(Ant.1+ Ant.2) | |
|-------|------------------|----------------------------|-------|
| | | (Ant.1 + Ant.2) EIRP Power | |
| | | (dBm) | (W) |
| UNII4 | 802.11ax (HE20) | 14.72 | 0.030 |
| | 802.11ax (HE40) | 13.79 | 0.024 |
| | 802.11ax (HE80) | 13.79 | 0.024 |
| UNII4 | 802.11ax (HE160) | 13.83 | 0.024 |

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement. Additionally, for U-NII-4 band, use the following measurement procedure KDB 291074 D02 EMC Measurement v01.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of ANSI C63.5

(Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4.

(Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty (dB) |
|--|---|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.98 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (9 kHz ~ 30 MHz) | 4.36 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (30 MHz ~ 1 GHz) | 5.70 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (1 GHz ~ 18 GHz) | 5.52 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (18 GHz ~ 40 GHz) | 5.66 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (Above 40 GHz) | 5.58 (Confidence level about 95 %, $k=2$) |

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

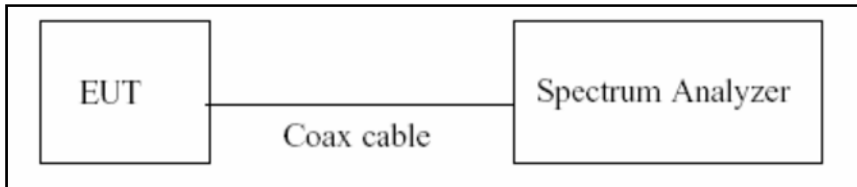

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth

Limit

Within the 5.725-5.85 GHz(NII-3) &5.85-5.925 GHz(NII-4) band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

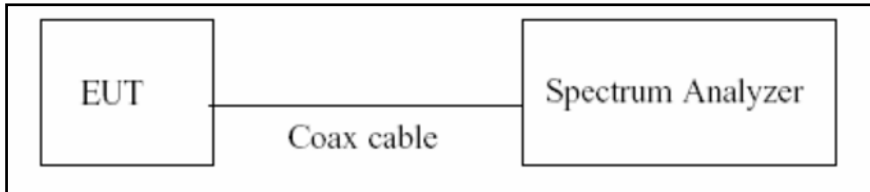

Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = Max Hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3 x RBW
3. Detector = Peak
4. Trace mode = Max Hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, we performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


| Band | Limit |
|-------------|--|
| UNII 1 | - Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm) |
| UNII 2A, 2C | Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.) |
| UNII 3 | Not exceed 1 W(=30 dBm) |
| UNII 4 | EIRP 30 dBm |

Test Configuration

Power Meter

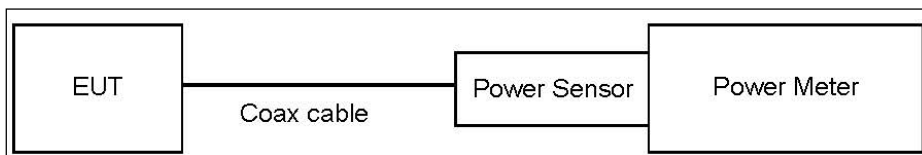

Spectrum Analyzer(Only Straddle Channel)

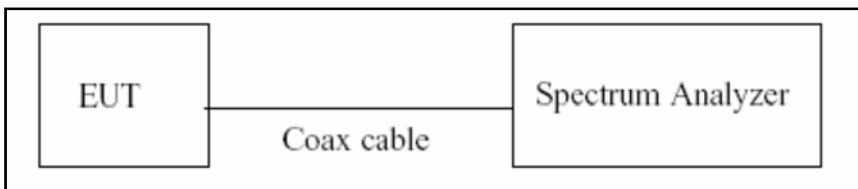

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

ANT1 = Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.5 dB)

ANT2 = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

| Band | ANT1 Loss(dB) | ANT2 Loss(dB) |
|----------|---------------|---------------|
| UNII 1 | 11.30 | 10.80 |
| UNII 2A | 11.30 | 10.80 |
| UNII 2C | 11.30 | 10.80 |
| UNII 3&4 | 11.30 | 10.80 |


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

| Band | Limit |
|-------------|-----------------|
| UNII 1 | 11 dBm/MHz |
| UNII 2A, 2C | 11 dBm/MHz |
| UNII 3 | 30 dBm/500 kHz |
| UNII 4 | EIRP 14 dBm/MHz |

Test Configuration

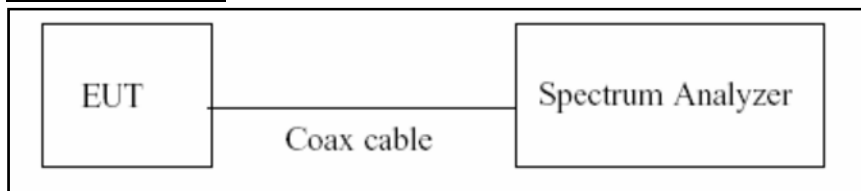

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

ANT1 = Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.5 dB)

ANT2 = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

| Band | ANT1 Loss(dB) | ANT2 Loss(dB) |
|----------|---------------|---------------|
| UNII 1 | 11.30 | 10.80 |
| UNII 2A | 11.30 | 10.80 |
| UNII 2C | 11.30 | 10.80 |
| UNII 3&4 | 11.30 | 10.80 |

(Actual value of loss for the attenuator and cable combination)

8.5. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|-------------------------|-------------------------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 ^(a) | 56 to 46 ^(a) |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors: Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.6. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4. UNII 4: [Low Channel O.O.B.E] measured with a Peak detector

For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

[High Channel O.O.B.E] measured with a RMS detector

For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.

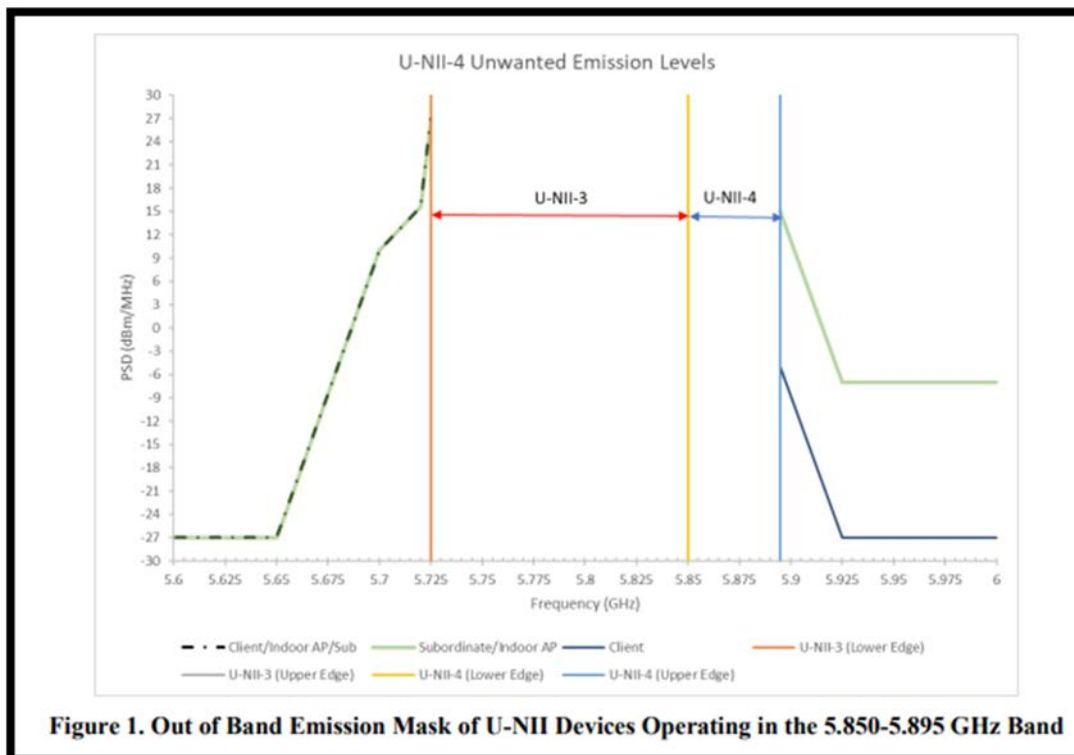



Figure 1. Out of Band Emission Mask of U-NII Devices Operating in the 5.850-5.895 GHz Band

5. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


| Frequency (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Measurement Distance (m) |
|-----------------|---|--------------------------|
| 0.009 – 0.490 | $2400/F(\text{kHz})$ | 300 |
| 0.490 – 1.705 | $24000/F(\text{kHz})$ | 30 |
| 1.705 – 30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Configuration


Below 30 MHz

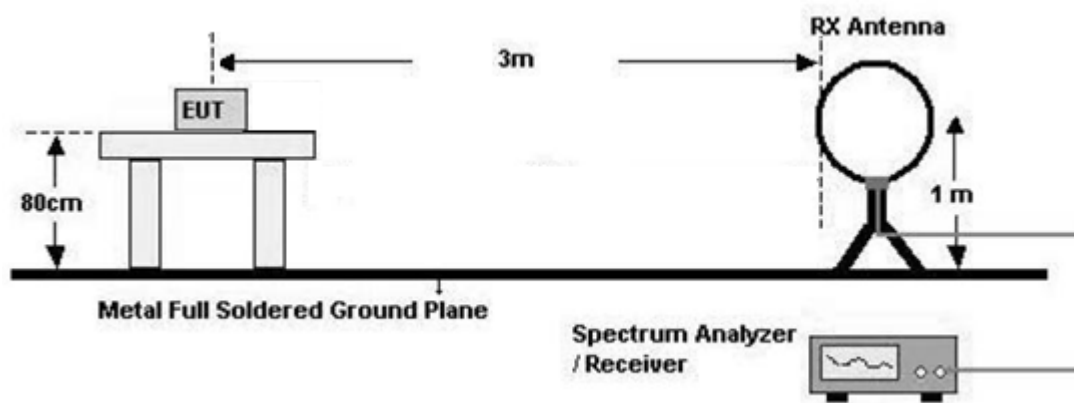

30 MHz - 1 GHz

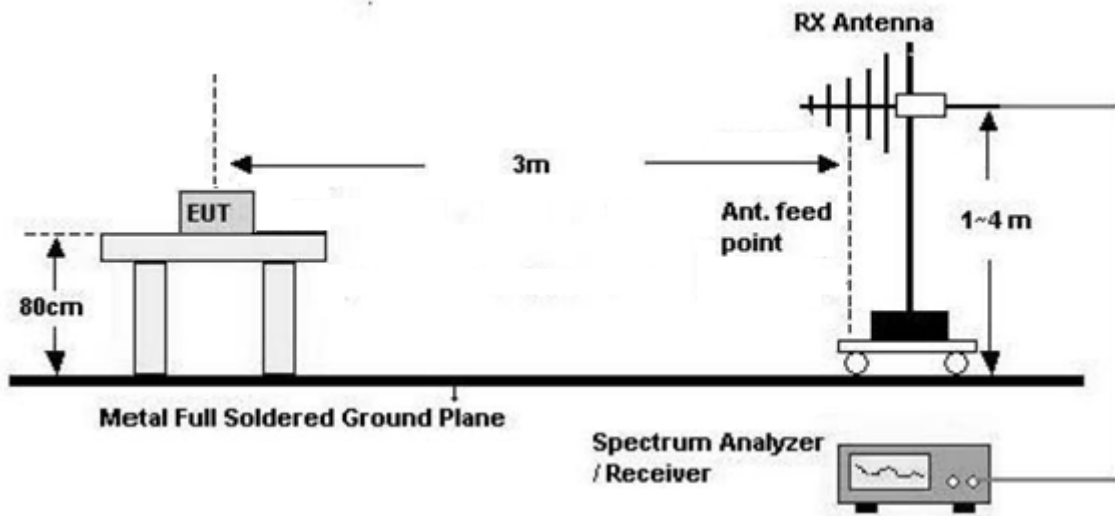

Above 1 GHz

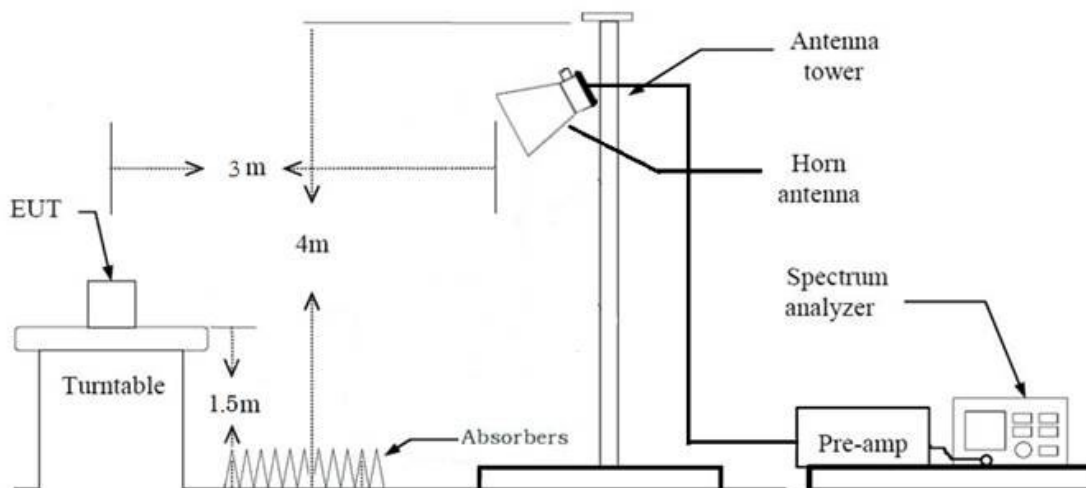

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Max Hold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = VBW RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is 98 percent) = VBW \geq $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a

factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)
+ Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = VBW RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is 98 percent) = VBW \geq $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max Hold.
- Allow Max Hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 350 MHz ~ 5 460 MHz
- 5 460 MHz ~ 5 470 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Attenuator(ATT)
+ Distance Factor(D.F)

The actual setting value of VBW

| Mode | Tone | Worst Data rate (Mbps) | Duty Cycle | Duty Cycle Factor (dB) | VBW (1/T) (kHz) | The actual setting value of VBW (Hz) |
|------------------|--------|------------------------|------------|------------------------|-----------------|--------------------------------------|
| 802.11ax (HE20) | 26 | MCS0 | 0.996 | 0.019 | 0.219 | 1 000 |
| | 52 | MCS0 | 0.997 | 0.014 | 0.219 | 1 000 |
| | 106 | MCS0 | 0.993 | 0.028 | 0.401 | 1 000 |
| | 242 | MCS0 | 0.985 | 0.067 | 0.891 | 1 000 |
| 802.11ax (HE40) | 26 | MCS0 | 0.997 | 0.014 | 0.218 | 1 000 |
| | 52 | MCS0 | 0.997 | 0.014 | 0.219 | 1 000 |
| | 106 | MCS0 | 0.992 | 0.034 | 0.402 | 1 000 |
| | 242 | MCS0 | 0.986 | 0.063 | 0.890 | 1 000 |
| 802.11ax (HE80) | 484 | MCS0 | 0.974 | 0.114 | 1.643 | 3 000 |
| | 26 | MCS0 | 0.996 | 0.019 | 0.219 | 1 000 |
| | 52 | MCS0 | 0.997 | 0.014 | 0.219 | 1 000 |
| | 106 | MCS0 | 0.993 | 0.029 | 0.402 | 1 000 |
| | 242 | MCS0 | 0.984 | 0.068 | 0.891 | 1 000 |
| | 484 | MCS0 | 0.973 | 0.119 | 1.645 | 3 000 |
| 802.11ax (HE160) | 996 | MCS0 | 0.973 | 0.120 | 1.667 | 3 000 |
| | 26 | MCS0 | 0.997 | 0.014 | 0.218 | 1 000 |
| | 52 | MCS0 | 0.996 | 0.019 | 0.219 | 1 000 |
| | 106 | MCS0 | 0.992 | 0.034 | 0.402 | 1 000 |
| | 242 | MCS0 | 0.984 | 0.068 | 0.891 | 1 000 |
| | 484 | MCS0 | 0.972 | 0.124 | 1.645 | 3 000 |
| | 996 | MCS0 | 0.974 | 0.115 | 1.665 | 3 000 |
| 802.11ax (SU) | 2x996 | MCS0 | 0.996 | 0.016 | 0.184 | 1 000 |
| | BW 20 | MCS0 | 0.997 | 0.012 | 0.184 | 1 000 |
| | BW 40 | MCS0 | 0.996 | 0.016 | 0.184 | 1 000 |
| | BW 80 | MCS0 | 0.996 | 0.016 | 0.184 | 1 000 |
| | BW 160 | MCS0 | 0.996 | 0.016 | 0.184 | 1 000 |

8.7. Test RU for Tones

| BW (MHz) | Tones (T) | RU offset | Test RU offset | | |
|-------------|--------------|-----------|----------------|-----|------|
| | | | Low | Mid | High |
| 20 | 26 | 0~8 | 0 | 4 | 8 |
| | 52 | 37~40 | 37 | 38 | 40 |
| | 106 | 53~54 | 53 | - | 54 |
| | 242 | 61 | - | 61 | - |
| 40 | 26 | 0~17 | 0 | 9 | 17 |
| | 52 | 37~44 | 37 | 41 | 44 |
| | 106 | 53~56 | 53 | 54 | 56 |
| | 242 | 61~62 | 61 | - | 62 |
| | 484 | 65 | - | 65 | - |
| 80 | 26 | 0~36 | 0 | 18 | 36 |
| | 52 | 37~52 | 37 | 45 | 52 |
| | 106 | 53~60 | 53 | 57 | 60 |
| | 242 | 61~64 | 61 | 62 | 64 |
| | 484 | 65~66 | 65 | - | 66 |
| | 996 | 67 | - | 67 | - |
| 160 | 26 | 0~36 | 0 | 18 | 36 |
| | 52 | 37~52 | 37 | 45 | 52 |
| | 106 | 53~60 | 53 | 57 | 60 |
| | 242 | 61~64 | 61 | 62 | 64 |
| | 484 | 65~66 | 65 | - | 66 |
| | 996 | 67 | - | 67 | - |
| | 2x996 | 68 | - | 68 | - |

8.8. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.
 - HE20, HE40, HE80, HE160 : MCS0

AC Power line Conducted Emissions

1. Please refer to the [UNII] Test Report.

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
 - Radiated Spurious Emissions Worst case : Open mode
 - Radiated Restricted Band Edge : Open mode
3. All data rate of operation were investigated and the worst case results are reported.
(Worst case : MCS0)
4. All Antenna of operation were investigated and the worst case results are reported
 - Antenna Operation Type : SISO, MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
 - Worstcase : MIMO_CDD(Ant.1+Ant.2)
5. EUT Axis
 - Radiated Spurious Emissions :
 - Radiated Restricted Band Edge : X
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

6. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

| Mode | TEST | TONE | RU OFFSET | | | | |
|----------------|-------------------------|---|--|---|---|--|--|
| Open mode | RSE | [HE20] WORST CASE: 106T 242T,SU | 106T: 53 Full Tone: 61 | | | | |
| | | [HE40]: 484T,SU | Full Tone: 65 | | | | |
| | | [HE80]: 996T,SU | Full Tone: 67 | | | | |
| | | [HE160]: 996Tx2, SU | Full Tone: 68 | | | | |
| Half-open mode | RSE | [HE20]: 106T, 242T | 106 Tone: 53 Full Tone: 61 | | | | |
| | | [HE40]: 484T | Full Tone: 65 | | | | |
| | | [HE80]: 996T,SU | Full Tone: 67 | | | | |
| | | [HE160]: SU | - | | | | |
| Closed mode | RSE | [HE20]: 106T, 242T | 106 Tone: 53 Full Tone: 61 | | | | |
| | | [HE40]: 484T | Full Tone: 65 | | | | |
| | | [HE80]: 996T,SU | Full Tone: 67 | | | | |
| | | [HE160]: SU | - | | | | |
| Open mode | Band-Edge (UNII1,2A,2C) | WORST CASE[HE80] : 996T WORST CASE[HE160]: 26T(80L) | 67 0 | | | | |
| | | [HE20] : 242T,SU | Full Tone: 61 | | | | |
| | | [HE40] : 484T,SU | Full Tone: 65 | | | | |
| | | [HE80] : 996T,SU | Full Tone: 67 | | | | |
| | | [HE160] : 996T(80L&80U), 996Tx2, SU | Full Tone: 67 & 68 | | | | |
| | | [HE20] Additional Tone: 26T, 52T,106T [HE40] Additional Tone: 26T, 52T, 106T, 242T [HE80] Additional Tone: 26T, 52T, 106T, 242T, 484T [HE 160] Additional Tone: 26T, 52T, 106T, 242T, 484T | [HE20] Low Edge: 0, 37, 53 High Edge: 8, 40, 54 [HE40] Low Edge: 0, 37, 53, 61 High Edge: 17, 44, 56, 62 [HE80] Low Edge: 0, 37, 53, 61, 65 High Edge: 36, 52, 60, 64, 66 [HE160] Low Edge: 0, 37, 53, 61, 65 High Edge: 36, 52, 60, 64, 66 | | | | |
| Half-open mode | Band-Edge (UNII1,2A,2C) | [HE20] : 242T [HE40] : 484T [HE80] : 484T [HE160] : 242T, 484T (80L) 52T, 242T (80U) 996Tx2,SU | 52 Tone: 37, 52 242 Tone: 64, 61 484 Tone: 65, 66 2x996 Tone: 68 | | | | |
| | | Closed mode | Band-Edge (UNII1,2A,2C) | [HE20] : 242T [HE40] : 484T [HE80] : 996T [HE160] : 26T, 996T (80L) 52T, 484T (80U) SU | 26 Tone: 0 52 Tone: 52 242 Tone: 61 484 Tone: 65, 66 996 Tone: 67 | | |
| | | | | Open mode | Band-Edge (Straddle, UNII3) Band-Edge (UNII4) | All supported RU tones were tested, and please refer to the attached test plot reduced to the worst case. | |

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions :

3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

| RSDB Scenario | 2.4 GHz WiFi Ant.1 | 2.4 GHz WiFi Ant.2 | 5 GHz WiFi Ant.1 | 5 GHz WiFi Ant.2 | 6 GHz WiFi Ant.1 | 6 GHz WiFi Ant.2 | Bluetooth Ant.1 | Bluetooth Ant.2 | Test Case |
|--|--------------------|--------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|-----------|
| 2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO | on | on | | | on | on | | | |
| 2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO | on | on | on | on | | | | | Scenario1 |
| Dual Bluetooth + 5 GHz WiFi MIMO | | | on | on | | | on | on | Scenario2 |
| Dual Bluetooth + 6 GHz WiFi MIMO | | | | | on | on | on | on | Scenario3 |
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO | | on | on | on | | | on | | Scenario4 |
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO | | on | | | on | on | on | | |

4. The RSDB mode test investigated both intermodulation and radiated spurious emissions.

And the worst results were reported.

- Worst result: Radiated spurious emissions
- Intermodulation: No signals are generated.
- Radiated spurious emissions: cf. Section 10.6.2.

5. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

| RSDB Scenario 1 | Description | 2.4GHz Emission | 5 GHz Emission |
|--|-------------|-----------------|----------------|
| 2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO | Antenna | Ant All | Ant All |
| | Channel | 11 | 36 |
| | Data Rate | MCS0 | MCS0 |
| | Mode | 802.11ax(HE20) | 802.11ax(HE20) |
| | Tone, RU | 106, 53 | 106, 53 |

Note : DTS ax RSDB Data refer to [DTS ax] Test Report

| RSDB Scenario 2 | Description | Bluetooth Emission | 5 GHz Emission |
|-------------------------------------|-------------|--------------------|----------------|
| Dual Bluetooth + 5 GHz WiFi MIMO | Antenna | Dual ANT | Ant All |
| | Channel | 78 | 36 |
| | Data Rate | 1 Mbps | MCS0 |
| | Mode | GFSK | 802.11ax(HE20) |
| | Tone, RU | N/A | 106, 53 |

Note : BT RSDB Data refer to [BT] Test Report

| RSDB Scenario 4 | Description | Bluetooth Emission | 2.4GHz Emission | 5 GHz Emission |
|--|-------------|--------------------|-----------------|----------------|
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO | Antenna | ANT1 | ANT2 | Ant All |
| | Channel | 78 | 11 | 36 |
| | Data Rate | 1 Mbps | MCS0 | MCS0 |
| | Mode | GFSK | 802.11ax(HE20) | 802.11ax(HE20) |
| | Tone, RU | N/A | 106, 53 | 106, 53 |

Note : DTS ax, BT RSDB Data refer to [DTS ax], [BT] Test Report

9. SUMMARY OF TEST RESULTS

| Test Description | FCC Part Section(s) | Test Limit | Test Condition | Test Result |
|--|--|--|----------------|-----------------|
| 26 dB Bandwidth | § 15.407 (for Power Measurement) | N/A | | PASS |
| 6 dB Bandwidth | § 15.407(e) | >500 kHz (5725-5850 MHz)(UNII-3) (5850-5895 MHz)(UNII-4) | | PASS |
| Maximum Conducted Output Power | § 15.407(a)(1),(2),(3) | 250 mW(5150-5250 MHz) 250 mW or $11+10\log_{10}$ (BW) dBm (5250-5350 MHz) 250 mW or $11+10\log_{10}$ (BW) dBm (5470-5725 MHz) 1 W (5725-5850 MHz) | | PASS |
| Maximum EIRP Output Power | § 15.407(a)(1)(3)(iii) | EIRP 30dBm (5850-5925 MHz) | Conducted | PASS |
| Maximum Power Spectral Density | § 15.407(a)(1),(2),(3) | 11 dBm/ MHz (5150-5250 MHz) 11 dBm/ MHz (5250-5350 MHz) 11 dBm/ MHz (5470-5725 MHz) 30 dBm/500 kHz(5725-5850 MHz) EIRP 14 dBm/MHz(5850-5925 MHz) | | PASS |
| Frequency Stability | § 15.407(g) § 2.1055 | Maintained within the band | | PASS (Note1) |
| AC Conducted Emissions 150 kHz-30 MHz | 15.207 15.407(b)(8) | FCC 15.207 limits | | PASS (Note1) |
| Undesirable Emissions | § 15.407(b) (1),(2),(3),(4) § 15.407(b)(5)(ii),(iii) | -27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.6 (UNII 3&4) | | PASS |
| General Field Strength Limits(Restricted Bands and Radiated Emission Limits) | 15.205, 15.407(b)(9),(10) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated | PASS |

Note1:

1. Please refer to the [UNII] Test Report.

10. TEST RESULT

10.1 DUTY CYCLE

| Mode | Tone | Worst Data rate (Mbps) | T _{on} (ms) | T _{total} (ms) | Duty Cycle | Duty Cycle Factor (dB) |
|---------------------|--------|------------------------|----------------------|-------------------------|------------|------------------------|
| 802.11ax (HE20) | 26 | MCS0 | 4.575 | 4.595 | 0.996 | 0.019 |
| | 52 | MCS0 | 4.570 | 4.585 | 0.997 | 0.014 |
| | 106 | MCS0 | 2.492 | 2.508 | 0.993 | 0.028 |
| | 242 | MCS0 | 1.123 | 1.140 | 0.985 | 0.067 |
| 802.11ax (HE40) | 26 | MCS0 | 4.580 | 4.595 | 0.997 | 0.014 |
| | 52 | MCS0 | 4.570 | 4.585 | 0.997 | 0.014 |
| | 106 | MCS0 | 2.489 | 2.509 | 0.992 | 0.034 |
| | 242 | MCS0 | 1.124 | 1.140 | 0.986 | 0.063 |
| | 484 | MCS0 | 0.609 | 0.625 | 0.974 | 0.114 |
| 802.11ax (HE80) | 26 | MCS0 | 4.575 | 4.595 | 0.996 | 0.019 |
| | 52 | MCS0 | 4.570 | 4.585 | 0.997 | 0.014 |
| | 106 | MCS0 | 2.489 | 2.506 | 0.993 | 0.029 |
| | 242 | MCS0 | 1.122 | 1.140 | 0.984 | 0.068 |
| | 484 | MCS0 | 0.608 | 0.625 | 0.973 | 0.119 |
| | 996 | MCS0 | 0.600 | 0.617 | 0.973 | 0.120 |
| 802.11ax (HE160) | 26 | MCS0 | 4.580 | 4.595 | 0.997 | 0.014 |
| | 52 | MCS0 | 4.565 | 4.585 | 0.996 | 0.019 |
| | 106 | MCS0 | 2.489 | 2.509 | 0.992 | 0.034 |
| | 242 | MCS0 | 1.122 | 1.140 | 0.984 | 0.068 |
| | 484 | MCS0 | 0.608 | 0.626 | 0.972 | 0.124 |
| | 996 | MCS0 | 0.601 | 0.617 | 0.974 | 0.115 |
| | 2x996 | MCS0 | 5.447 | 5.467 | 0.996 | 0.016 |
| 802.11ax (SU) | BW 20 | MCS0 | 5.447 | 5.462 | 0.997 | 0.012 |
| | BW 40 | MCS0 | 5.447 | 5.467 | 0.996 | 0.016 |
| | BW 80 | MCS0 | 5.447 | 5.467 | 0.996 | 0.016 |
| | BW 160 | MCS0 | 5.447 | 5.467 | 0.996 | 0.016 |



Note:

1. Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$. where, Duty Cycle = T_{on} / T_{total}

Test Plots(Bandwidth 20M Ch.100(5500 MHz))



26Tone MCS0

52Tone MCS0

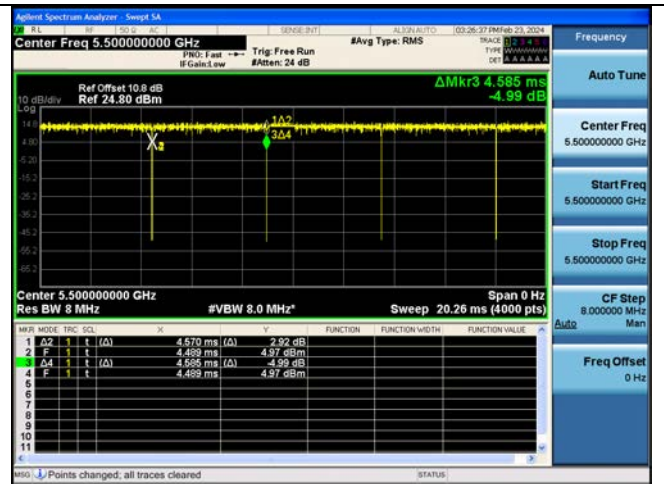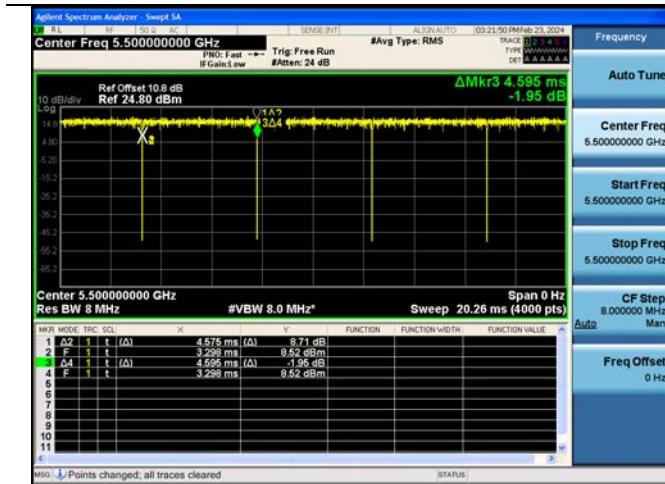


106Tone MCS0

242Tone MCS0

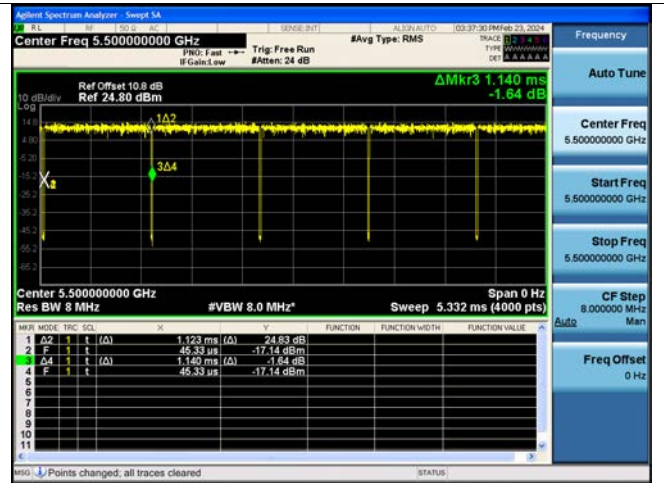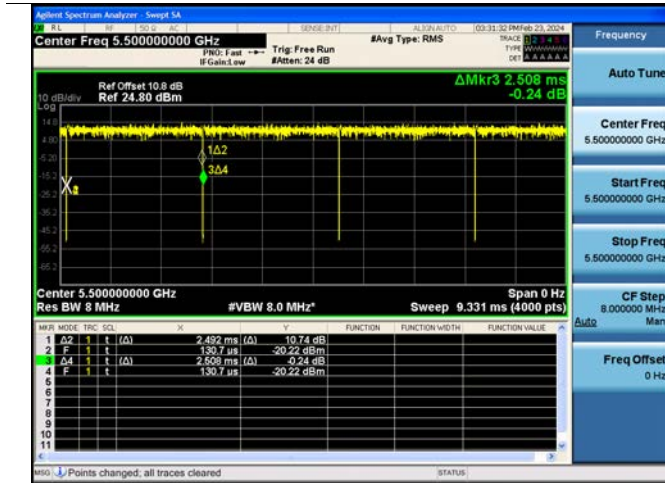



SU MCS0

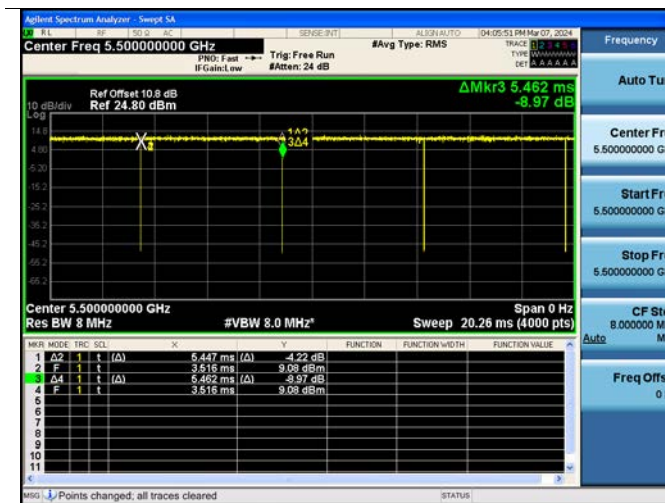

Test Plots(Bandwidth 40M Ch.102(5510 MHz))



26Tone MCS0

52Tone MCS0

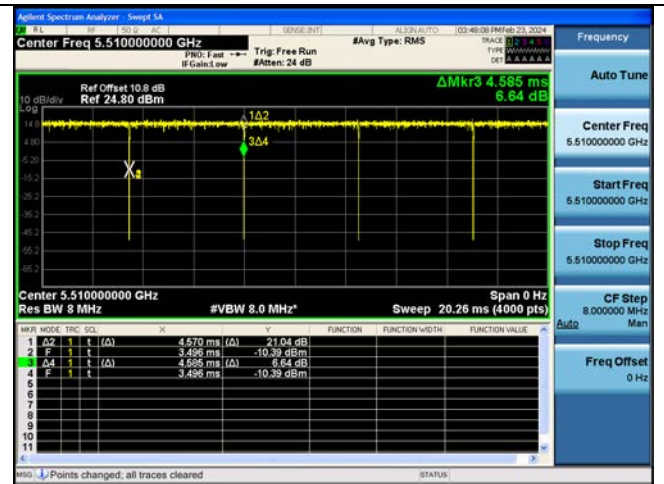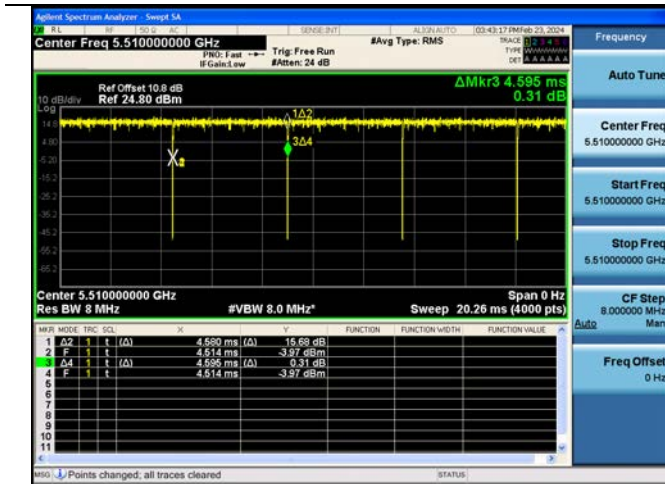



106Tone MCS0

242Tone MCS0

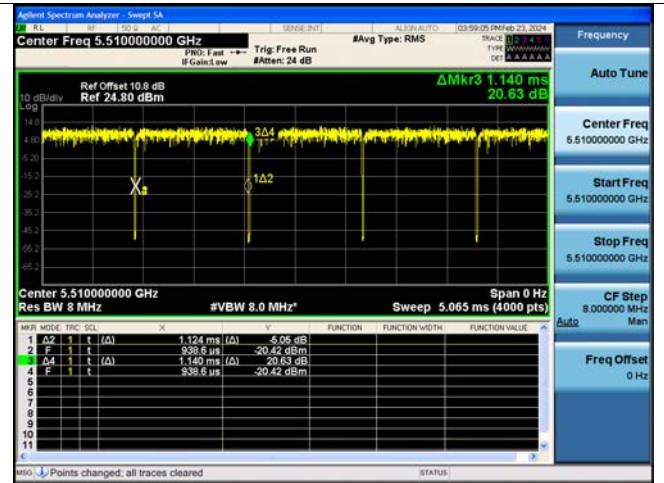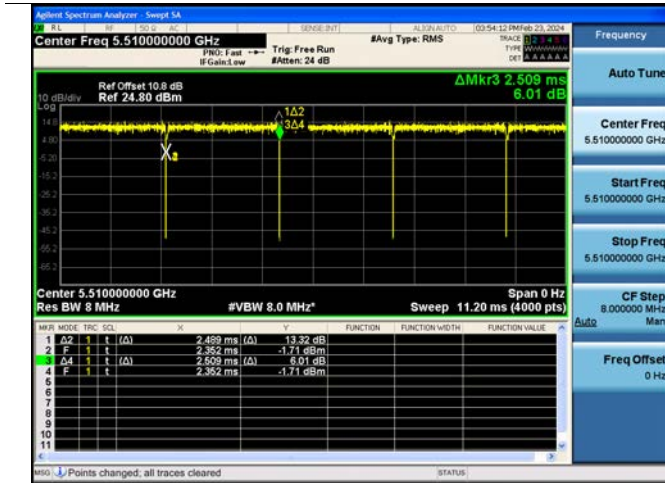

484Tone MCS0



SU

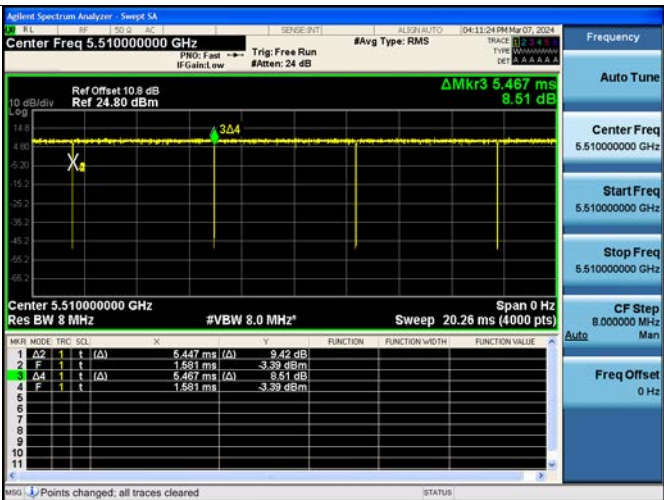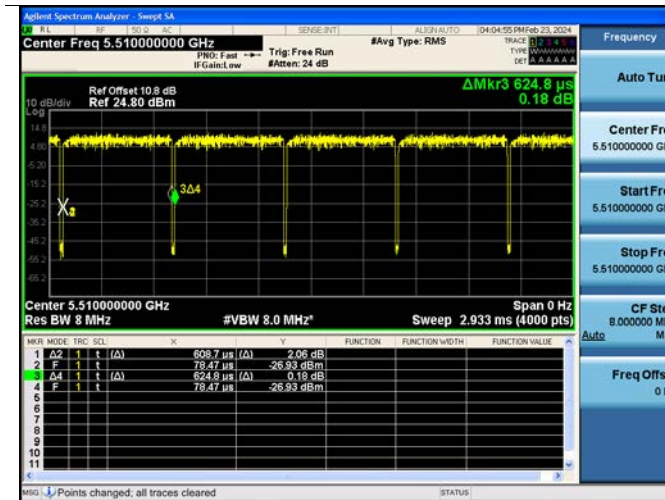

Test Plots(Bandwidth 80M Ch.106(5530 MHz))



26Tone MCS0

52Tone MCS0

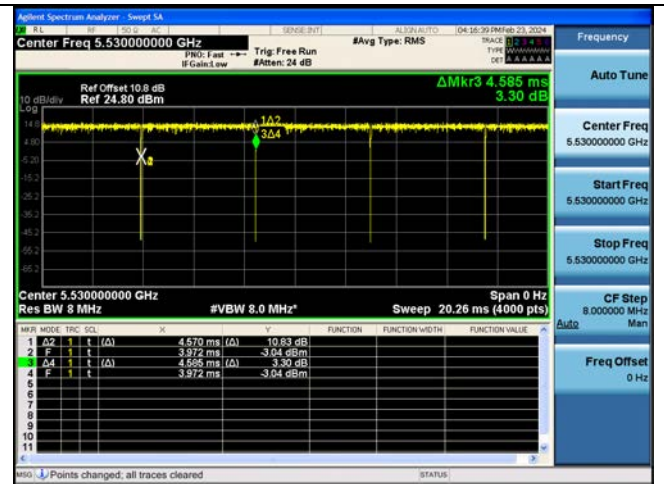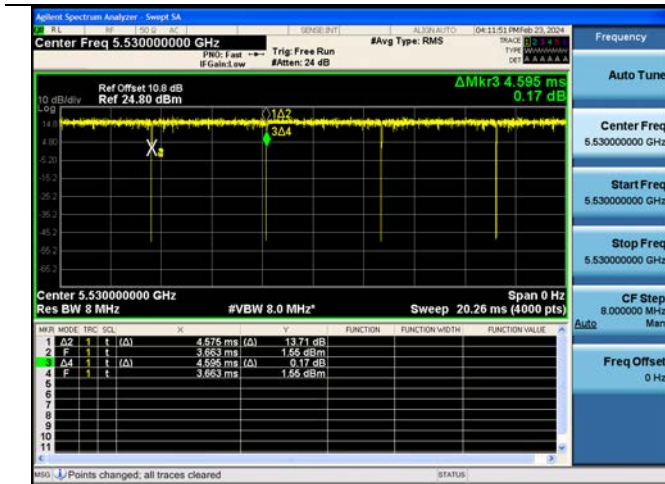



106Tone MCS0

242Tone MCS0

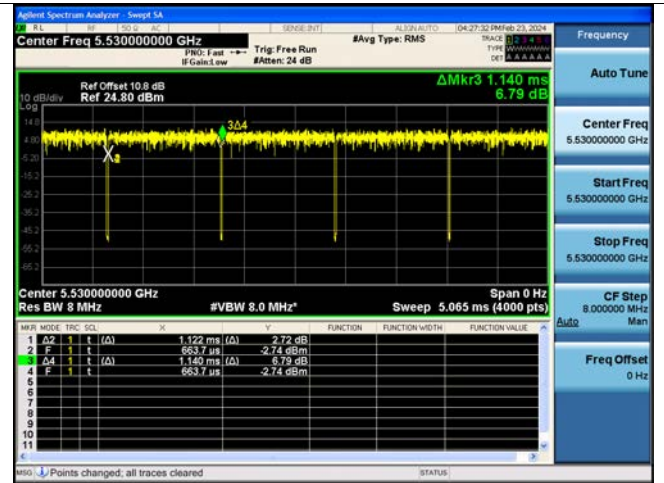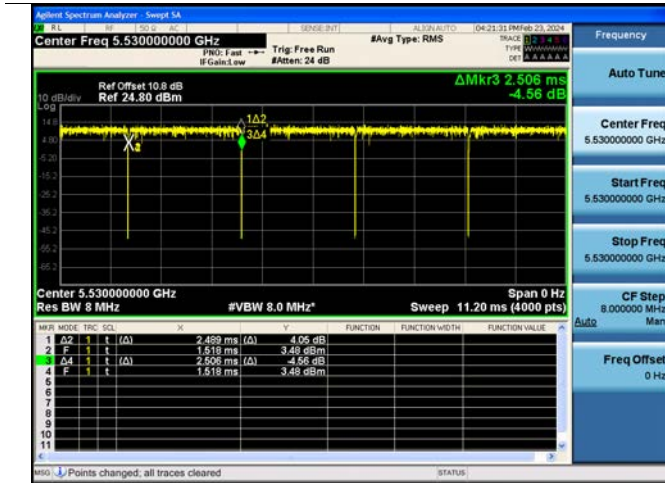


484Tone MCS0

996Tone MCS0

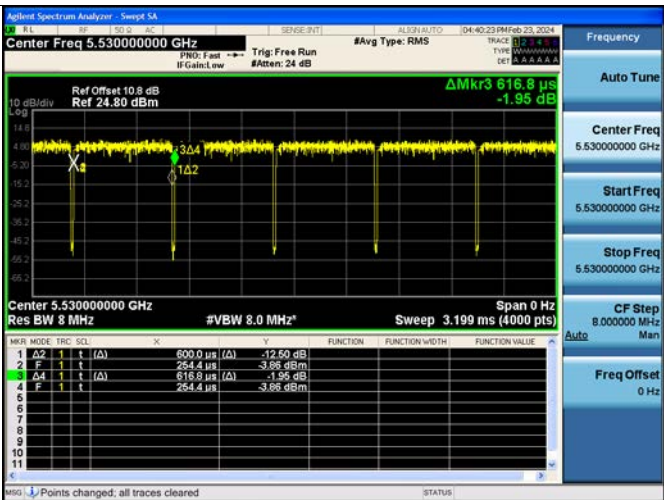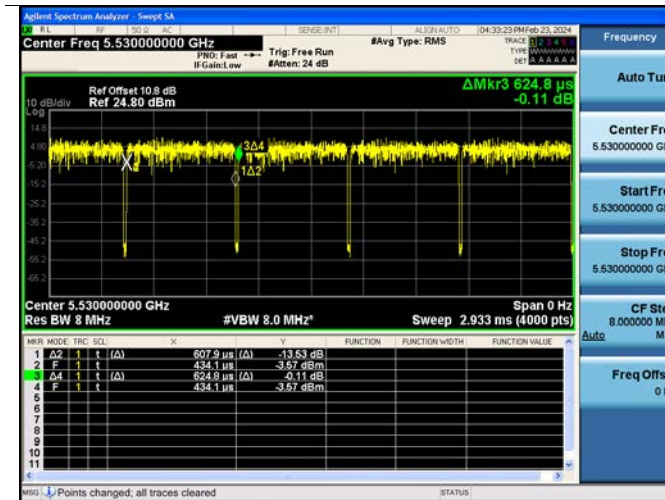



SU

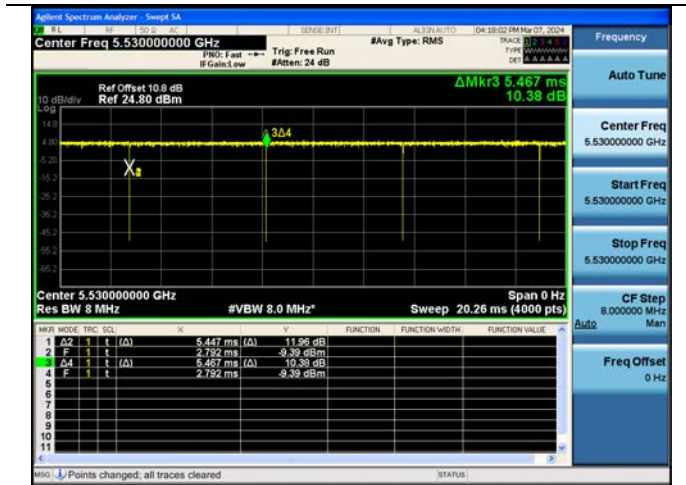

Test Plots(Bandwidth 160M Ch.50(5250 MHz))



26Tone MCS0

52Tone MCS0

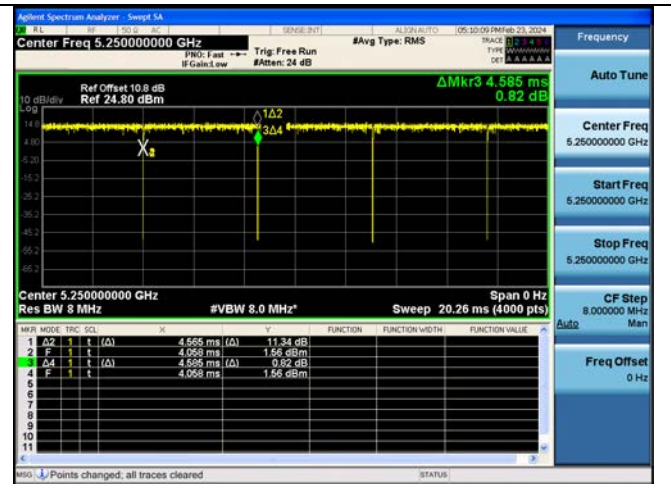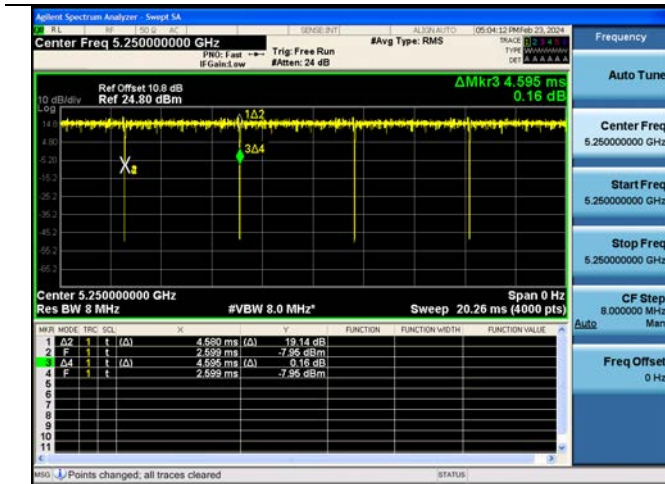



106Tone MCS0

242Tone MCS0

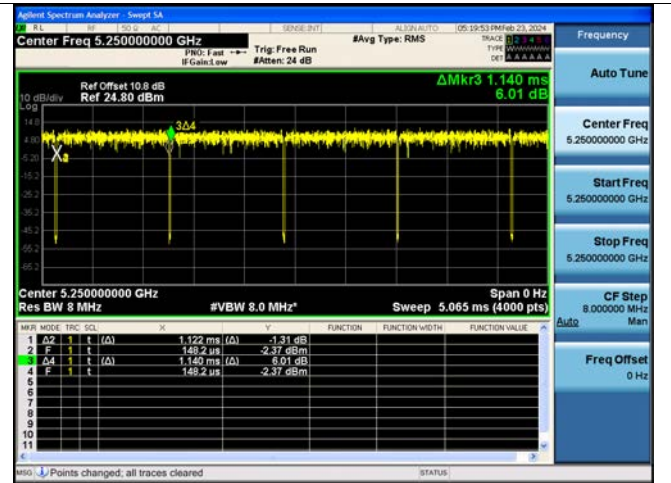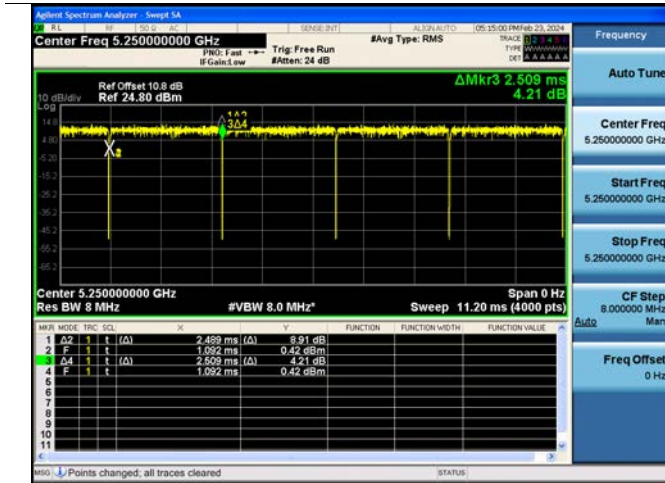


484Tone MCS0

996Tone MCS0

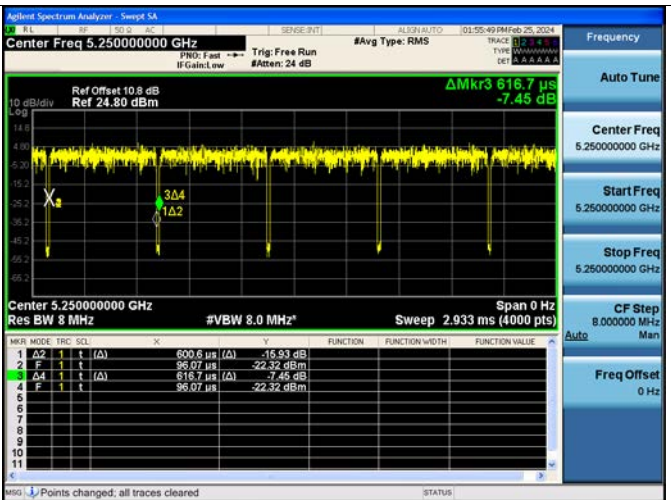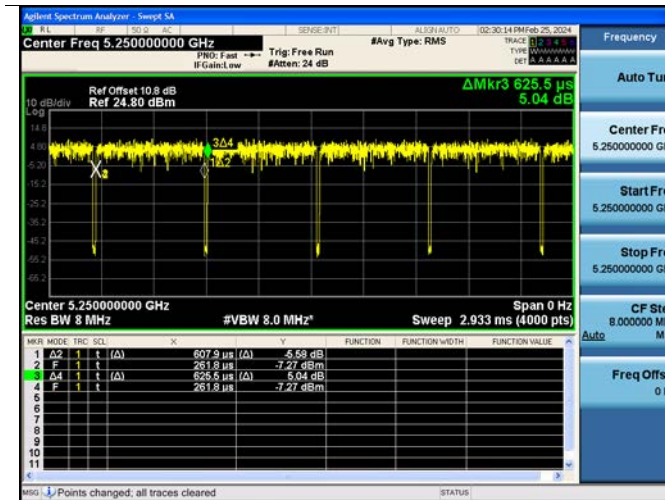

SU

2x996Tone MCS0

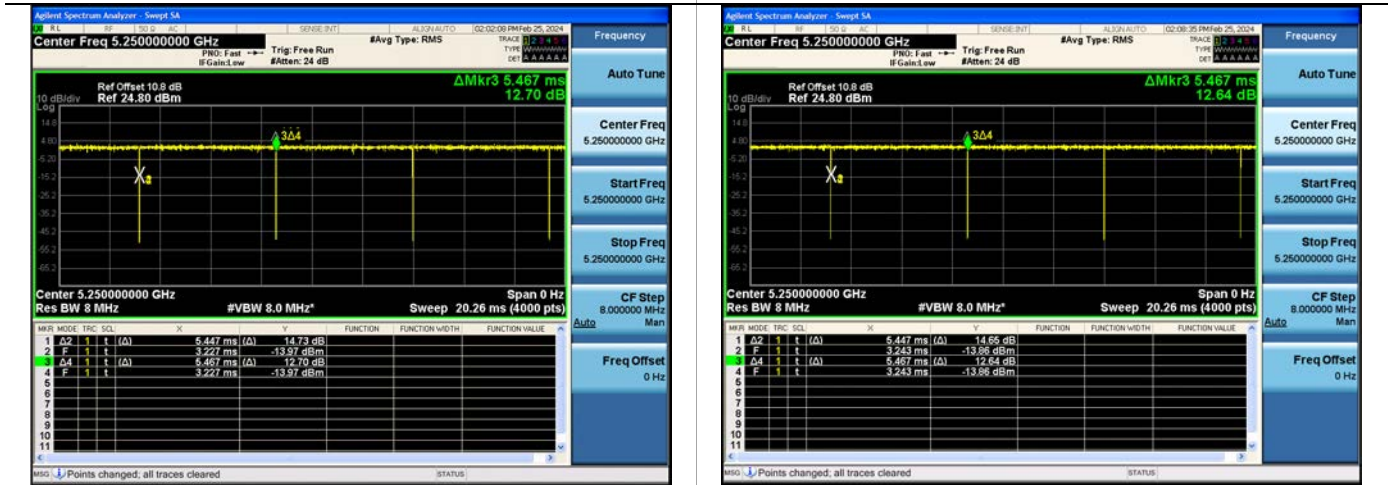

Note: In order to simplify the report, attached plots were only the lowest datarate.

10.2 26 dB BANDWIDTH & 99% BANDWIDTH

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.6.1.

10.2.1 Ant.1

| Mode : HE20 26T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5180 | 36 | 19.51 | 17.66 | 19.57 | 18.164 | 16.561 | 18.234 |
| | 5200 | 40 | 19.31 | 18.35 | 19.64 | 18.026 | 16.564 | 18.214 |
| | 5240 | 48 | 19.56 | 18.19 | 18.64 | 18.112 | 16.688 | 17.328 |
| UNII2A | 5260 | 52 | 19.66 | 18.14 | 19.56 | 17.979 | 17.095 | 18.256 |
| | 5300 | 60 | 19.42 | 18.43 | 19.33 | 18.089 | 16.829 | 17.949 |
| | 5320 | 64 | 19.54 | 18.09 | 19.13 | 17.976 | 17.070 | 17.905 |
| UNII2C | 5500 | 100 | 19.44 | 18.30 | 19.66 | 18.092 | 16.589 | 17.738 |
| | 5600 | 120 | 19.40 | 18.32 | 18.85 | 18.025 | 16.755 | 17.756 |
| | 5720 | 144 | 19.34 | 17.74 | 18.88 | 17.984 | 16.630 | 17.786 |
| UNII3 | 5745 | 149 | 19.73 | 18.20 | 19.62 | 18.132 | 17.081 | 17.911 |
| | 5785 | 157 | 19.57 | 18.19 | 19.50 | 18.108 | 17.053 | 18.197 |
| | 5825 | 165 | 18.66 | 18.29 | 19.56 | 17.218 | 17.111 | 18.160 |
| UNII4 | 5845 | 169 | 19.68 | 18.41 | 19.56 | 18.259 | 16.714 | 18.181 |
| | 5865 | 173 | 19.58 | 17.39 | 19.80 | 16.977 | 16.091 | 18.365 |
| | 5885 | 177 | 19.71 | 18.04 | 19.69 | 18.268 | 16.968 | 18.118 |

| Mode : HE20 52T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5180 | 36 | 20.13 | 18.57 | 19.75 | 18.101 | 17.119 | 18.113 |
| | 5200 | 40 | 19.94 | 18.70 | 20.11 | 18.201 | 16.336 | 18.032 |
| | 5240 | 48 | 19.68 | 17.74 | 19.99 | 18.196 | 16.700 | 18.046 |
| UNII2A | 5260 | 52 | 19.93 | 18.10 | 20.00 | 18.263 | 16.773 | 18.084 |
| | 5300 | 60 | 20.04 | 18.34 | 20.00 | 18.195 | 17.214 | 18.175 |
| | 5320 | 64 | 19.66 | 18.72 | 19.79 | 18.253 | 16.853 | 18.178 |
| UNII2C | 5500 | 100 | 19.81 | 18.47 | 19.89 | 18.258 | 17.071 | 18.156 |
| | 5600 | 120 | 19.71 | 18.14 | 19.73 | 18.185 | 16.963 | 18.077 |
| | 5720 | 144 | 19.62 | 18.22 | 19.83 | 18.201 | 17.112 | 18.015 |
| UNII3 | 5745 | 149 | 19.93 | 18.55 | 20.04 | 18.200 | 16.382 | 17.462 |
| | 5785 | 157 | 20.07 | 18.49 | 19.83 | 18.176 | 16.941 | 17.521 |
| | 5825 | 165 | 20.14 | 18.57 | 19.99 | 18.211 | 16.735 | 17.934 |
| UNII4 | 5845 | 169 | 19.73 | 18.73 | 20.01 | 17.683 | 17.144 | 17.686 |
| | 5865 | 173 | 19.52 | 18.29 | 19.15 | 18.200 | 17.010 | 17.853 |
| | 5885 | 177 | 20.07 | 17.26 | 20.05 | 18.159 | 16.175 | 18.261 |

| Mode : HE20 106T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5180 | 36 | 19.98 | - | 20.04 | 18.242 | - | 18.218 |
| | 5200 | 40 | 20.18 | - | 20.11 | 17.857 | - | 18.259 |
| | 5240 | 48 | 20.23 | - | 19.95 | 18.080 | - | 18.188 |
| UNII2A | 5260 | 52 | 19.80 | - | 20.09 | 18.028 | - | 18.207 |
| | 5300 | 60 | 19.90 | - | 20.19 | 18.207 | - | 18.227 |
| | 5320 | 64 | 19.79 | - | 20.07 | 18.204 | - | 18.224 |
| UNII2C | 5500 | 100 | 19.97 | - | 19.90 | 18.144 | - | 18.163 |
| | 5600 | 120 | 20.24 | - | 19.95 | 18.024 | - | 18.261 |
| | 5720 | 144 | 20.17 | - | 20.07 | 18.182 | - | 18.189 |
| UNII3 | 5745 | 149 | 19.92 | - | 20.11 | 18.105 | - | 18.149 |
| | 5785 | 157 | 19.97 | - | 19.78 | 18.216 | - | 18.144 |
| | 5825 | 165 | 19.73 | - | 20.14 | 18.159 | - | 17.197 |
| UNII4 | 5845 | 169 | 20.17 | - | 20.07 | 18.196 | - | 18.290 |
| | 5865 | 173 | 19.68 | - | 20.03 | 18.142 | - | 18.155 |
| | 5885 | 177 | 20.15 | - | 19.87 | 18.088 | - | 18.238 |

| Mode : HE20 242T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5180 | 36 | - | 21.08 | - | - | 19.039 | - |
| | 5200 | 40 | - | 21.05 | - | - | 19.033 | - |
| | 5240 | 48 | - | 21.18 | - | - | 19.017 | - |
| UNII2A | 5260 | 52 | - | 21.13 | - | - | 19.009 | - |
| | 5300 | 60 | - | 21.15 | - | - | 19.014 | - |
| | 5320 | 64 | - | 21.13 | - | - | 18.999 | - |
| UNII2C | 5500 | 100 | - | 21.19 | - | - | 18.994 | - |
| | 5600 | 120 | - | 21.01 | - | - | 19.017 | - |
| | 5720 | 144 | - | 20.87 | - | - | 19.032 | - |
| UNII3 | 5745 | 149 | - | 20.97 | - | - | 18.991 | - |
| | 5785 | 157 | - | 20.98 | - | - | 18.980 | - |
| | 5825 | 165 | - | 20.93 | - | - | 19.010 | - |
| UNII4 | 5845 | 169 | - | 21.03 | - | - | 19.004 | - |
| | 5865 | 173 | - | 21.13 | - | - | 19.068 | - |
| | 5885 | 177 | - | 21.07 | - | - | 18.983 | - |

| Mode : HE20 SU | | | | | | | | |
|----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5180 | 36 | - | 21.42 | - | - | 18.982 | - |
| | 5200 | 40 | - | 21.27 | - | - | 19.019 | - |
| | 5240 | 48 | - | 21.16 | - | - | 19.000 | - |
| UNII2A | 5260 | 52 | - | 21.24 | - | - | 19.046 | - |
| | 5300 | 60 | - | 21.53 | - | - | 19.051 | - |
| | 5320 | 64 | - | 21.32 | - | - | 19.048 | - |
| UNII2C | 5500 | 100 | - | 21.61 | - | - | 19.031 | - |
| | 5600 | 120 | - | 21.36 | - | - | 19.024 | - |
| | 5720 | 144 | - | 21.42 | - | - | 19.008 | - |
| UNII3 | 5745 | 149 | - | 21.49 | - | - | 19.037 | - |
| | 5785 | 157 | - | 21.31 | - | - | 19.026 | - |
| | 5825 | 165 | - | 21.55 | - | - | 19.036 | - |
| UNII4 | 5845 | 169 | - | 21.30 | - | - | 19.015 | - |
| | 5865 | 173 | - | 21.23 | - | - | 19.016 | - |
| | 5885 | 177 | - | 21.57 | - | - | 19.001 | - |

| Mode : HE40 26T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5190 | 38 | 20.09 | 22.57 | 19.88 | 18.436 | 19.864 | 18.457 |
| | 5230 | 46 | 19.71 | 22.01 | 19.99 | 18.044 | 19.825 | 18.299 |
| UNII2A | 5270 | 54 | 19.83 | 21.74 | 19.95 | 18.311 | 20.164 | 18.394 |
| | 5310 | 62 | 19.89 | 22.27 | 19.91 | 18.333 | 20.206 | 18.280 |
| UNII2C | 5510 | 102 | 20.18 | 22.61 | 20.44 | 18.319 | 20.319 | 18.403 |
| | 5590 | 118 | 20.03 | 22.42 | 19.89 | 18.361 | 20.351 | 18.197 |
| | 5710 | 142 | 19.93 | 21.76 | 20.23 | 18.306 | 20.385 | 18.176 |
| UNII3 | 5755 | 151 | 19.96 | 22.26 | 19.93 | 18.302 | 19.920 | 18.232 |
| | 5795 | 159 | 20.01 | 22.30 | 19.98 | 18.311 | 20.201 | 18.373 |
| UNII4 | 5835 | 167 | 20.19 | 22.42 | 19.88 | 18.443 | 20.194 | 18.228 |
| | 5875 | 175 | 19.96 | 21.91 | 20.22 | 18.240 | 19.969 | 17.721 |

| Mode : HE40 52T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5190 | 38 | 21.99 | 23.49 | 20.63 | 18.140 | 19.832 | 18.126 |
| | 5230 | 46 | 21.07 | 23.43 | 20.42 | 18.118 | 19.636 | 17.968 |
| UNII2A | 5270 | 54 | 20.72 | 23.11 | 20.04 | 18.134 | 19.809 | 18.124 |
| | 5310 | 62 | 20.79 | 22.29 | 19.86 | 18.296 | 19.688 | 17.363 |
| UNII2C | 5510 | 102 | 20.52 | 23.40 | 20.10 | 18.156 | 19.577 | 17.924 |
| | 5590 | 118 | 20.58 | 22.59 | 20.13 | 18.139 | 19.954 | 18.109 |
| | 5710 | 142 | 20.87 | 23.77 | 20.58 | 18.189 | 19.689 | 18.220 |
| UNII3 | 5755 | 151 | 20.52 | 23.39 | 20.13 | 18.111 | 19.854 | 17.961 |
| | 5795 | 159 | 22.00 | 23.78 | 21.83 | 17.951 | 19.460 | 17.949 |
| UNII4 | 5835 | 167 | 21.83 | 22.93 | 20.23 | 18.252 | 19.731 | 18.097 |
| | 5875 | 175 | 20.49 | 23.55 | 22.58 | 18.304 | 20.012 | 17.980 |

| Mode : HE40 106T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5190 | 38 | 29.63 | 28.64 | 29.69 | 17.973 | 19.223 | 18.140 |
| | 5230 | 46 | 25.65 | 24.52 | 25.50 | 17.882 | 18.977 | 18.004 |
| UNII2A | 5270 | 54 | 25.32 | 22.95 | 25.37 | 17.977 | 19.268 | 18.020 |
| | 5310 | 62 | 29.41 | 22.87 | 22.90 | 17.900 | 19.139 | 17.930 |
| UNII2C | 5510 | 102 | 29.58 | 28.27 | 29.71 | 17.969 | 19.265 | 18.095 |
| | 5590 | 118 | 25.58 | 23.97 | 29.82 | 17.960 | 19.213 | 18.030 |
| | 5710 | 142 | 29.66 | 28.59 | 22.81 | 17.899 | 19.653 | 17.841 |
| UNII3 | 5755 | 151 | 29.67 | 28.27 | 25.27 | 18.000 | 19.130 | 18.081 |
| | 5795 | 159 | 29.48 | 28.38 | 29.42 | 17.998 | 19.223 | 18.059 |
| UNII4 | 5835 | 167 | 25.54 | 24.44 | 29.65 | 17.871 | 19.216 | 18.019 |
| | 5875 | 175 | 25.65 | 28.47 | 29.49 | 17.885 | 19.282 | 18.005 |

| Mode : HE40 242T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5190 | 38 | 33.48 | - | 33.42 | 19.480 | - | 19.360 |
| | 5230 | 46 | 33.76 | - | 33.44 | 19.589 | - | 19.411 |
| UNII2A | 5270 | 54 | 33.68 | - | 33.49 | 19.524 | - | 19.487 |
| | 5310 | 62 | 33.46 | - | 33.55 | 19.517 | - | 19.422 |
| UNII2C | 5510 | 102 | 33.60 | - | 33.38 | 19.506 | - | 19.356 |
| | 5590 | 118 | 33.72 | - | 33.50 | 19.505 | - | 19.408 |
| | 5710 | 142 | 33.74 | - | 33.41 | 19.492 | - | 19.410 |
| UNII3 | 5755 | 151 | 33.68 | - | 33.20 | 19.531 | - | 19.385 |
| | 5795 | 159 | 33.70 | - | 33.46 | 19.433 | - | 19.404 |
| UNII4 | 5835 | 167 | 33.70 | - | 33.62 | 19.522 | - | 19.490 |
| | 5875 | 175 | 33.96 | - | 33.59 | 19.491 | - | 19.657 |

| Mode : HE40 484T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5190 | 38 | - | 41.62 | - | - | 37.984 | - |
| | 5230 | 46 | - | 41.65 | - | - | 37.977 | - |
| UNII2A | 5270 | 54 | - | 41.64 | - | - | 37.953 | - |
| | 5310 | 62 | - | 41.56 | - | - | 37.981 | - |
| UNII2C | 5510 | 102 | - | 41.56 | - | - | 37.960 | - |
| | 5590 | 118 | - | 41.52 | - | - | 37.952 | - |
| | 5710 | 142 | - | 41.68 | - | - | 38.004 | - |
| UNII3 | 5755 | 151 | - | 41.54 | - | - | 37.982 | - |
| | 5795 | 159 | - | 41.63 | - | - | 37.981 | - |
| UNII4 | 5835 | 167 | - | 41.38 | - | - | 37.967 | - |
| | 5875 | 175 | - | 41.55 | - | - | 37.978 | - |

| Mode : HE40 SU | | | | | | | | |
|----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5190 | 38 | - | 42.91 | - | - | 37.949 | - |
| | 5230 | 46 | - | 41.93 | - | - | 37.928 | - |
| UNII2A | 5270 | 54 | - | 42.02 | - | - | 37.907 | - |
| | 5310 | 62 | - | 42.13 | - | - | 37.903 | - |
| UNII2C | 5510 | 102 | - | 42.38 | - | - | 37.944 | - |
| | 5590 | 118 | - | 42.04 | - | - | 37.912 | - |
| | 5710 | 142 | - | 42.06 | - | - | 37.941 | - |
| UNII3 | 5755 | 151 | - | 41.91 | - | - | 37.948 | - |
| | 5795 | 159 | - | 41.78 | - | - | 37.942 | - |
| UNII4 | 5835 | 167 | - | 42.47 | - | - | 37.952 | - |
| | 5875 | 175 | - | 42.17 | - | - | 37.931 | - |

| Mode : HE80 26T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | 21.70 | 77.75 | 22.07 | 19.305 | 74.680 | 19.818 |
| UNII2A | 5290 | 58 | 22.01 | 78.54 | 21.82 | 20.320 | 75.124 | 19.567 |
| UNII2C | 5530 | 106 | 22.00 | 77.35 | 23.45 | 19.134 | 74.354 | 20.369 |
| | 5610 | 122 | 22.04 | 77.75 | 22.15 | 19.809 | 74.798 | 20.040 |
| | 5690 | 138 | 21.76 | 78.26 | 21.82 | 19.918 | 75.422 | 19.657 |
| UNII3 | 5775 | 155 | 22.48 | 78.05 | 23.42 | 19.874 | 75.025 | 20.126 |
| UNII4 | 5855 | 171 | 21.73 | 78.31 | 22.83 | 20.075 | 75.277 | 19.848 |

| Mode : HE80 52T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | 23.84 | 21.76 | 22.86 | 19.846 | 19.386 | 19.343 |
| UNII2A | 5290 | 58 | 24.22 | 25.86 | 24.14 | 20.014 | 21.094 | 19.499 |
| UNII2C | 5530 | 106 | 24.73 | 25.77 | 23.53 | 19.227 | 21.172 | 19.591 |
| | 5610 | 122 | 25.11 | 25.98 | 24.78 | 19.805 | 21.390 | 19.791 |
| | 5690 | 138 | 23.26 | 26.13 | 23.08 | 20.137 | 21.751 | 19.359 |
| UNII3 | 5775 | 155 | 24.11 | 26.73 | 23.33 | 19.550 | 18.595 | 19.478 |
| UNII4 | 5855 | 171 | 24.31 | 26.58 | 23.57 | 19.695 | 21.139 | 19.599 |

| Mode : HE80 106T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | 24.11 | 23.78 | 24.56 | 19.062 | 19.140 | 18.881 |
| UNII2A | 5290 | 58 | 24.51 | 25.69 | 24.03 | 18.802 | 19.202 | 18.932 |
| UNII2C | 5530 | 106 | 23.59 | 25.12 | 24.32 | 18.700 | 19.245 | 19.072 |
| | 5610 | 122 | 24.03 | 24.43 | 23.83 | 18.757 | 19.217 | 18.790 |
| | 5690 | 138 | 24.95 | 24.41 | 23.16 | 19.103 | 18.919 | 18.708 |
| UNII3 | 5775 | 155 | 22.70 | 23.37 | 23.50 | 18.612 | 18.938 | 18.540 |
| UNII4 | 5855 | 171 | 23.27 | 25.45 | 24.59 | 18.760 | 19.321 | 18.895 |

| Mode : HE80 242T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | 32.43 | 33.43 | 31.53 | 21.222 | 20.876 | 20.500 |
| UNII2A | 5290 | 58 | 31.17 | 35.71 | 31.17 | 20.738 | 21.299 | 20.685 |
| UNII2C | 5530 | 106 | 32.20 | 34.60 | 32.59 | 21.057 | 20.883 | 20.826 |
| | 5610 | 122 | 32.04 | 32.58 | 32.21 | 21.203 | 20.529 | 20.654 |
| | 5690 | 138 | 31.72 | 31.40 | 35.19 | 21.124 | 20.551 | 21.655 |
| UNII3 | 5775 | 155 | 32.12 | 34.70 | 34.07 | 21.488 | 21.357 | 20.684 |
| UNII4 | 5855 | 171 | 32.26 | 36.34 | 32.06 | 21.007 | 21.463 | 20.817 |

| Mode : HE80 484T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | 69.49 | - | 69.49 | 42.104 | - | 40.330 |
| UNII2A | 5290 | 58 | 69.34 | - | 69.51 | 41.165 | - | 40.963 |
| UNII2C | 5530 | 106 | 69.47 | - | 69.65 | 41.084 | - | 41.185 |
| | 5610 | 122 | 69.90 | - | 69.68 | 41.897 | - | 41.301 |
| | 5690 | 138 | 68.88 | - | 70.43 | 41.800 | - | 41.941 |
| UNII3 | 5775 | 155 | 69.34 | - | 69.70 | 43.025 | - | 40.633 |
| UNII4 | 5855 | 171 | 69.49 | - | 69.70 | 41.392 | - | 41.263 |

| Mode : HE80 996T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | - | 87.30 | - | - | 77.712 | - |
| UNII2A | 5290 | 58 | - | 87.55 | - | - | 77.807 | - |
| UNII2C | 5530 | 106 | - | 87.24 | - | - | 77.733 | - |
| | 5610 | 122 | - | 86.87 | - | - | 77.747 | - |
| | 5690 | 138 | - | 87.27 | - | - | 77.795 | - |
| UNII3 | 5775 | 155 | - | 87.59 | - | - | 77.753 | - |
| UNII4 | 5855 | 171 | - | 87.40 | - | - | 77.758 | - |

| Mode : HE80 SU | | | | | | | | |
|----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII1 | 5210 | 42 | - | 88.08 | - | - | 77.968 | - |
| UNII2A | 5290 | 58 | - | 90.10 | - | - | 77.857 | - |
| UNII2C | 5530 | 106 | - | 87.39 | - | - | 77.896 | - |
| | 5610 | 122 | - | 87.80 | - | - | 77.907 | - |
| | 5690 | 138 | - | 87.47 | - | - | 77.802 | - |
| UNII3 | 5775 | 155 | - | 89.33 | - | - | 77.811 | - |
| UNII4 | 5855 | 171 | - | 88.32 | - | - | 77.838 | - |

Mode : HE160(80L)

| Band | Tone | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
|-----------|------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| | | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII 1-2A | 26T | 5250 | 50 | 24.66 | 77.74 | 24.82 | 22.171 | 74.135 | 24.420 |
| UNII 2C | | 5570 | 114 | 25.13 | 79.23 | 24.78 | 21.816 | 75.549 | 24.498 |
| UNII 3-4 | | 5815 | 163 | 26.67 | 76.79 | 25.83 | 21.895 | 73.301 | 25.896 |
| UNII 1-2A | 52T | 5250 | 50 | 25.82 | 28.69 | 27.05 | 22.849 | 25.290 | 25.187 |
| UNII 2C | | 5570 | 114 | 30.10 | 29.57 | 32.40 | 22.391 | 25.099 | 25.036 |
| UNII 3-4 | | 5815 | 163 | 26.58 | 30.06 | 32.48 | 22.124 | 25.145 | 26.871 |
| UNII 1-2A | 106T | 5250 | 50 | 32.46 | 36.58 | 31.08 | 22.244 | 23.312 | 23.194 |
| UNII 2C | | 5570 | 114 | 31.32 | 34.59 | 33.18 | 21.608 | 23.162 | 23.118 |
| UNII 3-4 | | 5815 | 163 | 32.77 | 29.73 | 33.07 | 22.789 | 21.682 | 23.237 |
| UNII 1-2A | 242T | 5250 | 50 | 42.55 | 48.11 | 42.92 | 27.445 | 27.182 | 25.393 |
| UNII 2C | | 5570 | 114 | 40.20 | 45.02 | 39.83 | 25.561 | 25.620 | 25.231 |
| UNII 3-4 | | 5815 | 163 | 47.30 | 49.70 | 40.64 | 29.989 | 26.658 | 24.857 |
| UNII 1-2A | 484T | 5250 | 50 | 63.24 | - | 72.72 | 40.300 | - | 43.487 |
| UNII 2C | | 5570 | 114 | 61.32 | - | 72.41 | 40.226 | - | 43.798 |
| UNII 3-4 | | 5815 | 163 | 62.82 | - | 73.44 | 40.052 | - | 43.312 |
| UNII 1-2A | 996T | 5250 | 50 | - | 113.9 | - | - | 79.046 | - |
| UNII 2C | | 5570 | 114 | - | 110.3 | - | - | 79.015 | - |
| UNII 3-4 | | 5815 | 163 | - | 115.9 | - | - | 79.362 | - |

Mode : HE160(80U)

| Band | Tone | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
|-----------|------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| | | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII 1-2A | 26T | 5250 | 50 | 19.20 | 75.86 | 25.69 | 18.770 | 72.460 | 22.488 |
| UNII 2C | | 5570 | 114 | 26.59 | 77.44 | 25.57 | 25.660 | 74.158 | 22.103 |
| UNII 3-4 | | 5815 | 163 | 26.16 | 78.57 | 15.79 | 25.964 | 75.050 | 23.143 |
| UNII 1-2A | 52T | 5250 | 50 | 28.70 | 32.08 | 28.80 | 25.556 | 26.408 | 22.169 |
| UNII 2C | | 5570 | 114 | 30.54 | 32.69 | 26.97 | 27.730 | 27.996 | 21.857 |
| UNII 3-4 | | 5815 | 163 | 30.65 | 31.58 | 24.45 | 24.962 | 27.882 | 21.261 |
| UNII 1-2A | 106T | 5250 | 50 | 35.35 | 34.19 | 31.33 | 23.946 | 23.548 | 20.874 |
| UNII 2C | | 5570 | 114 | 33.67 | 34.68 | 33.69 | 24.048 | 23.616 | 21.164 |
| UNII 3-4 | | 5815 | 163 | 36.27 | 35.05 | 25.31 | 23.724 | 24.521 | 20.615 |
| UNII 1-2A | 242T | 5250 | 50 | 44.27 | 45.00 | 41.21 | 24.690 | 24.949 | 26.988 |
| UNII 2C | | 5570 | 114 | 44.14 | 50.59 | 43.39 | 25.319 | 27.398 | 29.021 |
| UNII 3-4 | | 5815 | 163 | 43.67 | 43.92 | 42.71 | 25.586 | 24.837 | 27.132 |
| UNII 1-2A | 484T | 5250 | 50 | 69.97 | - | 70.77 | 42.904 | - | 43.791 |
| UNII 2C | | 5570 | 114 | 71.06 | - | 66.05 | 42.291 | - | 44.913 |
| UNII 3-4 | | 5815 | 163 | 68.16 | - | 68.30 | 41.754 | - | 44.611 |
| UNII 1-2A | 996T | 5250 | 50 | - | 98.01 | - | - | 78.446 | - |
| UNII 2C | | 5570 | 114 | - | 104.5 | - | - | 78.800 | - |
| UNII 3-4 | | 5815 | 163 | - | 100.4 | - | - | 78.497 | - |

| Mode : HE160 | | | | | | | | | |
|--------------|--------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 | ANT1 |
| UNII 1-2A | SU | 5250 | 50 | - | 170.1 | - | - | 157.00 | - |
| UNII 2C | | 5570 | 114 | - | 174.2 | - | - | 157.03 | - |
| UNII 3-4 | | 5815 | 163 | - | 172.1 | - | - | 156.93 | - |
| UNII 1-2A | 2x996T | 5250 | 50 | - | 173.1 | - | - | 156.81 | - |
| UNII 2C | | 5570 | 114 | - | 173.1 | - | - | 157.06 | - |
| UNII 3-4 | | 5815 | 163 | - | 172.3 | - | - | 156.96 | - |

10.2.2 Ant.2

| Mode : HE20 26T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5180 | 36 | 19.50 | 18.38 | 19.64 | 18.263 | 17.012 | 18.009 |
| | 5200 | 40 | 19.60 | 17.55 | 19.66 | 17.953 | 16.161 | 18.111 |
| | 5240 | 48 | 19.55 | 18.18 | 19.79 | 18.164 | 16.670 | 18.292 |
| UNII2A | 5260 | 52 | 19.10 | 18.20 | 19.72 | 17.699 | 17.029 | 18.104 |
| | 5300 | 60 | 19.48 | 18.15 | 19.50 | 18.105 | 16.952 | 18.212 |
| | 5320 | 64 | 19.77 | 18.44 | 19.54 | 18.259 | 17.005 | 18.030 |
| UNII2C | 5500 | 100 | 19.68 | 18.21 | 19.58 | 17.982 | 16.992 | 18.085 |
| | 5600 | 120 | 19.69 | 18.00 | 19.55 | 18.202 | 16.015 | 18.332 |
| | 5720 | 144 | 19.64 | 18.24 | 19.58 | 18.197 | 16.719 | 18.188 |
| UNII3 | 5745 | 149 | 19.38 | 17.92 | 19.55 | 17.974 | 16.349 | 18.161 |
| | 5785 | 157 | 19.54 | 17.60 | 19.67 | 18.034 | 16.125 | 18.170 |
| | 5825 | 165 | 19.78 | 18.09 | 19.51 | 18.324 | 17.017 | 18.049 |
| UNII4 | 5845 | 169 | 19.65 | 18.16 | 19.54 | 18.138 | 16.783 | 18.004 |
| | 5865 | 173 | 19.64 | 17.60 | 19.48 | 16.838 | 16.006 | 18.308 |
| | 5885 | 177 | 19.56 | 18.01 | 19.59 | 17.934 | 16.692 | 18.262 |

| Mode : HE20 52T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5180 | 36 | 19.61 | 18.46 | 19.05 | 18.096 | 17.049 | 17.780 |
| | 5200 | 40 | 19.92 | 18.37 | 20.09 | 18.240 | 17.054 | 18.174 |
| | 5240 | 48 | 20.10 | 18.63 | 19.89 | 17.855 | 16.801 | 18.159 |
| UNII2A | 5260 | 52 | 19.96 | 18.16 | 19.83 | 17.892 | 16.882 | 17.913 |
| | 5300 | 60 | 19.92 | 18.42 | 20.10 | 17.080 | 16.827 | 17.971 |
| | 5320 | 64 | 19.87 | 18.33 | 19.08 | 17.730 | 17.021 | 17.388 |
| UNII2C | 5500 | 100 | 19.63 | 18.63 | 19.93 | 18.112 | 16.629 | 18.182 |
| | 5600 | 120 | 19.81 | 18.26 | 19.88 | 18.259 | 17.056 | 18.178 |
| | 5720 | 144 | 19.59 | 18.02 | 19.57 | 18.160 | 16.203 | 18.127 |
| UNII3 | 5745 | 149 | 19.91 | 18.74 | 19.73 | 18.239 | 17.051 | 18.140 |
| | 5785 | 157 | 20.09 | 18.32 | 19.95 | 18.118 | 16.768 | 18.125 |
| | 5825 | 165 | 19.68 | 17.97 | 19.27 | 18.167 | 16.515 | 17.862 |
| UNII4 | 5845 | 169 | 20.10 | 18.58 | 19.67 | 18.232 | 16.960 | 18.160 |
| | 5865 | 173 | 19.74 | 18.67 | 19.48 | 18.192 | 16.363 | 18.154 |
| | 5885 | 177 | 19.91 | 18.05 | 19.74 | 18.158 | 17.005 | 18.176 |

| Mode : HE20 106T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5180 | 36 | 19.79 | - | 19.88 | 18.220 | - | 18.262 |
| | 5200 | 40 | 20.13 | - | 20.13 | 18.178 | - | 18.258 |
| | 5240 | 48 | 20.05 | - | 20.08 | 18.221 | - | 17.912 |
| UNII2A | 5260 | 52 | 20.31 | - | 20.07 | 18.245 | - | 18.194 |
| | 5300 | 60 | 20.21 | - | 20.09 | 18.232 | - | 18.206 |
| | 5320 | 64 | 20.21 | - | 20.02 | 18.220 | - | 18.149 |
| UNII2C | 5500 | 100 | 20.14 | - | 19.61 | 18.218 | - | 18.205 |
| | 5600 | 120 | 20.31 | - | 19.94 | 18.151 | - | 18.202 |
| | 5720 | 144 | 20.07 | - | 19.84 | 18.191 | - | 18.279 |
| UNII3 | 5745 | 149 | 20.13 | - | 19.80 | 18.067 | - | 18.278 |
| | 5785 | 157 | 20.11 | - | 20.14 | 18.031 | - | 18.131 |
| | 5825 | 165 | 19.67 | - | 20.09 | 18.204 | - | 18.232 |
| UNII4 | 5845 | 169 | 19.98 | - | 20.04 | 18.171 | - | 18.288 |
| | 5865 | 173 | 20.12 | - | 20.05 | 18.203 | - | 18.265 |
| | 5885 | 177 | 19.89 | - | 19.90 | 18.155 | - | 18.057 |

| Mode : HE20 242T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5180 | 36 | - | 21.15 | - | - | 19.011 | - |
| | 5200 | 40 | - | 21.05 | - | - | 19.013 | - |
| | 5240 | 48 | - | 21.02 | - | - | 18.992 | - |
| UNII2A | 5260 | 52 | - | 20.75 | - | - | 18.986 | - |
| | 5300 | 60 | - | 21.15 | - | - | 18.983 | - |
| | 5320 | 64 | - | 21.02 | - | - | 18.992 | - |
| UNII2C | 5500 | 100 | - | 21.03 | - | - | 19.019 | - |
| | 5600 | 120 | - | 20.98 | - | - | 19.024 | - |
| | 5720 | 144 | - | 21.02 | - | - | 19.005 | - |
| UNII3 | 5745 | 149 | - | 20.95 | - | - | 19.030 | - |
| | 5785 | 157 | - | 20.98 | - | - | 19.018 | - |
| | 5825 | 165 | - | 20.95 | - | - | 19.005 | - |
| UNII4 | 5845 | 169 | - | 21.03 | - | - | 18.995 | - |
| | 5865 | 173 | - | 21.12 | - | - | 19.082 | - |
| | 5885 | 177 | - | 20.92 | - | - | 18.985 | - |

| Mode : HE20 SU | | | | | | | | |
|----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5180 | 36 | - | 21.40 | - | - | 19.009 | - |
| | 5200 | 40 | - | 21.30 | - | - | 19.054 | - |
| | 5240 | 48 | - | 21.22 | - | - | 19.039 | - |
| UNII2A | 5260 | 52 | - | 21.22 | - | - | 19.004 | - |
| | 5300 | 60 | - | 21.21 | - | - | 19.047 | - |
| | 5320 | 64 | - | 21.34 | - | - | 19.020 | - |
| UNII2C | 5500 | 100 | - | 21.42 | - | - | 19.027 | - |
| | 5600 | 120 | - | 21.41 | - | - | 19.001 | - |
| | 5720 | 144 | - | 21.24 | - | - | 19.022 | - |
| UNII3 | 5745 | 149 | - | 21.72 | - | - | 19.020 | - |
| | 5785 | 157 | - | 21.39 | - | - | 19.026 | - |
| | 5825 | 165 | - | 21.17 | - | - | 19.014 | - |
| UNII4 | 5845 | 169 | - | 21.34 | - | - | 18.999 | - |
| | 5865 | 173 | - | 21.15 | - | - | 19.028 | - |
| | 5885 | 177 | - | 21.39 | - | - | 18.998 | - |

| Mode : HE40 26T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5190 | 38 | 20.15 | 22.21 | 19.86 | 18.274 | 19.840 | 18.410 |
| | 5230 | 46 | 19.80 | 21.69 | 19.88 | 18.423 | 18.924 | 18.382 |
| UNII2A | 5270 | 54 | 19.88 | 22.58 | 20.03 | 18.307 | 19.934 | 18.349 |
| | 5310 | 62 | 19.86 | 22.36 | 21.37 | 18.247 | 19.932 | 18.373 |
| UNII2C | 5510 | 102 | 20.13 | 22.52 | 20.09 | 18.467 | 20.309 | 17.837 |
| | 5590 | 118 | 19.63 | 23.02 | 19.69 | 18.152 | 20.121 | 18.302 |
| | 5710 | 142 | 19.77 | 21.73 | 20.00 | 18.228 | 20.042 | 18.322 |
| UNII3 | 5755 | 151 | 19.89 | 22.39 | 19.68 | 18.285 | 19.510 | 18.297 |
| | 5795 | 159 | 19.84 | 22.06 | 20.19 | 18.271 | 20.231 | 18.414 |
| UNII4 | 5835 | 167 | 19.94 | 22.10 | 20.13 | 18.300 | 20.055 | 18.269 |
| | 5875 | 175 | 20.03 | 23.12 | 20.03 | 18.454 | 20.918 | 18.487 |

| Mode : HE40 52T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5190 | 38 | 21.99 | 23.36 | 21.77 | 18.109 | 19.699 | 18.090 |
| | 5230 | 46 | 22.83 | 22.91 | 20.14 | 18.204 | 19.724 | 17.680 |
| UNII2A | 5270 | 54 | 22.19 | 23.28 | 22.64 | 18.030 | 19.803 | 17.006 |
| | 5310 | 62 | 20.75 | 22.32 | 20.34 | 18.158 | 18.998 | 18.127 |
| UNII2C | 5510 | 102 | 22.25 | 23.58 | 22.85 | 18.259 | 19.572 | 17.360 |
| | 5590 | 118 | 20.52 | 23.66 | 21.92 | 18.004 | 19.898 | 18.118 |
| | 5710 | 142 | 20.62 | 23.15 | 22.26 | 17.869 | 19.729 | 18.147 |
| UNII3 | 5755 | 151 | 22.17 | 22.64 | 20.83 | 17.993 | 19.936 | 18.262 |
| | 5795 | 159 | 20.62 | 22.75 | 20.14 | 17.621 | 19.805 | 17.997 |
| UNII4 | 5835 | 167 | 22.11 | 22.99 | 19.90 | 18.165 | 19.790 | 18.069 |
| | 5875 | 175 | 22.12 | 23.59 | 20.66 | 18.150 | 19.560 | 18.202 |

| Mode : HE40 106T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5190 | 38 | 29.59 | 28.35 | 23.15 | 17.701 | 19.197 | 17.885 |
| | 5230 | 46 | 29.67 | 28.34 | 29.28 | 17.844 | 19.178 | 17.922 |
| UNII2A | 5270 | 54 | 29.64 | 22.84 | 29.77 | 17.979 | 19.238 | 17.976 |
| | 5310 | 62 | 29.56 | 28.55 | 29.69 | 17.952 | 19.239 | 17.955 |
| UNII2C | 5510 | 102 | 25.64 | 28.33 | 22.82 | 17.957 | 19.100 | 18.122 |
| | 5590 | 118 | 29.85 | 23.32 | 29.65 | 18.011 | 19.345 | 18.030 |
| | 5710 | 142 | 29.81 | 24.45 | 25.62 | 17.926 | 19.121 | 18.138 |
| UNII3 | 5755 | 151 | 29.61 | 28.23 | 29.40 | 17.930 | 19.045 | 18.017 |
| | 5795 | 159 | 29.45 | 24.28 | 29.44 | 17.976 | 19.161 | 17.916 |
| UNII4 | 5835 | 167 | 25.55 | 23.28 | 29.43 | 17.981 | 19.039 | 18.069 |
| | 5875 | 175 | 29.83 | 24.04 | 29.64 | 17.948 | 18.920 | 17.959 |

| Mode : HE40 242T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5190 | 38 | 33.74 | - | 32.99 | 19.499 | - | 19.368 |
| | 5230 | 46 | 33.67 | - | 33.55 | 19.537 | - | 19.374 |
| UNII2A | 5270 | 54 | 33.74 | - | 33.34 | 19.489 | - | 19.475 |
| | 5310 | 62 | 33.73 | - | 33.52 | 19.455 | - | 19.514 |
| UNII2C | 5510 | 102 | 33.66 | - | 33.63 | 19.510 | - | 19.463 |
| | 5590 | 118 | 30.50 | - | 33.42 | 19.604 | - | 19.605 |
| | 5710 | 142 | 33.50 | - | 33.60 | 19.620 | - | 19.412 |
| UNII3 | 5755 | 151 | 33.63 | - | 33.42 | 19.526 | - | 19.416 |
| | 5795 | 159 | 33.59 | - | 33.56 | 19.467 | - | 19.553 |
| UNII4 | 5835 | 167 | 33.60 | - | 33.56 | 19.512 | - | 19.450 |
| | 5875 | 175 | 33.60 | - | 33.50 | 19.423 | - | 19.482 |

| Mode : HE40 484T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5190 | 38 | - | 41.29 | - | - | 37.937 | - |
| | 5230 | 46 | - | 41.60 | - | - | 37.967 | - |
| UNII2A | 5270 | 54 | - | 41.55 | - | - | 37.988 | - |
| | 5310 | 62 | - | 41.62 | - | - | 38.009 | - |
| UNII2C | 5510 | 102 | - | 41.60 | - | - | 37.968 | - |
| | 5590 | 118 | - | 41.56 | - | - | 37.930 | - |
| | 5710 | 142 | - | 41.24 | - | - | 37.953 | - |
| UNII3 | 5755 | 151 | - | 41.55 | - | - | 37.961 | - |
| | 5795 | 159 | - | 41.36 | - | - | 37.982 | - |
| UNII4 | 5835 | 167 | - | 41.55 | - | - | 37.947 | - |
| | 5875 | 175 | - | 41.54 | - | - | 37.988 | - |

| Mode : HE40 SU | | | | | | | | |
|----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5190 | 38 | - | 42.06 | - | - | 37.916 | - |
| | 5230 | 46 | - | 42.51 | - | - | 37.903 | - |
| UNII2A | 5270 | 54 | - | 41.78 | - | - | 37.927 | - |
| | 5310 | 62 | - | 41.88 | - | - | 37.936 | - |
| UNII2C | 5510 | 102 | - | 42.13 | - | - | 37.957 | - |
| | 5590 | 118 | - | 41.47 | - | - | 37.927 | - |
| | 5710 | 142 | - | 42.41 | - | - | 37.923 | - |
| UNII3 | 5755 | 151 | - | 41.99 | - | - | 37.944 | - |
| | 5795 | 159 | - | 42.19 | - | - | 37.951 | - |
| UNII4 | 5835 | 167 | - | 42.09 | - | - | 37.941 | - |
| | 5875 | 175 | - | 41.84 | - | - | 37.922 | - |

| Mode : HE80 26T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | 22.29 | 78.28 | 21.67 | 20.178 | 75.191 | 20.137 |
| UNII2A | 5290 | 58 | 23.01 | 78.42 | 21.86 | 20.191 | 75.230 | 19.909 |
| UNII2C | 5530 | 106 | 21.81 | 77.57 | 21.21 | 19.966 | 75.044 | 19.310 |
| | 5610 | 122 | 22.91 | 78.40 | 22.68 | 19.987 | 75.280 | 19.955 |
| | 5690 | 138 | 22.19 | 78.35 | 21.89 | 19.943 | 75.393 | 19.682 |
| UNII3 | 5775 | 155 | 21.54 | 77.85 | 22.58 | 18.980 | 74.872 | 19.803 |
| UNII4 | 5855 | 171 | 23.02 | 78.02 | 23.30 | 20.310 | 74.699 | 20.040 |

| Mode : HE80 52T | | | | | | | | |
|-----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | 25.06 | 24.76 | 24.78 | 20.091 | 20.623 | 19.625 |
| UNII2A | 5290 | 58 | 23.33 | 24.77 | 24.07 | 19.998 | 21.207 | 19.682 |
| UNII2C | 5530 | 106 | 24.35 | 25.47 | 24.29 | 19.768 | 20.984 | 19.834 |
| | 5610 | 122 | 24.60 | 25.29 | 24.67 | 19.710 | 20.902 | 19.405 |
| | 5690 | 138 | 24.79 | 26.64 | 22.55 | 19.905 | 21.289 | 19.177 |
| UNII3 | 5775 | 155 | 25.43 | 26.16 | 23.95 | 20.412 | 21.164 | 19.531 |
| UNII4 | 5855 | 171 | 24.80 | 26.66 | 23.59 | 20.015 | 21.385 | 19.687 |

| Mode : HE80 106T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | 24.86 | 24.47 | 24.53 | 18.848 | 19.170 | 19.030 |
| UNII2A | 5290 | 58 | 23.53 | 22.95 | 23.51 | 19.013 | 19.221 | 18.870 |
| UNII2C | 5530 | 106 | 25.21 | 27.72 | 23.85 | 19.093 | 19.206 | 18.918 |
| | 5610 | 122 | 24.77 | 27.18 | 22.42 | 18.716 | 19.654 | 18.925 |
| | 5690 | 138 | 25.06 | 26.71 | 25.85 | 19.066 | 19.125 | 19.043 |
| UNII3 | 5775 | 155 | 23.28 | 24.91 | 22.73 | 18.789 | 19.380 | 18.820 |
| UNII4 | 5855 | 171 | 23.26 | 25.96 | 24.43 | 18.797 | 19.059 | 18.770 |

| Mode : HE80 242T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | 32.83 | 32.53 | 30.84 | 21.320 | 20.816 | 20.684 |
| UNII2A | 5290 | 58 | 32.05 | 35.27 | 31.70 | 20.926 | 21.190 | 20.588 |
| UNII2C | 5530 | 106 | 31.92 | 34.64 | 31.68 | 21.269 | 20.938 | 20.714 |
| | 5610 | 122 | 31.94 | 32.37 | 31.83 | 21.328 | 20.690 | 20.834 |
| | 5690 | 138 | 32.57 | 28.59 | 35.93 | 21.069 | 20.532 | 21.818 |
| UNII3 | 5775 | 155 | 33.44 | 33.23 | 34.61 | 21.285 | 20.874 | 21.058 |
| UNII4 | 5855 | 171 | 31.96 | 35.95 | 31.86 | 21.117 | 21.374 | 20.827 |

| Mode : HE80 484T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | 68.80 | - | 69.52 | 42.323 | - | 40.540 |
| UNII2A | 5290 | 58 | 69.47 | - | 69.33 | 42.355 | - | 40.572 |
| UNII2C | 5530 | 106 | 69.32 | - | 69.40 | 43.266 | - | 40.826 |
| | 5610 | 122 | 69.55 | - | 69.78 | 41.524 | - | 40.402 |
| | 5690 | 138 | 68.91 | - | 69.54 | 41.873 | - | 40.918 |
| UNII3 | 5775 | 155 | 68.86 | - | 69.48 | 41.779 | - | 41.329 |
| UNII4 | 5855 | 171 | 69.38 | - | 69.97 | 42.035 | - | 40.816 |

| Mode : HE80 996T | | | | | | | | |
|------------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | - | 86.72 | - | - | 77.796 | - |
| UNII2A | 5290 | 58 | - | 86.85 | - | - | 77.809 | - |
| UNII2C | 5530 | 106 | - | 86.59 | - | - | 77.791 | - |
| | 5610 | 122 | - | 86.80 | - | - | 77.732 | - |
| | 5690 | 138 | - | 85.82 | - | - | 77.785 | - |
| UNII3 | 5775 | 155 | - | 86.92 | - | - | 77.762 | - |
| UNII4 | 5855 | 171 | - | 86.58 | - | - | 77.780 | - |

| Mode : HE80 SU | | | | | | | | |
|----------------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII1 | 5210 | 42 | - | 88.64 | - | - | 77.908 | - |
| UNII2A | 5290 | 58 | - | 87.63 | - | - | 77.913 | - |
| UNII2C | 5530 | 106 | - | 87.16 | - | - | 77.854 | - |
| | 5610 | 122 | - | 88.10 | - | - | 77.889 | - |
| | 5690 | 138 | - | 89.92 | - | - | 77.985 | - |
| UNII3 | 5775 | 155 | - | 86.38 | - | - | 77.934 | - |
| UNII4 | 5855 | 171 | - | 88.23 | - | - | 77.826 | - |

Mode : HE160(80L)

| Band | Tone | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
|-----------|------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| | | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII 1-2A | 26T | 5250 | 50 | 24.41 | 79.36 | 27.01 | 22.144 | 75.495 | 26.420 |
| UNII 2C | | 5570 | 114 | 26.71 | 78.87 | 26.43 | 22.298 | 75.512 | 24.984 |
| UNII 3-4 | | 5815 | 163 | 26.37 | 78.15 | 28.61 | 22.576 | 74.988 | 25.345 |
| UNII 1-2A | 52T | 5250 | 50 | 21.71 | 30.77 | 29.05 | 20.815 | 25.648 | 24.740 |
| UNII 2C | | 5570 | 114 | 24.57 | 27.87 | 28.49 | 21.619 | 24.474 | 25.622 |
| UNII 3-4 | | 5815 | 163 | 24.48 | 26.49 | 30.24 | 21.200 | 24.841 | 24.898 |
| UNII 1-2A | 106T | 5250 | 50 | 32.74 | 26.25 | 30.63 | 21.637 | 22.129 | 23.309 |
| UNII 2C | | 5570 | 114 | 26.06 | 32.01 | 36.30 | 21.545 | 22.510 | 22.659 |
| UNII 3-4 | | 5815 | 163 | 31.29 | 29.76 | 35.56 | 22.942 | 22.750 | 22.382 |
| UNII 1-2A | 242T | 5250 | 50 | 39.83 | 48.58 | 40.70 | 26.049 | 26.511 | 24.538 |
| UNII 2C | | 5570 | 114 | 39.42 | 42.48 | 39.42 | 25.293 | 25.966 | 25.119 |
| UNII 3-4 | | 5815 | 163 | 45.30 | 74.03 | 40.05 | 28.637 | 26.290 | 24.822 |
| UNII 1-2A | 484T | 5250 | 50 | 86.85 | - | 70.74 | 40.131 | - | 42.417 |
| UNII 2C | | 5570 | 114 | 87.50 | - | 71.05 | 40.290 | - | 42.164 |
| UNII 3-4 | | 5815 | 163 | 87.75 | - | 71.03 | 39.845 | - | 42.531 |
| UNII 1-2A | 996T | 5250 | 50 | - | 113.7 | - | - | 79.031 | - |
| UNII 2C | | 5570 | 114 | - | 108.3 | - | - | 78.709 | - |
| UNII 3-4 | | 5815 | 163 | - | 108.0 | - | - | 78.740 | - |

Mode : HE160(80U)

| Band | Tone | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
|-----------|------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| | | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII 1-2A | 26T | 5250 | 50 | 25.61 | 78.35 | 27.41 | 24.821 | 74.600 | 24.907 |
| UNII 2C | | 5570 | 114 | 26.24 | 78.80 | 28.01 | 25.680 | 75.299 | 22.979 |
| UNII 3-4 | | 5815 | 163 | 27.80 | 77.00 | 26.11 | 25.978 | 74.081 | 23.444 |
| UNII 1-2A | 52T | 5250 | 50 | 25.46 | 28.23 | 28.04 | 23.138 | 21.655 | 21.950 |
| UNII 2C | | 5570 | 114 | 33.32 | 32.23 | 26.80 | 26.094 | 28.245 | 21.711 |
| UNII 3-4 | | 5815 | 163 | 29.59 | 31.18 | 28.11 | 26.129 | 27.469 | 22.189 |
| UNII 1-2A | 106T | 5250 | 50 | 32.17 | 35.19 | 34.63 | 24.452 | 24.562 | 21.816 |
| UNII 2C | | 5570 | 114 | 34.97 | 32.71 | 31.85 | 23.910 | 24.612 | 21.043 |
| UNII 3-4 | | 5815 | 163 | 32.15 | 32.67 | 30.14 | 22.947 | 23.571 | 20.786 |
| UNII 1-2A | 242T | 5250 | 50 | 42.19 | 48.63 | 41.44 | 24.061 | 26.554 | 27.471 |
| UNII 2C | | 5570 | 114 | 43.92 | 52.36 | 47.21 | 25.647 | 26.949 | 29.910 |
| UNII 3-4 | | 5815 | 163 | 43.33 | 42.31 | 42.20 | 24.637 | 25.245 | 28.526 |
| UNII 1-2A | 484T | 5250 | 50 | 69.53 | - | 91.02 | 43.111 | - | 45.742 |
| UNII 2C | | 5570 | 114 | 69.16 | - | 85.10 | 41.871 | - | 45.330 |
| UNII 3-4 | | 5815 | 163 | 66.34 | - | 87.08 | 42.043 | - | 45.981 |
| UNII 1-2A | 996T | 5250 | 50 | - | 100.5 | - | - | 78.560 | - |
| UNII 2C | | 5570 | 114 | - | 98.56 | - | - | 78.491 | - |
| UNII 3-4 | | 5815 | 163 | - | 103.4 | - | - | 78.513 | - |

| Mode : HE160 | | | | | | | | | |
|--------------|--------|-------------|-----|----------------------|----------------|-----------------|------------------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 26dB Bandwidth [MHz] | | | 99% Occupied Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 | ANT2 |
| UNII 1-2A | SU | 5250 | 50 | - | 171.1 | - | - | 156.99 | - |
| UNII 2C | | 5570 | 114 | - | 172.6 | - | - | 157.11 | - |
| UNII 3-4 | | 5815 | 163 | - | 171.4 | - | - | 157.07 | - |
| UNII 1-2A | 2x996T | 5250 | 50 | - | 172.1 | - | - | 157.16 | - |
| UNII 2C | | 5570 | 114 | - | 172.4 | - | - | 157.18 | - |
| UNII 3-4 | | 5815 | 163 | - | 171.9 | - | - | 157.10 | - |

Test Plots

[Ant.1]


Bandwidth 20M Ch.100(5500 MHz) SU




Bandwidth 40M Ch.38(5190 MHz) SU



Bandwidth 80M Ch.58(5290 MHz) SU

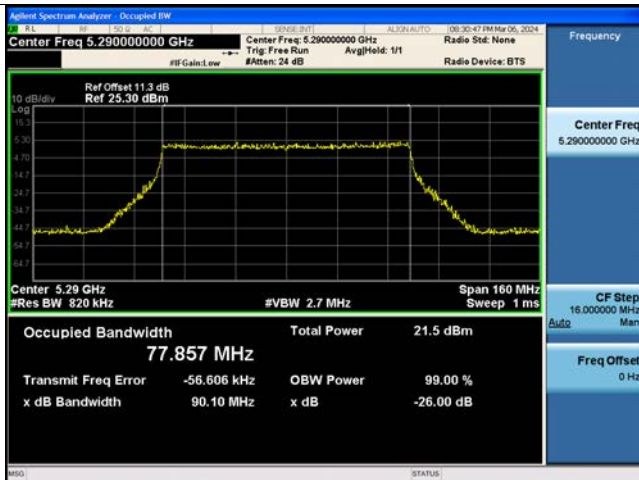

Bandwidth 160M_SU Ch.114(5570 MHz)

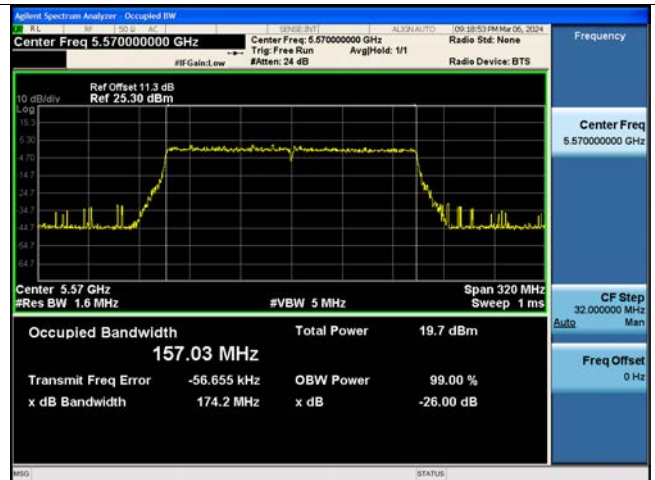



Note:

In order to simplify the report, attached plots were only the widest channel per channel bandwidth.

[Ant.2]


Bandwidth 20M Ch.149(5745 MHz) SU

Bandwidth 40M Ch.46(5230 MHz) SU

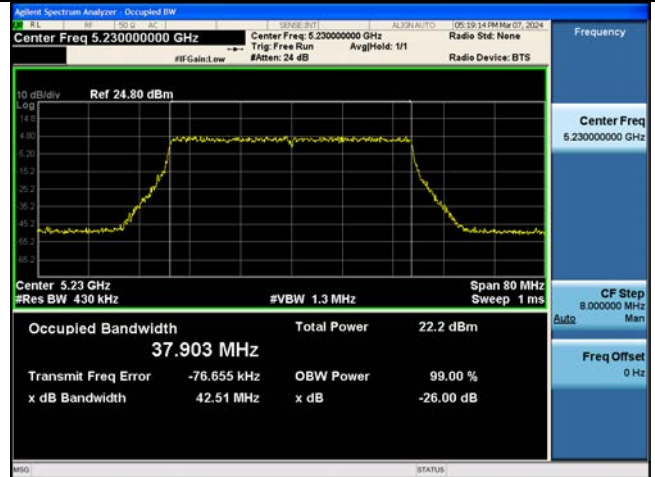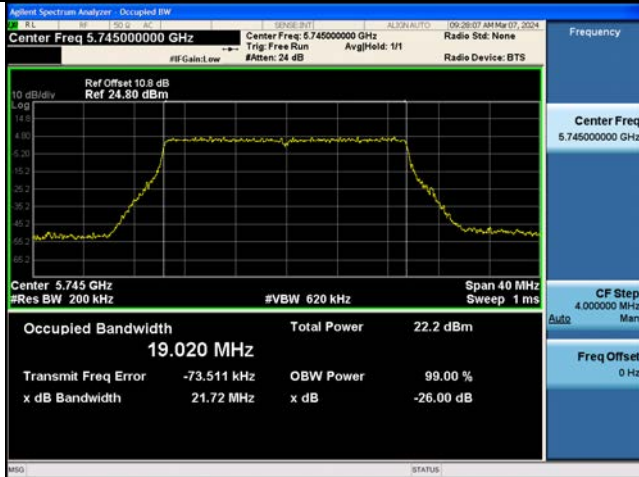

Bandwidth 80M Ch.138(5690 MHz) SU

Bandwidth 160M_SU Ch.114(5570 MHz)

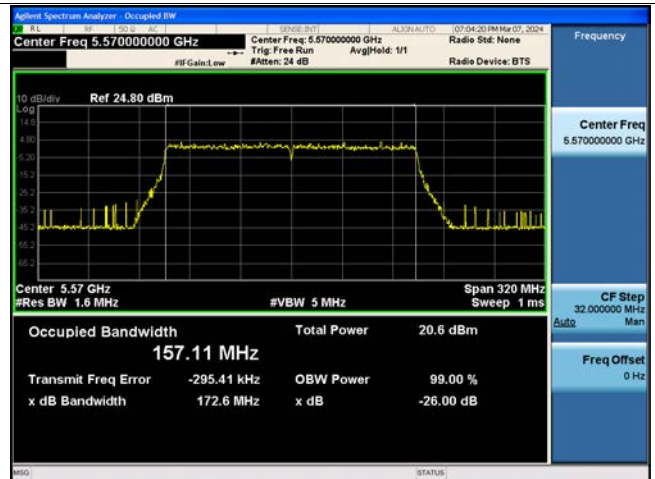

Note:

In order to simplify the report, attached plots were only the widest channel per channel bandwidth.

10.3 6 dB BANDWIDTH

Limit : > 0.5 MHz

10.3.1 Ant.1

| Mode : HE20 | | | | | | |
|-------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 |
| UNII3 | 26T | 5745 | 149 | 2.050 | 2.678 | 2.062 |
| | | 5785 | 157 | 2.068 | 2.637 | 2.090 |
| | | 5825 | 165 | 2.066 | 2.667 | 2.043 |
| | | 5845 | 169 | 2.044 | 2.672 | 2.052 |
| | | 5865 | 173 | 2.062 | 2.666 | 2.048 |
| UNII4 | | 5885 | 177 | 2.070 | 2.632 | 2.087 |
| UNII3 | 52T | 5745 | 149 | 14.562 | 15.019 | 8.246 |
| | | 5785 | 157 | 17.075 | 15.076 | 15.771 |
| | | 5825 | 165 | 17.089 | 11.307 | 17.093 |
| | | 5845 | 169 | 17.043 | 15.064 | 17.014 |
| | | 5865 | 173 | 17.070 | 10.439 | 15.820 |
| UNII4 | | 5885 | 177 | 14.560 | 13.766 | 14.596 |
| UNII3 | 106T | 5745 | 149 | 17.186 | - | 17.385 |
| | | 5785 | 157 | 17.148 | - | 17.173 |
| | | 5825 | 165 | 17.174 | - | 17.385 |
| | | 5845 | 169 | 18.075 | - | 17.374 |
| | | 5865 | 173 | 18.102 | - | 17.073 |
| UNII4 | | 5885 | 177 | 17.178 | - | 17.385 |
| UNII3 | 242T | 5745 | 149 | - | 19.078 | - |
| | | 5785 | 157 | - | 19.085 | - |
| | | 5825 | 165 | - | 19.073 | - |
| | | 5845 | 169 | - | 19.089 | - |
| | | 5865 | 173 | - | 19.076 | - |
| UNII4 | | 5885 | 177 | - | 19.105 | - |
| UNII3 | SU | 5745 | 149 | - | 19.092 | - |
| | | 5785 | 157 | - | 19.018 | - |
| | | 5825 | 165 | - | 19.083 | - |
| | | 5845 | 169 | - | 19.136 | - |
| | | 5865 | 173 | - | 19.099 | - |
| UNII4 | | 5885 | 177 | - | 19.062 | - |

| Mode : HE40 | | | | | | |
|-------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 |
| UNII3 | 26T | 5755 | 151 | 2.092 | 2.139 | 2.131 |
| | | 5795 | 159 | 2.129 | 2.123 | 2.146 |
| UNII4 | | 5835 | 167 | 2.160 | 2.111 | 2.125 |
| | | 5875 | 175 | 2.135 | 2.132 | 2.133 |
| UNII3 | 52T | 5755 | 151 | 16.585 | 17.288 | 16.616 |
| | | 5795 | 159 | 16.567 | 17.311 | 14.071 |
| UNII4 | | 5835 | 167 | 16.597 | 14.796 | 15.344 |
| | | 5875 | 175 | 16.581 | 14.804 | 15.391 |
| UNII3 | 106T | 5755 | 151 | 16.669 | 17.347 | 16.645 |
| | | 5795 | 159 | 16.682 | 17.537 | 16.637 |
| UNII4 | | 5835 | 167 | 16.613 | 17.361 | 16.647 |
| | | 5875 | 175 | 16.631 | 17.358 | 16.839 |
| UNII3 | 242T | 5755 | 151 | 18.908 | - | 18.873 |
| | | 5795 | 159 | 18.925 | - | 18.873 |
| UNII4 | | 5835 | 167 | 18.903 | - | 18.883 |
| | | 5875 | 175 | 18.856 | - | 18.877 |
| UNII3 | 484T | 5755 | 151 | - | 38.242 | - |
| | | 5795 | 159 | - | 38.242 | - |
| UNII4 | | 5835 | 167 | - | 38.246 | - |
| | | 5875 | 175 | - | 38.228 | - |
| UNII3 | SU | 5755 | 151 | - | 38.243 | - |
| | | 5795 | 159 | - | 38.196 | - |
| UNII4 | | 5835 | 167 | - | 38.168 | - |
| | | 5875 | 175 | - | 38.170 | - |

| Mode : HE80 | | | | | | |
|-------------|------|-------------|------|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 |
| UNII3 | 26T | 5775 | 155 | 2.196 | 2.783 | 2.231 |
| | | UNII4 | 5855 | 171 | 2.219 | 2.769 |
| UNII3 | 52T | 5775 | 155 | 16.633 | 13.742 | 16.642 |
| | | UNII4 | 5855 | 171 | 15.421 | 16.287 |
| UNII3 | 106T | 5775 | 155 | 16.717 | 16.373 | 16.734 |
| | | UNII4 | 5855 | 171 | 16.750 | 16.356 |
| UNII3 | 242T | 5775 | 155 | 19.018 | 19.024 | 18.970 |
| | | UNII4 | 5855 | 171 | 19.007 | 19.067 |
| UNII3 | 484T | 5775 | 155 | 37.958 | - | 37.804 |
| | | UNII4 | 5855 | 171 | 37.968 | - |
| UNII3 | 996T | 5775 | 155 | - | 78.208 | - |
| | | UNII4 | 5855 | 171 | - | 78.238 |
| UNII3 | SU | 5775 | 155 | - | 78.266 | - |
| | | UNII4 | 5855 | 171 | - | 78.339 |

| Mode : HE160(80L) | | | | | | |
|-------------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 |
| UNII 3-4 | 26T | 5815 | 163 | 2.366 | 2.991 | 2.524 |
| UNII 3-4 | 52T | 5815 | 163 | 14.316 | 5.020 | 16.910 |
| UNII 3-4 | 106T | 5815 | 163 | 17.081 | 15.517 | 17.112 |
| UNII 3-4 | 242T | 5815 | 163 | 19.118 | 19.073 | 19.181 |
| UNII 3-4 | 484T | 5815 | 163 | 37.968 | - | 37.975 |
| UNII 3-4 | 996T | 5815 | 163 | - | 78.223 | - |

| Mode : HE160(80U) | | | | | | |
|-------------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 |
| UNII 3-4 | 26T | 5815 | 163 | 2.396 | 3.021 | 2.507 |
| UNII 3-4 | 52T | 5815 | 163 | 13.123 | 16.590 | 13.015 |
| UNII 3-4 | 106T | 5815 | 163 | 15.834 | 16.409 | 17.035 |
| UNII 3-4 | 242T | 5815 | 163 | 19.107 | 19.082 | 19.143 |
| UNII 3-4 | 484T | 5815 | 163 | 37.965 | - | 37.998 |
| UNII 3-4 | 996T | 5815 | 163 | - | 78.210 | - |

| Mode : HE160 | | | | | | |
|--------------|--------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT1 | ANT1 | ANT1 |
| UNII 3-4 | SU | 5815 | 163 | - | 158.313 | - |
| UNII 3-4 | 2x996T | 5815 | 163 | - | 158.277 | - |

10.3.2 Ant.2

| Mode : HE20 | | | | | | |
|-------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 |
| UNII3 | 26T | 5745 | 149 | 2.039 | 2.680 | 2.064 |
| | | 5785 | 157 | 2.072 | 2.626 | 2.136 |
| | | 5825 | 165 | 2.044 | 2.666 | 2.059 |
| UNII4 | | 5845 | 169 | 2.084 | 2.708 | 2.148 |
| | | 5865 | 173 | 2.067 | 2.709 | 2.092 |
| | | 5885 | 177 | 2.080 | 2.712 | 2.049 |
| UNII3 | 52T | 5745 | 149 | 17.074 | 12.996 | 15.770 |
| | | 5785 | 157 | 17.035 | 15.058 | 16.985 |
| | | 5825 | 165 | 17.083 | 13.822 | 4.515 |
| UNII4 | | 5845 | 169 | 17.058 | 15.114 | 15.807 |
| | | 5865 | 173 | 15.821 | 12.912 | 4.055 |
| | | 5885 | 177 | 17.023 | 15.075 | 17.067 |
| UNII3 | 106T | 5745 | 149 | 17.191 | - | 17.391 |
| | | 5785 | 157 | 17.165 | - | 17.180 |
| | | 5825 | 165 | 15.931 | - | 17.404 |
| UNII4 | | 5845 | 169 | 17.179 | - | 17.387 |
| | | 5865 | 173 | 17.163 | - | 17.341 |
| | | 5885 | 177 | 17.159 | - | 17.405 |
| UNII3 | 242T | 5745 | 149 | - | 19.075 | - |
| | | 5785 | 157 | - | 19.047 | - |
| | | 5825 | 165 | - | 19.039 | - |
| UNII4 | | 5845 | 169 | - | 19.076 | - |
| | | 5865 | 173 | - | 19.086 | - |
| | | 5885 | 177 | - | 19.078 | - |
| UNII3 | SU | 5745 | 149 | - | 19.049 | - |
| | | 5785 | 157 | - | 19.065 | - |
| | | 5825 | 165 | - | 19.035 | - |
| UNII4 | | 5845 | 169 | - | 19.060 | - |
| | | 5865 | 173 | - | 19.138 | - |
| | | 5885 | 177 | - | 19.073 | - |

| Mode : HE40 | | | | | | |
|-------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 |
| UNII3 | 26T | 5755 | 151 | 2.145 | 2.077 | 2.145 |
| | | 5795 | 159 | 2.164 | 2.111 | 2.158 |
| UNII4 | | 5835 | 167 | 2.121 | 2.131 | 2.146 |
| | | 5875 | 175 | 2.150 | 2.111 | 2.147 |
| UNII3 | 52T | 5755 | 151 | 10.398 | 16.060 | 14.058 |
| | | 5795 | 159 | 16.569 | 17.294 | 16.642 |
| UNII4 | | 5835 | 167 | 12.922 | 14.845 | 16.622 |
| | | 5875 | 175 | 16.628 | 17.303 | 15.365 |
| UNII3 | 106T | 5755 | 151 | 16.671 | 17.344 | 16.635 |
| | | 5795 | 159 | 16.626 | 17.343 | 16.629 |
| UNII4 | | 5835 | 167 | 16.617 | 16.142 | 16.634 |
| | | 5875 | 175 | 16.622 | 17.540 | 16.670 |
| UNII3 | 242T | 5755 | 151 | 18.906 | - | 18.865 |
| | | 5795 | 159 | 18.890 | - | 18.850 |
| UNII4 | | 5835 | 167 | 18.891 | - | 18.844 |
| | | 5875 | 175 | 18.902 | - | 18.827 |
| UNII3 | 484T | 5755 | 151 | - | 38.241 | - |
| | | 5795 | 159 | - | 38.229 | - |
| UNII4 | | 5835 | 167 | - | 38.218 | - |
| | | 5875 | 175 | - | 38.215 | - |
| UNII3 | SU | 5755 | 151 | - | 38.229 | - |
| | | 5795 | 159 | - | 38.239 | - |
| UNII4 | | 5835 | 167 | - | 38.238 | - |
| | | 5875 | 175 | - | 38.244 | - |

| Mode : HE80 | | | | | | |
|-------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 |
| UNII3 | 26T | 5775 | 155 | 2.186 | 2.809 | 2.230 |
| UNII4 | | 5855 | 171 | 2.211 | 2.760 | 2.206 |
| UNII3 | 52T | 5775 | 155 | 16.650 | 15.061 | 15.453 |
| UNII4 | | 5855 | 171 | 16.636 | 14.975 | 16.712 |
| UNII3 | 106T | 5775 | 155 | 15.601 | 16.380 | 16.801 |
| UNII4 | | 5855 | 171 | 16.756 | 16.388 | 15.471 |
| UNII3 | 242T | 5775 | 155 | 18.983 | 19.014 | 19.019 |
| UNII4 | | 5855 | 171 | 19.008 | 18.961 | 19.004 |
| UNII3 | 484T | 5775 | 155 | 37.951 | - | 37.805 |
| UNII4 | | 5855 | 171 | 37.954 | - | 37.830 |
| UNII3 | 996T | 5775 | 155 | - | 78.175 | - |
| UNII4 | | 5855 | 171 | - | 78.137 | - |
| UNII3 | SU | 5775 | 155 | - | 78.247 | - |
| UNII4 | | 5855 | 171 | - | 78.329 | - |

| Mode : HE160(80L) | | | | | | |
|-------------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 |
| UNII 3-4 | 26T | 5815 | 163 | 2.339 | 3.001 | 2.508 |
| UNII 3-4 | 52T | 5815 | 163 | 17.009 | 12.702 | 16.944 |
| UNII 3-4 | 106T | 5815 | 163 | 17.859 | 16.404 | 17.050 |
| UNII 3-4 | 242T | 5815 | 163 | 19.085 | 19.059 | 19.160 |
| UNII 3-4 | 484T | 5815 | 163 | 37.962 | - | 37.938 |
| UNII 3-4 | 996T | 5815 | 163 | - | 78.201 | - |


| Mode : HE160(80U) | | | | | | |
|-------------------|------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 |
| UNII 3-4 | 26T | 5815 | 163 | 2.385 | 2.996 | 2.536 |
| UNII 3-4 | 52T | 5815 | 163 | 16.663 | 14.011 | 16.855 |
| UNII 3-4 | 106T | 5815 | 163 | 17.818 | 16.684 | 17.005 |
| UNII 3-4 | 242T | 5815 | 163 | 19.070 | 19.060 | 19.125 |
| UNII 3-4 | 484T | 5815 | 163 | 38.018 | - | 37.947 |
| UNII 3-4 | 996T | 5815 | 163 | - | 78.190 | - |

| Mode : HE160 | | | | | | |
|--------------|--------|-------------|-----|---------------------|----------------|-----------------|
| Band | Tone | Freq. [MHz] | CH. | 6dB Bandwidth [MHz] | | |
| | | | | RU Index : Low | RU Index : Mid | RU Index : High |
| | | | | ANT2 | ANT2 | ANT2 |
| UNII 3-4 | SU | 5815 | 163 | - | 158.281 | - |
| UNII 3-4 | 2x996T | 5815 | 163 | - | 158.209 | - |


Test Plots

[Ant.1]

Bandwidth 20M Ch.165(5825 MHz) 26Tones RU 8

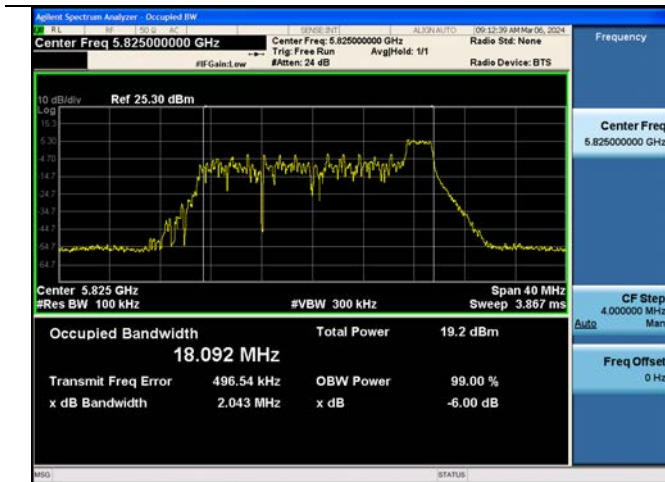


Bandwidth 40M Ch.151(5755 MHz) 26 Tones RU 0

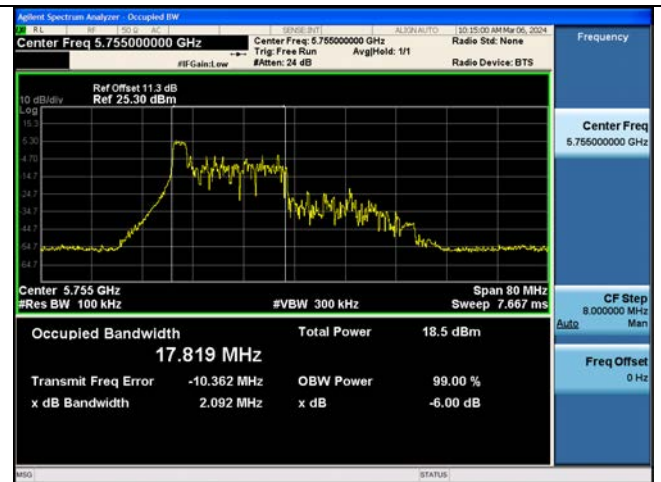

Bandwidth 80M Ch.155(5775 MHz) 26 Tones RU 0




Bandwidth 160M_80L Ch.163(5815 MHz) 26 Tones RU 0

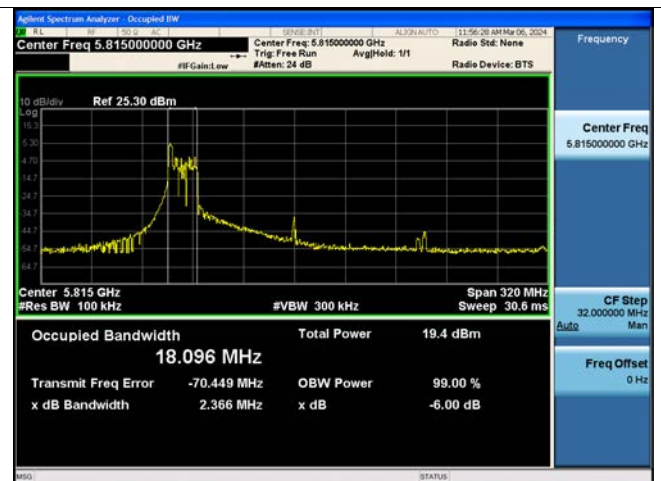


Note: In order to simplify the report, attached plots were only the narrowest channel.

[Ant.2]


Bandwidth 20M Ch.149(5745 MHz) 26Tones RU 0

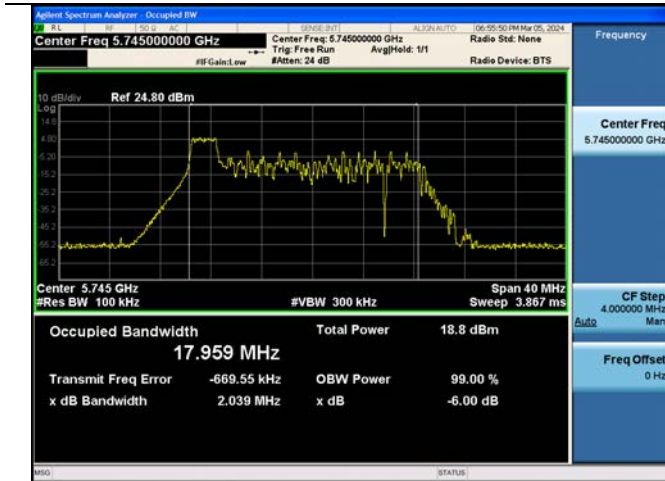


Bandwidth 40M Ch.151(5755 MHz) 26 Tones RU 9

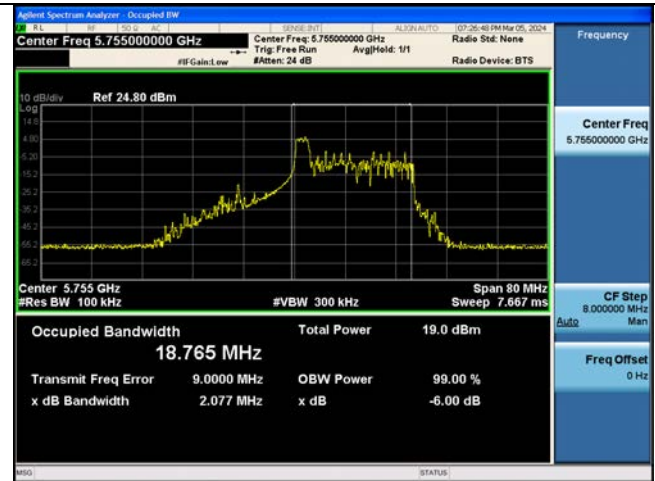

Bandwidth 80M Ch.155(5775 MHz) 26 Tones RU 0

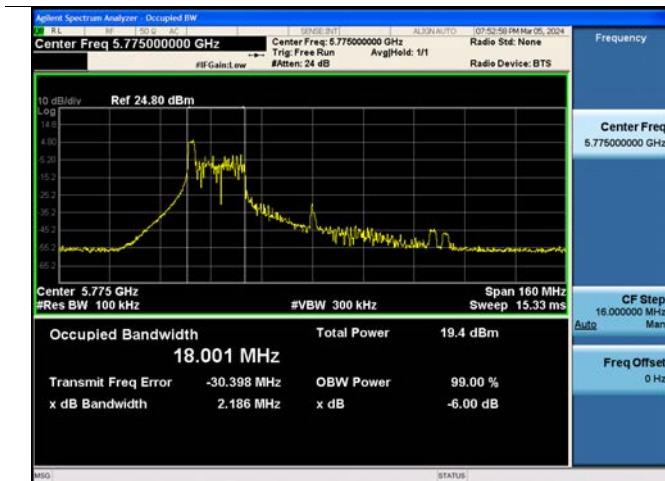

Bandwidth 160M_80L Ch.163(5815 MHz) 26 Tones RU 0

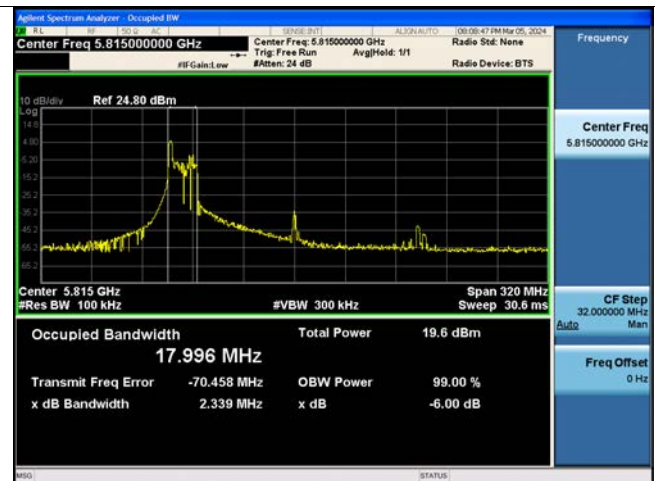

Note: In order to simplify the report, attached plots were only the narrowest channel.

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.6.3.

Note : Max EIRP Power = Conducted Power(Sum) + Ant Gain(Directional Gain)

Ant Total Power [dBm] = Measured Power [dBm] + Duty Cycle Factor [dB]

MIMO Total Power [dBm] = Ant.1 Total Power [dBm] + Ant.2 Total Power [dB]

Limit

(UNII 1) : 23.98 dBm

(UNII 2A, 2C) : 23.98 dBm or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)

(UNII 3) : 30.00 dBm

(UNII 4) : EIRP 30.0 dBm/MHz

(UNII 3&4) : Worst limit 30.00 dBm → UNII 4 Band Antenna Gain Negative

10.4.1 MIMO_CDD(Ant.1+ Ant.2)

| Mode : HE20 26T | | | | | | | | | | | | | |
|-----------------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | 9.73 | 10.15 | 12.96 | 9.57 | 9.91 | 12.75 | 9.90 | 10.15 | 13.04 | - | - |
| | 5200 | 40 | 9.82 | 10.15 | 13.00 | 9.63 | 9.90 | 12.78 | 9.97 | 10.12 | 13.05 | - | - |
| | 5240 | 48 | 9.76 | 10.17 | 12.98 | 9.54 | 9.97 | 12.77 | 9.89 | 10.19 | 13.05 | - | - |
| UNII2A | 5260 | 52 | 9.27 | 10.00 | 12.66 | 9.06 | 9.78 | 12.44 | 9.38 | 10.02 | 12.72 | - | - |
| | 5300 | 60 | 9.30 | 10.32 | 12.85 | 9.04 | 10.05 | 12.58 | 9.34 | 10.29 | 12.85 | - | - |
| | 5320 | 64 | 9.16 | 10.18 | 12.71 | 8.88 | 9.89 | 12.42 | 9.21 | 10.14 | 12.71 | - | - |
| UNII2C | 5500 | 100 | 8.89 | 10.49 | 12.78 | 8.58 | 10.23 | 12.49 | 8.81 | 10.46 | 12.72 | - | - |
| | 5600 | 120 | 8.93 | 10.14 | 12.59 | 8.66 | 9.94 | 12.35 | 8.94 | 10.19 | 12.62 | - | - |
| | 5720 | 144 | 9.30 | 10.02 | 12.69 | 9.05 | 9.79 | 12.44 | 9.33 | 10.02 | 12.70 | - | - |
| UNII3 | 5745 | 149 | 9.42 | 10.12 | 12.79 | 9.18 | 9.82 | 12.53 | 9.52 | 10.05 | 12.80 | - | - |
| | 5785 | 157 | 9.77 | 9.93 | 12.86 | 9.55 | 9.67 | 12.62 | 9.88 | 9.88 | 12.89 | - | - |
| | 5825 | 165 | 10.17 | 9.85 | 13.02 | 9.92 | 9.52 | 12.73 | 10.24 | 9.74 | 13.00 | - | - |
| UNII4 | 5845 | 169 | 10.42 | 9.96 | 13.20 | 10.11 | 9.65 | 12.89 | 10.40 | 9.85 | 13.15 | -3.29 | 9.91 |
| | 5865 | 173 | 10.34 | 9.88 | 13.13 | 10.16 | 9.59 | 12.89 | 10.47 | 9.87 | 13.19 | -3.29 | 9.90 |
| | 5885 | 177 | 10.16 | 9.53 | 12.87 | 9.79 | 9.33 | 12.58 | 10.02 | 9.58 | 12.82 | -3.29 | 9.58 |

| Mode : HE20 52T | | | | | | | | | | | | | |
|-----------------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | 12.25 | 12.35 | 15.31 | 12.14 | 12.22 | 15.19 | 12.37 | 12.30 | 15.34 | - | - |
| | 5200 | 40 | 12.29 | 12.31 | 15.31 | 12.18 | 12.18 | 15.19 | 12.41 | 12.27 | 15.35 | - | - |
| | 5240 | 48 | 12.33 | 12.46 | 15.41 | 12.18 | 12.33 | 15.27 | 12.42 | 12.48 | 15.46 | - | - |
| UNII2A | 5260 | 52 | 12.30 | 12.43 | 15.38 | 12.19 | 12.29 | 15.25 | 12.34 | 12.41 | 15.39 | - | - |
| | 5300 | 60 | 12.01 | 12.40 | 15.22 | 11.88 | 12.25 | 15.07 | 12.04 | 12.36 | 15.21 | - | - |
| | 5320 | 64 | 11.82 | 12.45 | 15.16 | 11.68 | 12.28 | 15.00 | 11.84 | 12.35 | 15.11 | - | - |
| UNII2C | 5500 | 100 | 11.74 | 12.77 | 15.29 | 11.55 | 12.62 | 15.13 | 11.66 | 12.73 | 15.24 | - | - |
| | 5600 | 120 | 11.85 | 12.50 | 15.20 | 11.70 | 12.38 | 15.06 | 11.82 | 12.52 | 15.19 | - | - |
| | 5720 | 144 | 12.44 | 12.57 | 15.52 | 12.33 | 12.46 | 15.40 | 12.47 | 12.52 | 15.50 | - | - |
| UNII3 | 5745 | 149 | 12.13 | 12.12 | 15.14 | 11.98 | 11.99 | 14.99 | 12.15 | 12.05 | 15.11 | - | - |
| | 5785 | 157 | 12.33 | 11.99 | 15.17 | 12.16 | 11.86 | 15.02 | 12.28 | 11.88 | 15.10 | - | - |
| | 5825 | 165 | 12.56 | 11.98 | 15.29 | 12.39 | 11.81 | 15.12 | 12.59 | 11.90 | 15.26 | - | - |
| UNII4 | 5845 | 169 | 12.71 | 12.13 | 15.44 | 12.56 | 11.96 | 15.28 | 12.78 | 12.01 | 15.43 | -3.29 | 12.15 |
| | 5865 | 173 | 12.88 | 11.99 | 15.47 | 12.76 | 11.83 | 15.33 | 12.99 | 11.97 | 15.52 | -3.29 | 12.23 |
| | 5885 | 177 | 12.73 | 11.56 | 15.20 | 12.64 | 11.46 | 15.10 | 12.82 | 11.59 | 15.26 | -3.29 | 11.97 |

| Mode : HE20 106T | | | | | | | | | | | | | |
|------------------|-------------|-----|---------------------------|-------|-------|----------------|------|------|-----------------|-------|-------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | 14.13 | 13.97 | 17.06 | - | - | - | 14.23 | 13.96 | 17.11 | - | - |
| | 5200 | 40 | 14.18 | 13.96 | 17.08 | - | - | - | 14.24 | 13.94 | 17.11 | - | - |
| | 5240 | 48 | 14.10 | 14.20 | 17.16 | - | - | - | 14.18 | 14.24 | 17.22 | - | - |
| UNII2A | 5260 | 52 | 13.81 | 14.44 | 17.15 | - | - | - | 13.86 | 14.41 | 17.15 | - | - |
| | 5300 | 60 | 13.46 | 14.07 | 16.79 | - | - | - | 13.49 | 14.07 | 16.80 | - | - |
| | 5320 | 64 | 13.39 | 14.08 | 16.76 | - | - | - | 13.41 | 14.06 | 16.76 | - | - |
| UNII2C | 5500 | 100 | 13.25 | 14.40 | 16.88 | - | - | - | 13.20 | 14.36 | 16.83 | - | - |
| | 5600 | 120 | 13.42 | 14.45 | 16.98 | - | - | - | 13.40 | 14.45 | 16.97 | - | - |
| | 5720 | 144 | 14.04 | 14.22 | 17.14 | - | - | - | 14.06 | 14.20 | 17.14 | - | - |
| UNII3 | 5745 | 149 | 13.68 | 13.87 | 16.79 | - | - | - | 13.72 | 13.81 | 16.77 | - | - |
| | 5785 | 157 | 13.94 | 13.70 | 16.83 | - | - | - | 13.95 | 13.61 | 16.79 | - | - |
| | 5825 | 165 | 14.23 | 13.64 | 16.95 | - | - | - | 14.24 | 13.58 | 16.93 | - | - |
| UNII4 | 5845 | 169 | 14.36 | 13.69 | 17.05 | - | - | - | 14.38 | 13.68 | 17.05 | -3.29 | 13.76 |
| | 5865 | 173 | 14.51 | 13.68 | 17.13 | - | - | - | 14.56 | 13.73 | 17.17 | -3.29 | 13.88 |
| | 5885 | 177 | 14.34 | 13.35 | 16.88 | - | - | - | 14.41 | 13.35 | 16.92 | -3.29 | 13.63 |

| Mode : HE20 242T | | | | | | | | | | | | | |
|------------------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | - | - | - | 15.21 | 14.85 | 18.05 | - | - | - | - | - |
| | 5200 | 40 | - | - | - | 15.22 | 14.83 | 18.04 | - | - | - | - | - |
| | 5240 | 48 | - | - | - | 15.09 | 14.97 | 18.04 | - | - | - | - | - |
| UNII2A | 5260 | 52 | - | - | - | 14.82 | 15.29 | 18.07 | - | - | - | - | - |
| | 5300 | 60 | - | - | - | 14.21 | 14.94 | 17.60 | - | - | - | - | - |
| | 5320 | 64 | - | - | - | 14.31 | 14.85 | 17.60 | - | - | - | - | - |
| UNII2C | 5500 | 100 | - | - | - | 14.14 | 15.18 | 17.70 | - | - | - | - | - |
| | 5600 | 120 | - | - | - | 14.33 | 15.28 | 17.84 | - | - | - | - | - |
| | 5720 | 144 | - | - | - | 15.02 | 15.16 | 18.10 | - | - | - | - | - |
| UNII3 | 5745 | 149 | - | - | - | 14.64 | 14.67 | 17.67 | - | - | - | - | - |
| | 5785 | 157 | - | - | - | 14.87 | 14.46 | 17.68 | - | - | - | - | - |
| | 5825 | 165 | - | - | - | 15.18 | 14.45 | 17.84 | - | - | - | - | - |
| UNII4 | 5845 | 169 | - | - | - | 15.33 | 14.51 | 17.95 | - | - | - | -3.29 | 14.66 |
| | 5865 | 173 | - | - | - | 15.47 | 14.48 | 18.01 | - | - | - | -3.29 | 14.72 |
| | 5885 | 177 | - | - | - | 15.30 | 14.25 | 17.82 | - | - | - | -3.29 | 14.53 |

| Mode : HE20 SU | | | | | | | | | | | | | |
|----------------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | - | - | - | 14.77 | 14.46 | 17.63 | - | - | - | - | - |
| | 5200 | 40 | - | - | - | 14.86 | 14.42 | 17.66 | - | - | - | - | - |
| | 5240 | 48 | - | - | - | 14.70 | 14.60 | 17.66 | - | - | - | - | - |
| UNII2A | 5260 | 52 | - | - | - | 14.44 | 14.91 | 17.69 | - | - | - | - | - |
| | 5300 | 60 | - | - | - | 13.84 | 14.56 | 17.23 | - | - | - | - | - |
| | 5320 | 64 | - | - | - | 13.90 | 14.51 | 17.22 | - | - | - | - | - |
| UNII2C | 5500 | 100 | - | - | - | 13.77 | 14.81 | 17.33 | - | - | - | - | - |
| | 5600 | 120 | - | - | - | 13.94 | 14.93 | 17.47 | - | - | - | - | - |
| | 5720 | 144 | - | - | - | 14.64 | 14.82 | 17.74 | - | - | - | - | - |
| UNII3 | 5745 | 149 | - | - | - | 14.25 | 14.32 | 17.30 | - | - | - | - | - |
| | 5785 | 157 | - | - | - | 14.49 | 14.12 | 17.32 | - | - | - | - | - |
| | 5825 | 165 | - | - | - | 14.82 | 14.09 | 17.48 | - | - | - | - | - |
| UNII4 | 5845 | 169 | - | - | - | 14.96 | 14.14 | 17.58 | - | - | - | -3.29 | 14.29 |
| | 5865 | 173 | - | - | - | 15.07 | 14.13 | 17.63 | - | - | - | -3.29 | 14.34 |
| | 5885 | 177 | - | - | - | 14.90 | 13.90 | 17.44 | - | - | - | -3.29 | 14.15 |

| Mode : HE40 26T | | | | | | | | | | | | | |
|-----------------|-------------|-----|---------------------------|------|-------|----------------|-------|-------|-----------------|------|-------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 9.85 | 9.73 | 12.80 | 10.05 | 9.85 | 12.96 | 9.82 | 9.62 | 12.73 | - | - |
| | 5230 | 46 | 9.64 | 9.62 | 12.64 | 9.87 | 9.92 | 12.91 | 9.70 | 9.66 | 12.69 | - | - |
| UNII2A | 5270 | 54 | 9.17 | 9.78 | 12.50 | 9.36 | 10.06 | 12.73 | 9.04 | 9.74 | 12.41 | - | - |
| | 5310 | 62 | 9.18 | 9.87 | 12.55 | 9.33 | 10.06 | 12.72 | 9.06 | 9.81 | 12.46 | - | - |
| UNII2C | 5510 | 102 | 9.17 | 9.95 | 12.59 | 9.26 | 10.19 | 12.76 | 8.96 | 9.90 | 12.47 | - | - |
| | 5590 | 118 | 8.61 | 9.85 | 12.29 | 8.78 | 10.11 | 12.50 | 8.53 | 9.81 | 12.23 | - | - |
| | 5710 | 142 | 8.85 | 9.93 | 12.44 | 9.02 | 10.13 | 12.62 | 8.84 | 9.84 | 12.38 | - | - |
| UNII3 | 5755 | 151 | 9.35 | 9.64 | 12.51 | 9.52 | 9.74 | 12.64 | 9.35 | 9.46 | 12.42 | - | - |
| | 5795 | 159 | 9.72 | 9.58 | 12.66 | 9.84 | 9.65 | 12.76 | 9.60 | 9.31 | 12.47 | - | - |
| UNII4 | 5835 | 167 | 10.01 | 9.60 | 12.82 | 10.14 | 9.66 | 12.92 | 9.97 | 9.36 | 12.68 | -3.29 | 9.63 |
| | 5875 | 175 | 10.29 | 9.50 | 12.92 | 10.38 | 9.58 | 13.01 | 10.25 | 9.34 | 12.83 | -3.29 | 9.72 |

| Mode : HE40 52T | | | | | | | | | | | | | |
|-----------------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 12.31 | 11.88 | 15.11 | 12.45 | 12.00 | 15.24 | 12.31 | 11.80 | 15.07 | - | - |
| | 5230 | 46 | 12.22 | 11.91 | 15.08 | 12.42 | 12.14 | 15.29 | 12.25 | 11.96 | 15.12 | - | - |
| UNII2A | 5270 | 54 | 11.61 | 11.85 | 14.74 | 11.73 | 12.03 | 14.89 | 11.50 | 11.79 | 14.66 | - | - |
| | 5310 | 62 | 11.81 | 12.21 | 15.02 | 11.92 | 12.36 | 15.15 | 11.79 | 12.33 | 15.08 | - | - |
| UNII2C | 5510 | 102 | 11.66 | 12.24 | 14.97 | 11.74 | 12.44 | 15.12 | 11.50 | 12.22 | 14.88 | - | - |
| | 5590 | 118 | 11.59 | 12.36 | 15.00 | 11.76 | 12.55 | 15.18 | 11.54 | 12.38 | 14.99 | - | - |
| | 5710 | 142 | 12.20 | 12.57 | 15.40 | 12.31 | 12.70 | 15.52 | 12.17 | 12.50 | 15.35 | - | - |
| UNII3 | 5755 | 151 | 12.03 | 12.04 | 15.05 | 12.19 | 12.11 | 15.16 | 12.05 | 11.90 | 14.99 | - | - |
| | 5795 | 159 | 12.39 | 12.10 | 15.26 | 12.49 | 12.15 | 15.33 | 12.31 | 11.90 | 15.12 | - | - |
| UNII4 | 5835 | 167 | 12.65 | 12.14 | 15.42 | 12.76 | 12.21 | 15.50 | 12.58 | 11.93 | 15.28 | -3.29 | 12.21 |
| | 5875 | 175 | 12.82 | 12.08 | 15.48 | 12.97 | 12.06 | 15.55 | 12.87 | 11.82 | 15.39 | -3.29 | 12.26 |

Mode : HE40 106T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 14.01 | 14.02 | 17.03 | 14.05 | 14.03 | 17.05 | 14.04 | 13.96 | 17.01 | - | - |
| | 5230 | 46 | 13.93 | 14.18 | 17.07 | 13.98 | 14.23 | 17.12 | 13.99 | 14.22 | 17.11 | - | - |
| UNII2A | 5270 | 54 | 13.26 | 14.04 | 16.68 | 13.30 | 14.09 | 16.72 | 13.17 | 14.01 | 16.62 | - | - |
| | 5310 | 62 | 13.40 | 14.06 | 16.75 | 13.36 | 14.07 | 16.74 | 13.32 | 14.03 | 16.70 | - | - |
| UNII2C | 5510 | 102 | 13.26 | 14.16 | 16.74 | 13.24 | 14.21 | 16.76 | 13.14 | 14.13 | 16.68 | - | - |
| | 5590 | 118 | 13.19 | 14.41 | 16.85 | 13.20 | 14.46 | 16.88 | 13.16 | 14.40 | 16.83 | - | - |
| | 5710 | 142 | 13.81 | 14.45 | 17.16 | 13.82 | 14.47 | 17.17 | 13.80 | 14.37 | 17.11 | - | - |
| UNII3 | 5755 | 151 | 13.62 | 13.85 | 16.75 | 13.52 | 13.77 | 16.65 | 13.60 | 13.60 | 16.61 | - | - |
| | 5795 | 159 | 13.98 | 13.75 | 16.88 | 13.97 | 13.69 | 16.84 | 13.93 | 13.50 | 16.73 | - | - |
| UNII4 | 5835 | 167 | 14.29 | 13.64 | 16.99 | 14.28 | 13.65 | 16.99 | 14.21 | 13.62 | 16.94 | -3.29 | 13.70 |
| | 5875 | 175 | 14.43 | 13.67 | 17.08 | 14.38 | 13.73 | 17.08 | 14.37 | 13.63 | 17.02 | -3.29 | 13.79 |

Mode : HE40 242T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|------|------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 13.87 | 13.79 | 16.84 | - | - | - | 13.92 | 13.77 | 16.86 | - | - |
| | 5230 | 46 | 13.78 | 13.97 | 16.89 | - | - | - | 13.86 | 14.03 | 16.96 | - | - |
| UNII2A | 5270 | 54 | 13.10 | 13.86 | 16.50 | - | - | - | 13.05 | 13.89 | 16.50 | - | - |
| | 5310 | 62 | 13.17 | 13.88 | 16.55 | - | - | - | 13.16 | 13.89 | 16.55 | - | - |
| UNII2C | 5510 | 102 | 13.05 | 13.95 | 16.54 | - | - | - | 12.98 | 14.01 | 16.54 | - | - |
| | 5590 | 118 | 12.99 | 14.23 | 16.66 | - | - | - | 13.01 | 14.25 | 16.69 | - | - |
| | 5710 | 142 | 13.62 | 14.24 | 16.95 | - | - | - | 13.64 | 14.24 | 16.96 | - | - |
| UNII3 | 5755 | 151 | 13.41 | 13.64 | 16.54 | - | - | - | 13.48 | 13.57 | 16.54 | - | - |
| | 5795 | 159 | 13.85 | 13.61 | 16.74 | - | - | - | 13.87 | 13.44 | 16.67 | - | - |
| UNII4 | 5835 | 167 | 14.18 | 13.52 | 16.87 | - | - | - | 14.14 | 13.49 | 16.84 | -3.29 | 13.58 |
| | 5875 | 175 | 14.29 | 13.52 | 16.93 | - | - | - | 14.29 | 13.56 | 16.95 | -3.29 | 13.66 |

Mode : HE40 484T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | - | - | - | 13.93 | 13.77 | 16.86 | - | - | - | - | - |
| | 5230 | 46 | - | - | - | 13.84 | 14.00 | 16.93 | - | - | - | - | - |
| UNII2A | 5270 | 54 | - | - | - | 13.09 | 13.86 | 16.51 | - | - | - | - | - |
| | 5310 | 62 | - | - | - | 13.20 | 13.88 | 16.57 | - | - | - | - | - |
| UNII2C | 5510 | 102 | - | - | - | 13.08 | 13.99 | 16.57 | - | - | - | - | - |
| | 5590 | 118 | - | - | - | 13.06 | 14.26 | 16.71 | - | - | - | - | - |
| | 5710 | 142 | - | - | - | 13.68 | 14.27 | 17.00 | - | - | - | - | - |
| UNII3 | 5755 | 151 | - | - | - | 13.48 | 13.60 | 16.55 | - | - | - | - | - |
| | 5795 | 159 | - | - | - | 13.91 | 13.52 | 16.73 | - | - | - | - | - |
| UNII4 | 5835 | 167 | - | - | - | 14.20 | 13.51 | 16.88 | - | - | - | -3.29 | 13.59 |
| | 5875 | 175 | - | - | - | 14.32 | 13.53 | 16.96 | - | - | - | -3.29 | 13.67 |

Mode : HE40 SU

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | - | - | - | 13.83 | 13.68 | 16.76 | - | - | - | - | - |
| | 5230 | 46 | - | - | - | 13.75 | 13.91 | 16.84 | - | - | - | - | - |
| UNII2A | 5270 | 54 | - | - | - | 13.01 | 13.78 | 16.42 | - | - | - | - | - |
| | 5310 | 62 | - | - | - | 13.11 | 13.79 | 16.48 | - | - | - | - | - |
| UNII2C | 5510 | 102 | - | - | - | 12.95 | 13.90 | 16.46 | - | - | - | - | - |
| | 5590 | 118 | - | - | - | 12.97 | 14.14 | 16.60 | - | - | - | - | - |
| | 5710 | 142 | - | - | - | 13.58 | 14.14 | 16.88 | - | - | - | - | - |
| UNII3 | 5755 | 151 | - | - | - | 13.37 | 13.52 | 16.45 | - | - | - | - | - |
| | 5795 | 159 | - | - | - | 13.80 | 13.44 | 16.63 | - | - | - | - | - |
| UNII4 | 5835 | 167 | - | - | - | 14.08 | 13.42 | 16.77 | - | - | - | -3.29 | 13.48 |
| | 5875 | 175 | - | - | - | 14.21 | 13.44 | 16.85 | - | - | - | -3.29 | 13.56 |

Mode : HE80 26T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 9.85 | 10.01 | 12.94 | 9.56 | 9.54 | 12.56 | 10.18 | 10.21 | 13.21 | - | - |
| UNII2A | 5290 | 58 | 9.34 | 10.13 | 12.76 | 8.91 | 9.80 | 12.39 | 9.38 | 10.35 | 12.90 | - | - |
| UNII2C | 5530 | 106 | 9.48 | 10.27 | 12.90 | 8.97 | 9.94 | 12.49 | 9.35 | 10.50 | 12.97 | - | - |
| | 5610 | 122 | 8.92 | 10.14 | 12.58 | 8.56 | 9.87 | 12.27 | 8.90 | 10.22 | 12.62 | - | - |
| | 5690 | 138 | 8.94 | 10.26 | 12.66 | 8.58 | 9.79 | 12.24 | 9.11 | 10.24 | 12.72 | - | - |
| UNII3 | 5775 | 155 | 9.74 | 9.91 | 12.84 | 9.49 | 9.46 | 12.49 | 10.07 | 9.85 | 12.97 | - | - |
| UNII4 | 5855 | 171 | 10.48 | 9.97 | 13.24 | 10.05 | 9.43 | 12.76 | 10.49 | 9.66 | 13.11 | -3.29 | 9.95 |

Mode : HE80 52T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 12.08 | 12.04 | 15.07 | 11.91 | 11.78 | 14.86 | 12.35 | 12.31 | 15.34 | - | - |
| UNII2A | 5290 | 58 | 12.22 | 12.68 | 15.47 | 11.90 | 12.46 | 15.20 | 12.23 | 12.89 | 15.58 | - | - |
| UNII2C | 5530 | 106 | 12.16 | 12.55 | 15.37 | 11.77 | 12.38 | 15.10 | 12.02 | 12.76 | 15.42 | - | - |
| | 5610 | 122 | 11.37 | 12.89 | 15.21 | 11.13 | 12.68 | 14.98 | 11.32 | 12.96 | 15.23 | - | - |
| | 5690 | 138 | 11.64 | 12.55 | 15.13 | 11.51 | 12.25 | 14.91 | 11.88 | 12.56 | 15.25 | - | - |
| UNII3 | 5775 | 155 | 12.37 | 12.34 | 15.37 | 12.27 | 11.97 | 15.13 | 12.67 | 12.24 | 15.47 | - | - |
| UNII4 | 5855 | 171 | 12.98 | 12.44 | 15.73 | 12.82 | 12.02 | 15.45 | 12.99 | 12.14 | 15.60 | -3.29 | 12.44 |

Mode : HE80 106T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 13.82 | 14.11 | 16.98 | 13.68 | 13.94 | 16.82 | 13.99 | 14.37 | 17.19 | - | - |
| UNII2A | 5290 | 58 | 13.66 | 14.67 | 17.21 | 13.44 | 14.48 | 17.00 | 13.65 | 14.76 | 17.25 | - | - |
| UNII2C | 5530 | 106 | 13.29 | 14.22 | 16.79 | 12.98 | 14.16 | 16.62 | 13.11 | 14.43 | 16.83 | - | - |
| | 5610 | 122 | 13.27 | 14.62 | 17.01 | 13.04 | 14.52 | 16.86 | 13.20 | 14.64 | 16.99 | - | - |
| | 5690 | 138 | 13.57 | 14.55 | 17.10 | 13.45 | 14.27 | 16.89 | 13.71 | 14.47 | 17.12 | - | - |
| UNII3 | 5775 | 155 | 13.53 | 13.80 | 16.68 | 13.51 | 13.56 | 16.55 | 13.79 | 13.71 | 16.76 | - | - |
| UNII4 | 5855 | 171 | 14.30 | 13.83 | 17.08 | 14.09 | 13.46 | 16.79 | 14.24 | 13.63 | 16.96 | -3.29 | 13.79 |

Mode : HE80 242T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 12.64 | 12.83 | 15.75 | 12.67 | 12.81 | 15.75 | 12.78 | 12.91 | 15.86 | - | - |
| UNII2A | 5290 | 58 | 12.64 | 13.46 | 16.08 | 12.59 | 13.47 | 16.06 | 12.55 | 13.51 | 16.06 | - | - |
| UNII2C | 5530 | 106 | 12.12 | 12.83 | 15.50 | 12.07 | 12.85 | 15.49 | 11.94 | 12.89 | 15.46 | - | - |
| | 5610 | 122 | 12.06 | 13.19 | 15.67 | 12.07 | 13.20 | 15.68 | 11.90 | 13.13 | 15.57 | - | - |
| | 5690 | 138 | 12.31 | 13.35 | 15.88 | 12.37 | 13.31 | 15.88 | 12.46 | 13.27 | 15.89 | - | - |
| UNII3 | 5775 | 155 | 12.41 | 12.52 | 15.47 | 12.48 | 12.50 | 15.50 | 12.59 | 12.34 | 15.48 | - | - |
| UNII4 | 5855 | 171 | 13.13 | 12.63 | 15.90 | 13.13 | 12.52 | 15.84 | 13.01 | 12.39 | 15.73 | -3.29 | 12.61 |

Mode : HE80 484T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|-------|-------|----------------|------|------|-----------------|-------|-------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 12.65 | 12.77 | 15.72 | - | - | - | 12.79 | 12.88 | 15.85 | - | - |
| UNII2A | 5290 | 58 | 12.63 | 13.44 | 16.06 | - | - | - | 12.58 | 13.51 | 16.08 | - | - |
| UNII2C | 5530 | 106 | 12.13 | 12.85 | 15.52 | - | - | - | 11.99 | 12.90 | 15.48 | - | - |
| | 5610 | 122 | 12.07 | 13.16 | 15.66 | - | - | - | 11.97 | 13.13 | 15.60 | - | - |
| | 5690 | 138 | 12.40 | 13.29 | 15.87 | - | - | - | 12.46 | 13.28 | 15.90 | - | - |
| UNII3 | 5775 | 155 | 12.48 | 12.52 | 15.51 | - | - | - | 12.63 | 12.36 | 15.51 | - | - |
| UNII4 | 5855 | 171 | 13.17 | 12.59 | 15.90 | - | - | - | 13.09 | 12.41 | 15.77 | -3.29 | 12.61 |

Mode : HE80 996T

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | - | - | - | 12.65 | 12.75 | 15.71 | - | - | - | - | - |
| UNII2A | 5290 | 58 | - | - | - | 12.54 | 13.40 | 16.00 | - | - | - | - | - |
| UNII2C | 5530 | 106 | - | - | - | 11.99 | 12.76 | 15.40 | - | - | - | - | - |
| | 5610 | 122 | - | - | - | 11.94 | 13.06 | 15.55 | - | - | - | - | - |
| | 5690 | 138 | - | - | - | 12.35 | 13.21 | 15.81 | - | - | - | - | - |
| UNII3 | 5775 | 155 | - | - | - | 12.47 | 12.36 | 15.43 | - | - | - | - | - |
| UNII4 | 5855 | 171 | - | - | - | 13.07 | 12.43 | 15.77 | - | - | - | -3.29 | 12.48 |

Mode : HE80 SU

| Band | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|--------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | - | - | - | 12.58 | 12.70 | 15.65 | - | - | - | - | - |
| UNII2A | 5290 | 58 | - | - | - | 12.47 | 13.31 | 15.92 | - | - | - | - | - |
| UNII2C | 5530 | 106 | - | - | - | 11.94 | 12.75 | 15.37 | - | - | - | - | - |
| | 5610 | 122 | - | - | - | 11.86 | 13.03 | 15.49 | - | - | - | - | - |
| | 5690 | 138 | - | - | - | 12.27 | 13.22 | 15.78 | - | - | - | - | - |
| UNII3 | 5775 | 155 | - | - | - | 12.38 | 12.22 | 15.31 | - | - | - | - | - |
| UNII4 | 5855 | 171 | - | - | - | 12.95 | 12.40 | 15.69 | - | - | - | -3.29 | 12.40 |

Mode : HE160(80L)

| Band | Tone | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|-----------|------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII 1-2A | 26T | 5250 | 50 | 9.15 | 9.65 | 12.42 | 9.51 | 9.86 | 12.70 | 9.77 | 9.94 | 12.87 | - | - |
| UNII 2C | | 5570 | 114 | 9.28 | 10.20 | 12.77 | 9.35 | 10.43 | 12.93 | 9.17 | 10.42 | 12.85 | - | - |
| UNII 3-4 | | 5815 | 163 | 9.60 | 9.65 | 12.63 | 9.99 | 9.80 | 12.91 | 10.16 | 9.70 | 12.95 | -3.29 | 9.66 |
| UNII 1-2A | 52T | 5250 | 50 | 11.65 | 11.81 | 14.74 | 11.90 | 11.96 | 14.94 | 12.27 | 12.12 | 15.21 | - | - |
| UNII 2C | | 5570 | 114 | 11.60 | 12.56 | 15.12 | 11.57 | 12.74 | 15.20 | 11.47 | 12.78 | 15.19 | - | - |
| UNII 3-4 | | 5815 | 163 | 12.06 | 12.08 | 15.08 | 12.44 | 12.15 | 15.31 | 12.63 | 12.08 | 15.37 | -3.29 | 12.08 |
| UNII 1-2A | 106T | 5250 | 50 | 13.44 | 13.87 | 16.67 | 13.65 | 14.01 | 16.84 | 13.87 | 14.12 | 17.01 | - | - |
| UNII 2C | | 5570 | 114 | 13.33 | 14.62 | 17.03 | 13.26 | 14.71 | 17.06 | 13.20 | 14.75 | 17.05 | - | - |
| UNII 3-4 | | 5815 | 163 | 13.88 | 14.09 | 16.99 | 14.16 | 14.05 | 17.12 | 14.30 | 13.87 | 17.10 | -3.29 | 13.83 |
| UNII 1-2A | 242T | 5250 | 50 | 11.46 | 11.65 | 14.57 | 11.49 | 11.69 | 14.60 | 11.68 | 11.84 | 14.77 | - | - |
| UNII 2C | | 5570 | 114 | 11.31 | 12.25 | 14.82 | 11.27 | 12.34 | 14.85 | 11.16 | 12.39 | 14.83 | - | - |
| UNII 3-4 | | 5815 | 163 | 11.74 | 12.02 | 14.90 | 11.85 | 11.98 | 14.93 | 12.07 | 11.82 | 14.96 | -3.29 | 11.67 |
| UNII 1-2A | 484T | 5250 | 50 | 11.49 | 11.63 | 14.57 | - | - | - | 11.70 | 11.77 | 14.74 | - | - |
| UNII 2C | | 5570 | 114 | 11.33 | 12.31 | 14.86 | - | - | - | 11.23 | 12.41 | 14.87 | - | - |
| UNII 3-4 | | 5815 | 163 | 11.84 | 12.04 | 14.95 | - | - | - | 12.07 | 11.91 | 15.00 | -3.29 | 11.71 |
| UNII 1-2A | 996T | 5250 | 50 | - | - | - | 11.58 | 11.69 | 14.65 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | 11.24 | 12.35 | 14.84 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | 11.95 | 11.95 | 14.96 | - | - | - | -3.29 | 11.67 |

Mode : HE160(80U)

| Band | Tone | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|-----------|------|-------------|-----|---------------------------|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------|
| | | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII 1-2A | 26T | 5250 | 50 | 9.51 | 10.03 | 12.79 | 9.64 | 10.11 | 12.89 | 9.59 | 10.00 | 12.81 | - | - |
| UNII 2C | | 5570 | 114 | 9.14 | 10.43 | 12.84 | 9.17 | 10.46 | 12.88 | 8.95 | 10.37 | 12.72 | - | - |
| UNII 3-4 | | 5815 | 163 | 9.97 | 9.72 | 12.86 | 10.11 | 9.64 | 12.89 | 9.81 | 9.17 | 12.51 | -3.29 | 9.60 |
| UNII 1-2A | 52T | 5250 | 50 | 12.11 | 12.24 | 15.19 | 12.14 | 12.33 | 15.24 | 12.15 | 12.19 | 15.18 | - | - |
| UNII 2C | | 5570 | 114 | 11.57 | 12.85 | 15.27 | 11.61 | 12.93 | 15.33 | 11.39 | 12.78 | 15.15 | - | - |
| UNII 3-4 | | 5815 | 163 | 12.56 | 12.11 | 15.35 | 12.59 | 12.01 | 15.32 | 12.37 | 11.59 | 15.01 | -3.29 | 12.06 |
| UNII 1-2A | 106T | 5250 | 50 | 13.30 | 13.76 | 16.55 | 13.31 | 13.85 | 16.60 | 13.31 | 13.79 | 16.57 | - | - |
| UNII 2C | | 5570 | 114 | 12.70 | 14.29 | 16.58 | 12.71 | 14.38 | 16.64 | 12.54 | 14.20 | 16.46 | - | - |
| UNII 3-4 | | 5815 | 163 | 13.80 | 13.29 | 16.56 | 13.86 | 13.17 | 16.54 | 13.64 | 12.97 | 16.32 | -3.29 | 13.27 |
| UNII 1-2A | 242T | 5250 | 50 | 11.17 | 11.81 | 14.51 | 11.14 | 11.76 | 14.47 | 11.14 | 11.83 | 14.51 | - | - |
| UNII 2C | | 5570 | 114 | 10.69 | 11.89 | 14.34 | 10.69 | 11.93 | 14.36 | 10.58 | 11.90 | 14.30 | - | - |
| UNII 3-4 | | 5815 | 163 | 11.67 | 11.40 | 14.55 | 11.71 | 11.33 | 14.54 | 11.55 | 11.06 | 14.32 | -3.29 | 11.26 |
| UNII 1-2A | 484T | 5250 | 50 | 11.18 | 11.79 | 14.50 | - | - | - | 11.17 | 11.86 | 14.54 | - | - |
| UNII 2C | | 5570 | 114 | 10.71 | 11.91 | 14.36 | - | - | - | 10.65 | 11.90 | 14.33 | - | - |
| UNII 3-4 | | 5815 | 163 | 11.70 | 11.39 | 14.56 | - | - | - | 11.60 | 11.11 | 14.37 | -3.29 | 11.27 |
| UNII 1-2A | 996T | 5250 | 50 | - | - | - | 11.14 | 11.80 | 14.49 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | 10.66 | 11.88 | 14.32 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | 11.64 | 11.22 | 14.45 | - | - | - | -3.29 | 11.16 |

Mode : HE160

| Band | Tone | Freq. [MHz] | CH. | Total Average Power [dBm] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.P [dBm] |
|-----------|--------|-------------|-----|---------------------------|------|------|----------------|-------|-------|-----------------|------|------|------------------------|-----------------------|
| | | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII 1-2A | SU | 5250 | 50 | - | - | - | 11.79 | 11.85 | 14.83 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | 11.32 | 12.40 | 14.91 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | 12.18 | 11.94 | 15.07 | - | - | - | -3.29 | 11.78 |
| UNII 1-2A | 2x996T | 5250 | 50 | - | - | - | 12.27 | 12.38 | 15.34 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | 11.79 | 12.96 | 15.42 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | 12.69 | 12.26 | 15.49 | - | - | - | -3.29 | 12.20 |

10.5 POWER SPECTRAL DENSITY

Note : Max EIRP PSD = Power Spectral Density(Sum) + Ant Gain(Directional Gain)

Ant Total PSD [dBm] = Measured PSD [dBm] + Duty Cycle Factor [dB]

MIMO Total PSD [dBm] = Ant.1 Total PSD [dBm] + Ant.2 Total PSD [dB]

Limit(UNII 1, 2A, 2C) : 11.0 dBm/MHz

Limit(UNII 3) : 30.0 dBm/500 kHz

Limit(UNII 4) : (EIRP) 14 dBm/MHz

10.5.1 MIMO_CDD(Ant.1+Ant.2)

Mode : HE20 26T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|--------|----------------|-------|-------|-----------------|-------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | 7.426 | 7.438 | 10.443 | 6.776 | 6.127 | 9.474 | 7.623 | 7.479 | 10.562 | - | - |
| | 5200 | 40 | 7.669 | 7.666 | 10.678 | 6.320 | 6.179 | 9.261 | 7.641 | 7.499 | 10.581 | - | - |
| | 5240 | 48 | 7.463 | 7.687 | 10.587 | 6.344 | 6.290 | 9.328 | 7.672 | 7.311 | 10.506 | - | - |
| UNII2A | 5260 | 52 | 6.776 | 7.662 | 10.252 | 5.491 | 6.320 | 8.936 | 6.976 | 7.774 | 10.404 | - | - |
| | 5300 | 60 | 7.265 | 7.958 | 10.636 | 5.967 | 6.348 | 9.172 | 7.091 | 7.758 | 10.448 | - | - |
| | 5320 | 64 | 7.088 | 7.709 | 10.420 | 5.532 | 6.410 | 9.004 | 6.799 | 7.796 | 10.337 | - | - |
| UNII2C | 5500 | 100 | 6.591 | 8.114 | 10.429 | 5.539 | 6.548 | 9.083 | 6.514 | 7.927 | 10.288 | - | - |
| | 5600 | 120 | 6.571 | 8.091 | 10.408 | 5.307 | 6.572 | 8.996 | 6.273 | 7.584 | 9.988 | - | - |
| | 5720 | 144 | 6.809 | 7.831 | 10.360 | 5.677 | 6.260 | 8.989 | 7.022 | 7.734 | 10.403 | - | - |
| UNII3 | 5745 | 149 | 4.043 | 4.642 | 7.363 | 3.548 | 4.182 | 6.887 | 4.416 | 4.684 | 7.563 | - | - |
| | 5785 | 157 | 4.471 | 4.739 | 7.618 | 4.037 | 4.324 | 7.193 | 4.666 | 4.348 | 7.520 | - | - |
| | 5825 | 165 | 4.747 | 4.628 | 7.698 | 4.069 | 3.965 | 7.028 | 4.646 | 4.563 | 7.615 | - | - |
| UNII4 | 5845 | 169 | 8.015 | 7.673 | 10.858 | 6.736 | 6.385 | 9.575 | 8.121 | 7.536 | 10.849 | -3.29 | 7.568 |
| | 5865 | 173 | 8.036 | 7.446 | 10.762 | 6.717 | 6.489 | 9.615 | 7.918 | 7.554 | 10.750 | -3.29 | 7.472 |
| | 5885 | 177 | 8.033 | 7.314 | 10.699 | 6.398 | 6.007 | 9.217 | 7.776 | 7.039 | 10.434 | -3.29 | 7.409 |

Mode : HE20 52T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|--------|----------------|-------|--------|-----------------|-------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | 7.119 | 7.061 | 10.101 | 7.427 | 6.703 | 10.091 | 7.433 | 6.844 | 10.159 | - | - |
| | 5200 | 40 | 7.309 | 7.157 | 10.244 | 7.139 | 6.869 | 10.017 | 7.422 | 6.772 | 10.120 | - | - |
| | 5240 | 48 | 7.263 | 7.234 | 10.259 | 7.103 | 6.854 | 9.991 | 7.469 | 7.161 | 10.328 | - | - |
| UNII2A | 5260 | 52 | 7.137 | 7.312 | 10.236 | 7.014 | 7.434 | 10.240 | 7.341 | 7.513 | 10.439 | - | - |
| | 5300 | 60 | 6.929 | 7.257 | 10.107 | 6.775 | 7.197 | 10.002 | 7.042 | 7.410 | 10.241 | - | - |
| | 5320 | 64 | 6.738 | 7.280 | 10.028 | 6.894 | 7.265 | 10.094 | 6.749 | 7.498 | 10.150 | - | - |
| UNII2C | 5500 | 100 | 6.556 | 7.772 | 10.217 | 6.480 | 7.538 | 10.052 | 6.528 | 7.499 | 10.051 | - | - |
| | 5600 | 120 | 6.950 | 7.373 | 10.177 | 6.598 | 7.350 | 10.001 | 6.659 | 7.331 | 10.019 | - | - |
| | 5720 | 144 | 7.152 | 7.679 | 10.434 | 6.950 | 7.466 | 10.226 | 7.328 | 7.611 | 10.483 | - | - |
| UNII3 | 5745 | 149 | 3.711 | 4.089 | 6.915 | 3.467 | 4.025 | 6.766 | 3.780 | 3.880 | 6.841 | - | - |
| | 5785 | 157 | 3.864 | 3.809 | 6.847 | 3.627 | 3.879 | 6.766 | 4.074 | 3.944 | 7.020 | - | - |
| | 5825 | 165 | 4.267 | 4.069 | 7.180 | 4.163 | 3.774 | 6.984 | 4.317 | 4.015 | 7.179 | - | - |
| UNII4 | 5845 | 169 | 7.750 | 7.410 | 10.594 | 7.530 | 6.997 | 10.282 | 7.640 | 7.169 | 10.422 | -3.29 | 7.304 |
| | 5865 | 173 | 8.086 | 7.021 | 10.597 | 7.562 | 6.965 | 10.284 | 7.690 | 7.015 | 10.376 | -3.29 | 7.307 |
| | 5885 | 177 | 7.496 | 6.455 | 10.017 | 7.131 | 6.283 | 9.738 | 7.399 | 6.320 | 9.904 | -3.29 | 6.727 |

Mode : HE20 106T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|-------|----------------|------|------|-----------------|-------|-------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | 5.564 | 5.640 | 8.613 | - | - | - | 5.949 | 5.338 | 8.665 | - | - |
| | 5200 | 40 | 5.684 | 5.639 | 8.672 | - | - | - | 6.247 | 5.454 | 8.879 | - | - |
| | 5240 | 48 | 5.545 | 5.797 | 8.683 | - | - | - | 5.813 | 5.893 | 8.864 | - | - |
| UNII2A | 5260 | 52 | 5.601 | 5.904 | 8.766 | - | - | - | 5.526 | 5.927 | 8.742 | - | - |
| | 5300 | 60 | 5.119 | 5.617 | 8.386 | - | - | - | 5.154 | 5.498 | 8.340 | - | - |
| | 5320 | 64 | 5.158 | 5.624 | 8.408 | - | - | - | 5.250 | 5.954 | 8.627 | - | - |
| UNII2C | 5500 | 100 | 4.989 | 5.913 | 8.486 | - | - | - | 4.692 | 5.990 | 8.400 | - | - |
| | 5600 | 120 | 4.984 | 6.067 | 8.570 | - | - | - | 5.075 | 6.074 | 8.614 | - | - |
| | 5720 | 144 | 5.806 | 5.812 | 8.820 | - | - | - | 5.797 | 5.771 | 8.795 | - | - |
| UNII3 | 5745 | 149 | 2.159 | 2.396 | 5.290 | - | - | - | 2.182 | 2.472 | 5.340 | - | - |
| | 5785 | 157 | 2.605 | 2.311 | 5.471 | - | - | - | 2.614 | 2.572 | 5.604 | - | - |
| | 5825 | 165 | 2.851 | 3.027 | 5.951 | - | - | - | 2.913 | 2.569 | 5.755 | - | - |
| UNII4 | 5845 | 169 | 6.299 | 5.589 | 8.969 | - | - | - | 6.109 | 5.568 | 8.858 | -3.29 | 5.679 |
| | 5865 | 173 | 6.361 | 5.393 | 8.915 | - | - | - | 6.512 | 5.260 | 8.942 | -3.29 | 5.652 |
| | 5885 | 177 | 6.049 | 5.171 | 8.643 | - | - | - | 5.933 | 5.068 | 8.533 | -3.29 | 5.353 |

Mode : HE20 242T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|------|------|----------------|--------|-------|-----------------|------|------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | - | - | - | 3.569 | 2.995 | 6.301 | - | - | - | - | - |
| | 5200 | 40 | - | - | - | 3.543 | 3.133 | 6.353 | - | - | - | - | - |
| | 5240 | 48 | - | - | - | 3.250 | 3.247 | 6.258 | - | - | - | - | - |
| UNII2A | 5260 | 52 | - | - | - | 3.156 | 3.453 | 6.317 | - | - | - | - | - |
| | 5300 | 60 | - | - | - | 2.456 | 3.242 | 5.877 | - | - | - | - | - |
| | 5320 | 64 | - | - | - | 2.754 | 3.370 | 6.083 | - | - | - | - | - |
| UNII2C | 5500 | 100 | - | - | - | 2.291 | 3.519 | 5.958 | - | - | - | - | - |
| | 5600 | 120 | - | - | - | 2.465 | 3.565 | 6.060 | - | - | - | - | - |
| | 5720 | 144 | - | - | - | 3.178 | 3.407 | 6.304 | - | - | - | - | - |
| UNII3 | 5745 | 149 | - | - | - | -0.291 | 0.075 | 2.906 | - | - | - | - | - |
| | 5785 | 157 | - | - | - | 0.097 | -0.205 | 2.958 | - | - | - | - | - |
| | 5825 | 165 | - | - | - | 0.234 | 0.005 | 3.131 | - | - | - | - | - |
| UNII4 | 5845 | 169 | - | - | - | 3.604 | 3.093 | 6.366 | - | - | - | -3.29 | 3.076 |
| | 5865 | 173 | - | - | - | 3.704 | 3.036 | 6.393 | - | - | - | -3.29 | 3.103 |
| | 5885 | 177 | - | - | - | 3.453 | 2.666 | 6.087 | - | - | - | -3.29 | 2.797 |

Mode : HE20 SU

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|------|------|----------------|--------|-------|-----------------|------|------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5180 | 36 | - | - | - | 3.057 | 2.784 | 5.933 | - | - | - | - | - |
| | 5200 | 40 | - | - | - | 2.927 | 2.562 | 5.759 | - | - | - | - | - |
| | 5240 | 48 | - | - | - | 2.991 | 2.938 | 5.975 | - | - | - | - | - |
| UNII2A | 5260 | 52 | - | - | - | 2.599 | 3.191 | 5.915 | - | - | - | - | - |
| | 5300 | 60 | - | - | - | 2.040 | 2.837 | 5.467 | - | - | - | - | - |
| | 5320 | 64 | - | - | - | 2.130 | 2.882 | 5.533 | - | - | - | - | - |
| UNII2C | 5500 | 100 | - | - | - | 2.158 | 3.105 | 5.668 | - | - | - | - | - |
| | 5600 | 120 | - | - | - | 2.035 | 3.292 | 5.719 | - | - | - | - | - |
| | 5720 | 144 | - | - | - | 2.808 | 3.162 | 5.999 | - | - | - | - | - |
| UNII3 | 5745 | 149 | - | - | - | -0.749 | -0.465 | 2.406 | - | - | - | - | - |
| | 5785 | 157 | - | - | - | -0.439 | -0.545 | 2.519 | - | - | - | - | - |
| | 5825 | 165 | - | - | - | 0.002 | -0.326 | 2.851 | - | - | - | - | - |
| UNII4 | 5845 | 169 | - | - | - | 3.286 | 2.752 | 6.038 | - | - | - | -3.29 | 2.748 |
| | 5865 | 173 | - | - | - | 3.229 | 2.499 | 5.890 | - | - | - | -3.29 | 2.600 |
| | 5885 | 177 | - | - | - | 3.265 | 2.365 | 5.849 | - | - | - | -3.29 | 2.559 |

Mode : HE40 26T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|--------|----------------|-------|--------|-----------------|-------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 7.291 | 7.575 | 10.446 | 7.633 | 7.052 | 10.363 | 7.344 | 6.954 | 10.164 | - | - |
| | 5230 | 46 | 7.479 | 7.446 | 10.473 | 7.526 | 7.443 | 10.495 | 7.018 | 7.278 | 10.161 | - | - |
| UNII2A | 5270 | 54 | 6.629 | 7.531 | 10.114 | 7.180 | 7.884 | 10.557 | 6.614 | 7.419 | 10.046 | - | - |
| | 5310 | 62 | 6.779 | 7.420 | 10.122 | 6.715 | 7.501 | 10.136 | 6.645 | 7.729 | 10.231 | - | - |
| UNII2C | 5510 | 102 | 6.995 | 7.547 | 10.290 | 7.026 | 7.736 | 10.406 | 6.822 | 7.554 | 10.214 | - | - |
| | 5590 | 118 | 6.235 | 7.285 | 9.802 | 6.187 | 7.517 | 9.913 | 6.371 | 7.465 | 9.963 | - | - |
| | 5710 | 142 | 6.526 | 7.711 | 10.169 | 6.496 | 7.664 | 10.130 | 6.555 | 7.243 | 9.923 | - | - |
| UNII3 | 5755 | 151 | 3.836 | 4.315 | 7.093 | 3.879 | 4.770 | 7.358 | 3.620 | 4.078 | 6.866 | - | - |
| | 5795 | 159 | 4.038 | 4.185 | 7.123 | 4.254 | 4.511 | 7.395 | 3.969 | 4.073 | 7.032 | - | - |
| UNII4 | 5835 | 167 | 7.606 | 7.483 | 10.556 | 7.719 | 7.609 | 10.675 | 7.377 | 7.005 | 10.206 | -3.29 | 7.385 |
| | 5875 | 175 | 7.703 | 7.228 | 10.483 | 8.184 | 7.320 | 10.784 | 7.969 | 6.935 | 10.493 | -3.29 | 7.494 |

Mode : HE40 52T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|--------|----------------|-------|--------|-----------------|-------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 7.198 | 6.672 | 9.954 | 7.089 | 6.635 | 9.879 | 7.035 | 6.649 | 9.857 | - | - |
| | 5230 | 46 | 6.993 | 6.794 | 9.905 | 7.247 | 6.931 | 10.103 | 7.017 | 6.987 | 10.013 | - | - |
| UNII2A | 5270 | 54 | 6.502 | 6.752 | 9.640 | 6.550 | 6.906 | 9.742 | 6.422 | 6.480 | 9.462 | - | - |
| | 5310 | 62 | 6.699 | 6.936 | 9.830 | 6.499 | 7.255 | 9.904 | 6.556 | 7.029 | 9.810 | - | - |
| UNII2C | 5510 | 102 | 6.256 | 6.925 | 9.614 | 6.596 | 7.131 | 9.882 | 6.228 | 6.880 | 9.577 | - | - |
| | 5590 | 118 | 6.284 | 7.141 | 9.744 | 6.360 | 7.236 | 9.831 | 6.065 | 7.012 | 9.575 | - | - |
| | 5710 | 142 | 7.006 | 7.382 | 10.209 | 6.983 | 7.431 | 10.223 | 6.776 | 7.158 | 9.982 | - | - |
| UNII3 | 5755 | 151 | 3.681 | 3.574 | 6.639 | 3.685 | 3.742 | 6.724 | 3.732 | 3.403 | 6.581 | - | - |
| | 5795 | 159 | 3.731 | 4.093 | 6.926 | 3.954 | 3.663 | 6.822 | 3.789 | 3.780 | 6.795 | - | - |
| UNII4 | 5835 | 167 | 7.593 | 7.086 | 10.358 | 7.393 | 6.825 | 10.129 | 7.245 | 6.663 | 9.974 | -3.29 | 7.068 |
| | 5875 | 175 | 7.421 | 6.677 | 10.076 | 7.821 | 6.809 | 10.355 | 7.609 | 6.578 | 10.135 | -3.29 | 7.065 |

Mode : HE40 106T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 5.851 | 5.642 | 8.758 | 5.788 | 5.535 | 8.674 | 5.701 | 5.478 | 8.601 | - | - |
| | 5230 | 46 | 5.549 | 5.552 | 8.561 | 5.594 | 5.736 | 8.676 | 5.616 | 5.801 | 8.720 | - | - |
| UNII2A | 5270 | 54 | 4.982 | 5.464 | 8.240 | 4.870 | 5.537 | 8.227 | 4.877 | 5.599 | 8.263 | - | - |
| | 5310 | 62 | 5.232 | 5.641 | 8.452 | 5.153 | 5.621 | 8.404 | 5.050 | 5.521 | 8.302 | - | - |
| UNII2C | 5510 | 102 | 4.959 | 5.701 | 8.356 | 4.931 | 5.725 | 8.356 | 4.802 | 5.720 | 8.296 | - | - |
| | 5590 | 118 | 4.865 | 5.948 | 8.451 | 4.734 | 6.061 | 8.458 | 4.732 | 6.083 | 8.470 | - | - |
| | 5710 | 142 | 5.379 | 6.030 | 8.727 | 5.437 | 5.983 | 8.729 | 5.449 | 5.905 | 8.693 | - | - |
| UNII3 | 5755 | 151 | 1.799 | 2.620 | 5.239 | 2.266 | 2.725 | 5.512 | 2.165 | 2.777 | 5.492 | - | - |
| | 5795 | 159 | 2.366 | 2.534 | 5.461 | 2.415 | 2.651 | 5.545 | 2.484 | 2.378 | 5.442 | - | - |
| UNII4 | 5835 | 167 | 6.094 | 5.726 | 8.924 | 6.018 | 5.463 | 8.760 | 5.867 | 5.335 | 8.620 | -3.29 | 5.634 |
| | 5875 | 175 | 6.325 | 5.123 | 8.776 | 6.308 | 5.399 | 8.888 | 6.405 | 5.005 | 8.772 | -3.29 | 5.598 |

Mode : HE40 242T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|--------|-------|----------------|------|------|-----------------|--------|-------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | 2.191 | 1.993 | 5.104 | - | - | - | 2.019 | 1.915 | 4.978 | - | - |
| | 5230 | 46 | 1.992 | 2.146 | 5.080 | - | - | - | 2.106 | 2.143 | 5.135 | - | - |
| UNII2A | 5270 | 54 | 1.523 | 1.995 | 4.776 | - | - | - | 1.347 | 2.214 | 4.813 | - | - |
| | 5310 | 62 | 1.504 | 1.945 | 4.741 | - | - | - | 1.425 | 2.079 | 4.775 | - | - |
| UNII2C | 5510 | 102 | 1.223 | 2.069 | 4.677 | - | - | - | 1.338 | 2.350 | 4.884 | - | - |
| | 5590 | 118 | 1.302 | 2.405 | 4.899 | - | - | - | 1.283 | 2.403 | 4.890 | - | - |
| | 5710 | 142 | 1.958 | 2.581 | 5.291 | - | - | - | 1.903 | 2.415 | 5.177 | - | - |
| UNII3 | 5755 | 151 | -1.368 | -0.997 | 1.832 | - | - | - | -1.507 | -1.053 | 1.736 | - | - |
| | 5795 | 159 | -0.894 | -1.180 | 1.976 | - | - | - | -1.158 | -1.232 | 1.816 | - | - |
| UNII4 | 5835 | 167 | 2.482 | 2.073 | 5.293 | - | - | - | 2.405 | 1.643 | 5.051 | -3.29 | 2.003 |
| | 5875 | 175 | 2.547 | 1.856 | 5.226 | - | - | - | 2.678 | 1.679 | 5.218 | -3.29 | 1.936 |

Mode : HE40 484T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|------|------|----------------|--------|--------|-----------------|------|------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | - | - | - | -0.798 | -0.981 | 2.121 | - | - | - | - | - |
| | 5230 | 46 | - | - | - | -0.790 | -0.939 | 2.146 | - | - | - | - | - |
| UNII2A | 5270 | 54 | - | - | - | -1.451 | -0.523 | 2.048 | - | - | - | - | - |
| | 5310 | 62 | - | - | - | -1.365 | -0.812 | 1.930 | - | - | - | - | - |
| UNII2C | 5510 | 102 | - | - | - | -1.512 | -0.948 | 1.789 | - | - | - | - | - |
| | 5590 | 118 | - | - | - | -1.395 | -0.528 | 2.070 | - | - | - | - | - |
| | 5710 | 142 | - | - | - | -0.719 | -0.424 | 2.441 | - | - | - | - | - |
| UNII3 | 5755 | 151 | - | - | - | -4.396 | -3.892 | -1.127 | - | - | - | - | - |
| | 5795 | 159 | - | - | - | -4.086 | -3.857 | -0.960 | - | - | - | - | - |
| UNII4 | 5835 | 167 | - | - | - | -0.453 | -1.071 | 2.259 | - | - | - | -3.29 | -1.031 |
| | 5875 | 175 | - | - | - | -0.333 | -1.020 | 2.347 | - | - | - | -3.29 | -0.943 |

Mode : HE40 SU

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|------|------|----------------|--------|--------|-----------------|------|------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5190 | 38 | - | - | - | -0.737 | -1.034 | 2.127 | - | - | - | - | - |
| | 5230 | 46 | - | - | - | -0.897 | -0.865 | 2.129 | - | - | - | - | - |
| UNII2A | 5270 | 54 | - | - | - | -1.764 | -1.037 | 1.625 | - | - | - | - | - |
| | 5310 | 62 | - | - | - | -1.556 | -0.762 | 1.870 | - | - | - | - | - |
| UNII2C | 5510 | 102 | - | - | - | -1.780 | -0.720 | 1.793 | - | - | - | - | - |
| | 5590 | 118 | - | - | - | -1.736 | -0.528 | 1.920 | - | - | - | - | - |
| | 5710 | 142 | - | - | - | -1.149 | -0.347 | 2.281 | - | - | - | - | - |
| UNII3 | 5755 | 151 | - | - | - | -4.642 | -4.190 | -1.400 | - | - | - | - | - |
| | 5795 | 159 | - | - | - | -4.252 | -4.250 | -1.241 | - | - | - | - | - |
| UNII4 | 5835 | 167 | - | - | - | -0.784 | -1.176 | 2.035 | - | - | - | -3.29 | -1.255 |
| | 5875 | 175 | - | - | - | -0.208 | -1.295 | 2.293 | - | - | - | -3.29 | -0.997 |

Mode : HE80 26T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|--------|----------------|-------|-------|-----------------|-------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 7.334 | 7.772 | 10.569 | 6.325 | 6.032 | 9.191 | 7.679 | 7.936 | 10.820 | - | - |
| UNII2A | 5290 | 58 | 6.863 | 7.975 | 10.465 | 5.386 | 6.185 | 8.814 | 6.641 | 7.616 | 10.166 | - | - |
| UNII2C | 5530 | 106 | 6.821 | 7.705 | 10.296 | 5.300 | 6.482 | 8.942 | 6.811 | 8.132 | 10.532 | - | - |
| | 5610 | 122 | 6.192 | 7.904 | 10.142 | 5.214 | 6.014 | 8.643 | 6.577 | 7.547 | 10.100 | - | - |
| | 5690 | 138 | 6.702 | 7.990 | 10.404 | 5.345 | 6.100 | 8.749 | 6.673 | 8.012 | 10.404 | - | - |
| UNII3 | 5775 | 155 | 4.381 | 4.327 | 7.365 | 3.729 | 3.292 | 6.526 | 4.219 | 4.229 | 7.235 | - | - |
| UNII4 | 5855 | 171 | 7.839 | 7.600 | 10.732 | 6.831 | 5.864 | 9.385 | 8.492 | 7.398 | 10.990 | -3.29 | 7.700 |

Mode : HE80 52T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|--------|----------------|-------|--------|-----------------|-------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 7.161 | 7.176 | 10.179 | 6.948 | 6.379 | 9.684 | 7.049 | 6.907 | 9.989 | - | - |
| UNII2A | 5290 | 58 | 6.914 | 7.421 | 10.186 | 6.691 | 7.375 | 10.057 | 6.793 | 7.316 | 10.073 | - | - |
| UNII2C | 5530 | 106 | 7.113 | 7.312 | 10.224 | 6.692 | 6.861 | 9.788 | 7.111 | 7.404 | 10.271 | - | - |
| | 5610 | 122 | 6.050 | 7.613 | 9.912 | 5.812 | 7.383 | 9.679 | 6.069 | 7.947 | 10.119 | - | - |
| | 5690 | 138 | 6.443 | 7.291 | 9.898 | 6.117 | 6.663 | 9.409 | 6.439 | 7.229 | 9.863 | - | - |
| UNII3 | 5775 | 155 | 3.858 | 4.343 | 7.118 | 3.785 | 3.300 | 6.560 | 4.173 | 4.387 | 7.292 | - | - |
| UNII4 | 5855 | 171 | 8.023 | 7.264 | 10.671 | 7.640 | 6.966 | 10.327 | 8.411 | 7.058 | 10.798 | -3.29 | 7.508 |

Mode : HE80 106T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|-------|-------|----------------|-------|-------|-----------------|-------|-------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 6.150 | 6.050 | 9.111 | 5.902 | 5.589 | 8.759 | 6.036 | 6.054 | 9.056 | - | - |
| UNII2A | 5290 | 58 | 5.764 | 6.382 | 9.094 | 5.374 | 6.040 | 8.730 | 5.931 | 6.035 | 8.994 | - | - |
| UNII2C | 5530 | 106 | 5.302 | 6.021 | 8.687 | 4.880 | 5.706 | 8.323 | 4.991 | 6.051 | 8.564 | - | - |
| | 5610 | 122 | 5.240 | 6.294 | 8.809 | 5.132 | 6.059 | 8.631 | 5.144 | 6.286 | 8.763 | - | - |
| | 5690 | 138 | 5.703 | 6.556 | 9.161 | 5.598 | 6.145 | 8.891 | 5.528 | 6.083 | 8.825 | - | - |
| UNII3 | 5775 | 155 | 2.223 | 2.557 | 5.404 | 2.093 | 2.089 | 5.102 | 2.193 | 2.429 | 5.323 | - | - |
| UNII4 | 5855 | 171 | 6.316 | 5.635 | 8.999 | 6.186 | 5.284 | 8.769 | 6.897 | 5.431 | 9.236 | -3.29 | 5.946 |

Mode : HE80 242T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|--------|-------|----------------|--------|-------|-----------------|--------|-------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | 1.514 | 1.506 | 4.520 | 1.367 | 1.135 | 4.263 | 1.911 | 1.578 | 4.758 | - | - |
| UNII2A | 5290 | 58 | 1.380 | 1.872 | 4.643 | 1.155 | 1.785 | 4.492 | 1.205 | 2.002 | 4.632 | - | - |
| UNII2C | 5530 | 106 | 0.819 | 1.153 | 4.000 | 0.643 | 1.074 | 3.874 | 0.721 | 1.311 | 4.036 | - | - |
| | 5610 | 122 | 0.612 | 1.680 | 4.189 | 0.762 | 1.414 | 4.111 | 0.605 | 1.717 | 4.207 | - | - |
| | 5690 | 138 | 1.198 | 1.775 | 4.506 | 0.921 | 2.016 | 4.513 | 1.158 | 1.687 | 4.441 | - | - |
| UNII3 | 5775 | 155 | -2.385 | -2.310 | 0.663 | -1.942 | -2.190 | 0.946 | -2.168 | -2.570 | 0.646 | - | - |
| UNII4 | 5855 | 171 | 1.711 | 1.005 | 4.383 | 1.961 | 1.134 | 4.578 | 1.881 | 1.058 | 4.499 | -3.29 | 1.288 |

Mode : HE80 484T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|--------|--------|----------------|------|------|-----------------|--------|--------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | -1.173 | -1.589 | 1.634 | - | - | - | -1.164 | -1.270 | 1.793 | - | - |
| UNII2A | 5290 | 58 | -1.516 | -0.771 | 1.883 | - | - | - | -1.600 | -0.763 | 1.849 | - | - |
| UNII2C | 5530 | 106 | -2.097 | -1.852 | 1.037 | - | - | - | -2.395 | -1.377 | 1.154 | - | - |
| | 5610 | 122 | -2.180 | -1.463 | 1.203 | - | - | - | -1.790 | -1.306 | 1.469 | - | - |
| | 5690 | 138 | -1.881 | -1.036 | 1.572 | - | - | - | -1.635 | -0.756 | 1.837 | - | - |
| UNII3 | 5775 | 155 | -5.162 | -5.109 | -2.125 | - | - | - | -4.966 | -5.326 | -2.132 | - | - |
| UNII4 | 5855 | 171 | -1.083 | -1.871 | 1.551 | - | - | - | -0.765 | -2.029 | 1.659 | -3.29 | -1.631 |

Mode : HE80 996T

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|------|------|----------------|--------|--------|-----------------|------|------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | - | - | - | -4.255 | -4.131 | -1.182 | - | - | - | - | - |
| UNII2A | 5290 | 58 | - | - | - | -4.254 | -3.936 | -1.082 | - | - | - | - | - |
| UNII2C | 5530 | 106 | - | - | - | -5.357 | -4.412 | -1.849 | - | - | - | - | - |
| | 5610 | 122 | - | - | - | -4.952 | -3.981 | -1.429 | - | - | - | - | - |
| | 5690 | 138 | - | - | - | -4.610 | -3.824 | -1.189 | - | - | - | - | - |
| UNII3 | 5775 | 155 | - | - | - | -7.849 | -8.389 | -5.100 | - | - | - | - | - |
| UNII4 | 5855 | 171 | - | - | - | -3.770 | -4.784 | -1.237 | - | - | - | -3.29 | -4.527 |

Mode : HE80 SU

| Band | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|--------|-------------|-----|--|------|------|----------------|--------|--------|-----------------|------|------|------------------------|-----------------------------|
| | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII1 | 5210 | 42 | - | - | - | -4.342 | -4.319 | -1.320 | - | - | - | - | - |
| UNII2A | 5290 | 58 | - | - | - | -4.417 | -4.091 | -1.241 | - | - | - | - | - |
| UNII2C | 5530 | 106 | - | - | - | -5.246 | -4.793 | -2.003 | - | - | - | - | - |
| | 5610 | 122 | - | - | - | -5.355 | -4.187 | -1.721 | - | - | - | - | - |
| | 5690 | 138 | - | - | - | -4.915 | -4.084 | -1.469 | - | - | - | - | - |
| UNII3 | 5775 | 155 | - | - | - | -7.800 | -8.288 | -5.027 | - | - | - | - | - |
| UNII4 | 5855 | 171 | - | - | - | -3.561 | -4.958 | -1.193 | - | - | - | -3.29 | -4.483 |

| Mode : HE160(80L) | | | | | | | | | | | | | | |
|-------------------|------|-------------|-----|--|--------|--------|----------------|--------|--------|-----------------|--------|--------|------------------------|-----------------------------|
| Band | Tone | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
| | | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII 1-2A | 26T | 5250 | 50 | 6.027 | 6.584 | 9.325 | 5.788 | 5.844 | 8.827 | 6.982 | 6.877 | 9.941 | - | - |
| UNII 2C | | 5570 | 114 | 6.016 | 7.204 | 9.661 | 5.228 | 6.048 | 8.668 | 5.679 | 7.397 | 9.633 | - | - |
| UNII 3-4 | | 5815 | 163 | 6.809 | 6.840 | 9.835 | 5.566 | 6.052 | 8.826 | 7.142 | 6.602 | 9.891 | -3.29 | 6.601 |
| UNII 1-2A | 52T | 5250 | 50 | 6.170 | 5.760 | 8.980 | 6.250 | 6.069 | 9.171 | 6.866 | 6.170 | 9.542 | - | - |
| UNII 2C | | 5570 | 114 | 5.844 | 6.633 | 9.267 | 6.380 | 6.957 | 9.689 | 5.790 | 6.666 | 9.261 | - | - |
| UNII 3-4 | | 5815 | 163 | 6.521 | 6.921 | 9.736 | 6.829 | 6.749 | 9.800 | 7.670 | 6.411 | 10.096 | -3.29 | 6.806 |
| UNII 1-2A | 106T | 5250 | 50 | 4.695 | 4.832 | 7.774 | 4.900 | 4.786 | 7.854 | 5.166 | 5.287 | 8.237 | - | - |
| UNII 2C | | 5570 | 114 | 4.578 | 5.666 | 8.166 | 4.501 | 5.472 | 8.024 | 4.257 | 5.601 | 7.991 | - | - |
| UNII 3-4 | | 5815 | 163 | 5.250 | 5.242 | 8.256 | 5.569 | 5.069 | 8.337 | 5.887 | 5.260 | 8.595 | -3.29 | 5.305 |
| UNII 1-2A | 242T | 5250 | 50 | -0.690 | -0.904 | 2.215 | -0.516 | -0.561 | 2.472 | -0.393 | -0.457 | 2.585 | - | - |
| UNII 2C | | 5570 | 114 | -0.980 | -0.198 | 2.439 | -1.168 | -0.266 | 2.317 | -1.422 | -0.263 | 2.206 | - | - |
| UNII 3-4 | | 5815 | 163 | -0.298 | -0.047 | 2.840 | -0.050 | -0.267 | 2.853 | 0.039 | 0.067 | 3.063 | -3.29 | -0.227 |
| UNII 1-2A | 484T | 5250 | 50 | -3.486 | -3.659 | -0.561 | - | - | - | -3.253 | -3.399 | -0.315 | - | - |
| UNII 2C | | 5570 | 114 | -3.743 | -3.053 | -0.374 | - | - | - | -4.099 | -3.253 | -0.645 | - | - |
| UNII 3-4 | | 5815 | 163 | -3.000 | -3.012 | 0.004 | - | - | - | -2.994 | -3.080 | -0.027 | -3.29 | -3.286 |
| UNII 1-2A | 996T | 5250 | 50 | - | - | - | -5.931 | -6.606 | -3.245 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | -6.714 | -6.177 | -3.427 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | -5.655 | -6.026 | -2.826 | - | - | - | -3.29 | -6.116 |

| Mode : HE160(80U) | | | | | | | | | | | | | | |
|-------------------|------|-------------|-----|--|--------|--------|----------------|--------|--------|-----------------|--------|--------|------------------------|-----------------------------|
| Band | Tone | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
| | | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII 1-2A | 26T | 5250 | 50 | 6.688 | 7.021 | 9.868 | 5.252 | 5.908 | 8.603 | 6.739 | 6.906 | 9.834 | - | - |
| UNII 2C | | 5570 | 114 | 5.899 | 7.164 | 9.588 | 5.053 | 5.758 | 8.430 | 5.427 | 7.384 | 9.526 | - | - |
| UNII 3-4 | | 5815 | 163 | 7.038 | 7.209 | 10.135 | 6.166 | 5.717 | 8.958 | 7.402 | 5.934 | 9.740 | -3.29 | 6.845 |
| UNII 1-2A | 52T | 5250 | 50 | 6.447 | 6.593 | 9.531 | 6.437 | 6.769 | 9.617 | 6.304 | 6.160 | 9.243 | - | - |
| UNII 2C | | 5570 | 114 | 5.802 | 6.777 | 9.327 | 5.469 | 6.899 | 9.253 | 5.644 | 6.595 | 9.156 | - | - |
| UNII 3-4 | | 5815 | 163 | 7.343 | 6.591 | 9.994 | 7.431 | 6.648 | 10.068 | 6.928 | 6.230 | 9.604 | -3.29 | 6.778 |
| UNII 1-2A | 106T | 5250 | 50 | 5.009 | 5.370 | 8.204 | 5.399 | 5.013 | 8.221 | 5.013 | 4.849 | 7.942 | - | - |
| UNII 2C | | 5570 | 114 | 4.198 | 5.435 | 7.871 | 4.598 | 5.352 | 8.002 | 4.207 | 5.451 | 7.884 | - | - |
| UNII 3-4 | | 5815 | 163 | 5.921 | 5.270 | 8.618 | 5.890 | 5.253 | 8.594 | 5.790 | 4.831 | 8.347 | -3.29 | 5.328 |
| UNII 1-2A | 242T | 5250 | 50 | -0.136 | -0.723 | 2.591 | -0.084 | -0.750 | 2.606 | -0.406 | -0.532 | 2.542 | - | - |
| UNII 2C | | 5570 | 114 | -0.815 | -0.278 | 2.472 | -0.861 | -0.179 | 2.504 | -1.208 | -0.043 | 2.424 | - | - |
| UNII 3-4 | | 5815 | 163 | 0.346 | -0.390 | 3.004 | 0.250 | -0.311 | 2.989 | 0.586 | -0.568 | 3.058 | -3.29 | -0.232 |
| UNII 1-2A | 484T | 5250 | 50 | -3.077 | -3.129 | -0.093 | - | - | - | -3.363 | -3.383 | -0.363 | - | - |
| UNII 2C | | 5570 | 114 | -3.704 | -2.770 | -0.202 | - | - | - | -4.036 | -2.949 | -0.448 | - | - |
| UNII 3-4 | | 5815 | 163 | -2.441 | -2.940 | 0.327 | - | - | - | -2.396 | -3.021 | 0.313 | -3.29 | -2.963 |
| UNII 1-2A | 996T | 5250 | 50 | - | - | - | -6.239 | -6.309 | -3.263 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | -7.049 | -5.980 | -3.471 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | -5.590 | -6.290 | -2.915 | - | - | - | -3.29 | -6.205 |

Mode : HE160

| Band | Tone | Freq. [MHz] | CH. | Total Power Spectral Density [dBm/MHz] | | | | | | | | | Directional Gain [dBi] | Maximum E.I.R.PSD [dBm/MHz] |
|-----------|--------|-------------|-----|--|------|------|----------------|--------|--------|-----------------|------|------|------------------------|-----------------------------|
| | | | | RU Index : Low | | | RU Index : Mid | | | RU Index : High | | | | |
| | | | | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | ANT1 | ANT2 | MIMO | | |
| UNII 1-2A | SU | 5250 | 50 | - | - | - | -8.440 | -9.190 | -5.788 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | -9.506 | -8.804 | -6.130 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | -8.285 | -8.712 | -5.483 | - | - | - | -3.29 | -8.773 |
| UNII 1-2A | 2x996T | 5250 | 50 | - | - | - | -8.773 | -9.106 | -5.926 | - | - | - | - | - |
| UNII 2C | | 5570 | 114 | - | - | - | -9.709 | -8.849 | -6.247 | - | - | - | - | - |
| UNII 3-4 | | 5815 | 163 | - | - | - | -8.332 | -8.652 | -5.479 | - | - | - | -3.29 | -8.769 |

[MIMO_CDD(Ant.1+Ant.2)]



Note: In order to simplify the report, attached plots were only channel of the highest PSD.

Test Plots


Ant.1

Ant.2

UNII 1-2C Bandwidth 20M Ch.40(5200 MHz) 26 Tone RU 0

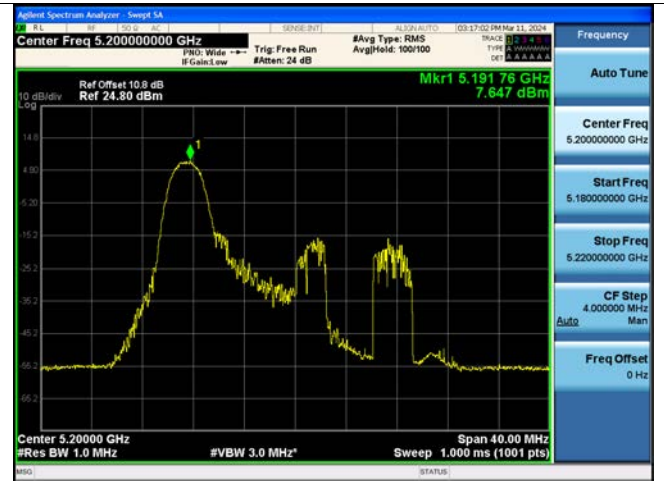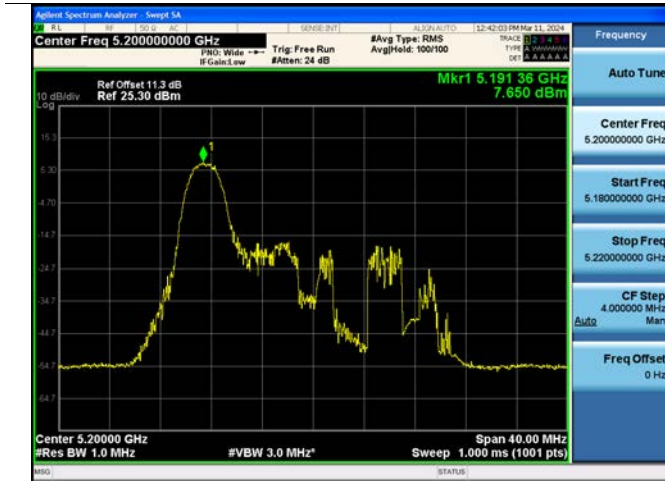


UNII 3 Bandwidth 20M Ch.165(5825 MHz) 26 Tone RU 0

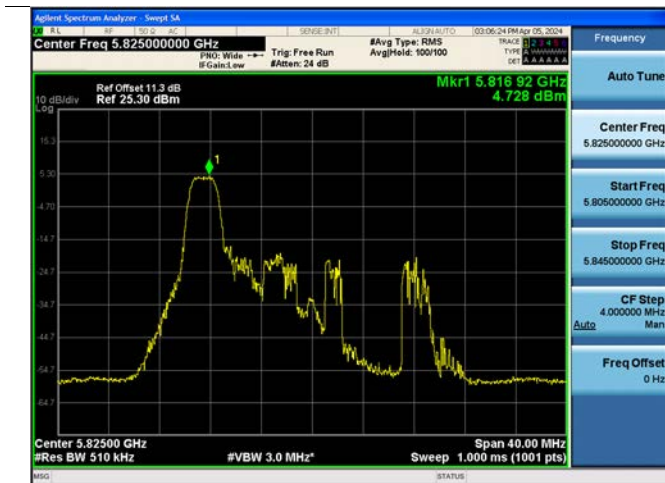

Ant.1

Ant.2

UNII 1-2C Bandwidth 40M Ch.54 (5270 MHz) 26Tone RU 9

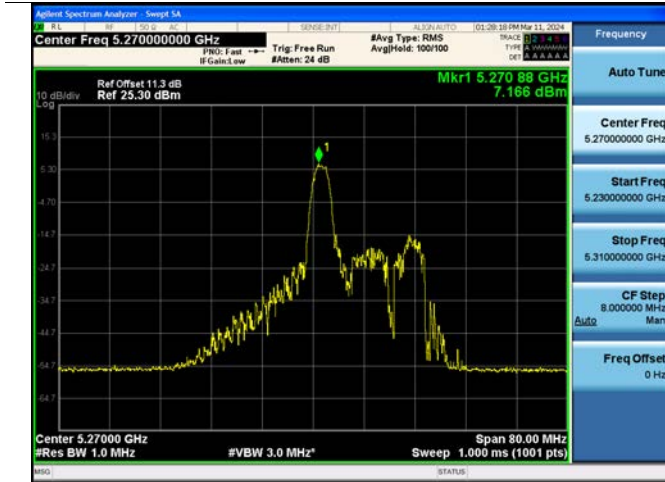


UNII 3 Bandwidth 40M Ch.159 (5795 MHz) 26Tone RU 9





Ant.1

Ant.2

UNII 1-2C Bandwidth 80M Ch.42 (5210 MHz) 26Tone RU 36

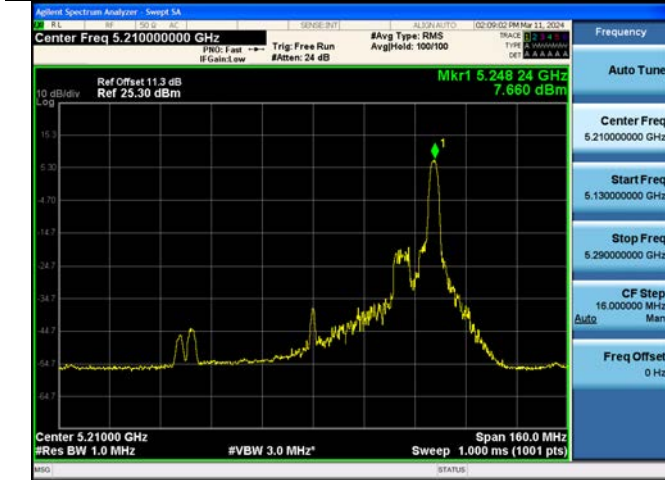



UNII 3 Bandwidth 80M Ch.155 (5775 MHz) 26 Tone RU 0

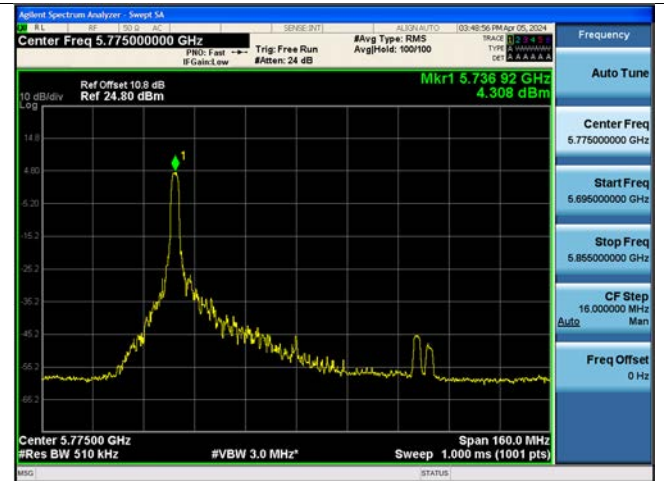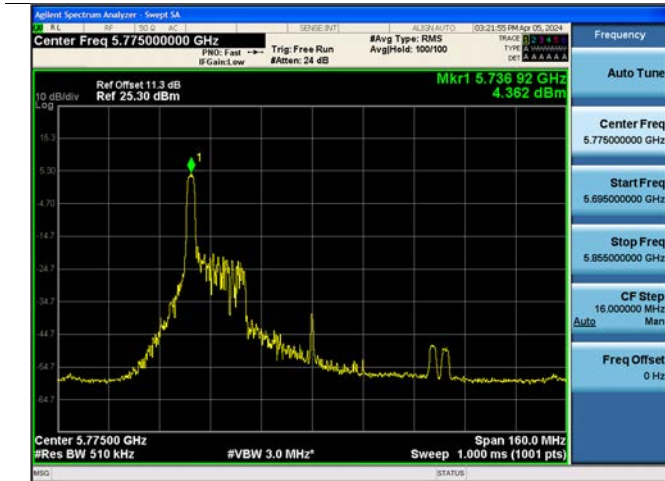

Ant.1

Ant.2

UNII 1-2C Bandwidth 160M_80L Ch.50 (5250 MHz) 26 Tones RU 36

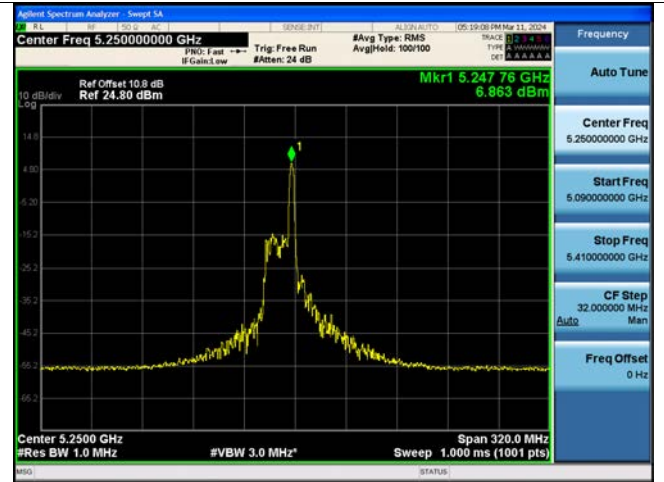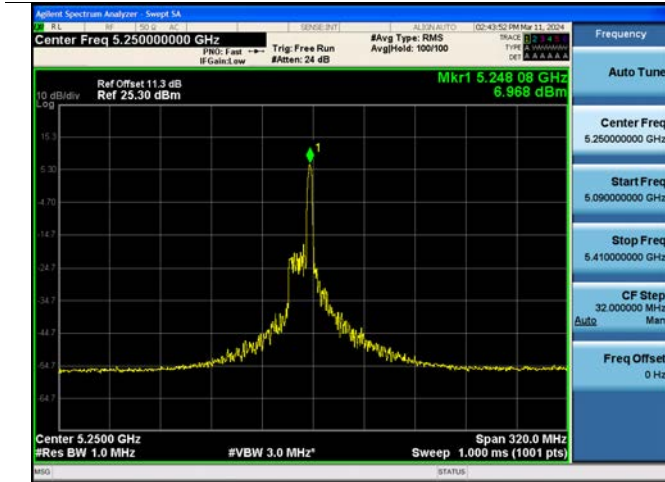


Test Plots(UNII4 Band, EIRP)

Note: In order to simplify the report, attached plots were only channel of the highest PSD.



Ant.1

Ant.2

UNII 4 Bandwidth 20M Ch.169 (5845 MHz) 26Tone RU 0

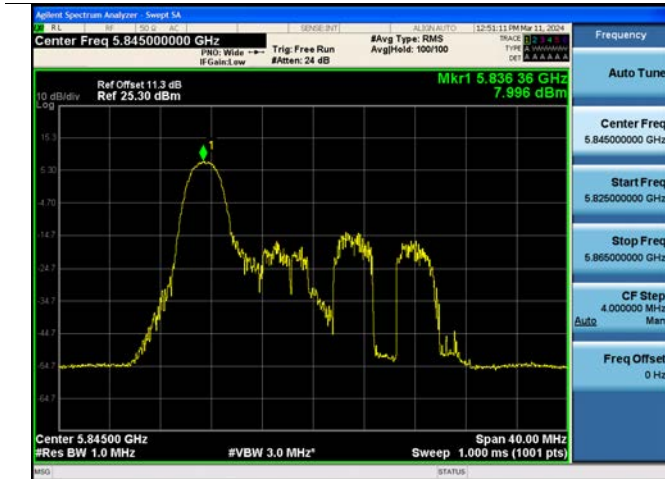


UNII 4 Bandwidth 40M Ch.175 (5835 MHz) 26Tone RU 9

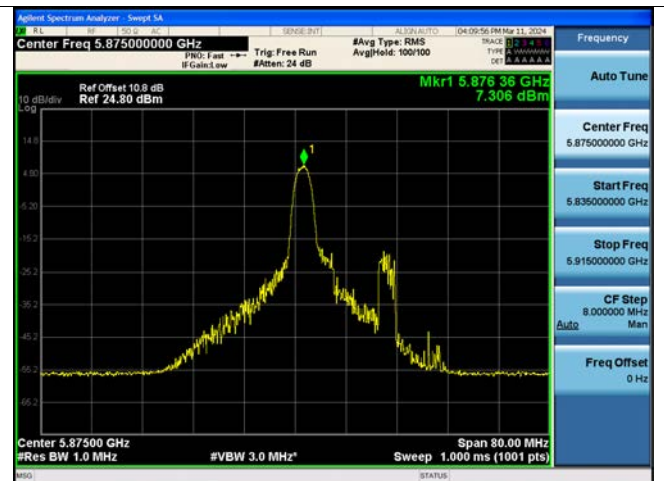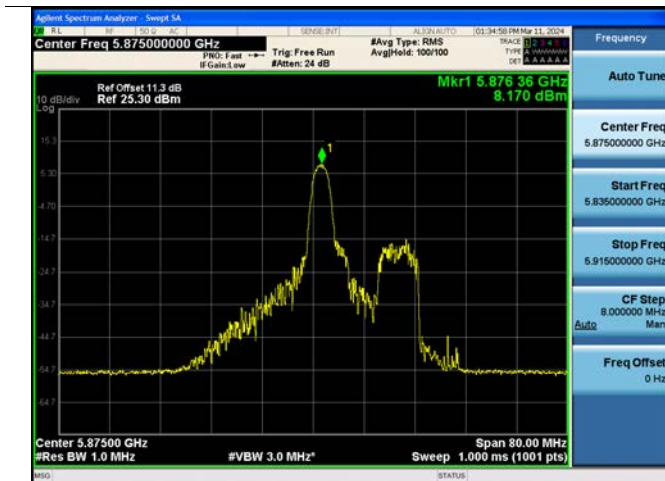



Ant.1

Ant.2

UNII 4 Bandwidth 80M Ch.171 (5855 MHz) 52Tone RU 36

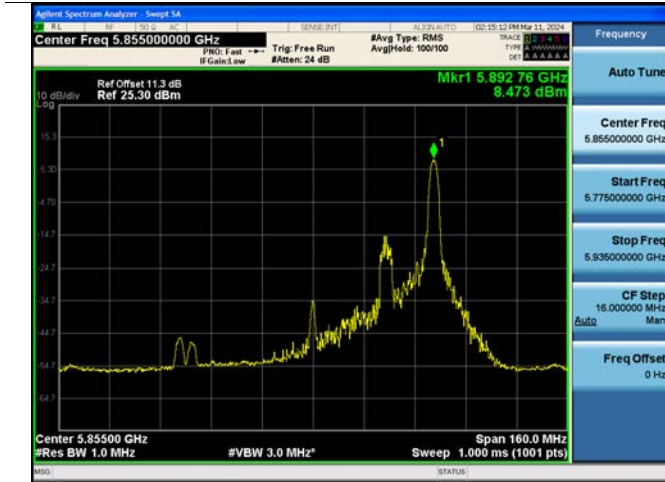

UNII 4 Bandwidth 160M_80U Ch.163 (5815 MHz) 26 Tones RU 0

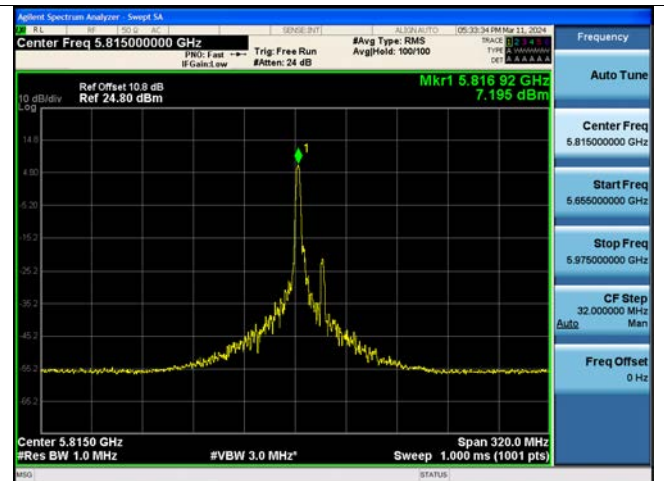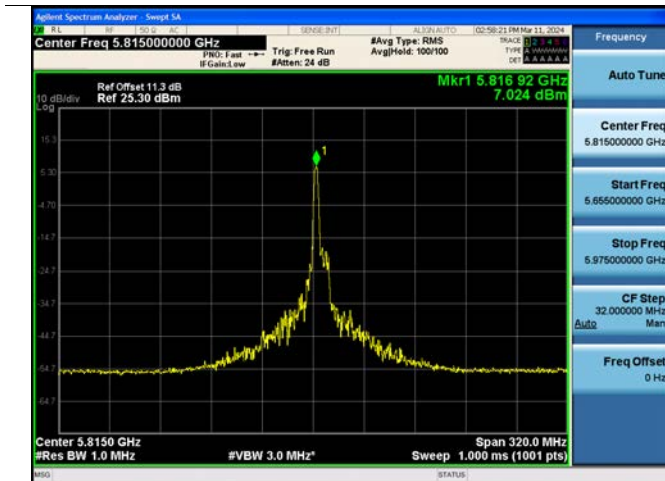

10.6 STRADDLE CHANNEL

| Test Description | Note |
|------------------------|--|
| 26 dB Bandwidth | 1. [UNII 2C] 26 dB Bandwidth = Measured Frequency[MHz] - 5725 MHz 2. [UNII 3] 26 dB Bandwidth = Measured Frequency[MHz] - 5725 MHz |
| 6 dB Bandwidth | 1. 6 dB Bandwidth = Measured Frequency[MHz] - 5725 MHz 2. Limit : > 0.5 MHz |
| Output Power | 1. Limit(UNII2C) : 23.98 dBm or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.) 2. Limit(UNII 3) : 30.00 dBm 3. Total Power (dBm) = Measured Value (dBm) + Duty Cycle Factor (dB) |
| Power Spectral Density | 1. Limit(UNII 2C) : 11.0 dBm/MHz 2. Limit(UNII 3) : 30.0 dBm/500 kHz 3. Total PSD (dBm) = Measured Value (dBm) + Duty Cycle Factor (dB) |

Note:

- (1) : 6dB bandwidth is only located in UNII 2C. Therefore 6dB bandwidth do not overlap.
 (2) : 26dB bandwidth is only located in UNII 2C. Therefore 26dB bandwidth do not overlap.

10.6.1 Ant.1

| Mode : HE20 | | | | | | | | | | |
|-------------|-----|------|---------|--------------|--------|--------|--------|-----------|---------|---------|
| Freq.[MHz] | CH. | Tone | RUIndex | 26dB BW[MHz] | | 6dB BW | Power | | PSD | |
| | | | | UNII 2C | UNII 3 | [MHz] | [dBm] | [dBm/MHz] | | |
| 5720 | 144 | 26T | (1) 0 | 15.60 | 4.16 | - | 9.36 | -19.17 | 6.609 | -20.786 |
| | | | (1) 4 | 14.08 | 4.12 | - | 8.98 | -18.95 | 5.284 | -21.745 |
| | | | 7 | 14.08 | 4.04 | 2.48 | -6.75 | 9.17 | -2.104 | 3.938 |
| | | | 8 | 14.04 | 5.64 | 4.48 | -12.89 | 9.31 | -18.488 | 3.957 |
| | | 52T | (1) 37 | 15.72 | 4.40 | - | 12.37 | -16.18 | 6.901 | -16.718 |
| | | | (1) 38 | 14.36 | 4.32 | - | 12.20 | -16.53 | 6.653 | -17.404 |
| | | | 39 | 14.20 | 4.24 | 2.52 | 11.77 | 1.90 | 6.730 | 3.300 |
| | | 106T | 40 | 14.12 | 5.64 | 4.48 | -5.50 | 12.32 | -2.390 | 4.191 |
| | | | (1) 53 | 15.60 | 4.72 | - | 13.82 | -11.93 | 5.608 | -16.325 |
| | | 242T | 54 | 14.48 | 5.64 | 4.56 | 10.30 | 11.23 | 5.341 | 2.649 |
| | | | 61 | 15.48 | 5.60 | 4.52 | 13.57 | 8.70 | 2.861 | 0.044 |
| | | SU | - | 15.68 | 5.64 | 4.52 | 12.66 | 7.69 | 1.983 | -0.952 |

| Mode : HE40 | | | | | | | | | | |
|-------------|-----|------|-----------|---------------|--------|--------|--------|-----------|---------|---------|
| Freq. [MHz] | CH. | Tone | RU Index | 26dB BW [MHz] | | 6dB BW | Power | | PSD | |
| | | | | UNII 2C | UNII 3 | [MHz] | [dBm] | [dBm/MHz] | | |
| 5710 | 142 | 26T | (1)(2) 0 | - | - | - | - | - | - | - |
| | | | (1) 9 | 18.28 | 4.20 | - | 9.04 | -20.16 | 6.441 | -23.247 |
| | | | 16 | 14.20 | 4.28 | 2.04 | -0.75 | 8.45 | 2.799 | 3.589 |
| | | | 17 | 14.20 | 5.88 | 4.04 | -12.28 | 8.78 | -20.503 | 3.457 |
| | | 52T | (1)(2) 37 | - | - | - | - | - | - | - |
| | | | (1) 41 | 19.48 | 4.12 | - | 12.11 | -17.13 | 6.717 | -22.009 |
| | | | 43 | 16.28 | 4.12 | 2.52 | 12.04 | -4.99 | 6.772 | -8.581 |
| | | 106T | 44 | 14.76 | 5.88 | 4.04 | -0.09 | 11.65 | 3.319 | 3.730 |
| | | | (1)(2) 53 | - | - | - | - | - | - | - |
| | | | (1)(2) 54 | - | - | - | - | - | - | - |
| | | 242T | 55 | 23.64 | 4.92 | 2.60 | 13.63 | -13.10 | 5.231 | -14.960 |
| | | | 56 | 23.64 | 5.96 | 4.04 | 10.73 | 10.25 | 5.316 | 2.221 |
| | | 484T | (1)(2) 61 | - | - | - | - | - | - | - |
| | | SU | 62 | 27.64 | 5.96 | 4.12 | 12.44 | 6.65 | 1.570 | -1.444 |
| | | | 65 | 36.12 | 5.64 | 4.12 | 13.03 | 3.60 | -1.272 | -4.482 |
| | | | - | 36.44 | 6.44 | 4.04 | 12.46 | 3.03 | -1.998 | -5.143 |

| Mode : HE80 | | | | | | | | | | |
|----------------|-----|------|-------------|------------------|--------|-----------------|----------------|--------|------------------|---------|
| Freq. [MHz] | CH. | Tone | RU Index | 26dB BW [MHz] | | 6dB BW [MHz] | Power [dBm] | | PSD [dBm/MHz] | |
| | | | | UNII 2C | UNII 3 | UNII 3 | UNII 2C | UNII 3 | UNII 2C | UNII 3 |
| 5690 | 138 | 26T | (1)(2) 0 | - | - | - | - | - | - | - |
| | | | (1)(2) 18 | - | - | - | - | - | - | - |
| | | | 35 | 15.00 | 6.28 | 2.12 | -0.19 | 8.62 | 3.206 | 3.806 |
| | | | 36 | 14.52 | 7.40 | 4.20 | -12.64 | 9.11 | -18.911 | 3.805 |
| | | 52T | (1)(2) 37 | - | - | - | - | - | - | - |
| | | | (1)(2) 45 | - | - | - | - | - | - | - |
| | | | 51 | 15.32 | 5.48 | 2.60 | 11.59 | -5.18 | 6.371 | -10.182 |
| | | | 52 | 15.48 | 8.36 | 4.04 | -0.43 | 11.54 | 2.521 | 3.498 |
| | | 106T | (1)(2) 53 | - | - | - | - | - | - | - |
| | | | (1)(2) 57 | - | - | - | - | - | - | - |
| | | | 59 | 21.24 | 6.28 | 2.76 | 13.60 | -11.70 | 5.317 | -14.926 |
| | | | 60 | 16.28 | 8.36 | 4.20 | 11.00 | 10.75 | 5.624 | 2.818 |
| | | 242T | (1)(2) 61 | - | - | - | - | - | - | - |
| | | | (1)(2) 62 | - | - | - | - | - | - | - |
| | | | (1)(2) 63 | - | - | - | - | - | - | - |
| | | | 64 | 22.68 | 9.16 | 4.20 | 11.55 | 6.22 | 0.751 | -2.022 |
| | | 484T | (1)(2) 65 | - | - | - | - | - | - | - |
| | | | 66 | 60.12 | 9.32 | 4.20 | 12.27 | 3.43 | -2.029 | -4.852 |
| | | 996T | 67 | 79.32 | 8.68 | 4.20 | 12.54 | 0.41 | -5.028 | -7.630 |
| | | SU | - | 80.12 | 9.16 | 4.20 | 11.67 | -0.31 | -5.680 | -8.535 |

10.6.2 Ant.2

| Mode : HE20 | | | | | | | | | | |
|-------------|-----|------|---------|--------------|--------|-------------|------------|--------|--------------|---------|
| Freq.[MHz] | CH. | Tone | RUIndex | 26dB BW[MHz] | | 6dB BW[MHz] | Power[dBm] | | PSD[dBm/MHz] | |
| | | | | UNII 2C | UNII 3 | UNII 3 | UNII 2C | UNII 3 | UNII 2C | UNII 3 |
| 5720 | 144 | 26T | (1) 0 | 15.52 | 3.88 | - | 10.08 | -18.87 | 7.503 | -20.459 |
| | | | (1) 4 | 14.24 | 3.64 | - | 9.76 | -18.82 | 6.296 | -23.567 |
| | | | 7 | 14.20 | 4.12 | 2.44 | -5.22 | 9.82 | -0.673 | 4.522 |
| | | | 8 | 14.20 | 5.40 | 4.44 | -11.24 | 9.93 | -16.963 | 4.735 |
| | | 52T | (1) 37 | 15.76 | 4.32 | - | 12.70 | -15.07 | 7.358 | -16.613 |
| | | | (1) 38 | 14.32 | 4.28 | - | 12.54 | -15.96 | 7.252 | -18.057 |
| | | | 39 | 14.36 | 4.12 | 2.48 | 12.08 | 2.00 | 7.154 | 3.020 |
| | | 106T | 40 | 14.20 | 5.56 | 4.48 | -4.94 | 12.52 | -1.197 | 4.644 |
| | | | (1) 53 | 15.60 | 4.68 | - | 14.12 | -11.96 | 5.678 | -14.143 |
| | | 242T | 54 | 14.56 | 5.56 | 4.52 | 10.60 | 11.44 | 5.419 | 2.770 |
| | | | 61 | 15.64 | 5.52 | 4.48 | 13.86 | 8.87 | 3.070 | 0.333 |
| | | SU | - | 15.88 | 5.64 | 4.48 | 13.24 | 8.17 | 2.497 | -0.453 |

| Mode : HE40 | | | | | | | | | | |
|-------------|-----|------|-----------|---------------|--------|--------------|-------------|--------|---------------|---------|
| Freq. [MHz] | CH. | Tone | RU Index | 26dB BW [MHz] | | 6dB BW [MHz] | Power [dBm] | | PSD [dBm/MHz] | |
| | | | | UNII 2C | UNII 3 | UNII 3 | UNII 2C | UNII 3 | UNII 2C | UNII 3 |
| 5710 | 142 | 26T | (1)(2) 0 | - | - | - | - | - | - | - |
| | | | (1) 9 | 18.04 | 4.12 | - | 10.05 | -19.66 | 7.403 | -22.100 |
| | | | 16 | 14.52 | 4.12 | 2.04 | 0.62 | 9.33 | 4.540 | 4.532 |
| | | | 17 | 14.28 | 5.80 | 4.04 | -11.27 | 9.72 | -18.523 | 4.603 |
| | | 52T | (1)(2) 37 | - | - | - | - | - | - | - |
| | | | (1) 41 | 19.40 | 4.20 | - | 12.66 | -17.08 | 7.315 | -20.016 |
| | | | 43 | 16.20 | 4.20 | 2.52 | 12.49 | -4.68 | 7.221 | -8.744 |
| | | 106T | 44 | 16.36 | 5.88 | 4.04 | 0.58 | 12.10 | 3.977 | 4.164 |
| | | | (1)(2) 53 | - | - | - | - | - | - | - |
| | | | (1)(2) 54 | - | - | - | - | - | - | - |
| | | 242T | 55 | 19.56 | 4.84 | 2.60 | 14.29 | -12.21 | 5.903 | -15.360 |
| | | | 56 | 23.56 | 6.04 | 4.04 | 11.46 | 10.84 | 5.914 | 2.989 |
| | | | (1)(2) 61 | - | - | - | - | - | - | - |
| | | 484T | 62 | 27.72 | 5.88 | 4.04 | 13.15 | 7.21 | 2.325 | -0.940 |
| | | | 65 | 36.20 | 5.56 | 4.04 | 13.73 | 4.17 | -0.556 | -3.813 |
| | | SU | - | 36.20 | 6.04 | 4.04 | 13.31 | 3.82 | -1.132 | -4.359 |

| Mode : HE80 | | | | | | | | | | |
|----------------|-----|------|-------------|------------------|--------|-----------------|----------------|--------|------------------|---------|
| Freq. [MHz] | CH. | Tone | RU Index | 26dB BW [MHz] | | 6dB BW [MHz] | Power [dBm] | | PSD [dBm/MHz] | |
| | | | | UNII 2C | UNII 3 | UNII 3 | UNII 2C | UNII 3 | UNII 2C | UNII 3 |
| 5690 | 138 | 26T | (1)(2) 0 | - | - | - | - | - | - | - |
| | | | (1)(2) 18 | - | - | - | - | - | - | - |
| | | | 35 | 14.52 | 5.48 | 2.12 | 0.82 | 9.60 | 4.429 | 4.917 |
| | | | 36 | 15.16 | 7.40 | 4.04 | -11.83 | 10.22 | -20.607 | 4.600 |
| | | 52T | (1)(2) 37 | - | - | - | - | - | - | - |
| | | | (1)(2) 45 | - | - | - | - | - | - | - |
| | | | 51 | 15.16 | 4.84 | 2.60 | 12.11 | -4.56 | 6.932 | -4.258 |
| | | | 52 | 15.16 | 9.00 | 4.20 | -0.10 | 12.12 | 1.477 | 4.284 |
| | | 106T | (1)(2) 53 | - | - | - | - | - | - | - |
| | | | (1)(2) 57 | - | - | - | - | - | - | - |
| | | | 59 | 22.04 | 6.28 | 2.60 | 14.12 | -11.55 | 5.652 | -17.028 |
| | | | 60 | 15.96 | 8.04 | 4.04 | 11.53 | 11.24 | 5.949 | 3.485 |
| | | 242T | (1)(2) 61 | - | - | - | - | - | - | - |
| | | | (1)(2) 62 | - | - | - | - | - | - | - |
| | | | (1)(2) 63 | - | - | - | - | - | - | - |
| | | | 64 | 22.68 | 8.68 | 4.20 | 12.13 | 6.77 | 1.631 | -1.478 |
| | | 484T | (1)(2) 65 | - | - | - | - | - | - | - |
| | | | 66 | 60.28 | 9.48 | 4.20 | 12.88 | 4.02 | -1.281 | -4.011 |
| | | 996T | 67 | 78.04 | 8.68 | 4.20 | 13.24 | 1.04 | -4.162 | -7.202 |
| | | SU | - | 78.36 | 9.00 | 4.20 | 12.67 | 0.70 | -4.807 | -7.498 |

Test Plots(26dB Bandwidth)


Note: In order to simplify the report, attached plots were only the widest channel. (UNII1~3)
[Ant.1]

UNII 2C

20M Ch.144(5720 MHz) 52 Tones RU 37

UNII 3

20M Ch.144(5720 MHz) 26 Tones RU 8

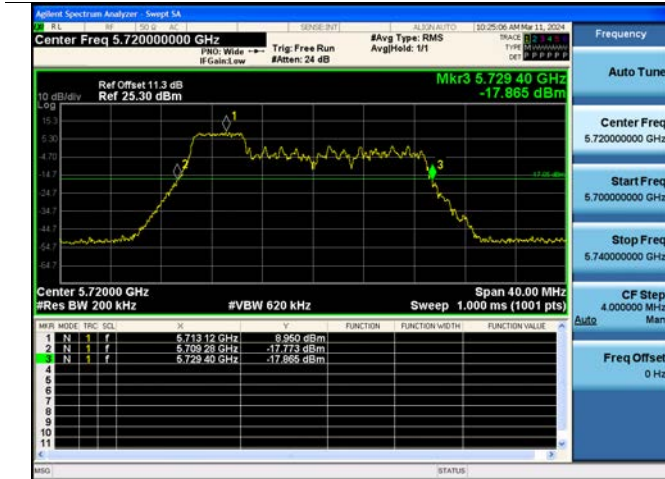

40M Ch.142(5710 MHz) SU

40M Ch.142(5710 MHz) SU



80M Ch.138(5690 MHz) SU

80M Ch.138(5690 MHz) 484 Tones RU 66




[Ant.2]

UNII 2C

UNII 3


20M Ch.144(5720 MHz) SU

20M Ch.144(5720 MHz) SU

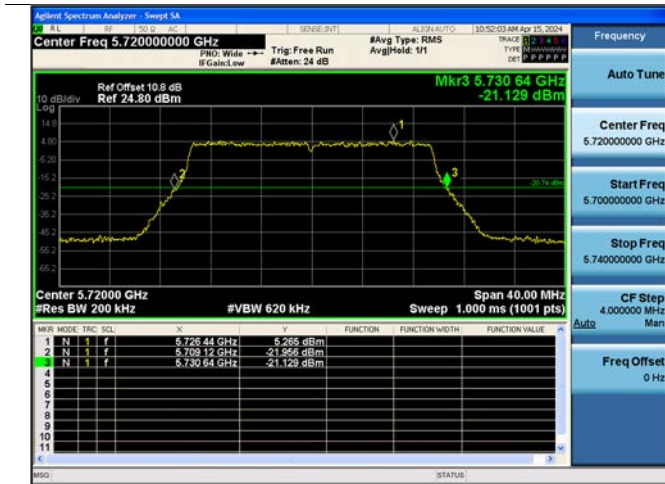

40M Ch.142(5710 MHz) SU

40M Ch.142(5710 MHz) SU

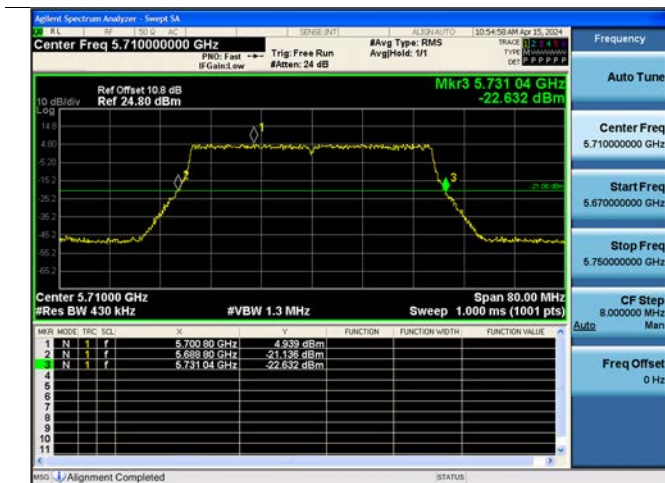

80M Ch.138(5690 MHz) SU

80M Ch.138(5690 MHz) 484 Tones RU 66




Test Plots(6dB Bandwidth)

Note: In order to simplify the report, attached plots were only the narrowest channel. (UNIII~3)

[Ant.1]


20M Ch.144(5720 MHz) 26 Tones RU 7

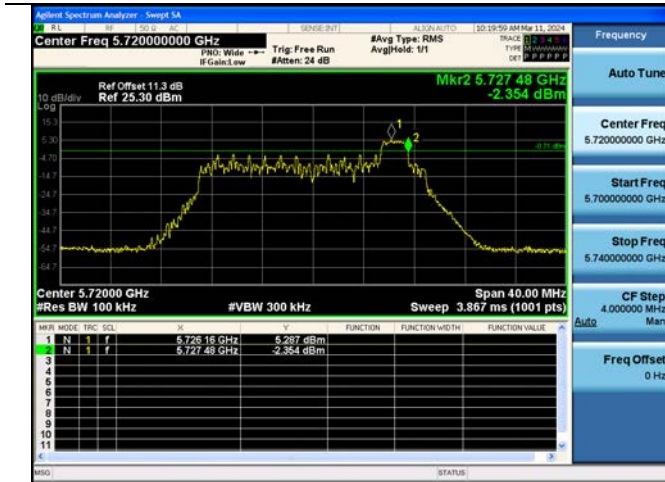

40M Ch.142(5710 MHz) 26 Tones RU 16




80M Ch.138(5690 MHz) 242 Tones RU 35

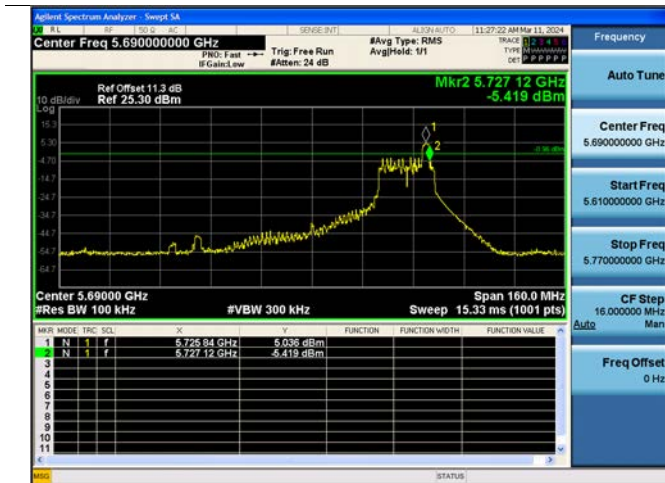

[Ant.2]


20M Ch.144(5720 MHz) 26 Tones RU 7

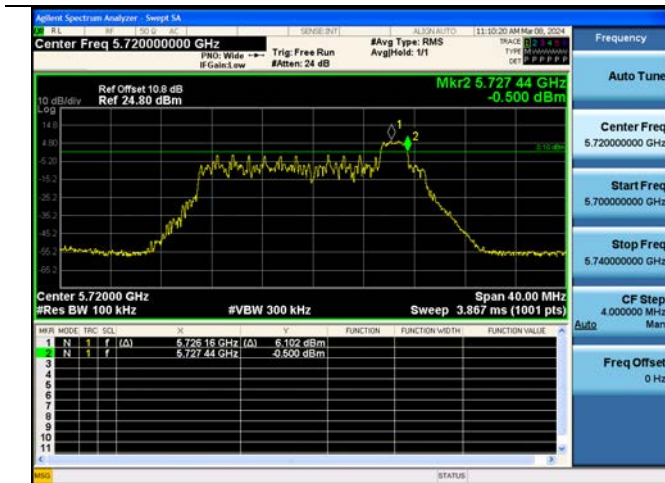

40M Ch.142(5710 MHz) 26 Tones RU 16




80M Ch.138(5690 MHz) 242 Tones RU 35

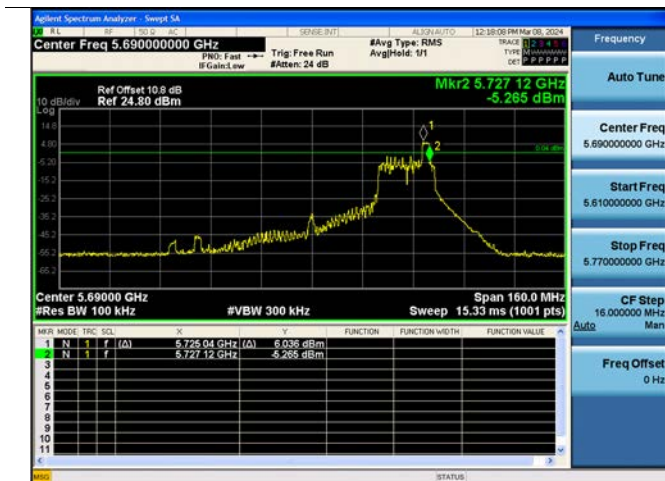

Test Plots(Output Power)

Note: In order to simplify the report, attached plots were only channel of highest Power.


[Ant.1]

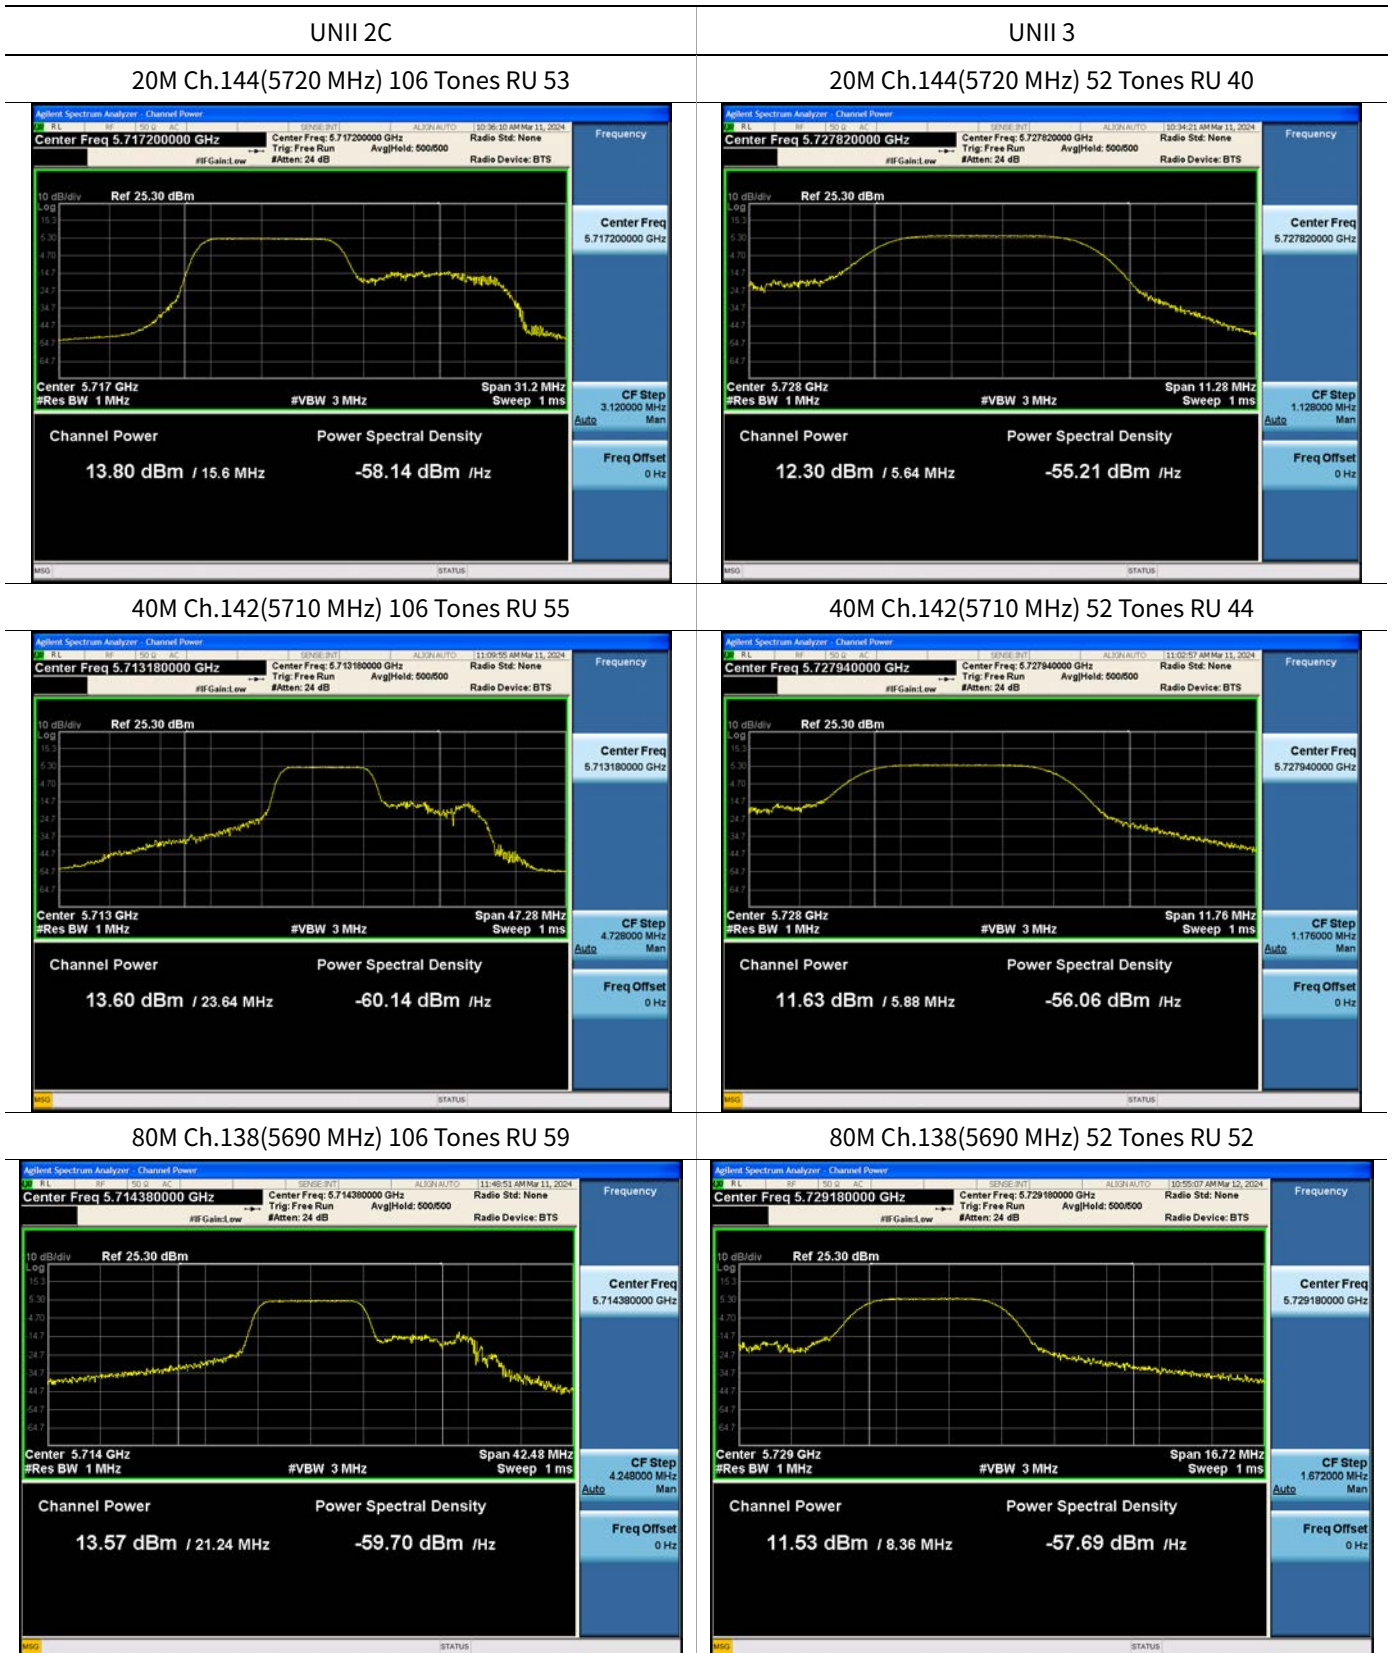

[Ant.2]


UNII 2C

20M Ch.144(5720 MHz) 106 Tones RU 53

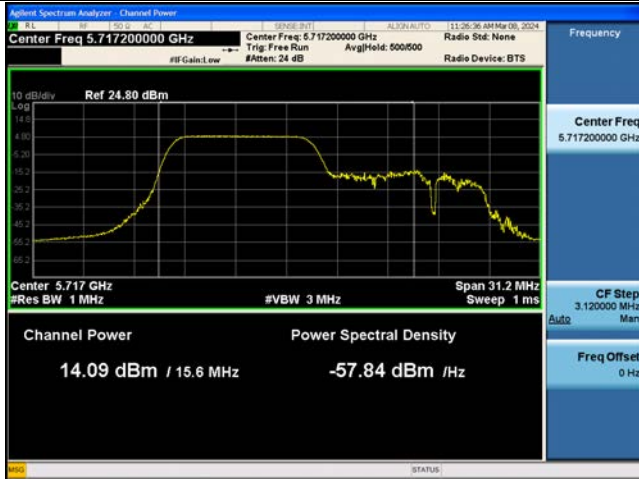


UNII 3


20M Ch.144(5720 MHz) 52 Tones RU 40

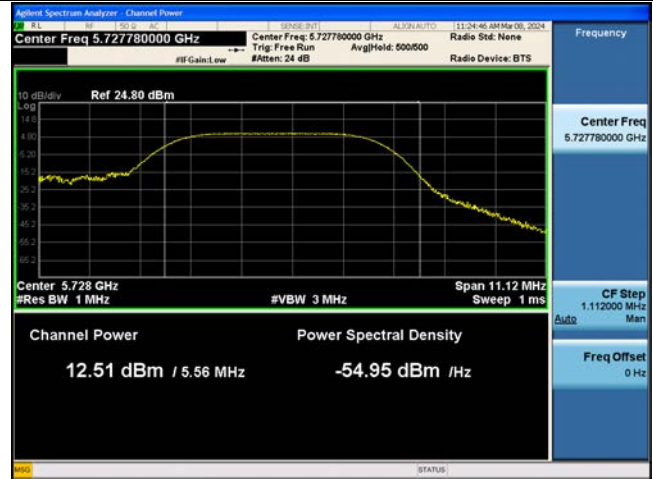


40M Ch.142(5710 MHz) 106 Tones RU 55

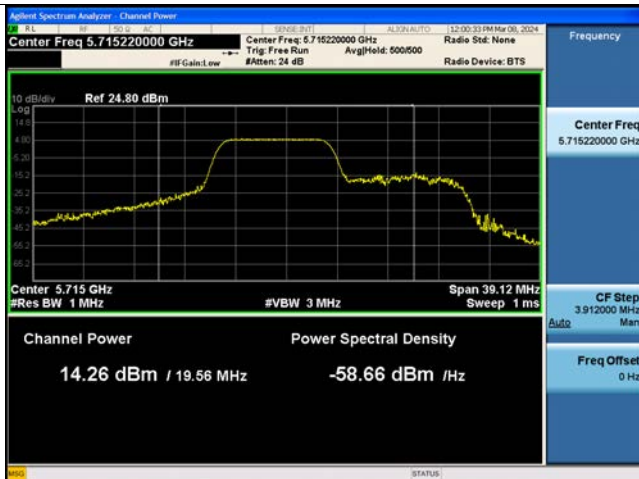


40M Ch.142(5710 MHz) 52 Tones RU 44

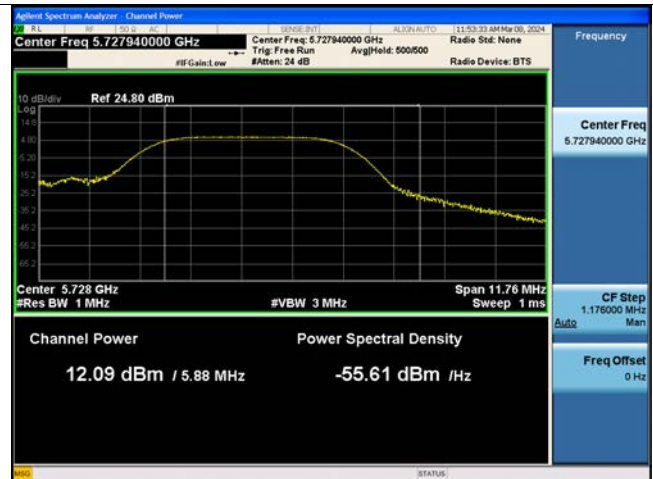

80M Ch.138(5690 MHz) 106 Tones RU 59

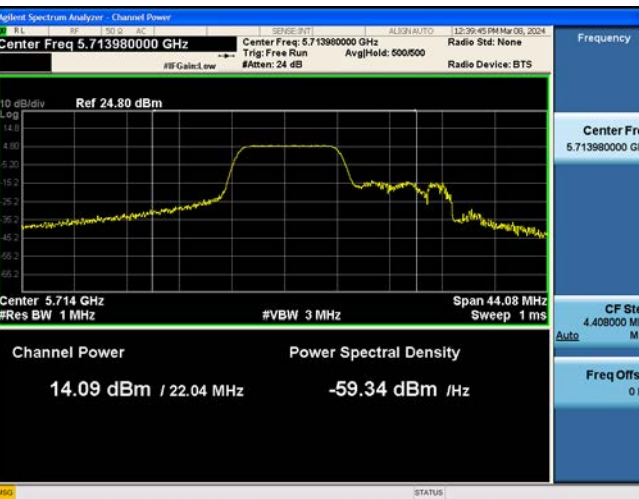

80M Ch.138(5690 MHz) 52 Tones RU 52

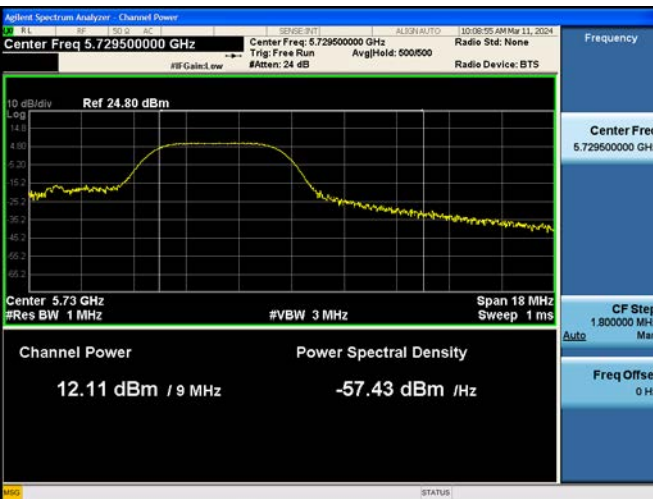

Test Plots(Power Spectral Density)

Note: In order to simplify the report, attached plots were only channel of highest PSD.

[Ant.1]

