

TEST REPORT

FCC LTE B26(5) Test for SM-F741U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2404-FC016

DATE OF ISSUE
April 26, 2024

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST
REPORT**

REPORT NO.
HCT-RF-2404-FC016

DATE OF ISSUE
April 26, 2024

Additional Model
SM-F741U1

Applicant **SAMSUNG Electronics Co., Ltd.**
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name Mobile Phone
Model Name SM-F741U

Date of Test February 22, 2024 ~ April 23, 2024

FCC ID A3LSMF741U

Location of Test Permanent Testing Lab On Site Testing
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s): § 22

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 26, 2024	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S.C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	16
3.9 WORST CASE(RADIATED TEST).....	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS.....	21
7. SAMPLE CALCULATION	22
8. TEST DATA.....	24
8.1 EFFECTIVE RADIATED POWER	24
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS.....	30
8.6 BAND EDGE	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	31
9. TEST PLOTS	36
10. ANNEX A_ TEST SETUP PHOTO	122

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMF741U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 22
EUT Type:	Mobile phone
Model(s):	SM-F741U
Additional Model(s)	SM-F741U1
Tx Frequency:	824.7 MHz – 848.3 MHz (LTE – Band 5 / 26 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band 5 / 26 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band 5 / 26 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band 5 / 26 (10 MHz)) 831.5 MHz – 841.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	February 22, 2024 ~ April 23, 2024
Serial number:	Radiated : R3CX20KJSJW Conducted : 7b5599bdac507ece

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5/26 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.092	19.63
		1M10W7D	16QAM	0.072	18.60
		1M10W7D	64QAM	0.058	17.62
		1M10W7D	256QAM	0.029	14.57
LTE – Band5/26 (3)	825.5 – 847.5	2M71G7D	QPSK	0.094	19.74
		2M72W7D	16QAM	0.074	18.68
		2M71W7D	64QAM	0.059	17.73
		2M72W7D	256QAM	0.030	14.75
LTE – Band5/26 (5)	826.5 – 846.5	4M52G7D	QPSK	0.097	19.89
		4M52W7D	16QAM	0.076	18.79
		4M52W7D	64QAM	0.059	17.74
		4M51W7D	256QAM	0.030	14.78
LTE – Band5/26 (10)	829.0 – 844.0	9M01G7D	QPSK	0.091	19.60
		9M01W7D	16QAM	0.072	18.56
		9M00W7D	64QAM	0.058	17.62
		9M01W7D	256QAM	0.029	14.58
LTE – Band26 (15)	831.5 – 841.5	13M5G7D	QPSK	0.089	19.51
		13M5W7D	16QAM	0.070	18.44
		13M5W7D	64QAM	0.057	17.54
		13M5W7D	256QAM	0.028	14.46

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6, mmWave. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

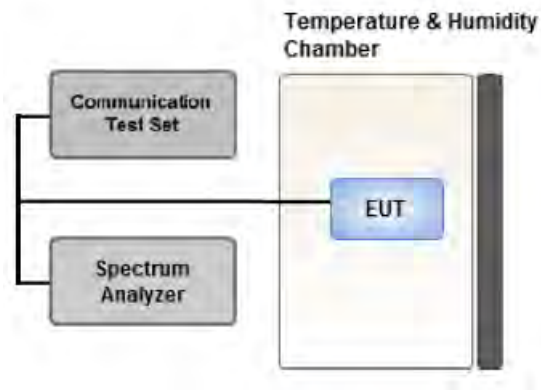


Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

3.5 OCCUPIED BANDWIDTH.

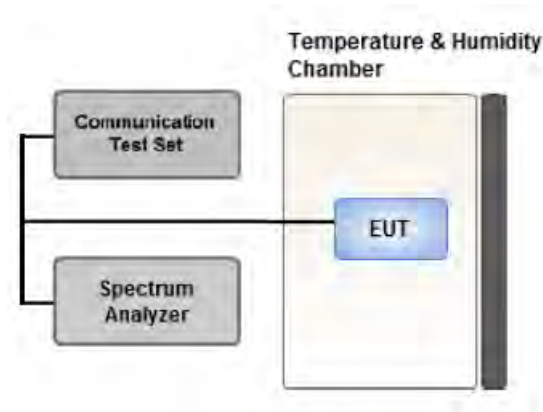

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

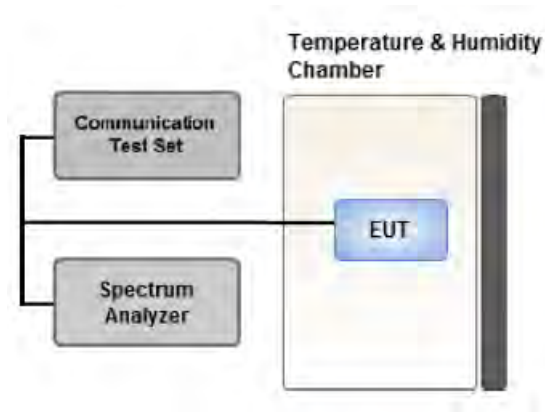

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

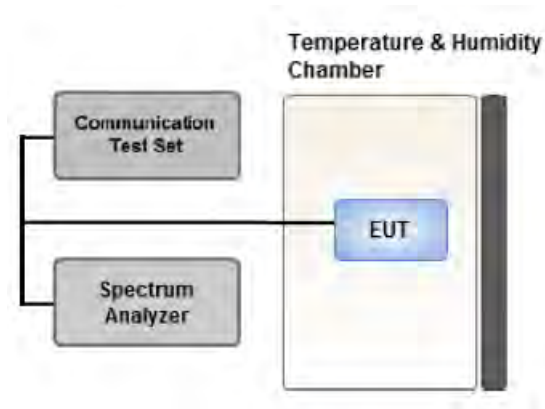

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

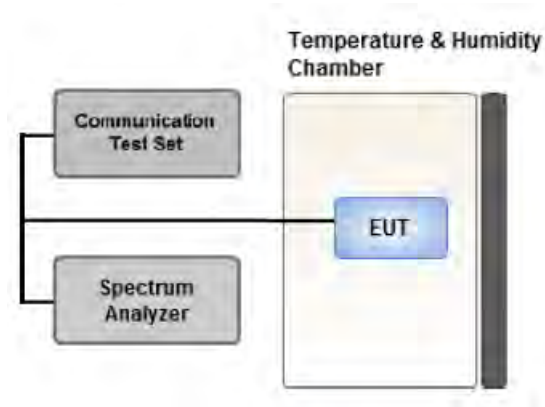

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz)
- LTE Band 26(1.4 M/3 M/5 M/10 M) overlaps the entire frequency range of LTE Band 5(1.4 M/3 M/5 M/10 M) and they have the same Tune-up power.
 Therefore, test data provided in this report covers Band 5 as well as Band 26.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
 Worst case: Open Mode.
- Please refer to the table below.
- SM-F741U & additional models were tested and the worst case results are reported.
 (Worst case : SM-F741U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		X

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - SM-F741U & additional models were tested and the worst case results are reported.
- (Worst case : SM-F741U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		1.4, 3, 5, 10, 15	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	12/11/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	12/11/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	09/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	09/16/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a)	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 22.913(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a)	< 43 + 10log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP		RB	
								W	W	dBm	Size	Offset	
824.7	LTE 5/26 (1.4 MHz)	QPSK	-30.43	30.47	-10.05	1.38	H	< 7.00	0.080	19.04	1	3	
		16-QAM	-31.55	29.35	-10.05	1.38	H			17.92			
		64-QAM	-32.48	28.42	-10.05	1.38	H			16.99			
		256-QAM	-35.43	25.47	-10.05	1.38	H			14.04			
836.5		QPSK	-30.60	30.69	-10.05	1.40	H		0.084	19.24	1	3	
		16-QAM	-31.60	29.69	-10.05	1.40	H		0.067	18.24			
		64-QAM	-32.62	28.67	-10.05	1.40	H		0.053	17.22			
		256-QAM	-35.63	25.66	-10.05	1.40	H		0.026	14.21			
848.3		QPSK	-30.53	31.09	-10.05	1.41	H		0.092	19.63	1	0	
		16-QAM	-31.56	30.06	-10.05	1.41	H		0.072	18.60			
		64-QAM	-32.54	29.08	-10.05	1.41	H		0.058	17.62			
		256-QAM	-35.59	26.03	-10.05	1.41	H		0.029	14.57			

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP		RB	
								W	W	dBm	Size	Offset	
825.5	LTE 5/26 (3 MHz)	QPSK	-30.47	30.44	-10.05	1.39	H	< 7.00	0.079	19.00	1	0	
		16-QAM	-31.42	29.49	-10.05	1.39	H			18.05			
		64-QAM	-32.49	28.42	-10.05	1.39	H			16.98			
		256-QAM	-35.51	25.40	-10.05	1.39	H			13.96			
836.5		QPSK	-30.58	30.71	-10.05	1.40	H		0.084	19.26	1	8	
		16-QAM	-31.58	29.71	-10.05	1.40	H		0.067	18.26			
		64-QAM	-32.60	28.69	-10.05	1.40	H		0.053	17.24			
		256-QAM	-35.51	25.78	-10.05	1.40	H		0.027	14.33			
847.5		QPSK	-30.43	31.20	-10.05	1.41	H		0.094	19.74	1	8	
		16-QAM	-31.49	30.14	-10.05	1.41	H		0.074	18.68			
		64-QAM	-32.44	29.19	-10.05	1.41	H		0.059	17.73			
		256-QAM	-35.42	26.21	-10.05	1.41	H		0.030	14.75			

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP		RB	
								W	W	dBm	Size	Offset	
826.5	LTE 5/26 (5 MHz)	QPSK	-30.60	30.30	-10.05	1.39	H	< 7.00	0.077	18.86	1	13	
		16-QAM	-31.68	29.22	-10.05	1.39	H		0.060	17.78			
		64-QAM	-32.75	28.15	-10.05	1.39	H		0.047	16.71			
		256-QAM	-35.72	25.18	-10.05	1.39	H		0.024	13.74			
836.5		QPSK	-30.53	30.76	-10.05	1.40	H		0.085	19.31	1	13	
		16-QAM	-31.52	29.77	-10.05	1.40	H		0.068	18.32			
		64-QAM	-32.61	28.68	-10.05	1.40	H		0.053	17.23			
		256-QAM	-35.49	25.80	-10.05	1.40	H		0.027	14.35			
846.5		QPSK	-30.33	31.35	-10.05	1.41	H		0.097	19.89	1	0	
		16-QAM	-31.43	30.25	-10.05	1.41	H		0.076	18.79			
		64-QAM	-32.48	29.20	-10.05	1.41	H		0.059	17.74			
		256-QAM	-35.44	26.24	-10.05	1.41	H		0.030	14.78			

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP		RB	
								W	W	dBm	Size	Offset	
829.0	LTE 5/26 (10 MHz)	QPSK	-30.56	30.46	-10.05	1.39	H	< 7.00	0.080	19.02	1	49	
		16-QAM	-31.75	29.27	-10.05	1.39	H		0.061	17.83			
		64-QAM	-32.70	28.32	-10.05	1.39	H		0.049	16.88			
		256-QAM	-35.73	25.29	-10.05	1.39	H		0.024	13.85			
836.5		QPSK	-30.45	30.84	-10.05	1.40	H		0.087	19.39	1	49	
		16-QAM	-31.50	29.79	-10.05	1.40	H		0.068	18.34			
		64-QAM	-32.51	28.78	-10.05	1.40	H		0.054	17.33			
		256-QAM	-35.54	25.75	-10.05	1.40	H		0.027	14.30			
844.0		QPSK	-30.42	31.06	-10.05	1.41	H		0.091	19.60	1	25	
		16-QAM	-31.46	30.02	-10.05	1.41	H		0.072	18.56			
		64-QAM	-32.40	29.08	-10.05	1.41	H		0.058	17.62			
		256-QAM	-35.44	26.04	-10.05	1.41	H		0.029	14.58			

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
									W	W	dBm	Size
831.5		QPSK	-30.62	30.51	-10.05	1.39	H	< 7.00	0.081	19.07	1	38
		16-QAM	-31.70	29.43	-10.05	1.39	H		0.063	17.99		
		64-QAM	-32.71	28.42	-10.05	1.39	H		0.050	16.98		
		256-QAM	-35.75	25.38	-10.05	1.39	H		0.025	13.94		
836.5	LTE 26 (15 MHz)	QPSK	-30.49	30.80	-10.05	1.40	H	< 7.00	0.086	19.35	1	74
		16-QAM	-31.55	29.74	-10.05	1.40	H		0.067	18.29		
		64-QAM	-32.53	28.76	-10.05	1.40	H		0.054	17.31		
		256-QAM	-35.70	25.59	-10.05	1.40	H		0.026	14.14		
841.5		QPSK	-30.45	30.97	-10.05	1.41	H	< 7.00	0.089	19.51	1	38
		16-QAM	-31.52	29.90	-10.05	1.41	H		0.070	18.44		
		64-QAM	-32.42	29.00	-10.05	1.41	H		0.057	17.54		
		256-QAM	-35.50	25.92	-10.05	1.41	H		0.028	14.46		

8.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE 26(5)
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	RB	
									Size	Offset
26815 (826.5)	1 653.00	-59.46	9.20	-68.37	2.03	V	-61.20	-13.00	1	13
	2 479.50	-60.91	10.20	-64.16	2.45	V	-56.41	-13.00		
	3 306.00	-61.92	10.90	-63.96	2.92	V	-55.98	-13.00		
	4 132.50	-60.89	11.30	-60.74	3.25	V	-52.69	-13.00		
	4 959.00	-61.41	10.90	-57.12	3.58	V	-49.80	-13.00		
26915 (836.5)	1 673.00	-58.19	9.20	-67.37	2.03	V	-60.20	-13.00	1	13
	2 509.50	-60.04	10.30	-64.57	2.50	V	-56.77	-13.00		
	3 346.00	-59.20	10.95	-62.09	2.89	V	-54.03	-13.00		
	4 182.50	-62.50	11.30	-62.35	3.30	V	-54.35	-13.00		
	5 019.00	-62.25	10.70	-57.19	3.55	V	-50.04	-13.00		
27015 (846.5)	1 693.00	-58.29	9.40	-66.91	2.00	V	-59.51	-13.00	1	0
	2 539.50	-60.81	10.30	-65.64	2.52	V	-57.86	-13.00		
	3 386.00	-61.76	11.00	-64.24	2.94	V	-56.18	-13.00		
	4 232.50	-58.40	11.20	-57.48	3.28	V	-49.56	-13.00		
	5 079.00	-59.97	10.70	-54.81	3.61	V	-47.72	-13.00		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
5/26	1.4 MHz	836.5	QPSK	6	0	5.43
			16-QAM			6.10
			64-QAM			6.49
			256-QAM			6.62
	3 MHz		QPSK	15		4.72
			16-QAM			5.96
			64-QAM			6.46
			256-QAM			6.59
	5 MHz		QPSK	25		4.81
			16-QAM			5.79
			64-QAM			6.41
			256-QAM			6.57
	10 MHz		QPSK	50		4.86
			16-QAM			5.80
			64-QAM			6.37
			256-QAM			6.55
26	15 MHz	QPSK	75	4.87		
		16-QAM		5.90		
		64-QAM		6.42		
		256-QAM		6.56		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 57 ~ 76.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
5/26	1.4 MHz	836.5	QPSK	6	0	1.0992
			16-QAM			1.0989
			64-QAM			1.0989
			256-QAM			1.0979
	3 MHz		QPSK	15		2.7119
			16-QAM			2.7225
			64-QAM			2.7069
			256-QAM			2.7171
	5 MHz		QPSK	25		4.5218
			16-QAM			4.5235
			64-QAM			4.5146
			256-QAM			4.5127
	10 MHz		QPSK	50		9.0058
			16-QAM			9.0090
			64-QAM			9.0040
			256-QAM			9.0100
26	15 MHz	QPSK	75	13.488		
		16-QAM		13.510		
		64-QAM		13.473		
		256-QAM		13.502		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 37 ~ 56.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5/26	1.4	824.7	3.6810	27.976	-66.955	-38.979	-13.00
		836.5	3.6970	27.976	-66.975	-38.999	
		848.3	3.7079	27.976	-67.238	-39.262	
	3	825.5	3.6965	27.976	-67.323	-39.347	
		836.5	3.6760	27.976	-66.965	-38.989	
		847.5	3.6755	27.976	-66.920	-38.944	
	5	826.5	3.6950	27.976	-67.234	-39.258	
		836.5	3.7084	27.976	-67.104	-39.128	
		846.5	3.7239	27.976	-67.224	-39.248	
	10	829.0	3.6970	27.976	-66.879	-38.903	
		836.5	3.7024	27.976	-67.215	-39.239	
		844.0	3.7074	27.976	-67.316	-39.340	
26	15	831.5	3.6870	27.976	-67.077	-39.101	
		836.5	3.6900	27.976	-66.653	-38.677	
		841.5	3.7069	27.976	-67.168	-39.192	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 107 ~ 121.
2. Conducted Spurious Emissions was tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 77 ~ 106.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 011	0.0	0.000 000	0.000
100 %		-30	836 500 009	-1.9	0.000 000	-0.002
100 %		-20	836 500 007	-3.6	0.000 000	-0.004
100 %		-10	836 500 019	8.6	0.000 001	0.010
100 %		0	836 499 997	-13.3	-0.000 002	-0.016
100 %		+10	836 500 006	-4.8	-0.000 001	-0.006
100 %		+30	836 500 015	3.9	0.000 000	0.005
100 %		+40	836 500 009	-1.9	0.000 000	-0.002
100 %		+50	836 500 013	2.1	0.000 000	0.003
Batt. Endpoint		3.300	+20	836 500 013	2.4	0.000 000

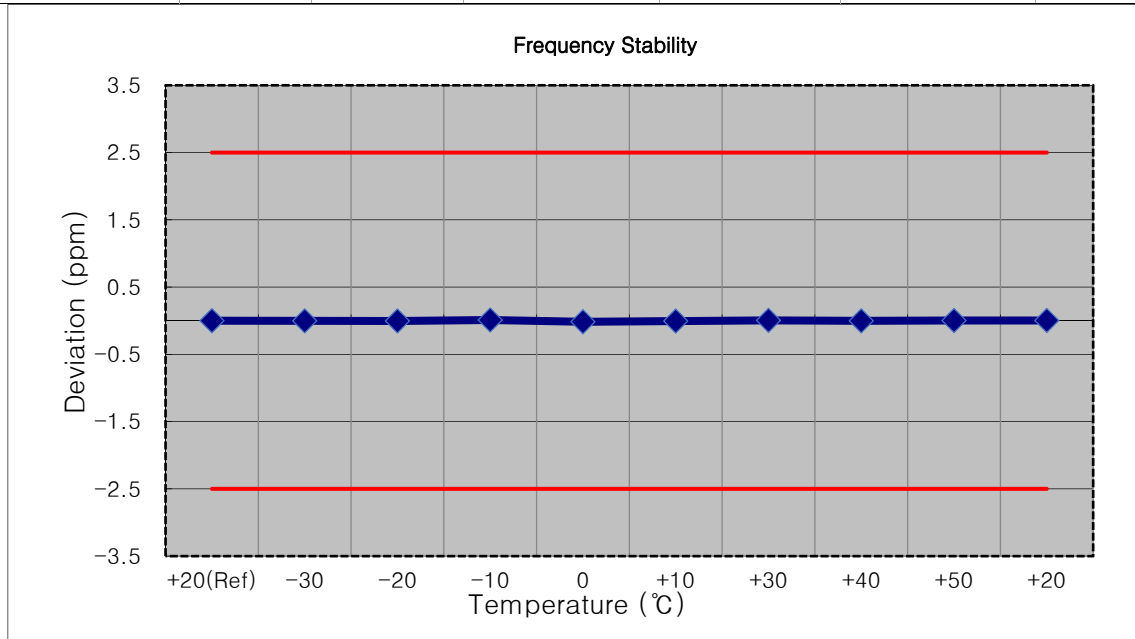


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100 %		-30	836 500 011	6.2	0.000 001	0.007
100 %		-20	836 500 011	6.5	0.000 001	0.008
100 %		-10	836 500 013	7.9	0.000 001	0.009
100 %		0	836 500 013	8.6	0.000 001	0.010
100 %		+10	836 500 012	7.1	0.000 001	0.008
100 %		+30	836 500 013	8.4	0.000 001	0.010
100 %		+40	836 500 011	6.2	0.000 001	0.007
100 %		+50	836 500 013	8.2	0.000 001	0.010
Batt. Endpoint		3.300	+20	836 500 016	11.4	0.000 001

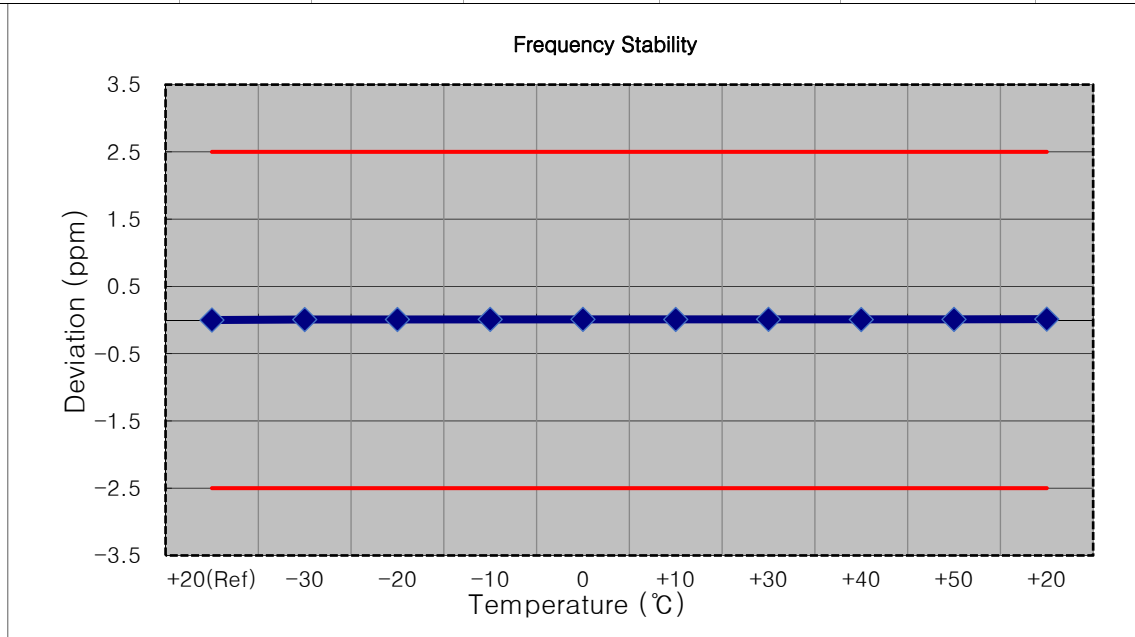


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100 %		-30	836 500 014	8.1	0.000 001	0.010
100 %		-20	836 500 012	6.7	0.000 001	0.008
100 %		-10	836 500 012	7.0	0.000 001	0.008
100 %		0	836 500 013	7.5	0.000 001	0.009
100 %		+10	836 500 013	7.6	0.000 001	0.009
100 %		+30	836 500 012	6.2	0.000 001	0.007
100 %		+40	836 500 013	7.6	0.000 001	0.009
100 %		+50	836 500 011	5.3	0.000 001	0.006
Batt. Endpoint		3.300	+20	836 500 011	5.9	0.000 001

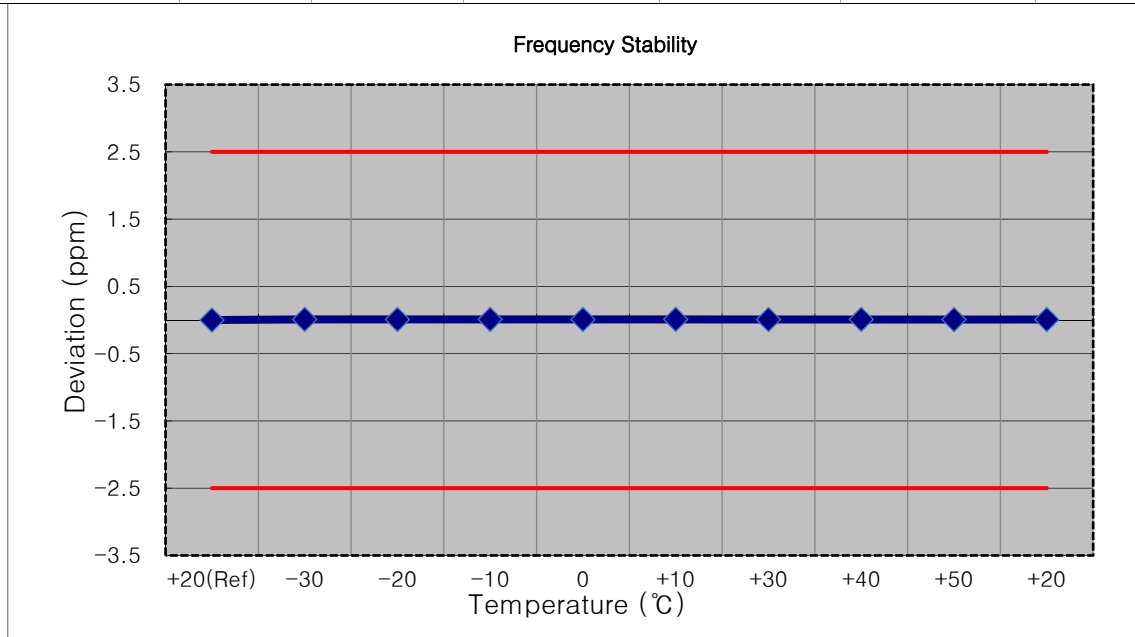


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100 %		-30	836 500 007	2.3	0.000 000	0.003
100 %		-20	836 500 008	2.7	0.000 000	0.003
100 %		-10	836 500 008	2.8	0.000 000	0.003
100 %		0	836 500 010	5.3	0.000 001	0.006
100 %		+10	836 500 009	4.2	0.000 001	0.005
100 %		+30	836 500 010	4.8	0.000 001	0.006
100 %		+40	836 500 014	9.2	0.000 001	0.011
100 %		+50	836 500 011	5.7	0.000 001	0.007
Batt. Endpoint		3.300	+20	836 500 009	3.6	0.000 000

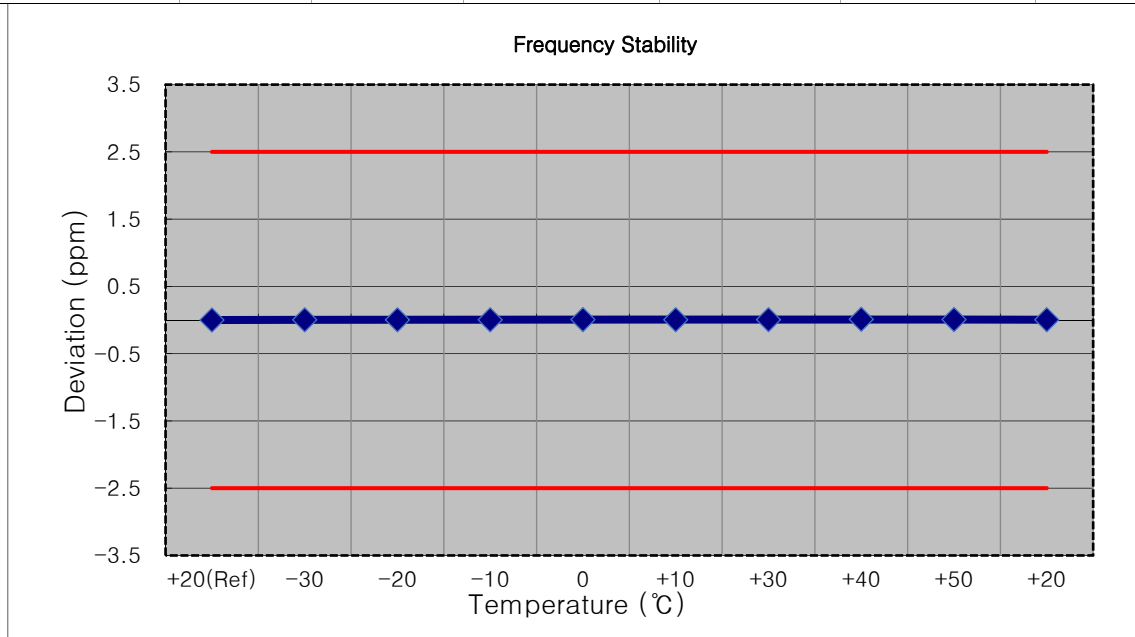


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100 %		-30	836 500 010	5.0	0.000 001	0.006
100 %		-20	836 500 012	7.2	0.000 001	0.009
100 %		-10	836 500 010	4.6	0.000 001	0.005
100 %		0	836 500 011	6.2	0.000 001	0.007
100 %		+10	836 500 009	3.5	0.000 000	0.004
100 %		+30	836 500 010	5.1	0.000 001	0.006
100 %		+40	836 500 010	4.9	0.000 001	0.006
100 %		+50	836 500 002	-2.7	0.000 000	-0.003
Batt. Endpoint		3.300	+20	836 500 011	6.1	0.000 001

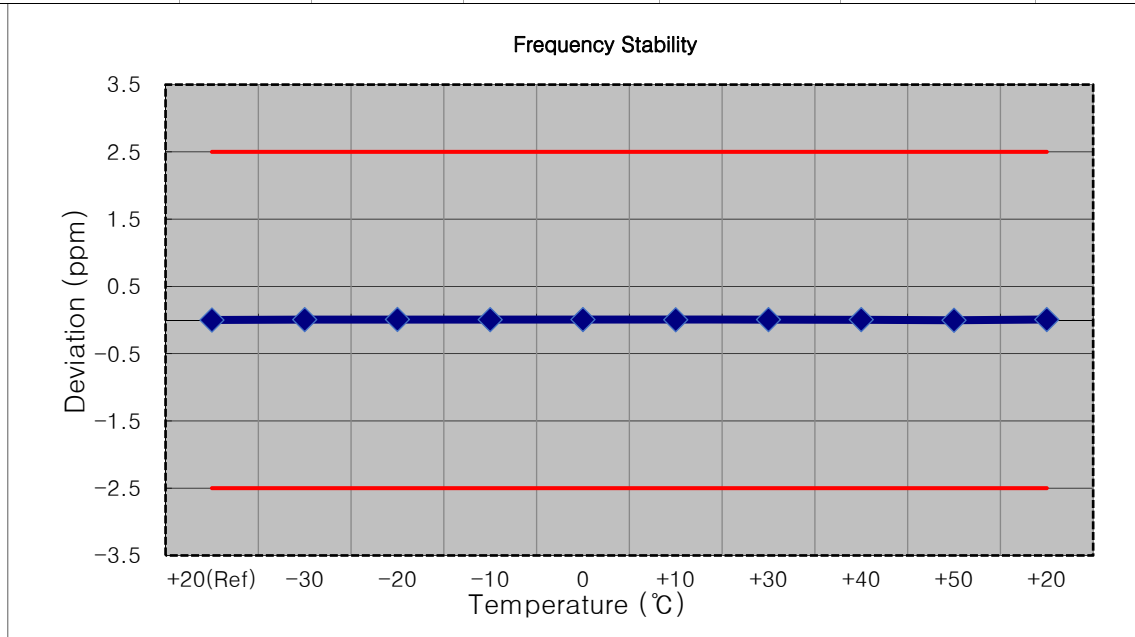


9. TEST PLOTS


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 QPSK_RB6_0)

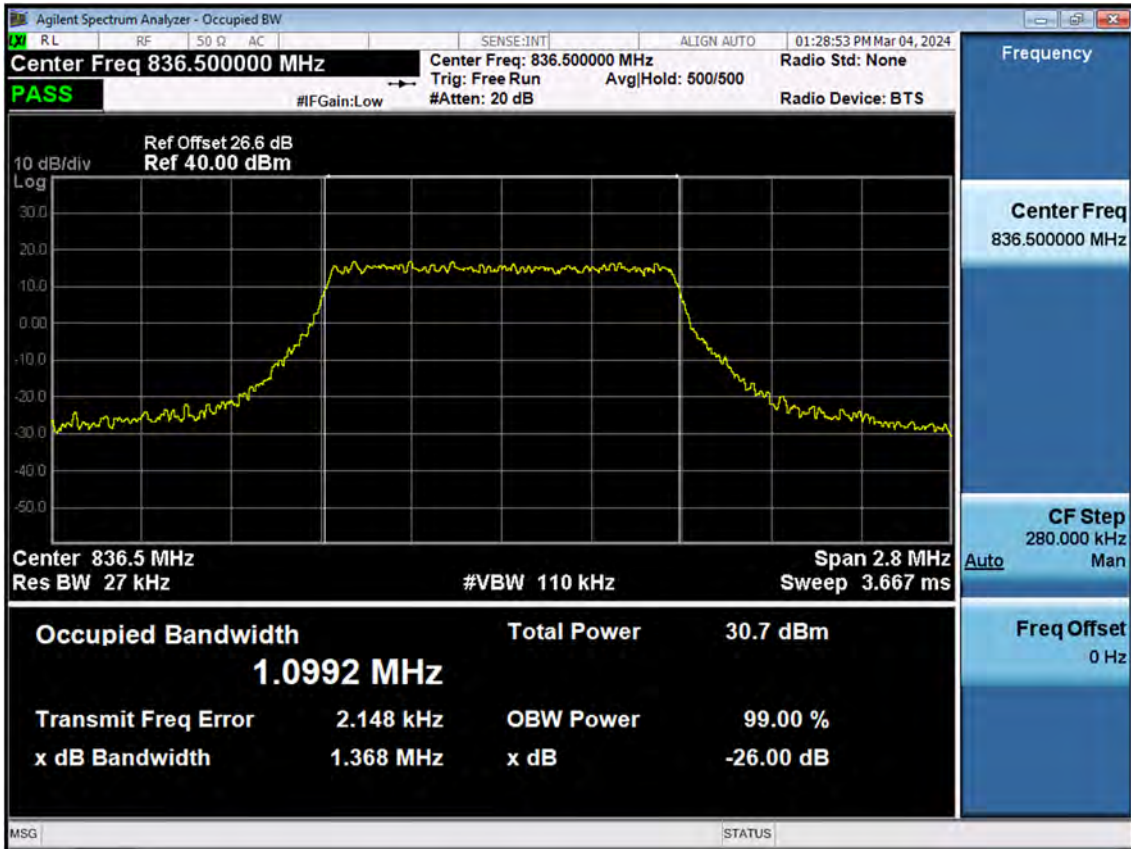


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 16QAM_RB6_0)

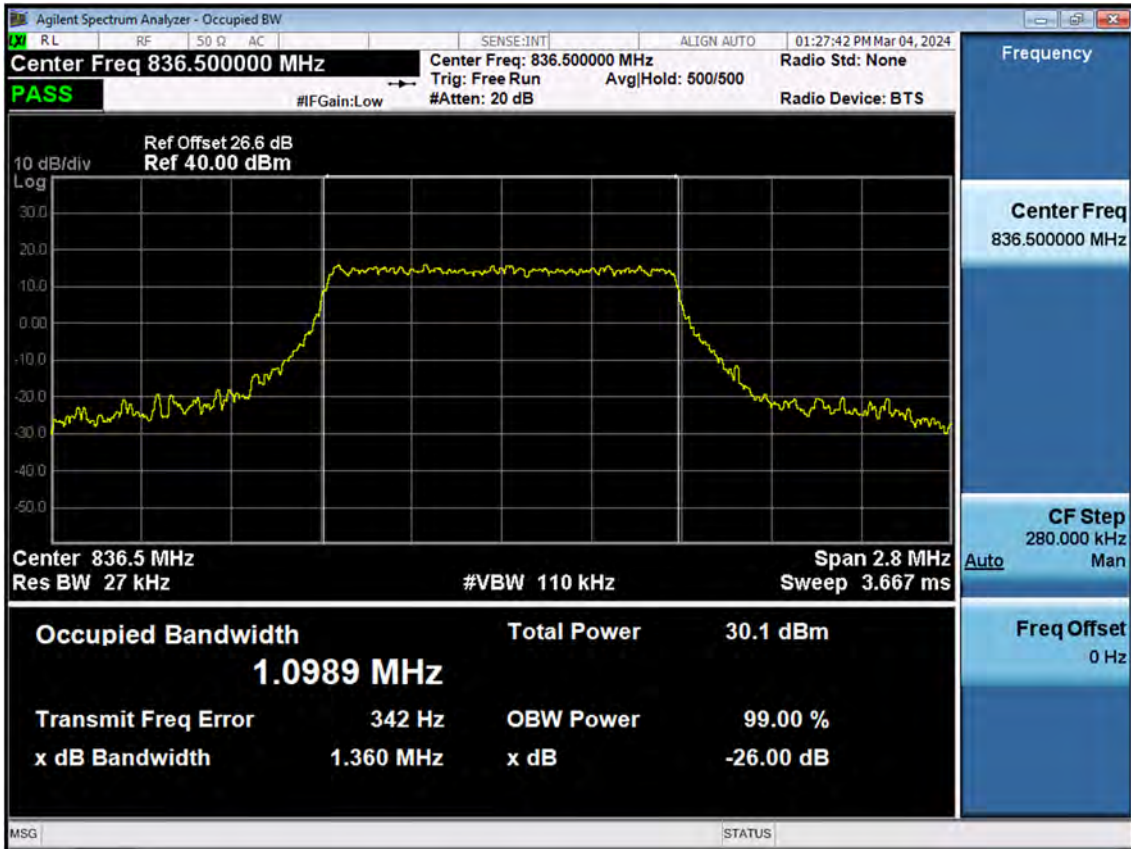


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 64QAM_RB6_0)

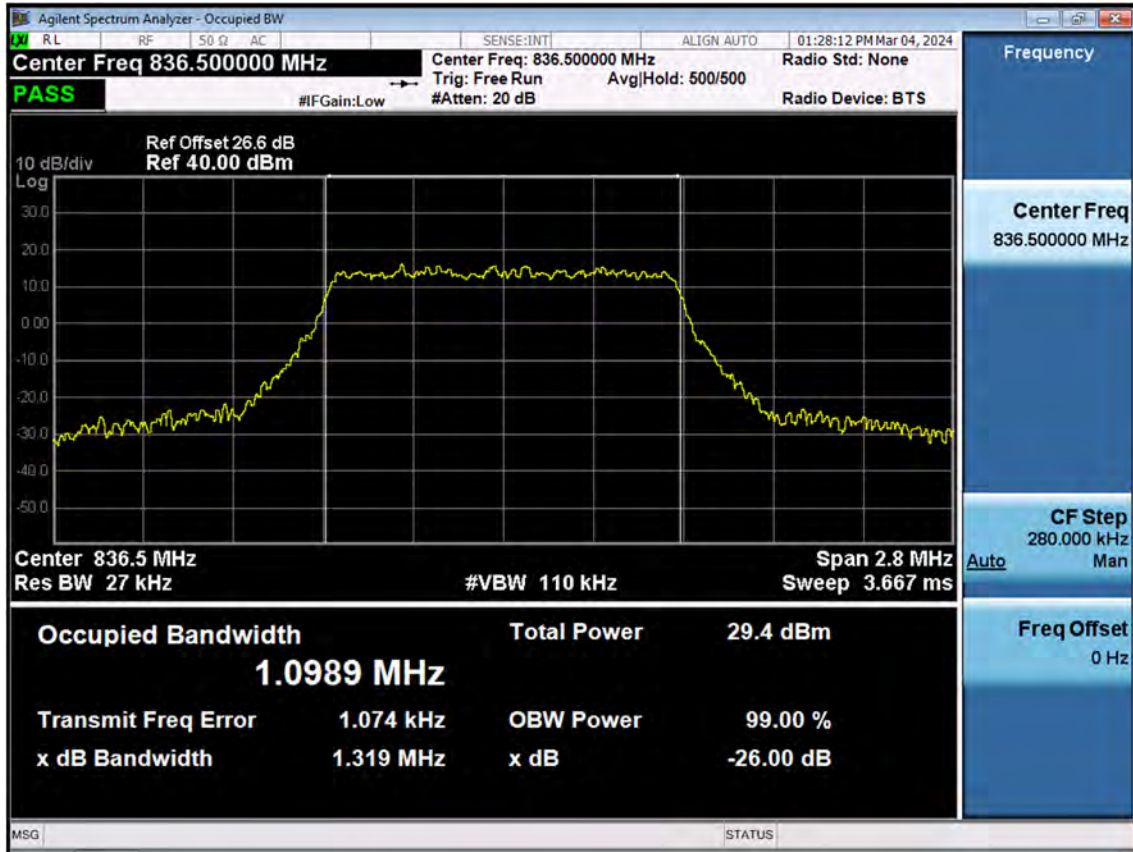


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 256QAM_RB6_0)

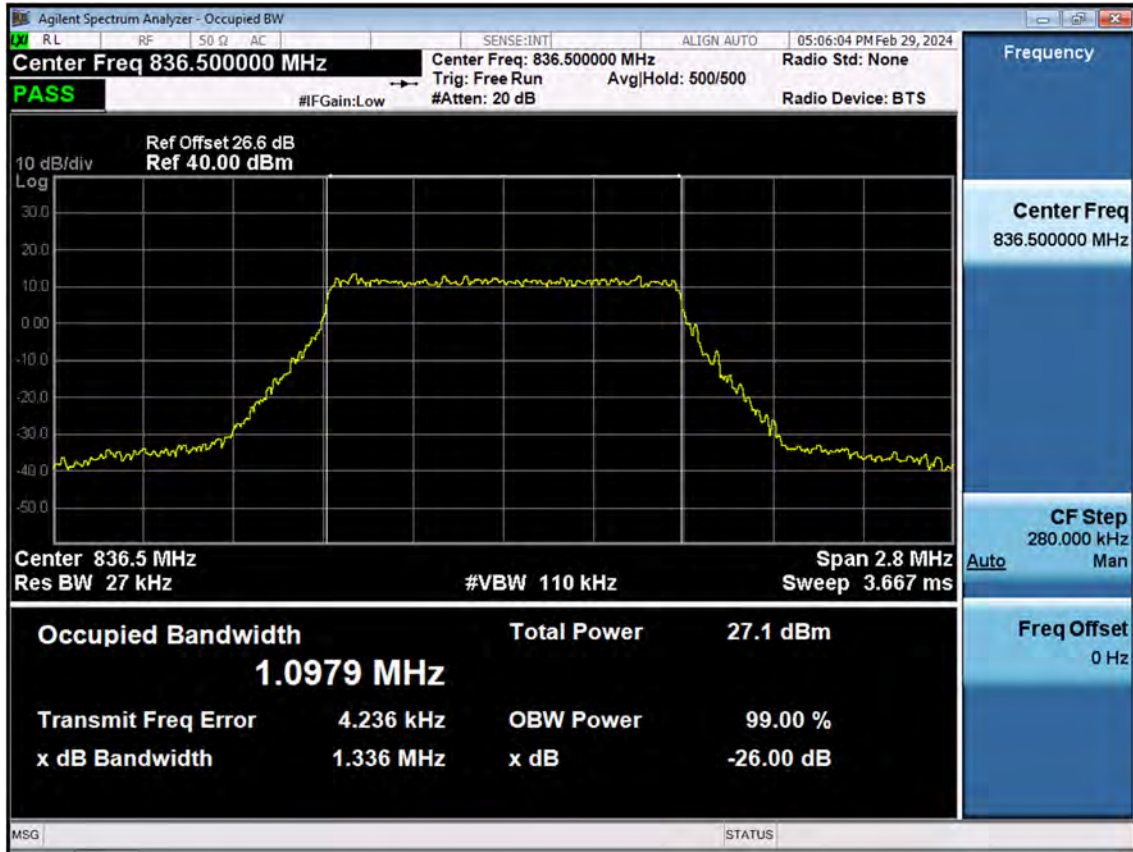


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 QPSK_RB15_0)

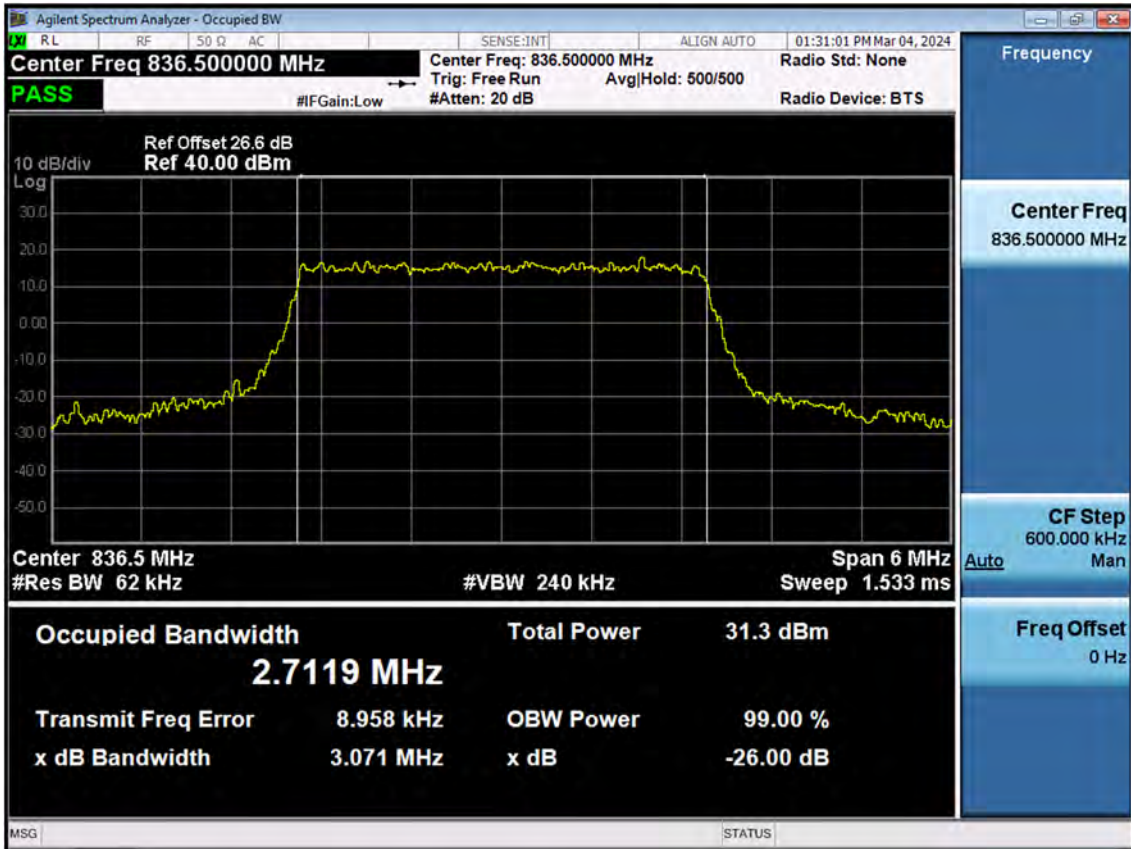


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 16QAM_RB15_0)

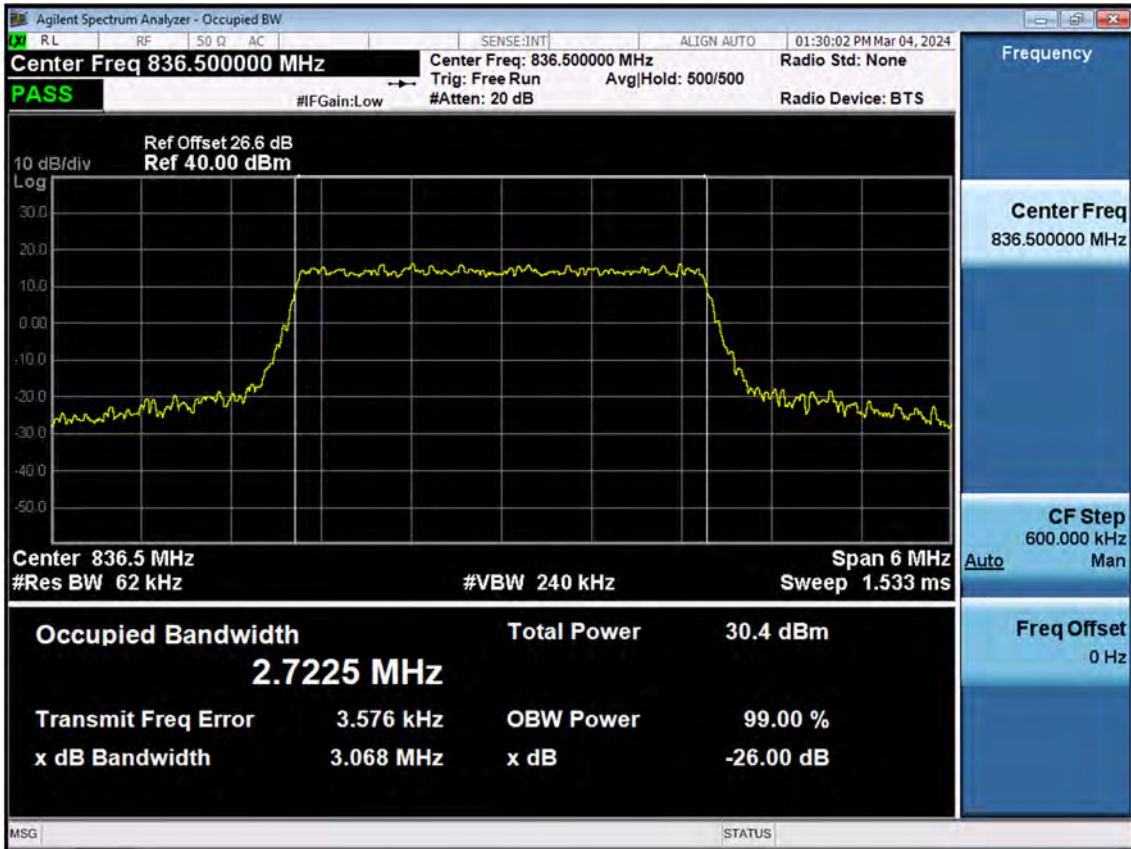


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 64QAM_RB15_0)

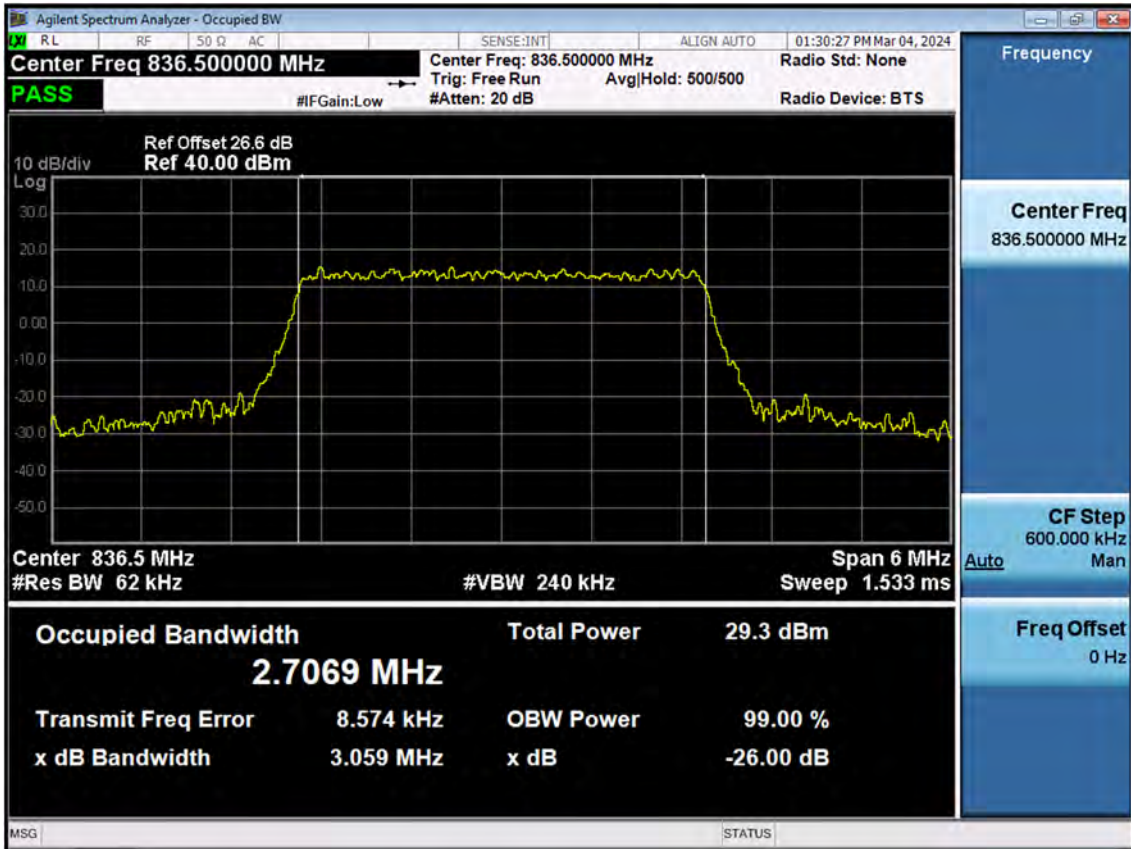


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 256QAM_RB15_0)

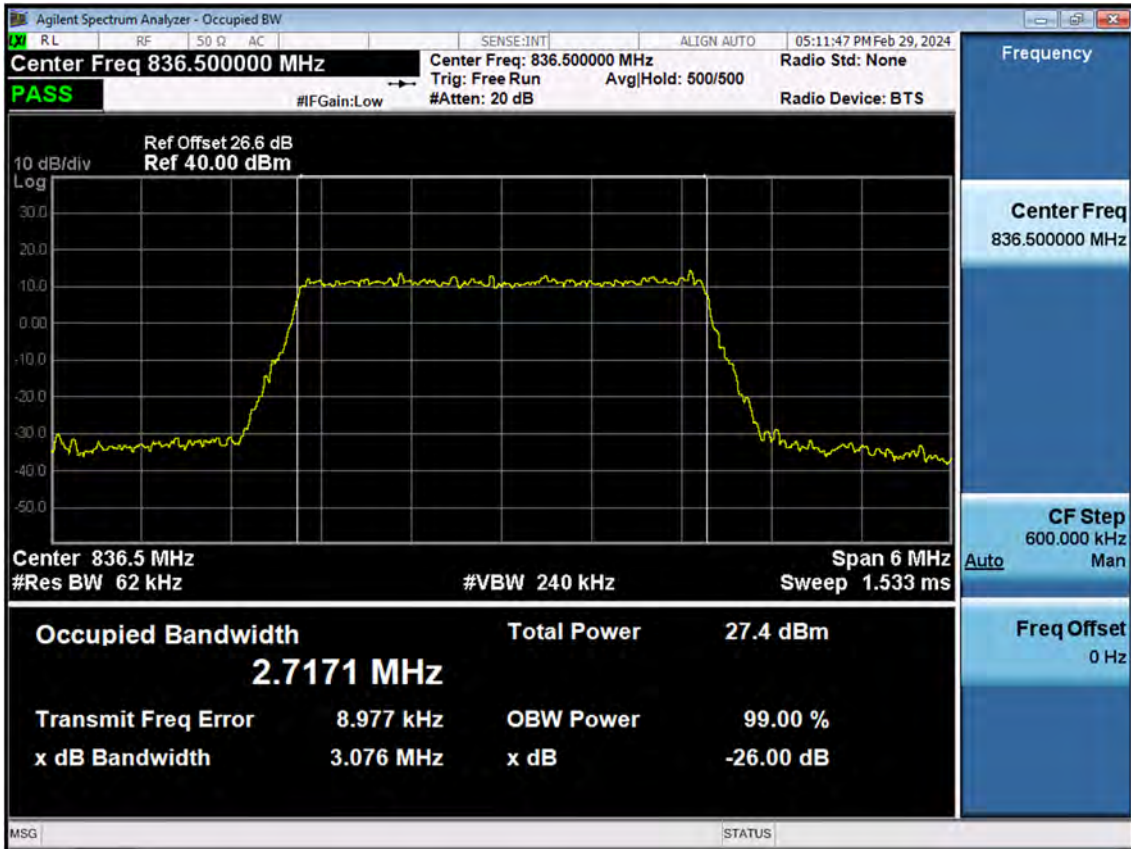


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 QPSK_RB25_0)

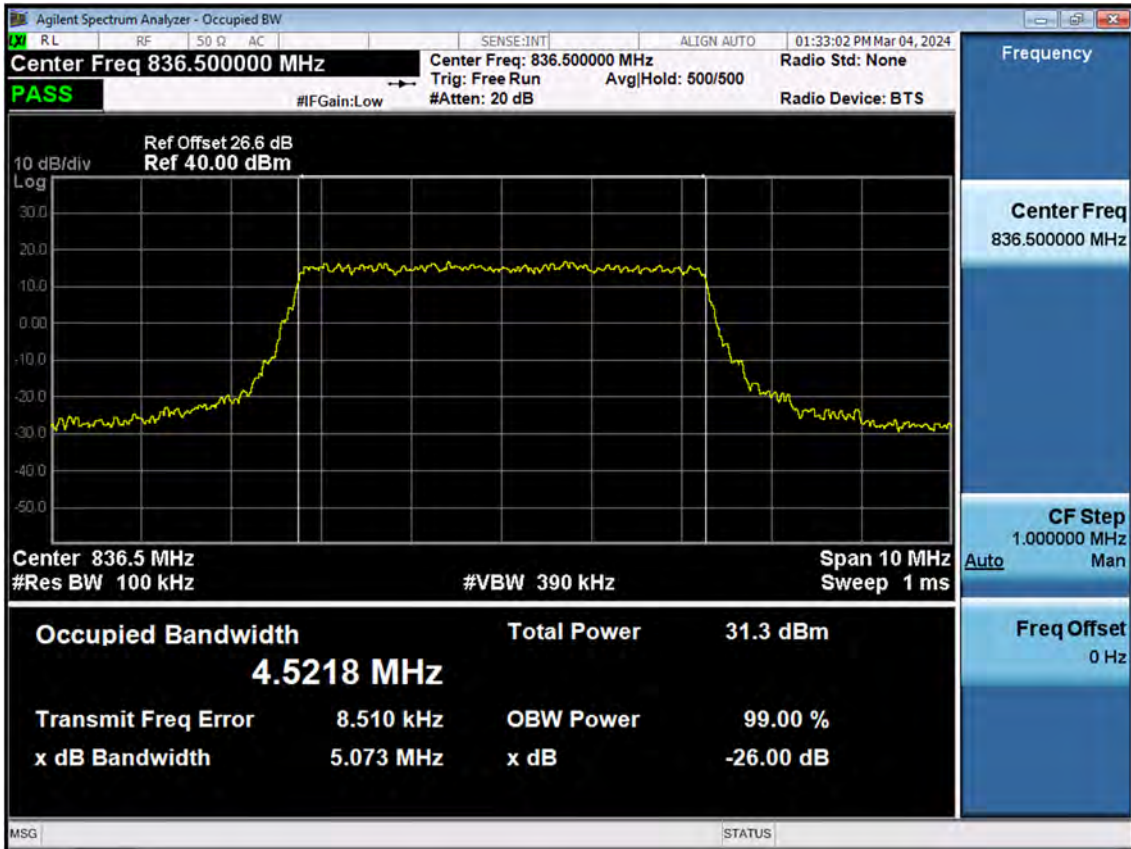


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 16QAM_RB25_0)

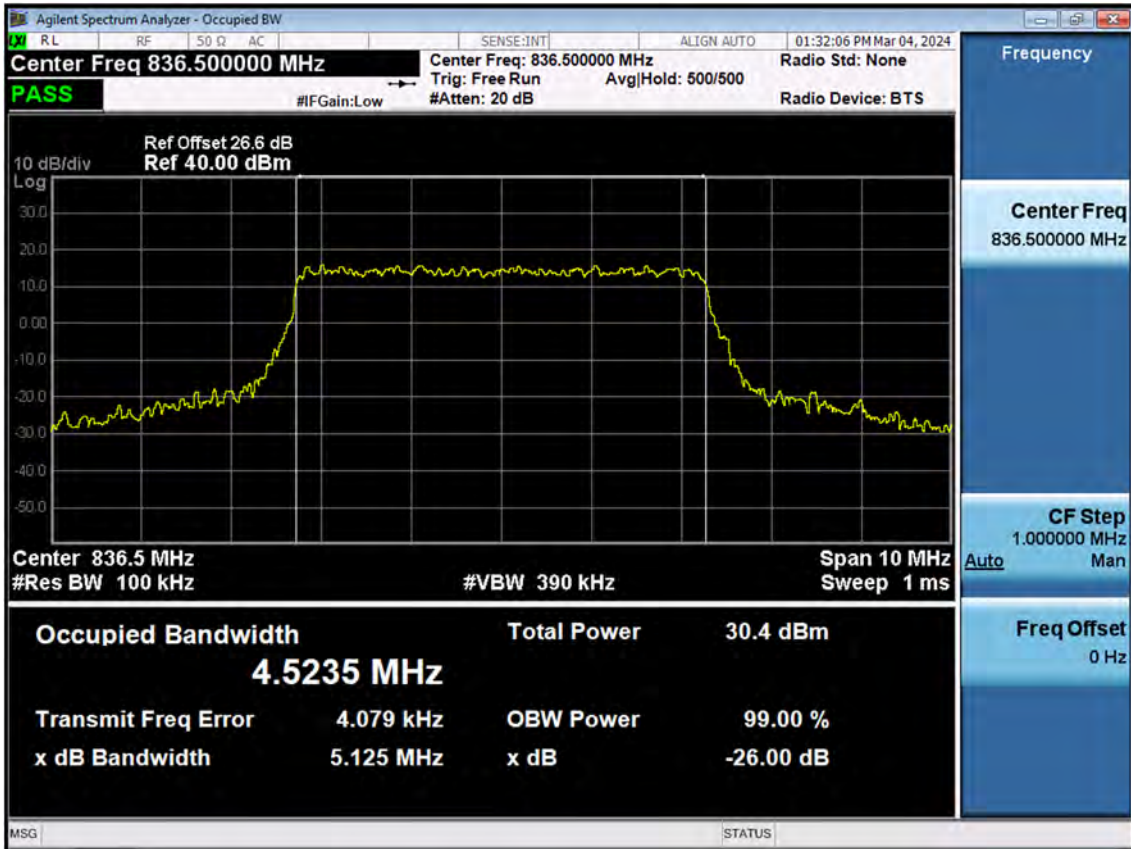


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 64QAM_RB25_0)

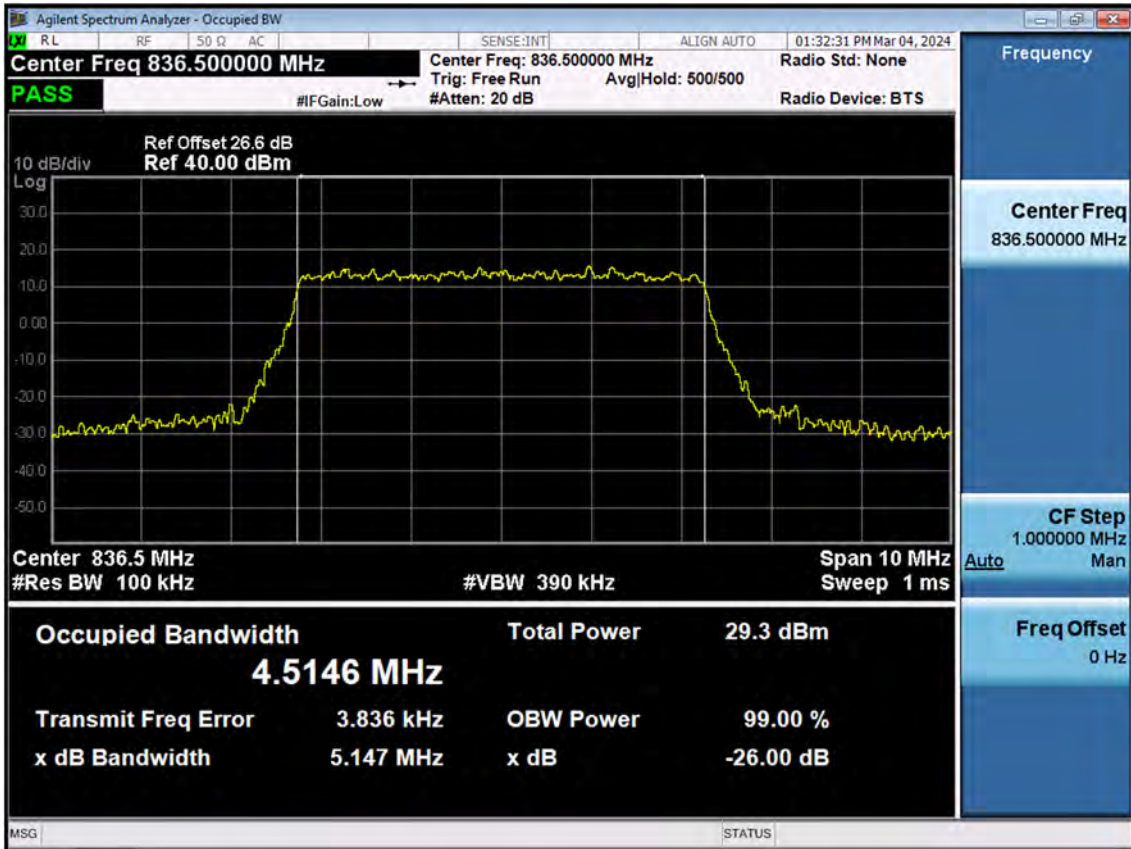


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 256QAM_RB25_0)

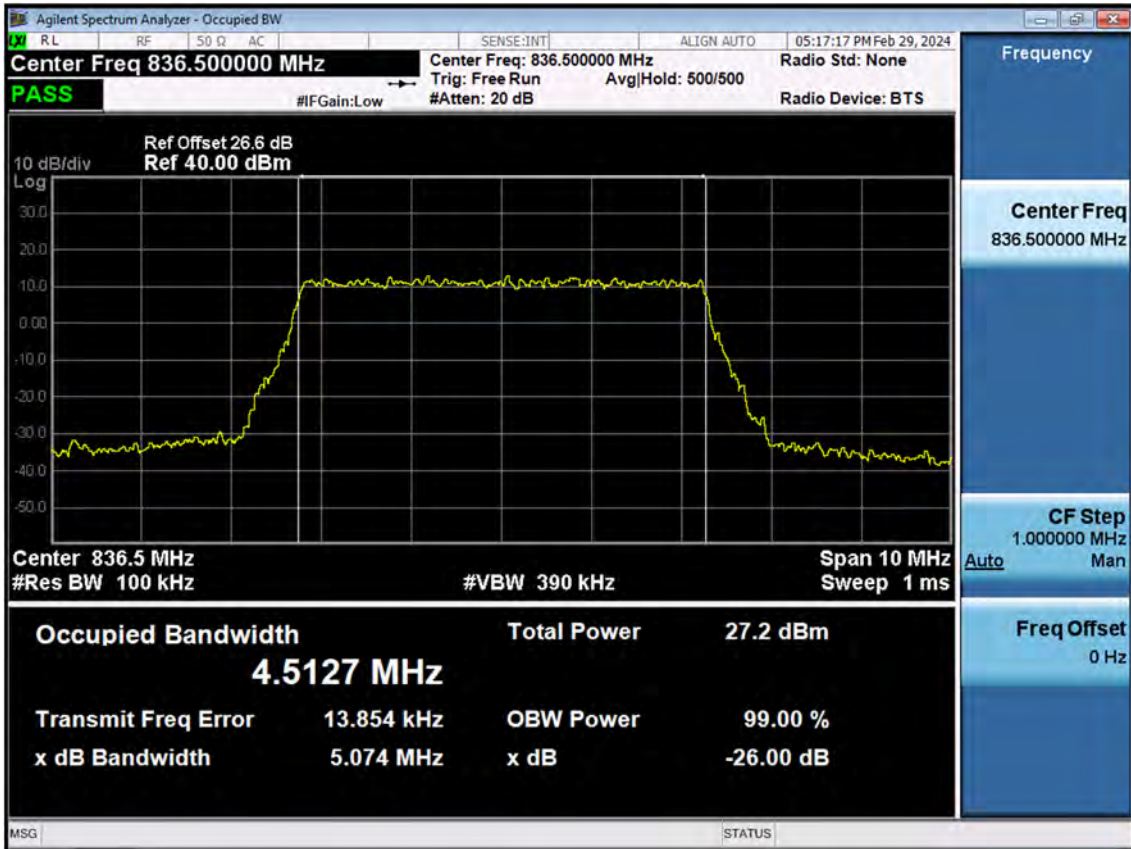


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 QPSK_RB50_0)

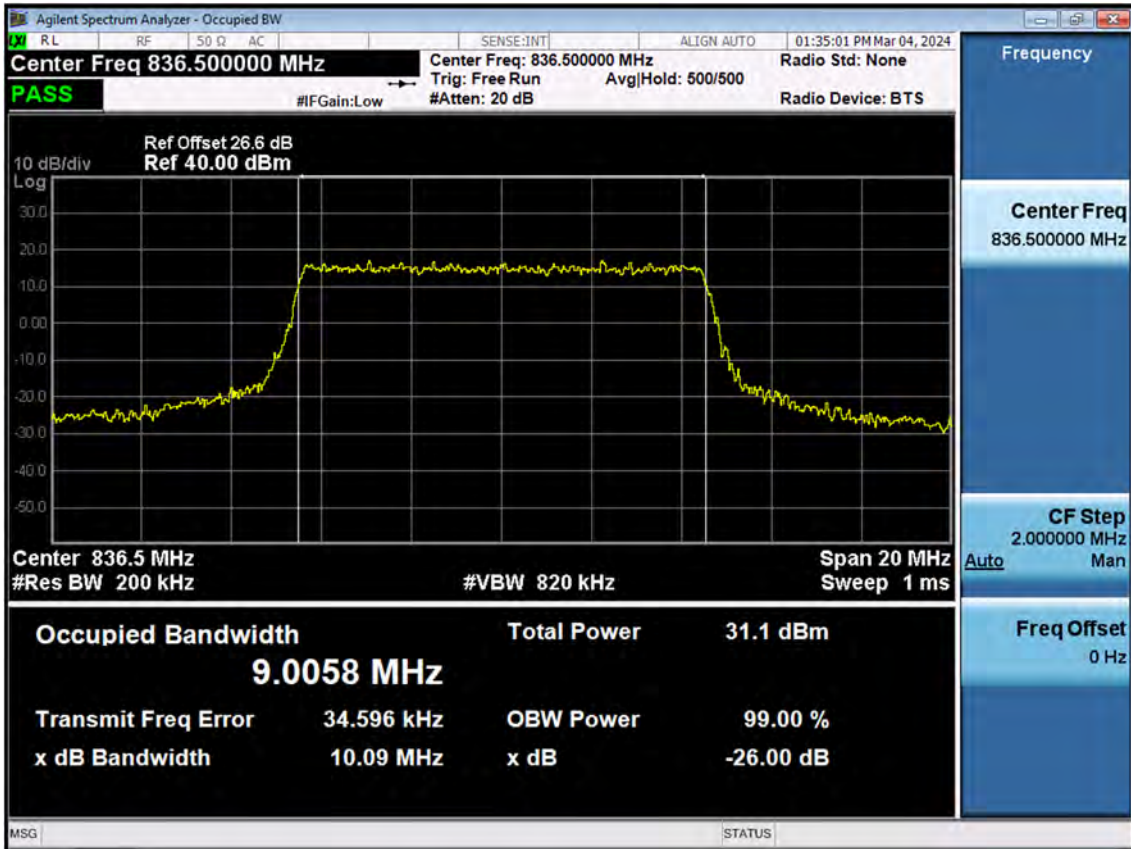


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 16QAM_RB50_0)

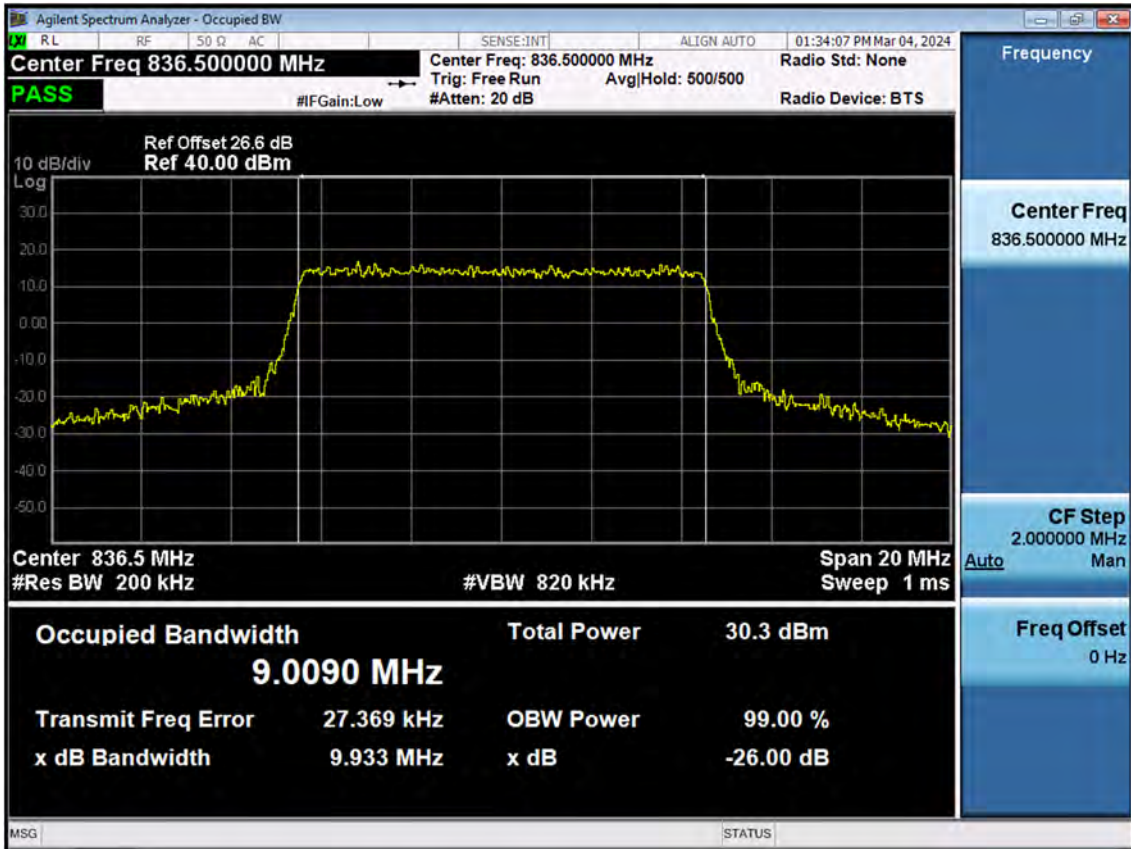


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 64QAM_RB50_0)

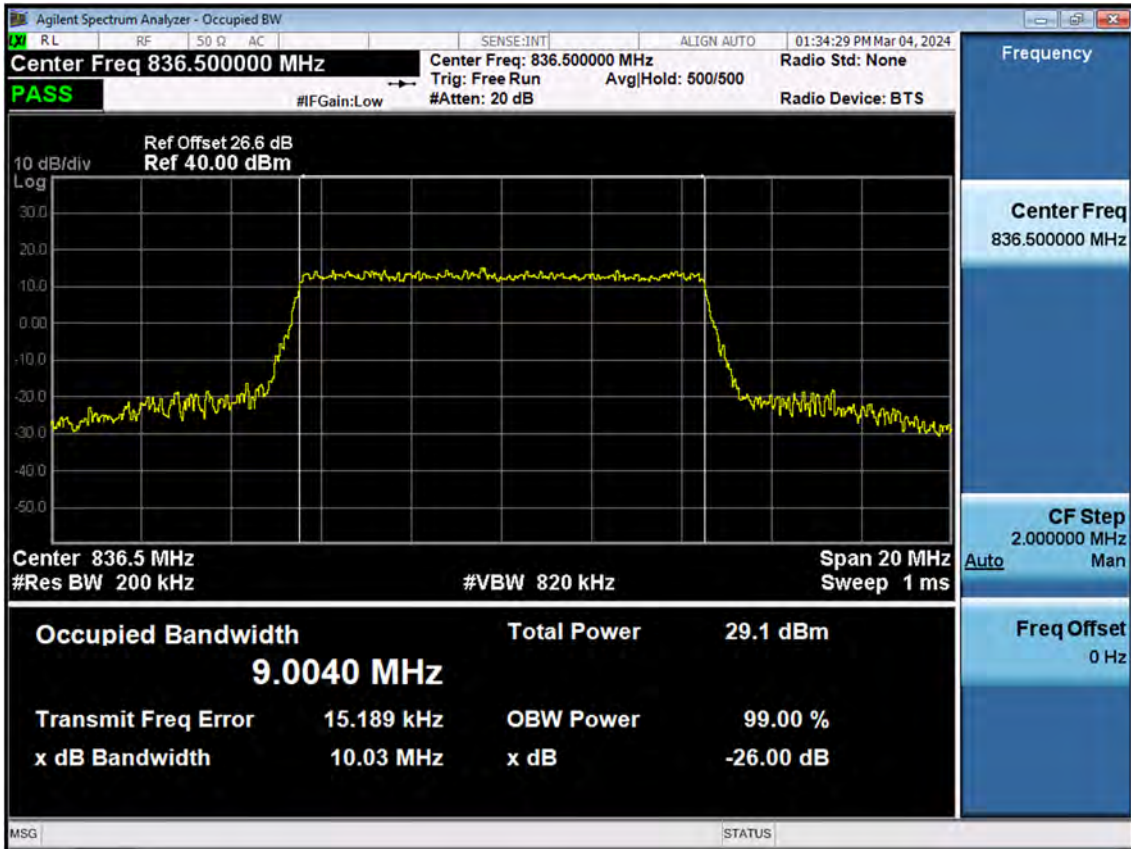


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 256QAM_RB50_0)

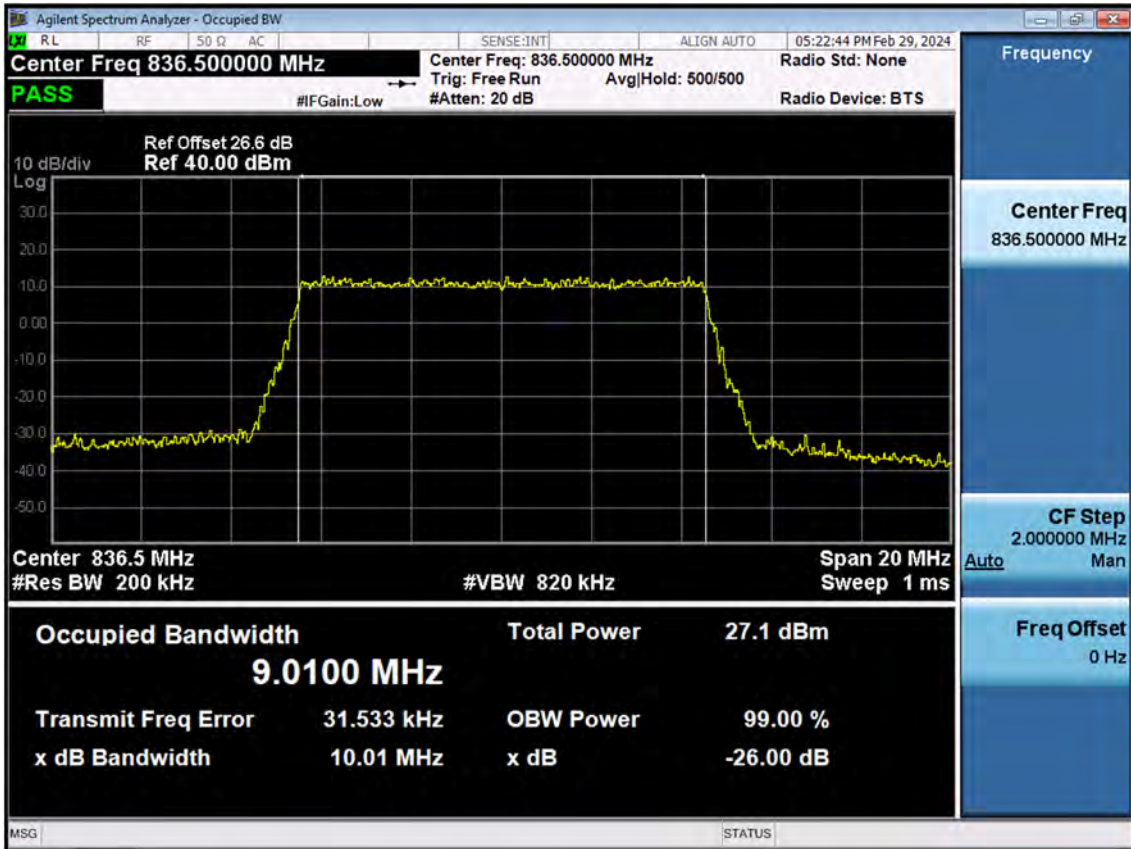


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 QPSK RB 75_0)

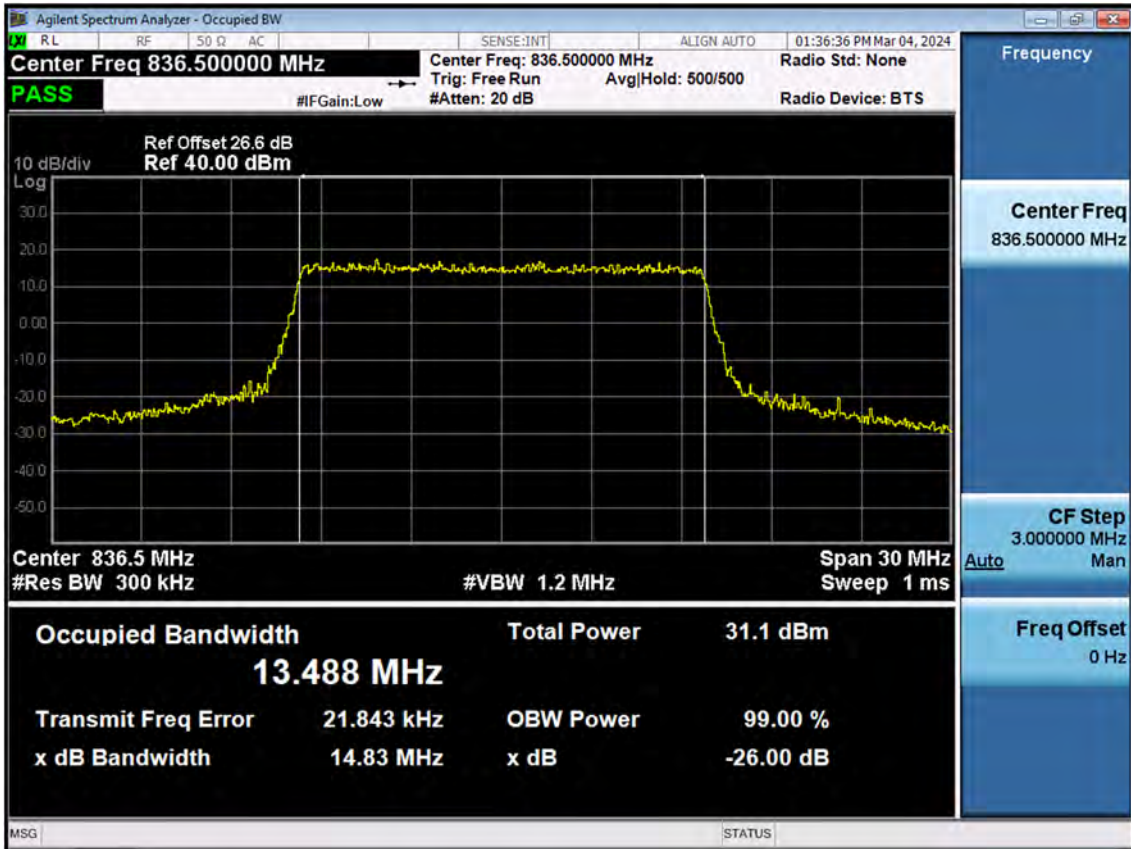


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 16QAM RB 75_0)

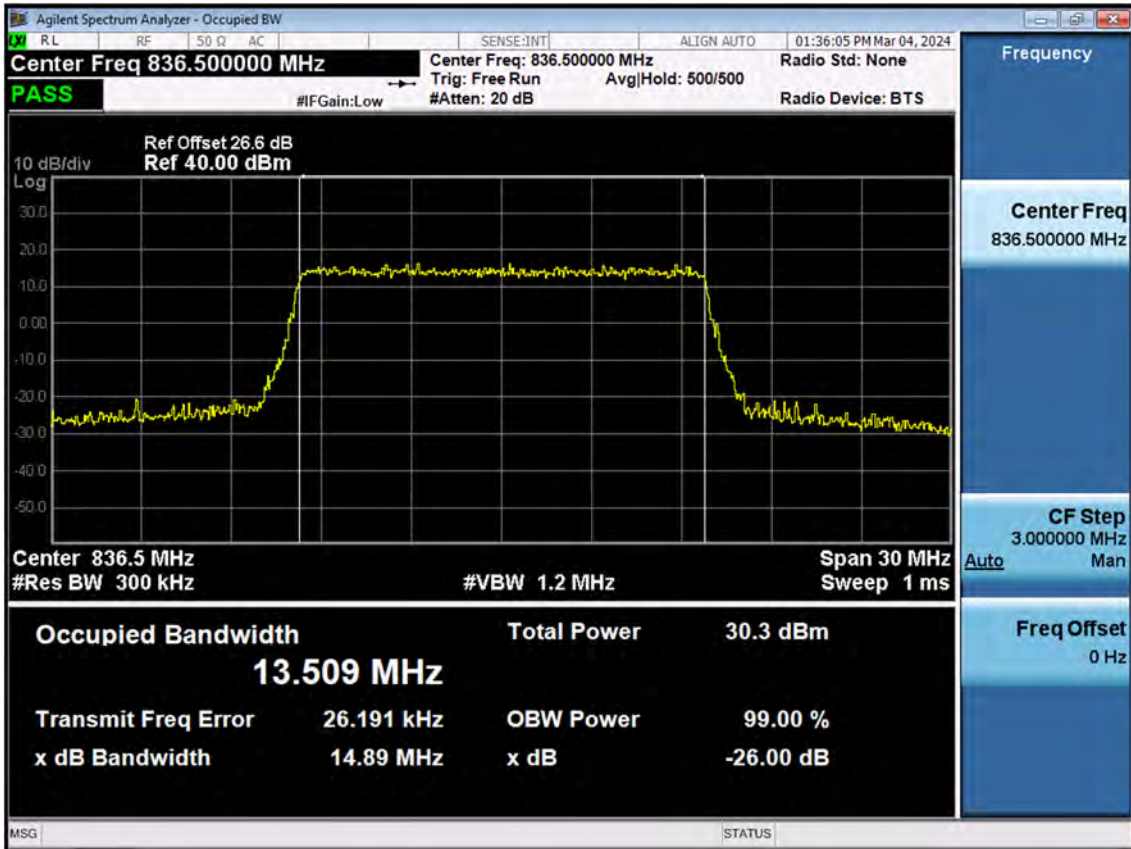


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 64QAM RB 75_0)

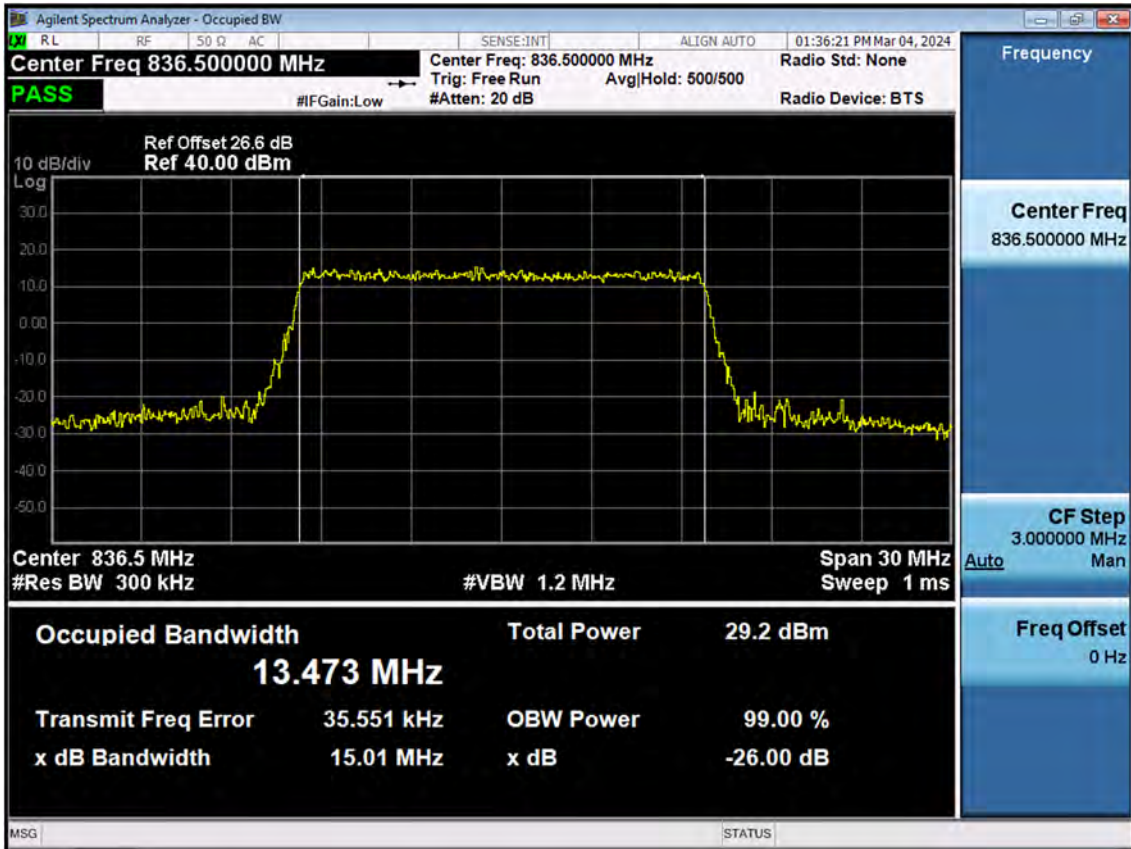


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 256QAM RB 75_0)

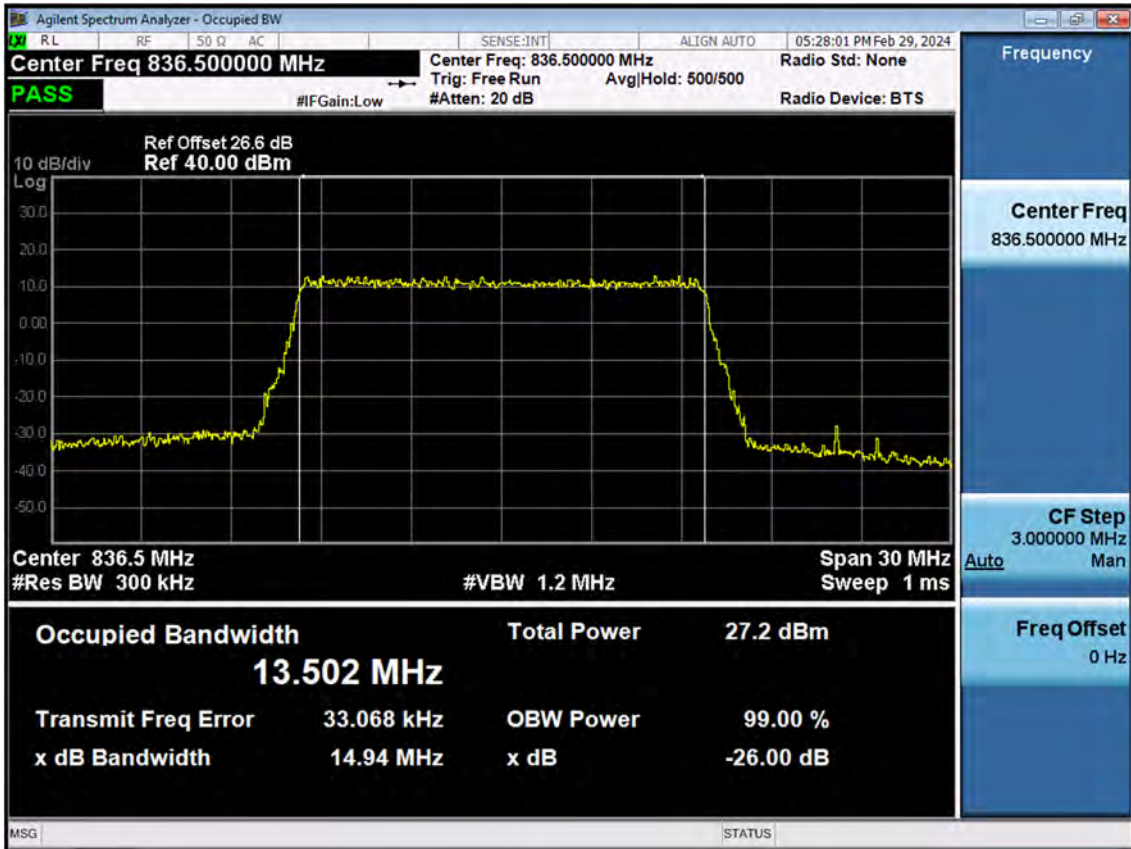


BAND5/26. PAR Plot (1.4 M BW Ch.26915 QPSK_RB6_0)

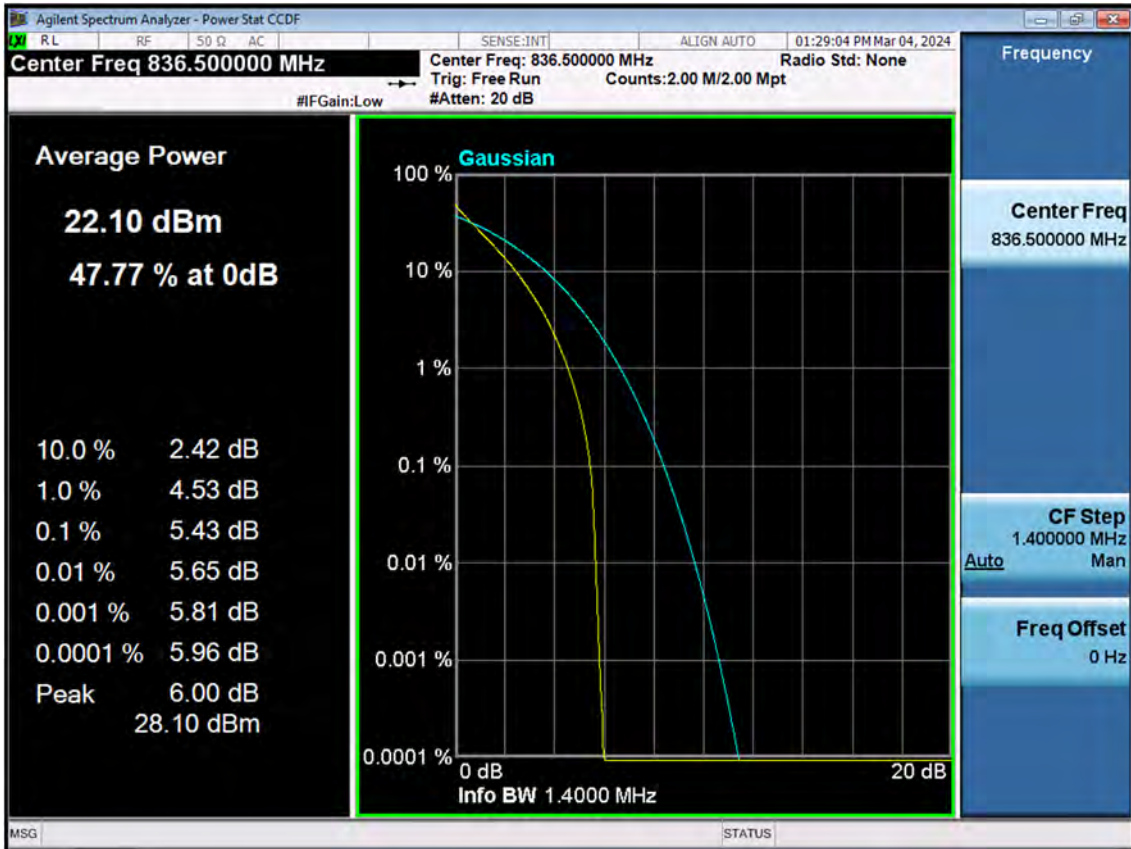


BAND5/26. PAR Plot (1.4 M BW Ch.26915 16QAM_RB6_0)

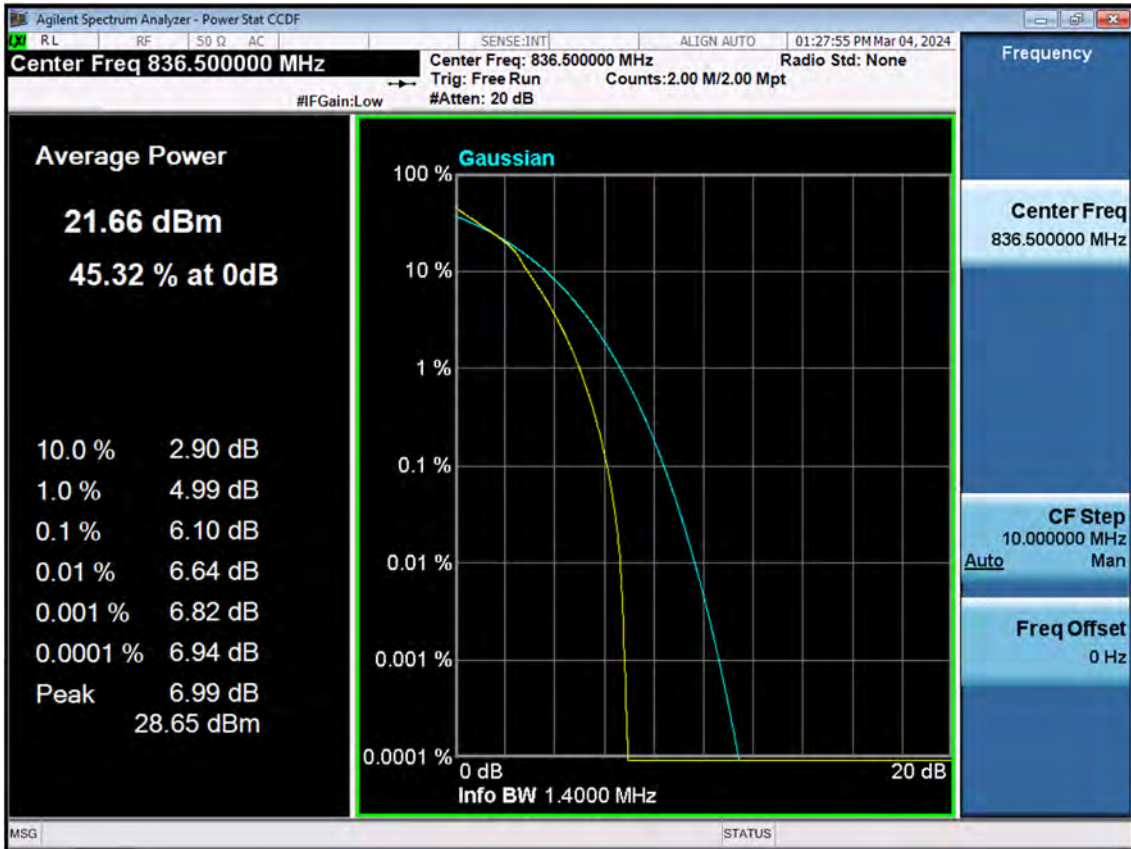


BAND5/26. PAR Plot (1.4 M BW Ch.26915 64QAM_RB6_0)

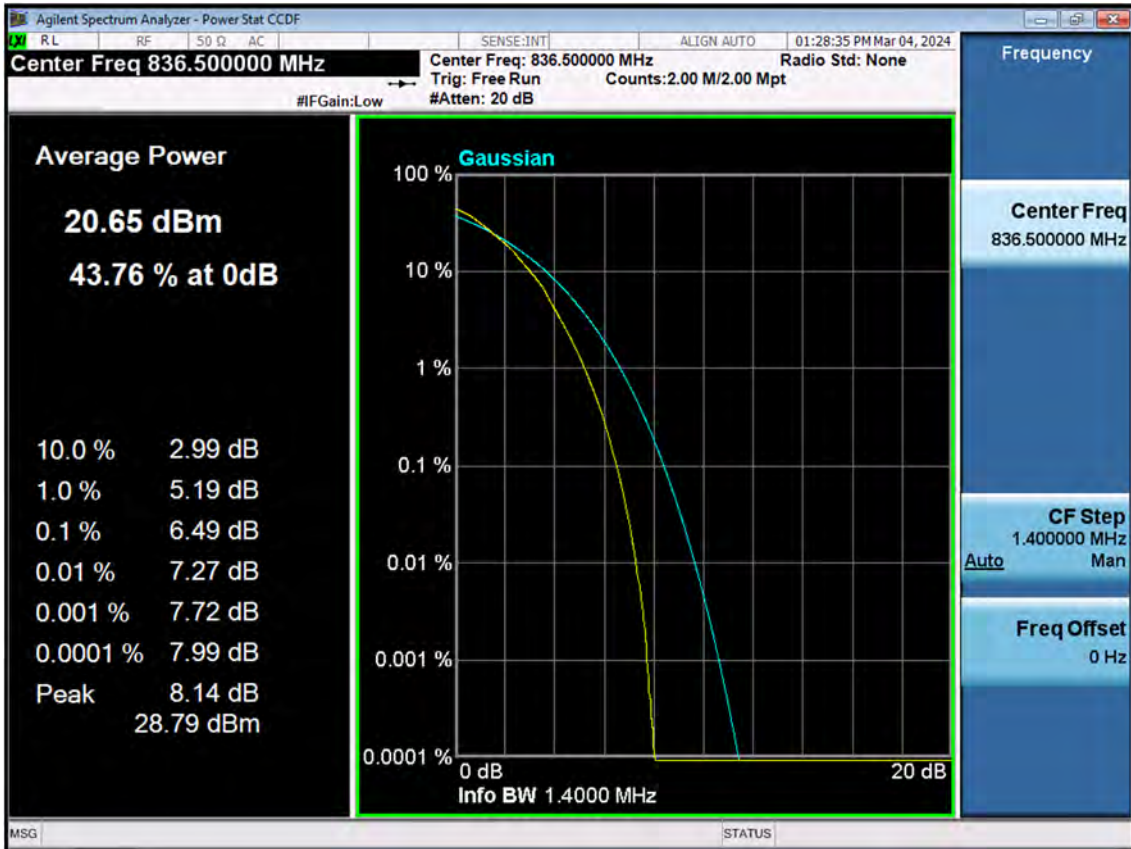


BAND5/26. PAR Plot (1.4 M BW Ch.26915 256QAM_RB6_0)

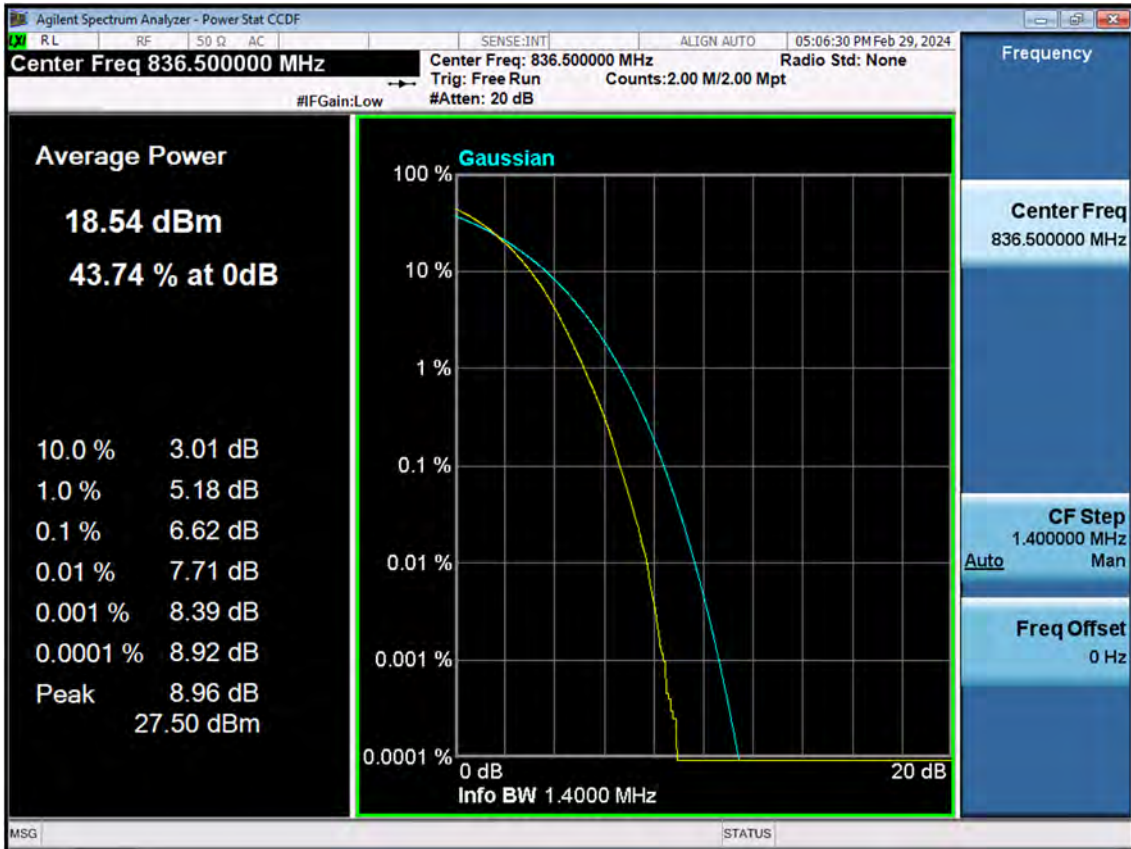


BAND5/26. PAR Plot (3 M BW Ch.26915 QPSK_RB15_0)

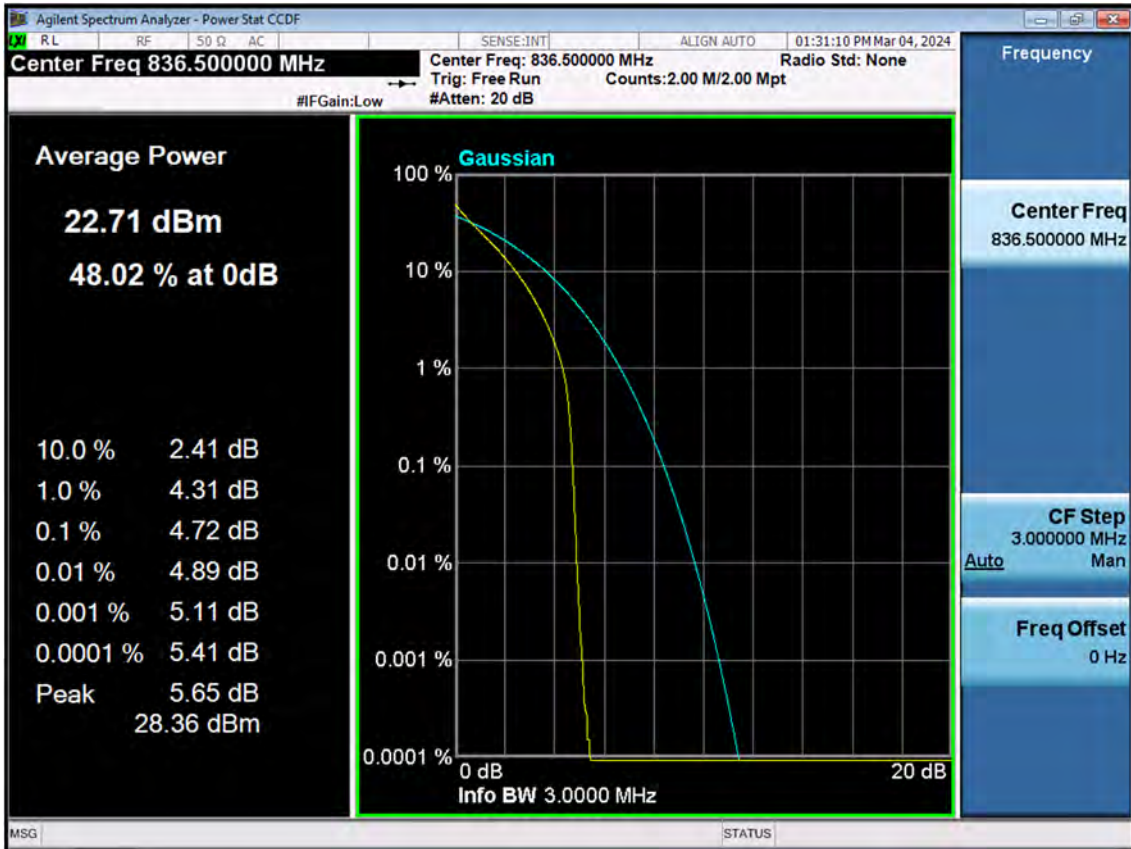


BAND5/26 PAR Plot (3 M BW Ch.26915 16QAM_RB15_0)

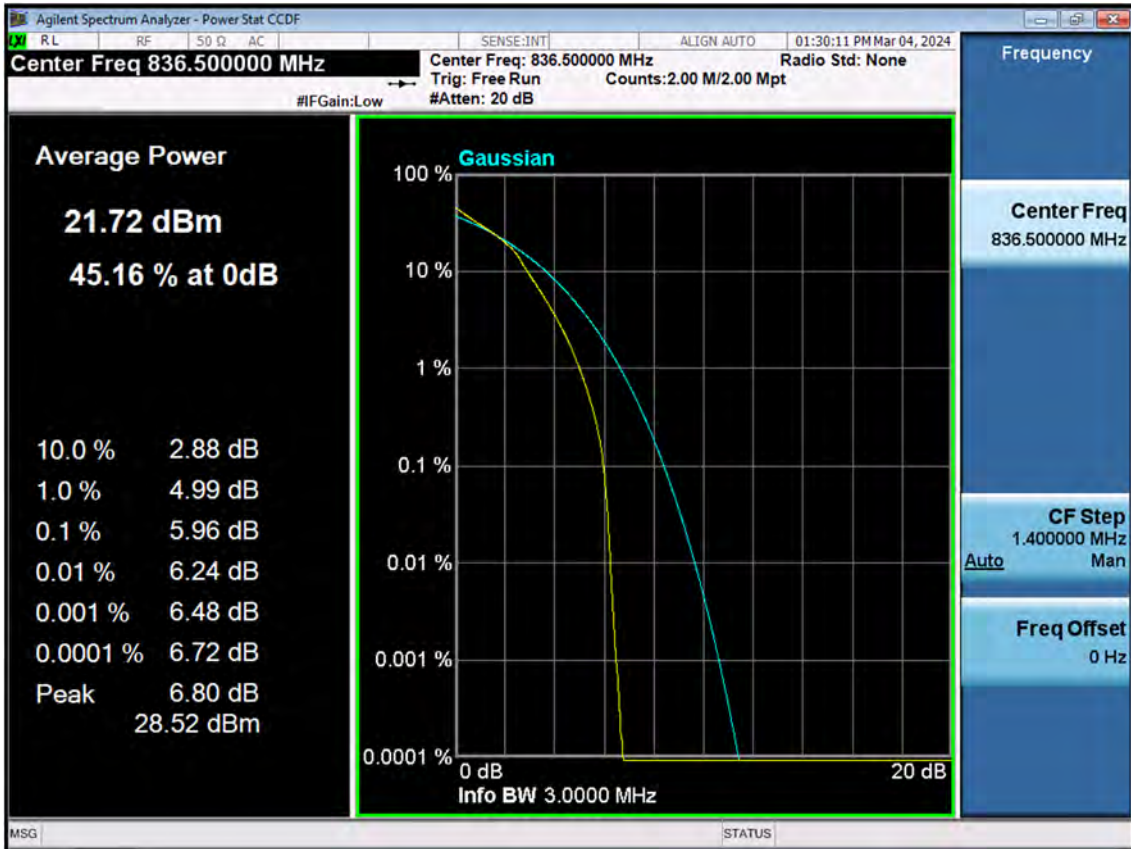


BAND5/26. PAR Plot (3 M BW Ch.26915 64QAM_RB15_0)

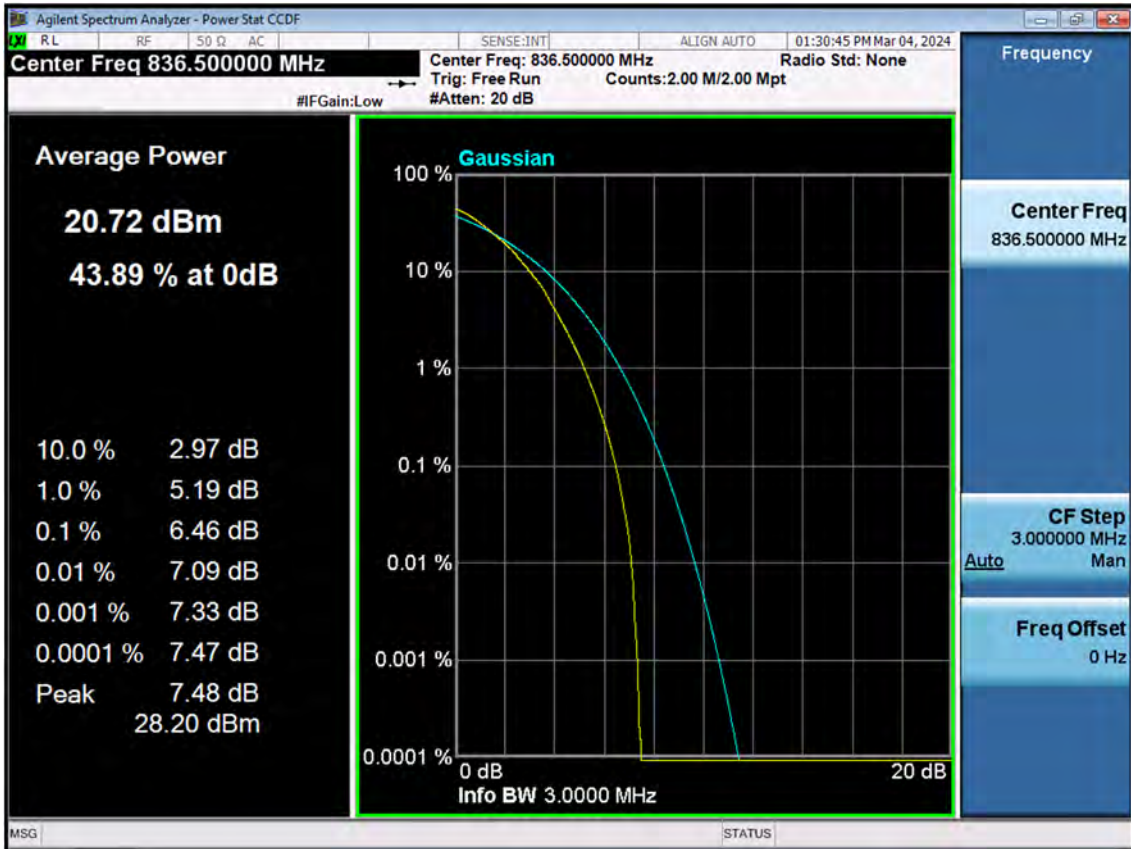


BAND5/26. PAR Plot (3 M BW Ch.26915 256QAM_RB15_0)

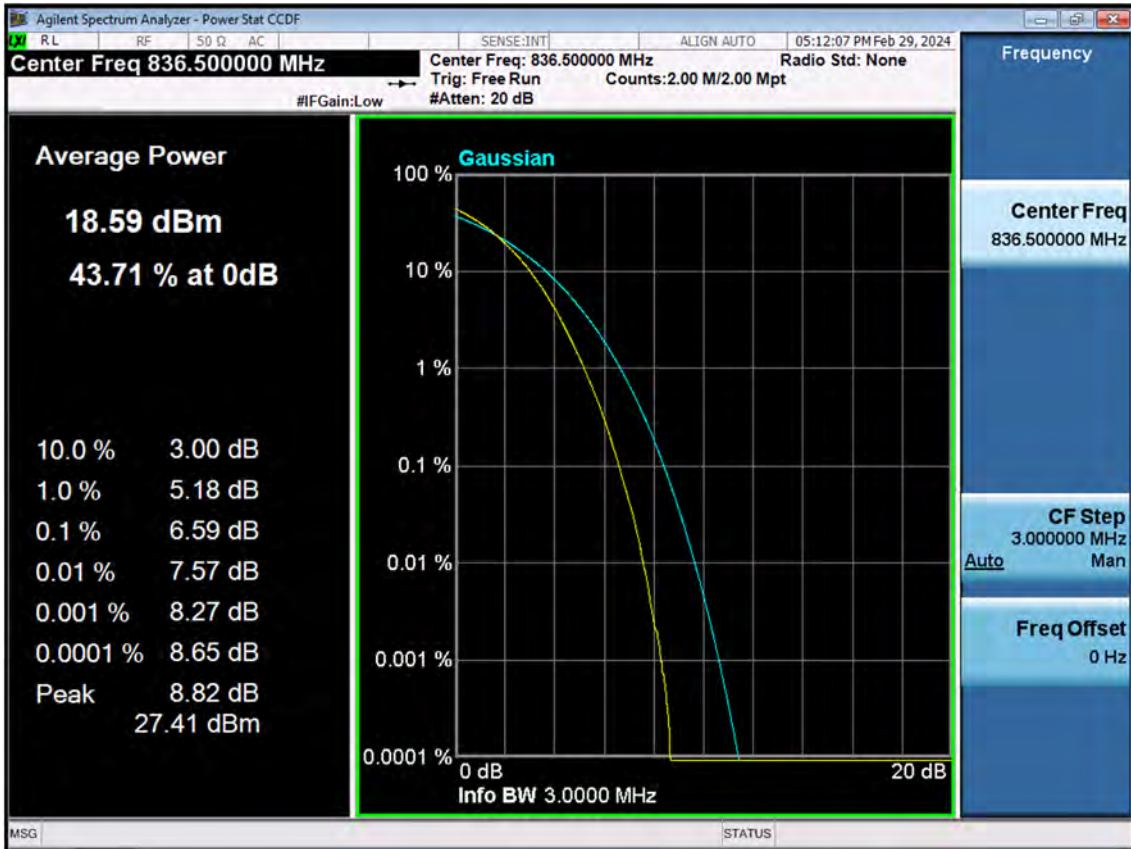


BAND5/26. PAR Plot (5 M BW Ch.26915 QPSK_RB25_0)

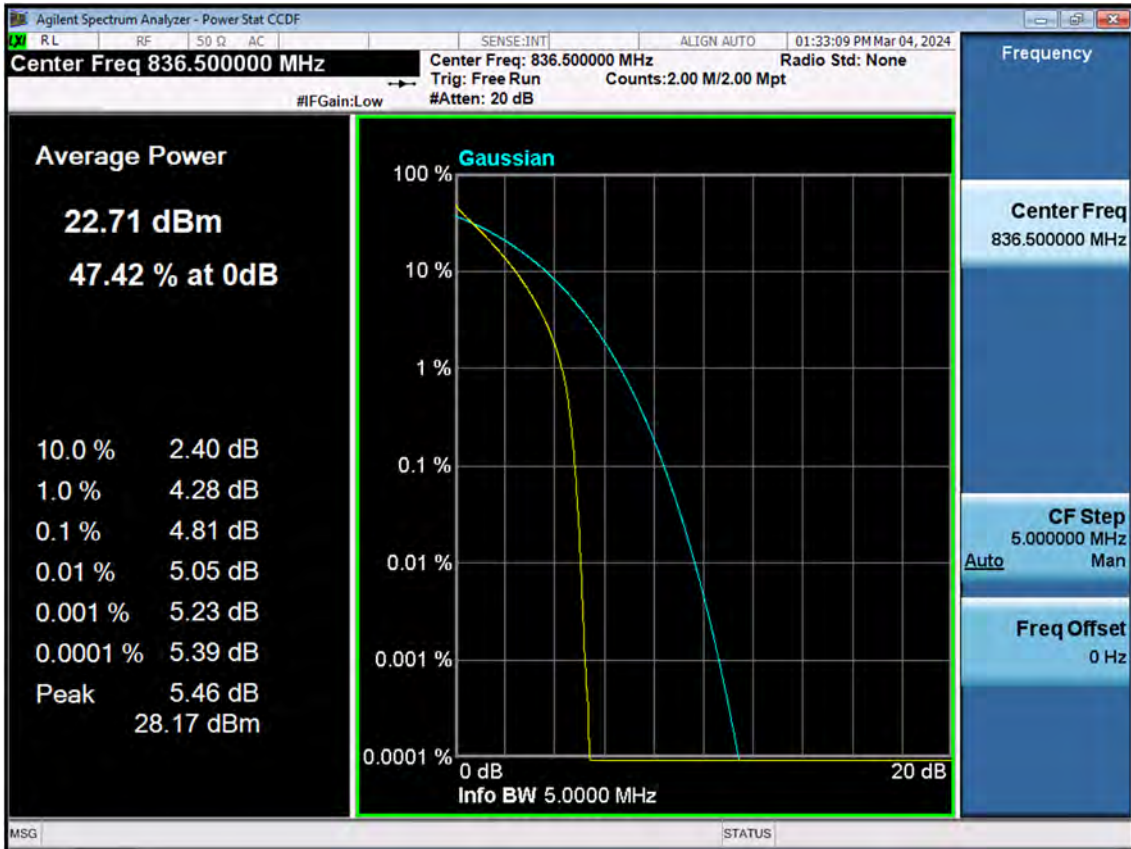


BAND5/26. PAR Plot (5 M BW Ch.26915 16QAM_RB25_0)

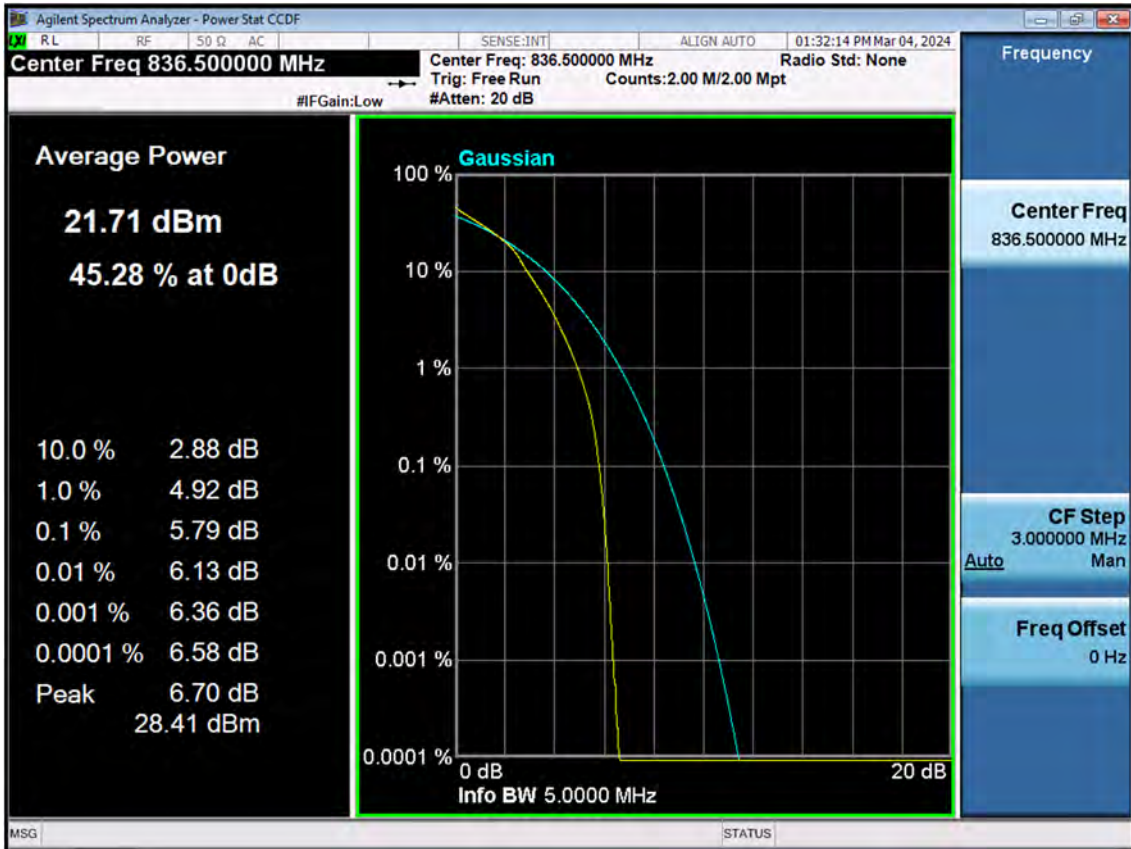


BAND5/26. PAR Plot (5 M BW Ch.26915 64QAM_RB25_0)

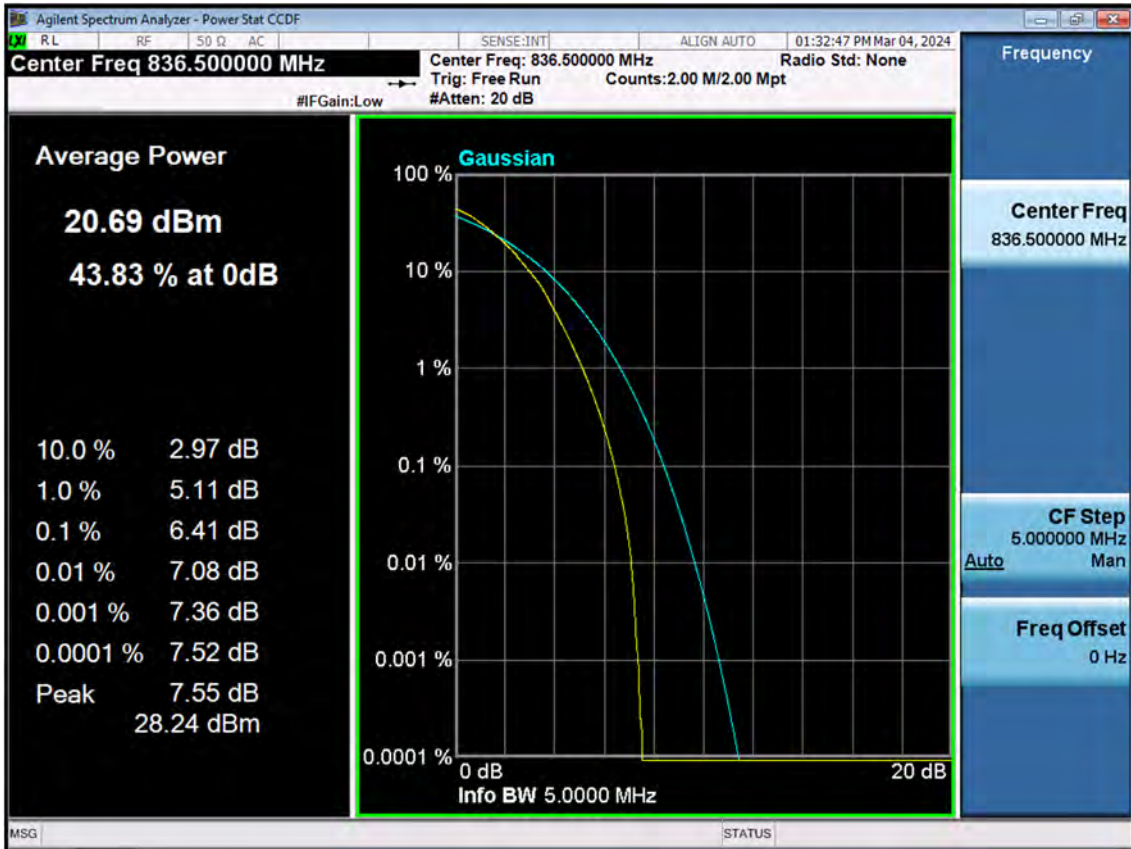


BAND5/26. PAR Plot (5 M BW Ch.26915 256QAM_RB25_0)

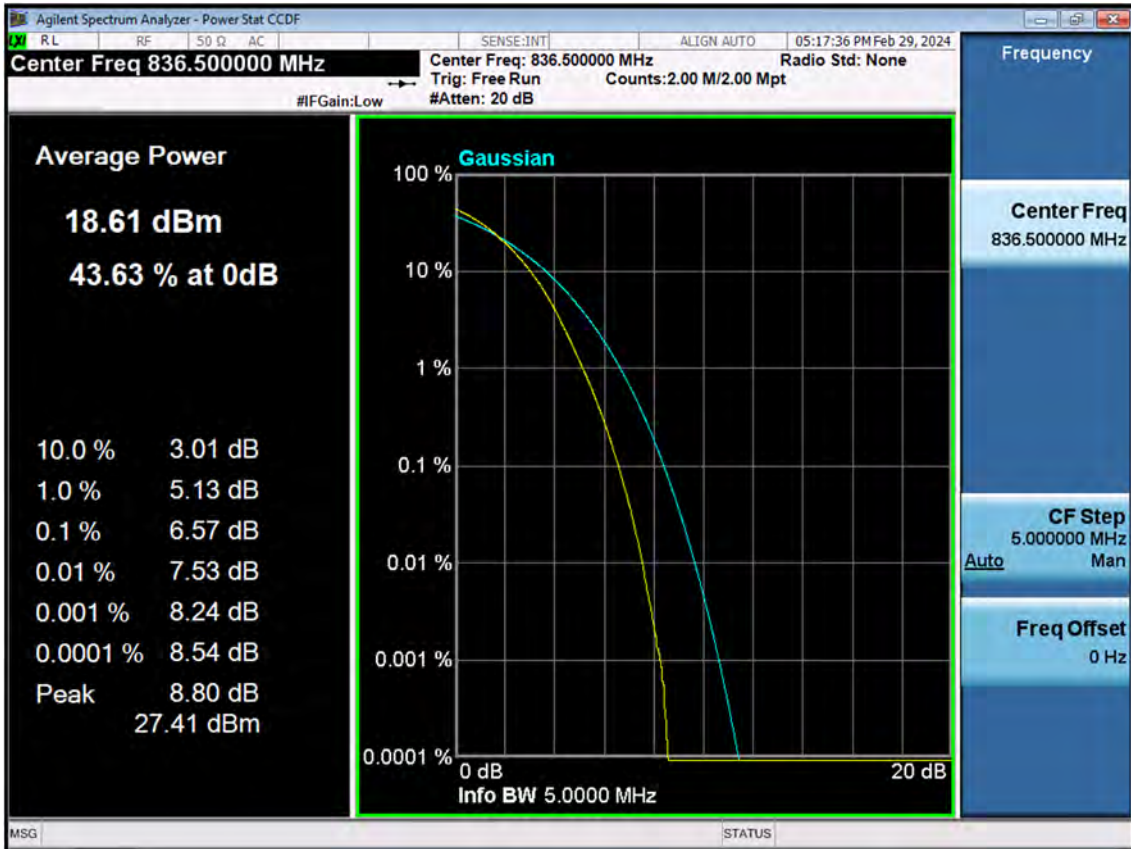


BAND5/26. PAR Plot (10 M BW Ch.26915 QPSK_RB50_0)

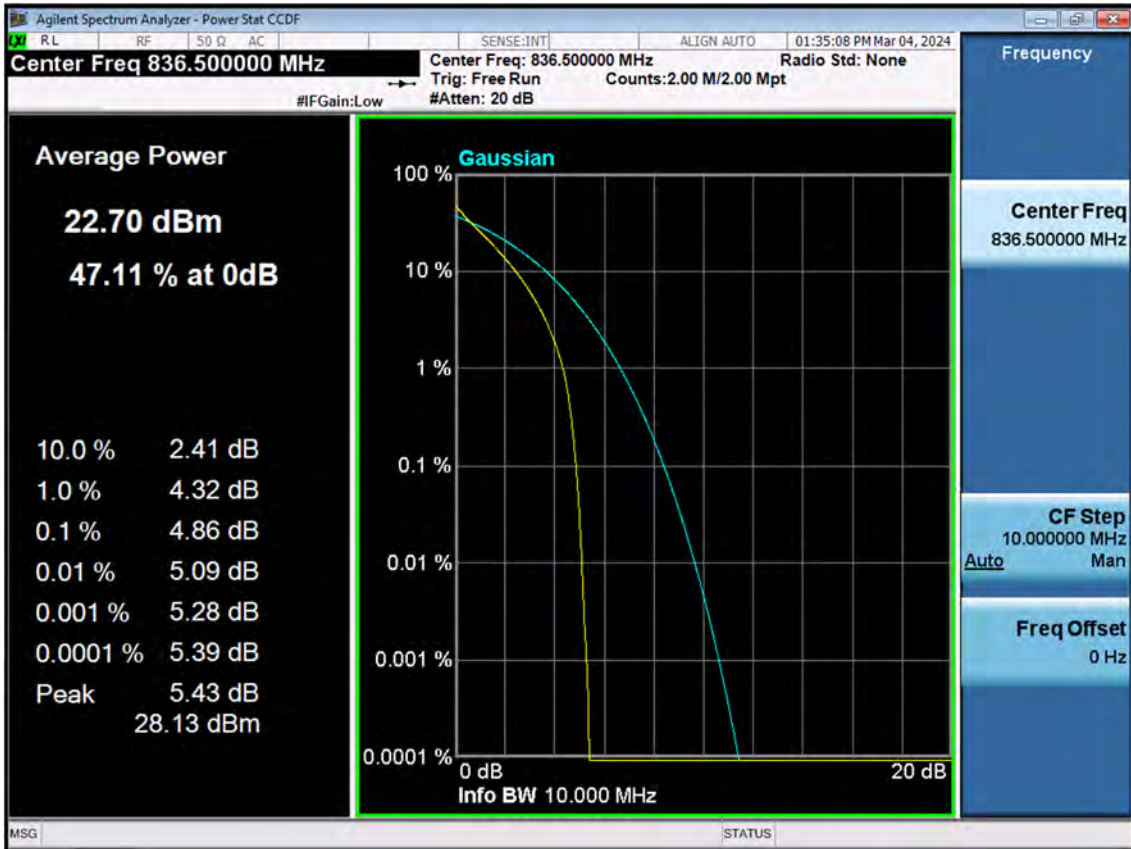


BAND5/26. PAR Plot (10 M BW Ch.26915 16QAM_RB50_0)

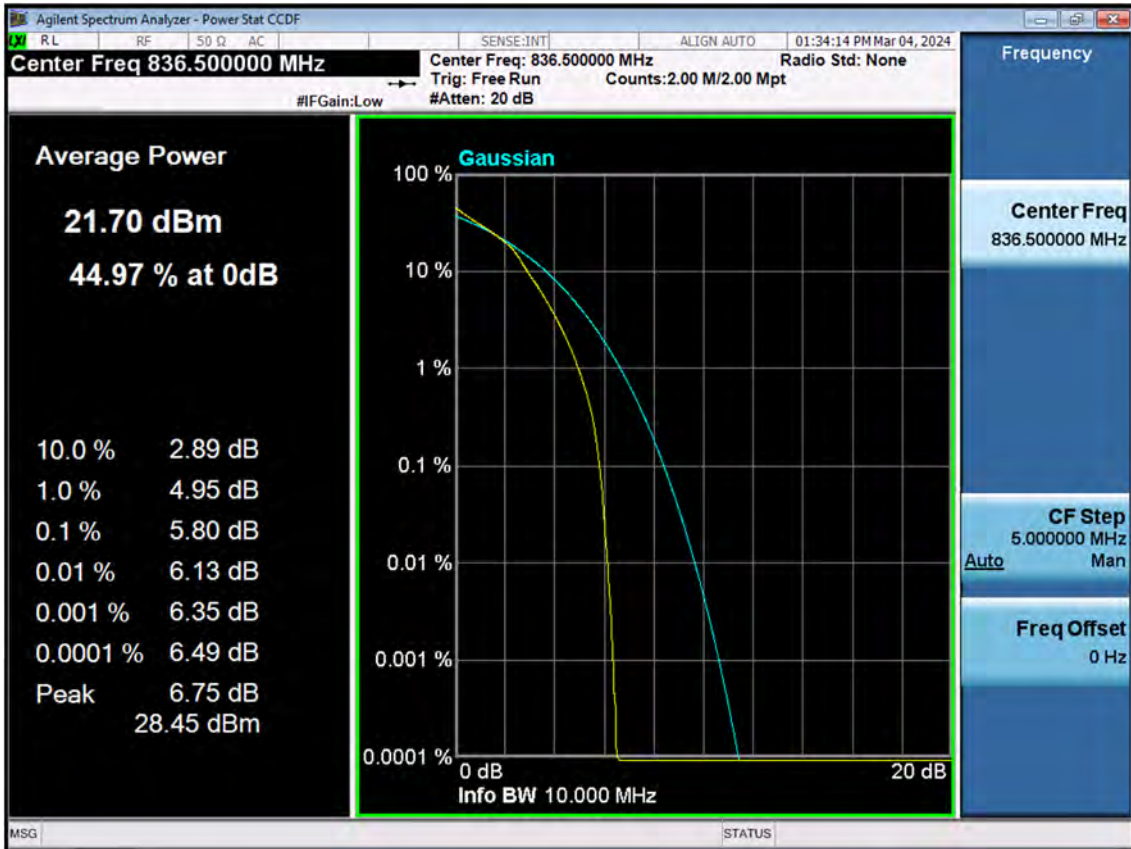


BAND5/26. PAR Plot (10 M BW Ch.26915 64QAM_RB50_0)

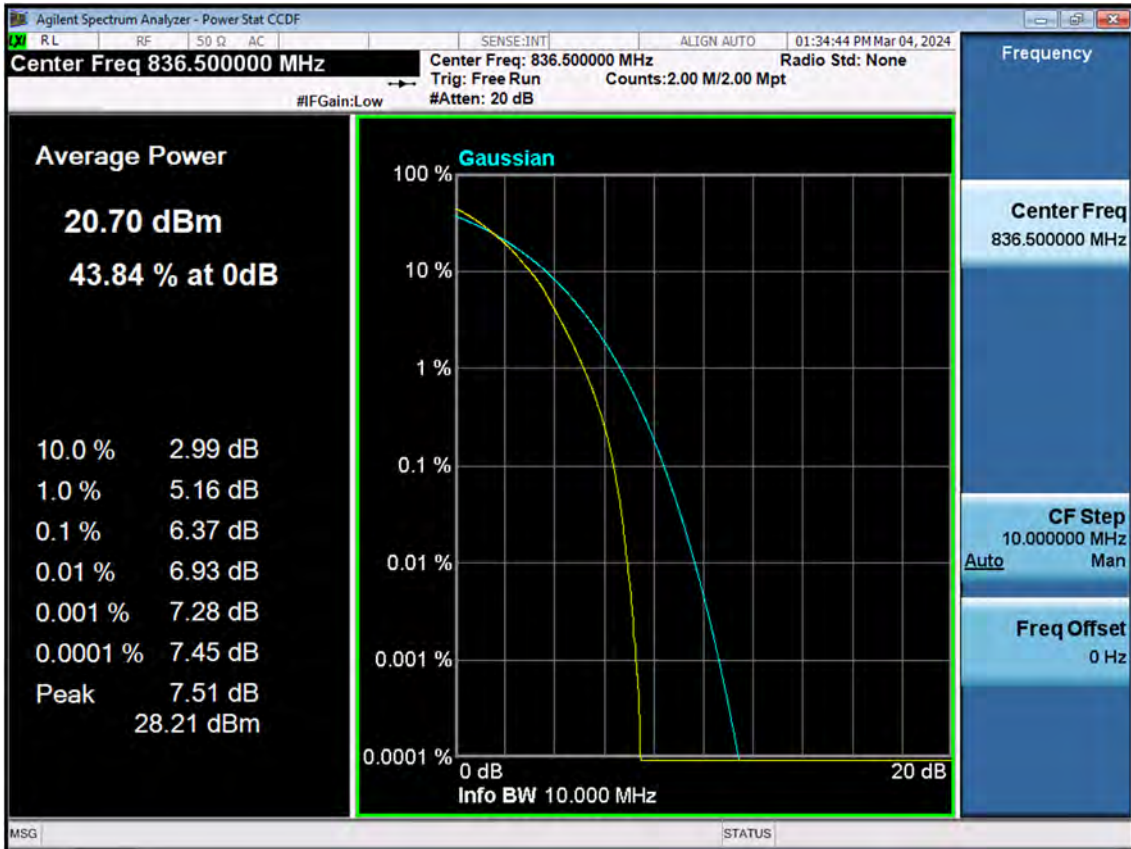


BAND5/26. PAR Plot (10 M BW Ch.26915 256QAM_RB50_0)

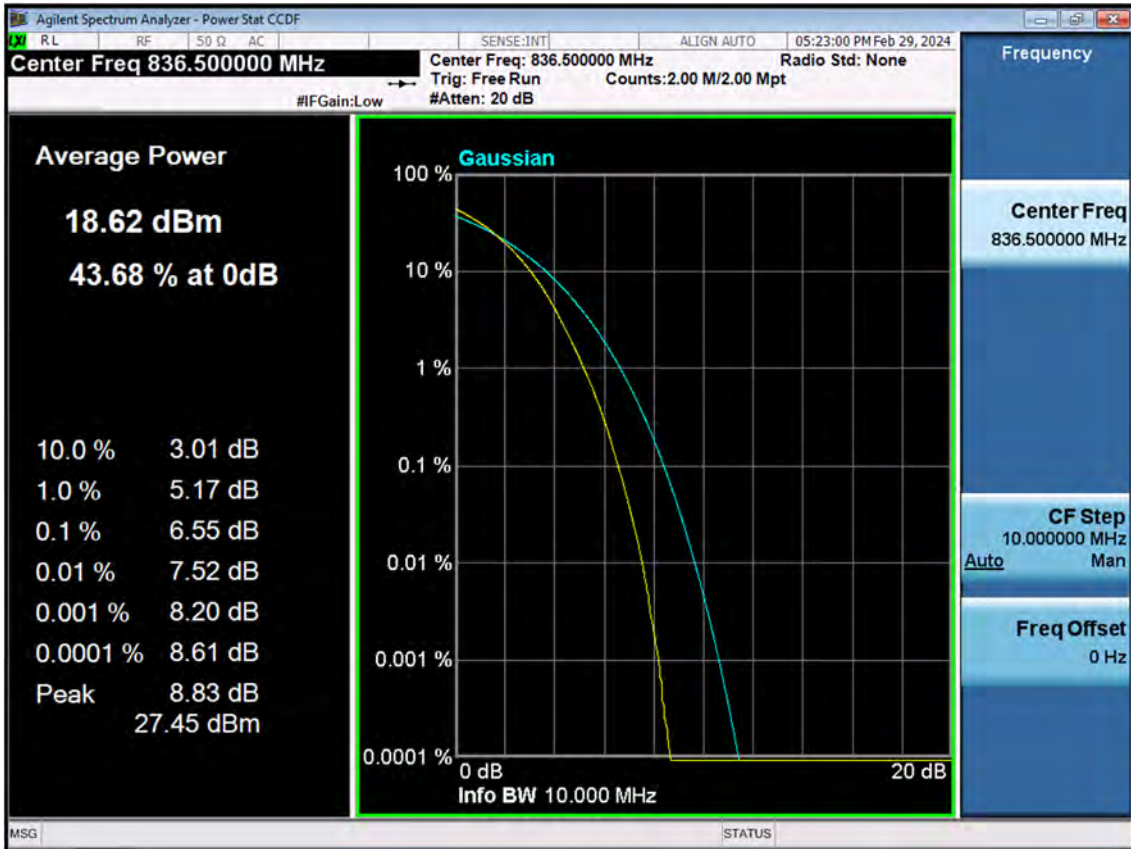


BAND 26. PAR Plot (15 M BW Ch.26915 QPSK RB 75_0)

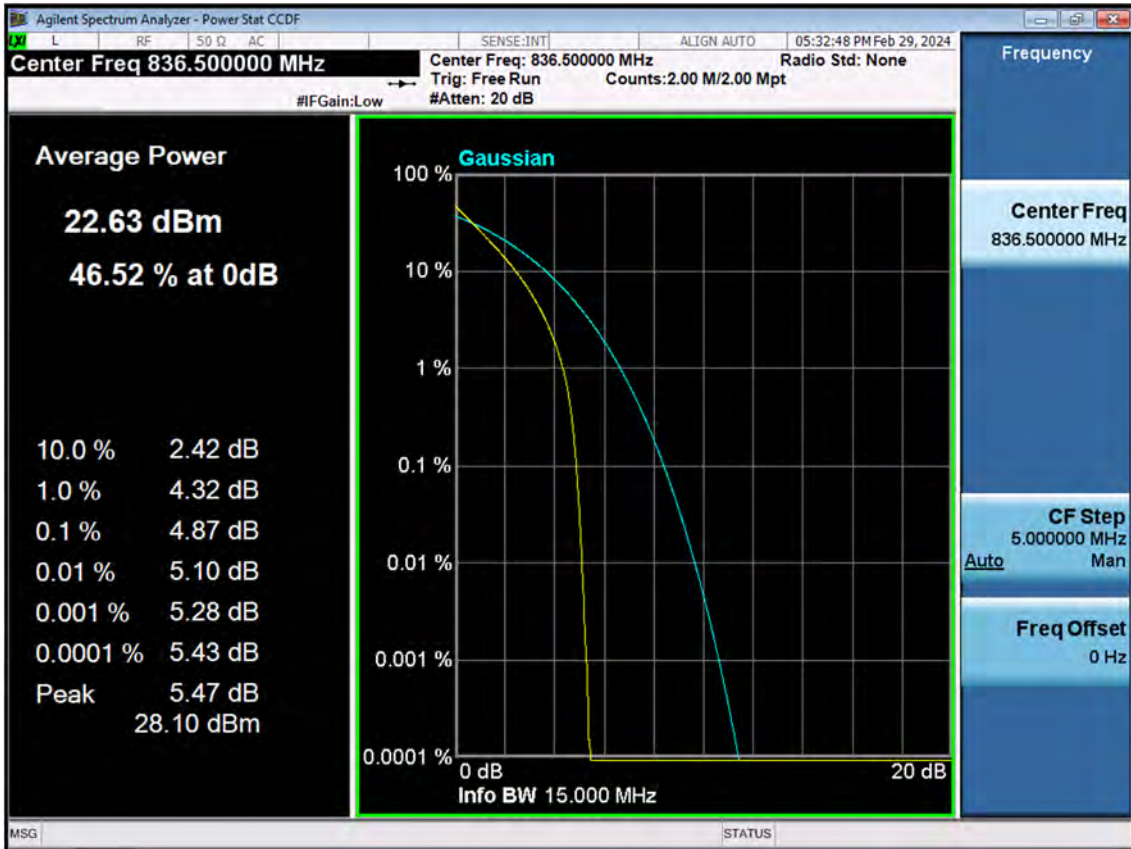


BAND 26. PAR Plot (15 M BW Ch.26915 16QAM RB 75_0)

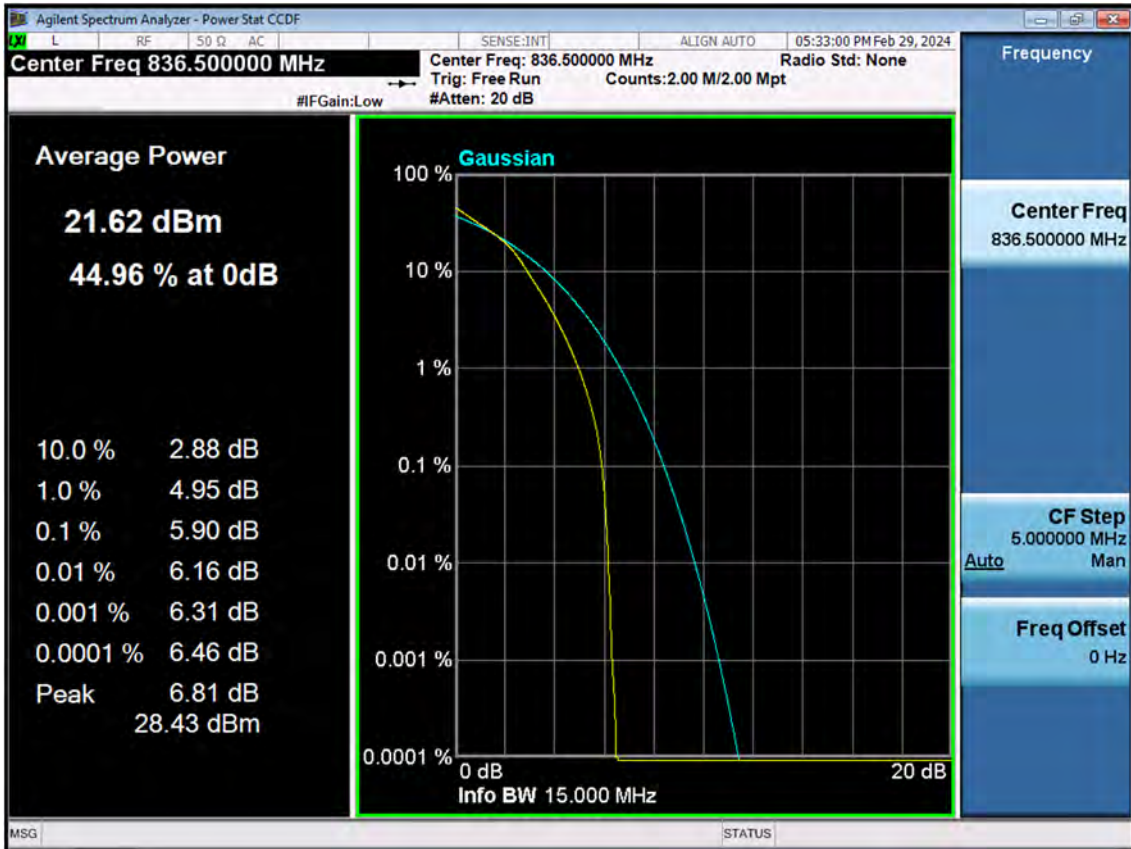


BAND 26. PAR Plot (15 M BW Ch.26915 64QAM RB 75_0)

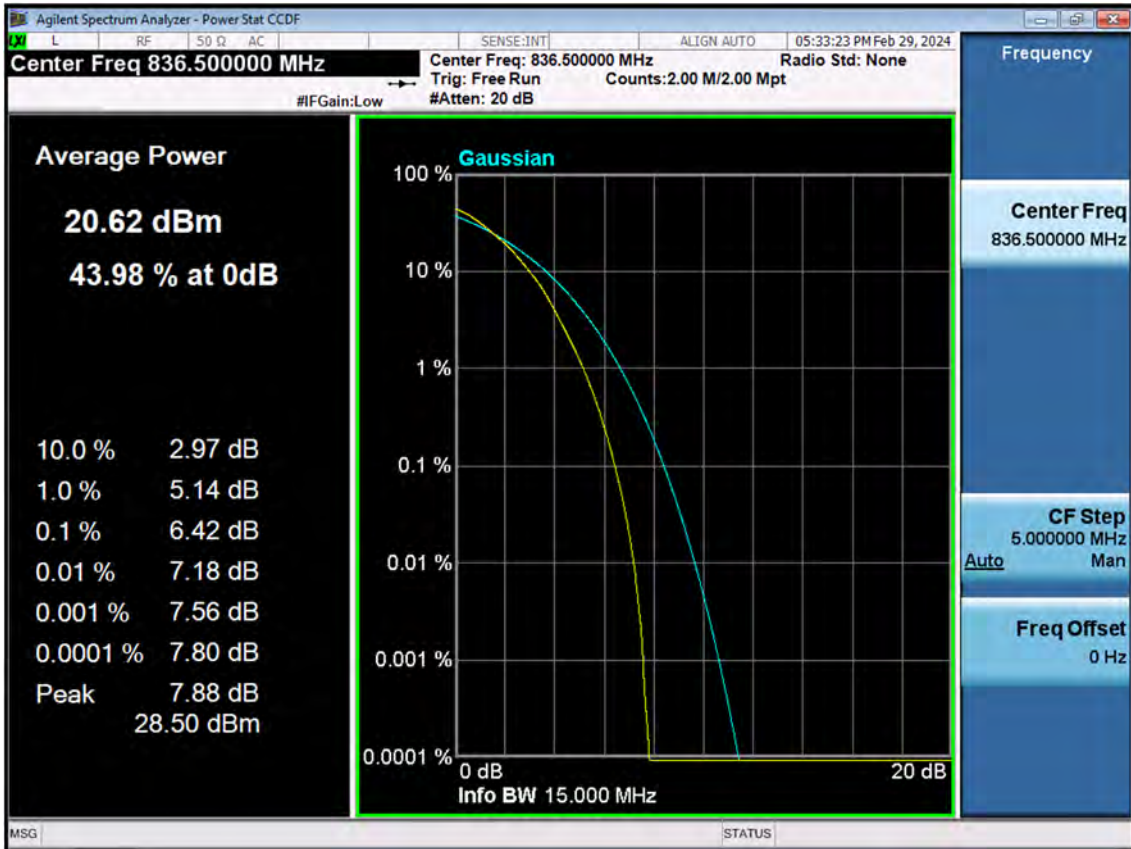

BAND 26. PAR Plot (15 M BW Ch.26915 256QAM RB 75_0)

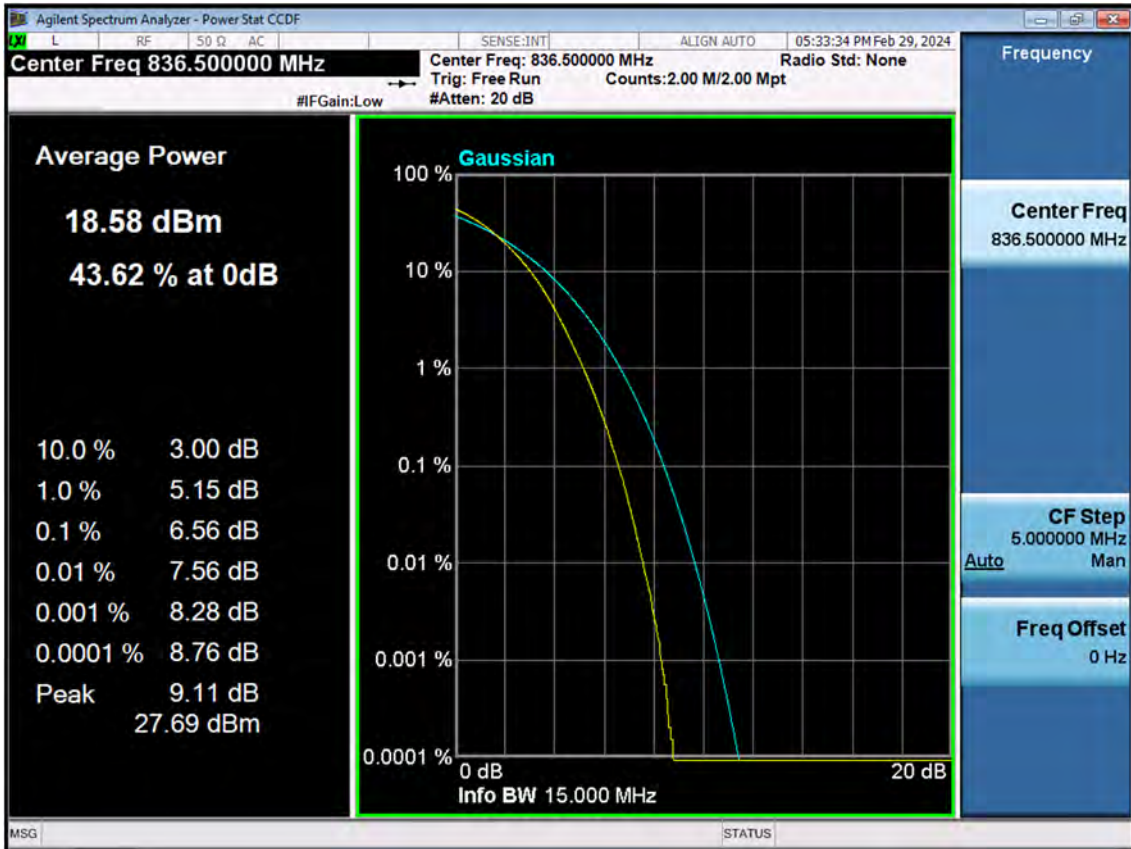

BAND5/26. Lower Band Edge Plot (1.4 M BW Ch.26797 QPSK_RB1_Offset 0)

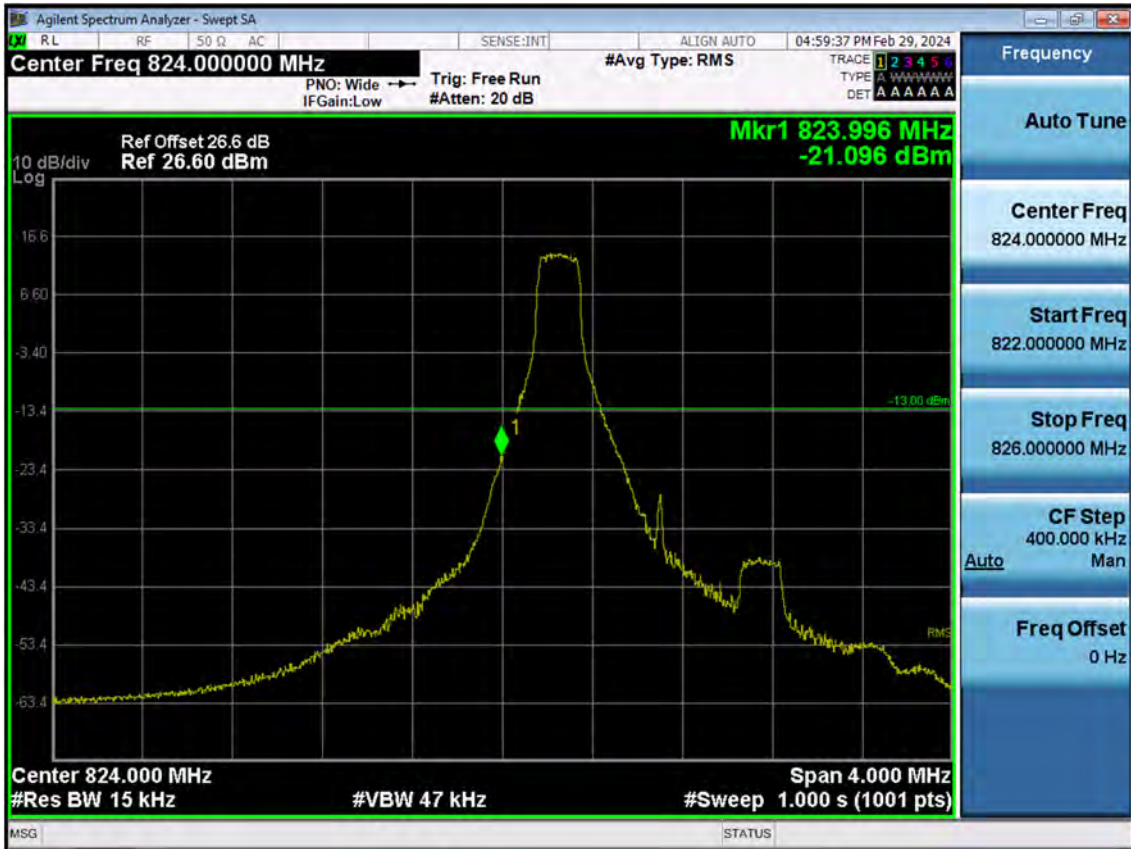


BAND5/26. Lower Band Edge Plot (1.4 M BW Ch.26797 QPSK_RB6_Offset 0)



BAND5/26. Lower Extended Band Edge Plot (1.4 M BW Ch.26797 QPSK_RB6_0)



BAND5/26. Lower Band Edge Plot (3 M BW Ch.26805 QPSK_RB1_Offset 0)

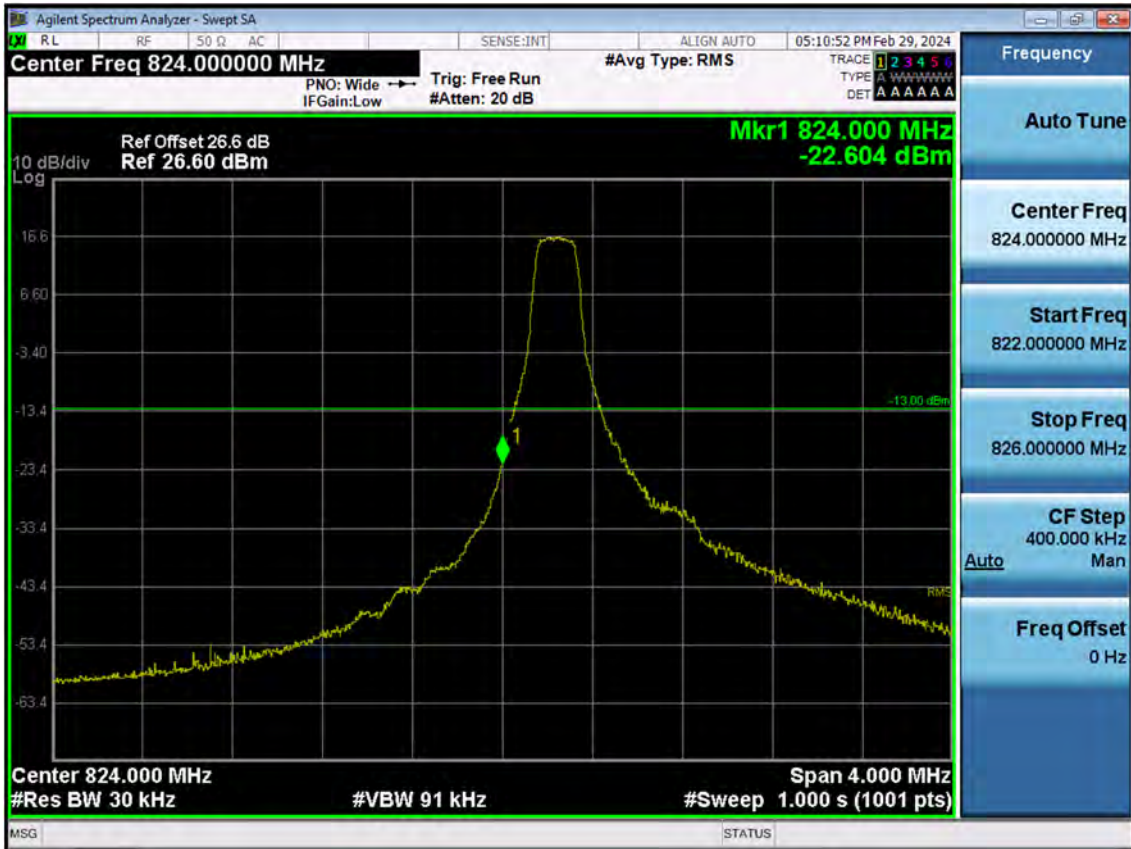


BAND5/26. Lower Band Edge Plot (3 M BW Ch.26805 QPSK_RB15_Offset 0)



BAND5/26. Lower Extended Band Edge Plot (3 M BW Ch.26805 QPSK_RB15_0)



BAND5/26. Lower Band Edge Plot (5 M BW Ch.26815 QPSK_RB1_Offset 0)

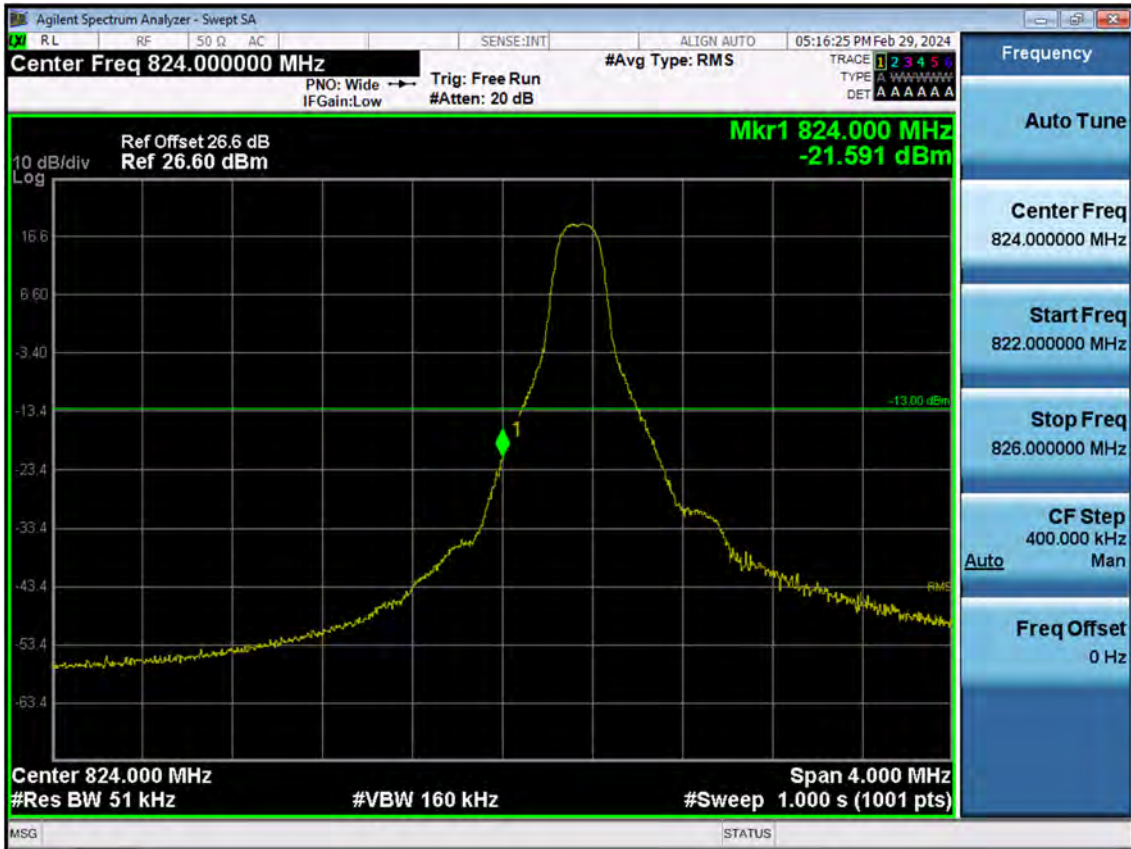


BAND5/26. Lower Band Edge Plot (5 M BW Ch.26815 QPSK_RB25_Offset 0)



BAND5/26. Lower Extended Band Edge Plot (5 M BW Ch.26815 QPSK_RB25_0)




BAND5/26. Lower Band Edge Plot (10 M BW Ch.26840 QPSK_RB1_Offset 0)

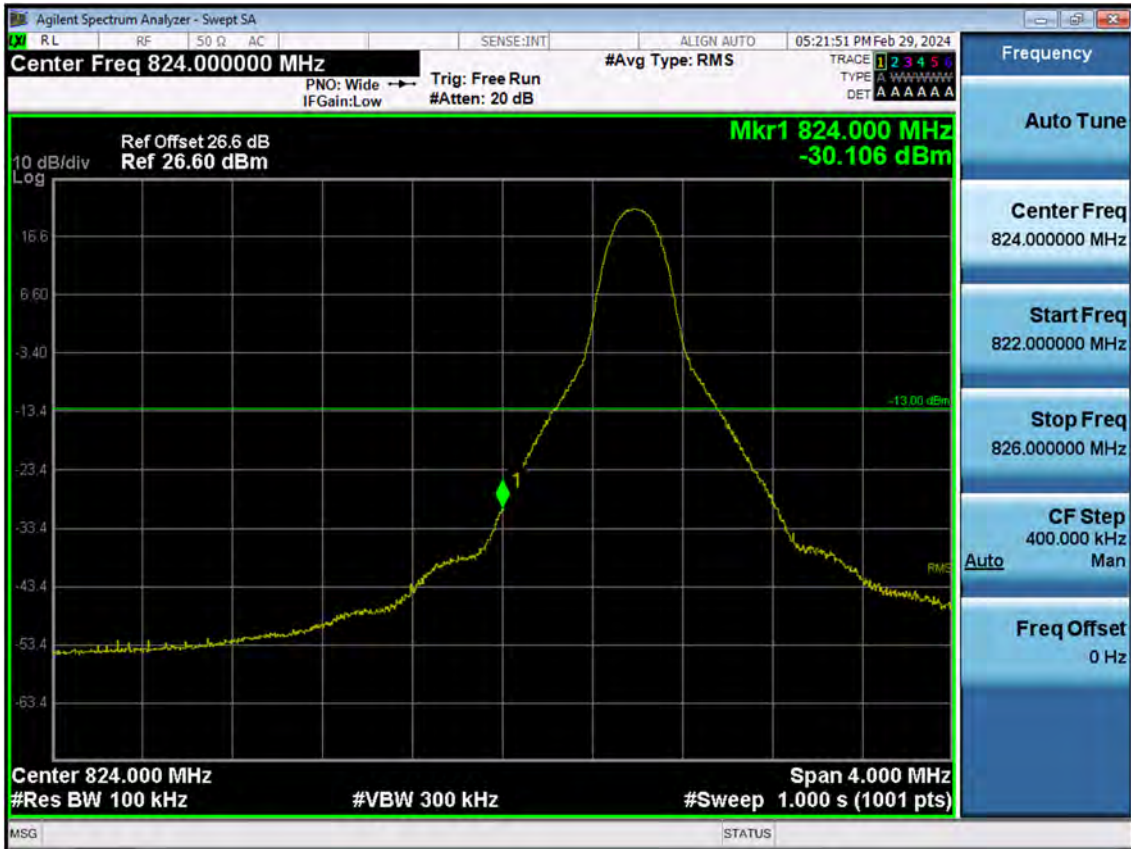

BAND5/26. Lower Band Edge Plot (10 M BW Ch.26840 QPSK_RB50_Offset 0)



BAND5/26. Lower Extended Band Edge Plot (10 M BW Ch.26840 QPSK_RB50_0)

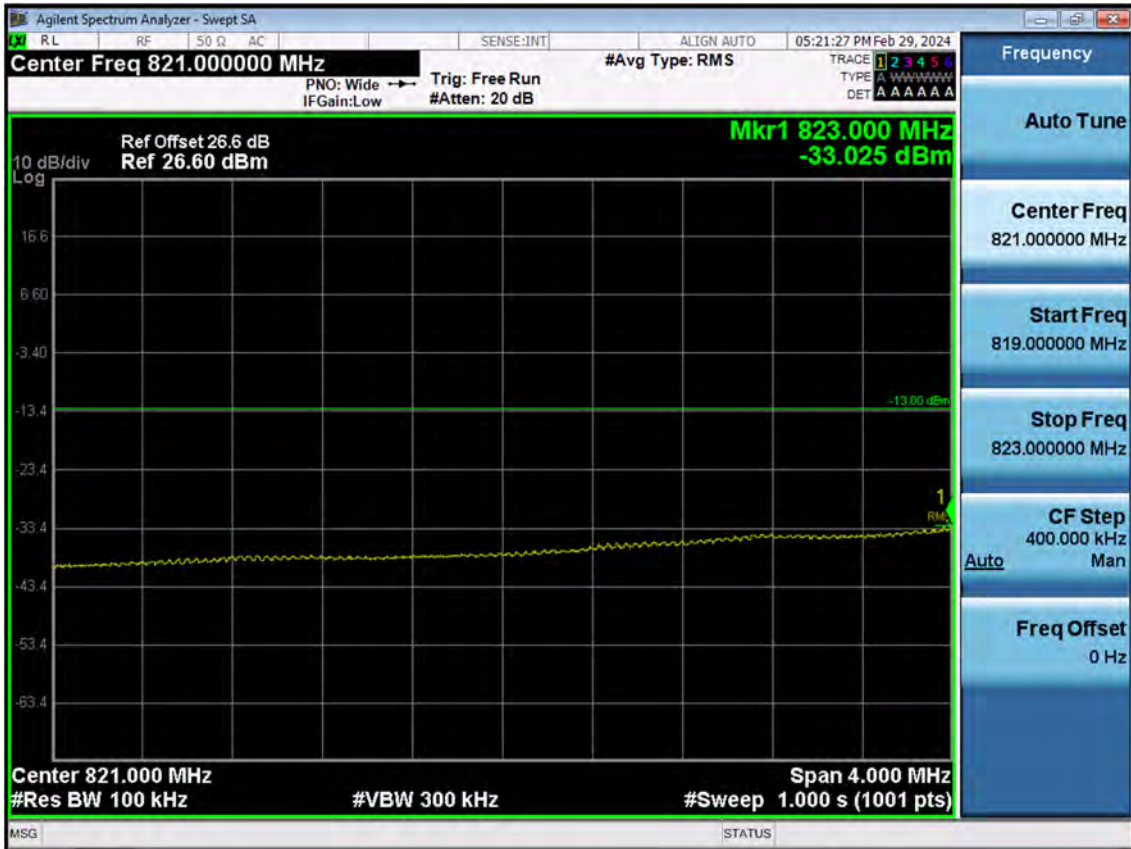


BAND 26. Lower Band Edge Plot (15 M BW Ch.26865 QPSK_RB1_Offset 0)




BAND 26. Lower Band Edge Plot (15 M BW Ch.26865 QPSK_RB75_Offset 0)



BAND 26. Lower Extended Band Edge Plot (15 M BW Ch.26865 QPSK_RB75_0)

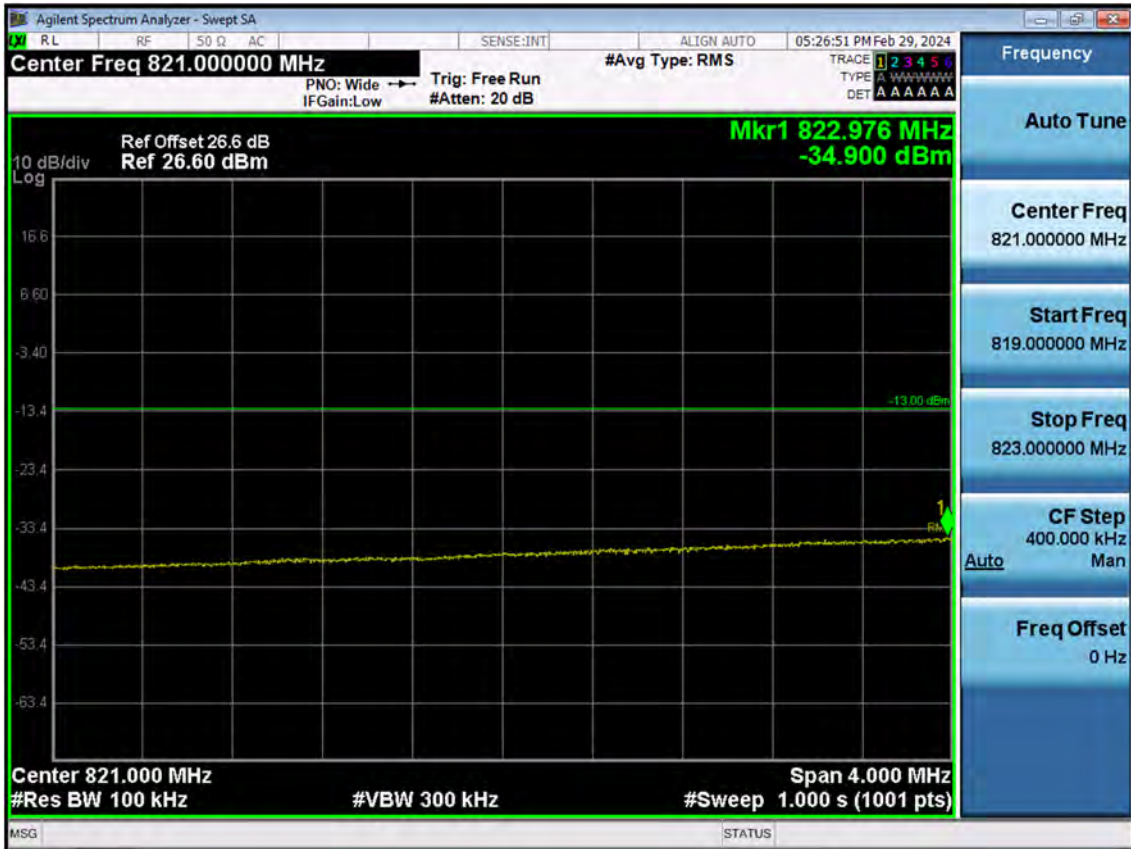


BAND5/26. Upper Band Edge Plot (1.4 M BW Ch.27033 QPSK_RB1_Offset 5)

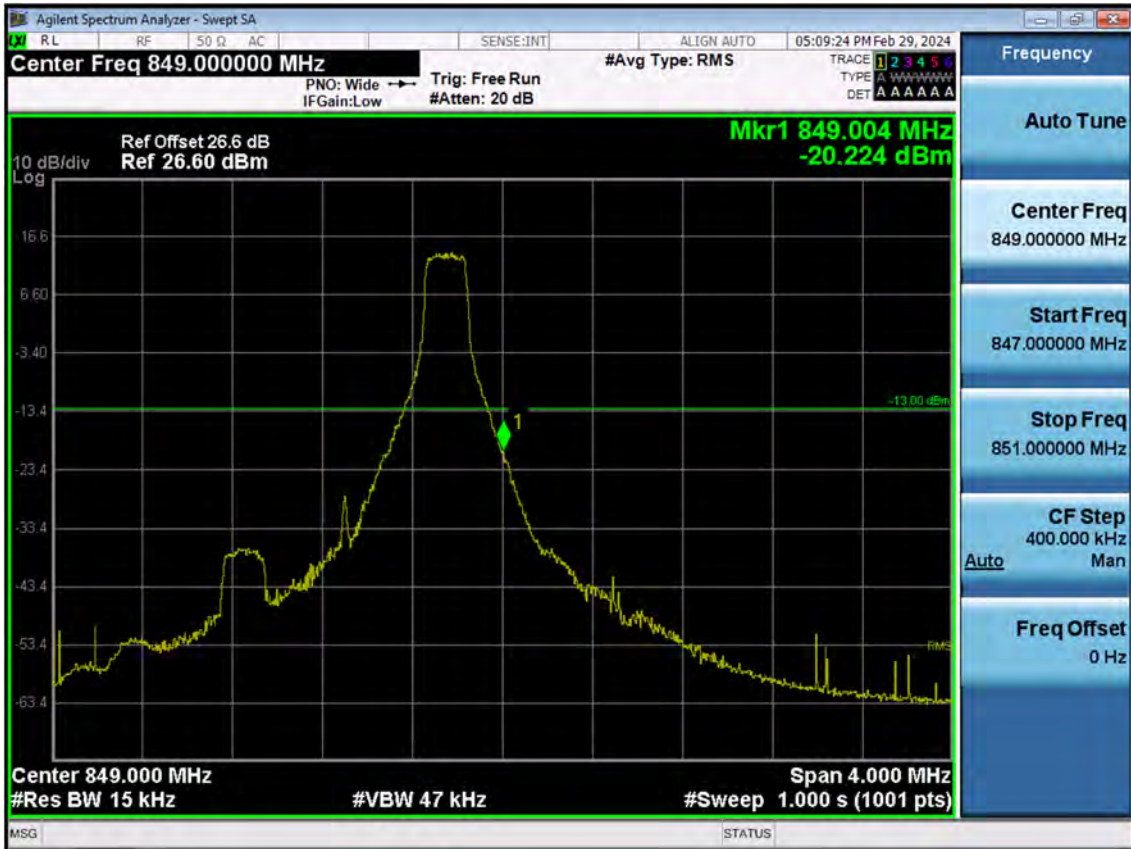

BAND5/26. Upper Band Edge Plot (1.4 M BW Ch.27033 QPSK_RB6_Offset 0)




BAND5/26. Upper Extended Band Edge Plot (1.4 M BW Ch.27033 QPSK_RB6_0)

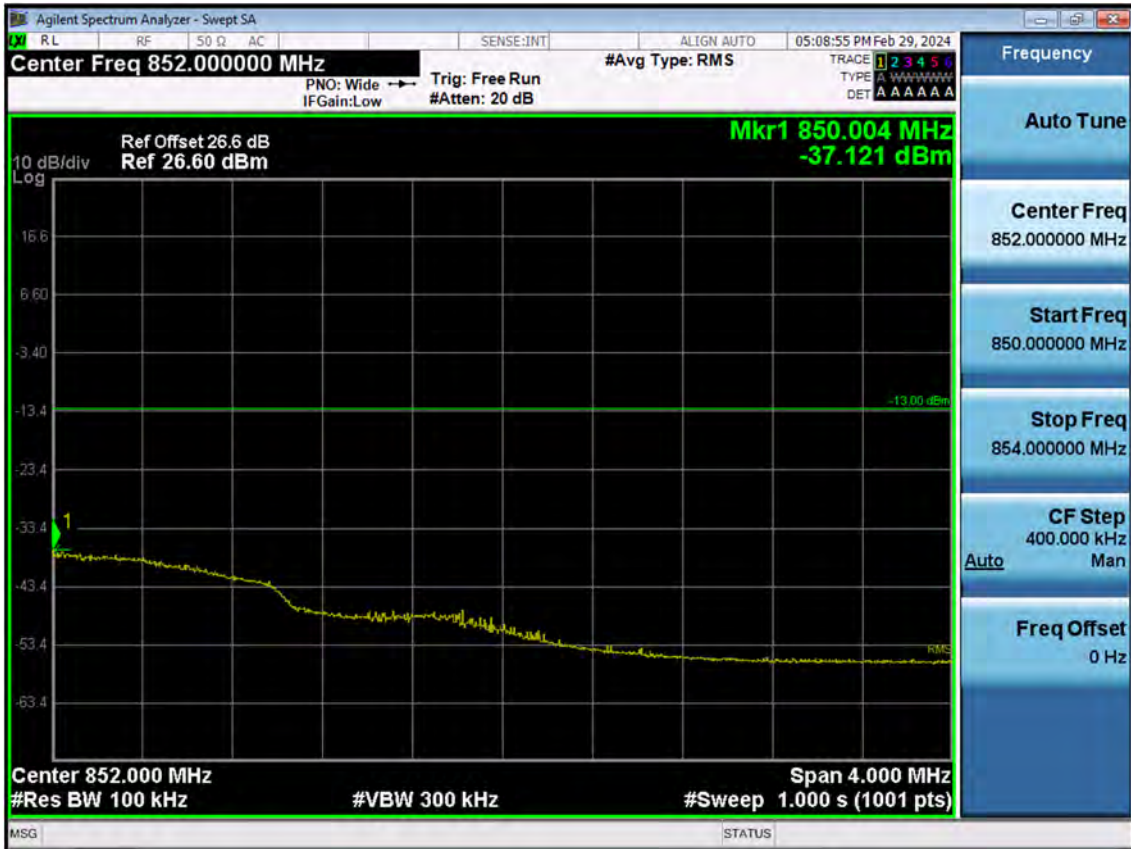

BAND5/26. Upper Band Edge Plot (3 M BW Ch.27025 QPSK_RB1_Offset 14)



BAND5/26. Upper Band Edge Plot (3 M BW Ch.27025 QPSK_RB15_Offset 0)

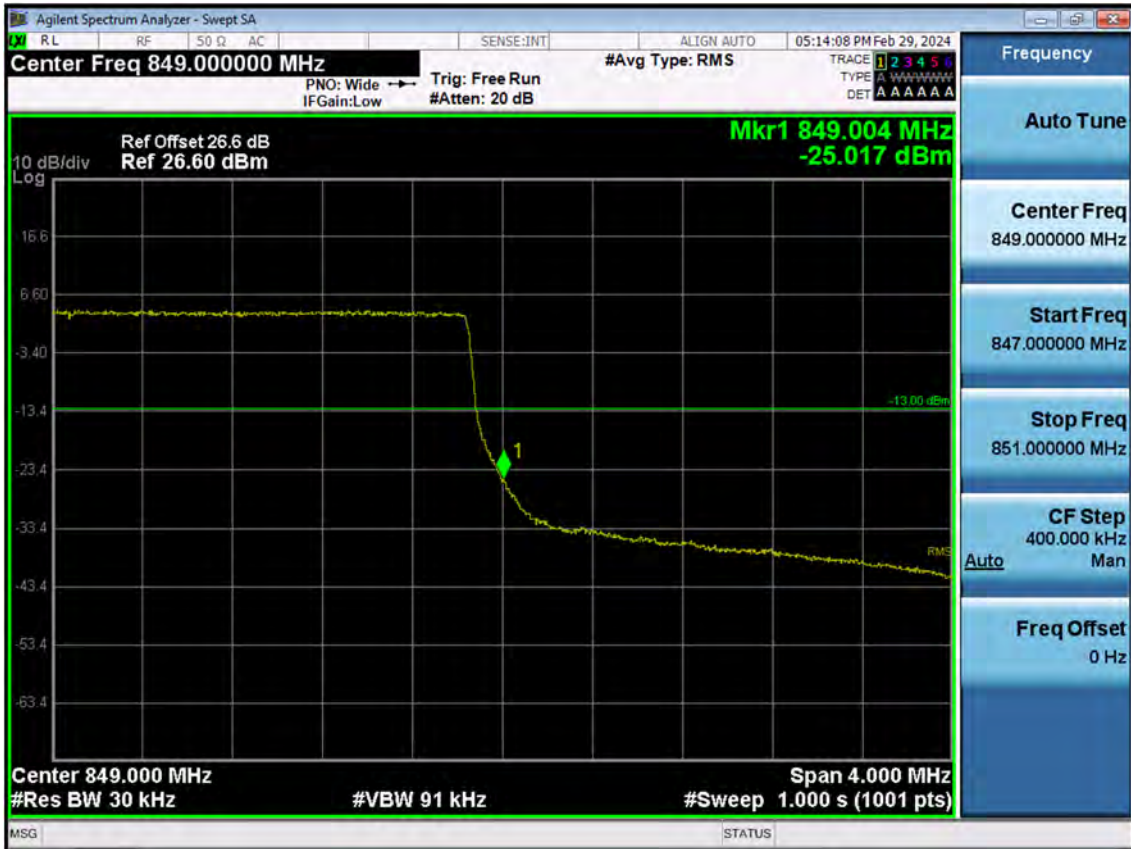


BAND5/26. Upper Extended Band Edge Plot (3 M BW Ch.27025 QPSK_RB15_0)



BAND5/26. Upper Band Edge Plot (5 M BW Ch.27015 QPSK_RB1_Offset 24)



BAND5/26. Upper Band Edge Plot (5 M BW Ch.27015 QPSK_RB25_Offset 0)

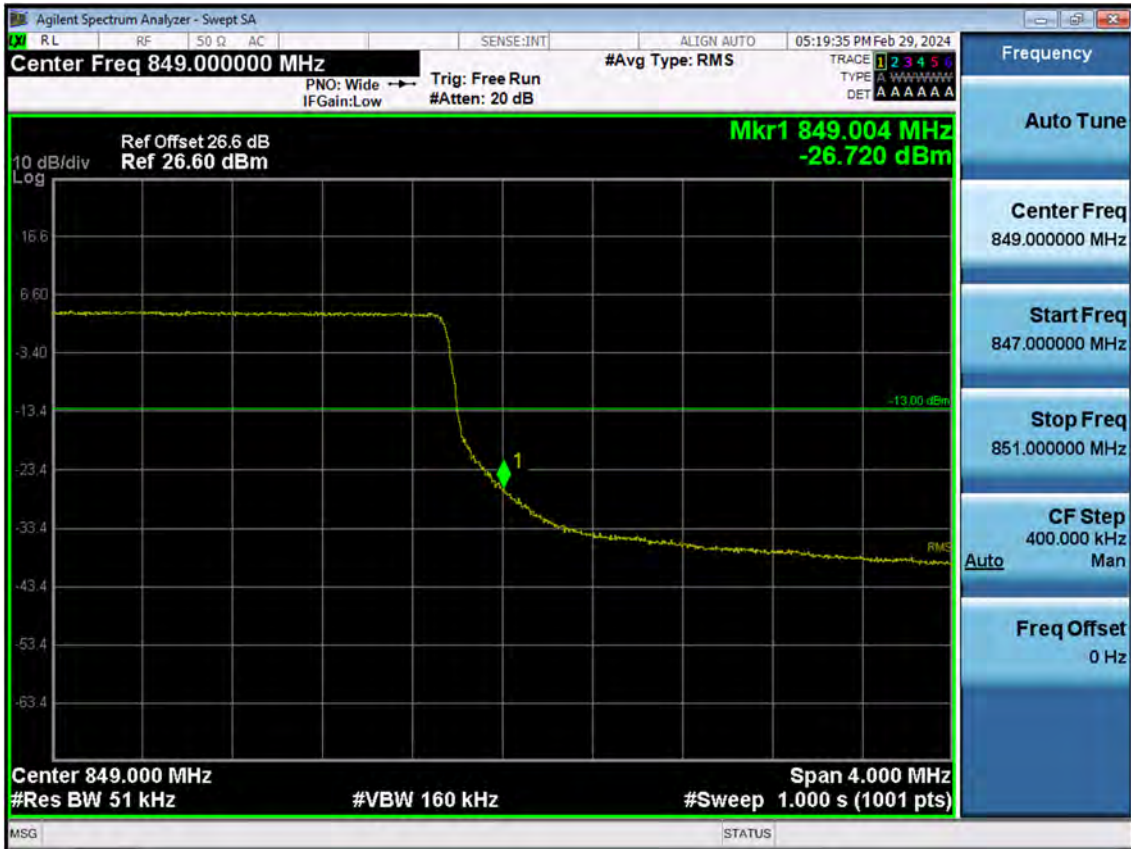

BAND5/26. Upper Band Edge Plot (10 M BW Ch.26990 QPSK_RB1_Offset 49)



BAND5/26. Upper Band Edge Plot (10 M BW Ch.26990 QPSK_RB50_Offset 0)



BAND5/26. Upper Extended Band Edge Plot (10 M BW Ch.26990 QPSK_RB50_0)



BAND 26. Upper Band Edge Plot (15 M BW Ch.26965 QPSK_RB1_Offset 74)




BAND 26. Upper Band Edge Plot (15 M BW Ch.26965 QPSK_RB75_Offset 0)




BAND 26. Upper Extended Band Edge Plot (15 M BW Ch.26965 QPSK_RB75_0)




BAND5/26. Conducted Spurious Plot (26797ch_1.4 MHz_QPSK_RB 1_0)

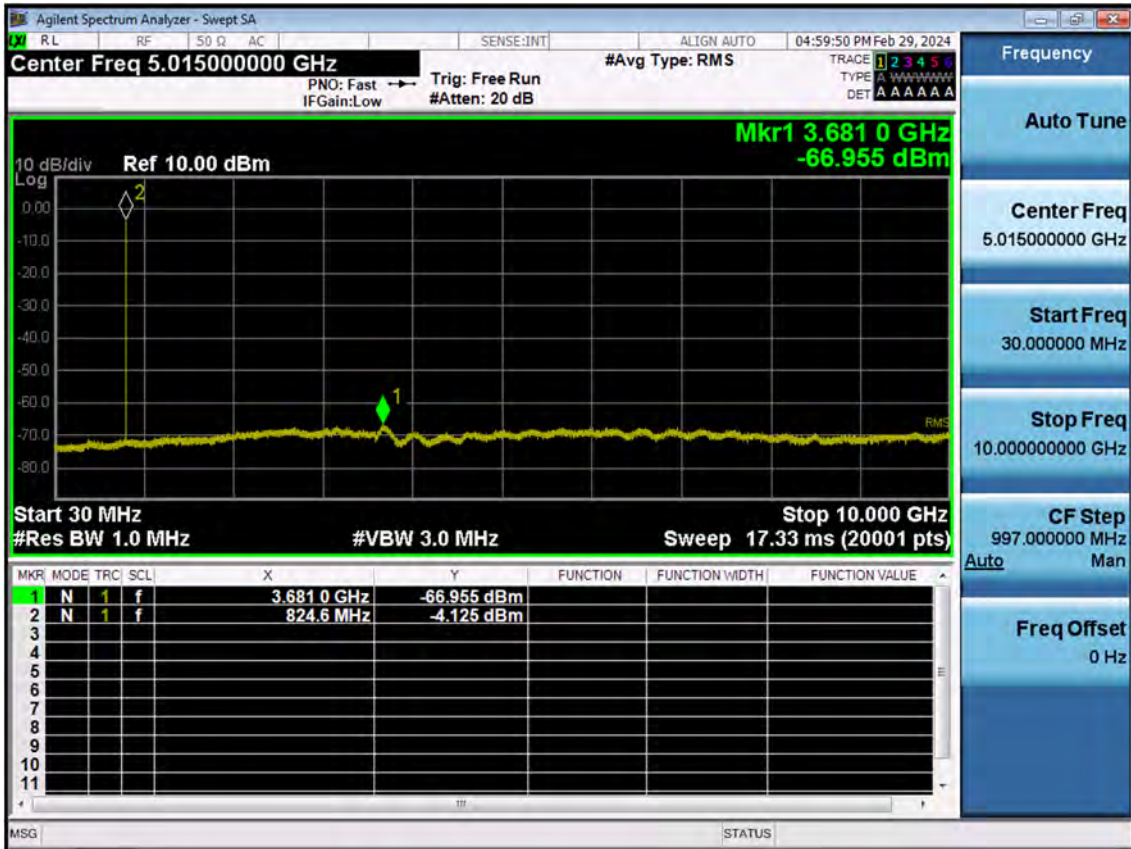


BAND5/26. Conducted Spurious Plot (26915ch_1.4 MHz_QPSK_RB 1_0)

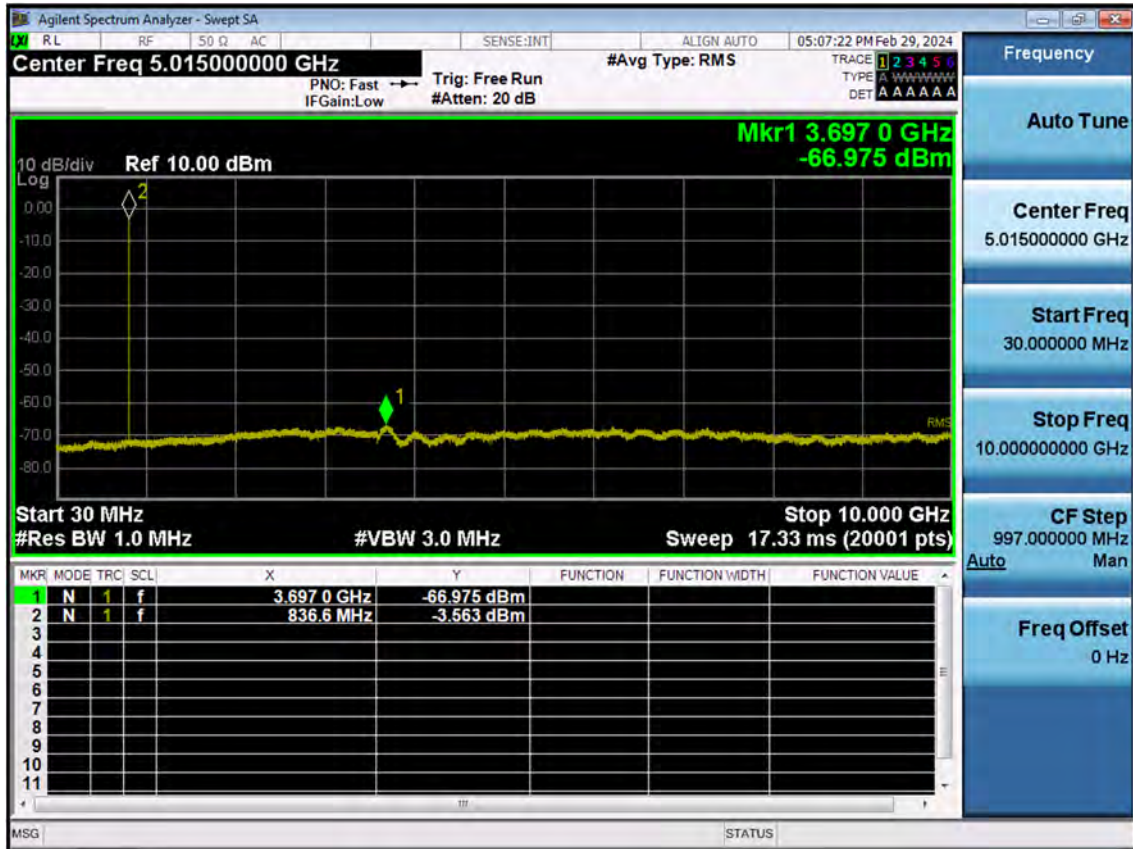


BAND5/26. Conducted Spurious Plot (27033ch_1.4 MHz_QPSK_RB 1_0)

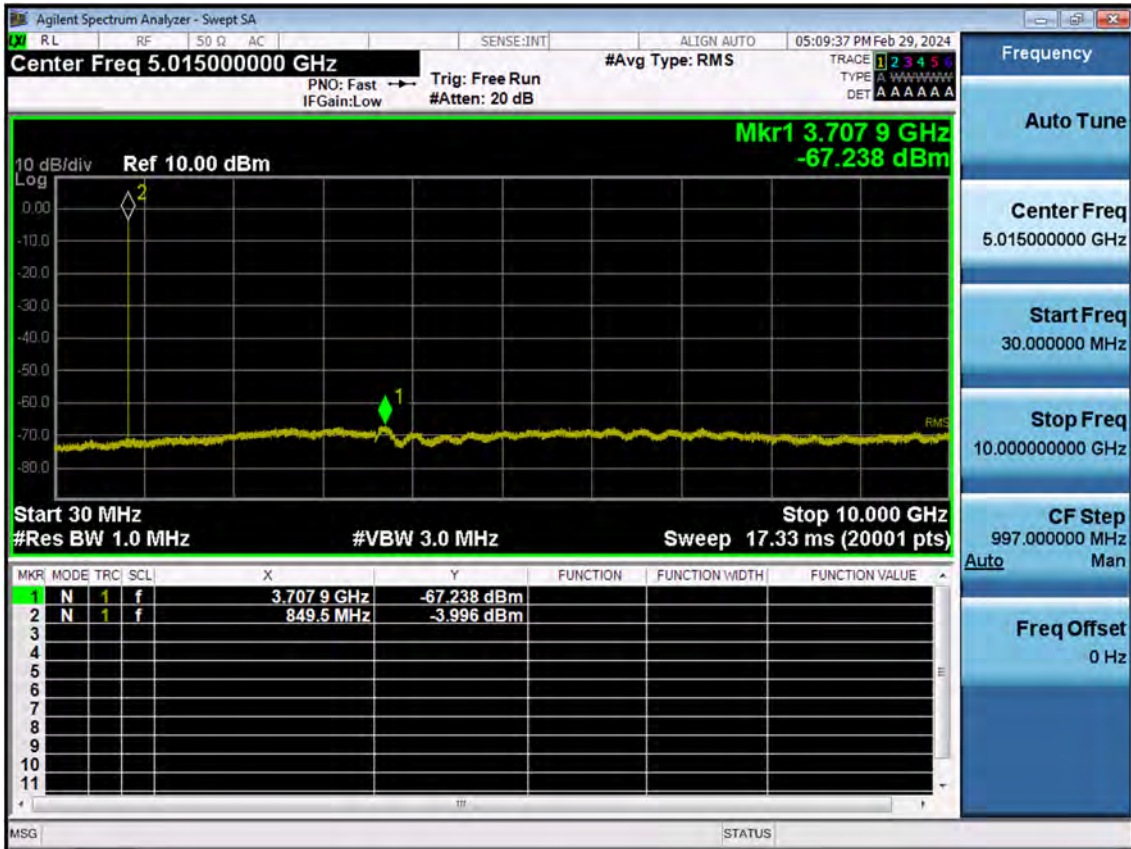


BAND5/26. Conducted Spurious Plot (26805ch_3 MHz_QPSK_RB 1_0)

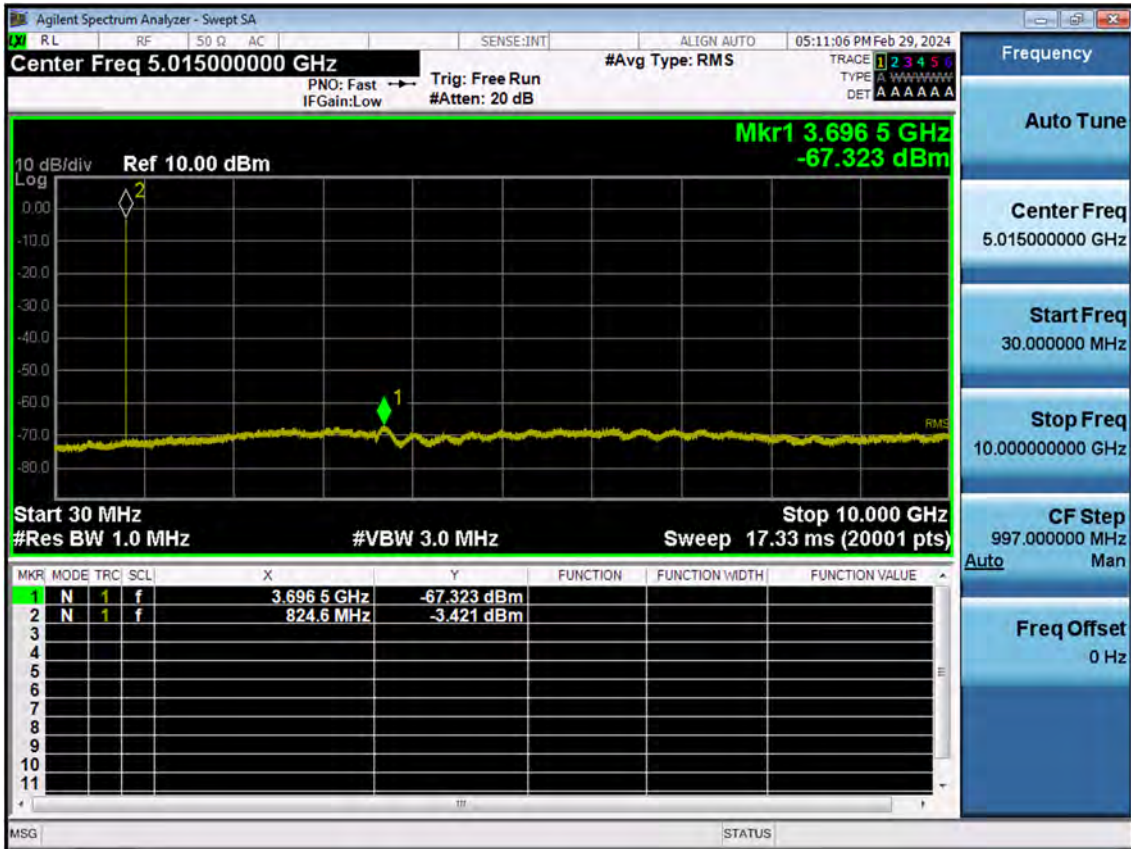


BAND5/26. Conducted Spurious Plot (26915ch_3 MHz_QPSK_RB 1_0)

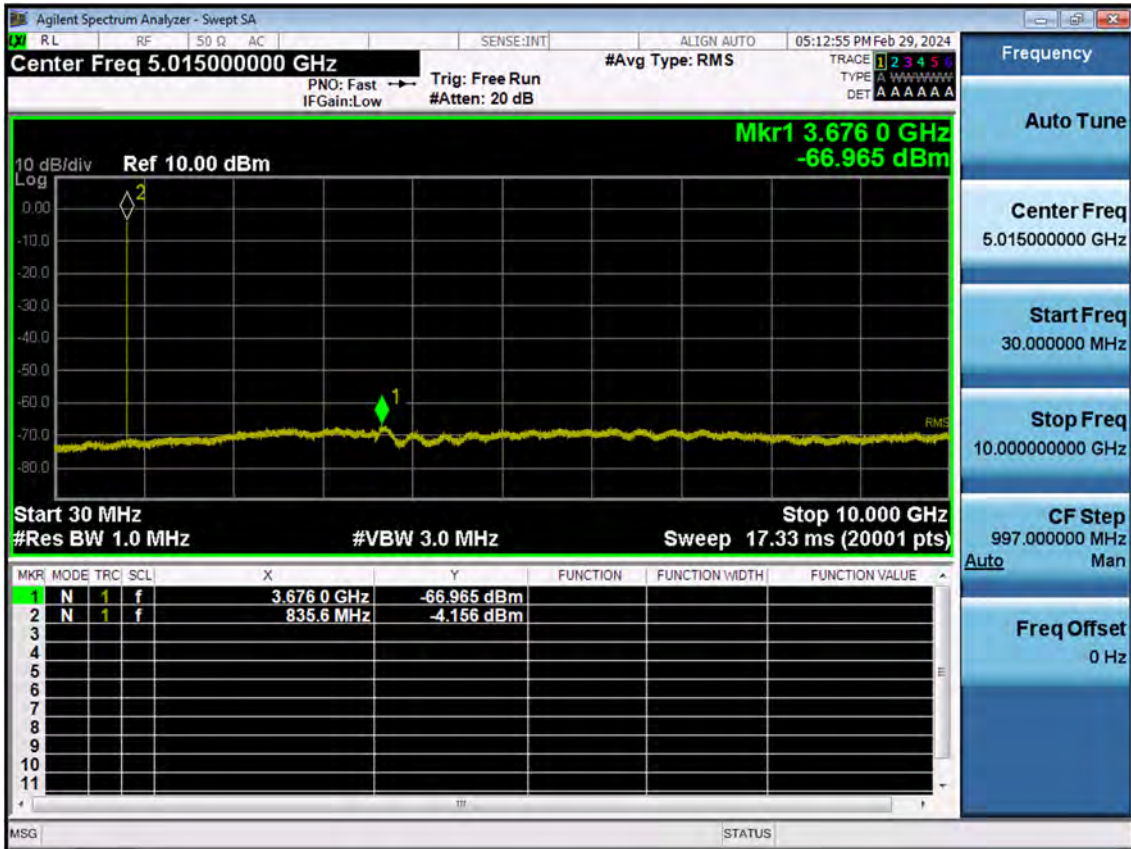


BAND5/26. Conducted Spurious Plot (27025ch_3 MHz_QPSK_RB 1_0)

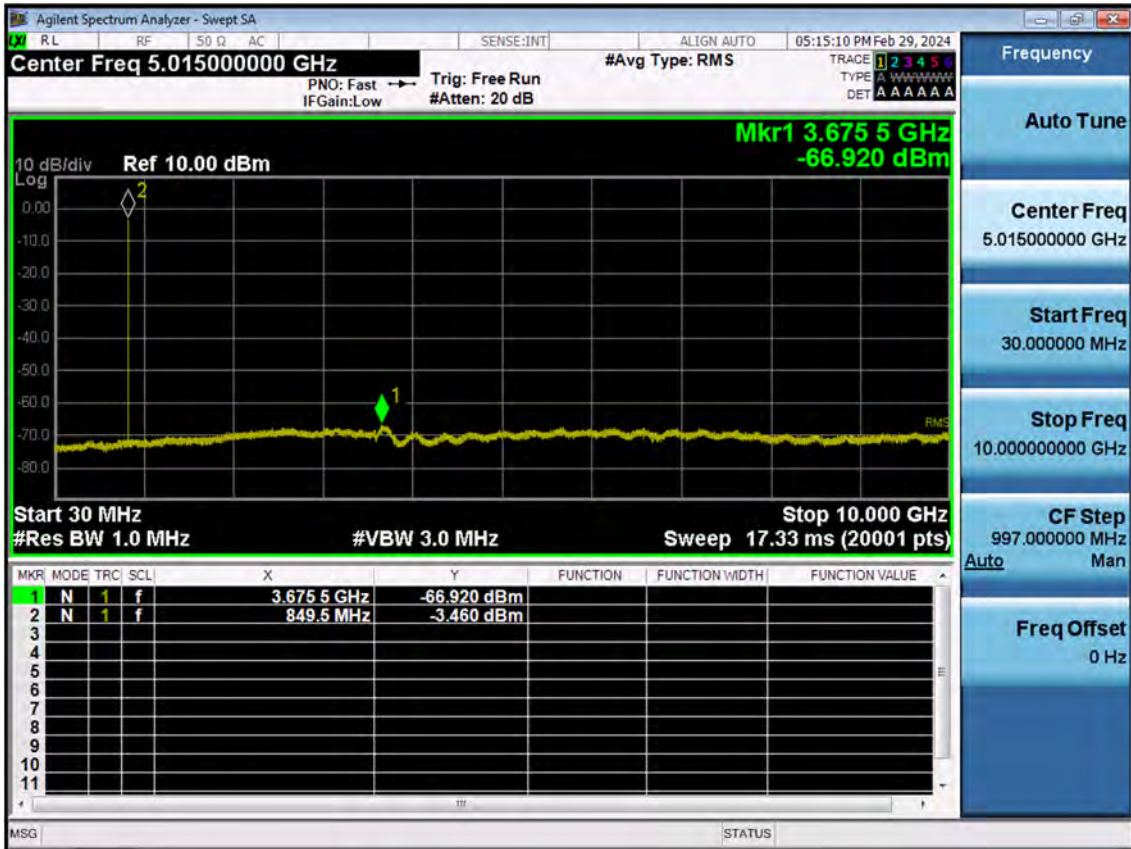


BAND5/26. Conducted Spurious Plot (26815ch_5 MHz_QPSK_RB 1_0)

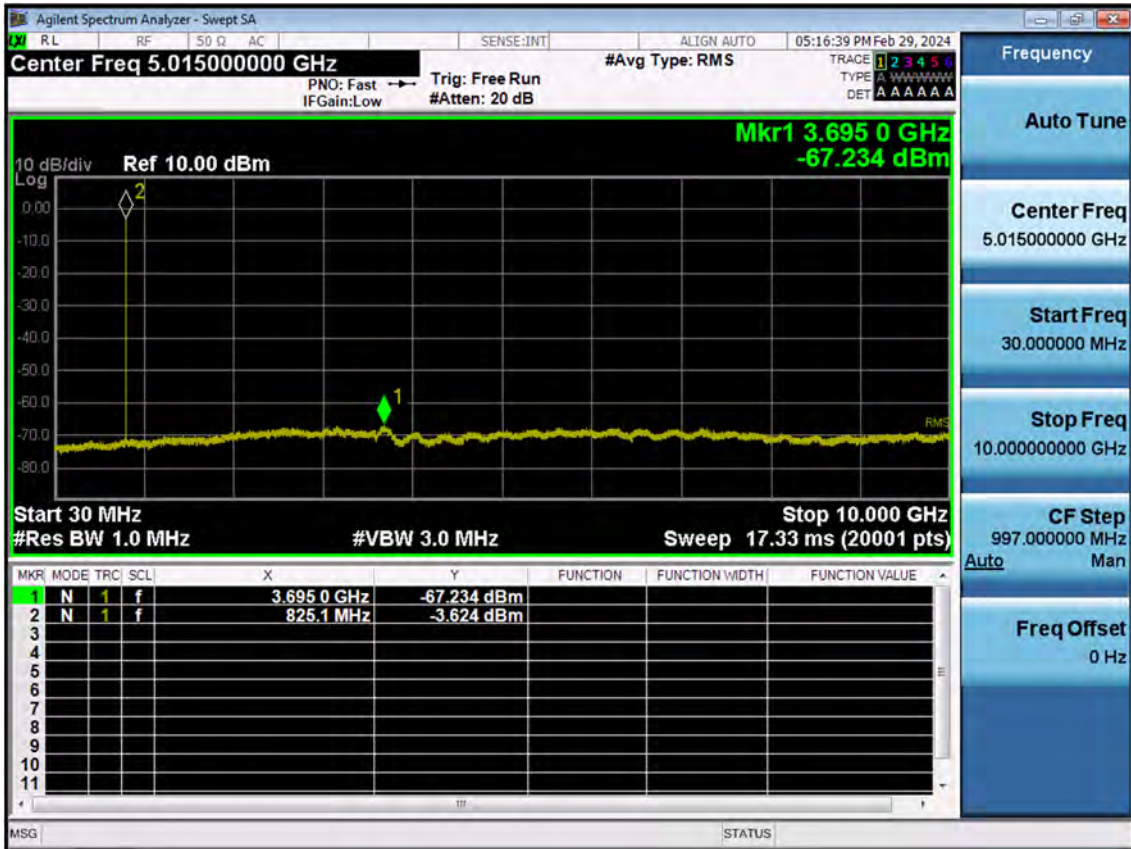


BAND5/26. Conducted Spurious Plot (26915ch_5 MHz_QPSK_RB 1_0)

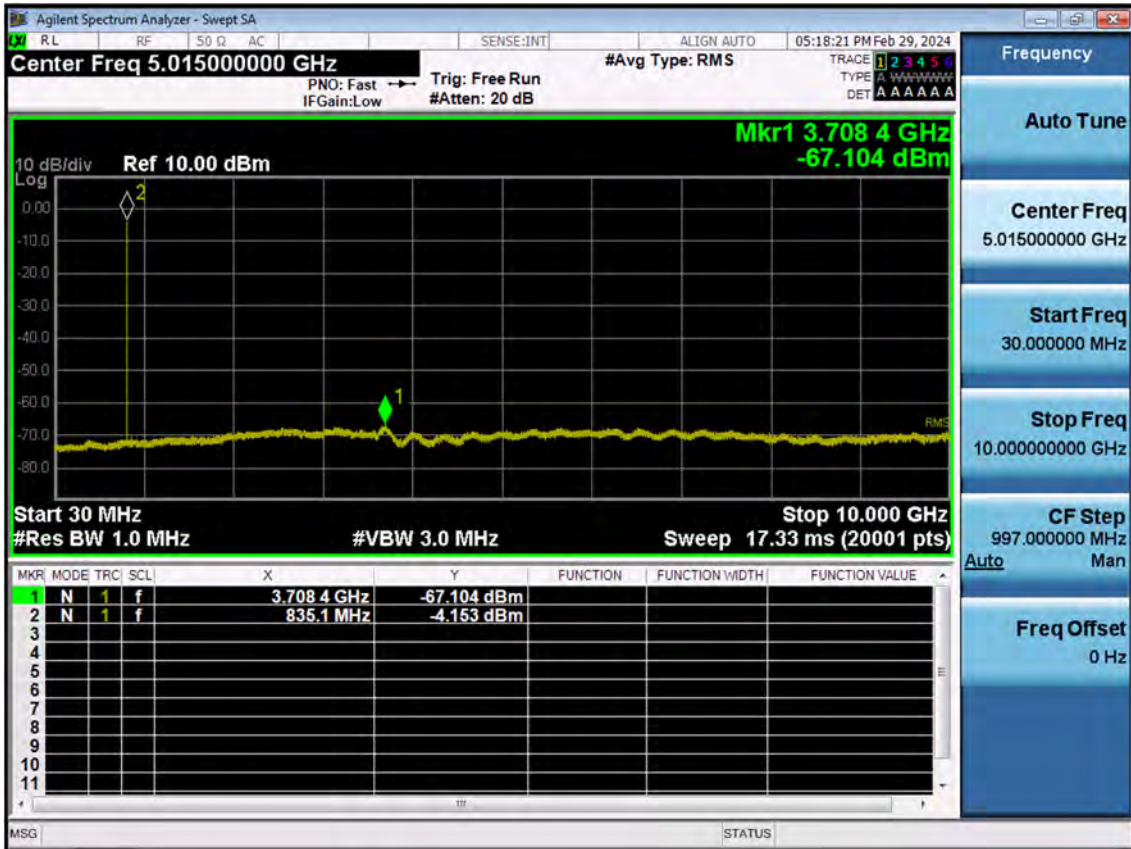


BAND5/26. Conducted Spurious Plot (27015ch_5 MHz_QPSK_RB 1_0)

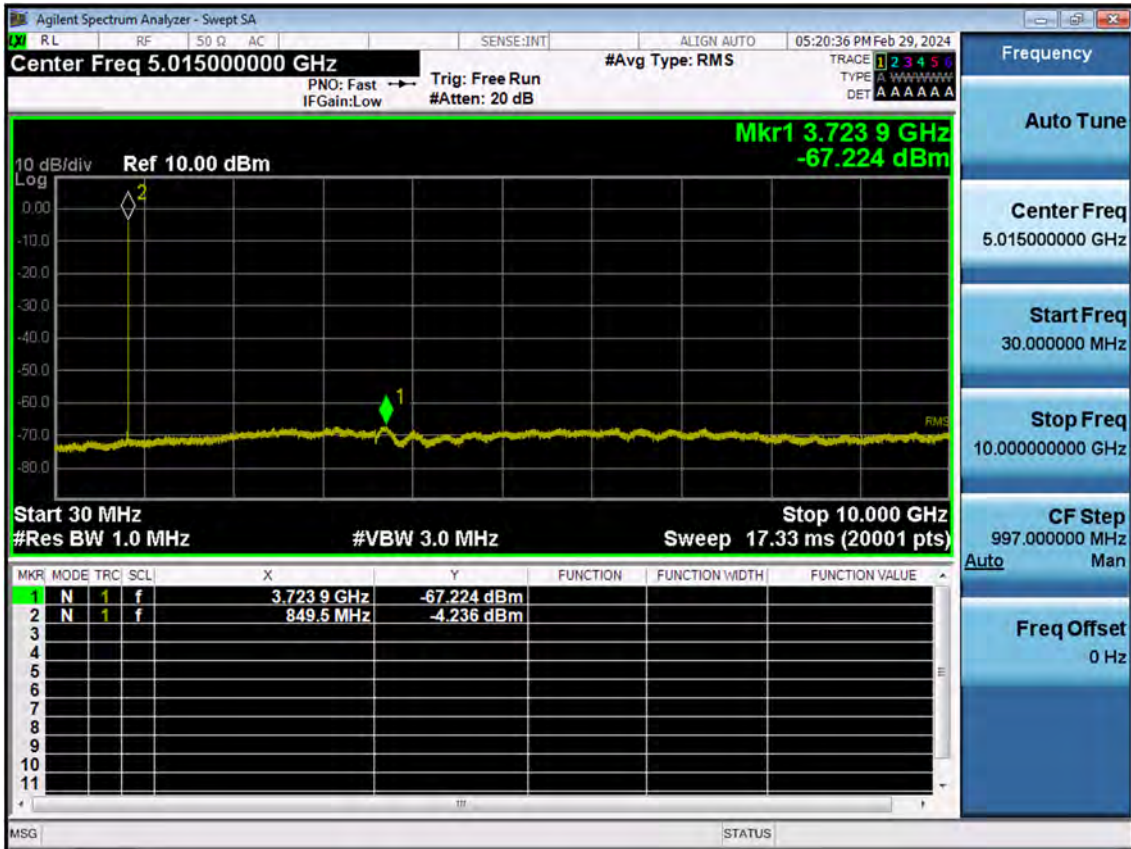


BAND5/26. Conducted Spurious Plot (26840ch_10 MHz_QPSK_RB 1_0)

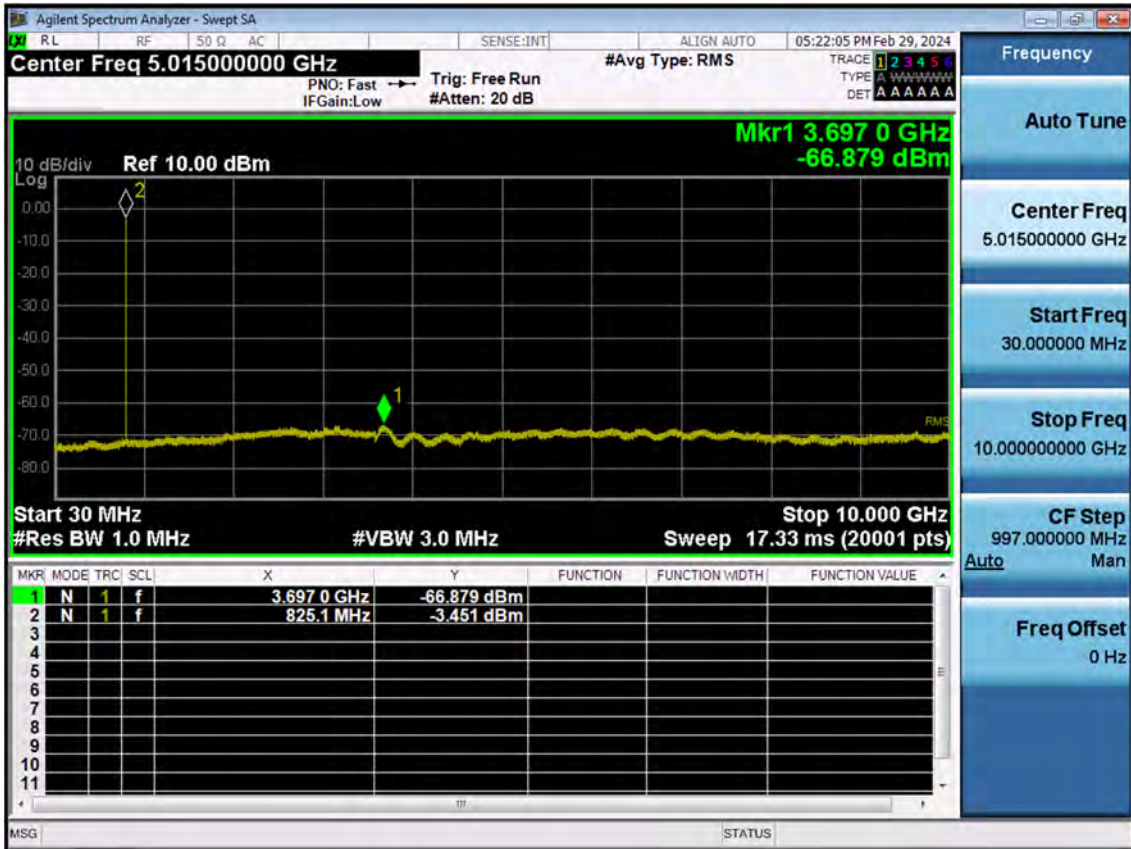


BAND5/26. Conducted Spurious Plot (26915ch_10 MHz_QPSK_RB 1_0)

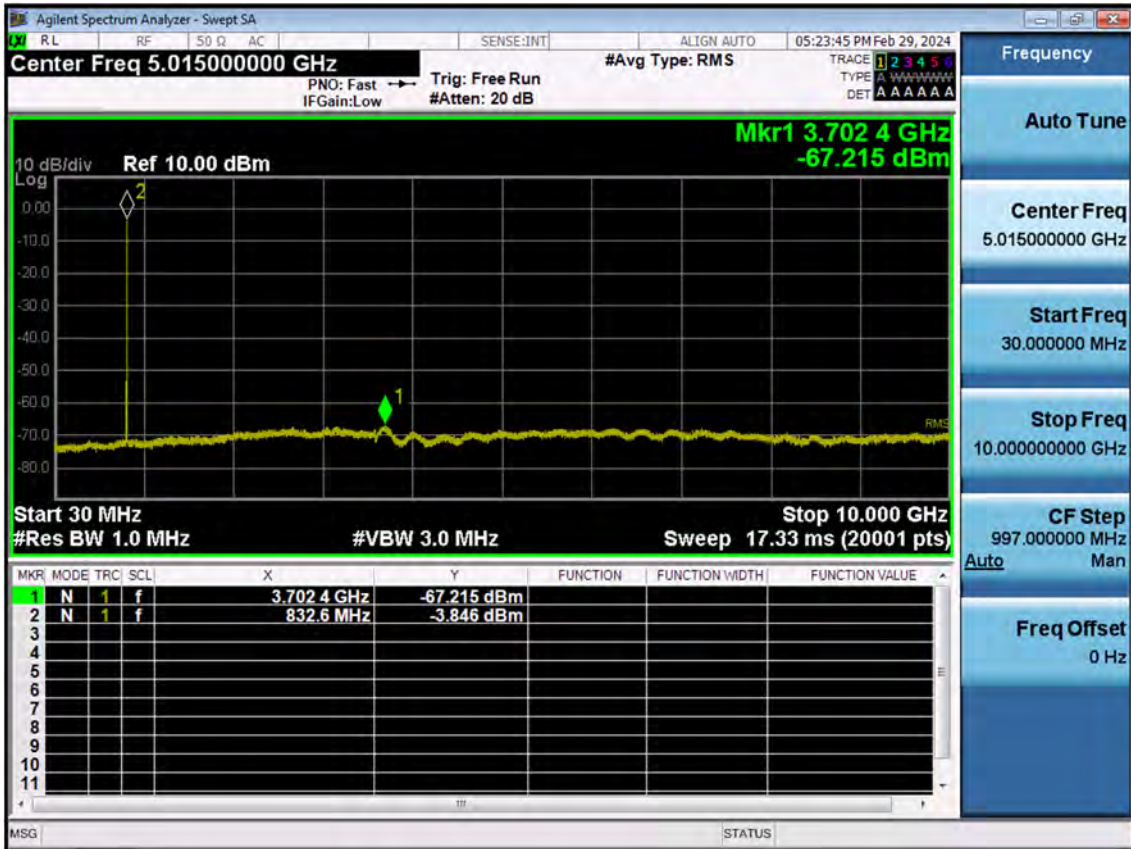


BAND5/26. Conducted Spurious Plot (26990ch_10 MHz_QPSK_RB 1_0)

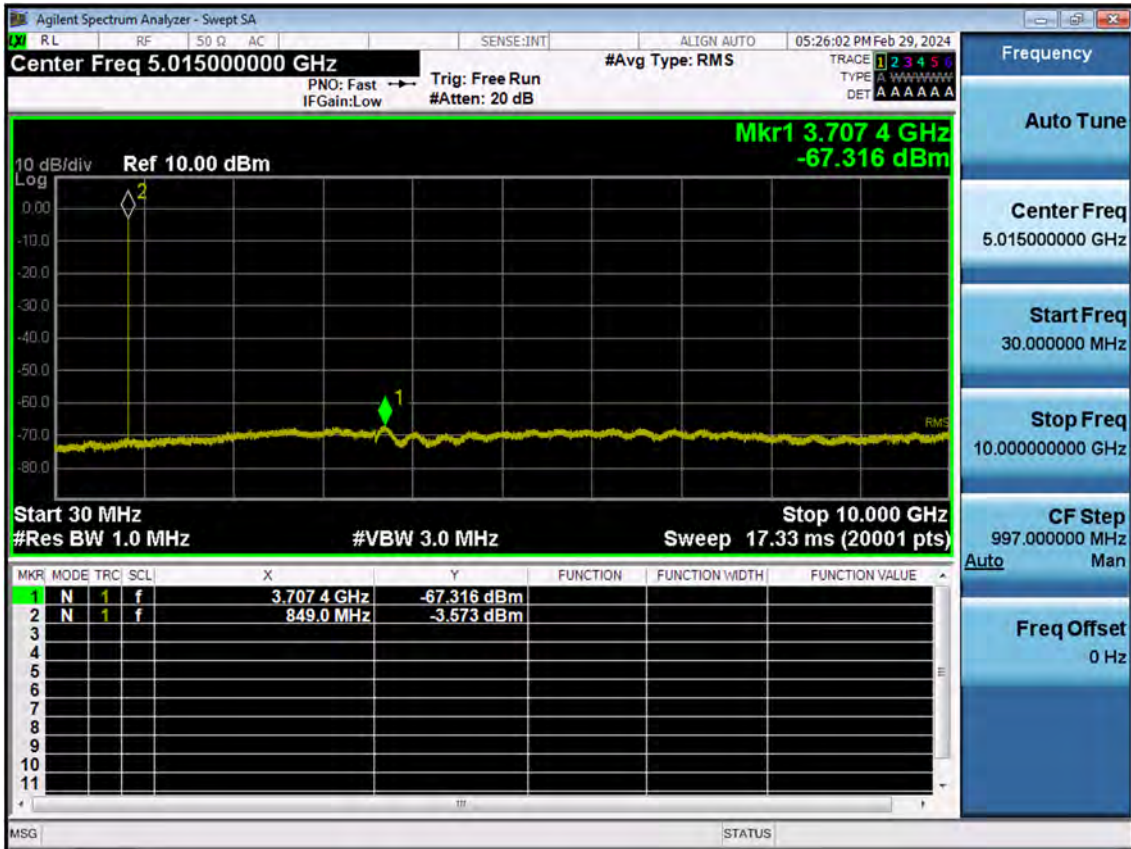


BAND 26. Conducted Spurious (26865ch_15 MHz_QPSK_RB 1_0)

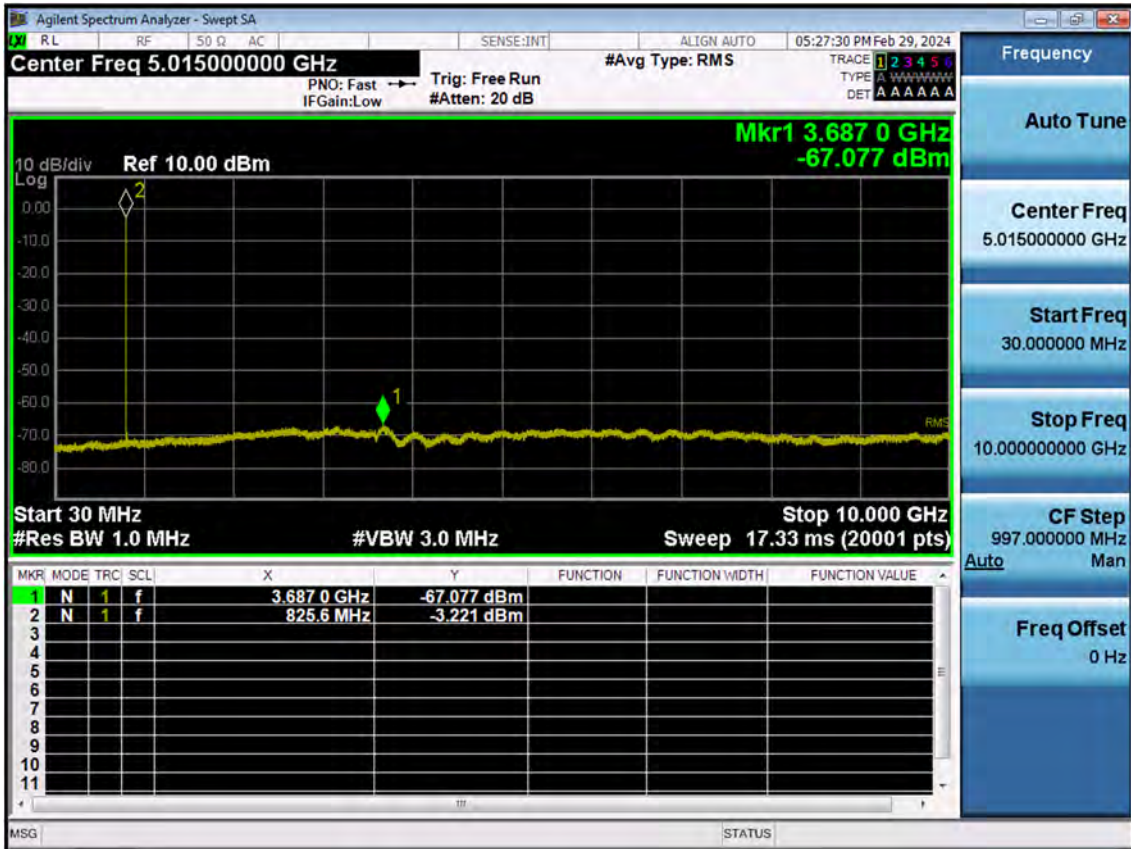

BAND 26. Conducted Spurious (26915ch_15 MHz_QPSK_RB 1_0)

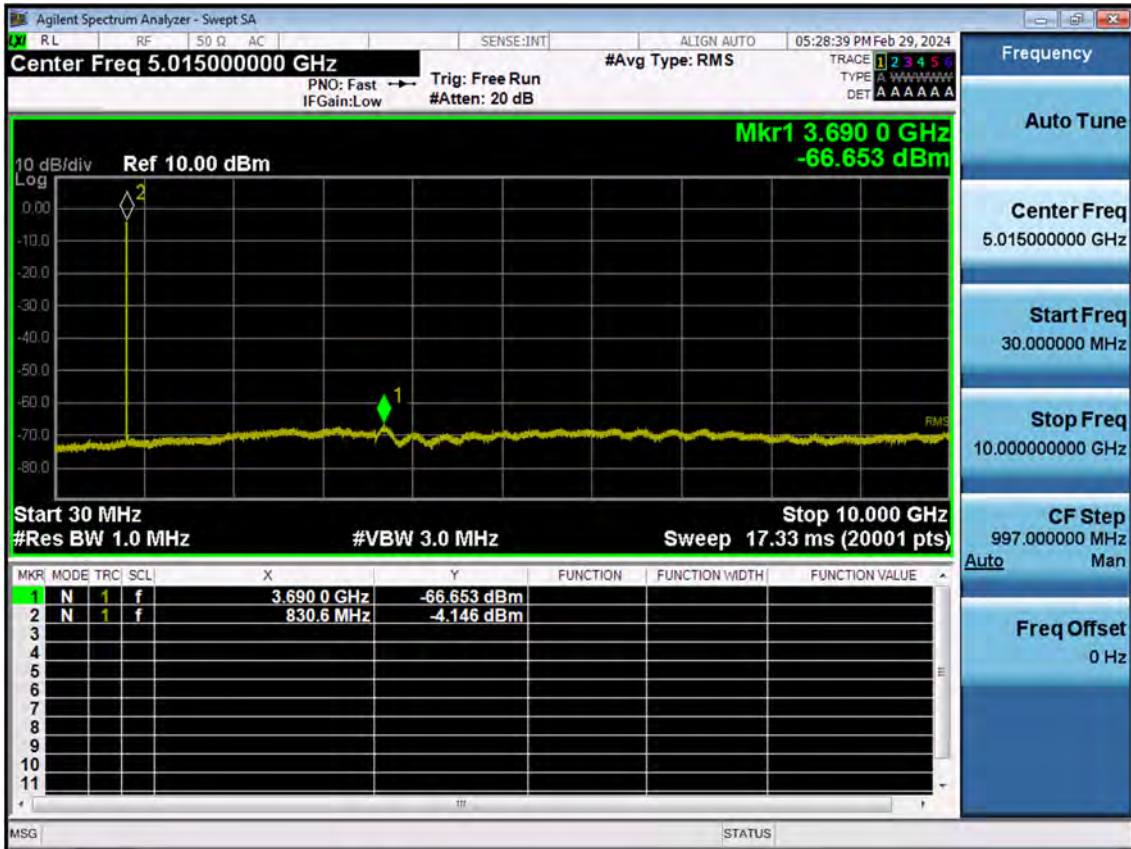

BAND 26. Conducted Spurious (26965ch_15 MHz_QPSK_RB 1_0)

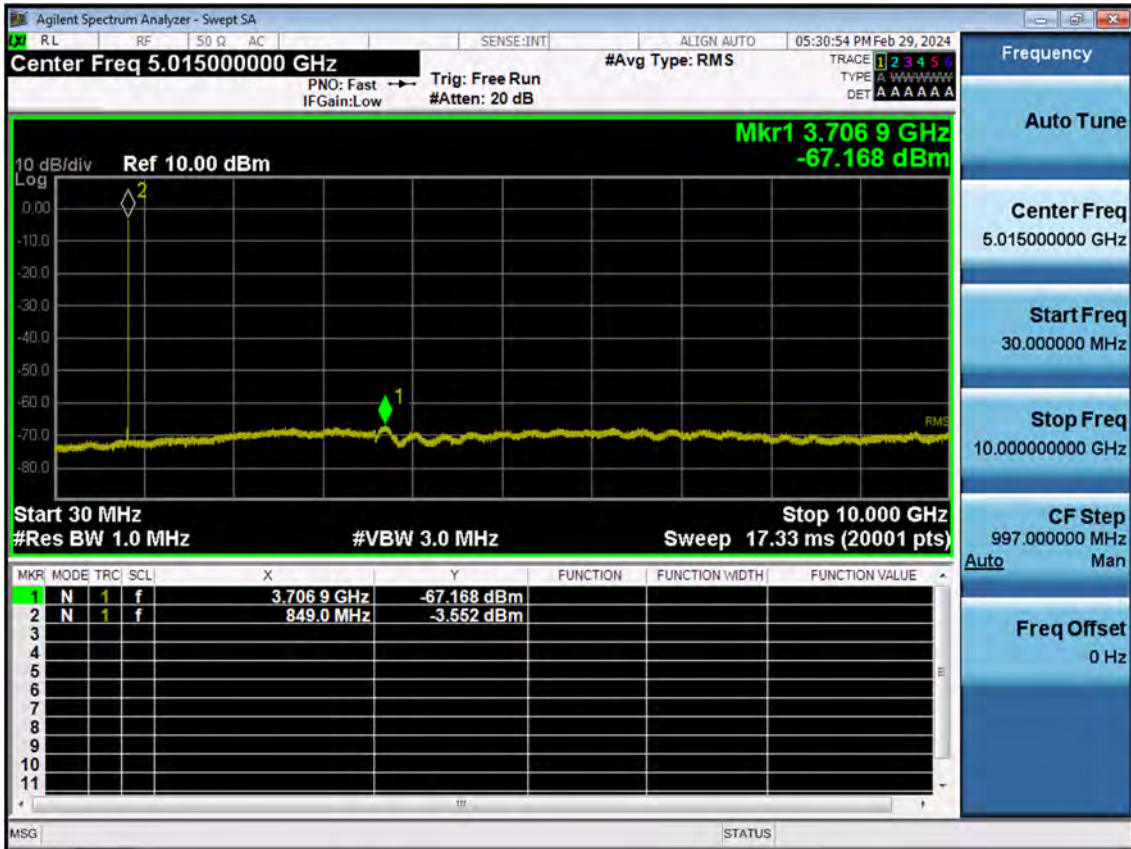

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2404-FC016-P