

# TEST REPORT

FCC LTE B48 Test for SM-F741U  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2404-FC021

**DATE OF ISSUE**  
April 26, 2024

**Tested by**  
Jae Mun Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

**REPORT NO.**  
HCT-RF-2404-FC021

**DATE OF ISSUE**  
April 26, 2024

**Additional Model**  
SM-F741U1

**Applicant**      **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name**      Mobile Phone  
**Model Name**      SM-F741U

**Date of Test**      February 22, 2024 ~ April 23, 2024

**FCC ID**      A3LSMF741U

**Location of Test**       Permanent Testing Lab     On Site Testing  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

**FCC Classification:**      Citizens Band End User Devices (CBE)

**FCC Rule Part(s):**      § 96

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 26, 2024	Initial Release

## Notice

---

### Content

---

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER .....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 CHANNEL EDGE.....	15
3.8 Adjacent Channel Leakage Ratio .....	16
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	17
3.10 End User Device Additional Requirement (CBSD Protocol) .....	18
3.8 WORST CASE(RADIATED TEST).....	19
3.9 WORST CASE(CONDUCTED TEST) .....	20
4. LIST OF TEST EQUIPMENT .....	21
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS.....	23
7. SAMPLE CALCULATION .....	25
8. TEST DATA.....	27
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	27
8.2 RADIATED SPURIOUS EMISSIONS .....	29
8.3 PEAK-TO-AVERAGE RATIO.....	33
8.4 OCCUPIED BANDWIDTH .....	34
8.5 CONDUCTED SPURIOUS EMISSIONS.....	35
8.6 CHANNEL EDGE.....	36
8.7 Adjacent Channel Leakage Ratio(ACLR) .....	38
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	39
8.9 End User Device Additional Requirements (CBSD Protocol) .....	51
9. TEST PLOTS .....	53
10. ANNEX A_ TEST SETUP PHOTO .....	166

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF741U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	Citizens Band End User Devices (CBE)
<b>FCC Rule Part(s):</b>	§ 96
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F741U
<b>Additional Model(s)</b>	SM-F741U1
<b>Tx Frequency:</b>	3552.5 – 3697.5 : 5 MHz 3555.0 – 3695.0 : 10 MHz 3557.5 – 3692.5 : 15 MHz 3560.0 – 3690.0 : 20 MHz
<b>Date(s) of Tests:</b>	February 22, 2024 ~ April 23, 2024
<b>Serial number:</b>	Radiated : R3CX20KJT0F Conducted : 7b5599bdac507ece

**1.1. MAXIMUM OUTPUT POWER**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm/10 MHz)
LTE – Band 48 (5)	3552.5 – 3697.5	4M48G7D	QPSK	0.145	21.60
		4M50W7D	16QAM	0.119	20.77
		4M48W7D	64QAM	0.093	19.70
		4M51W7D	256QAM	0.048	16.81
LTE – Band 48 (10)	3555.0 – 3695.0	8M96G7D	QPSK	0.139	21.43
		8M97W7D	16QAM	0.113	20.54
		8M88W7D	64QAM	0.088	19.45
		8M88W7D	256QAM	0.044	16.42
LTE – Band 48 (15)	3557.5 – 3692.5	13M5G7D	QPSK	0.136	21.34
		13M4W7D	16QAM	0.120	20.78
		13M5W7D	64QAM	0.087	19.40
		13M4W7D	256QAM	0.047	16.76
LTE – Band 48 (20)	3560.0 – 3690.0	17M9G7D	QPSK	0.138	21.41
		17M9W7D	16QAM	0.116	20.65
		17M9W7D	64QAM	0.089	19.49
		17M9W7D	256QAM	0.046	16.63

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6, mmWave. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 - KDB 940660 D01 v01
Channel Edge/ ACLR	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - KDB 940660 D01 v01
Frequency stability	- ANSI C63.26-2015 – Section 5.6 - KDB 940660 D01 v01
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17 - KDB 940660 D01 v01
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12 - KDB 940660 D01 v01
End User Device Additional Requirement (CBSD Protocol)	- KDB 940660 D01 v01 - WINNF-TS-0122 V1.0.2



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $>$  2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

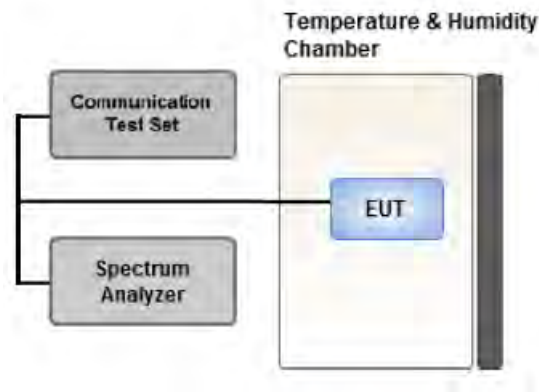

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

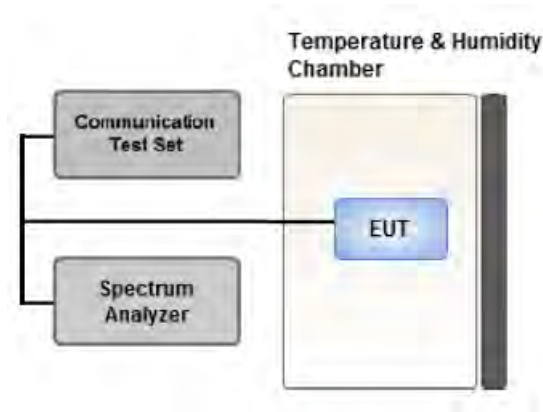

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

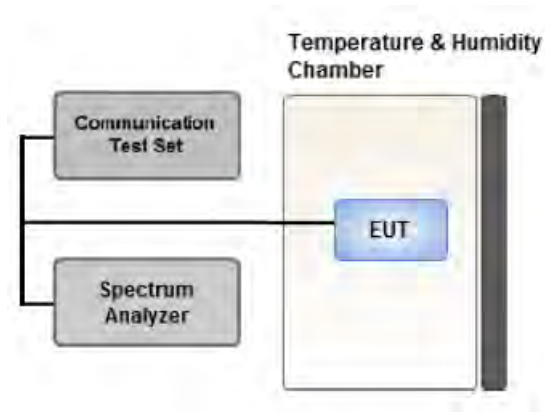

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

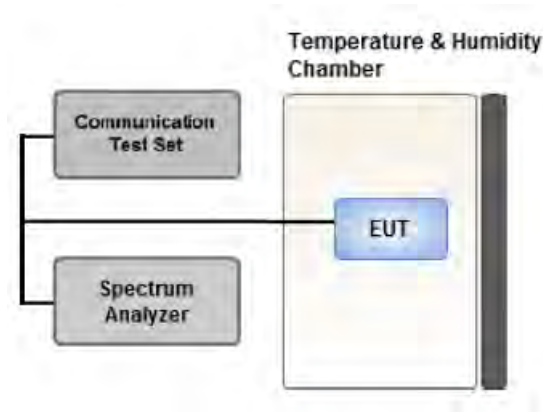

#### Test setup

##### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


##### Test Notes

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed  $-13 \text{ dBm/MHz}$  within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed  $-25 \text{ dBm/MHz}$ .

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed  $-40 \text{ dBm/MHz}$

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz}/\text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 Adjacent Channel Leakage Ratio

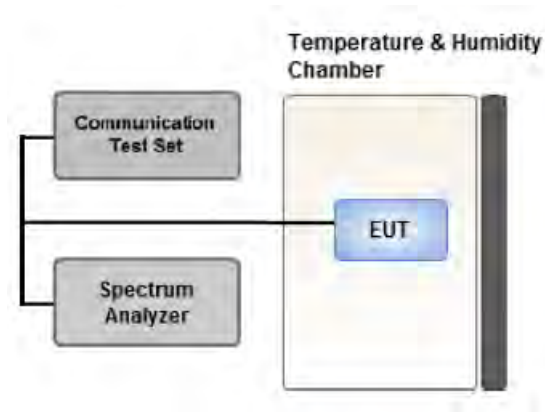

Test setup

#### Test Settings


1. Use ACP measurement function of Spectrum analyzer to measure adjacent channel leakage ratio
2. Integ BW = Assigned channel bandwidth
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = 1 s
9. The trace was allowed to stabilize

#### Test Notes

the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.



### 3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

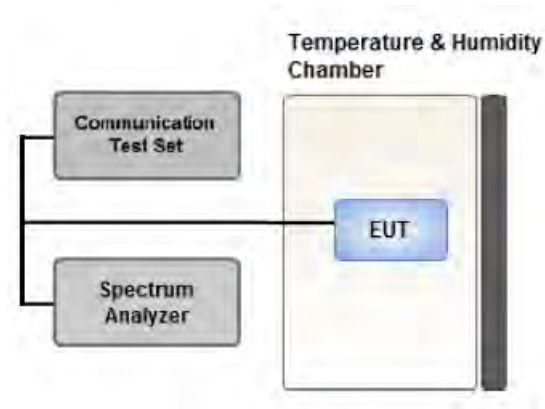

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.


2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

##### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.10 End User Device Additional Requirement (CBSD Protocol)

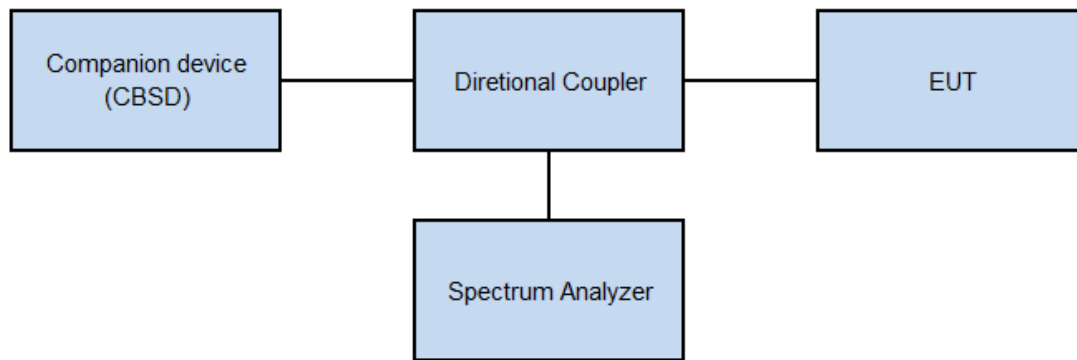

Test setup

#### Test Overview

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (FCC ID: 2AS48SC-220) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

#### Test Settings

- a. Setup companion device with 3570 MHz & 3610 MHz.
- b. Enable AP service from companion device.
- c. EUT is connected to a companion device.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from companion device and check EUT stop transmission within 10 s.

### 3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
 Mode : Stand alone, Simultaneous transmission scenarios  
 Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.  
 Worst case: Closed mode.
- Please refer to the table below.
- SM-F741U & additional models were tested and the worst case results are reported.  
 (Worst case : SM-F741U)

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Z

### 3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
  - SM-F741U & additional models were tested and the worst case results are reported.
- (Worst case : SM-F741U)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
5, 10, 15, 20	Low, Mid, High	Full RB	0		
	Low, Mid, High	1	0		
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	12/11/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	12/11/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	09/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	09/16/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 96.41(e)	<ul style="list-style-type: none"> <li>■ -13 dBm/Mhz at frequencies within 0-10 MHz of channel edge</li> <li>■ -25 dBm/MHz at frequencies greater than 10 MHz above and below channel edge</li> <li>■ -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz</li> </ul>	PASS
Adjacent Channel Leakage Ratio	§ 96.41(e)	At least 30 dB.	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055,	Emission must remain in band	PASS
End User Device Additional Requirements (CBSD Protocol)	§ 96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS

Note:

1. See SAR Report
2. The EUT is an End User Device

## 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 96.41(b)	23 dBm/10 MHz	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 96.41(e)	-40 dBm/MHz	PASS



## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Offset
3552.5	LTE B48/ 5 MHz	QPSK	-26.98	11.72	12.34	3.23	H	20.83	23.0	1	24
		16-QAM	-27.91	10.79	12.34	3.23	H	19.90			
		64-QAM	-28.88	9.82	12.34	3.23	H	18.93			
		256-QAM	-32.14	6.56	12.34	3.23	H	15.67			
3625.0		QPSK	-26.06	12.50	12.32	3.22	H	21.60		1	13
		16-QAM	-26.89	11.67	12.32	3.22	H	20.77			
		64-QAM	-27.96	10.60	12.32	3.22	H	19.70			
		256-QAM	-30.85	7.71	12.32	3.22	H	16.81			
3697.5		QPSK	-26.84	11.89	12.29	3.13	H	21.05		1	0
		16-QAM	-27.78	10.95	12.29	3.13	H	20.11			
		64-QAM	-28.83	9.90	12.29	3.13	H	19.06			
		256-QAM	-32.05	6.68	12.29	3.13	H	15.84			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Offset
3555.0	LTE B48/ 10 MHz	QPSK	-26.54	11.99	12.34	3.24	H	21.09	23.0	1	49
		16-QAM	-27.60	10.93	12.34	3.24	H	20.03			
		64-QAM	-28.66	9.87	12.34	3.24	H	18.97			
		256-QAM	-31.88	6.65	12.34	3.24	H	15.75			
3625.0		QPSK	-26.23	12.33	12.32	3.22	H	21.43		1	25
		16-QAM	-27.12	11.44	12.32	3.22	H	20.54			
		64-QAM	-28.21	10.35	12.32	3.22	H	19.45			
		256-QAM	-31.24	7.32	12.32	3.22	H	16.42			
3695.0		QPSK	-26.99	11.93	12.29	3.13	H	21.09		1	0
		16-QAM	-27.94	10.98	12.29	3.13	H	20.14			
		64-QAM	-28.98	9.94	12.29	3.13	H	19.10			
		256-QAM	-32.06	6.86	12.29	3.13	H	16.02			

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB		
								dBm/10 MHz		Size	Offset	
3557.5	LTE B48/ 15 MHz	QPSK	-26.69	11.67	12.34	3.24	H	20.77	23.0	1	74	
		16-QAM	-27.63	10.73	12.34	3.24	H	19.83				
		64-QAM	-28.70	9.66	12.34	3.24	H	18.76				
		256-QAM	-31.87	6.49	12.34	3.24	H	15.59				
3625.0		QPSK	-26.32	12.24	12.32	3.22	H	21.34		23.0	1	38
		16-QAM	-26.88	11.68	12.32	3.22	H	20.78				
		64-QAM	-28.26	10.30	12.32	3.22	H	19.40				
		256-QAM	-30.90	7.66	12.32	3.22	H	16.76				
3692.5		QPSK	-26.94	12.17	12.29	3.13	H	21.33		23.0	1	0
		16-QAM	-27.90	11.21	12.29	3.13	H	20.37				
		64-QAM	-28.91	10.20	12.29	3.13	H	19.36				
		256-QAM	-32.26	6.85	12.29	3.13	H	16.01				

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB		
								dBm/10 MHz		Size	Offset	
3560.0	LTE B48/ 20 MHz	QPSK	-26.60	11.76	12.34	3.24	H	20.86	23.0	1	99	
		16-QAM	-27.26	11.10	12.34	3.24	H	20.20				
		64-QAM	-28.63	9.73	12.34	3.24	H	18.83				
		256-QAM	-31.70	6.66	12.34	3.24	H	15.76				
3625.0		QPSK	-26.25	12.31	12.32	3.22	H	21.41		23.0	1	50
		16-QAM	-27.01	11.55	12.32	3.22	H	20.65				
		64-QAM	-28.17	10.39	12.32	3.22	H	19.49				
		256-QAM	-31.03	7.53	12.32	3.22	H	16.63				
3690.0		QPSK	-26.90	12.21	12.29	3.13	H	21.37		23.0	1	0
		16-QAM	-27.67	11.44	12.29	3.13	H	20.60				
		64-QAM	-28.88	10.23	12.29	3.13	H	19.39				
		256-QAM	-32.04	7.07	12.29	3.13	H	16.23				

### 8.2 RADIATED SPURIOUS EMISSIONS

MODE: LTE B48  
 MODULATION SIGNAL: 5 MHz QPSK  
 DISTANCE: 1 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
55265 (3552.5)	7 105.00	-69.22	10.87	-69.46	4.59	H	-63.17	-40.00	Average	1	24
	10 657.50	-70.75	11.32	-66.21	5.62	H	-60.51	-40.00	Average		
	14 210.00	-73.18	11.88	-62.22	6.76	H	-57.10	-40.00	Average		
55990 (3625.0)	7 250.00	-69.17	10.74	-71.10	4.64	H	-65.00	-40.00	Average	1	13
	10 875.00	-71.87	11.04	-64.92	5.72	H	-59.60	-40.00	Average		
	14 500.00	-73.24	11.45	-62.05	6.81	H	-57.41	-40.00	Average		
56715 (3697.5)	7 395.00	-69.48	10.81	-69.45	4.68	H	-63.32	-40.00	Average	1	0
	11 092.50	-70.82	11.06	-66.18	5.92	H	-61.04	-40.00	Average		
	14 790.00	-72.99	11.30	-61.88	6.89	H	-57.47	-40.00	Average		

MODE: LTE B48  
 MODULATION SIGNAL: 10 MHz QPSK  
 DISTANCE: 1 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
55290 (3555.0)	7 110.00	-68.03	10.86	-68.12	4.58	H	-61.84	-40.00	Average	1	49
	10 665.00	-70.88	11.33	-66.55	5.65	H	-60.87	-40.00	Average		
	14 220.00	-73.35	11.86	-62.37	6.75	H	-57.26	-40.00	Average		
55990 (3625.0)	7 250.00	-68.85	10.74	-70.78	4.64	H	-64.68	-40.00	Average	1	25
	10 875.00	-71.62	11.04	-64.67	5.72	H	-59.35	-40.00	Average		
	14 500.00	-72.66	11.45	-61.47	6.81	H	-56.83	-40.00	Average		
56690 (3695.0)	7 390.00	-69.17	10.81	-69.13	4.67	H	-62.99	-40.00	Average	1	0
	11 085.00	-71.48	11.05	-66.84	5.90	H	-61.68	-40.00	Average		
	14 780.00	-73.12	11.30	-61.85	6.88	H	-57.43	-40.00	Average		

MODE: LTE B48  
 MODULATION SIGNAL: 15 MHz QPSK  
 DISTANCE: 1 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
55315 (3557.5)	7 115.00	-68.15	10.85	-68.31	4.58	H	-62.04	-40.00	Average	1	74
	10 672.50	-70.94	11.33	-66.83	5.67	H	-61.17	-40.00	Average		
	14 230.00	-73.38	11.84	-62.30	6.75	H	-57.21	-40.00	Average		
55990 (3625.0)	7 250.00	-69.24	10.74	-71.17	4.64	H	-65.07	-40.00	Average	1	38
	10 875.00	-71.68	11.04	-64.73	5.72	H	-59.41	-40.00	Average		
	14 500.00	-72.92	11.45	-61.73	6.81	H	-57.09	-40.00	Average		
56665 (3692.5)	7 385.00	-69.45	10.81	-69.44	4.67	H	-63.30	-40.00	Average	1	0
	11 077.50	-71.15	11.04	-66.50	5.87	H	-61.33	-40.00	Average		
	14 770.00	-73.65	11.30	-62.29	6.86	H	-57.85	-40.00	Average		

MODE: LTE B48  
 MODULATION SIGNAL: 20 MHz QPSK  
 DISTANCE: 1 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
55340 (3560.0)	7 120.00	-68.34	10.84	-68.57	4.57	H	-62.30	-40.00	Average	1	99
	10 680.00	-71.24	11.34	-67.39	5.72	H	-61.77	-40.00	Average		
	14 240.00	-73.62	11.82	-62.57	6.75	H	-57.50	-40.00	Average		
55990 (3625.0)	7 250.00	-69.08	10.74	-71.01	4.64	H	-64.91	-40.00	Average	1	50
	10 875.00	-71.89	11.04	-64.94	5.72	H	-59.62	-40.00	Average		
	14 500.00	-73.06	11.45	-61.87	6.81	H	-57.23	-40.00	Average		
56640 (3690.0)	7 380.00	-69.11	10.81	-69.13	4.67	H	-62.99	-40.00	Average	1	0
	11 070.00	-71.36	11.03	-66.65	5.81	H	-61.43	-40.00	Average		
	14 760.00	-73.32	11.30	-62.05	6.87	H	-57.62	-40.00	Average		



### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
48	5 MHz	3625.0	QPSK	25	0	4.61
			16-QAM			5.72
			64-QAM			6.67
			256-QAM			7.23
	10 MHz		QPSK	50		4.64
			16-QAM			5.74
			64-QAM			6.51
			256-QAM			7.04
	15 MHz		QPSK	75		4.58
			16-QAM			5.70
			64-QAM			6.58
			256-QAM			7.01
	20 MHz		QPSK	100		4.64
			16-QAM			5.73
			64-QAM			6.57
			256-QAM			6.92

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 70 ~ 85.

#### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
48	5 MHz	3625.0	QPSK	25	0	4.4839
			16-QAM			4.5023
			64-QAM			4.4749
			256-QAM			4.5051
	10 MHz		QPSK	50		8.9595
			16-QAM			8.9695
			64-QAM			8.8836
			256-QAM			8.8825
	15 MHz		QPSK	75		13.528
			16-QAM			13.391
			64-QAM			13.480
			256-QAM			13.381
	20 MHz		QPSK	100		17.936
			16-QAM			17.897
			64-QAM			17.916
			256-QAM			17.926

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 54 ~ 69.

### 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
48	5	3552.5	36.1600	30.131	-78.687	-48.556	-40.00
		3625.0	36.1770	30.131	-78.670	-48.539	
		3697.5	36.3665	30.131	-79.534	-49.403	
	10	3555.0	36.6145	30.131	-79.296	-49.165	
		3625.0	36.1875	30.131	-79.149	-49.018	
		3695.0	36.1920	30.131	-78.847	-48.716	
	15	3557.5	36.1815	30.131	-78.933	-48.802	
		3625.0	36.1095	30.131	-78.965	-48.834	
		3692.5	35.9335	30.131	-78.918	-48.787	
	20	3560.0	35.9225	30.131	-78.652	-48.521	
		3625.0	36.4755	30.131	-78.775	-48.644	
		3690.0	36.3770	30.131	-78.628	-48.497	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 142 ~ 165.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

### 8.6 CHANNEL EDGE

BW (MHz)	RB (Size/ Offset)	Freq. (MHz)	Outside of the authorized band (dBm)							
			Lower Side(MHz)				Upper Side(MHz)			
			Below 3530 MHz	-[B]MHz ~ 3530 MHz	-1 MHz ~ -[B]MHz	0 MHz ~ -1 MHz	0 MHz ~ +1 MHz	1 MHz ~ +[B]MHz	+ [B]MHz ~ 3720 MHz	Above 3720 MHz
5	25/0	3552.5	-48.46	-37.97	-24.42	-27.43	-26.82	-24.50	-37.51	-
		3625.0	-	-36.62	-23.44	-25.53	-25.80	-23.07	-36.78	-
		3697.5	-	-34.52	-20.40	-26.90	-26.01	-19.69	-33.42	-46.86
10	50/0	3555.0	-47.40	-41.69	-26.61	-31.63	-32.39	-26.66	-41.47	-
		3625.0	-	-40.17	-22.98	-29.06	-28.50	-23.12	-39.92	-
		3695.0	-	-39.70	-22.90	-28.86	-29.04	-23.61	-40.17	-45.01
15	75/0	3557.5	-43.97	-41.75	-25.48	-30.88	-30.67	-25.69	-42.95	-
		3625.0	-	-40.94	-24.59	-29.40	-29.66	-24.14	-42.22	-
		3692.5	-	-41.32	-24.81	-29.42	-30.09	-24.43	-40.07	-42.79
20	100/0	3560.0	-41.75	-37.94	-26.19	-31.20	-31.31	-26.06	-41.92	-
		3625.0	-	-40.39	-25.43	-30.41	-30.36	-25.81	-41.09	-
		3690.0	-	-40.82	-25.09	-30.46	-30.54	-25.68	-36.69	-41.59
Limit (dBm)			-40.00	-25.00	-13.00	-13.00	-13.00	-13.00	-25.00	-40.00

Note:

1. C.E = Channel Edge
2. Plots of the EUT's Channel Edge are shown Page 98 ~ 141.

BW (MHz)	RB (Size/ Offset)	Freq. (MHz)	Outside of the authorized band (dBm)							
			Lower Side(MHz)				Upper Side(MHz)			
			Below 3530 MHz	-[B]MHz ~ 3530 MHz	-1 MHz ~ -[B]MHz	0 MHz ~ -1 MHz	0 MHz ~ +1 MHz	1 MHz ~ +[B]MHz	+ [B]MHz ~ 3720 MHz	Above 3720 MHz
5	Lower Side: 1/0	3552.5	-48.37	-40.71	-26.86	-21.85	-22.04	-26.18	-40.66	-
	Upper Side: 1/24	3625.0	-	-39.30	-25.48	-21.39	-20.33	-24.60	-39.33	-
		3697.5	-	-40.21	-25.22	-21.71	-20.63	-24.81	-39.86	-46.70
10	Lower Side: 1/0	3555.0	-48.03	-45.22	-26.95	-28.75	-27.52	-26.98	-44.98	-
	Upper Side: 1/49	3625.0	-	-45.13	-25.84	-27.64	-27.23	-25.54	-44.46	-
		3695.0	-	-44.21	-26.17	-27.82	-27.77	-26.07	-44.35	-46.64
15	Lower Side: 1/0	3557.5	-47.95	-44.98	-29.29	-27.52	-26.86	-29.23	-46.63	-
	Upper Side: 1/74	3625.0	-	-46.67	-28.04	-26.08	-25.63	-27.50	-45.78	-
		3692.5	-	-45.33	-27.73	-26.42	-26.52	-27.71	-43.70	-46.43
20	Lower Side: 1/0	3560.0	-48.03	-44.89	-30.80	-27.32	-26.25	-29.65	-47.45	-
	Upper Side: 1/99	3625.0	-	-47.35	-29.74	-26.34	-25.07	-29.26	-46.57	-
		3690.0	-	-46.22	-29.13	-26.47	-26.12	-29.06	-43.79	-46.26
Limit (dBm)			-40.00	-25.00	-13.00	-13.00	-13.00	-13.00	-25.00	-40.00

Note:

1. C.E = Channel Edge
2. Plots of the EUT's Channel Edge are shown Page 98 ~ 141.

### 8.7 Adjacent Channel Leakage Ratio(ACLR)

Band Width	RB (Size/Offset)	Frequency (MHz)	Adjacent Channel Leakage Ratio(dB)	
			Lower Side	Upper Side
5 MHz	25/0	3552.5	39.36	39.04
		3625.0	38.31	38.22
		3697.5	37.60	37.37
10 MHz	50/0	3555.0	39.88	39.49
		3625.0	39.12	38.98
		3695.0	38.06	37.84
15 MHz	75/0	3557.5	39.96	39.64
		3625.0	38.68	38.60
		3692.5	37.42	37.16
20 MHz	100/0	3560.0	39.51	39.29
		3625.0	38.29	38.43
		3690.0	37.90	37.74
Limit (dB)			ACLR > 30 dB	ACLR > 30 dB


**Note:**

- Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
- Plots of the EUT's Adjacent Channel Leakage Ratio(ACLR) are shown Page 86 ~ 97.

### 8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ OPERATING FREQUENCY: 3,552,500,000 Hz
- ▣ BANDWIDTH: 5 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3552 500 003	0.0	0.000 000	0.000
100 %		-30	3552 500 007	3.9	0.000 000	0.001
100 %		-20	3552 499 998	-5.4	0.000 000	-0.002
100 %		-10	3552 499 998	-5.3	0.000 000	-0.001
100 %		0	3552 500 000	-3.3	0.000 000	-0.001
100 %		+10	3552 499 998	-5.3	0.000 000	-0.001
100 %		+30	3552 500 008	5.1	0.000 000	0.001
100 %		+40	3552 500 000	-3.1	0.000 000	-0.001
100 %		+50	3552 499 996	-6.5	0.000 000	-0.002
Batt. Endpoint		3.300	+20	3552 499 998	-5.0	0.000 000

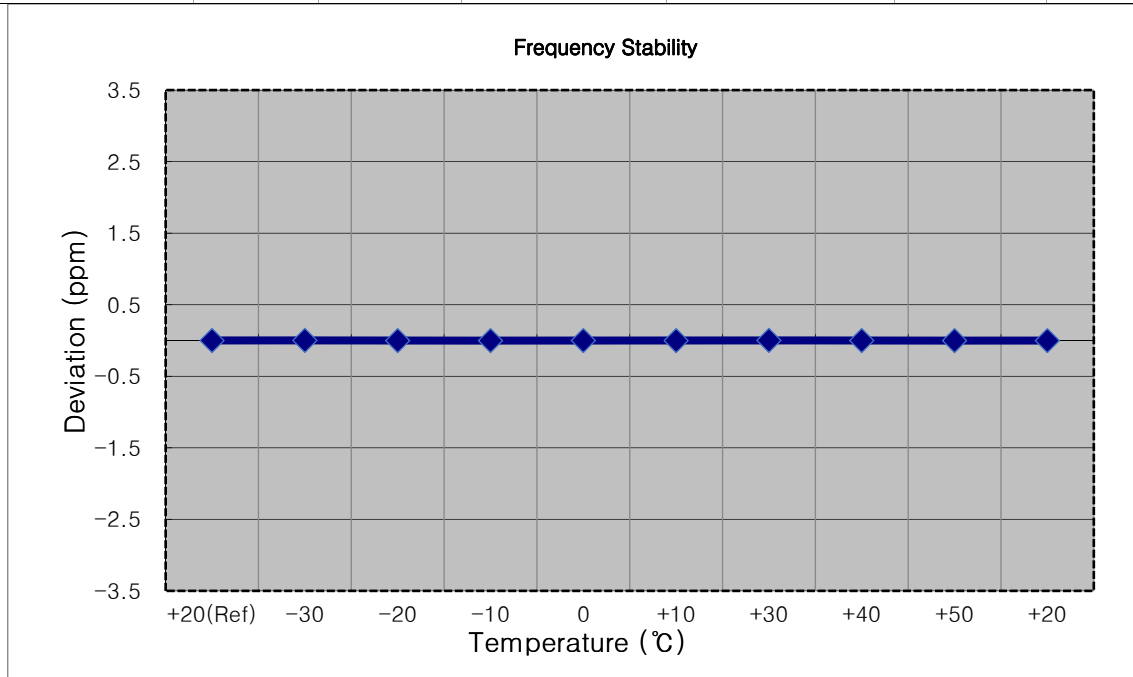

- ▣ OPERATING FREQUENCY: 3,555,000,000 Hz
- ▣ BANDWIDTH: 10 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3555 000 007	0.0	0.000 000	0.000
100 %		-30	3555 000 010	3.9	0.000 000	0.001
100 %		-20	3555 000 010	3.5	0.000 000	0.001
100 %		-10	3555 000 015	8.6	0.000 000	0.002
100 %		0	3555 000 014	7.5	0.000 000	0.002
100 %		+10	3555 000 013	6.6	0.000 000	0.002
100 %		+30	3555 000 013	6.1	0.000 000	0.002
100 %		+40	3555 000 015	8.5	0.000 000	0.002
100 %		+50	3555 000 015	8.6	0.000 000	0.002
Batt. Endpoint	3.300	+20	3555 000 012	5.0	0.000 000	0.001

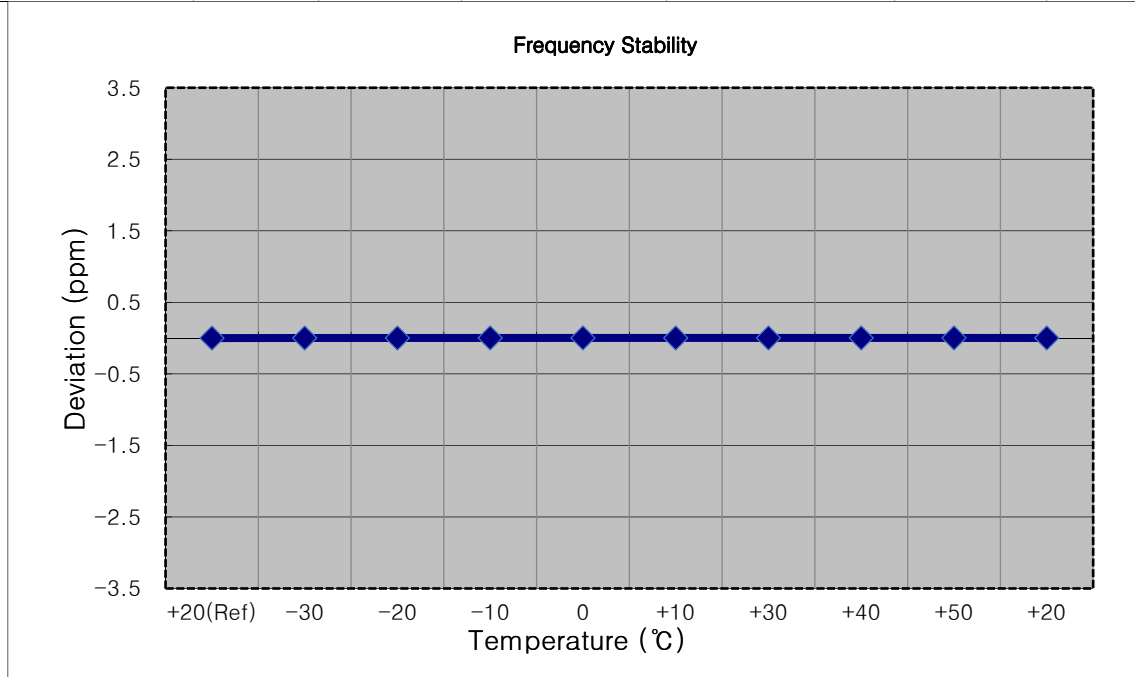




- ▣ OPERATING FREQUENCY: 3,557,500,000 Hz
- ▣ BANDWIDTH: 15 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3557 500 005	0.0	0.000 000	0.000
100 %		-30	3557 500 013	8.1	0.000 000	0.002
100 %		-20	3557 500 013	7.5	0.000 000	0.002
100 %		-10	3557 500 013	7.4	0.000 000	0.002
100 %		0	3557 500 011	5.8	0.000 000	0.002
100 %		+10	3557 500 013	7.2	0.000 000	0.002
100 %		+30	3557 500 010	4.9	0.000 000	0.001
100 %		+40	3557 500 012	6.5	0.000 000	0.002
100 %		+50	3557 500 017	11.3	0.000 000	0.003
Batt. Endpoint		3.300	+20	3557 500 009	3.7	0.000 000

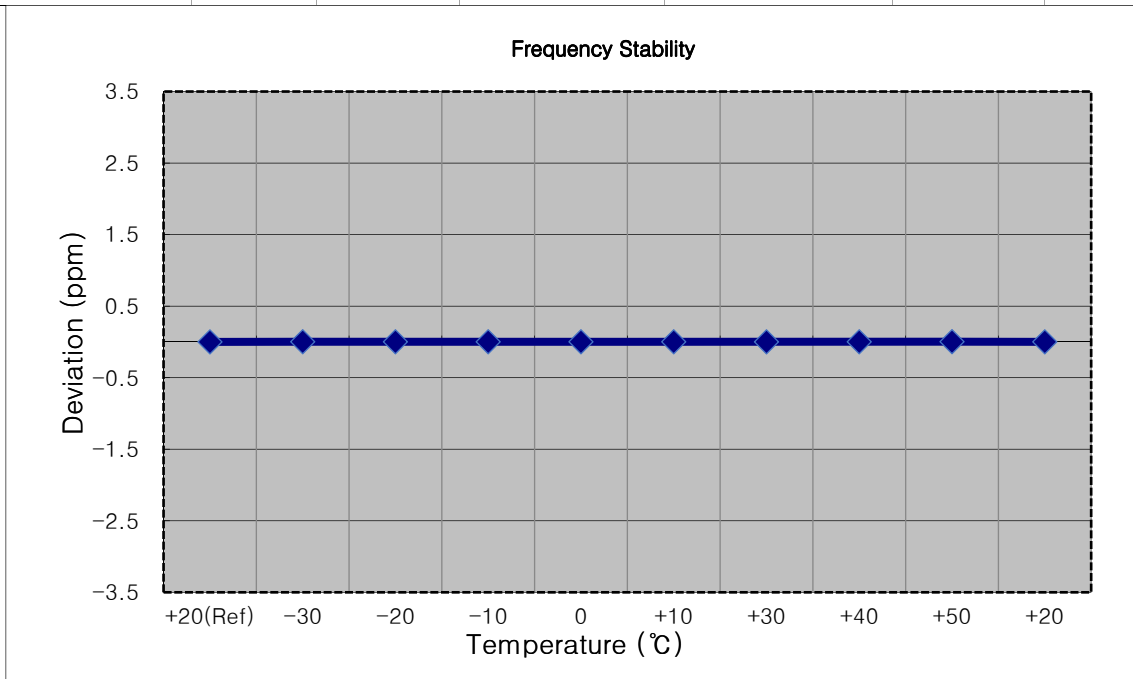


- ▣ OPERATING FREQUENCY: 3,560,000,000 Hz
- ▣ BANDWIDTH: 20 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3560 000 007	0.0	0.000 000	0.000
100 %		-30	3560 000 003	-3.5	0.000 000	-0.001
100 %		-20	3560 000 010	3.6	0.000 000	0.001
100 %		-10	3560 000 011	4.1	0.000 000	0.001
100 %		0	3560 000 002	-4.8	0.000 000	-0.001
100 %		+10	3560 000 000	-6.6	0.000 000	-0.002
100 %		+30	3560 000 010	3.3	0.000 000	0.001
100 %		+40	3559 999 998	-8.6	0.000 000	-0.002
100 %		+50	3560 000 011	4.7	0.000 000	0.001
Batt. Endpoint		3.300	+20	3560 000 011	4.2	0.000 000

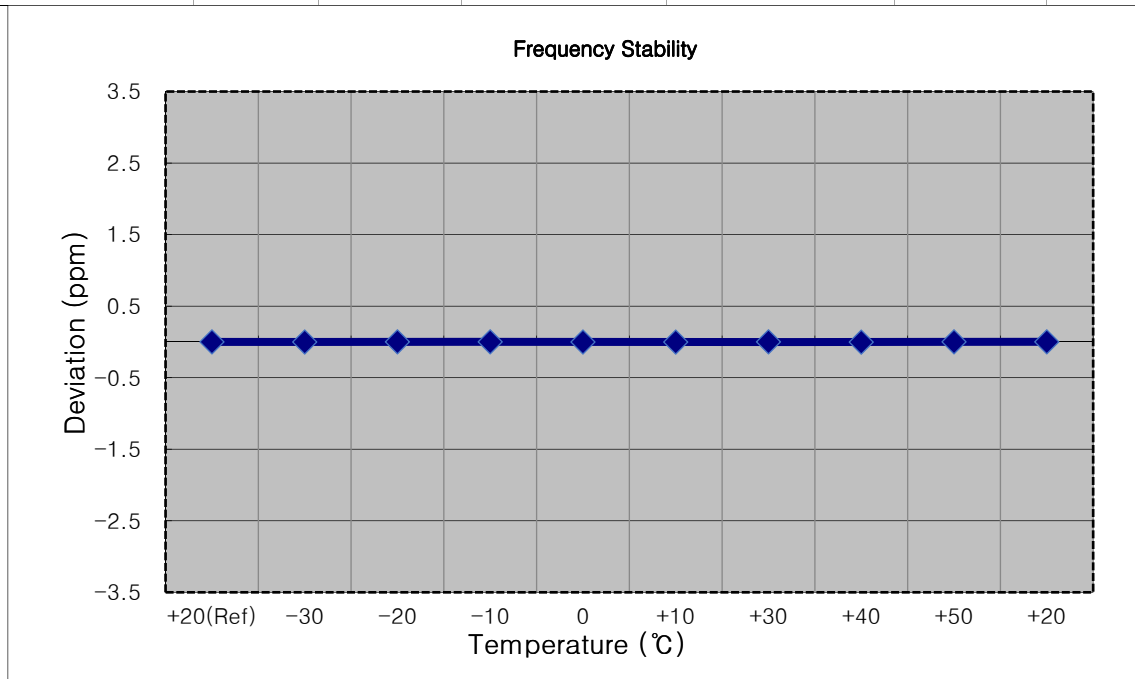


- ▣ OPERATING FREQUENCY: 3,625,000,000 Hz
- ▣ BANDWIDTH: 5 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3625 000 003	0.0	0.000 000	0.000
100 %		-30	3625 000 010	6.7	0.000 000	0.002
100 %		-20	3625 000 008	5.2	0.000 000	0.001
100 %		-10	3625 000 010	7.2	0.000 000	0.002
100 %		0	3625 000 006	3.0	0.000 000	0.001
100 %		+10	3625 000 010	6.6	0.000 000	0.002
100 %		+30	3625 000 006	3.4	0.000 000	0.001
100 %		+40	3624 999 999	-3.9	0.000 000	-0.001
100 %		+50	3625 000 011	7.7	0.000 000	0.002
Batt. Endpoint		3.300	+20	3625 000 010	7.1	0.000 000

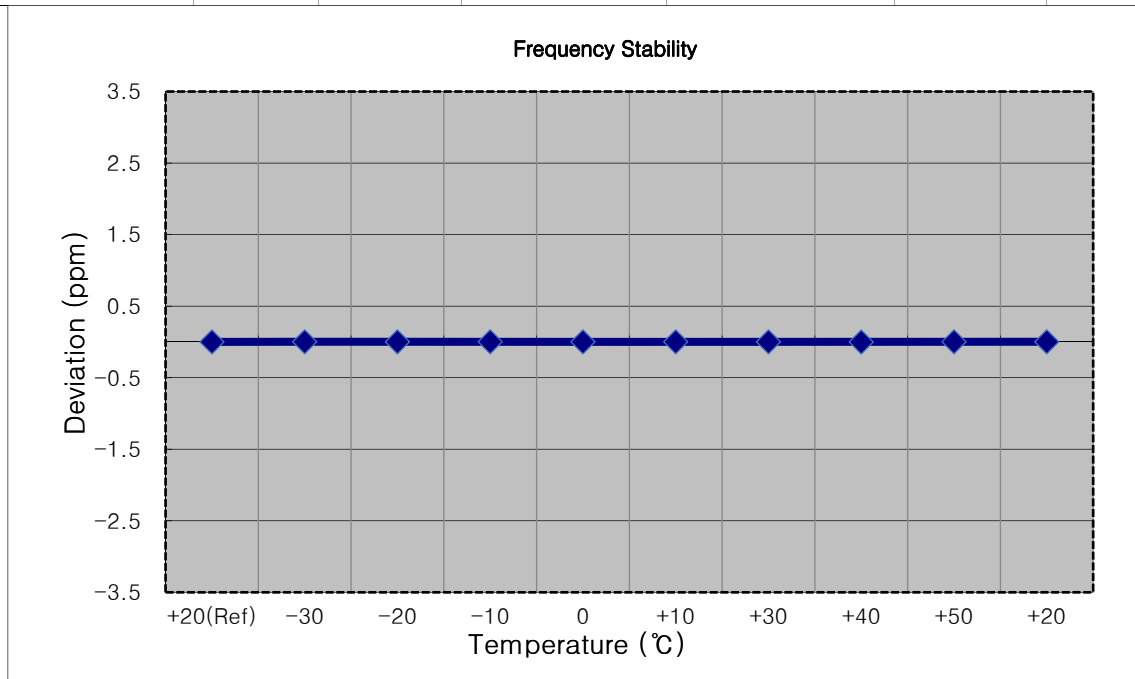


- ▣ OPERATING FREQUENCY: 3,625,000,000 Hz
- ▣ BANDWIDTH: 10 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3625 000 009	0.0	0.000 000	0.000
100 %		-30	3625 000 013	4.3	0.000 000	0.001
100 %		-20	3625 000 017	8.0	0.000 000	0.002
100 %		-10	3625 000 019	9.9	0.000 000	0.003
100 %		0	3625 000 015	6.3	0.000 000	0.002
100 %		+10	3625 000 017	8.6	0.000 000	0.002
100 %		+30	3625 000 014	5.7	0.000 000	0.002
100 %		+40	3625 000 016	7.0	0.000 000	0.002
100 %		+50	3625 000 017	8.7	0.000 000	0.002
Batt. Endpoint		3.300	+20	3625 000 016	7.1	0.000 000

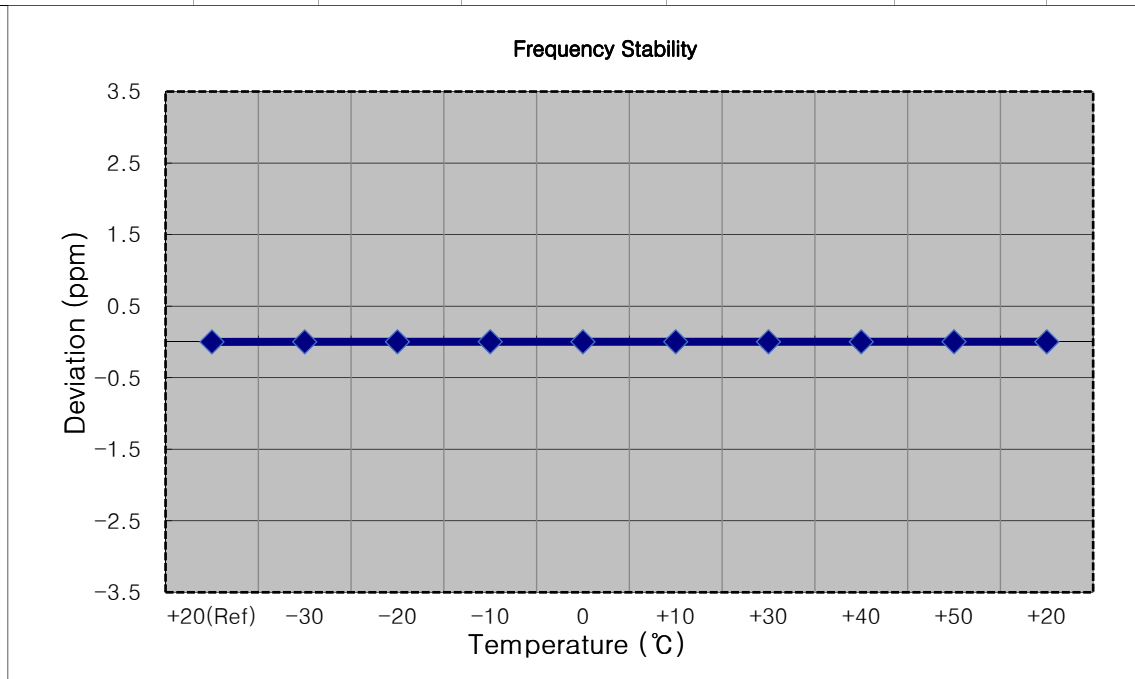


- ▣ OPERATING FREQUENCY: 3,625,000,000 Hz
- ▣ BANDWIDTH: 15 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3625 000 006	0.0	0.000 000	0.000
100 %		-30	3624 999 999	-6.7	0.000 000	-0.002
100 %		-20	3625 000 015	9.1	0.000 000	0.003
100 %		-10	3625 000 014	7.9	0.000 000	0.002
100 %		0	3625 000 013	6.9	0.000 000	0.002
100 %		+10	3625 000 015	9.4	0.000 000	0.003
100 %		+30	3625 000 012	5.9	0.000 000	0.002
100 %		+40	3625 000 011	5.3	0.000 000	0.001
100 %		+50	3625 000 011	5.4	0.000 000	0.001
Batt. Endpoint		3.300	+20	3625 000 013	7.1	0.000 000

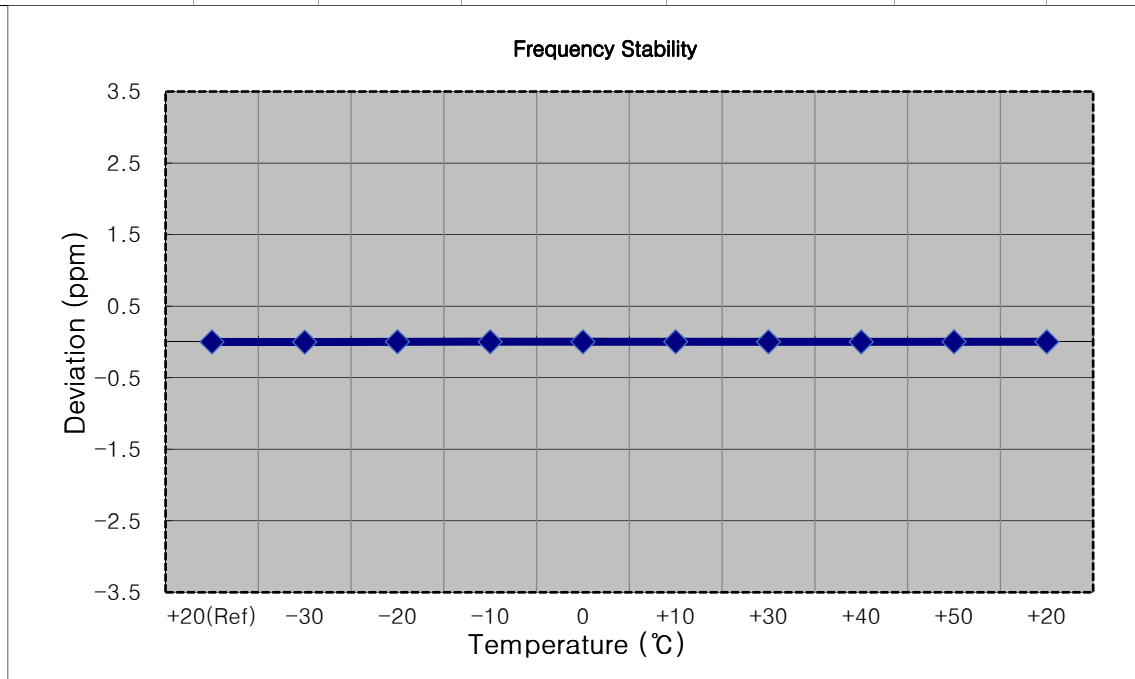


- ▣ OPERATING FREQUENCY: 3,625,000,000 Hz
- ▣ BANDWIDTH: 20 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3625 000 005	0.0	0.000 000	0.000
100 %		-30	3625 000 013	8.2	0.000 000	0.002
100 %		-20	3625 000 014	8.7	0.000 000	0.002
100 %		-10	3625 000 011	6.5	0.000 000	0.002
100 %		0	3625 000 011	6.5	0.000 000	0.002
100 %		+10	3625 000 008	2.7	0.000 000	0.001
100 %		+30	3625 000 010	5.6	0.000 000	0.002
100 %		+40	3625 000 012	7.6	0.000 000	0.002
100 %		+50	3625 000 013	7.7	0.000 000	0.002
Batt. Endpoint	3.300	+20	3625 000 000	-5.1	0.000 000	-0.001

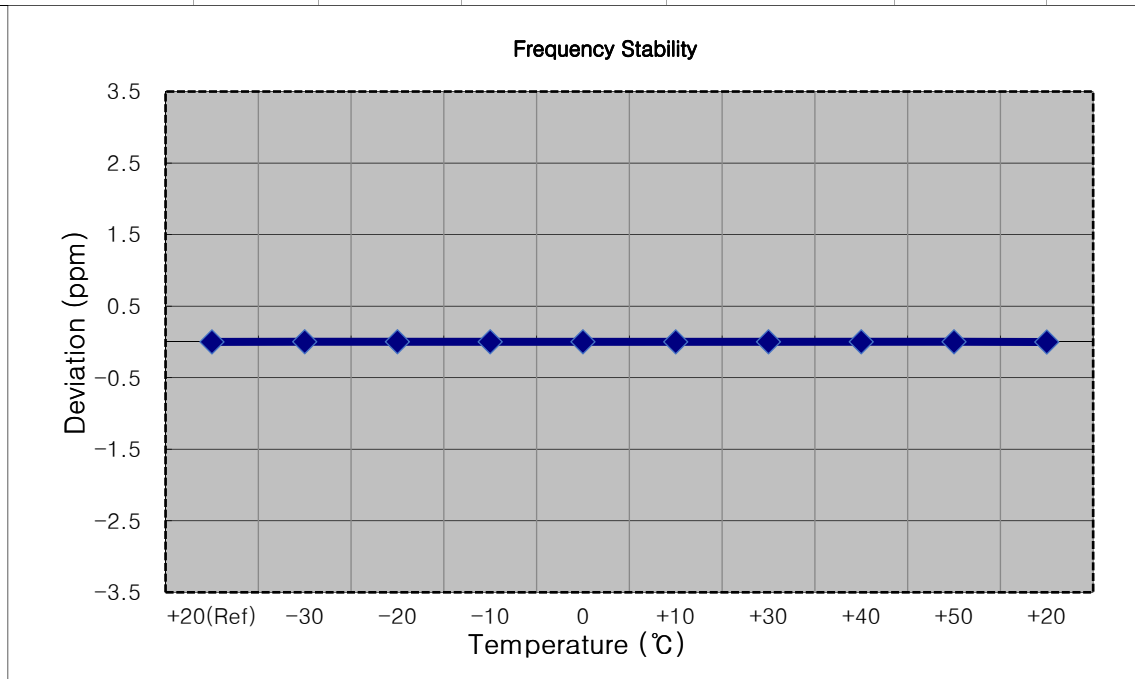


- ▣ OPERATING FREQUENCY: 3,697,500,000 Hz
- ▣ BANDWIDTH: 5 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3697 500 004	0.0	0.000 000	0.000
100 %		-30	3697 500 009	4.7	0.000 000	0.001
100 %		-20	3697 500 010	6.2	0.000 000	0.002
100 %		-10	3697 500 009	4.8	0.000 000	0.001
100 %		0	3697 500 010	6.0	0.000 000	0.002
100 %		+10	3697 500 008	4.3	0.000 000	0.001
100 %		+30	3697 500 009	4.9	0.000 000	0.001
100 %		+40	3697 499 997	-6.5	0.000 000	-0.002
100 %		+50	3697 500 009	4.9	0.000 000	0.001
Batt. Endpoint		3.300	+20	3697 500 000	-3.9	0.000 000

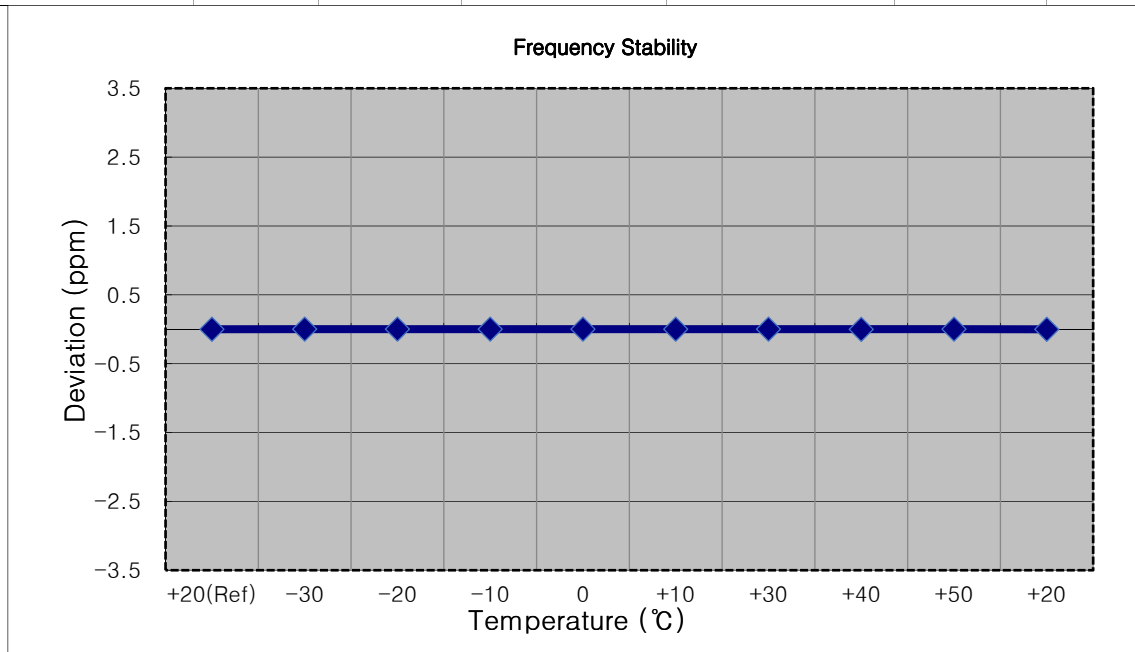

- ▣ OPERATING FREQUENCY: 3,695,000,000 Hz
- ▣ BANDWIDTH: 10 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3695 000 004	0.0	0.000 000	0.000
100 %		-30	3694 999 998	-6.6	0.000 000	-0.002
100 %		-20	3695 000 011	6.1	0.000 000	0.002
100 %		-10	3695 000 012	8.0	0.000 000	0.002
100 %		0	3695 000 000	-4.9	0.000 000	-0.001
100 %		+10	3695 000 001	-3.9	0.000 000	-0.001
100 %		+30	3695 000 010	5.7	0.000 000	0.002
100 %		+40	3695 000 002	-2.5	0.000 000	-0.001
100 %		+50	3695 000 008	3.1	0.000 000	0.001
Batt. Endpoint		3.300	+20	3695 000 000	-4.0	0.000 000

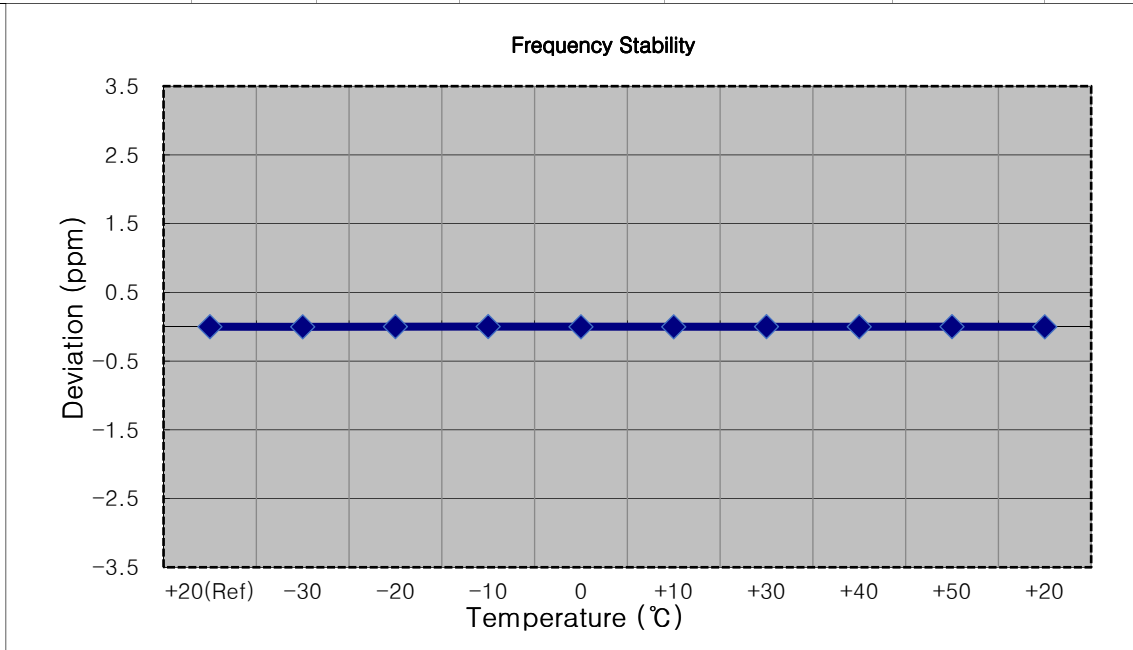




- ▣ OPERATING FREQUENCY: 3,692,500,000 Hz
- ▣ BANDWIDTH: 15 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3692 500 009	0.0	0.000 000	0.000
100 %		-30	3692 500 016	7.8	0.000 000	0.002
100 %		-20	3692 500 016	7.3	0.000 000	0.002
100 %		-10	3692 500 014	5.6	0.000 000	0.002
100 %		0	3692 500 014	5.7	0.000 000	0.002
100 %		+10	3692 500 016	7.9	0.000 000	0.002
100 %		+30	3692 500 013	4.7	0.000 000	0.001
100 %		+40	3692 500 016	7.7	0.000 000	0.002
100 %		+50	3692 500 016	7.5	0.000 000	0.002
Batt. Endpoint		3.300	+20	3692 500 017	8.0	0.000 000

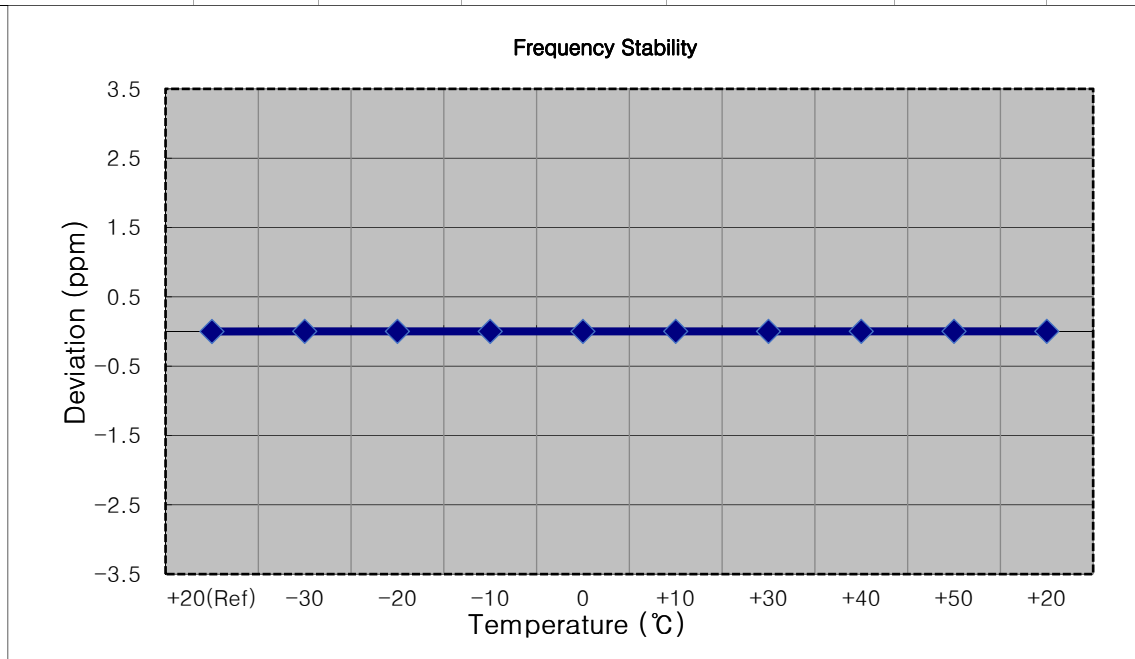


- ▣ OPERATING FREQUENCY: 3,690,000,000 Hz
- ▣ BANDWIDTH: 20 MHz
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	3690 000 004	0.0	0.000 000	0.000
100 %		-30	3690 000 011	6.8	0.000 000	0.002
100 %		-20	3690 000 011	7.6	0.000 000	0.002
100 %		-10	3690 000 011	7.1	0.000 000	0.002
100 %		0	3690 000 009	5.3	0.000 000	0.001
100 %		+10	3690 000 008	4.6	0.000 000	0.001
100 %		+30	3690 000 010	6.3	0.000 000	0.002
100 %		+40	3690 000 009	4.8	0.000 000	0.001
100 %		+50	3690 000 011	7.2	0.000 000	0.002
Batt. Endpoint		3.300	+20	3690 000 007	3.3	0.000 000

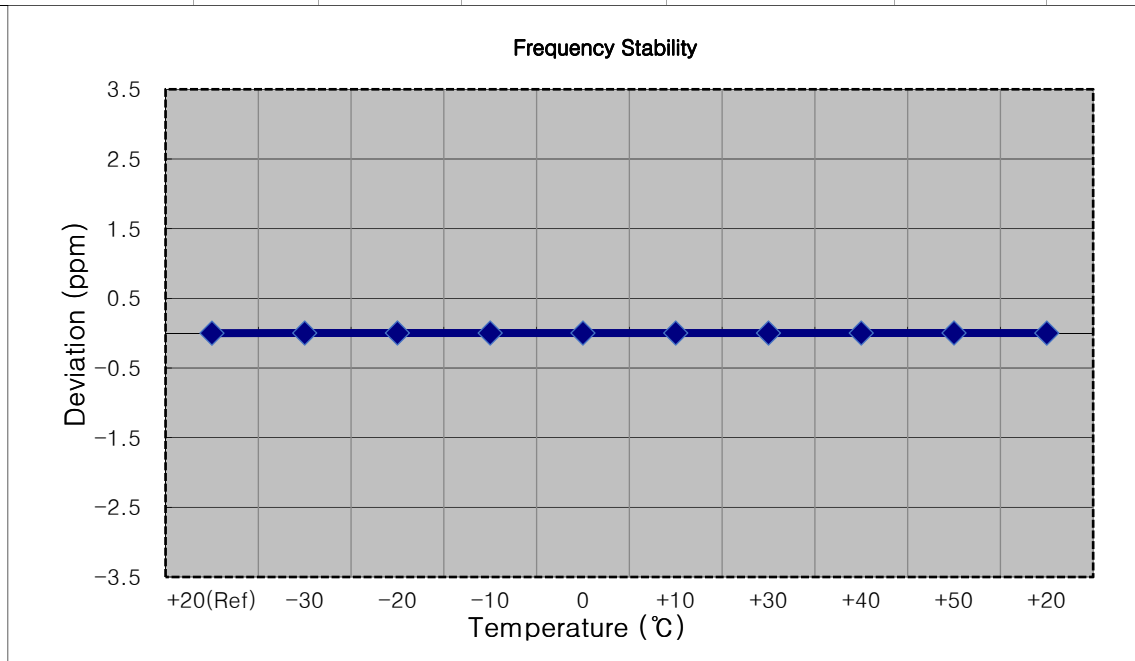


### 8.9 End User Device Additional Requirements (CBSD Protocol)

#### Test#1: 3580 MHz(BW: 20 MHz)

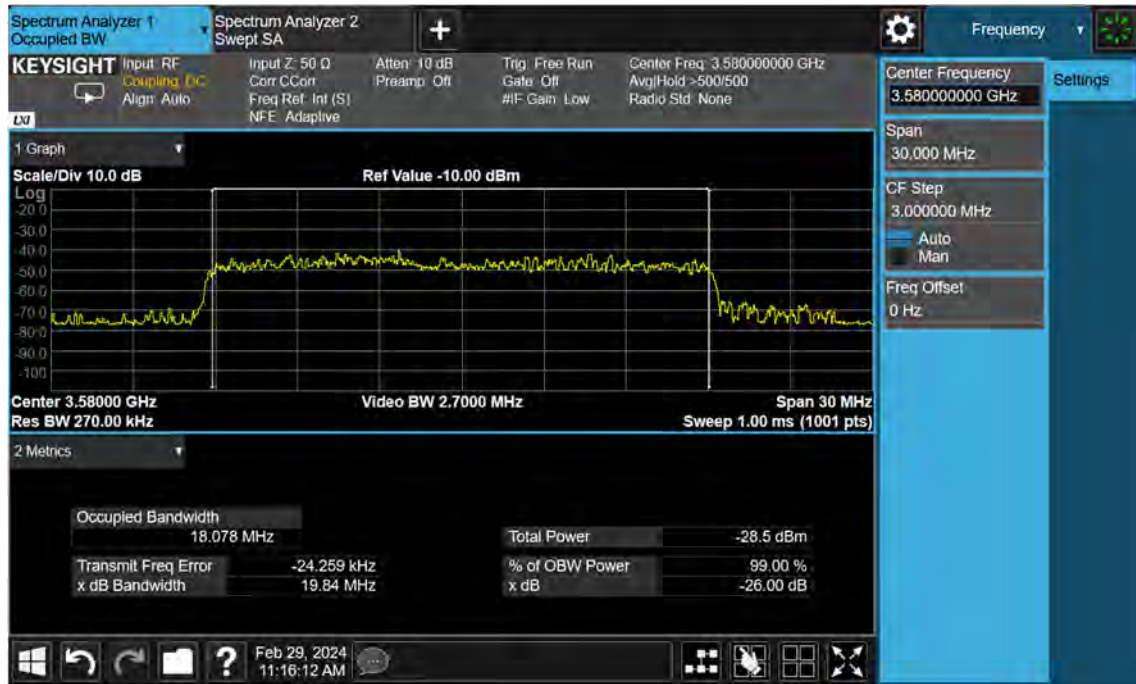

#### Operation Mode

**Stop Operation Within 10 s**

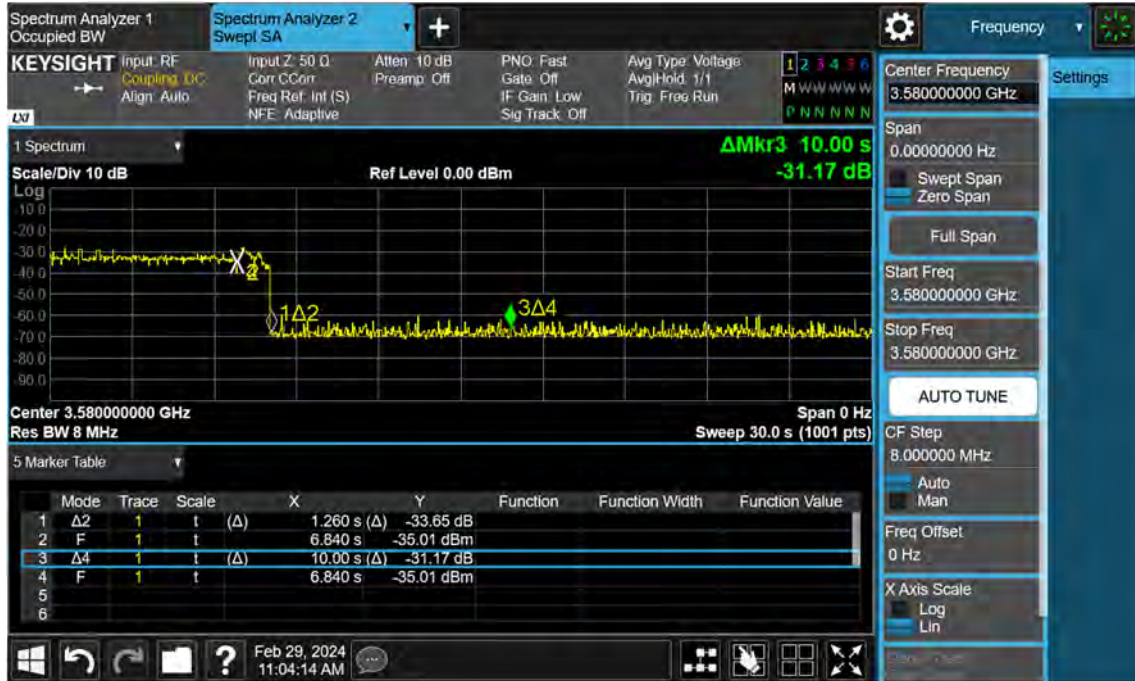

**Note:**


Marker 2: CBSD sends instructions to discontinue LTE operations.

Marker 1Δ2: EUT discontinues operation. (2.7 s)


Marker 3Δ4: 10 seconds elapsed time from CBSD sending instructions to EUT.(10.0 s)

## 9. TEST PLOTS


BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 QPSK RB 25)

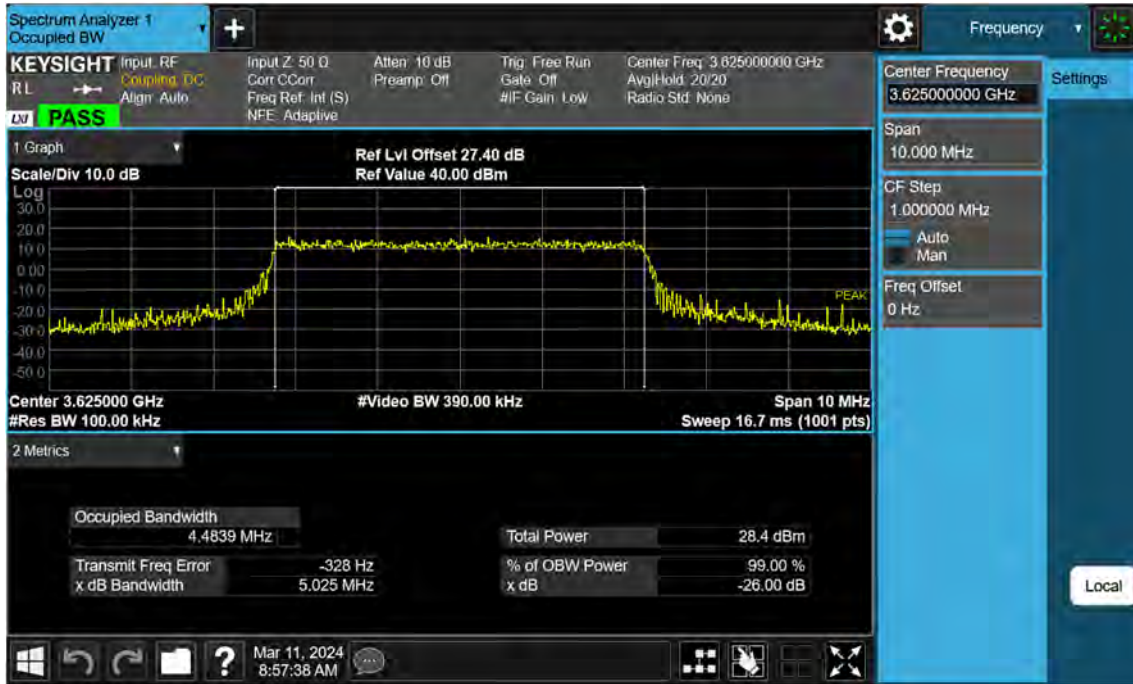

BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 16-QAM RB 25)

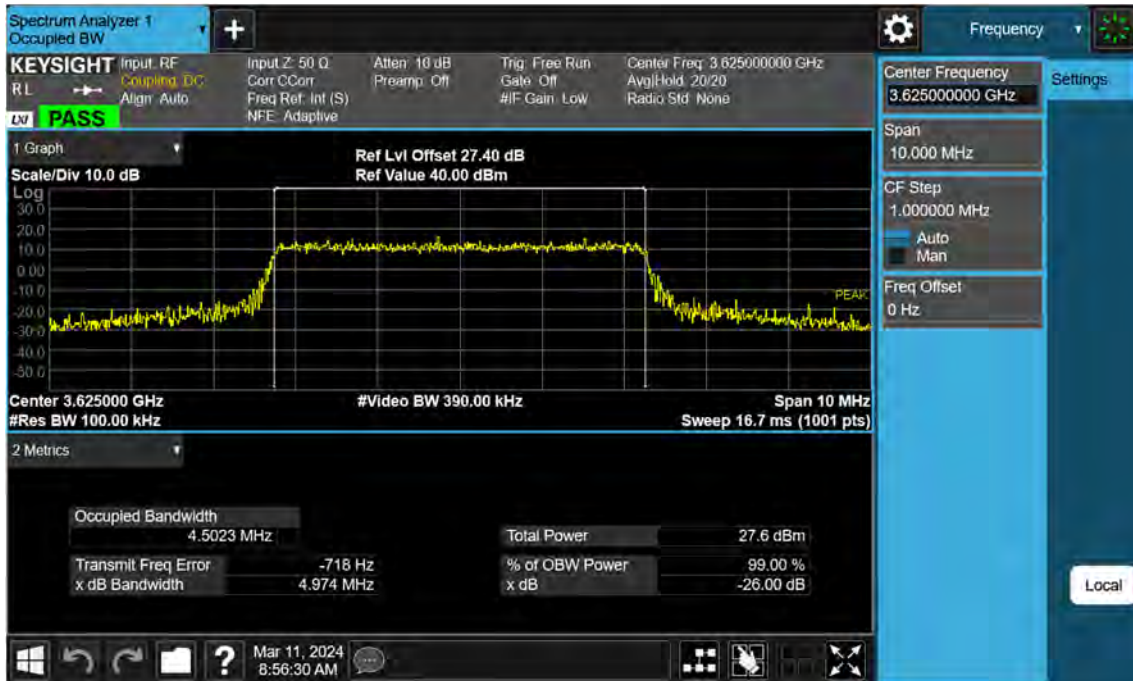


BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 64-QAM RB 25)

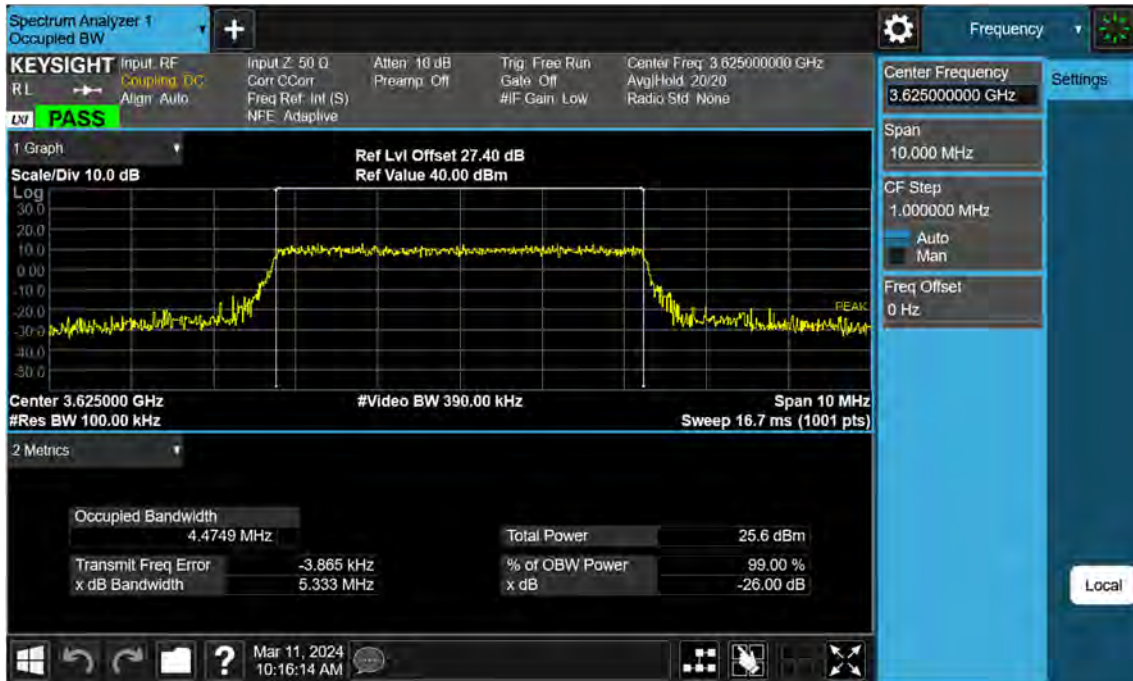





BAND 48. Occupied Bandwidth Plot (5 MHz Ch.55990 256-QAM RB 25)

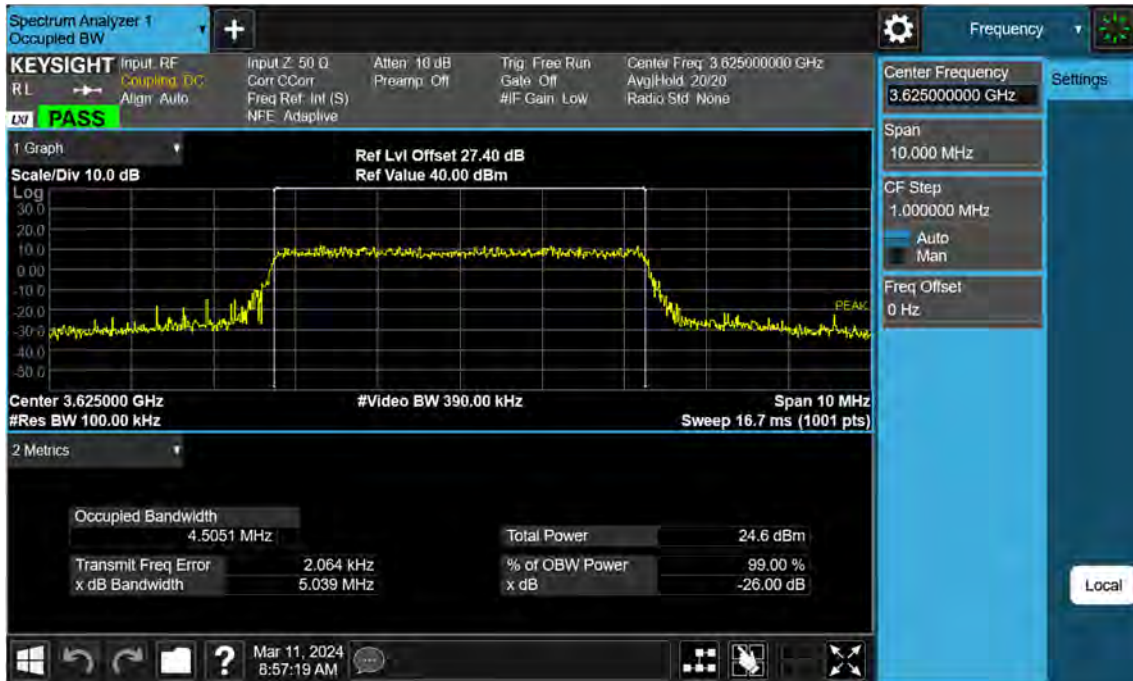


BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 QPSK RB 50)

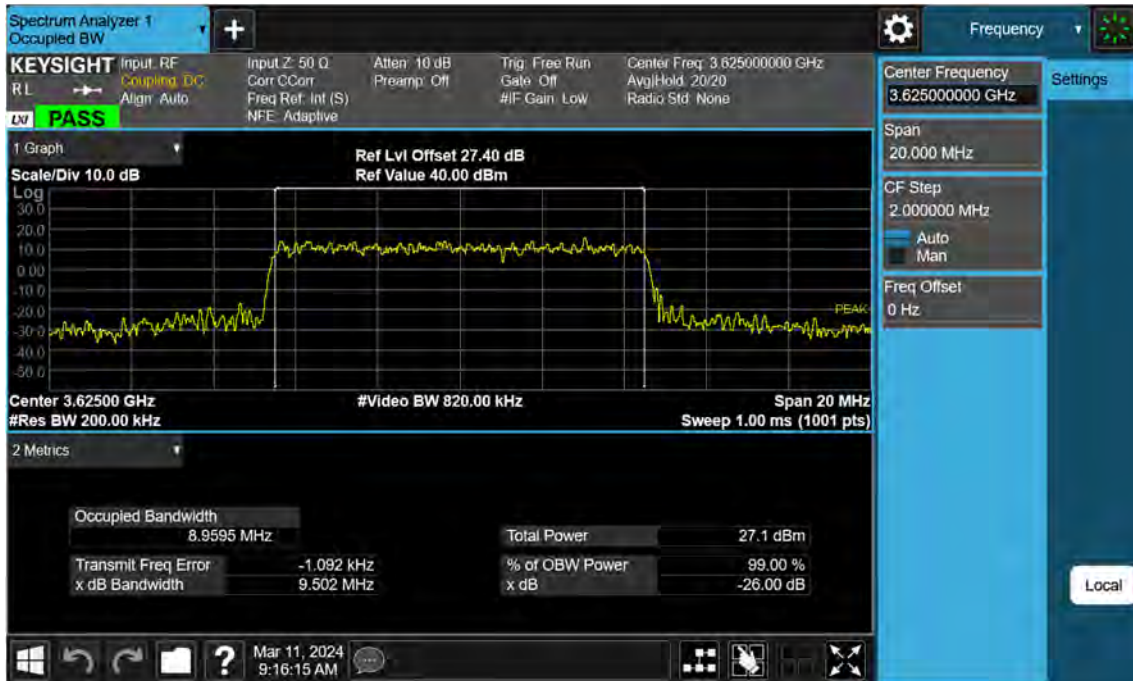


BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 16-QAM RB 50)

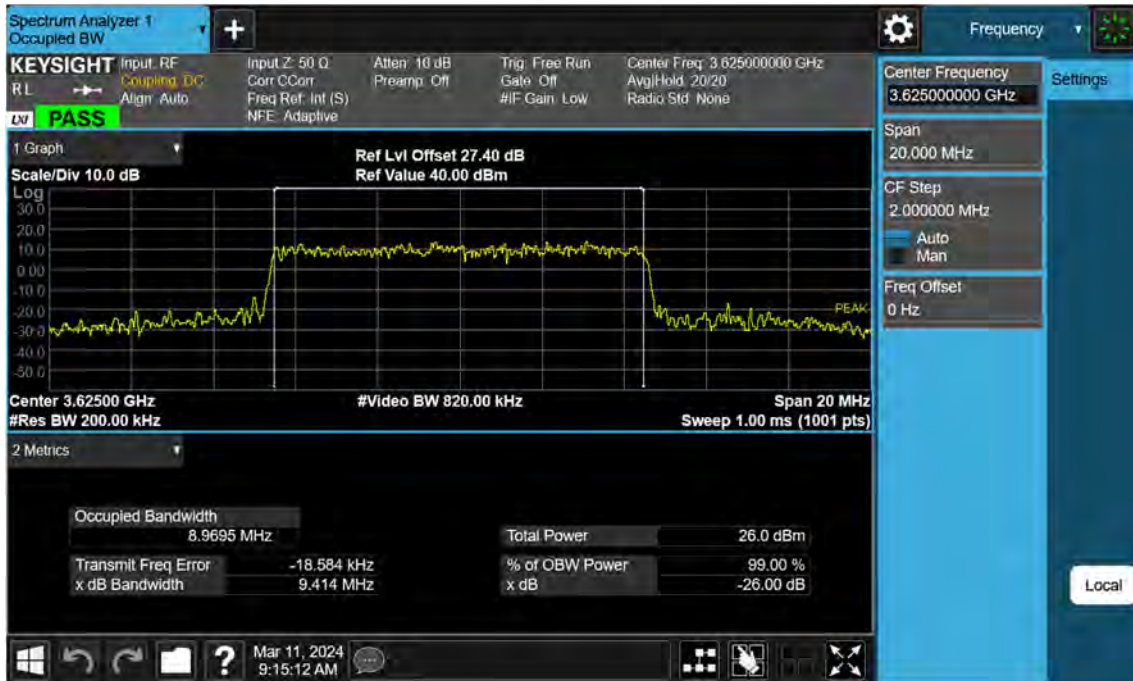


BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 64-QAM RB 50)

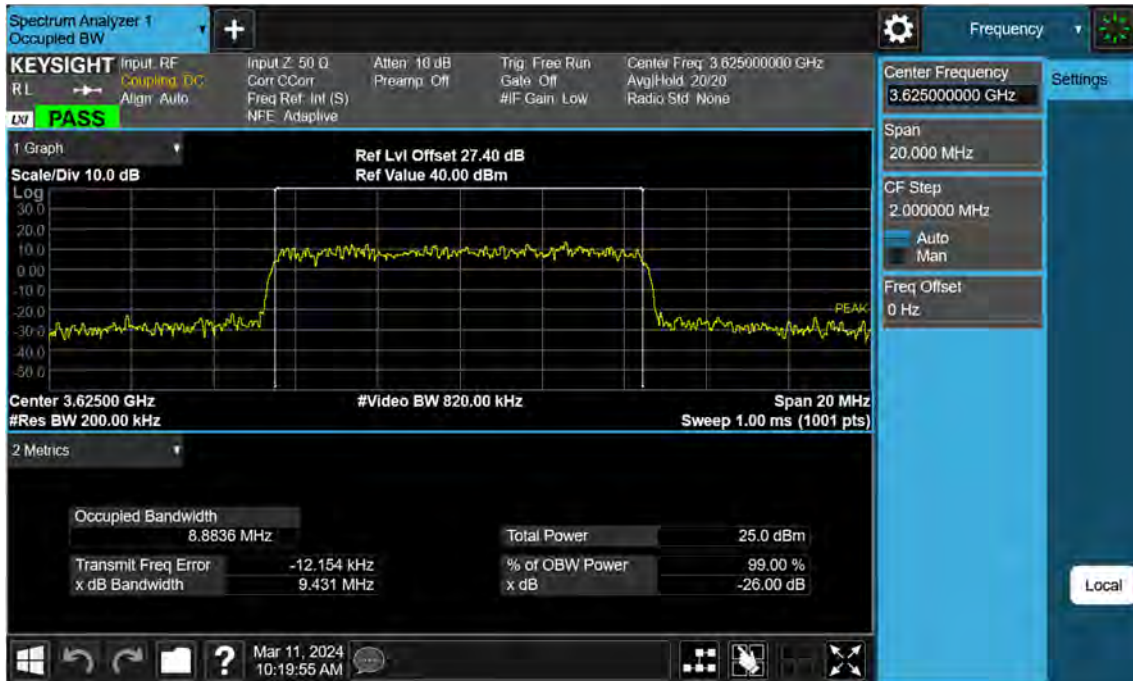


BAND 48. Occupied Bandwidth Plot (10 MHz Ch.55990 256-QAM RB 50)

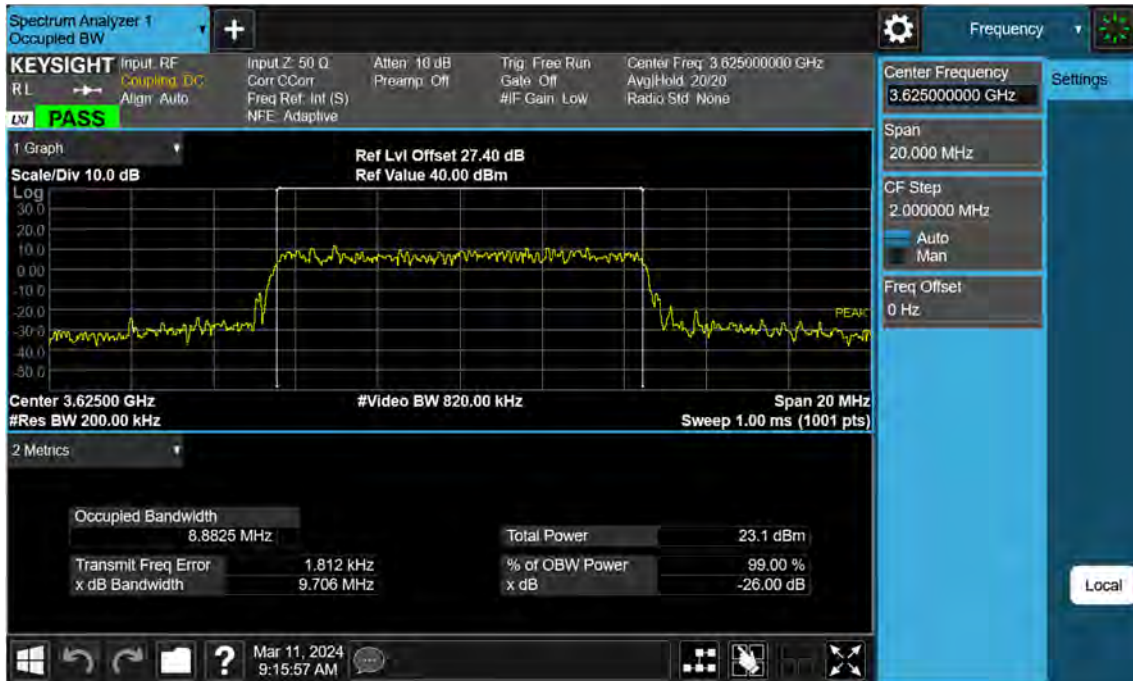


BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 QPSK RB 75)

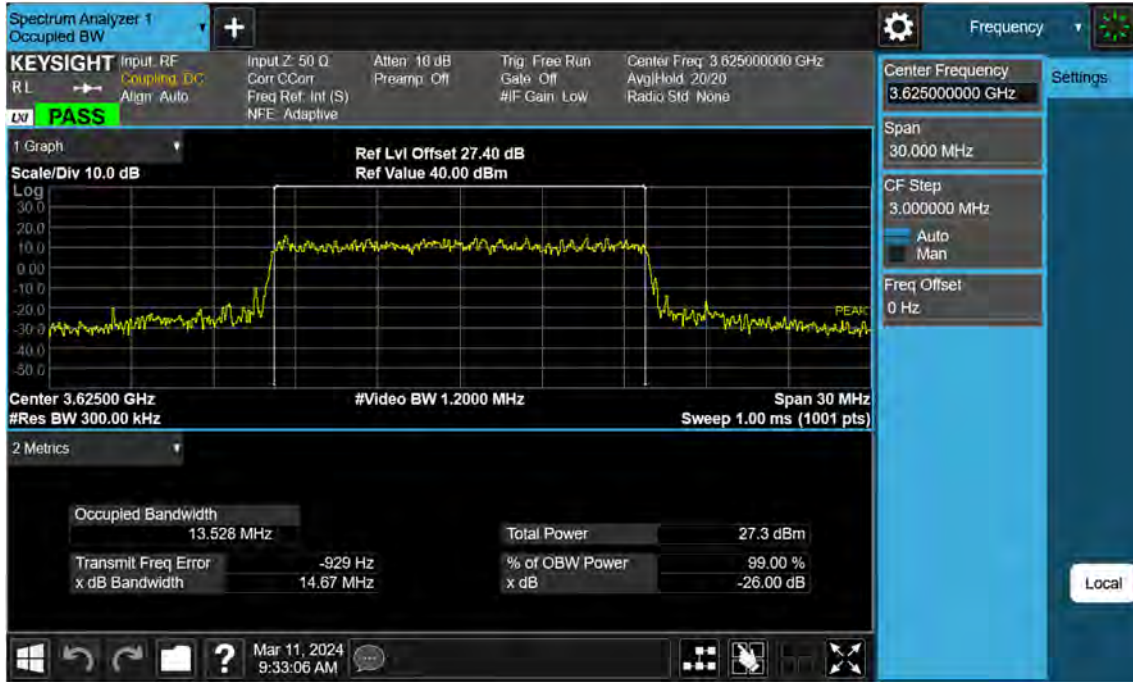

BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 16-QAM RB 75)

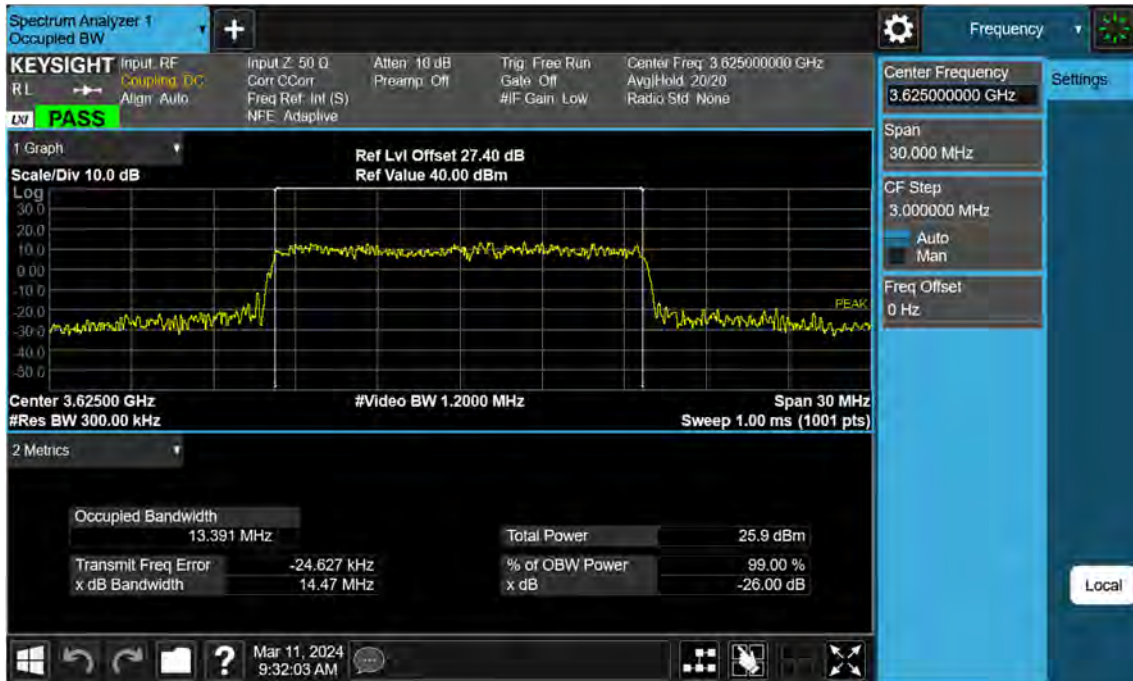


BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 64-QAM RB 75)

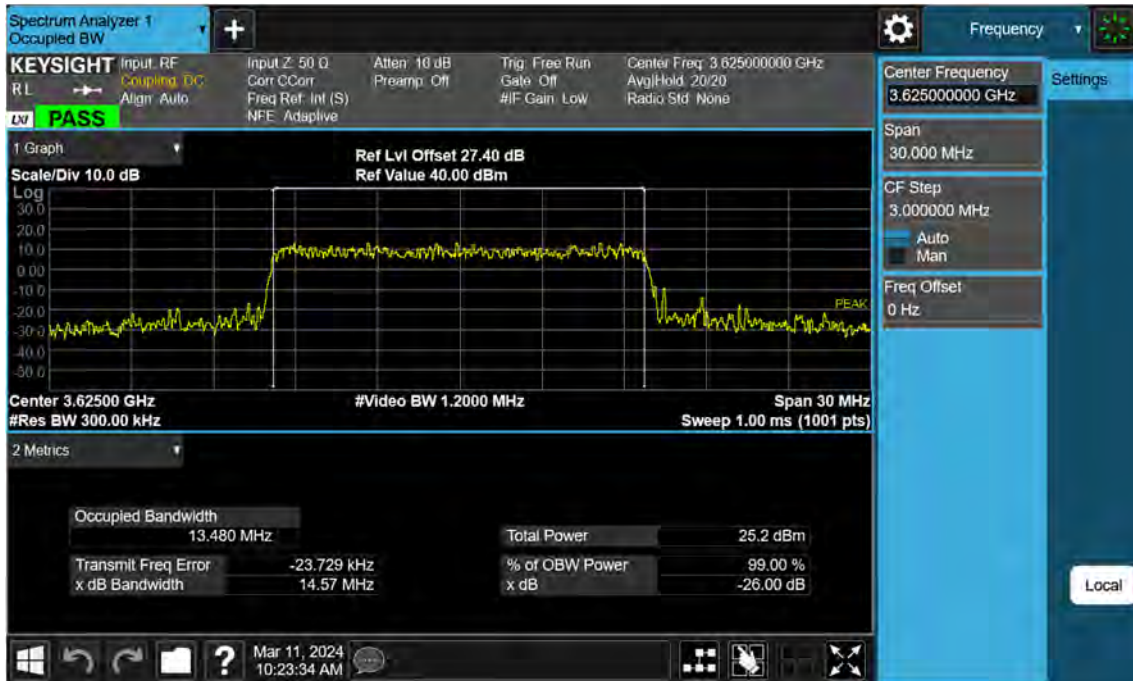





BAND 48. Occupied Bandwidth Plot (15 MHz Ch.55990 256-QAM RB 75)

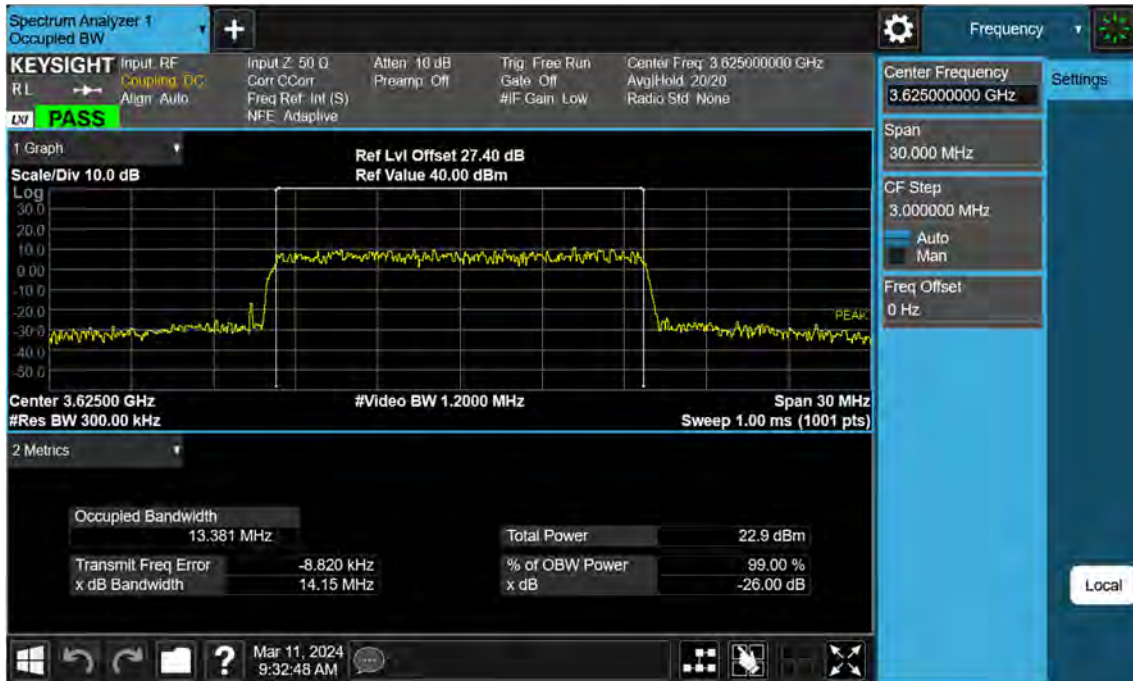


BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 QPSK RB 100)

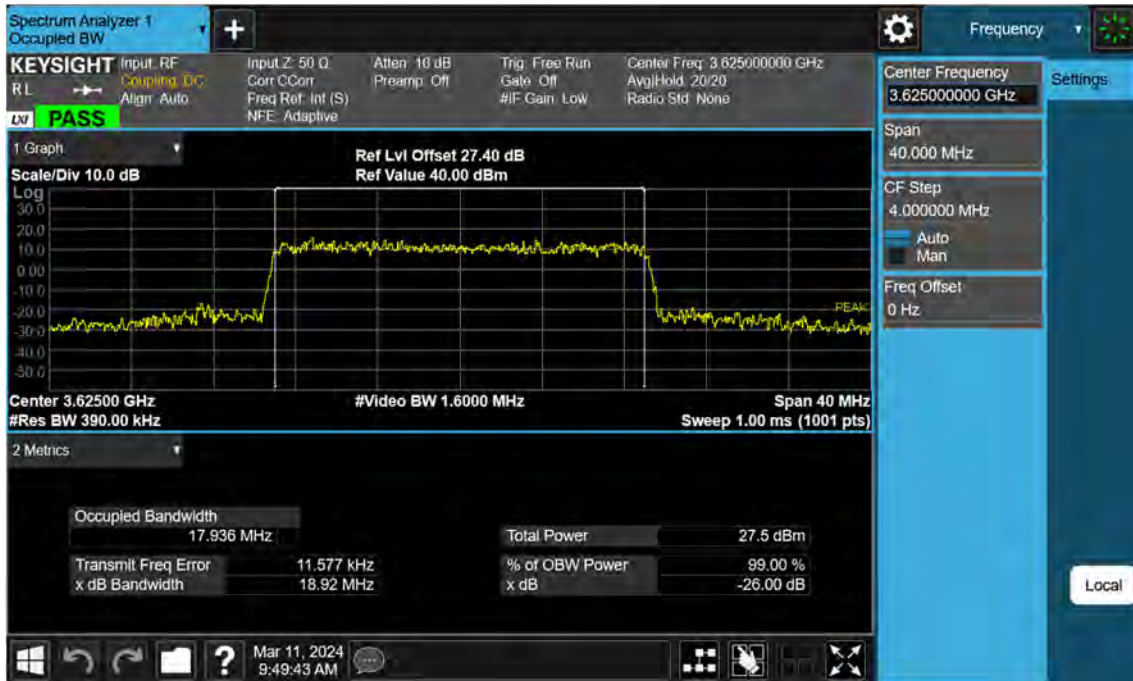


BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 16-QAM RB 100)

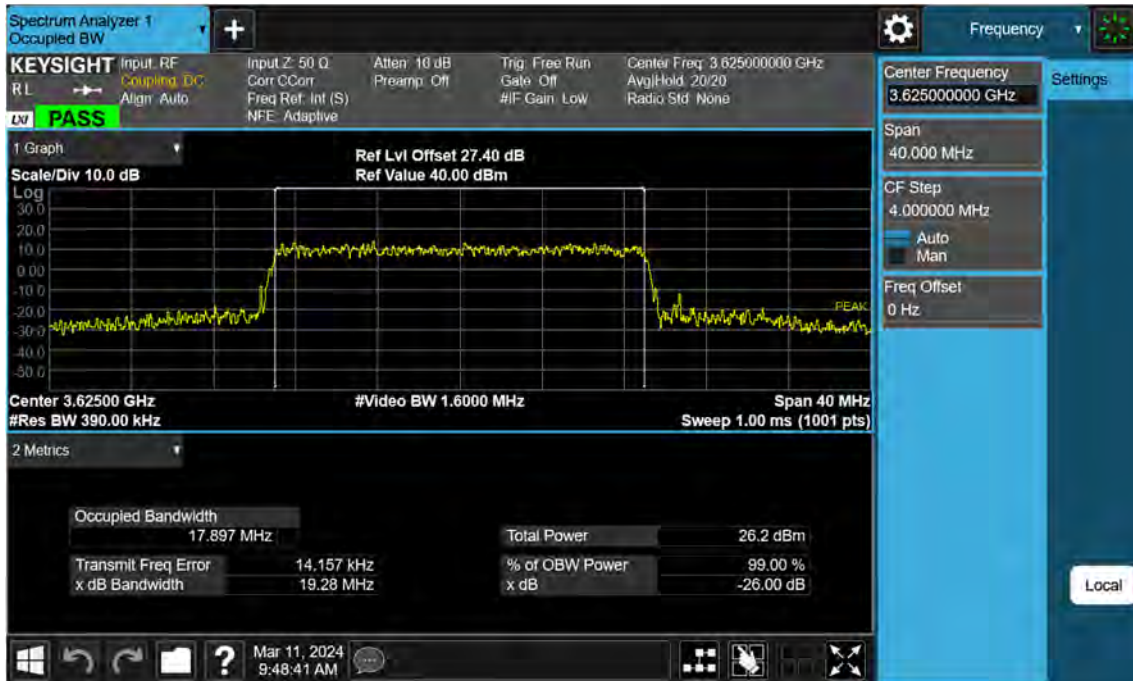


BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 64-QAM RB 100)

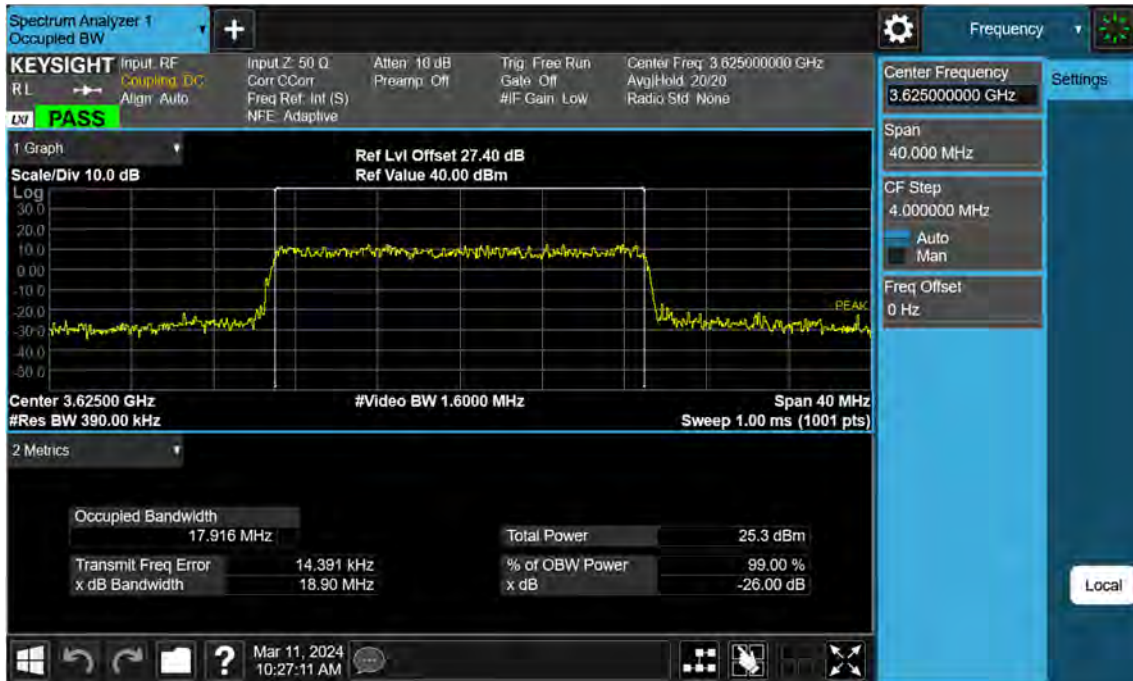

BAND 48. Occupied Bandwidth Plot (20 MHz Ch.55990 256-QAM RB 100)

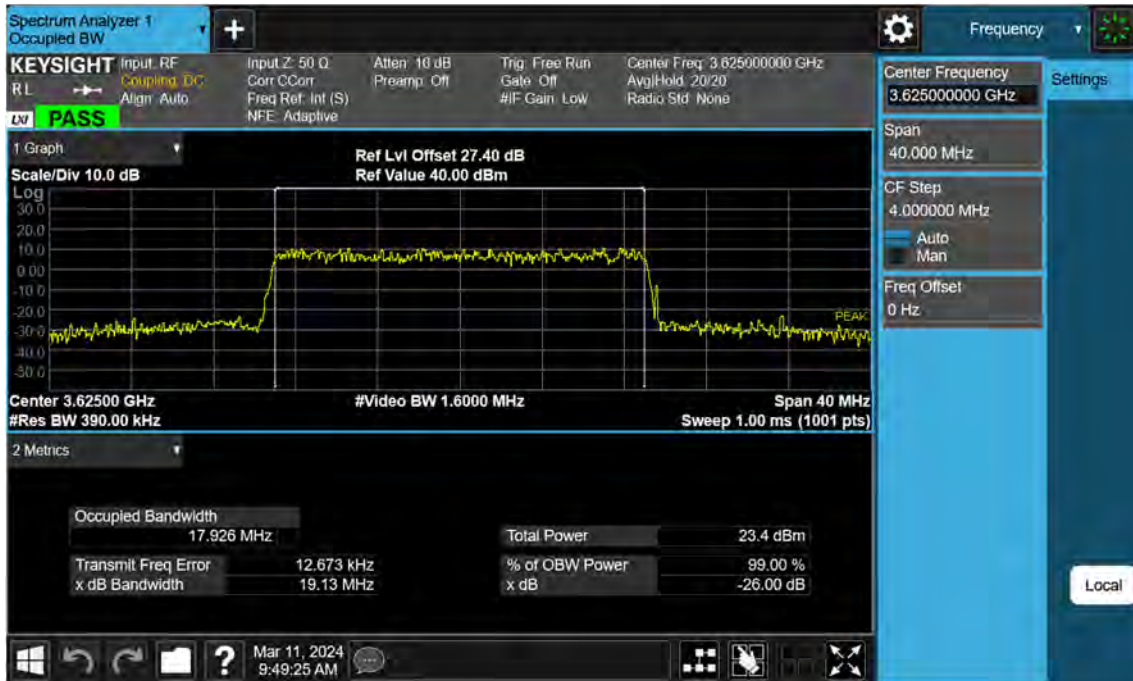

BAND 48. PAR Plot (5 M BW\_Ch.55990\_QPSK\_RB25\_0)

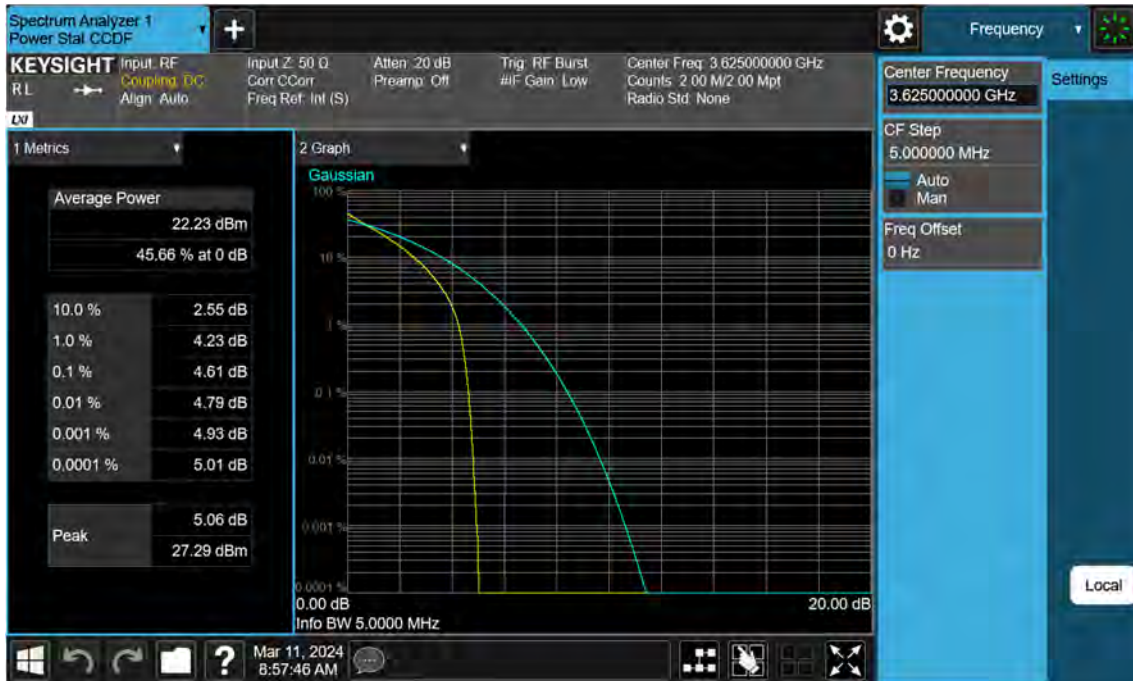

BAND 48. PAR Plot (5 M BW\_Ch.55990\_16QAM\_RB25\_0)



BAND 48. PAR Plot (5 M BW\_Ch.55990\_64QAM\_RB25\_0)





BAND 48. PAR Plot (5 M BW\_Ch.55990\_256QAM\_RB25\_0)



BAND 48. PAR Plot (10 M BW\_Ch.55990\_QPSK\_RB50\_0)



BAND 48. PAR Plot (10 M BW\_Ch.55990\_16QAM\_RB50\_0)




BAND 48. PAR Plot (10 M BW\_Ch.55990\_64QAM\_RB50\_0)



BAND 48. PAR Plot (10 M BW\_Ch.55990\_256QAM\_RB50\_0)



BAND 48. PAR Plot (15 M BW\_Ch.55990\_QPSK\_RB75\_0)

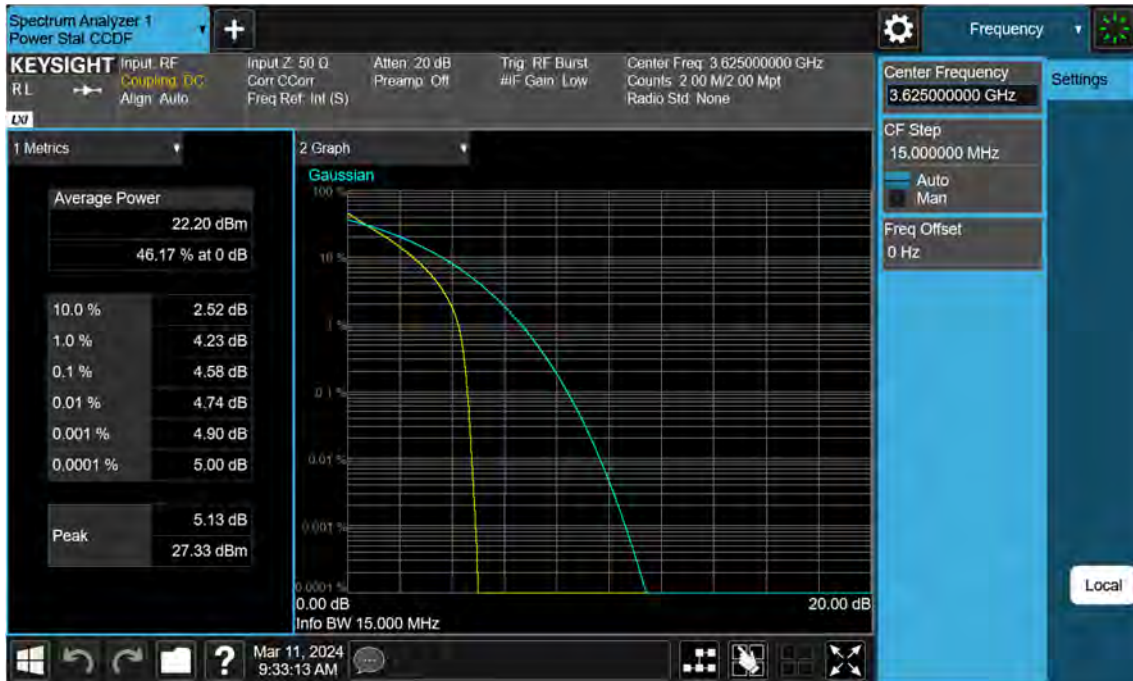

BAND 48. PAR Plot (15 M BW\_Ch.55990\_16QAM\_RB75\_0)



BAND 48. PAR Plot (15 M BW\_Ch.55990\_64QAM\_RB75\_0)





BAND 48. PAR Plot (15 M BW\_Ch.55990\_256QAM\_RB75\_0)



BAND 48. PAR Plot (20 M BW\_Ch.55990\_QPSK\_RB100\_0)



BAND 48. PAR Plot (20 M BW\_Ch.55990\_16QAM\_RB100\_0)



BAND 48. PAR Plot (20 M BW\_Ch.55990\_64QAM\_RB100\_0)




BAND 48. PAR Plot (20 M BW\_Ch.55990\_256QAM\_RB100\_0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (5 MHz Ch.55265 QPSK RB 25, Offset 0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (5 MHz Ch.55990 QPSK RB 25, Offset 0)

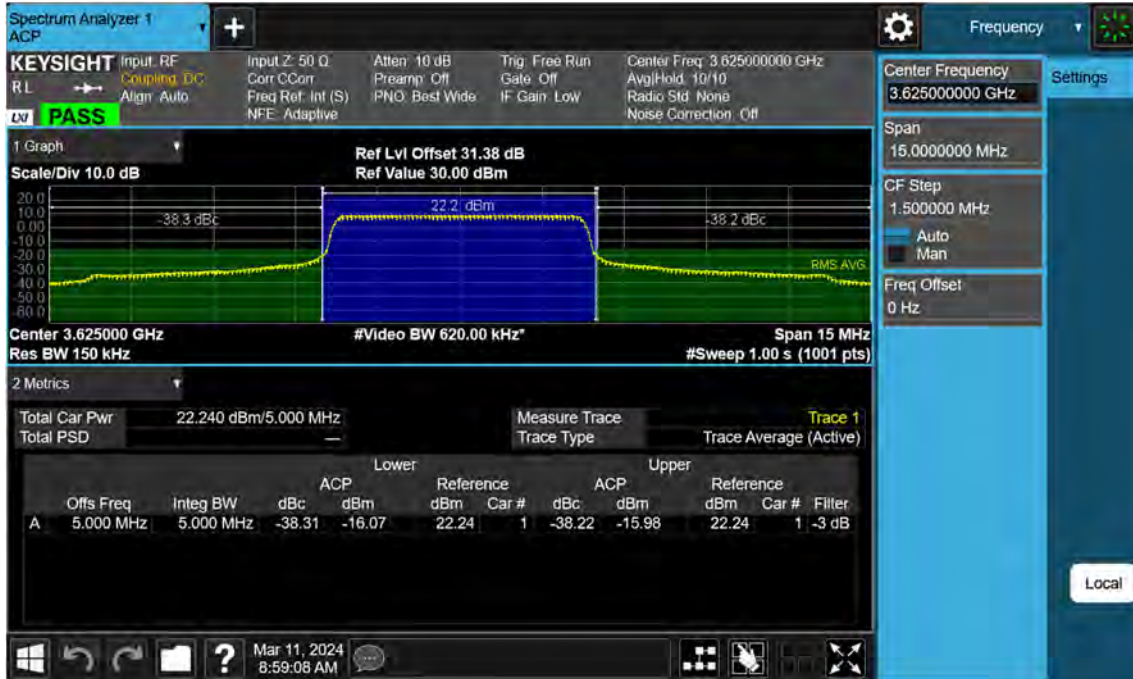


BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (5 MHz Ch.56715 QPSK RB 25, Offset 0)






BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (10 MHz Ch.55290 QPSK RB 50, Offset 0)

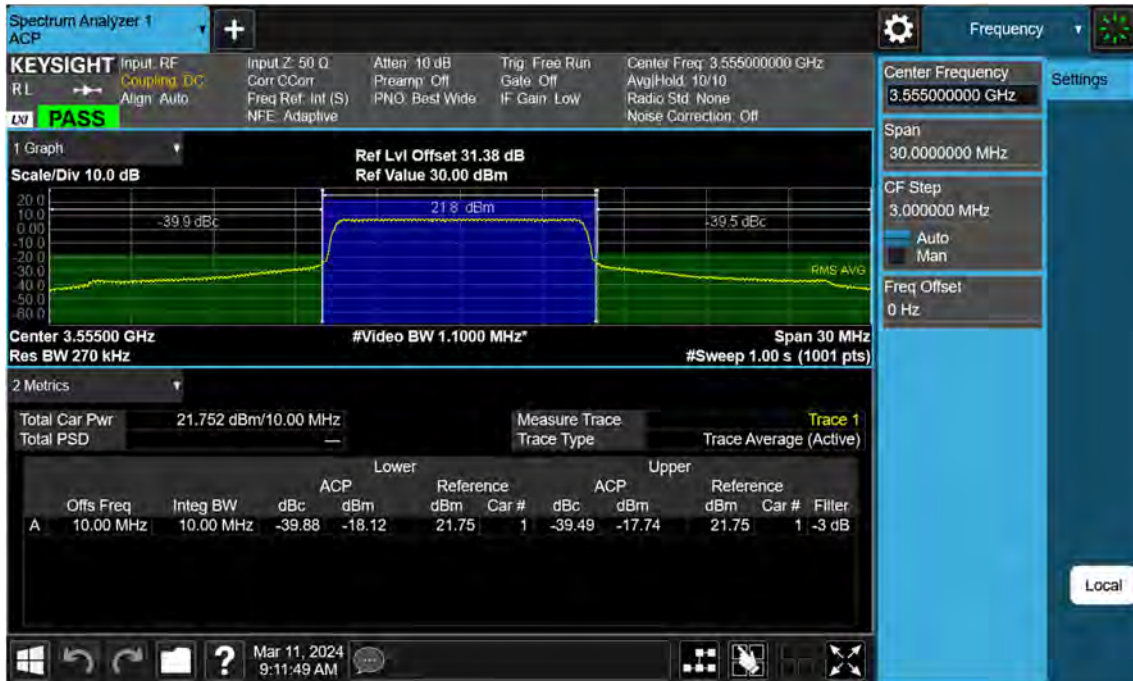

BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (10 MHz Ch.55990 QPSK RB 50, Offset 0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (10 MHz Ch. 56690 QPSK RB 50, Offset 0)

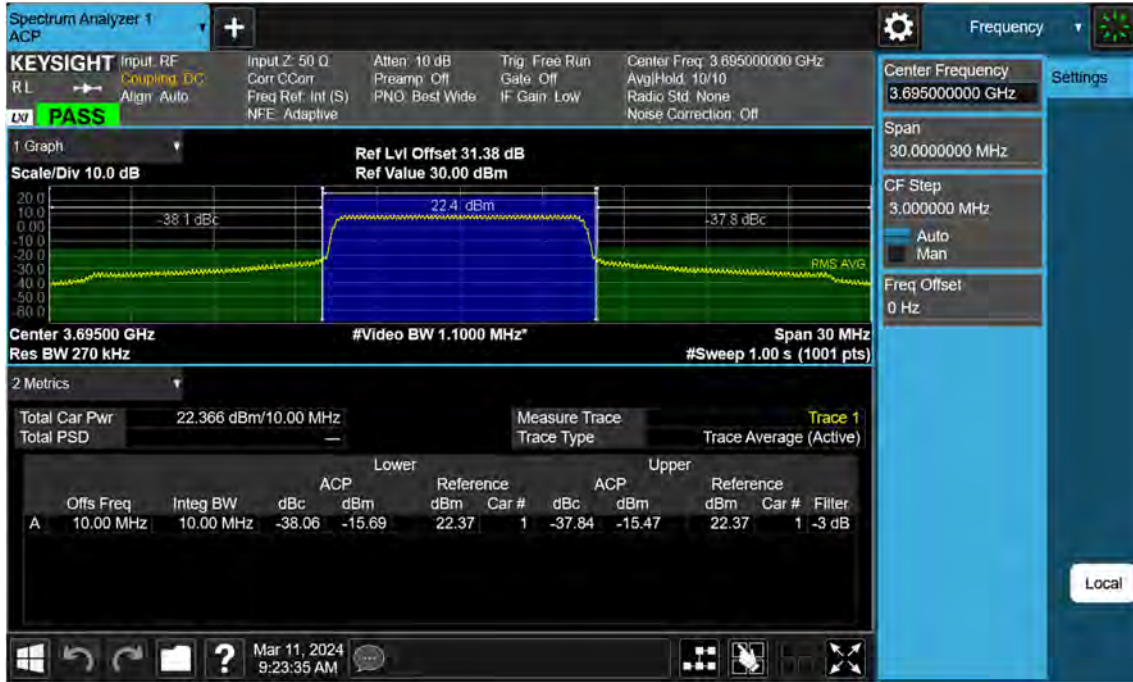

BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (15 MHz Ch.55315 QPSK RB 75, Offset 0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (15 MHz Ch.55990 QPSK RB 75, Offset 0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (15 MHz Ch.56665 QPSK RB 75, Offset 0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (20 MHz Ch.55340 QPSK RB 100, Offset 0)



BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (20 MHz Ch.55990 QPSK RB 100, Offset 0)







BAND 48. Adjacent Channel Leakage Ratio(ACLR) Plot (20 MHz Ch.56640 QPSK RB 100, Offset 0)




BAND 48. 5 M BandEdge(Lower)\_Low\_3552.5 MHz\_QPSK\_Full RB

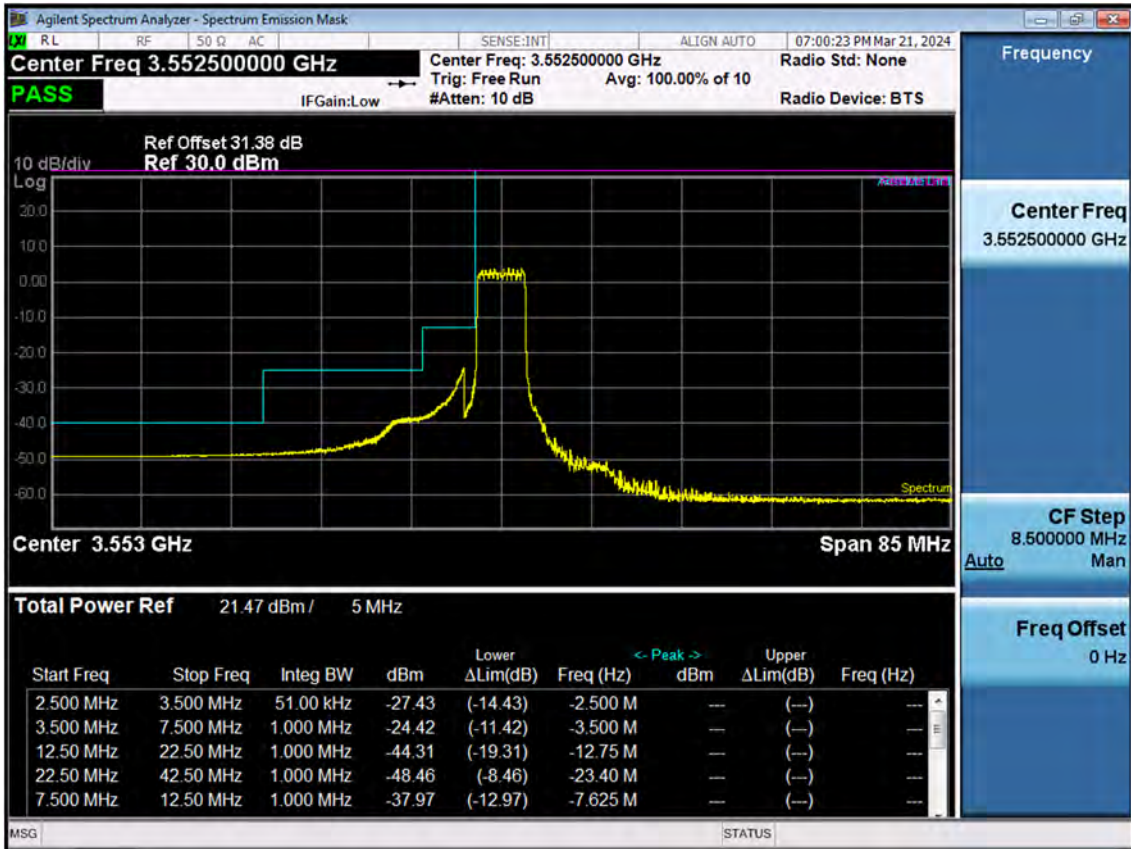


BAND 48.5 M\_BandEdge(Upper)\_Low\_3552.5 MHz\_QPSK\_Full RB

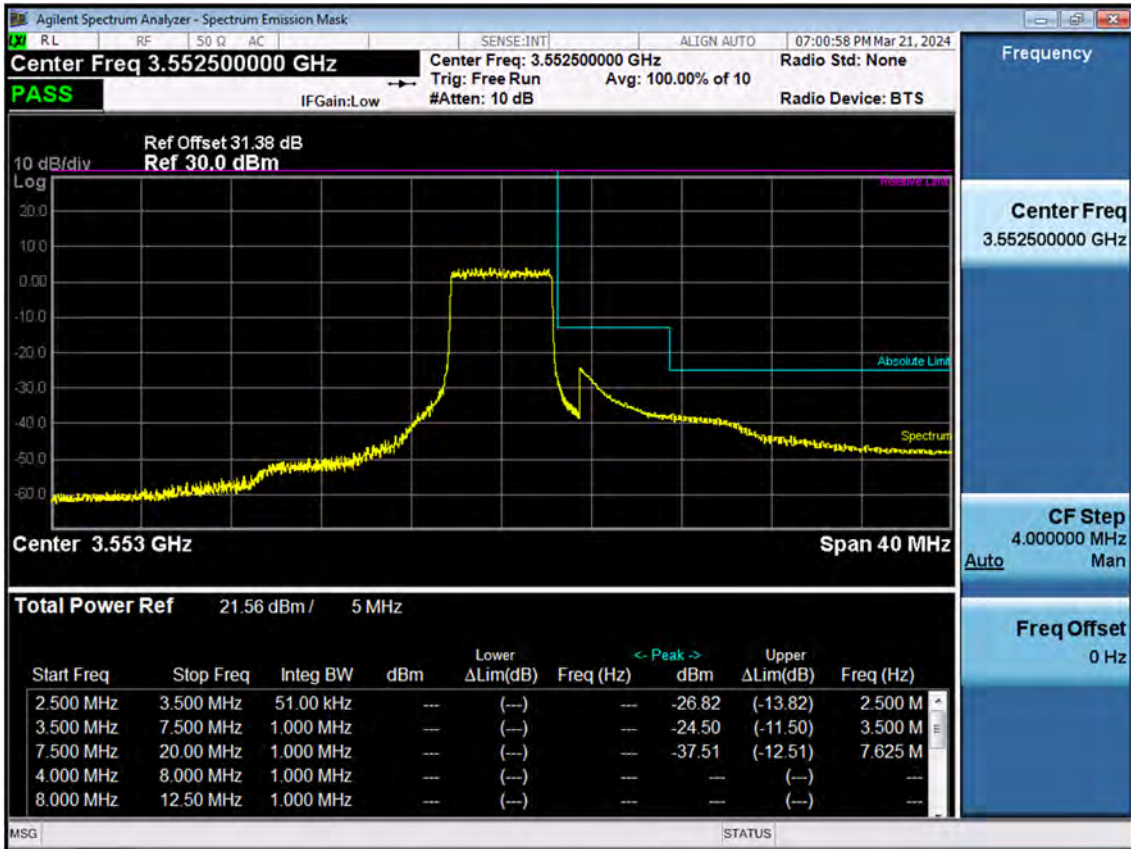


BAND 48.5 M\_BandEdge(Lower)\_Low\_3552.5 MHz\_QPSK\_1RB

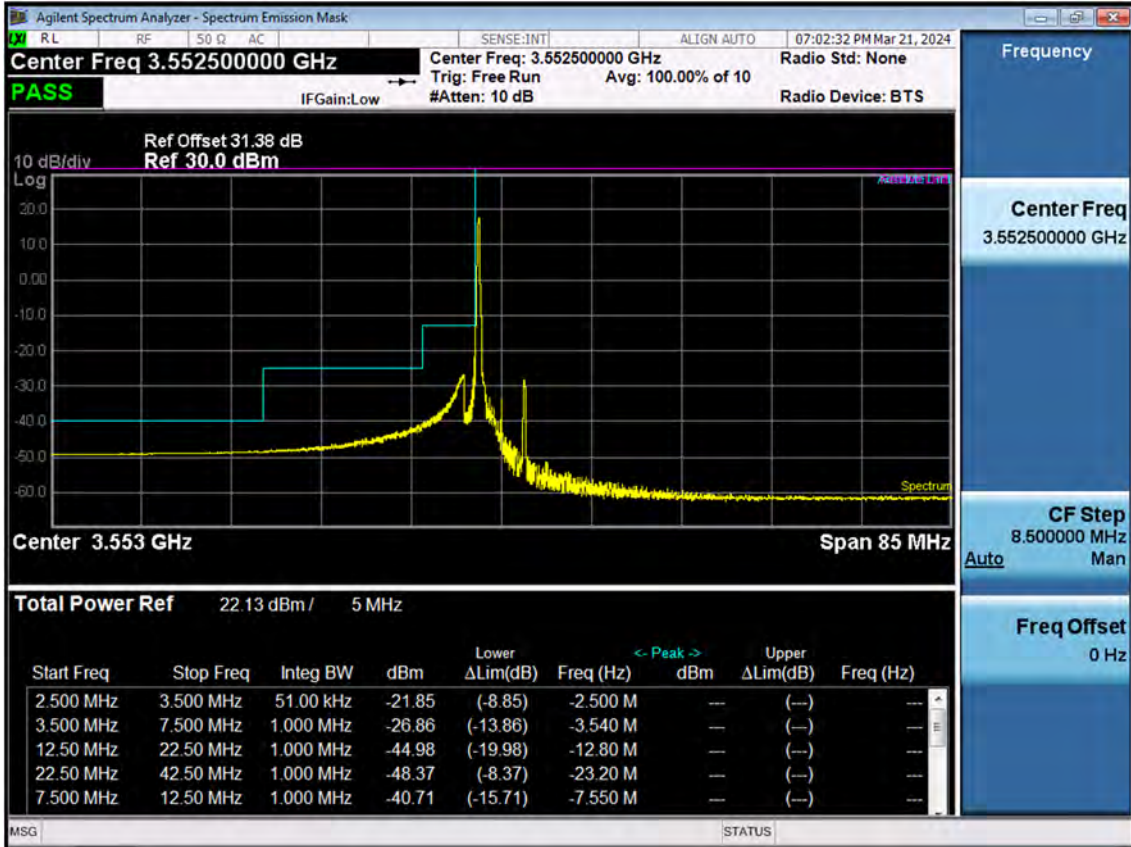


BAND 48.5 M\_BandEdge(Upper)\_Low\_3552.5 MHz\_QPSK\_1RB

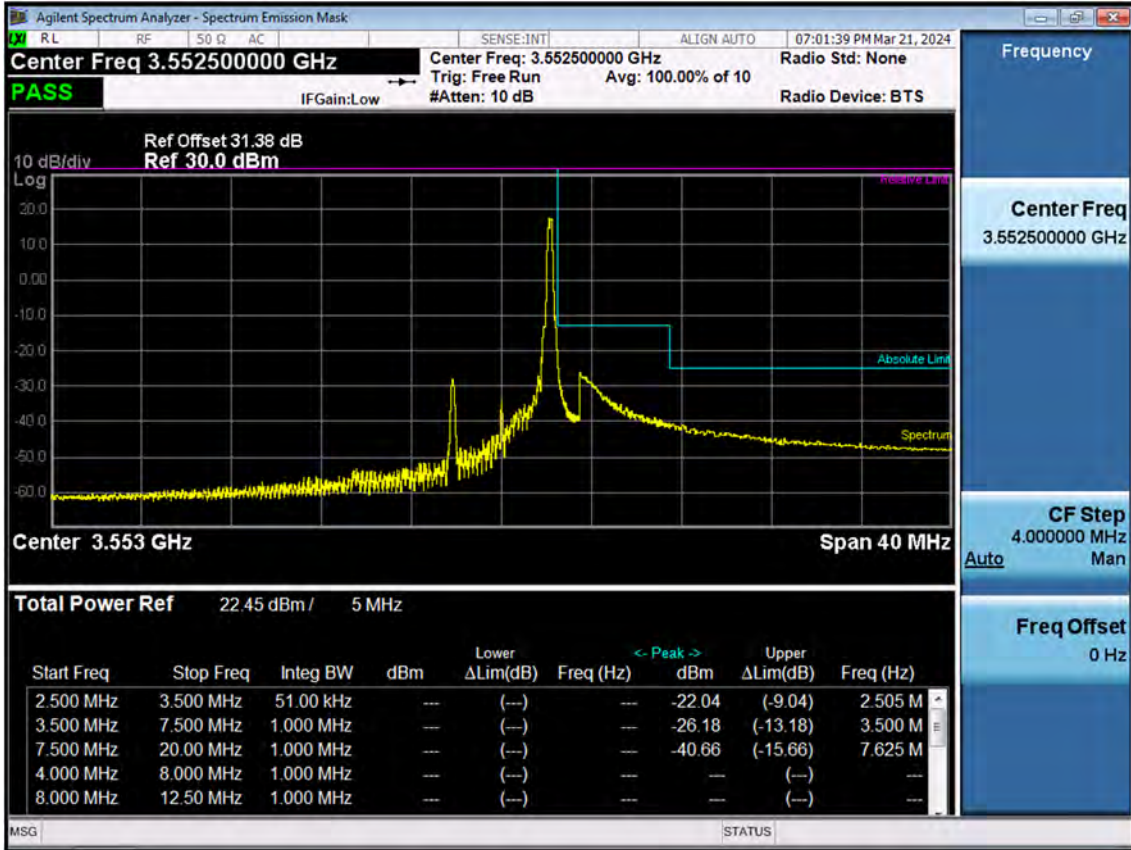


BAND 48.5 M\_BandEdge(Center)\_Mid\_3625 MHz\_QPSK\_Full RB

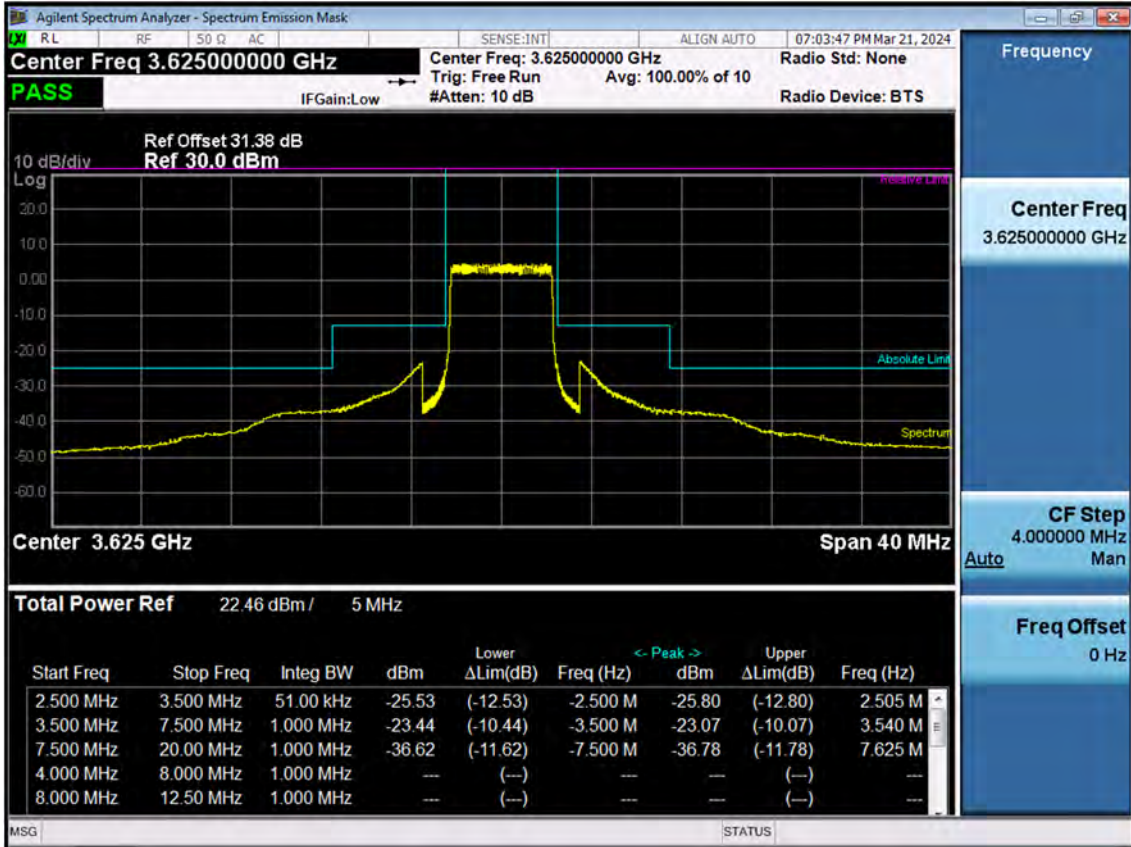

BAND 48.5 M\_BandEdge(Lower)\_Mid\_3625 MHz\_QPSK\_1RB

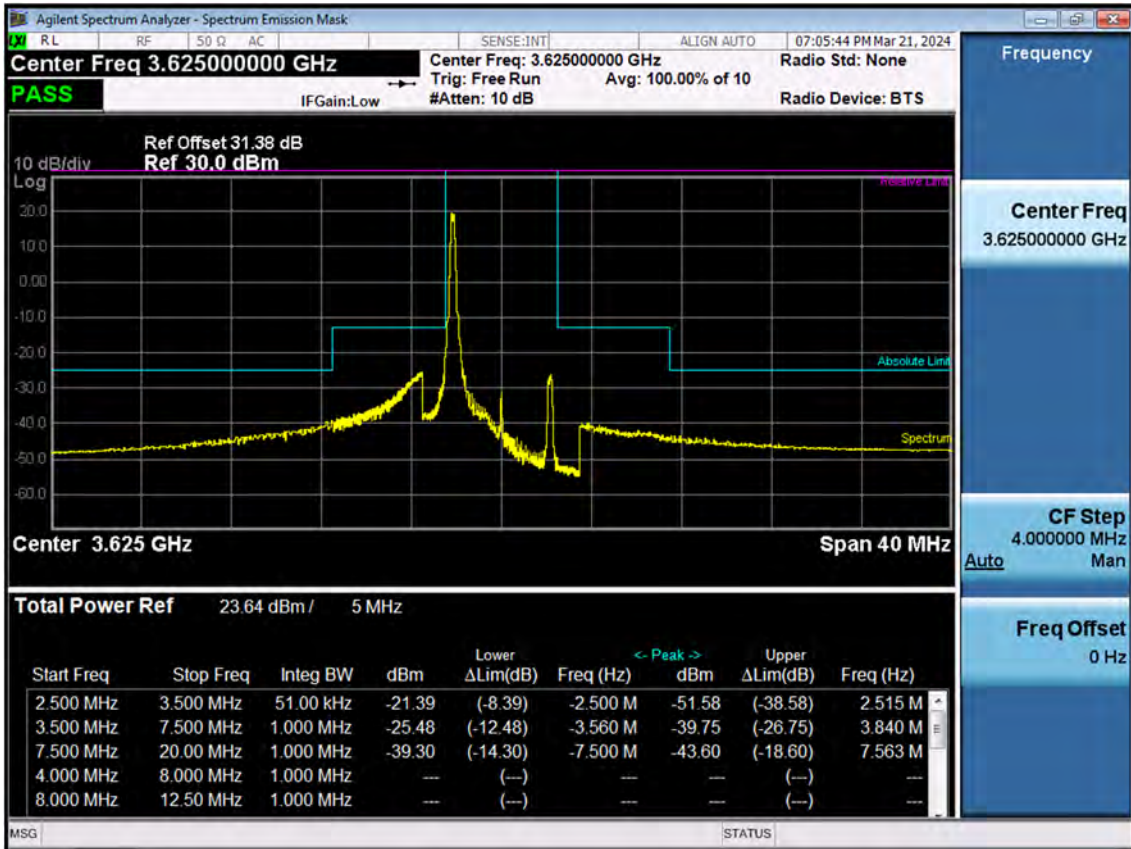

BAND 48.5 M\_BandEdge(Upper)\_Mid\_3625 MHz\_QPSK\_1RB

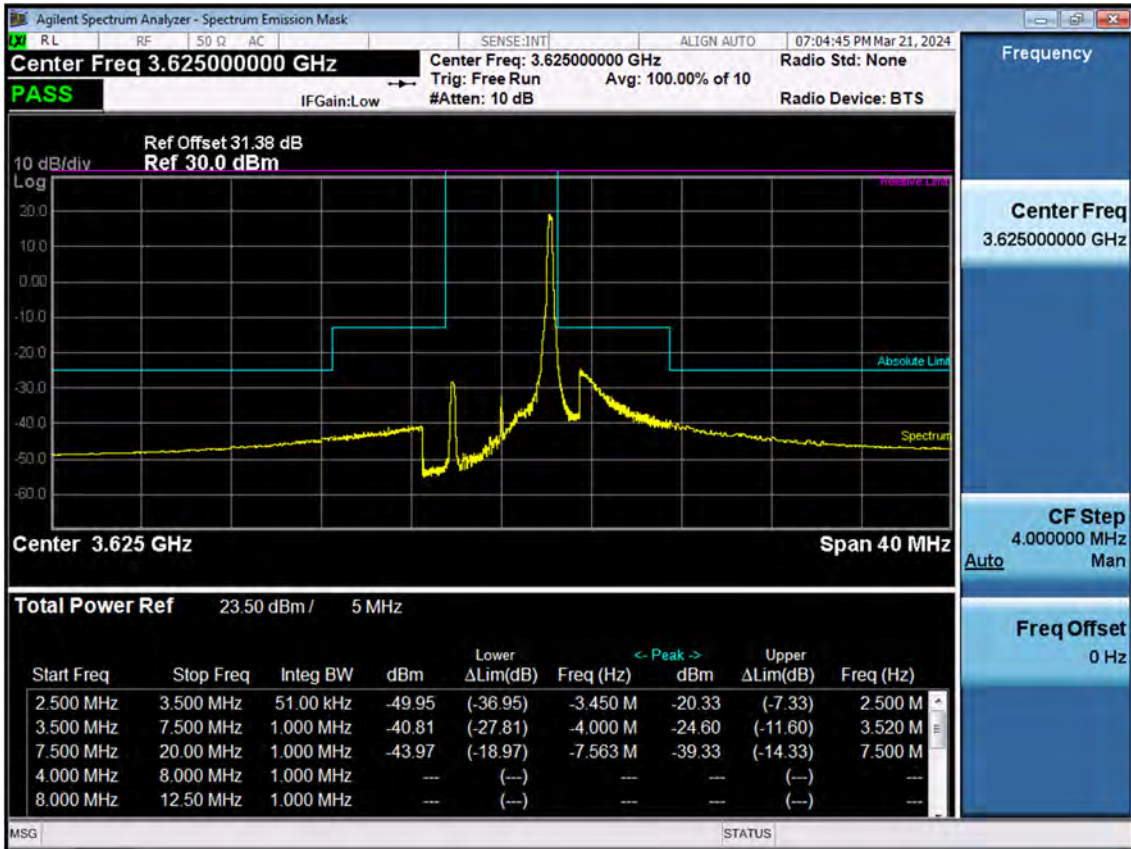





BAND 48.5 M\_BandEdge(Lower)\_High\_3697.5 MHz\_QPSK\_Full RB




BAND 48.5 M\_BandEdge(Upper)\_High\_3697.5 MHz\_QPSK\_Full RB

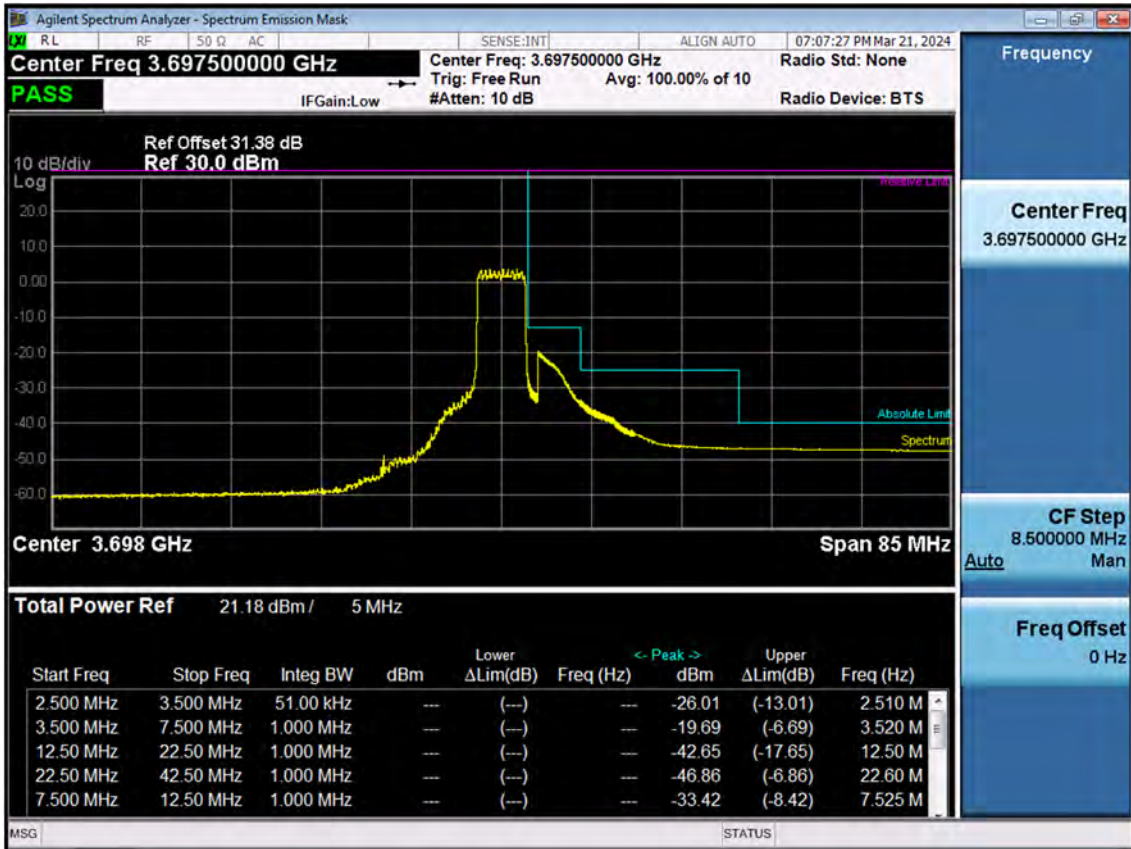


BAND 48.5 M\_BandEdge(Lower)\_High\_3697.5 MHz\_QPSK\_1RB

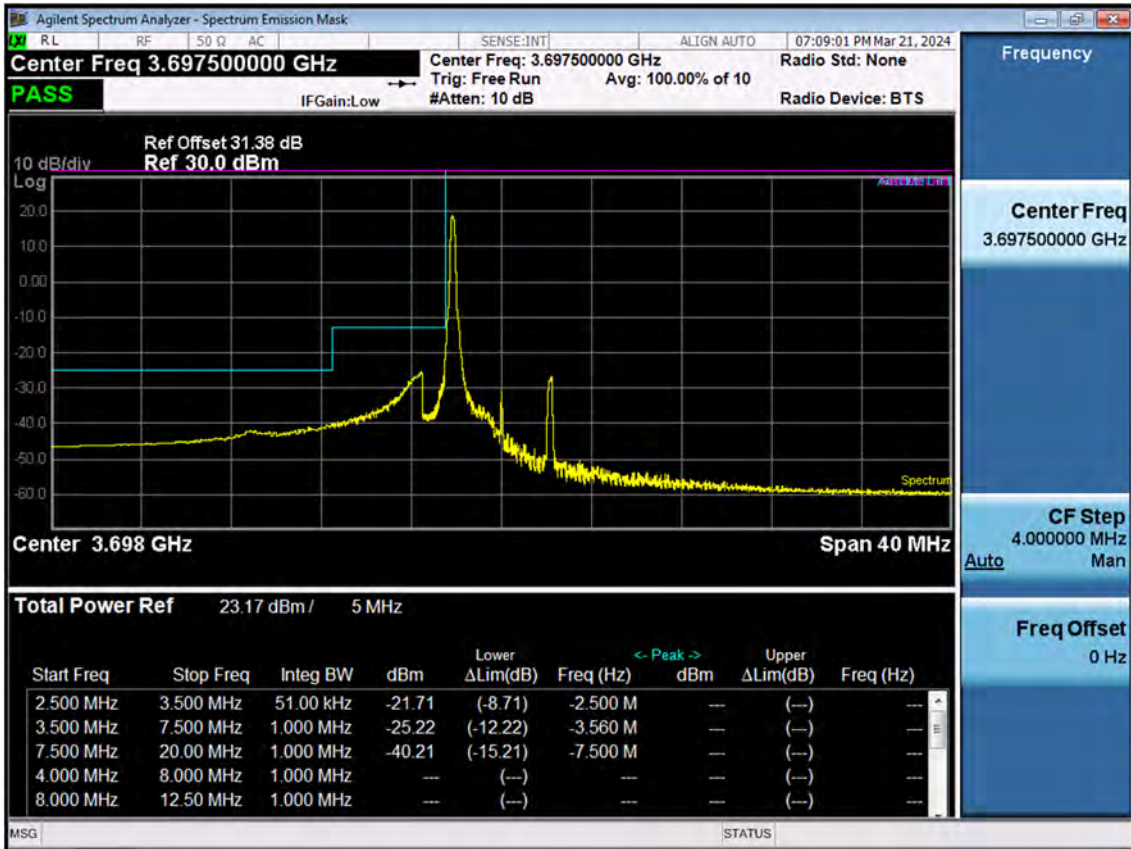

BAND 48.5 M\_BandEdge(Upper)\_High\_3697.5 MHz\_QPSK\_1RB

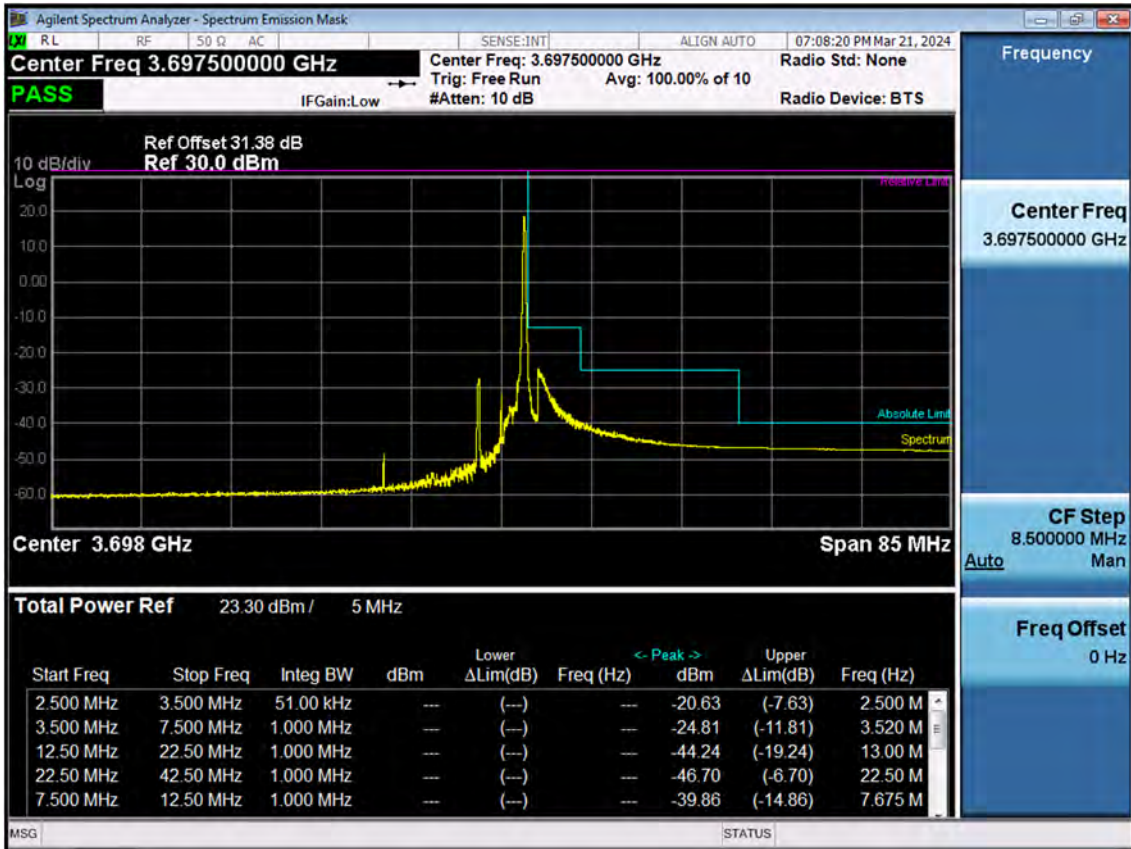


BAND 48. 10 M\_BandEdge(Lower)\_Low\_3555 MHz\_QPSK\_Full RB

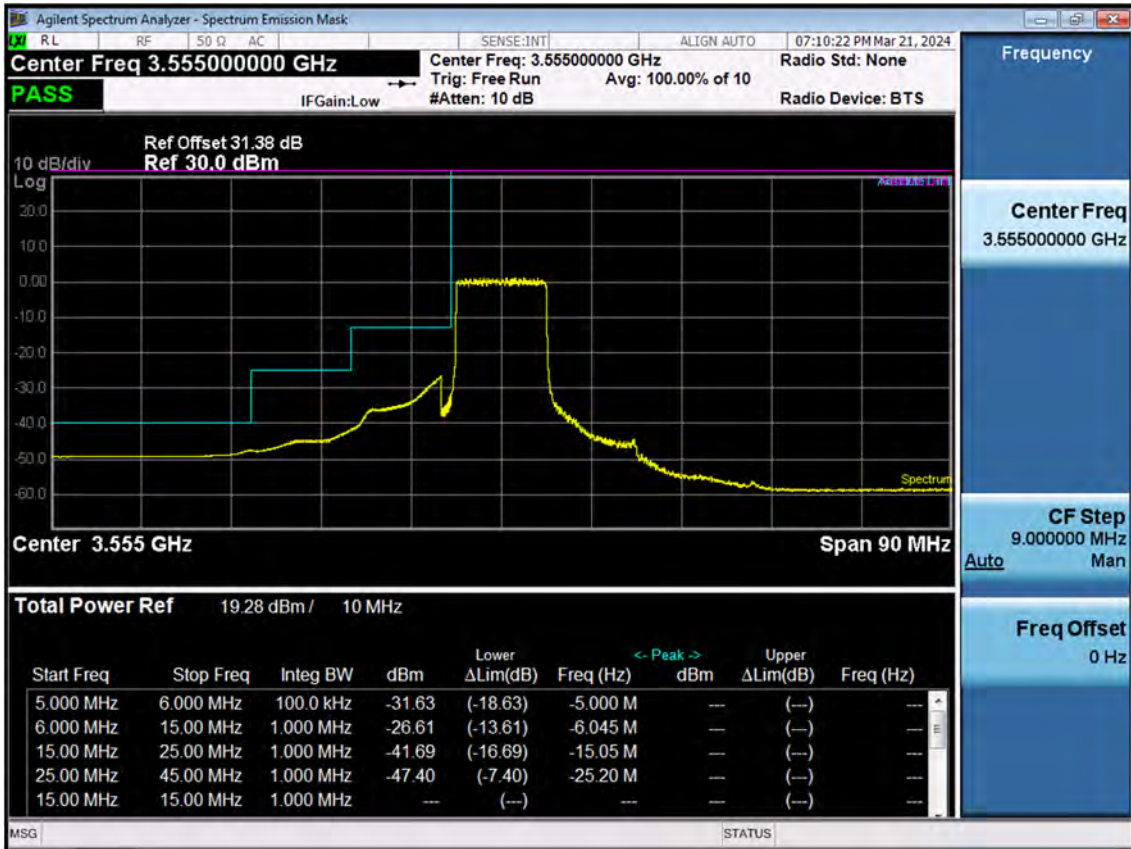


BAND 48. 10 M\_BandEdge(Upper)\_Low\_3555 MHz\_QPSK\_Full RB



BAND 48. 10 M\_BandEdge(Lower)\_Low\_3555 MHz\_QPSK\_1RB

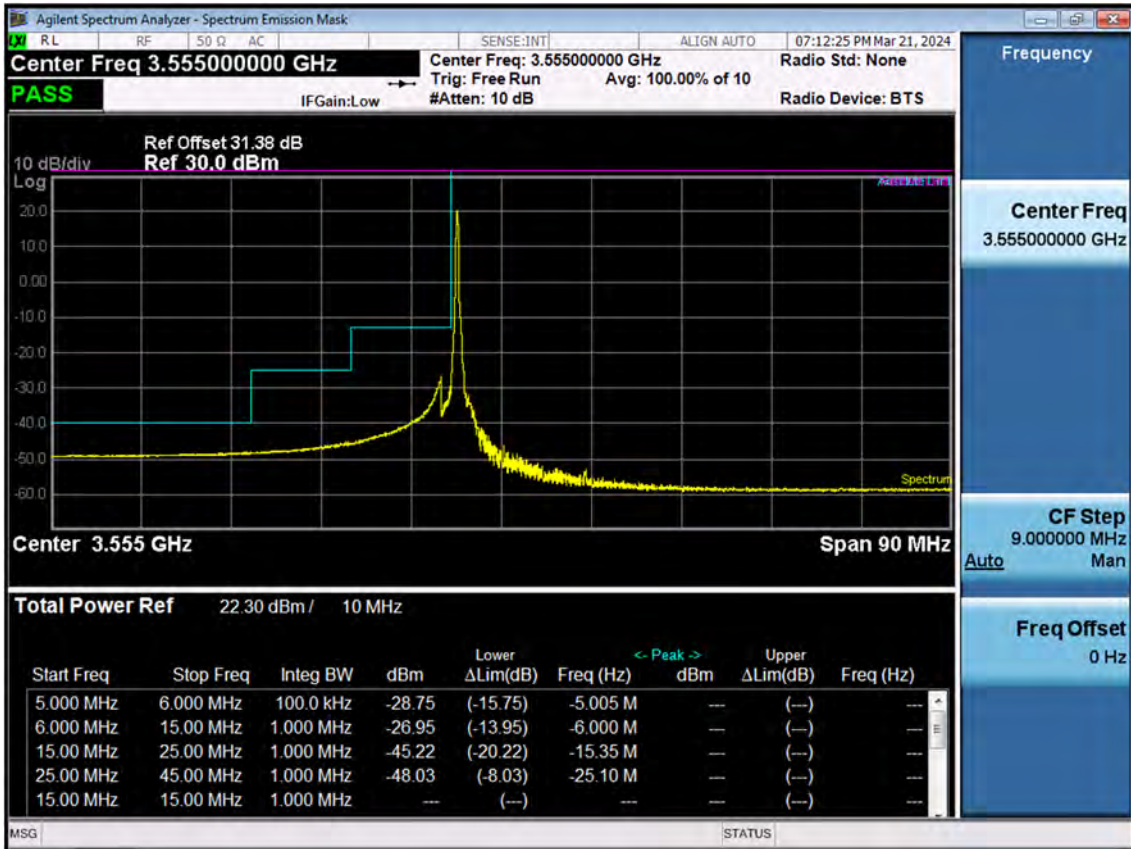


BAND 48. 10 M\_BandEdge(Upper)\_Low\_3555 MHz\_QPSK\_1RB

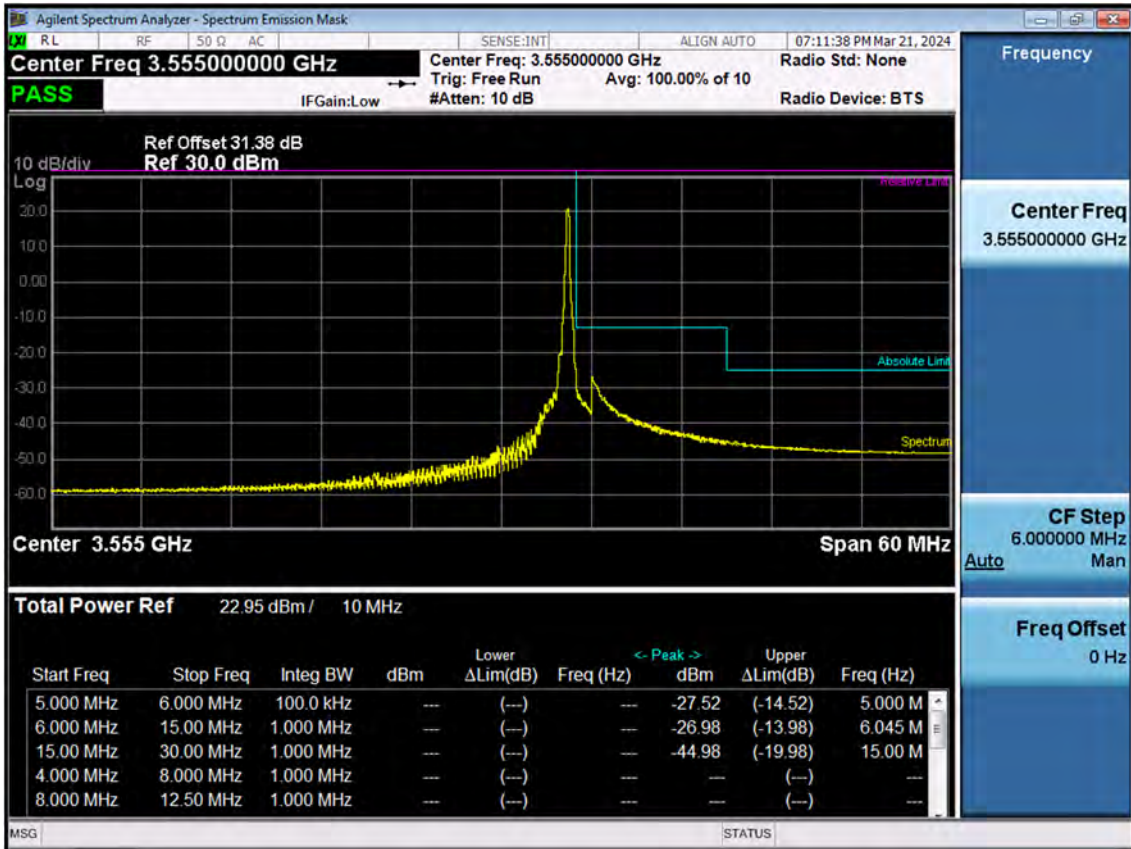





BAND 48. 10 M\_BandEdge(Center)\_Mid\_3625 MHz\_QPSK\_Full RB

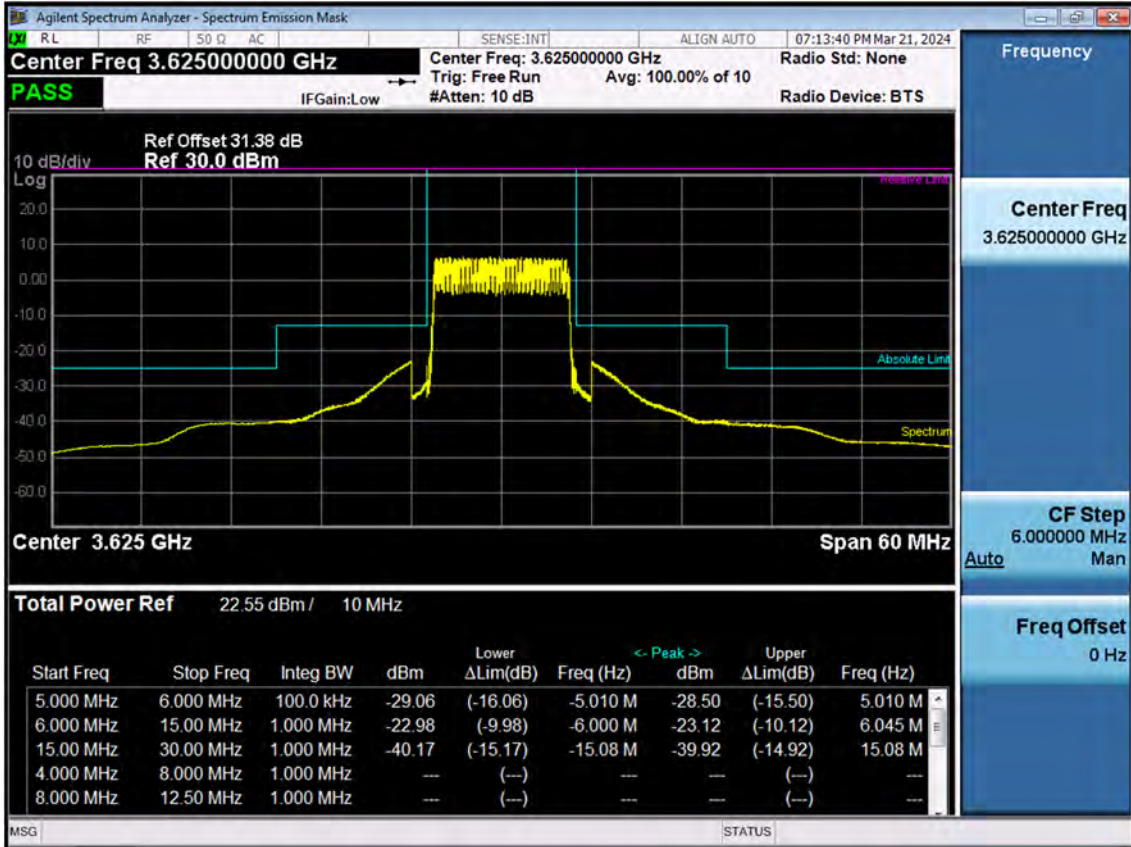


BAND 48. 10 M\_BandEdge(Lower)\_Mid\_3625 MHz\_QPSK\_1RB

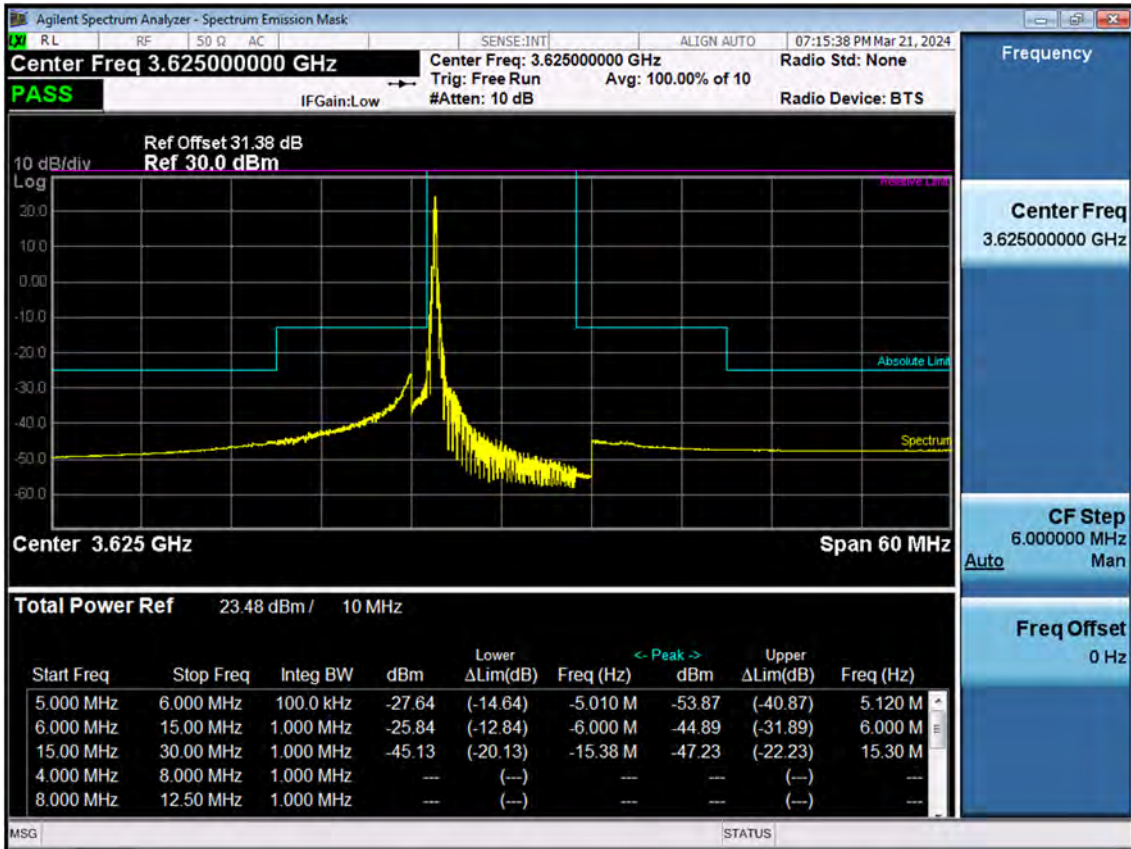

BAND 48. 10 M\_BandEdge(Upper)\_Mid\_3625 MHz\_QPSK\_1RB

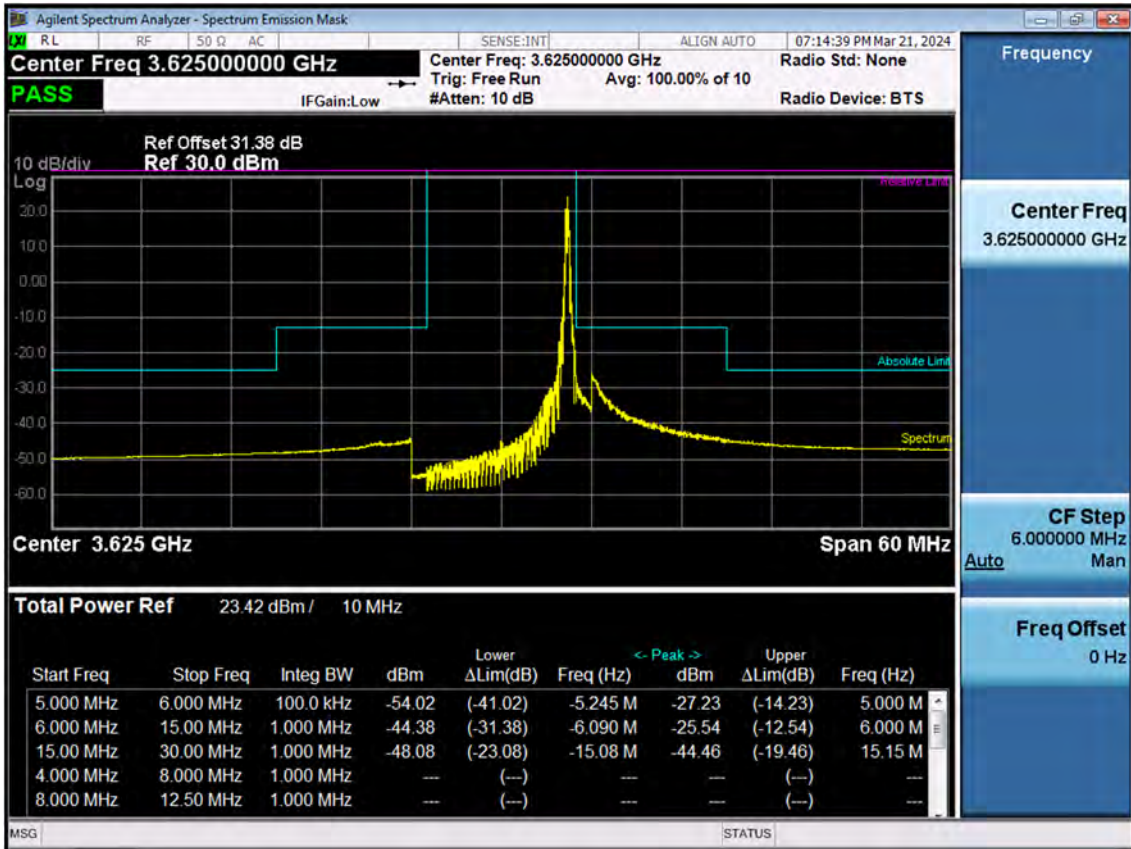


BAND 48. 10 M\_BandEdge(Lower)\_High\_3695 MHz\_QPSK\_Full RB

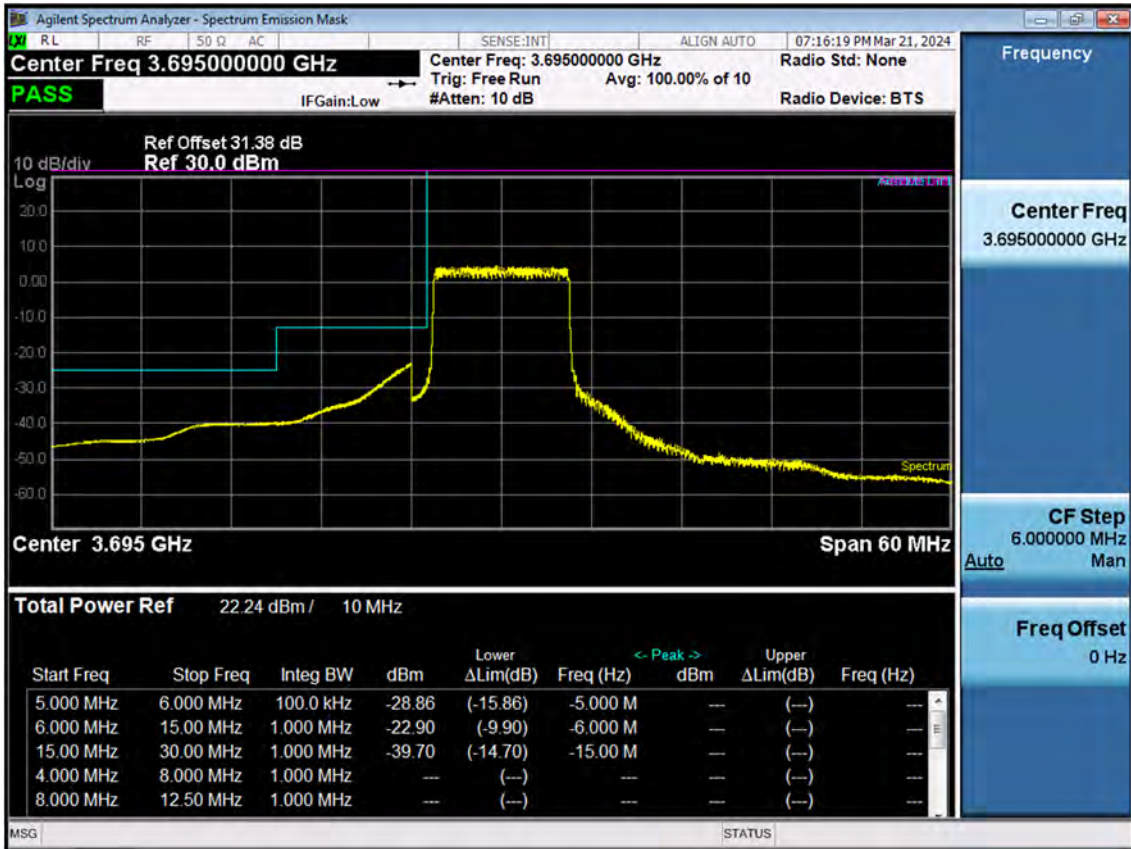


BAND 48. 10 M\_BandEdge(Upper)\_High\_3695 MHz\_QPSK\_Full RB



BAND 48. 10 M\_BandEdge(Lower)\_High\_3695 MHz\_QPSK\_1RB

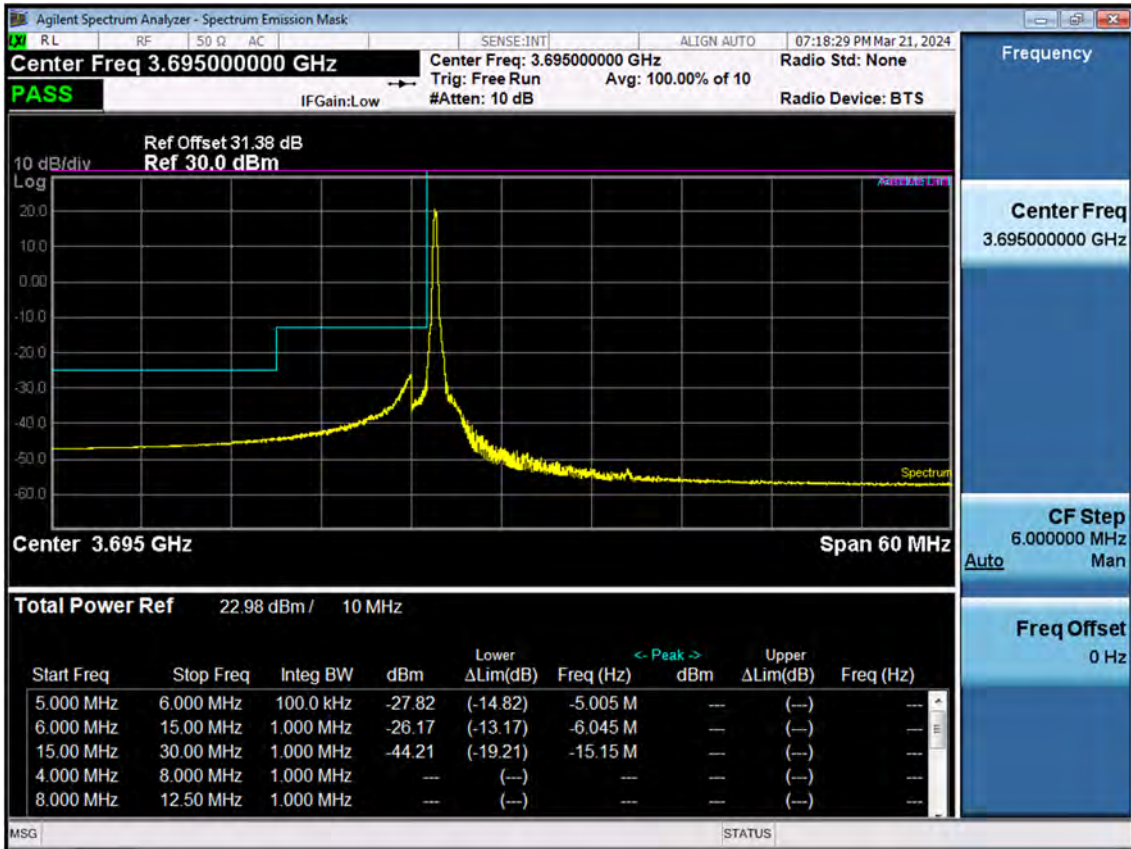

BAND 48. 10 M\_BandEdge(Upper)\_High\_3695 MHz\_QPSK\_1RB

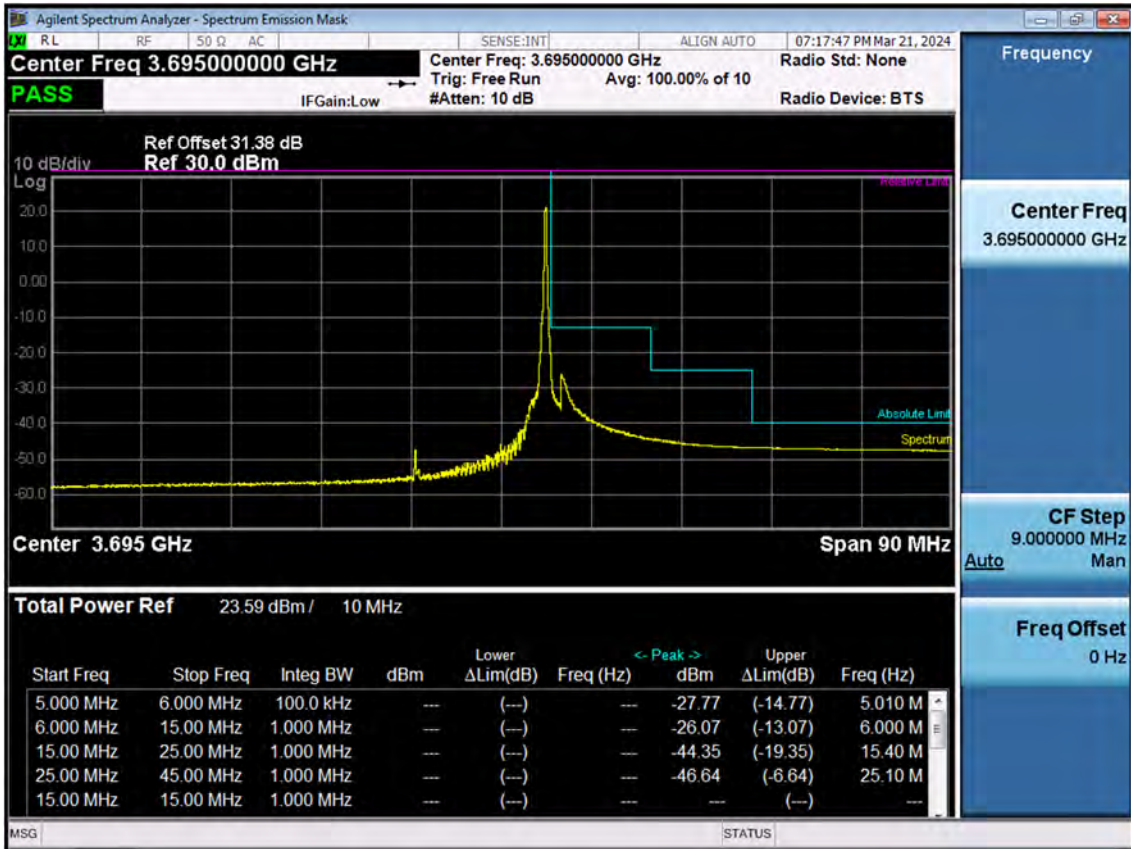

BAND 48. 15 M\_BandEdge(Lower)\_Low\_3557.5 MHz\_QPSK\_Full RB







BAND 48. 15 M\_BandEdge(Upper)\_Low\_3557.5 MHz\_QPSK\_Full RB




BAND 48. 15 M\_BandEdge(Lower)\_Low\_3557.5 MHz\_QPSK\_1RB

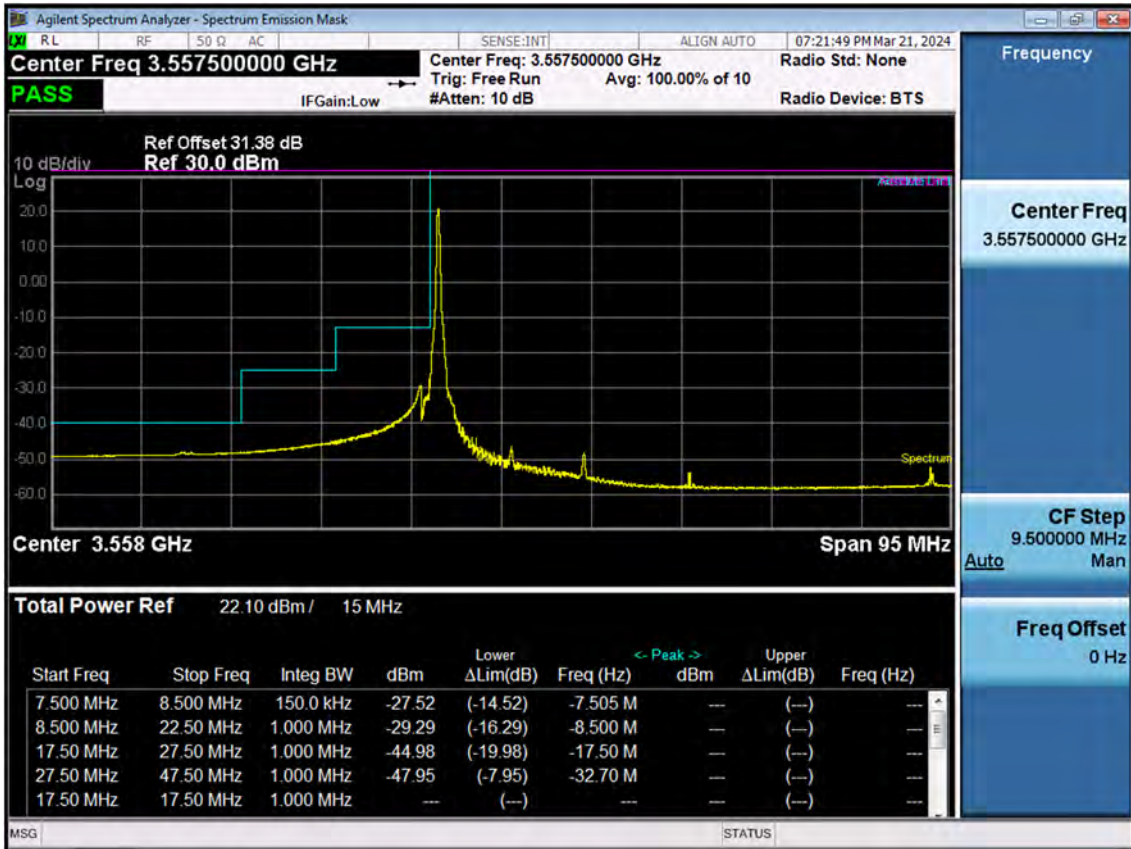


BAND 48. 15 M\_BandEdge(Upper)\_Low\_3557.5 MHz\_QPSK\_1RB

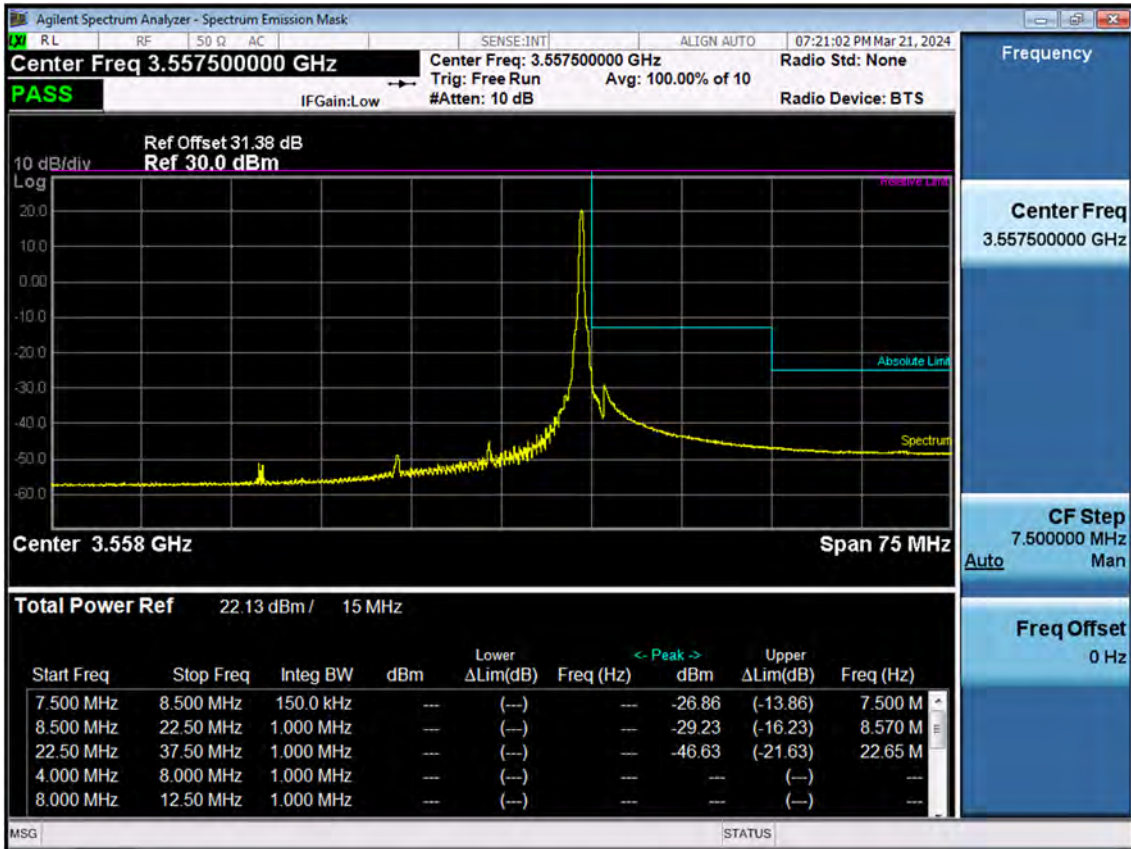


BAND 48. 15 M\_BandEdge(Center)\_Mid\_3625 MHz\_QPSK\_Full RB

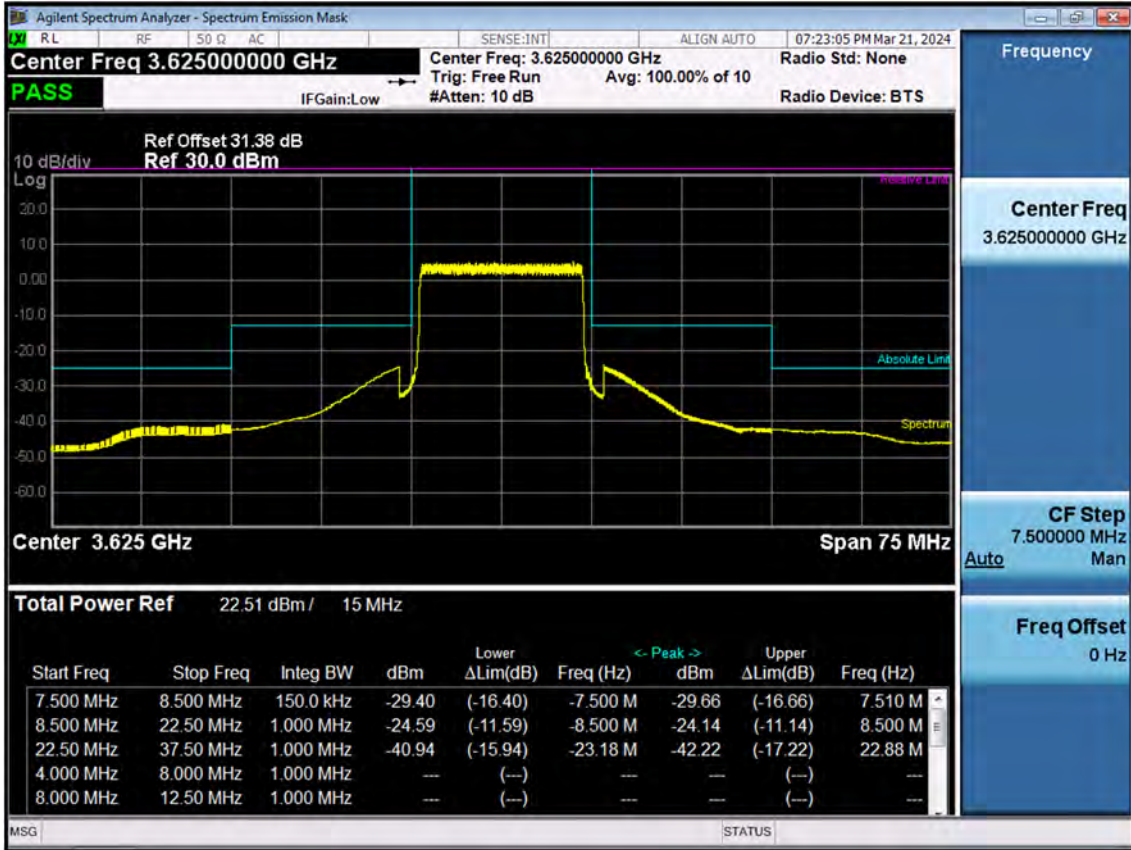


BAND 48. 15 M\_BandEdge(Lower)\_Mid\_3625 MHz\_QPSK\_1RB

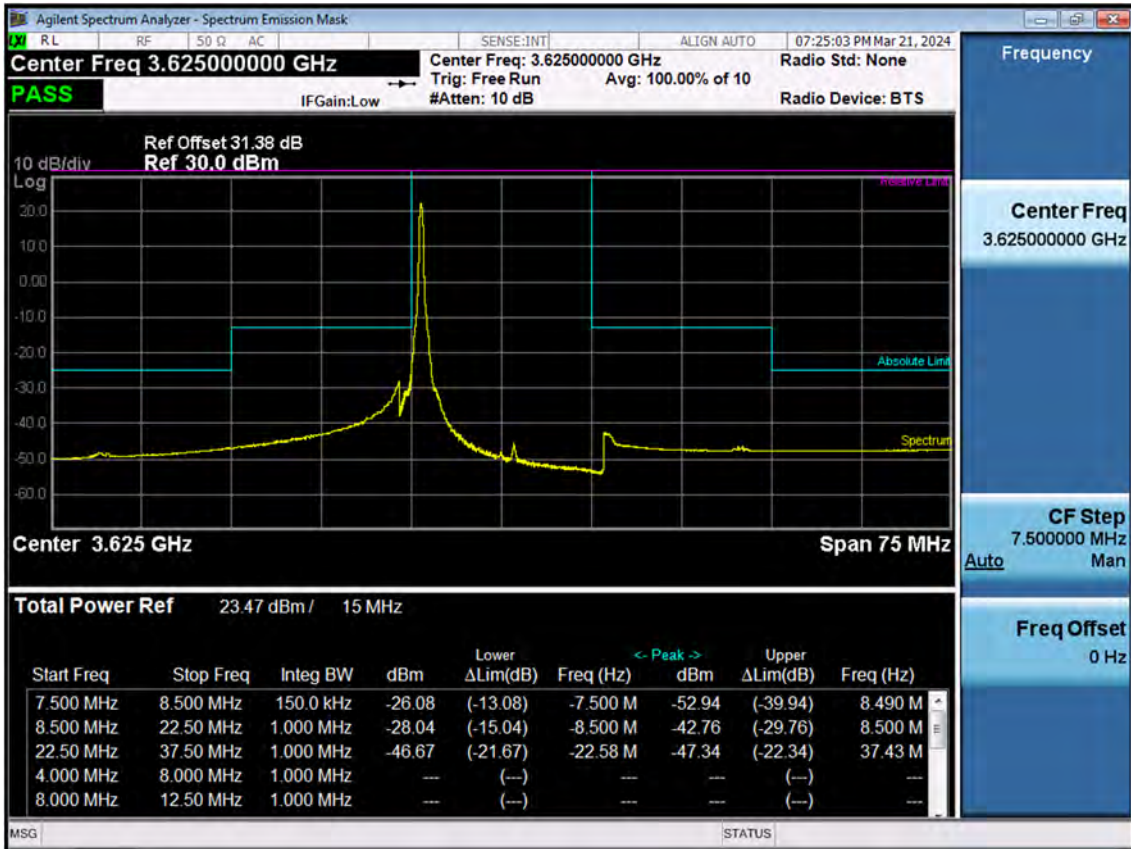

BAND 48. 15 M\_BandEdge(Upper)\_Mid\_3625 MHz\_QPSK\_1RB

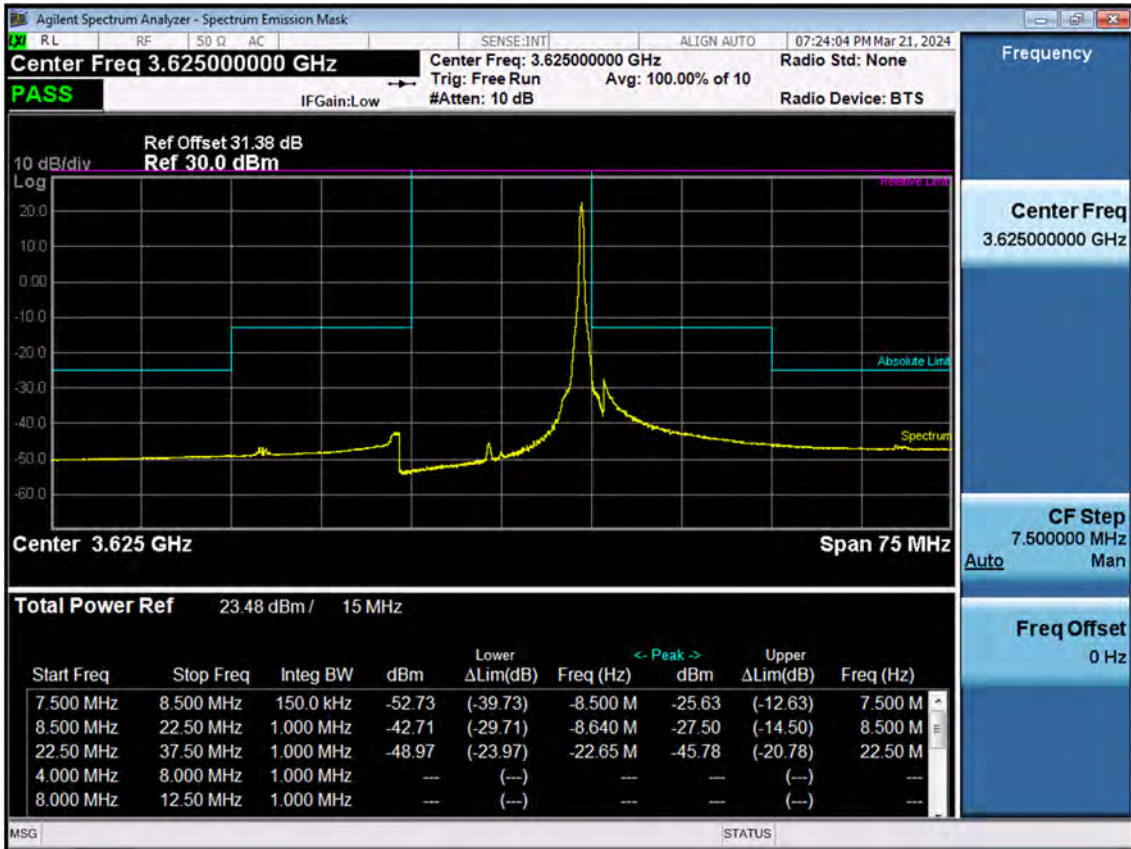

BAND 48. 15 M\_BandEdge(Lower)\_High\_3692.5 MHz\_QPSK\_Full RB

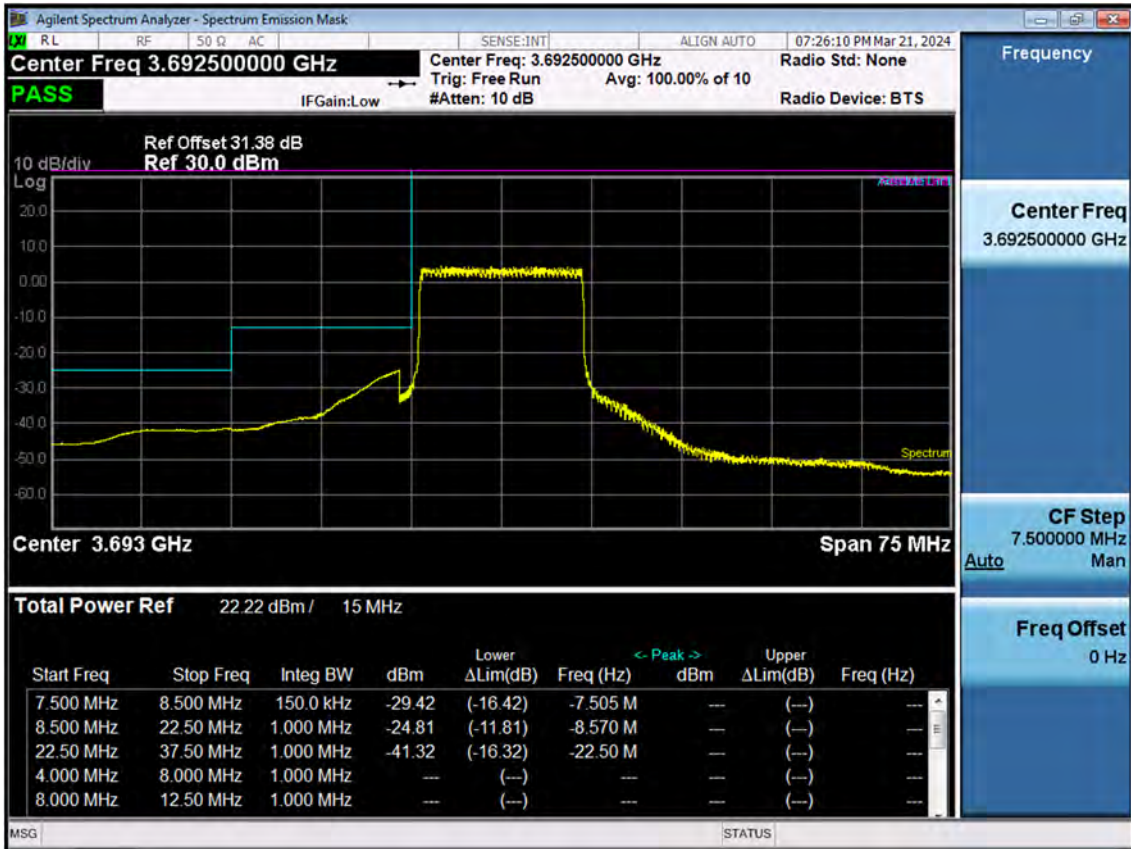


BAND 48. 15 M\_BandEdge(Upper)\_High\_3692.5 MHz\_QPSK\_Full RB







BAND 48. 15 M\_BandEdge(Lower)\_High\_3692.5 MHz\_QPSK\_1RB

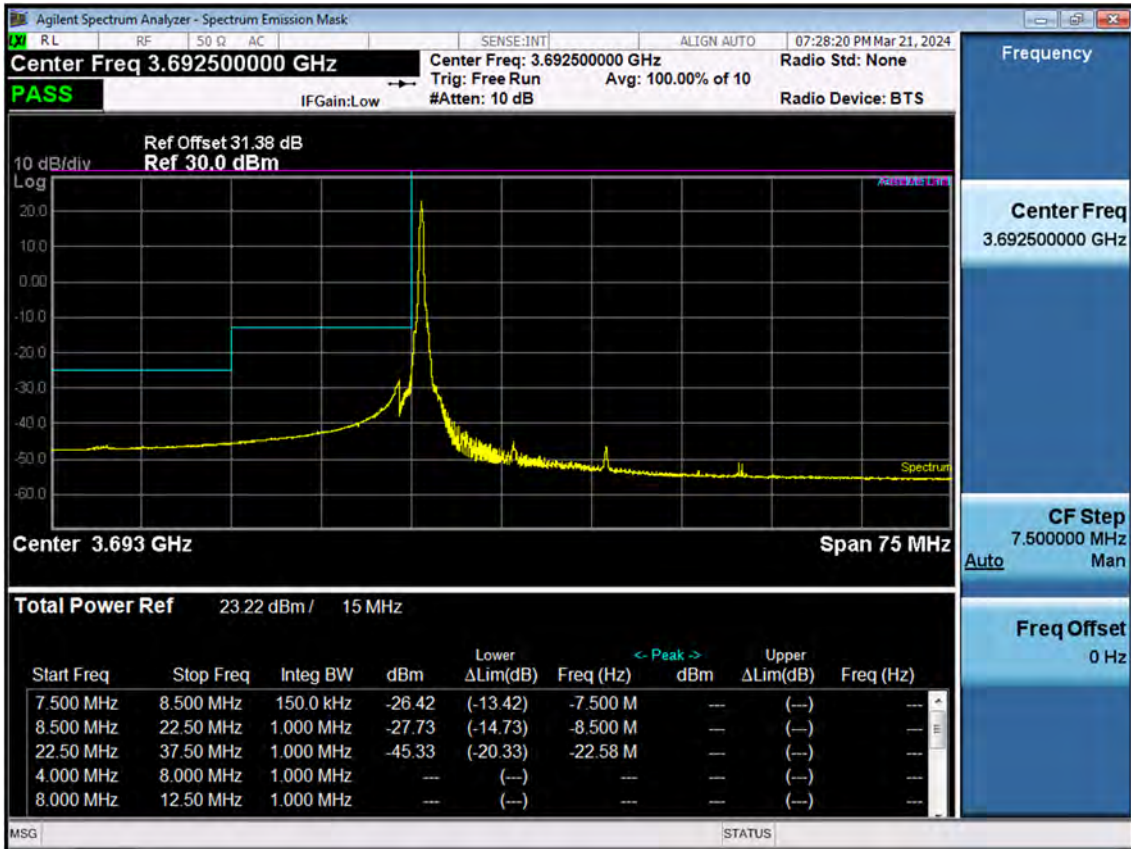


BAND 48. 15 M\_BandEdge(Upper)\_High\_3692.5 MHz\_QPSK\_1RB

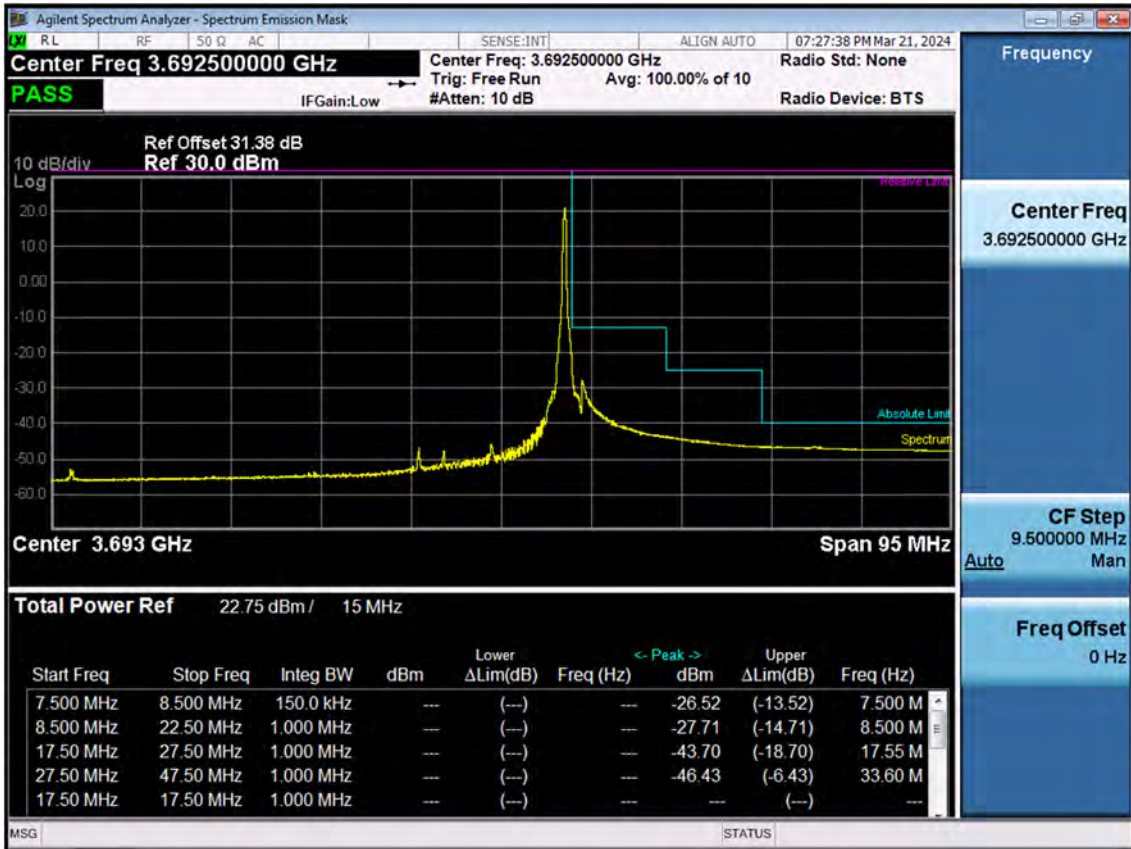


BAND 48. 20 M\_BandEdge(Lower)\_Low\_3560 MHz\_QPSK\_Full RB

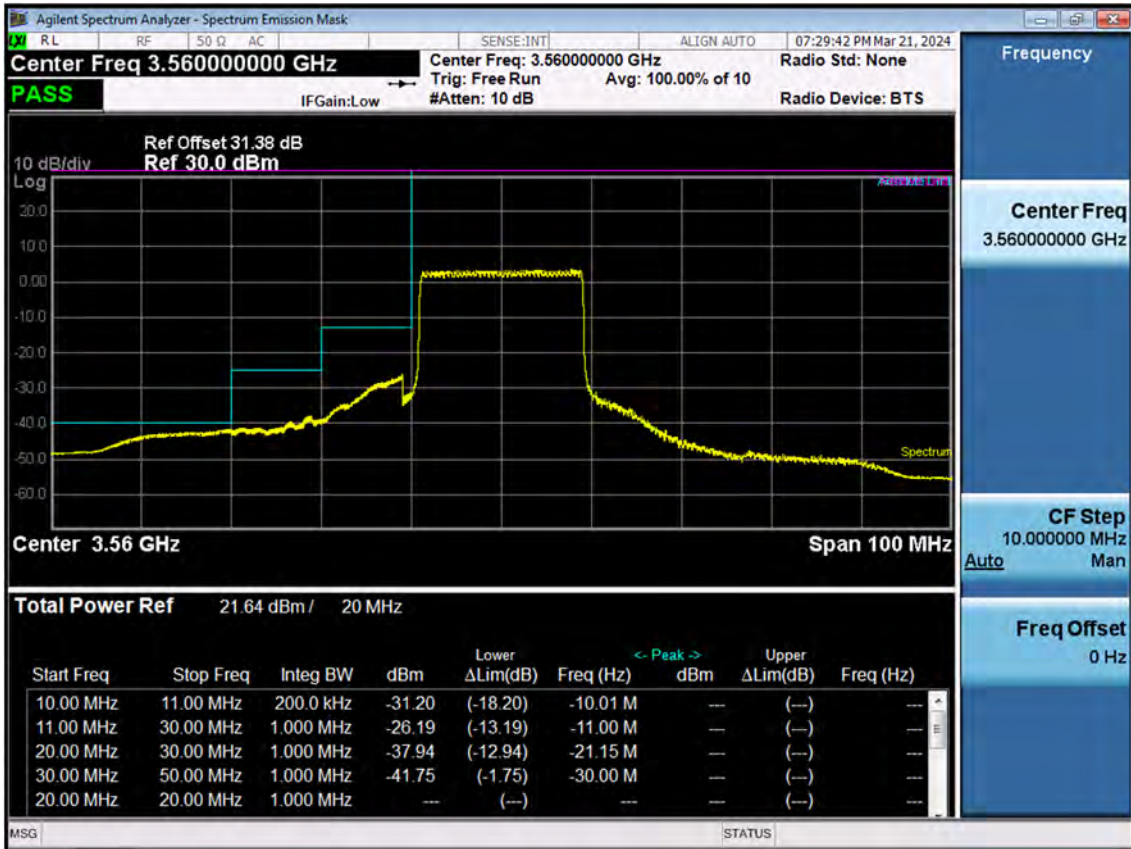


BAND 48. 20 M\_BandEdge(Upper)\_Low\_3560 MHz\_QPSK\_Full RB

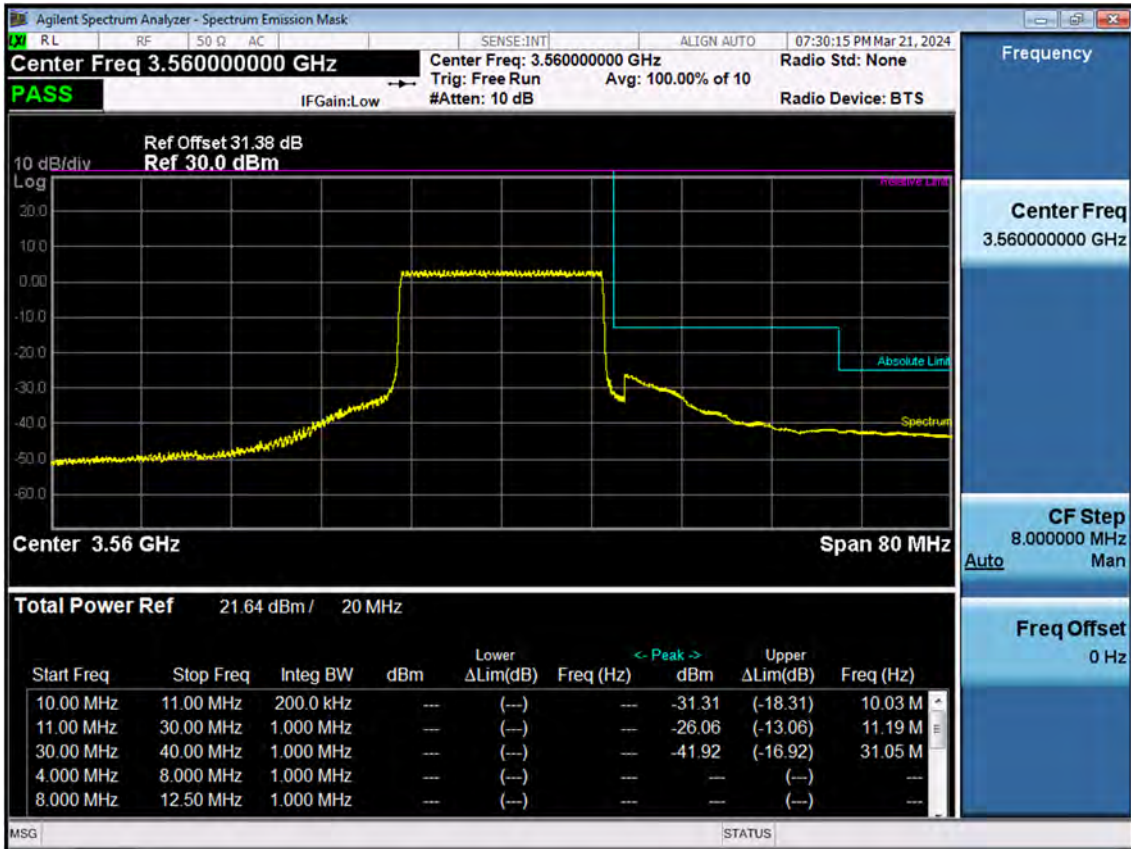


BAND 48. 20 M\_BandEdge(Lower)\_Low\_3560 MHz\_QPSK\_1RB

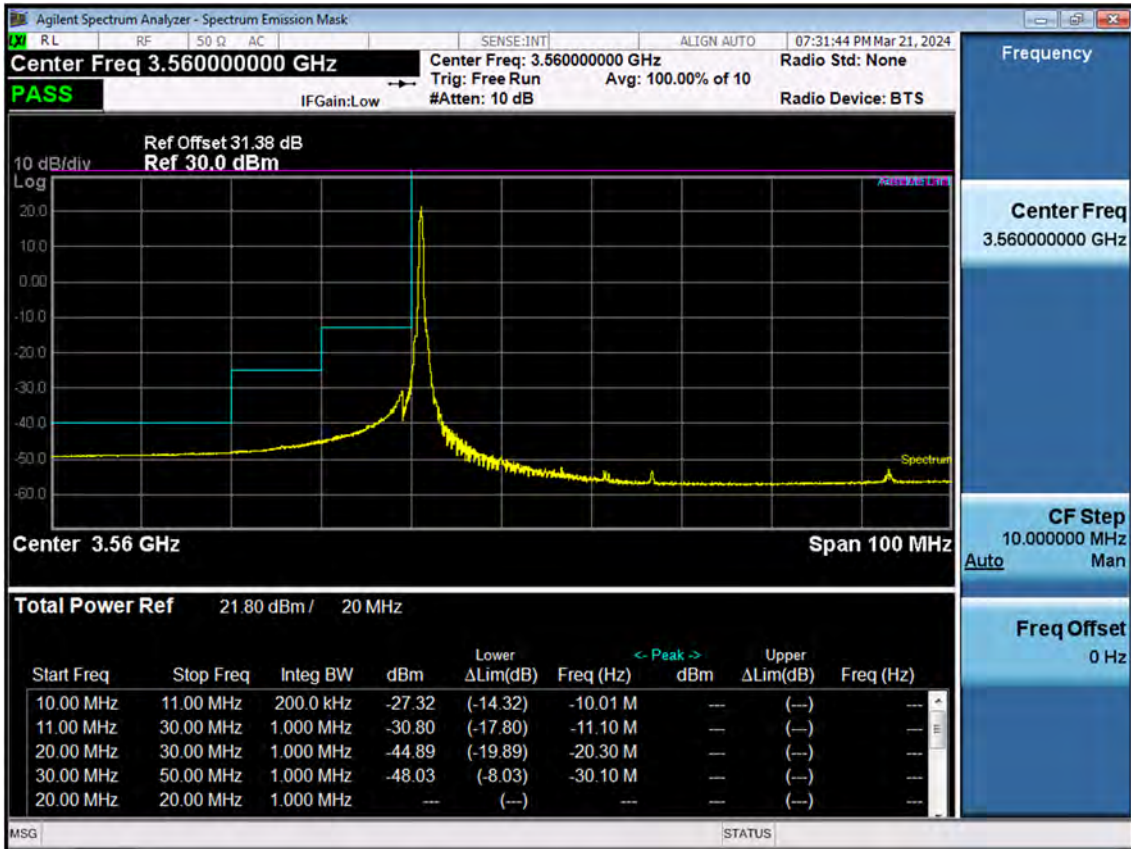


BAND 48. 20 M\_BandEdge(Upper)\_Low\_3560 MHz\_QPSK\_1RB

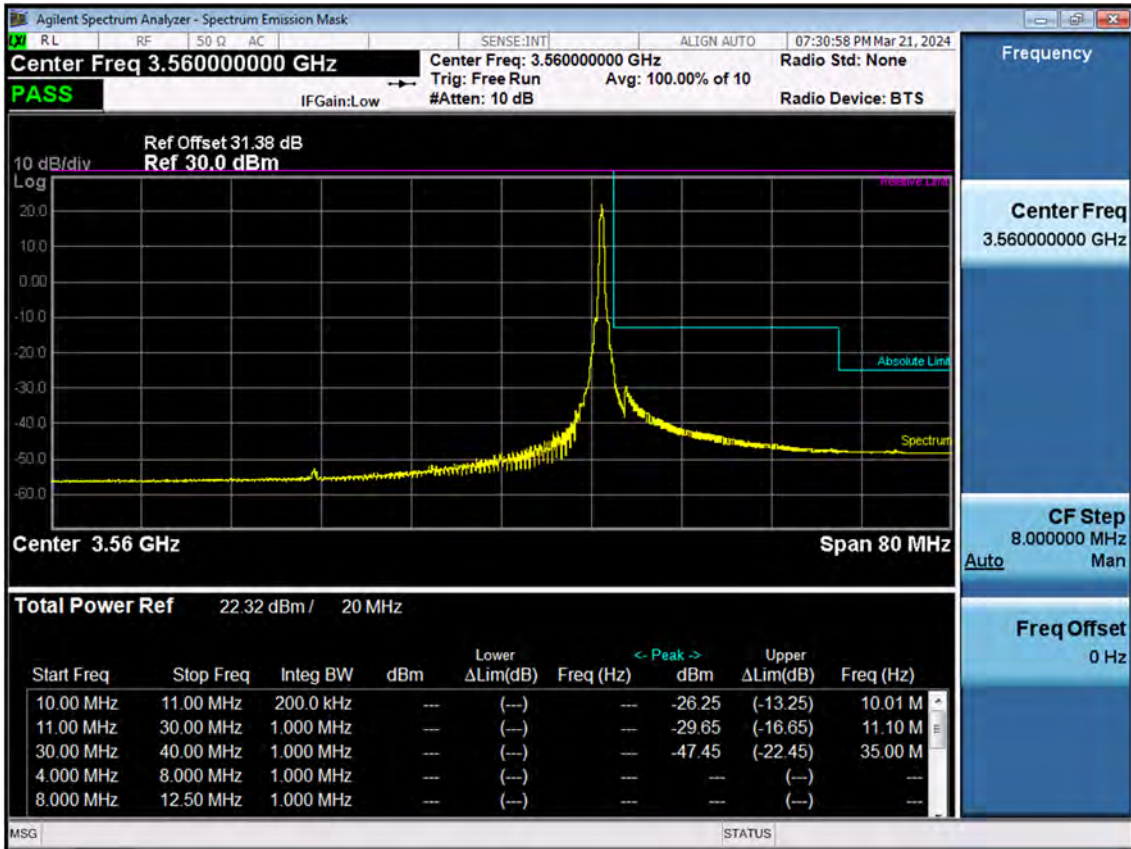

BAND 48. 20 M\_BandEdge(Center)\_Mid\_3625 MHz\_QPSK\_Full RB

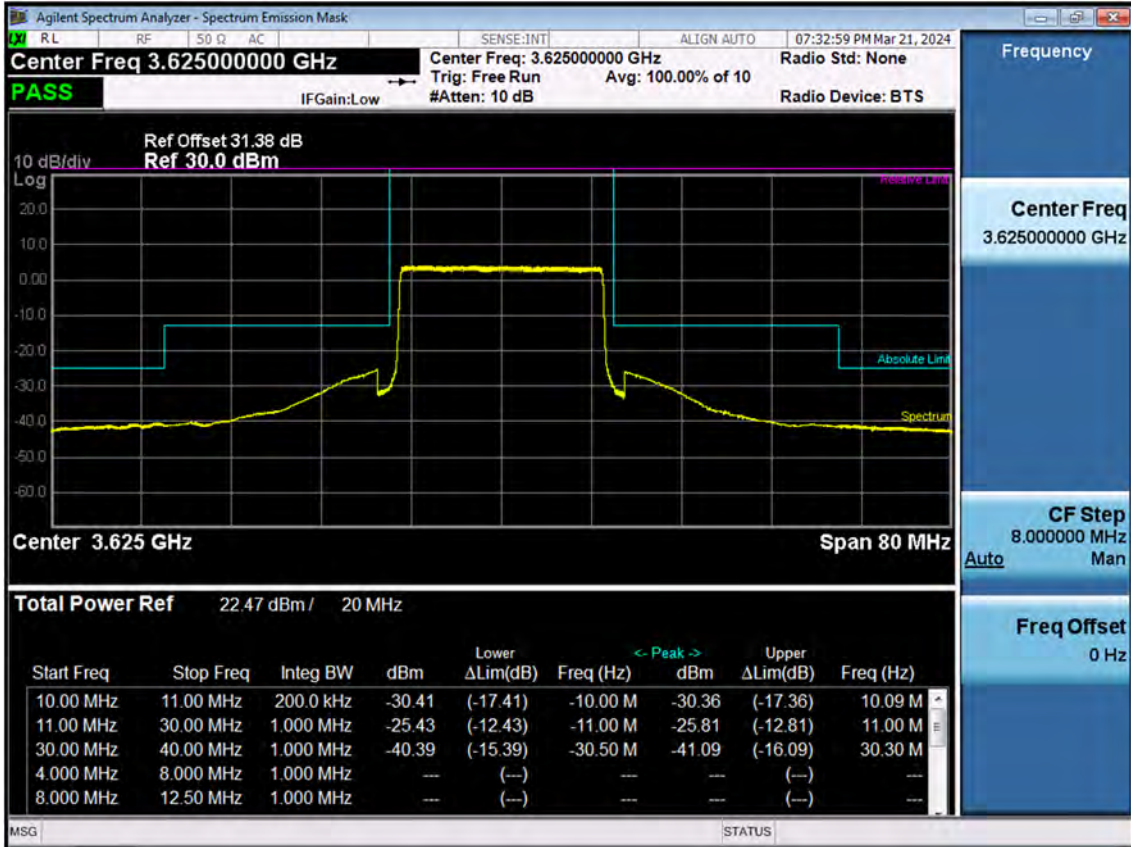


BAND 48. 20 M\_BandEdge(Lower)\_Mid\_3625 MHz\_QPSK\_1RB

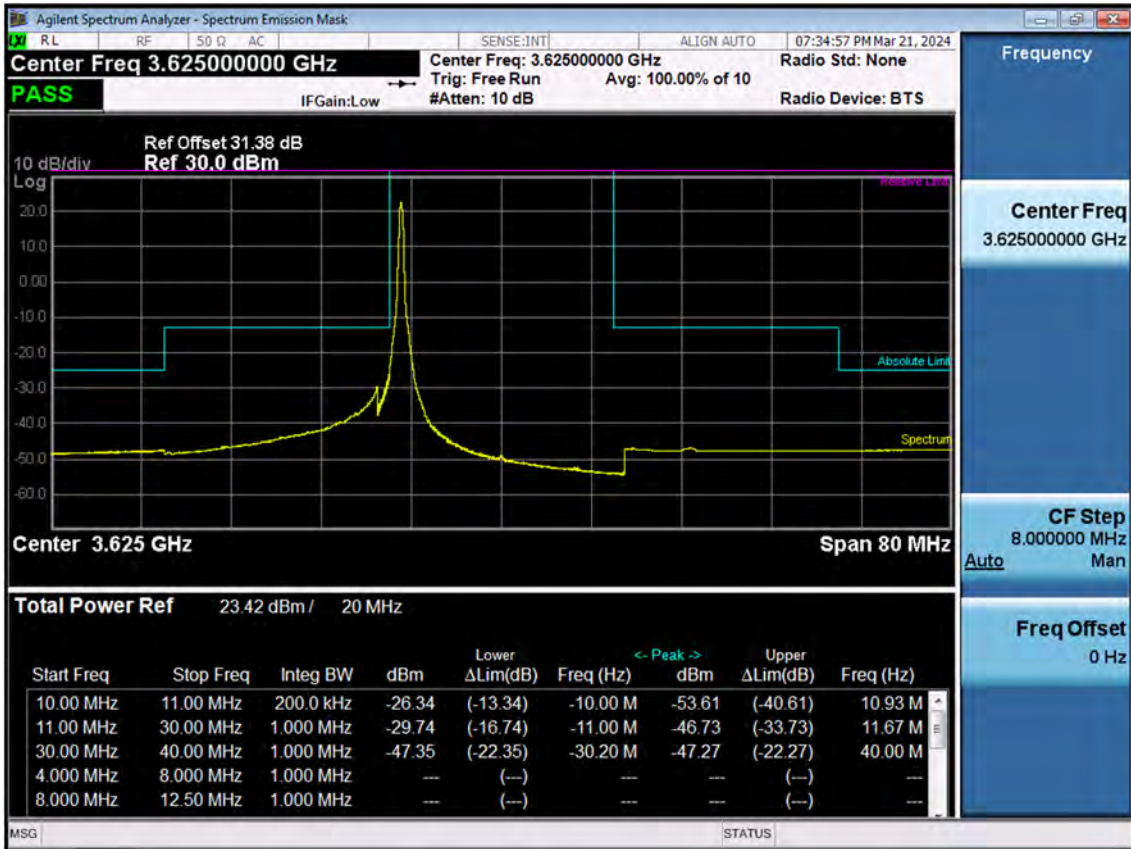





BAND 48. 20 M\_BandEdge(Upper)\_Mid\_3625 MHz\_QPSK\_1RB

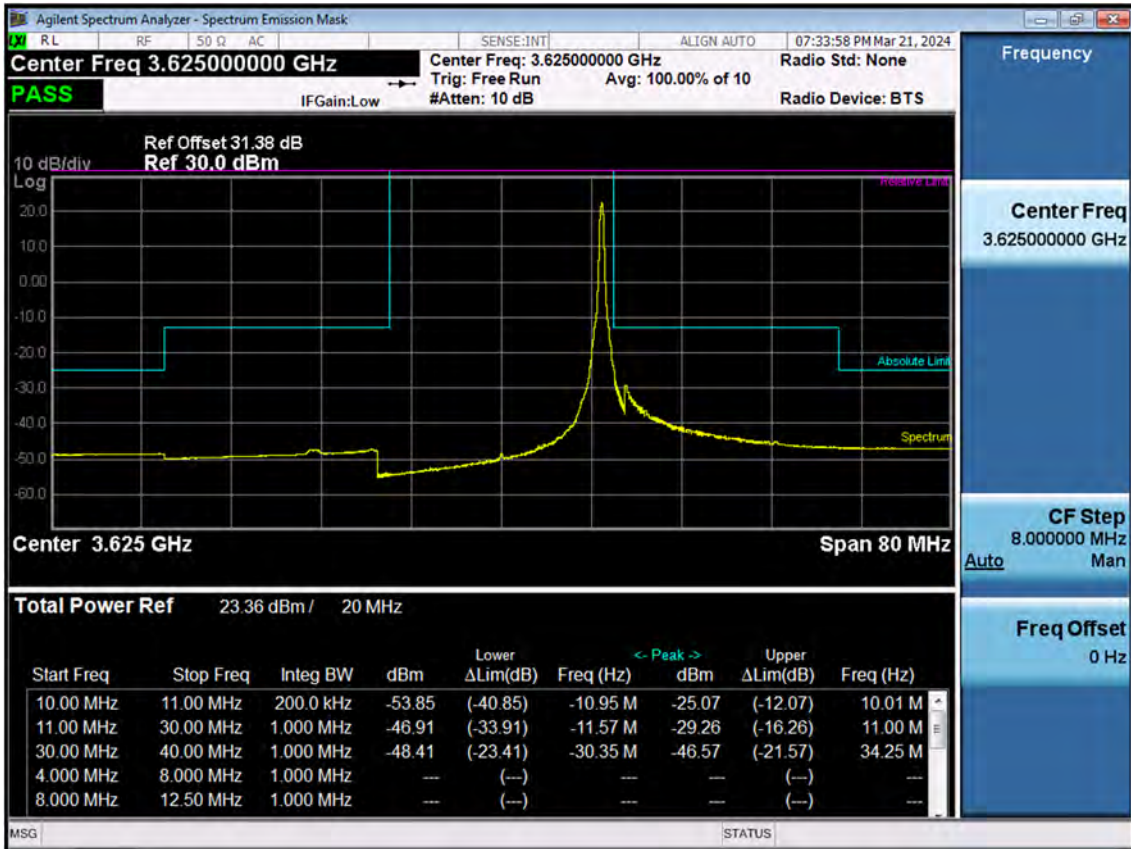


BAND 48. 20 M\_BandEdge(Lower)\_High\_3690 MHz\_QPSK\_Full RB

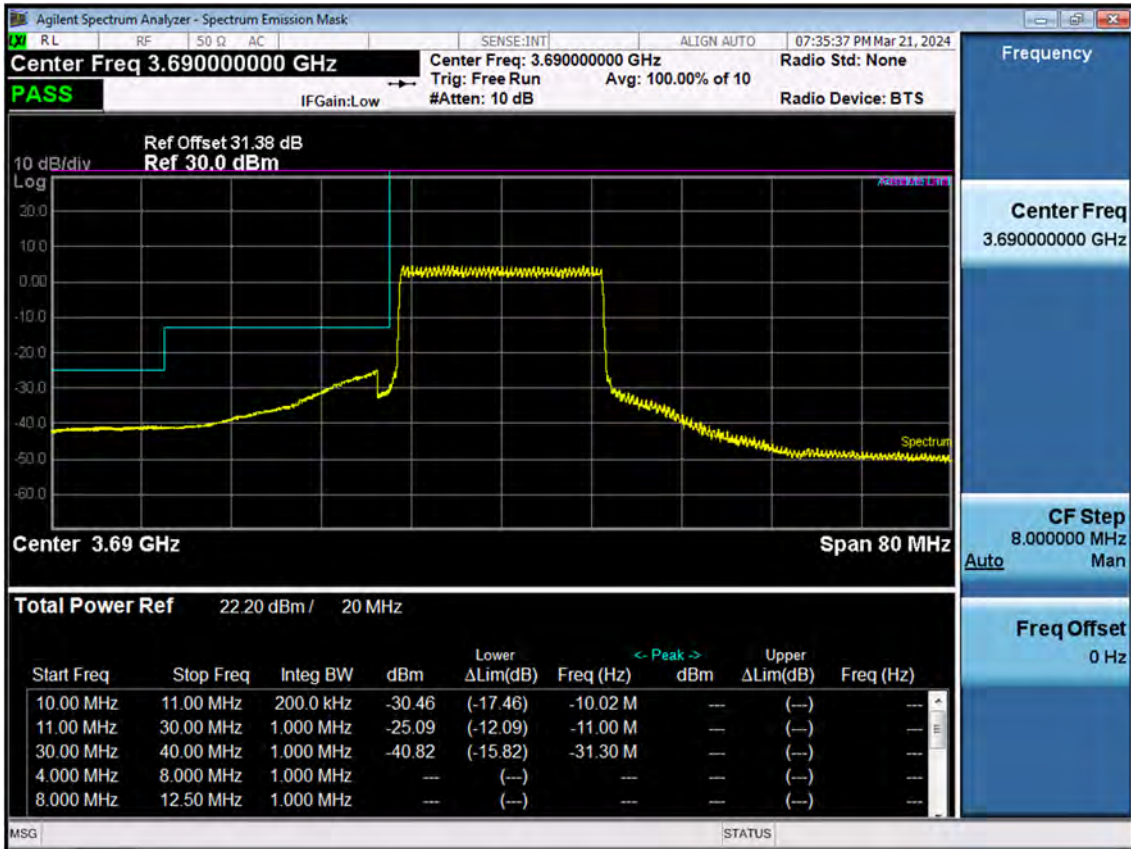


BAND 48. 20 M\_BandEdge(Upper)\_High\_3690 MHz\_QPSK\_Full RB

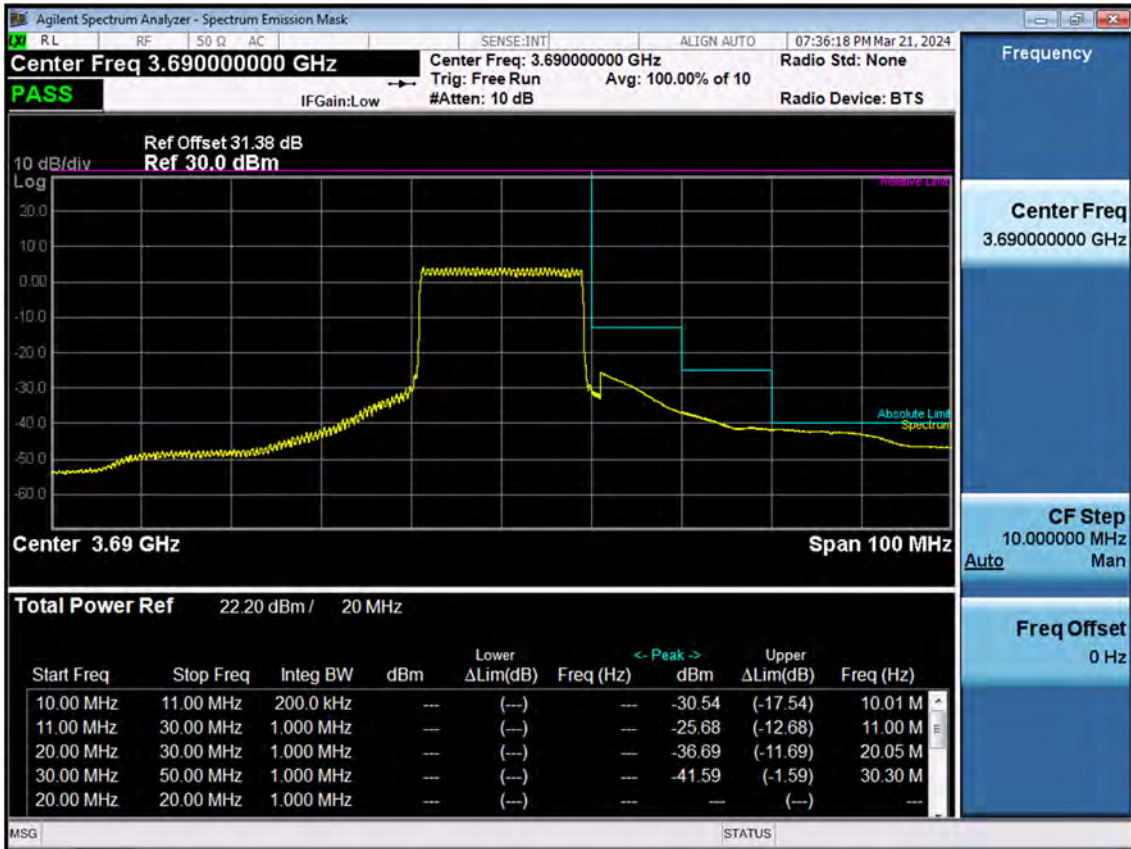


BAND 48. 20 M\_BandEdge(Lower)\_High\_3690 MHz\_QPSK\_1RB

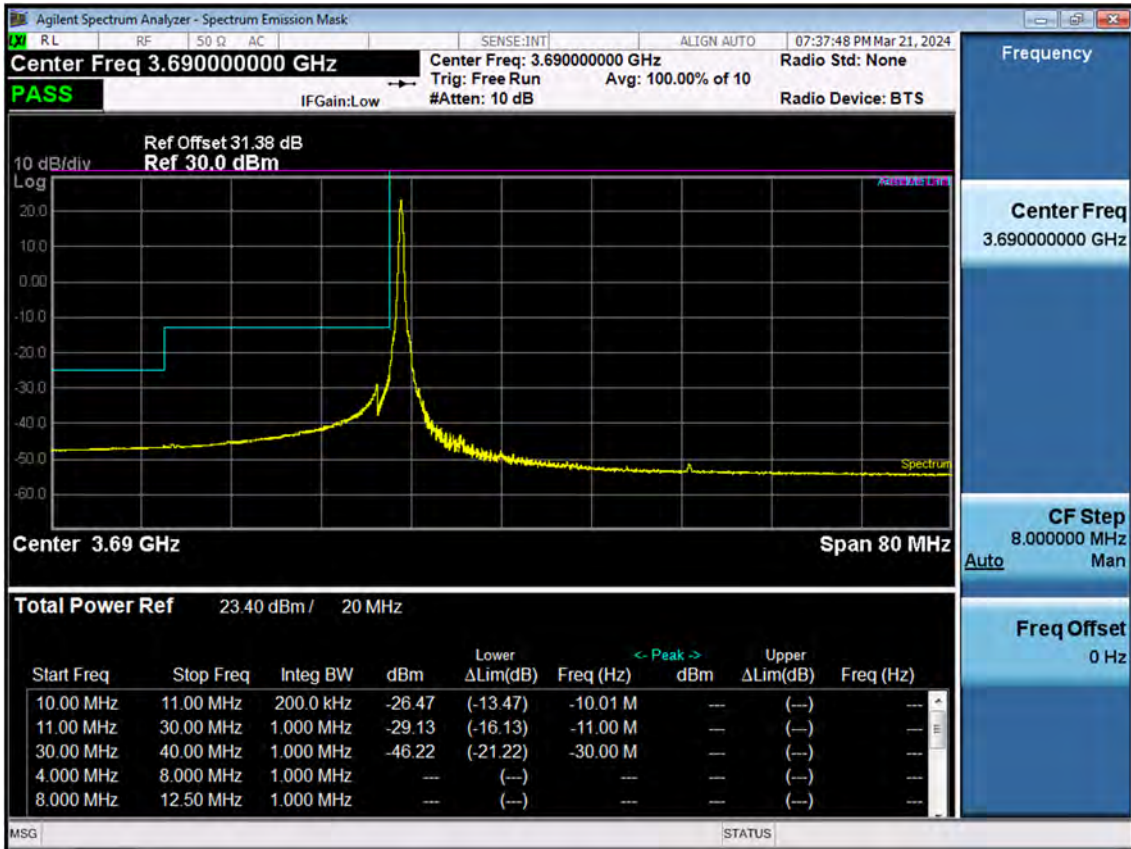

BAND 48. 20 M\_BandEdge(Upper)\_High\_3690 MHz\_QPSK\_1RB

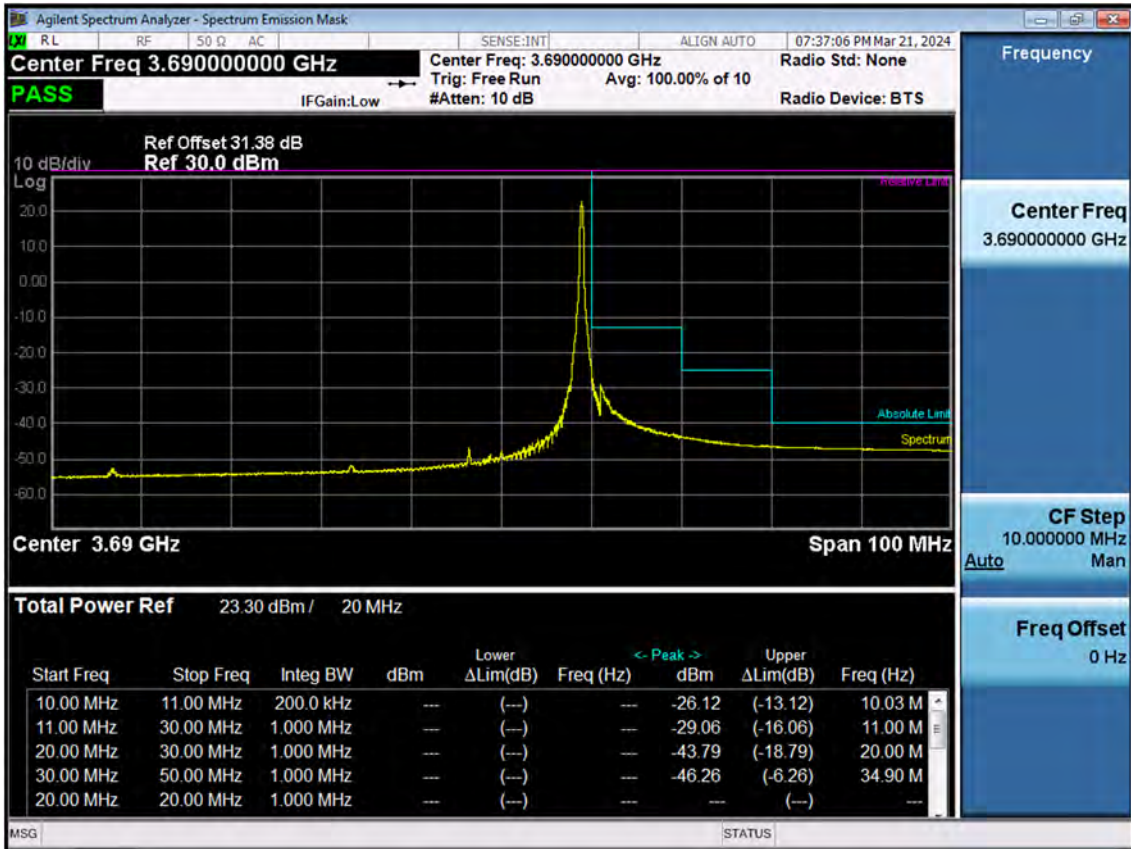

BAND 48. Conducted Spurious Plot 1 (5 MHz Ch.55265 QPSK RB 1, Offset 0)

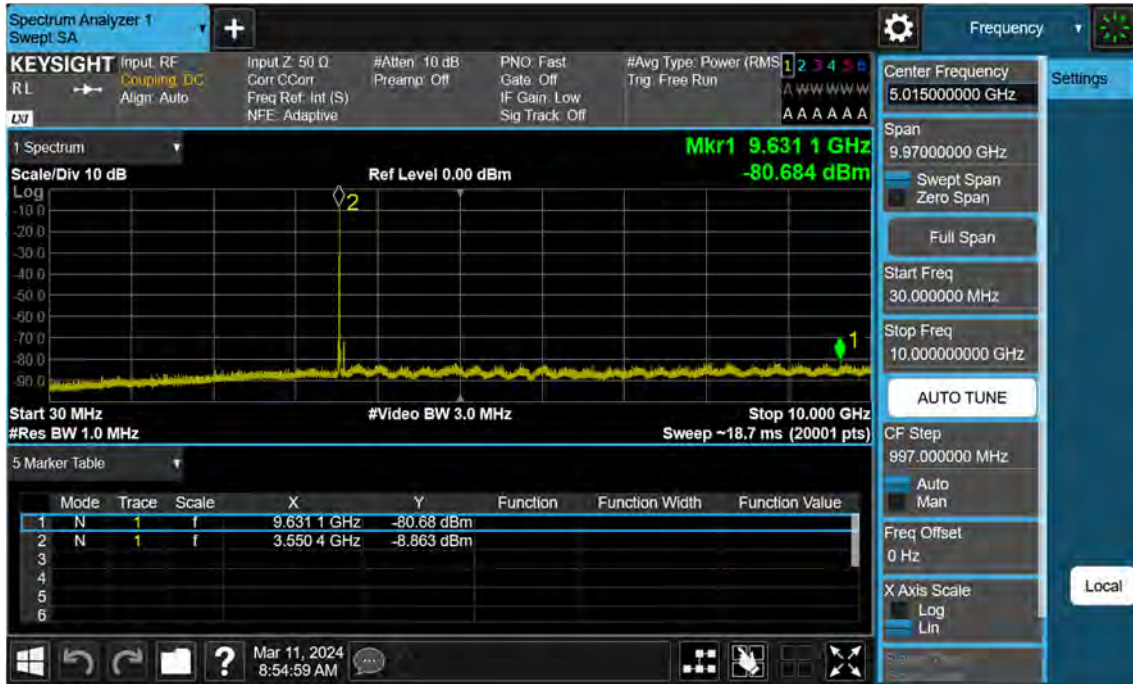

BAND 48. Conducted Spurious Plot 2 (5 MHz Ch. 55265 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 1 (5 MHz Ch.55990 QPSK RB 1, Offset 0)






BAND 48. Conducted Spurious Plot 2 (5 MHz Ch. 55990 QPSK RB 1, Offset 0)




BAND 48. Conducted Spurious Plot 1 (5 MHz Ch.56715 QPSK RB 1, Offset 0)




BAND 48. Conducted Spurious Plot 2 (5 MHz Ch. 56715 QPSK RB 1, Offset 0)

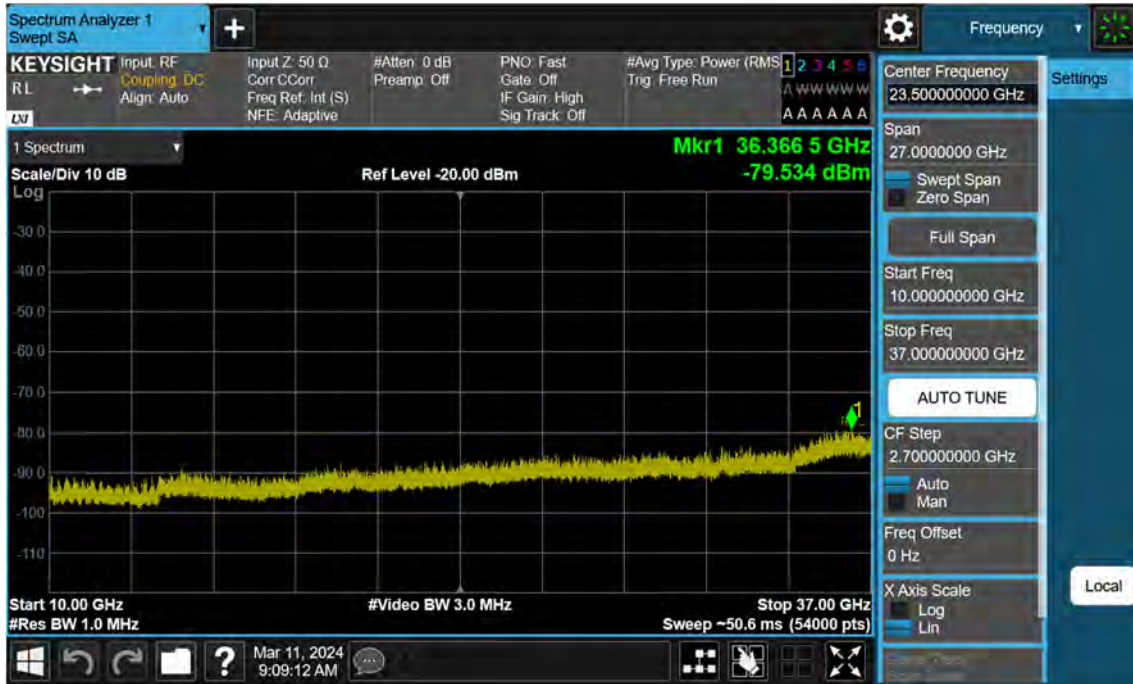

BAND 48. Conducted Spurious Plot 1 (10 MHz Ch.55290 QPSK RB 1, Offset 0)

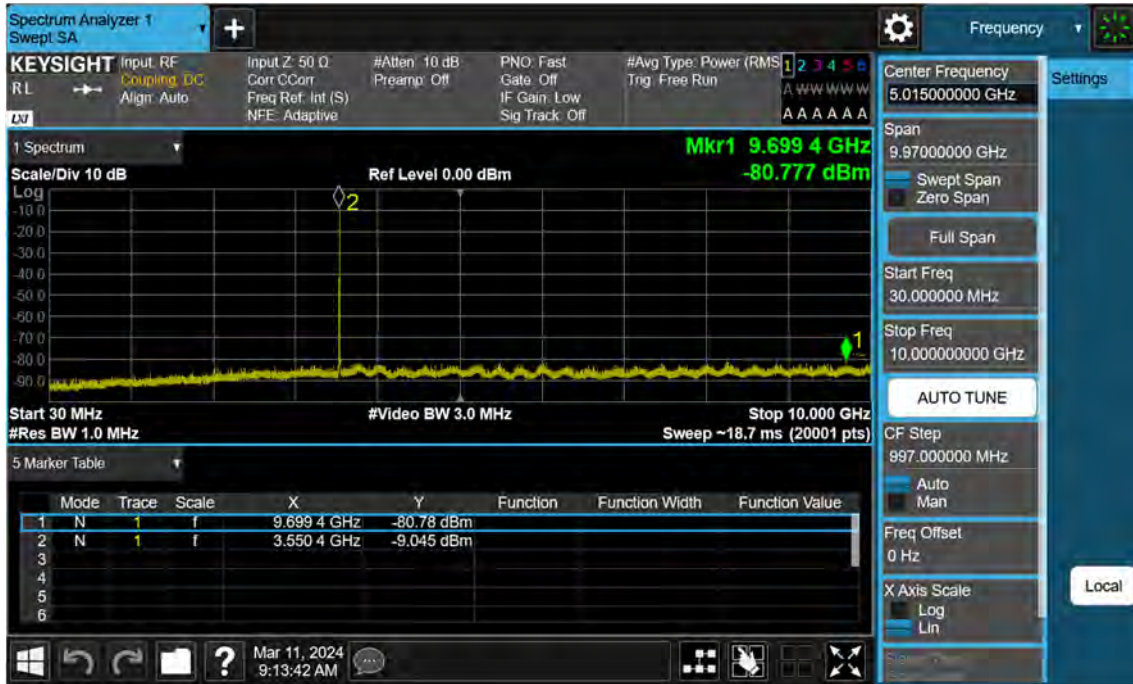

BAND 48. Conducted Spurious Plot 2 (10 MHz Ch. 55290 QPSK RB 1, Offset 0)

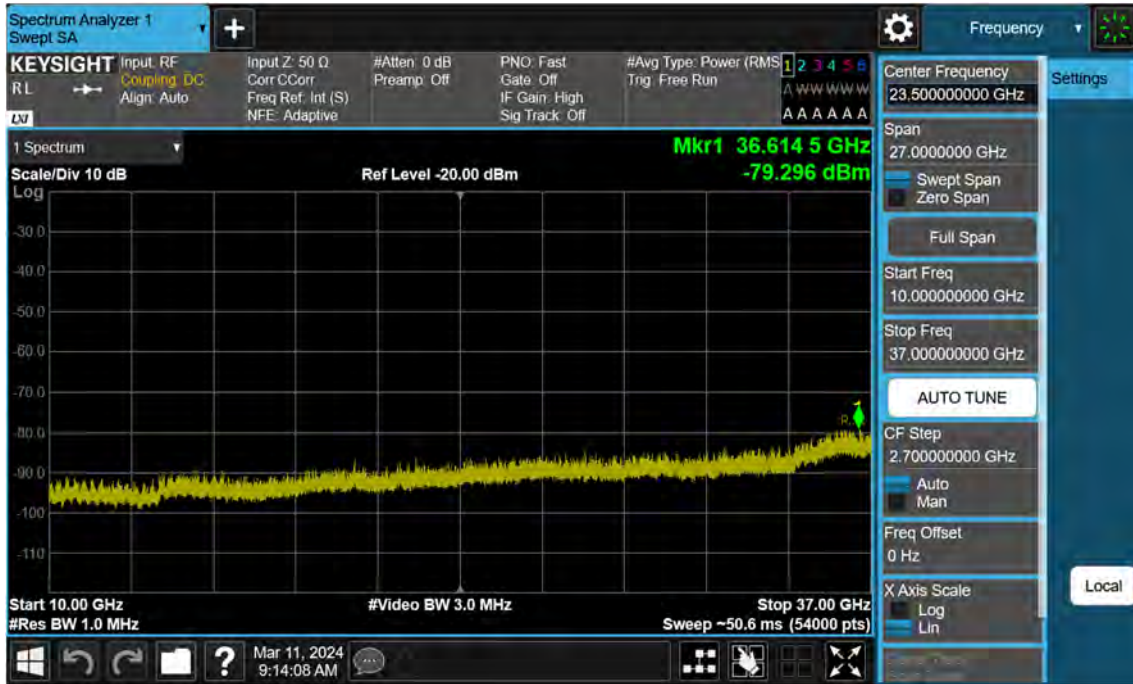


BAND 48. Conducted Spurious Plot 1 (10 MHz Ch.55990 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 2 (10 MHz Ch. 55990 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 1 (10 MHz Ch. 56690 QPSK RB 1, Offset 0)

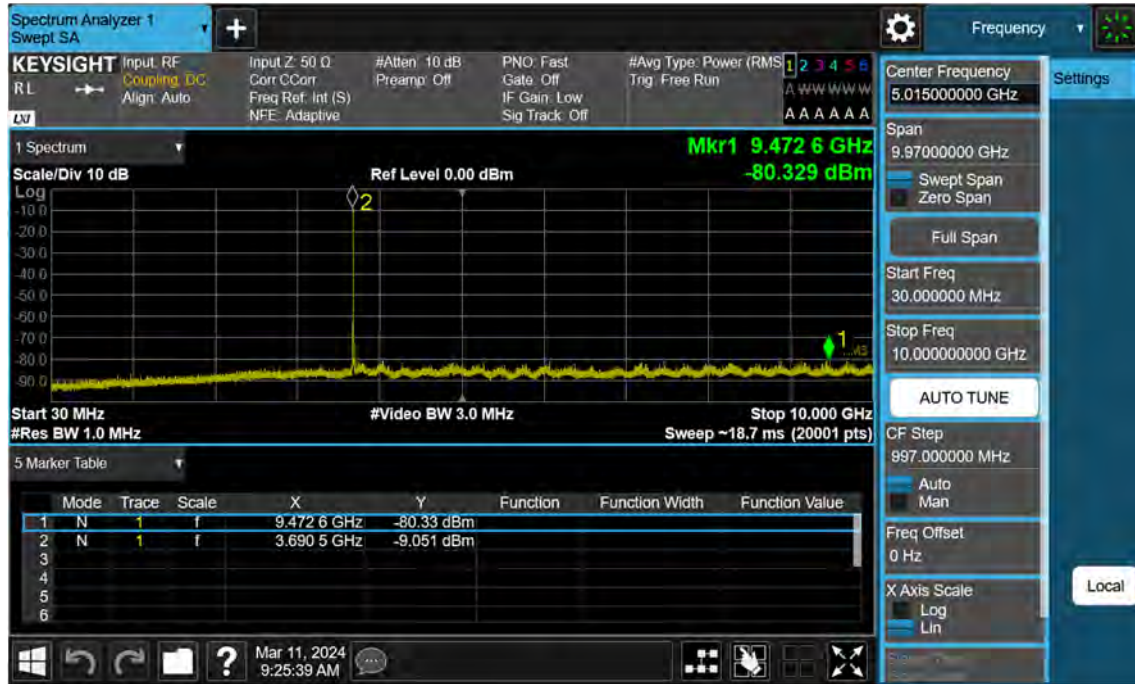



## BAND 48. Conducted Spurious Plot 2 (10 MHz Ch. 56690 QPSK RB 1, Offset 0)




BAND 48. Conducted Spurious Plot 1 (15 MHz Ch.55315 QPSK RB 1, Offset 0)




BAND 48. Conducted Spurious Plot 2 (15 MHz Ch. 55315 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 1 (15 MHz Ch.55990 QPSK RB 1, Offset 0)

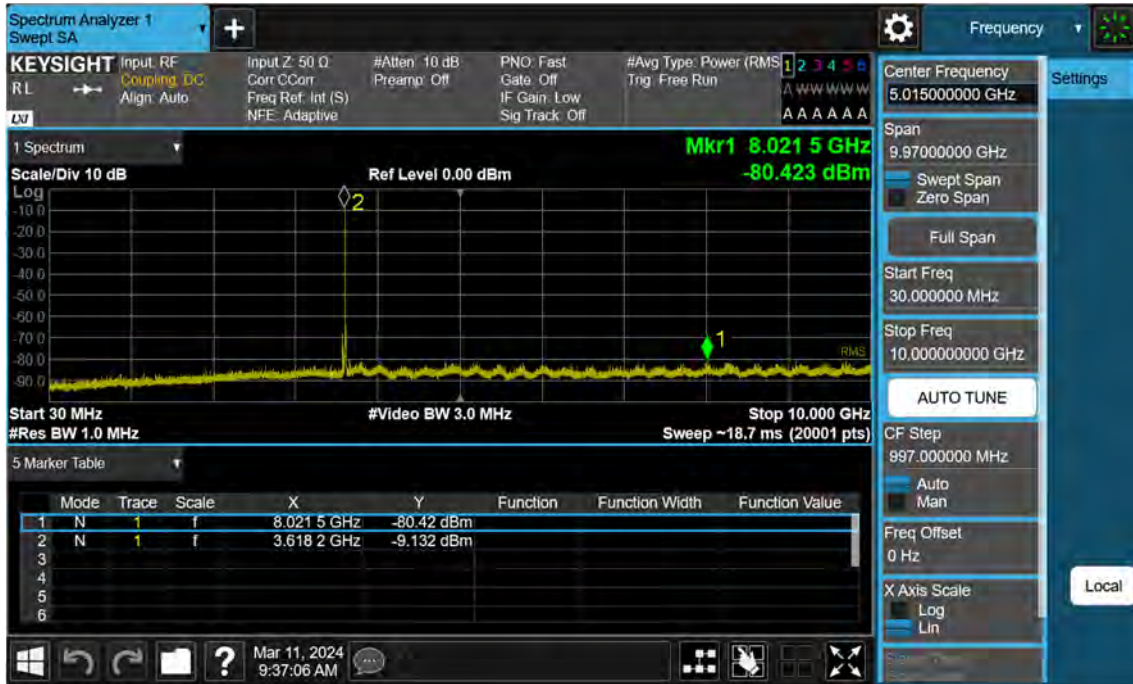

BAND 48. Conducted Spurious Plot 2 (15 MHz Ch. 55990 QPSK RB 1, Offset 0)

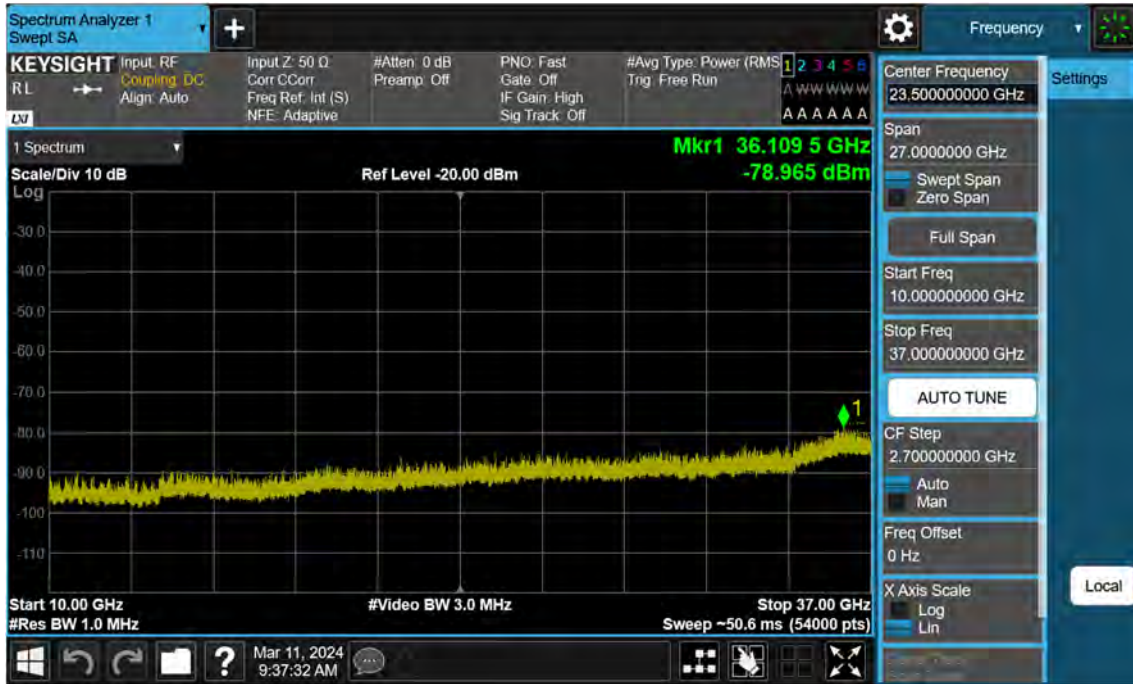


BAND 48. Conducted Spurious Plot 1 (15 MHz Ch.56665 QPSK RB 1, Offset 0)



## BAND 48. Conducted Spurious Plot 2 (15 MHz Ch. 56665 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 1 (20 MHz Ch.55340 QPSK RB 1, Offset 0)

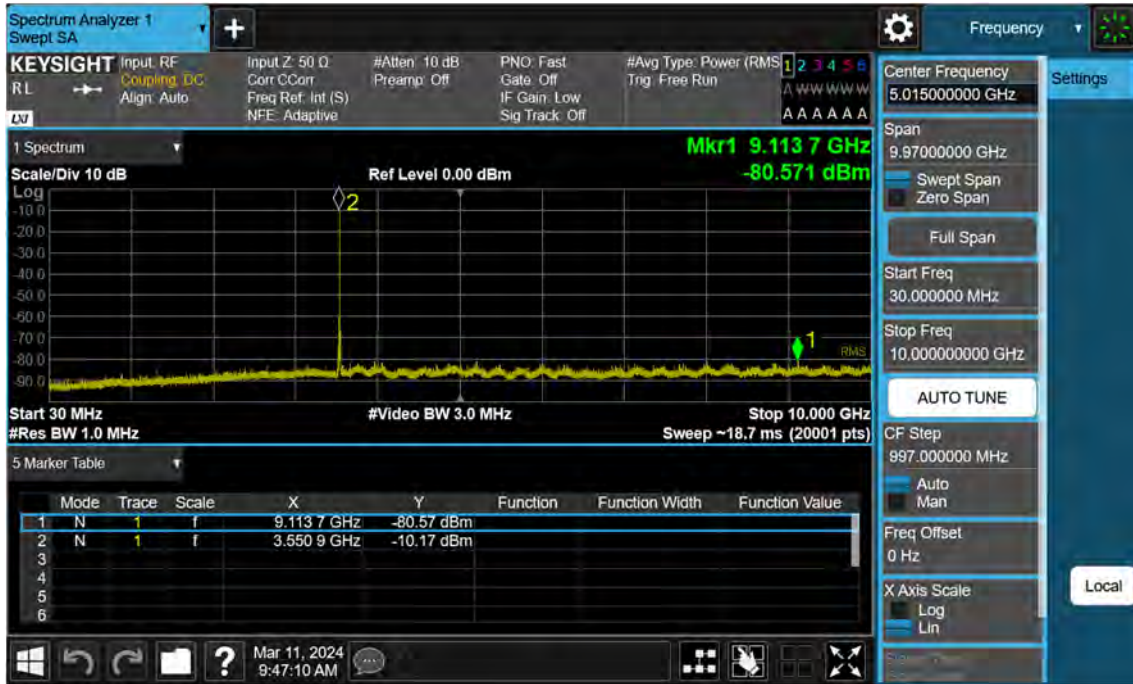





BAND 48. Conducted Spurious Plot 2 (20 MHz Ch. 55340 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 1 (20 MHz Ch.55990 QPSK RB 1, Offset 0)

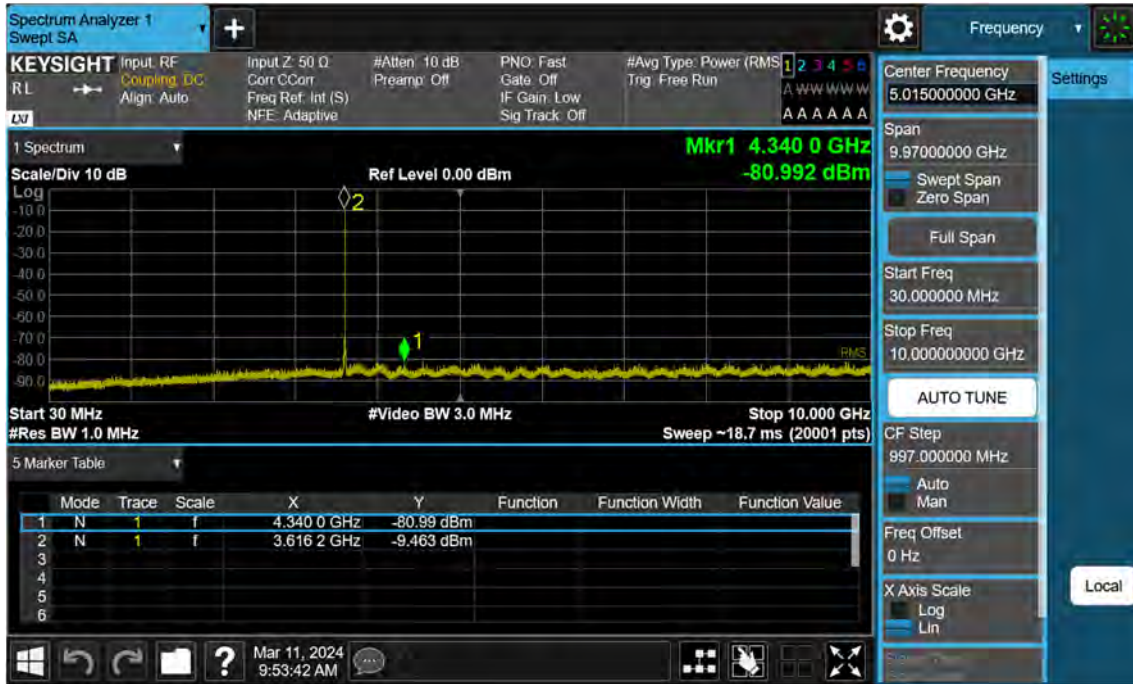


BAND 48. Conducted Spurious Plot 2 (20 MHz Ch. 55990 QPSK RB 1, Offset 0)

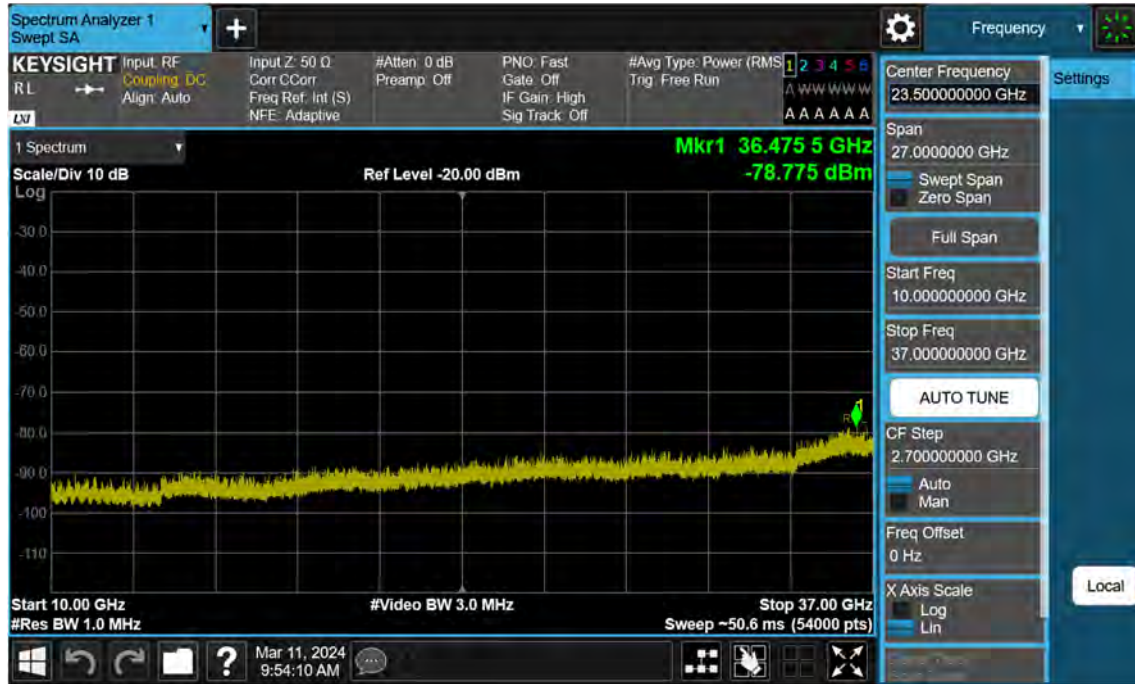

BAND 48. Conducted Spurious Plot 1 (20 MHz Ch.56640 QPSK RB 1, Offset 0)



BAND 48. Conducted Spurious Plot 2 (20 MHz Ch. 56640 QPSK RB 1, Offset 0)

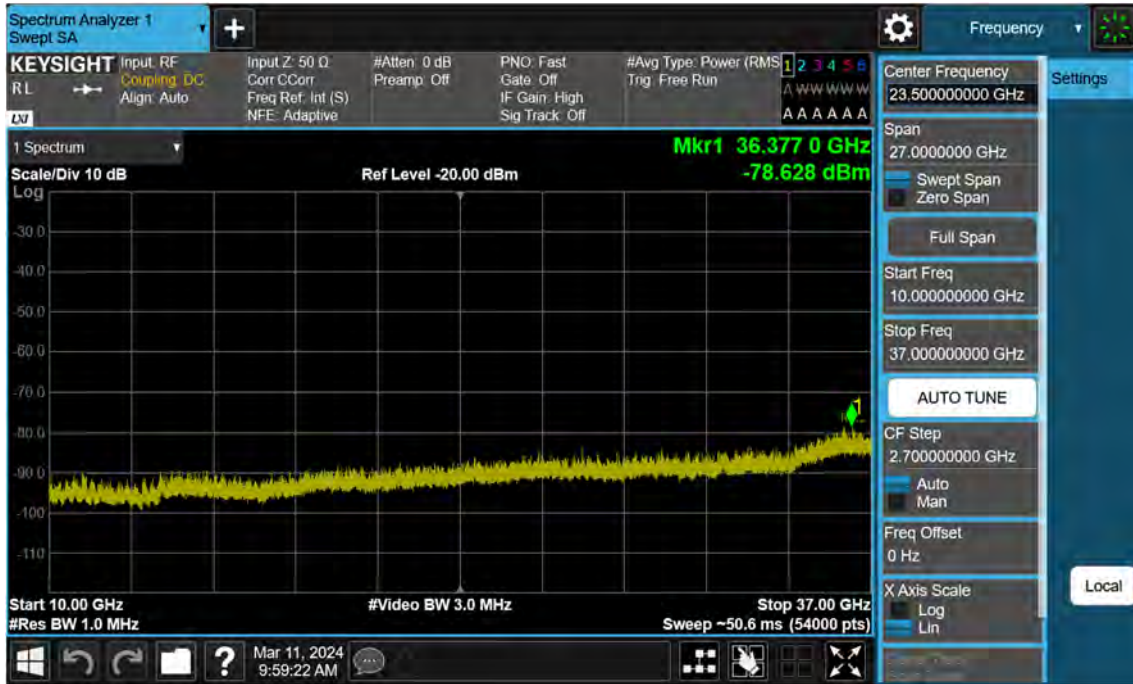

## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2404-FC021-P