

APPENDIX I: LTE DOWNLINK ONLY CARRIER AGGREGATION TEST REDUCTION METHODOLOGY

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA_2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.
- Downlink CA combinations for SISO and 4x4 Downlink MIMO operations were measured independently, per May 2017 TCBC Workshop notes.

Table I-1 – Example of Exclusion Table for SISO Configurations

Index	BCC	Supported Channel Bandwidth (MHz)				Restriction	Completely Covered by Measurement Superset
		CC1	CC2	CC3	CC4		
CCC#1	CA_2A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#2	CA_2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#3	CA_2A-2A-4A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#4	CA_2A-2A-4A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#5	CA_2A-2A-4A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#6	CA_2A-2A-4A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#7	CA_2A-2A-4A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#8	CA_2A-2A-4A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#9	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#10	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#11	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#12	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#13	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#14	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#15	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#16	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#17	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#18	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#19	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	
CCC#20	CA_2A-2A-4A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A-12A	5, 10, 15, 20	5, 10, 15, 20			CCC#1	

Table I-2 – Example of Exclusion Table for 4x4 Downlink MIMO Configurations

Index	BCC	Supported Channel Bandwidth (MHz)				Restriction	Completely Covered by Measurement Superset
		CC1	CC2	CC3	CC4		
CCC#M1	CA_12C1	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M2	CA_12A1-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M3	CA_12A1-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M4	CA_12A1-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M5	CA_12A1-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M6	CA_12A1-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M7	CA_12A1-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M8	CA_12A1-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M9	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M10	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M11	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M12	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M13	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M14	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M15	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M16	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M17	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M18	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M19	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	
CCC#M20	CA_12A1-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A-2A	5, 10, 15, 20	5, 10, 15, 20			CCC#M1	

Note: [CC] indicates component carrier with 4x4 DL MIMO antenna configuration

I.1 LTE Downlink Only Carrier Aggregation Test Selection and Setup

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by the product implementation. For those configurations required by April 2018 TCBC Workshop Notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink

FCC ID A3LSMF936B	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 1 of 6


only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation active measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

This device supports LAA with downlink carrier aggregation only. It uses carrier aggregation in the downlink to combine LTE in the unlicensed spectrum (i.e. LTE Band 46) with LTE in the licensed band (served as PCC). All uplink communications and acknowledgements on the PCC remain identical to specifications when downlink carrier aggregation is inactive.

Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the maximum average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive. All bands required for SAR testing per FCC KDB procedures were considered. Based on the measured maximum powers below, no additional SAR tests were required for DLCA SAR configurations.

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. All LTE bandwidth conducted powers needed for PCC uplink configuration selection can be found in Section 9.3 and Appendix H. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.



**Figure I-1
DL CA Power Measurement Setup**

FCC ID A3LSMF936B	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 2 of 6

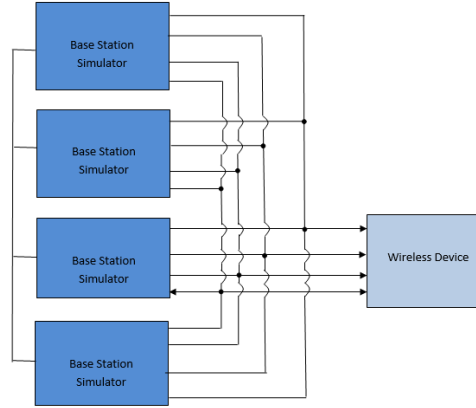


Figure I-2
DL CA with DL 4x4 MIMO Power Measurement Setup

I.2 Downlink Carrier Aggregation RF Conducted Powers

I.2.1 LTE Band 12 as PCC

Table I-3
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC				SCC 1			SCC 2			Power			
						PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-12A (1)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B2	20	900	1960	-	-	-	-	24.56	24.91
CA_4A-12A (1)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B4	20	2175	2132.5	-	-	-	-	24.68	24.91
CA_4A-12A (2)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B4	20	2175	2132.5	-	-	-	-	24.68	24.91
CA_12A-26A	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B25	20	8365	1962.5	-	-	-	-	24.62	24.91
CA_12A-66A (1)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B66	20	66786	2145	-	-	-	-	24.63	24.91
CA_12A-66A (2)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B66	20	66786	2145	-	-	-	-	24.63	24.91
CA_4A-4A-12A	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B4	20	2175	2132.5	LTE B4	10	2350	2150	24.71	24.91
CA_12A-66A-66A	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	LTE B66	20	66786	2145	LTE B66	20	67236	2190	24.73	24.91

I.2.2 LTE Band 13 as PCC

Table I-4
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC				SCC 1			SCC 2			Power			
						PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-13A (2)	LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1960	-	-	-	-	23.27	23.17
CA_2A-4A-13A	LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1960	LTE B4	20	2175	2132.5	23.25	23.17

I.2.1 LTE Band 26 as PCC

Table I-5
Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC				SCC 1			SCC 2			Power			
						PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_26A-41A	LTE B26	5	26715	816.5	QPSK	1	12	8715	861.5	LTE B41	20	40620	2593	-	-	-	-	24.49	24.57
CA_26A-41C	LTE B26	5	26715	816.5	QPSK	1	12	8715	861.5	LTE B41	20	40620	2593	LTE B41	20	40422	2573.2	24.49	24.57

FCC ID A3LSMF936B	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 3 of 6

I.2.2 LTE Band 66 as PCC

**Table I-6
Maximum Output Powers**

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC				SCC 1				SCC 2				Power			
				PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 2A-66A	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B2	20	900	1960	-	-	-	-	24.35	24.37
CA 12A-66A (1)	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B12	10	5095	737.5	-	-	-	-	24.30	24.37
CA 12A-66A (2)	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B12	10	5095	737.5	-	-	-	-	24.30	24.37
CA 66B	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B66	15	66693	2135.7	-	-	-	-	24.33	24.37
CA 66C	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B66	20	66669	2133.3	-	-	-	-	24.35	24.37
CA 5A-66A-66A	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B66	20	67236	2190	LTE B5	10	2525	881.5	24.23	24.37
CA 12A-66A-66A	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	LTE B66	20	67236	2190	LTE B12	10	5095	737.5	24.17	24.37

I.2.3 LTE Band 25 as PCC

**Table I-7
Maximum Output Powers**

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC				SCC 1				Power			
				PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 12A-25A	LTE B25	5	26065	1852.5	QPSK	1	12	8065	1932.5	LTE B12	10	5095	737.5	24.00	24.08

I.2.4 LTE Band 41 as PCC

**Table I-8
Maximum Output Powers**

Combination	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC				SCC 1				SCC 2				SCC 3				SCC 4				Power							
				PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Channel	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)				
CA 41A-41A (1)	LTE B41	5	41490	2680	QPSK	1	12	41400	2680	LTE B41	20	39760	2500	-	-	-	-	-	-	-	-	-	-	-	-	-	-	22.11	22.13		
CA 41A-41C	LTE B41	5	41490	2680	QPSK	1	12	41400	2680	LTE B41	20	39948	2525.8	LTE B41	20	39760	2500	-	-	-	-	-	-	-	-	-	-	-	22.15	22.17	
CA 41C-41A	LTE B41	5	41490	2680	QPSK	1	12	41400	2680	LTE B41	20	41373	2655.8	LTE B41	20	39760	2500	-	-	-	-	-	-	-	-	-	-	-	22.13	22.17	
CA 41A-41D	LTE B41	5	41490	2680	QPSK	1	12	41400	2680	LTE B41	20	42146	2545.6	LTE B41	20	39948	2525.8	LTE B41	20	39760	2500	-	-	-	-	-	-	-	22.10	22.12	
CA 41D-41A	LTE B41	10	41490	2680	QPSK	1	25	41400	2680	LTE B41	20	41346	2665.6	LTE B41	20	41148	2645.6	LTE B41	20	39760	2500	-	-	-	-	-	-	-	22.18	22.11	
CA 41C-41C	LTE B41	10	41490	2680	QPSK	1	25	41400	2680	LTE B41	20	41346	2665.6	LTE B41	20	39948	2525.8	LTE B41	20	39760	2500	-	-	-	-	-	-	-	22.13	22.11	
CA 41E	LTE B41	20	41490	2680	TDM	1	50	41400	2680	LTE B41	20	41292	2655.2	LTE B41	20	41094	2645.4	LTE B41	20	40956	2630.0	-	-	-	-	-	-	-	-	22.06	21.98
CA 41C-41D	LTE B41	10	41490	2680	QPSK	1	25	41400	2680	LTE B41	20	41346	2665.6	LTE B41	20	40146	2545.6	LTE B41	20	39948	2525.8	LTE B41	20	39760	2500	-	-	-	22.17	22.11	
CA 41D-41C	LTE B41	10	41490	2680	QPSK	1	25	41400	2680	LTE B41	20	41346	2665.6	LTE B41	20	41148	2645.6	LTE B41	20	39948	2525.8	LTE B41	20	39760	2500	-	-	-	22.11	22.11	

I.3 DL CA with DL 4x4 MIMO RF Conduction Powers

This device supports downlink 4x4 MIMO operations for some LTE bands. Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Section I.1 were applied.

Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

I.3.1 LTE 4x4 MIMO DL Standalone Powers

**Table I-9
Maximum Output Powers**

FCC ID A3LSMF936B	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 4 of 6

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]	Target Power [dBm]
66	5	132322	1745	QPSK	1	12	24.40	24.37	24.0
41	5	41490	2680	QPSK	1	12	22.19	22.12	22.0

I.3.2 LTE Band 12 as PCC

Table I-10
Maximum Output Powers

Combination	PCC										SCC 1					SCC 2					Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [4A]-[12A] (1)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B4	20	2175	2132.5	4x4	-	-	-	-	-	24.59	24.91
CA [4A]-[12A] (2)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B4	20	2175	2132.5	4x4	-	-	-	-	-	24.59	24.91
CA [12A]-[66A] (1)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B66	20	66786	2145	4x4	-	-	-	-	-	24.62	24.91
CA [12A]-[66A] (2)	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B66	20	66786	2145	4x4	-	-	-	-	-	24.62	24.91
CA [4A]-[4A]-[12A]	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B4	20	2175	2132.5	4x4	LTE B4	10	2350	2150	2x2	24.67	24.91
CA [4A]-[4A]-[12A]	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B4	20	2175	2132.5	4x4	LTE B4	10	2350	2150	4x4	24.69	24.91
CA [12A]-[66A]-[66A]	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B66	20	66786	2145	4x4	LTE B66	20	67236	2190	2x2	24.34	24.91
CA [12A]-[66A]-[66A]	LTE B12	10	23095	707.5	QPSK	1	0	5095	737.5	2x2	LTE B66	20	66786	2145	4x4	LTE B66	20	67236	2190	4x4	24.61	24.91

I.3.3 LTE Band 13 as PCC

Table I-11
Maximum Output Powers

Combination	PCC										SCC 1					SCC 2					Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [2A]-[4A]-[13A]	LTE B13	10	23230	782	QPSK	1	0	5230	751	2x2	LTE B2	20	900	1960	2x2	LTE B4	20	2175	2132.5	4x4	23.34	23.17

I.3.1 LTE Band 26 as PCC

Table I-12
Maximum Output Powers

Combination	PCC										SCC 1					SCC 2					Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [26A]-[41A]	LTE B26	5	26715	816.5	QPSK	1	12	8715	861.5	2x2	LTE B41	20	40620	2593	4x4	-	-	-	-	-	24.46	24.57
CA [26A]-[41C]	LTE B26	5	26715	816.5	QPSK	1	12	8715	861.5	2x2	LTE B41	20	40620	2593	4x4	LTE B41	20	40422	2573.2	4x4	24.46	24.57

I.3.2 LTE Band 66 as PCC

Table I-13
Maximum Output Powers

Combination	PCC										SCC 1					SCC 2					Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Mod.	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	DL Ant. Config.	LTE Tx. Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [26A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B2	20	900	1960	2x2	-	-	-	-	-	24.27	24.37
CA [12A]-[66A] (1)	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B12	10	5095	737.5	2x2	-	-	-	-	-	24.22	24.37
CA [12A]-[66A] (2)	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B12	10	5095	737.5	2x2	-	-	-	-	-	24.22	24.37
CA [66B]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B66	15	66693	2135.7	4x4	-	-	-	-	-	24.35	24.37
CA [66C]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B66	20	66669	2133.3	4x4	-	-	-	-	-	24.36	24.37
CA [5A]-[66A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B66	20	67236	2190	2x2	LTE B5	10	2525	881.5	2x2	24.17	24.37
CA [5A]-[66A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	2x2	LTE B66	20	67236	2190	4x4	LTE B5	10	2525	881.5	2x2	24.22	24.37
CA [5A]-[66A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B66	20	67236	2190	4x4	LTE B5	10	2525	881.5	2x2	24.22	24.37
CA [12A]-[66A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B66	20	67236	2190	2x2	LTE B12	10	5095	737.5	2x2	24.26	24.37
CA [12A]-[66A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	2x2	LTE B66	20	67236	2190	4x4	LTE B12	10	5095	737.5	2x2	24.21	24.37
CA [12A]-[66A]-[66A]	LTE B66	5	132322	1745	QPSK	1	12	66786	2145	4x4	LTE B66	20	67236	2190	4x4	LTE B12	10	5095	737.5	2x2	24.29	24.37

FCC ID A3LSMF936B	SAR EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Portable Handset		APPENDIX I: Page 5 of 6

I.3.3 LTE Band 41 as PCC

Table I-14 Maximum Output Powers

Combination	PCC Band	PCC BW [MHz]	PCC [UL] Ch.	PCC [UL] Freq. [MHz]	Mod.	PCC				SCC 1				SCC 2				SCC 3				SCC 4				Power								
						PCC UL RB	PCC UL BB Offset	PCC [DL] Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC [DL] Ch.	SCC [DL] Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC [DL] Ch.	SCC [DL] Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC [DL] Ch.	SCC [DL] Freq. [MHz]	DL Ant. Config.	SCC Band	SCC BW [MHz]	SCC [DL] Ch.	SCC [DL] Freq. [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled [dBm]	LTE Single Carrier Tx Power [dBm]			
CA 41A-41A (1)	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	22.14	22.12			
CA 41A-41A (1)	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	2x2	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	22.12	22.12			
CA 41A-41A (1)	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	22.13	22.12			
CA 41A-41C	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	39948	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	-	-	-	-	22.10	22.12		
CA 41C-41A	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	2x2	LTE B41	20	41373	2668.3	2x2	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	22.16	22.12		
CA 41A-41C	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	2x2	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	22.12	22.12		
CA 41C-41A	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	41373	2668.3	4x4	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	-	-	-	-	22.12	22.12		
CA 41A-41C	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	41373	2668.3	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	22.13	22.12		
CA 41C-41A	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	41373	2668.3	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	-	-	-	-	22.14	22.12		
CA 41A-41D	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	40246	2545.6	2x2	LTE B41	20	39948	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	22.08	22.11	
CA 41D-41A	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	2x2	LTE B41	20	41346	2665.6	2x2	LTE B41	20	41348	2645.8	2x2	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	22.12	22.11	
CA 41A-41D	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	2x2	LTE B41	20	40246	2545.6	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	22.13	22.12	
CA 41D-41A	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	41348	2645.8	4x4	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	22.06	22.11	
CA 41A-41A	LTE B41	5	41490	2680	QPSK	1	12	41490	2680	4x4	LTE B41	20	40246	2545.6	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	22.07	22.12	
CA 41C-41A	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	41348	2645.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	22.08	22.11	
CA 41C-41C	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	39948	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	-	-	-	-	-	22.01	22.11	
CA 41C-41C	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	2x2	LTE B41	20	41346	2665.6	2x2	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	22.16	22.11	
CA 41C-41C	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	39948	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	-	-	-	-	22.08	22.11	
CA 41C	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	41348	2645.8	4x4	LTE B41	20	41348	2645.8	4x4	-	-	-	-	-	-	22.09	22.06	
CA 41C-41D	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	40248	2545.8	2x2	LTE B41	20	39648	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	-	22.06	22.11
CA 41D-41C	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	2x2	LTE B41	20	41346	2665.6	2x2	LTE B41	20	41348	2645.8	2x2	LTE B41	20	39648	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	22.13	22.11
CA 41C-41D	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	2x2	LTE B41	20	41346	2665.6	2x2	LTE B41	20	40248	2545.8	4x4	LTE B41	20	39648	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	22.08	22.11
CA 41D-41C	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	41348	2645.8	4x4	LTE B41	20	39648	2525.8	2x2	LTE B41	20	39750	2506	2x2	-	-	22.04	22.11
CA 41C-41D	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	40248	2545.8	4x4	LTE B41	20	39648	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	22.04	22.11
CA 41C-41D	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	40248	2545.8	4x4	LTE B41	20	39648	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	22.07	22.11
CA 41D-41D	LTE B41	10	41490	2680	QPSK	1	25	41490	2680	4x4	LTE B41	20	41346	2665.6	4x4	LTE B41	20	41348	2645.8	4x4	LTE B41	20	39648	2525.8	4x4	LTE B41	20	39750	2506	4x4	-	-	22.10	22.11

FCC ID A3LSMF936B

SAR EVALUATION REPORT

Approved by:
Technical Manager

DUT Type:
Portable Handset

APPENDIX I:
Page 6 of 6