



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART M**

WWAN

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth/BLE and DTS b/g/n

MODEL NUMBER : SM-G6000

FCC ID: A3LSMG6000

REPORT NUMBER: 15K21563-E4

ISSUE DATE: SEP 16, 2015

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by
**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| -- | 09/16/15 | Initial issue | SungGil Park |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS | 5 |
| 2. TEST METHODOLOGY | 6 |
| 3. FACILITIES AND ACCREDITATION | 6 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 6 |
| 4.2. SAMPLE CALCULATION | 6 |
| 4.3. MEASUREMENT UNCERTAINTY..... | 6 |
| 5. EQUIPMENT UNDER TEST..... | 7 |
| 5.1. DESCRIPTION OF EUT | 7 |
| 5.2. MAXIMUM OUTPUT POWER (GSM)..... | 7 |
| 5.3. MAXIMUM OUTPUT POWER (WCDMA)..... | 7 |
| 5.4. MAXIMUM OUTPUT POWER (LTE)..... | 8 |
| 5.5. DESCRIPTION OF AVAILABLE ANTENNAS..... | 8 |
| 5.6. DESCRIPTION OF TEST SETUP..... | 9 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 11 |
| 7. Summary Table | 12 |
| 8. RF POWER OUTPUT VERIFICATION | 13 |
| 8.1. GSM/GPRS/EDGE | 13 |
| 8.1.1. GSM OUTPUT POWER RESULT..... | 14 |
| 8.2. UMTS REL 99..... | 16 |
| 8.2.1. WCDMA OUTPUT POWER RESULT | 20 |
| 8.3. LTE OUTPUT VERIFICATION..... | 22 |
| 8.3.1. LTE OUTPUT POWER RESULT | 23 |
| 9. PEAK TO AVERAGE RATIO | 24 |
| 9.1. CONDUCTED PEAK TO AVERAGE RESULT..... | 24 |
| 9.2. CONDUCTED PEAK TO AVERAGE PLOTS..... | 25 |
| 10. LIMITS AND CONDUCTED RESULTS..... | 28 |
| 10.1. OCCUPIED BANDWIDTH..... | 28 |
| 10.1.1. OCCUPIED BANDWIDTH RESULTS..... | 28 |
| 10.1.2. OCCUPIED BANDWIDTH PLOTS | 30 |
| 10.2. BAND EDGE EMISSIONS | 38 |
| 10.2.1. BAND EDGE PLOTS | 42 |
| 10.2.1. EMISSION MASK PLOTS | 44 |

| | | |
|------------|---|-----------|
| 10.3 | OUT OF BAND EMISSIONS..... | 48 |
| 10.3.1. | OUT OF BAND EMISSIONS RESULT | 48 |
| 10.3.2. | OUT OF BAND EMISSIONS PLOTS..... | 51 |
| 10.4. | FREQUENCY STABILITY | 59 |
| 10.4.1. | FREQUENCY STABILITY RESULTS..... | 60 |
| 11. | RADIATED TEST RESULTS | 63 |
| 11.1. | RADIATED POWER (ERP & EIRP)..... | 63 |
| 11.1.1. | ERP/EIRP Results..... | 64 |
| 11.1.2. | ERP/EIRP DATA..... | 67 |
| 11.2. | FIELD STRENGTH OF SPURIOUS RADIATION..... | 75 |
| 11.2.1. | SPURIOUS RADIATION PLOTS..... | 76 |
| 12. | SETUP PHOTOS | 84 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth/BLE and DTS b/g/n
MODEL NUMBER: SM-G6000
SERIAL NUMBER: R28G911CK6N(RADIATED); R28G911413R (CONDUCTED)
DATE TESTED: AUG 20, 2015 - SEP 15, 2015

| APPLICABLE STANDARDS | |
|-----------------------|--------------|
| STANDARD | TEST RESULTS |
| FCC PART 22H, 24E, 27 | Pass |

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 22, FCC CFR Part 24 and FCC CFR Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| | |
|-------------------------------------|-----------|
| 218 Maeyeong-ro | |
| <input type="checkbox"/> | Chamber 1 |
| <input checked="" type="checkbox"/> | Chamber 2 |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 2.32 dB |
| Radiated Disturbance, Below 1GHz | 4.14 dB |
| Radiated Disturbance, Above 1 GHz | 5.97 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth/BLE and DTS b/g/n.

5.2. MAXIMUM OUTPUT POWER (GSM)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

| FCC Part 22/24 | | | | | | |
|----------------|-----------------|------------|-----------|-----------|----------|-----------|
| Band | Frequency Range | Modulation | Conducted | | Radiated | |
| | [MHz] | | Peak | Avg [dBm] | Avg [mW] | Avg [dBm] |
| GSM850 | 824~849 | GMSK | 33.18 | 2079.70 | | |
| | | GPRS | 33.24 | 2108.63 | 28.42 | 695.02 |
| | | EGPRS | 25.80 | 380.19 | 21.23 | 132.74 |
| GSM1900 | 1850~1910 | GMSK | 30.13 | 1030.39 | | |
| | | GPRS | 30.20 | 1047.13 | 29.39 | 868.96 |
| | | EGPRS | 24.70 | 295.12 | 24.73 | 297.17 |

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

| FCC Part 22/24 | | | | | | |
|----------------|-----------------|------------|-----------|-----------|----------|-----------|
| Band | Frequency Range | Modulation | Conducted | | Radiated | |
| | [MHz] | | Peak | Avg [dBm] | Avg [mW] | Avg [dBm] |
| Band 5 | 824~849 | REL99 | 22.48 | 177.01 | 18.10 | 64.57 |
| | | HSDPA | 21.65 | 146.22 | 16.46 | 44.26 |
| | | HSUPA | 21.39 | 137.72 | | |
| | | DC-HSDPA | 21.38 | 137.40 | | |
| Band 2 | 1850~1910 | REL99 | 22.22 | 166.72 | 20.56 | 113.76 |
| | | HSDPA | 21.44 | 139.32 | 19.32 | 85.51 |
| | | HSUPA | 21.12 | 129.42 | | |
| | | DC-HSDPA | 21.22 | 132.43 | | |

5.4. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

LTE Band 41

| FCC Part 27 | | | | | | | |
|-------------|-----------------------|-----------------|-----------------|-----------|----------|-----------|----------|
| Band | Frequency Range [MHz] | BandWidth [MHz] | Modulation Peak | Conducted | | Radiated | |
| | | | | Avg [dBm] | Avg [mW] | Avg [dBm] | Avg [mW] |
| Band 41 | 2555~2655 | 20MHz | QPSK | 23.77 | 238.23 | 23.10 | 204.17 |
| | | | 16QAM | 22.67 | 184.93 | 22.21 | 166.34 |
| | | 15MHz | QPSK | 23.71 | 234.96 | 22.95 | 197.24 |
| | | | 16QAM | 22.48 | 177.01 | 22.17 | 164.82 |
| | | 10MHz | QPSK | 22.46 | 176.20 | 23.28 | 212.81 |
| | | | 16QAM | 22.54 | 179.47 | 22.49 | 177.42 |
| | | 5MHz | QPSK | 23.51 | 224.39 | 23.48 | 222.84 |
| | | | 16QAM | 23.00 | 199.53 | 22.73 | 187.50 |

5.5. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a FPCB antenna for the [List the bands supported] with a maximum peak gain as follow:

| Frequency (MHz) | Peak Gain (dBi) |
|---|-----------------|
| GSM850 / WCDMA Band 5 824 ~ 849 MHz | -2.3 |
| GSM1900 / WCDMA Band 2 1850 ~ 1910 MHz | -0.07 |
| LTE Band 41 2557.5 ~ 2652.5 MHz | -0.7 |

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| Support Equipment List | | | | |
|------------------------|--------------|-------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Charger | SAMSUNG | ETA0U83CBC | DW2G201BS/A-E | N/A |
| Data Cable | SAMSUNG | ECB-DU68WE | N/A | N/A |
| Earphone | SAMSUNG | GH59-11129M | N/A | N/A |


I/O CABLES

| I/O Cable List | | | | | | |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1 | DC Power | 1 | Mini-USB | Shielded | 0.8m | N/A |
| 1 | Audio | 1 | Mini-Jack | Unshielded | 1.0m | N/A |


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

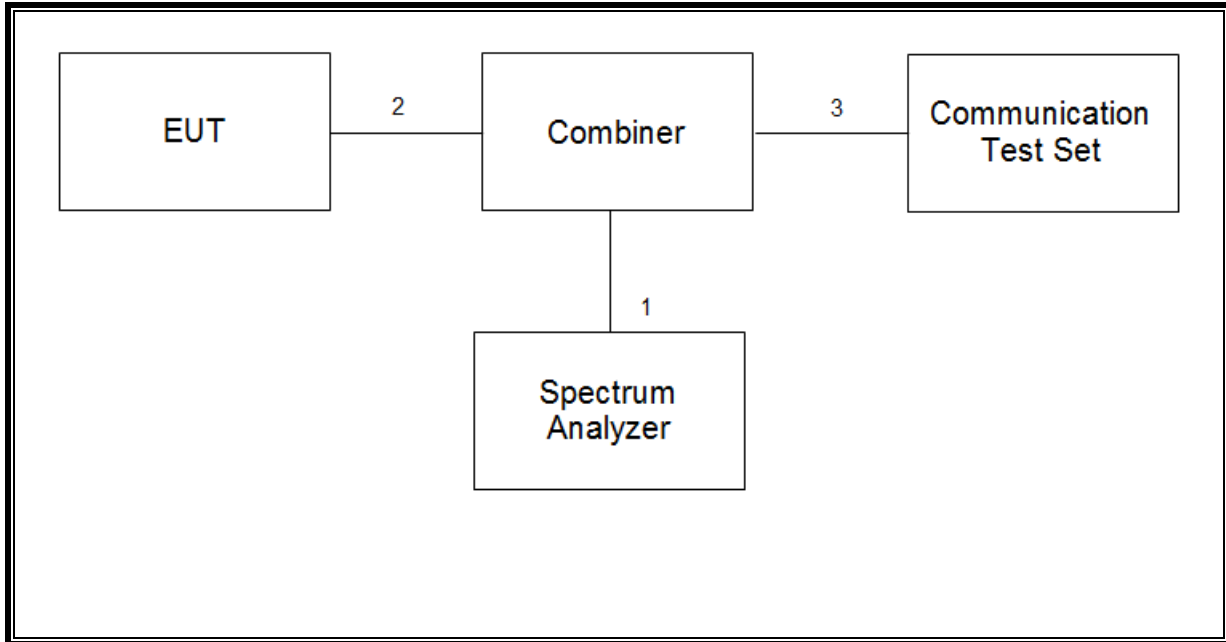

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

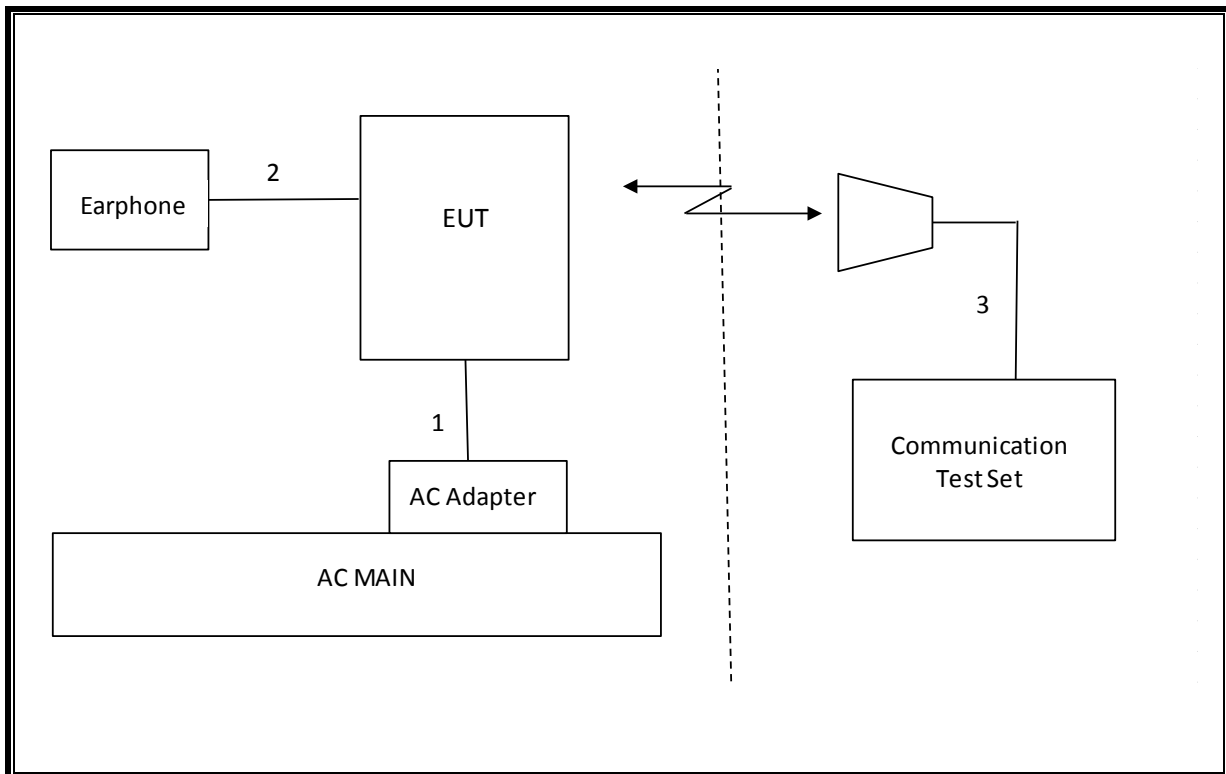

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List | | | | |
|---------------------------------------|---------------|------------------------|-------------|----------|
| Description | Manufacturer | Model | S/N | Cal Due |
| Antenna, Tuned Dipole 400~1000 MHz | ETS | 3121D DB4 | 00164753 | 07-28-16 |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK | VULB9163 | 750 | 11-17-15 |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK | VULB9163 | 749 | 04-25-16 |
| Antenna, Horn, 18 GHz | ETS | 3115 | 00167211 | 09-20-15 |
| Antenna, Horn, 18 GHz | ETS | 3115 | 00161451 | 05-17-16 |
| Antenna, Horn, 18 GHz | ETS | 3117 | 00168724 | 06-17-16 |
| Antenna, Horn, 18 GHz | ETS | 3117 | 00168717 | 06-17-16 |
| Antenna, Horn, 40 GHz | ETS | 3116C | 00166255 | 09-23-15 |
| Antenna, Horn, 40 GHz | ETS | 3116C-PA | 00168841 | 09-29-15 |
| Combiner | WEINSCHTEL | 1575 | 2153 | 08-20-16 |
| Communications Test Set | R&S | CMW500 | 150312 | 08-18-16 |
| Communications Test Set | R&S | CMW500 | 115331 | 08-18-16 |
| Communications Test Set | R&S | CMW500 | 102271 | 08-18-16 |
| DC Power Supply | Agilent / HP | E3640A | MY54226395 | 08-18-16 |
| Preamplifier, 1000 MHz | Sonoma | 310N | 341282 | 08-18-16 |
| Preamplifier, 1000 MHz | Sonoma | 310N | 351741 | 08-18-16 |
| Preamplifier, 18 GHz | Miteq | AFS42-00101800-25-S-42 | 1876511 | 08-18-16 |
| Preamplifier, 18 GHz | Miteq | AFS42-00101800-25-S-42 | 1896138 | 08-18-16 |
| Spectrum Analyzer, 44 GHz | Agilent / HP | N9030A | MY54170614 | 08-19-16 |
| Spectrum Analyzer, 44 GHz | Agilent / HP | N9030A | MY54490312 | 08-19-16 |
| Bluetooth Tester | TESCOM | TC-3000C | 3000C000546 | 08-18-16 |
| Average Power Sensor | R&S | NRZ-Z91 | 102681 | 08-18-16 |
| Average Power Sensor | Agilent / HP | U2000 | MY54270007 | 08-18-16 |
| EMI Test Receive, 40 GHz | R&S | ESU40 | 100439 | 08-19-16 |
| EMI Test Receive, 40 GHz | R&S | ESU40 | 100457 | 08-19-16 |
| EMI Test Receive, 3 GHz | R&S | ESR3 | 101832 | 08-19-16 |
| Attenuator / Switch driver | HP | 11713A | 3748A04272 | N/A |
| Low Pass Filter 3GHz | Micro-Tronics | LPS17541 | 009 | 08-18-16 |
| Low Pass Filter 3GHz | Micro-Tronics | LPS17541 | 015 | 08-18-16 |
| High Pass Filter 5GHz | Micro-Tronics | HPS17542 | 009 | 08-18-16 |
| High Pass Filter 6GHz | Micro-Tronics | HPM17543 | 010 | 08-18-16 |
| High Pass Filter 5GHz | Micro-Tronics | HPS17542 | 016 | 08-18-16 |
| High Pass Filter 6GHz | Micro-Tronics | HPM17543 | 015 | 08-18-16 |
| LISN | R&S | ENV-216 | 101836 | 08-19-16 |
| LISN | R&S | ENV-216 | 101837 | 08-19-16 |

7. Summary Table

| FCC Part Section | Test Description | Test Limit | Test Condition | Test Result | Note |
|---------------------------|---|------------|----------------|-------------|------------|
| 2.1049 | Occupied Band width (99%) | N/A | Conducted | Pass | 17.918 MHz |
| 22.917(a) 24.238(a) | Band Edge / Conducted Spurious Emission | -13dBm | | Pass | -23.76 dBm |
| 27.53(m) | Conducted Spurious Emission | -25dBm | | Pass | -30.39 dBm |
| 27.53(m) | Emission Mask | - | | Pass | -28.37 dBm |
| 2.1046 | Conducted output power | N/A | | Pass | 33.24 dBm |
| 22.355 24.235 27.54 | Frequency Stability | 2.5PPM | | Pass | -0.031PPM |
| 22.913(a)(2) | Effective Radiated Power | 38 dBm | | Radiated | Pass |
| 24.232(c) 27.50(h)(2) | Equivalent Isotropic Radiated Power | 33dBm | Pass | | 29.39 dBm |
| 22.917(a) 24.238(a) | Radiated Spurious Emission | -13dBm | Pass | | -17.3 dBm |
| 27.53(m) | Radiated Spurious Emission | -25dBm | Pass | | -31.9 dBm |

| FCC Rule Part | Frequency Range [MHz] | Output Power [W] | Frequency Tolerance | Emission Designator | Emission Bandwidth [MHz] | Communication Type |
|---------------|-----------------------|------------------|---------------------|---------------------|--------------------------|--------------------|
| GSM | | | | | | |
| 22H | 824.2 - 848.8 | 0.695 | 2.5 ppm | 245KGXW | | GSM850 |
| 22H | 824.2 - 848.8 | 0.133 | 2.5 ppm | 249KG7W | | EDGE850 |
| 24E | 1850.2 - 1909.8 | 0.869 | 2.5 ppm | 246KGXW | | GSM1900 |
| 24E | 1850.2 - 1909.8 | 0.297 | 2.5 ppm | 247KG7W | | EDGE1900 |
| WCDMA | | | | | | |
| 22H | 826.4 - 846.6 | 0.065 | 2.5 ppm | 4M16F9W | | WCDMA |
| 24E | 1852.4 - 1907.6 | 0.114 | 2.5 ppm | 4M18F9W | | WCDMA |
| LTE Band 41 | | | | | | |
| 27M | 2565.0 - 2645.0 | 0.204 | 2.5 ppm | 17M9G7D | 20 | QPSK |
| 27M | 2565.0 - 2645.0 | 0.166 | 2.5 ppm | 17M9D7W | 20 | 16QAM |
| 27M | 2557.5 - 2652.5 | 0.223 | 2.5 ppm | 4M49G7D | 5 | QPSK |
| 27M | 2557.5 - 2652.5 | 0.188 | 2.5 ppm | 4M49D7W | 5 | 16QAM |

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

GSM850 Measured Results

| Band | Mode | Coding Scheme | Time Slots | Ch No. | Freq. [MHz] | Max. Power | | | | |
|------|-------------|---------------|--------------|--------|-------------|------------------|------------------|-------|-------|-------|
| | | | | | | Burst Pw r [dBm] | Frame Pw r [dBm] | | | |
| 850 | GSM (Voice) | CS1 | 1 | 128 | 824.2 | 33.15 | 24.12 | | | |
| | | | | 190 | 836.6 | 33.18 | 24.15 | | | |
| | | | | 251 | 848.8 | 33.11 | 24.08 | | | |
| | GPRS (GMSK) | CS1 | 1 | 2 | 128 | 824.2 | 33.24 | 24.21 | | |
| | | | | | 190 | 836.6 | 33.24 | 24.21 | | |
| | | | | | 251 | 848.8 | 33.17 | 24.14 | | |
| | | | | 3 | 128 | 824.2 | 30.28 | 24.26 | | |
| | | | | | 190 | 836.6 | 30.41 | 24.39 | | |
| | | | | | 251 | 848.8 | 30.52 | 24.50 | | |
| | | | 4 | 128 | 824.2 | 28.64 | 24.38 | | | |
| | | | | 190 | 836.6 | 28.95 | 24.69 | | | |
| | | | | 251 | 848.8 | 29.36 | 25.10 | | | |
| | | | EGPRS (8PSK) | MCS5 | 1 | 2 | 128 | 824.2 | 27.51 | 24.50 |
| | | | | | | | 190 | 836.6 | 27.47 | 24.46 |
| | | | | | | | 251 | 848.8 | 27.91 | 24.90 |
| | 3 | 128 | | | | 824.2 | 25.71 | 16.67 | | |
| | | 190 | | | | 836.6 | 25.79 | 16.76 | | |
| | | 251 | | | | 848.8 | 25.80 | 16.77 | | |
| | 4 | 128 | | | 824.2 | 24.72 | 18.69 | | | |
| | | 190 | | | 836.6 | 24.81 | 18.79 | | | |
| | | 251 | | | 848.8 | 24.98 | 18.96 | | | |
| | | 3 | | | 128 | 824.2 | 22.87 | 18.61 | | |
| | | | | | 190 | 836.6 | 22.96 | 18.70 | | |
| | | | | | 251 | 848.8 | 23.14 | 18.88 | | |
| 4 | 128 | 824.2 | 21.62 | 18.61 | | | | | | |
| | 190 | 836.6 | 21.80 | 18.79 | | | | | | |
| | 251 | 848.8 | 21.80 | 18.79 | | | | | | |

GSM1900 Measured Results

| Band | Mode | Coding Scheme | Time Slots | Ch No. | Freq. [MHz] | Max. Power | |
|------|--------------|---------------|------------|--------|-------------|-------------------|-------------------|
| | | | | | | Burst Power [dBm] | Frame Power [dBm] |
| 1900 | GSM (Voice) | CS1 | 1 | 512 | 1850.2 | 29.84 | 20.81 |
| | | | | 661 | 1880.0 | 30.13 | 21.10 |
| | | | | 810 | 1909.8 | 29.75 | 20.72 |
| | GPRS (GMSK) | CS1 | 1 | 512 | 1850.2 | 29.92 | 20.89 |
| | | | | 661 | 1880.0 | 30.20 | 21.17 |
| | | | | 810 | 1909.8 | 29.82 | 20.79 |
| | | | 2 | 512 | 1850.2 | 27.00 | 20.98 |
| | | | | 661 | 1880.0 | 27.00 | 20.98 |
| | | | | 810 | 1909.8 | 27.00 | 20.98 |
| | | | 3 | 512 | 1850.2 | 24.70 | 20.44 |
| | | | | 661 | 1880.0 | 24.78 | 20.52 |
| | | | | 810 | 1909.8 | 24.70 | 20.44 |
| | | | 4 | 512 | 1850.2 | 23.63 | 20.62 |
| | | | | 661 | 1880.0 | 23.73 | 20.72 |
| | | | | 810 | 1909.8 | 23.55 | 20.54 |
| | EGPRS (8PSK) | MCS5 | 1 | 512 | 1850.2 | 24.62 | 15.59 |
| | | | | 661 | 1880.0 | 24.70 | 15.67 |
| | | | | 810 | 1909.8 | 24.55 | 15.52 |
| | | | 2 | 512 | 1850.2 | 23.83 | 17.81 |
| | | | | 661 | 1880.0 | 23.87 | 17.85 |
| | | | | 810 | 1909.8 | 23.73 | 17.71 |
| | | | 3 | 512 | 1850.2 | 22.20 | 17.94 |
| | | | | 661 | 1880.0 | 21.85 | 17.59 |
| | | | | 810 | 1909.8 | 22.20 | 17.94 |
| 4 | | | 512 | 1850.2 | 20.37 | 17.36 | |
| | | | 661 | 1880.0 | 20.50 | 17.49 | |
| | | | 810 | 1909.8 | 20.36 | 17.35 | |

8.2. UMTS REL 99

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

| Mode | Subtest | Rel99 |
|------------------------|-------------------------|--------------|
| WCDMA General Settings | Loopback Mode | Test Mode 2 |
| | Rel99 RMC | 12.2kbps RMC |
| | Power Control Algorithm | Algorithm2 |
| | β_c/β_d | 8/15 |

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

| | Mode | HSDPA | HSDPA | HSDPA | HSDPA |
|-------------------------|--------------------------------------|--------------|-------|-------|-------|
| | Subtest | 1 | 2 | 3 | 4 |
| W-CDMA General Settings | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2kbps RMC | | | |
| | HSDPA FRC | H-Set 1 | | | |
| | Power Control Algorithm | Algorithm 2 | | | |
| | β_c | 2/15 | 11/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | Bd (SF) | 64 | | | |
| | β_c/β_d | 2/15 | 12/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| MPR (dB) | 0 | 0 | 0.5 | 0.5 | |
| HSDPA Specific Settings | D_{ACK} | 8 | | | |
| | D_{NAK} | 8 | | | |
| | DCQI | 8 | | | |
| | Ack-Nack repetition factor | 3 | | | |
| | CQI Feedback (Table 5.2B.4) | 4ms | | | |
| | CQI Repetition Factor (Table 5.2B.4) | 2 | | | |
| | $A_{hs}=\beta_{hs}/\beta_c$ | 30/15 | | | |

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

| | Mode | HSPA | | | | |
|-------------------------------|--|---------------|-------|-------|-------|-------------|
| | Subtest | 1 | 2 | 3 | 4 | 5 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | | |
| | Rel99 RMC | 12.2 kbps RMC | | | | |
| | HSDPA FRC | H-Set 1 | | | | |
| | HSUPA Test | HSPA | | | | |
| | Power Control Algorithm | Algorithm 2 | | | | Algorithm 1 |
| | β_c | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 9/15 | 15/15 | 0 |
| | β_{ec} | 209/225 | 12/15 | 30/15 | 2/15 | 5/15 |
| | β_c/β_d | 11/15 | 6/15 | 15/9 | 2/15 | 15/1 |
| | β_{hs} | 22/15 | 12/15 | 30/15 | 4/15 | 5/15 |
| | β_{ed} | 1309/225 | 94/75 | 47/15 | 56/75 | 47/15 |
| | CM (dB) | 1 | 3 | 2 | 3 | 1 |
| MPR (dB) | 0 | 2 | 1 | 2 | 0 | |
| HSDPA Specific Settings | DACK | 8 | | | | 0 |
| | DNAK | 8 | | | | 0 |
| | DCQI | 8 | | | | 0 |
| | Ack-Nack repetition factor | 3 | | | | |
| | CQI Feedback (Table 5.2B.4) | 4ms | | | | |
| | CQI Repetition Factor (Table 5.2B.4) | 2 | | | | |
| | A _{hs} = β_{hs}/β_c | 30/15 | | | | |
| HSUPA Specific Settings | E-DPDCCH | 6 | 8 | 8 | 5 | 7 |
| | DHARQ | 0 | 0 | 0 | 0 | 0 |
| | AG Index | 20 | 12 | 15 | 17 | 21 |
| | ETFCI (from 34.121 Table C.11.1.3) | 75 | 67 | 92 | 71 | 81 |
| | Associated Max UL Data Rate kbps | 242.1 | 174.9 | 482.8 | 205.8 | 308.9 |
| | Reference E-TFCIs | 5 | 5 | 2 | 5 | 1 |
| | Reference E-TFCI | 11 | 11 | 11 | 11 | 67 |
| | Reference E-TFCI PO | 4 | 4 | 4 | 4 | 18 |
| | Reference E-TFCI | 67 | 67 | 92 | 67 | 67 |
| | Reference E-TFCI PO | 18 | 18 | 18 | 18 | 18 |
| | Reference E-TFCI | 71 | 71 | 71 | 71 | 71 |
| | Reference E-TFCI PO | 23 | 23 | 23 | 23 | 23 |
| | Reference E-TFCI | 75 | 75 | 75 | 75 | 75 |
| | Reference E-TFCI PO | 26 | 26 | 26 | 26 | 26 |
| | Reference E-TFCI | 81 | 81 | 81 | 81 | 81 |
| Reference E-TFCI PO | 27 | 27 | 27 | 27 | 27 | |
| Maximum Channelisation Codes | 2xSF2 | | | | SF4 | |

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

| Parameter During Connection setup | Unit | Value |
|--------------------------------------|------|-------|
| P-CPICH_Ec/Ior | dB | -10 |
| P-CCPCH and SCH_Ec/Ior | dB | -12 |
| PICH_Ec/Ior | dB | -15 |
| HS-PDSCH | dB | off |
| HS-SCCH_1 | dB | off |
| DPCH_Ec/Ior | dB | -5 |
| OCNS_Ec/Ior | dB | -3.1 |

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

| Parameter | Unit | Value |
|--|-----------|-------|
| Nominal Avg. Inf. Bit Rate | kbps | 60 |
| inter-TTI Distance | TTI's | 1 |
| Number of HARQ Processes | Processes | 6 |
| Information Bit Payload (N_{INF}) | Bits | 120 |
| Number Code Blocks | Blocks | 1 |
| Binary Channel Bits Per TTI | Bits | 960 |
| Total Available SML's in UE | SML's | 19200 |
| Number of SML's per HARQ Proc. | SML's | 3200 |
| Coding Rate | | 0.15 |
| Number of Physical Channel Codes | Codes | 1 |
| Modulation | | QPSK |
| Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. | | |
| Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used. | | |

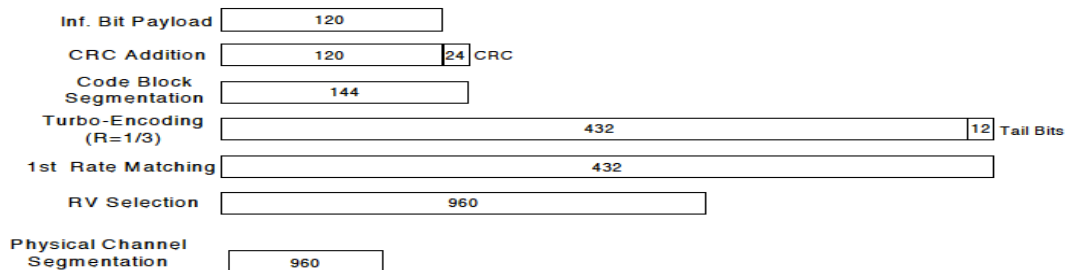


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

| Mode | HSDPA | HSDPA | HSDPA | HSDPA |
|--|----------------------------|-------|-------|-------|
| Subtest | 1 | 2 | 3 | 4 |
| WCDMA General Settings | Loopback Mode | | | |
| | Test Mode 1 | | | |
| | Rel99 RMC | | | |
| | 12.2kbps RMC | | | |
| | HSDPA FRC | | | |
| | H-Set 1 | | | |
| | Power Control Algorithm | | | |
| | Algorithm2 | | | |
| | β_c | 2/15 | 11/15 | 15/15 |
| β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| β_d (SF) | 64 | | | |
| β_c/β_d | 2/15 | 11/15 | 15/8 | 15/4 |
| β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| MPR (dB) | 0 | 0 | 0.5 | 0.5 |
| HSDPA Specific Settings | DACK | | | |
| | 8 | | | |
| | DNAK | | | |
| | 8 | | | |
| | DCQI | | | |
| | 8 | | | |
| | Ack-Nack Repetition factor | | | |
| 3 | | | | |
| CQI Feedback | | | | |
| 4ms | | | | |
| CQI Repetition Factor | | | | |
| 2 | | | | |
| A _{hs} = β_{hs} / β_c | | | | |
| 30/15 | | | | |

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

8.2.1. WCDMA OUTPUT POWER RESULT

WCDMA Band 5 Measured Results

| Band | Mode | | UL Ch No. | Freq. [MHz] | MPR [dB] | Avg Pwr [dBm] | |
|---------------|-----------|----------------|-----------|-------------|----------|---------------|-------|
| W-CDMA Band V | Rel 99 | RMC, 12.2 kbps | 4132 | 826.4 | 0 | 22.48 | |
| | | | 4183 | 836.6 | 0 | 22.46 | |
| | | | 4233 | 846.6 | 0 | 22.42 | |
| | HSDPA | Subtest 1 | 4132 | 826.4 | 0 | 21.39 | |
| | | | 4183 | 836.6 | 0 | 21.65 | |
| | | | 4233 | 846.6 | 0 | 21.36 | |
| | | Subtest 2 | 4132 | 826.4 | 0 | 21.03 | |
| | | | 4183 | 836.6 | 0 | 21.00 | |
| | | | 4233 | 846.6 | 0 | 21.00 | |
| | | Subtest 3 | 4132 | 826.4 | 0.5 | 20.89 | |
| | | | 4183 | 836.6 | 0.5 | 20.87 | |
| | | | 4233 | 846.6 | 0.5 | 20.79 | |
| | | Subtest 4 | 4132 | 826.4 | 0.5 | 20.96 | |
| | | | 4183 | 836.6 | 0.5 | 20.91 | |
| | | | 4233 | 846.6 | 0.5 | 20.70 | |
| | | HSUPA | Subtest 1 | 4132 | 826.4 | 0 | 21.36 |
| | | | | 4183 | 836.6 | 0 | 21.20 |
| | | | | 4233 | 846.6 | 0 | 21.32 |
| | Subtest 2 | | 4132 | 826.4 | 2 | 19.93 | |
| | | | 4183 | 836.6 | 2 | 20.00 | |
| | | | 4233 | 846.6 | 2 | 19.73 | |
| | Subtest 3 | | 4132 | 826.4 | 1 | 20.33 | |
| | | | 4183 | 836.6 | 1 | 20.17 | |
| | | | 4233 | 846.6 | 1 | 20.00 | |
| | Subtest 4 | | 4132 | 826.4 | 2 | 20.31 | |
| | | | 4183 | 836.6 | 2 | 20.63 | |
| | | | 4233 | 846.6 | 2 | 20.83 | |
| | Subtest 5 | | 4132 | 826.4 | 0 | 21.38 | |
| | | | 4183 | 836.6 | 0 | 21.39 | |
| | | | 4233 | 846.6 | 0 | 21.33 | |
| | DC-HSDPA | Subtest 1 | 4132 | 826.4 | 0 | 21.38 | |
| | | | 4183 | 836.6 | 0 | 21.35 | |
| | | | 4233 | 846.6 | 0 | 21.32 | |
| | | Subtest 2 | 4132 | 826.4 | 0 | 21.03 | |
| | | | 4183 | 836.6 | 0 | 21.02 | |
| | | | 4233 | 846.6 | 0 | 21.05 | |
| | | Subtest 3 | 4132 | 826.4 | 0.5 | 20.90 | |
| | | | 4183 | 836.6 | 0.5 | 20.87 | |
| | | | 4233 | 846.6 | 0.5 | 20.87 | |
| | | Subtest 4 | 4132 | 826.4 | 0.5 | 20.90 | |
| | | | 4183 | 836.6 | 0.5 | 20.86 | |
| | | | 4233 | 846.6 | 0.5 | 20.86 | |

WCDMA Band 2 Measured Results

| Band | Mode | | UL Ch No. | Freq. [MHz] | MPR [dB] | Avg Pwr [dBm] | |
|----------------|-----------|----------------|-----------|-------------|----------|---------------|-------|
| W-CDMA Band II | Rel 99 | RMC, 12.2 kbps | 9262 | 1852.4 | 0 | 22.14 | |
| | | | 9400 | 1880.0 | 0 | 22.22 | |
| | | | 9538 | 1907.6 | 0 | 22.00 | |
| | HSDPA | Subtest 1 | 9262 | 1852.4 | 0 | 21.07 | |
| | | | 9400 | 1880.0 | 0 | 21.44 | |
| | | | 9538 | 1907.6 | 0 | 21.13 | |
| | | Subtest 2 | 9262 | 1852.4 | 0 | 21.07 | |
| | | | 9400 | 1880.0 | 0 | 21.00 | |
| | | | 9538 | 1907.6 | 0 | 21.01 | |
| | | Subtest 3 | 9262 | 1852.4 | 0.5 | 20.55 | |
| | | | 9400 | 1880.0 | 0.5 | 20.71 | |
| | | | 9538 | 1907.6 | 0.5 | 20.50 | |
| | | Subtest 4 | 9262 | 1852.4 | 0.5 | 20.56 | |
| | | | 9400 | 1880.0 | 0.5 | 21.16 | |
| | | | 9538 | 1907.6 | 0.5 | 20.53 | |
| | | HSUPA | Subtest 1 | 9262 | 1852.4 | 0 | 21.05 |
| | | | | 9400 | 1880.0 | 0 | 21.12 |
| | | | | 9538 | 1907.6 | 0 | 21.00 |
| | Subtest 2 | | 9262 | 1852.4 | 2 | 19.51 | |
| | | | 9400 | 1880.0 | 2 | 19.78 | |
| | | | 9538 | 1907.6 | 2 | 19.38 | |
| | Subtest 3 | | 9262 | 1852.4 | 1 | 20.00 | |
| | | | 9400 | 1880.0 | 1 | 20.00 | |
| | | | 9538 | 1907.6 | 1 | 20.00 | |
| | Subtest 4 | | 9262 | 1852.4 | 2 | 19.92 | |
| | | | 9400 | 1880.0 | 2 | 20.28 | |
| | | | 9538 | 1907.6 | 2 | 19.85 | |
| | Subtest 5 | | 9262 | 1852.4 | 0 | 21.00 | |
| | | | 9400 | 1880.0 | 0 | 21.09 | |
| | | | 9538 | 1907.6 | 0 | 21.00 | |
| | DC-HSDPA | | Subtest 1 | 9262 | 1852.4 | 0 | 21.00 |
| | | | | 9400 | 1880.0 | 0 | 21.22 |
| | | | | 9538 | 1907.6 | 0 | 21.00 |
| | | Subtest 2 | 9262 | 1852.4 | 0 | 21.00 | |
| | | | 9400 | 1880.0 | 0 | 21.17 | |
| | | | 9538 | 1907.6 | 0 | 21.00 | |
| | | Subtest 3 | 9262 | 1852.4 | 0.5 | 20.60 | |
| | | | 9400 | 1880.0 | 0.5 | 21.07 | |
| | | | 9538 | 1907.6 | 0.5 | 20.53 | |
| | | Subtest 4 | 9262 | 1852.4 | 0.5 | 20.56 | |
| | | | 9400 | 1880.0 | 0.5 | 21.03 | |
| | | | 9538 | 1907.6 | 0.5 | 20.50 | |

8.3. LTE OUTPUT VERIFICATION

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

| Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) |
|------------|---|---------|-------|--------|--------|--------|----------|
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

| Network Signalling value | Requirements (sub-clause) | E-UTRA Band | Channel bandwidth (MHz) | Resources Blocks (N_{RB}) | A-MPR (dB) |
|--------------------------|---------------------------|--------------------------|-------------------------|-------------------------------|---------------|
| NS_01 | 6.6.2.1.1 | Table 5.5-1 | 1.4, 3, 5, 10, 15, 20 | Table 5.6-1 | NA |
| NS_03 | 6.6.2.2.1 | 2, 4, 10, 23, 25, 35, 36 | 3 | >5 | ≤ 1 |
| | | | 5 | >6 | ≤ 1 |
| | | | 10 | >6 | ≤ 1 |
| | | | 15 | >8 | ≤ 1 |
| | | | 20 | >10 | ≤ 1 |
| NS_04 | 6.6.2.2.2 | 41 | 5 | >6 | ≤ 1 |
| | | | 10, 15, 20 | See Table 6.2.4-4 | |
| NS_05 | 6.6.3.3.1 | 1 | 10,15,20 | ≥ 50 | ≤ 1 |
| NS_06 | 6.6.2.2.3 | 12, 13, 14, 17 | 1.4, 3, 5, 10 | Table 5.6-1 | n/a |
| NS_07 | 6.6.2.2.3 | 13 | 10 | Table 6.2.4-2 | Table 6.2.4-2 |
| | 6.6.3.3.2 | | | | |
| NS_08 | 6.6.3.3.3 | 19 | 10, 15 | > 44 | ≤ 3 |
| NS_09 | 6.6.3.3.4 | 21 | 10, 15 | > 40 | ≤ 1 |
| | | | | > 55 | ≤ 2 |
| NS_10 | | 20 | 15, 20 | Table 6.2.4-3 | Table 6.2.4-3 |
| NS_11 | 6.6.2.2.1 | 23 ¹ | 1.4, 3, 5, 10 | Table 6.2.4-5 | Table 6.2.4-5 |
| .. | | | | | |
| NS_32 | - | - | - | - | - |

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

8.3.1. LTE OUTPUT POWER RESULT

LTE Band 41 Measured Results

| Band | BW (MHz) | Mode | RB Allocation | RB offset | Target MPR | Avg Pwr [dBm] | | |
|-------------|----------|-------|---------------|-----------|------------|---------------|----------|------------|
| | | | | | | Max. Power | | |
| | | | | | | 2565 MHz | 2593 MHz | 2645 MHz |
| LTE Band 41 | 20 | QPSK | 1 | 0 | 0 | 23.63 | 23.70 | 23.60 |
| | | | 1 | 49 | 0 | 23.77 | 23.38 | 23.60 |
| | | | 1 | 99 | 0 | 23.65 | 23.60 | 23.23 |
| | | | 50 | 0 | 1 | 22.91 | 22.37 | 22.61 |
| | | | 50 | 24 | 1 | 22.90 | 22.32 | 22.41 |
| | | | 50 | 50 | 1 | 23.00 | 22.35 | 22.42 |
| | | 16QAM | 100 | 0 | 1 | 22.97 | 22.35 | 22.44 |
| | | | 1 | 0 | 1 | 22.67 | 22.19 | 22.30 |
| | | | 1 | 49 | 1 | 22.53 | 21.85 | 22.30 |
| | | | 1 | 99 | 1 | 22.28 | 22.08 | 22.20 |
| | | | 50 | 0 | 2 | 21.86 | 21.24 | 21.66 |
| | | | 50 | 24 | 2 | 21.85 | 21.24 | 21.42 |
| | | | 50 | 50 | 2 | 21.87 | 21.25 | 21.32 |
| | | | 100 | 0 | 2 | 21.78 | 21.33 | 21.30 |
| Band | BW (MHz) | Mode | RB Allocation | RB offset | Target MPR | Avg Pwr [dBm] | | |
| | | | | | | Max. Power | | |
| | | | | | | 2562.5 MHz | 2593 MHz | 2647.5 MHz |
| LTE Band 41 | 15 | QPSK | 1 | 0 | 0 | 23.52 | 23.71 | 23.64 |
| | | | 1 | 37 | 0 | 23.38 | 23.18 | 23.37 |
| | | | 1 | 74 | 0 | 23.35 | 23.34 | 23.34 |
| | | | 36 | 0 | 1 | 22.33 | 22.42 | 22.33 |
| | | | 36 | 20 | 1 | 22.33 | 22.33 | 22.32 |
| | | | 36 | 39 | 1 | 22.34 | 22.35 | 22.34 |
| | | | 75 | 0 | 1 | 22.33 | 22.32 | 22.31 |
| | | 16QAM | 1 | 0 | 1 | 22.09 | 22.48 | 22.48 |
| | | | 1 | 37 | 1 | 21.79 | 22.22 | 22.21 |
| | | | 1 | 74 | 1 | 21.97 | 22.00 | 22.12 |
| | | | 36 | 0 | 2 | 21.42 | 21.43 | 21.42 |
| | | | 36 | 20 | 2 | 21.34 | 21.35 | 21.34 |
| | | | 36 | 39 | 2 | 21.55 | 21.48 | 21.46 |
| | | | 75 | 0 | 2 | 21.44 | 21.30 | 21.33 |
| Band | BW (MHz) | Mode | RB Allocation | RB offset | Target MPR | Avg Pwr [dBm] | | |
| | | | | | | Max. Power | | |
| | | | | | | 2560 MHz | 2593 MHz | 2650 MHz |
| LTE Band 41 | 10 | QPSK | 1 | 0 | 0 | 23.46 | 23.35 | 23.35 |
| | | | 1 | 25 | 0 | 23.12 | 23.14 | 23.13 |
| | | | 1 | 49 | 0 | 23.07 | 23.10 | 23.07 |
| | | | 25 | 0 | 1 | 22.34 | 22.39 | 22.37 |
| | | | 25 | 12 | 1 | 22.26 | 22.32 | 22.28 |
| | | | 25 | 25 | 1 | 22.31 | 22.37 | 22.33 |
| | | | 50 | 0 | 1 | 22.25 | 22.39 | 22.35 |
| | | 16QAM | 1 | 0 | 1 | 22.38 | 22.54 | 22.15 |
| | | | 1 | 25 | 1 | 21.80 | 22.14 | 21.68 |
| | | | 1 | 49 | 1 | 22.04 | 22.20 | 21.92 |
| | | | 25 | 0 | 2 | 21.39 | 21.37 | 21.25 |
| | | | 25 | 12 | 2 | 21.32 | 21.30 | 21.18 |
| | | | 25 | 25 | 2 | 21.28 | 21.27 | 21.24 |
| | | | 50 | 0 | 2 | 21.18 | 21.17 | 21.23 |
| Band | BW (MHz) | Mode | RB Allocation | RB offset | Target MPR | Avg Pwr [dBm] | | |
| | | | | | | Max. Power | | |
| | | | | | | 2557.5 MHz | 2593 MHz | 2652.5 MHz |
| LTE Band 41 | 5 | QPSK | 1 | 0 | 0 | 23.28 | 23.14 | 23.13 |
| | | | 1 | 12 | 0 | 23.29 | 23.16 | 23.51 |
| | | | 1 | 24 | 0 | 23.24 | 23.26 | 23.28 |
| | | | 12 | 0 | 1 | 22.33 | 22.30 | 22.30 |
| | | | 12 | 7 | 1 | 22.31 | 22.20 | 22.19 |
| | | | 12 | 13 | 1 | 22.36 | 22.44 | 22.26 |
| | | | 25 | 0 | 1 | 22.42 | 22.49 | 22.23 |
| | | 16QAM | 1 | 0 | 1 | 22.90 | 23.00 | 22.17 |
| | | | 1 | 12 | 1 | 22.86 | 23.00 | 22.31 |
| | | | 1 | 24 | 1 | 23.00 | 23.00 | 22.05 |
| | | | 12 | 0 | 2 | 21.53 | 21.33 | 21.39 |
| | | | 12 | 7 | 2 | 21.38 | 21.37 | 21.12 |
| | | | 12 | 13 | 2 | 21.32 | 21.46 | 21.31 |
| | | | 25 | 0 | 2 | 21.41 | 21.27 | 21.22 |

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r02;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM

| Band | Channel | f [MHz] | Mode | Ratio [dB] | Limit [dB] |
|---------|---------|---------|-------|------------|------------|
| GSM850 | 190 | 836.6 | GPRS | 2.67 | 13.00 |
| | | | EGPRS | 5.74 | |
| GSM1900 | 661 | 1880.0 | GPRS | 2.71 | |
| | | | EGPRS | 5.70 | |

WCDMA


| Band | Channel | f [MHz] | Mode | Ratio [dB] | Limit [dB] |
|--------|---------|---------|-------|------------|------------|
| Band 5 | 4183 | 836.6 | REL99 | 2.59 | 13.00 |
| | | | HSDPA | 2.98 | |
| Band 2 | 9400 | 1880.0 | REL99 | 3.18 | |
| | | | HSDPA | 3.30 | |

LTE


| Band | BW [MHz] | Channel | f [MHz] | Mode | Ratio [dB] | Limit [dB] |
|---------|----------|---------|---------|-------|------------|------------|
| Band 41 | 20 | 40620 | 2593.0 | QPSK | 2.74 | 13.00 |
| | | | | 16QAM | 3.39 | |
| | 15 | | | QPSK | 2.55 | |
| | | | | 16QAM | 3.38 | |
| | 10 | | | QPSK | 2.59 | |
| | | | | 16QAM | 3.37 | |
| | 5 | | | QPSK | 2.58 | |
| | | | | 16QAM | 3.53 | |

9.2. CONDUCTED PEAK TO AVERAGE PLOTS


GSM

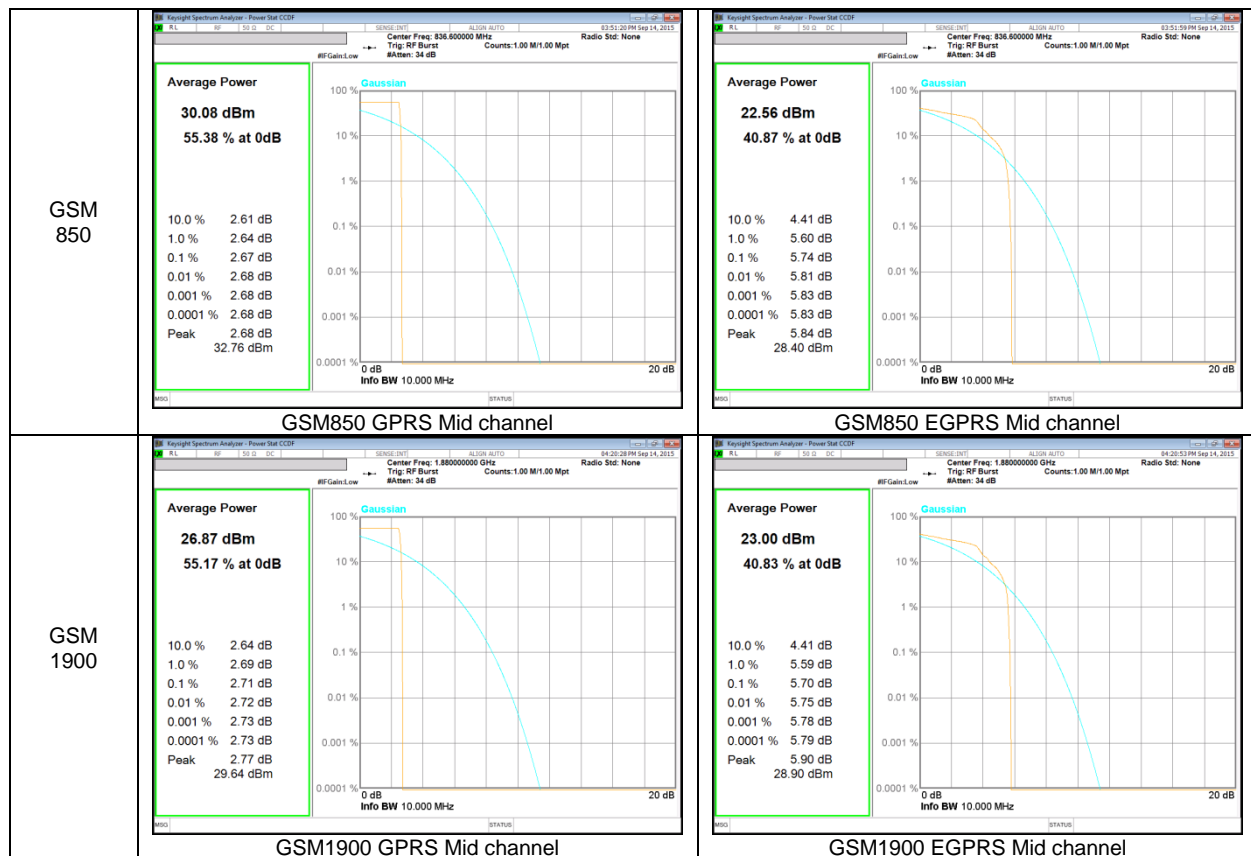

WCDMA

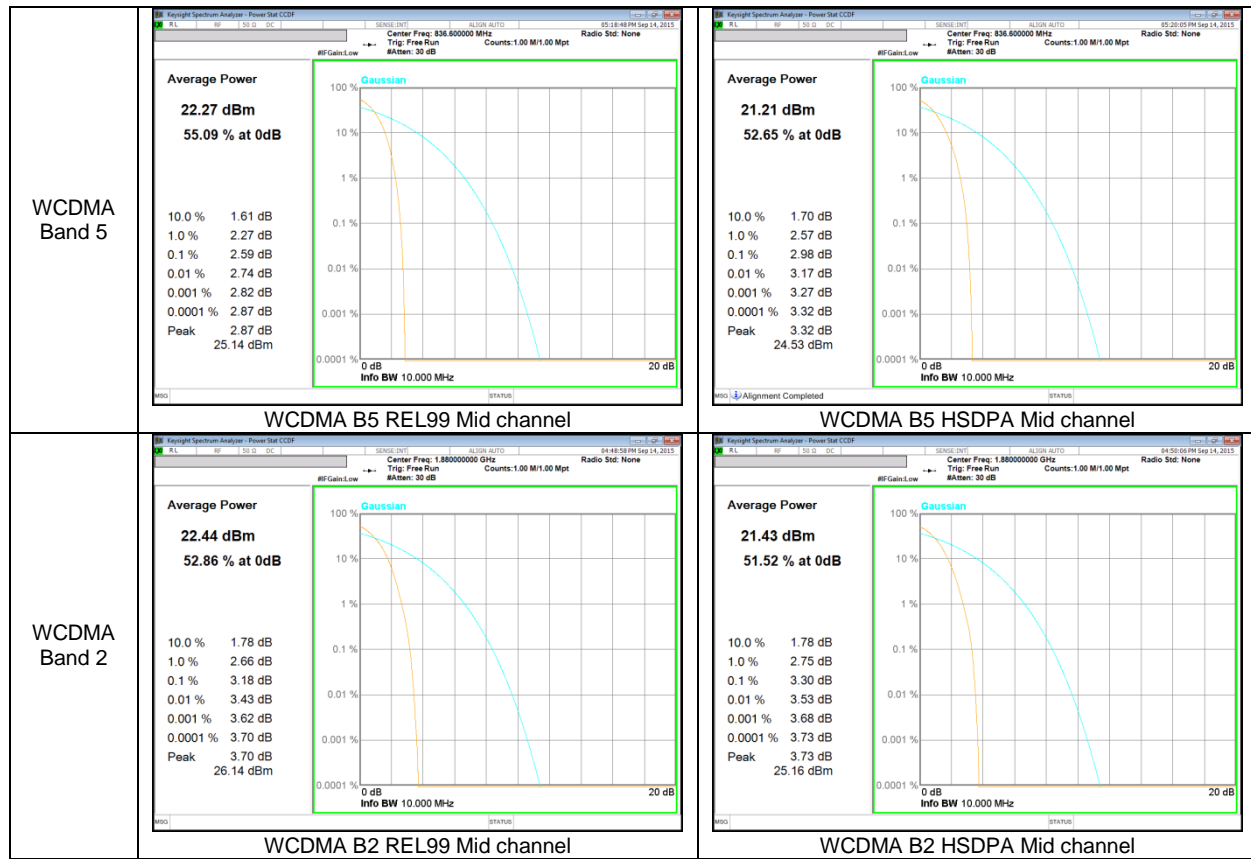

LTE Band 41

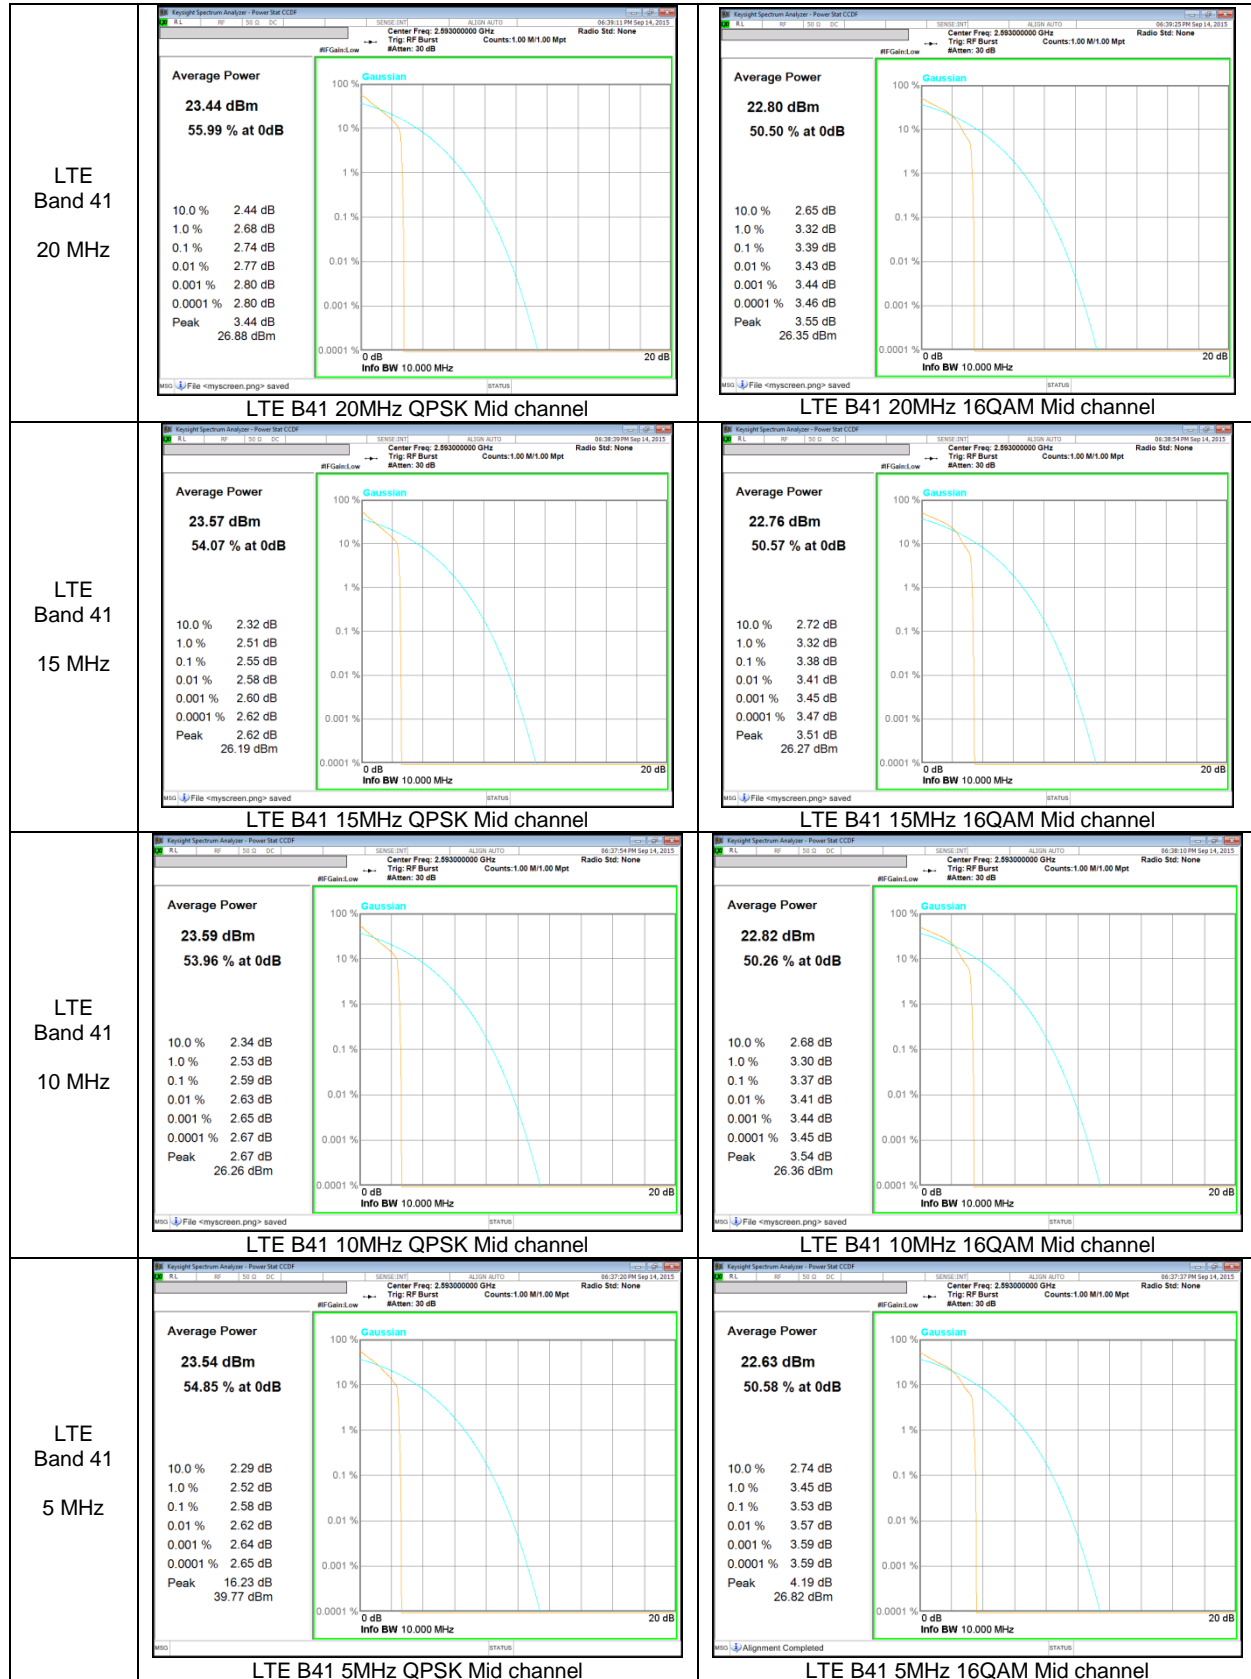

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM

| Band | Mode | Channel | f [MHz] | 99% BW [KHz] | 26dB BW [KHz] |
|---------|-------|---------|---------|--------------|---------------|
| GSM850 | GPRS | 128 | 824.2 | 243.54 | 311.5 |
| | | 190 | 836.6 | 240.21 | 318.6 |
| | | 251 | 848.8 | 244.77 | 316.2 |
| | EGPRS | 128 | 824.2 | 249.36 | 315.3 |
| | | 190 | 836.6 | 227.57 | 296.2 |
| | | 251 | 848.8 | 243.11 | 300.6 |
| GSM1900 | GPRS | 512 | 1850.2 | 245.57 | 306.3 |
| | | 661 | 1880.0 | 243.04 | 317.9 |
| | | 810 | 1909.8 | 241.61 | 318.4 |
| | EGPRS | 512 | 1850.2 | 245.16 | 321.4 |
| | | 661 | 1880.0 | 246.63 | 303.8 |
| | | 810 | 1909.8 | 244.86 | 312.3 |

WCDMA

| Band | Mode | Channel | f [MHz] | 99% BW [MHz] | 26dB BW [MHz] |
|--------|-------|---------|---------|--------------|---------------|
| Band 5 | REL99 | 4132 | 826.4 | 4.1567 | 4.625 |
| | | 4183 | 836.6 | 4.1573 | 4.627 |
| | | 4233 | 846.6 | 4.1442 | 4.619 |
| | HSDPA | 4132 | 826.4 | 4.1600 | 4.602 |
| | | 4183 | 836.6 | 4.1428 | 4.599 |
| | | 4233 | 846.6 | 4.1570 | 4.611 |
| Band 2 | REL99 | 9262 | 1852.4 | 4.1621 | 4.626 |
| | | 9400 | 1880.0 | 4.1621 | 4.611 |
| | | 9538 | 1907.6 | 4.1757 | 4.617 |
| | HSDPA | 9262 | 1852.4 | 4.1678 | 4.614 |
| | | 9400 | 1880.0 | 4.1836 | 4.618 |
| | | 9538 | 1907.6 | 4.1675 | 4.626 |

LTE Band 41


| Band | BW [MHz] | Channel | f [MHz] | Mode | 99% BW [MHz] | 26dB BW [MHz] |
|---------|----------|---------|---------|-------|--------------|---------------|
| Band 41 | 20 | 40340 | 2565.0 | QPSK | 17.872 | 19.38 |
| | | | | 16QAM | 17.848 | 19.57 |
| | | 40620 | 2593.0 | QPSK | 17.918 | 19.41 |
| | | | | 16QAM | 17.877 | 19.52 |
| | | 41140 | 2645.0 | QPSK | 17.847 | 19.43 |
| | | | | 16QAM | 17.879 | 19.23 |
| | 15 | 40315 | 2562.5 | QPSK | 13.415 | 14.69 |
| | | | | 16QAM | 13.437 | 14.61 |
| | | 40620 | 2593.0 | QPSK | 13.442 | 15.20 |
| | | | | 16QAM | 13.448 | 14.95 |
| | | 41165 | 2647.5 | QPSK | 13.428 | 14.80 |
| | | | | 16QAM | 13.419 | 14.95 |
| | 10 | 40290 | 2560.0 | QPSK | 8.9719 | 9.936 |
| | | | | 16QAM | 8.9567 | 9.871 |
| | | 40620 | 2593.0 | QPSK | 8.9606 | 9.854 |
| | | | | 16QAM | 8.9707 | 9.922 |
| | | 41190 | 2650.0 | QPSK | 8.9903 | 9.865 |
| | | | | 16QAM | 8.9690 | 9.908 |
| | 5 | 40265 | 2557.5 | QPSK | 4.4811 | 5.024 |
| | | | | 16QAM | 4.4835 | 4.991 |
| | | 40620 | 2593.0 | QPSK | 4.4876 | 5.101 |
| | | | | 16QAM | 4.4907 | 5.029 |
| | | 41215 | 2652.5 | QPSK | 4.4841 | 5.016 |
| | | | | 16QAM | 4.4883 | 4.981 |

10.1.2. OCCUPIED BANDWIDTH PLOTS


GSM 850




GSM 1900

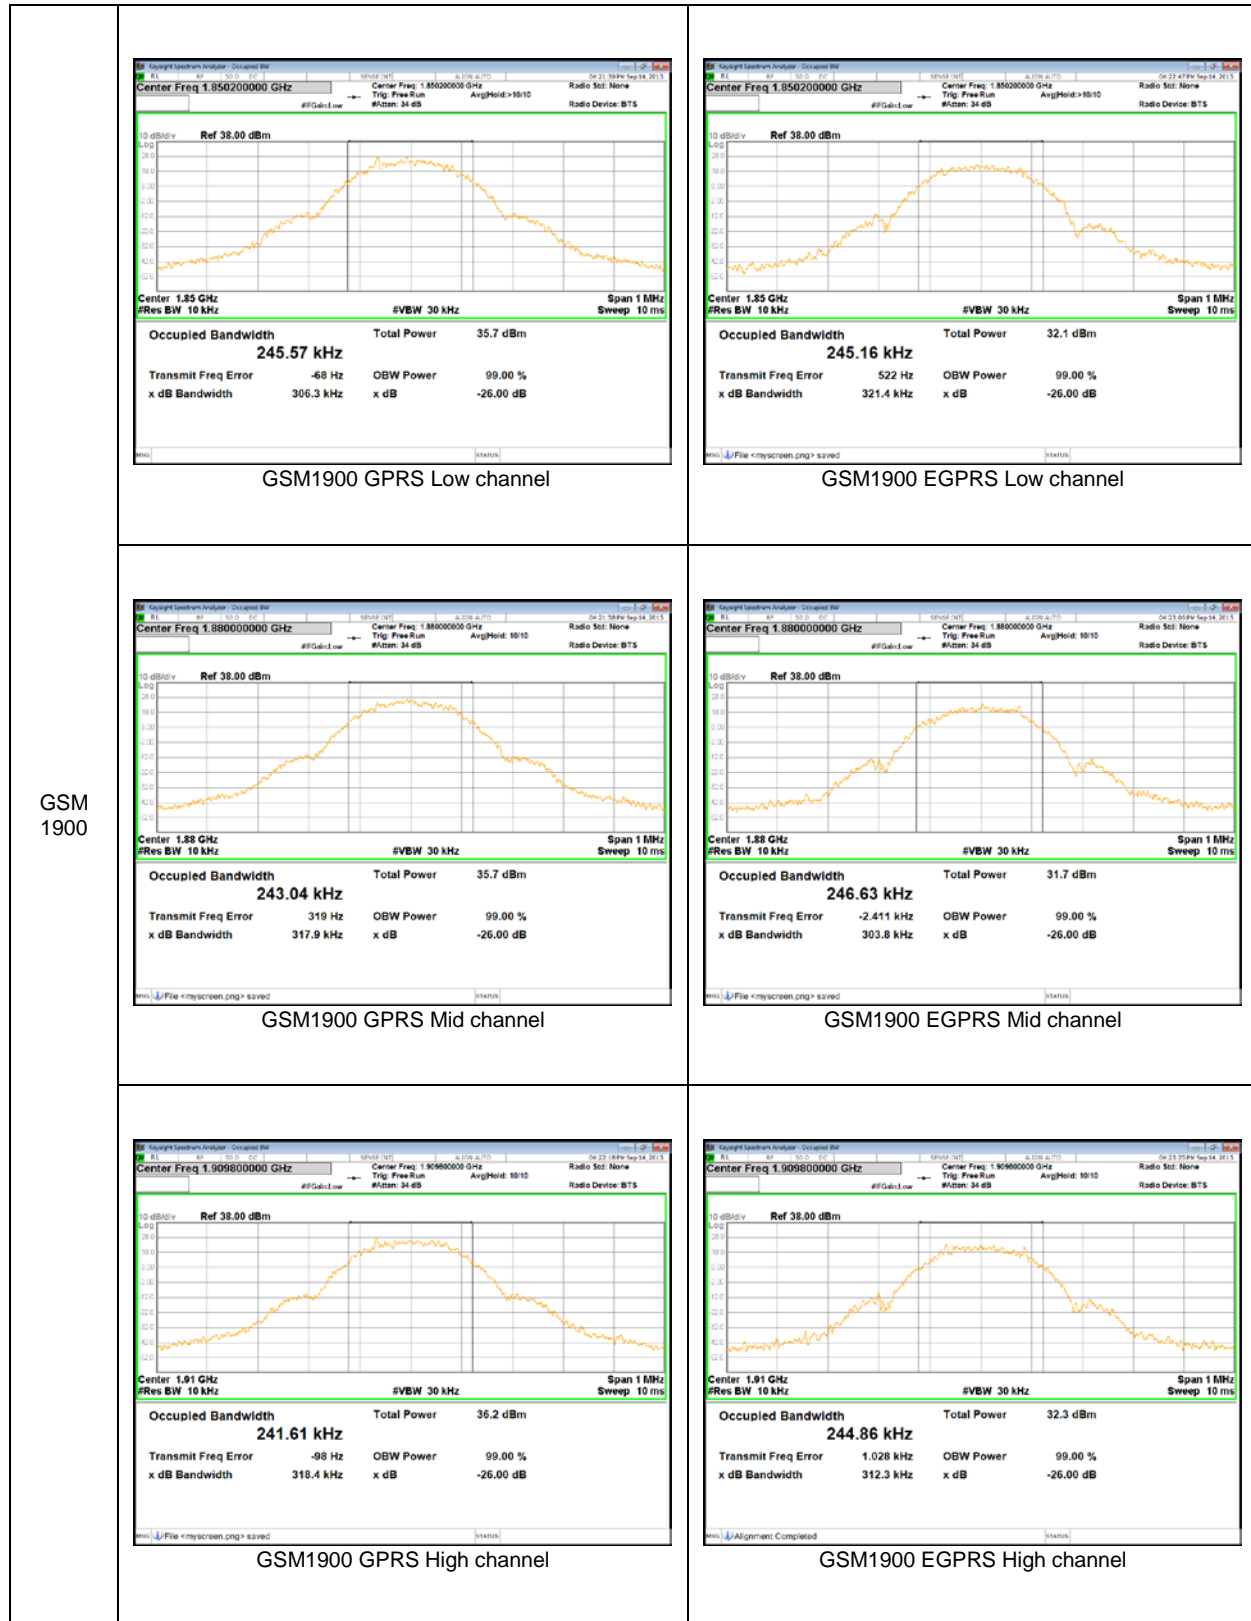


WCDMA Band 5

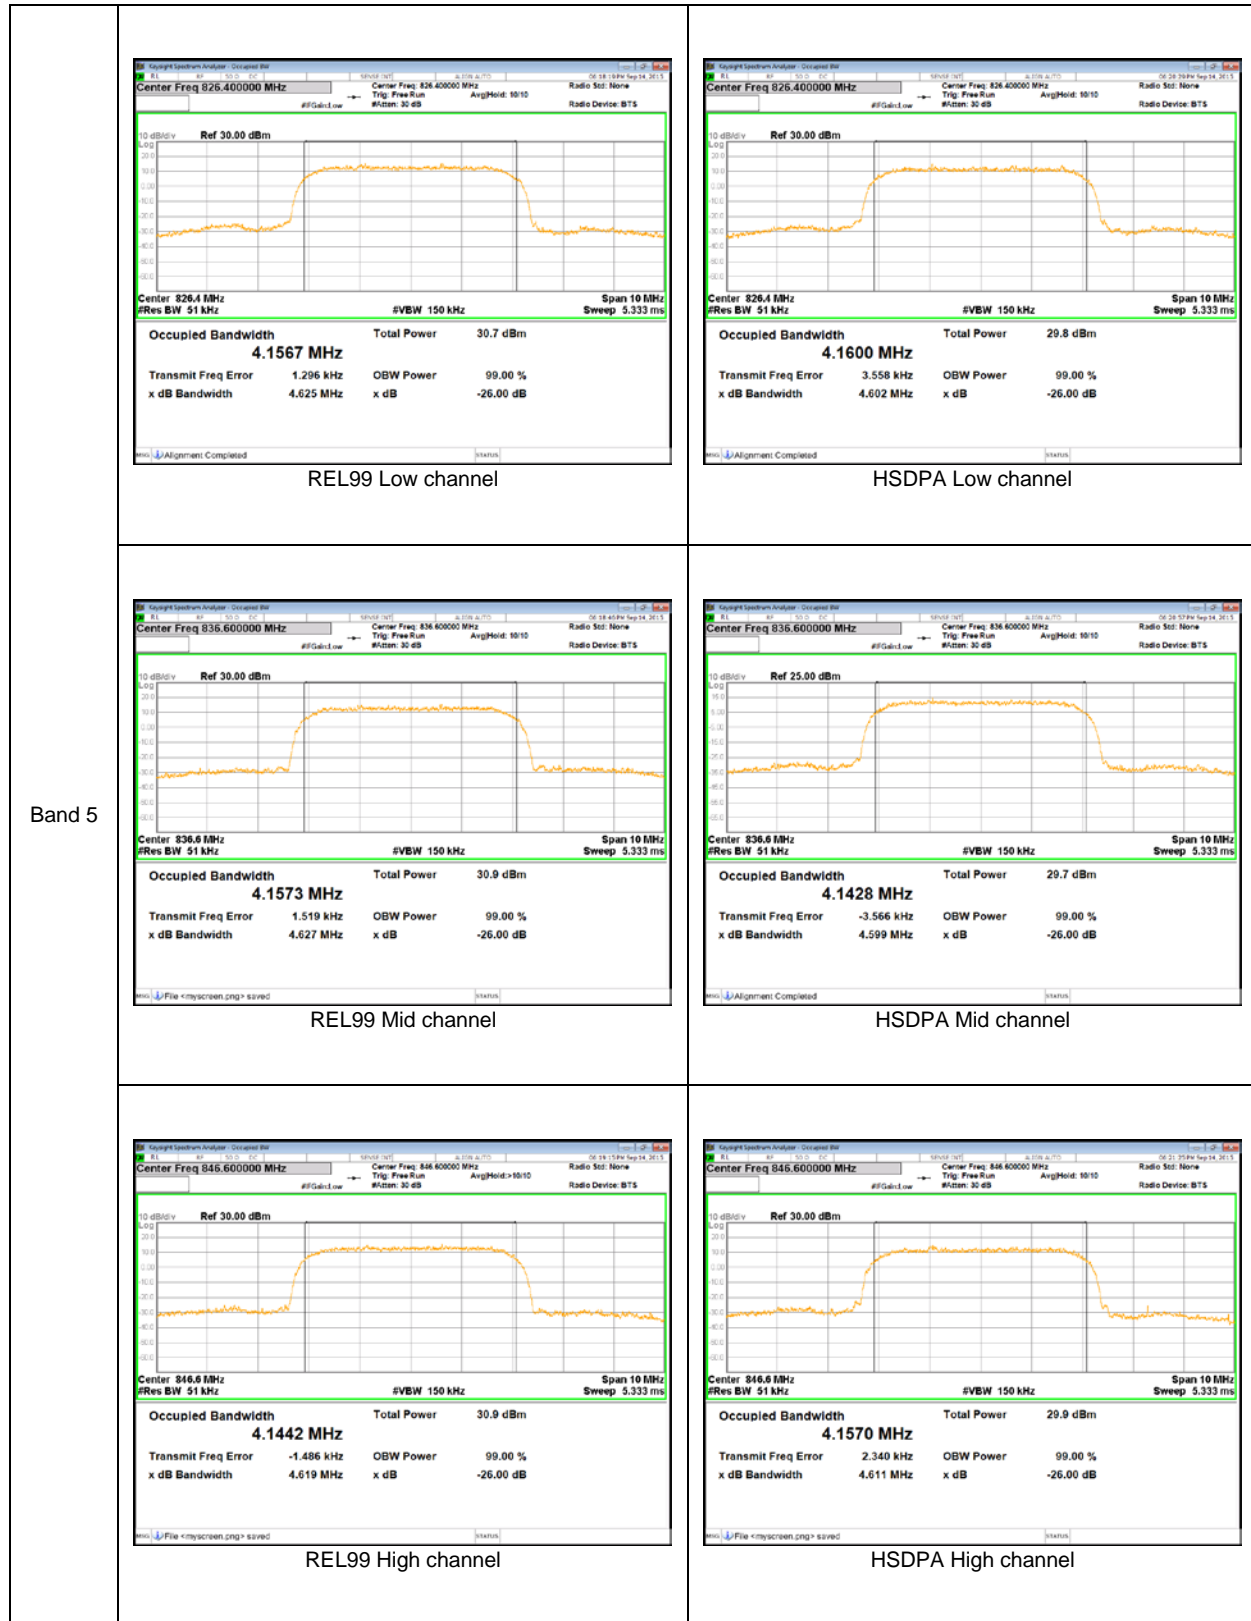


WCDMA Band 2

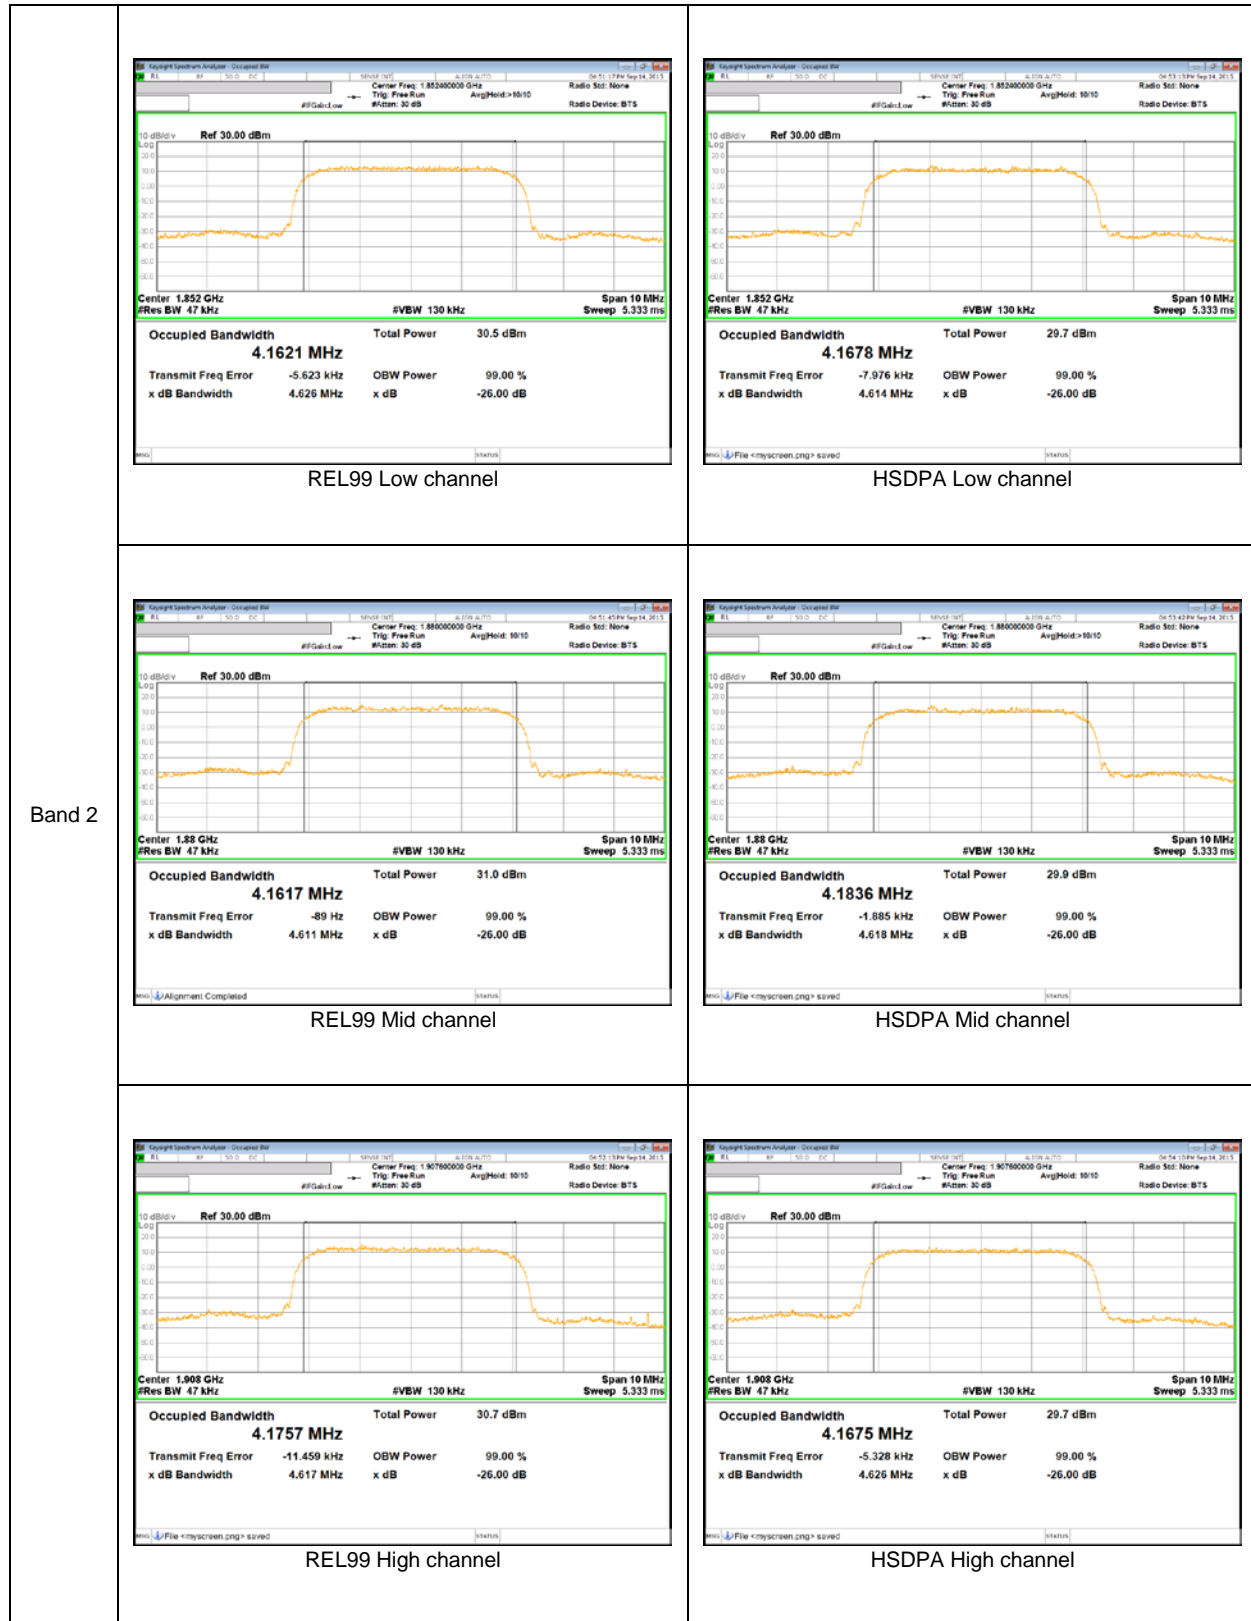

LTE Band 41

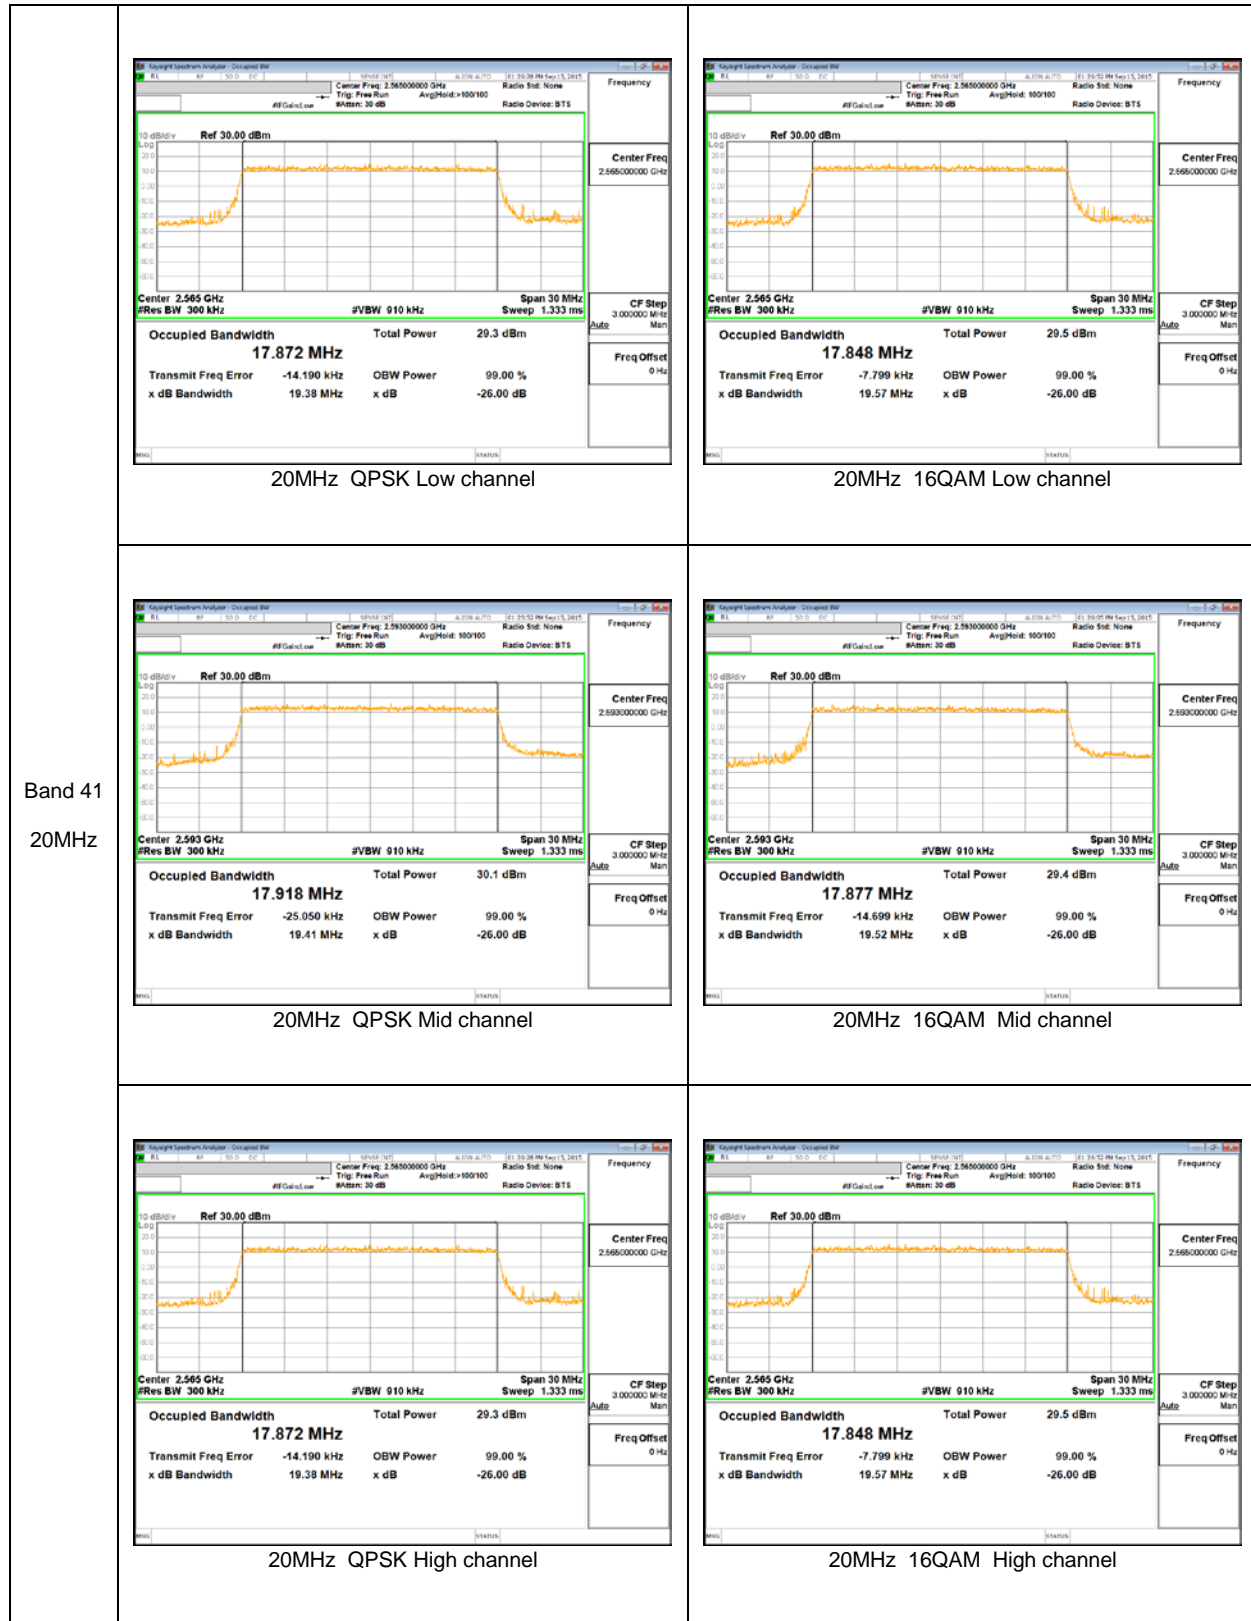

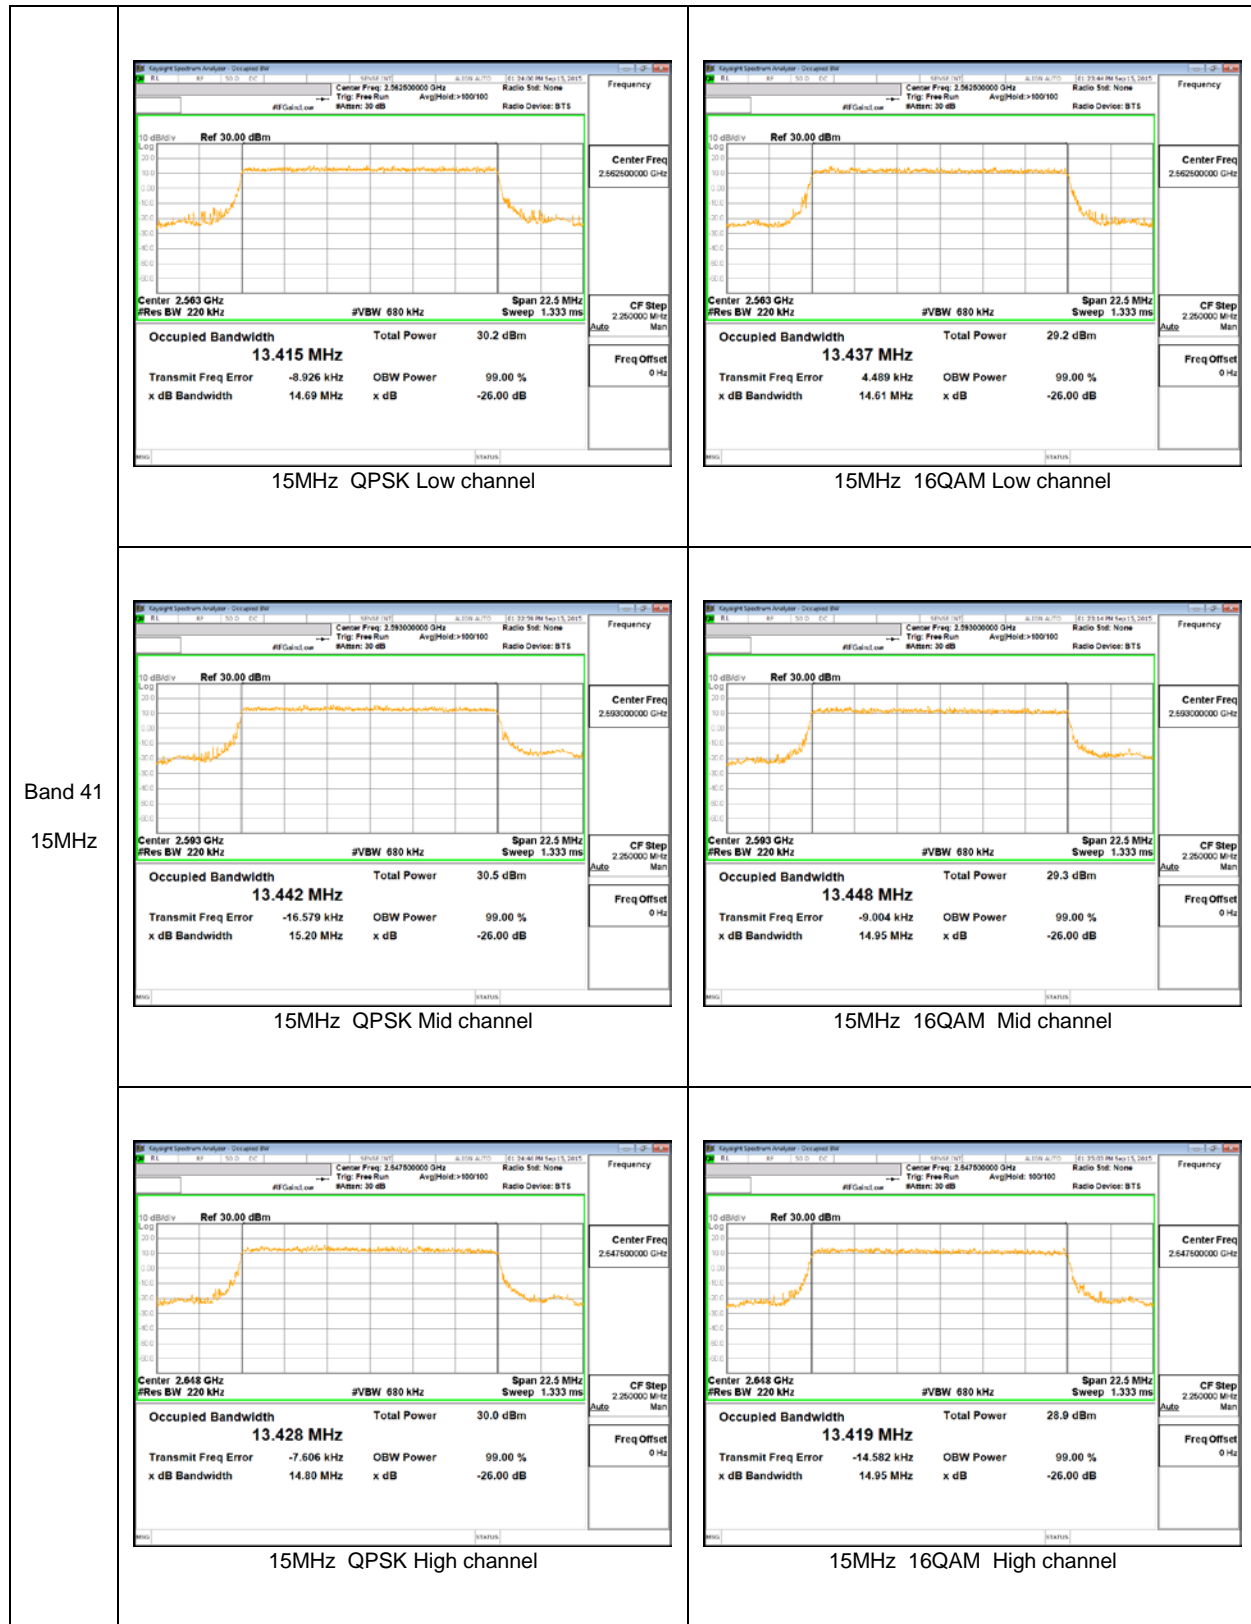





10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238 and §27. 53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27.53(m) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

GSM

| Band | Mode | Side | f [MHz] | Level [dBm] | Limit [dBm] |
|---------|-------|-------|-----------|-------------|-------------|
| GSM850 | GPRS | Lower | 823.9784 | -24.886 | -13.00 |
| | | Upper | 849.0220 | -25.190 | |
| | EGPRS | Lower | 823.9840 | -34.243 | |
| | | Upper | 849.0179 | -30.777 | |
| GSM1900 | GPRS | Lower | 1849.9827 | -26.610 | |
| | | Upper | 1910.0152 | -26.610 | |
| | EGPRS | Lower | 1849.9809 | -30.945 | |
| | | Upper | 1910.0116 | -29.938 | |

WCDMA

| Band | Mode | Side | f [MHz] | Level [dBm] | Limit [dBm] |
|--------|-------|-------|---------|-------------|-------------|
| Band 5 | REL99 | Lower | 824 | -32.636 | -13.00 |
| | | Upper | 849 | -34.615 | |
| | HSDPA | Lower | 824 | -31.446 | |
| | | Upper | 849 | -35.124 | |
| Band 2 | REL99 | Lower | 1850 | -34.251 | |
| | | Upper | 1910 | -36.718 | |
| | HSDPA | Lower | 1850 | -33.794 | |
| | | Upper | 1910 | -36.093 | |

LTE 41

| Bandwidth | Mode | f [MHz] | RB Status | Side Trace | Level [dBm] | Limit [dBm] |
|---------------|---------------|---------------|---------------|---------------|-------------|-------------|
| 20 MHz | QPSK | 2565.0 | 1RB | Lower Trace 1 | -27.92 | -13.00 |
| | | | | Lower Trace 2 | -36.80 | -25.00 |
| | | FRB | Lower Trace 1 | -25.36 | -13.00 | |
| | | | Lower Trace 2 | -31.62 | -25.00 | |
| | | 2645.0 | 1RB | Upper Trace 1 | -29.55 | -10.00 |
| | | | | Upper Trace 2 | -36.24 | -13.00 |
| | Upper Trace 3 | | | -44.51 | -25.00 | |
| | FRB | Upper Trace 1 | -24.05 | -10.00 | | |
| | | Upper Trace 2 | -29.60 | -13.00 | | |
| | | Upper Trace 3 | -41.00 | -25.00 | | |
| | 16QAM | 2565.0 | 1RB | Lower Trace 1 | -29.45 | -13.00 |
| | | | | Lower Trace 2 | -38.24 | -25.00 |
| | | FRB | Lower Trace 1 | -26.72 | -13.00 | |
| | | | Lower Trace 2 | -30.14 | -25.00 | |
| | | 2645.0 | 1RB | Upper Trace 1 | -29.75 | -10.00 |
| | | | | Upper Trace 2 | -36.38 | -13.00 |
| | Upper Trace 3 | | | -44.43 | -25.00 | |
| | FRB | Upper Trace 1 | -26.33 | -10.00 | | |
| Upper Trace 2 | | -29.97 | -13.00 | | | |
| Upper Trace 3 | | -40.33 | -25.00 | | | |
| 15 MHz | QPSK | 2562.5 | 1RB | Lower Trace 1 | -25.16 | -13.00 |
| | | | | Lower Trace 2 | -38.01 | -25.00 |
| | | FRB | Lower Trace 1 | -23.26 | -13.00 | |
| | | | Lower Trace 2 | -28.37 | -25.00 | |
| | | 2647.5 | 1RB | Upper Trace 1 | -27.50 | -10.00 |
| | | | | Upper Trace 2 | -35.79 | -13.00 |
| | Upper Trace 3 | | | -44.29 | -25.00 | |
| | FRB | Upper Trace 1 | -20.98 | -10.00 | | |
| | | Upper Trace 2 | -27.28 | -13.00 | | |
| | | Upper Trace 3 | -37.88 | -25.00 | | |
| | 16QAM | 2562.5 | 1RB | Lower Trace 1 | -26.56 | -13.00 |
| | | | | Lower Trace 2 | -38.48 | -25.00 |
| | | FRB | Lower Trace 1 | -24.91 | -13.00 | |
| | | | Lower Trace 2 | -28.44 | -25.00 | |
| | | 2647.5 | 1RB | Upper Trace 1 | -28.47 | -10.00 |
| | | | | Upper Trace 2 | -36.40 | -13.00 |
| | Upper Trace 3 | | | -44.38 | -25.00 | |
| | FRB | Upper Trace 1 | -22.71 | -10.00 | | |
| Upper Trace 2 | | -28.29 | -13.00 | | | |
| Upper Trace 3 | | -37.14 | -25.00 | | | |

LTE 41 (continued)

| Bandwidth | Mode | f [MHz] | RB Status | Side Trace | Level [dBm] | Limit [dBm] |
|---------------|---------------|---------------|---------------|---------------|-------------|-------------|
| 10 MHz | QPSK | 2560.0 | 1RB | Lower Trace 1 | -27.20 | -13.00 |
| | | | | Lower Trace 2 | -34.22 | -25.00 |
| | | FRB | Lower Trace 1 | -22.25 | -13.00 | |
| | | | Lower Trace 2 | -28.50 | -25.00 | |
| | | 2650.0 | 1RB | Upper Trace 1 | -28.00 | -10.00 |
| | | | | Upper Trace 2 | -35.27 | -13.00 |
| | Upper Trace 3 | | | -44.39 | -25.00 | |
| | FRB | Upper Trace 1 | -18.91 | -10.00 | | |
| | | Upper Trace 2 | -27.96 | -13.00 | | |
| | | Upper Trace 3 | -36.22 | -25.00 | | |
| | 16QAM | 2560.0 | 1RB | Lower Trace 1 | -28.46 | -13.00 |
| | | | | Lower Trace 2 | -35.50 | -25.00 |
| | | FRB | Lower Trace 1 | -23.31 | -13.00 | |
| | | | Lower Trace 2 | -29.57 | -25.00 | |
| | | 2650.0 | 1RB | Upper Trace 1 | -27.99 | -10.00 |
| | | | | Upper Trace 2 | -36.37 | -13.00 |
| | Upper Trace 3 | | | -44.48 | -25.00 | |
| | FRB | Upper Trace 1 | -20.92 | -10.00 | | |
| Upper Trace 2 | | -28.83 | -13.00 | | | |
| Upper Trace 3 | | -35.70 | -25.00 | | | |
| 5 MHz | QPSK | 2557.5 | 1RB | Lower Trace 1 | -18.45 | -13.00 |
| | | | | Lower Trace 2 | -42.57 | -25.00 |
| | | FRB | Lower Trace 1 | -22.41 | -13.00 | |
| | | | Lower Trace 2 | -34.59 | -25.00 | |
| | | 2652.5 | 1RB | Upper Trace 1 | -22.73 | -10.00 |
| | | | | Upper Trace 2 | -43.70 | -13.00 |
| | Upper Trace 3 | | | -43.93 | -25.00 | |
| | FRB | Upper Trace 1 | -21.40 | -10.00 | | |
| | | Upper Trace 2 | -34.92 | -13.00 | | |
| | | Upper Trace 3 | -34.13 | -25.00 | | |
| | 16QAM | 2557.5 | 1RB | Lower Trace 1 | -19.29 | -13.00 |
| | | | | Lower Trace 2 | -43.00 | -25.00 |
| | | FRB | Lower Trace 1 | -22.81 | -13.00 | |
| | | | Lower Trace 2 | -35.07 | -25.00 | |
| | | 2652.5 | 1RB | Upper Trace 1 | -23.38 | -10.00 |
| | | | | Upper Trace 2 | -43.77 | -13.00 |
| | Upper Trace 3 | | | -44.07 | -25.00 | |
| | FRB | Upper Trace 1 | -22.64 | -10.00 | | |
| Upper Trace 2 | | -34.35 | -13.00 | | | |
| Upper Trace 3 | | -35.33 | -25.00 | | | |

10.2.1. BAND EDGE PLOTS

GSM

