

FCC/IC 2G3G REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
January 13, 2020

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2001-FI009

FCC ID:	A3LSMG715U
IC:	649E-SMG715W
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-G715U1
 Additional Model(s): SM-G715W
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §22, §24, §27, §2
 IC Rule(s): RSS-Gen Issue5, RSS-132 Issue3, RSS-133 Issue6, RSS-139 Issue3

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	246 KGXW	0.759	28.80
GSM850 EDGE			242 KG7W	0.160	22.05
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M13F9W	0.093	19.70


Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	249 KGXW	1.235	30.92
GSM1900 EDGE			243 KG7W	0.416	26.19
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M14F9W	0.309	24.90
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M14F9W	0.201	23.03

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center

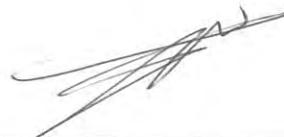

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2001-FI009	January 13, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT.....	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER.....	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 PEAK- TO- AVERAGE RATIO.....	9
3.5 OCCUPIED BANDWIDTH.	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.7 BAND EDGE	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
3.9 WORST CASE(CONDUCTED TEST)	15
3.10 WORST CASE(RADIATED TEST)	16
3.11 RECEIVER SPURIOUS EMISSIONS	17
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION.....	22
8. TEST DATA	24
8.1 EFFECTIVE RADIATED POWER.....	24
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	25
8.3 RADIATED SPURIOUS EMISSIONS	26
8.4 PEAK-TO-AVERAGE RATIO.....	31
8.5 OCCUPIED BANDWIDTH	32
8.6 CONDUCTED SPURIOUS EMISSIONS	33
8.7 BAND EDGE	33
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
8.9 RECEIVER SPURIOUS EMISSIONS	45
9. TEST PLOTS.....	46
10. ANNEX A_ TEST SETUP PHOTO.....	132

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG715U
IC	649E-SMG715W
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §27, §2
IC Rule(s):	RSS-Gen Issue5, RSS-132 Issue3, RSS-133 Issue6, RSS-139 Issue3
EUT Type:	Mobile Phone
Model(s):	SM-G715U1
Additional Model(s):	SM-G715W
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700)
Date(s) of Tests:	December 17, 2019 ~ January 08, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC, ANT+.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dB})}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

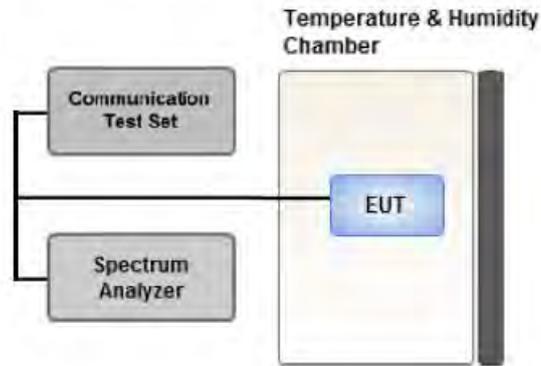

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

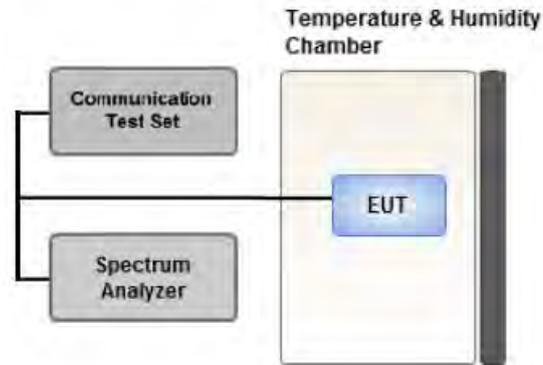

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

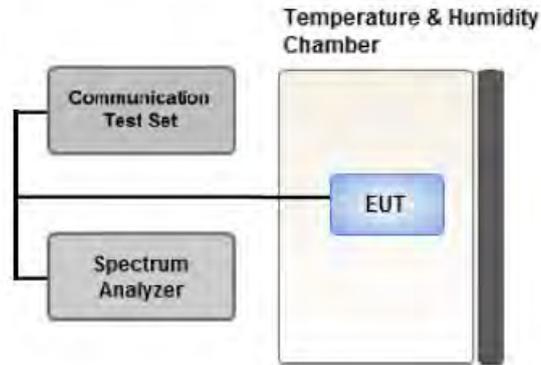

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

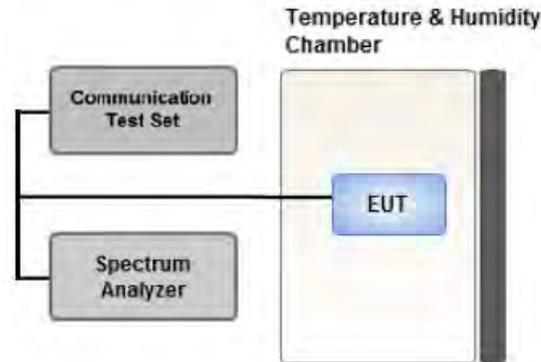

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

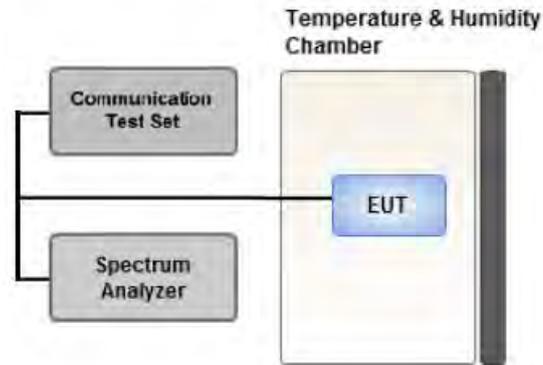

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to $+50^{\circ}\text{C}$ in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to $+50^{\circ}\text{C}$. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-G715U1 & additional models were tested and the worst case results are reported.

(Worst case : SM-G715U1)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, Mid, High
	2G : EDGE(1 TX Slot)	Low, Mid, High
Band Edge	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	2G : Voice 3G : QPSK	Low, Mid, High

[Test Channel]

	UplinkChannel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-G715U1 & additional models were tested and the worst case results are reported.

(Worst case : SM-G715U1)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z	Low, Mid, High
			WCDMA B4 : Z	
			WCDMA B5 : X	
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 :X	Low, Mid, High
			WCDMA B4 :Y	
			WCDMA B5 : Z	

[Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : X GSM1900 : Z	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : X GSM1900 : Z	GSM 850 : Mid GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : Z GSM1900 : Z	Low, Mid, High

[Test Channel]

	UplinkChannel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

3.11 RECEIVER SPURIOUS EMISSIONS

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/20/2019	Annual	03/20/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	05/17/2019	Annual	05/17/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h)	RSS 132(5.5) RSS 133(6.5) RSS 139(6.6)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	-	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d), §27.50(d)(5)	RSS 133(6.4) RSS 139(6.5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	RSS 132(5.3)	< 2.5 ppm	PASS
	§24.235, §27.54	RSS 133(6.3) RSS 139(6.4)	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	RSS 132(5.4)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	RSS 133(6.4) RSS 139(6.5)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	RSS 132(5.5) RSS 133(6.5) RSS 139(6.6)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.9	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
GSM850	128	824.2	-23.28	40.33	-10.25	1.28	H	< 7.00	0.759	28.80
	190	836.6	-24.61	39.57	-10.19	1.29	H		0.645	28.09
	251	848.8	-25.79	38.23	-10.14	1.30	H		0.477	26.79
EDGE	128	824.2	-30.03	33.58	-10.25	1.28	H		0.160	22.05

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-32.38	31.23	-10.25	1.28	H	< 7.00	0.093	19.70
	4183	836.6	-33.15	31.03	-10.19	1.29	H		0.090	19.55
	4233	846.6	-33.77	30.28	-10.15	1.30	H		0.076	18.83

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
GSM1900	512	1850.2	-10.96	22.68	10.10	1.94	V	< 2.00	1.213	30.84
	661	1880.0	-11.64	22.25	10.15	1.98	V		1.101	30.42
	810	1909.8	-11.65	22.69	10.23	2.00	V		1.235	30.92
EDGE	810	1909.8	-16.38	17.96	10.23	2.00	V		0.416	26.19

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
WCDMA1900	9262	1852.4	-17.80	15.84	10.10	1.94	V	< 2.00	0.251	24.00
	9400	1880.0	-17.49	16.40	10.15	1.98	V		0.286	24.57
	9538	1907.6	-17.67	16.67	10.23	2.00	V		0.309	24.90

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit W	EIRP	
	channel	Freq.(MHz)							W	dBm
WCDMA1700	1312	1712.4	-18.48	14.82	9.85	1.88	V	< 1.00	0.190	22.79
	1412	1732.4	-18.36	15.02	9.90	1.89	V		0.201	23.03
	1513	1752.6	-18.56	14.76	10.00	1.90	V		0.193	22.86

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-32.38	31.23	-10.25	1.28	H	< 7.00	0.153	21.85
	4183	836.6	-33.15	31.03	-10.19	1.29	H		0.148	21.70
	4233	846.6	-33.77	30.28	-10.15	1.30	H		0.125	20.98

Note:

1. WCDMA850 EIRP result = ERP + 2.15

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MEASURED OUTPUT POWER: 30.95 dBm = 1.245 W
- ▣ MODULATION SIGNAL: GSM850
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \times \log_{10}(W) =$ 43.95 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
128 (824.2)	1,648.40	-38.54	9.50	-49.30	1.84	H	-41.64	72.60
	2,472.60	-42.86	10.60	-47.90	2.28	H	-39.58	70.53
	3,296.80	-39.34	12.25	-41.16	2.69	H	-31.60	62.56
	4,121.00	-49.23	12.80	-47.85	3.02	V	-38.07	69.02
	4,945.20	-52.08	12.80	-46.38	3.36	V	-36.94	67.89
190 (836.6)	1,673.20	-34.52	9.65	-45.28	1.86	V	-37.49	68.44
	2,509.80	-40.07	10.75	-45.18	2.32	H	-36.75	67.70
	3,346.40	-42.05	12.48	-43.70	2.70	H	-33.93	64.88
	4,183.00	-49.63	12.80	-48.08	3.06	H	-38.34	69.29
251 (848.8)	1,697.60	-31.02	9.80	-41.49	1.87	V	-33.56	64.51
	2,546.40	-36.97	10.88	-41.08	2.32	H	-32.52	63.48
	3,395.20	-46.81	12.68	-48.79	2.72	H	-38.83	69.78
	4,244.00	-54.83	12.80	-52.48	3.07	H	-42.75	73.70
	5,092.80	-55.68	12.35	-48.56	3.41	H	-39.62	70.57

- ▣ MEASURED OUTPUT POWER: 30.92 dBm = 1.235 W
- ▣ MODULATION SIGNAL: GSM1900
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \times \log_{10}(W) =$ 43.92 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
512 (1850.2)	3,700.40	-48.40	12.40	-53.37	2.86	H	-43.83	74.74
	5,550.60	-38.72	13.10	-37.17	3.58	H	-27.65	58.56
	7,400.80	-55.75	11.10	-45.96	4.26	V	-39.12	70.03
661 (1880.0)	3,760.00	-50.19	12.48	-55.17	2.88	H	-45.57	76.48
	5,640.00	-38.22	13.30	-36.84	3.62	H	-27.16	58.08
	7,520.00	-57.19	11.30	-47.02	4.30	V	-40.02	70.93
810 (1909.8)	3,819.60	-48.35	12.40	-53.32	2.90	V	-43.82	74.74
	5,729.40	-39.35	13.35	-37.25	3.63	H	-27.53	58.45
	7,639.20	-56.95	11.65	-46.82	4.34	V	-39.51	70.43

- ▣ MEASURED OUTPUT POWER: 21.85 dBm = 0.153 W
- ▣ MODULATION SIGNAL: WCDMA850
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \times \log_{10}(W) =$ 34.85 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
4,132 (826.4)	1,652.80	-53.50	9.50	-64.26	1.84	H	-56.60	78.46
	2,479.20	-55.67	10.60	-60.48	2.30	H	-52.18	74.03
	3,305.60	-56.98	12.33	-58.97	2.69	H	-49.33	71.19
4,183 (836.6)	1,673.20	-52.87	9.65	-63.63	1.86	H	-55.84	77.69
	2,509.80	-55.44	10.75	-60.55	2.32	V	-52.12	73.97
	3,346.40	-57.48	12.48	-59.13	2.70	V	-49.36	71.21
4,233 (846.6)	1,693.20	-52.51	9.73	-63.13	1.87	H	-55.27	77.12
	2,539.80	-55.52	10.85	-59.38	2.32	H	-50.85	72.70
	3,386.40	-57.34	12.63	-59.34	2.72	H	-49.43	71.28

- ▣ MEASURED OUTPUT POWER: 24.90 dBm = 0.309 W
- ▣ MODULATION SIGNAL: WCDMA1900
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \times \log_{10}(W) =$ 37.90 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
9262 (1852.4)	3,704.80	-54.83	12.42	-59.82	2.86	H	-50.26	75.15
	5,557.20	-52.52	13.15	-50.98	3.58	H	-41.41	66.31
	7,409.60	-56.67	11.13	-46.76	4.25	H	-39.88	64.77
9400 (1880.0)	3,760.00	-55.00	12.48	-59.98	2.88	H	-50.38	75.27
	5,640.00	-51.14	13.30	-49.76	3.62	H	-40.08	64.98
	7,520.00	-57.84	11.30	-47.67	4.30	V	-40.67	65.56
9538 (1907.6)	3,815.20	-54.42	12.40	-59.43	2.90	H	-49.93	74.82
	5,722.80	-56.01	13.35	-53.87	3.63	H	-44.15	69.05
	7,630.40	-57.21	11.60	-47.16	4.34	V	-39.90	64.79

- ▣ MEASURED OUTPUT POWER: 23.03 dBm = 0.201 W
- ▣ MODULATION SIGNAL: WCDMA1700
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \times \log_{10}(W) =$ 36.03 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
1312 (1712.4)	3,424.80	-54.32	12.60	-61.16	2.73	V	-51.29	74.32
	5,137.20	-54.60	12.45	-52.31	3.39	V	-43.25	66.28
	6,849.60	-56.06	12.20	-50.06	4.03	V	-41.89	64.91
1412 (1732.4)	3,464.80	-54.03	12.48	-60.90	2.76	H	-51.18	74.20
	5,197.20	-54.39	12.90	-53.66	3.43	H	-44.19	67.22
	6,929.60	-56.14	12.05	-48.69	4.08	H	-40.72	63.75
1513 (1752.6)	3,505.20	-54.44	12.28	-60.94	2.76	H	-51.42	74.44
	5,257.80	-51.48	13.25	-51.20	3.47	H	-41.42	64.45
	7,010.40	-57.02	11.65	-48.76	4.10	V	-41.21	64.24

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				T _{XTotal} (ms)	T _{XOn} (ms)	Factor (dB)			
GSM1900	661	30.132	20.25	4.6160	0.5475	9.26	0.63	13	Pass
GSM1900 EDGE	661	28.513	15.54	4.616	0.5475	9.26	3.72		
WCDMA1900	9400	CCDF Procedure					2.85		
WCDMA1700	1732.4						3.27		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 64 ~ 71.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \text{ (} P_{Avg} = \text{Average Power} + \text{Duty cycle Factor)}$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), X = T_{XOn} / T_{XTotal}$$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	244.63
	190	836.60	246.38
	251	848.80	245.31
GSM850 EDGE	128	824.20	241.16
	190	836.60	241.69
	251	848.80	236.30
GSM1900	512	1,850.20	249.12
	661	1,880.00	243.76
	810	1,909.80	247.89
GSM1900 EDGE	512	1,850.20	235.84
	661	1,880.00	242.52
	810	1,909.80	236.53
WCDMA850	4132	826.40	4.1297
	4183	836.60	4.1298
	4233	846.60	4.1295
WCDMA1900	9262	1852.40	4.1286
	9400	1880.00	4.1362
	9538	1907.60	4.1327
WCDMA1700	1312	1712.40	4.1386
	1412	1732.40	4.1174
	1513	1752.60	4.1356

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 47 ~ 63.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	3.6531	27.976	-57.78	-29.803	-13.00
	190	3.7024	27.976	-57.74	-29.767	
	251	3.7164	27.976	-58.12	-30.146	
GSM1900	512	19.57474	29.489	-52.492	-23.003	
	661	19.76024	29.489	-53.079	-23.590	
	810	18.91197	29.489	-53.277	-23.788	
WCDMA850	4132	3.7029	27.976	-77.132	-49.156	
	4183	3.7054	27.976	-77.164	-49.188	
	4233	2.5380	27.976	-77.303	-49.327	
WCDMA1900	9262	18.8850	29.489	-73.025	-43.536	
	9400	18.9125	29.489	-72.783	-43.294	
	9538	18.9255	29.489	-73.113	-43.624	
WCDMA1700	1712.4	18.87472	29.489	-72.575	-43.086	
	1732.4	18.93597	29.489	-73.033	-43.544	
	1752.6	16.61717	29.489	-73.149	-43.660	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 108 ~ 131.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 72 ~ 107.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 599 965	0.0	0.000 000	0.0000
100%		-30	836 599 930	-34.6	-0.000 004	-0.0414
100%		-20	836 599 929	-35.6	-0.000 004	-0.0426
100%		-10	836 599 929	-36.4	-0.000 004	-0.0435
100%		0	836 599 931	-34.3	-0.000 004	-0.0410
100%		+10	836 599 931	-34.3	-0.000 004	-0.0410
100%		+30	836 599 929	-36.2	-0.000 004	-0.0432
100%		+40	836 599 930	-34.5	-0.000 004	-0.0413
100%		+50	836 599 930	-34.6	-0.000 004	-0.0413
Batt. Endpoint		3.600	+20	836 599 931	-33.7	-0.000 004

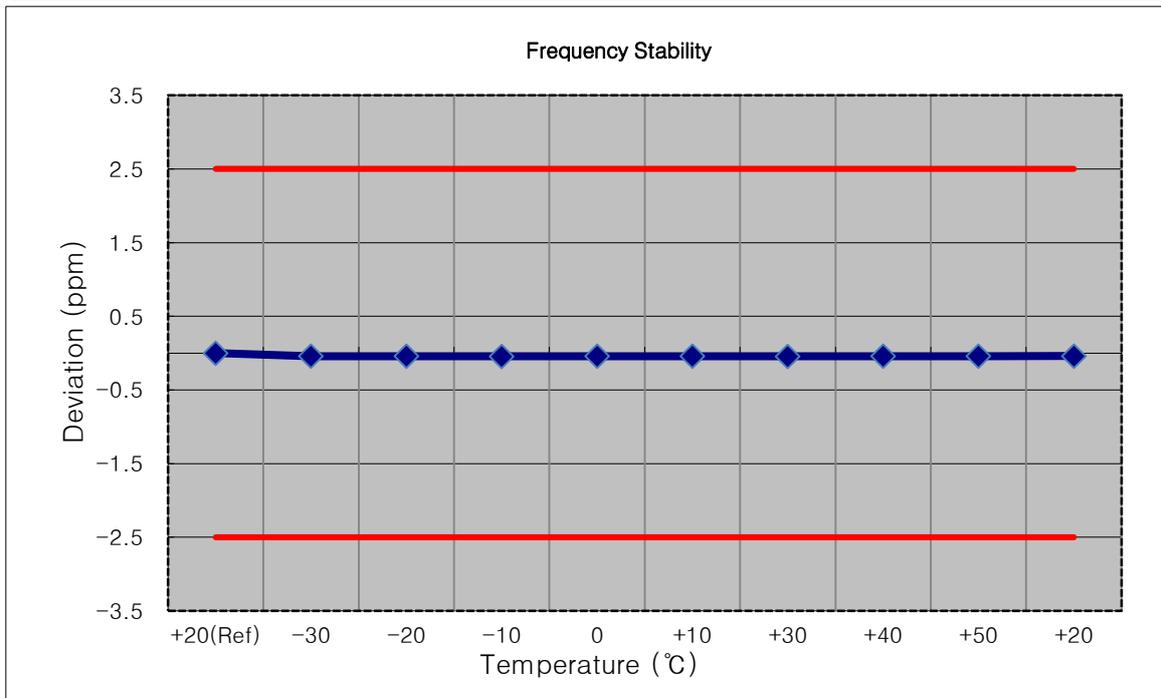


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1850,200,000 Hz
- ▣ CHANNEL: 512
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1850 199 964	0.0	0.000 000	0.0000
100%		-30	1850 199 927	-37.6	-0.000 002	-0.0203
100%		-20	1850 199 928	-36.1	-0.000 002	-0.0195
100%		-10	1850 199 929	-35.4	-0.000 002	-0.0192
100%		0	1850 199 931	-33.6	-0.000 002	-0.0182
100%		+10	1850 199 929	-35.2	-0.000 002	-0.0191
100%		+30	1850 199 929	-35.6	-0.000 002	-0.0192
100%		+40	1850 199 928	-36.0	-0.000 002	-0.0194
100%		+50	1850 199 929	-35.6	-0.000 002	-0.0192
Batt. Endpoint	3.600	+20	1850 199 927	-36.8	-0.000 002	-0.0199

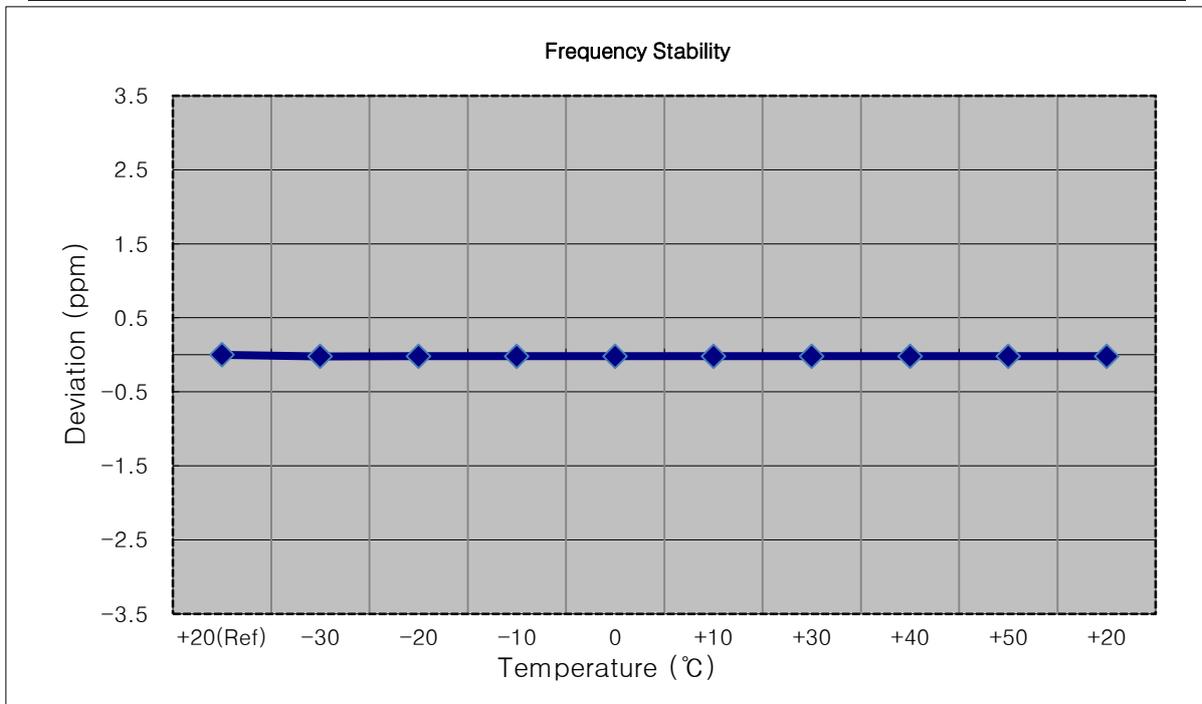


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1879 999 963	0.0	0.000 000	0.000
100%		-30	1879 999 925	-38.5	-0.000 002	-0.020
100%		-20	1879 999 928	-35.5	-0.000 002	-0.019
100%		-10	1879 999 927	-35.7	-0.000 002	-0.019
100%		0	1879 999 927	-35.9	-0.000 002	-0.019
100%		+10	1879 999 929	-34.1	-0.000 002	-0.018
100%		+30	1879 999 927	-35.6	-0.000 002	-0.019
100%		+40	1879 999 926	-37.1	-0.000 002	-0.020
100%		+50	1879 999 928	-35.3	-0.000 002	-0.019
Batt. Endpoint	3.600	+20	1879 999 925	-38.1	-0.000 002	-0.020

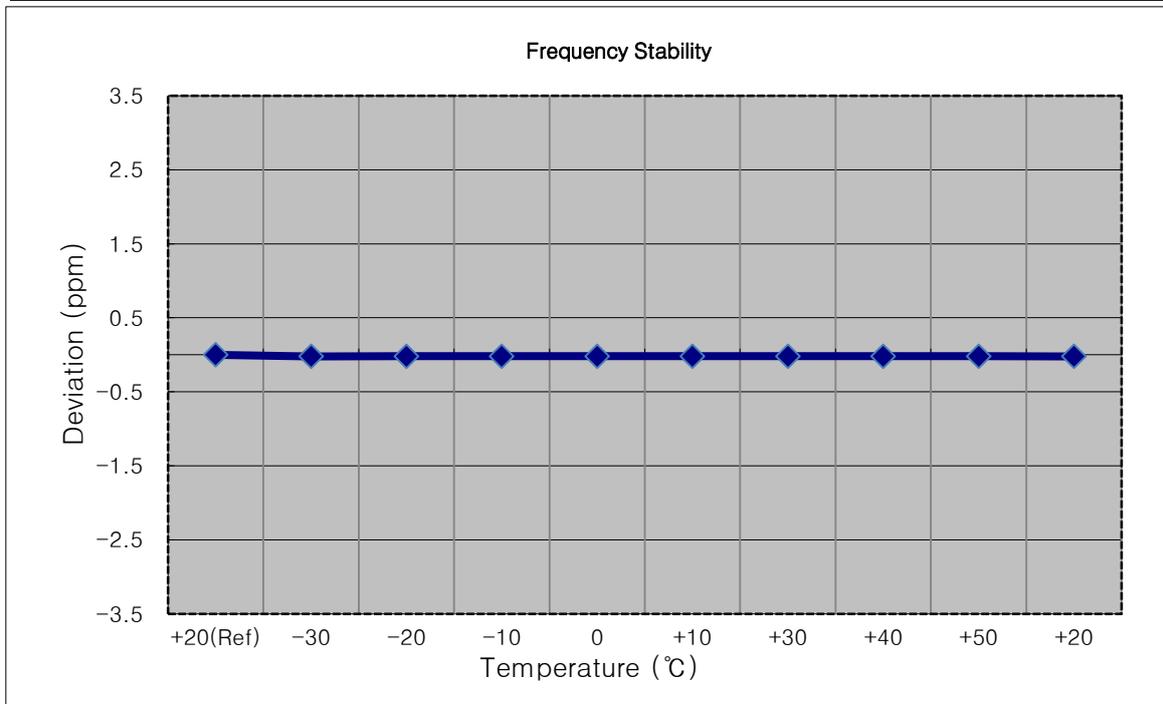


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1909 799 966	0.0	0.000 000	0.000
100%		-30	1909 799 932	-34.0	-0.000 002	-0.018
100%		-20	1909 799 933	-32.4	-0.000 002	-0.017
100%		-10	1909 799 931	-35.0	-0.000 002	-0.018
100%		0	1909 799 932	-33.1	-0.000 002	-0.017
100%		+10	1909 799 932	-33.8	-0.000 002	-0.018
100%		+30	1909 799 931	-34.8	-0.000 002	-0.018
100%		+40	1909 799 933	-32.2	-0.000 002	-0.017
100%		+50	1909 799 932	-33.7	-0.000 002	-0.018
Batt. Endpoint	3.600	+20	1909 799 932	-33.7	-0.000 002	-0.018

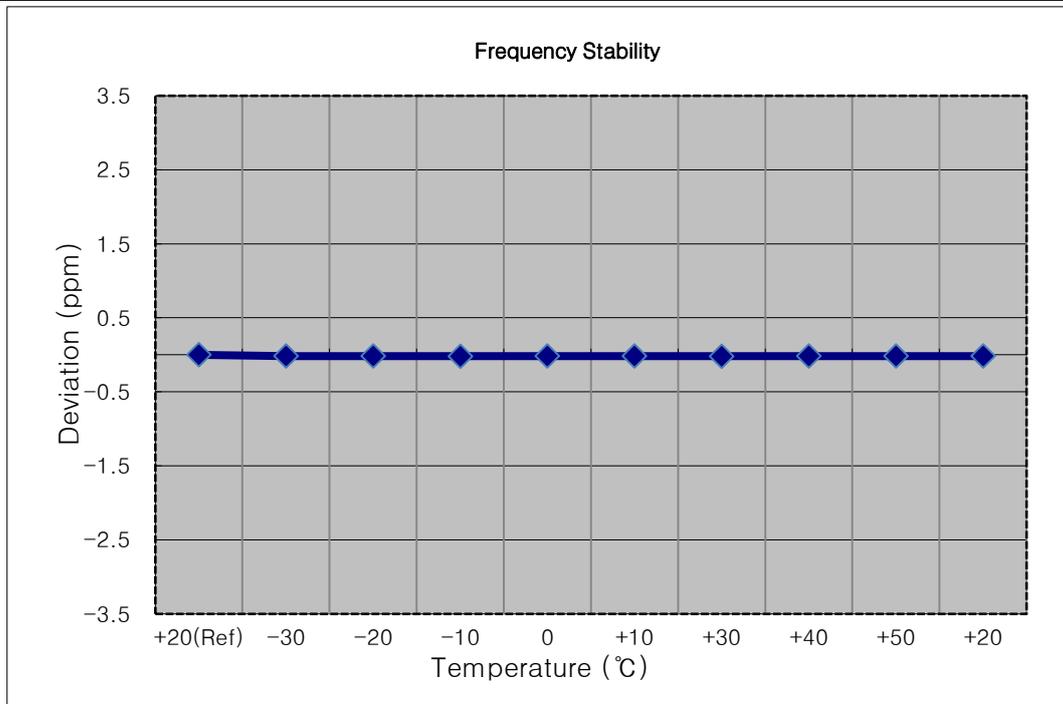


- ▣ Mode: WCDMA850
- ▣ OPERATING FREQUENCY: 836.600.000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 600 002	0.0	0.000 000	0.0000
100%		-30	836 600 003	0.9	0.000 000	0.0011
100%		-20	836 600 001	-1.0	0.000 000	-0.0011
100%		-10	836 600 001	-1.3	0.000 000	-0.0015
100%		0	836 600 003	1.3	0.000 000	0.0015
100%		+10	836 600 003	0.8	0.000 000	0.0010
100%		+30	836 600 002	0.7	0.000 000	0.0008
100%		+40	836 600 001	-0.8	0.000 000	-0.0009
100%		+50	836 600 003	1.3	0.000 000	0.0015
Batt. Endpoint		3.600	+20	836 600 003	1.2	0.000 000

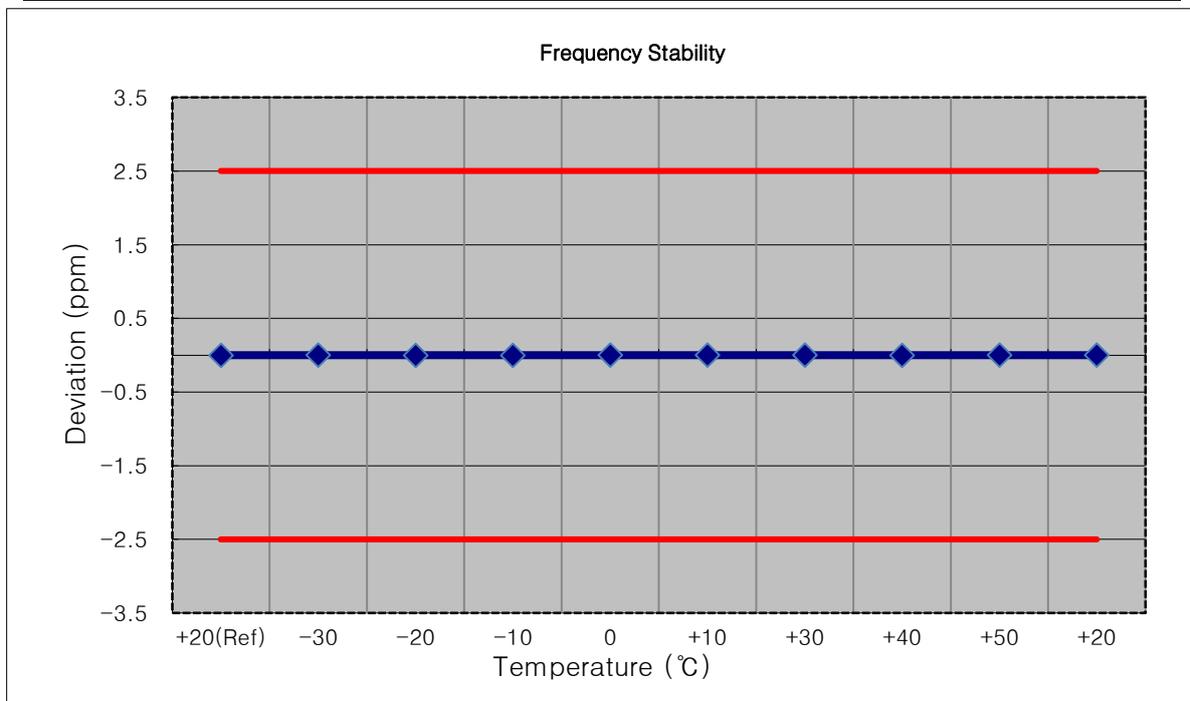


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,852,400,000 Hz
- ▣ CHANNEL: 9262
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1852 400 003	0.0	0.000 000	0.0000
100%		-30	1852 400 004	1.7	0.000 000	0.0009
100%		-20	1852 400 005	1.9	0.000 000	0.0010
100%		-10	1852 400 005	2.5	0.000 000	0.0014
100%		0	1852 400 004	1.8	0.000 000	0.0010
100%		+10	1852 400 005	2.1	0.000 000	0.0011
100%		+30	1852 400 005	2.2	0.000 000	0.0012
100%		+40	1852 400 006	2.8	0.000 000	0.0015
100%		+50	1852 400 006	3.2	0.000 000	0.0017
Batt. Endpoint	3.600	+20	1852 400 005	2.0	0.000 000	0.0011

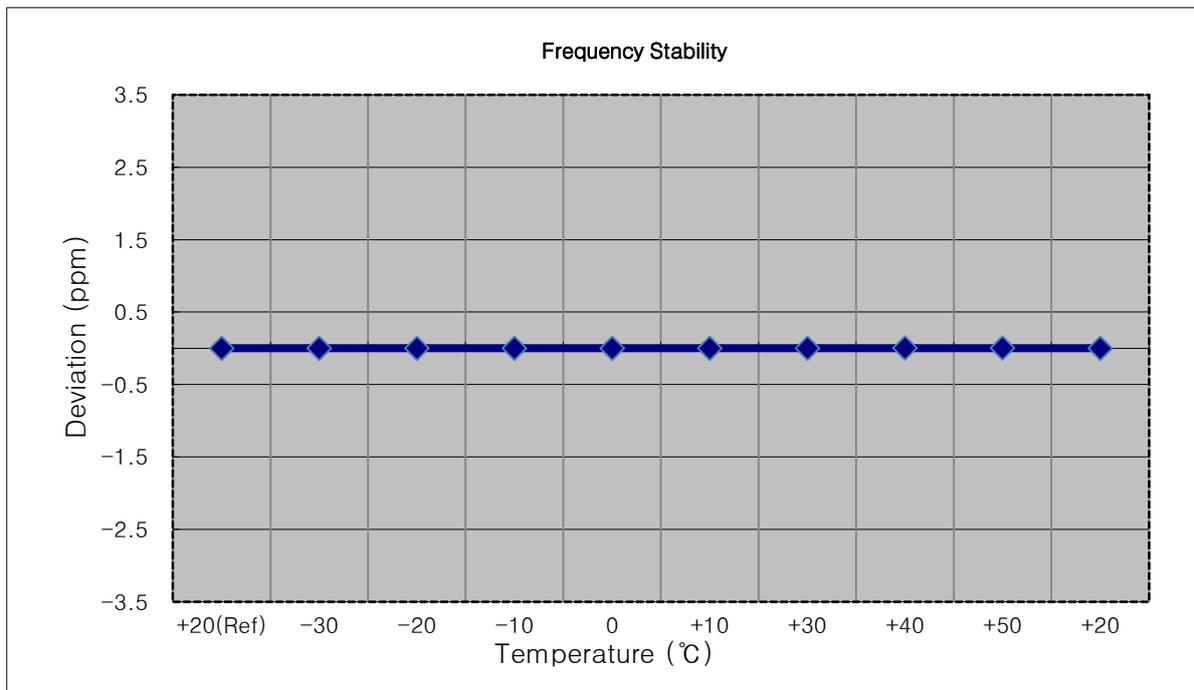


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1880 000 003	0.0	0.000 000	0.0000
100%		-30	1880 000 005	2.5	0.000 000	0.0013
100%		-20	1880 000 004	1.5	0.000 000	0.0008
100%		-10	1880 000 004	1.8	0.000 000	0.0010
100%		0	1880 000 000	-2.1	0.000 000	-0.0011
100%		+10	1880 000 005	2.1	0.000 000	0.0011
100%		+30	1880 000 006	3.3	0.000 000	0.0018
100%		+40	1880 000 005	2.4	0.000 000	0.0013
100%		+50	1880 000 004	1.6	0.000 000	0.0009
Batt. Endpoint		3.600	+20	1880 000 005	1.9	0.000 000

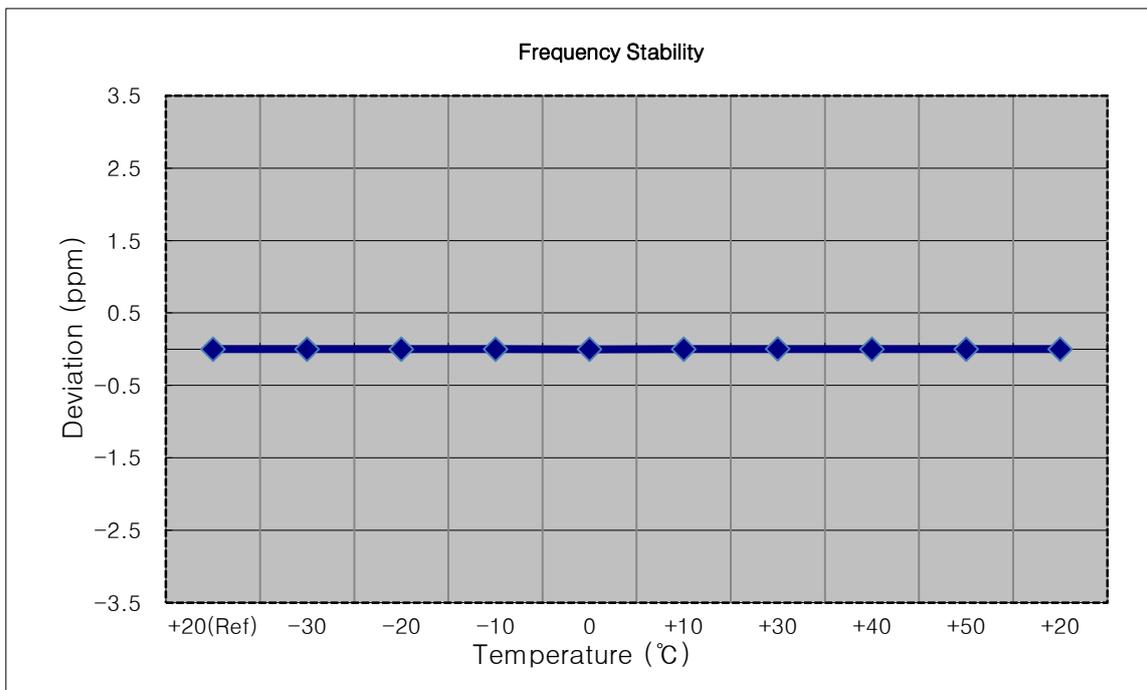


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1907 600 002	0.0	0.000 000	0.0000
100%		-30	1907 600 005	2.7	0.000 000	0.0014
100%		-20	1907 599 999	-2.6	0.000 000	-0.0014
100%		-10	1907 600 005	2.8	0.000 000	0.0015
100%		0	1907 600 000	-1.8	0.000 000	-0.0009
100%		+10	1907 600 004	1.7	0.000 000	0.0009
100%		+30	1907 600 004	2.4	0.000 000	0.0012
100%		+40	1907 600 005	2.6	0.000 000	0.0013
100%		+50	1907 600 004	2.3	0.000 000	0.0012
Batt. Endpoint		3.600	+20	1907 600 005	3.1	0.000 000

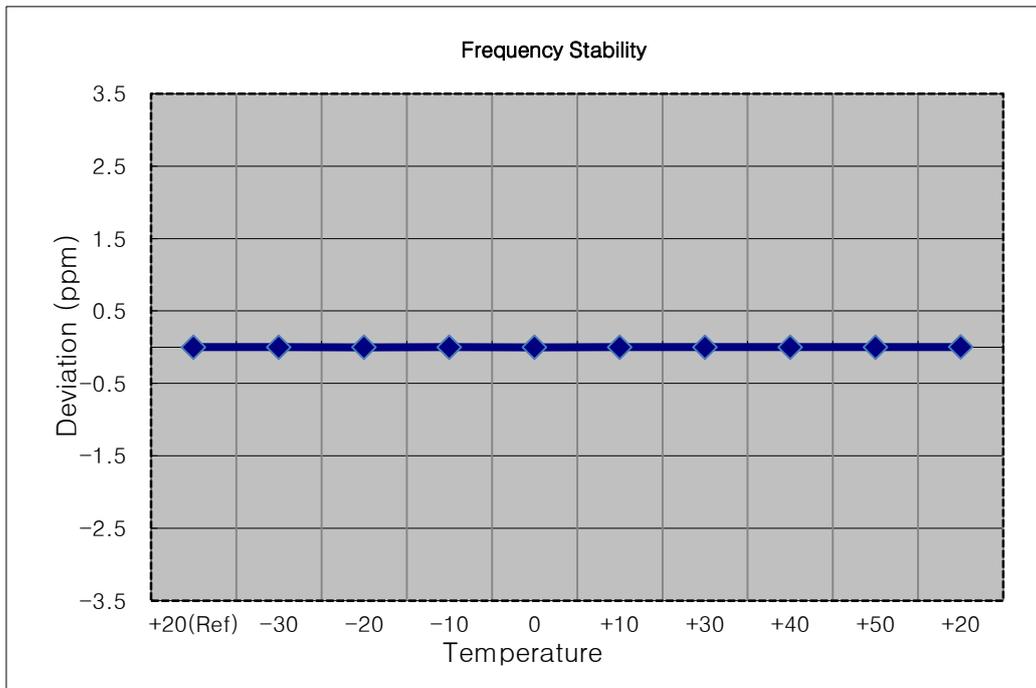


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,712,400,000 Hz
- ▣ CHANNEL: 1312
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1712 399 999	0.0	0.000 000	0.0000
100%		-30	1712 400 001	2.0	0.000 000	0.0012
100%		-20	1712 399 996	-2.2	0.000 000	-0.0013
100%		-10	1712 400 002	3.4	0.000 000	0.0020
100%		0	1712 399 997	-1.8	0.000 000	-0.0010
100%		+10	1712 399 996	-2.1	0.000 000	-0.0012
100%		+30	1712 400 001	2.1	0.000 000	0.0012
100%		+40	1712 399 997	-1.4	0.000 000	-0.0008
100%		+50	1712 399 996	-2.4	0.000 000	-0.0014
Batt. Endpoint		3.600	+20	1712 399 997	-1.9	0.000 000

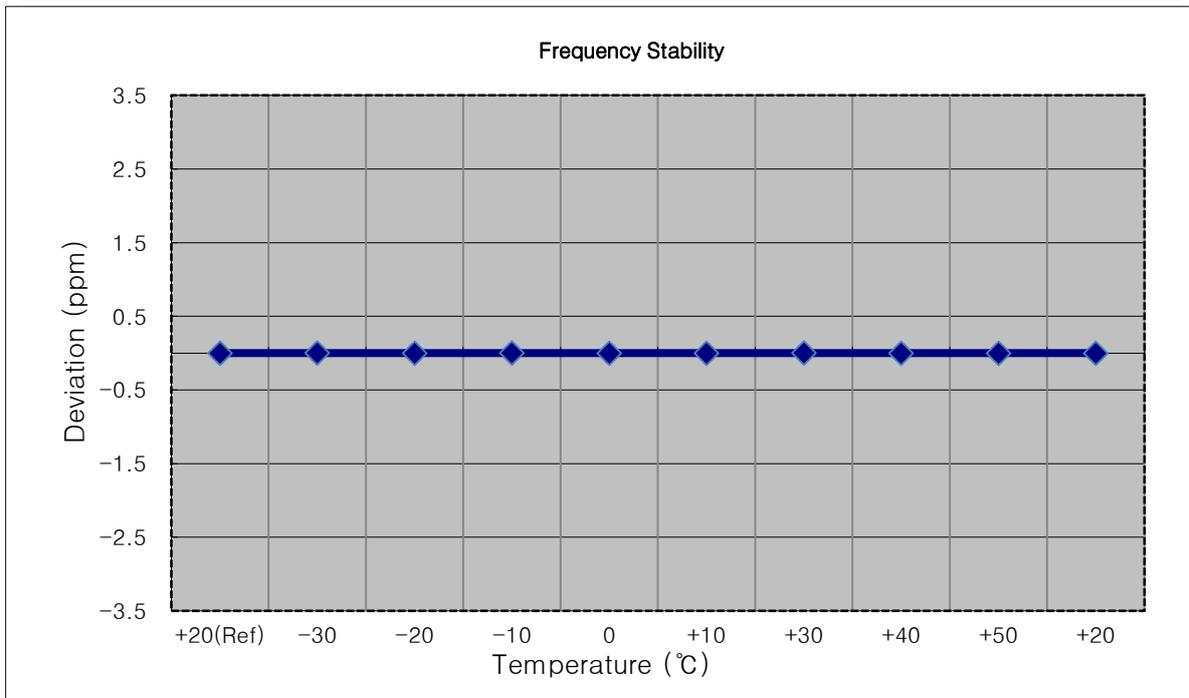


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,732,400,000 Hz
- ▣ CHANNEL: 1412
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1732 400 002	0.0	0.000 000	0.0000
100%		-30	1732 400 004	1.5	0.000 000	0.0008
100%		-20	1732 400 004	2.1	0.000 000	0.0012
100%		-10	1732 400 004	1.9	0.000 000	0.0011
100%		0	1732 400 004	1.4	0.000 000	0.0008
100%		+10	1732 400 003	1.1	0.000 000	0.0007
100%		+30	1732 400 004	1.8	0.000 000	0.0011
100%		+40	1732 400 004	2.1	0.000 000	0.0012
100%		+50	1732 400 004	1.8	0.000 000	0.0010
Batt. Endpoint	3.600	+20	1732 400 003	1.3	0.000 000	0.0008

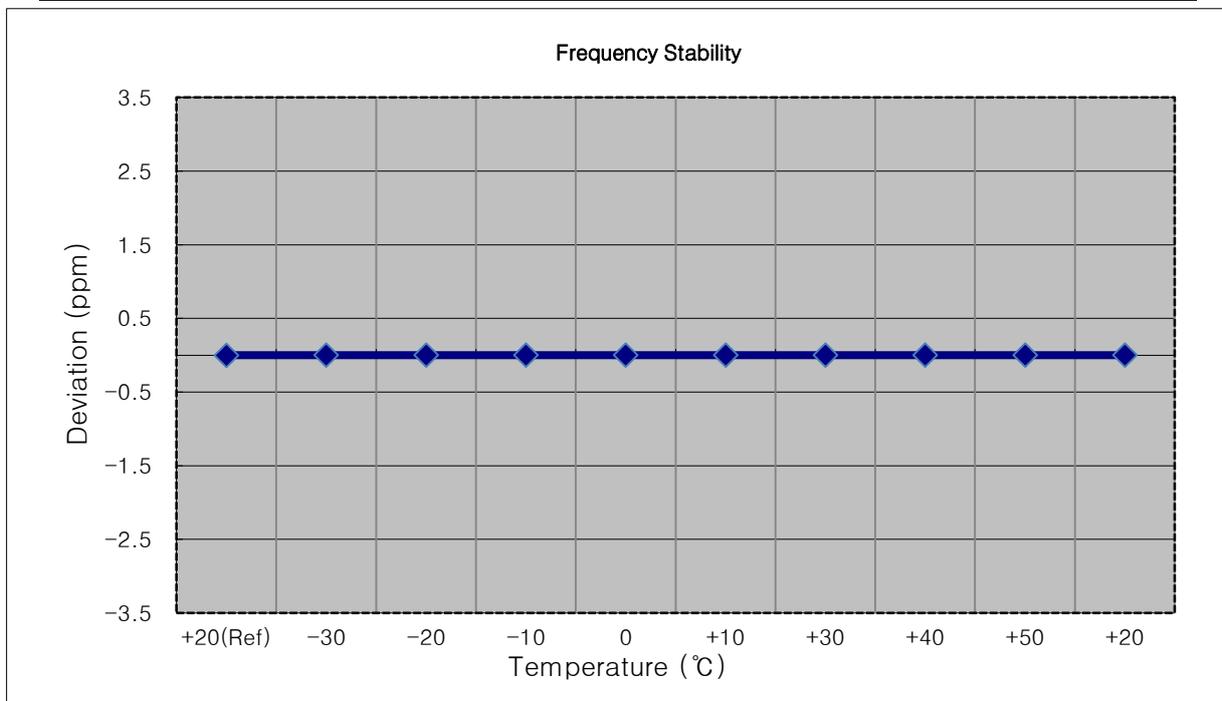

- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1752 600 002	0.0	0.000 000	0.0000
100%		-30	1752 600 006	3.3	0.000 000	0.0019
100%		-20	1752 600 005	2.4	0.000 000	0.0014
100%		-10	1752 600 005	2.5	0.000 000	0.0014
100%		0	1752 600 004	1.6	0.000 000	0.0009
100%		+10	1752 600 005	2.2	0.000 000	0.0012
100%		+30	1752 600 005	2.2	0.000 000	0.0013
100%		+40	1752 600 001	-1.7	0.000 000	-0.0010
100%		+50	1752 600 004	1.9	0.000 000	0.0011
Batt. Endpoint		3.600	+20	1752 600 005	2.3	0.000 000

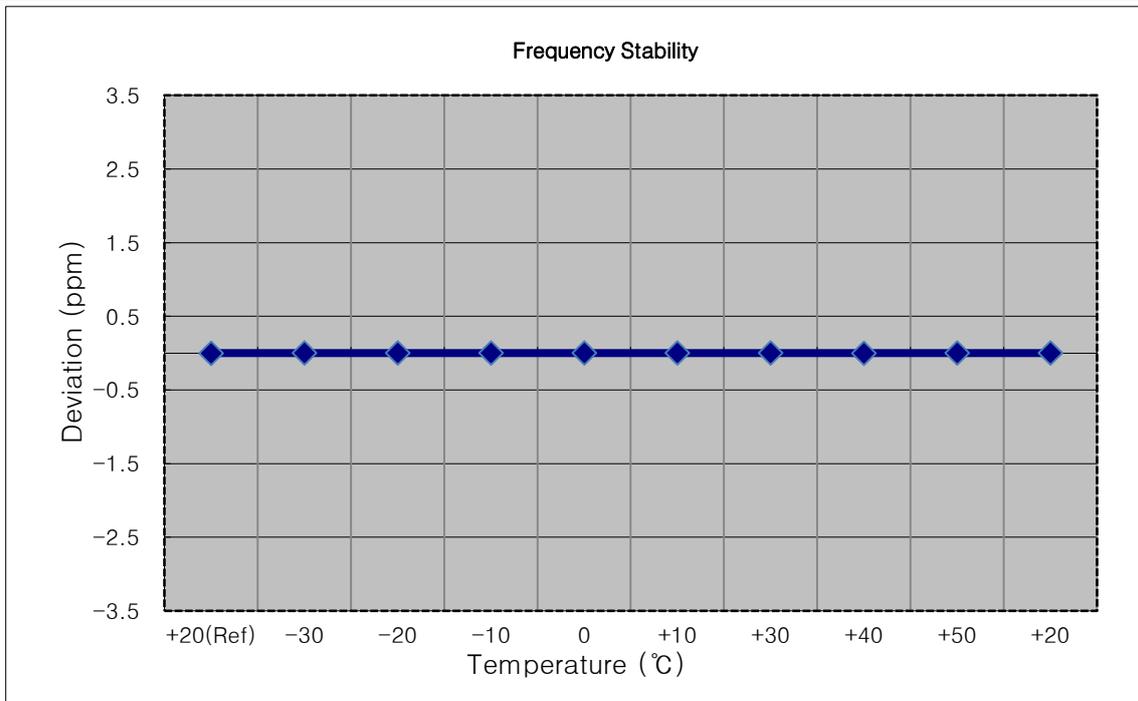

8.9 RECEIVER SPURIOUS EMISSIONS

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Limit


Frequency (MHz)	Field Strength (μ v/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

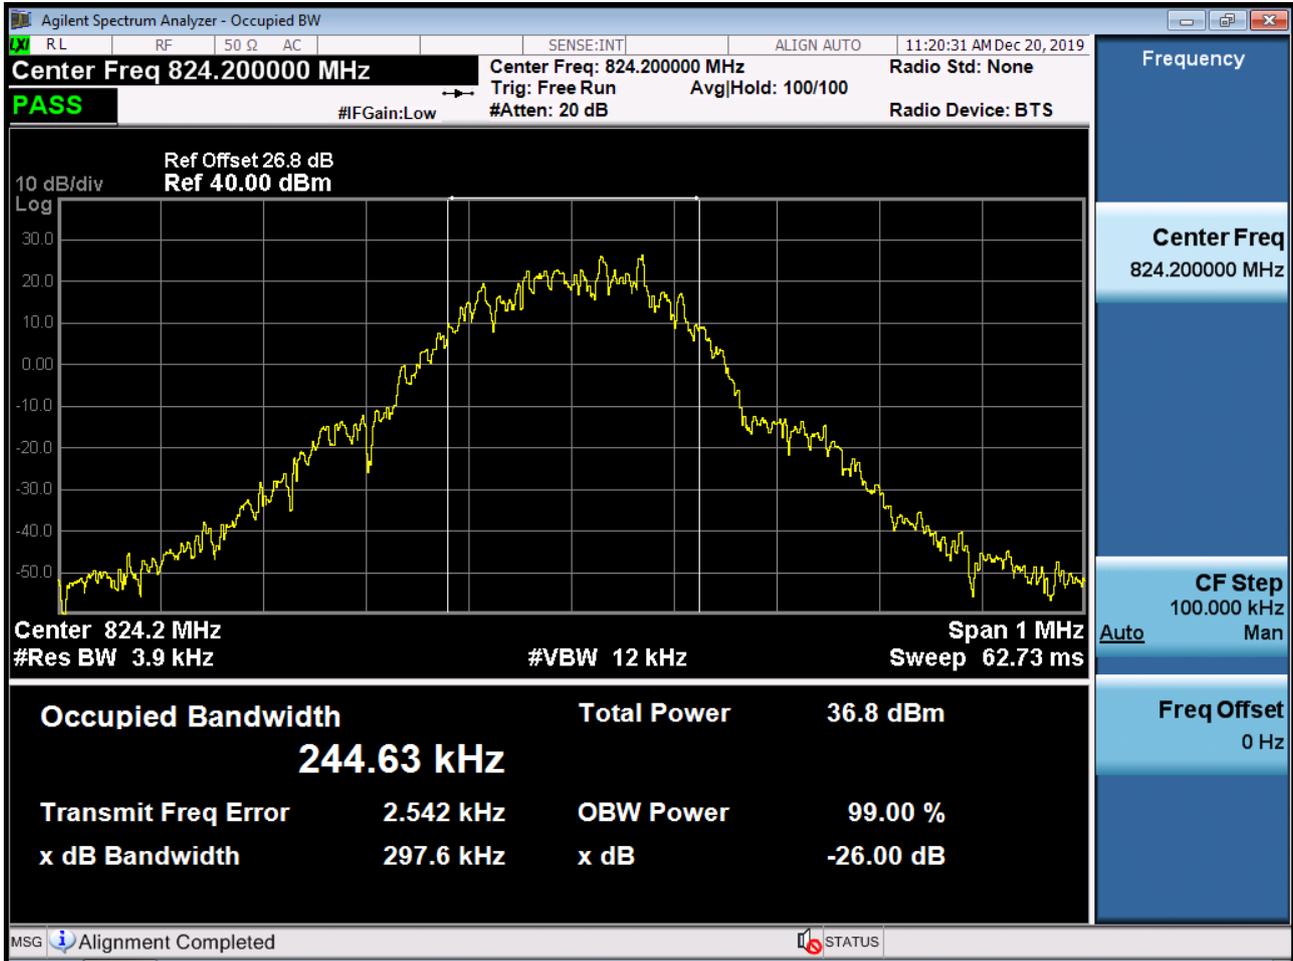


■ GSM850 MODE (190 CH.) Occupied Bandwidth

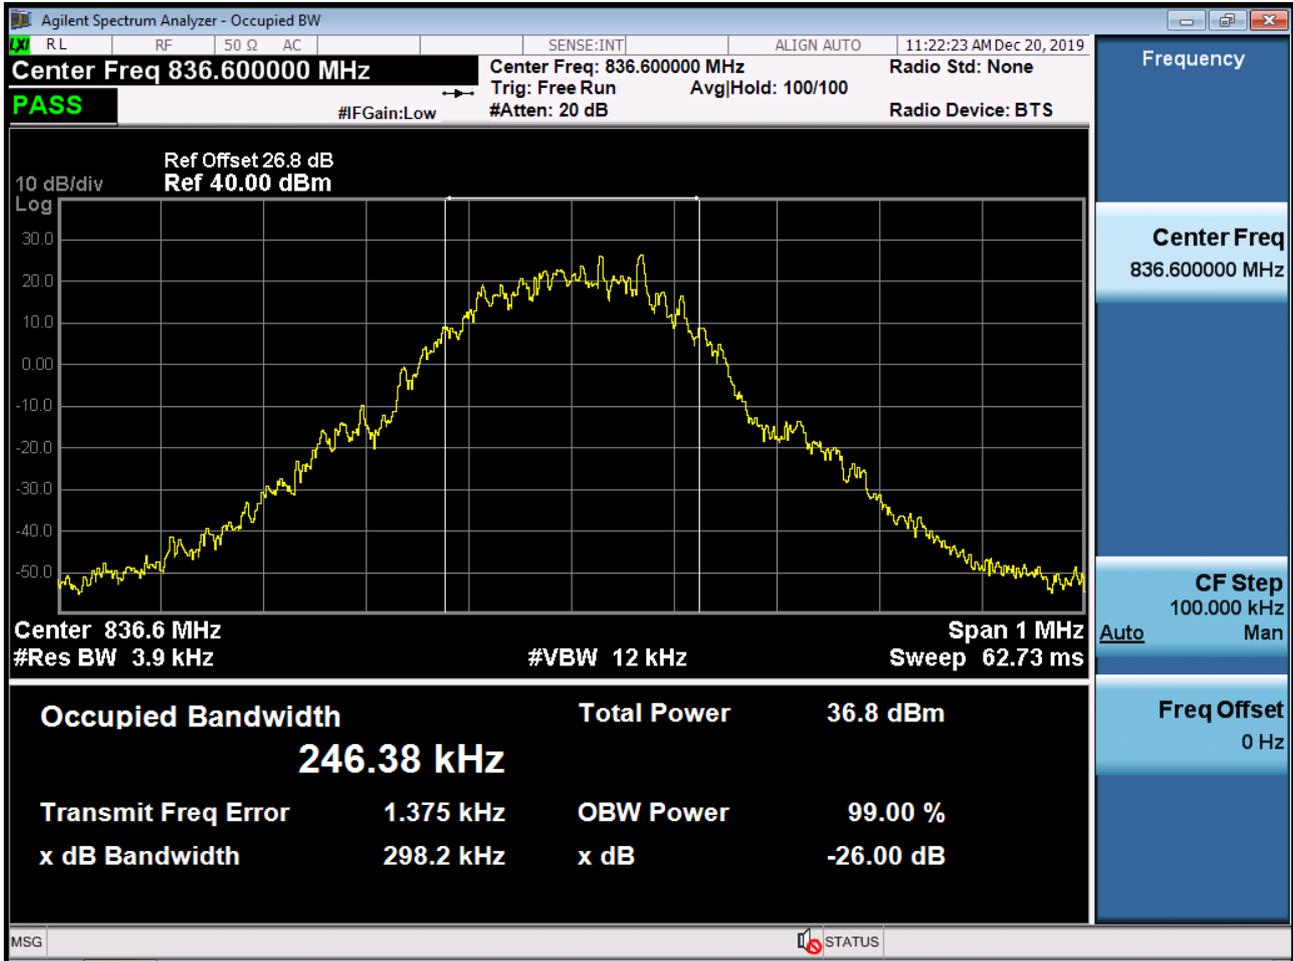


■ GSM850 MODE (251 CH.) Occupied Bandwidth

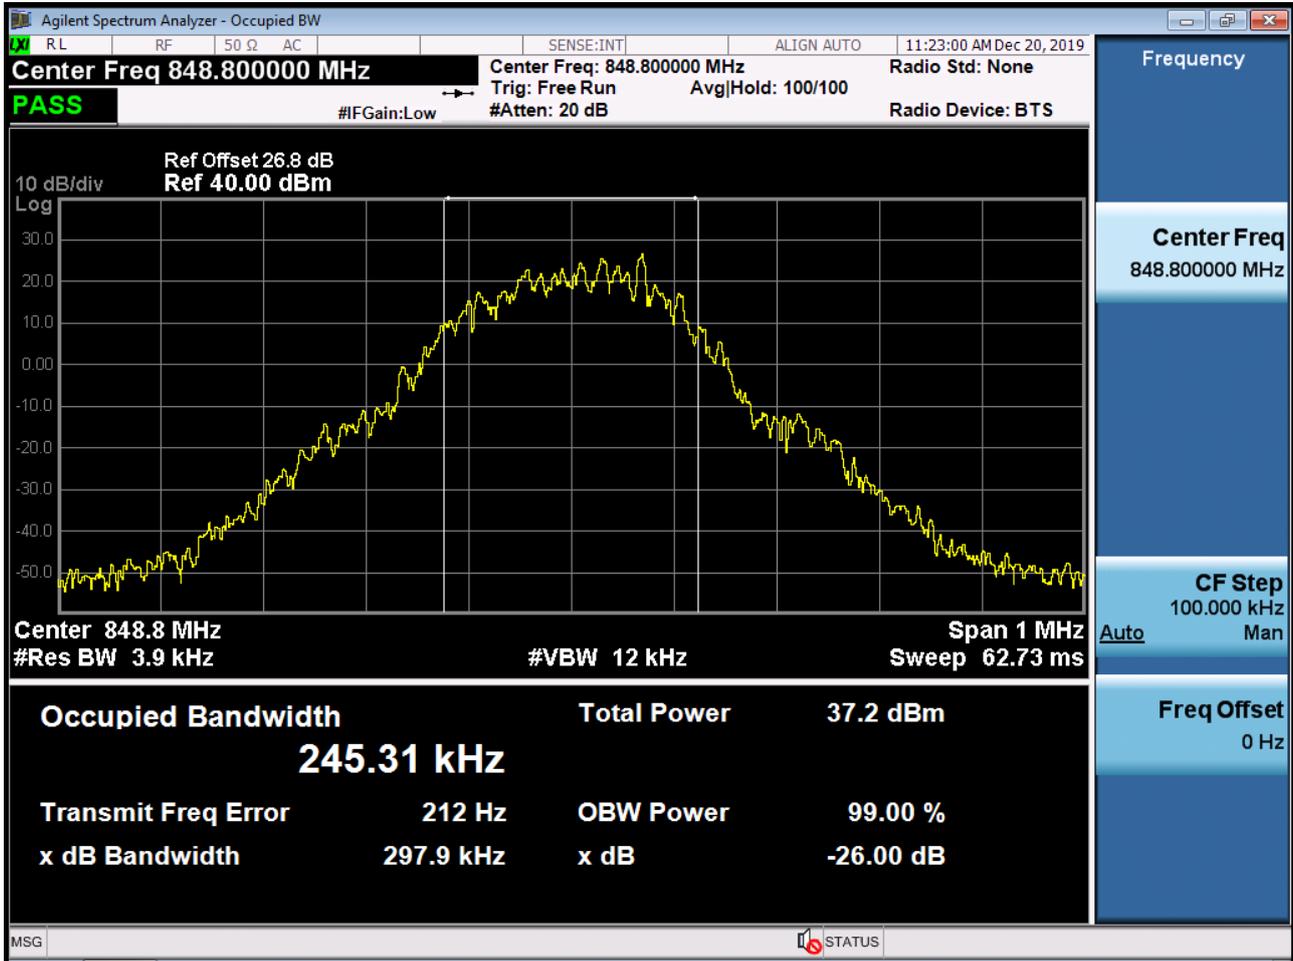


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

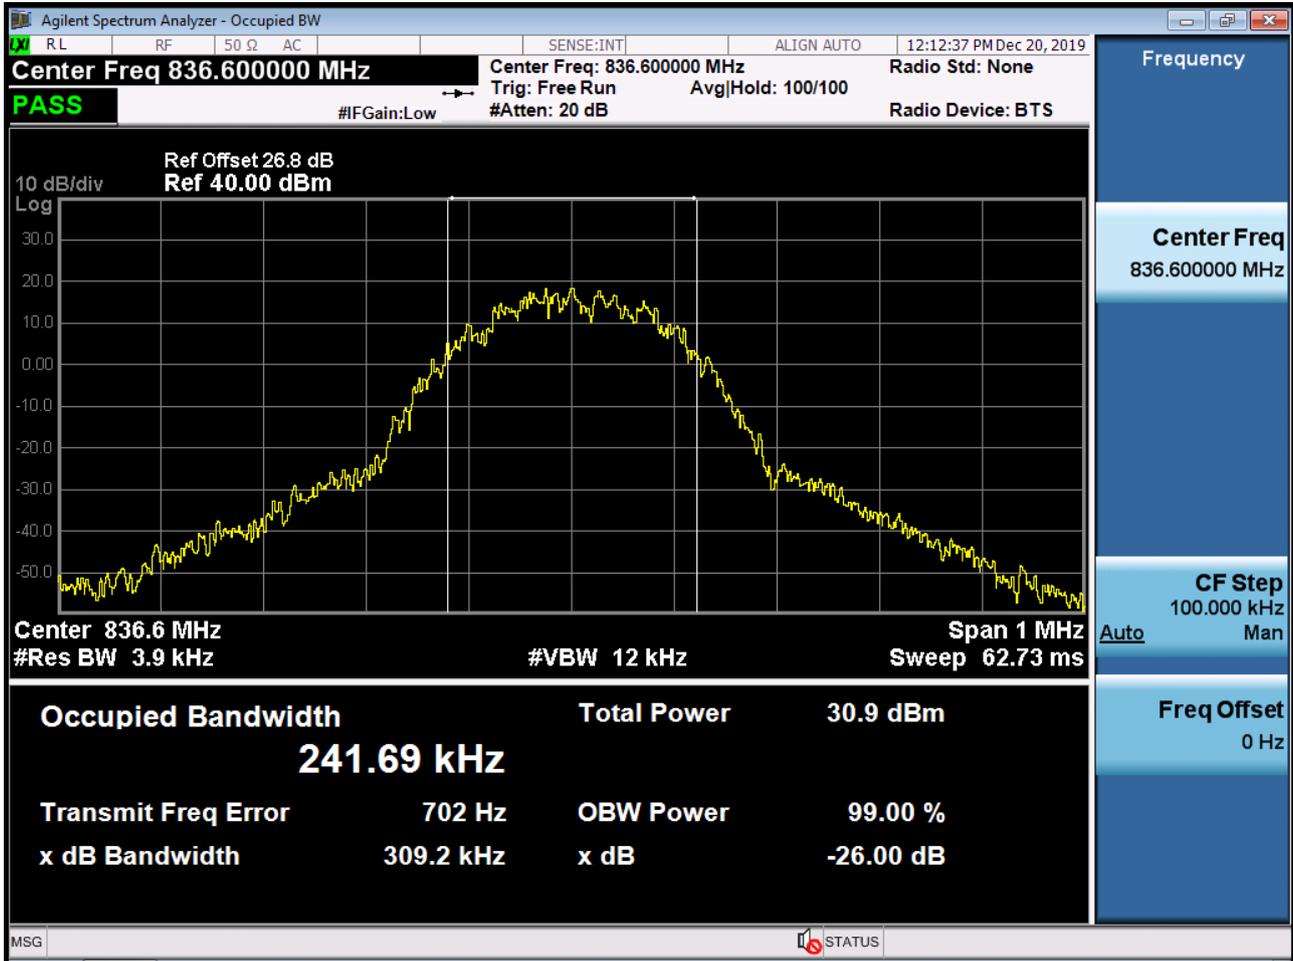


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

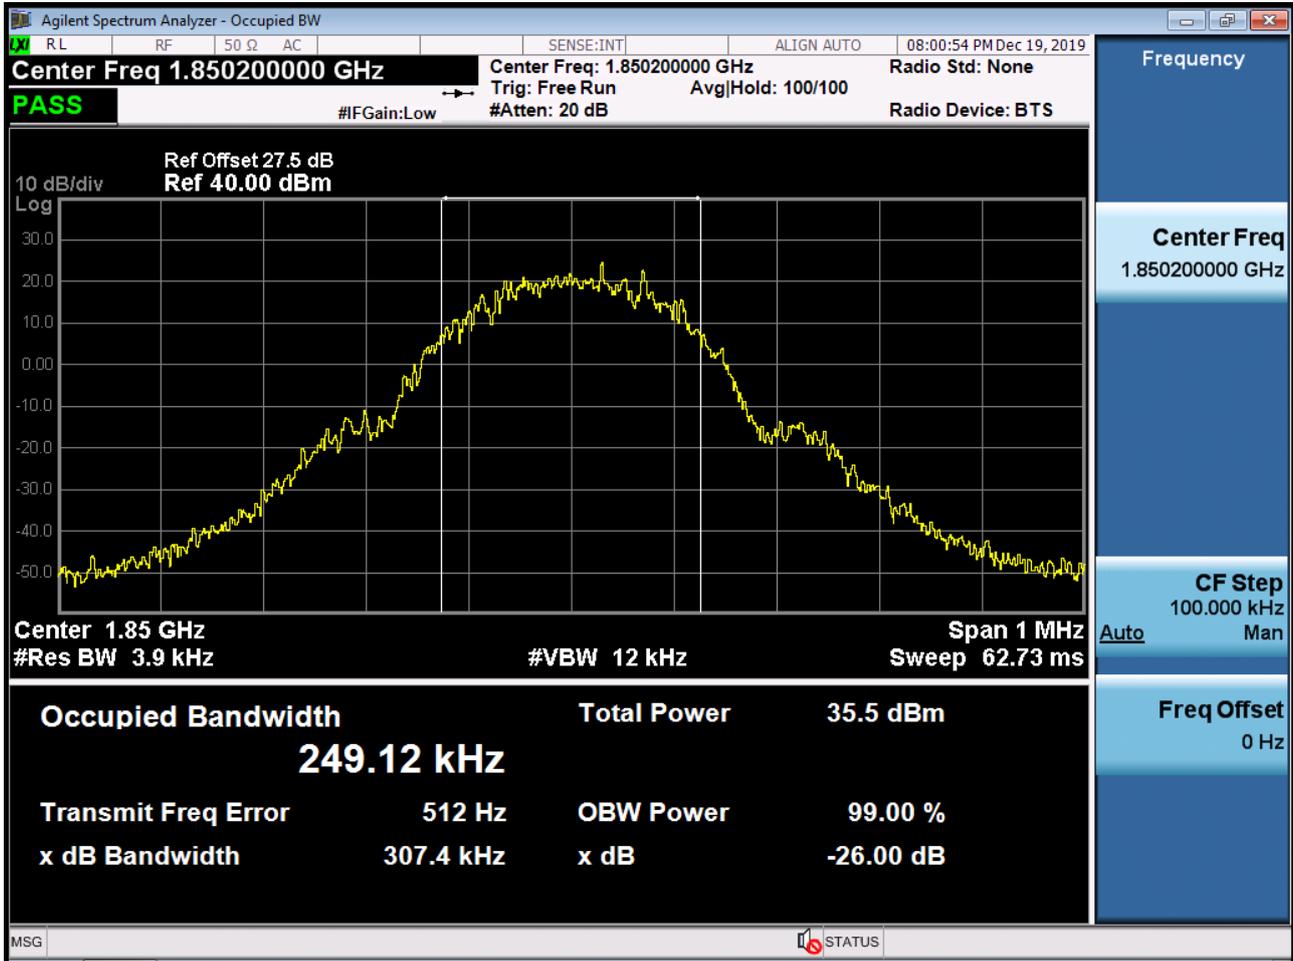


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

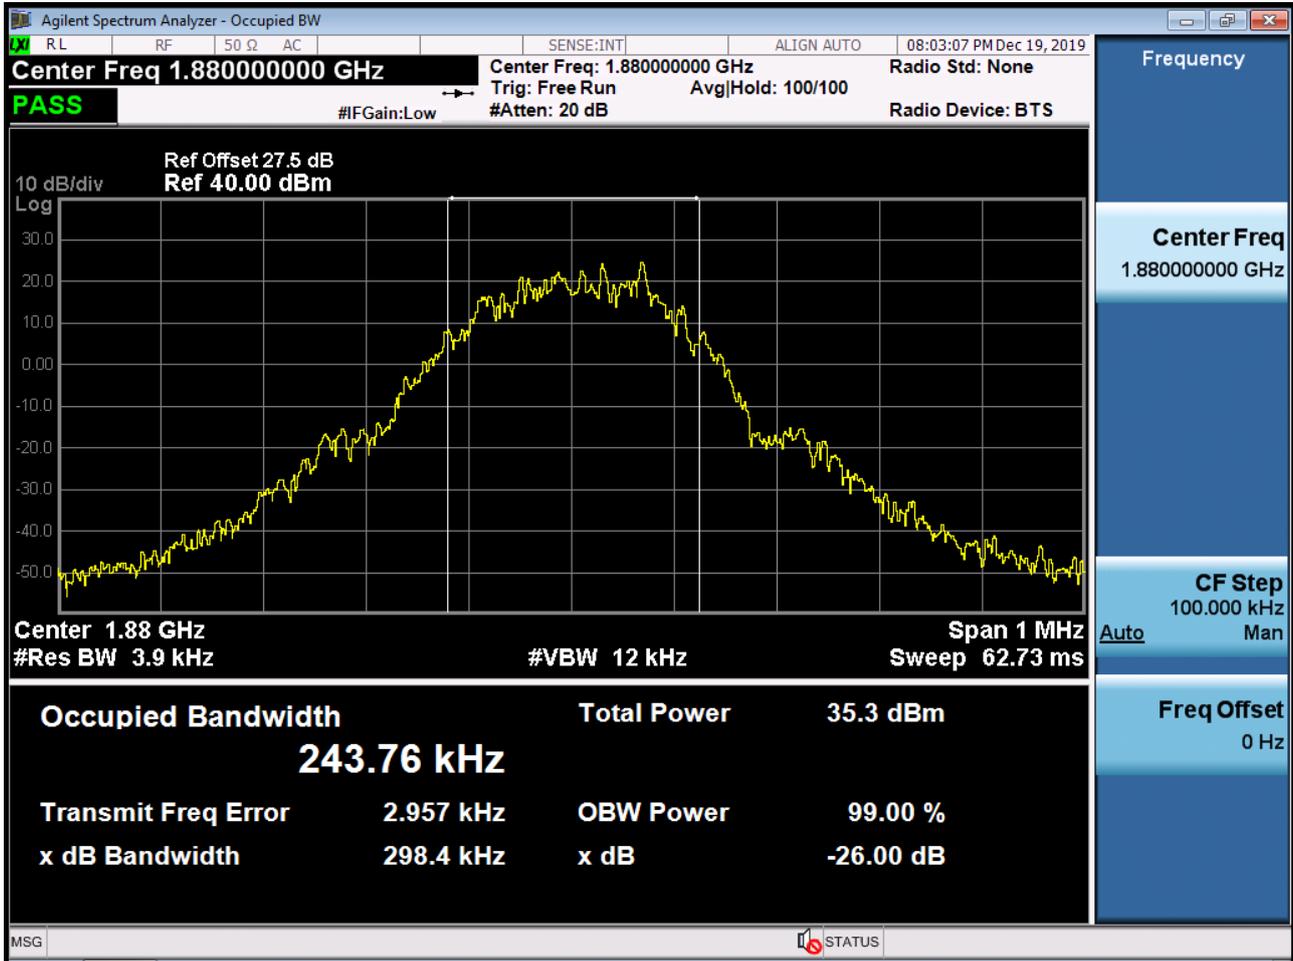


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

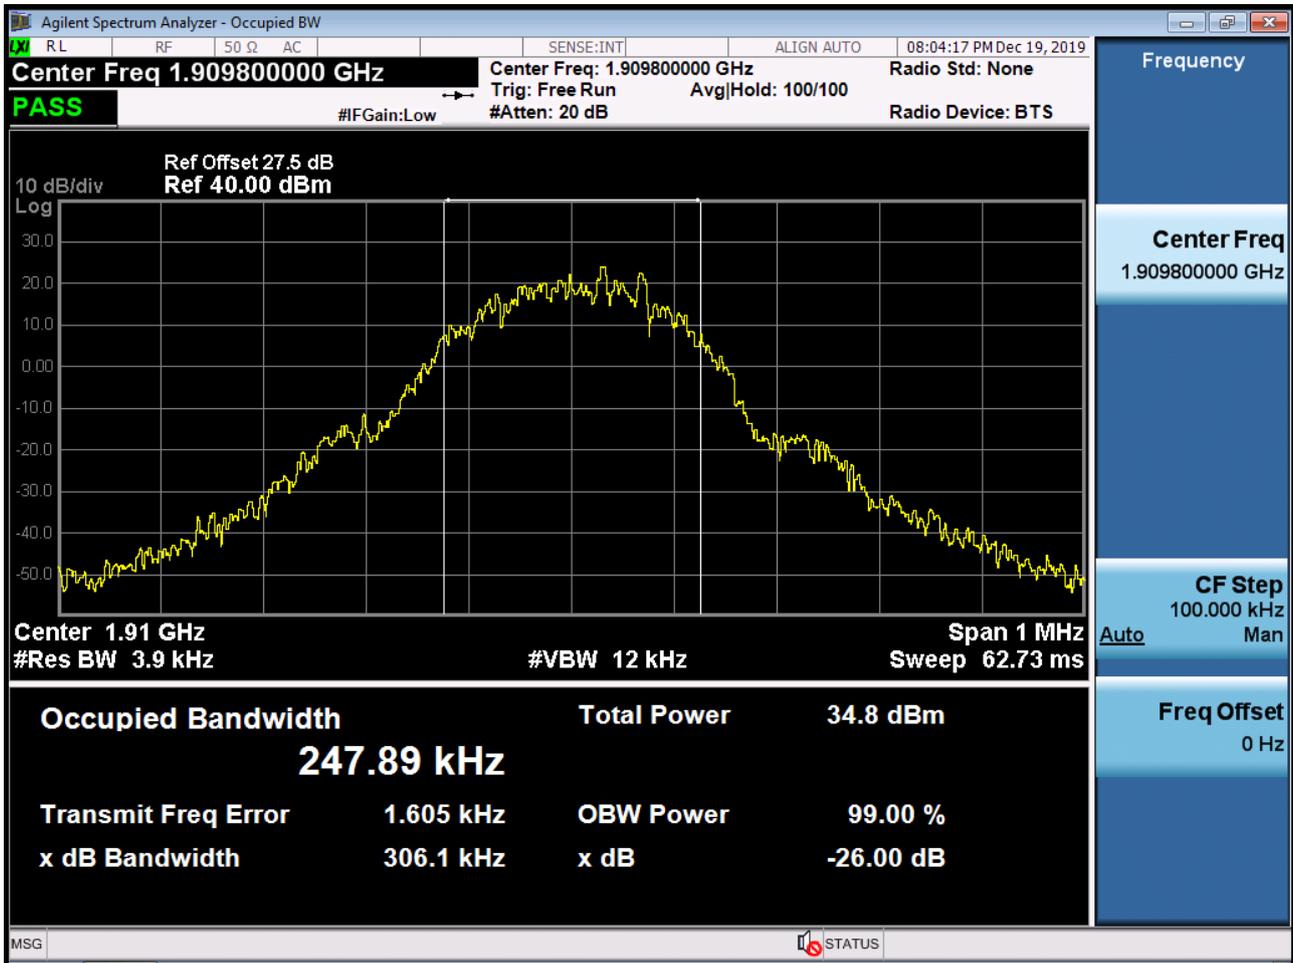


■ GSM1900 EDGE (661 CH.) Occupied Bandwidth

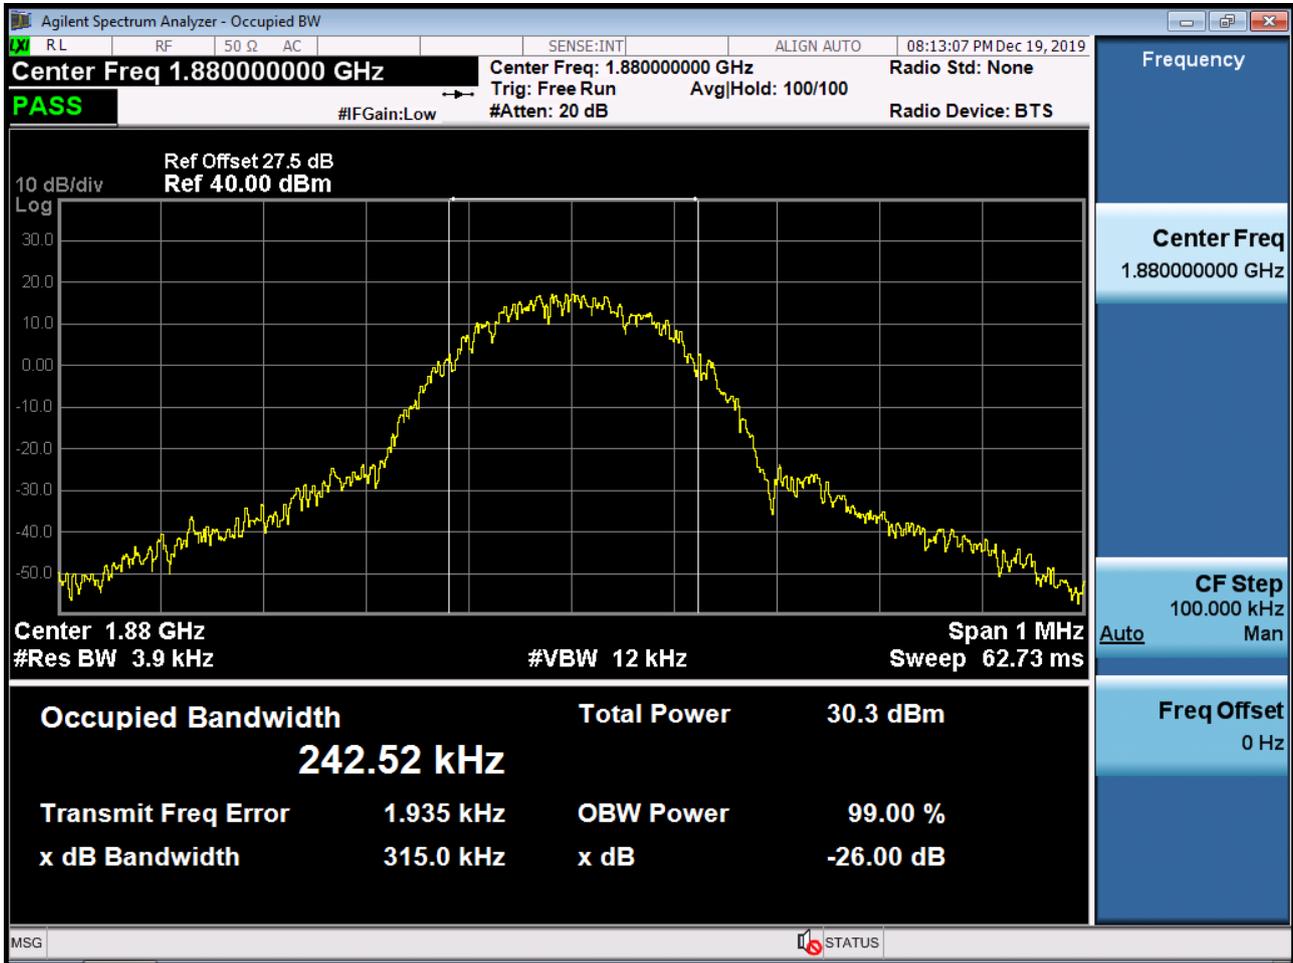


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

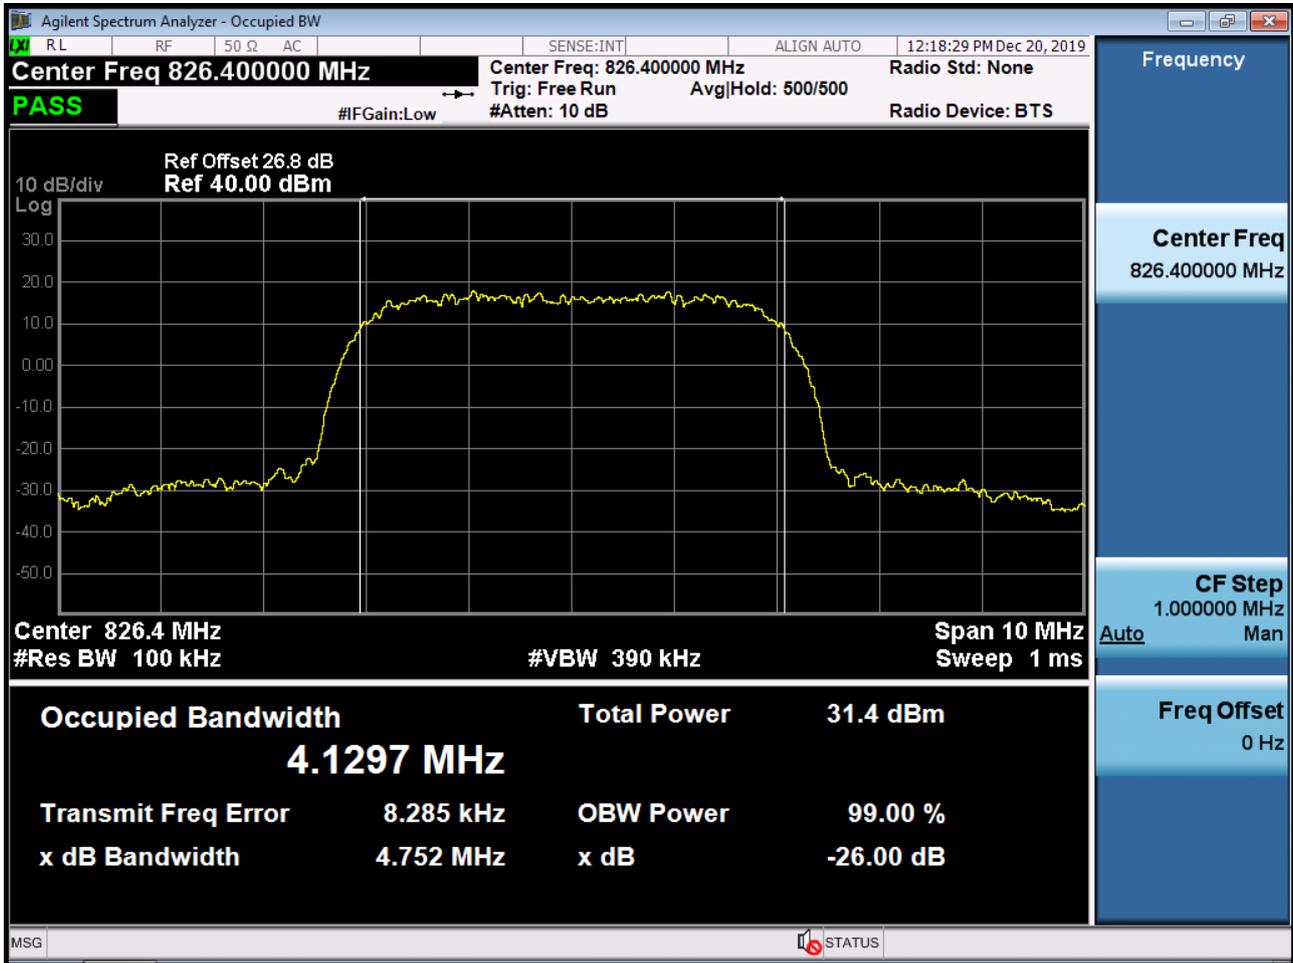


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

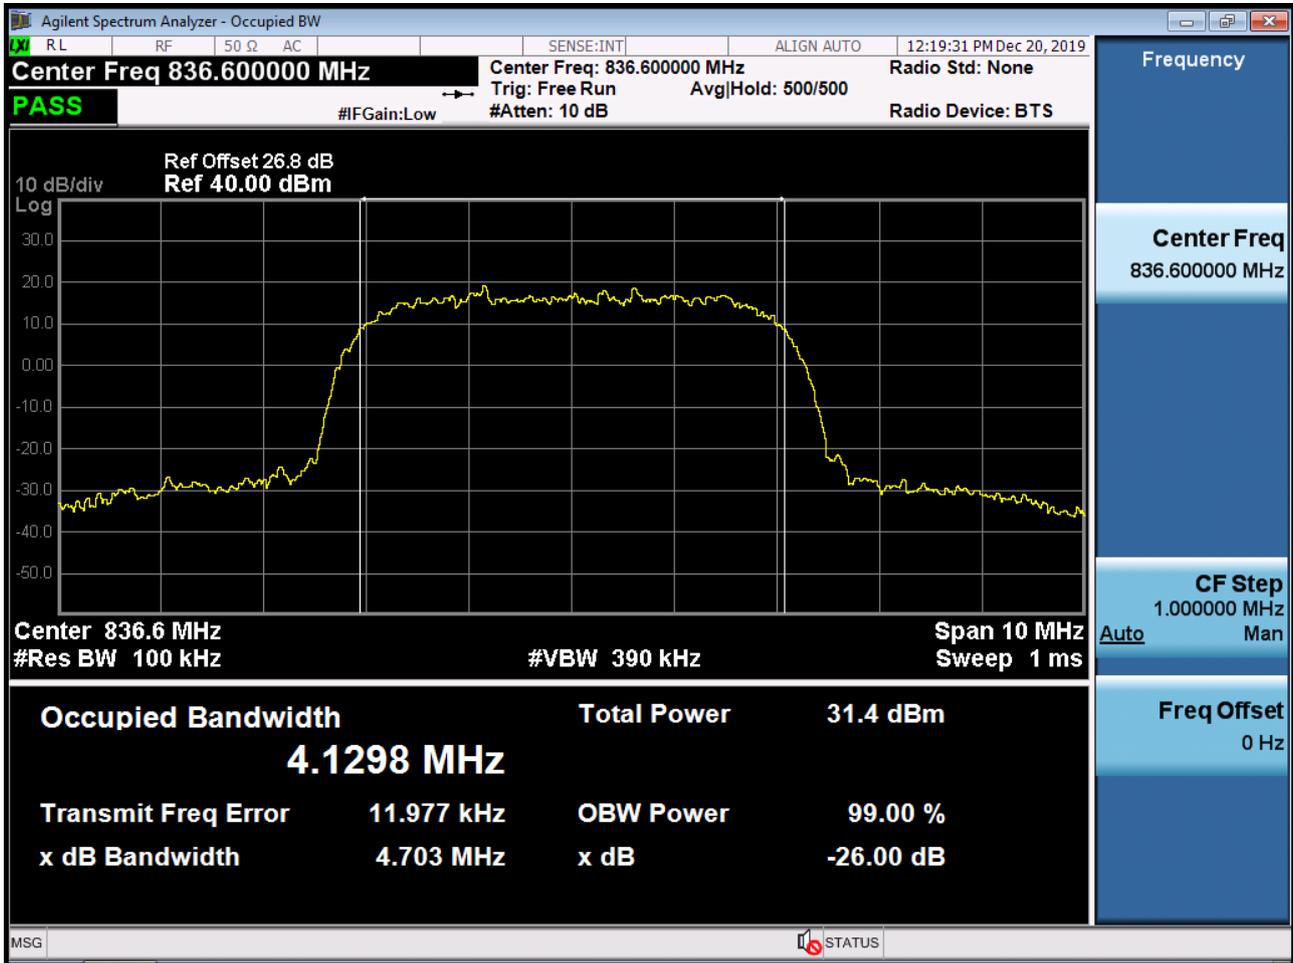


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

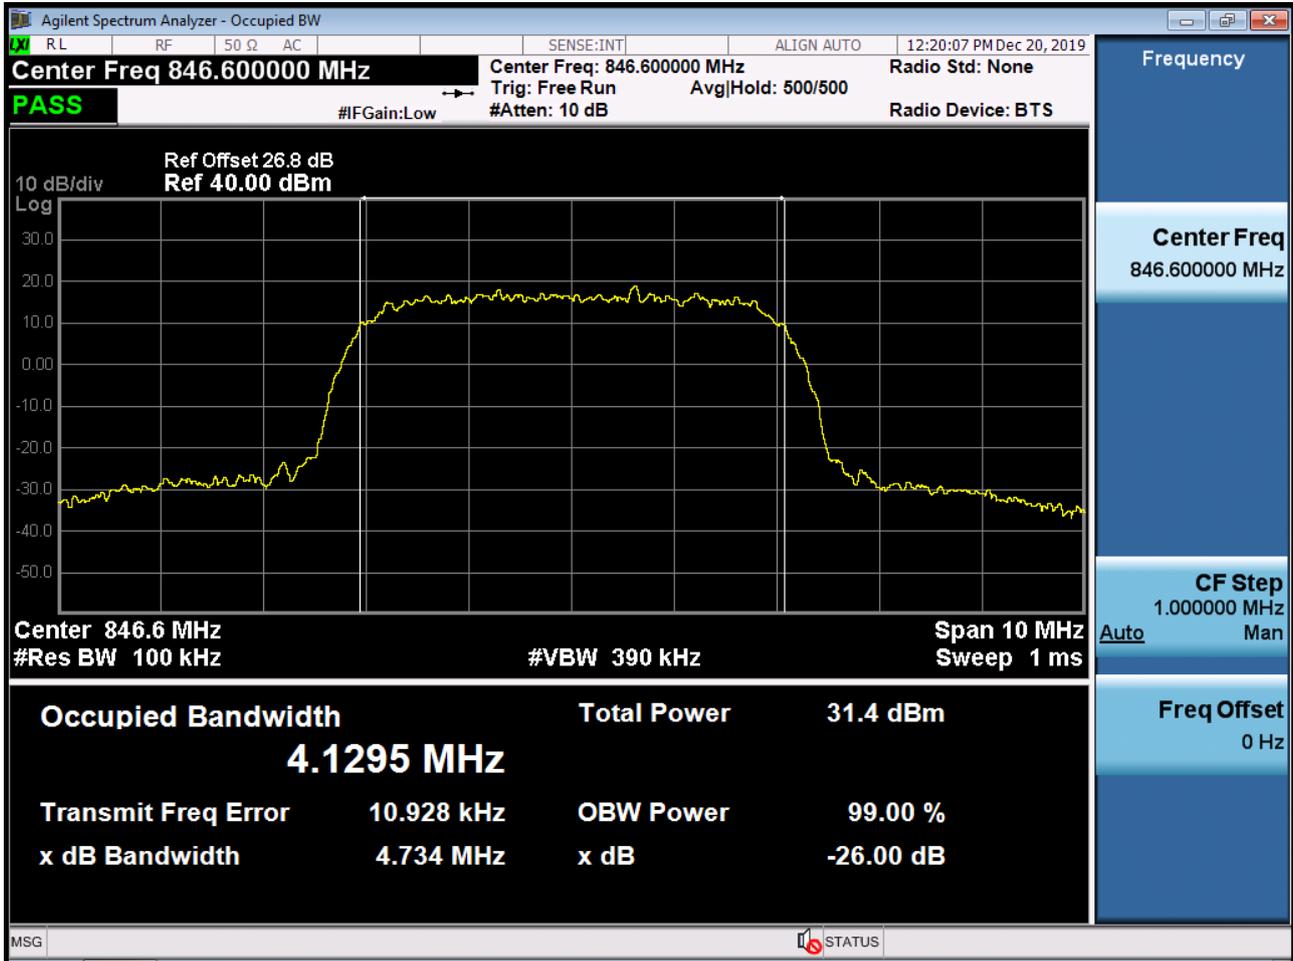


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

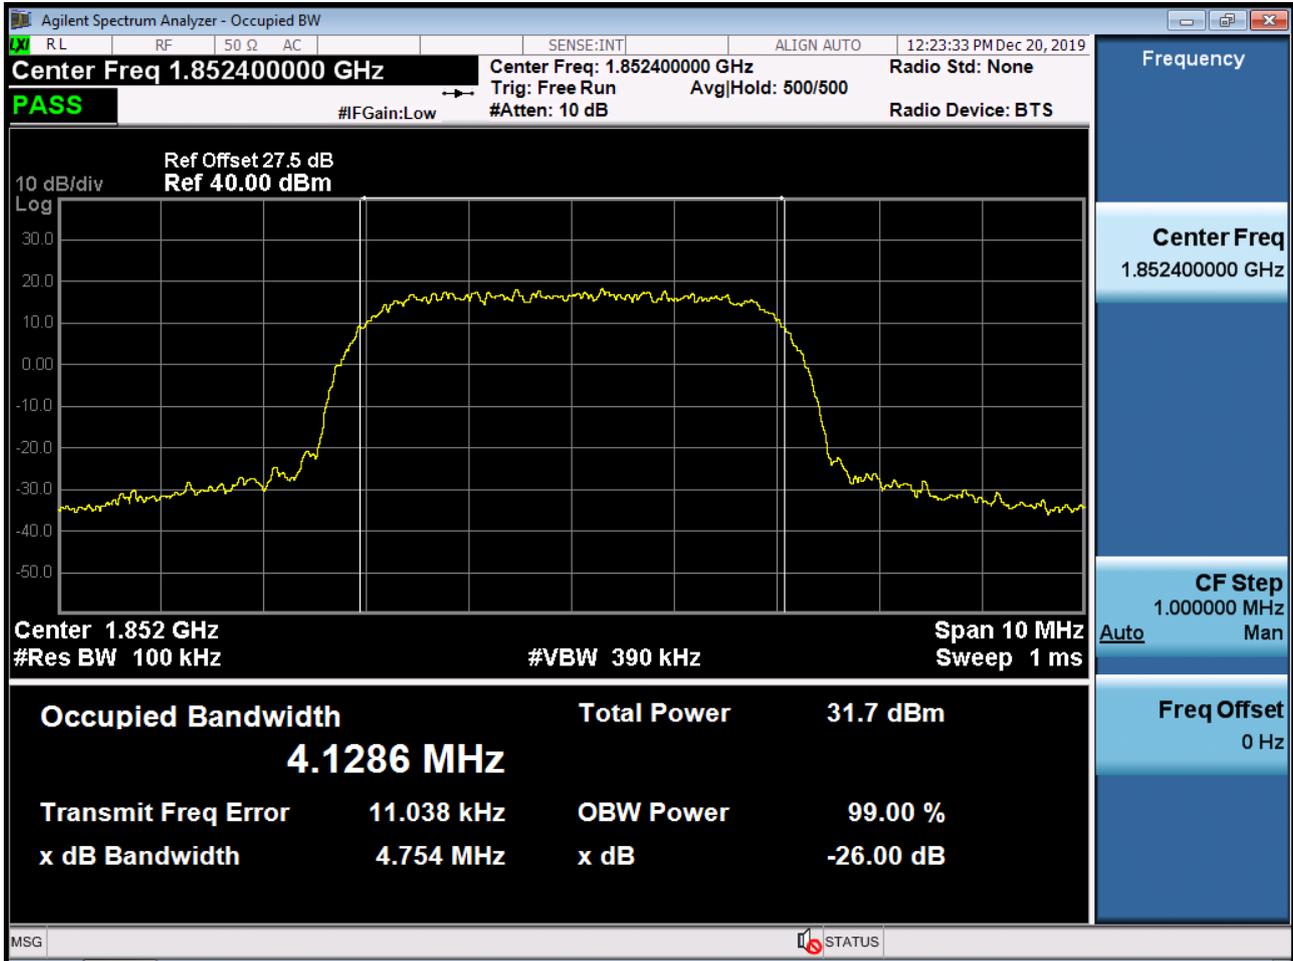


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

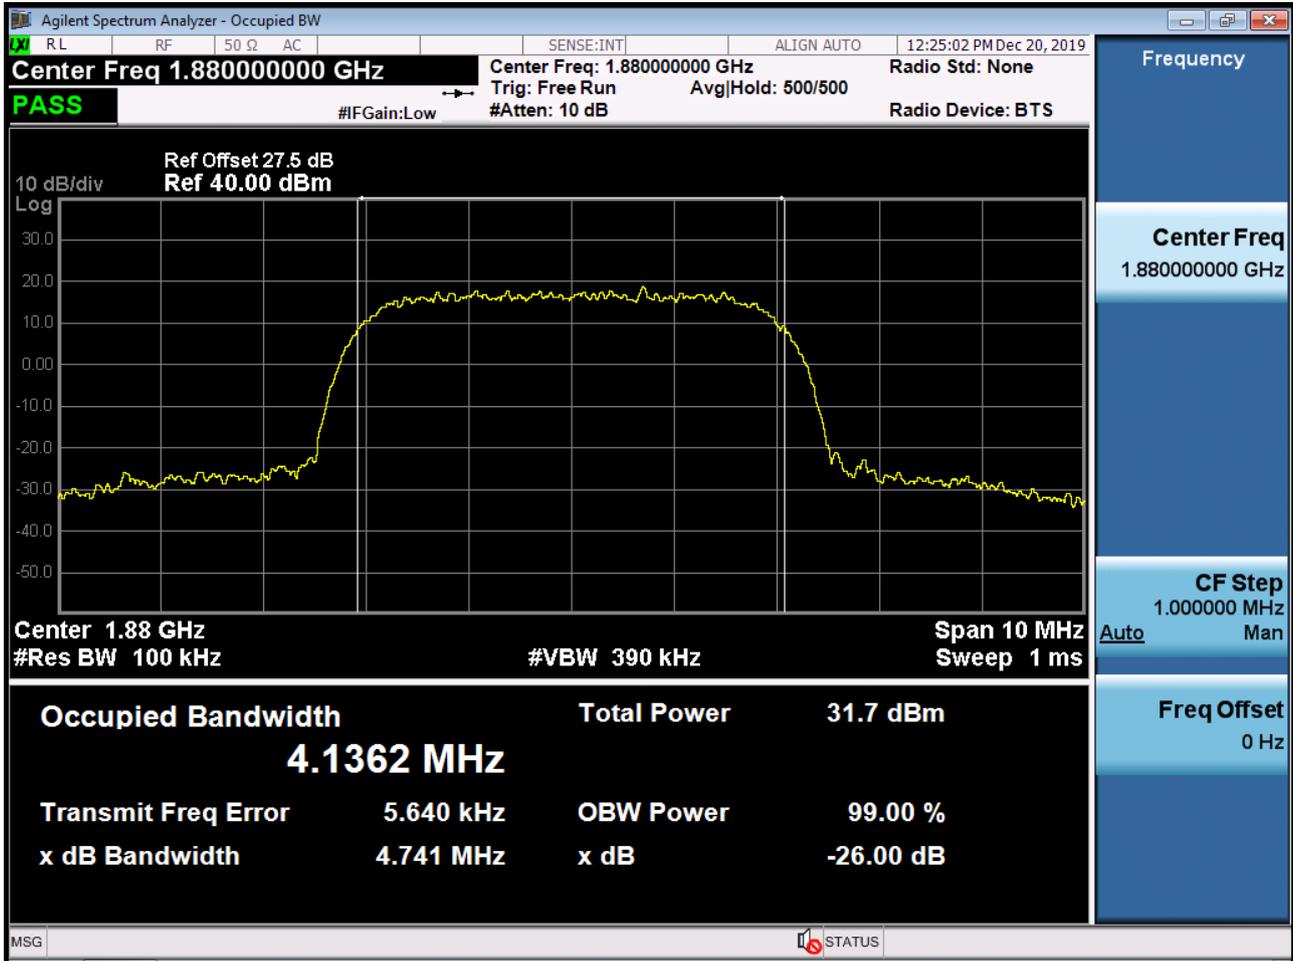


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

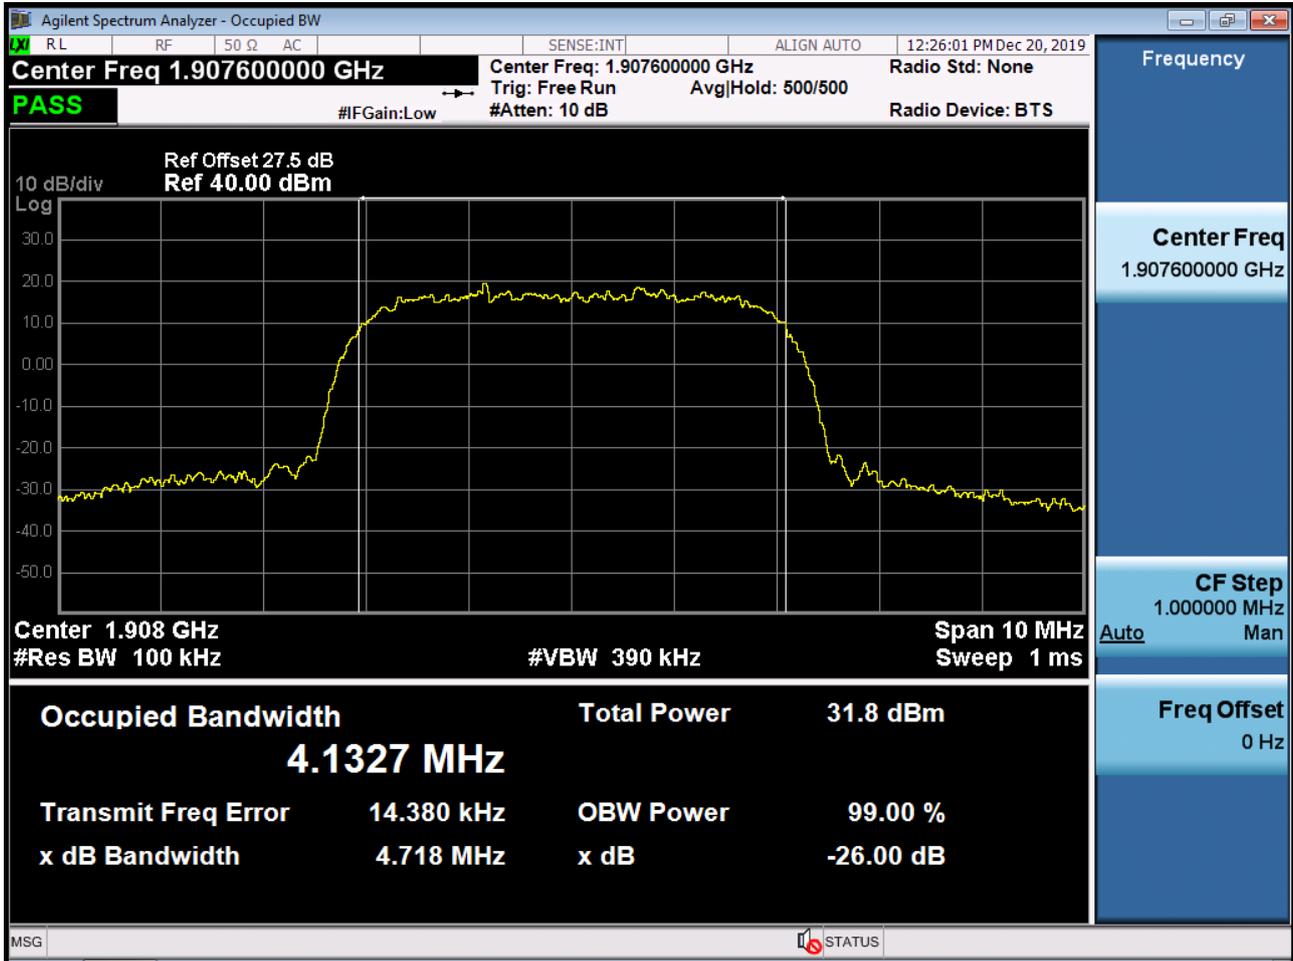


■ WCDMA1700 MODE (1712.4 CH.) Occupied Bandwidth

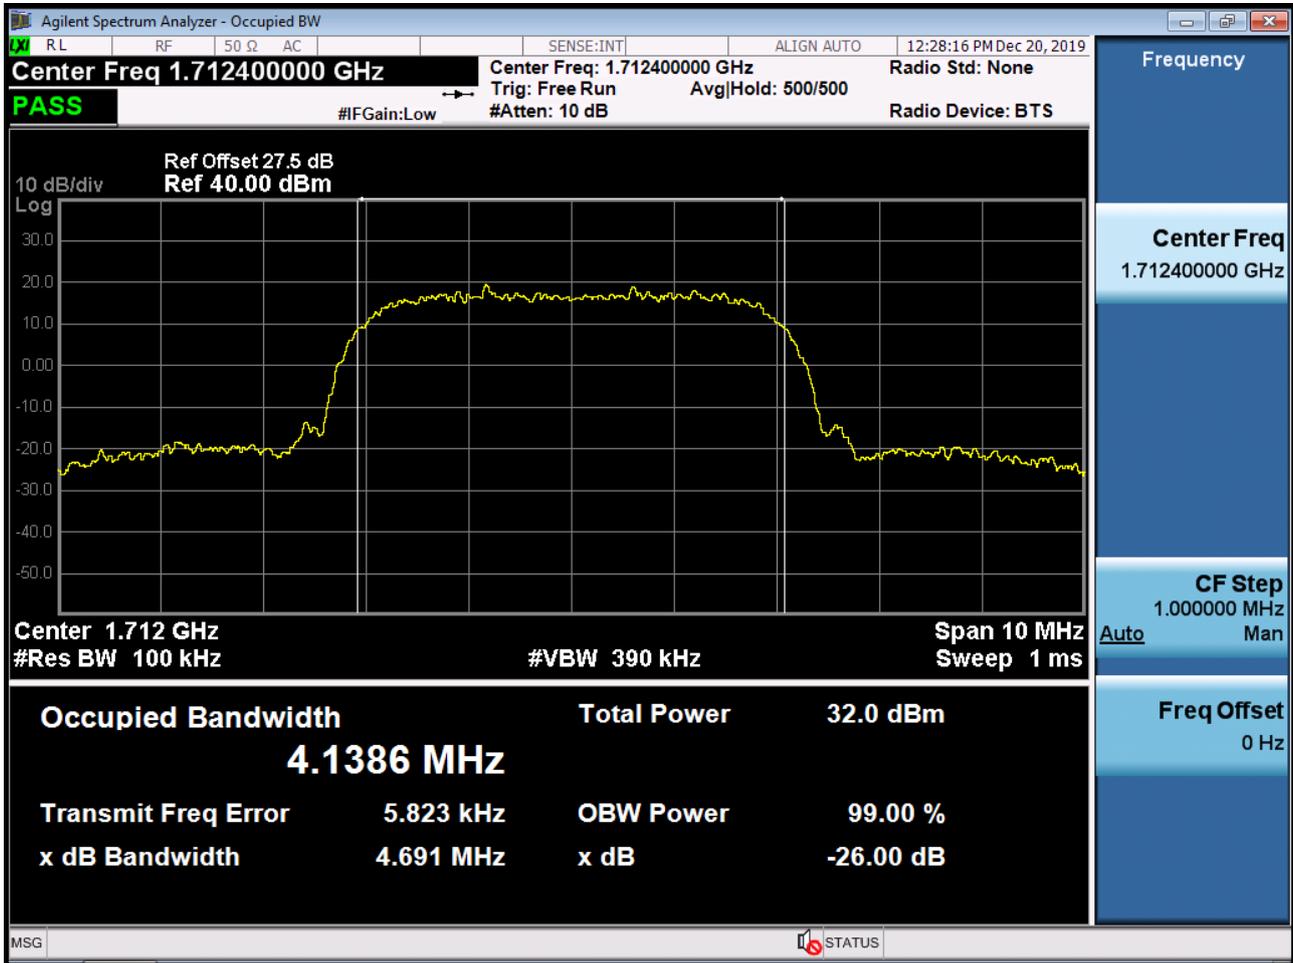


■ WCDMA1700 MODE (1732.4 CH.) Occupied Bandwidth

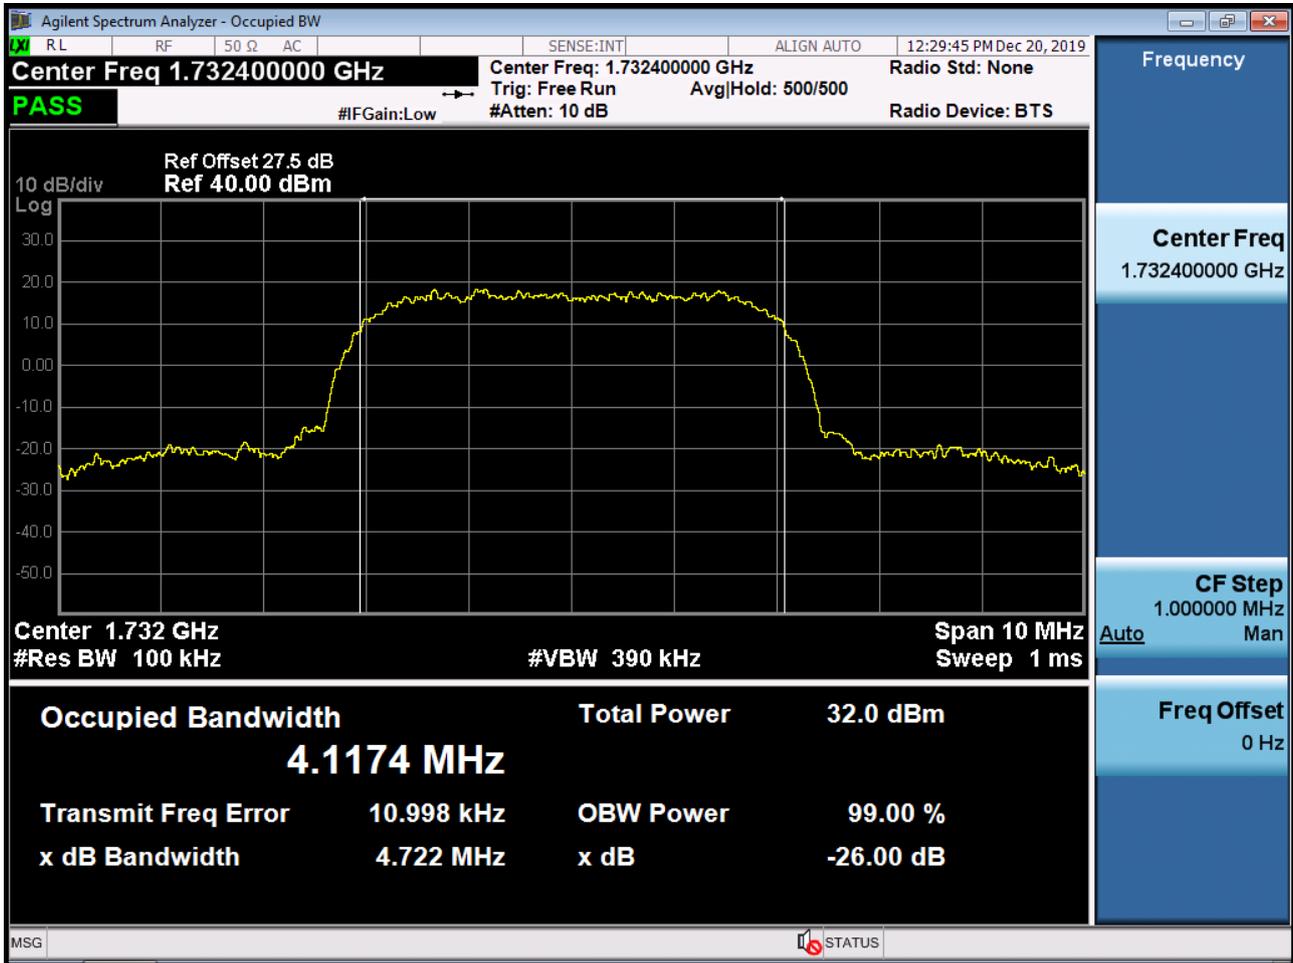


■ WCDMA1700 MODE (1752.6 CH.) Occupied Bandwidth

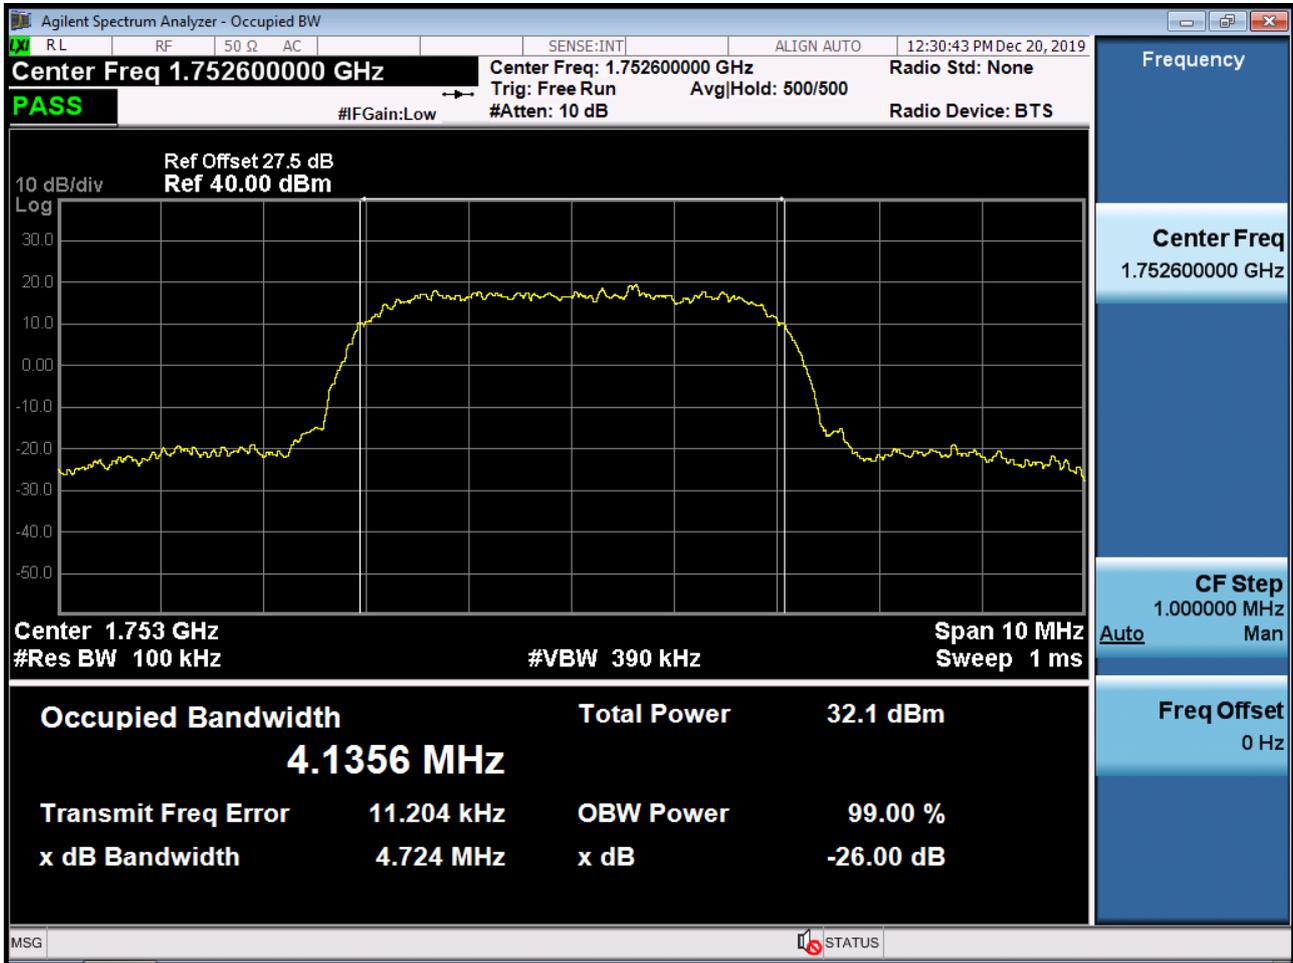


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{PK}

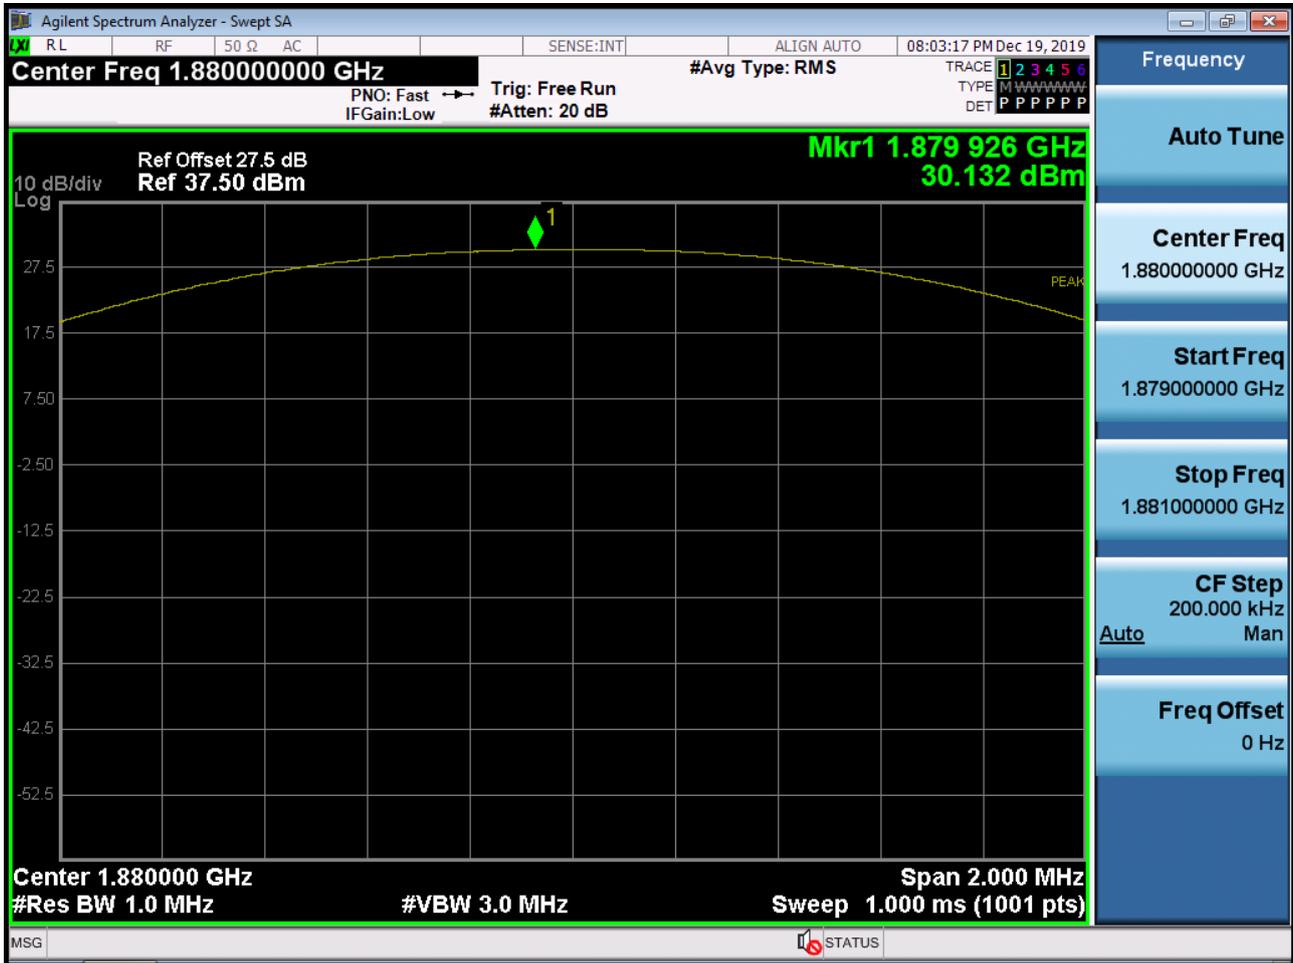


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

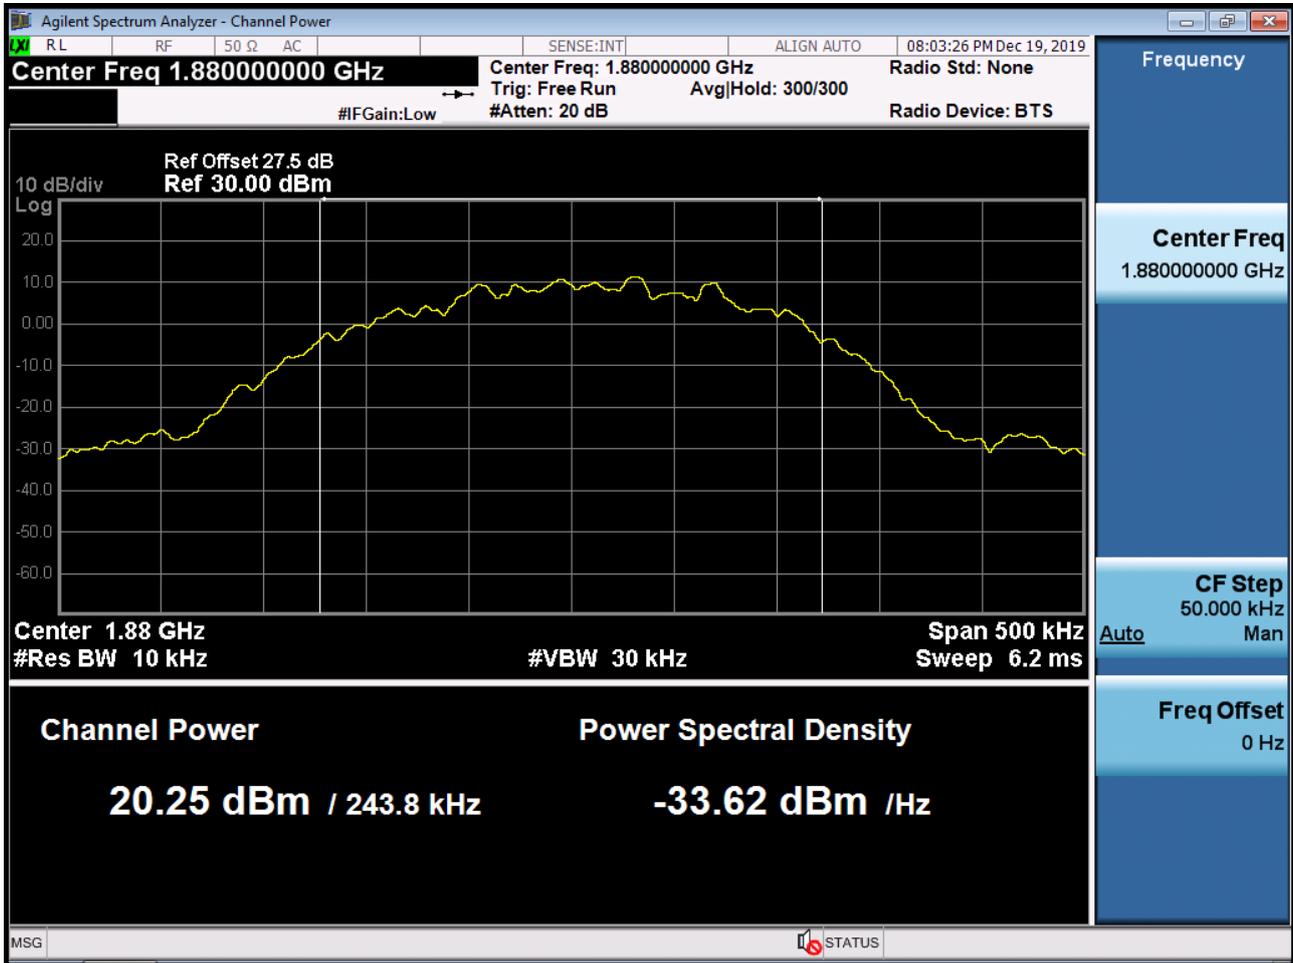


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

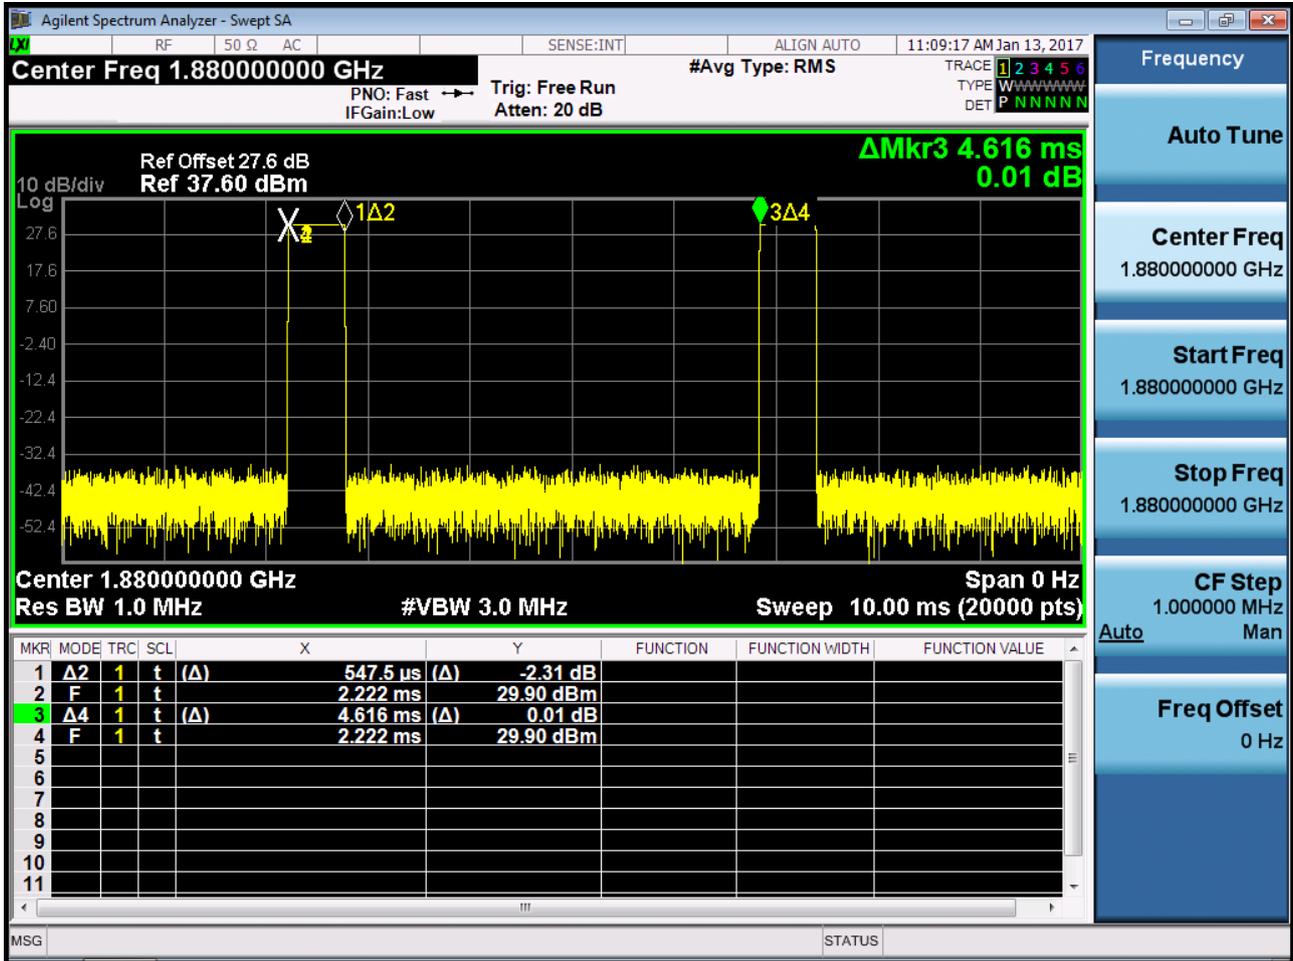


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

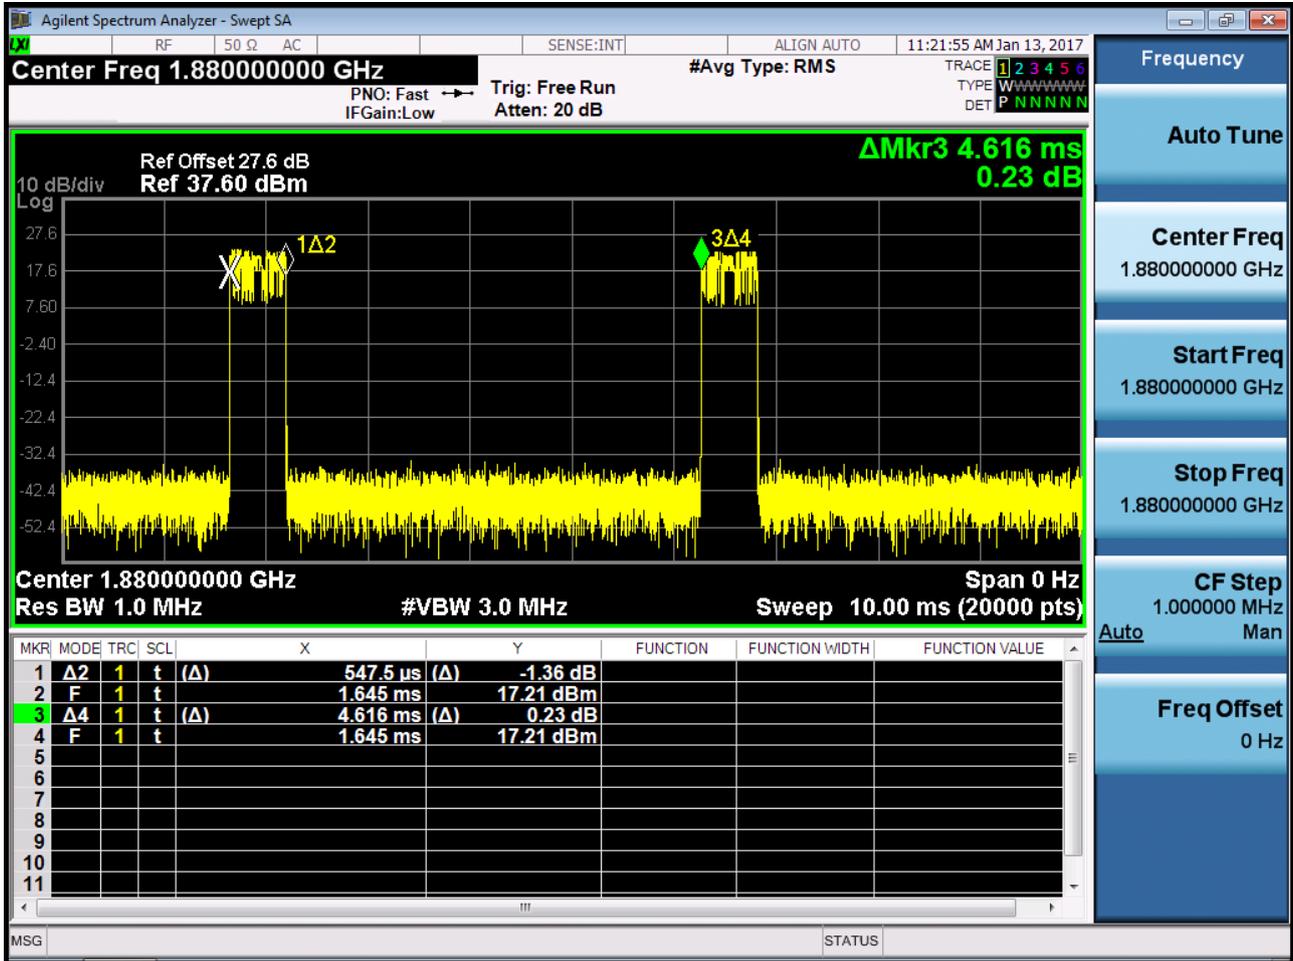


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{PK}

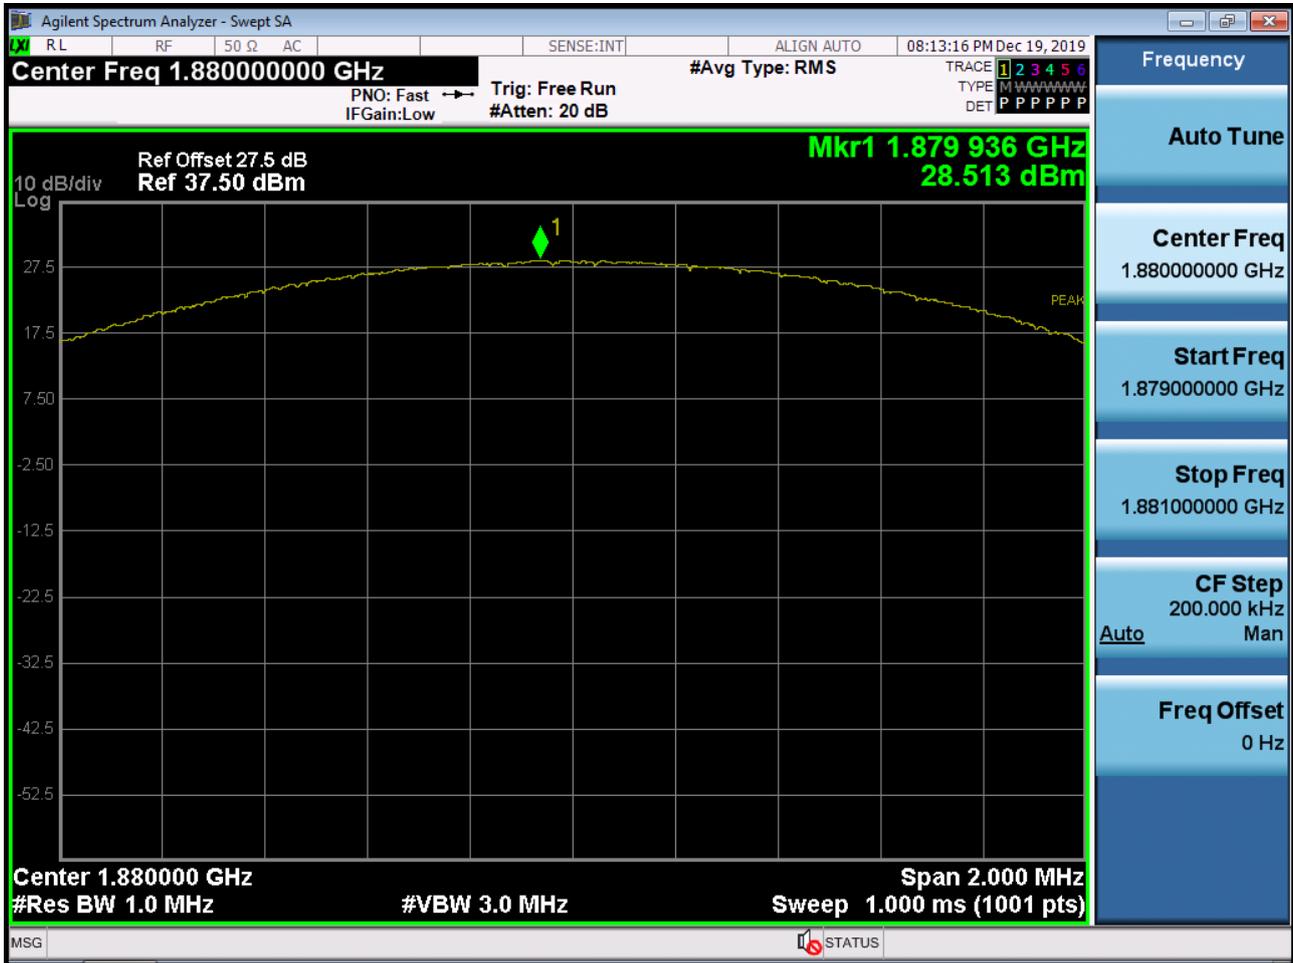


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

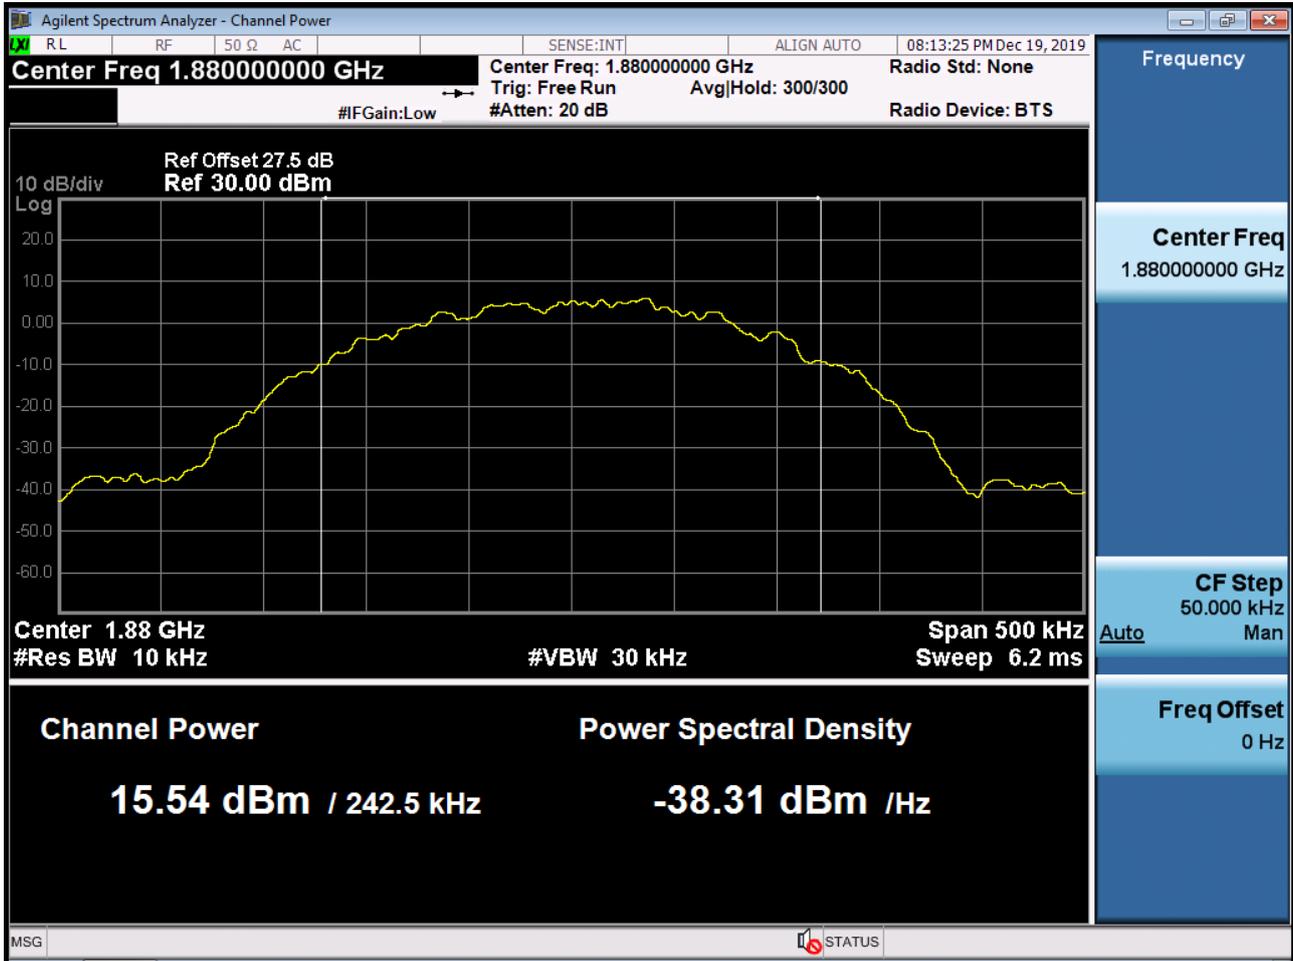


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

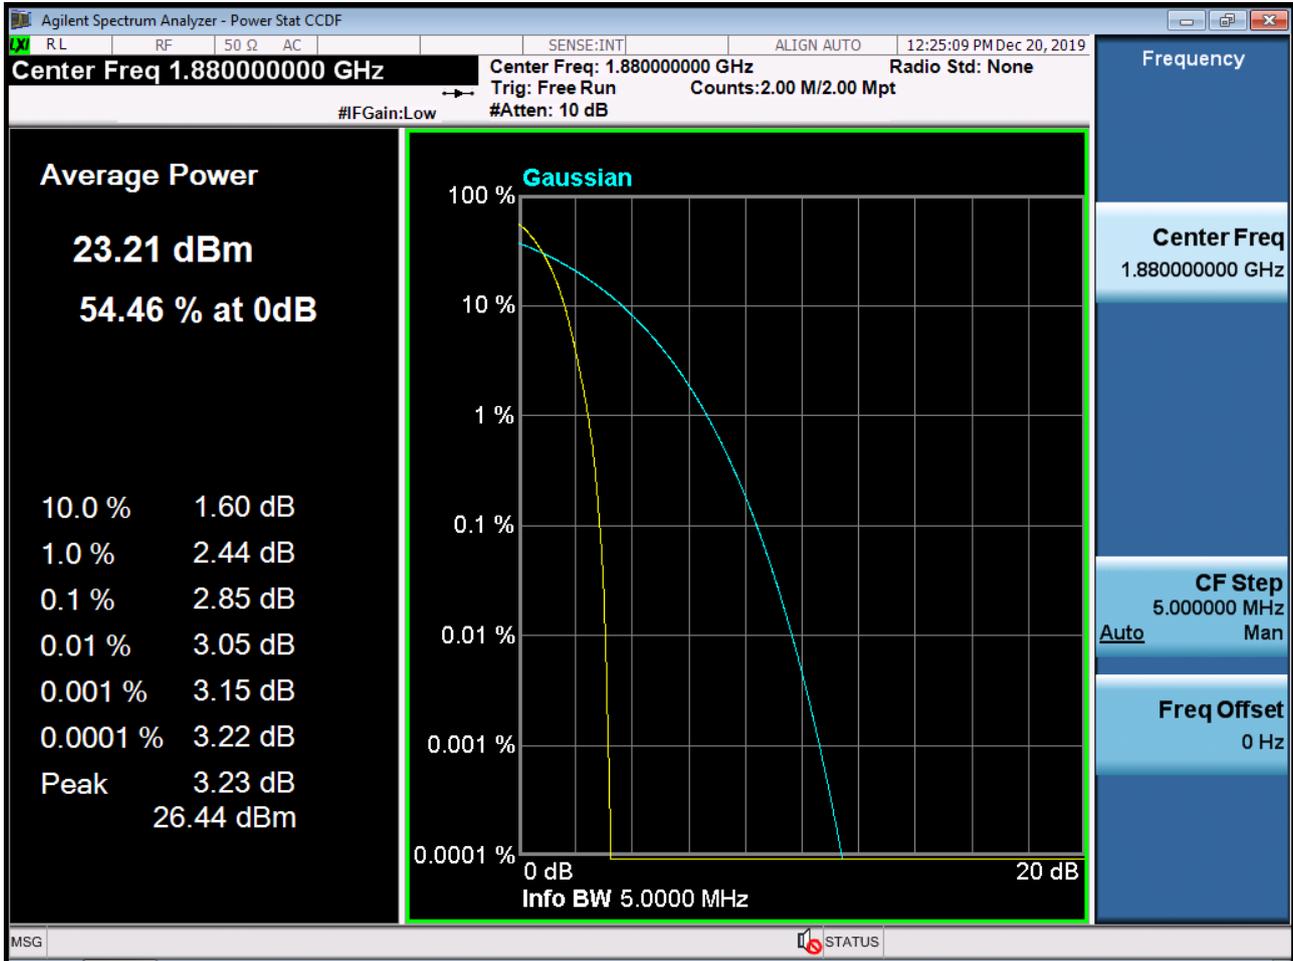


■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

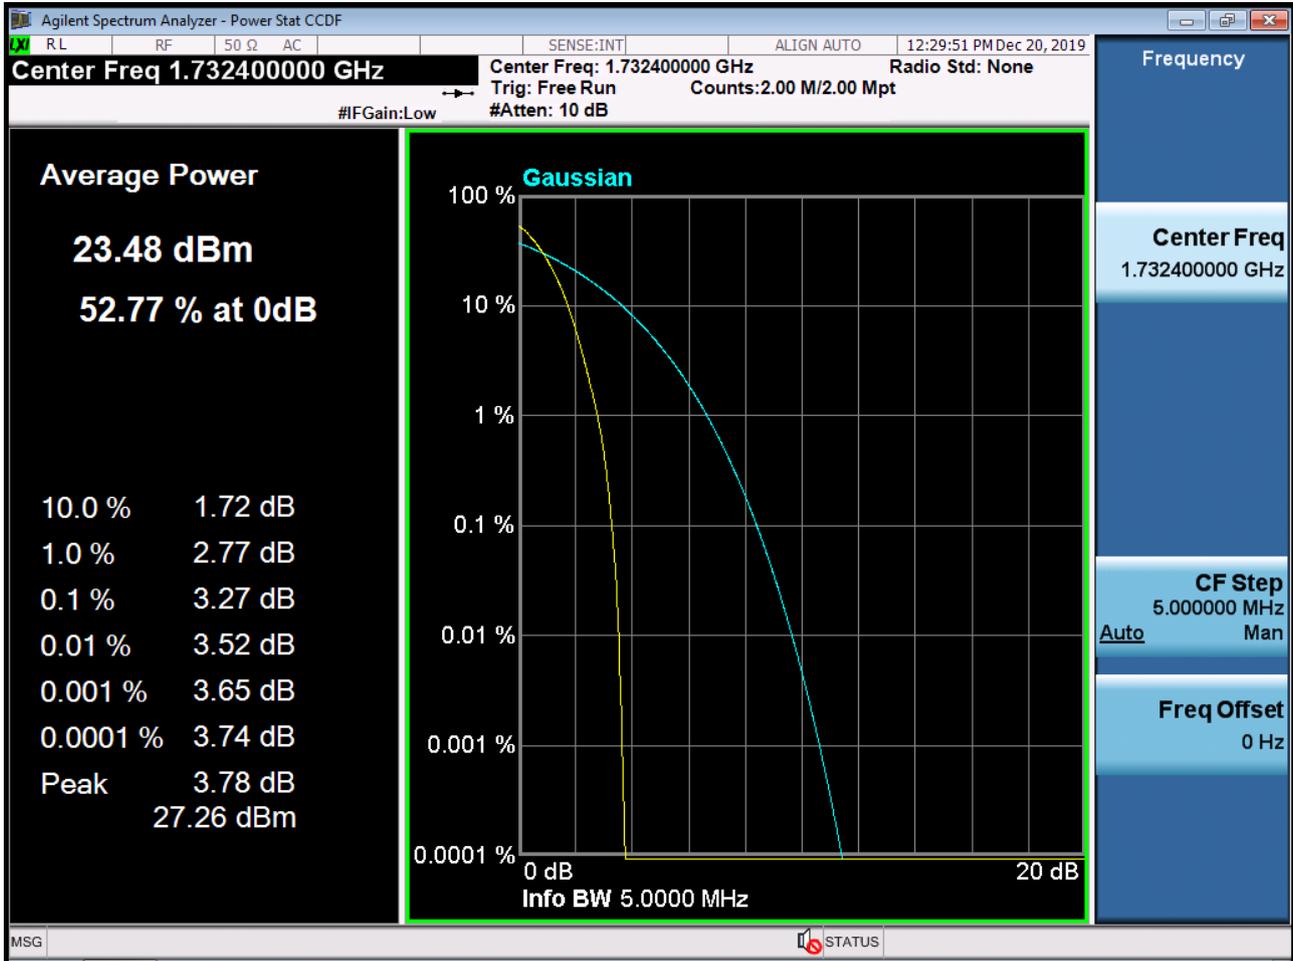


■ GSM850 MODE (128 CH.) Block Edge 1

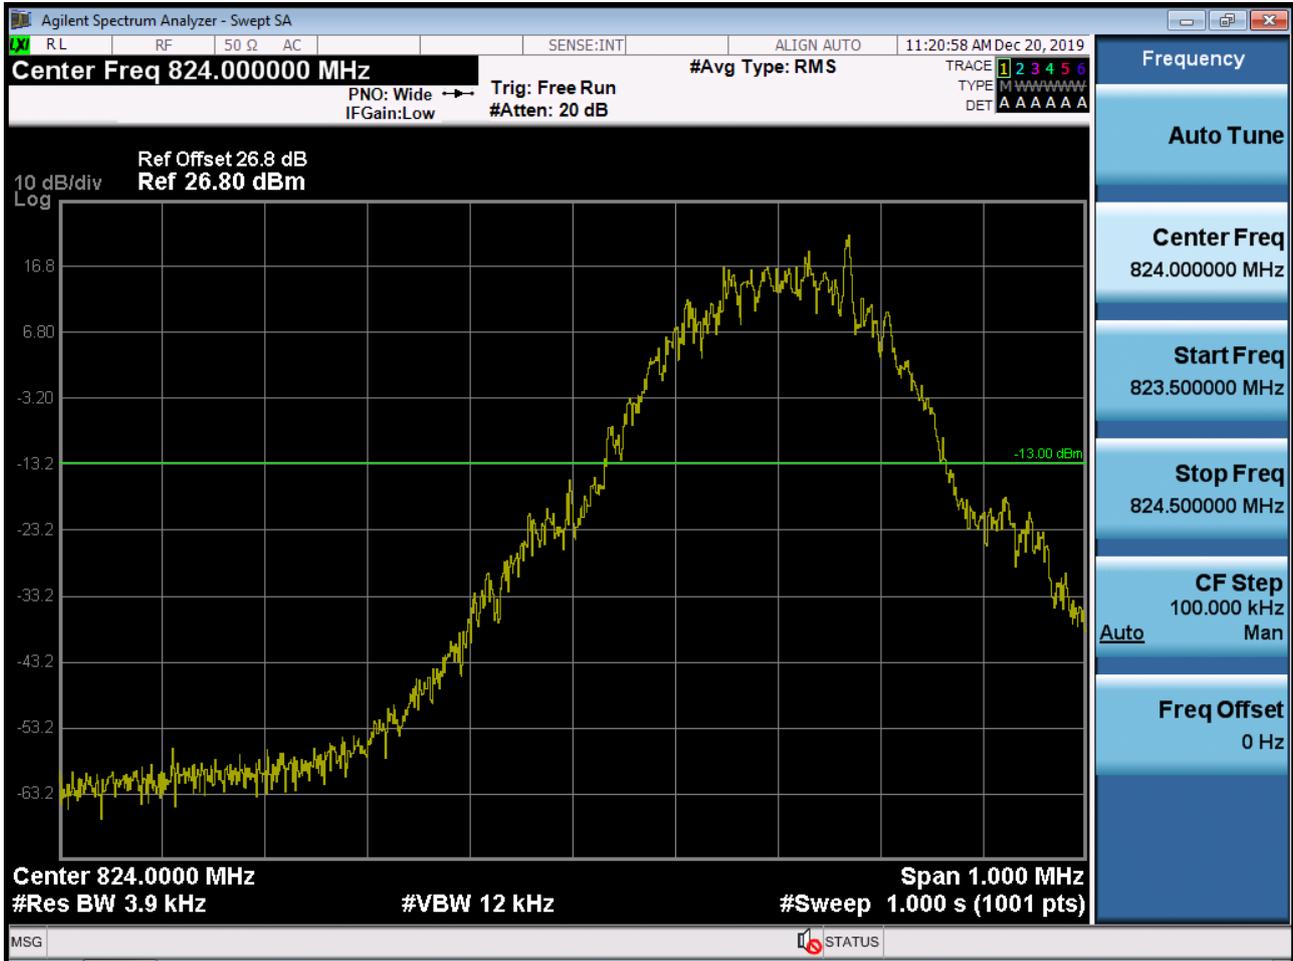


■ GSM850 MODE (128 CH.) Block Edge 2

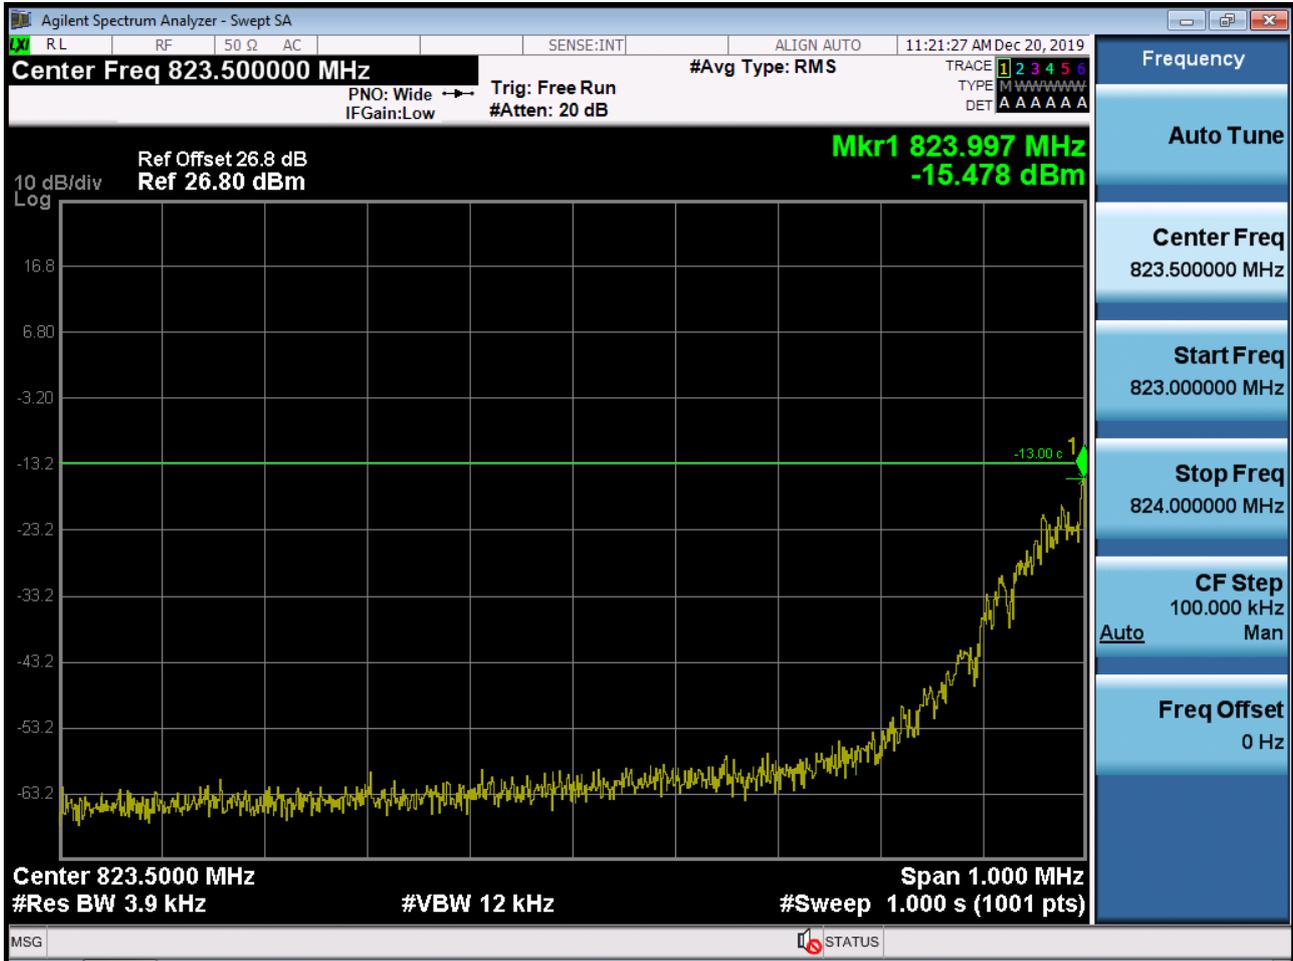


■ GSM850 MODE (128 CH.) Block Edge 3

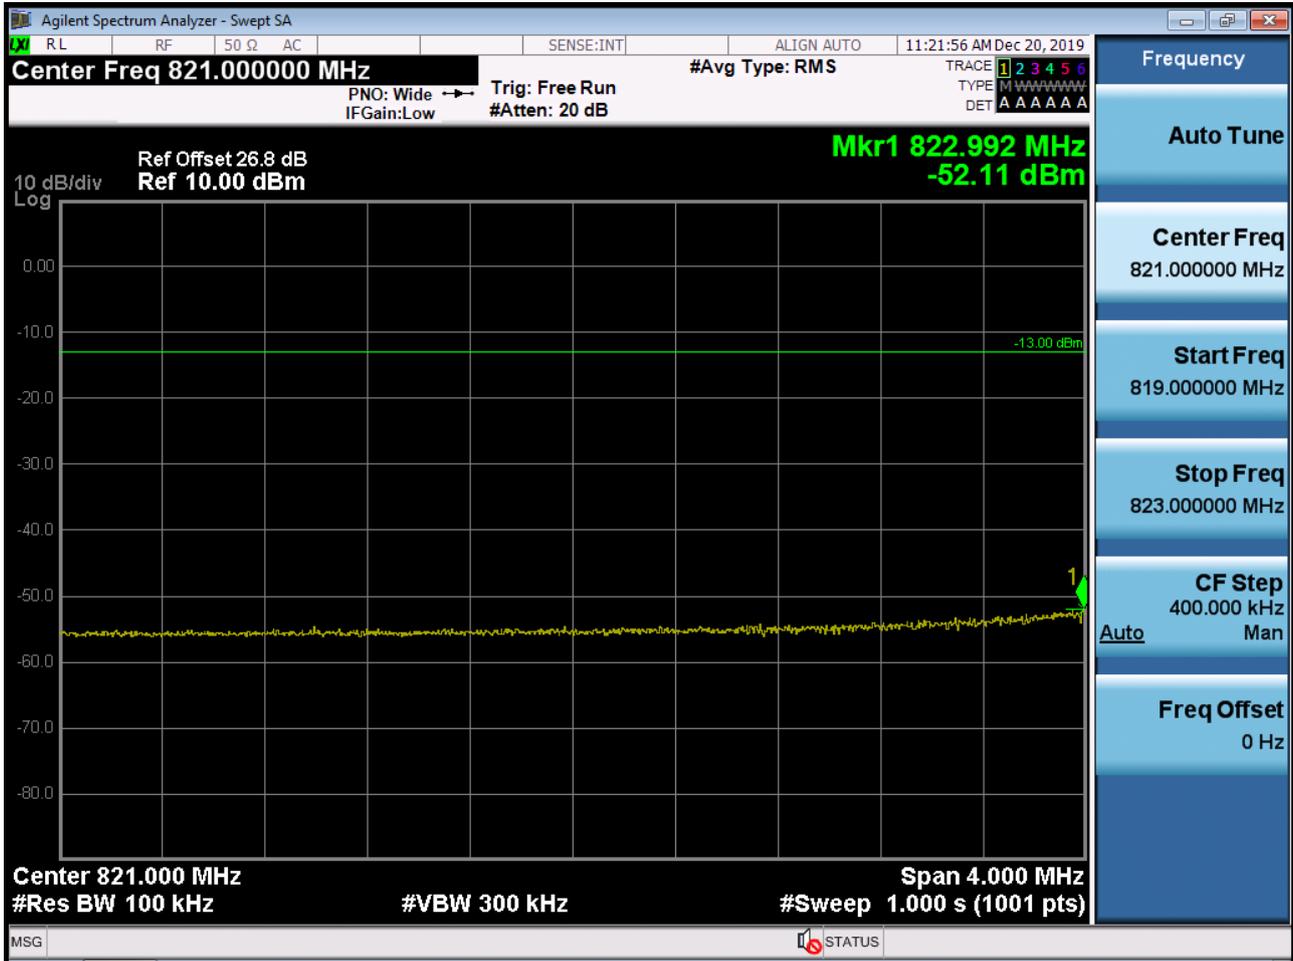


■ GSM850 MODE (251 CH.) Block Edge 1

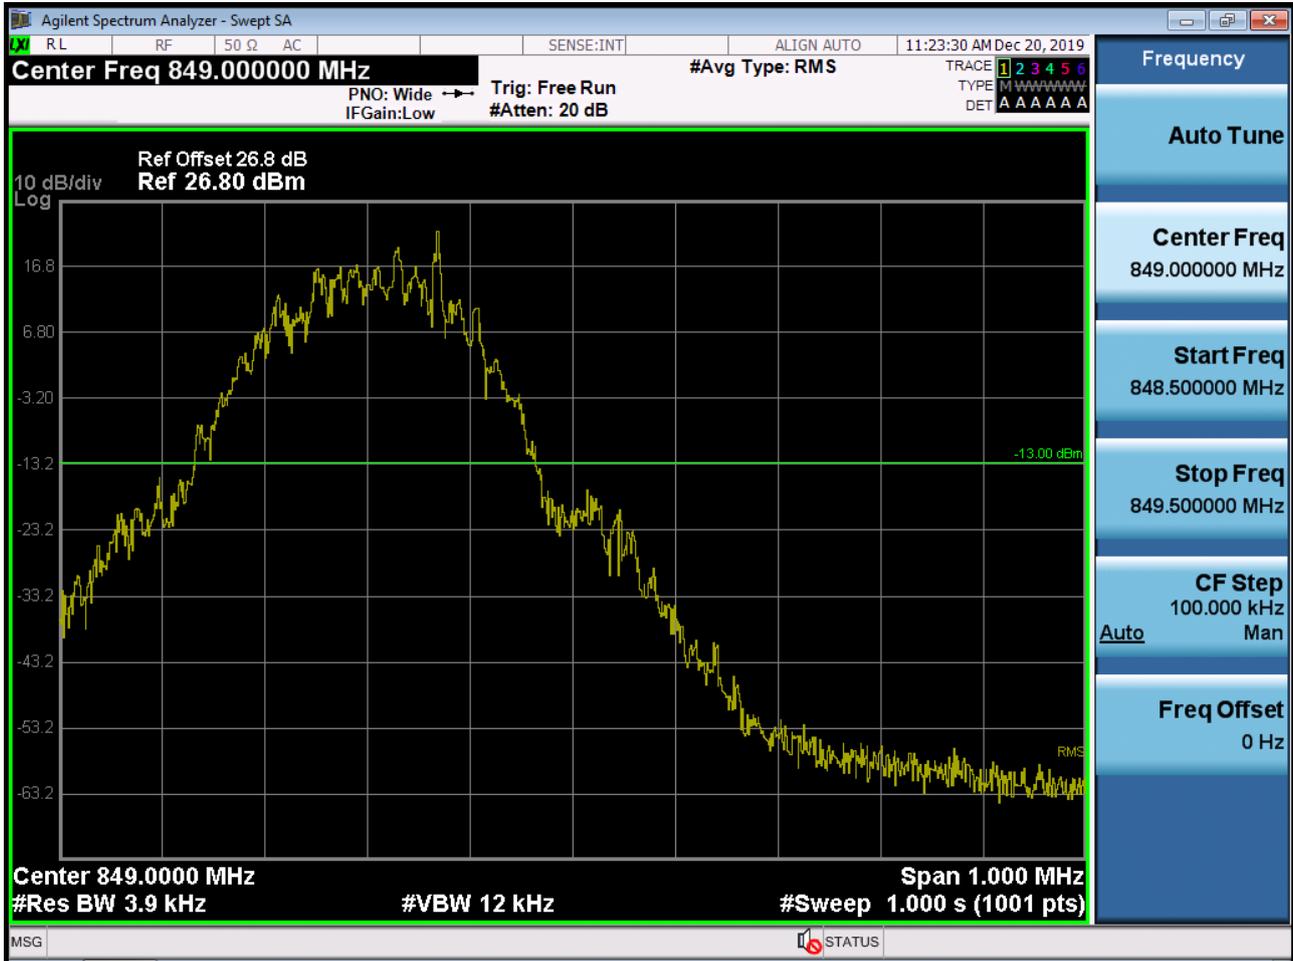


■ GSM850 MODE (251 CH.) Block Edge 3

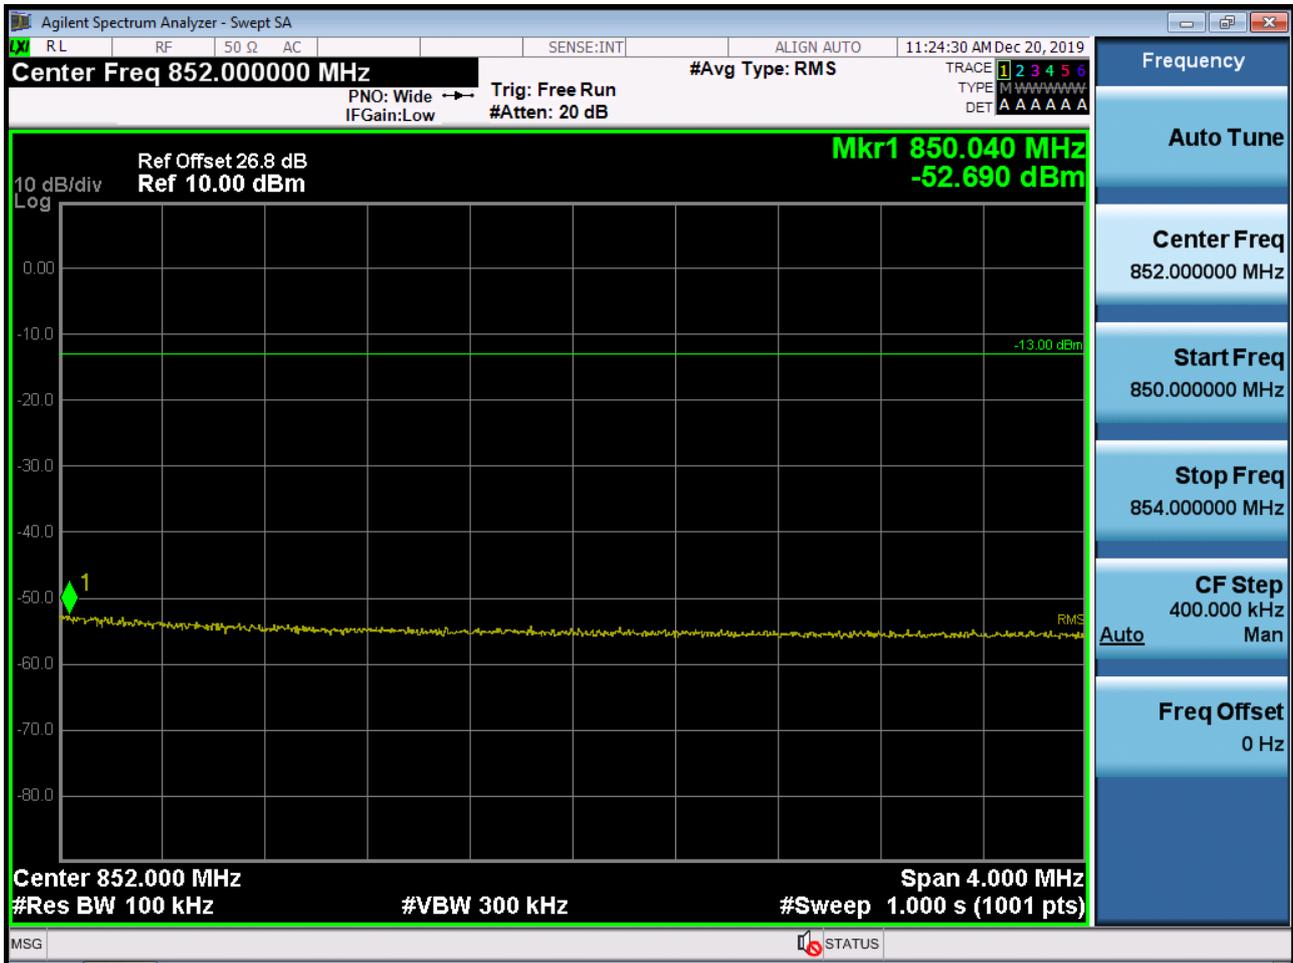


■ EDGE MODE (128 CH.) Block Edge 1

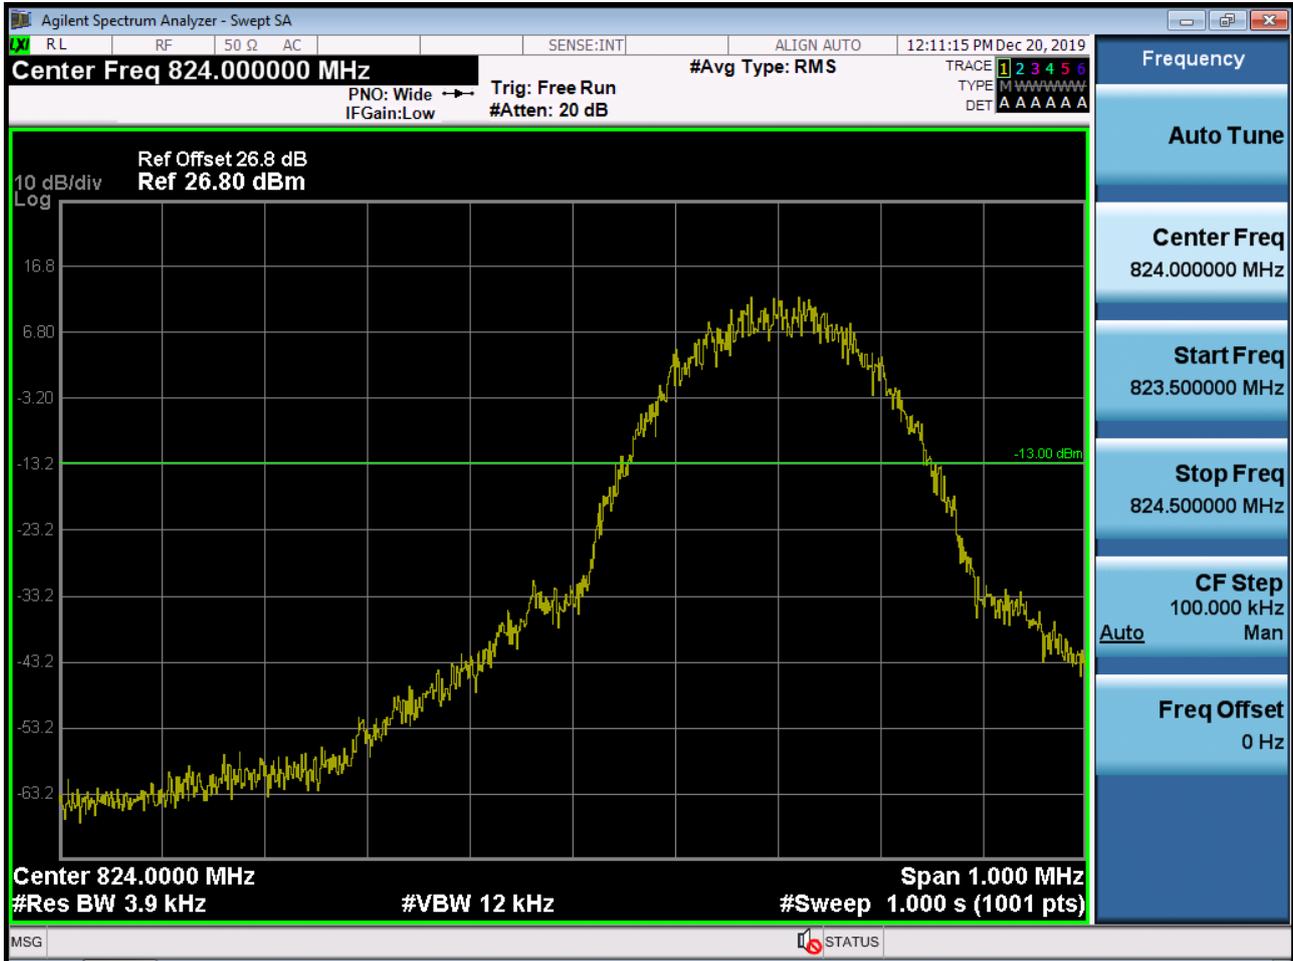


■ EDGE MODE (128 CH.) Block Edge 2

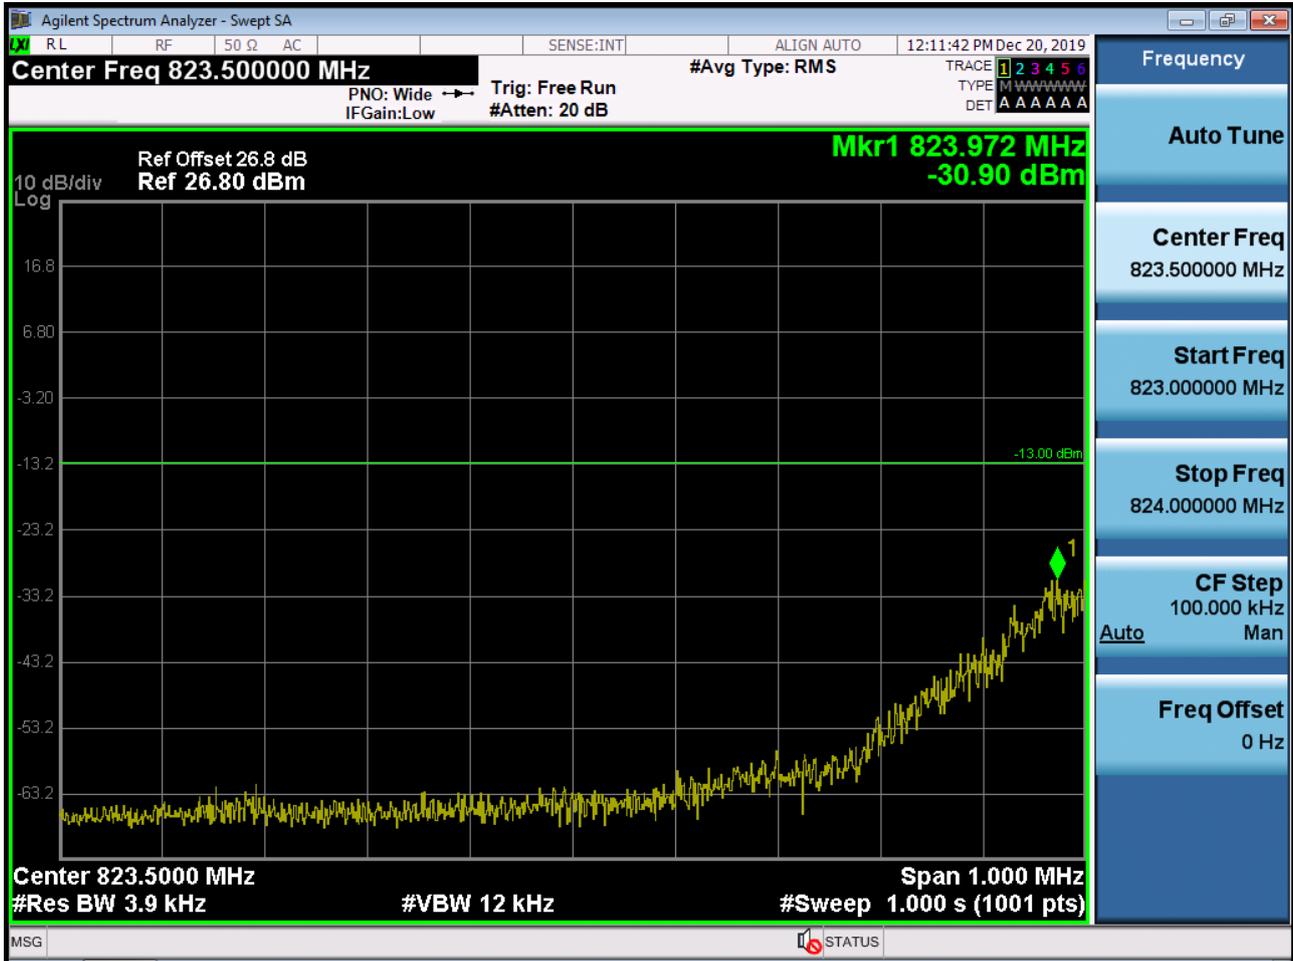

■ EDGE MODE (128 CH.) Block Edge 3

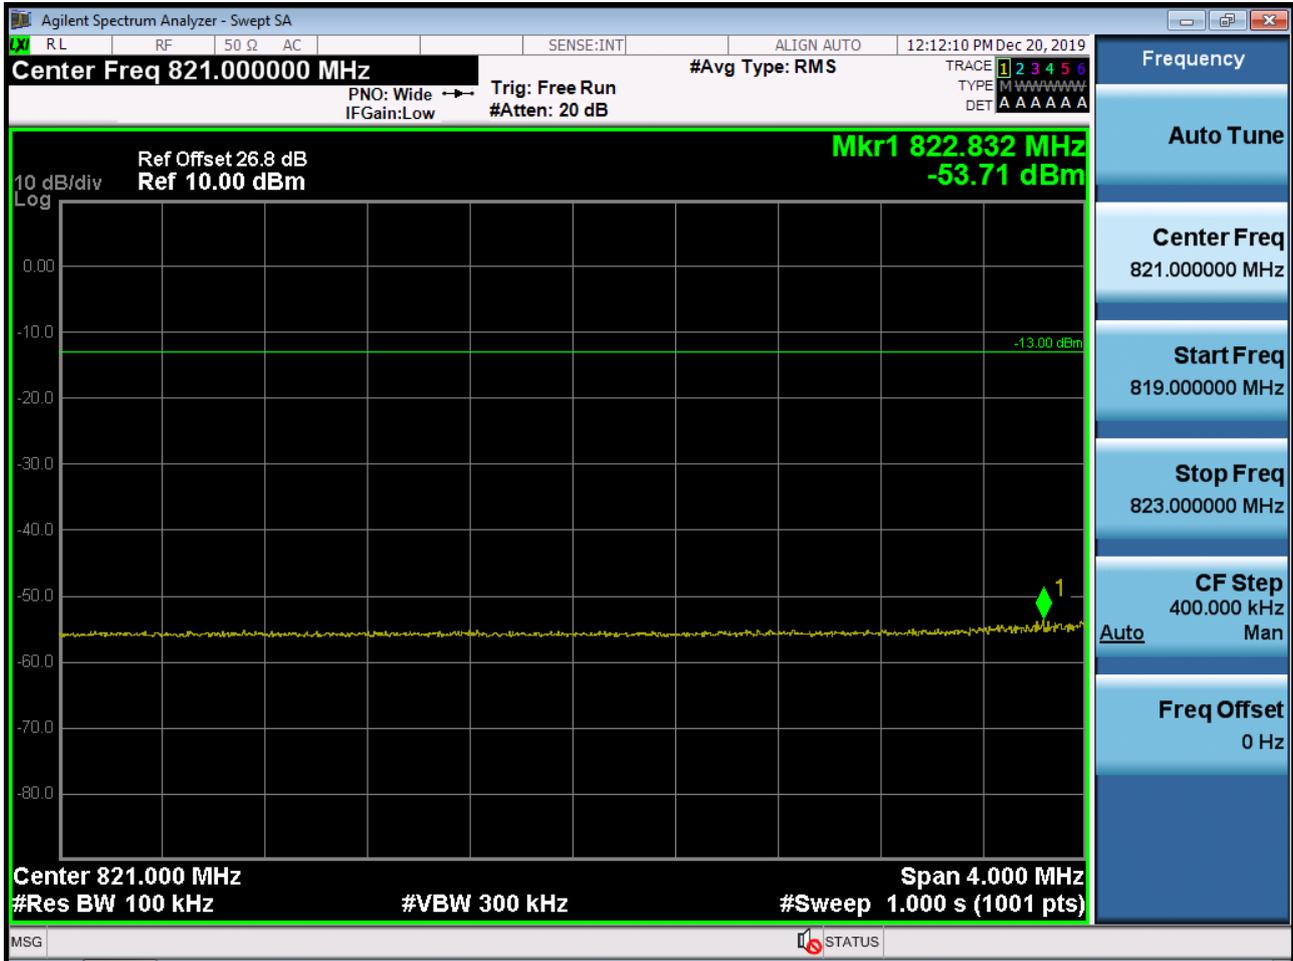


■ EDGE MODE (251 CH.) Block Edge 1

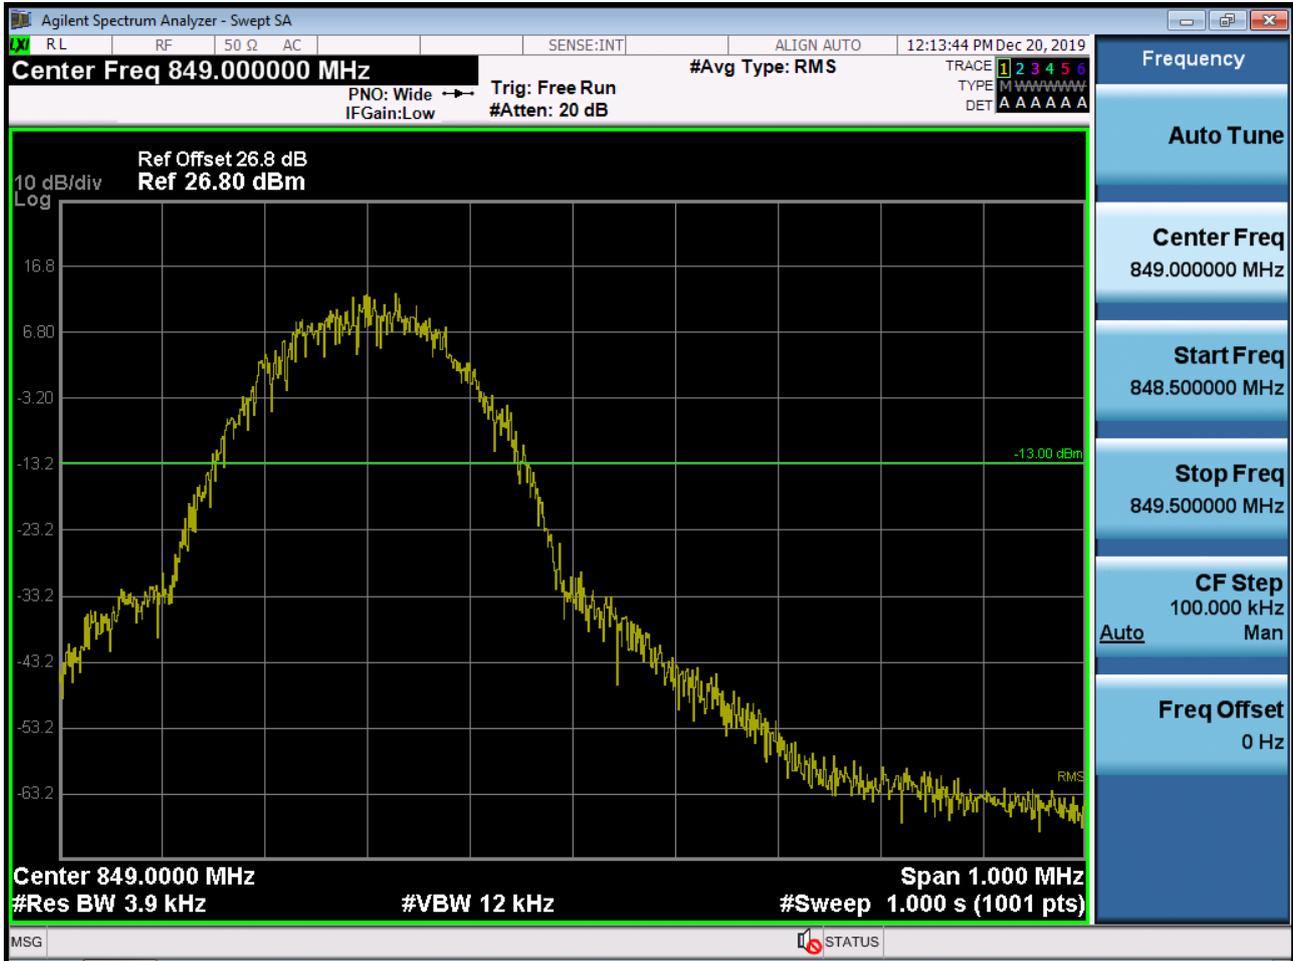


■ EDGE MODE (251 CH.) Block Edge 3




■ GSM1900 MODE (512 CH.) Block Edge 1

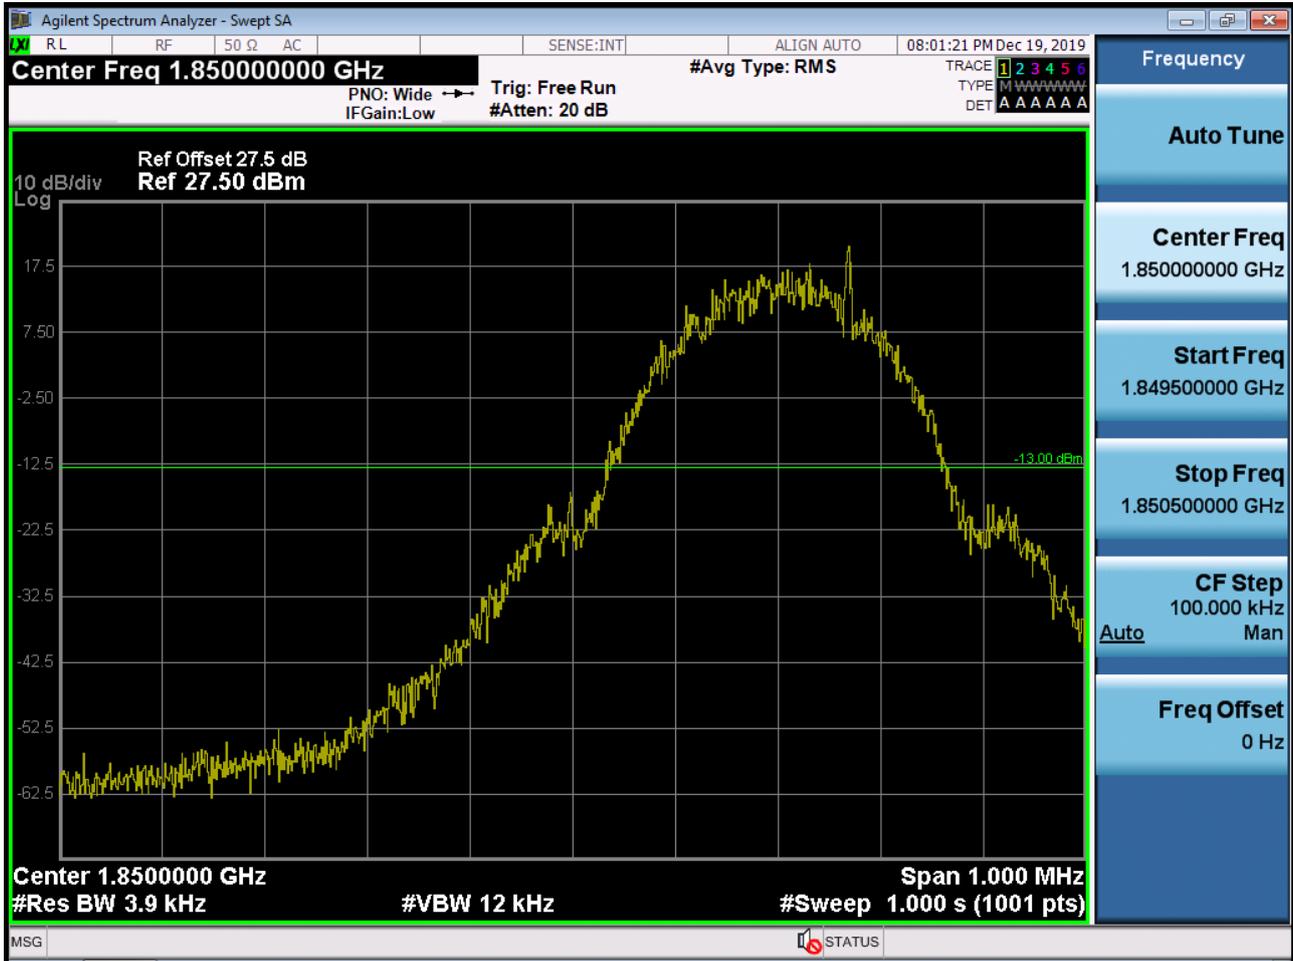

■ GSM1900 MODE (512 CH.) Block Edge 2

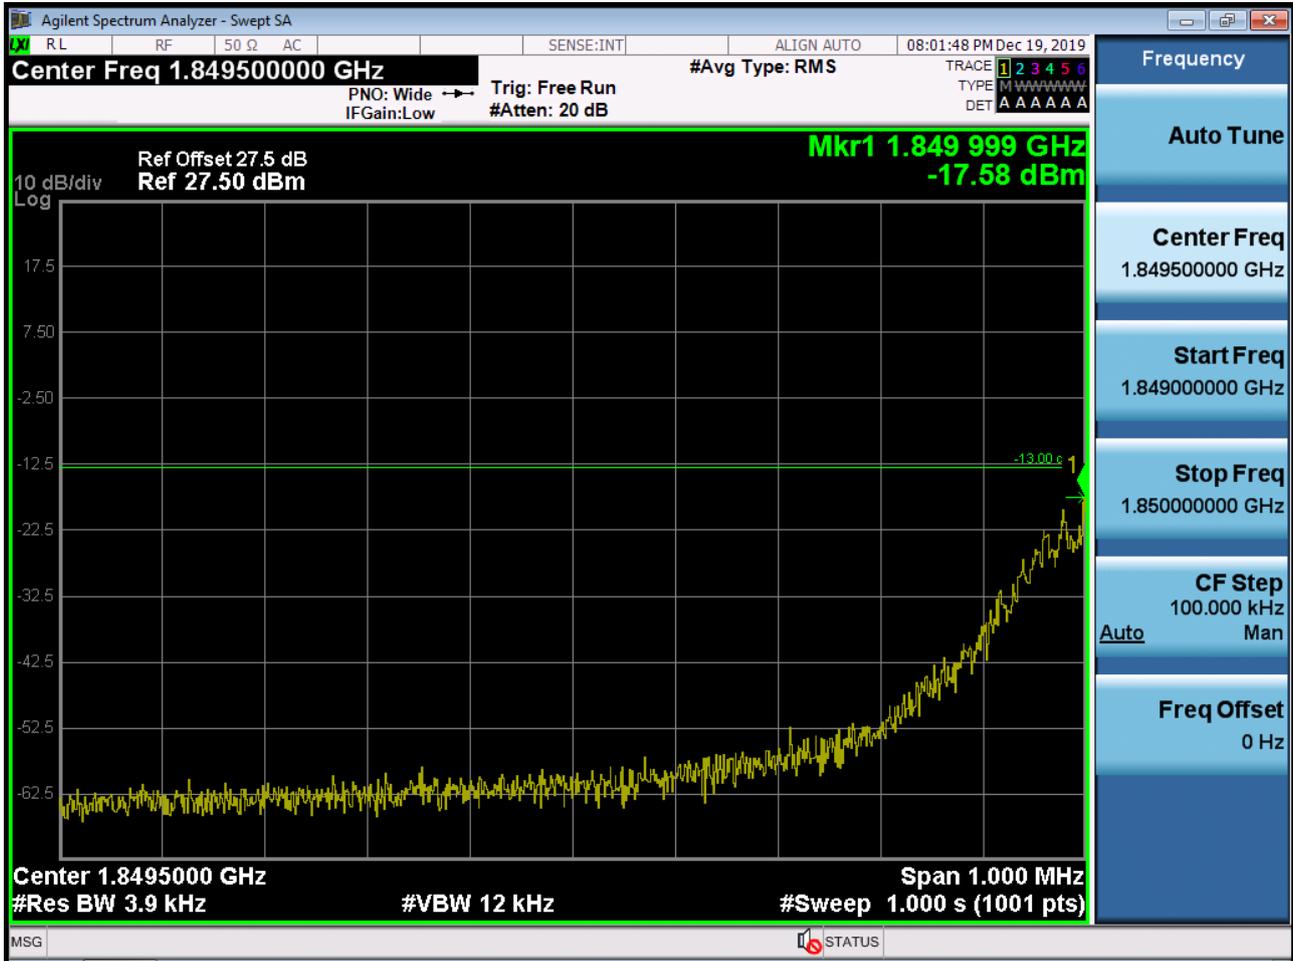


■ GSM1900 MODE (512 CH.) Block Edge 3

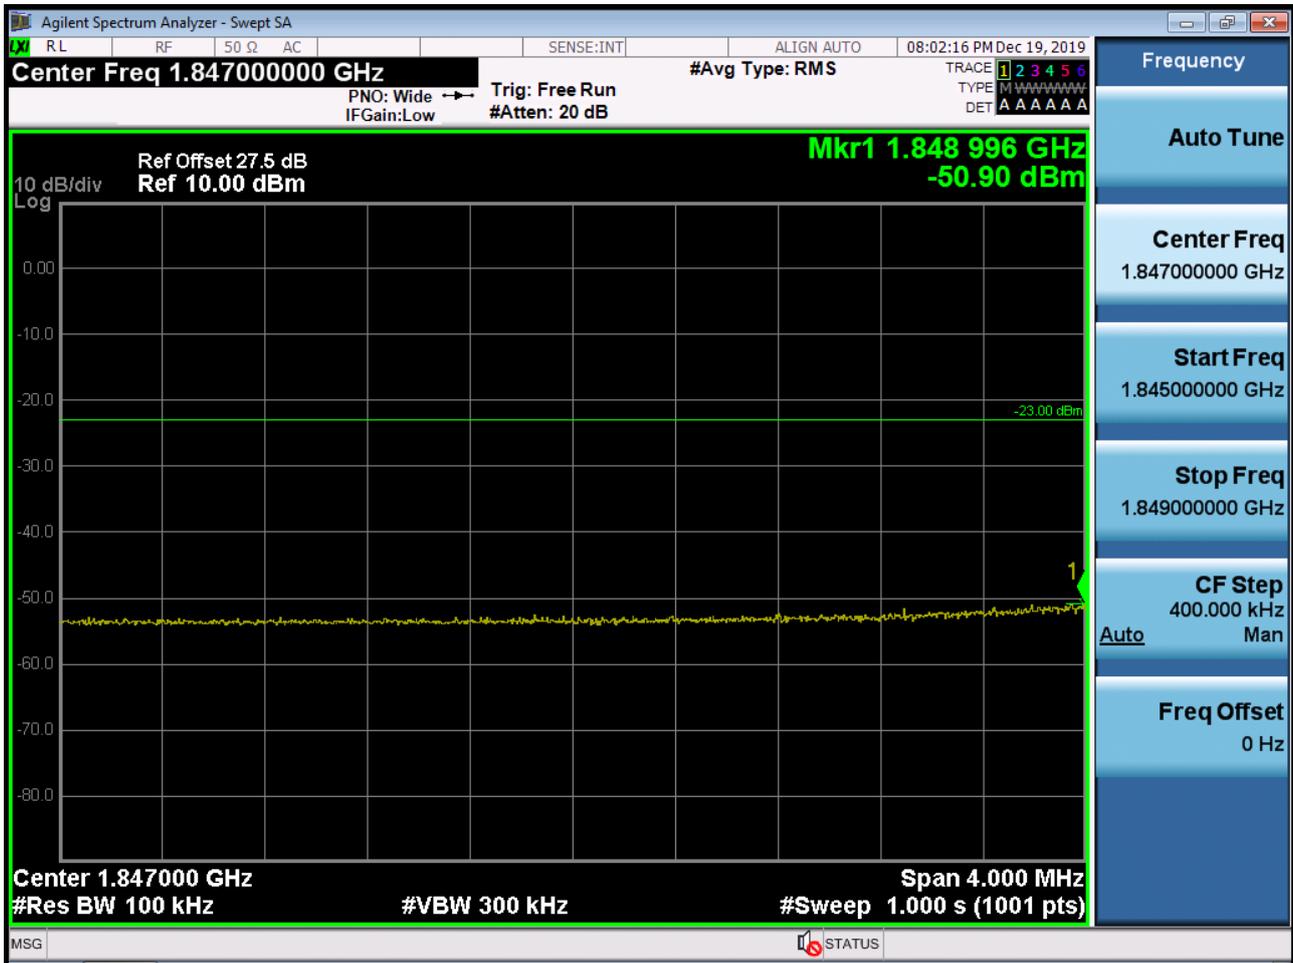


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.90 dBm + 10 dB = -40.90 dBm


■ GSM1900 MODE (810 CH.) Block Edge 1

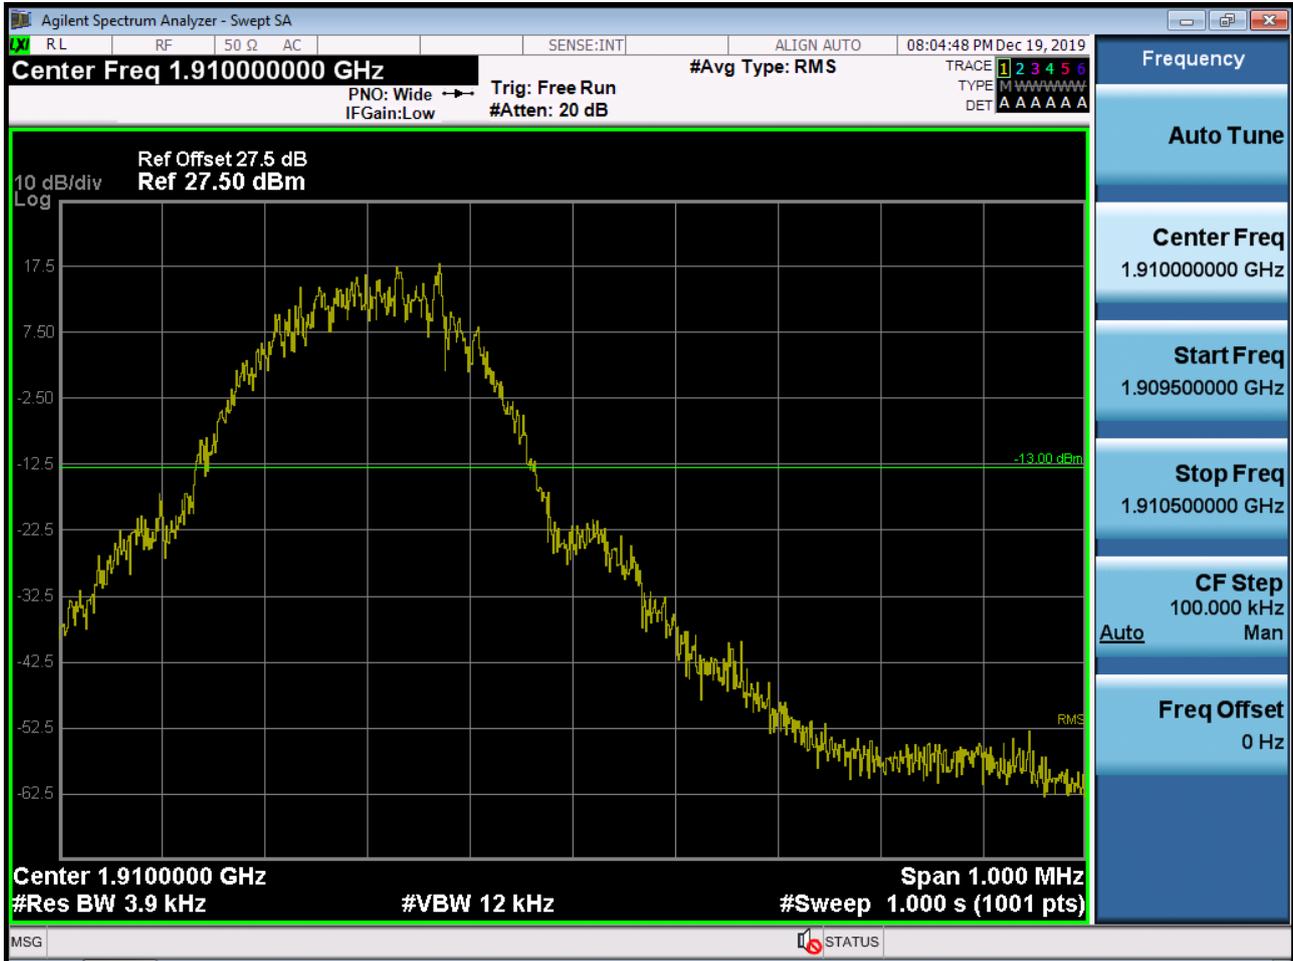

■ GSM1900 MODE (810 CH.) Block Edge 2

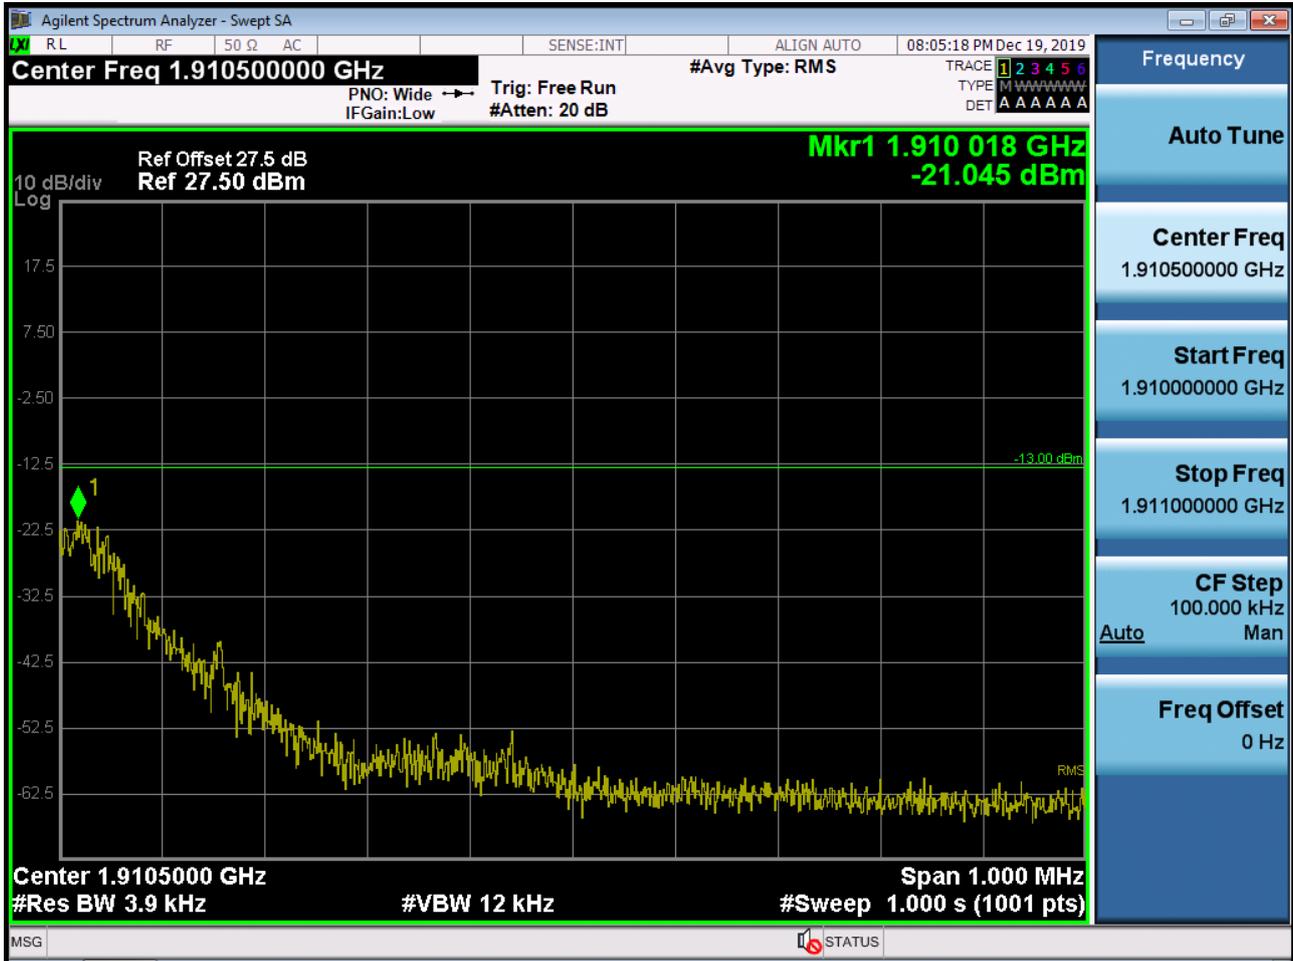


■ GSM1900 MODE (810 CH.) Block Edge 3

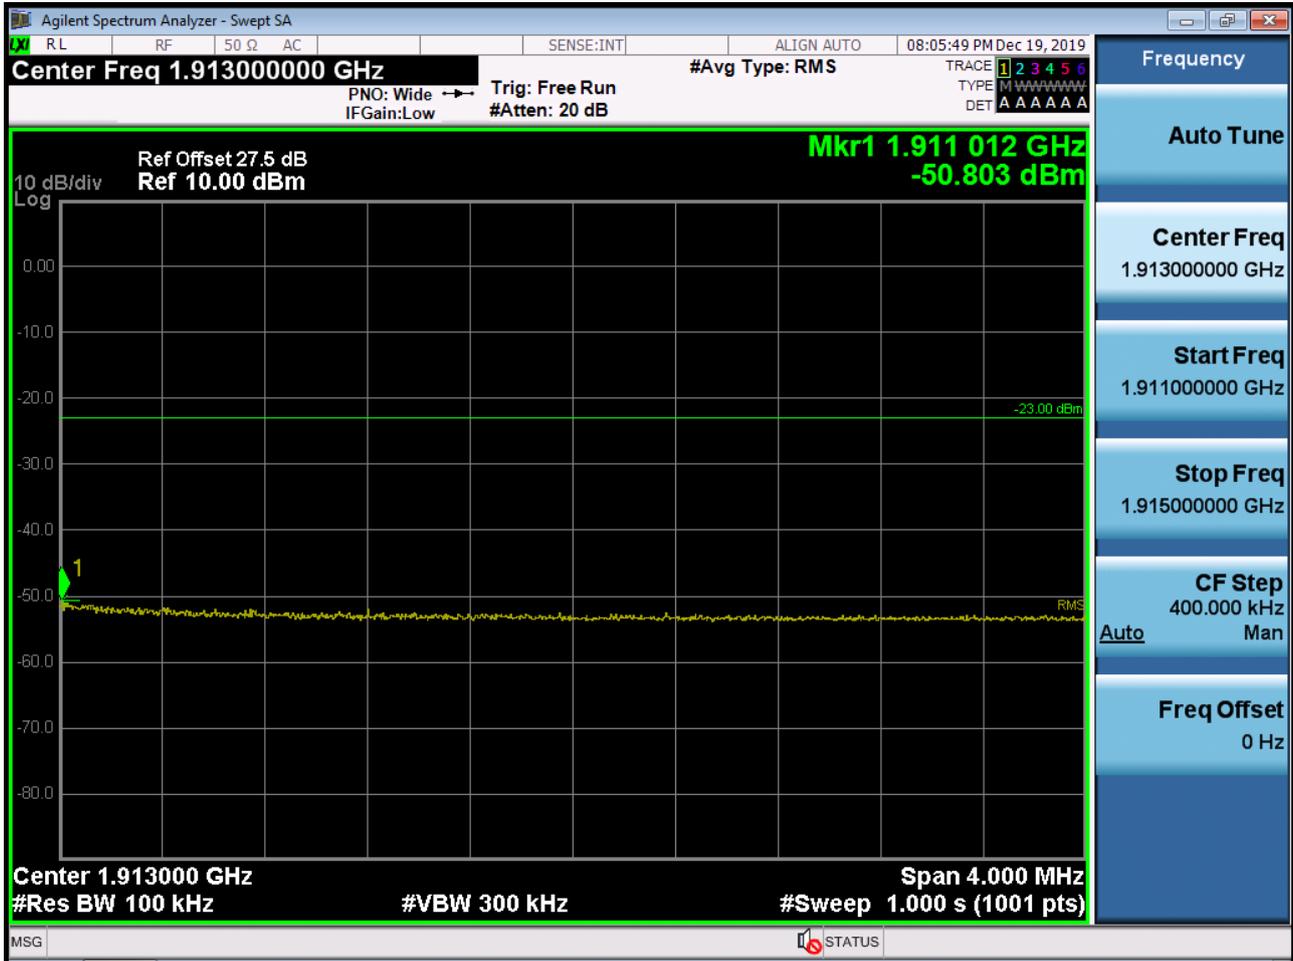


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.803 dBm + 10 dB = -40.803 dBm

■ EDGE MODE (512 CH.) Block Edge 1

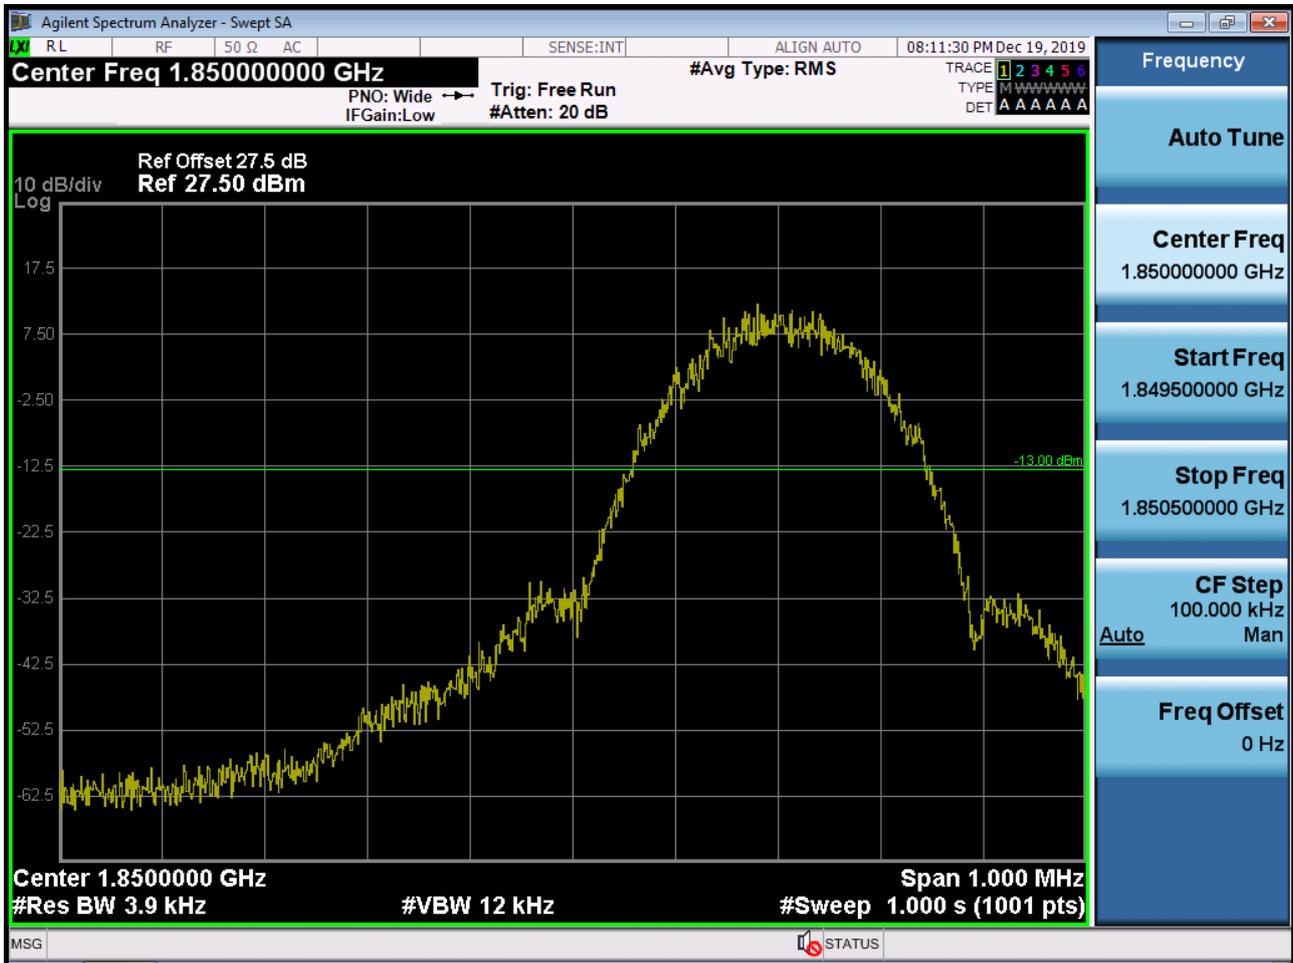

■ EDGE MODE (512 CH.) Block Edge 2

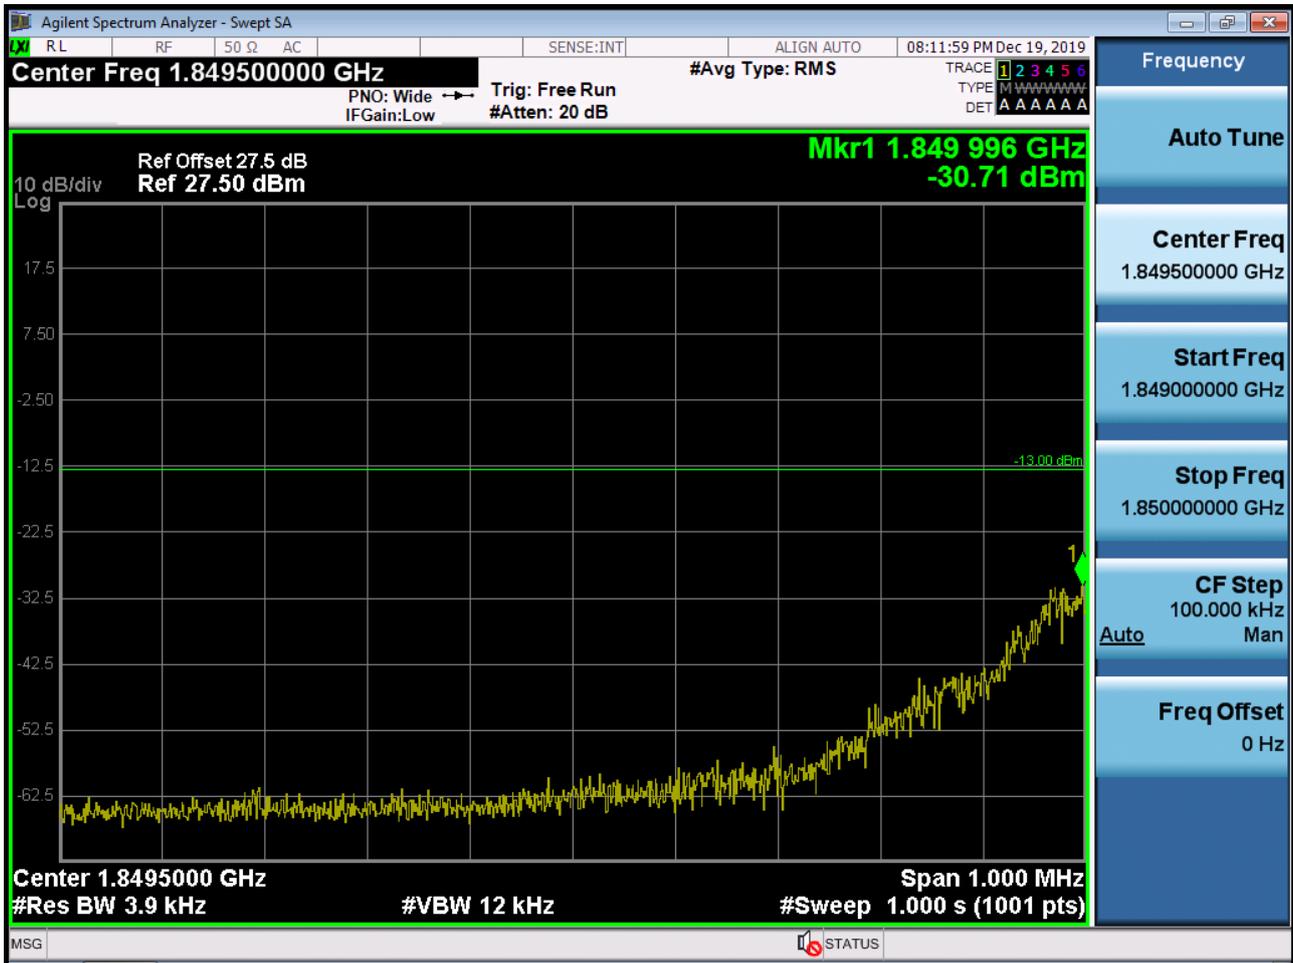


■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -52.12 dBm + 10 dB = -42.12 dBm


■ EDGE MODE (810 CH.) Block Edge 1

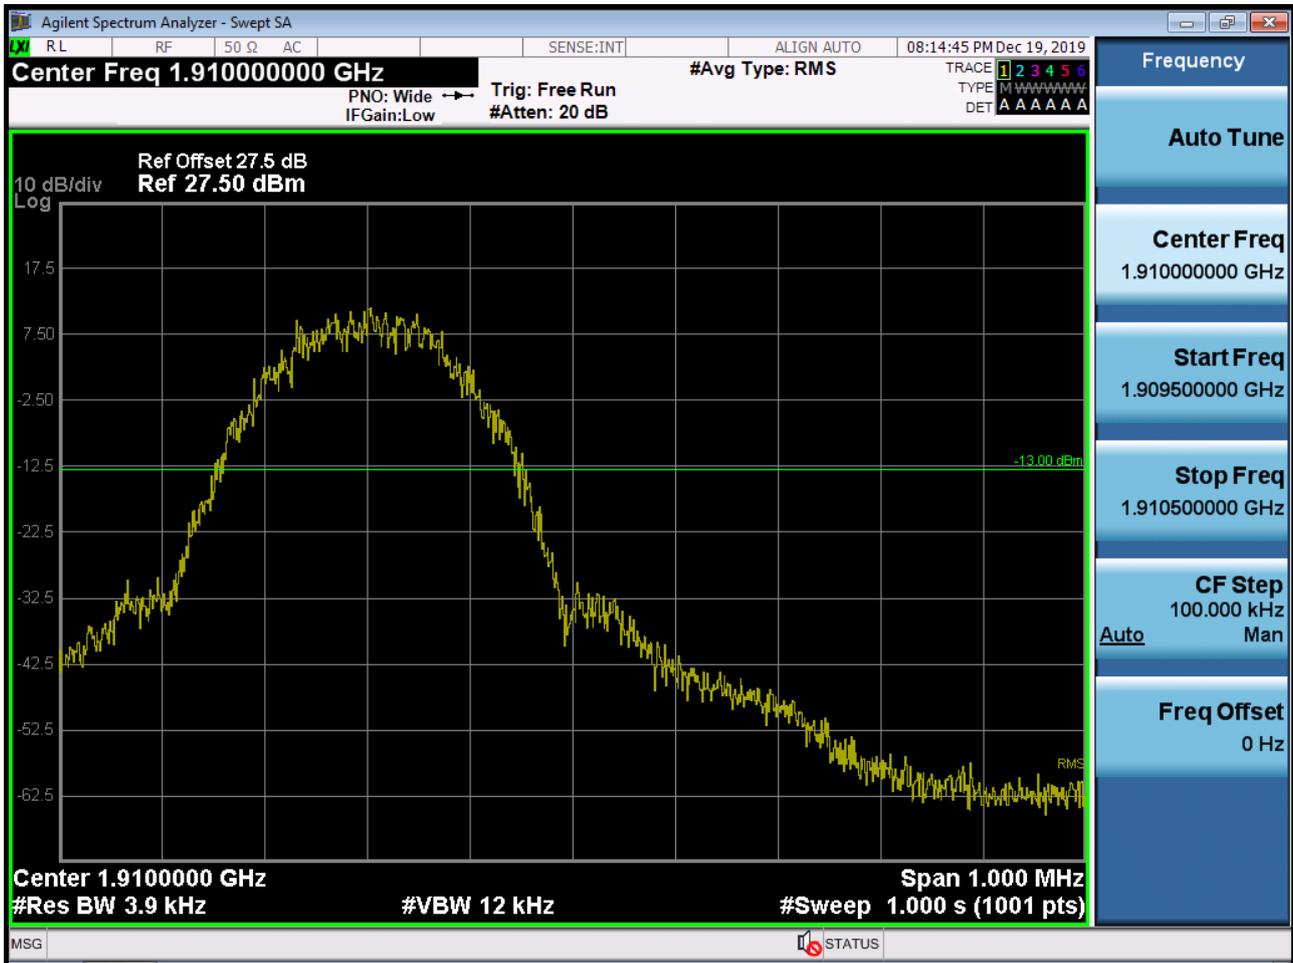

■ EDGE MODE (810 CH.) Block Edge 2

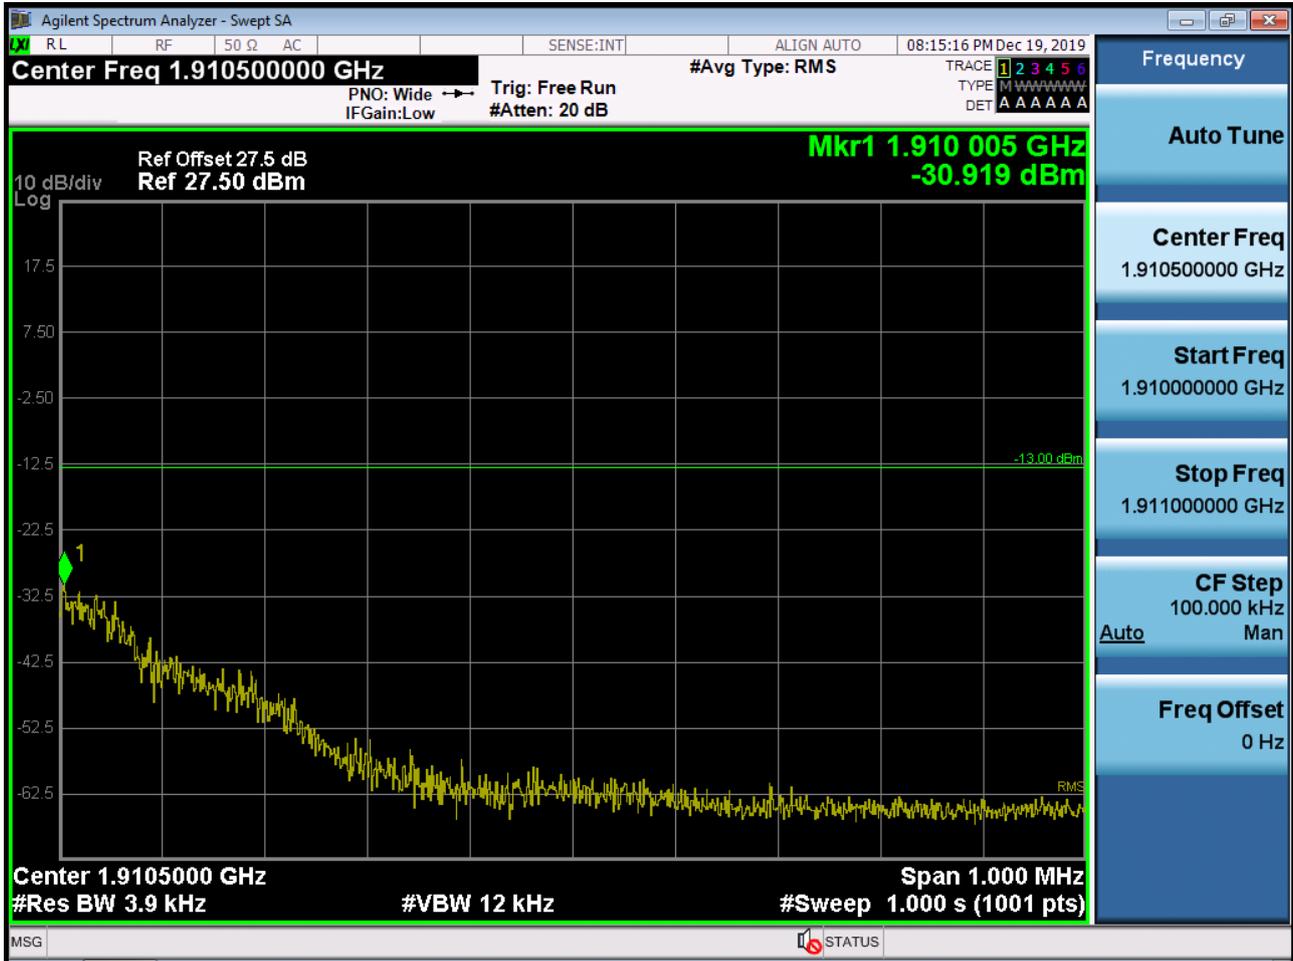

■ EDGE MODE (810 CH.) Block Edge 3

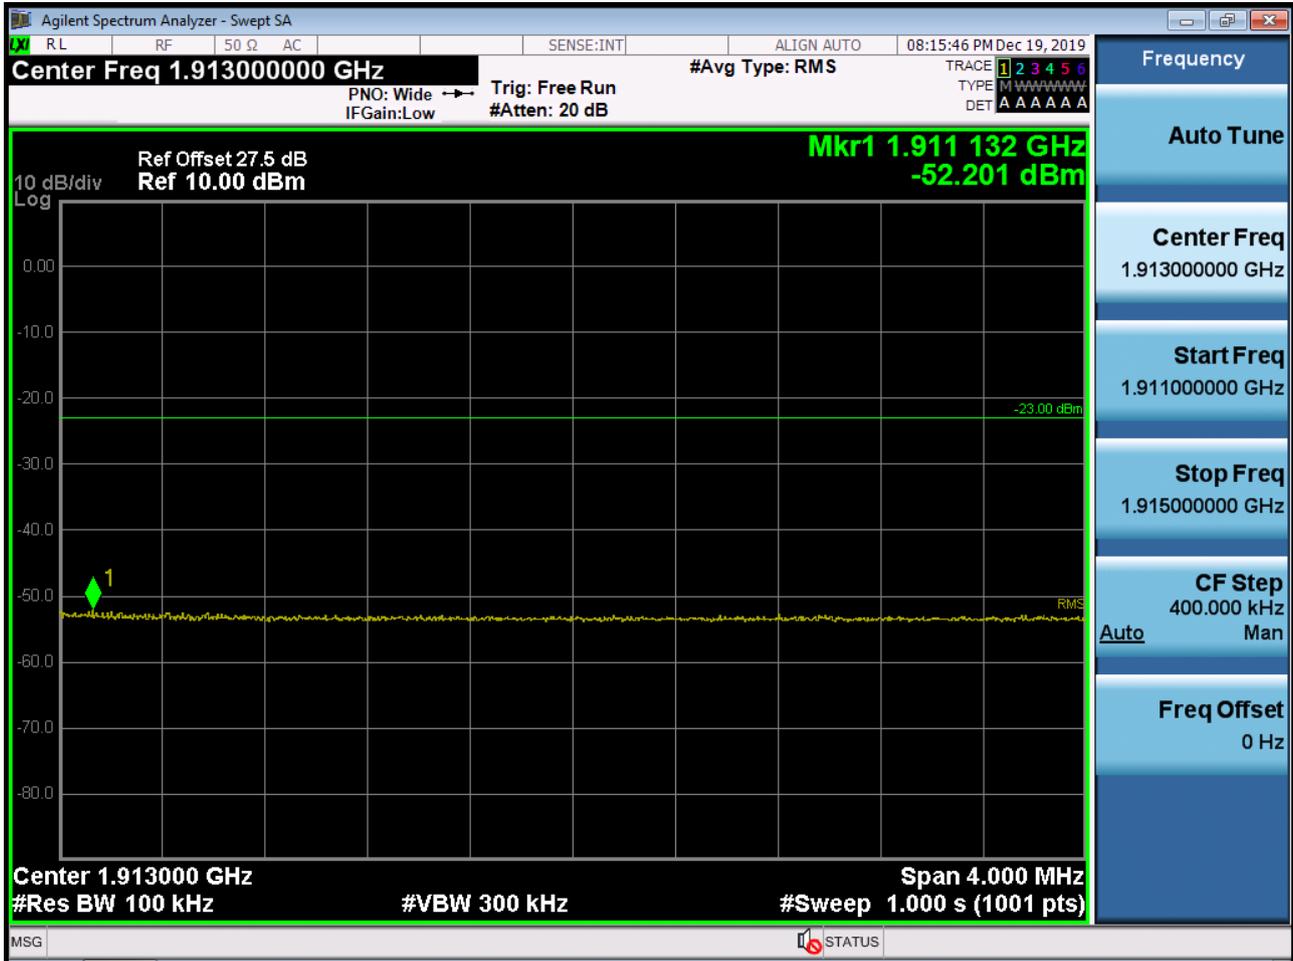

Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -52.201 dBm + 10 dB = -42.201 dBm

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge




■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge




■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

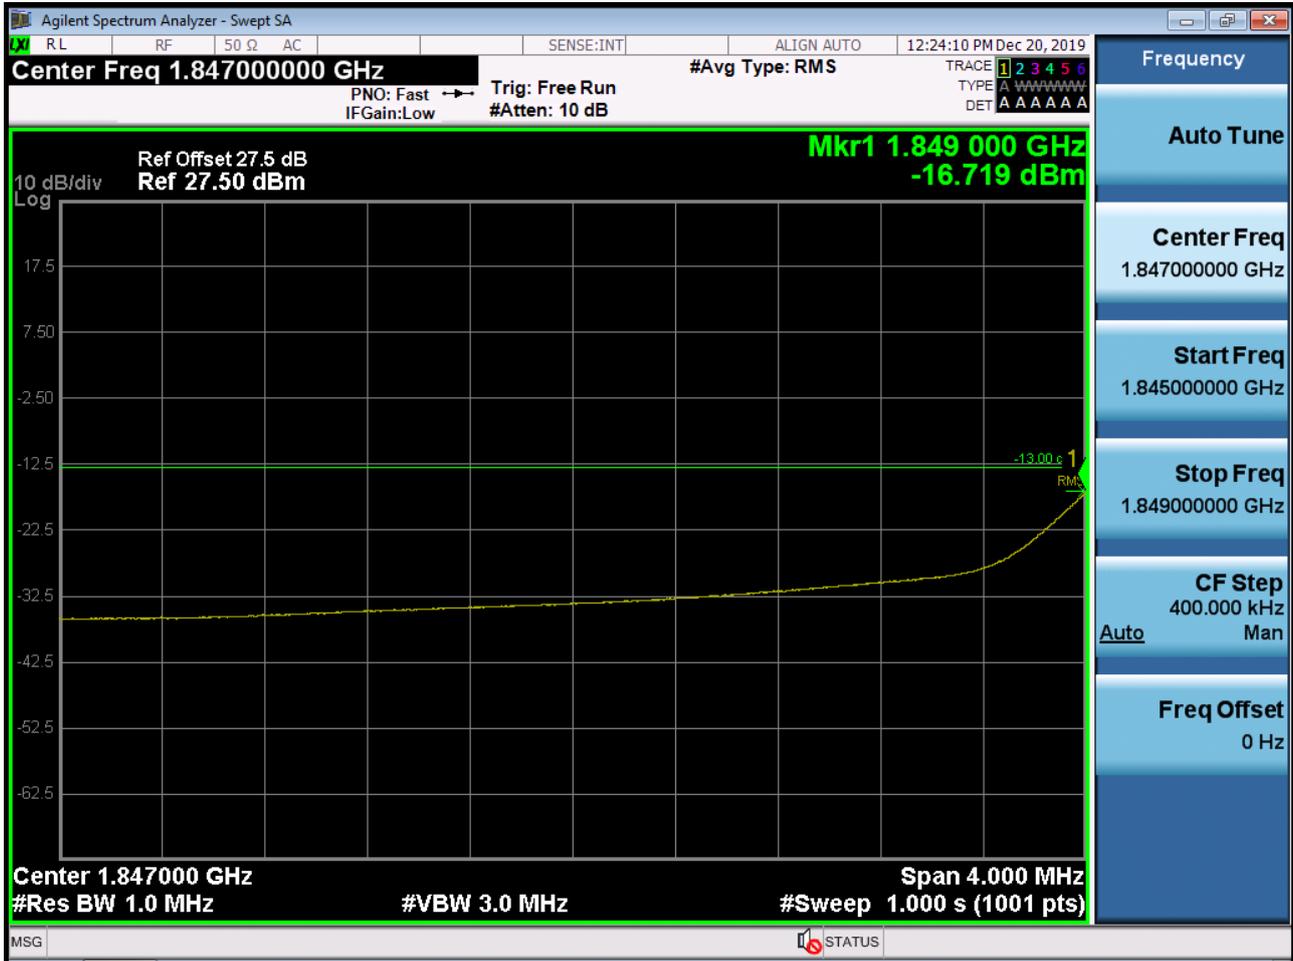

■ WCDMA1900 MODE (9538 CH.) Block Edge




■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

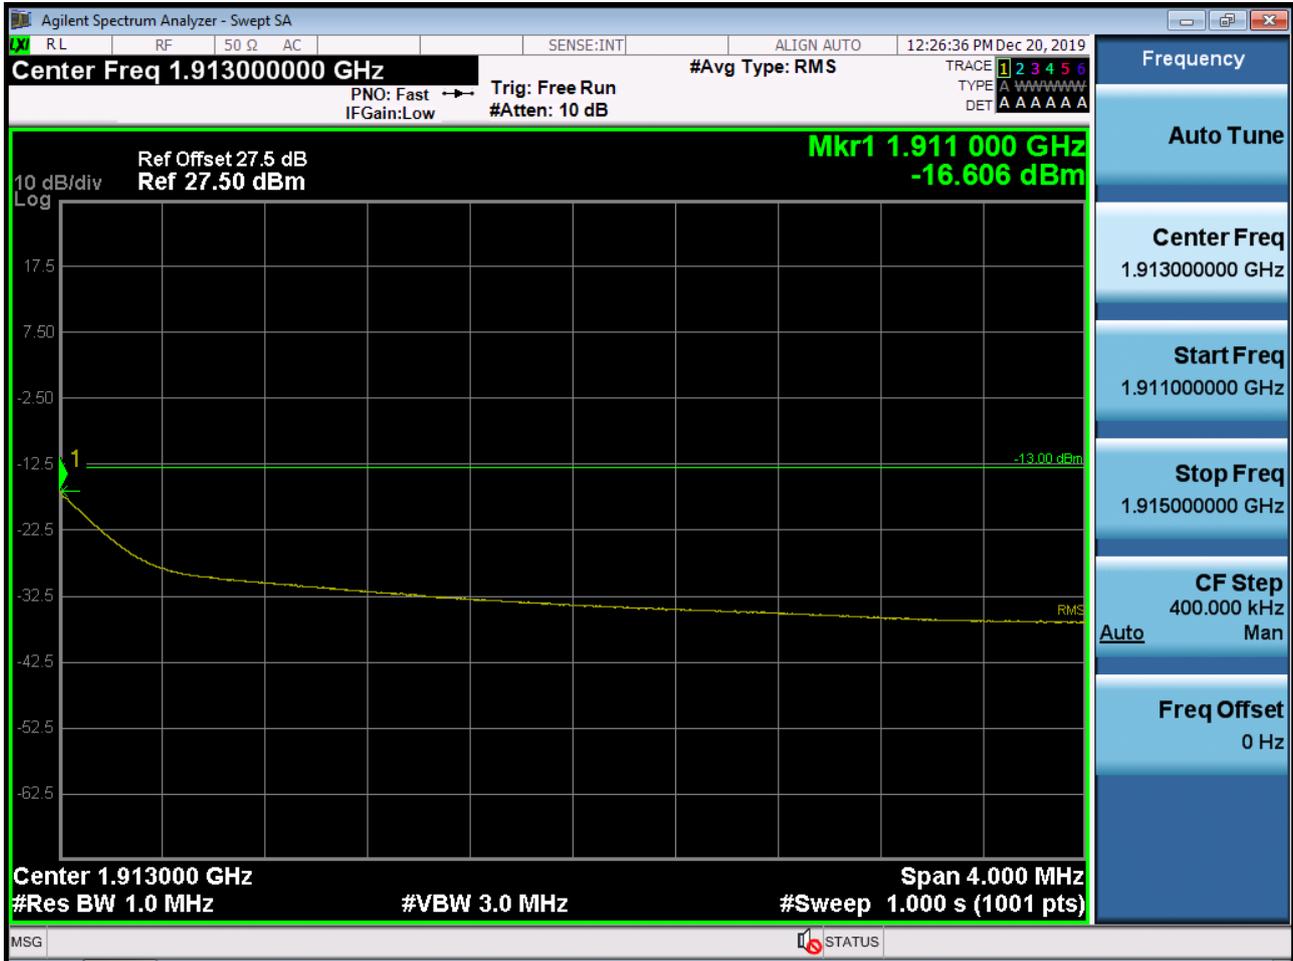

■ WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span

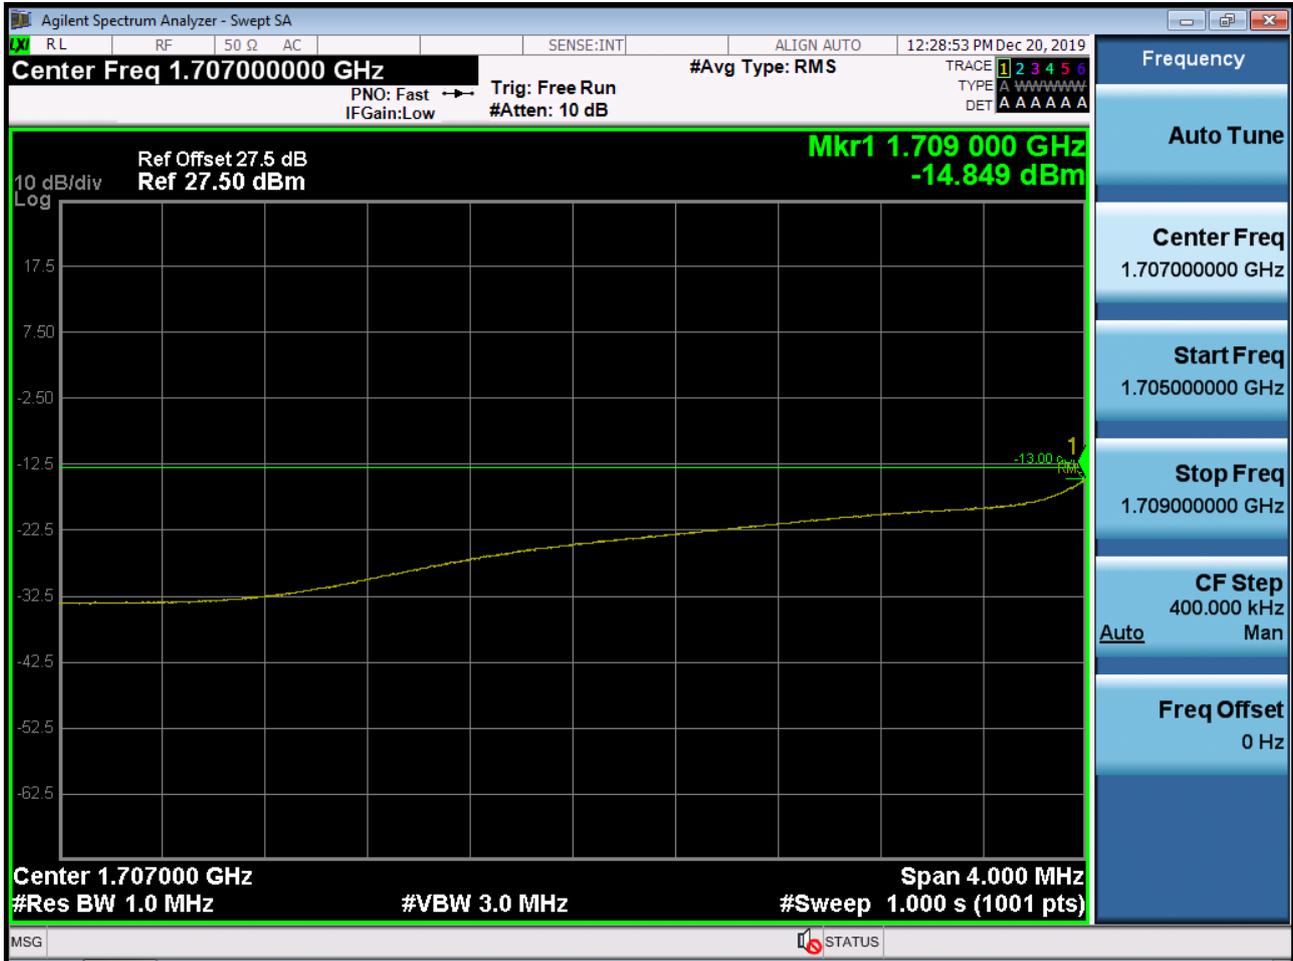


■ WCDMA1700 MODE (1513 CH.) Block Edge




■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

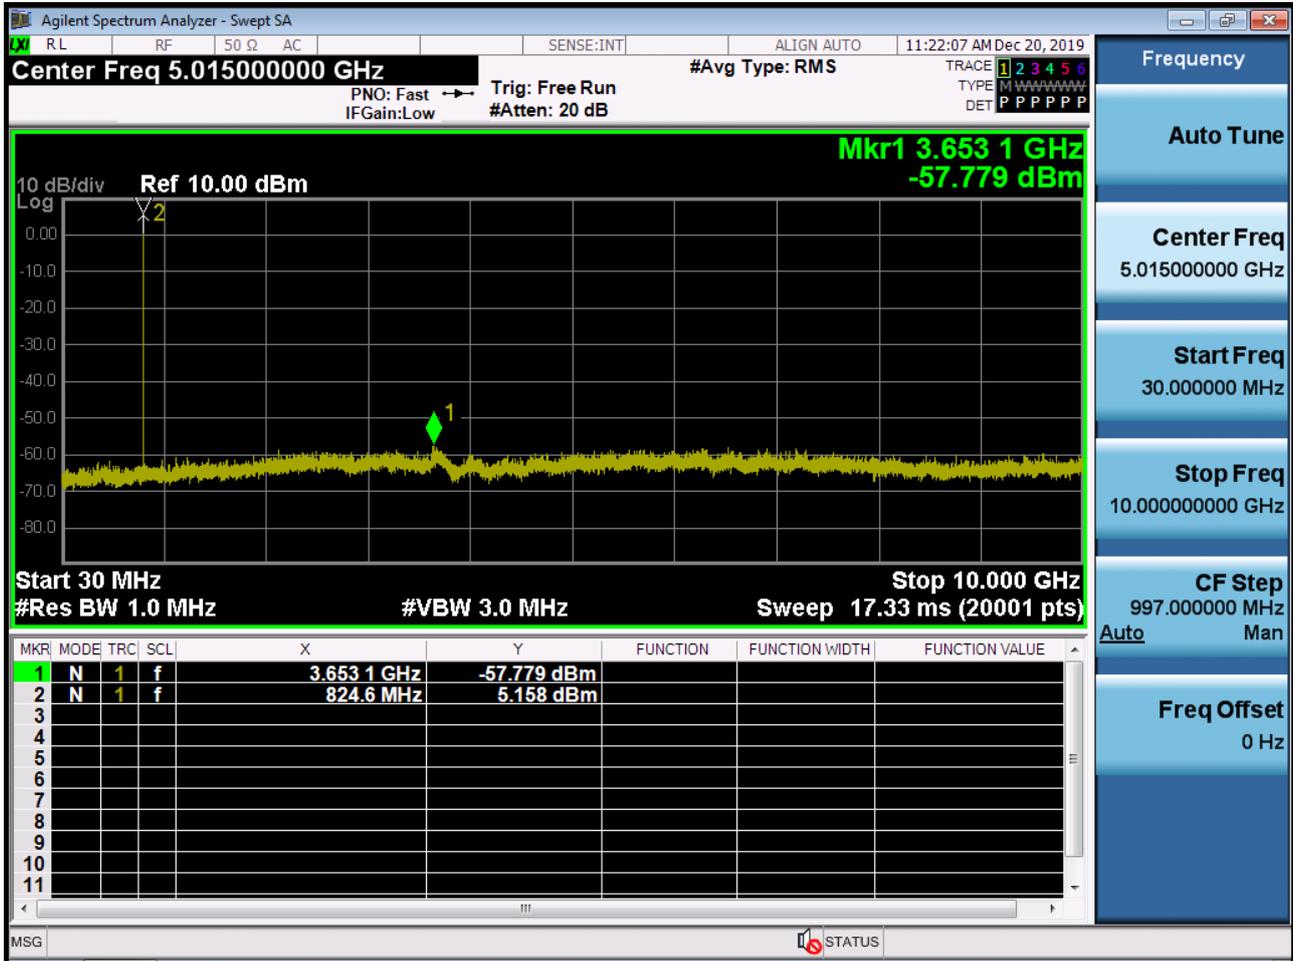


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

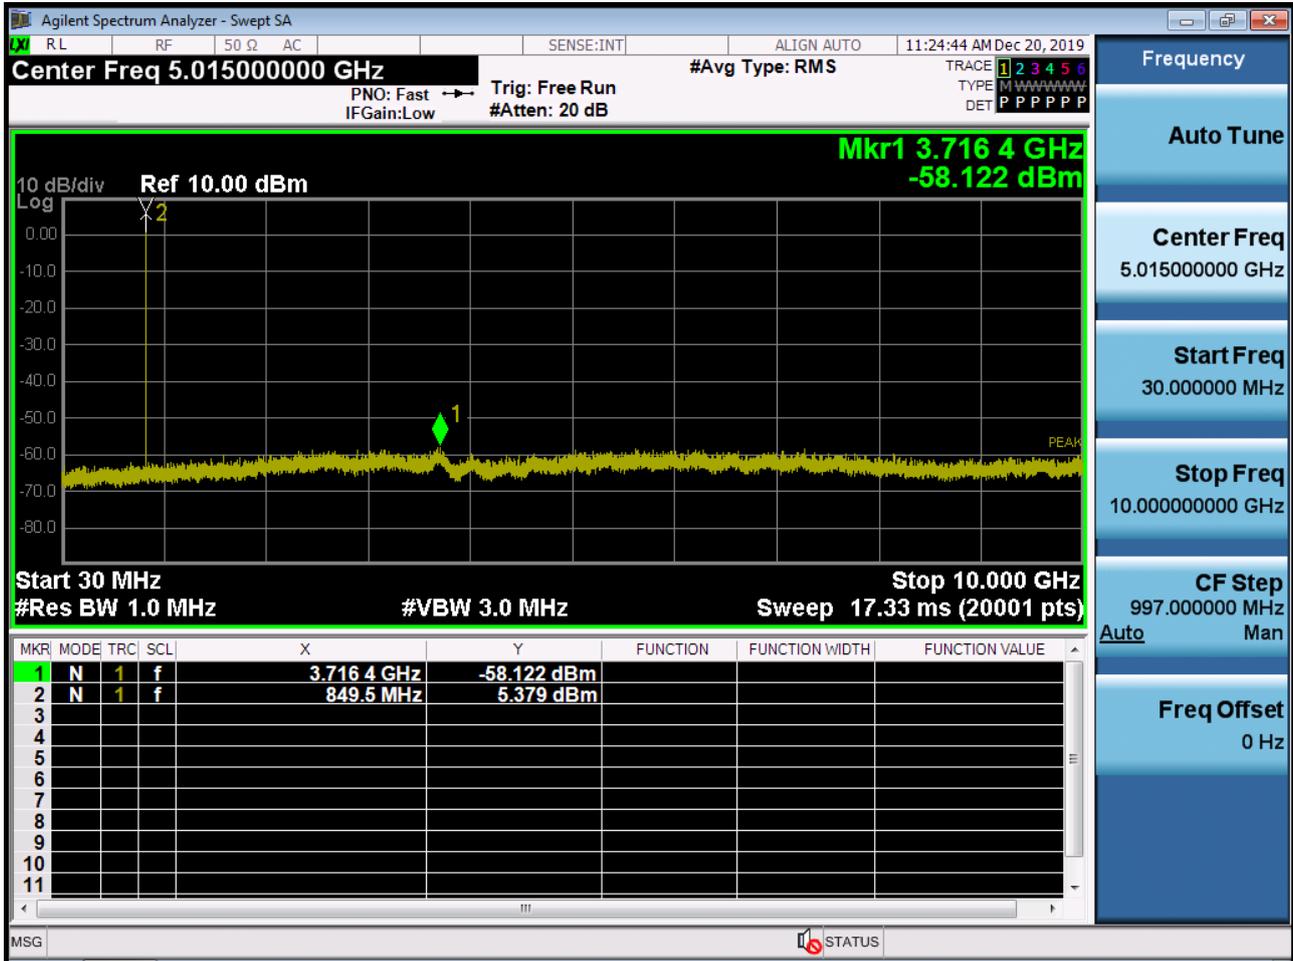


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

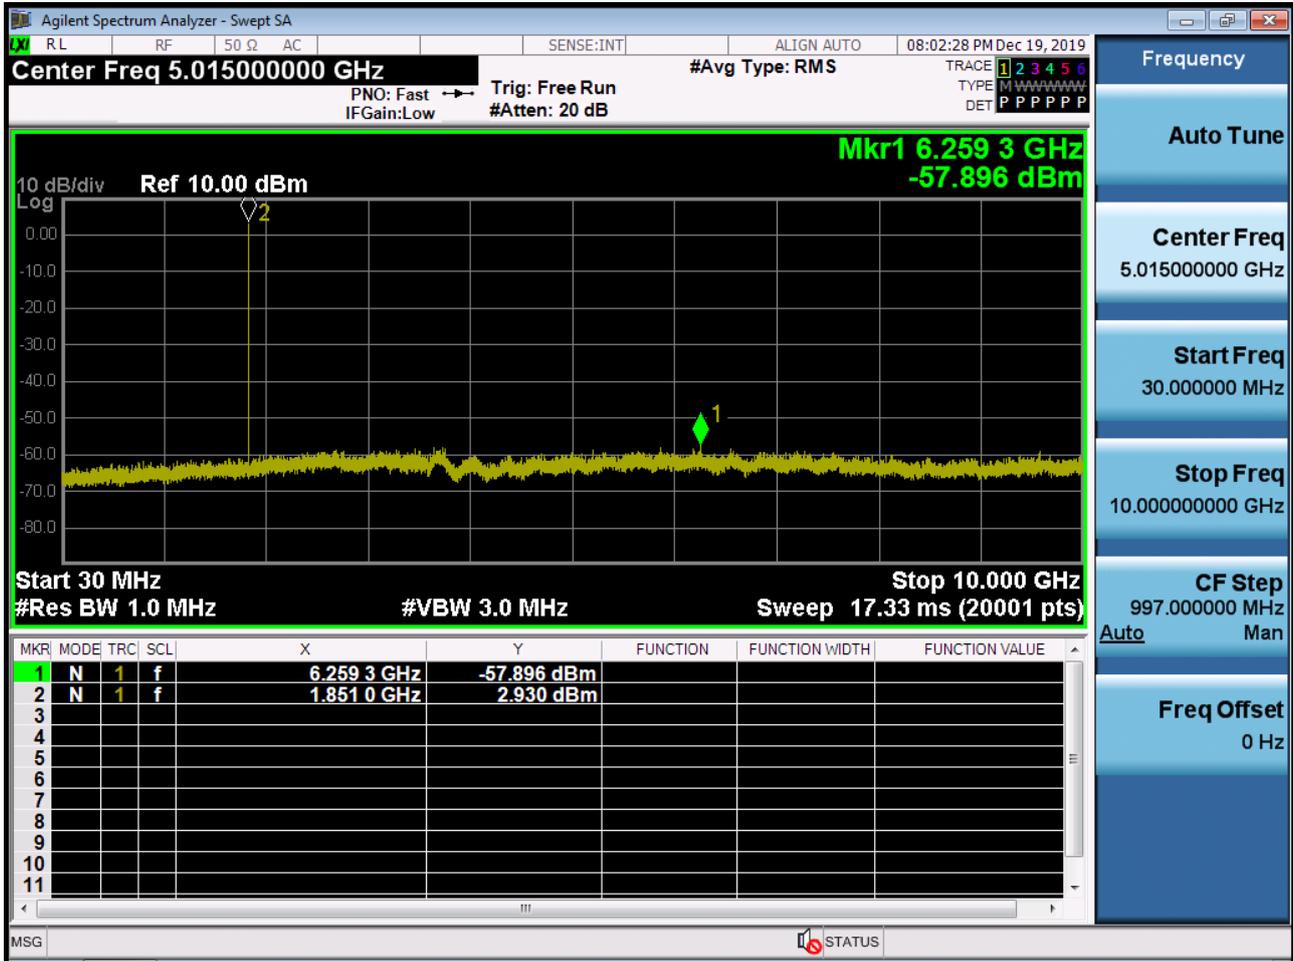


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

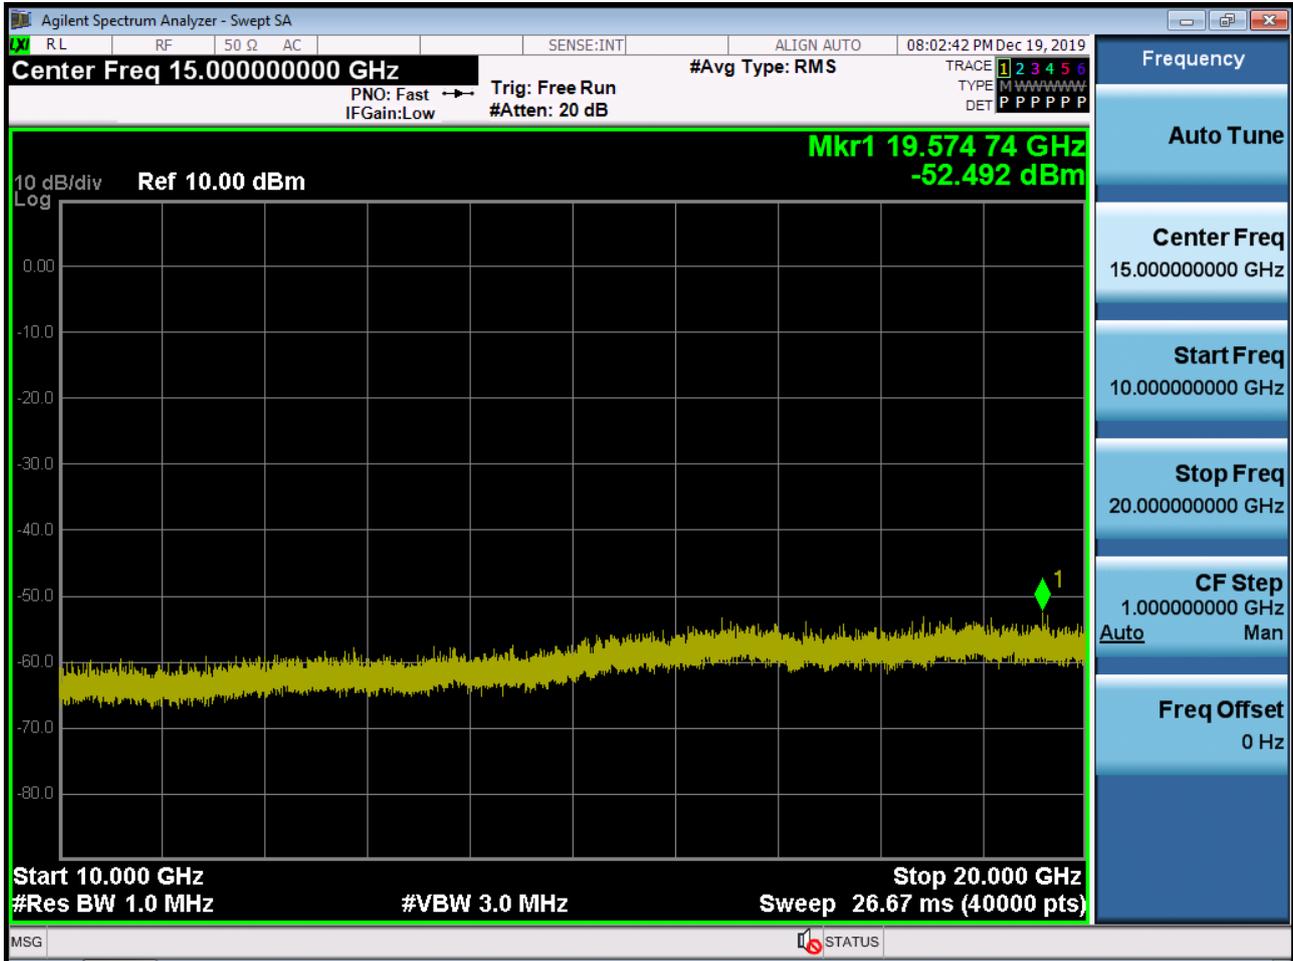


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

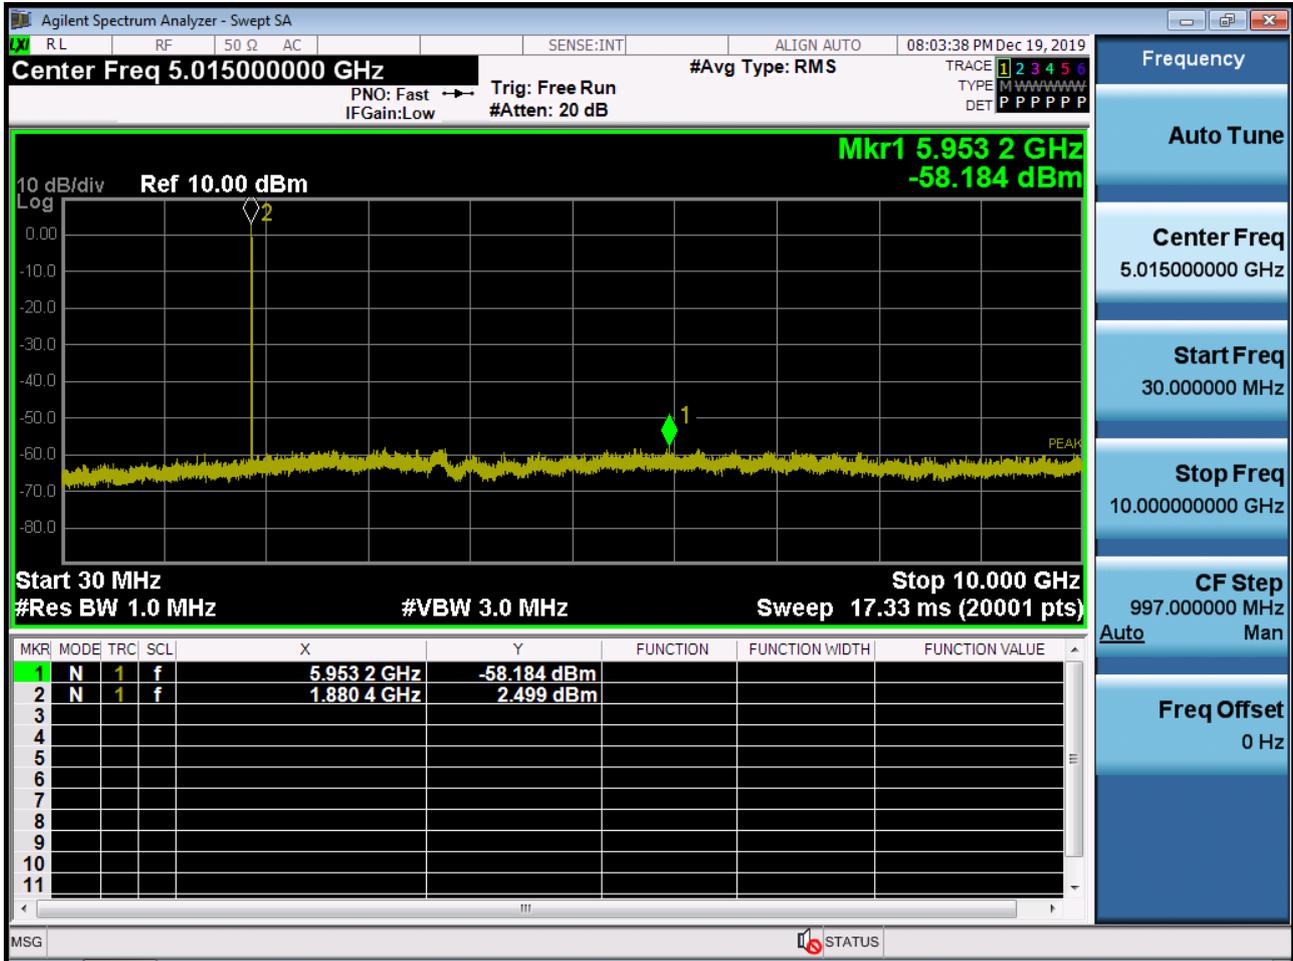


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

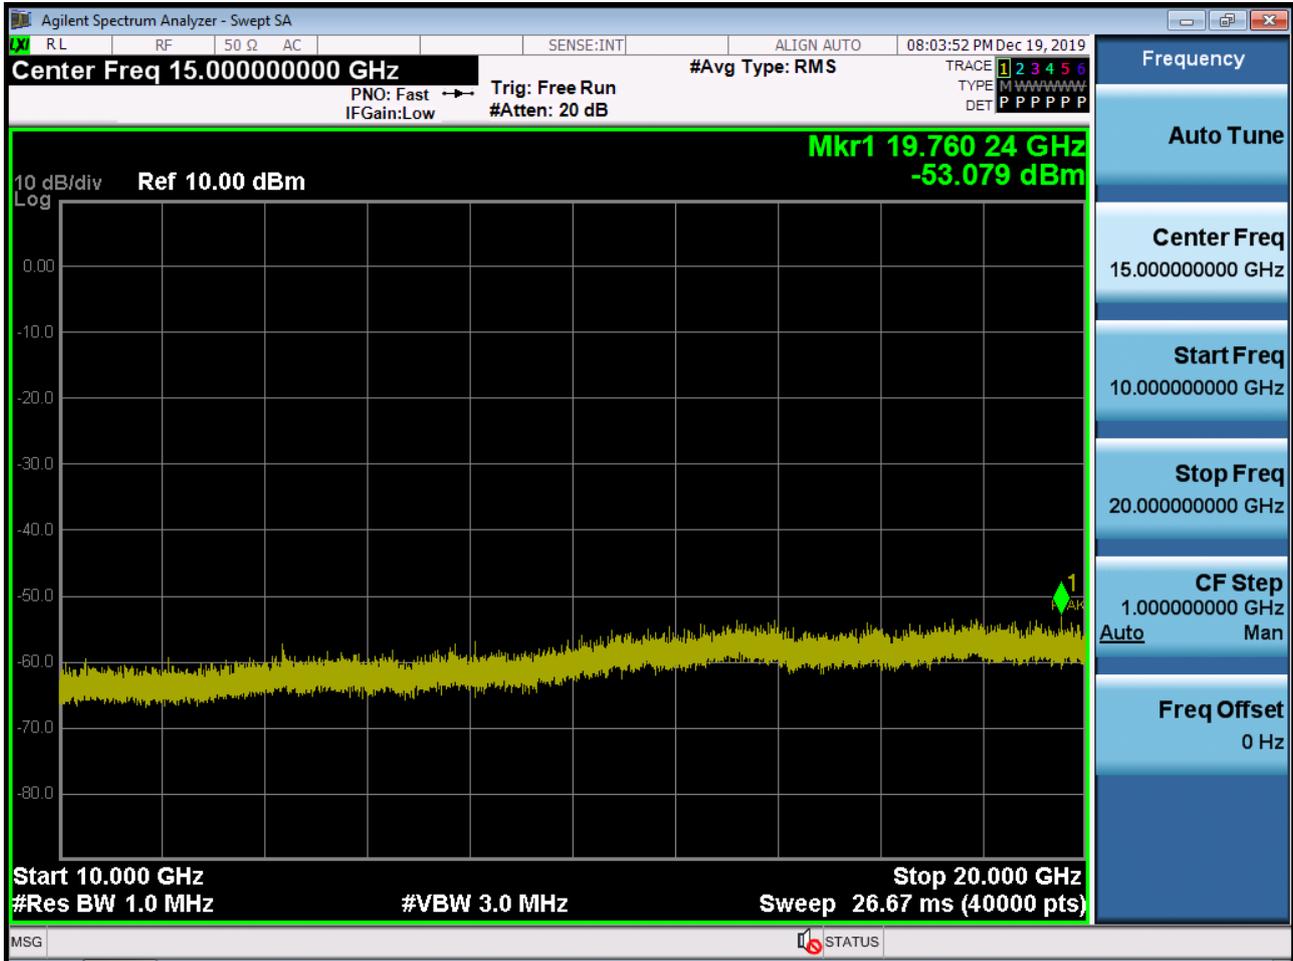


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

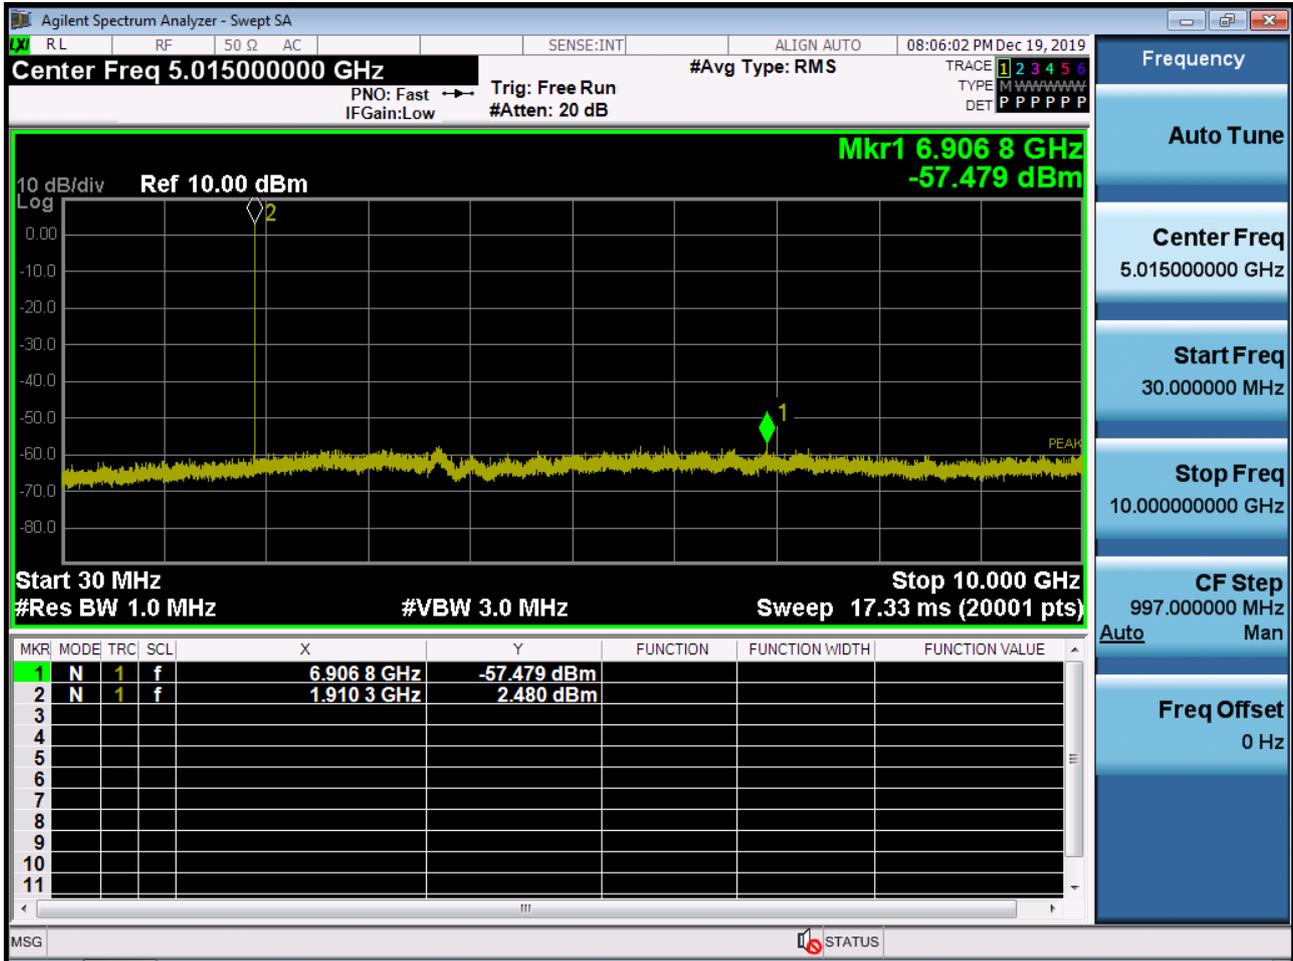


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

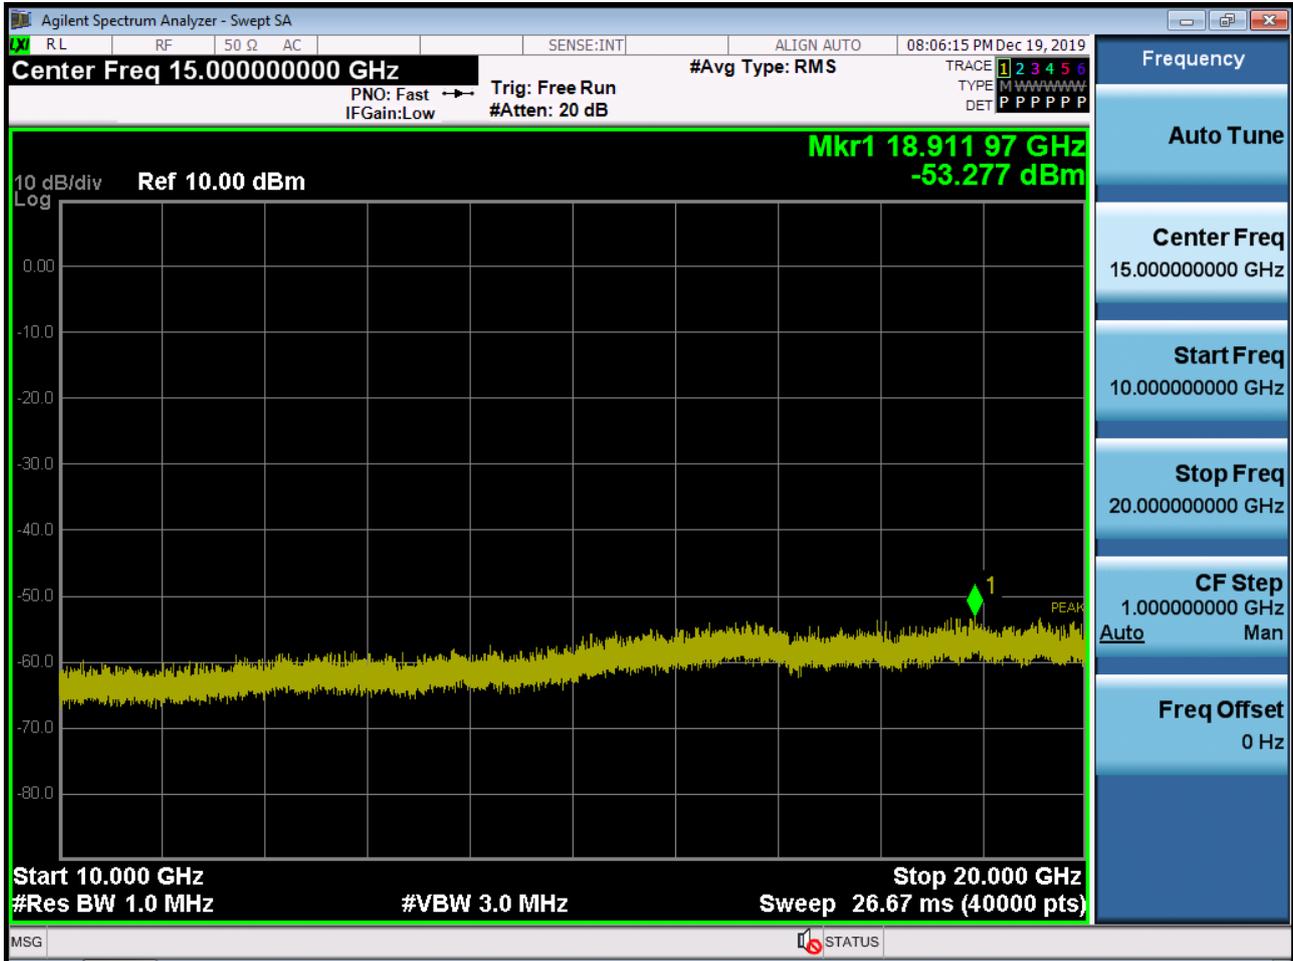


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

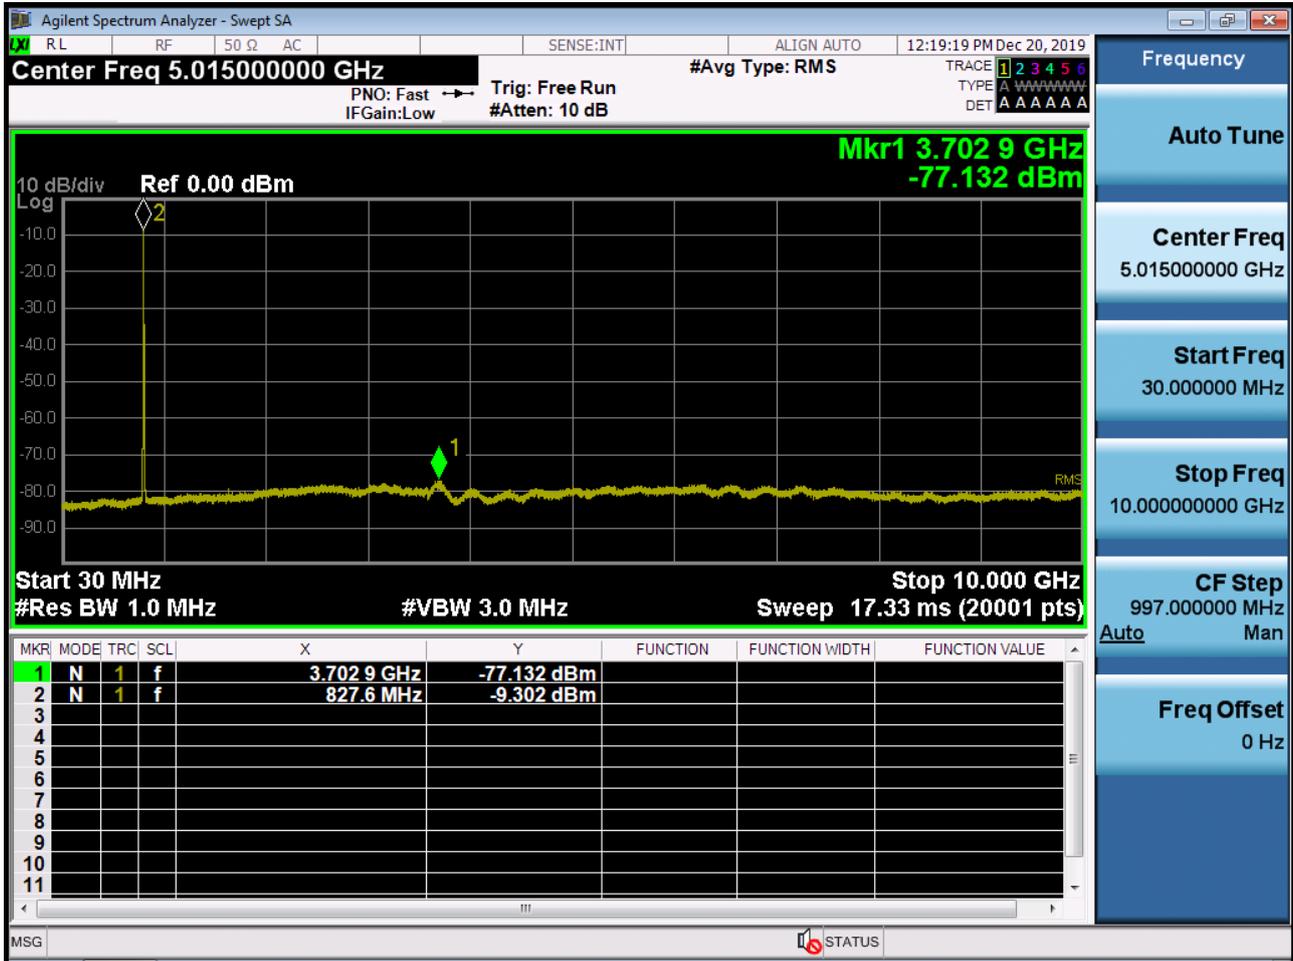


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

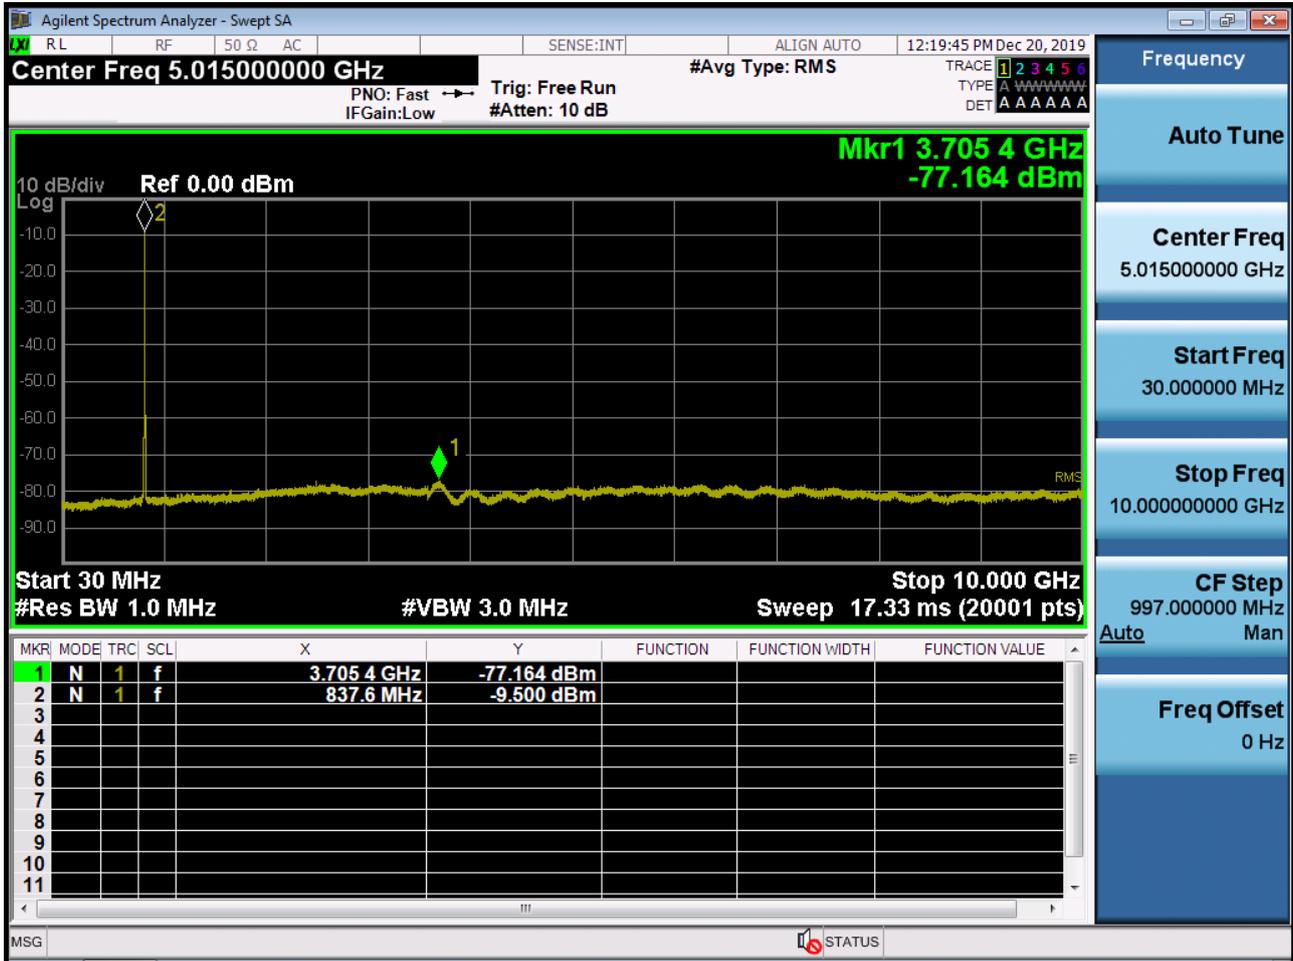


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

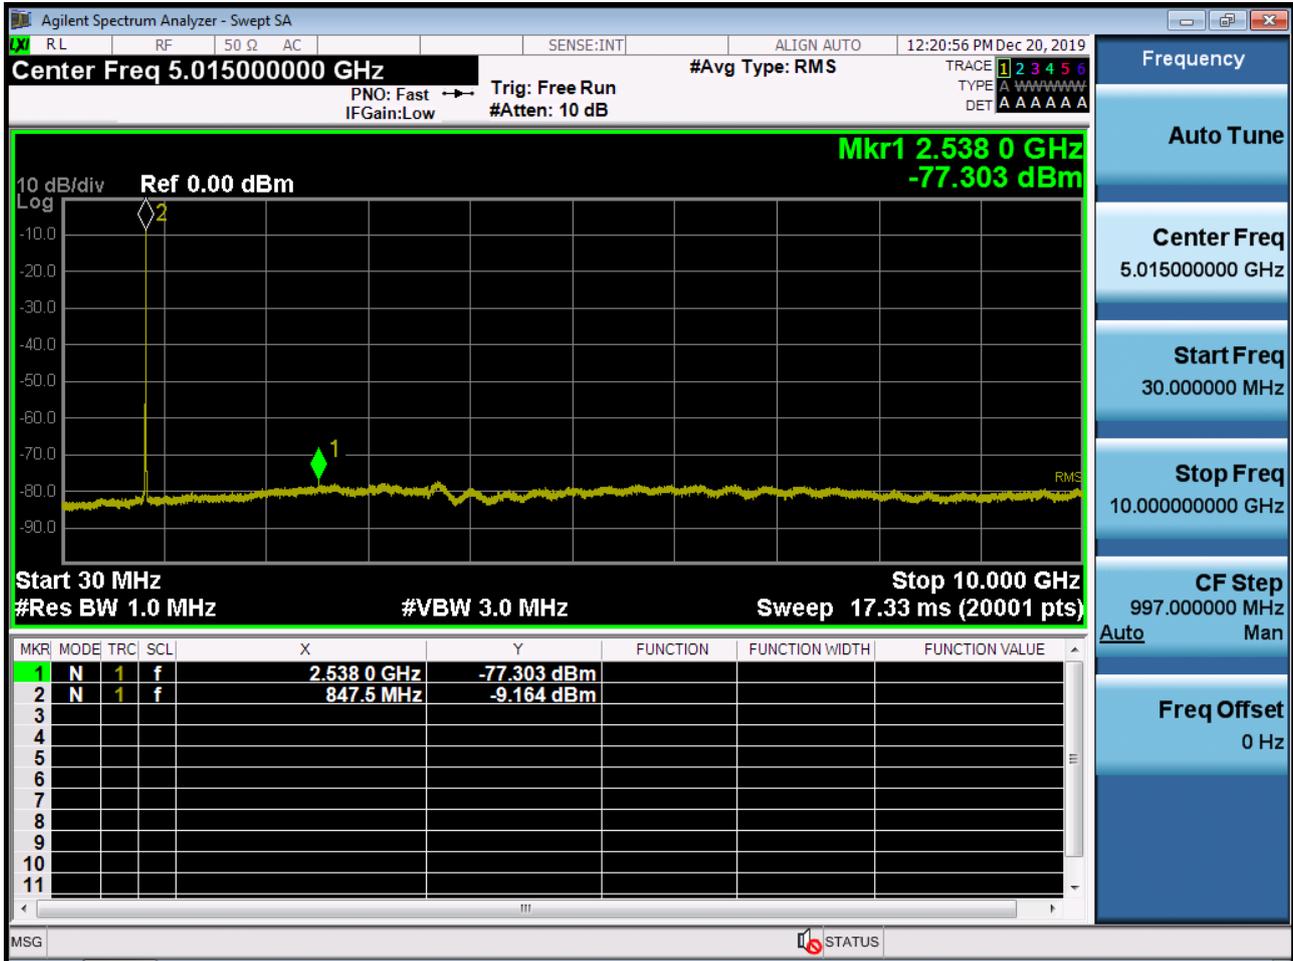


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

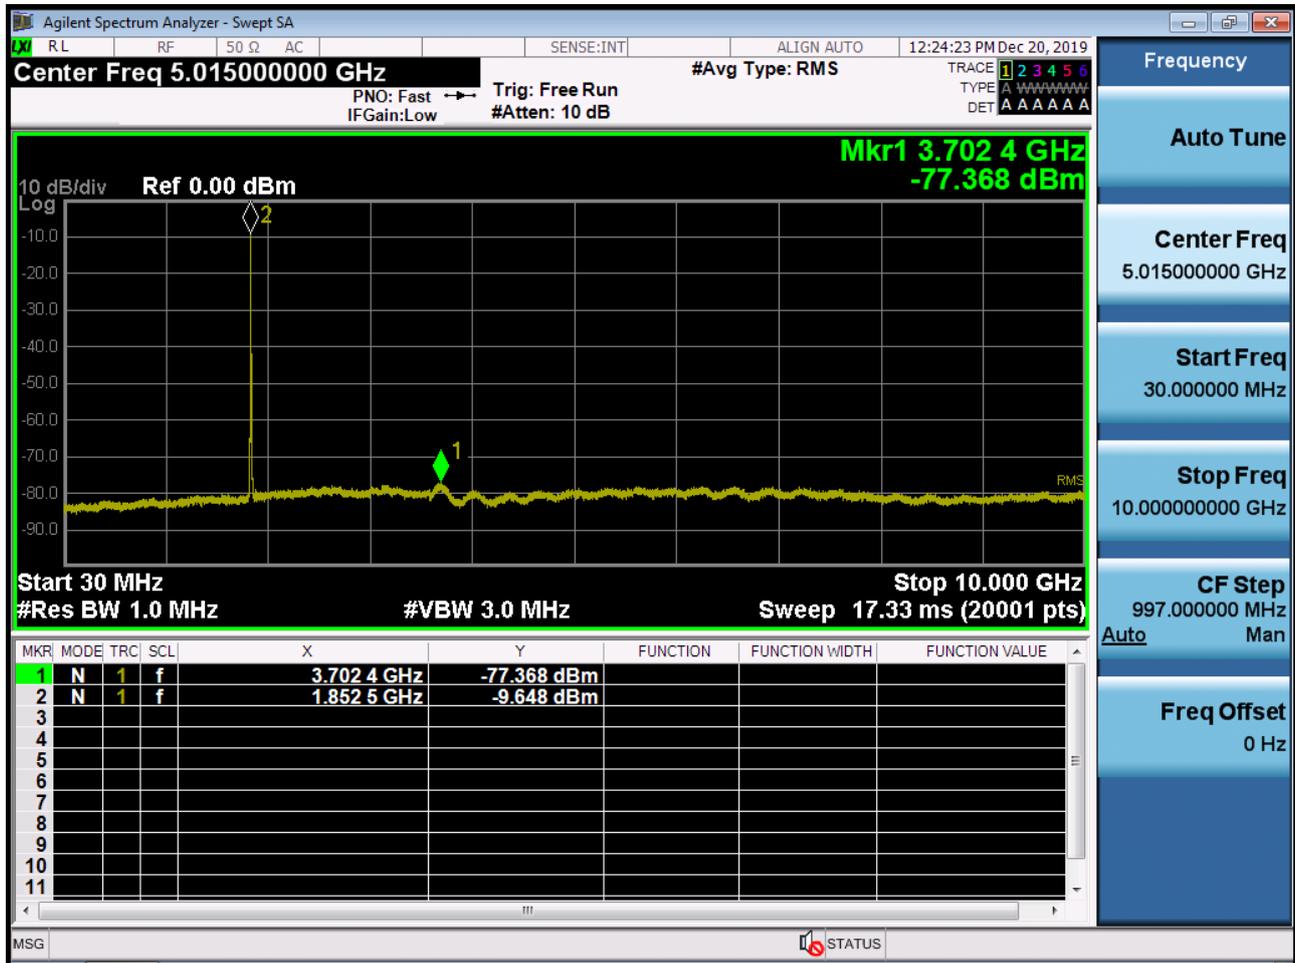


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

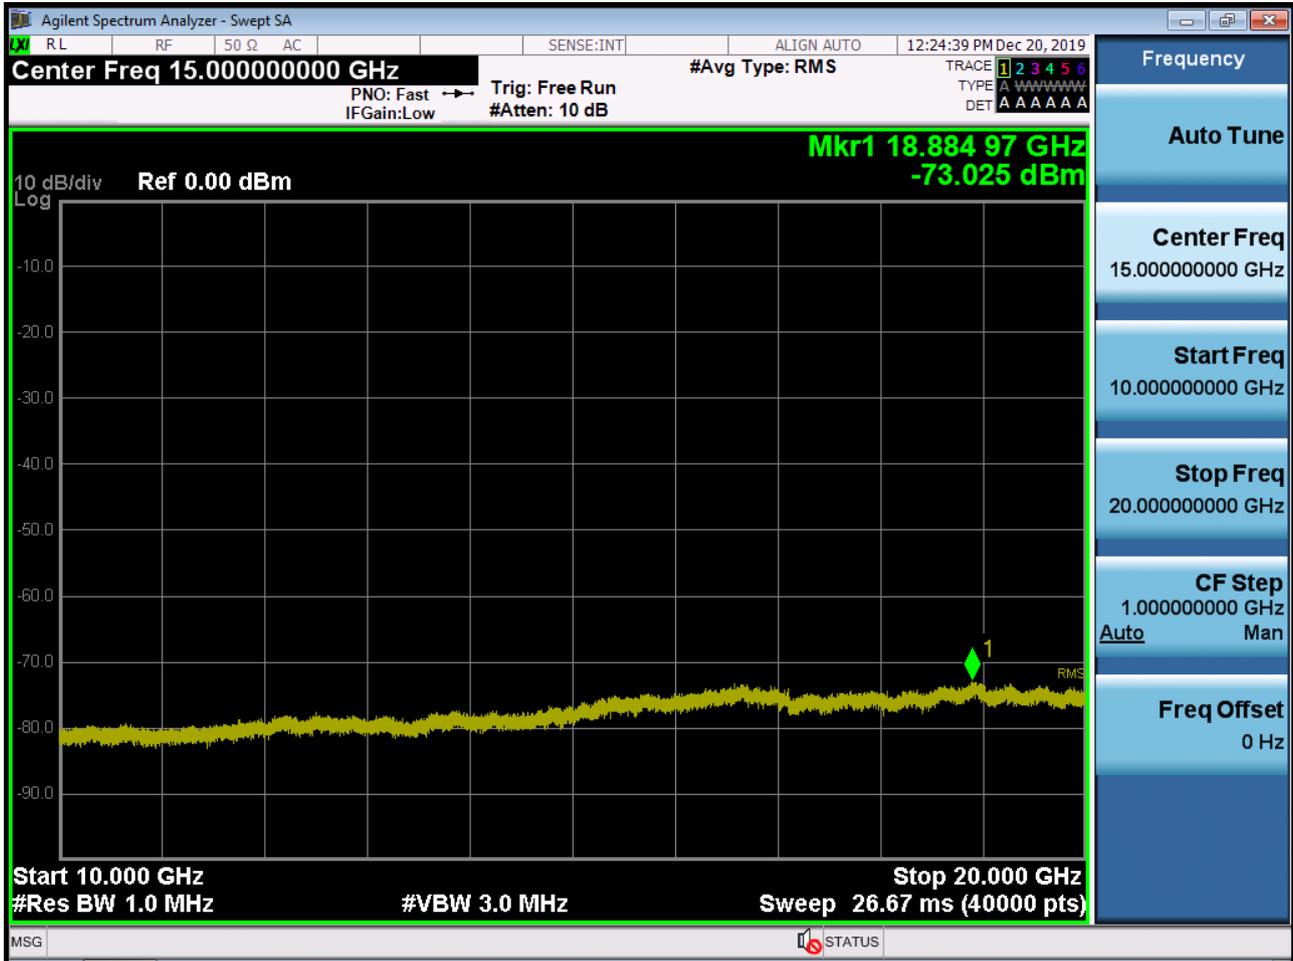


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

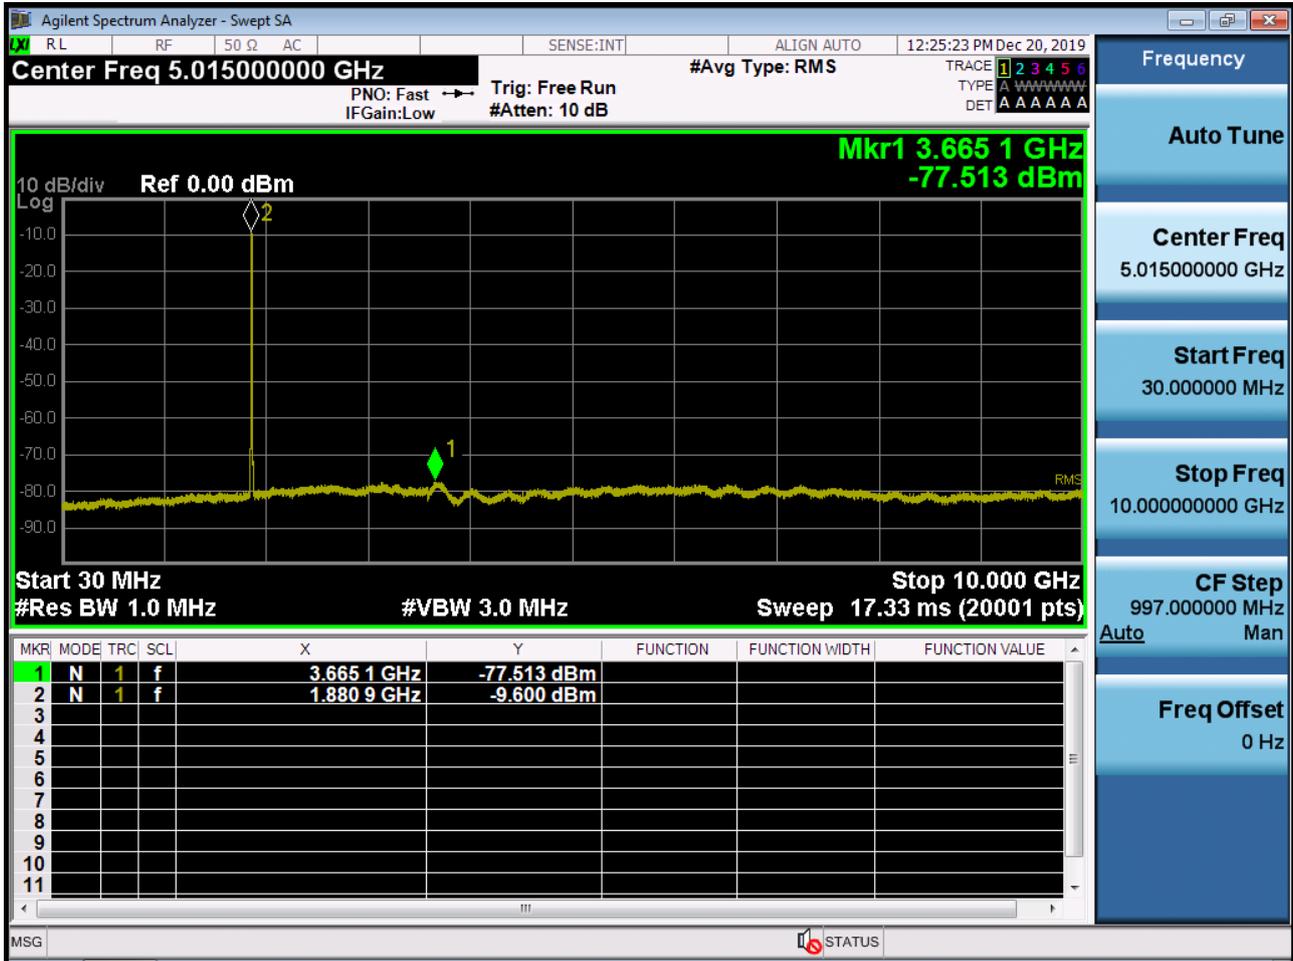


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

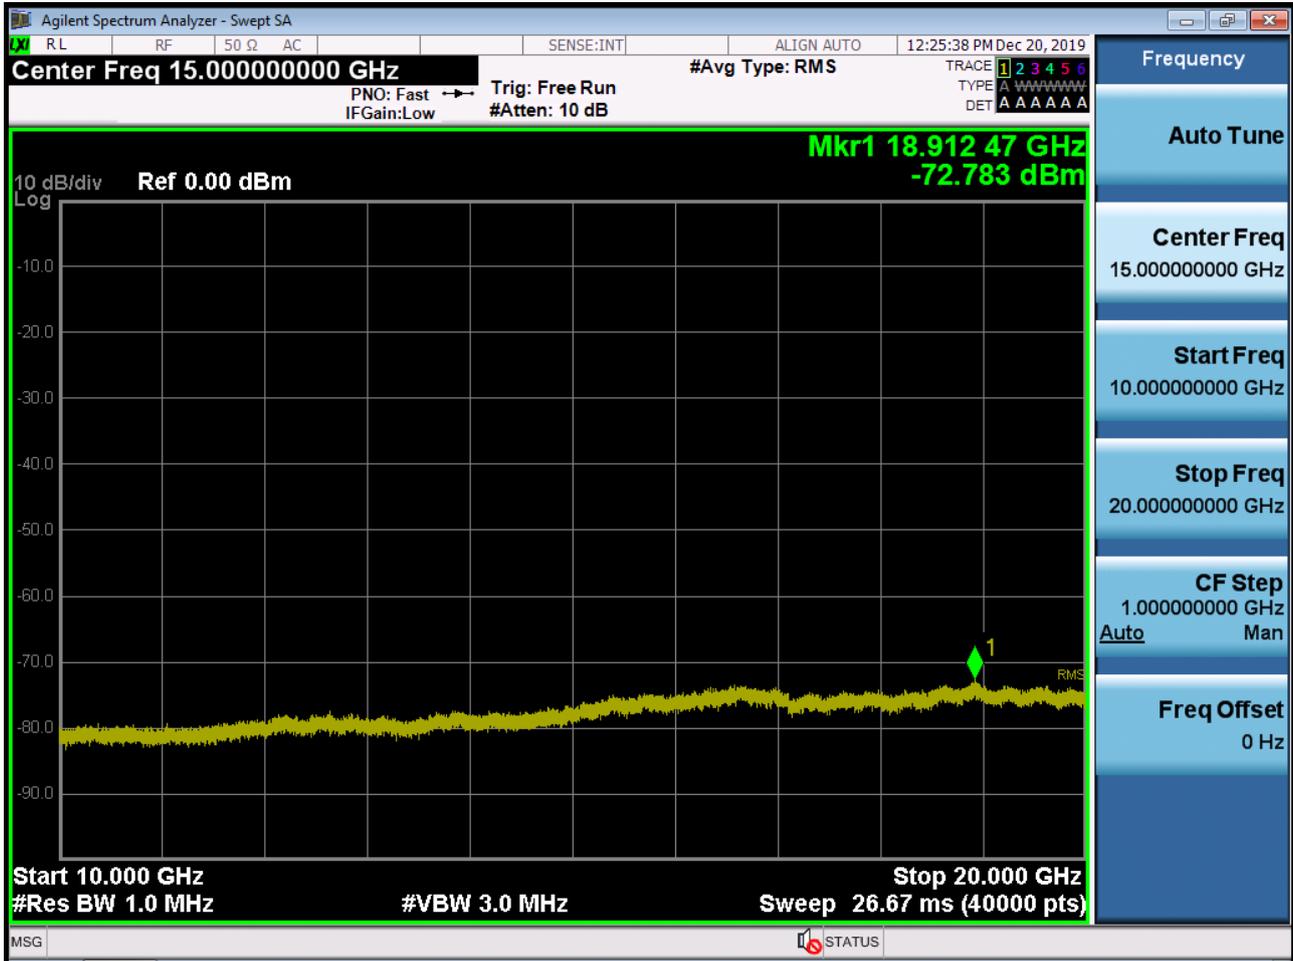


■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

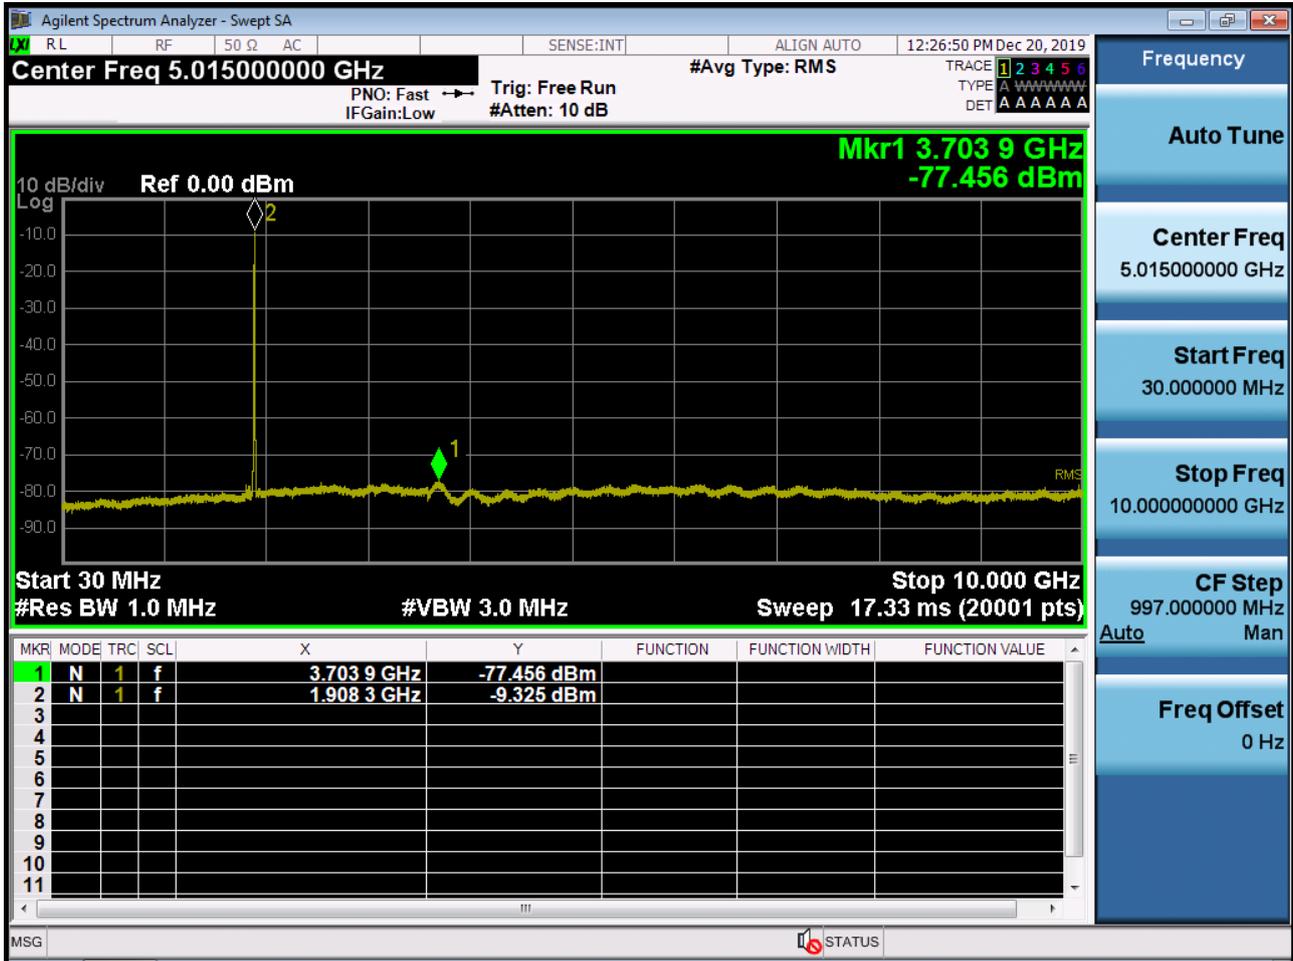


■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

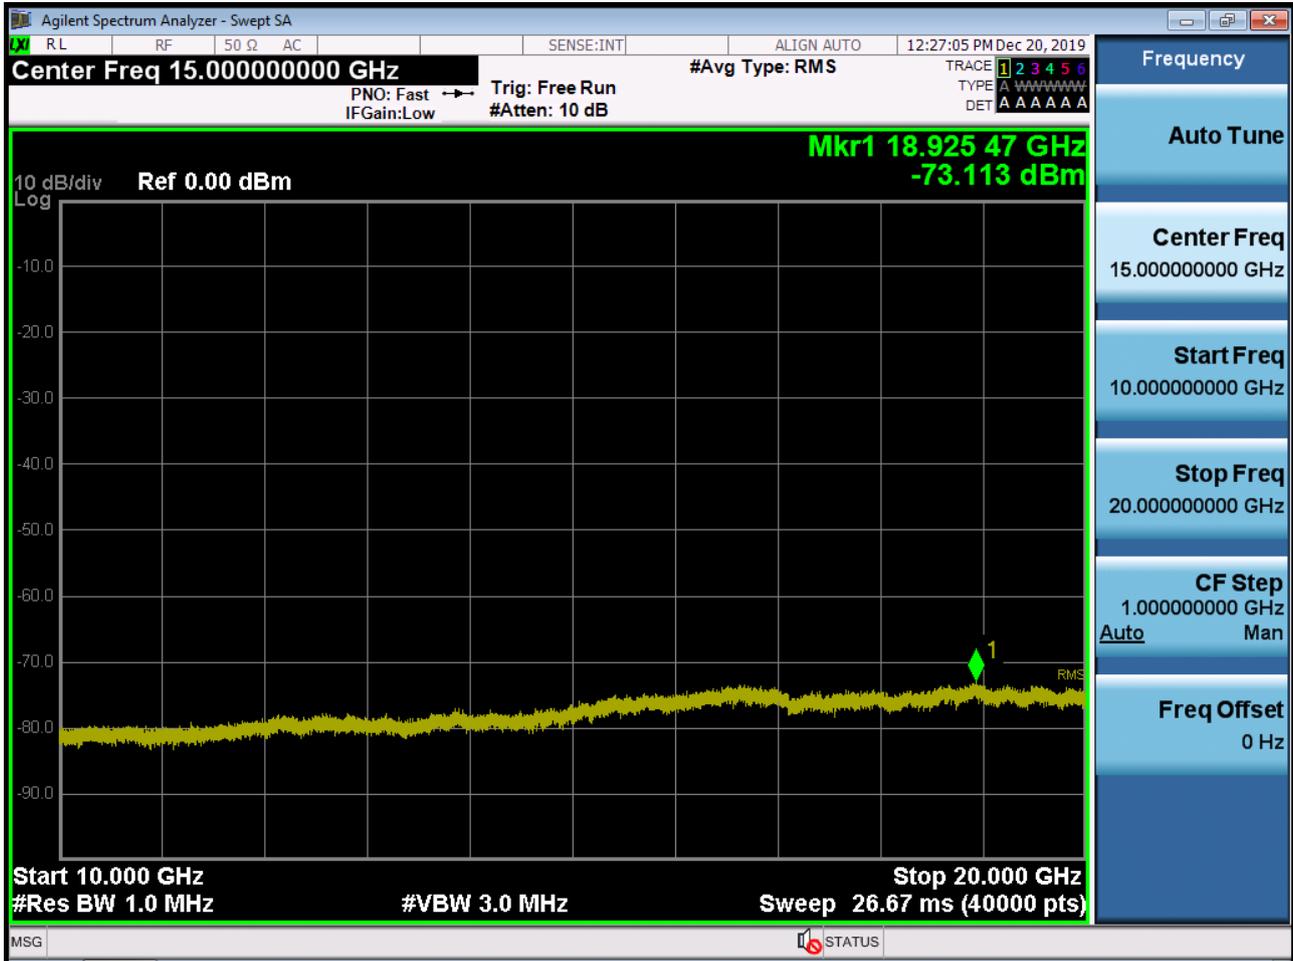


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

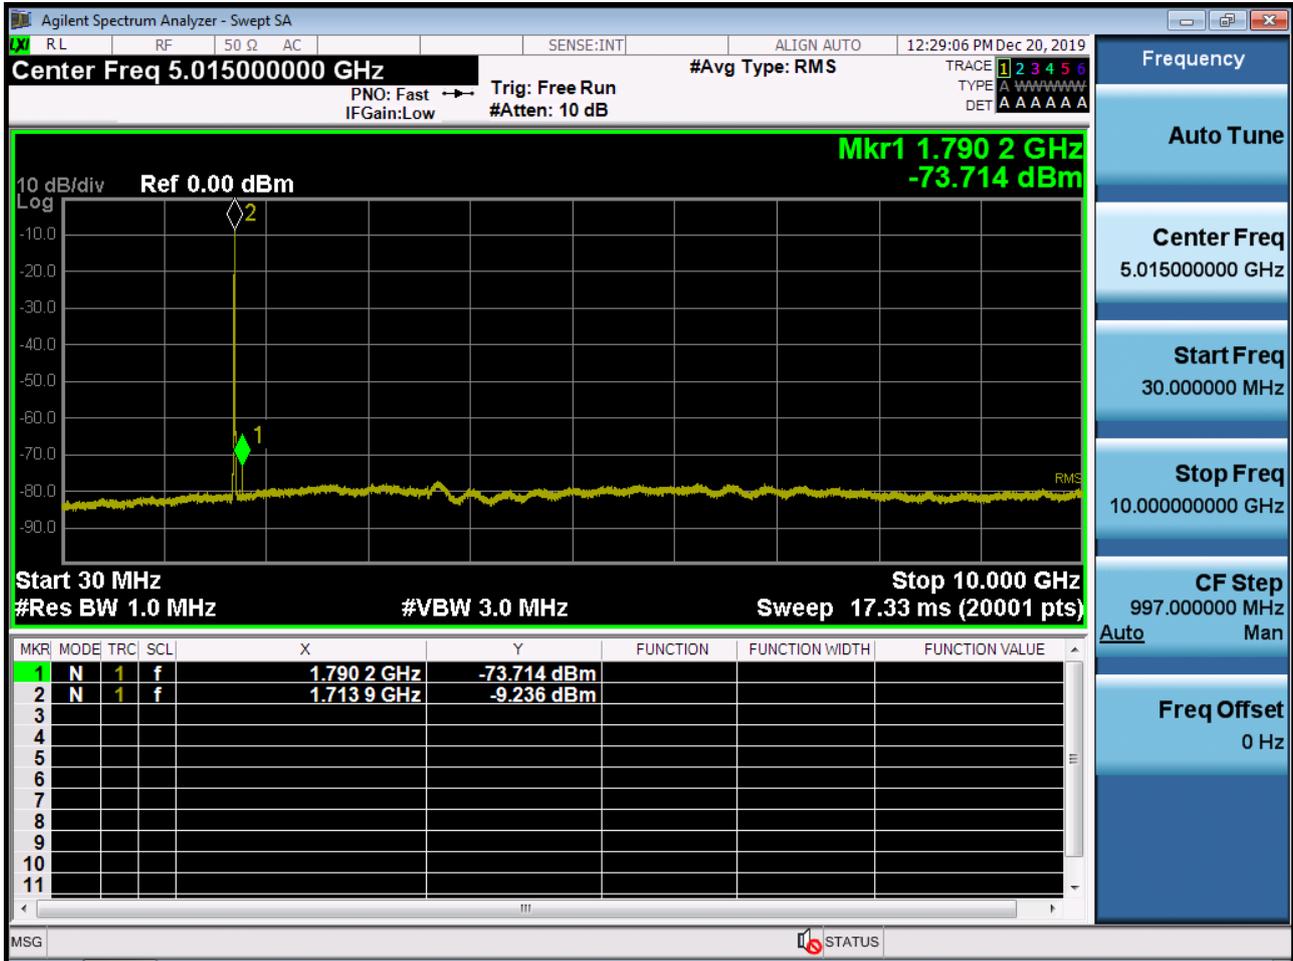

■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2

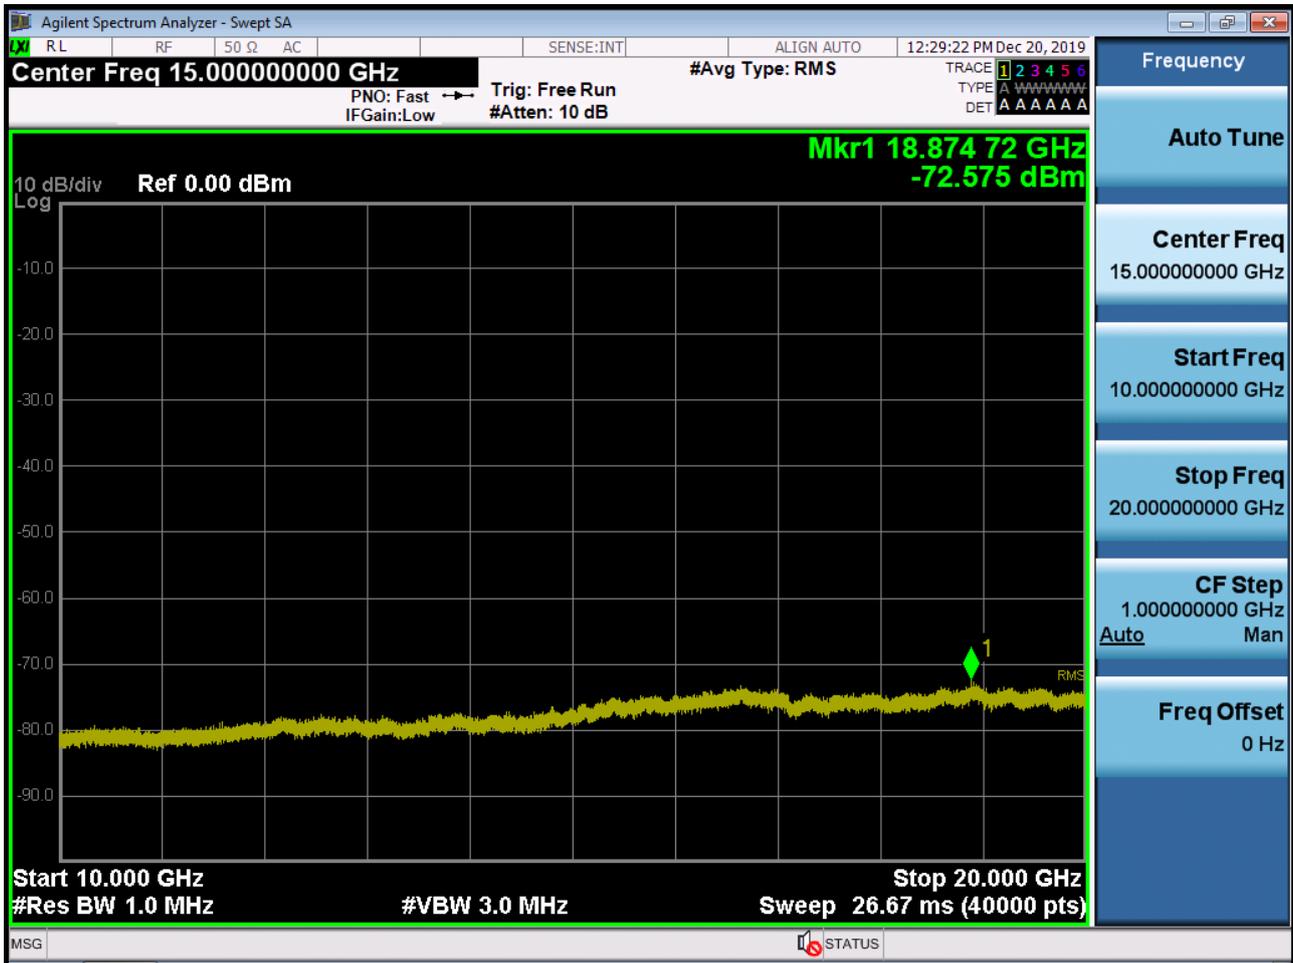


■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

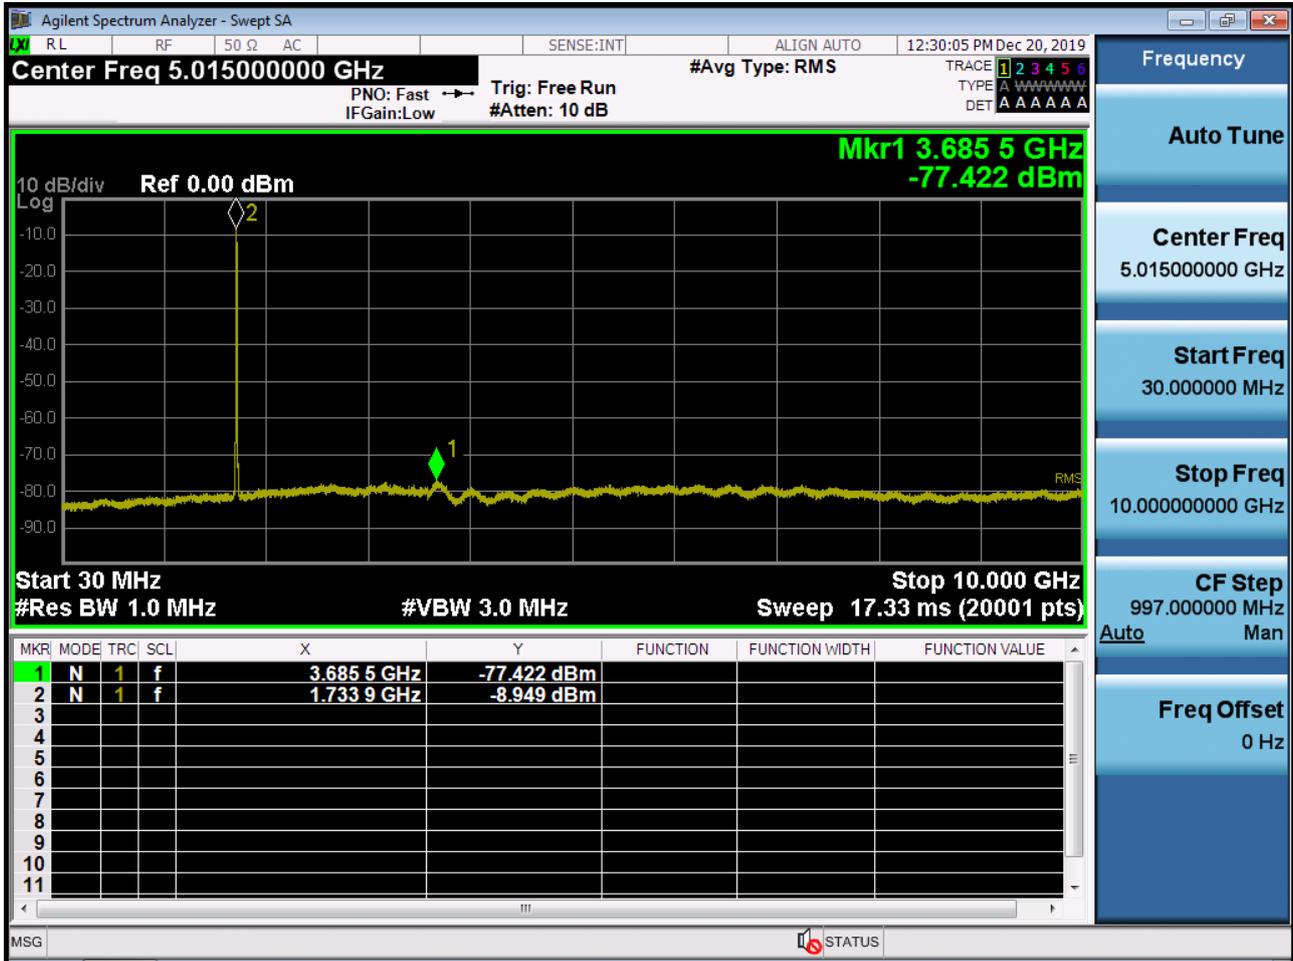


■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2



■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

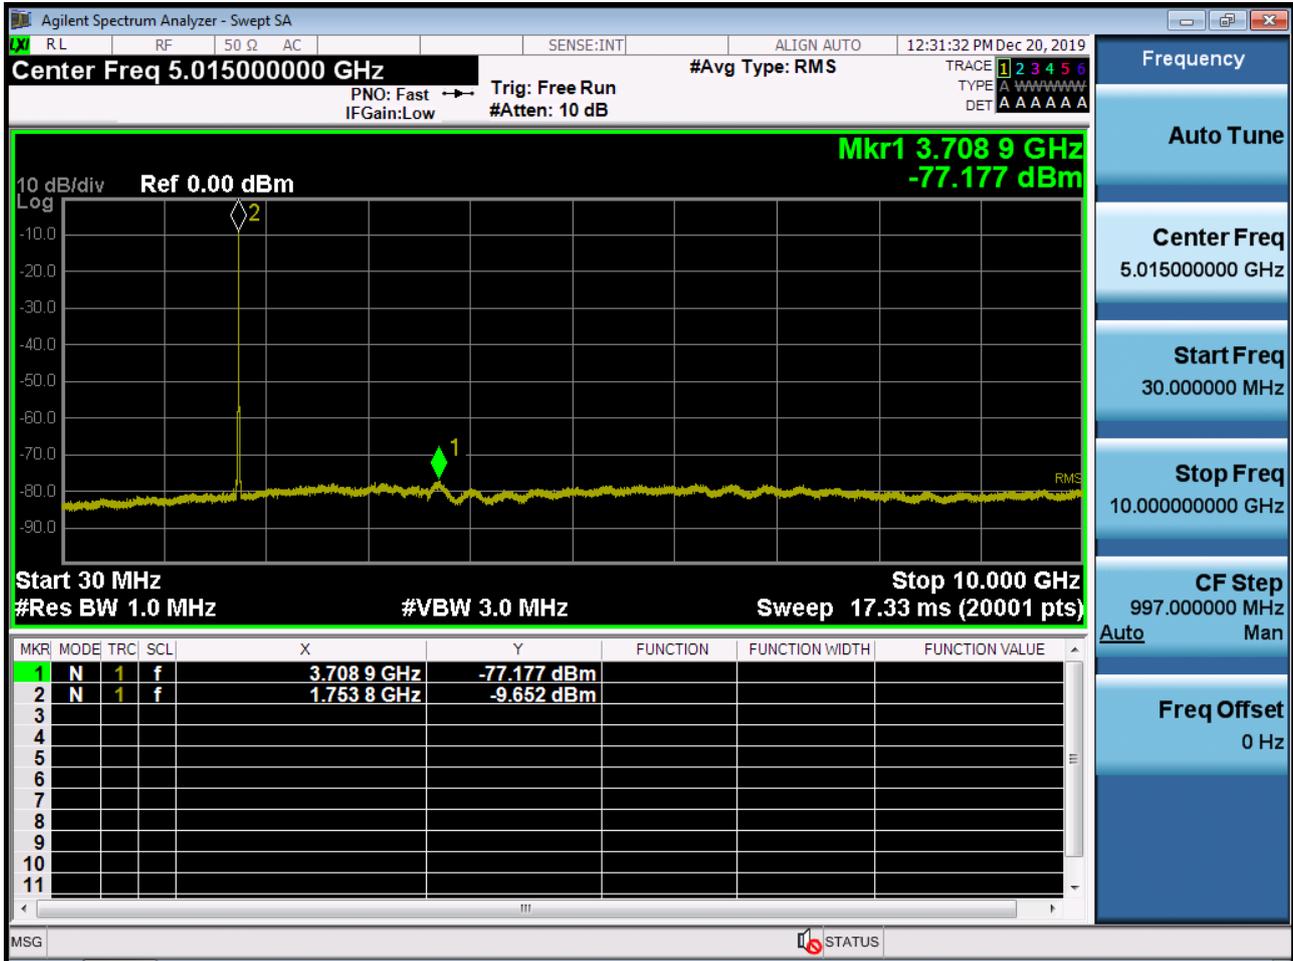

■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2

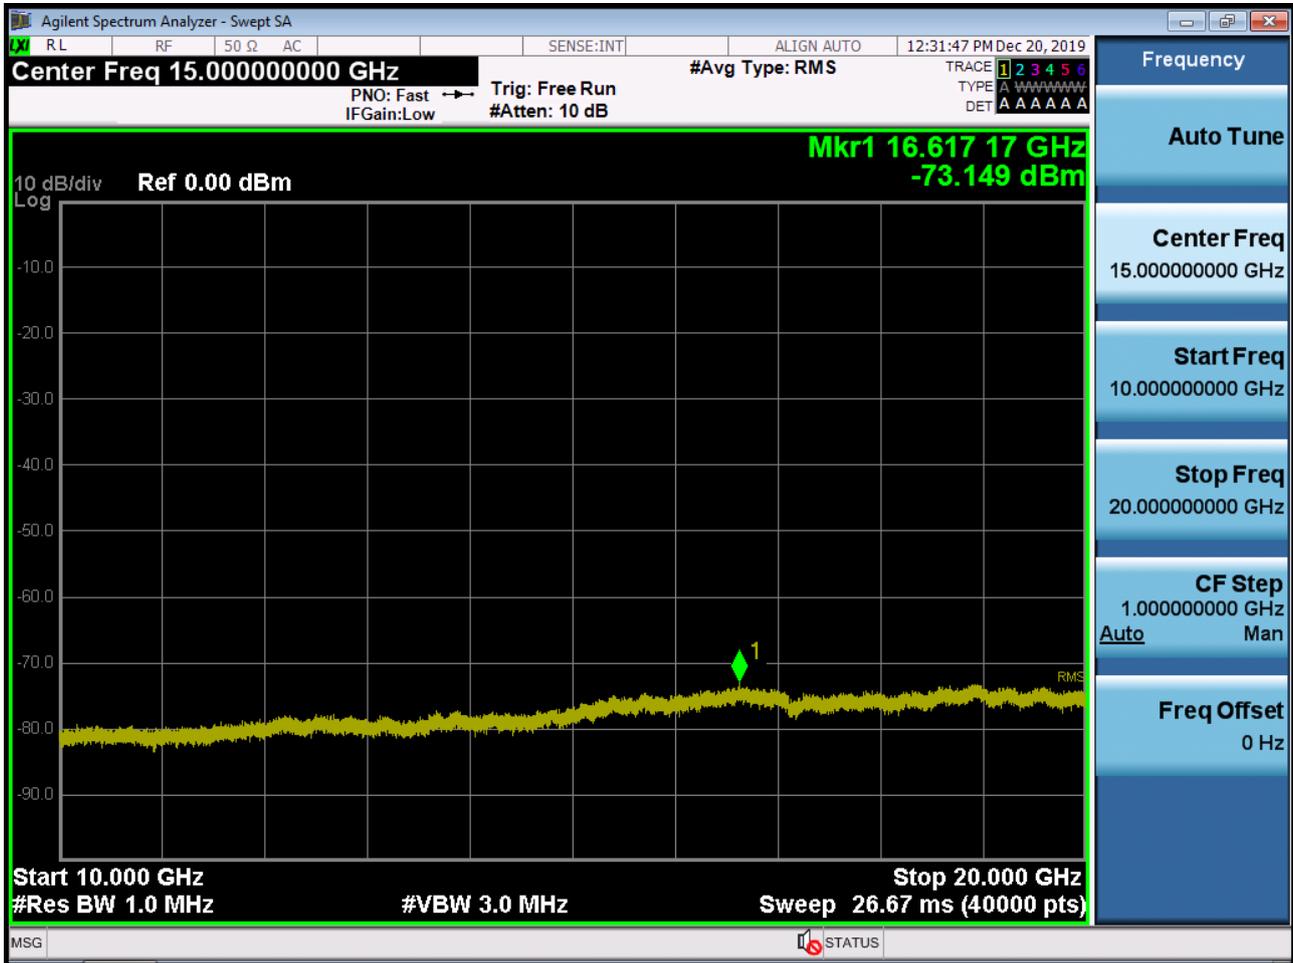

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2001-FI009-P