

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 10, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2204-FC028-R1

FCC ID: A3LSMG736B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G736B/DS
 Additional Model(s): SM-G736B
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M09G7D	QPSK	0.348	25.42
		1M09W7D	16QAM	0.298	24.74
		1M09W7D	64QAM	0.235	23.71
		1M09W7D	256QAM	0.117	20.68
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.352	25.46
		2M70W7D	16QAM	0.303	24.81
		2M70W7D	64QAM	0.239	23.79
		2M70W7D	256QAM	0.116	20.66
LTE – Band66/4 (5)	1712.5 – 1777.5	4M51G7D	QPSK	0.347	25.40
		4M49W7D	16QAM	0.299	24.76
		4M50W7D	64QAM	0.236	23.72
		4M51W7D	256QAM	0.115	20.60
LTE – Band66/4 (10)	1715.0 – 1775.0	8M96G7D	QPSK	0.342	25.34
		8M98W7D	16QAM	0.303	24.81
		8M97W7D	64QAM	0.235	23.71
		8M98W7D	256QAM	0.115	20.61
LTE – Band66/4 (15)	1717.5 – 1772.5	13M4G7D	QPSK	0.335	25.25
		13M4W7D	16QAM	0.291	24.64
		13M4W7D	64QAM	0.224	23.50
		13M4W7D	256QAM	0.110	20.41
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.331	25.20
		17M8W7D	16QAM	0.292	24.65
		17M9W7D	64QAM	0.224	23.50
		17M8W7D	256QAM	0.110	20.41

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2204-FC028-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2204-FC028	April 26, 2022	- First Approval Report
HCT-RF-2204-FC028-R1	May 10, 2022	- Revised the Description of eut. (6 page)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS	30
8.6 BAND EDGE	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS.....	50
10. ANNEX A_ TEST SETUP PHOTO.....	171

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG736B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-G736B/DS
Additional Model(s):	SM-G736B
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	March 29, 2022 ~ April 22, 2022
Serial number:	Radiated: R3CT20ALL8F Conducted: R3CT20AJDKF

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), Bluetooth, BT LE, WIFI 6E, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

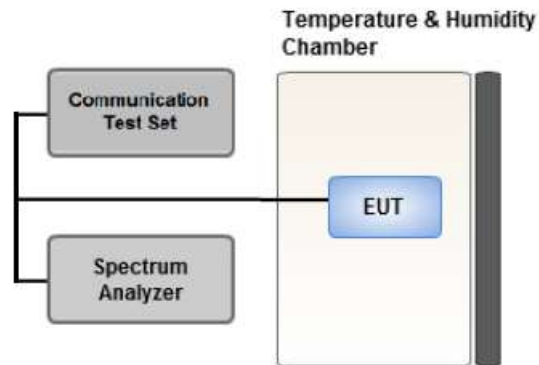

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

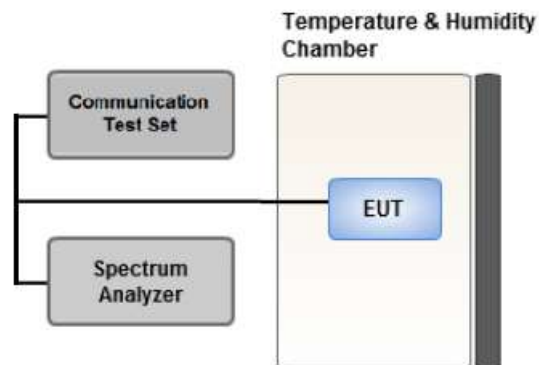

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

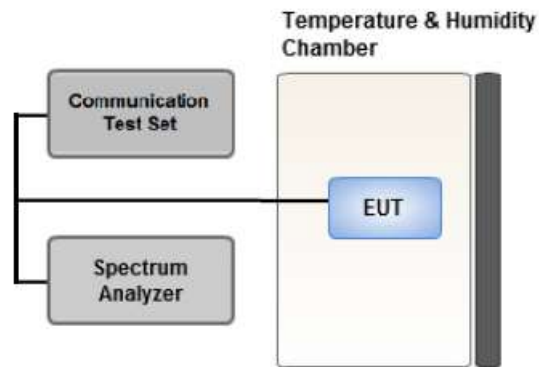

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

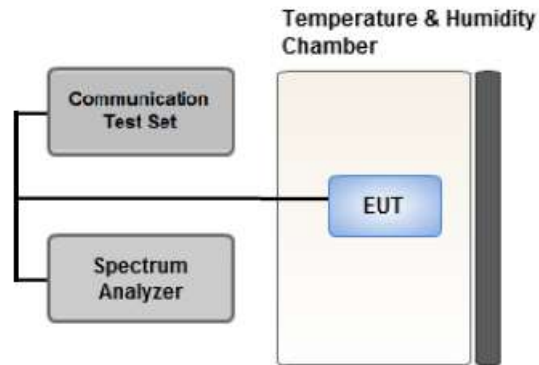

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

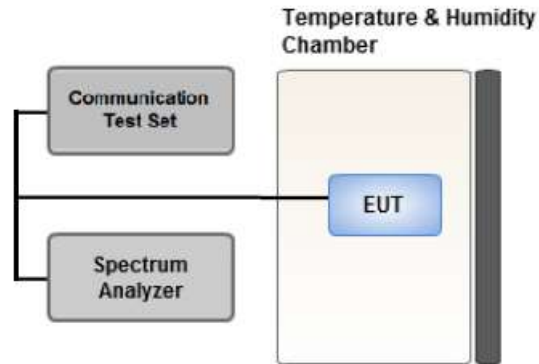

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- Main1 Antenna: LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SM-G736B/DS & additional models were tested and the worst case results are reported.
 (Worst case : SM-G736B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	Low, High	1	3	Z
			Mid	1	5	
		3	Low, High	1	8	
			Mid	1	14	
		5	Low, High	1	13	
			Mid	1	24	
		10	Low, High	1	25	
			Mid	1	49	
		15	Low, High	1	38	
			Mid	1	74	
		20	Low, High	1	50	
			Mid	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	10	Low, High	1	25	Y
			Mid	1	49	

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- Main1 Antenna: LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SM-G736B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-G736B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
20	Low	1	0		
	High	1	99		
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-17.06	16.73	10.04	2.05	V	< 1.00	0.296	24.72
		16-QAM	-17.68	16.11	10.04	2.05	V		0.257	24.10
		64-QAM	-18.71	15.08	10.04	2.05	V		0.203	23.07
		256-QAM	-21.71	12.08	10.04	2.05	V		0.102	20.07
1745.0		QPSK	-17.09	16.63	10.18	2.06	V		0.299	24.75
		16-QAM	-17.76	15.96	10.18	2.06	V		0.256	24.08
		64-QAM	-18.81	14.91	10.18	2.06	V		0.201	23.03
		256-QAM	-21.83	11.89	10.18	2.06	V		0.100	20.01
1779.3		QPSK	-16.45	17.23	10.26	2.07	V		0.348	25.42
		16-QAM	-17.13	16.55	10.26	2.07	V		0.298	24.74
		64-QAM	-18.16	15.52	10.26	2.07	V		0.235	23.71
		256-QAM	-21.19	12.49	10.26	2.07	V		0.117	20.68

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1711.5	LTE B66/ B4 3 MHz	QPSK	-16.92	16.87	10.04	2.05	V	< 1.00	0.306	24.86
		16-QAM	-17.56	16.23	10.04	2.05	V		0.264	24.22
		64-QAM	-18.58	15.21	10.04	2.05	V		0.209	23.20
		256-QAM	-21.67	12.12	10.04	2.05	V		0.103	20.11
1745.0		QPSK	-17.04	16.68	10.18	2.06	V		0.302	24.80
		16-QAM	-17.70	16.02	10.18	2.06	V		0.259	24.14
		64-QAM	-18.80	14.92	10.18	2.06	V		0.201	23.04
		256-QAM	-21.85	11.87	10.18	2.06	V		0.100	19.99
1778.5		QPSK	-16.41	17.27	10.26	2.07	V		0.352	25.46
		16-QAM	-17.06	16.62	10.26	2.07	V		0.303	24.81
		64-QAM	-18.08	15.60	10.26	2.07	V		0.239	23.79
		256-QAM	-21.21	12.47	10.26	2.07	V		0.116	20.66

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-16.92	16.87	10.04	2.05	V	< 1.00	0.306	24.86
		16-QAM	-17.57	16.22	10.04	2.05	V		0.263	24.21
		64-QAM	-18.61	15.18	10.04	2.05	V		0.207	23.17
		256-QAM	-21.69	12.10	10.04	2.05	V		0.102	20.09
1745.0		QPSK	-17.03	16.69	10.18	2.06	V		0.303	24.81
		16-QAM	-17.71	16.01	10.18	2.06	V		0.259	24.13
		64-QAM	-18.81	14.91	10.18	2.06	V		0.201	23.03
		256-QAM	-21.88	11.84	10.18	2.06	V		0.099	19.96
1777.5		QPSK	-16.47	17.21	10.26	2.07	V		0.347	25.40
		16-QAM	-17.11	16.57	10.26	2.07	V		0.299	24.76
		64-QAM	-18.15	15.53	10.26	2.07	V		0.236	23.72
		256-QAM	-21.27	12.41	10.26	2.07	V		0.115	20.60

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-17.01	16.74	10.06	2.05	V	< 1.00	0.299	24.75
		16-QAM	-17.58	16.17	10.06	2.05	V		0.262	24.18
		64-QAM	-18.62	15.13	10.06	2.05	V		0.206	23.14
		256-QAM	-21.71	12.04	10.06	2.05	V		0.101	20.05
1745.0		QPSK	-17.16	16.56	10.18	2.06	V		0.294	24.68
		16-QAM	-17.79	15.93	10.18	2.06	V		0.254	24.05
		64-QAM	-18.87	14.85	10.18	2.06	V		0.198	22.97
		256-QAM	-21.95	11.77	10.18	2.06	V		0.098	19.89
1775.0		QPSK	-16.53	17.16	10.25	2.07	V		0.342	25.34
		16-QAM	-17.06	16.63	10.25	2.07	V		0.303	24.81
		64-QAM	-18.16	15.53	10.25	2.07	V		0.235	23.71
		256-QAM	-21.26	12.43	10.25	2.07	V		0.115	20.61

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-17.02	16.69	10.08	2.05	V	< 1.00	0.297	24.72
		16-QAM	-17.58	16.13	10.08	2.05	V		0.261	24.16
		64-QAM	-18.76	14.95	10.08	2.05	V		0.199	22.98
		256-QAM	-21.88	11.83	10.08	2.05	V		0.097	19.86
1745.0		QPSK	-17.09	16.63	10.18	2.06	V		0.299	24.75
		16-QAM	-17.73	15.99	10.18	2.06	V		0.258	24.11
		64-QAM	-18.90	14.82	10.18	2.06	V		0.197	22.94
		256-QAM	-21.94	11.78	10.18	2.06	V		0.098	19.90
1772.5		QPSK	-16.61	17.08	10.24	2.07	V		0.335	25.25
		16-QAM	-17.22	16.47	10.24	2.07	V		0.291	24.64
		64-QAM	-18.36	15.33	10.24	2.07	V		0.224	23.50
		256-QAM	-21.45	12.24	10.24	2.07	V		0.110	20.41

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-17.09	16.62	10.08	2.05	V	< 1.00	0.292	24.65
		16-QAM	-17.61	16.10	10.08	2.05	V		0.259	24.13
		64-QAM	-18.77	14.94	10.08	2.05	V		0.198	22.97
		256-QAM	-21.87	11.84	10.08	2.05	V		0.097	19.87
1745.0		QPSK	-17.20	16.52	10.18	2.06	V		0.291	24.64
		16-QAM	-17.80	15.92	10.18	2.06	V		0.254	24.04
		64-QAM	-18.98	14.74	10.18	2.06	V		0.193	22.86
		256-QAM	-22.05	11.67	10.18	2.06	V		0.095	19.79
1770.0		QPSK	-16.66	17.03	10.24	2.07	V		0.331	25.20
		16-QAM	-17.21	16.48	10.24	2.07	V		0.292	24.65
		64-QAM	-18.36	15.33	10.24	2.07	V		0.224	23.50
		256-QAM	-21.45	12.24	10.24	2.07	V		0.110	20.41

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1710.7 MHz
- ▣ MEASURED OUTPUT POWER: 25.46 dBm = 0.252 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 38.46 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131987 (1711.5)	3 423.00	-52.90	12.56	-59.63	2.95	H	-50.02	75.49
	5 134.50	-55.53	12.27	-53.03	3.67	V	-44.42	69.88
	6 846.00	-55.11	12.00	-48.43	4.25	H	-40.68	66.14
132322 (1745.0)	3 490.00	-53.59	12.42	-59.69	2.97	H	-50.24	75.70
	5 235.00	-54.94	12.71	-54.14	3.70	H	-45.12	70.58
	6 980.00	-53.77	11.52	-45.59	4.28	V	-38.35	63.81
132657 (1778.5)	3 557.00	-54.12	12.38	-59.96	3.01	H	-50.59	76.05
	5 335.50	-55.10	13.00	-54.39	3.74	V	-45.12	70.58
	7 114.00	-55.35	10.87	-46.25	4.34	H	-39.72	65.18

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	4.71
			16-QAM			5.48
			64-QAM			6.20
			256-QAM			6.47
	3 MHz		QPSK	15		4.80
			16-QAM			5.56
			64-QAM			6.14
			256-QAM			6.49
	5 MHz		QPSK	25		4.77
			16-QAM			5.51
			64-QAM			6.16
			256-QAM			6.47
	10 MHz		QPSK	50		4.80
			16-QAM			5.54
			64-QAM			6.13
			256-QAM			6.46
	15 MHz		QPSK	75		4.74
			16-QAM			5.50
			64-QAM			6.15
			256-QAM			6.44
20 MHz	QPSK	100	4.69			
	16-QAM		5.48			
	64-QAM		6.13			
	256-QAM		6.44			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 111 ~ 134.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0933
			16-QAM			1.0915
			64-QAM			1.0900
			256-QAM			1.0900
	3 MHz		QPSK	15		2.7079
			16-QAM			2.7037
			64-QAM			2.7034
			256-QAM			2.7027
	5 MHz		QPSK	25		4.5063
			16-QAM			4.4923
			64-QAM			4.4960
			256-QAM			4.5059
	10 MHz		QPSK	50		8.9594
			16-QAM			8.9807
			64-QAM			8.9729
			256-QAM			8.9790
	15 MHz		QPSK	75		13.412
			16-QAM			13.434
			64-QAM			13.404
			256-QAM			13.428
20 MHz	QPSK	100	17.982			
	16-QAM		17.823			
	64-QAM		17.885			
	256-QAM		17.843			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 87 ~ 110.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4213	27.976	-72.943	-44.967	-13.00
		1745.0	3.4896	27.976	-74.611	-46.635	
		1779.3	3.5604	27.976	-74.406	-46.430	
	3	1711.5	3.4213	27.976	-73.173	-45.197	
		1745.0	3.4881	27.976	-73.148	-45.172	
		1778.5	3.5604	27.976	-75.563	-47.587	
	5	1712.5	3.4213	27.976	-73.393	-45.417	
		1745.0	3.4861	27.976	-73.595	-45.619	
		1777.5	3.5599	27.976	-73.870	-45.894	
	10	1715.0	3.4218	27.976	-73.991	-46.015	
		1745.0	3.4816	27.976	-74.534	-46.558	
		1775.0	3.5594	27.976	-74.520	-46.544	
	15	1717.5	3.4223	27.976	-73.810	-45.834	
		1745.0	3.4771	27.976	-74.240	-46.264	
		1772.5	3.5589	27.976	-74.161	-46.185	
	20	1720.0	3.4228	27.976	-74.395	-46.419	
		1745.0	3.4726	27.976	-74.564	-46.588	
		1770.0	3.5584	27.976	-74.286	-46.310	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 135 ~ 170.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 51 ~ 86.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 003	0.0	0.000 000	0.000
100 %		-30	1710 700 000	-2.8	0.000 000	-0.002
100 %		-20	1710 700 005	2.5	0.000 000	0.001
100 %		-10	1710 700 000	-2.9	0.000 000	-0.002
100 %		0	1710 700 005	1.9	0.000 000	0.001
100 %		+10	1710 700 006	3.0	0.000 000	0.002
100 %		+30	1710 700 005	2.4	0.000 000	0.001
100 %		+40	1710 700 008	4.8	0.000 000	0.003
100 %		+50	1710 700 007	4.0	0.000 000	0.002
Batt. Endpoint		3.400	+20	1710 700 006	3.3	0.000 000

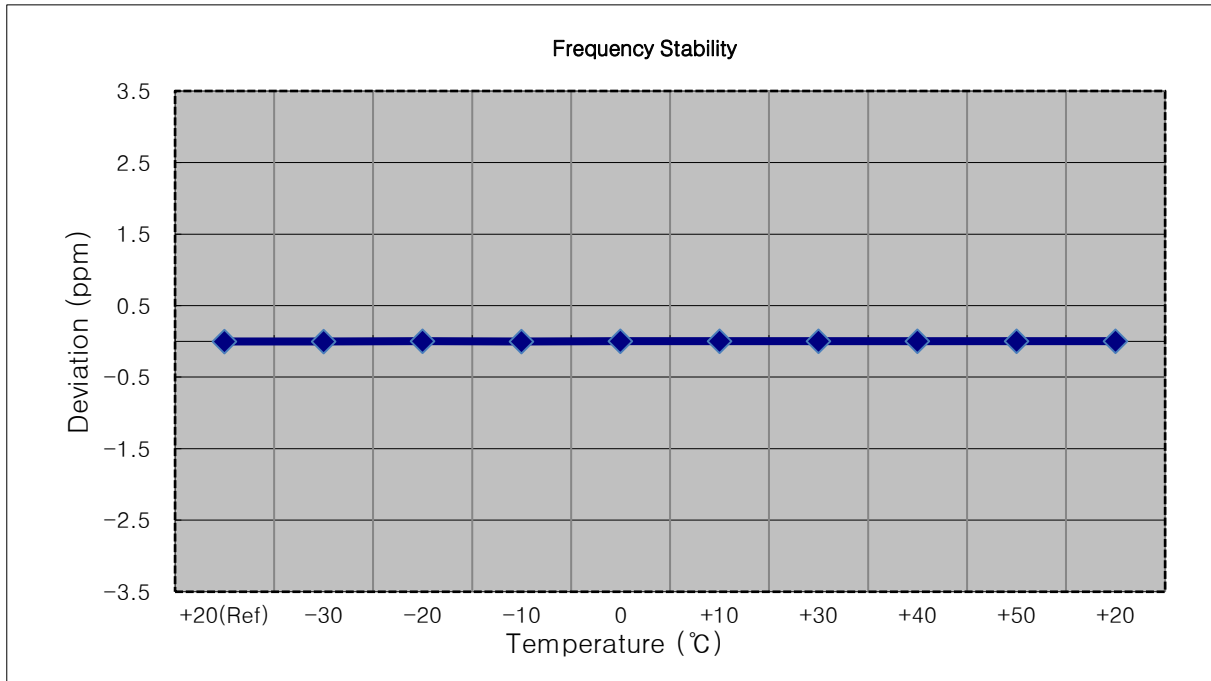


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 500 003	0.0	0.000 000	0.000
100 %		-30	1711 500 000	-2.9	0.000 000	-0.002
100 %		-20	1711 500 001	-2.4	0.000 000	-0.001
100 %		-10	1711 500 006	2.7	0.000 000	0.002
100 %		0	1711 500 008	4.6	0.000 000	0.003
100 %		+10	1711 500 007	4.3	0.000 000	0.003
100 %		+30	1711 500 008	4.6	0.000 000	0.003
100 %		+40	1711 500 007	3.6	0.000 000	0.002
100 %		+50	1711 500 000	-3.3	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1711 500 005	1.6	0.000 000	0.001

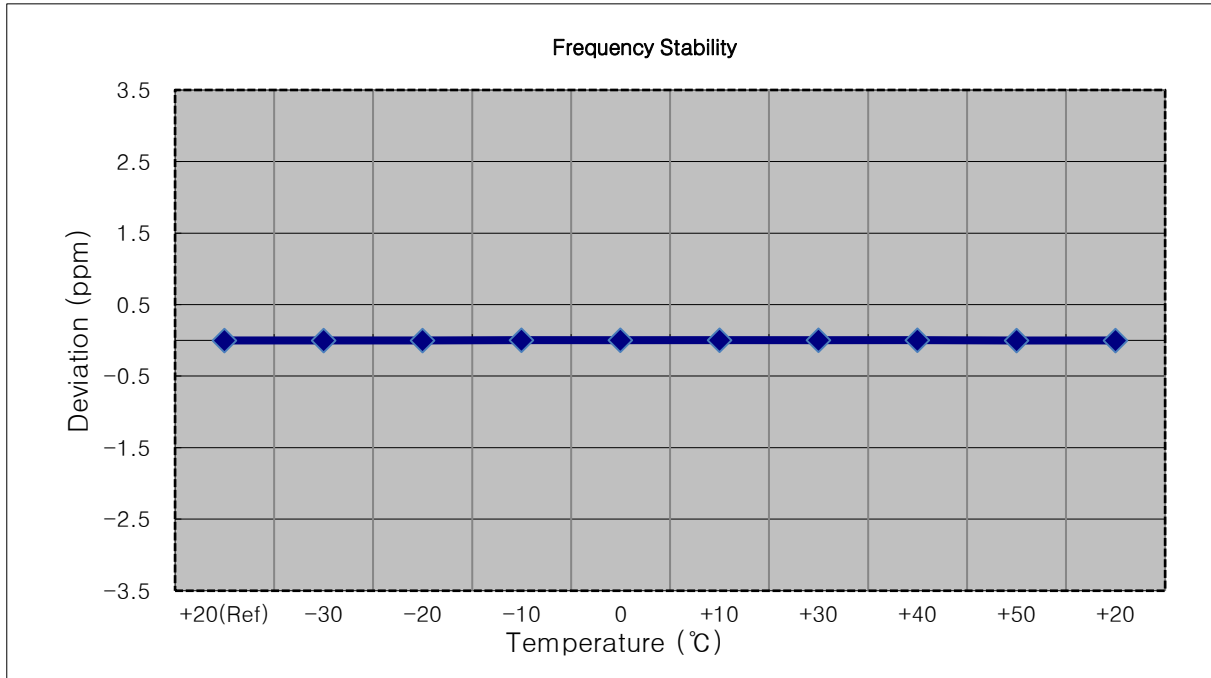


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 499 997	0.0	0.000 000	0.000
100 %		-30	1712 500 000	2.8	0.000 000	0.002
100 %		-20	1712 499 992	-5.4	0.000 000	-0.003
100 %		-10	1712 499 992	-5.3	0.000 000	-0.003
100 %		0	1712 499 992	-4.5	0.000 000	-0.003
100 %		+10	1712 499 992	-4.9	0.000 000	-0.003
100 %		+30	1712 499 993	-3.6	0.000 000	-0.002
100 %		+40	1712 499 993	-4.1	0.000 000	-0.002
100 %		+50	1712 499 993	-4.4	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1712 499 994	-2.8	0.000 000	-0.002

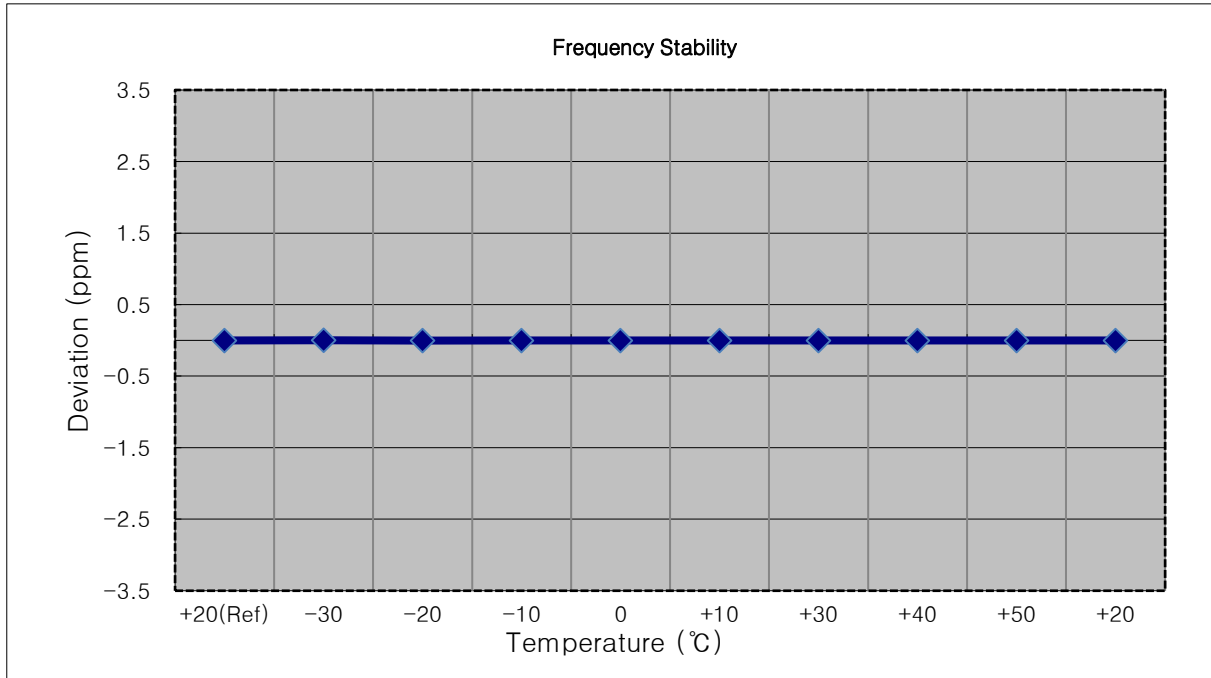


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1714 999 996	0.0	0.000 000	0.000
100 %		-30	1714 999 993	-3.3	0.000 000	-0.002
100 %		-20	1714 999 995	-1.8	0.000 000	-0.001
100 %		-10	1714 999 998	1.4	0.000 000	0.001
100 %		0	1714 999 994	-2.7	0.000 000	-0.002
100 %		+10	1714 999 994	-2.0	0.000 000	-0.001
100 %		+30	1714 999 999	3.0	0.000 000	0.002
100 %		+40	1714 999 999	3.0	0.000 000	0.002
100 %		+50	1714 999 993	-3.5	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1714 999 993	-3.8	0.000 000	-0.002

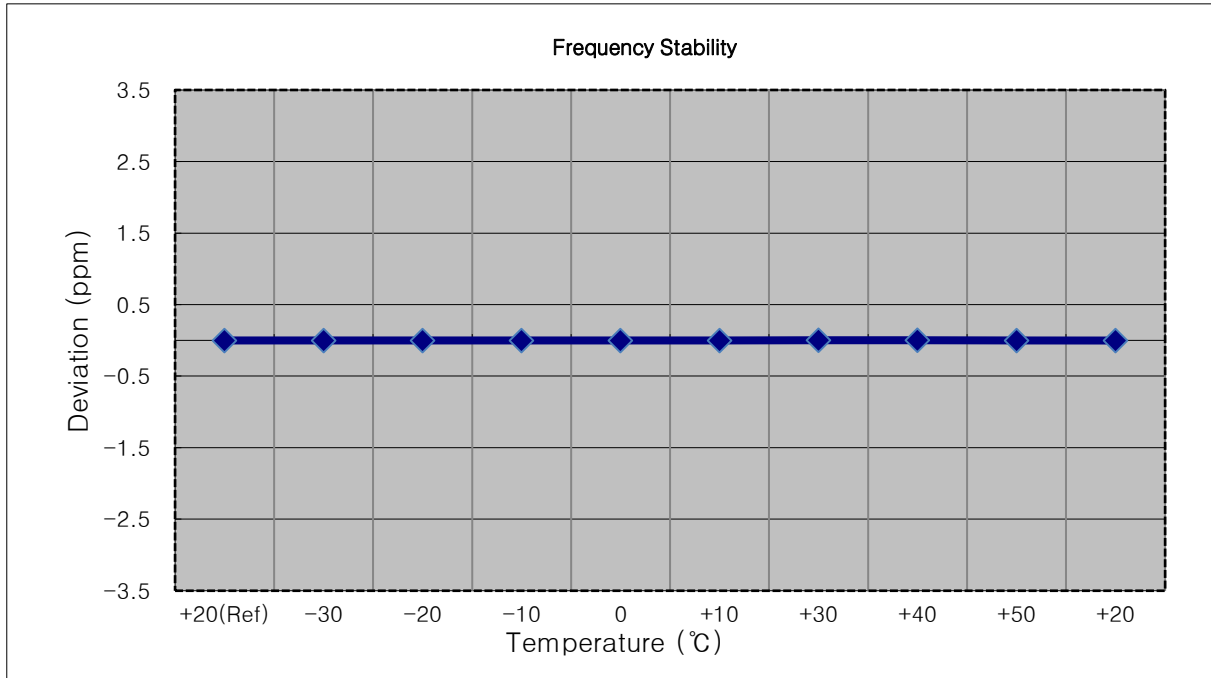


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 499 999	0.0	0.000 000	0.000
100 %		-30	1717 500 000	1.8	0.000 000	0.001
100 %		-20	1717 500 002	3.0	0.000 000	0.002
100 %		-10	1717 499 995	-3.2	0.000 000	-0.002
100 %		0	1717 499 996	-3.1	0.000 000	-0.002
100 %		+10	1717 499 995	-3.2	0.000 000	-0.002
100 %		+30	1717 499 996	-2.6	0.000 000	-0.002
100 %		+40	1717 499 997	-1.6	0.000 000	-0.001
100 %		+50	1717 499 996	-2.7	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1717 499 997	-2.0	0.000 000	-0.001

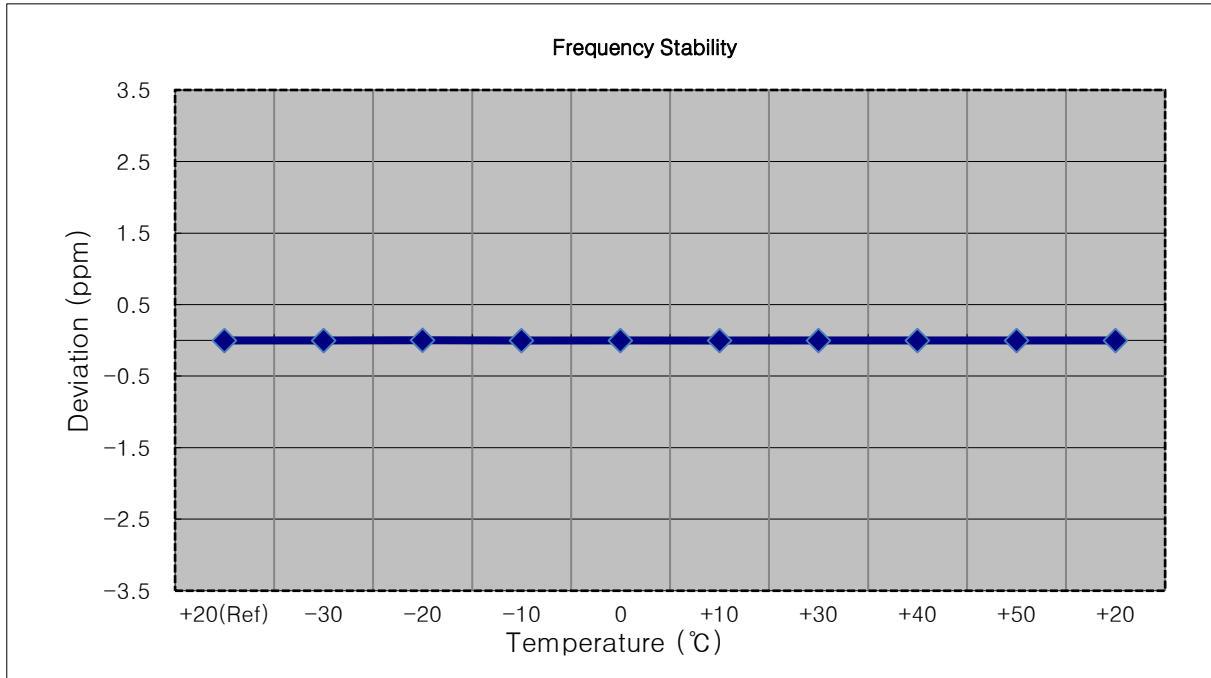


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1720 000 003	0.0	0.000 000	0.000
100 %		-30	1720 000 000	-3.5	0.000 000	-0.002
100 %		-20	1720 000 001	-2.2	0.000 000	-0.001
100 %		-10	1720 000 006	3.0	0.000 000	0.002
100 %		0	1720 000 001	-1.9	0.000 000	-0.001
100 %		+10	1720 000 001	-2.1	0.000 000	-0.001
100 %		+30	1720 000 006	2.8	0.000 000	0.002
100 %		+40	1720 000 006	2.9	0.000 000	0.002
100 %		+50	1720 000 006	3.2	0.000 000	0.002
Batt. Endpoint		3.400	+20	1720 000 002	-1.3	0.000 000

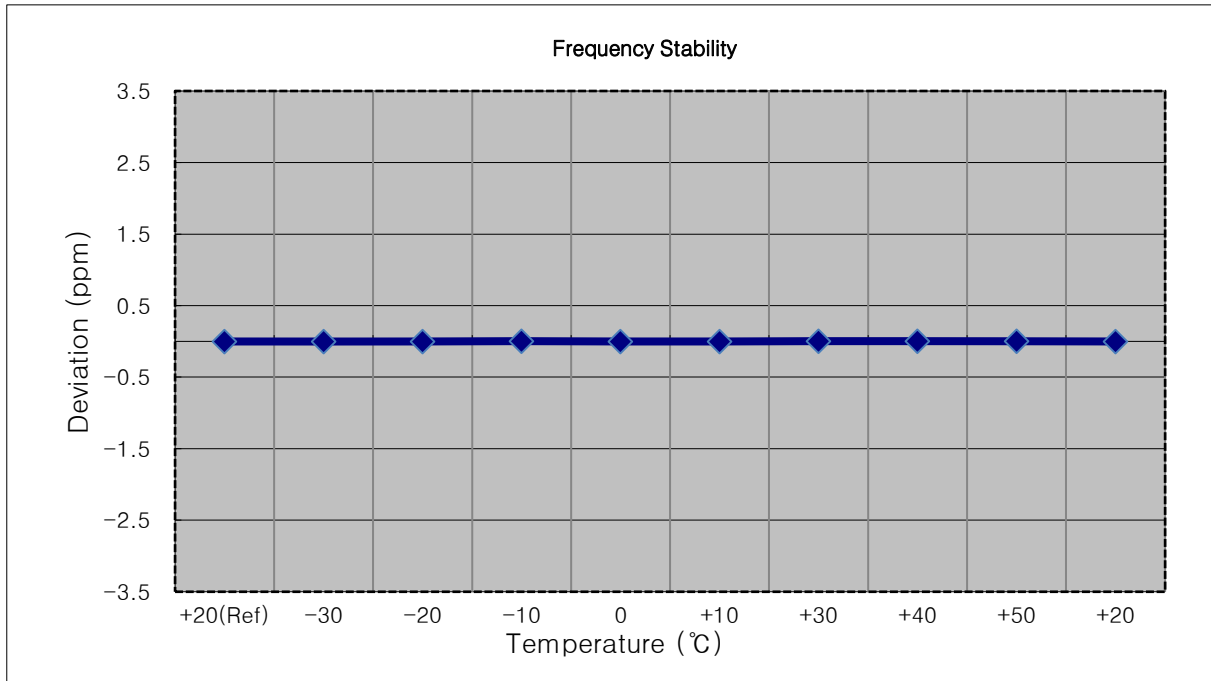


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 007	4.1	0.000 000	0.002
100 %		-20	1745 000 005	2.0	0.000 000	0.001
100 %		-10	1745 000 005	2.7	0.000 000	0.002
100 %		0	1745 000 007	4.5	0.000 000	0.003
100 %		+10	1745 000 007	3.8	0.000 000	0.002
100 %		+30	1745 000 006	3.2	0.000 000	0.002
100 %		+40	1745 000 008	5.4	0.000 000	0.003
100 %		+50	1745 000 000	1745 000 000	-2.6	0.000 000
Batt. Endpoint	3.400	+20	1745 000 004	1.5	0.000 000	0.001

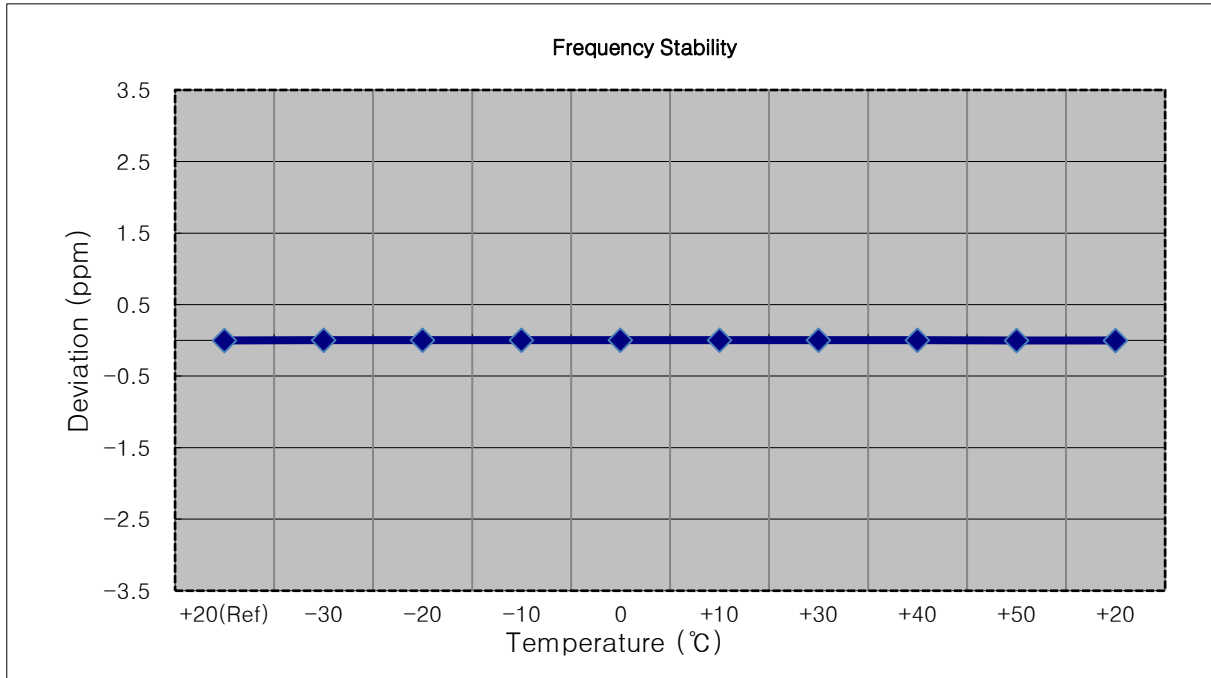


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 007	4.0	0.000 000	0.002
100 %		-20	1745 000 006	2.9	0.000 000	0.002
100 %		-10	1745 000 007	3.9	0.000 000	0.002
100 %		0	1745 000 006	2.4	0.000 000	0.001
100 %		+10	1745 000 001	-2.0	0.000 000	-0.001
100 %		+30	1745 000 005	1.8	0.000 000	0.001
100 %		+40	1745 000 006	2.4	0.000 000	0.001
100 %		+50	1745 000 006	2.3	0.000 000	0.001
Batt. Endpoint	3.400	+20	1745 000 005	1.3	0.000 000	0.001

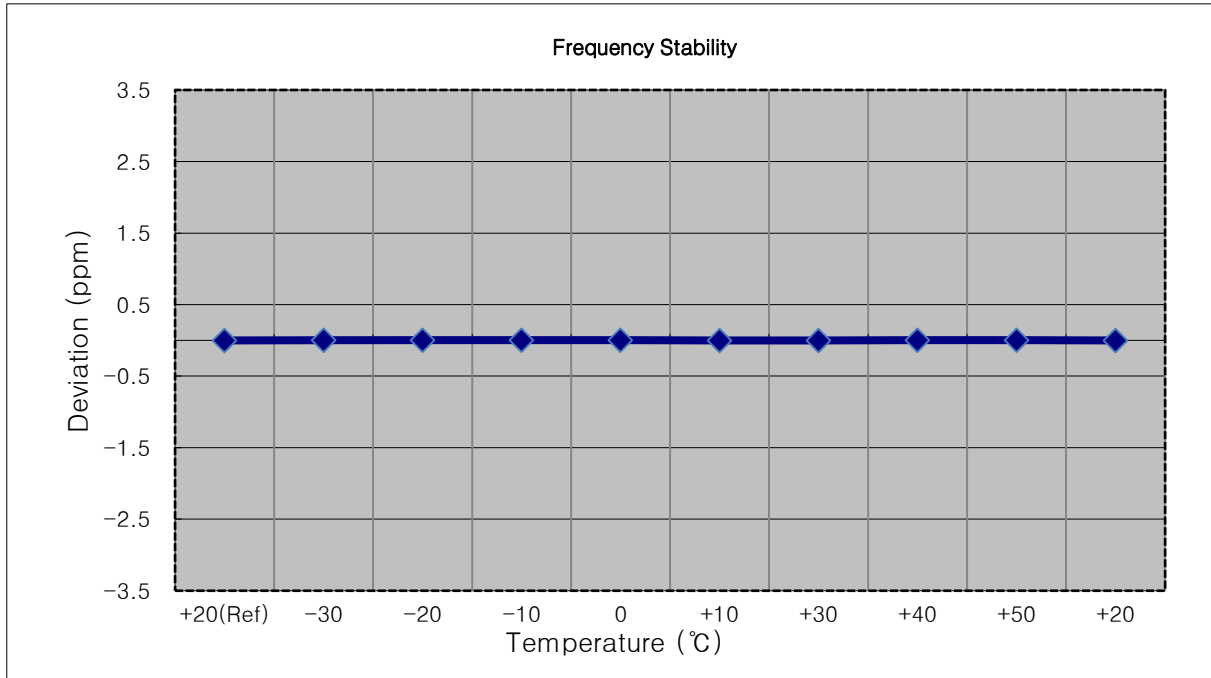


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1745 000 000	-1.9	0.000 000	-0.001
100 %		-20	1744 999 998	-3.6	0.000 000	-0.002
100 %		-10	1744 999 997	-4.8	0.000 000	-0.003
100 %		0	1745 000 000	-1.8	0.000 000	-0.001
100 %		+10	1744 999 999	-2.6	0.000 000	-0.001
100 %		+30	1745 000 004	2.6	0.000 000	0.001
100 %		+40	1745 000 005	3.0	0.000 000	0.002
100 %		+50	1745 000 005	3.5	0.000 000	0.002
Batt. Endpoint	3.400	+20	1744 999 999	-3.2	0.000 000	-0.002

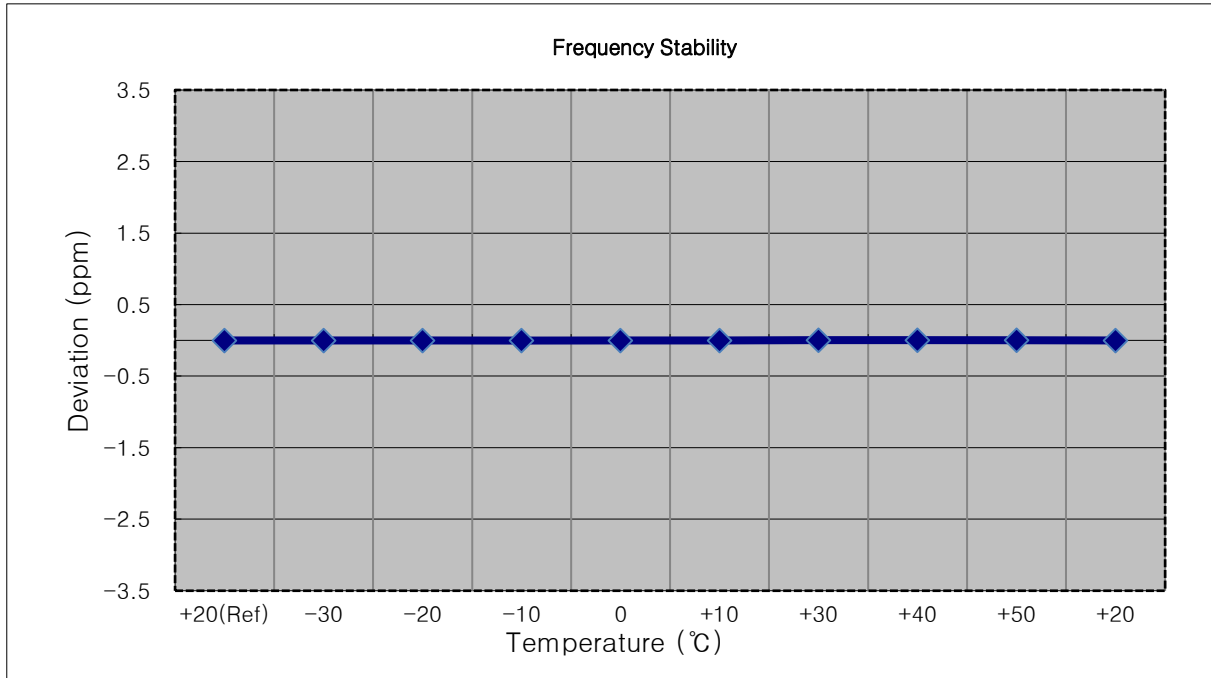


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1744 999 999	-3.3	0.000 000	-0.002
100 %		-20	1744 999 998	-3.8	0.000 000	-0.002
100 %		-10	1745 000 005	3.0	0.000 000	0.002
100 %		0	1745 000 000	-2.0	0.000 000	-0.001
100 %		+10	1744 999 998	-3.7	0.000 000	-0.002
100 %		+30	1744 999 998	-4.2	0.000 000	-0.002
100 %		+40	1745 000 000	-2.2	0.000 000	-0.001
100 %		+50	1744 999 999	-2.8	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1745 000 005	2.7	0.000 000	0.002

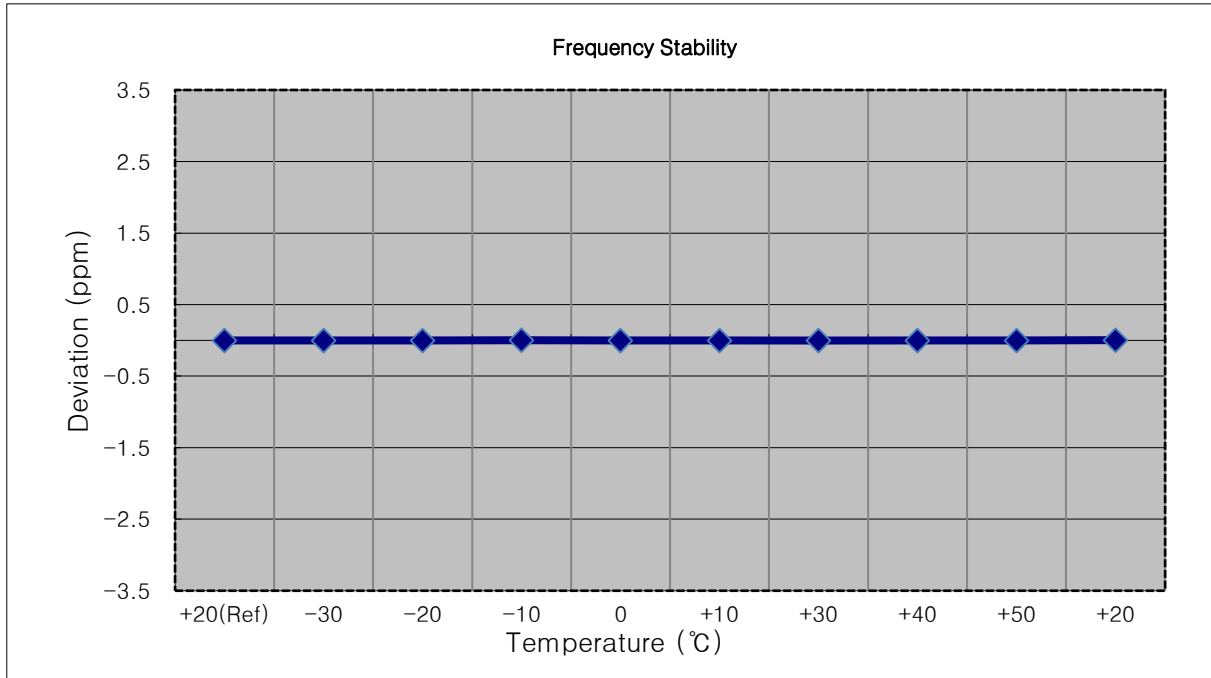


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 008	3.9	0.000 000	0.002
100 %		-20	1745 000 006	2.6	0.000 000	0.001
100 %		-10	1745 000 008	4.6	0.000 000	0.003
100 %		0	1745 000 006	2.1	0.000 000	0.001
100 %		+10	1745 000 002	-1.2	0.000 000	-0.001
100 %		+30	1745 000 007	3.7	0.000 000	0.002
100 %		+40	1745 000 001	-2.9	0.000 000	-0.002
100 %		+50	1745 000 009	5.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1745 000 008	4.2	0.000 000	0.002

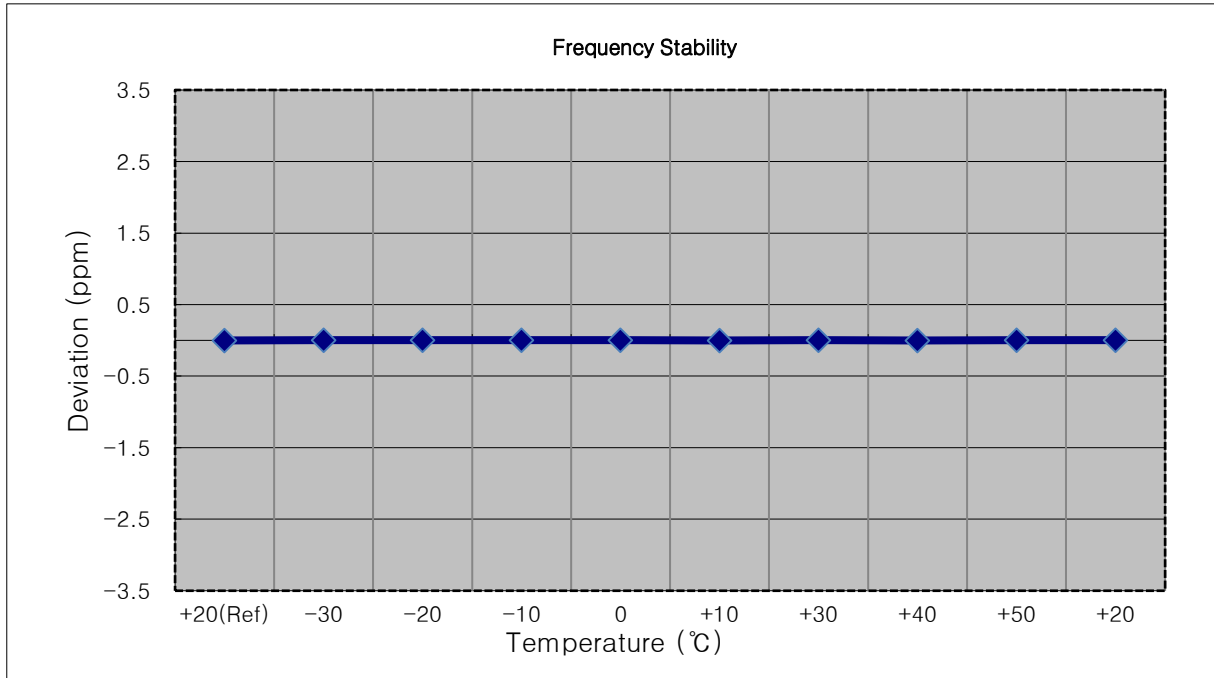


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 007	2.8	0.000 000	0.002
100 %		-20	1745 000 007	2.7	0.000 000	0.002
100 %		-10	1745 000 006	2.1	0.000 000	0.001
100 %		0	1745 000 006	2.3	0.000 000	0.001
100 %		+10	1745 000 006	1.7	0.000 000	0.001
100 %		+30	1745 000 006	2.2	0.000 000	0.001
100 %		+40	1745 000 001	-2.9	0.000 000	-0.002
100 %		+50	1745 000 001	-2.9	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1745 000 002	-2.2	0.000 000	-0.001

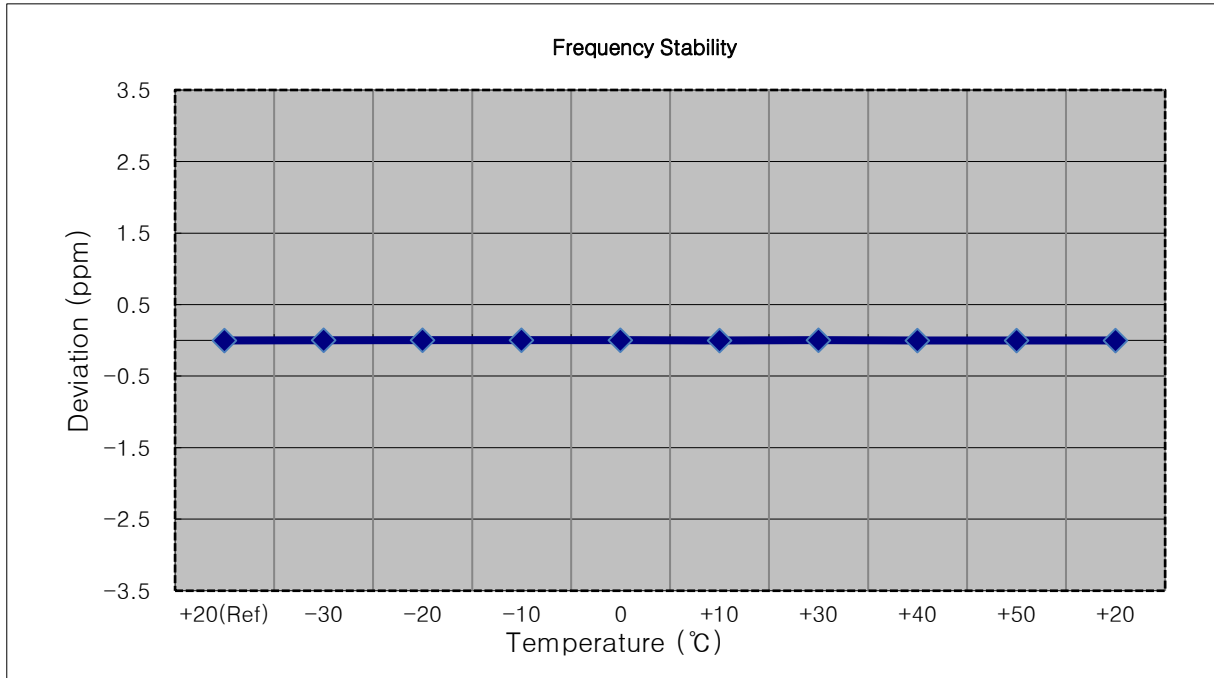


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 300 004	0.0	0.000 000	0.000
100 %		-30	1779 300 009	4.5	0.000 000	0.003
100 %		-20	1779 300 009	4.6	0.000 000	0.003
100 %		-10	1779 300 008	3.7	0.000 000	0.002
100 %		0	1779 300 001	-3.2	0.000 000	-0.002
100 %		+10	1779 300 002	-2.4	0.000 000	-0.001
100 %		+30	1779 300 002	-2.9	0.000 000	-0.002
100 %		+40	1779 300 010	6.0	0.000 000	0.003
100 %		+50	1779 300 001	-3.6	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1779 300 002	-2.5	0.000 000	-0.001

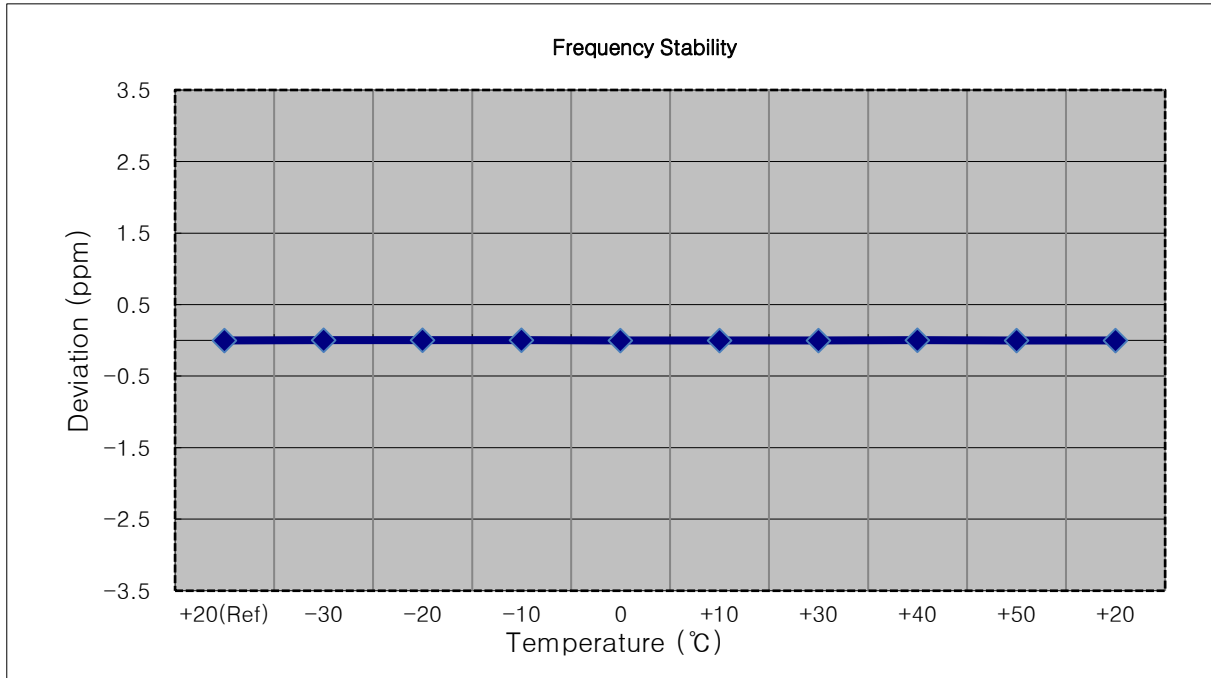


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 008	0.0	0.000 000	0.000
100 %		-30	1778 500 019	10.6	0.000 001	0.006
100 %		-20	1778 500 021	12.6	0.000 001	0.007
100 %		-10	1778 500 018	9.9	0.000 001	0.006
100 %		0	1778 500 018	10.1	0.000 001	0.006
100 %		+10	1778 500 018	10.1	0.000 001	0.006
100 %		+30	1778 500 017	9.4	0.000 001	0.005
100 %		+40	1778 500 000	-7.5	0.000 000	-0.004
100 %		+50	1778 500 019	10.8	0.000 001	0.006
Batt. Endpoint	3.400	+20	1778 500 019	10.8	0.000 001	0.006

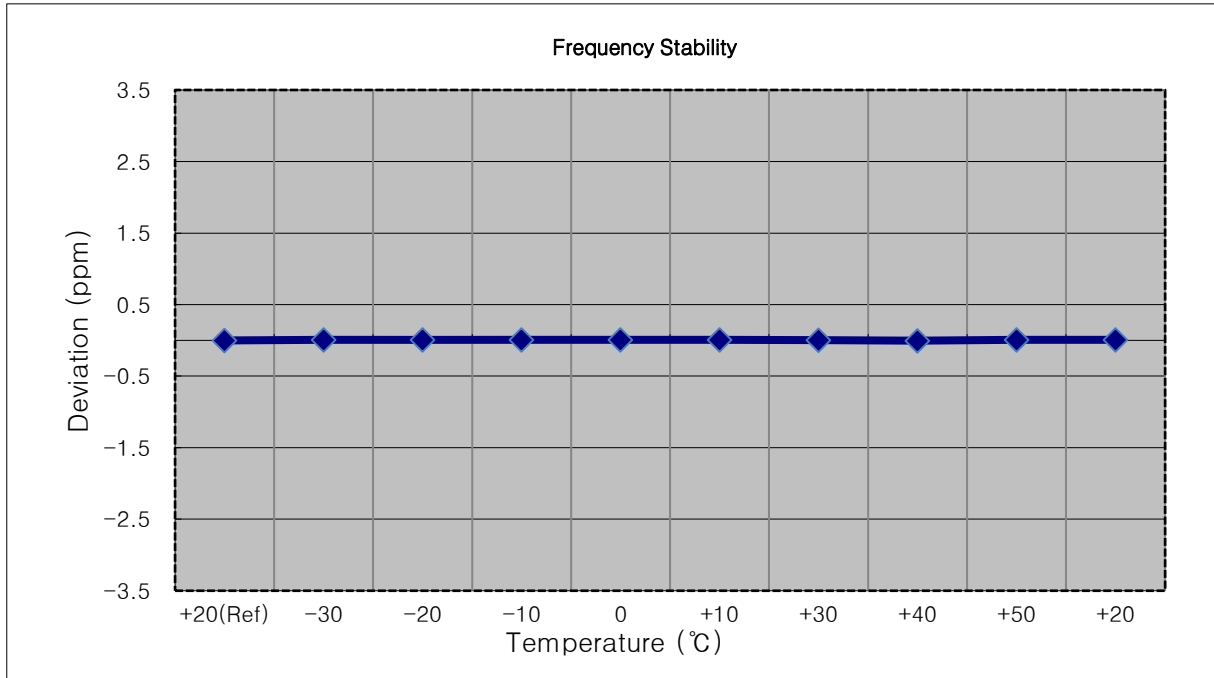


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 499 998	0.0	0.000 000	0.000
100 %		-30	1777 500 001	2.8	0.000 000	0.002
100 %		-20	1777 499 994	-3.9	0.000 000	-0.002
100 %		-10	1777 500 003	4.9	0.000 000	0.003
100 %		0	1777 500 001	3.2	0.000 000	0.002
100 %		+10	1777 500 000	1.9	0.000 000	0.001
100 %		+30	1777 500 001	3.6	0.000 000	0.002
100 %		+40	1777 499 996	-2.1	0.000 000	-0.001
100 %		+50	1777 500 001	3.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1777 500 001	3.5	0.000 000	0.002

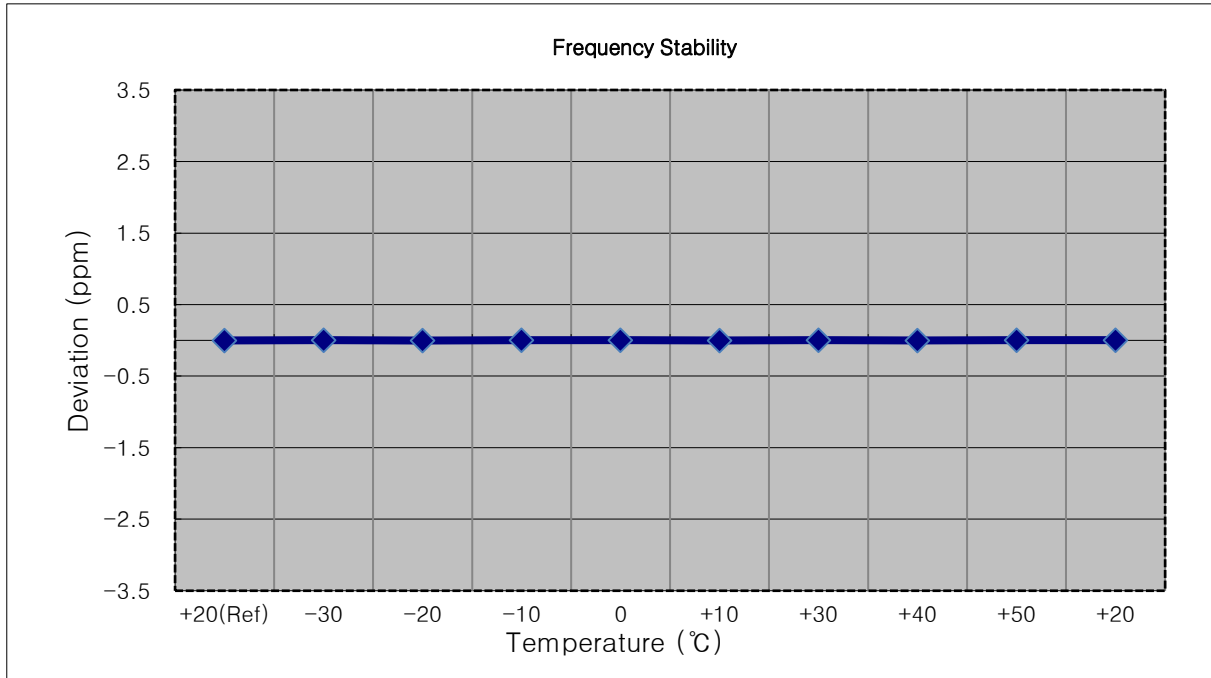


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1775 000 003	0.0	0.000 000	0.000
100 %		-30	1775 000 001	-2.2	0.000 000	-0.001
100 %		-20	1775 000 005	2.6	0.000 000	0.001
100 %		-10	1775 000 005	1.9	0.000 000	0.001
100 %		0	1775 000 005	2.1	0.000 000	0.001
100 %		+10	1775 000 005	2.4	0.000 000	0.001
100 %		+30	1775 000 007	3.9	0.000 000	0.002
100 %		+40	1775 000 001	-2.0	0.000 000	-0.001
100 %		+50	1775 000 004	1.6	0.000 000	0.001
Batt. Endpoint		3.400	+20	1775 000 005	2.7	0.000 000

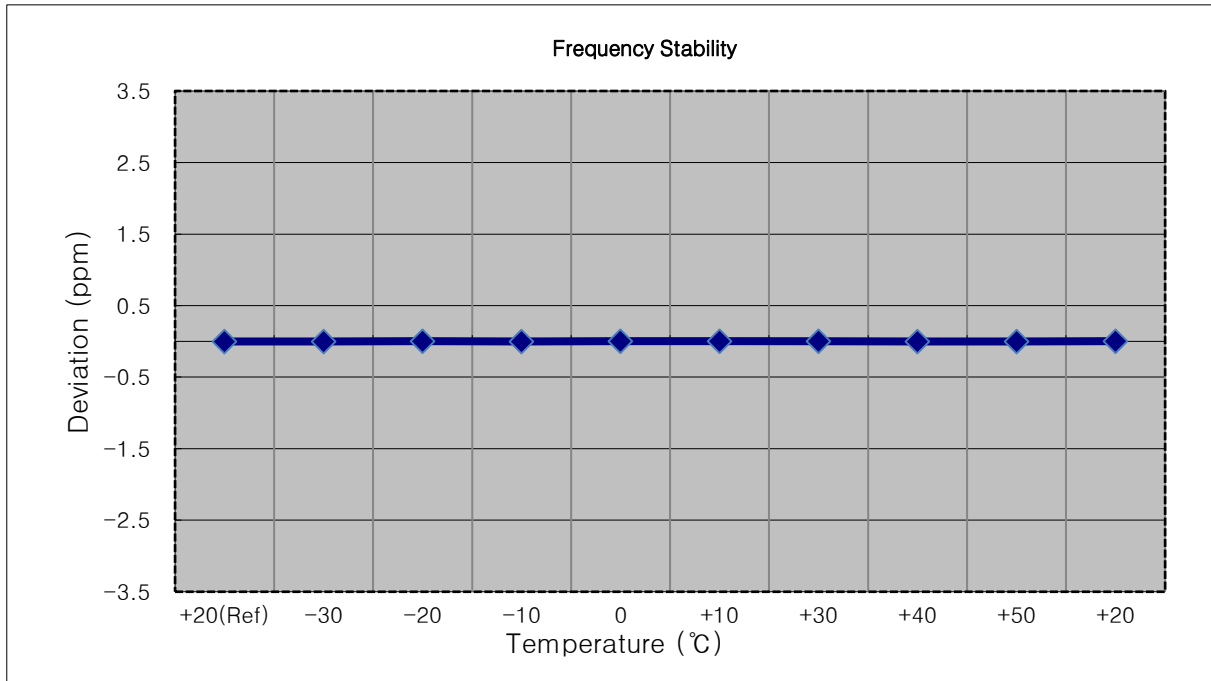


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 995	0.0	0.000 000	0.000
100 %		-30	1772 499 988	-6.4	0.000 000	-0.004
100 %		-20	1772 499 990	-4.9	0.000 000	-0.003
100 %		-10	1772 499 989	-6.0	0.000 000	-0.003
100 %		0	1772 499 988	-6.4	0.000 000	-0.004
100 %		+10	1772 499 989	-5.8	0.000 000	-0.003
100 %		+30	1772 499 991	-4.0	0.000 000	-0.002
100 %		+40	1772 499 986	-8.7	0.000 000	-0.005
100 %		+50	1772 499 988	-6.3	0.000 000	-0.004
Batt. Endpoint		3.400	+20	1772 499 988	-6.5	0.000 000

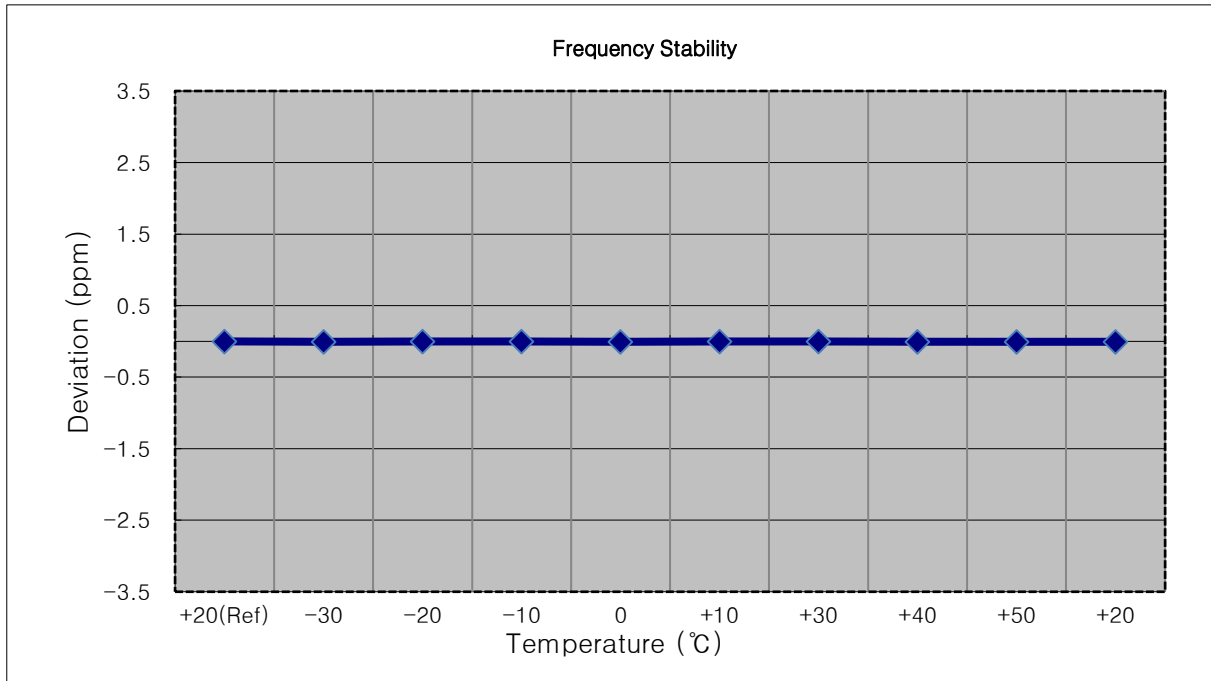

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1769 999 995	0.0	0.000 000	0.000
100 %		-30	1769 999 991	-4.1	0.000 000	-0.002
100 %		-20	1769 999 987	-7.5	0.000 000	-0.004
100 %		-10	1769 999 990	-5.0	0.000 000	-0.003
100 %		0	1769 999 987	-7.5	0.000 000	-0.004
100 %		+10	1769 999 990	-5.0	0.000 000	-0.003
100 %		+30	1769 999 988	-6.9	0.000 000	-0.004
100 %		+40	1769 999 989	-5.9	0.000 000	-0.003
100 %		+50	1769 999 987	-8.1	0.000 000	-0.005
Batt. Endpoint	3.400	+20	1769 999 989	-5.5	0.000 000	-0.003

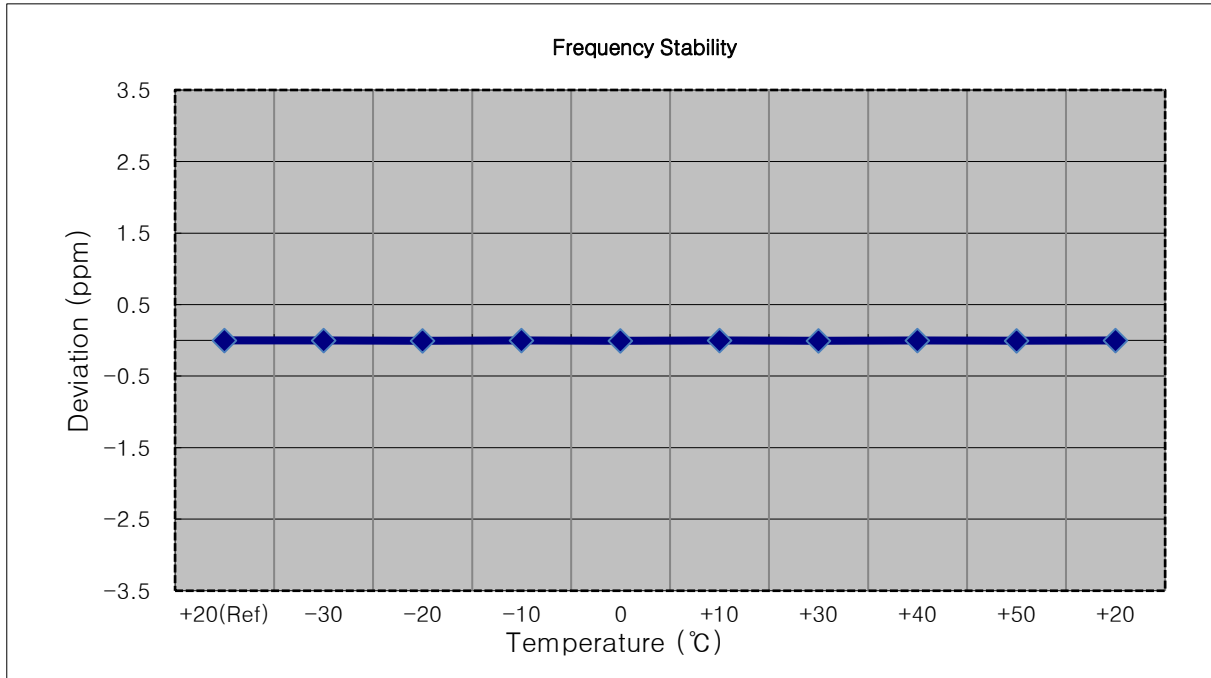

9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2)

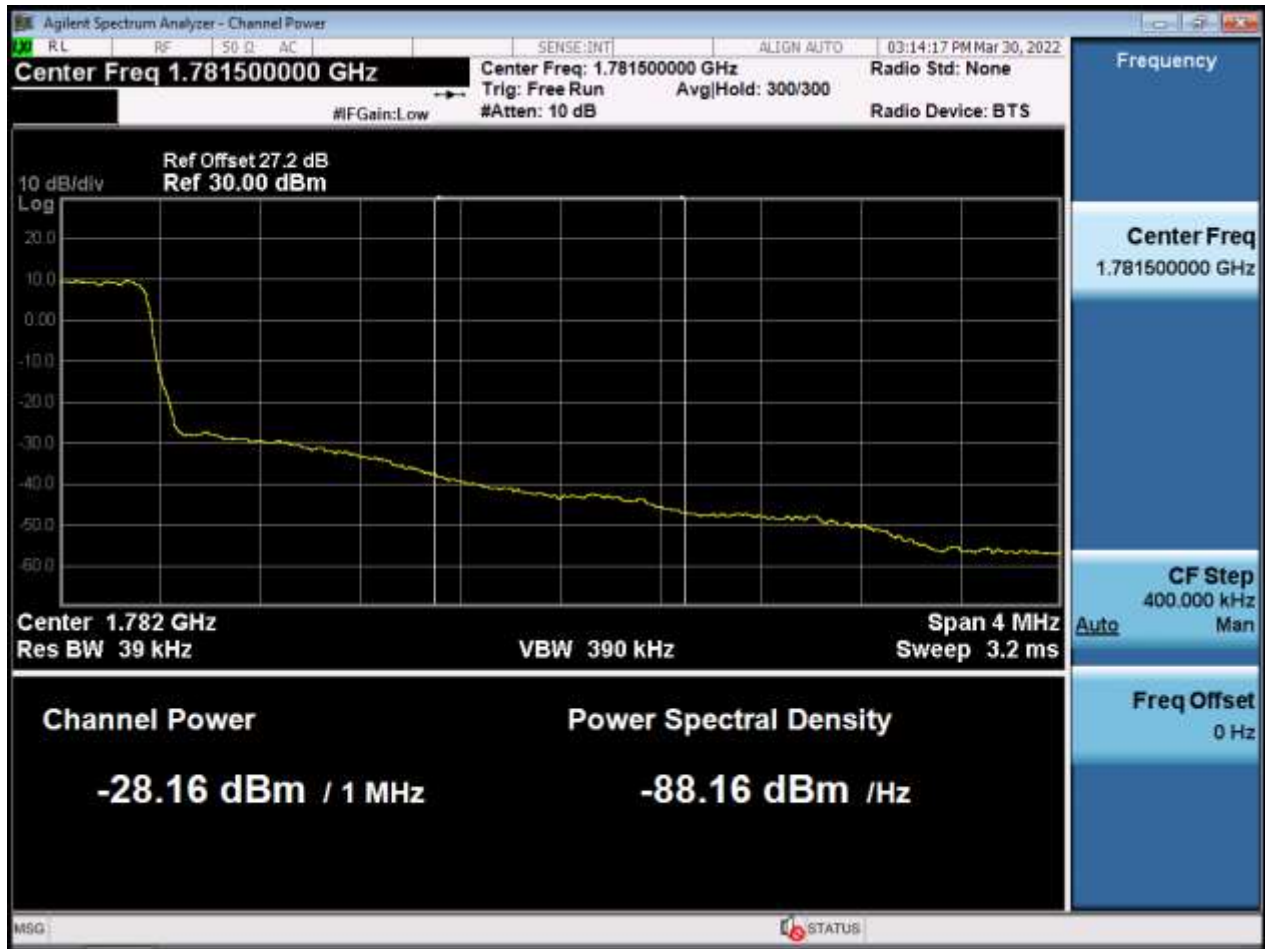

BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB




BW1.4 M_BandEdge_Highest Channel_QPSK_1RB



BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

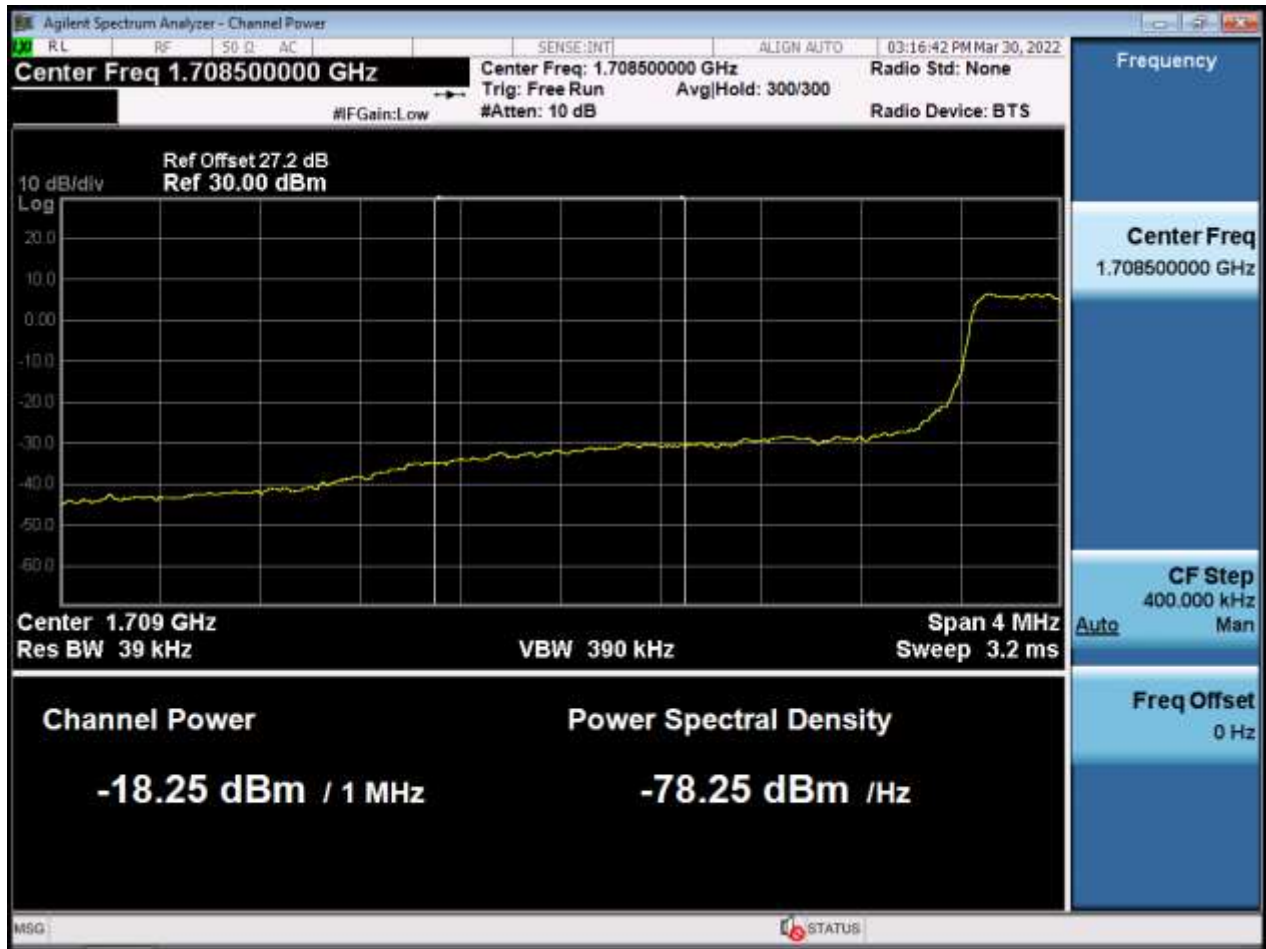

BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

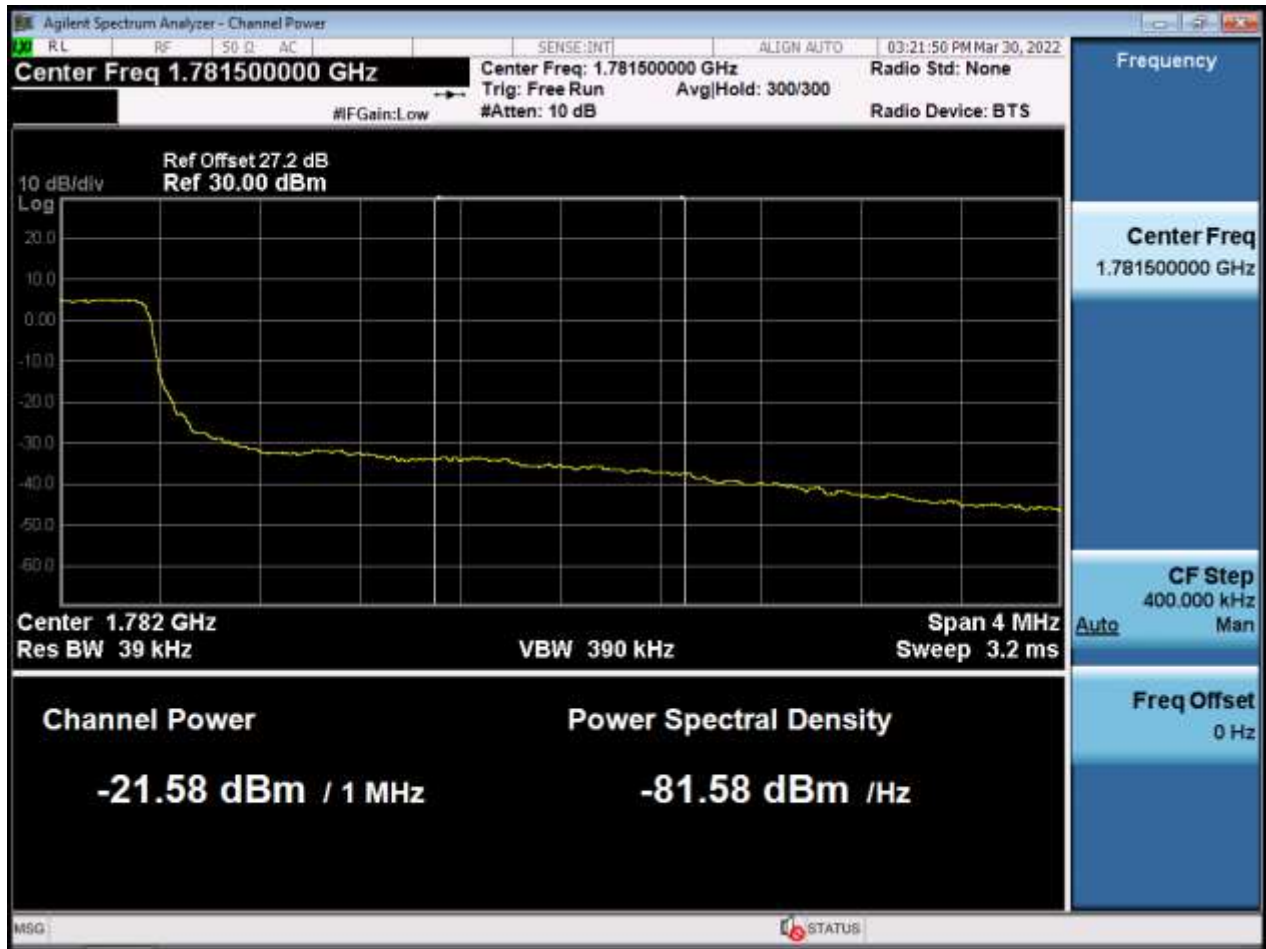


BW3 M_BandEdge_Highest Channel_QPSK_1RB



BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)



BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

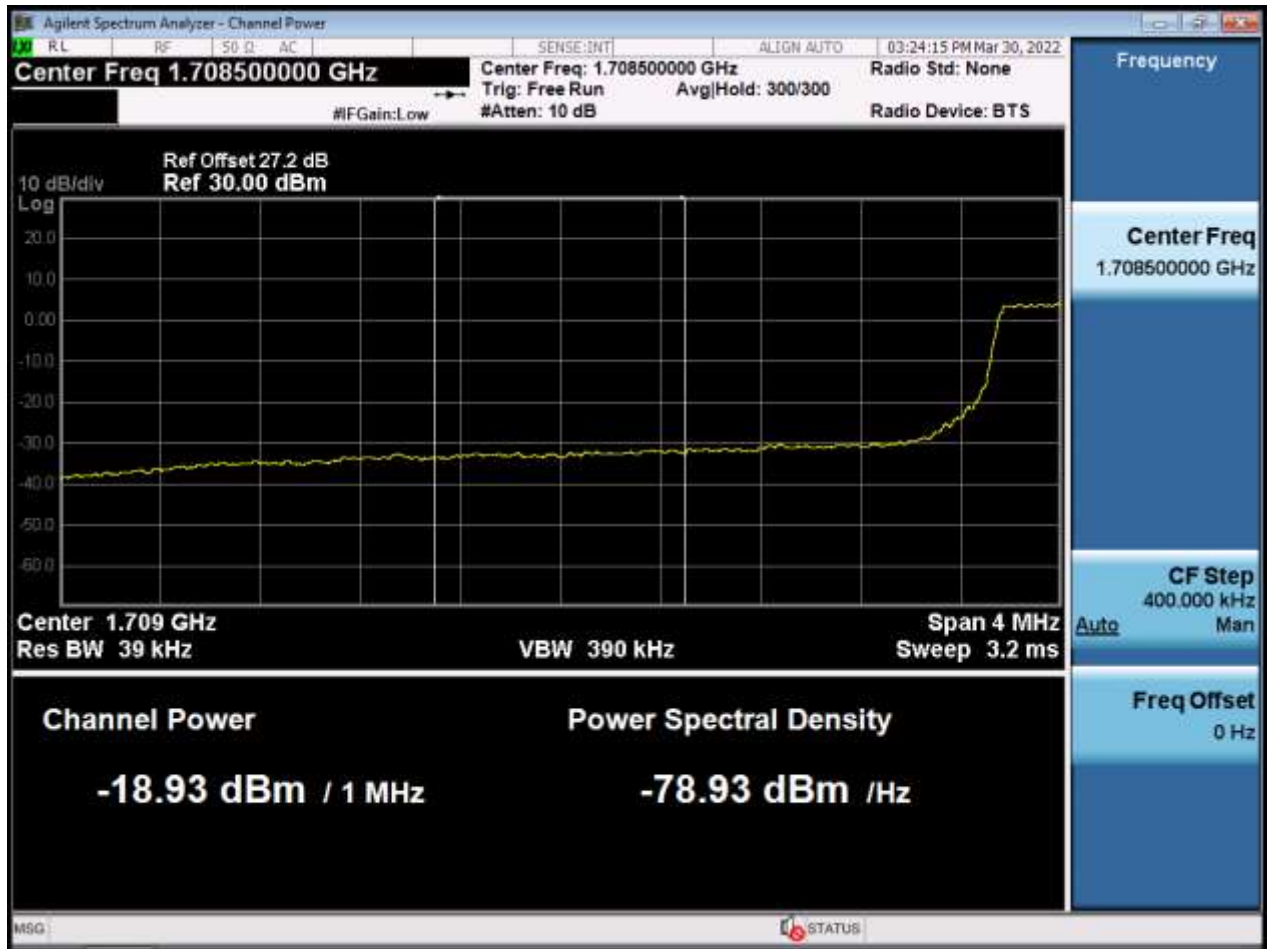

BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW5 M_BandEdge_Lowest Channel_QPSK_1RB




BW5 M_BandEdge_Highest Channel_QPSK_1RB

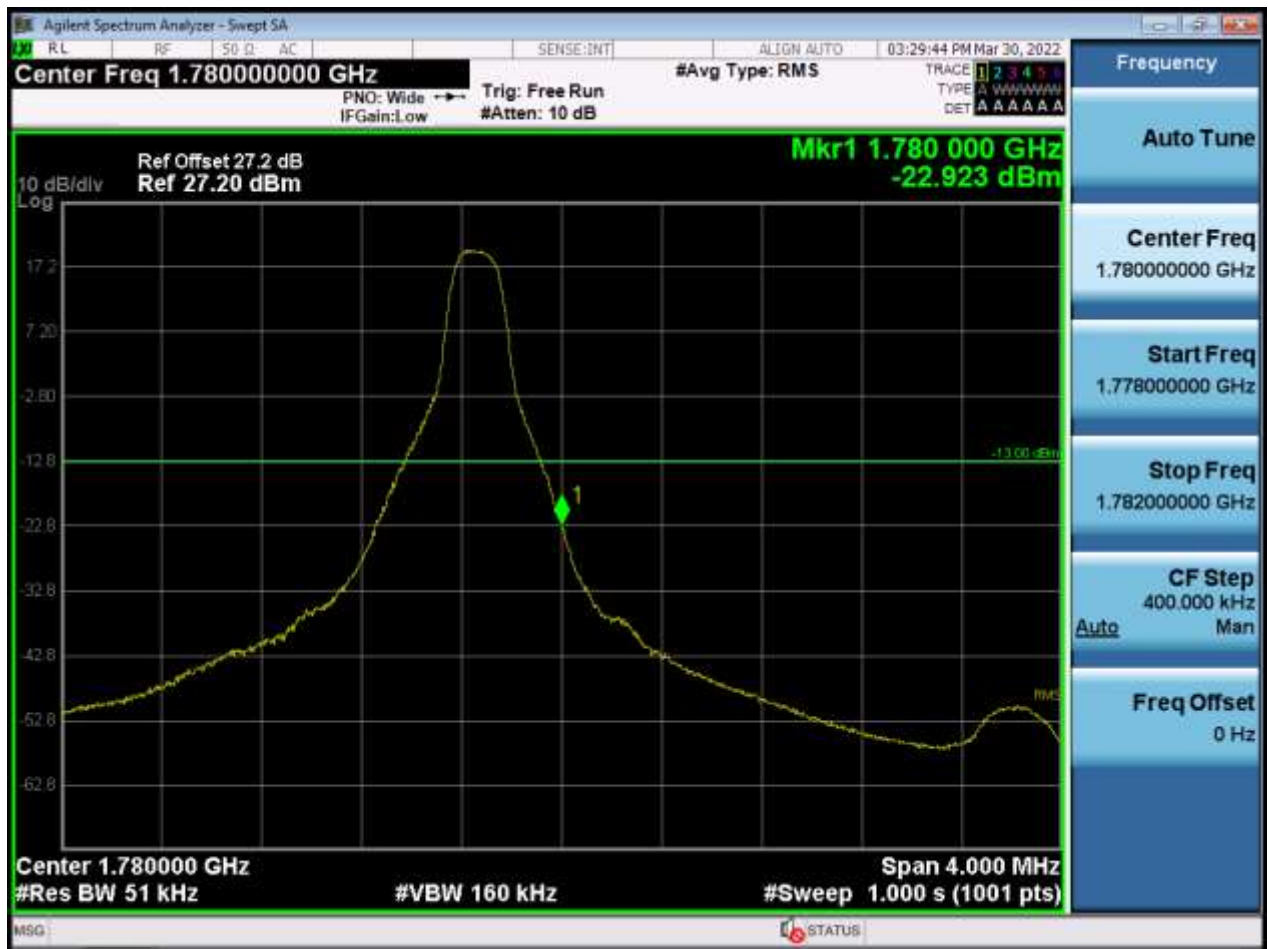

BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

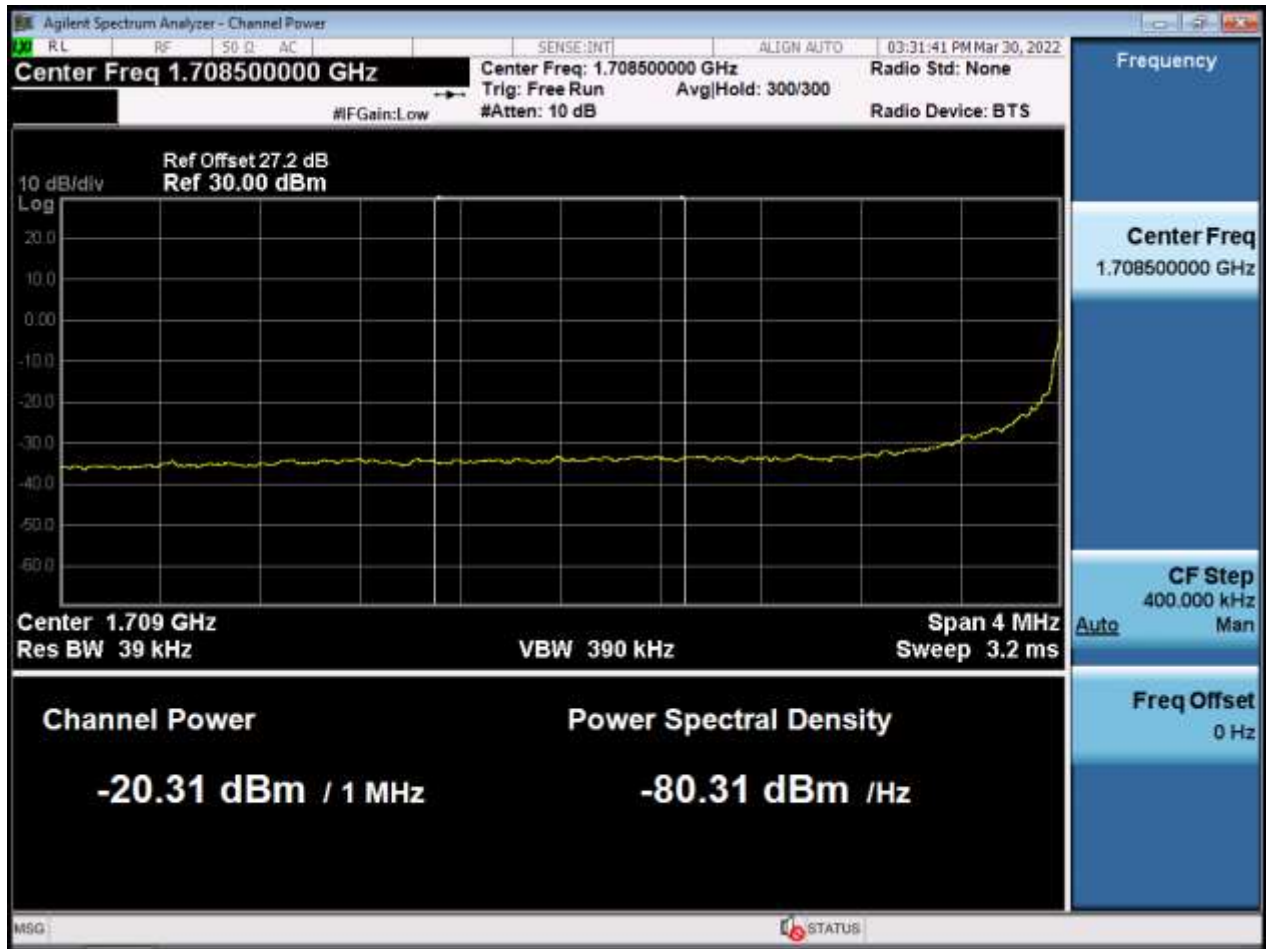

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

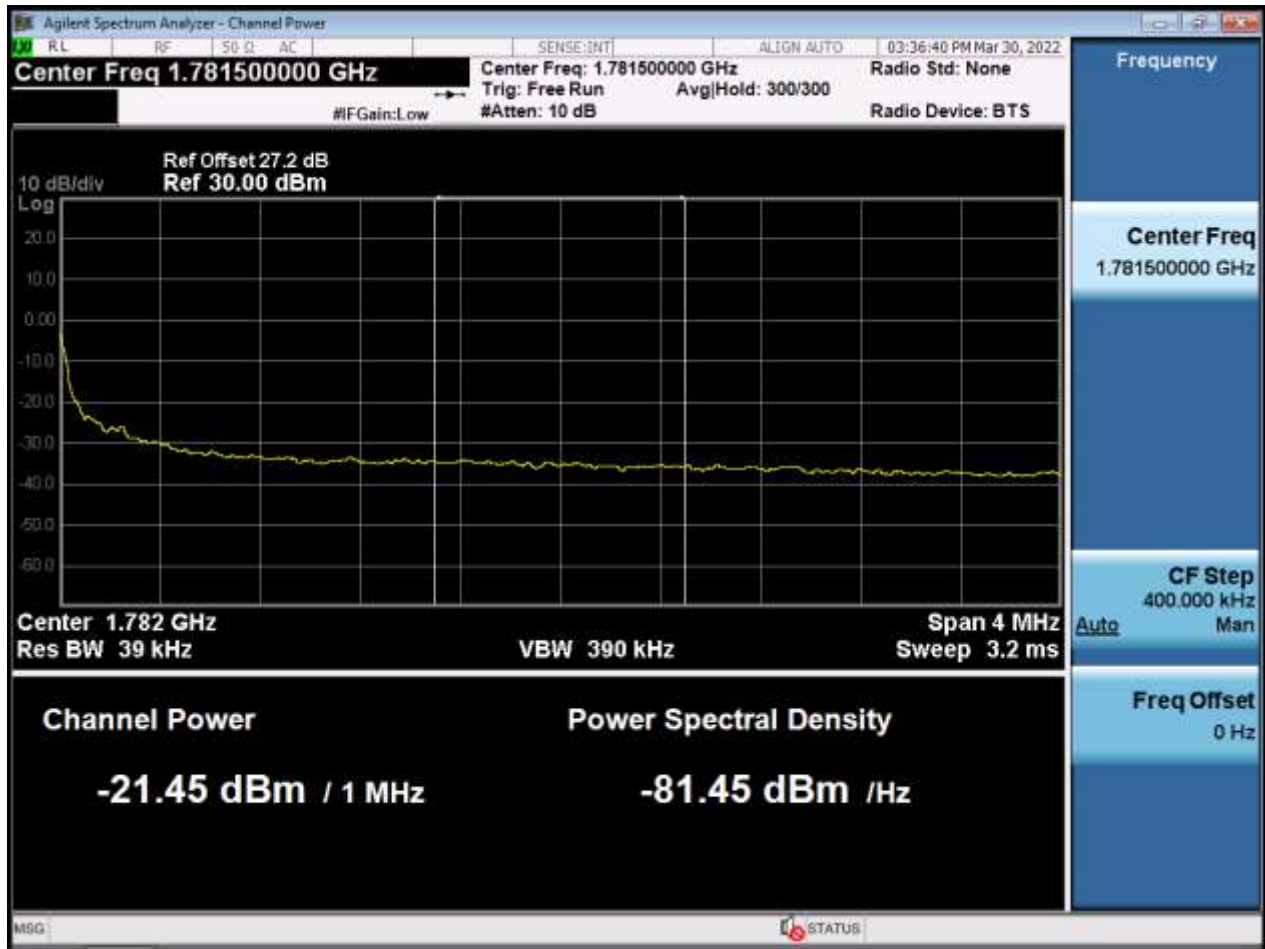

BW10 M_BandEdge_Lowest Channel_QPSK_1RB




BW10 M_BandEdge_Highest Channel_QPSK_1RB



BW15 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW15 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

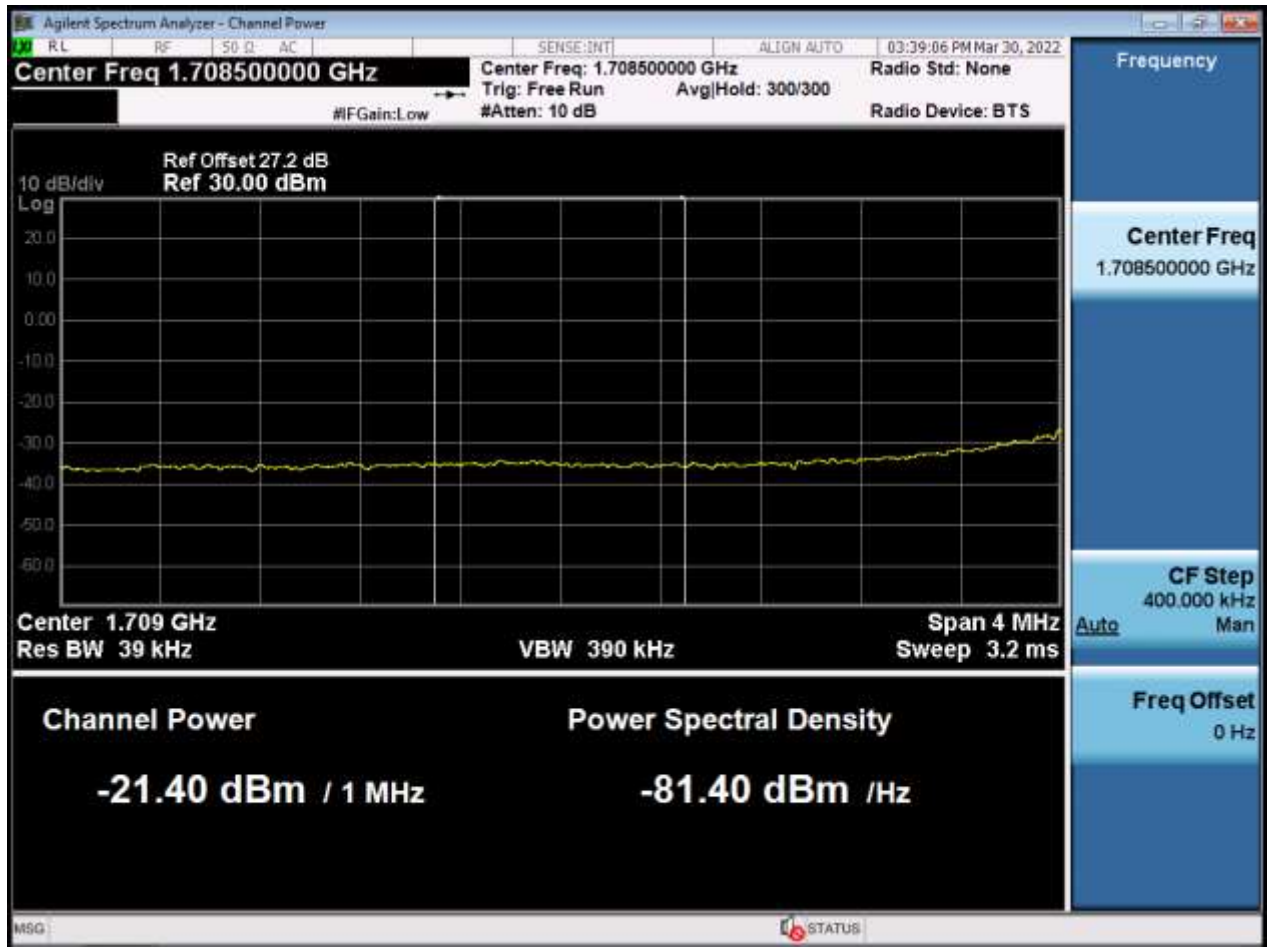

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

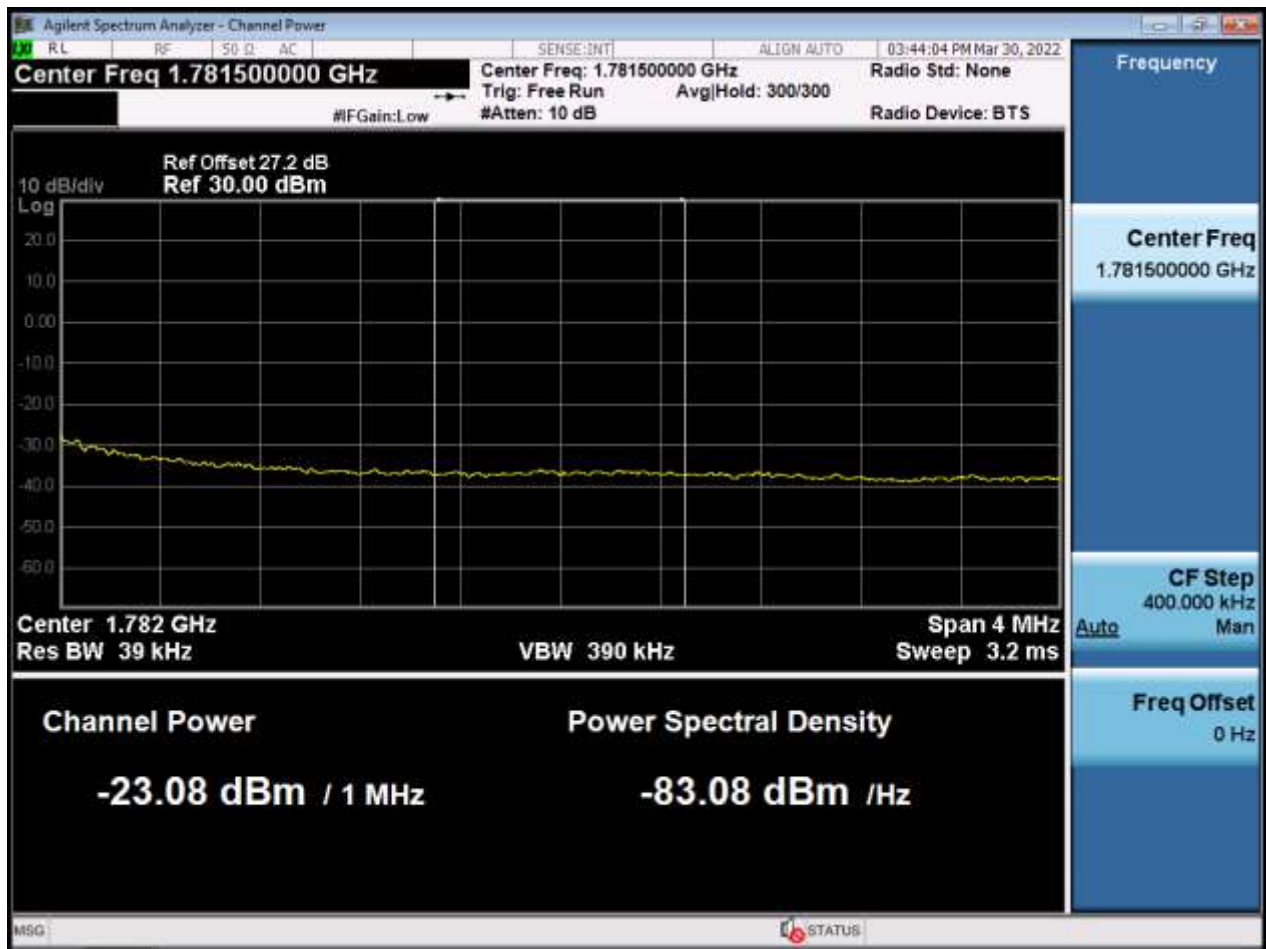

BW15 M_BandEdge_Lowest Channel_QPSK_1RB



BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)




BW20 M_BandEdge_Lowest Channel_QPSK_1RB




BW20 M_BandEdge_Highest Channel_QPSK_1RB




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

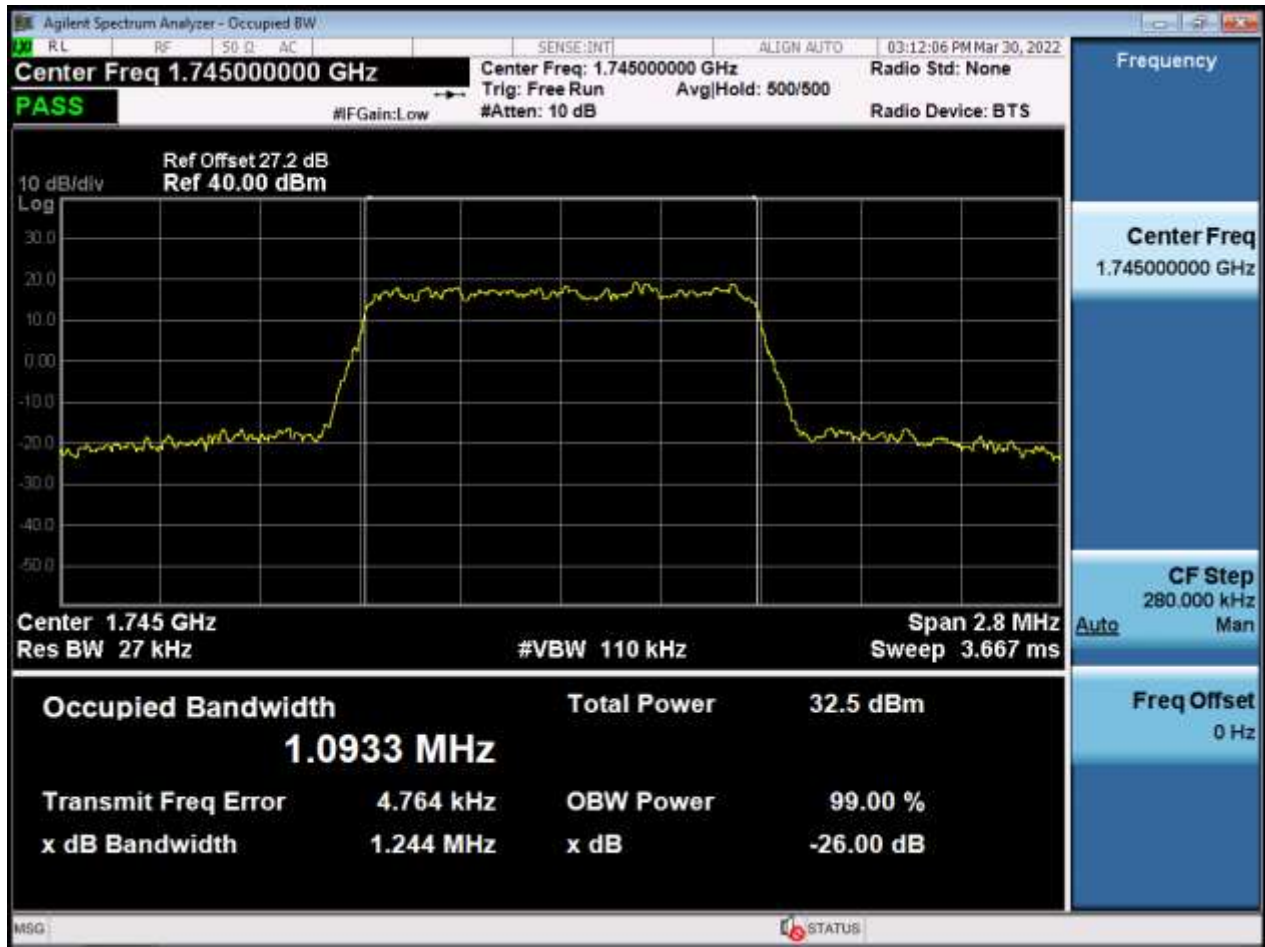


BW1.4 M_OBW_Middle Channel_16QAM_FullRB

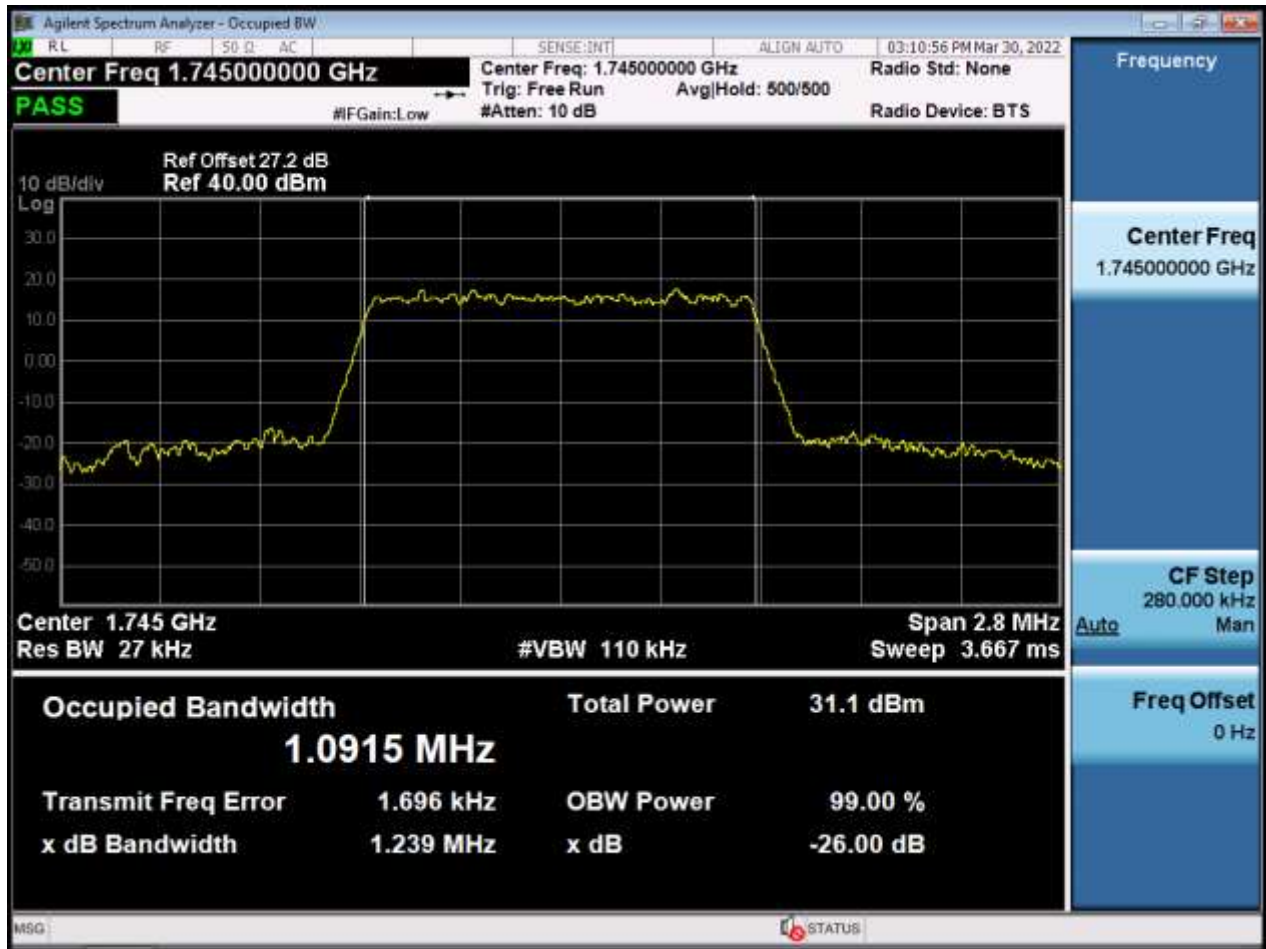


BW1.4 M_OBW_Middle Channel_64QAM_FullRB

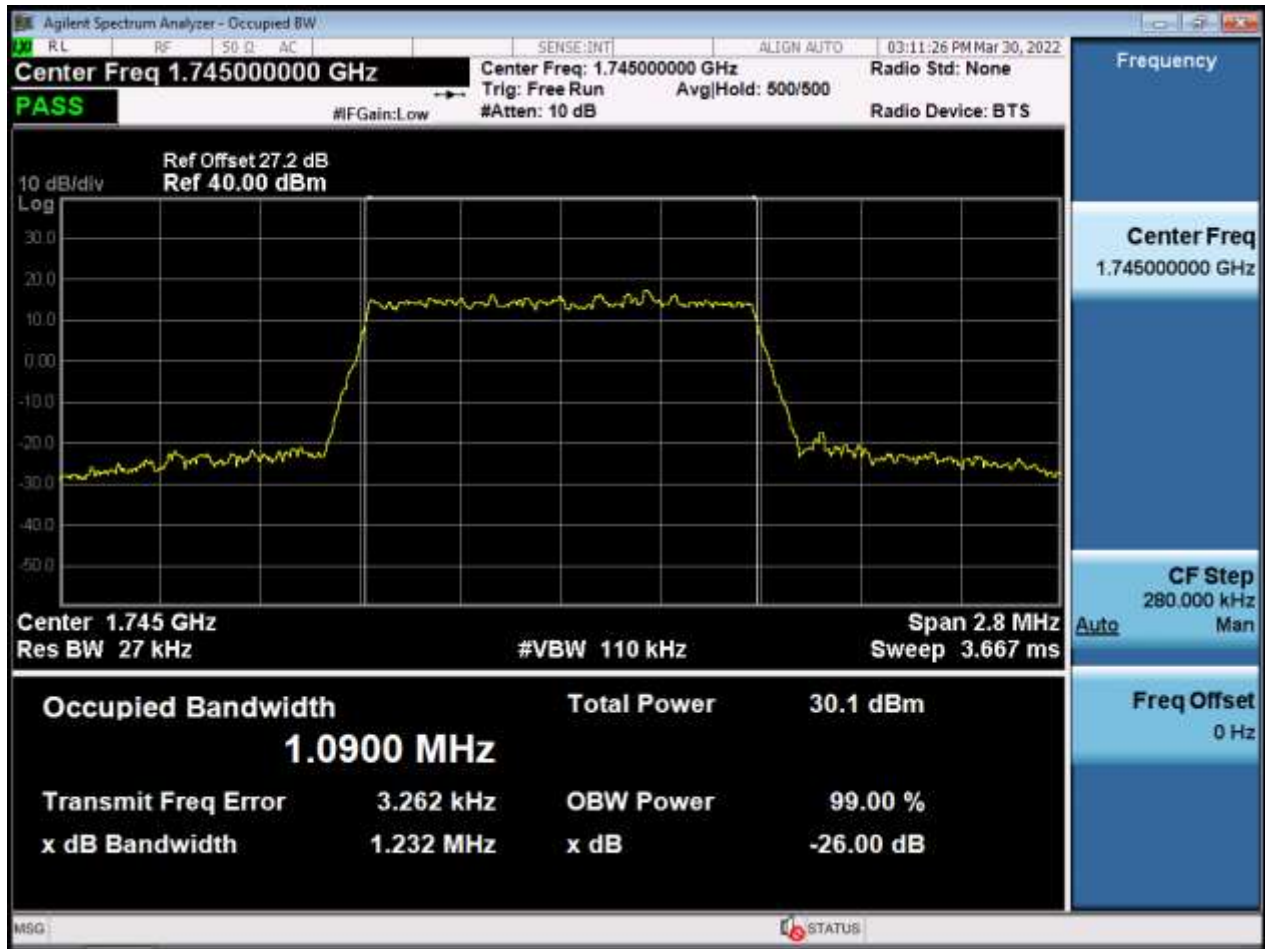


BW1.4 M_OBW_Middle Channel_256QAM_FullRB

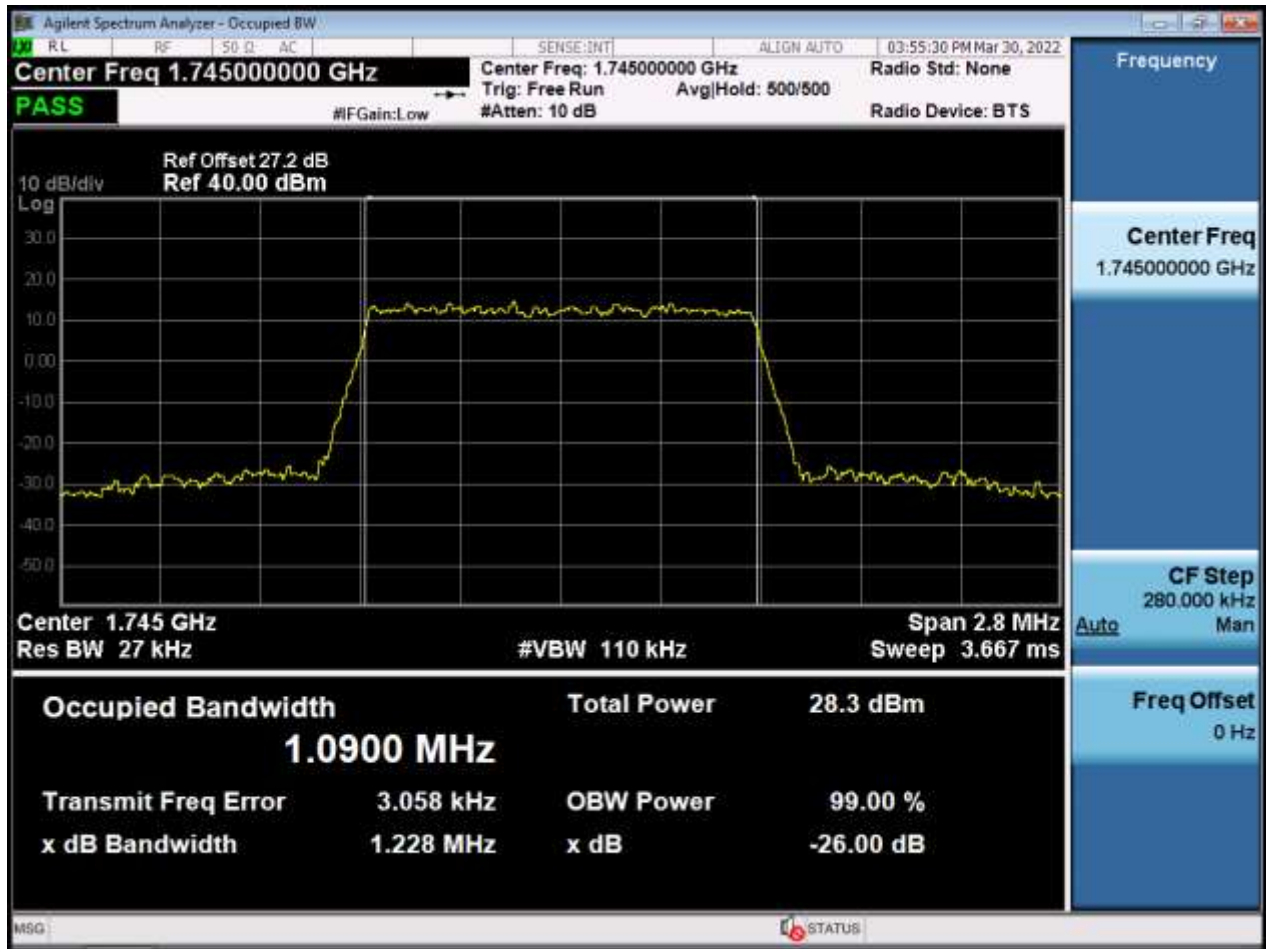


BW3 M_OBW_Middle Channel_QPSK_FullIRB

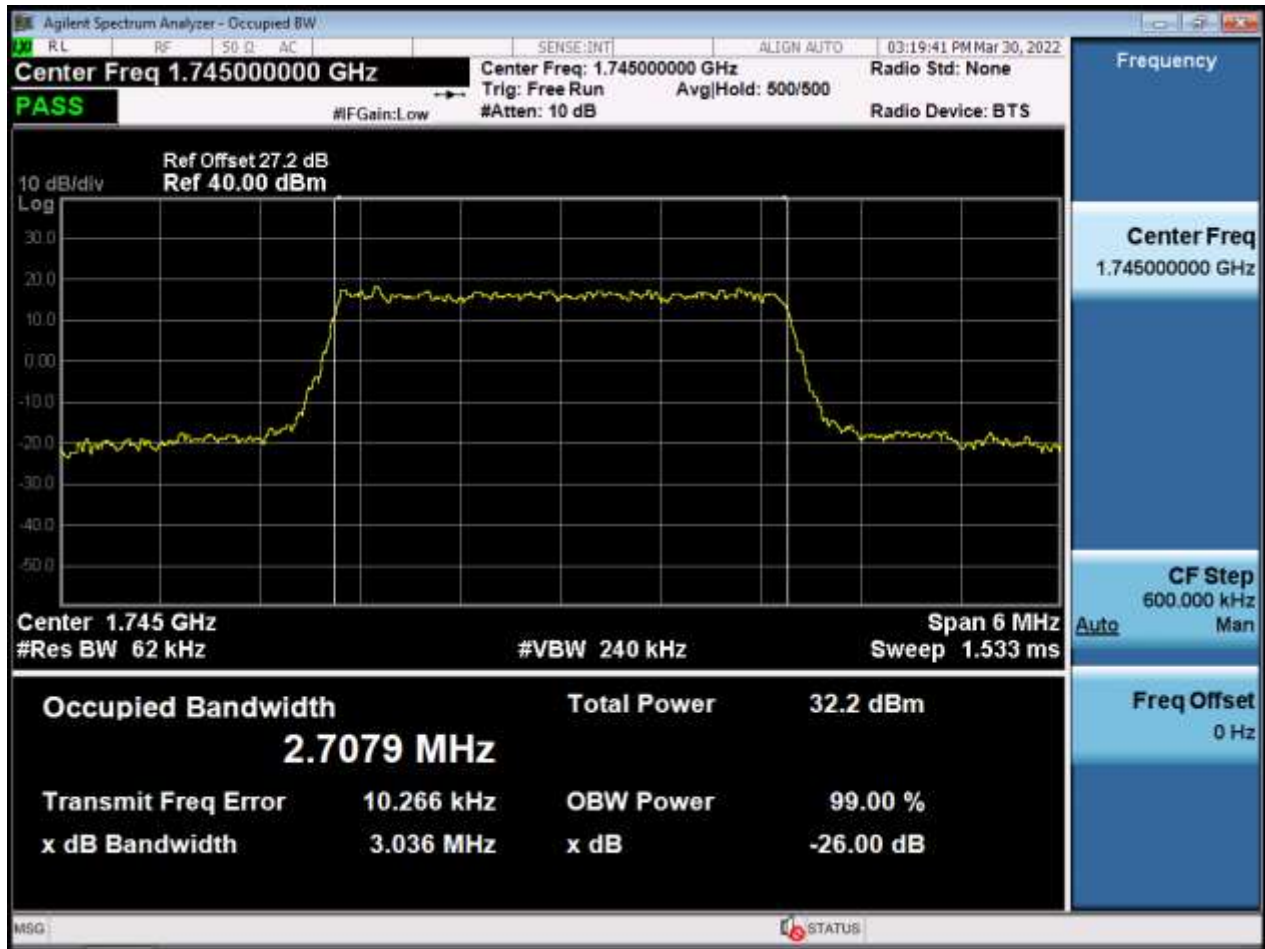


BW3 M_OBW_Middle Channel_16QAM_FullRB

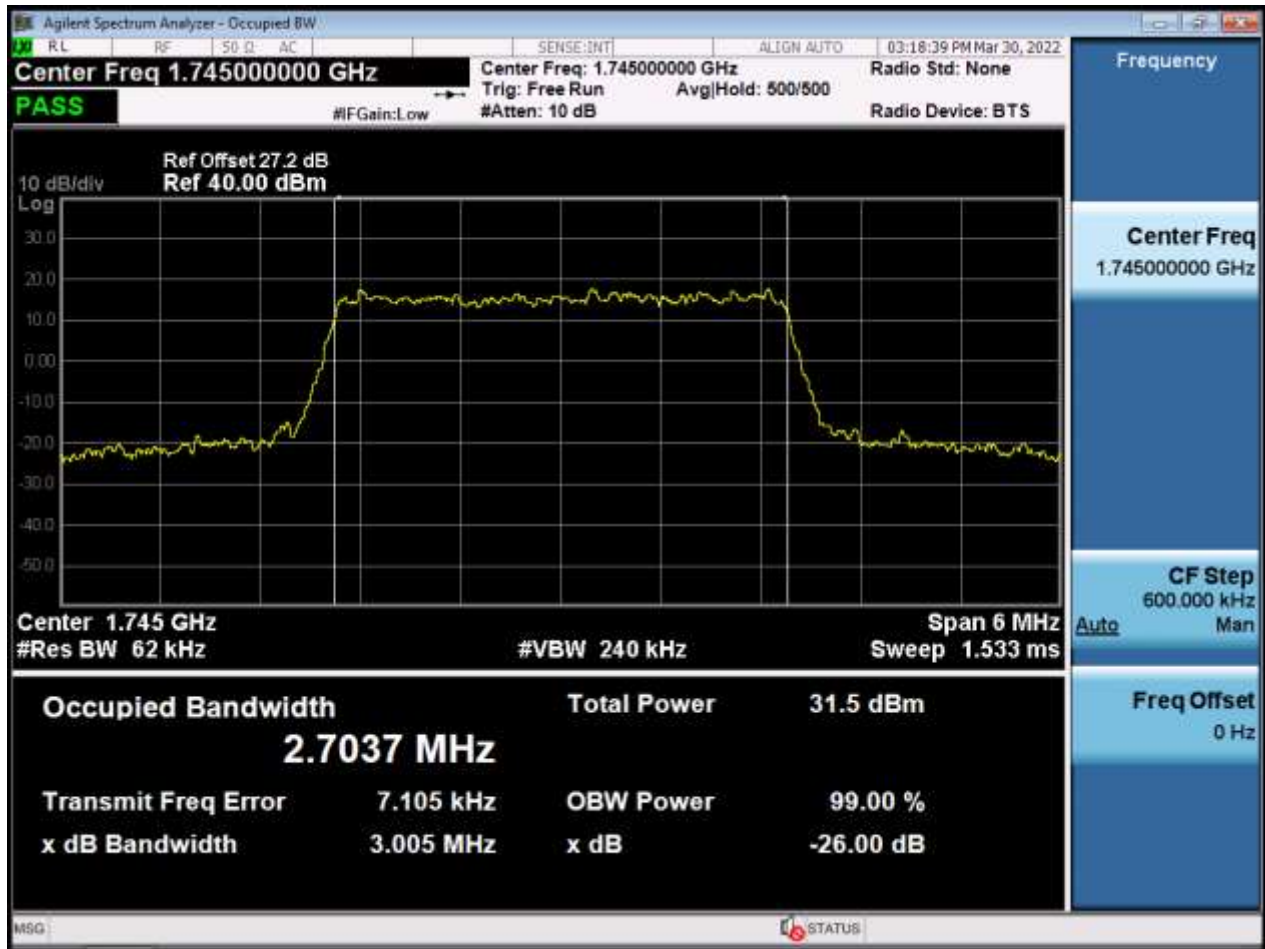


BW3 M_OBW_Middle Channel_64QAM_FullRB

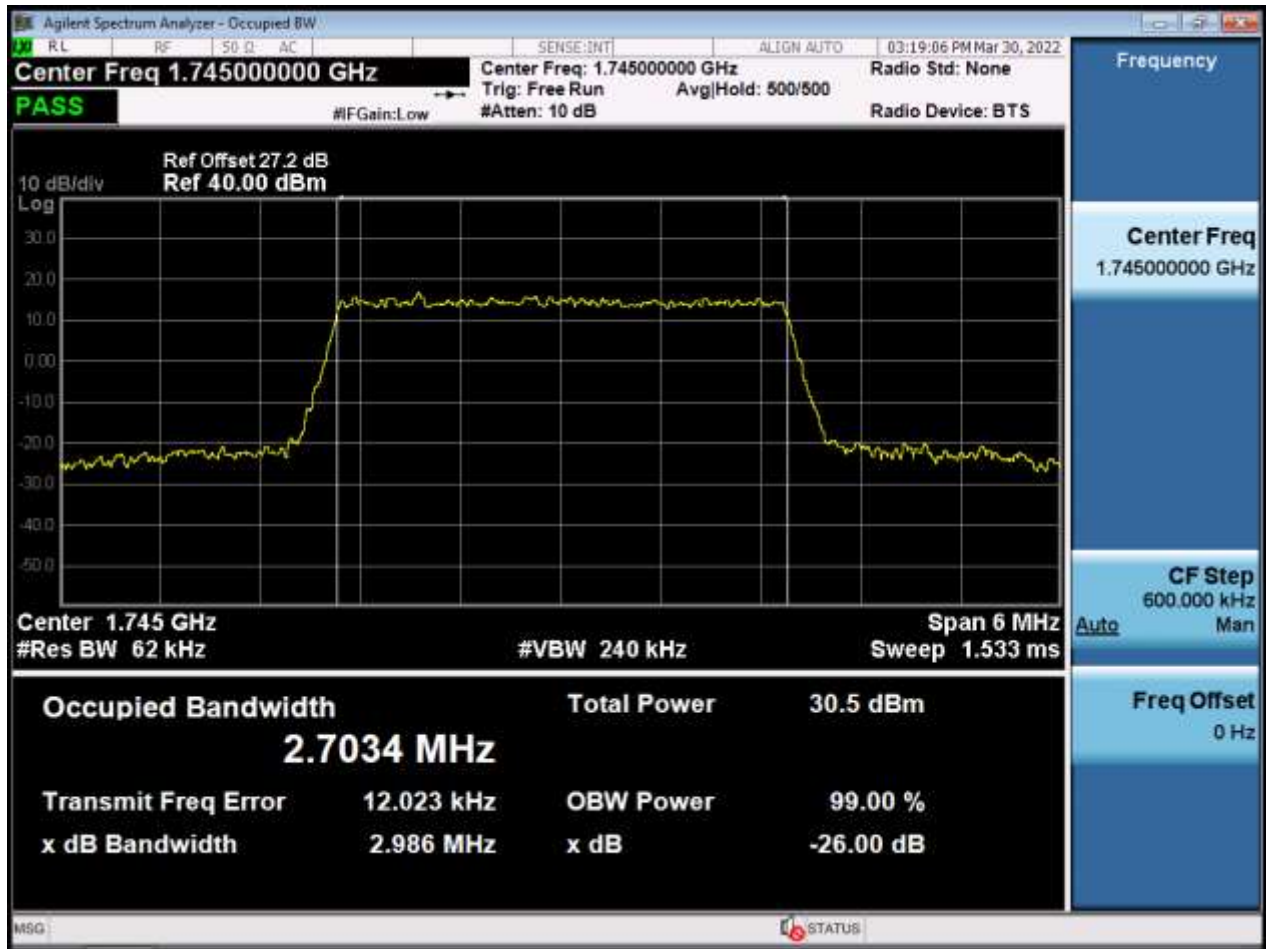


BW3 M_OBW_Middle Channel_256QAM_FullRB

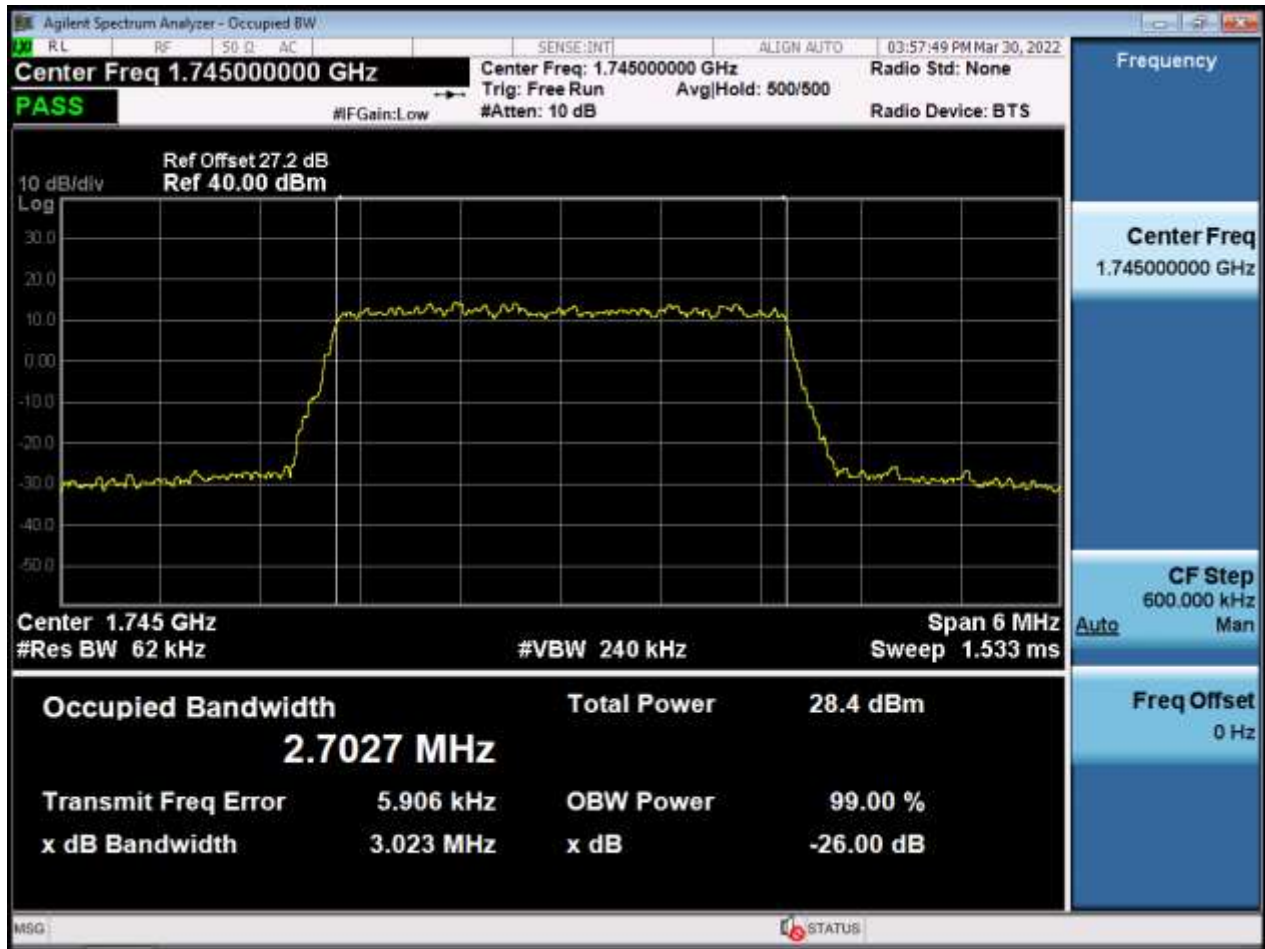


BW5 M_OBW_Middle Channel_QPSK_FullRB

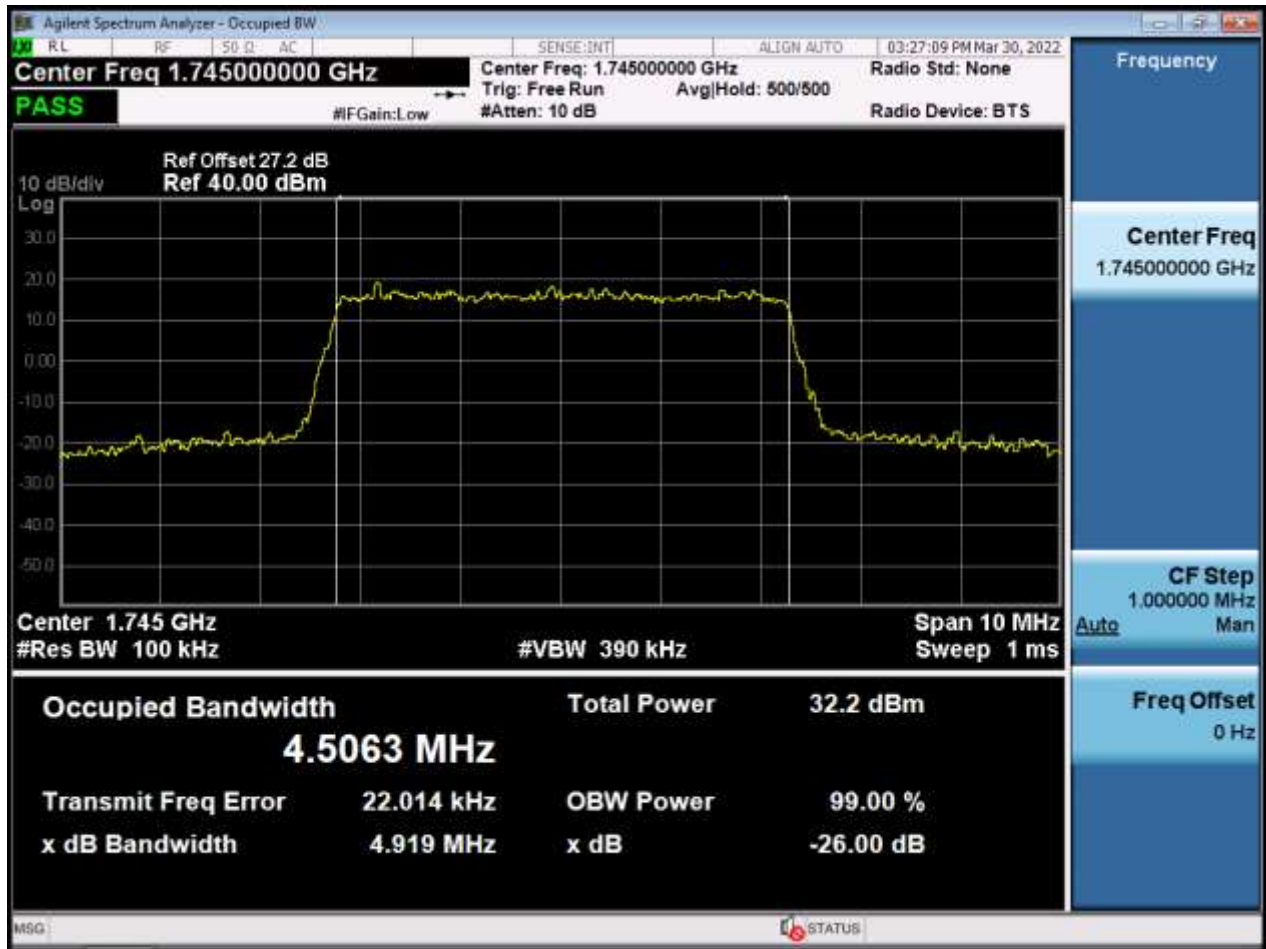


BW5 M_OBW_Middle Channel_16QAM_FullRB

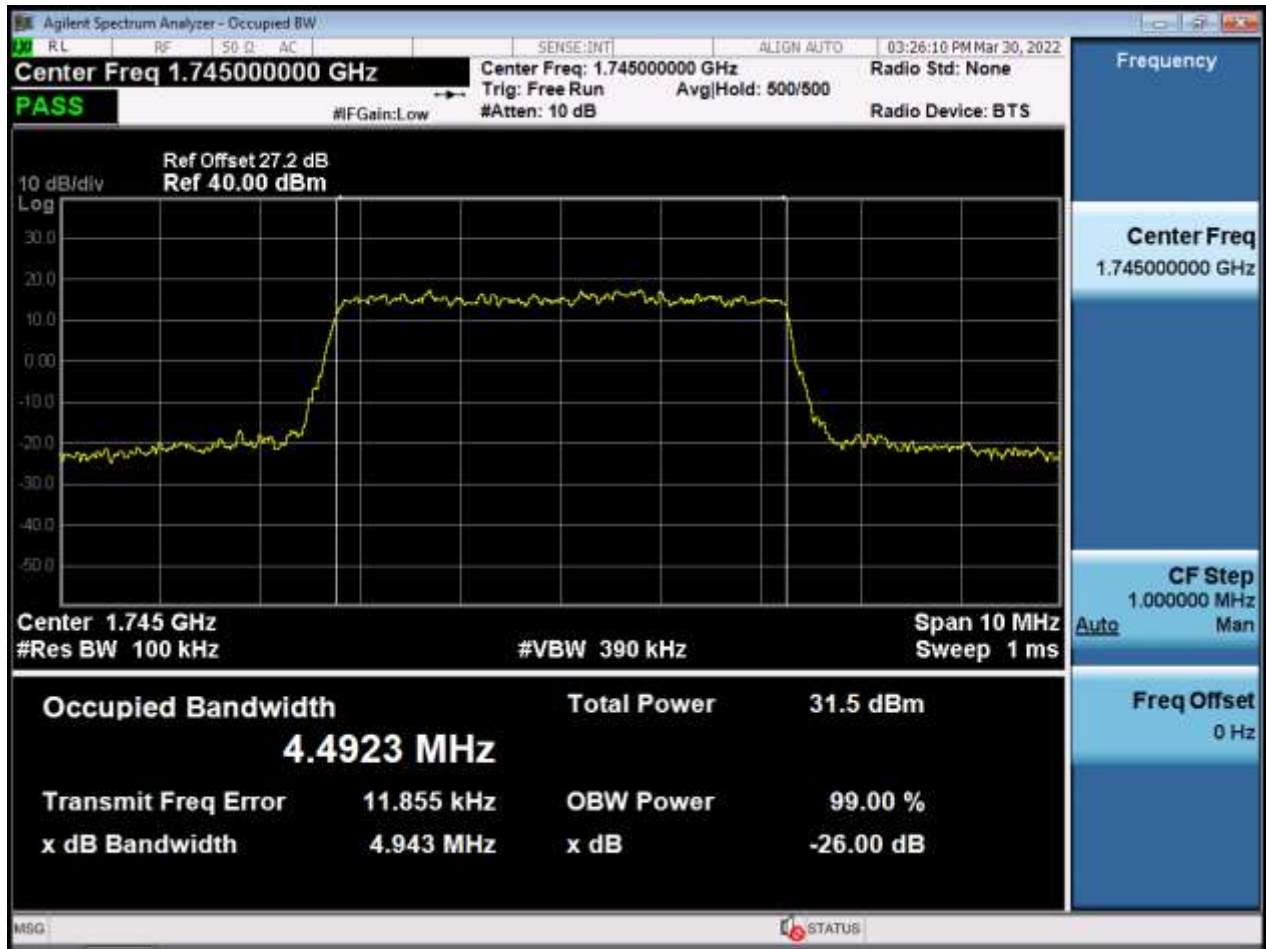


BW5 M_OBW_Middle Channel_64QAM_FullIRB

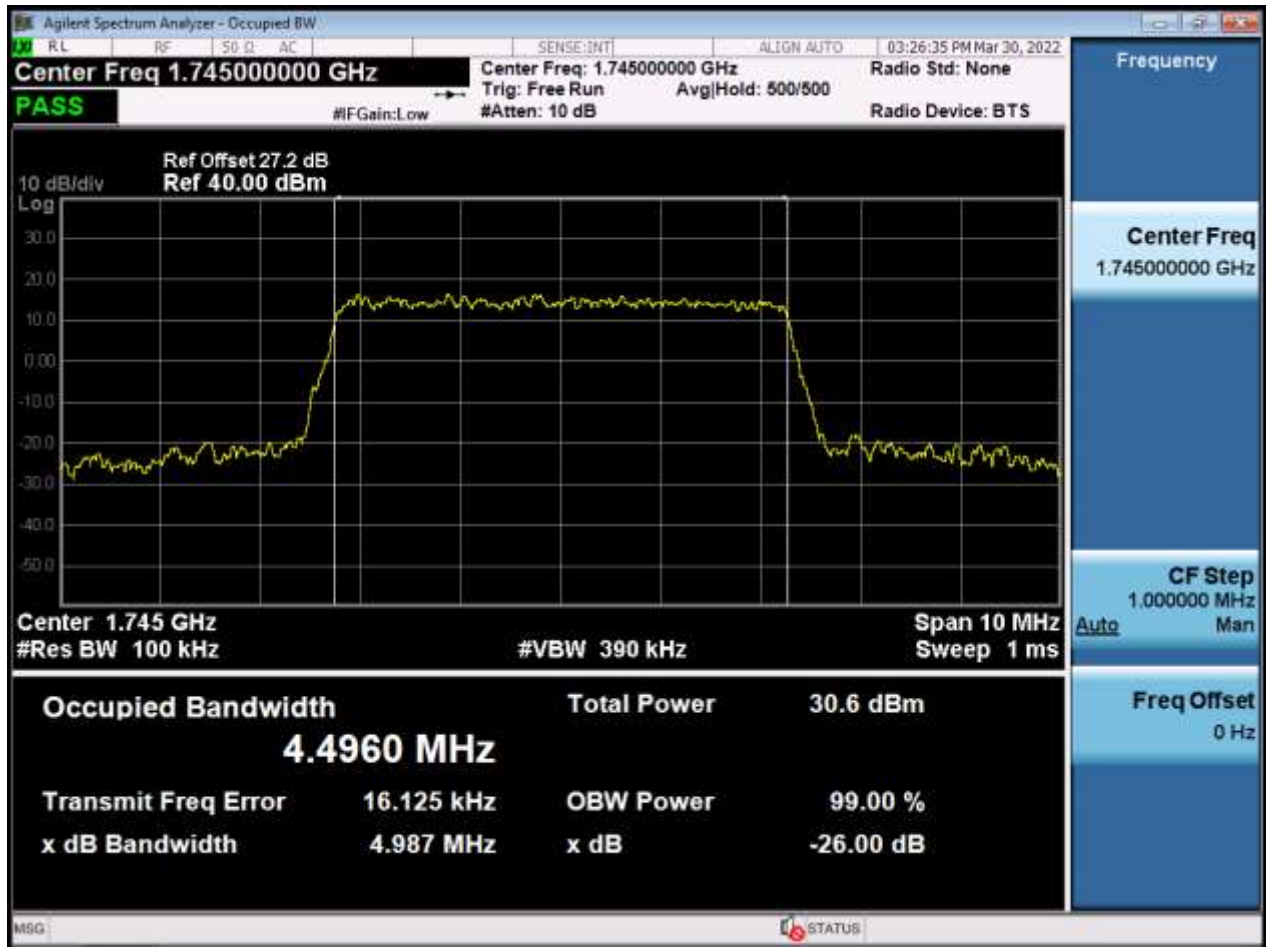


BW5 M_OBW_Middle Channel_256QAM_FullRB

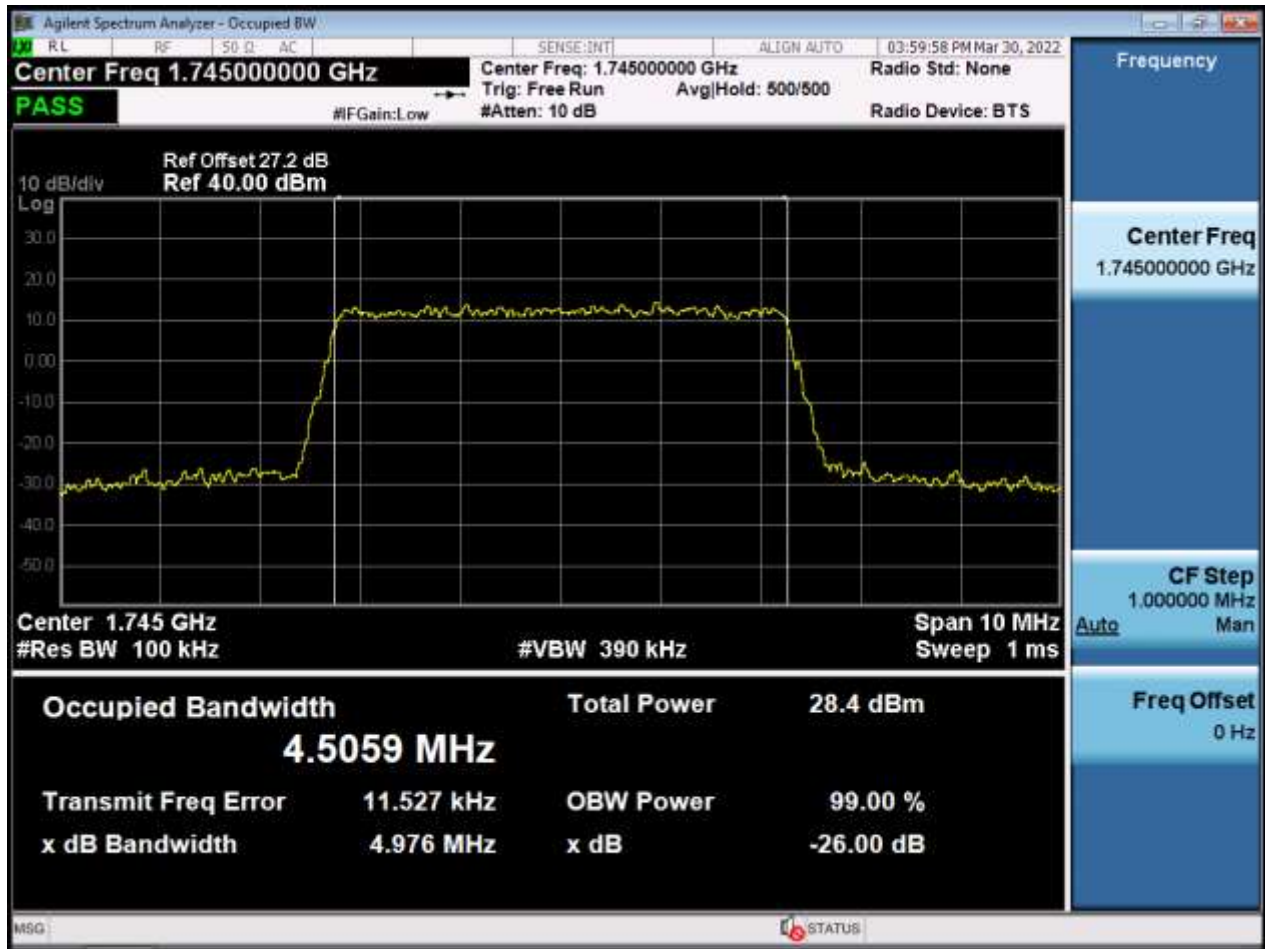


BW10 M_OBW_Middle Channel_QPSK_FullIRB

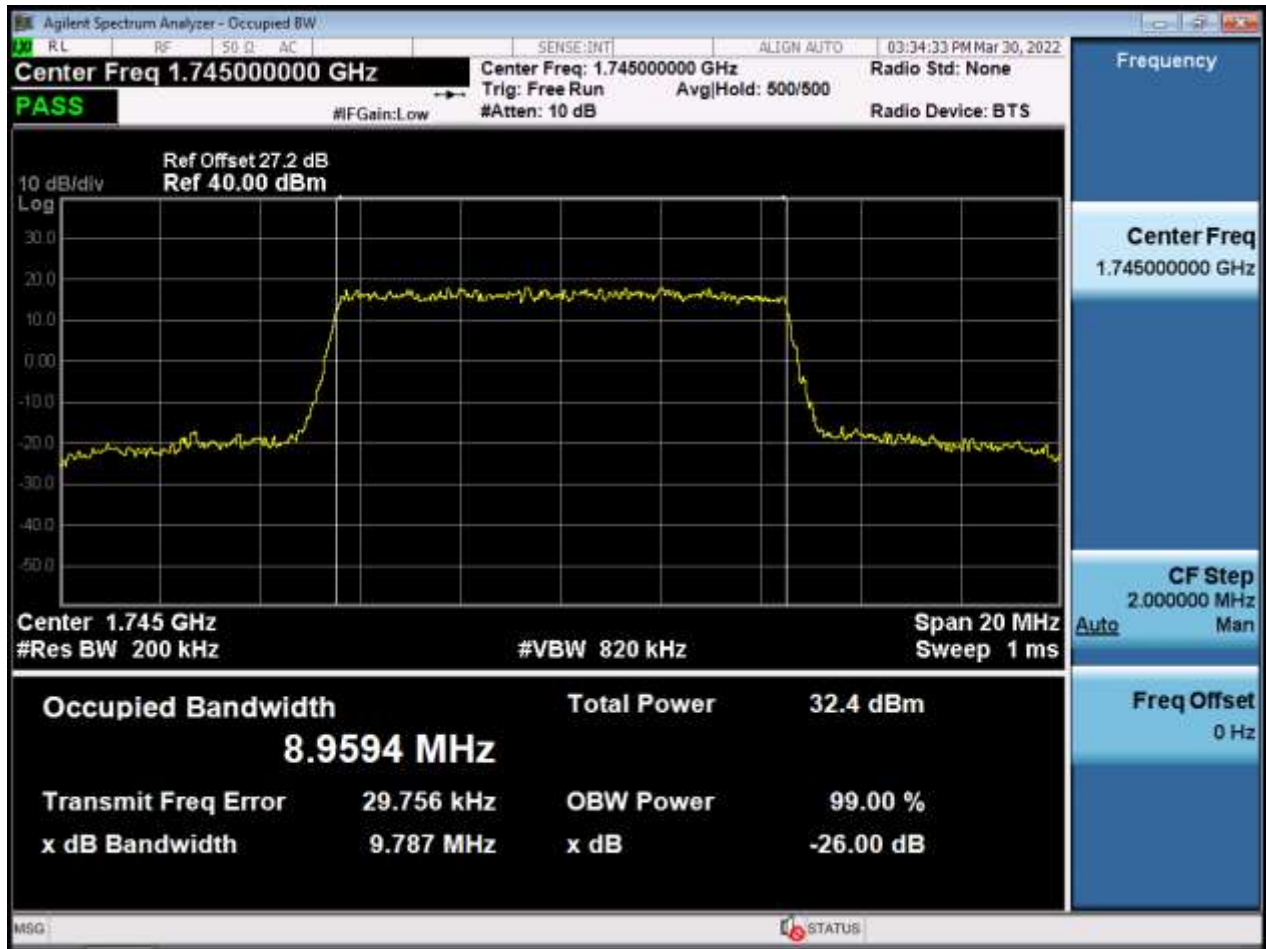


BW10 M_OBW_Middle Channel_16QAM_FullIRB

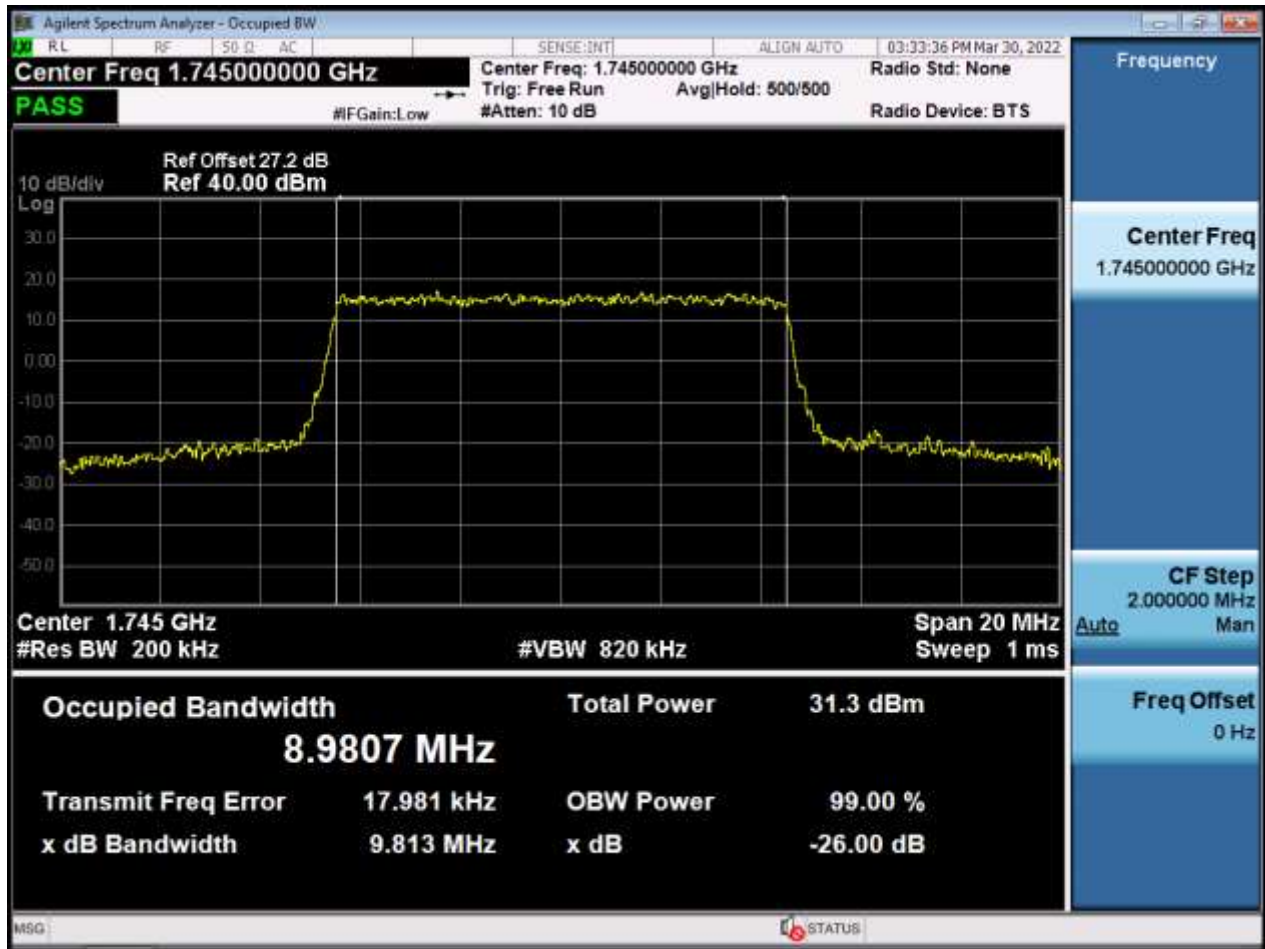


BW10 M_OBW_Middle Channel_64QAM_FullIRB

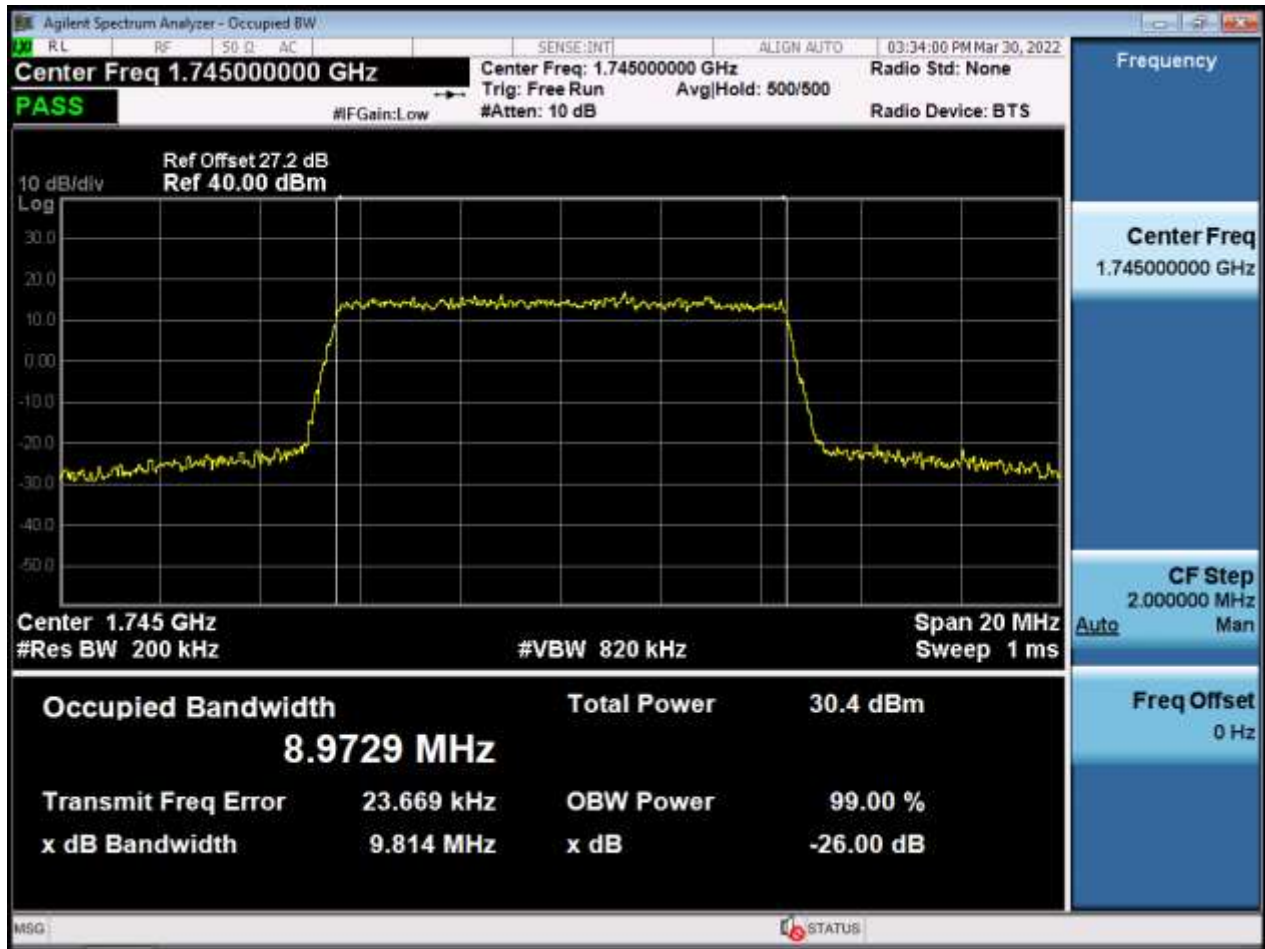


BW10 M_OBW_Middle Channel_256QAM_FullRB

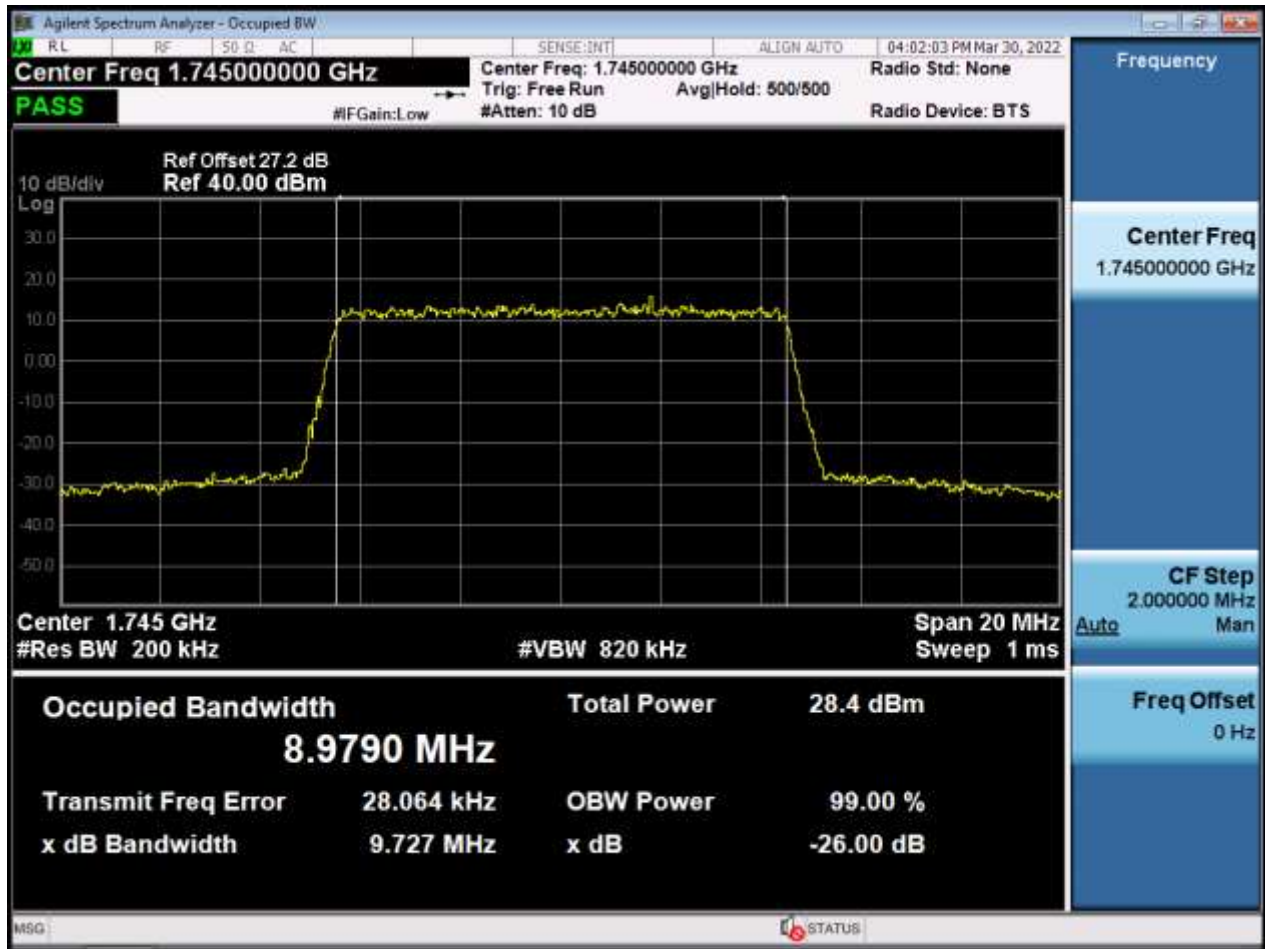


BW15 M_OBW_Middle Channel_QPSK_FullIRB

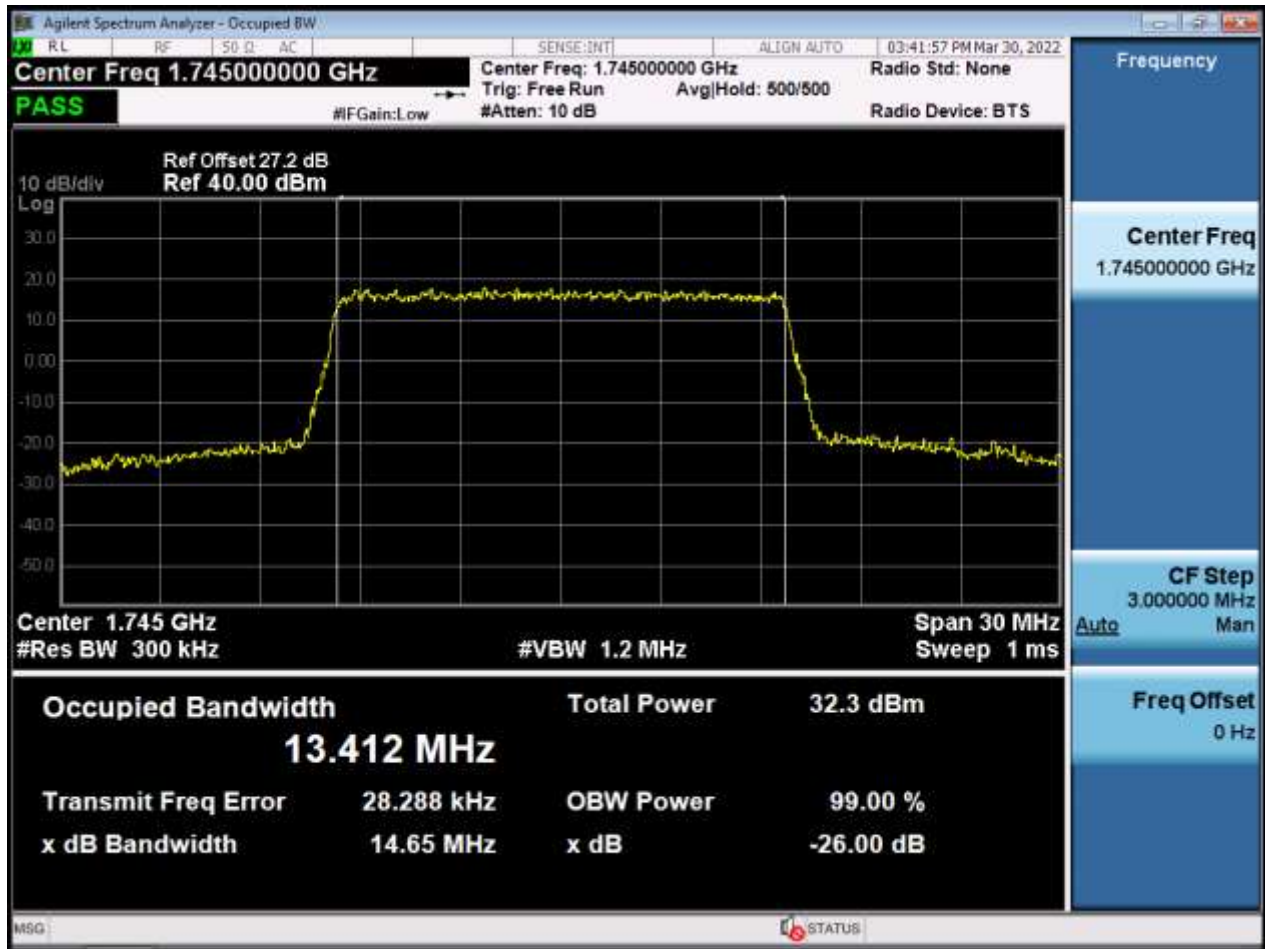


BW15 M_OBW_Middle Channel_16QAM_FullIRB

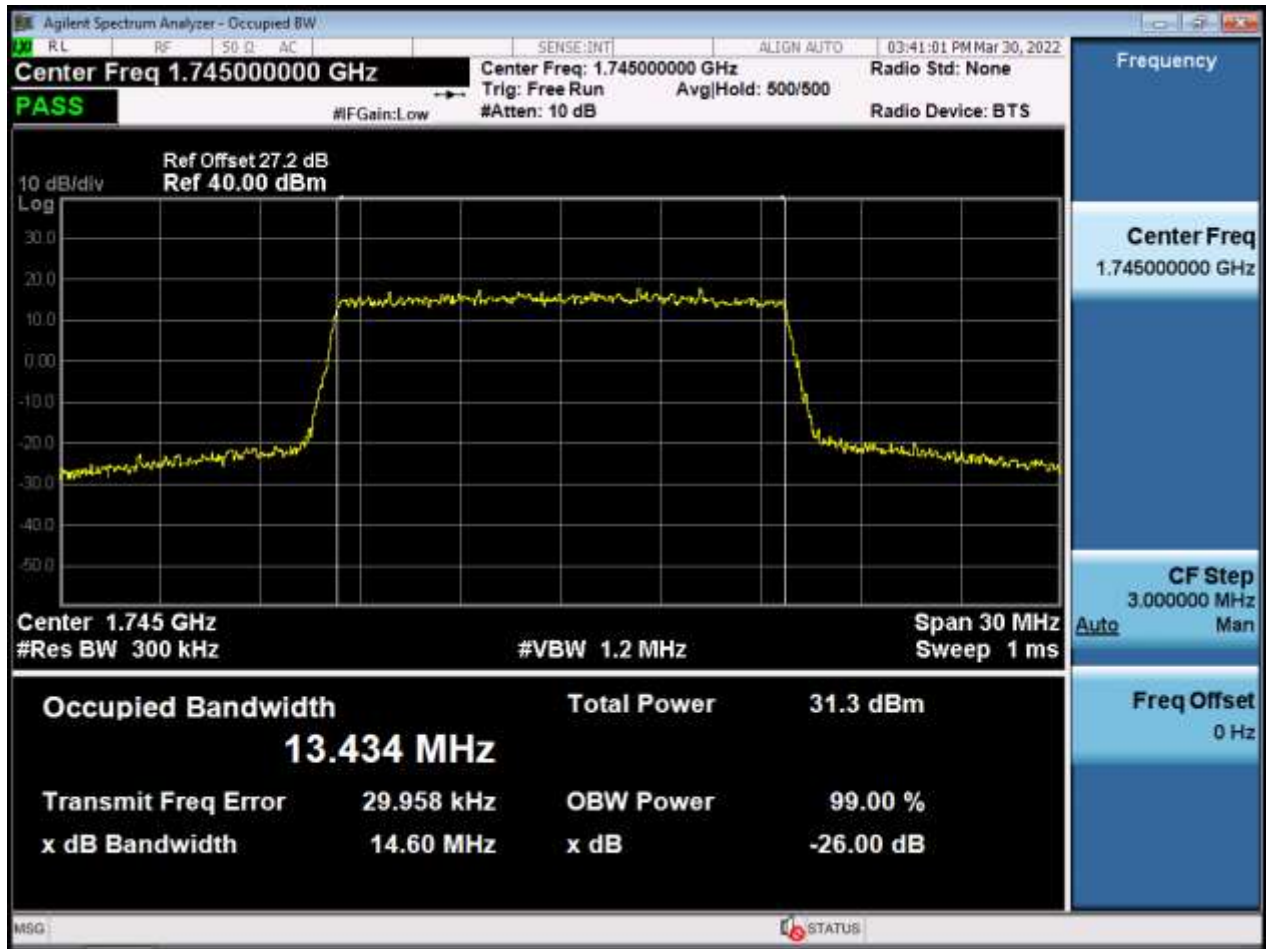


BW15 M_OBW_Middle Channel_64QAM_FullIRB

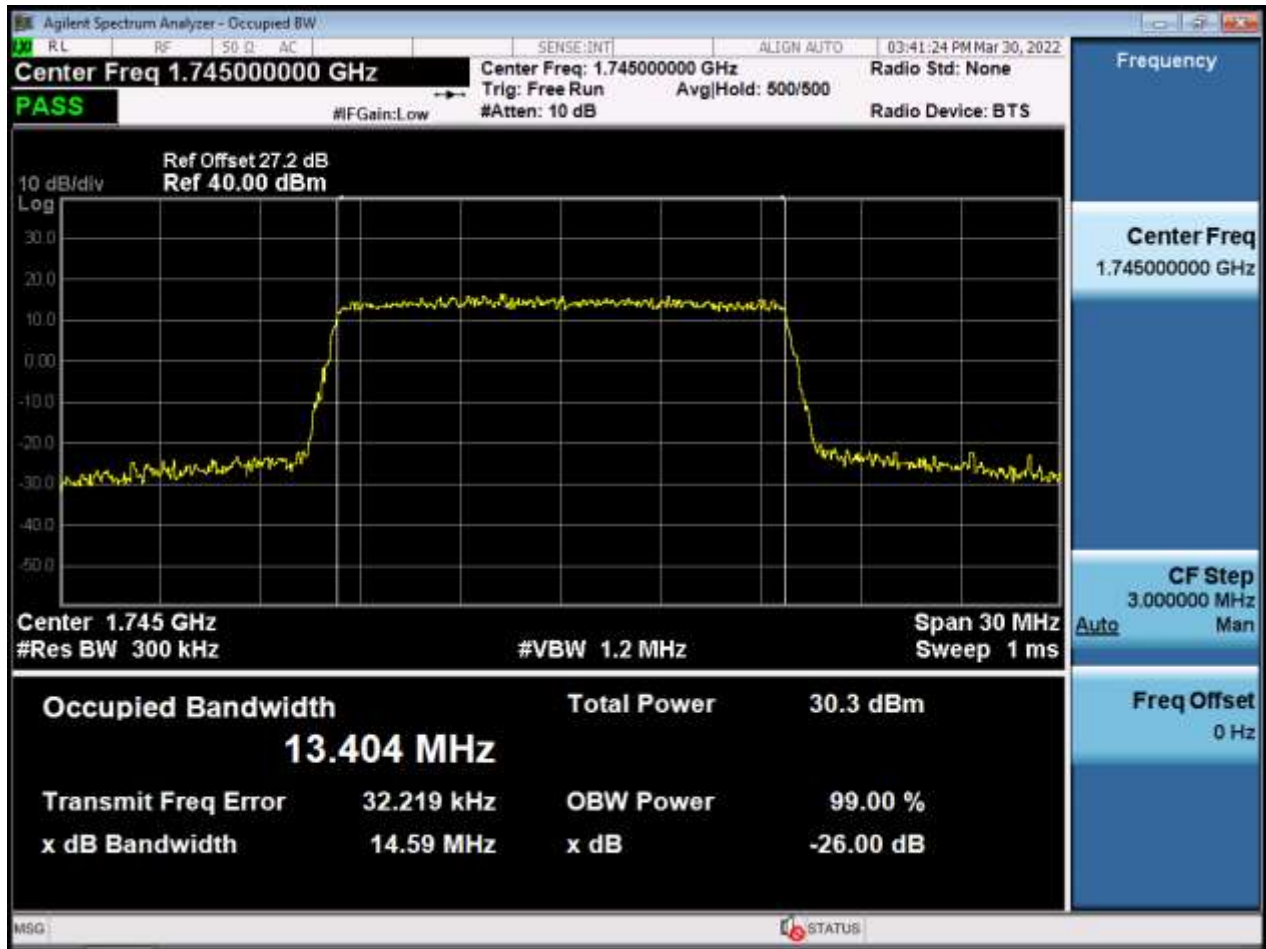


BW15 M_OBW_Middle Channel_256QAM_FullRB

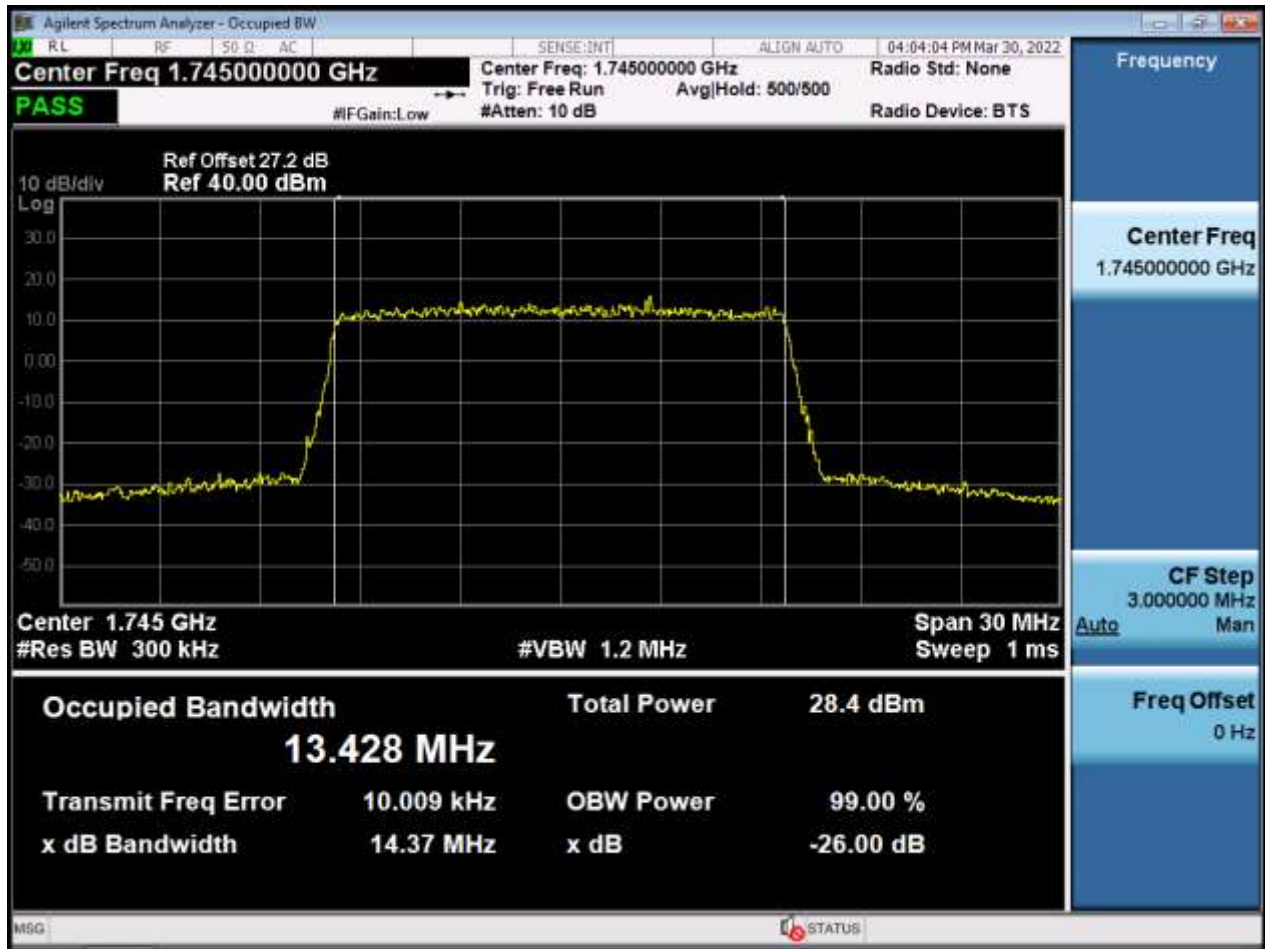


BW20 M_OBW_Middle Channel_QPSK_FullIRB

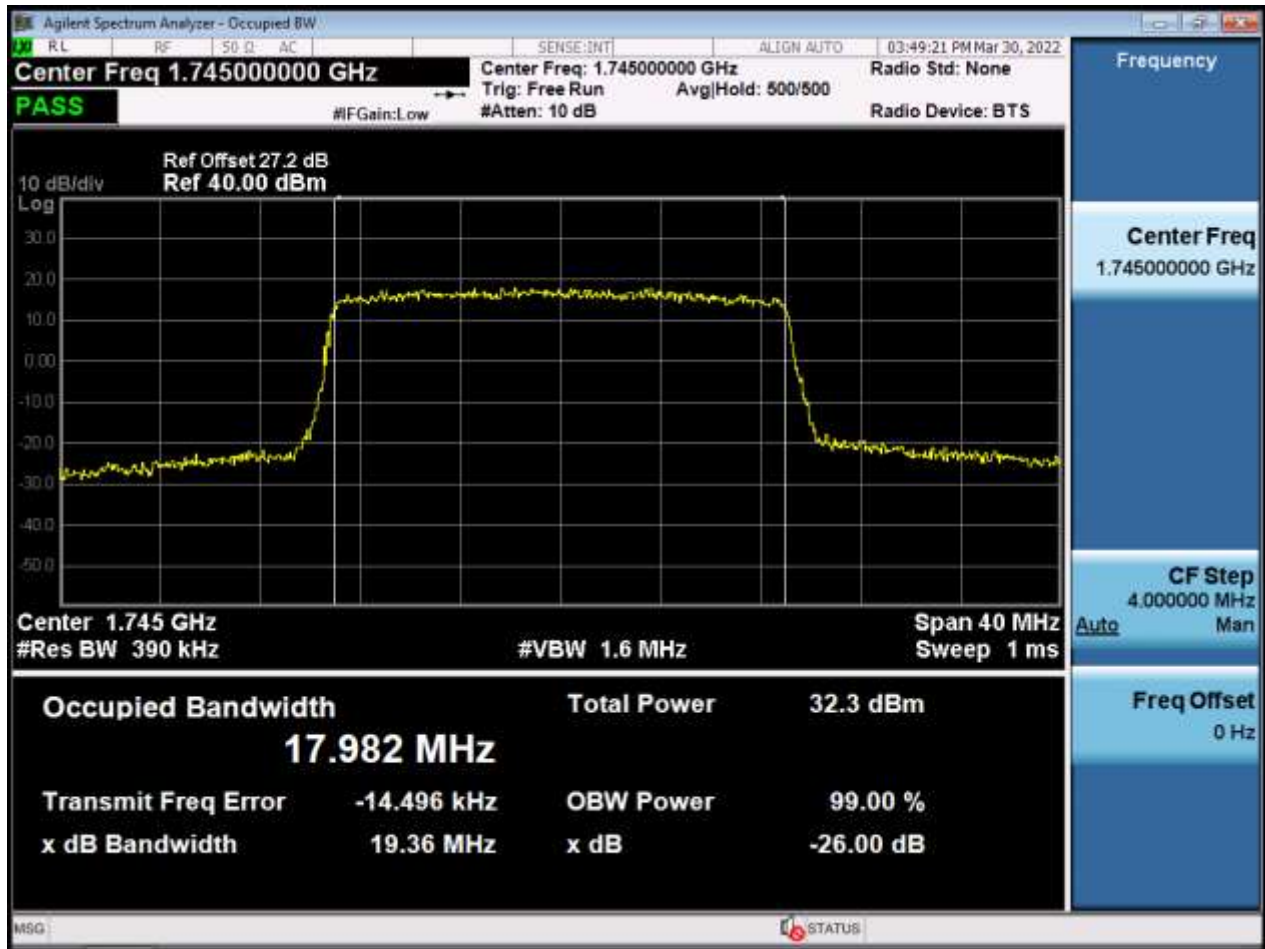


BW20 M_OBW_Middle Channel_16QAM_FullIRB

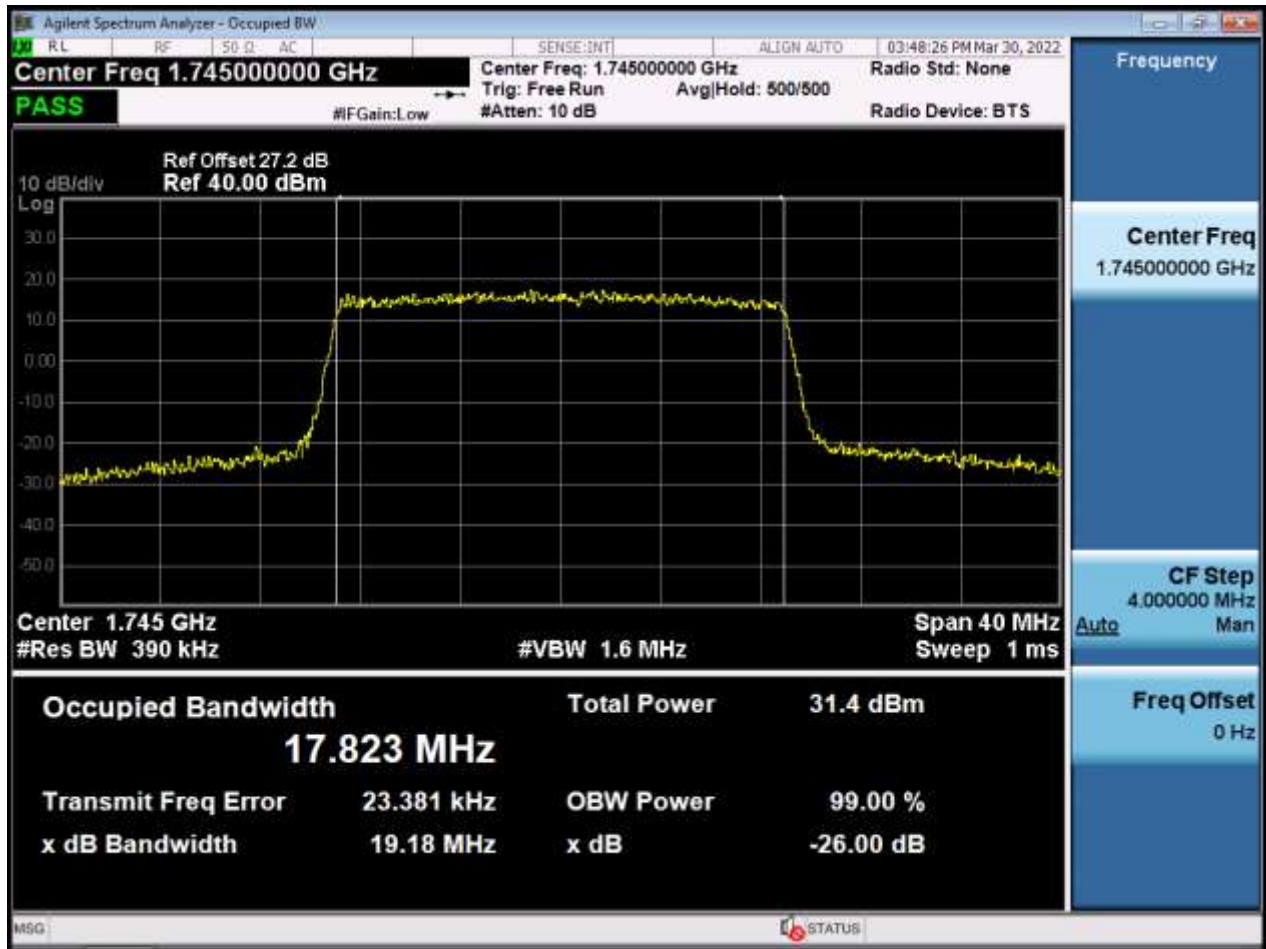

BW20 M_OBW_Middle Channel_64QAM_FullIRB

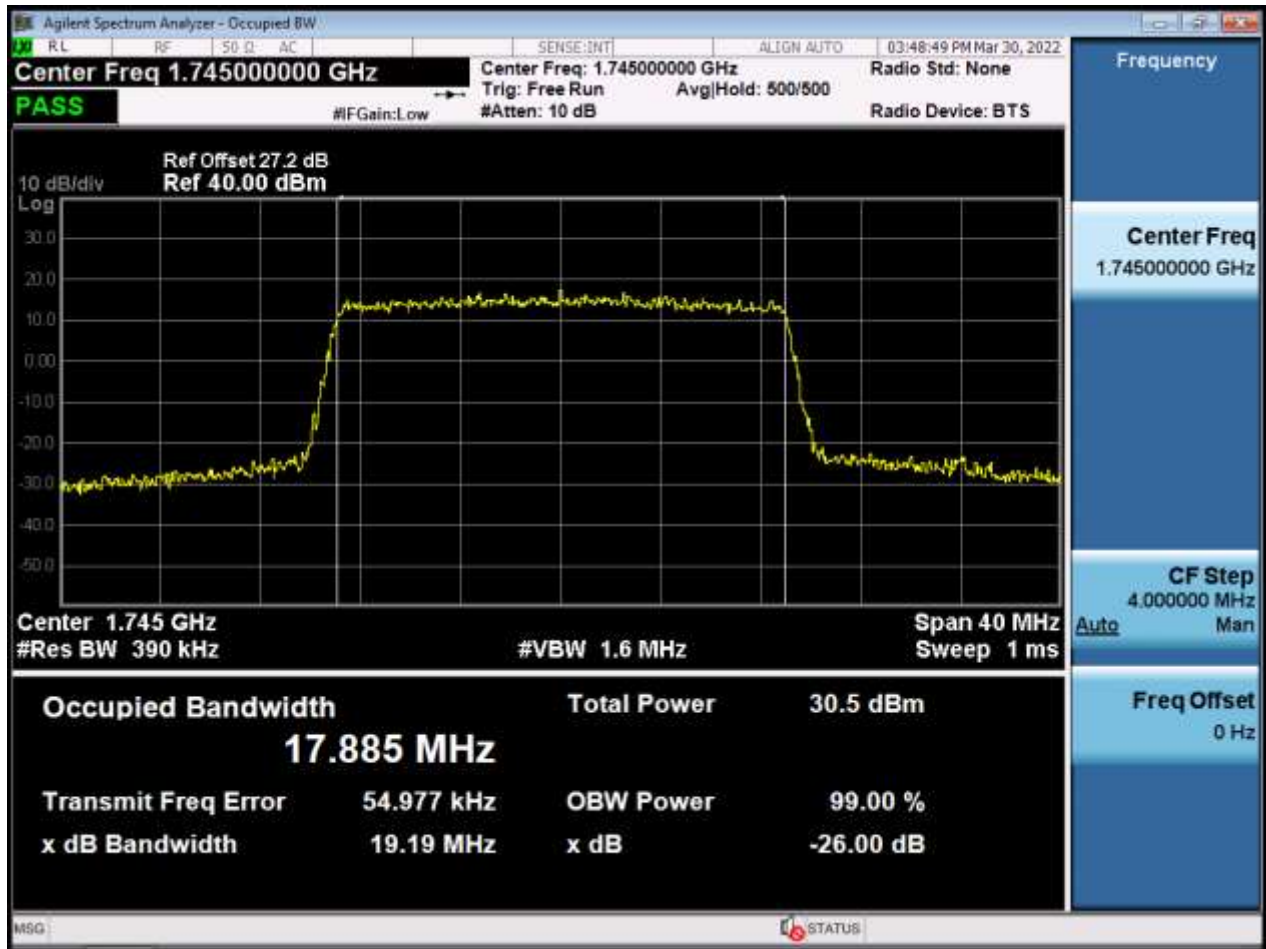

BW20 M_OBW_Middle Channel_256QAM_FullRB

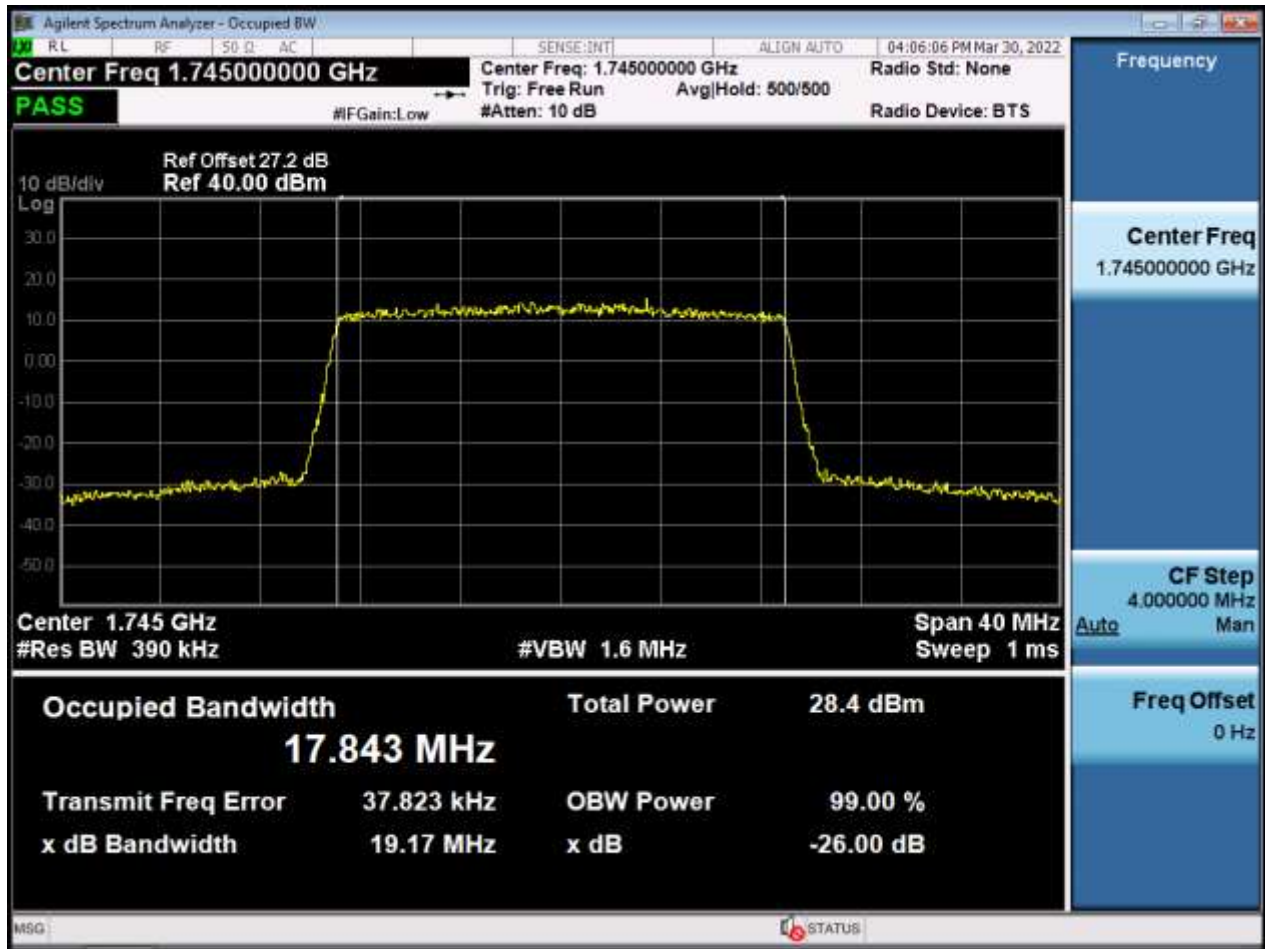


BW1.4 M_PAR_Middle Channel_QPSK_FullRB



BW1.4 M_PAR_Middle Channel_16QAM_FullRB



BW1.4 M_PAR_Middle Channel_64QAM_FullRB

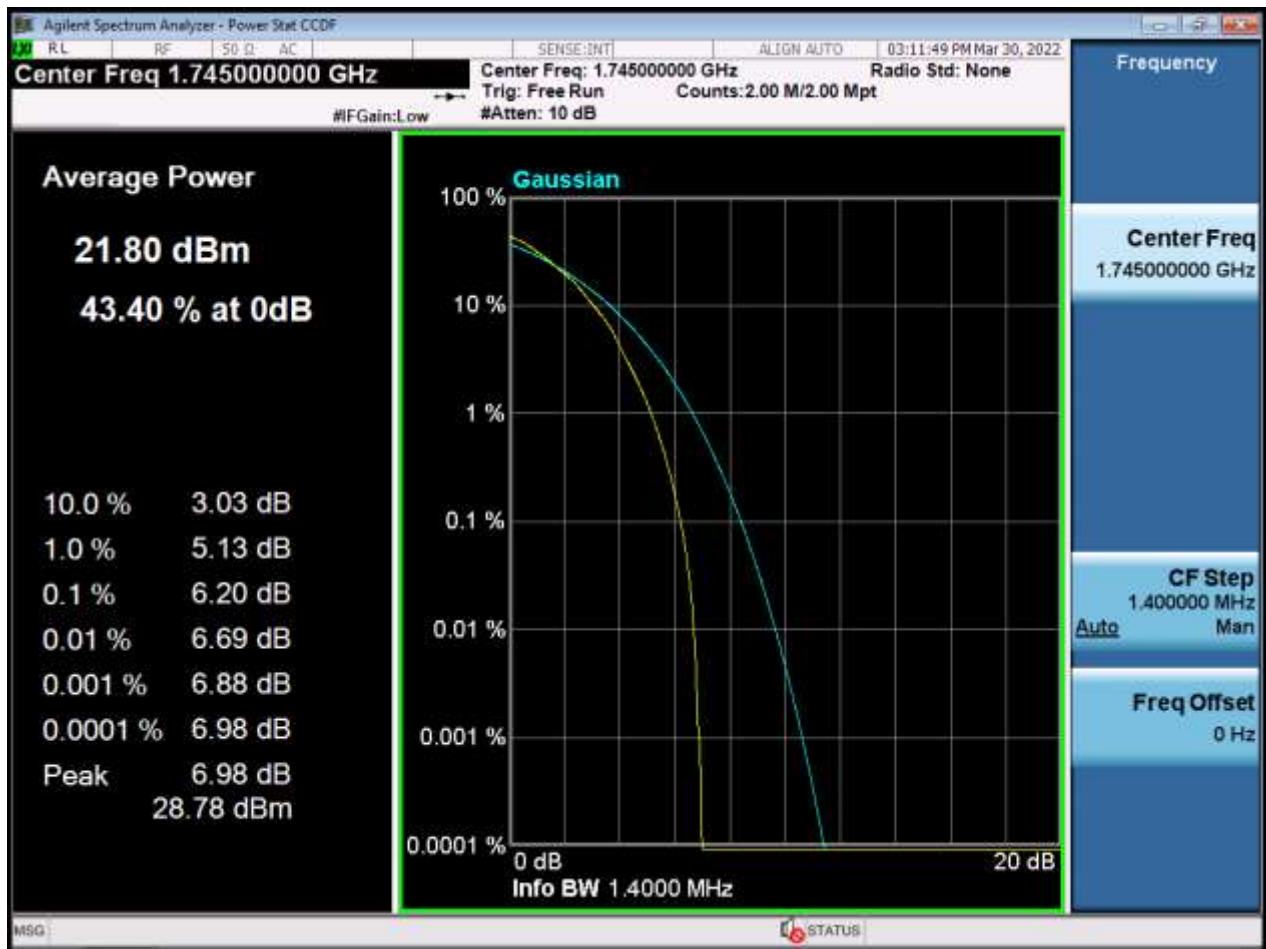

BW1.4 M_PAR_Middle Channel_256QAM_FullRB



BW3 M_PAR_Middle Channel_QPSK_FullIRB




BW3 M_PAR_Middle Channel_16QAM_FuIRB



BW3 M_PAR_Middle Channel_64QAM_FullRB




BW3 M_PAR_Middle Channel_256QAM_FullRB

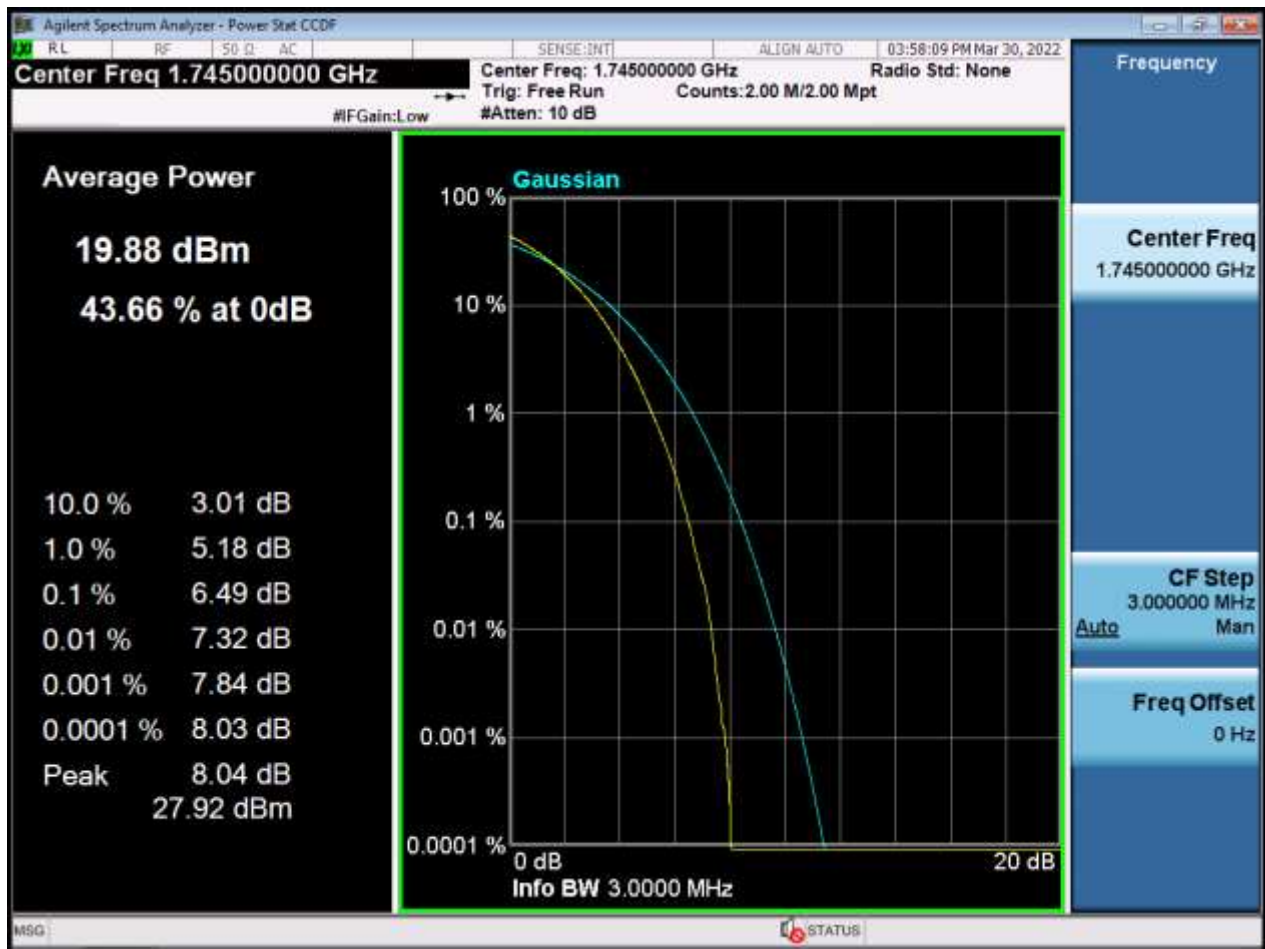


BW5 M_PAR_Middle Channel_QPSK_FullIRB



BW5 M_PAR_Middle Channel_16QAM_FuIRB

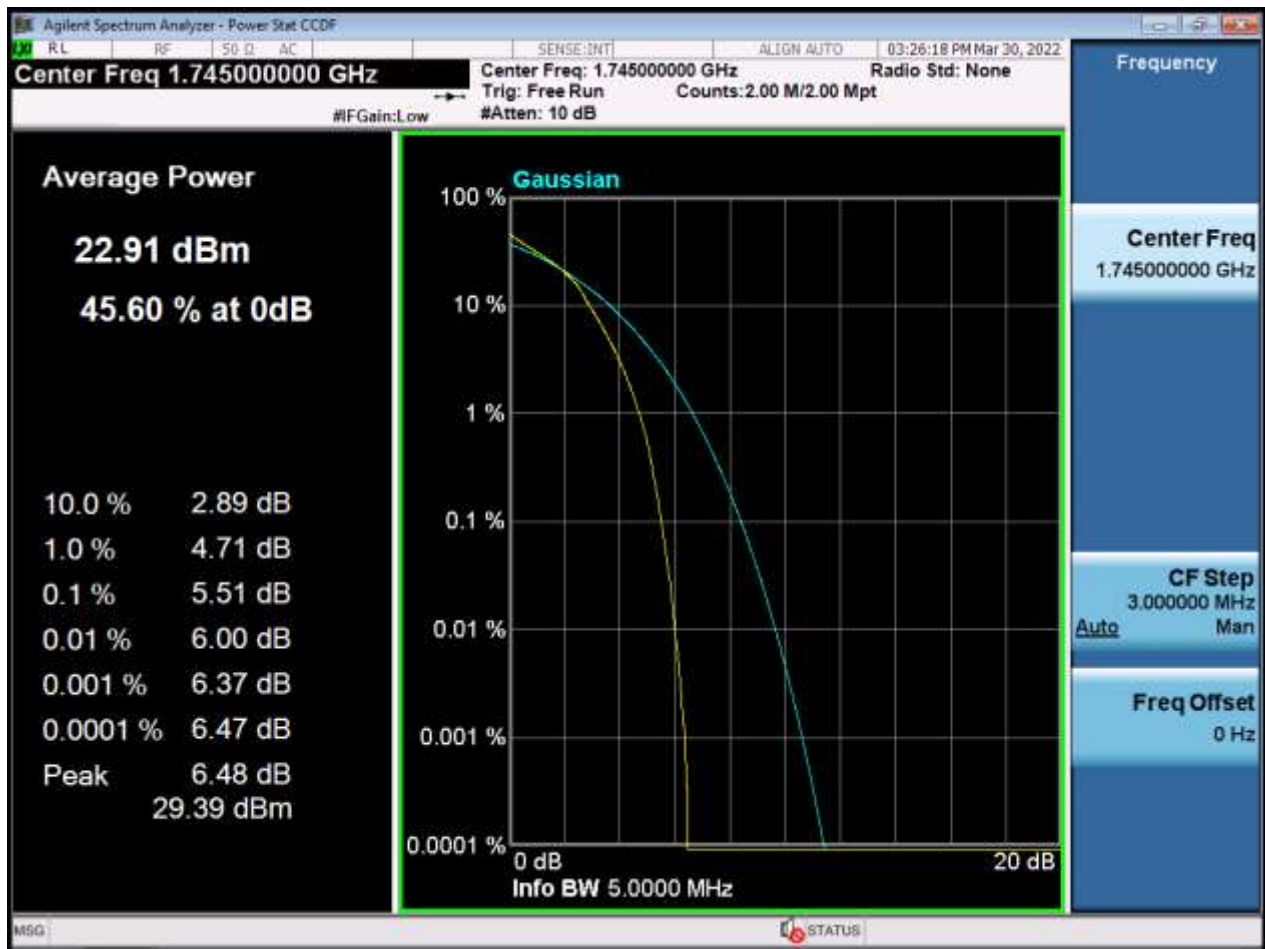

BW5 M_PAR_Middle Channel_64QAM_FuIRB

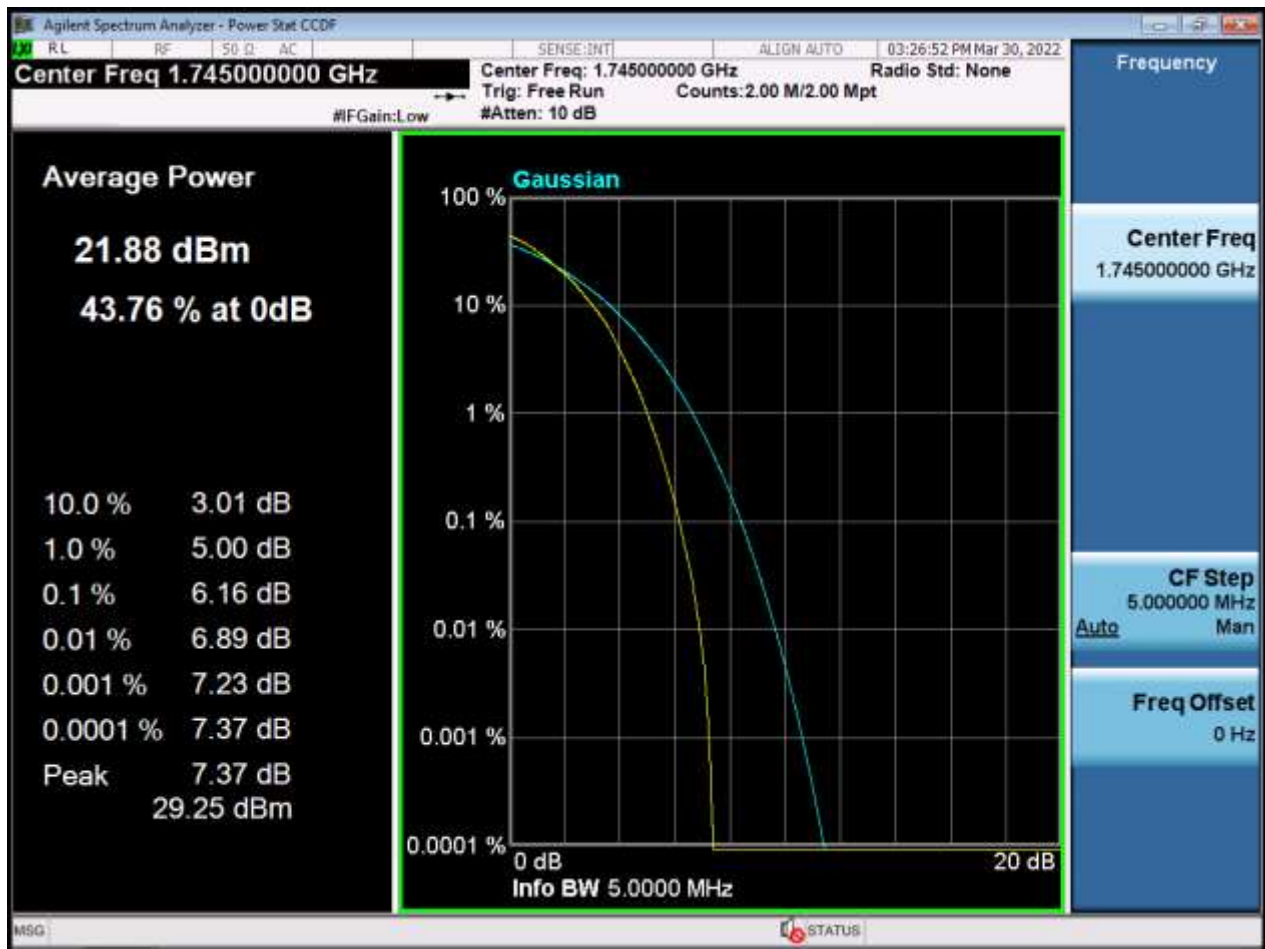


BW5 M_PAR_Middle Channel_256QAM_FullRB



BW10 M_PAR_Middle Channelz_QPSK_FullRB




BW10 M_PAR_Middle Channel_16QAM_FullRB

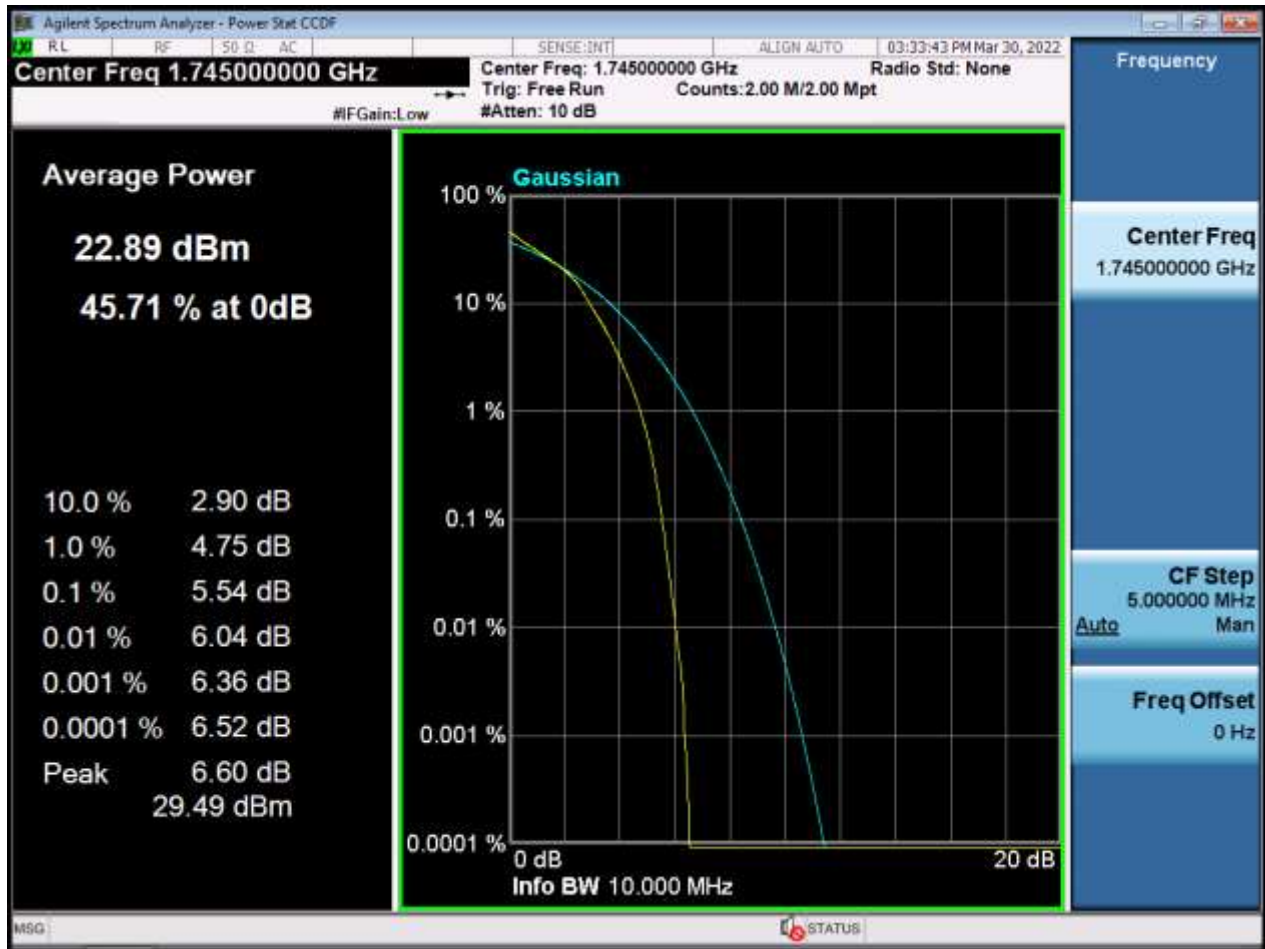

BW10 M_PAR_Middle Channel_64QAM_FullRB



BW10 M_PAR_Middle Channel_256QAM_FullIRB

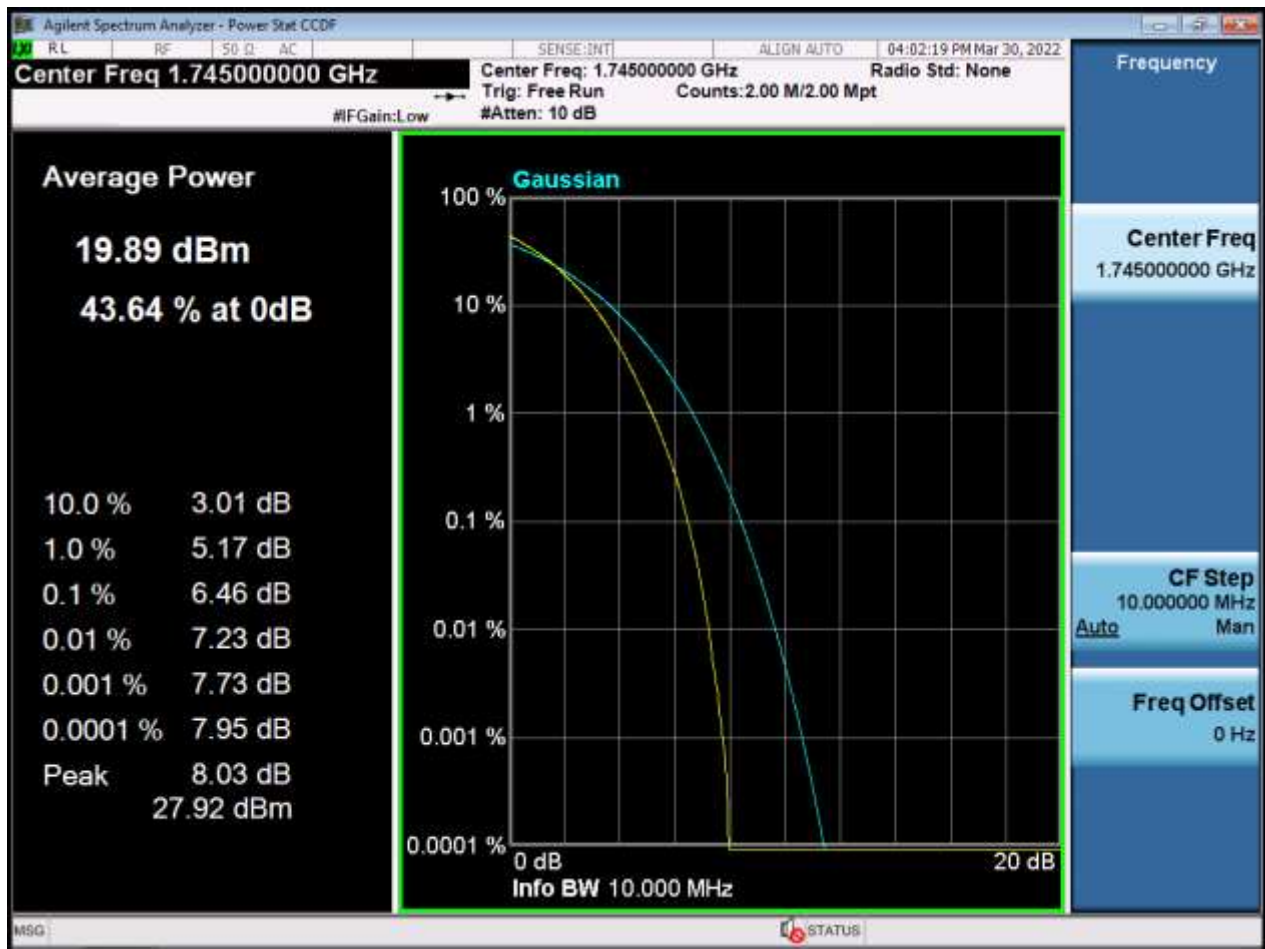

BW15 M_PAR_Middle Channel_QPSK_FullRB




BW15 M_PAR_Middle Channel_16QAM_FullRB



BW15 M_PAR_Middle Channel_64QAM_FullRB



BW15 M_PAR_Middle Channel_256QAM_FullIRB

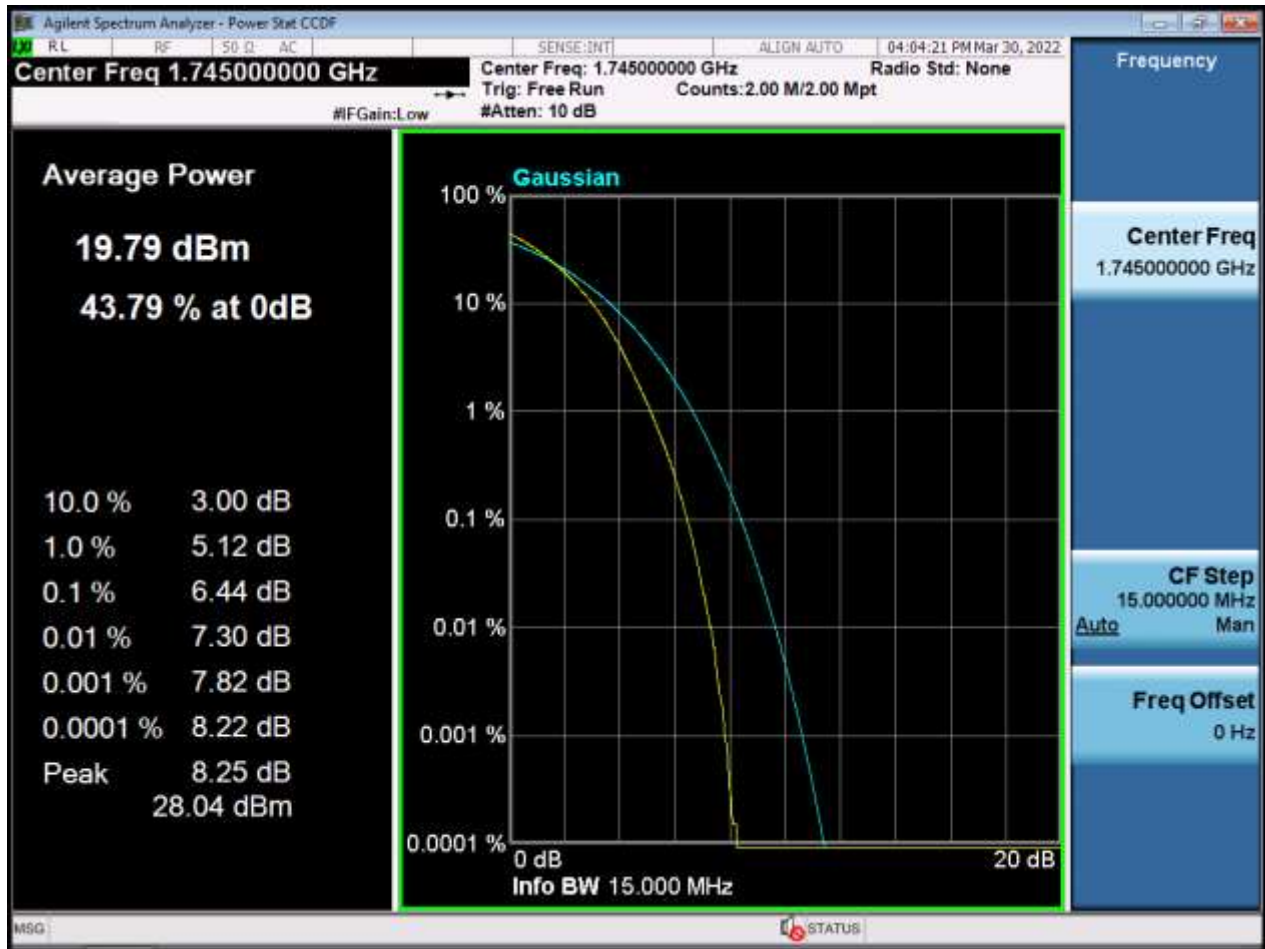


BW20 M_PAR_Middle Channel_QPSK_FullRB




BW20 M_PAR_Middle Channel_16QAM_FullRB




BW20 M_PAR_Middle Channel_64QAM_FullRB

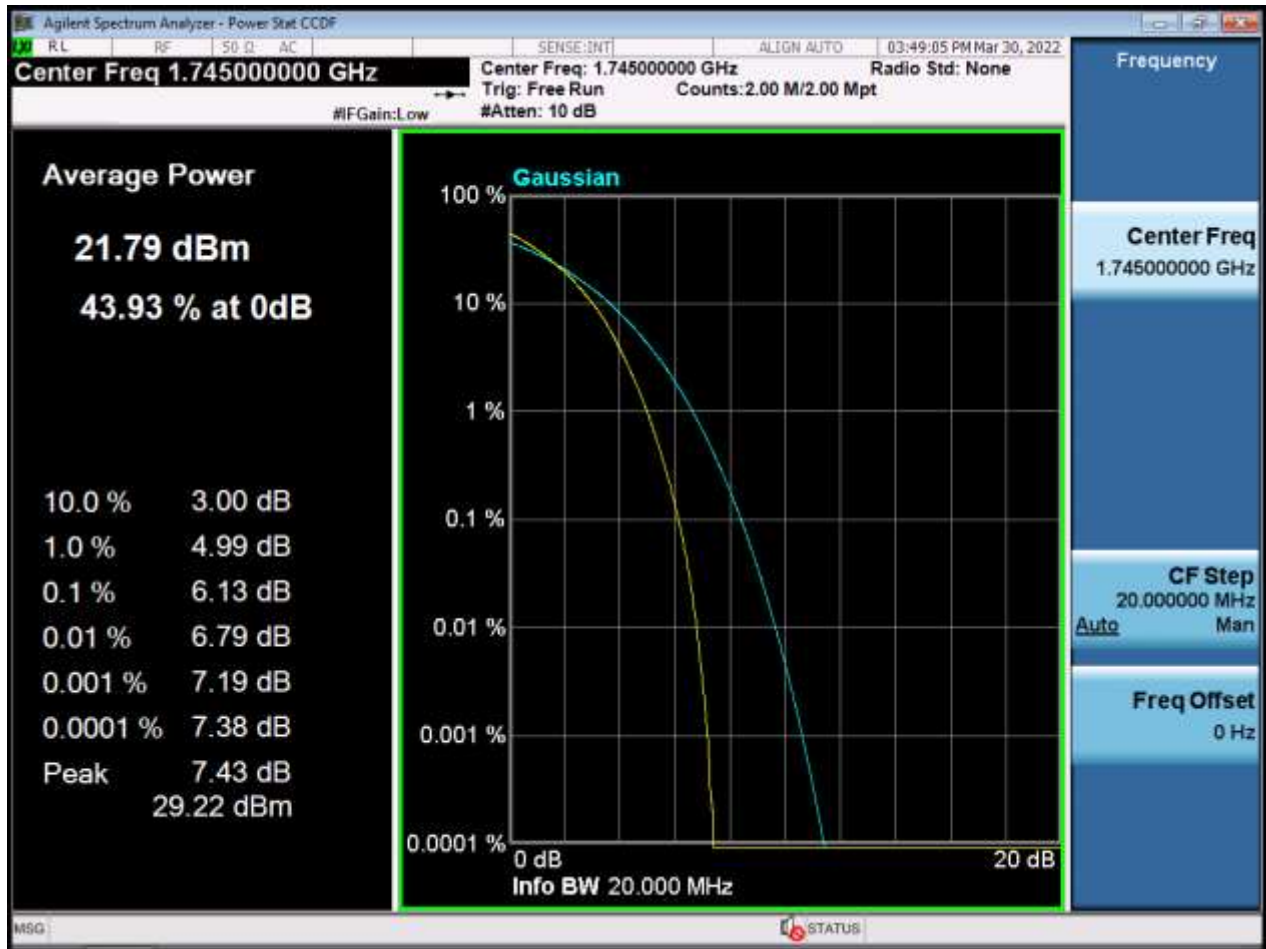


BW20 M_PAR_Middle Channel_256QAM_FullIRB

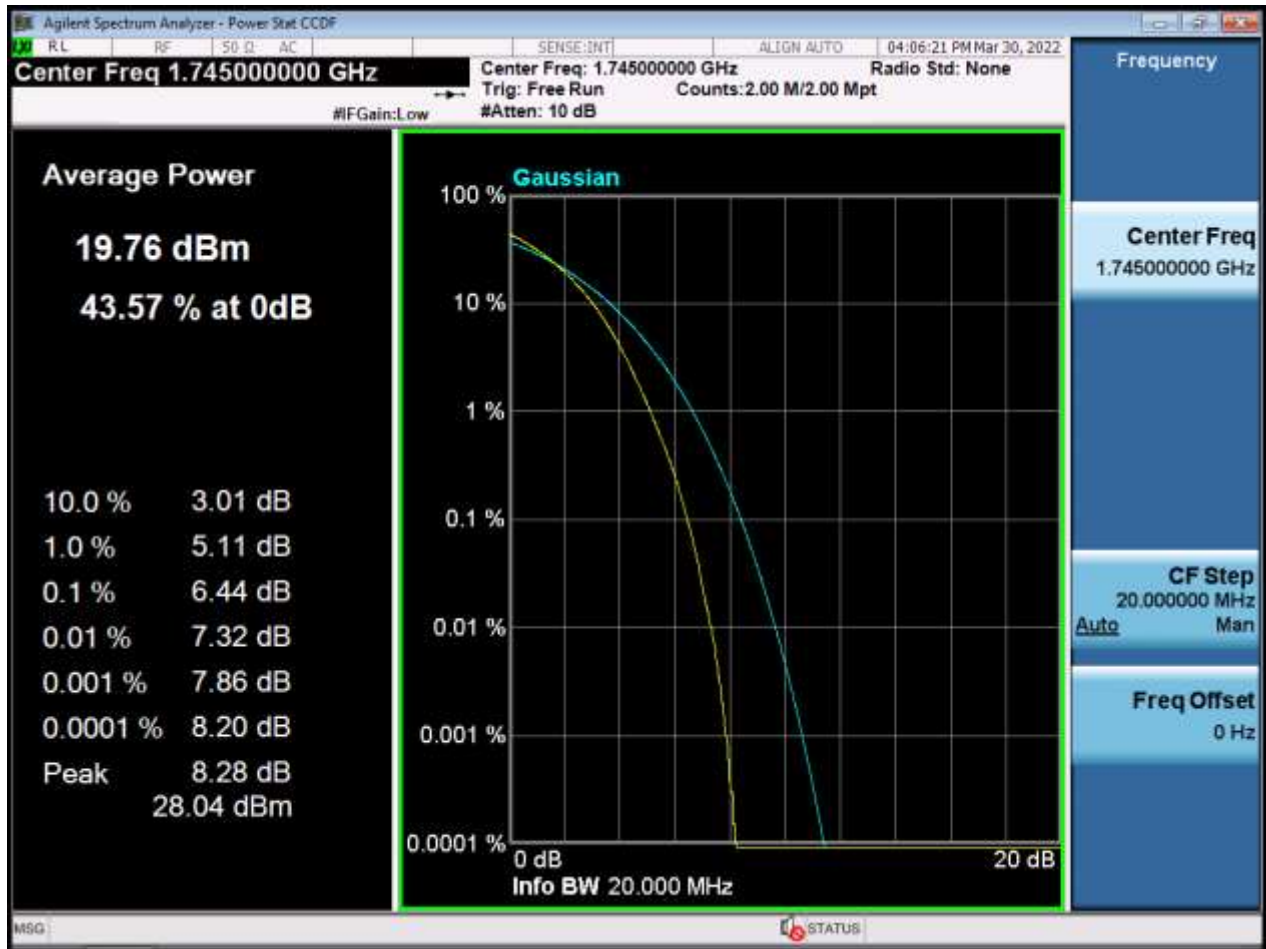


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

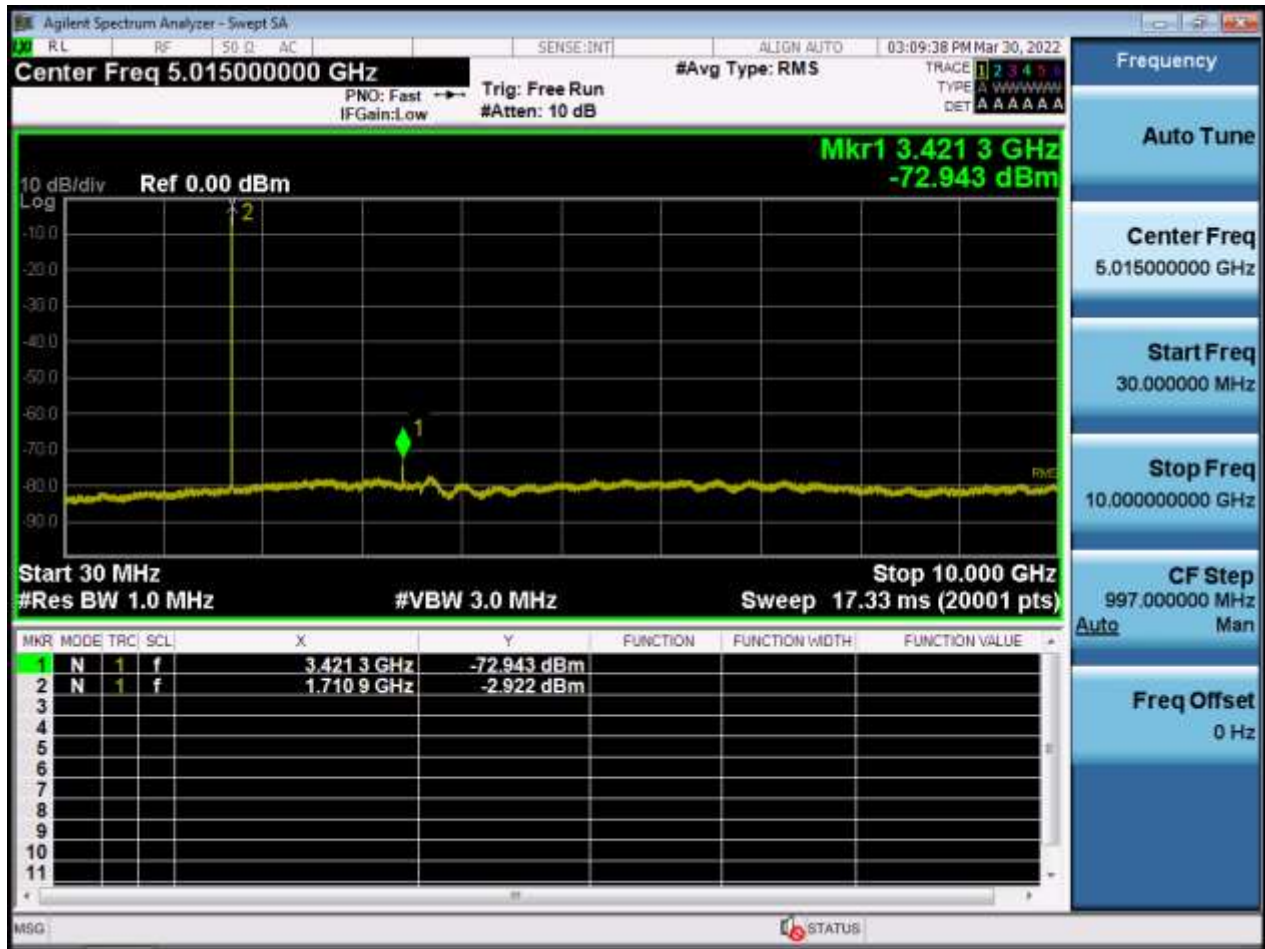


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

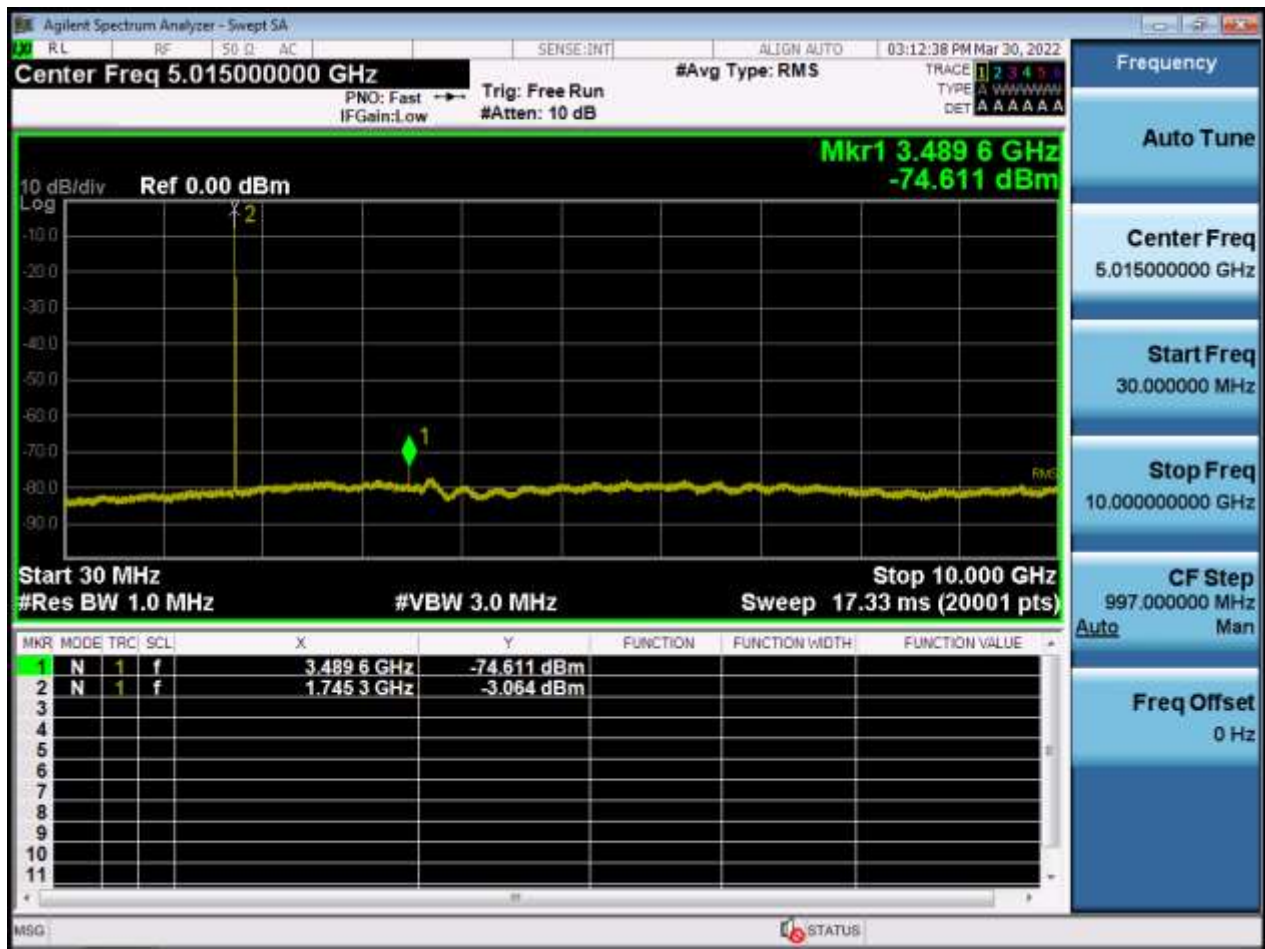


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

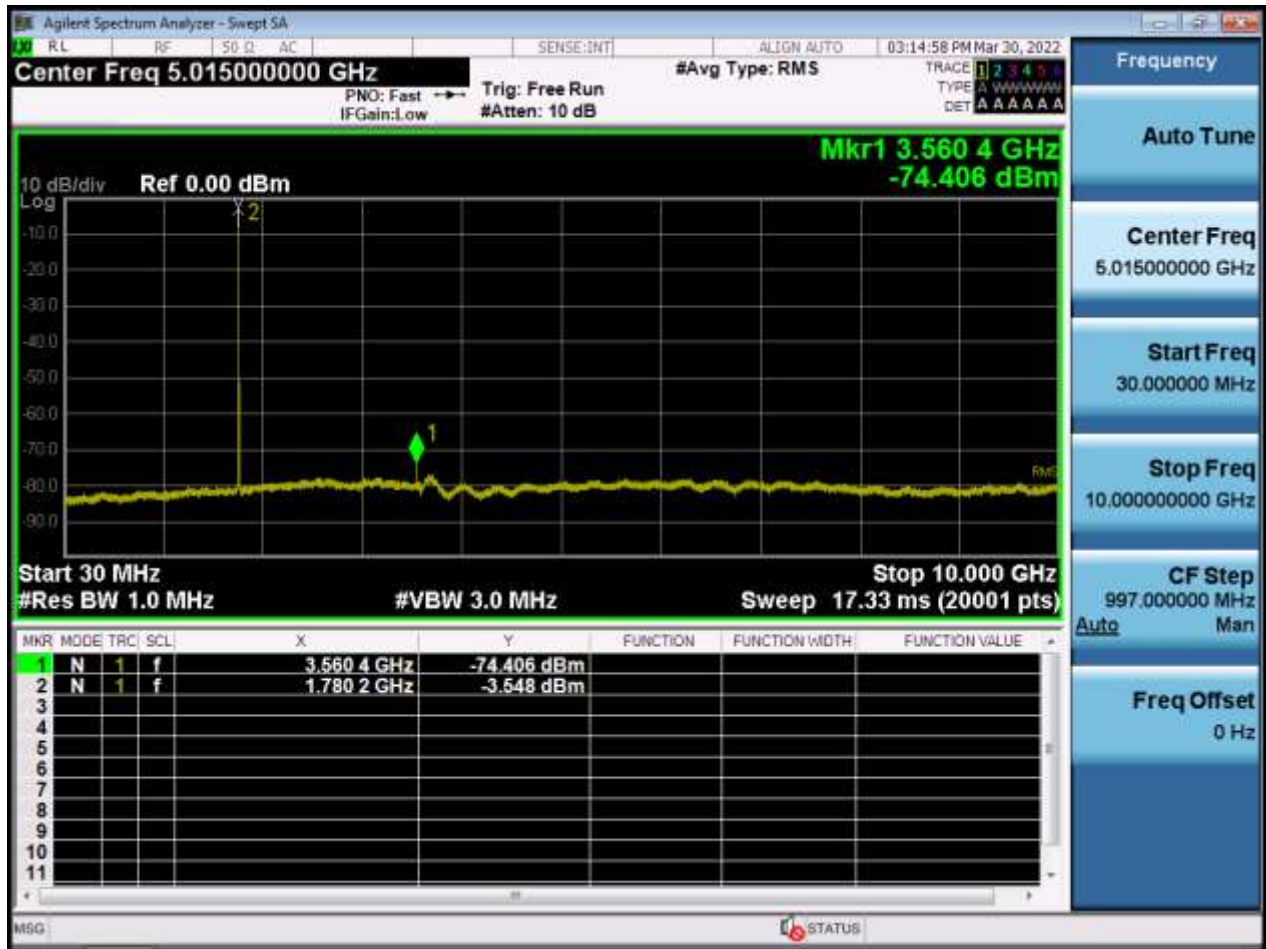


BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

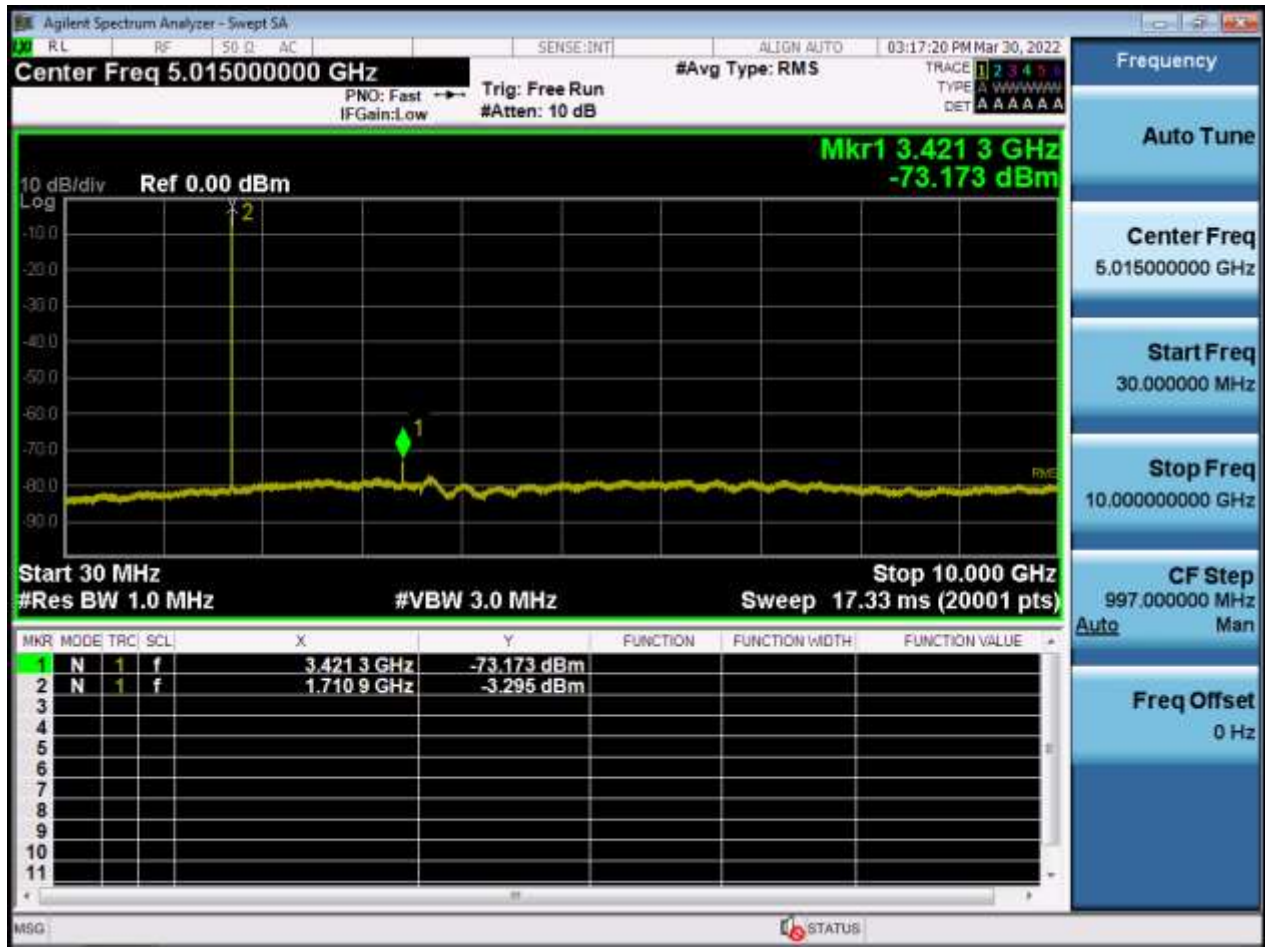


BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

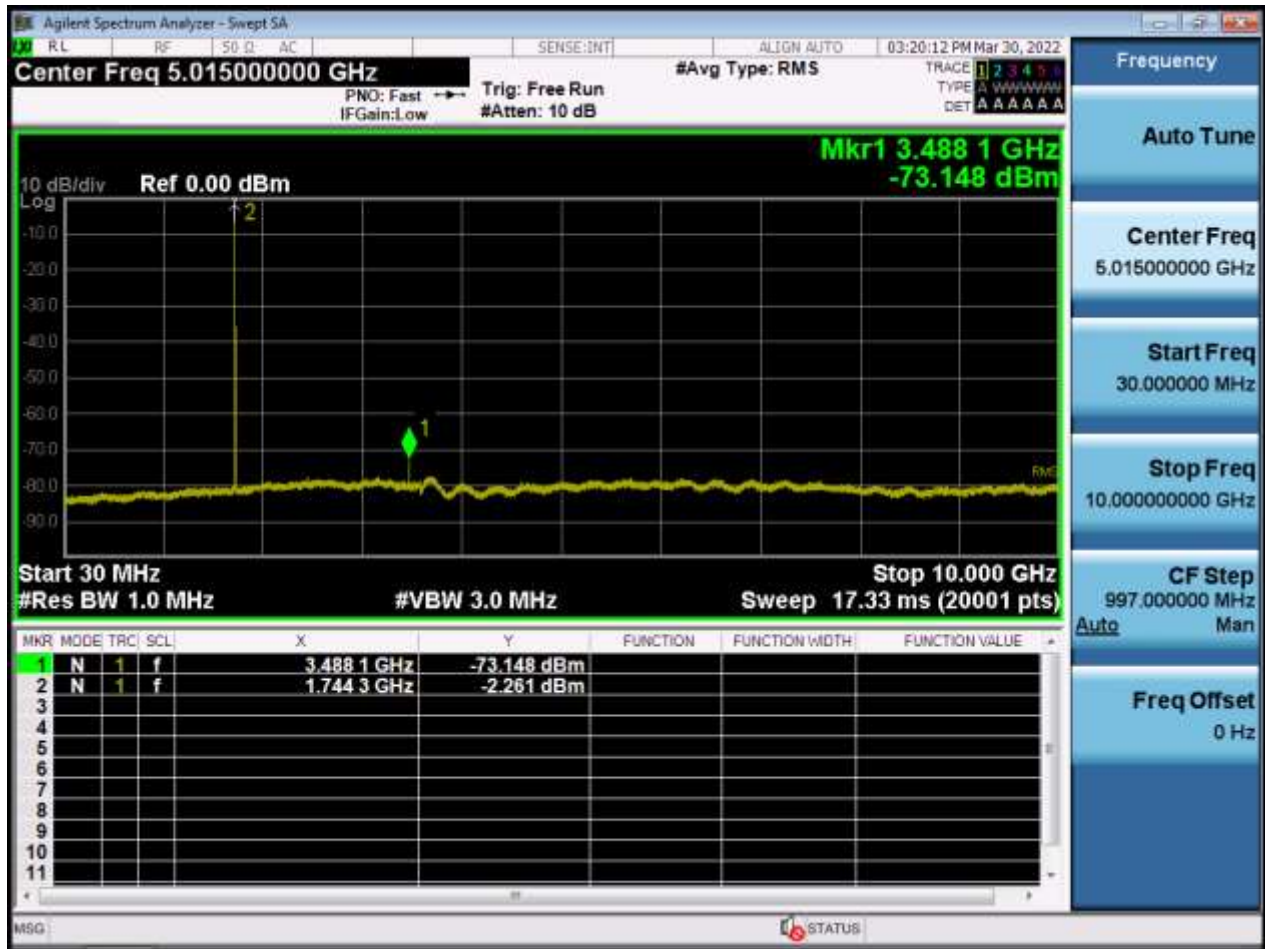


BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

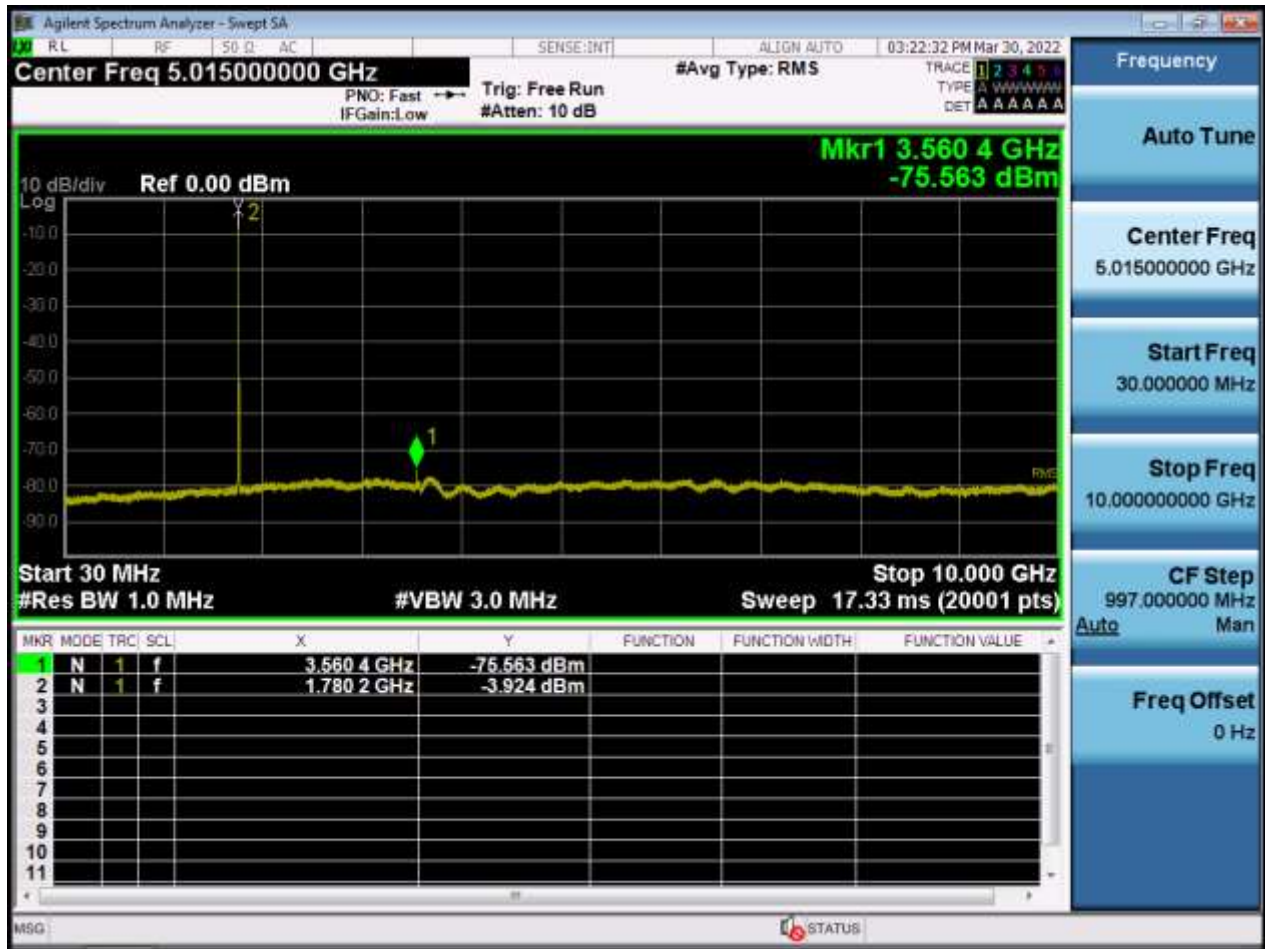


BW5 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

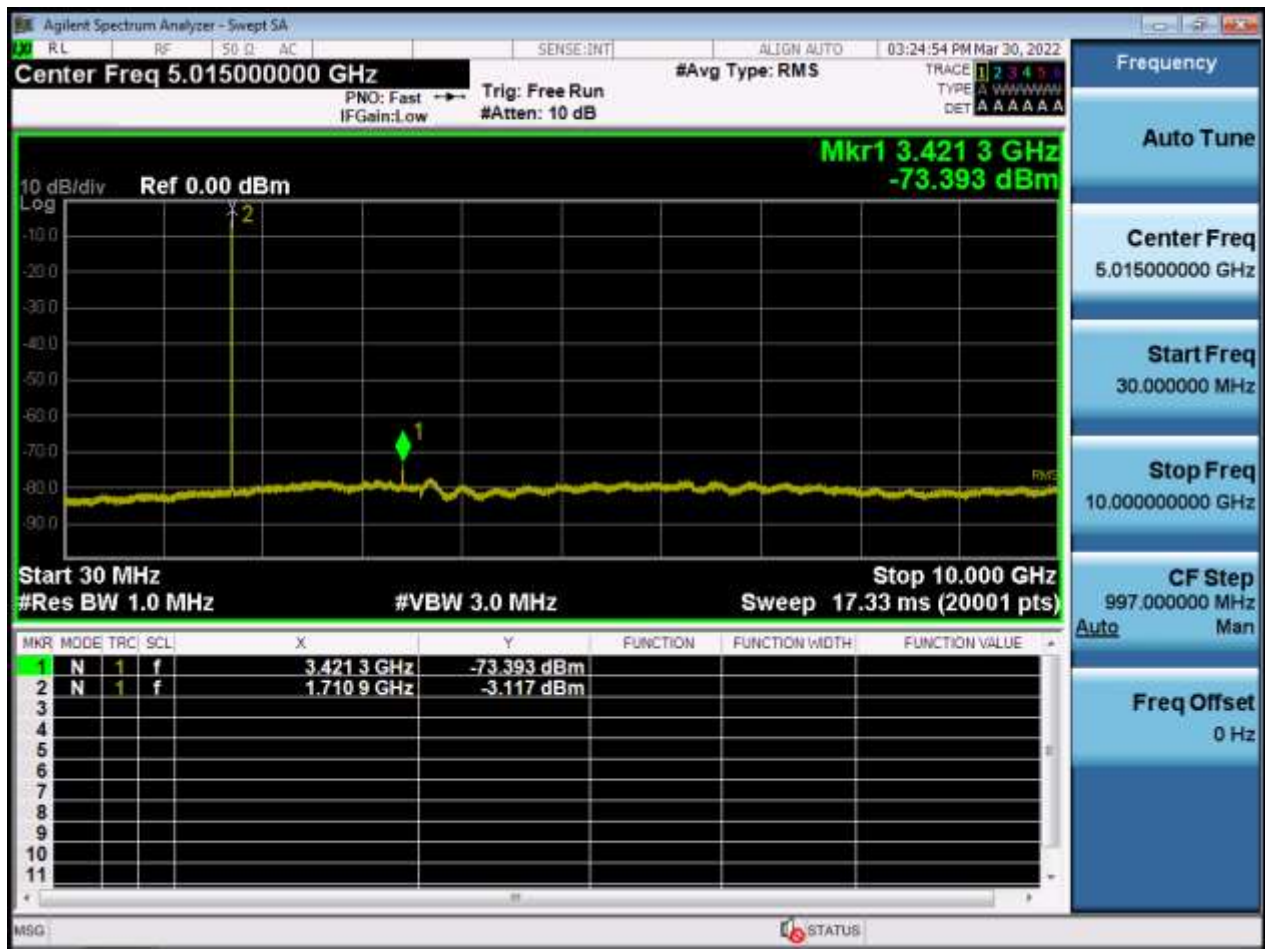


BW5 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

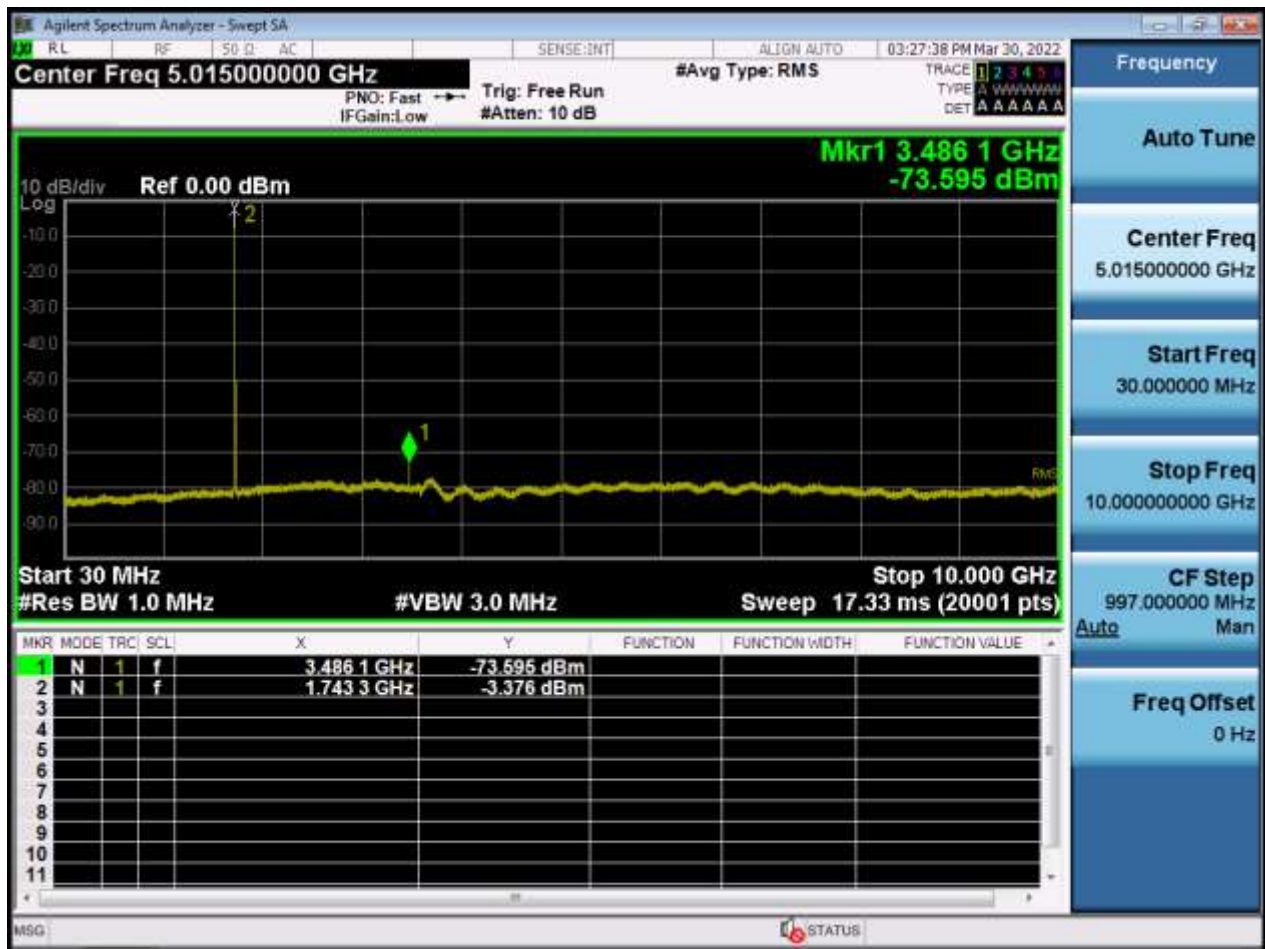


BW5 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

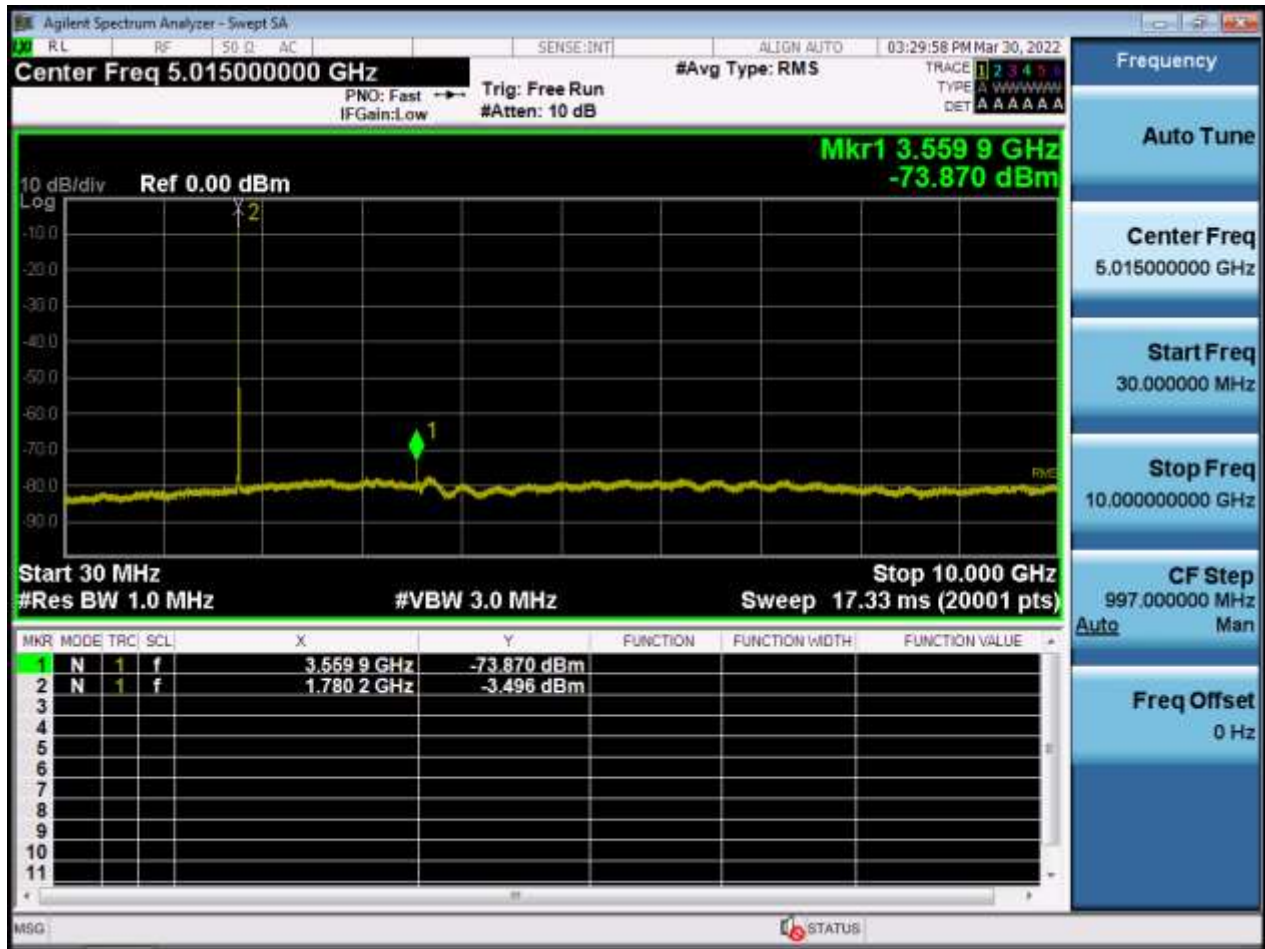


BW10 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

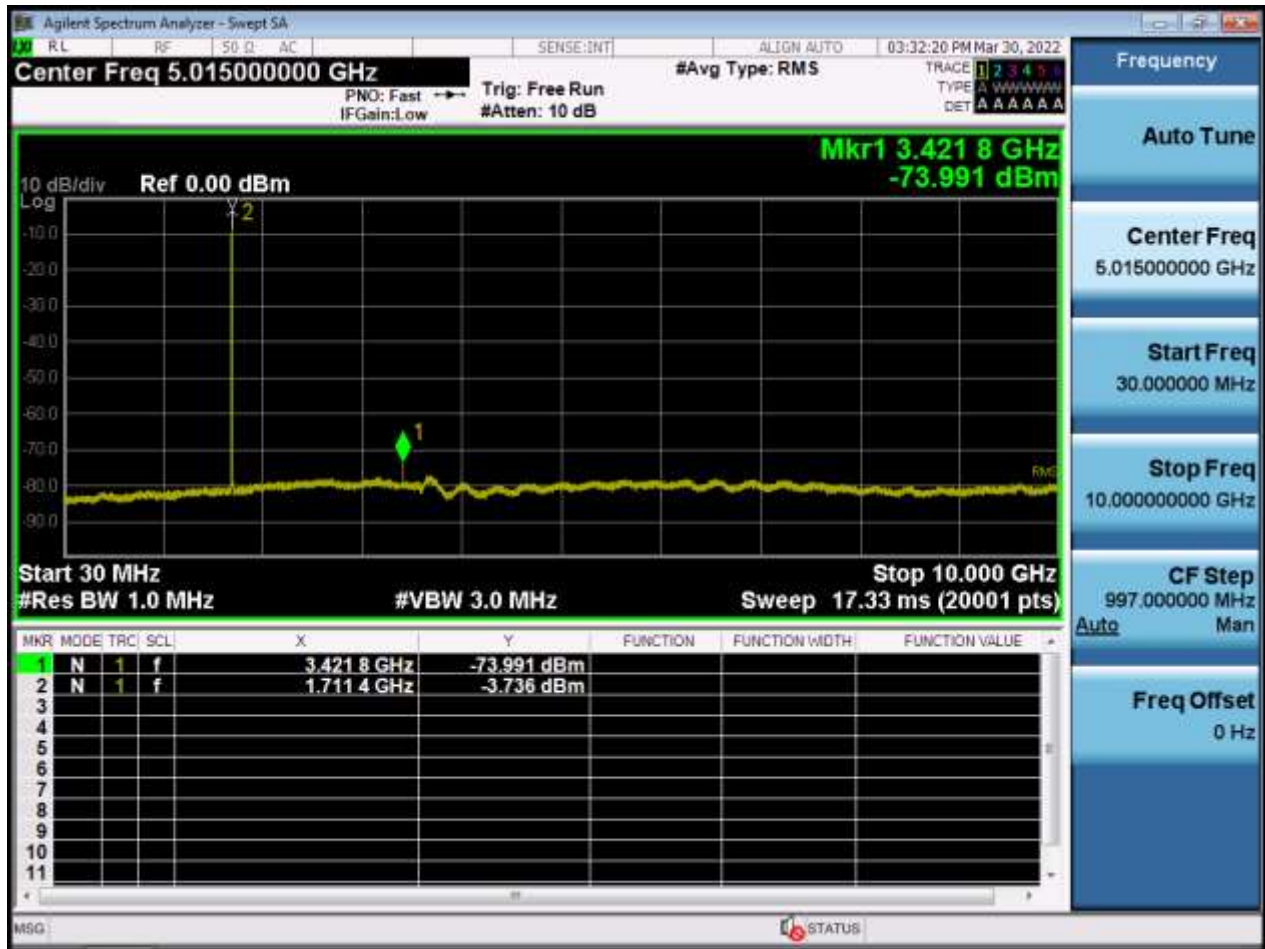


BW10 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

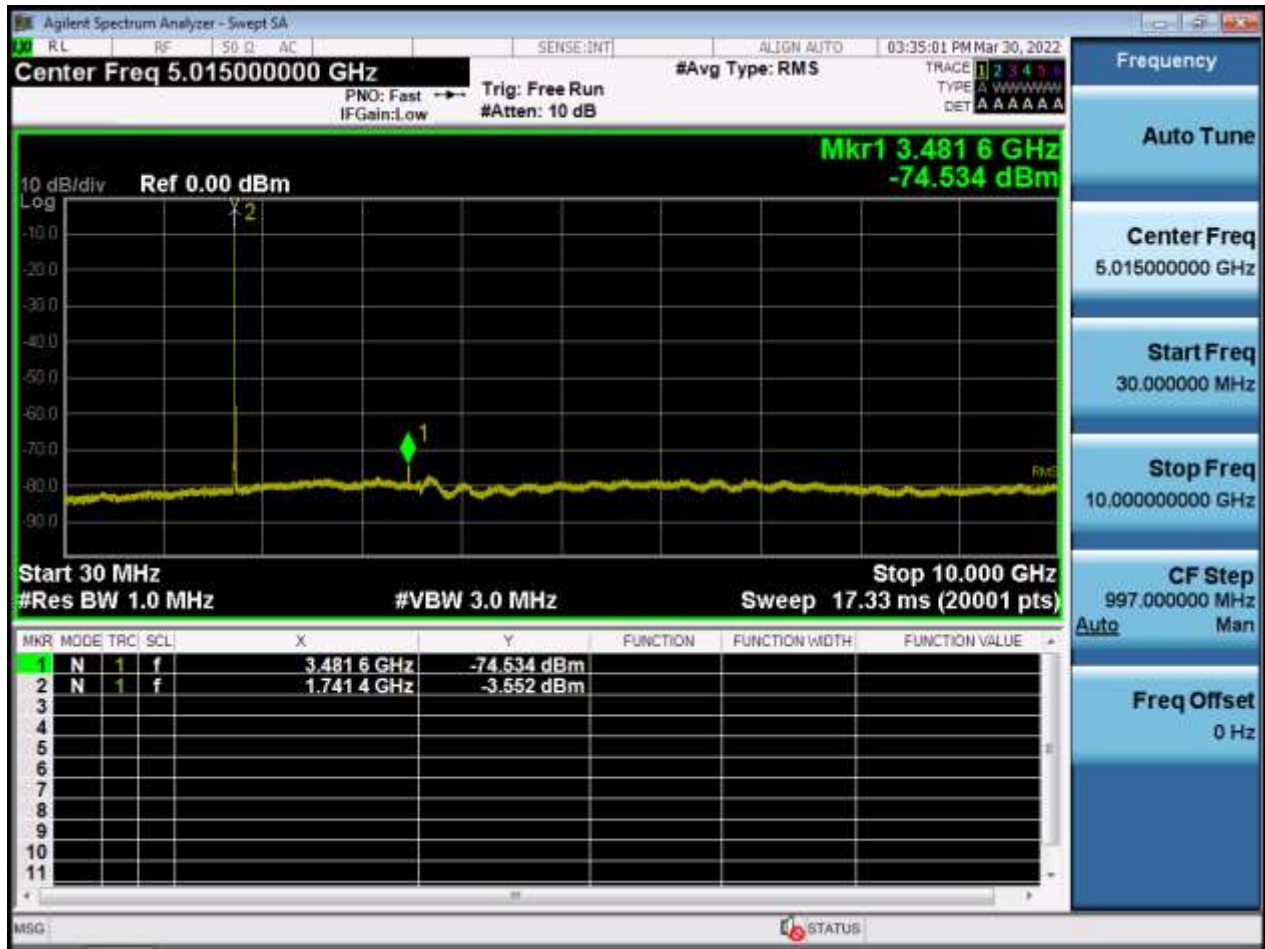


BW10 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

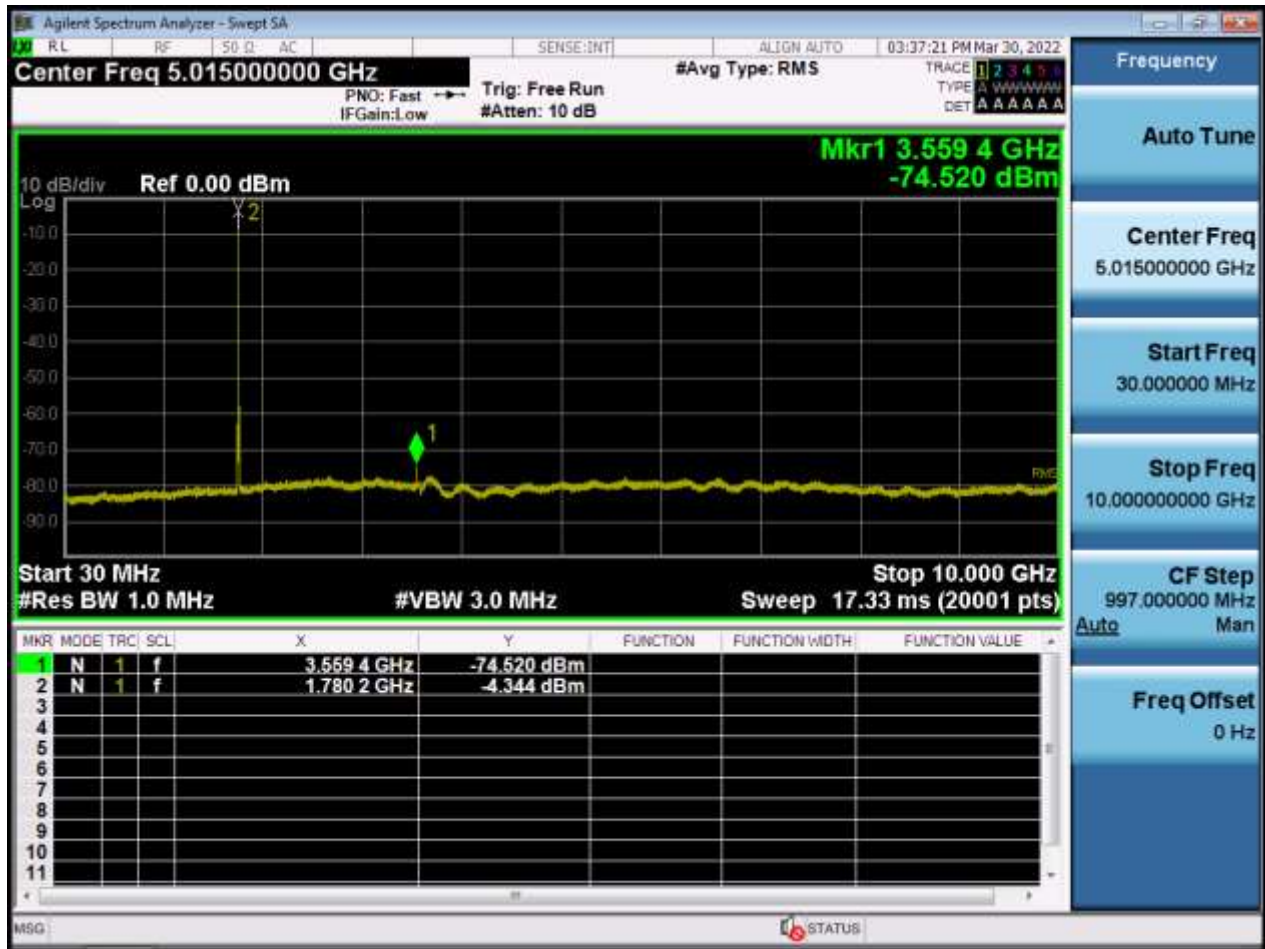


BW15 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

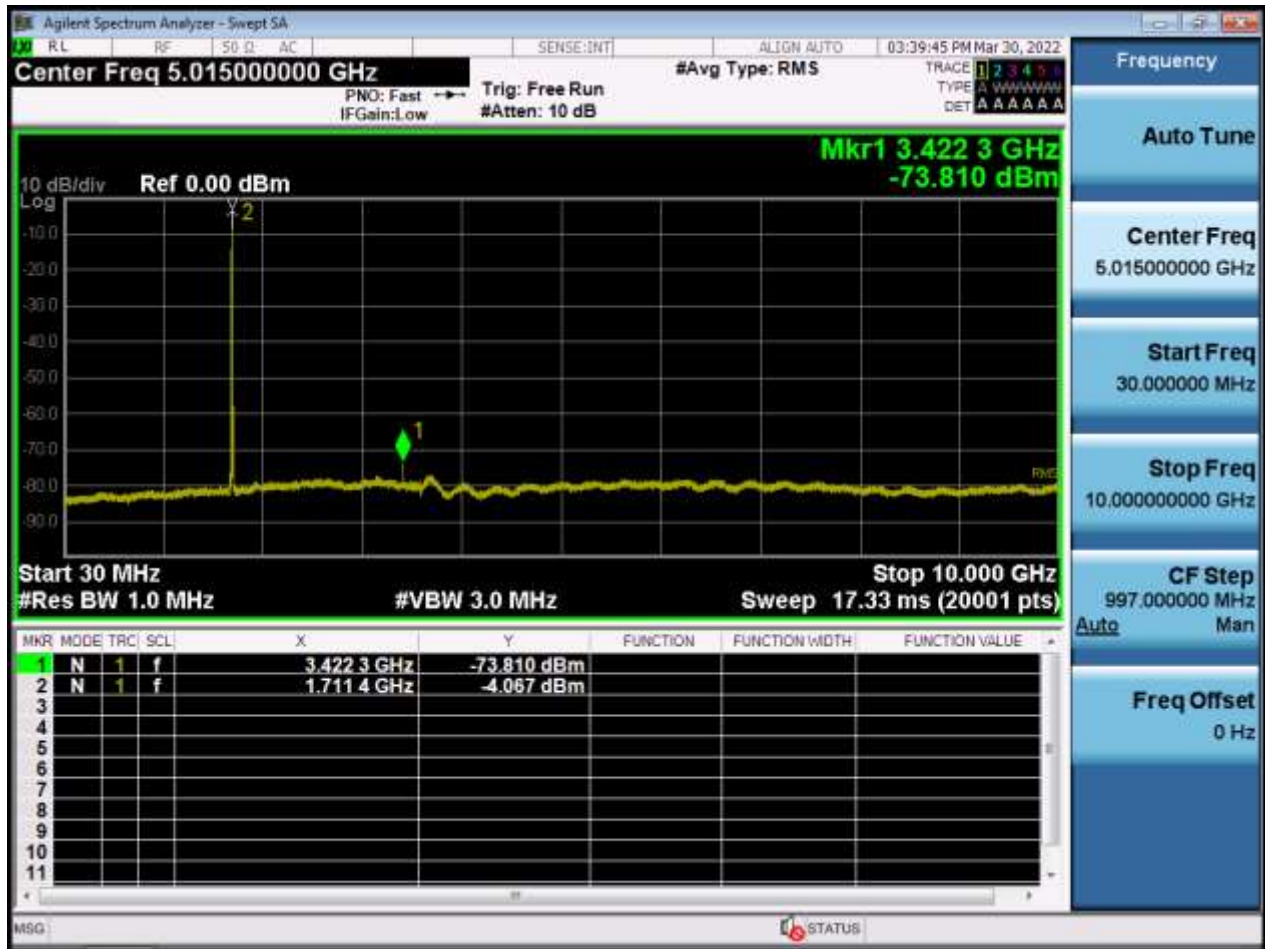


BW15 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

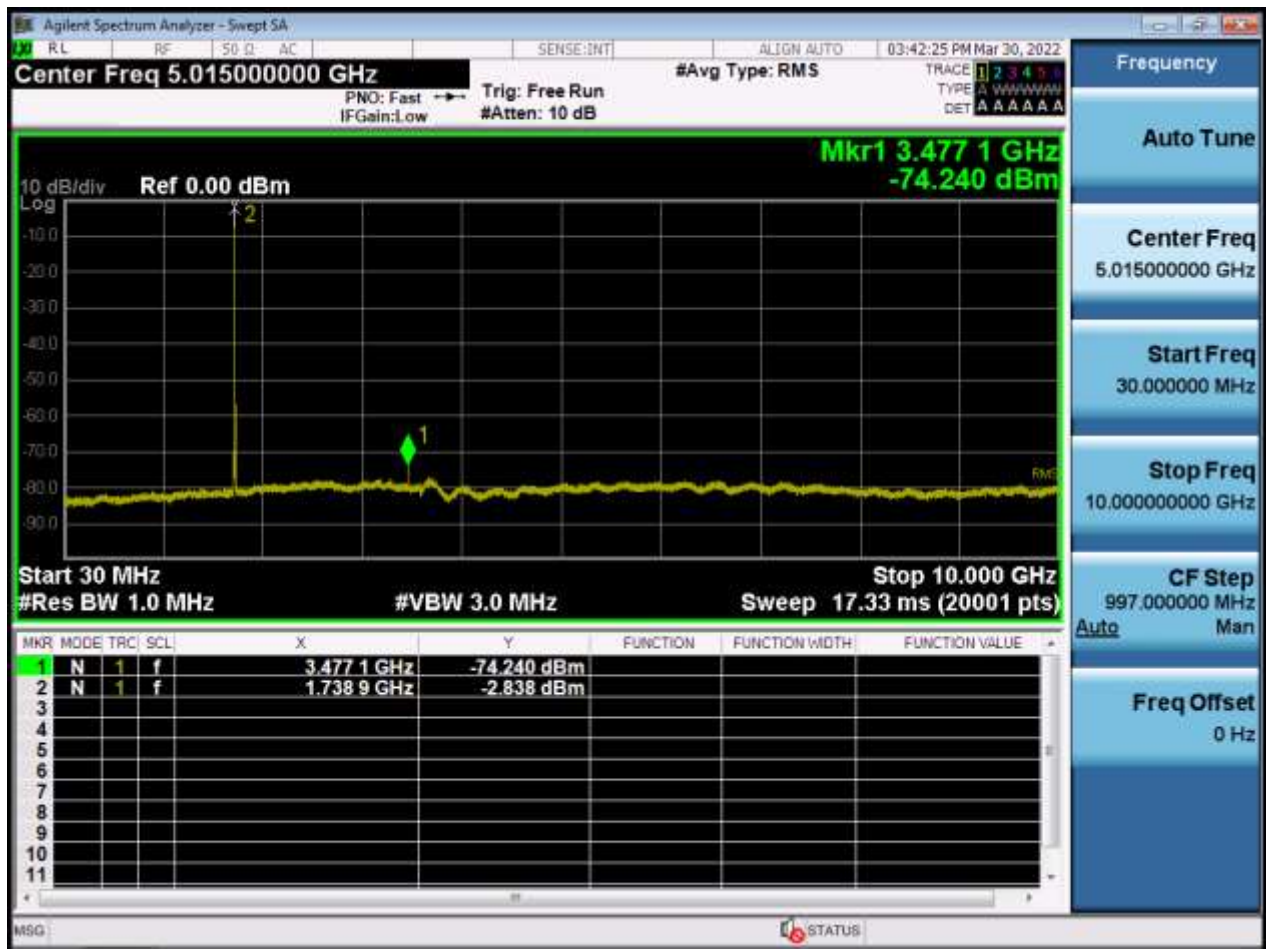


BW15 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

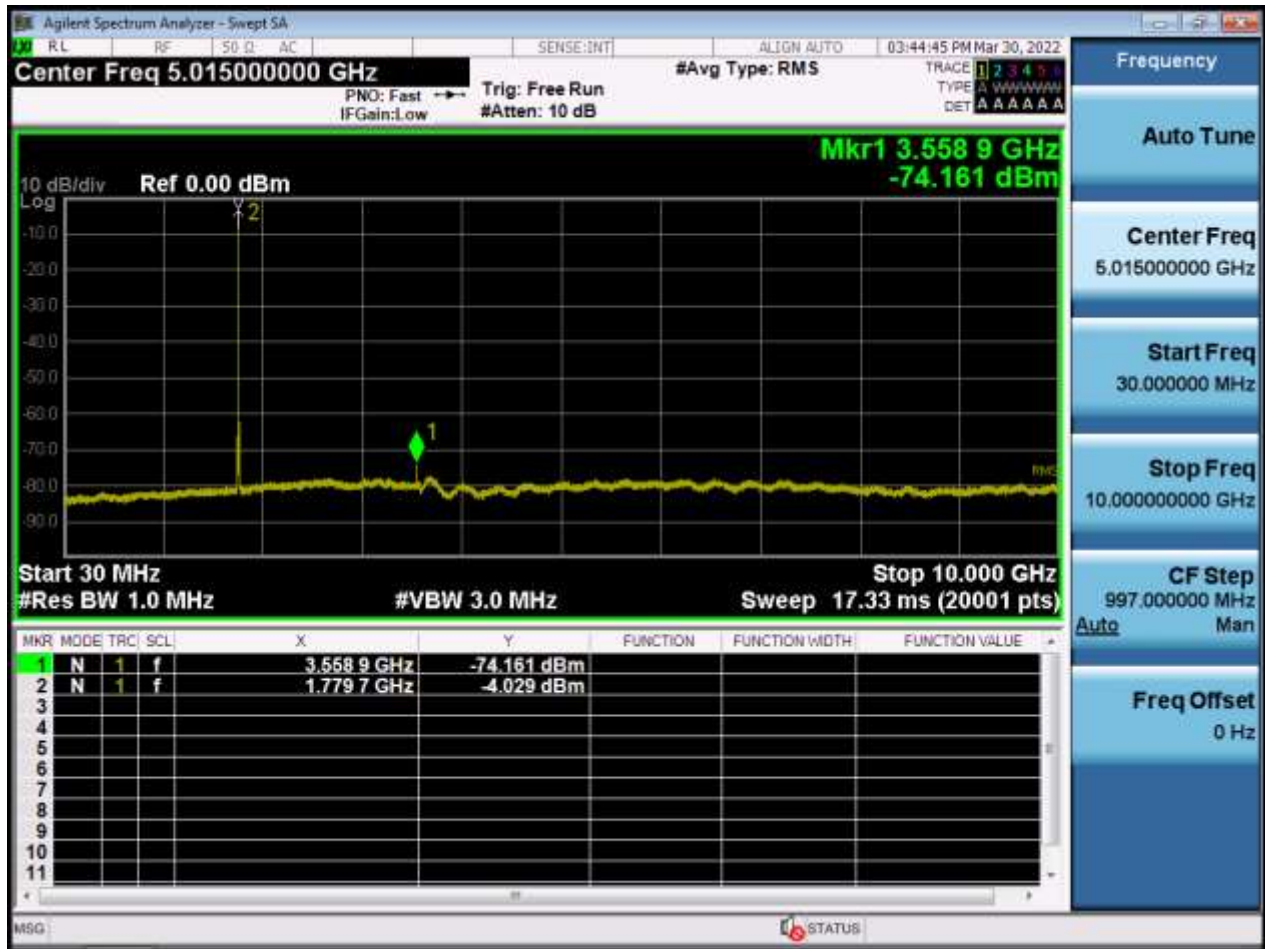


BW20 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

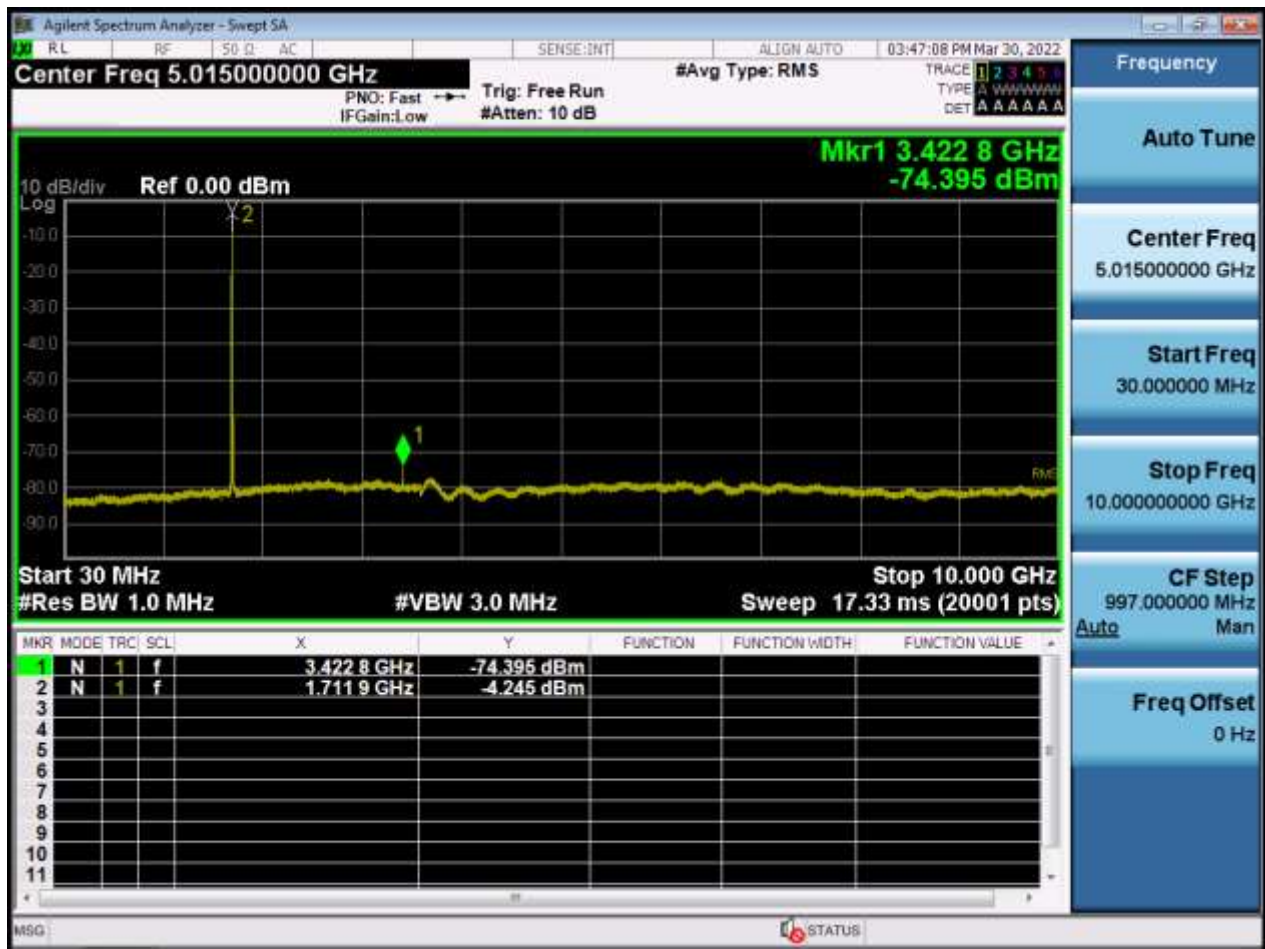

BW20 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

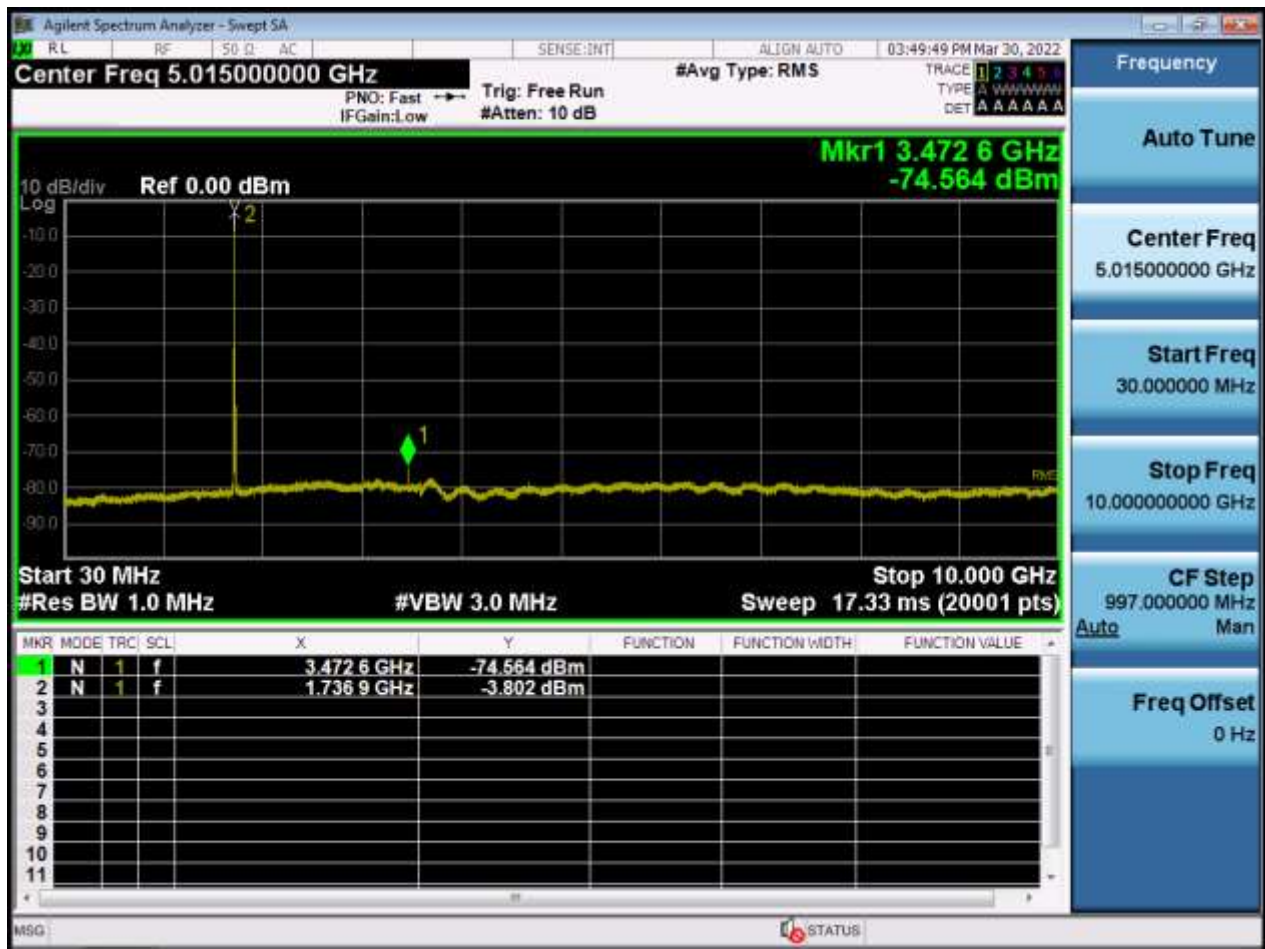


BW20 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

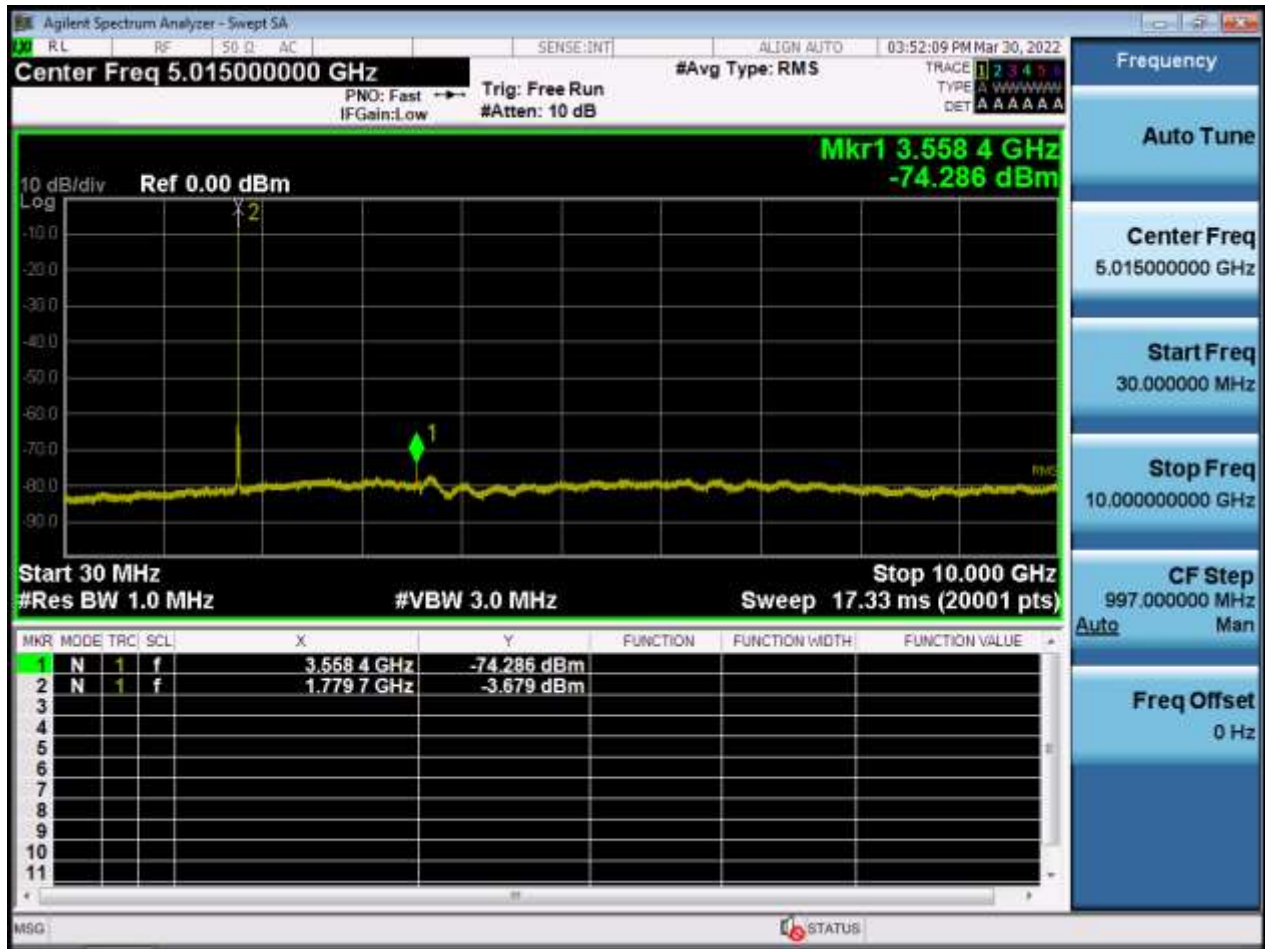

BW1.4 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW1.4 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB

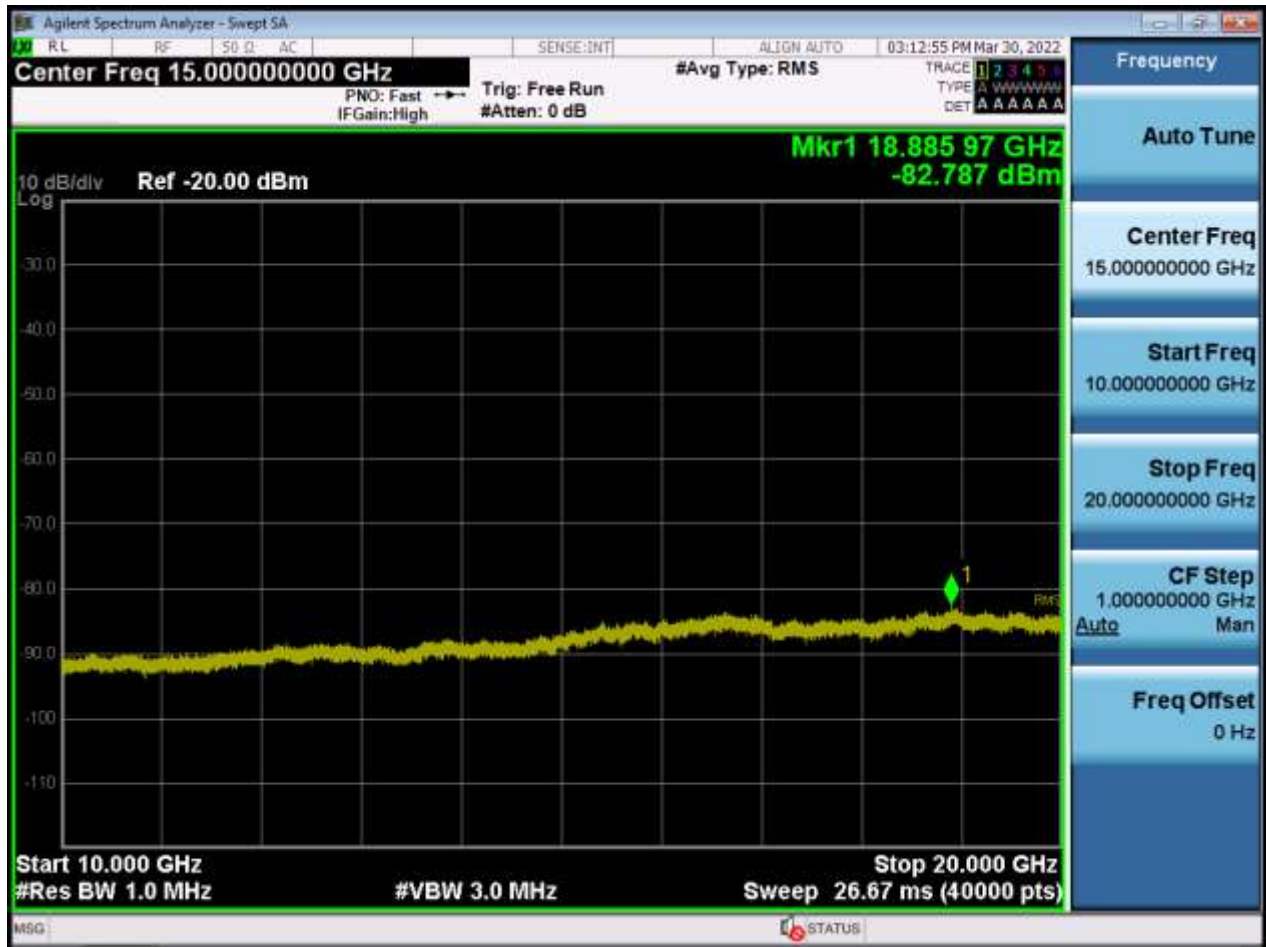

BW1.4 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW3 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB

