

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 16, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2205-FC059

FCC ID: A3LSMG736U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G736U
 Additional Model(s): SM-G736U1
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §24, §2

-Main2 Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band25/2 (1.4)	1850.7 - 1914.3	1M09G7D	QPSK	0.390	25.91
		1M09W7D	16QAM	0.333	25.23
		1M09W7D	64QAM	0.265	24.24
		1M09W7D	256QAM	0.130	21.13
LTE – Band25/2 (3)	1851.5 - 1913.5	2M72G7D	QPSK	0.390	25.91
		2M70W7D	16QAM	0.331	25.20
		2M70W7D	64QAM	0.261	24.17
		2M70W7D	256QAM	0.130	21.14
LTE – Band25/2 (5)	1852.5 - 1912.5	4M52G7D	QPSK	0.389	25.90
		4M50W7D	16QAM	0.329	25.17
		4M51W7D	64QAM	0.259	24.13
		4M51W7D	256QAM	0.128	21.07
LTE – Band25/2 (10)	1855.0 - 1910.0	9M00G7D	QPSK	0.377	25.76
		8M98W7D	16QAM	0.320	25.05
		9M00W7D	64QAM	0.254	24.04
		9M00W7D	256QAM	0.126	21.01
LTE – Band25/2 (15)	1857.5 - 1907.5	13M5G7D	QPSK	0.382	25.82
		13M5W7D	16QAM	0.330	25.19
		13M5W7D	64QAM	0.255	24.07
		13M4W7D	256QAM	0.126	20.99
LTE – Band25/2 (20)	1860.0 - 1905.0	17M9G7D	QPSK	0.400	26.02
		17M9W7D	16QAM	0.352	25.46
		17M9W7D	64QAM	0.269	24.30
		17M9W7D	256QAM	0.120	20.80

-Sub1 Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band25/2 (1.4)	1850.7 - 1914.3	1M11G7D	QPSK	0.152	21.83
		1M11W7D	16QAM	0.152	21.82
		1M12W7D	64QAM	0.126	21.01
		1M12W7D	256QAM	0.061	17.84
LTE – Band25/2 (3)	1851.5 - 1913.5	2M76G7D	QPSK	0.167	22.23
		2M76W7D	16QAM	0.167	22.22
		2M77W7D	64QAM	0.138	21.40
		2M79W7D	256QAM	0.066	18.20
LTE – Band25/2 (5)	1852.5 - 1912.5	4M51G7D	QPSK	0.161	22.07
		4M50W7D	16QAM	0.160	22.05
		4M51W7D	64QAM	0.134	21.27
		4M50W7D	256QAM	0.064	18.07
LTE – Band25/2 (10)	1855.0 - 1910.0	9M01G7D	QPSK	0.143	21.55
		9M00W7D	16QAM	0.142	21.52
		9M02W7D	64QAM	0.128	21.06
		8M99W7D	256QAM	0.057	17.53
LTE – Band25/2 (15)	1857.5 - 1907.5	13M5G7D	QPSK	0.136	21.32
		13M5W7D	16QAM	0.135	21.30
		13M5W7D	64QAM	0.120	20.80
		13M5W7D	256QAM	0.054	17.30
LTE – Band25/2 (20)	1860.0 - 1905.0	17M9G7D	QPSK	0.135	21.29
		17M9W7D	16QAM	0.134	21.26
		17M9W7D	64QAM	0.118	20.73
		17M9W7D	256QAM	0.056	17.47

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2205-FC059

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2205-FC059	May 16, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH.	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 BAND EDGE	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	25
8.1.1 Main2 Ant	25
8.1.2 Sub1 Ant.....	28
8.2 RADIATED SPURIOUS EMISSIONS	31
8.2.1 Main2 Ant	31
8.2.2 Sub1 Ant.....	32
8.3 PEAK-TO-AVERAGE RATIO.....	33
8.3.1 Main2 Ant	33
8.3.2 Sub1 Ant.....	34
8.4 OCCUPIED BANDWIDTH	35
8.4.1 Main2 Ant	35
8.4.2 Sub1 Ant.....	36
8.5 CONDUCTED SPURIOUS EMISSIONS	37
8.5.1 Main2 Ant	37
8.5.2 Sub1 Ant.....	38

8.6 BAND EDGE	39
8.6.1 Main2 Ant	39
8.6.2 Sub1 Ant	39
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	40
8.7.1 Main2 Ant	40
8.7.1 Sub1 Ant	58
9. TEST PLOTS.....	76
10. APPENDIX A_ TEST SETUP PHOTO	317

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG736U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24, §2
EUT Type:	Mobile phone
Model(s):	SM-G736U
Additional Model(s):	SM-G736U1
Tx Frequency:	1850.7 MHz – 1914.3 MHz (LTE – Band25/2 (1.4 MHz)) 1851.5 MHz – 1913.5 MHz (LTE – Band25/2 (3 MHz)) 1852.5 MHz – 1912.5 MHz (LTE – Band25/2 (5 MHz)) 1855.0 MHz – 1910.0 MHz (LTE – Band25/2 (10 MHz)) 1857.5 MHz – 1907.5 MHz (LTE – Band25/2 (15 MHz)) 1860.0 MHz – 1905.0 MHz (LTE – Band25/2 (20 MHz))
Date(s) of Tests:	April 01, 2022 ~ May 10, 2022
Serial number:	Radiated: R3CT30RXNKH Conducted: R3CT30RXHWD

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), Bluetooth, BT LE, NFC, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

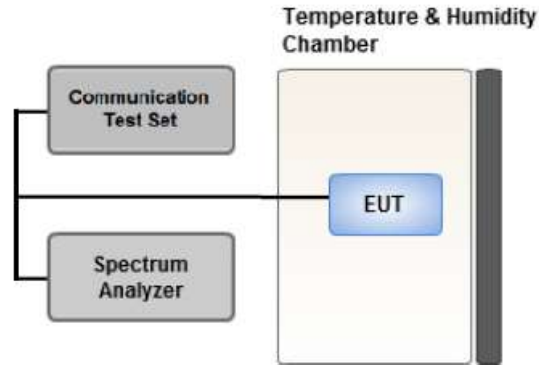

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

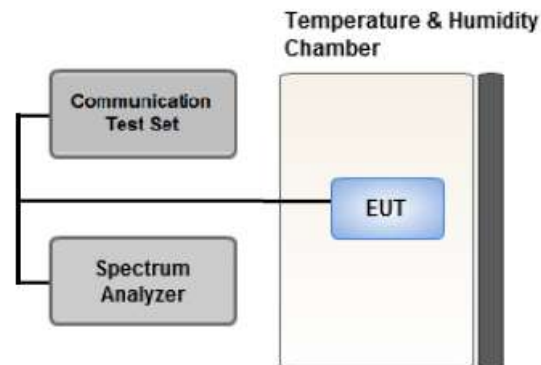

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

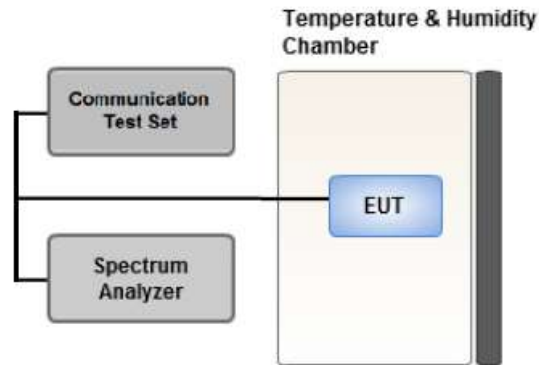

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

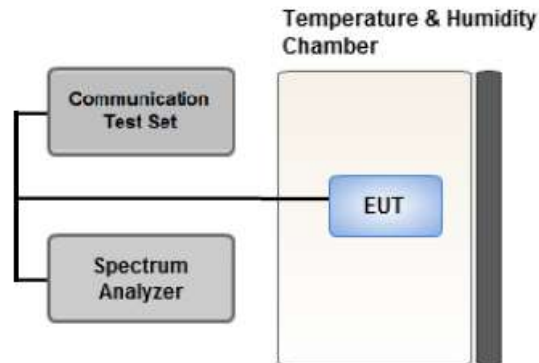

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

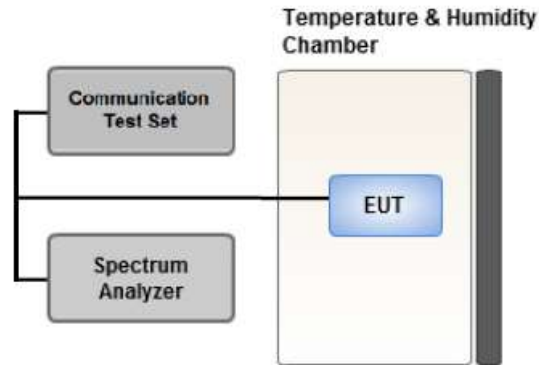

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 20 MHz(Main2 Ant), 3 MHz(Sub1 Ant))
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- LTE BAND 25 (1850 – 1915 MHz) overlaps the entire frequency range of LTE BAND 2 (1850 - 1910 MHz) and they have the same Tune-up power.
Therefore, test data provided in this report covers BAND 2 as well as BAND 25.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, keyboard, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
- SM-G736U & additional models were tested and the worst case results are reported.
(Worst case : SM-G736U)

[Main2 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

[Sub1 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.
 - LTE BAND 25 (1850 – 1915 MHz) overlaps the entire frequency range of LTE BAND 2 (1850 - 1910 MHz) and they have the same Tune-up power.
- Therefore, test data provided in this report covers BAND 2 as well as BAND 25.
- SM-G736U & additional models were tested and the worst case results are reported.
- (Worst case : SM-G736U)

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

8.1.1 Main2 Ant

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
1850.7	LTE B25/B2 1.4 MHz	QPSK	-16.03	17.62	10.40	2.11	V	< 2.00	0.390	25.91
		16-QAM	-16.71	16.94	10.40	2.11	V		0.333	25.23
		64-QAM	-17.70	15.95	10.40	2.11	V		0.265	24.24
		256-QAM	-20.81	12.84	10.40	2.11	V		0.130	21.13
1882.5		QPSK	-16.58	17.50	10.40	2.15	V		0.376	25.75
		16-QAM	-17.21	16.87	10.40	2.15	V		0.325	25.12
		64-QAM	-18.23	15.85	10.40	2.15	V		0.257	24.10
		256-QAM	-21.30	12.78	10.40	2.15	V		0.127	21.03
1914.3		QPSK	-17.79	16.62	10.40	2.16	V		0.306	24.86
		16-QAM	-18.46	15.95	10.40	2.16	V		0.262	24.19
		64-QAM	-19.48	14.93	10.40	2.16	V		0.208	23.17
		256-QAM	-22.50	11.91	10.40	2.16	V		0.104	20.15

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
1851.5	LTE B25/B2 3 MHz	QPSK	-16.03	17.62	10.40	2.11	V	< 2.00	0.390	25.91
		16-QAM	-16.74	16.91	10.40	2.11	V		0.331	25.20
		64-QAM	-17.77	15.88	10.40	2.11	V		0.261	24.17
		256-QAM	-20.80	12.85	10.40	2.11	V		0.130	21.14
1882.5		QPSK	-16.57	17.51	10.40	2.15	V		0.377	25.76
		16-QAM	-17.22	16.86	10.40	2.15	V		0.325	25.11
		64-QAM	-18.23	15.85	10.40	2.15	V		0.257	24.10
		256-QAM	-21.32	12.76	10.40	2.15	V		0.126	21.01
1913.5		QPSK	-17.69	16.61	10.40	2.15	V		0.306	24.86
		16-QAM	-18.35	15.95	10.40	2.15	V		0.263	24.20
		64-QAM	-19.45	14.85	10.40	2.15	V		0.204	23.10
		256-QAM	-22.46	11.84	10.40	2.15	V		0.102	20.09

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit W	EIRP	
									W	dBm
1852.5	LTE B25/B2 5 MHz	QPSK	-16.04	17.61	10.40	2.11	V	< 2.00	0.389	25.90
		16-QAM	-16.77	16.88	10.40	2.11	V		0.329	25.17
		64-QAM	-17.81	15.84	10.40	2.11	V		0.259	24.13
		256-QAM	-20.87	12.78	10.40	2.11	V		0.128	21.07
1882.5		QPSK	-16.61	17.47	10.40	2.15	V		0.373	25.72
		16-QAM	-17.26	16.82	10.40	2.15	V		0.322	25.07
		64-QAM	-18.26	15.82	10.40	2.15	V		0.255	24.07
		256-QAM	-21.36	12.72	10.40	2.15	V		0.125	20.97
1912.5		QPSK	-17.71	16.59	10.40	2.15	V		0.305	24.84
		16-QAM	-18.40	15.90	10.40	2.15	V		0.260	24.15
		64-QAM	-19.43	14.87	10.40	2.15	V		0.205	23.12
		256-QAM	-22.52	11.78	10.40	2.15	V		0.101	20.03

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit W	EIRP	
									W	dBm
1855.0	LTE B25/B2 10 MHz	QPSK	-16.30	17.47	10.40	2.12	V	< 2.00	0.377	25.76
		16-QAM	-17.03	16.75	10.40	2.12	V		0.318	25.03
		64-QAM	-18.02	15.75	10.40	2.12	V		0.254	24.04
		256-QAM	-21.05	12.73	10.40	2.12	V		0.126	21.01
1882.5		QPSK	-16.66	17.42	10.40	2.15	V		0.369	25.67
		16-QAM	-17.28	16.80	10.40	2.15	V		0.320	25.05
		64-QAM	-18.31	15.77	10.40	2.15	V		0.253	24.02
		256-QAM	-21.36	12.72	10.40	2.15	V		0.125	20.97
1910.0		QPSK	-17.57	16.73	10.40	2.15	V		0.315	24.98
		16-QAM	-18.22	16.08	10.40	2.15	V		0.271	24.33
		64-QAM	-19.25	15.05	10.40	2.15	V		0.214	23.30
		256-QAM	-22.55	11.75	10.40	2.15	V		0.100	20.00

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	
1857.5	LTE B25/B2 15 MHz	QPSK	-16.36	17.54	10.40	2.12	V	< 2.00	0.382	25.82	
		16-QAM	-16.99	16.91	10.40	2.12	V		0.330	25.19	
		64-QAM	-18.11	15.79	10.40	2.12	V		0.255	24.07	
		256-QAM	-21.19	12.71	10.40	2.12	V		0.126	20.99	
1882.5		QPSK	-16.60	17.48	10.40	2.15	V		0.374	25.73	
		16-QAM	-17.18	16.90	10.40	2.15	V		0.328	25.15	
		64-QAM	-18.35	15.73	10.40	2.15	V		0.250	23.98	
		256-QAM	-21.71	12.37	10.40	2.15	V		0.115	20.62	
1907.5		QPSK	-17.35	16.95	10.40	2.15	V		0.331	25.20	
		16-QAM	-17.95	16.35	10.40	2.15	V		0.288	24.60	
		64-QAM	-19.11	15.19	10.40	2.15	V		0.221	23.44	
		256-QAM	-22.48	11.82	10.40	2.15	V		0.102	20.07	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	
1860.0	LTE B25/B2 20 MHz	QPSK	-16.16	17.74	10.40	2.12	V	< 2.00	0.400	26.02	
		16-QAM	-16.72	17.18	10.40	2.12	V		0.352	25.46	
		64-QAM	-17.88	16.02	10.40	2.12	V		0.269	24.30	
		256-QAM	-21.38	12.52	10.40	2.12	V		0.120	20.80	
1882.5		QPSK	-16.76	17.32	10.40	2.15	V		0.361	25.57	
		16-QAM	-17.40	16.68	10.40	2.15	V		0.311	24.93	
		64-QAM	-18.59	15.49	10.40	2.15	V		0.237	23.74	
		256-QAM	-22.08	12.00	10.40	2.15	V		0.106	20.25	
1905.0		QPSK	-17.12	17.11	10.40	2.15	V		0.343	25.36	
		16-QAM	-17.69	16.54	10.40	2.15	V		0.301	24.79	
		64-QAM	-18.90	15.33	10.40	2.15	V		0.228	23.58	
		256-QAM	-22.36	11.87	10.40	2.15	V		0.103	20.12	

8.1.2 Sub1 Ant

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1850.7	LTE B25/B2 1.4 MHz	QPSK	-19.84	13.88	10.10	2.15	H	< 2.00		0.152	21.83
		16-QAM	-19.85	13.87	10.10	2.15	H			0.152	21.82
		64-QAM	-20.66	13.06	10.10	2.15	H			0.126	21.01
		256-QAM	-23.83	9.89	10.10	2.15	H			0.061	17.84
1882.5		QPSK	-20.30	12.89	9.98	2.25	H			0.115	20.62
		16-QAM	-20.31	12.88	9.98	2.25	H			0.115	20.61
		64-QAM	-21.19	12.00	9.98	2.25	H			0.094	19.73
		256-QAM	-24.21	8.98	9.98	2.25	H			0.047	16.71
1914.3		QPSK	-21.07	12.91	9.87	2.17	H			0.115	20.62
		16-QAM	-21.12	12.86	9.87	2.17	H			0.114	20.57
		64-QAM	-21.30	12.68	9.87	2.17	H			0.109	20.39
		256-QAM	-24.80	9.18	9.87	2.17	H			0.049	16.89

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1851.5	LTE B25/B2 3 MHz	QPSK	-19.44	14.28	10.10	2.15	H	< 2.00		0.167	22.23
		16-QAM	-19.45	14.27	10.10	2.15	H			0.167	22.22
		64-QAM	-20.27	13.45	10.10	2.15	H			0.138	21.40
		256-QAM	-23.47	10.25	10.10	2.15	H			0.066	18.20
1882.5		QPSK	-19.55	13.64	9.98	2.25	H			0.137	21.37
		16-QAM	-19.63	13.56	9.98	2.25	H			0.135	21.29
		64-QAM	-20.48	12.71	9.98	2.25	H			0.111	20.44
		256-QAM	-23.59	9.60	9.98	2.25	H			0.054	17.33
1913.5		QPSK	-21.08	12.71	9.88	2.17	H			0.110	20.42
		16-QAM	-21.10	12.69	9.88	2.17	H			0.110	20.40
		64-QAM	-21.52	12.27	9.88	2.17	H			0.100	19.98
		256-QAM	-24.74	9.05	9.88	2.17	H			0.047	16.76

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	LTE B25/B2 5 MHz	QPSK	-19.60	14.12	10.10	2.15	H	< 2.00	0.161	22.07
		16-QAM	-19.62	14.10	10.10	2.15	H		0.160	22.05
		64-QAM	-20.40	13.32	10.10	2.15	H		0.134	21.27
		256-QAM	-23.60	10.12	10.10	2.15	H		0.064	18.07
1882.5		QPSK	-19.83	13.36	9.98	2.25	H		0.129	21.09
		16-QAM	-19.84	13.35	9.98	2.25	H		0.128	21.08
		64-QAM	-20.55	12.64	9.98	2.25	H		0.109	20.37
		256-QAM	-23.84	9.35	9.98	2.25	H		0.051	17.08
1912.5		QPSK	-20.90	12.89	9.88	2.17	H		0.115	20.60
		16-QAM	-20.91	12.88	9.88	2.17	H		0.115	20.59
		64-QAM	-21.56	12.23	9.88	2.17	H		0.099	19.94
		256-QAM	-24.27	9.52	9.88	2.17	H		0.053	17.23

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	LTE B25/B2 10 MHz	QPSK	-19.77	13.64	10.08	2.17	H	< 2.00	0.143	21.55
		16-QAM	-19.80	13.61	10.08	2.17	H		0.142	21.52
		64-QAM	-20.26	13.15	10.08	2.17	H		0.128	21.06
		256-QAM	-23.79	9.62	10.08	2.17	H		0.057	17.53
1882.5		QPSK	-20.32	12.87	9.98	2.25	H		0.115	20.60
		16-QAM	-20.33	12.86	9.98	2.25	H		0.115	20.59
		64-QAM	-21.19	12.00	9.98	2.25	H		0.094	19.73
		256-QAM	-24.33	8.86	9.98	2.25	H		0.046	16.59
1910.0		QPSK	-21.25	12.53	9.89	2.17	H		0.106	20.25
		16-QAM	-21.26	12.52	9.89	2.17	H		0.106	20.24
		64-QAM	-21.96	11.82	9.89	2.17	H		0.090	19.54
		256-QAM	-24.76	9.02	9.89	2.17	H		0.047	16.74

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	LTE B25/B2 15 MHz	QPSK	-19.82	13.43	10.06	2.17	H	< 2.00	0.136	21.32
		16-QAM	-19.84	13.41	10.06	2.17	H		0.135	21.30
		64-QAM	-20.34	12.91	10.06	2.17	H		0.120	20.80
		256-QAM	-23.84	9.41	10.06	2.17	H		0.054	17.30
1882.5		QPSK	-20.26	12.93	9.98	2.25	H		0.116	20.66
		16-QAM	-20.27	12.92	9.98	2.25	H		0.116	20.65
		64-QAM	-20.64	12.55	9.98	2.25	H		0.107	20.28
		256-QAM	-23.80	9.39	9.98	2.25	H		0.052	17.12
1907.5		QPSK	-21.11	12.66	9.90	2.17	H		0.109	20.39
		16-QAM	-21.12	12.65	9.90	2.17	H		0.109	20.38
		64-QAM	-21.45	12.32	9.90	2.17	H		0.101	20.05
		256-QAM	-24.47	9.30	9.90	2.17	H		0.050	17.03

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	LTE B25/B2 20 MHz	QPSK	-19.67	13.42	10.06	2.19	H	< 2.00	0.135	21.29
		16-QAM	-19.70	13.39	10.06	2.19	H		0.134	21.26
		64-QAM	-20.23	12.86	10.06	2.19	H		0.118	20.73
		256-QAM	-23.49	9.60	10.06	2.19	H		0.056	17.47
1882.5		QPSK	-20.21	12.98	9.98	2.25	H		0.118	20.71
		16-QAM	-20.22	12.97	9.98	2.25	H		0.118	20.70
		64-QAM	-20.60	12.59	9.98	2.25	H		0.108	20.32
		256-QAM	-23.84	9.35	9.98	2.25	H		0.051	17.08
1905.0		QPSK	-21.05	12.66	9.89	2.19	H		0.109	20.37
		16-QAM	-21.08	12.63	9.89	2.19	H		0.108	20.34
		64-QAM	-21.44	12.27	9.89	2.19	H		0.100	19.98
		256-QAM	-24.38	9.33	9.89	2.19	H		0.051	17.04

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Main2 Ant

- ▣ OPERATING FREQUENCY: 1914.3 MHz
- ▣ MEASURED OUTPUT POWER: 26.02 dBm = 0.400 W
- ▣ MOD: LTE B25/B2
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 39.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26140 (1860.0)	3 720.00	-55.58	12.30	-60.47	3.09	H	-51.26	77.27
	5 580.00	-56.50	13.60	-54.84	3.84	H	-45.08	71.10
	7 440.00	-57.34	10.80	-46.66	4.40	V	-40.26	66.28
26365 (1882.5)	3 765.00	-54.39	12.33	-58.99	3.10	V	-49.76	75.78
	5 647.50	-56.87	13.10	-54.91	3.87	V	-45.68	71.69
	7 530.00	-57.00	10.86	-46.63	4.45	H	-40.22	66.24
26590 (1905.0)	3 810.00	-55.63	12.40	-60.48	3.13	H	-51.21	77.22
	5 715.00	-56.51	13.07	-53.82	3.88	H	-44.63	70.65
	7 620.00	-58.00	11.18	-47.71	4.48	V	-41.01	67.03

8.2.2 Sub1 Ant

- ▣ OPERATING FREQUENCY: 1914.3 MHz
- ▣ MEASURED OUTPUT POWER: 22.23 dBm = 0.167 W
- ▣ MOD: LTE B25/B2
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 35.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26055 (1851.5)	3 703.00	-59.39	11.70	-60.54	3.12	V	-51.96	74.18
	5 554.50	-60.12	12.09	-55.04	3.86	V	-46.80	69.03
	7 406.00	-58.47	11.22	-43.30	4.43	H	-36.51	58.74
	9 257.50	-60.71	11.24	-45.98	5.03	H	-39.77	61.99
	11 109.00	-64.75	12.30	-46.21	5.60	V	-39.51	61.74
26365 (1882.5)	3 765.00	-57.40	11.64	-57.63	3.16	V	-49.15	71.38
	5 647.50	-62.26	12.00	-56.08	3.93	V	-48.01	70.24
	7 530.00	-60.25	11.54	-45.80	4.51	H	-38.77	60.99
	9 412.50	-60.93	11.20	-46.14	5.18	V	-40.12	62.35
	11 295.00	-63.95	12.14	-45.14	5.73	V	-38.73	60.96
26675 (1913.5)	3 827.00	-59.61	11.28	-58.85	3.20	H	-50.77	72.99
	5 740.50	-62.97	11.72	-56.30	3.89	H	-48.47	70.69
	7 654.00	-61.47	11.59	-47.73	4.63	H	-40.76	62.99
	9 567.50	-64.15	11.38	-48.23	5.16	H	-42.01	64.24
	11 481.00	-65.40	12.36	-46.15	5.85	H	-39.64	61.87

8.3 PEAK-TO-AVERAGE RATIO

8.3.1 Main2 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
25/2	1.4 MHz	1882.5	QPSK	6	0	4.71
			16-QAM	6	0	5.48
			64-QAM	6	0	6.18
			256-QAM	6	0	6.41
	3 MHz		QPSK	15	0	4.80
			16-QAM	15	0	5.56
			64-QAM	15	0	6.13
			256-QAM	15	0	6.48
	5 MHz		QPSK	25	0	4.79
			16-QAM	25	0	5.52
			64-QAM	25	0	6.14
			256-QAM	25	0	6.47
	10 MHz		QPSK	50	0	4.85
			16-QAM	50	0	5.56
			64-QAM	50	0	6.17
			256-QAM	50	0	6.47
	15 MHz		QPSK	75	0	4.84
			16-QAM	75	0	5.56
			64-QAM	75	0	6.21
			256-QAM	75	0	6.46
20 MHz	QPSK	100	0	4.86		
	16-QAM	100	0	5.59		
	64-QAM	100	0	6.22		
	256-QAM	100	0	6.46		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 197 ~ 220.

8.3.2 Sub1 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
25/2	1.4 MHz	1882.5	QPSK	6	0	4.45
			16-QAM	6	0	5.12
			64-QAM	6	0	5.79
			256-QAM	6	0	6.21
	3 MHz		QPSK	15	0	4.49
			16-QAM	15	0	5.15
			64-QAM	15	0	5.83
			256-QAM	15	0	6.14
	5 MHz		QPSK	25	0	4.52
			16-QAM	25	0	5.26
			64-QAM	25	0	6.00
			256-QAM	25	0	6.42
	10 MHz		QPSK	50	0	4.61
			16-QAM	50	0	5.33
			64-QAM	50	0	5.99
			256-QAM	50	0	6.43
	15 MHz		QPSK	75	0	4.61
			16-QAM	75	0	5.32
			64-QAM	75	0	6.11
			256-QAM	75	0	6.40
20 MHz	QPSK	100	0	4.66		
	16-QAM	100	0	5.36		
	64-QAM	100	0	6.13		
	256-QAM	100	0	6.39		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 221 ~ 244.

8.4 OCCUPIED BANDWIDTH

8.4.1 Main2 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
25/2	1.4 MHz	1882.5	QPSK	6	0	1.0926
			16-QAM	6	0	1.0927
			64-QAM	6	0	1.0929
			256-QAM	6	0	1.0893
	3 MHz		QPSK	15	0	2.7149
			16-QAM	15	0	2.7025
			64-QAM	15	0	2.7040
			256-QAM	15	0	2.7028
	5 MHz		QPSK	25	0	4.5228
			16-QAM	25	0	4.5008
			64-QAM	25	0	4.5068
			256-QAM	25	0	4.5082
	10 MHz		QPSK	50	0	8.9970
			16-QAM	50	0	8.9753
			64-QAM	50	0	8.9974
			256-QAM	50	0	8.9998
	15 MHz		QPSK	75	0	13.451
			16-QAM	75	0	13.460
			64-QAM	75	0	13.451
			256-QAM	75	0	13.435
20 MHz	QPSK	100	0	17.926		
	16-QAM	100	0	17.866		
	64-QAM	100	0	17.928		
	256-QAM	100	0	17.883		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 149 ~ 172.

8.4.2 Sub1 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
25/2	1.4 MHz	1882.5	QPSK	6	0	1.1103
			16-QAM	6	0	1.1111
			64-QAM	6	0	1.1158
			256-QAM	6	0	1.1148
	3 MHz		QPSK	15	0	2.7629
			16-QAM	15	0	2.7591
			64-QAM	15	0	2.7686
			256-QAM	15	0	2.7916
	5 MHz		QPSK	25	0	4.5135
			16-QAM	25	0	4.4965
			64-QAM	25	0	4.5110
			256-QAM	25	0	4.4967
	10 MHz		QPSK	50	0	9.0084
			16-QAM	50	0	9.0001
			64-QAM	50	0	9.0189
			256-QAM	50	0	8.9921
	15 MHz		QPSK	75	0	13.453
			16-QAM	75	0	13.471
			64-QAM	75	0	13.491
			256-QAM	75	0	13.476
20 MHz	QPSK	100	0	17.934		
	16-QAM	100	0	17.924		
	64-QAM	100	0	17.892		
	256-QAM	100	0	17.927		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 173 ~ 196.

8.5 CONDUCTED SPURIOUS EMISSIONS

8.5.1 Main2 Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
25/2	1.4	3.6790	3.7049	27.976	-77.143	-49.167	-13.00
		3.6790	3.6830	27.976	-77.205	-49.229	
		3.6780	3.6970	27.976	-77.356	-49.380	
	3	3.6815	3.6760	27.976	-77.075	-49.099	
		3.7114	3.7084	27.976	-77.078	-49.102	
		3.6885	3.7024	27.976	-77.126	-49.150	
	5	3.7194	3.1551	27.976	-77.293	-49.317	
		3.7114	3.7089	27.976	-76.910	-48.934	
		3.6850	3.6905	27.976	-77.214	-49.238	
	10	3.7189	3.7069	27.976	-76.853	-48.877	
		3.7044	3.6835	27.976	-76.772	-48.796	
		3.6785	3.6950	27.976	-77.132	-49.156	
	15	3.6910	3.6845	27.976	-77.029	-49.053	
		3.7039	3.7089	27.976	-76.988	-49.012	
		3.7044	3.6880	27.976	-77.085	-49.109	
	20	3.7169	3.7189	27.976	-77.198	-49.222	
		3.7124	3.7184	27.976	-77.168	-49.192	
		3.7005	3.7020	27.976	-77.370	-49.394	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 245 ~ 280.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.5.2 Sub1 Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
25/2	1.4	3.6790	3.7005	30.200	-63.734	-33.534	-13.00
		3.6790	3.7643	30.200	-56.846	-26.646	
		3.6780	5.7443	30.815	-73.882	-43.067	
	3	3.6815	3.7005	30.200	-64.556	-34.356	
		3.7114	3.7623	30.200	-56.184	-25.984	
		3.6885	1.9936	30.200	-74.008	-43.808	
	5	3.7194	3.7005	30.200	-64.088	-33.888	
		3.7114	1.9617	30.200	-75.111	-44.911	
		3.6850	1.9941	30.200	-74.183	-43.983	
	10	3.7189	3.7010	30.200	-65.736	-35.536	
		3.7044	3.7563	30.200	-61.759	-31.559	
		3.6785	1.9936	30.200	-73.623	-43.423	
	15	3.6910	3.7015	30.200	-66.380	-36.180	
		3.7039	3.7518	30.200	-62.885	-32.685	
		3.7044	1.9846	30.200	-73.034	-42.834	
	20	3.7169	3.7020	30.200	-64.684	-34.484	
		3.7124	3.7473	30.200	-62.072	-31.872	
		3.7005	1.9801	30.200	-73.417	-43.217	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 281 ~ 316.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20(26.5)	32.355

8.6 BAND EDGE

8.6.1 Main2 Ant

- Plots of the EUT's Band Edge are shown Page 77 ~ 112.

8.6.2 Sub1 Ant


- Plots of the EUT's Band Edge are shown Page 113 ~ 148.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

8.7.1 Main2 Ant


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1850.700.000 Hz
- ▣ CHANNEL: 26047 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1850 700 004	0.0	0.000 000	0.000
100 %		-30	1850 700 008	4.0	0.000 000	0.002
100 %		-20	1850 700 008	3.6	0.000 000	0.002
100 %		-10	1850 700 009	4.3	0.000 000	0.002
100 %		0	1850 700 003	-1.7	0.000 000	-0.001
100 %		+10	1850 700 010	5.4	0.000 000	0.003
100 %		+30	1850 700 009	4.9	0.000 000	0.003
100 %		+40	1850 700 009	4.6	0.000 000	0.002
100 %		+50	1850 700 007	3.1	0.000 000	0.002
Batt. Endpoint		3.400	+20	1850 700 010	6.1	0.000 000

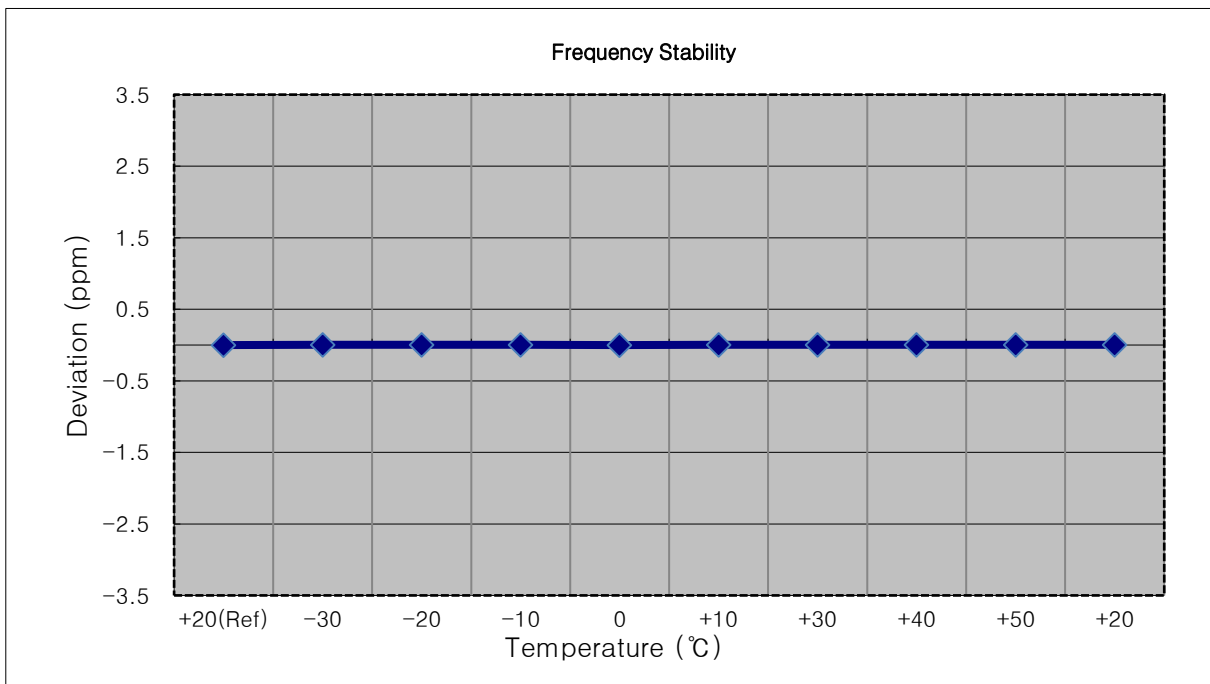


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 26055 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1851 499 996	0.0	0.000 000	0.000
100 %		-30	1851 500 002	5.3	0.000 000	0.003
100 %		-20	1851 499 999	2.8	0.000 000	0.002
100 %		-10	1851 499 994	-2.6	0.000 000	-0.001
100 %		0	1851 499 994	-2.6	0.000 000	-0.001
100 %		+10	1851 499 993	-3.5	0.000 000	-0.002
100 %		+30	1851 499 993	-3.4	0.000 000	-0.002
100 %		+40	1851 499 994	-2.7	0.000 000	-0.001
100 %		+50	1851 500 000	3.5	0.000 000	0.002
Batt. Endpoint	3.400	+20	1851 499 994	-2.6	0.000 000	-0.001

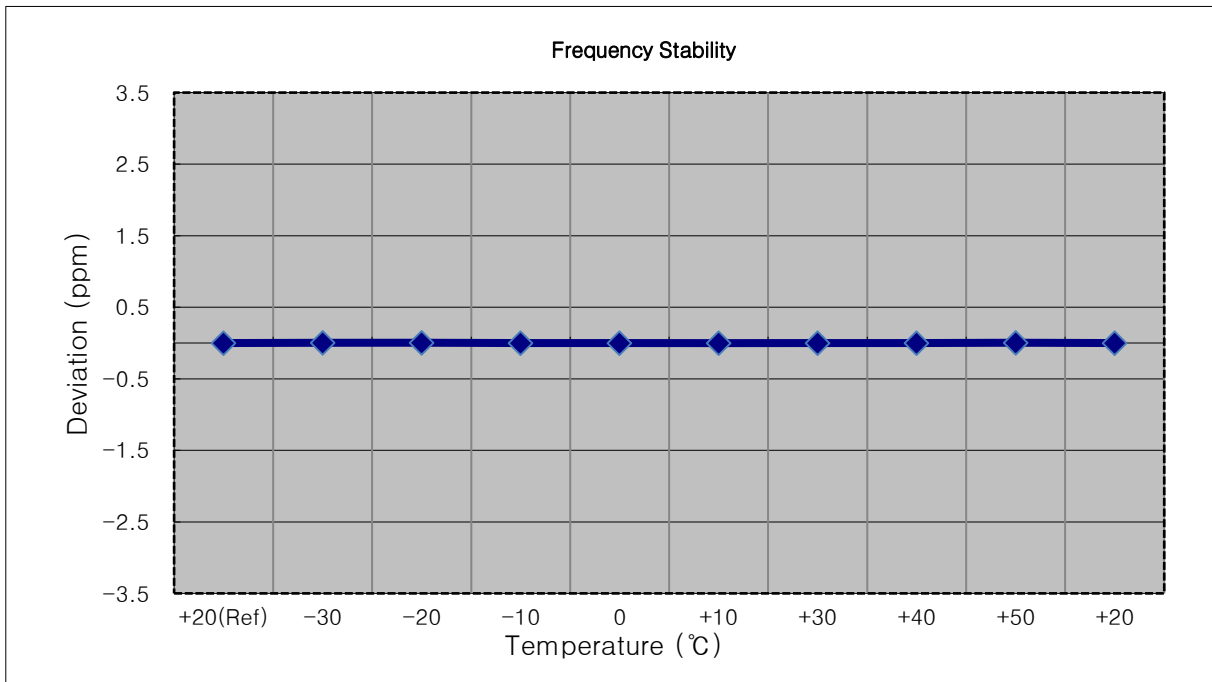


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1852.500.000 Hz
- ▣ CHANNEL: 26065 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1852 499 996	0.0	0.000 000	0.000
100 %		-30	1852 499 994	-2.8	0.000 000	-0.002
100 %		-20	1852 499 992	-4.5	0.000 000	-0.002
100 %		-10	1852 499 992	-4.4	0.000 000	-0.002
100 %		0	1852 499 991	-5.0	0.000 000	-0.003
100 %		+10	1852 499 993	-3.7	0.000 000	-0.002
100 %		+30	1852 499 992	-4.1	0.000 000	-0.002
100 %		+40	1852 499 991	-5.6	0.000 000	-0.003
100 %		+50	1852 499 993	-3.7	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1852 499 999	2.6	0.000 000	0.001

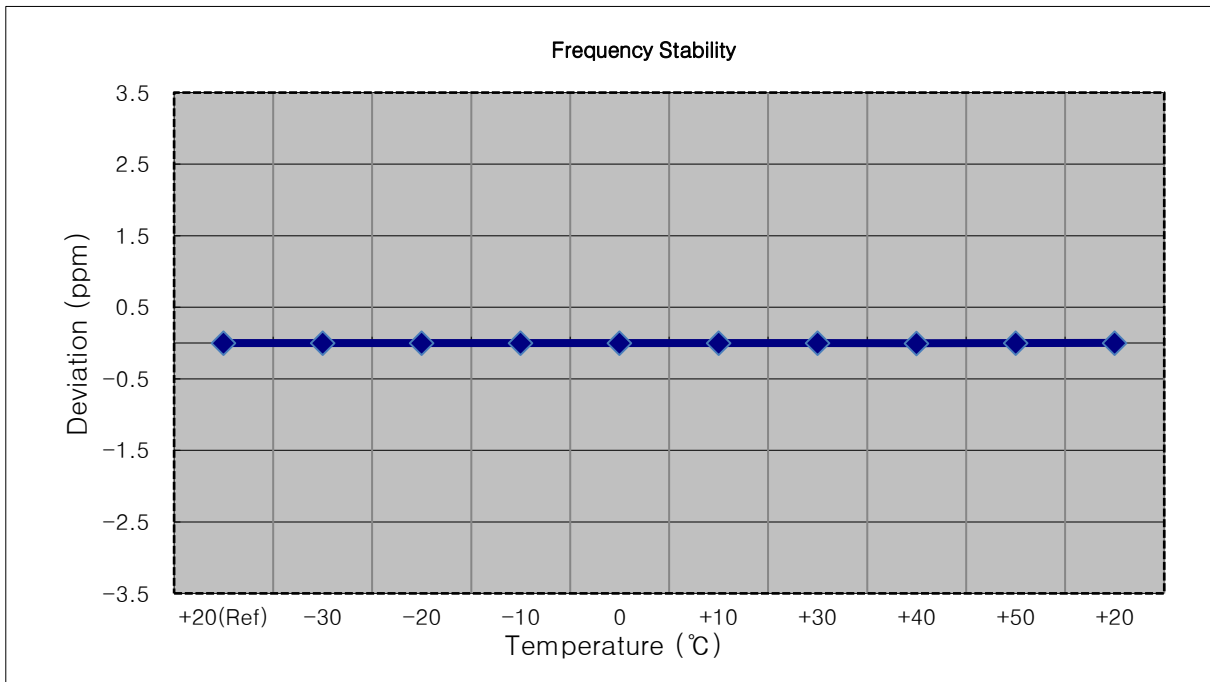


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 26090 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1854 999 997	0.0	0.000 000	0.000
100 %		-30	1854 999 999	2.2	0.000 000	0.001
100 %		-20	1854 999 992	-5.5	0.000 000	-0.003
100 %		-10	1854 999 994	-3.6	0.000 000	-0.002
100 %		0	1854 999 995	-2.4	0.000 000	-0.001
100 %		+10	1854 999 992	-4.9	0.000 000	-0.003
100 %		+30	1854 999 995	-2.3	0.000 000	-0.001
100 %		+40	1854 999 994	-3.4	0.000 000	-0.002
100 %		+50	1854 999 991	-6.2	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1854 999 994	-3.2	0.000 000	-0.002

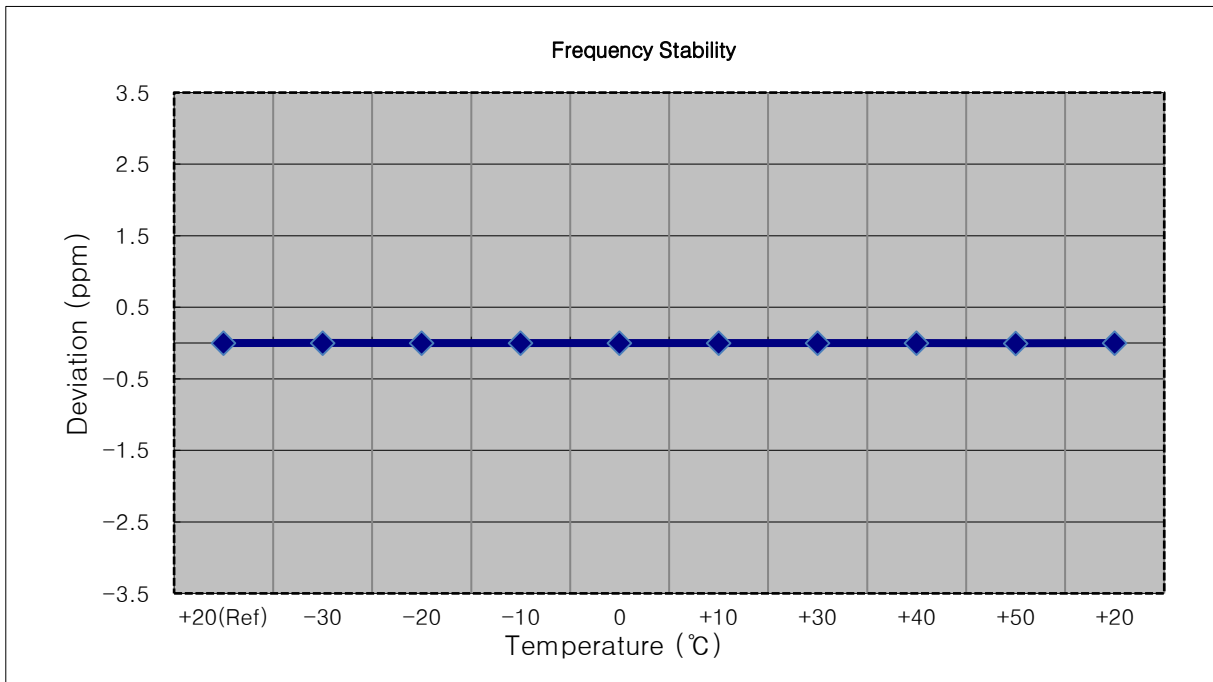


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1857.500.000 Hz
- ▣ CHANNEL: 26115 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1857 499 995	0.0	0.000 000	0.000
100 %		-30	1857 499 991	-4.6	0.000 000	-0.002
100 %		-20	1857 499 989	-5.9	0.000 000	-0.003
100 %		-10	1857 499 989	-6.3	0.000 000	-0.003
100 %		0	1857 499 993	-2.6	0.000 000	-0.001
100 %		+10	1857 499 989	-6.4	0.000 000	-0.003
100 %		+30	1857 499 991	-4.4	0.000 000	-0.002
100 %		+40	1857 499 993	-2.5	0.000 000	-0.001
100 %		+50	1857 499 992	-3.0	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1857 499 993	-2.7	0.000 000	-0.001

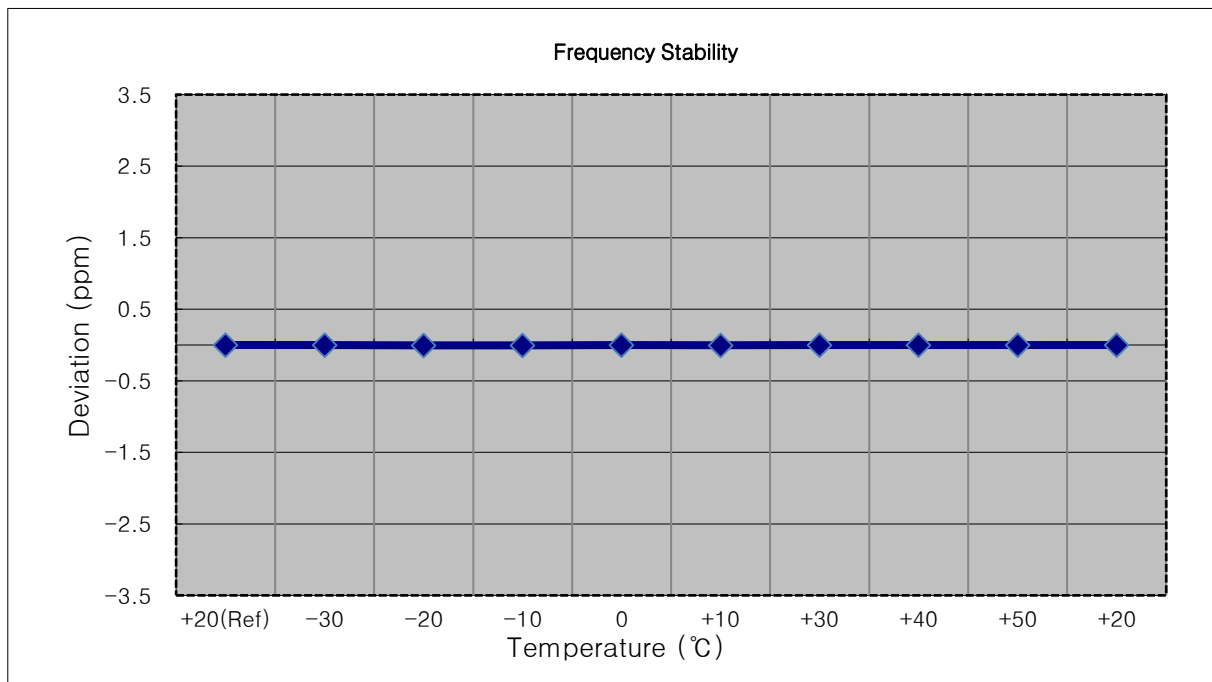


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 26140 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1860 000 008	0.0	0.000 000	0.000
100 %		-30	1860 000 012	4.3	0.000 000	0.002
100 %		-20	1860 000 013	5.7	0.000 000	0.003
100 %		-10	1860 000 013	5.2	0.000 000	0.003
100 %		0	1860 000 013	5.7	0.000 000	0.003
100 %		+10	1860 000 013	5.5	0.000 000	0.003
100 %		+30	1860 000 014	6.0	0.000 000	0.003
100 %		+40	1860 000 013	5.2	0.000 000	0.003
100 %		+50	1860 000 013	5.5	0.000 000	0.003
Batt. Endpoint	3.400	+20	1860 000 014	6.4	0.000 000	0.003

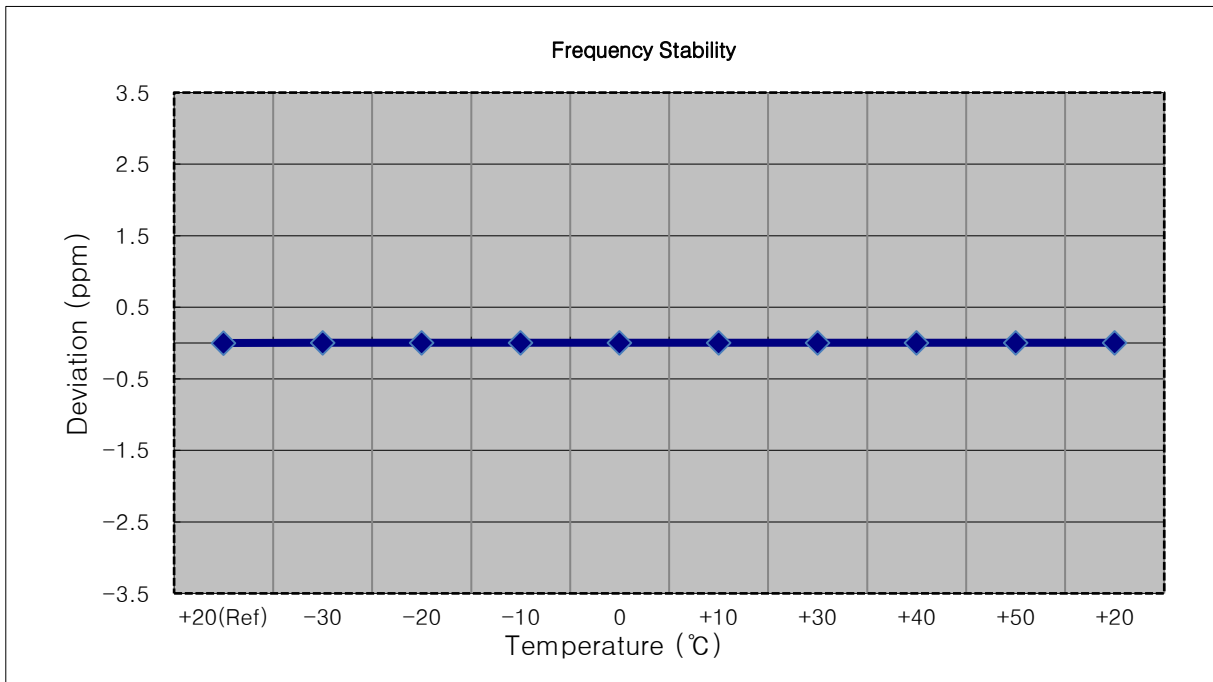


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 004	0.0	0.000 000	0.000
100 %		-30	1882 500 009	5.7	0.000 000	0.003
100 %		-20	1882 500 008	4.2	0.000 000	0.002
100 %		-10	1882 500 010	6.1	0.000 000	0.003
100 %		0	1882 500 010	5.9	0.000 000	0.003
100 %		+10	1882 500 006	2.1	0.000 000	0.001
100 %		+30	1882 500 010	6.2	0.000 000	0.003
100 %		+40	1882 500 007	3.4	0.000 000	0.002
100 %		+50	1882 500 009	5.1	0.000 000	0.003
Batt. Endpoint	3.400	+20	1882 500 000	-3.3	0.000 000	-0.002

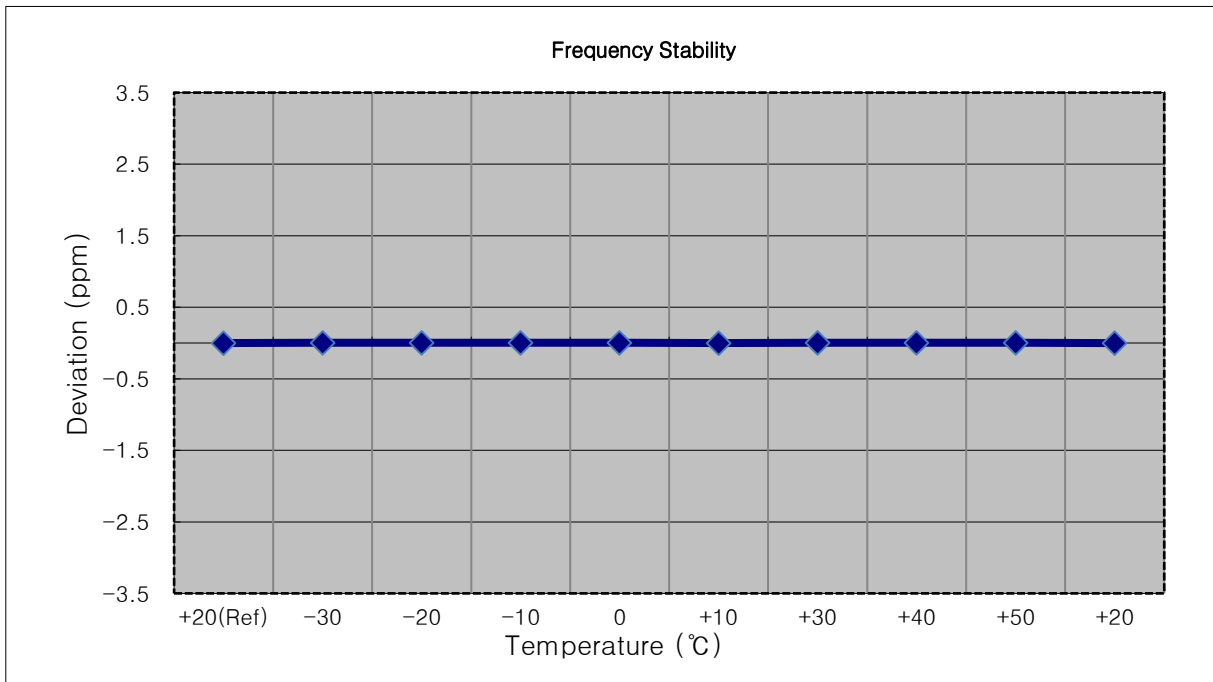


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 002	0.0	0.000 000	0.000
100 %		-30	1882 500 005	3.2	0.000 000	0.002
100 %		-20	1882 499 999	-2.7	0.000 000	-0.001
100 %		-10	1882 500 007	4.7	0.000 000	0.002
100 %		0	1882 500 006	3.5	0.000 000	0.002
100 %		+10	1882 500 006	3.6	0.000 000	0.002
100 %		+30	1882 500 005	2.7	0.000 000	0.001
100 %		+40	1882 499 998	-3.8	0.000 000	-0.002
100 %		+50	1882 500 006	4.2	0.000 000	0.002
Batt. Endpoint	3.400	+20	1882 500 005	2.8	0.000 000	0.001

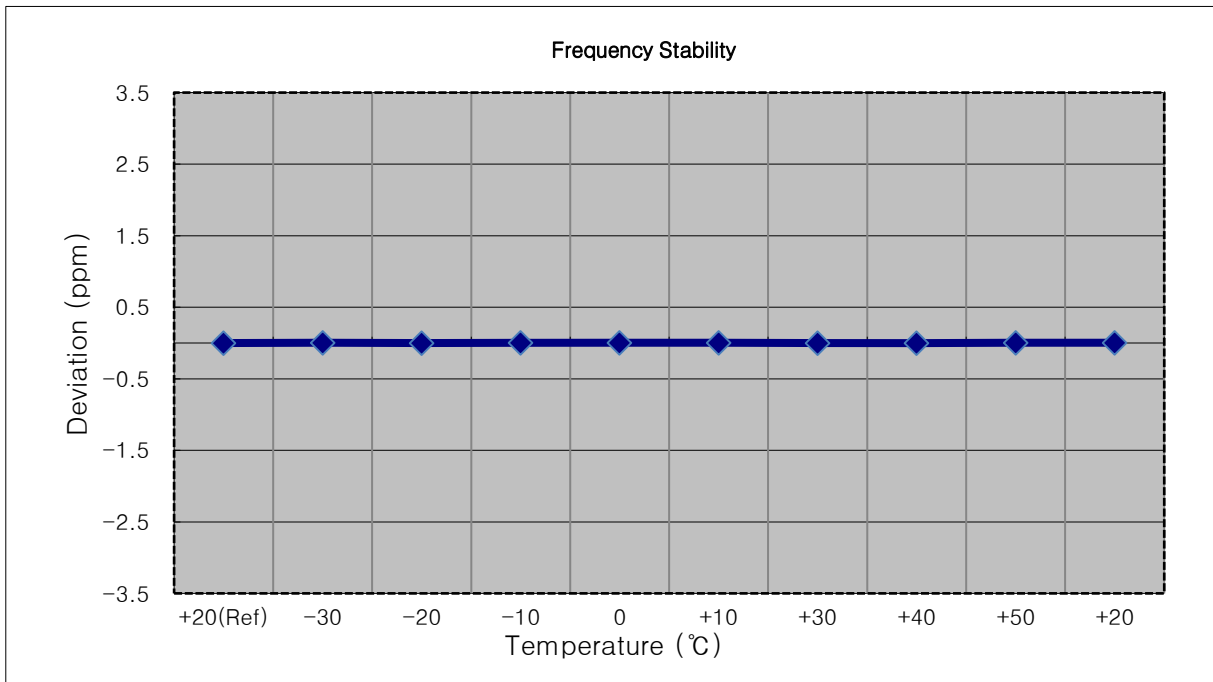


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 003	0.0	0.000 000	0.000
100 %		-30	1882 499 997	-6.4	0.000 000	-0.003
100 %		-20	1882 499 999	-3.9	0.000 000	-0.002
100 %		-10	1882 500 007	3.6	0.000 000	0.002
100 %		0	1882 500 008	4.3	0.000 000	0.002
100 %		+10	1882 500 000	-3.2	0.000 000	-0.002
100 %		+30	1882 500 000	-3.7	0.000 000	-0.002
100 %		+40	1882 499 999	-3.9	0.000 000	-0.002
100 %		+50	1882 500 000	-2.9	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1882 500 006	2.9	0.000 000	0.002

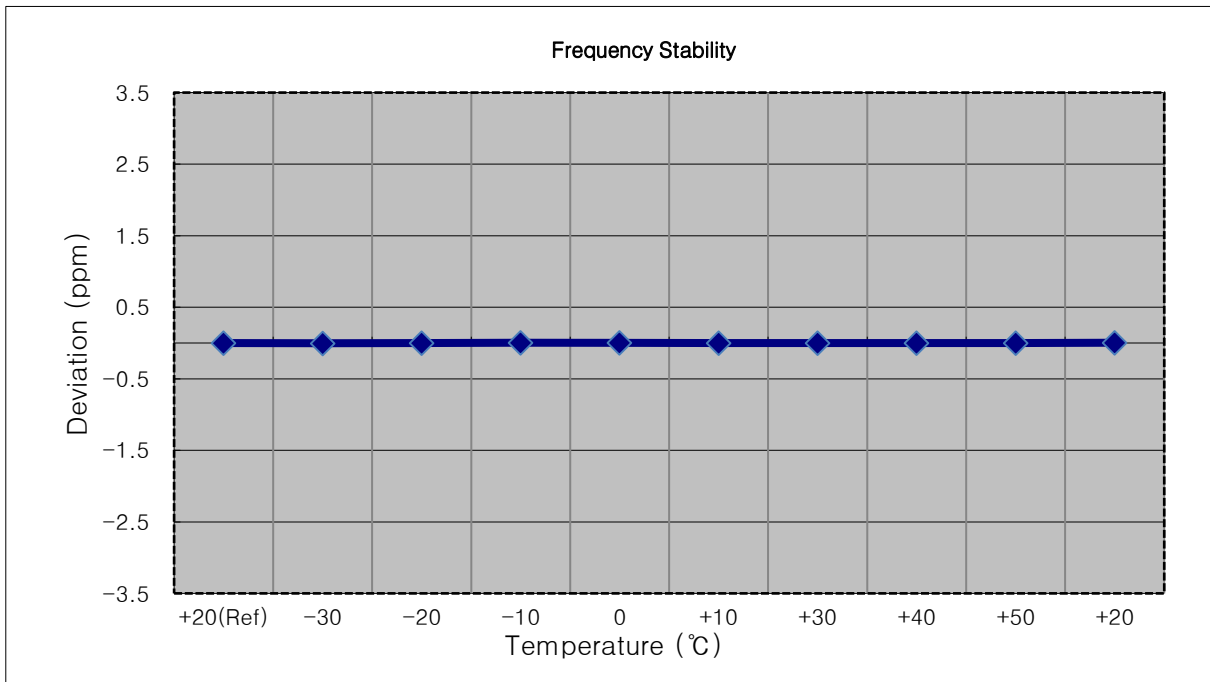


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 499 996	0.0	0.000 000	0.000
100 %		-30	1882 499 990	-5.5	0.000 000	-0.003
100 %		-20	1882 499 990	-6.0	0.000 000	-0.003
100 %		-10	1882 499 992	-4.0	0.000 000	-0.002
100 %		0	1882 499 991	-4.9	0.000 000	-0.003
100 %		+10	1882 499 993	-2.7	0.000 000	-0.001
100 %		+30	1882 499 992	-3.6	0.000 000	-0.002
100 %		+40	1882 499 990	-5.5	0.000 000	-0.003
100 %		+50	1882 499 991	-4.3	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1882 499 990	-5.4	0.000 000

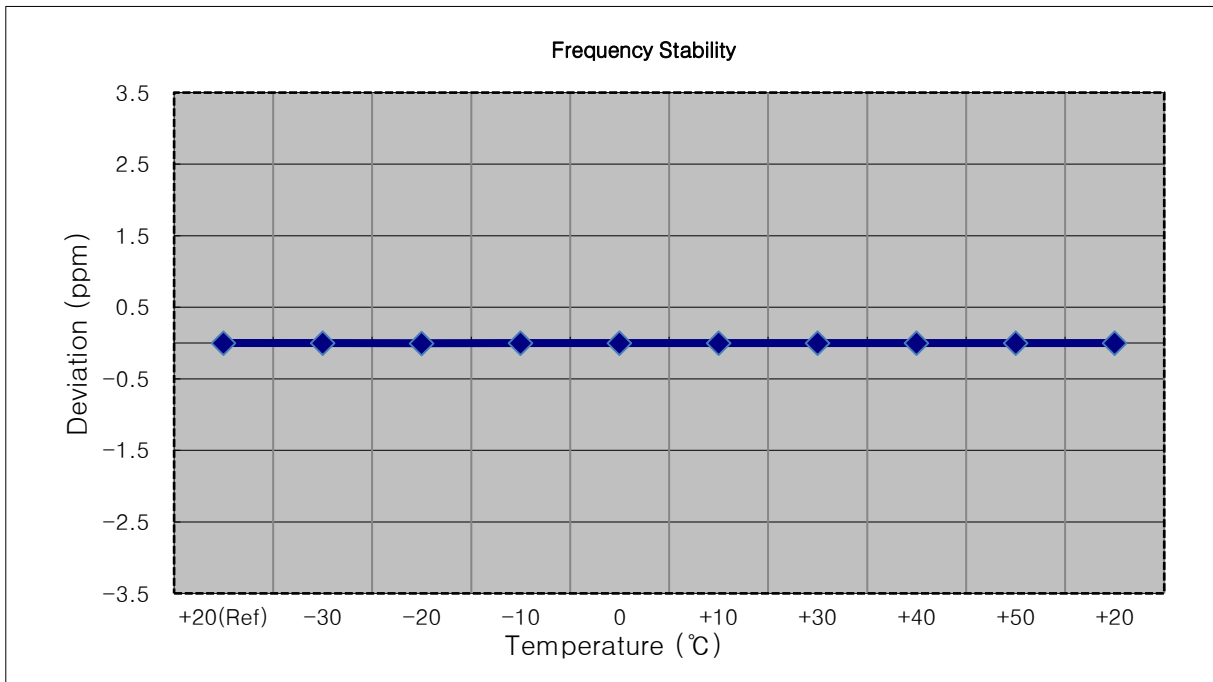


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 002	0.0	0.000 000	0.000
100 %		-30	1882 500 006	4.3	0.000 000	0.002
100 %		-20	1882 500 006	4.6	0.000 000	0.002
100 %		-10	1882 500 005	3.7	0.000 000	0.002
100 %		0	1882 500 006	4.8	0.000 000	0.003
100 %		+10	1882 500 006	4.3	0.000 000	0.002
100 %		+30	1882 500 005	3.2	0.000 000	0.002
100 %		+40	1882 499 999	-2.3	0.000 000	-0.001
100 %		+50	1882 500 003	1.4	0.000 000	0.001
Batt. Endpoint		3.400	+20	1882 500 000	-1.2	0.000 000

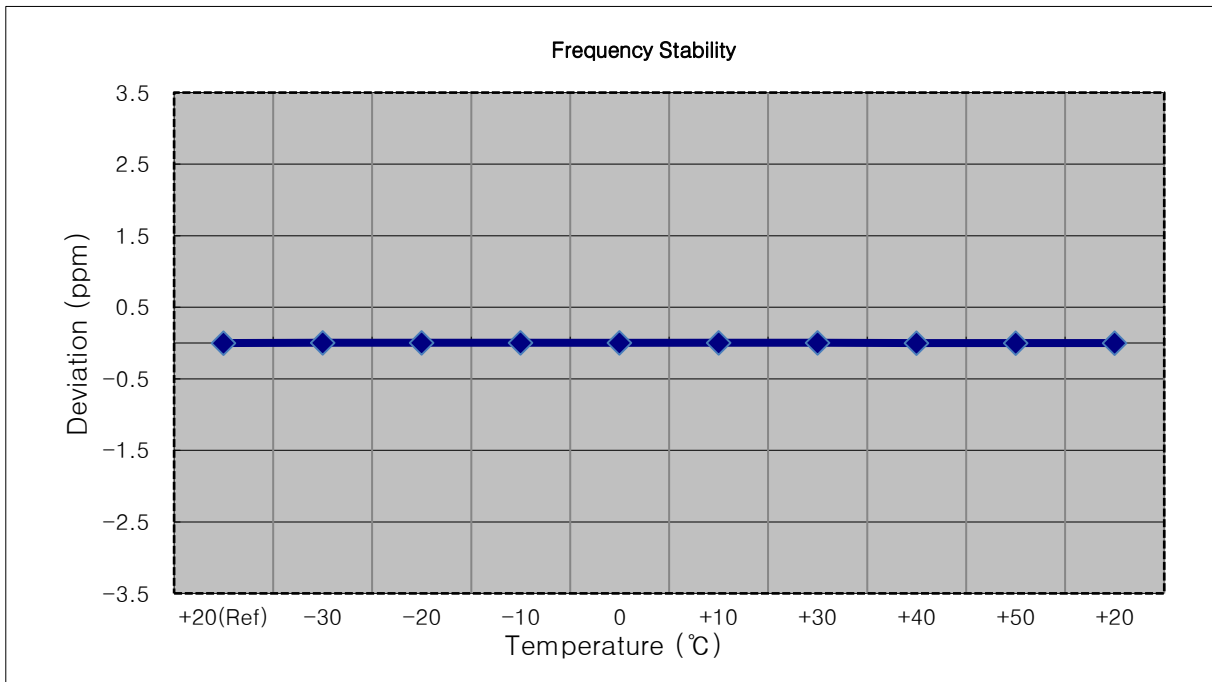


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 003	0.0	0.000 000	0.000
100 %		-30	1882 500 007	4.4	0.000 000	0.002
100 %		-20	1882 500 006	3.1	0.000 000	0.002
100 %		-10	1882 500 007	4.7	0.000 000	0.002
100 %		0	1882 500 008	5.5	0.000 000	0.003
100 %		+10	1882 500 007	4.1	0.000 000	0.002
100 %		+30	1882 500 004	1.7	0.000 000	0.001
100 %		+40	1882 500 007	4.8	0.000 000	0.003
100 %		+50	1882 500 007	4.2	0.000 000	0.002
Batt. Endpoint		3.400	+20	1882 500 008	5.6	0.000 000

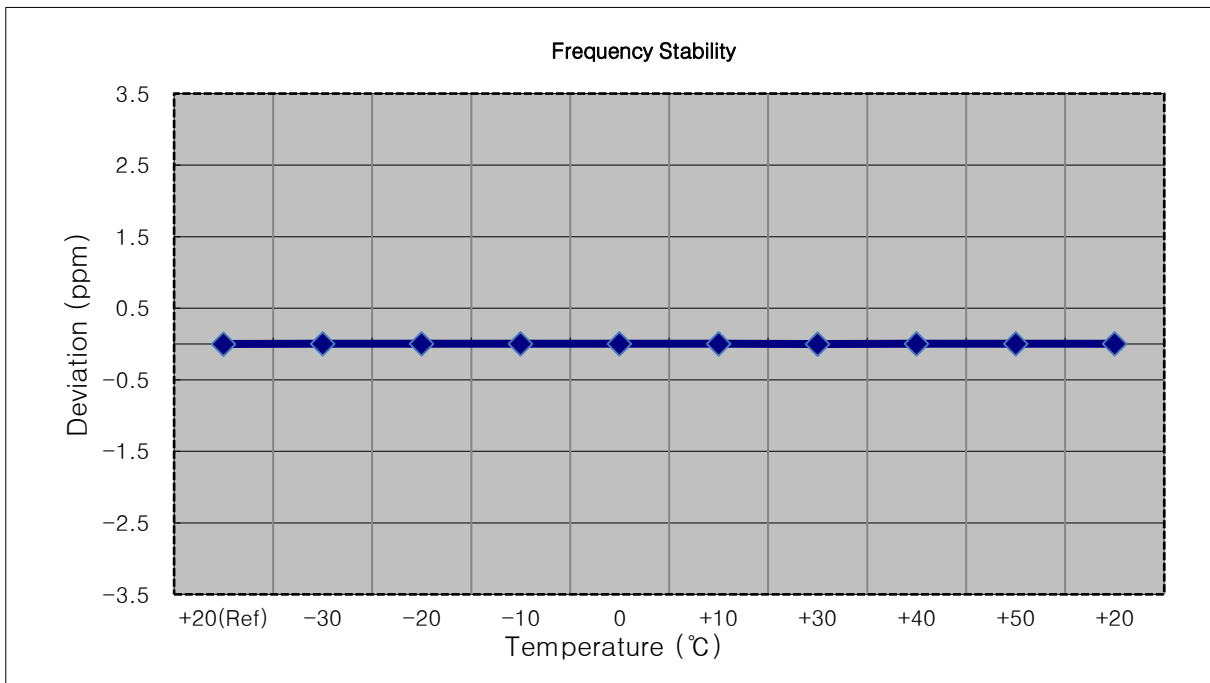


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1914,300,000 Hz
- ▣ CHANNEL: 26683 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1914 300 010	0.0	0.000 000	0.000
100 %		-30	1914 300 015	5.7	0.000 000	0.003
100 %		-20	1914 300 015	5.2	0.000 000	0.003
100 %		-10	1914 300 013	3.3	0.000 000	0.002
100 %		0	1914 300 007	-2.9	0.000 000	-0.002
100 %		+10	1914 300 015	5.2	0.000 000	0.003
100 %		+30	1914 300 015	5.2	0.000 000	0.003
100 %		+40	1914 300 014	4.7	0.000 000	0.002
100 %		+50	1914 300 007	-2.7	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1914 300 016	6.0	0.000 000

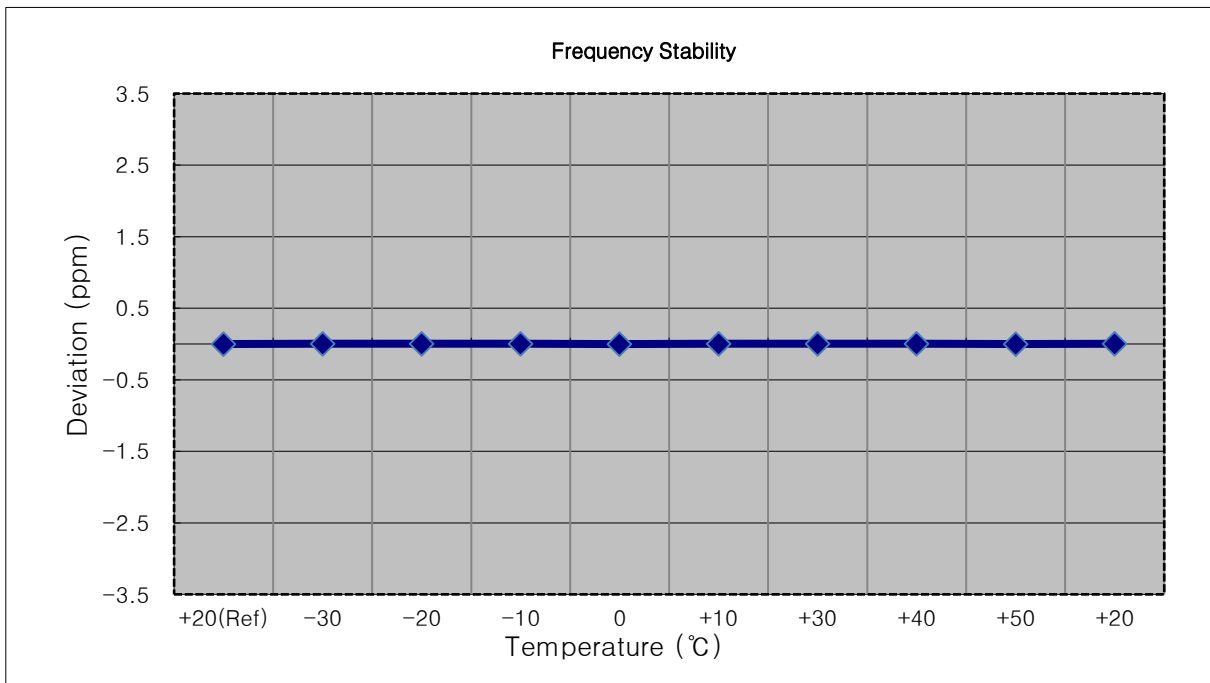


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1913,500,000 Hz
- ▣ CHANNEL: 26675 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1913 500 014	0.0	0.000 000	0.000
100 %		-30	1913 500 005	-9.4	0.000 000	-0.005
100 %		-20	1913 500 006	-8.1	0.000 000	-0.004
100 %		-10	1913 500 003	-11.5	-0.000 001	-0.006
100 %		0	1913 500 007	-7.6	0.000 000	-0.004
100 %		+10	1913 500 007	-7.6	0.000 000	-0.004
100 %		+30	1913 500 003	-10.8	-0.000 001	-0.006
100 %		+40	1913 500 004	-10.5	-0.000 001	-0.005
100 %		+50	1913 500 027	12.9	0.000 001	0.007
Batt. Endpoint		3.400	+20	1913 500 023	8.8	0.000 000

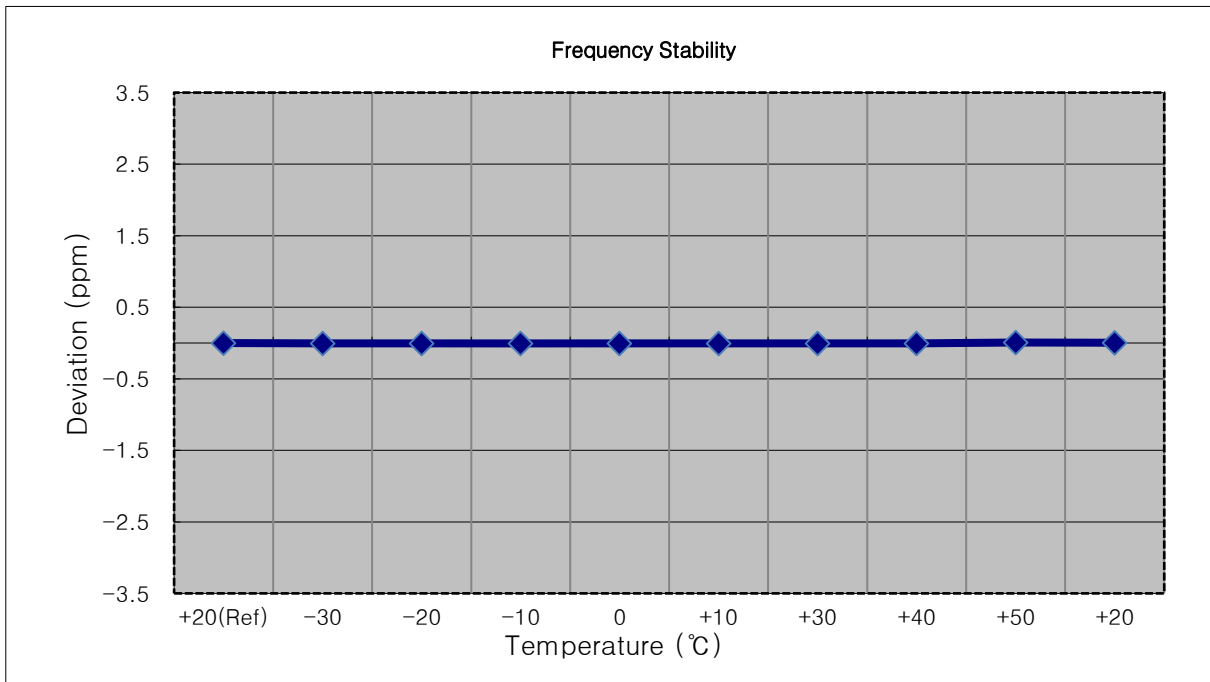


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1912.500.000 Hz
- ▣ CHANNEL: 26665 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1912 499 994	0.0	0.000 000	0.000
100 %		-30	1912 499 987	-7.0	0.000 000	-0.004
100 %		-20	1912 499 987	-6.9	0.000 000	-0.004
100 %		-10	1912 499 988	-6.1	0.000 000	-0.003
100 %		0	1912 499 986	-7.6	0.000 000	-0.004
100 %		+10	1912 499 987	-6.9	0.000 000	-0.004
100 %		+30	1912 499 989	-4.7	0.000 000	-0.002
100 %		+40	1912 499 986	-7.4	0.000 000	-0.004
100 %		+50	1912 499 986	-8.2	0.000 000	-0.004
Batt. Endpoint		3.400	+20	1912 499 989	-5.0	0.000 000

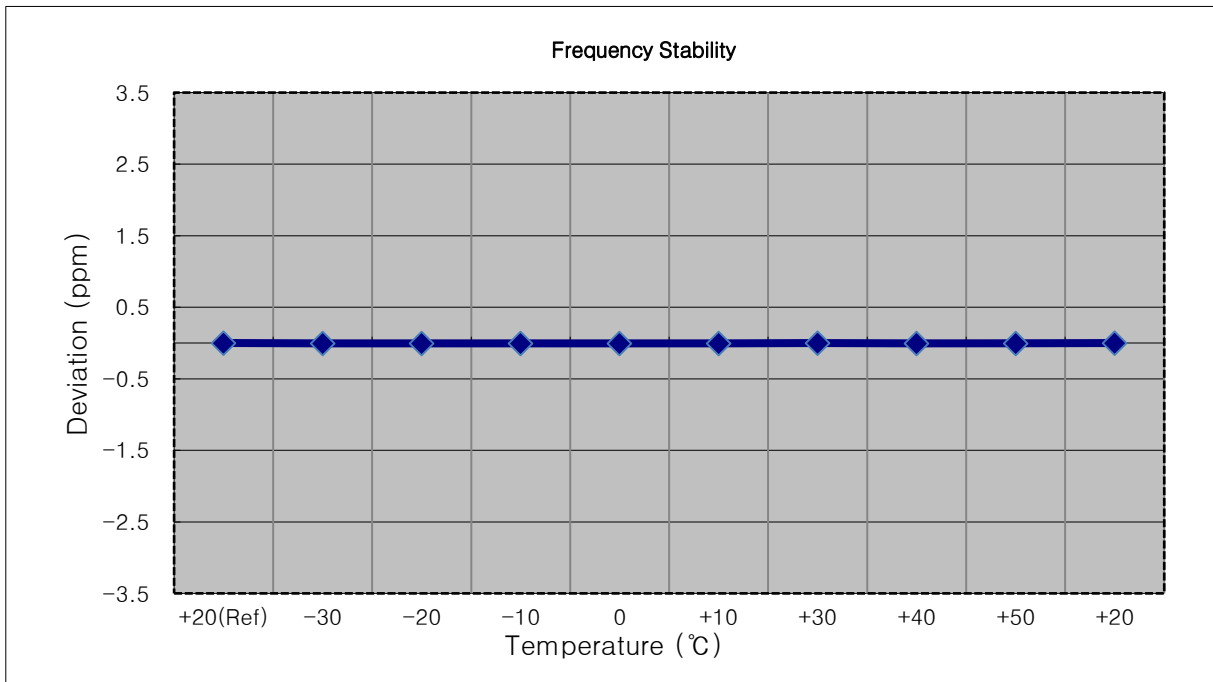


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1910.000.000 Hz
- ▣ CHANNEL: 26640 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1909 999 991	0.0	0.000 000	0.000
100 %		-30	1909 999 983	-8.4	0.000 000	-0.004
100 %		-20	1909 999 986	-5.0	0.000 000	-0.003
100 %		-10	1909 999 985	-5.8	0.000 000	-0.003
100 %		0	1909 999 985	-6.6	0.000 000	-0.003
100 %		+10	1909 999 988	-2.8	0.000 000	-0.001
100 %		+30	1909 999 985	-5.7	0.000 000	-0.003
100 %		+40	1909 999 984	-6.9	0.000 000	-0.004
100 %		+50	1909 999 986	-5.1	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1909 999 987	-4.1	0.000 000

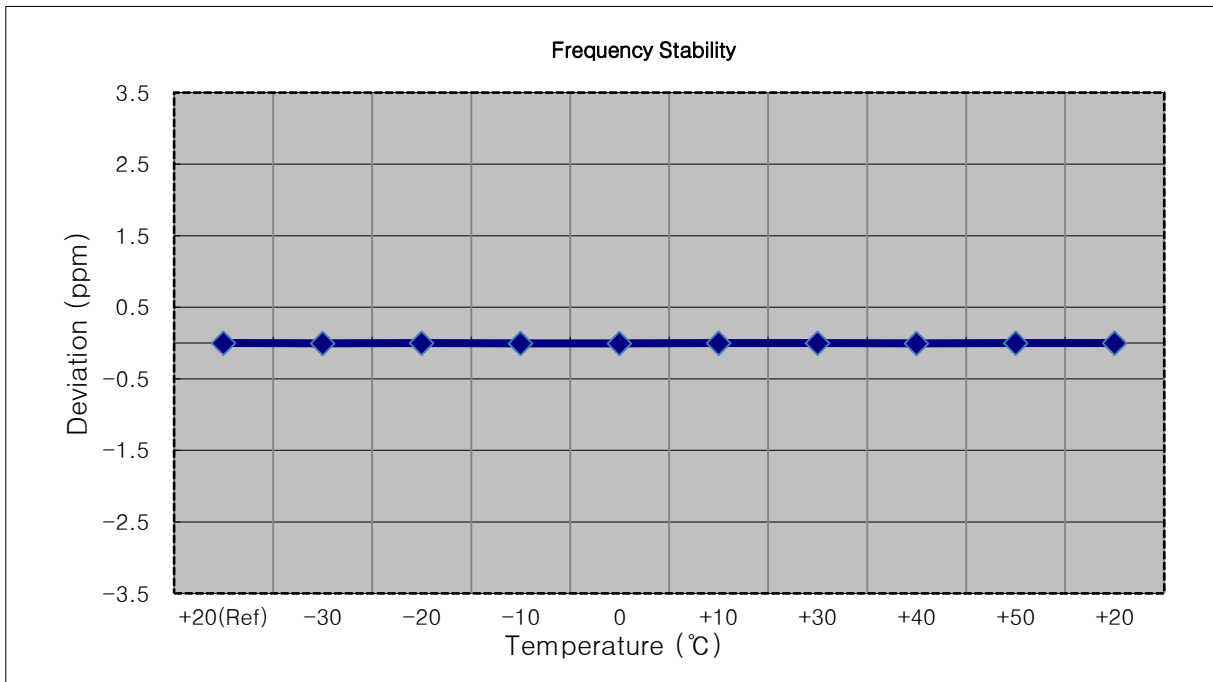


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1907.500.000 Hz
- ▣ CHANNEL: 26615 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1907 499 995	0.0	0.000 000	0.000
100 %		-30	1907 499 988	-6.4	0.000 000	-0.003
100 %		-20	1907 499 989	-5.6	0.000 000	-0.003
100 %		-10	1907 499 988	-6.5	0.000 000	-0.003
100 %		0	1907 499 988	-7.1	0.000 000	-0.004
100 %		+10	1907 499 987	-8.1	0.000 000	-0.004
100 %		+30	1907 499 988	-6.4	0.000 000	-0.003
100 %		+40	1907 499 985	-9.5	0.000 000	-0.005
100 %		+50	1907 499 988	-7.1	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1907 499 988	-7.0	0.000 000	-0.004

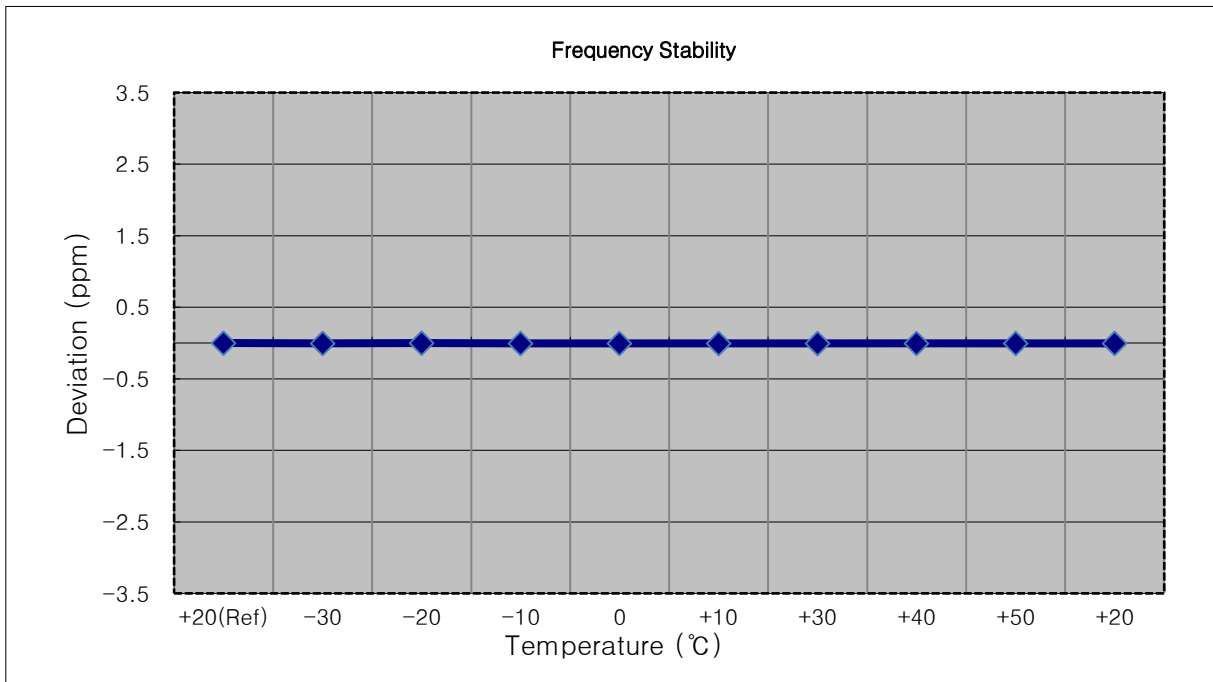

- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 26590 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1904 999 991	0.0	0.000 000	0.000
100 %		-30	1904 999 983	-8.6	0.000 000	-0.005
100 %		-20	1904 999 981	-10.0	-0.000 001	-0.005
100 %		-10	1904 999 982	-9.2	0.000 000	-0.005
100 %		0	1904 999 981	-10.0	-0.000 001	-0.005
100 %		+10	1904 999 984	-7.6	0.000 000	-0.004
100 %		+30	1904 999 979	-12.1	-0.000 001	-0.006
100 %		+40	1904 999 982	-8.9	0.000 000	-0.005
100 %		+50	1904 999 982	-9.7	-0.000 001	-0.005
Batt. Endpoint		3.400	+20	1904 999 983	-8.5	0.000 000

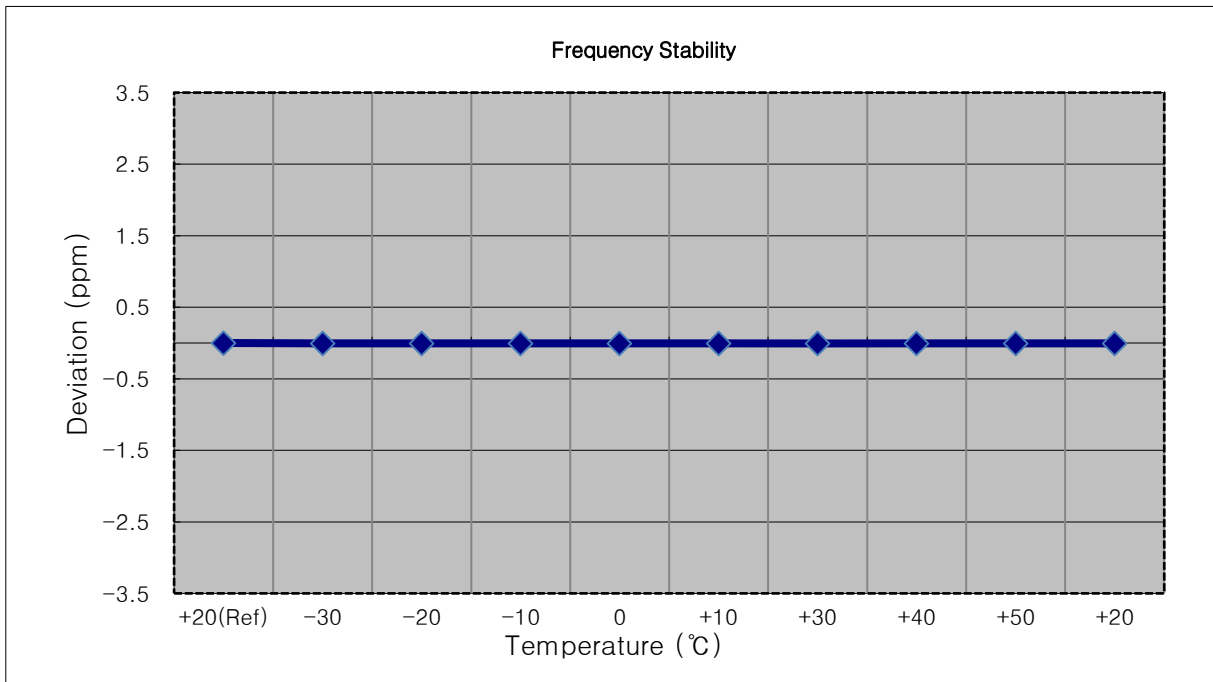

8.7.1 Sub1 Ant


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 26047 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1850 700 001	0.0	0.000 000	0.000
100 %		-30	1850 700 008	7.0	0.000 000	0.004
100 %		-20	1850 700 007	5.5	0.000 000	0.003
100 %		-10	1850 700 017	15.1	0.000 001	0.008
100 %		0	1850 700 011	9.2	0.000 000	0.005
100 %		+10	1850 699 999	-2.0	0.000 000	-0.001
100 %		+30	1850 700 004	2.9	0.000 000	0.002
100 %		+40	1850 700 001	-0.6	0.000 000	0.000
100 %		+50	1850 700 007	6.0	0.000 000	0.003
Batt. Endpoint		3.400	+20	1850 700 000	-1.1	0.000 000

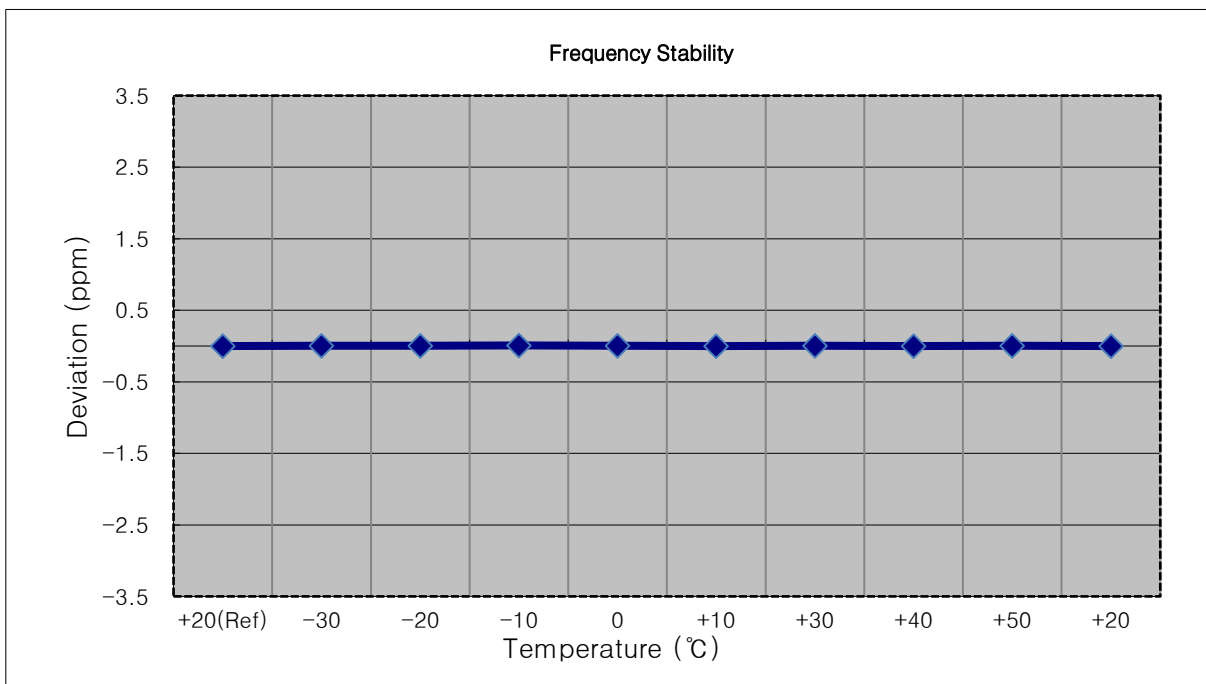


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 26055 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1851 499 999	0.0	0.000 000	0.000
100 %		-30	1851 500 006	6.9	0.000 000	0.004
100 %		-20	1851 500 003	3.9	0.000 000	0.002
100 %		-10	1851 500 014	14.5	0.000 001	0.008
100 %		0	1851 500 007	7.7	0.000 000	0.004
100 %		+10	1851 500 012	12.6	0.000 001	0.007
100 %		+30	1851 500 009	9.4	0.000 001	0.005
100 %		+40	1851 499 999	-0.3	0.000 000	0.000
100 %		+50	1851 500 001	1.8	0.000 000	0.001
Batt. Endpoint	3.400	+20	1851 500 002	2.5	0.000 000	0.001

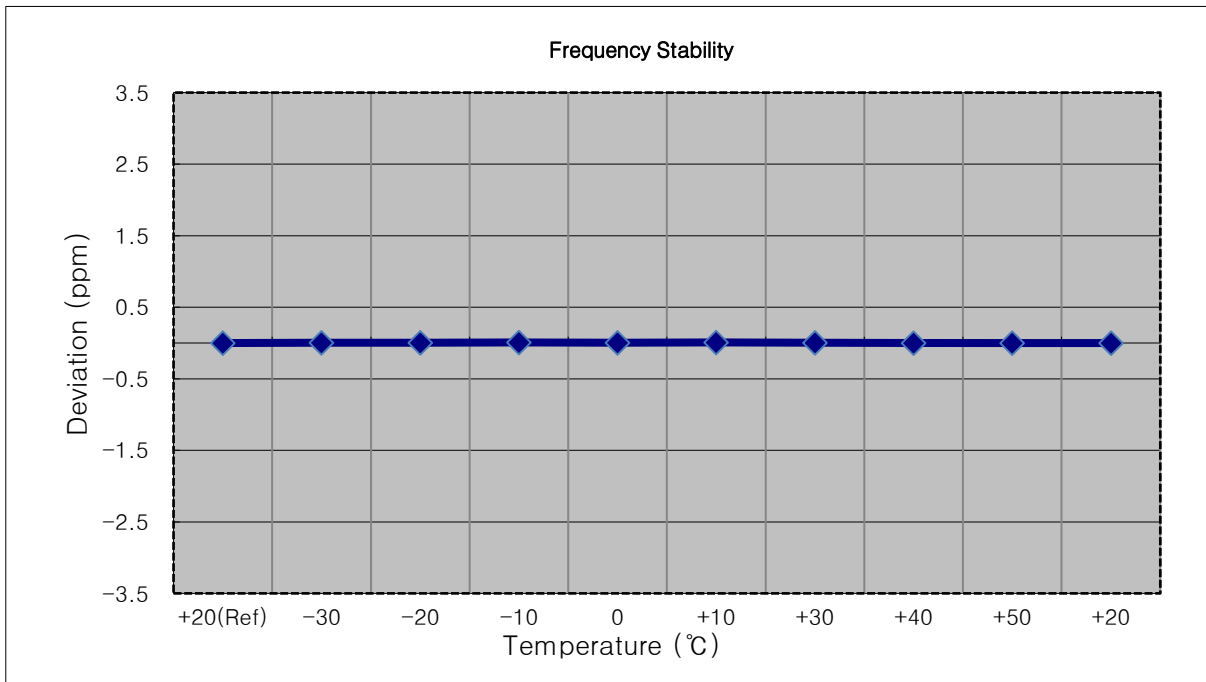


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1852.500.000 Hz
- ▣ CHANNEL: 26065 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1852 500 011	0.0	0.000 000	0.000
100 %		-30	1852 500 014	3.2	0.000 000	0.002
100 %		-20	1852 500 023	12.1	0.000 001	0.007
100 %		-10	1852 500 012	0.3	0.000 000	0.000
100 %		0	1852 500 025	13.8	0.000 001	0.007
100 %		+10	1852 500 026	15.1	0.000 001	0.008
100 %		+30	1852 500 020	9.2	0.000 000	0.005
100 %		+40	1852 500 013	2.0	0.000 000	0.001
100 %		+50	1852 500 016	4.4	0.000 000	0.002
Batt. Endpoint		3.400	+20	1852 500 010	-1.0	0.000 000

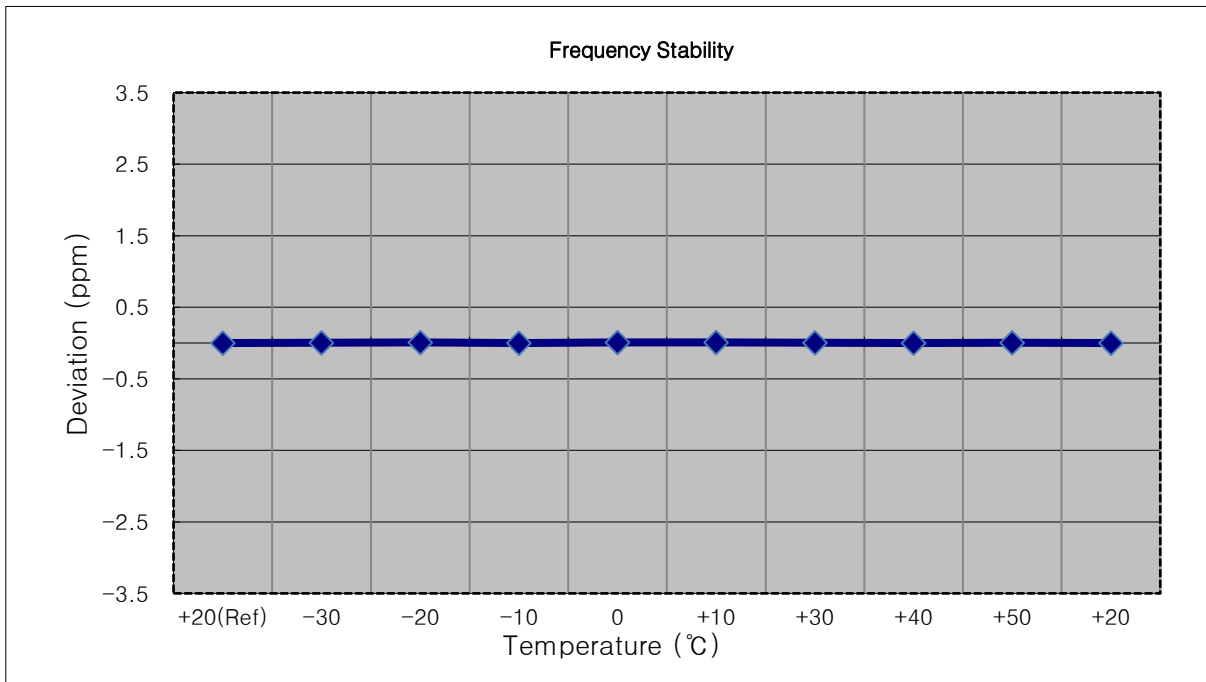


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 26090 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1855 000 010	0.0	0.000 000	0.000
100 %		-30	1855 000 008	-2.0	0.000 000	-0.001
100 %		-20	1855 000 018	8.2	0.000 000	0.004
100 %		-10	1855 000 023	12.6	0.000 001	0.007
100 %		0	1855 000 025	14.6	0.000 001	0.008
100 %		+10	1855 000 013	2.6	0.000 000	0.001
100 %		+30	1855 000 023	12.4	0.000 001	0.007
100 %		+40	1855 000 013	2.5	0.000 000	0.001
100 %		+50	1855 000 016	5.5	0.000 000	0.003
Batt. Endpoint		3.400	+20	1855 000 010	-0.1	0.000 000

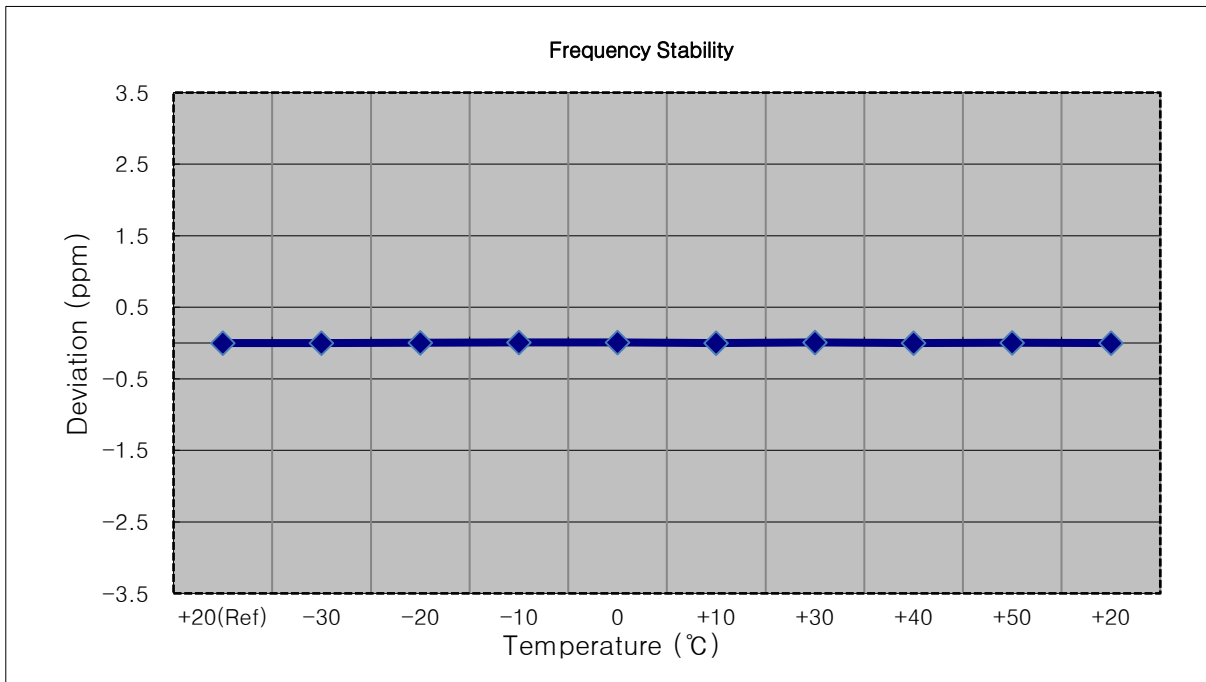


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1857.500.000 Hz
- ▣ CHANNEL: 26115 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1857 499 998	0.0	0.000 000	0.000
100 %		-30	1857 500 010	12.2	0.000 001	0.007
100 %		-20	1857 500 008	9.8	0.000 001	0.005
100 %		-10	1857 500 007	8.6	0.000 000	0.005
100 %		0	1857 500 012	13.7	0.000 001	0.007
100 %		+10	1857 499 997	-1.1	0.000 000	-0.001
100 %		+30	1857 499 996	-1.9	0.000 000	-0.001
100 %		+40	1857 500 003	4.5	0.000 000	0.002
100 %		+50	1857 500 004	5.9	0.000 000	0.003
Batt. Endpoint		3.400	+20	1857 500 009	11.1	0.000 001

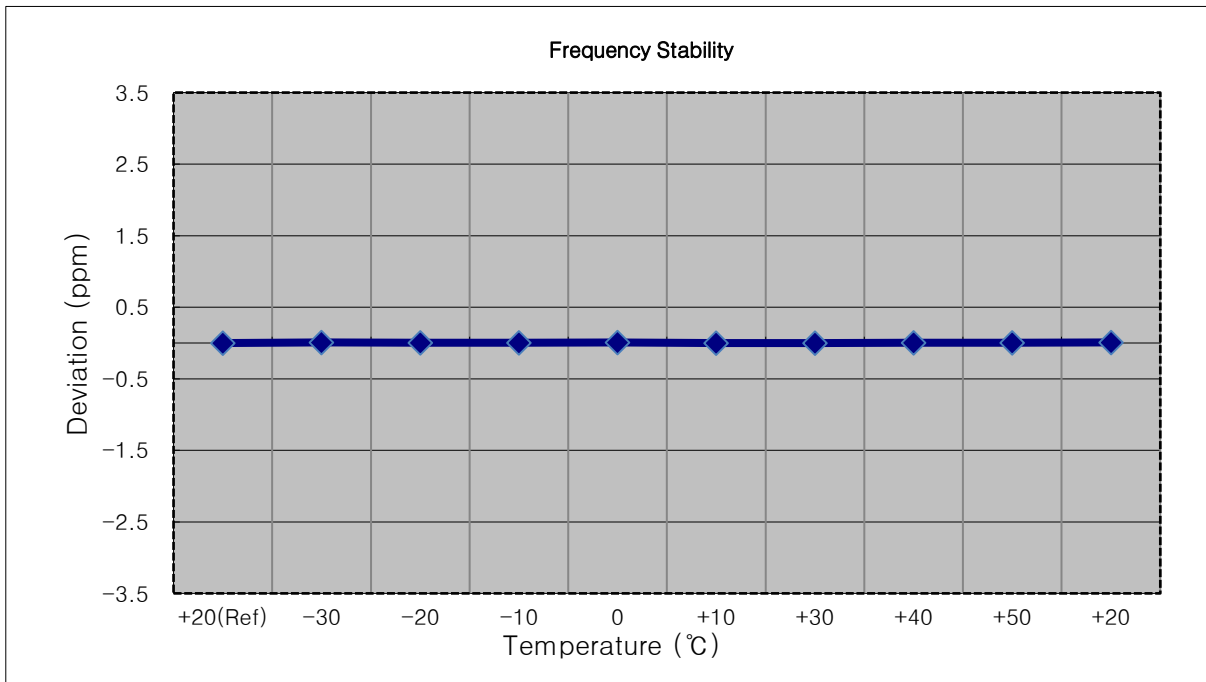


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 26140 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1860 000 013	0.0	0.000 000	0.000
100 %		-30	1860 000 022	8.4	0.000 000	0.005
100 %		-20	1860 000 020	7.1	0.000 000	0.004
100 %		-10	1860 000 022	8.5	0.000 000	0.005
100 %		0	1860 000 012	-1.0	0.000 000	-0.001
100 %		+10	1860 000 028	14.8	0.000 001	0.008
100 %		+30	1860 000 014	0.7	0.000 000	0.000
100 %		+40	1860 000 026	13.2	0.000 001	0.007
100 %		+50	1860 000 022	8.4	0.000 000	0.005
Batt. Endpoint		3.400	+20	1860 000 018	5.2	0.000 000

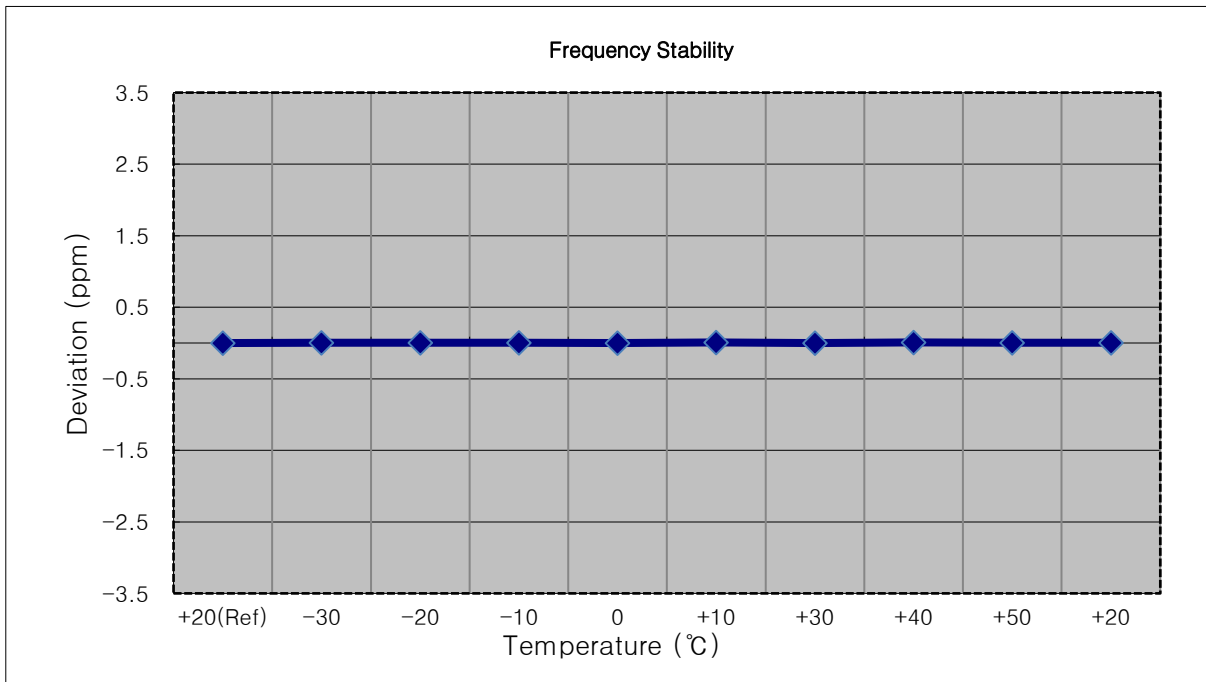


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 011	0.0	0.000 000	0.000
100 %		-30	1882 500 011	-0.6	0.000 000	0.000
100 %		-20	1882 500 018	6.8	0.000 000	0.004
100 %		-10	1882 500 026	14.8	0.000 001	0.008
100 %		0	1882 500 023	12.0	0.000 001	0.006
100 %		+10	1882 500 013	2.1	0.000 000	0.001
100 %		+30	1882 500 013	2.1	0.000 000	0.001
100 %		+40	1882 500 015	3.7	0.000 000	0.002
100 %		+50	1882 500 016	4.8	0.000 000	0.003
Batt. Endpoint	3.400	+20	1882 500 018	6.4	0.000 000	0.003

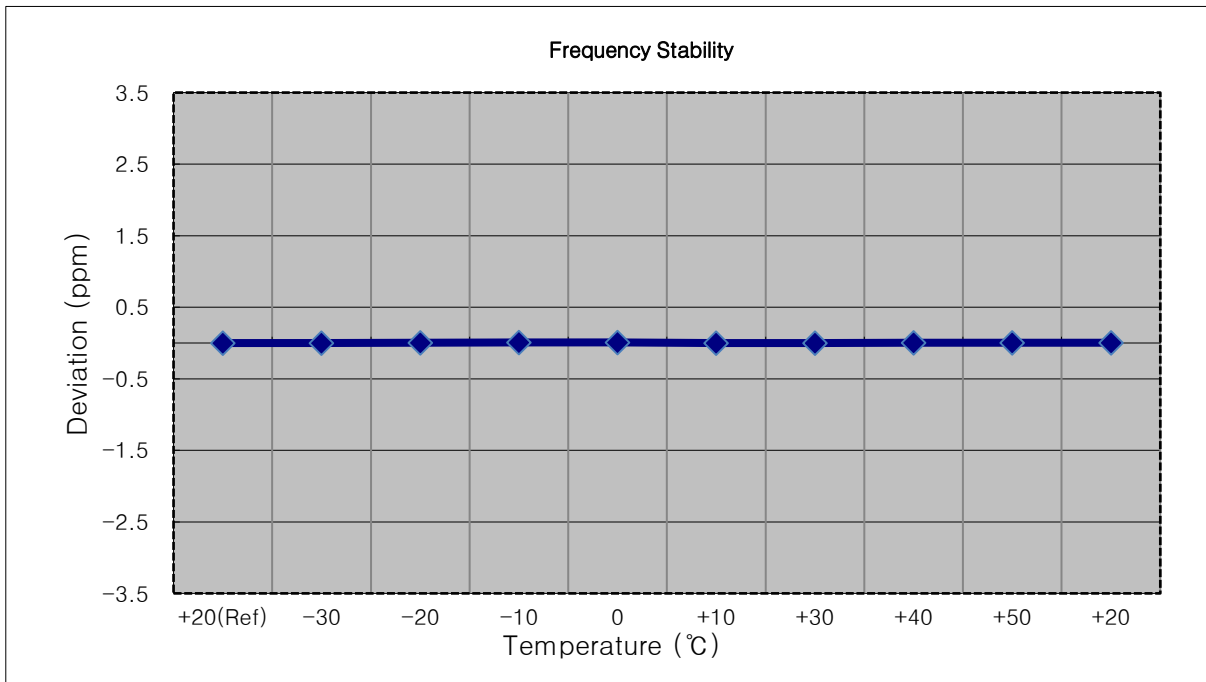


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 001	0.0	0.000 000	0.000
100 %		-30	1882 500 013	12.4	0.000 001	0.007
100 %		-20	1882 500 012	11.4	0.000 001	0.006
100 %		-10	1882 500 005	4.0	0.000 000	0.002
100 %		0	1882 500 014	13.2	0.000 001	0.007
100 %		+10	1882 500 000	-1.0	0.000 000	-0.001
100 %		+30	1882 500 008	6.8	0.000 000	0.004
100 %		+40	1882 500 012	11.4	0.000 001	0.006
100 %		+50	1882 500 011	9.9	0.000 001	0.005
Batt. Endpoint		3.400	+20	1882 500 014	13.0	0.000 001

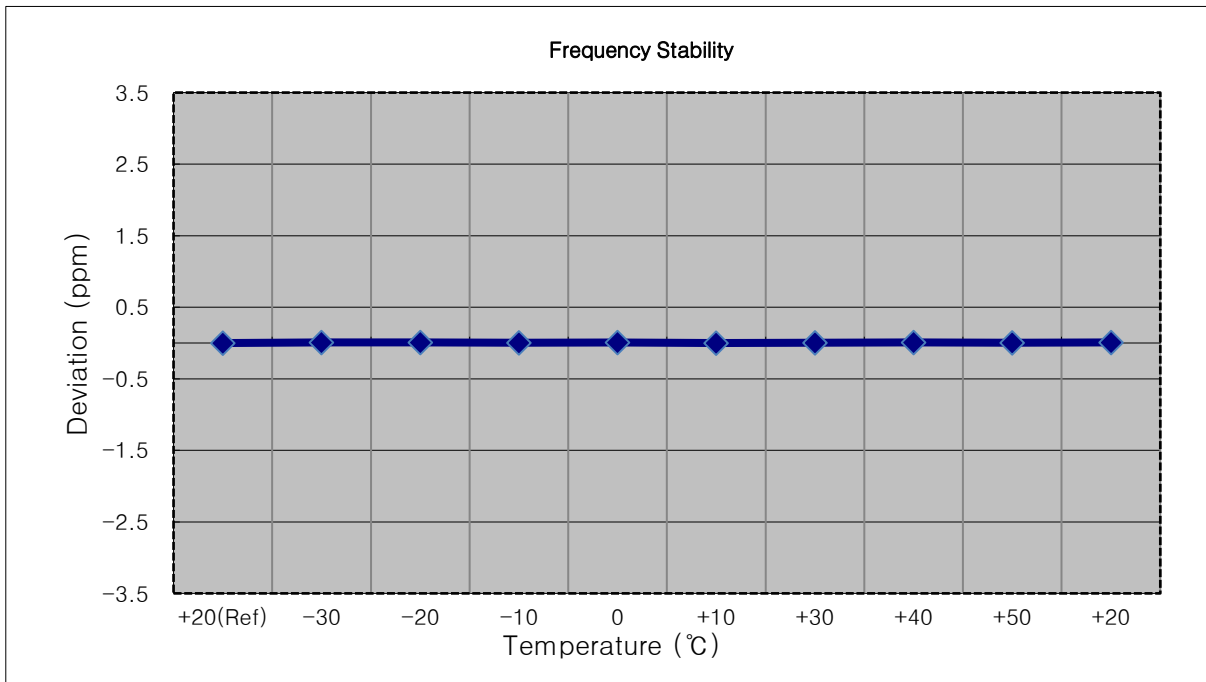


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 013	0.0	0.000 000	0.000
100 %		-30	1882 500 015	1.7	0.000 000	0.001
100 %		-20	1882 500 026	12.7	0.000 001	0.007
100 %		-10	1882 500 018	5.4	0.000 000	0.003
100 %		0	1882 500 022	8.8	0.000 000	0.005
100 %		+10	1882 500 020	7.4	0.000 000	0.004
100 %		+30	1882 500 013	-0.3	0.000 000	0.000
100 %		+40	1882 500 028	15.1	0.000 001	0.008
100 %		+50	1882 500 013	0.2	0.000 000	0.000
Batt. Endpoint		3.400	+20	1882 500 017	4.0	0.000 000

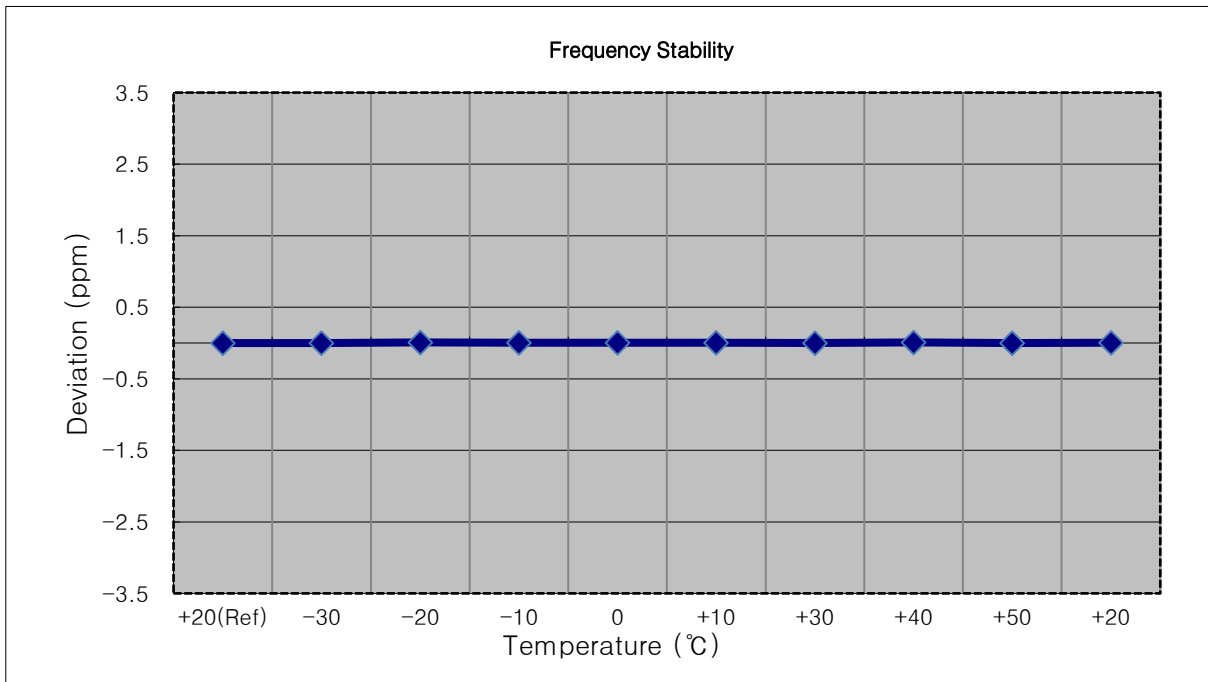


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 005	0.0	0.000 000	0.000
100 %		-30	1882 500 006	1.0	0.000 000	0.001
100 %		-20	1882 500 010	5.1	0.000 000	0.003
100 %		-10	1882 500 017	12.7	0.000 001	0.007
100 %		0	1882 500 012	7.8	0.000 000	0.004
100 %		+10	1882 500 010	5.6	0.000 000	0.003
100 %		+30	1882 500 006	1.5	0.000 000	0.001
100 %		+40	1882 500 017	12.2	0.000 001	0.006
100 %		+50	1882 500 005	0.9	0.000 000	0.000
Batt. Endpoint		3.400	+20	1882 500 003	-1.9	0.000 000

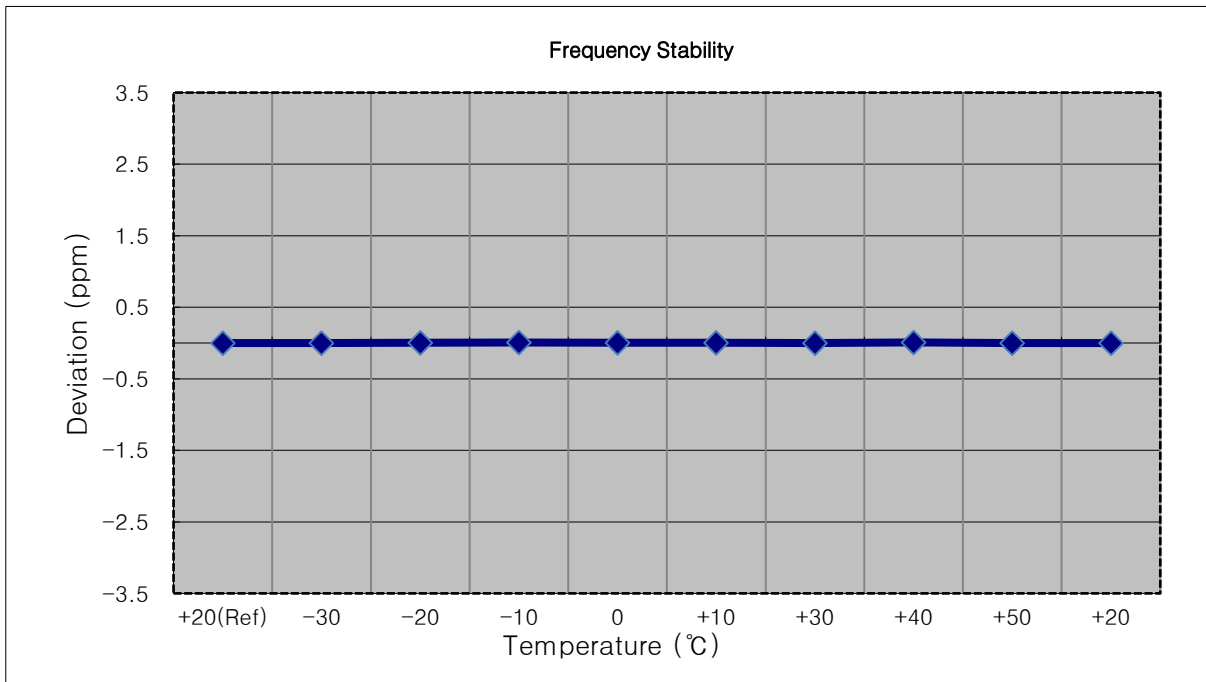


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 500 002	0.0	0.000 000	0.000
100 %		-30	1882 500 017	14.9	0.000 001	0.008
100 %		-20	1882 500 006	3.7	0.000 000	0.002
100 %		-10	1882 500 002	-0.1	0.000 000	0.000
100 %		0	1882 500 010	7.4	0.000 000	0.004
100 %		+10	1882 500 016	13.9	0.000 001	0.007
100 %		+30	1882 500 007	5.1	0.000 000	0.003
100 %		+40	1882 500 013	11.0	0.000 001	0.006
100 %		+50	1882 500 010	7.9	0.000 000	0.004
Batt. Endpoint	3.400	+20	1882 500 006	3.6	0.000 000	0.002

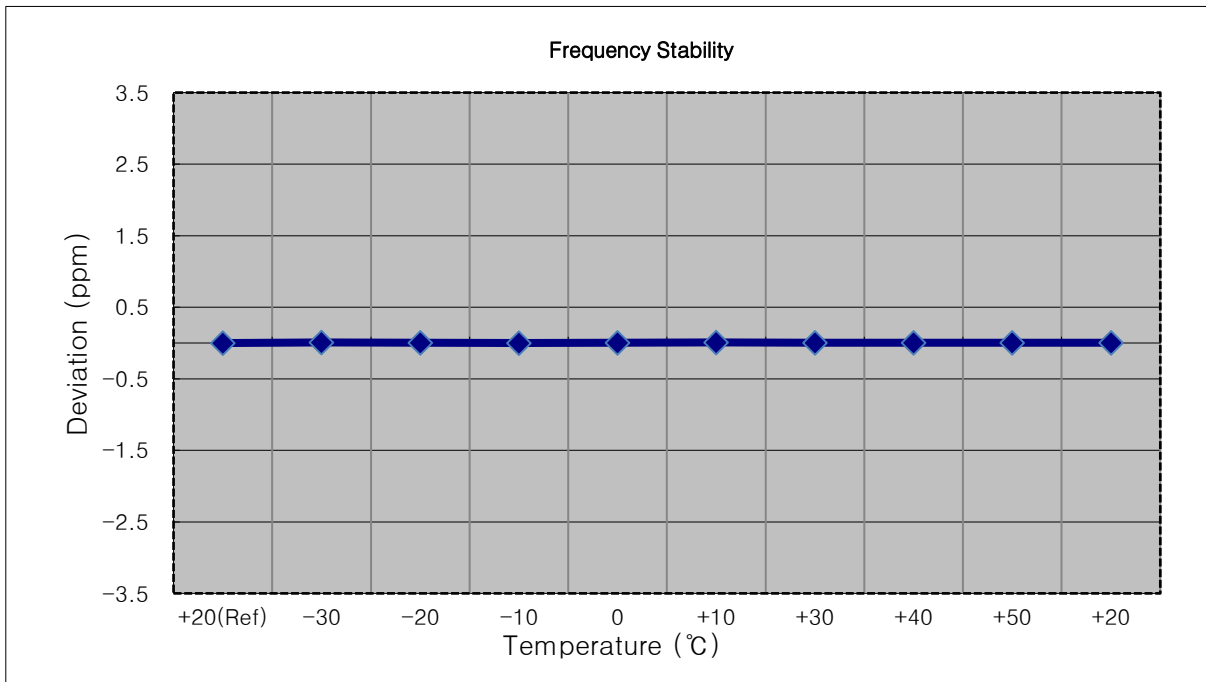


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882.500.000 Hz
- ▣ CHANNEL: 26365 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1882 499 998	0.0	0.000 000	0.000
100 %		-30	1882 500 010	11.5	0.000 001	0.006
100 %		-20	1882 500 004	5.5	0.000 000	0.003
100 %		-10	1882 499 997	-1.6	0.000 000	-0.001
100 %		0	1882 500 010	12.4	0.000 001	0.007
100 %		+10	1882 500 004	6.3	0.000 000	0.003
100 %		+30	1882 500 009	10.6	0.000 001	0.006
100 %		+40	1882 499 998	0.1	0.000 000	0.000
100 %		+50	1882 500 010	12.1	0.000 001	0.006
Batt. Endpoint		3.400	+20	1882 500 001	3.3	0.000 000

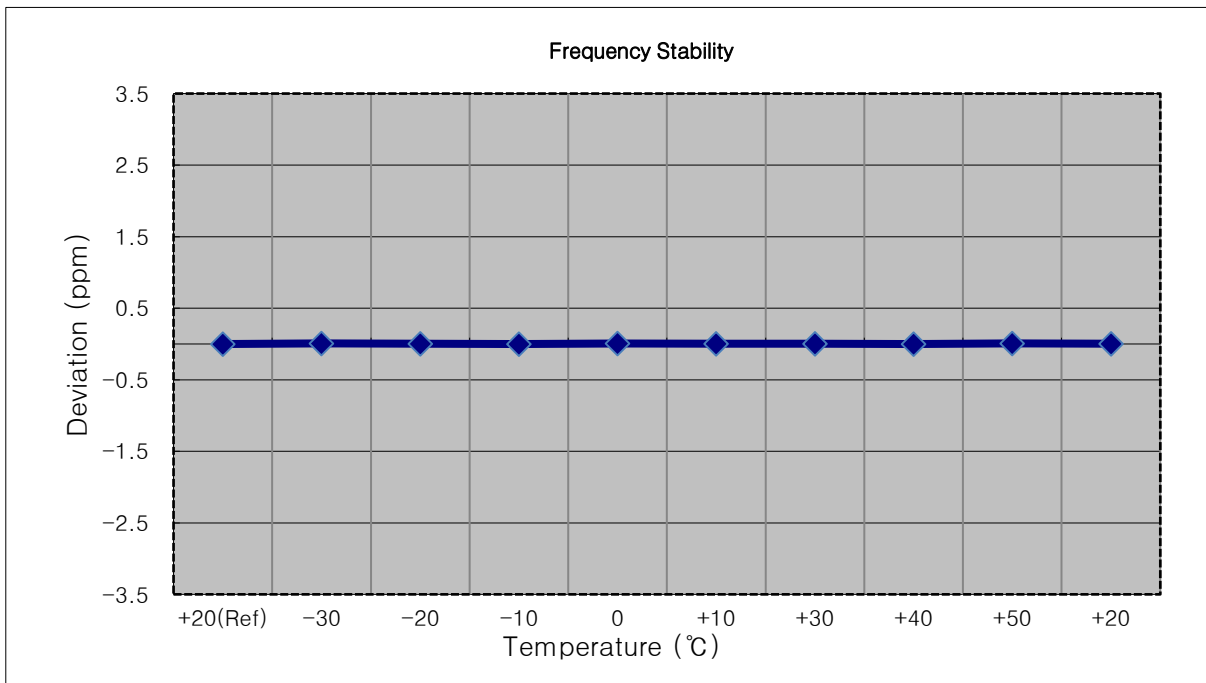


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1914,300,000 Hz
- ▣ CHANNEL: 26683 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1914 299 999	0.0	0.000 000	0.000
100 %		-30	1914 300 012	12.7	0.000 001	0.007
100 %		-20	1914 300 002	2.8	0.000 000	0.001
100 %		-10	1914 300 001	1.8	0.000 000	0.001
100 %		0	1914 299 999	0.2	0.000 000	0.000
100 %		+10	1914 300 005	6.2	0.000 000	0.003
100 %		+30	1914 299 998	-0.7	0.000 000	0.000
100 %		+40	1914 300 013	13.9	0.000 001	0.007
100 %		+50	1914 300 001	2.2	0.000 000	0.001
Batt. Endpoint		3.400	+20	1914 300 007	8.4	0.000 000

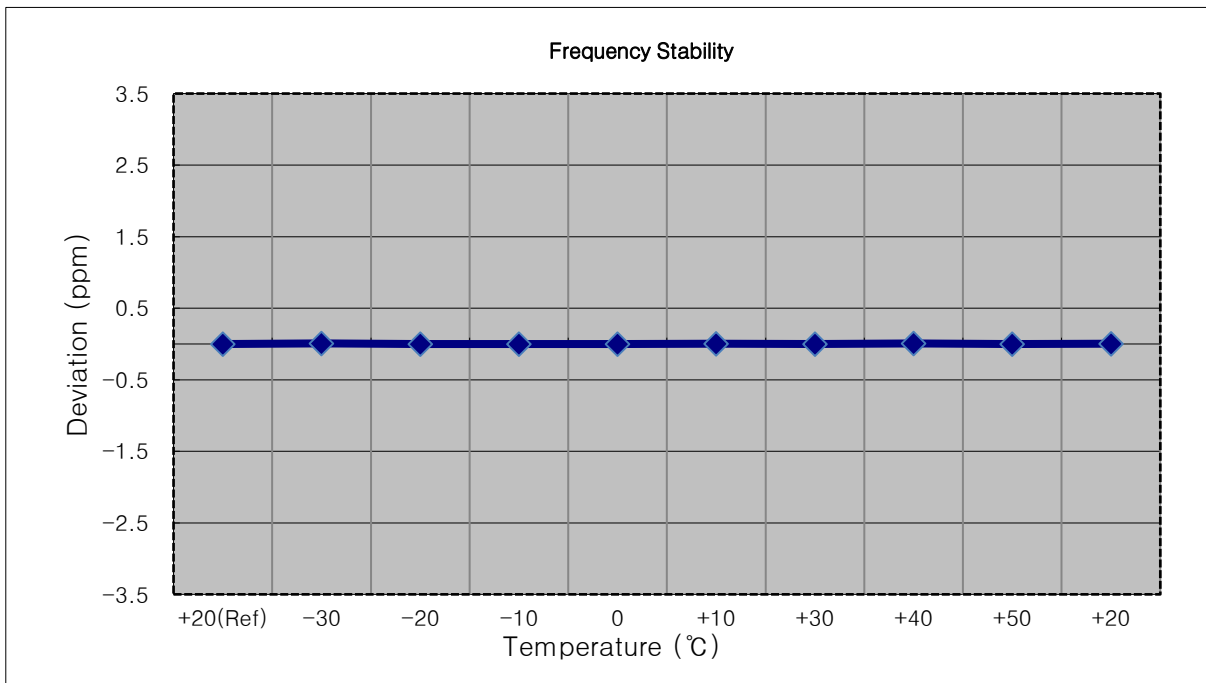


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1913,500,000 Hz
- ▣ CHANNEL: 26675 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1913 500 010	0.0	0.000 000	0.000
100 %		-30	1913 500 022	11.7	0.000 001	0.006
100 %		-20	1913 500 021	11.4	0.000 001	0.006
100 %		-10	1913 500 011	0.7	0.000 000	0.000
100 %		0	1913 500 011	0.6	0.000 000	0.000
100 %		+10	1913 500 008	-2.2	0.000 000	-0.001
100 %		+30	1913 500 008	-2.0	0.000 000	-0.001
100 %		+40	1913 500 023	12.6	0.000 001	0.007
100 %		+50	1913 500 022	12.1	0.000 001	0.006
Batt. Endpoint		3.400	+20	1913 500 013	3.4	0.000 000

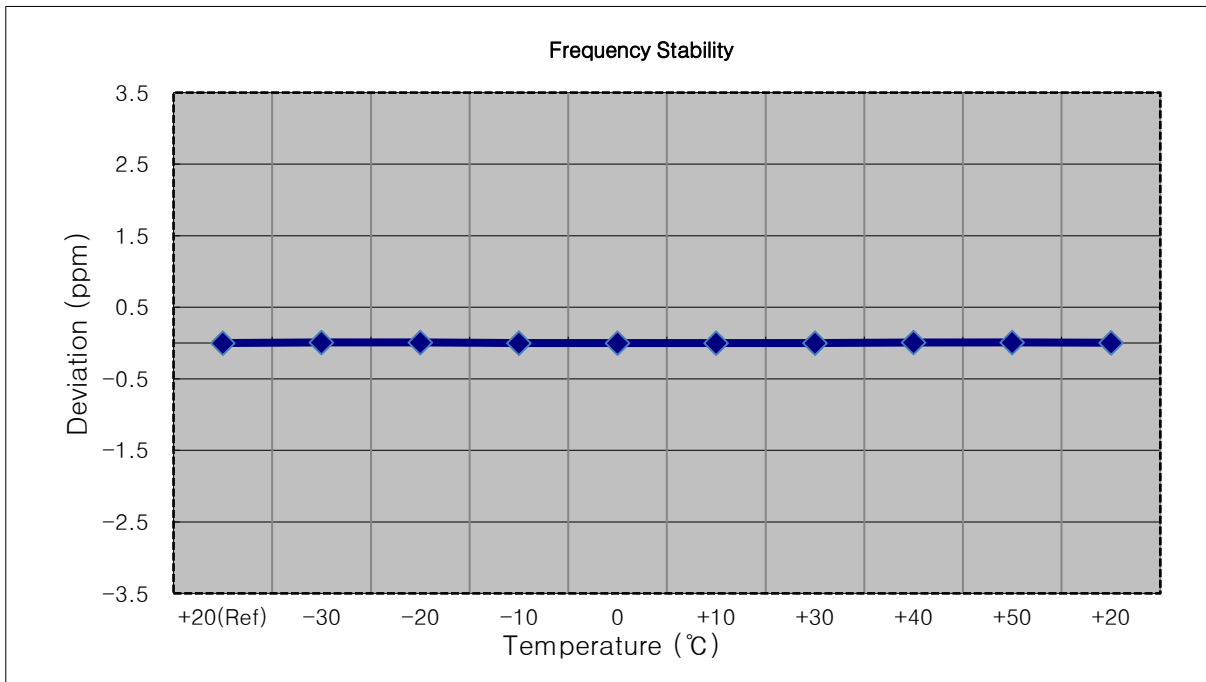


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1912.500.000 Hz
- ▣ CHANNEL: 26665 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1912 500 005	0.0	0.000 000	0.000
100 %		-30	1912 500 006	1.7	0.000 000	0.001
100 %		-20	1912 500 008	3.0	0.000 000	0.002
100 %		-10	1912 500 006	1.6	0.000 000	0.001
100 %		0	1912 500 019	13.9	0.000 001	0.007
100 %		+10	1912 500 014	9.3	0.000 000	0.005
100 %		+30	1912 500 020	15.4	0.000 001	0.008
100 %		+40	1912 500 011	6.2	0.000 000	0.003
100 %		+50	1912 500 006	0.9	0.000 000	0.000
Batt. Endpoint		3.400	+20	1912 500 013	8.3	0.000 000

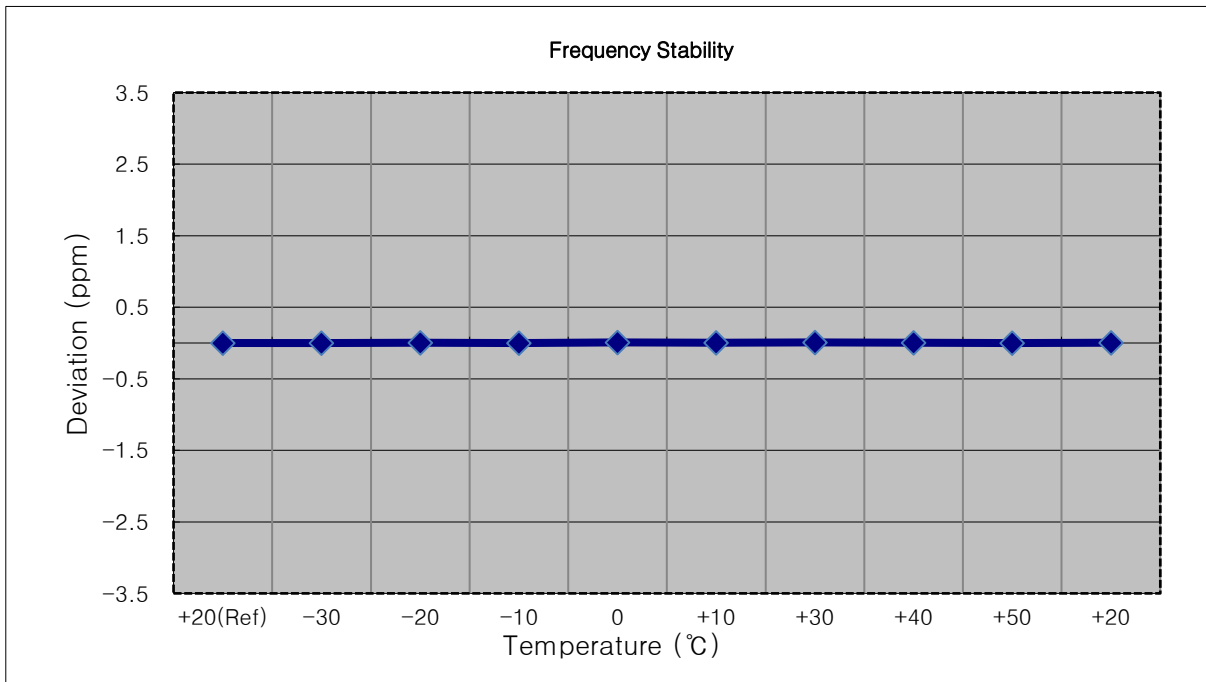


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1910,000,000 Hz
- ▣ CHANNEL: 26640 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1910 000 013	0.0	0.000 000	0.000
100 %		-30	1910 000 018	5.2	0.000 000	0.003
100 %		-20	1910 000 027	14.5	0.000 001	0.008
100 %		-10	1910 000 021	8.4	0.000 000	0.004
100 %		0	1910 000 022	9.4	0.000 000	0.005
100 %		+10	1910 000 023	10.4	0.000 001	0.005
100 %		+30	1910 000 018	5.6	0.000 000	0.003
100 %		+40	1910 000 027	14.6	0.000 001	0.008
100 %		+50	1910 000 023	10.2	0.000 001	0.005
Batt. Endpoint		3.400	+20	1910 000 013	0.3	0.000 000

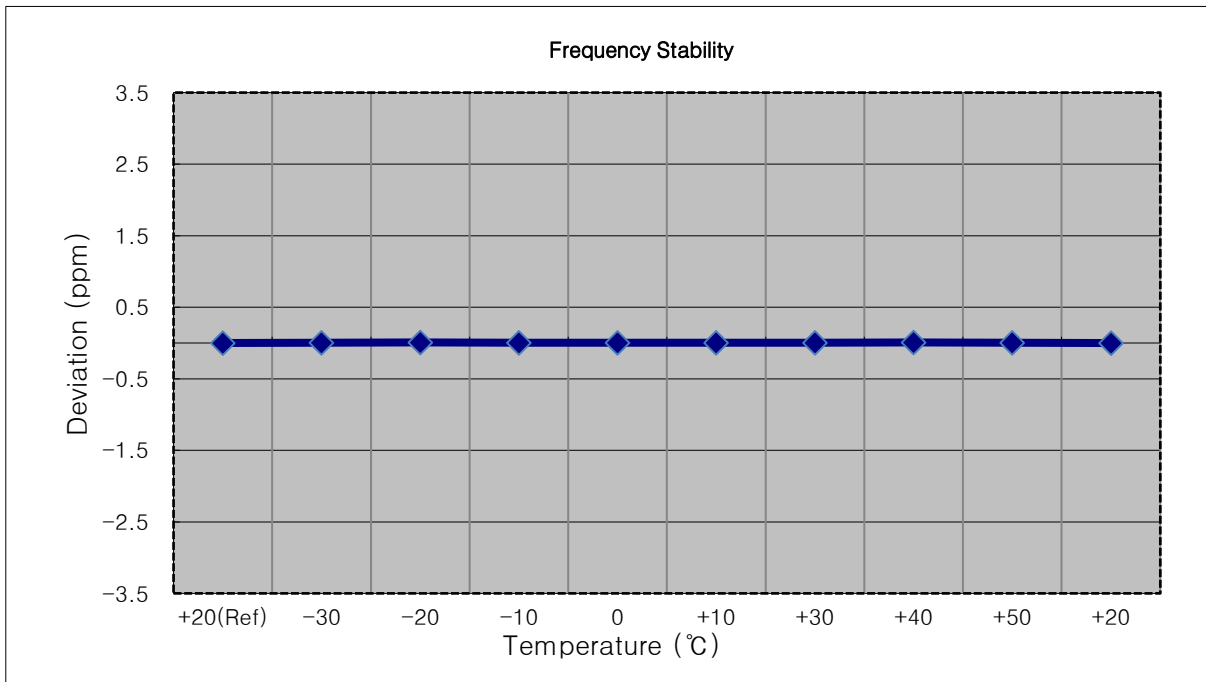


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1907.500.000 Hz
- ▣ CHANNEL: 26615 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1907 500 012	0.0	0.000 000	0.000
100 %		-30	1907 500 021	8.3	0.000 000	0.004
100 %		-20	1907 500 017	5.0	0.000 000	0.003
100 %		-10	1907 500 011	-1.5	0.000 000	-0.001
100 %		0	1907 500 028	15.4	0.000 001	0.008
100 %		+10	1907 500 022	10.0	0.000 001	0.005
100 %		+30	1907 500 022	9.3	0.000 000	0.005
100 %		+40	1907 500 015	3.0	0.000 000	0.002
100 %		+50	1907 500 012	-0.2	0.000 000	0.000
Batt. Endpoint	3.400	+20	1907 500 025	12.3	0.000 001	0.006

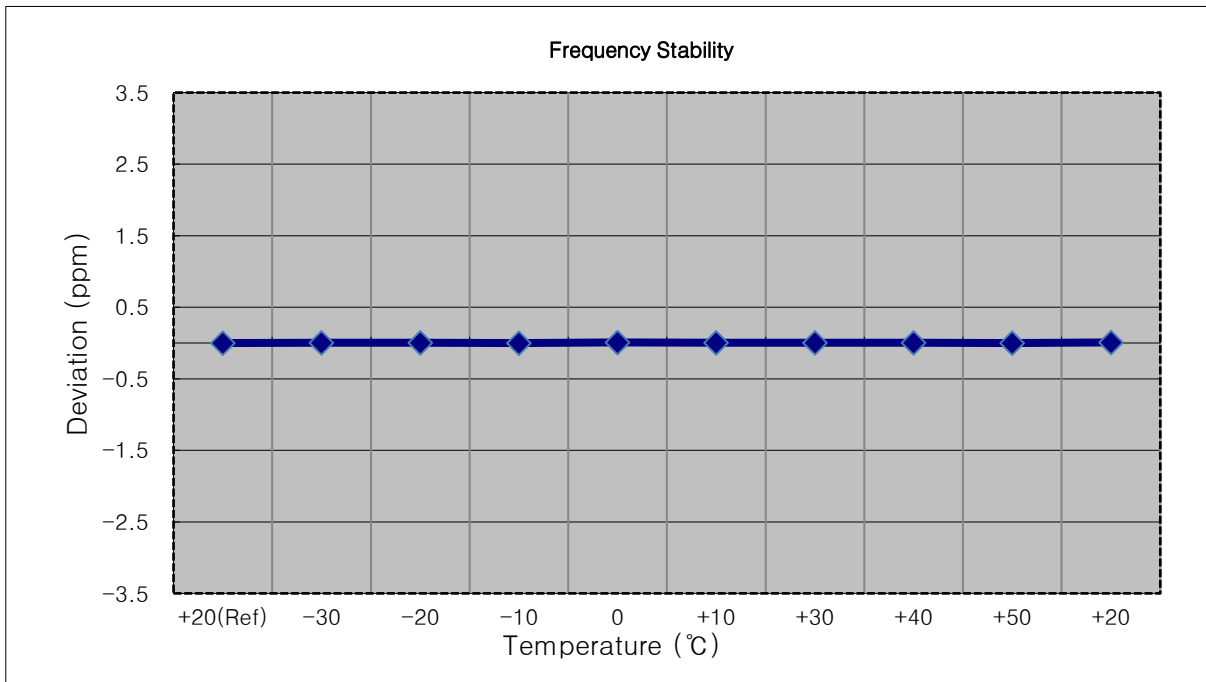

- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 26590 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1905 000 013	0.0	0.000 000	0.000
100 %		-30	1905 000 015	1.4	0.000 000	0.001
100 %		-20	1905 000 014	0.4	0.000 000	0.000
100 %		-10	1905 000 025	11.4	0.000 001	0.006
100 %		0	1905 000 015	1.6	0.000 000	0.001
100 %		+10	1905 000 014	0.6	0.000 000	0.000
100 %		+30	1905 000 028	14.2	0.000 001	0.007
100 %		+40	1905 000 018	4.9	0.000 000	0.003
100 %		+50	1905 000 013	-0.9	0.000 000	0.000
Batt. Endpoint		3.400	+20	1905 000 020	6.7	0.000 000

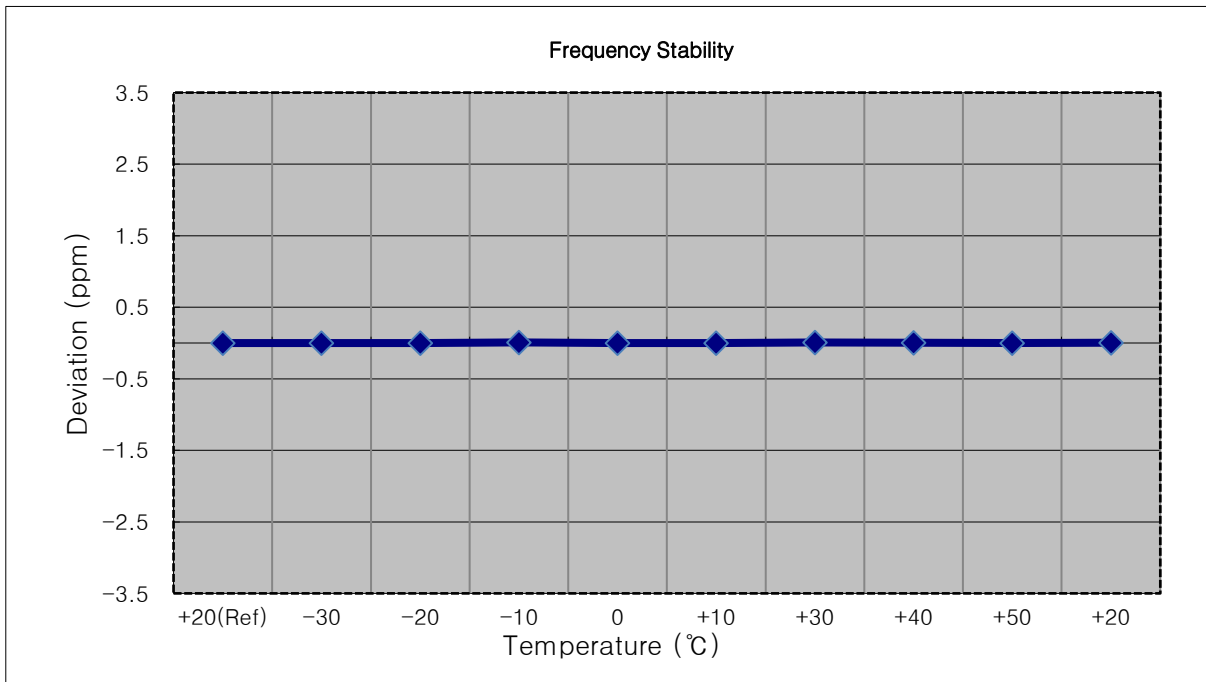

9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)

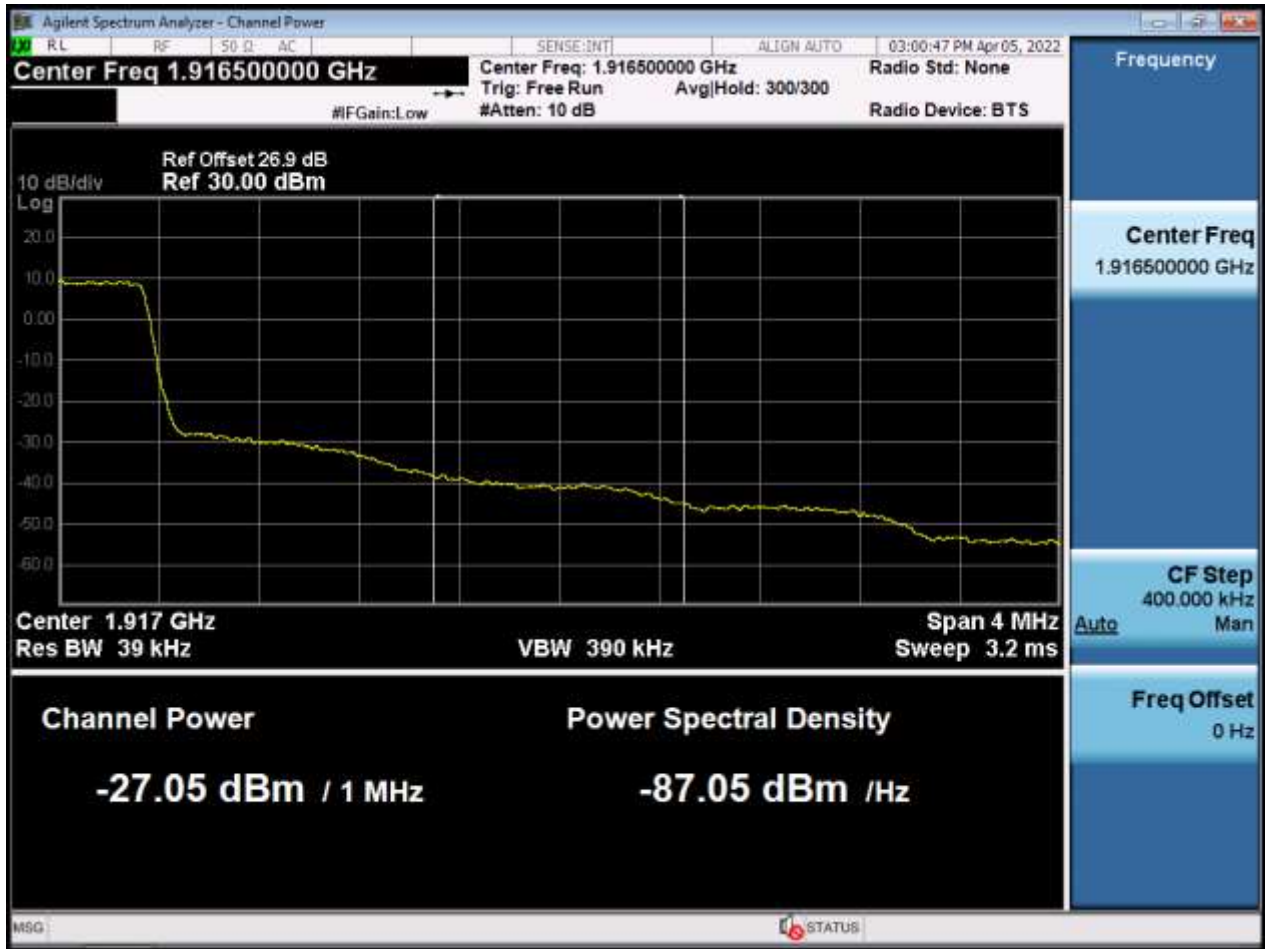

BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)

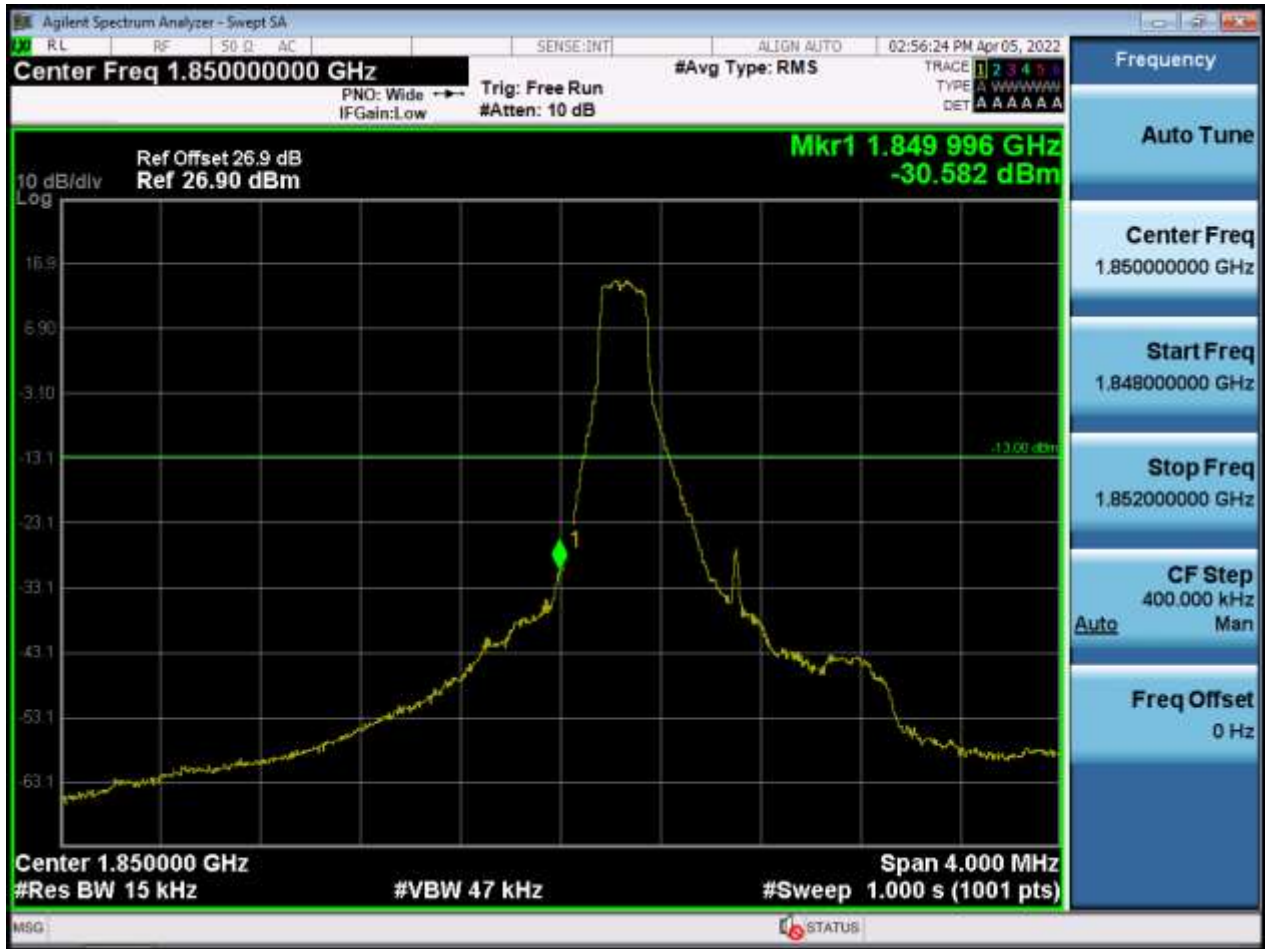


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)

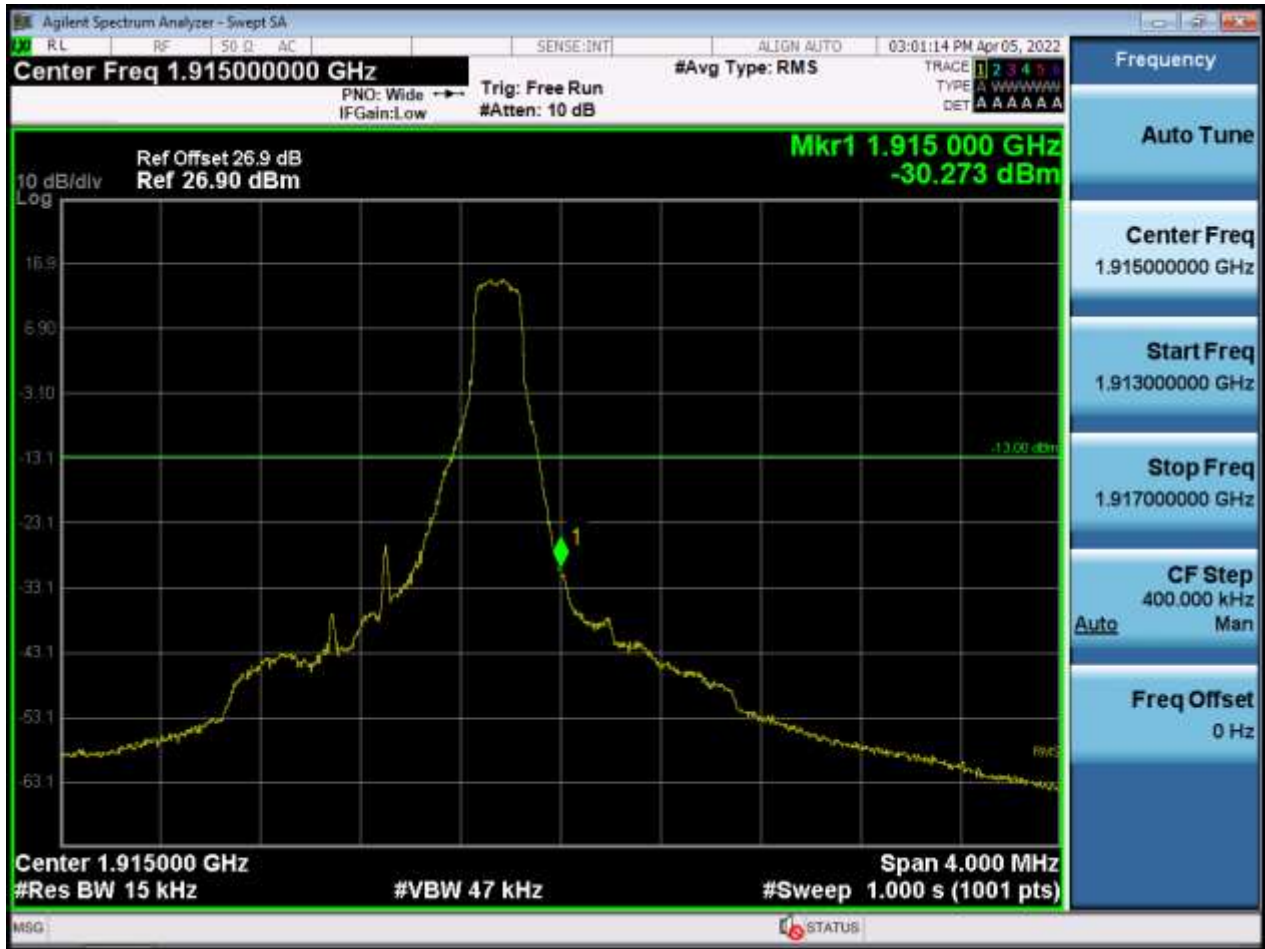

BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Main2 Ant)




BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Main2 Ant)

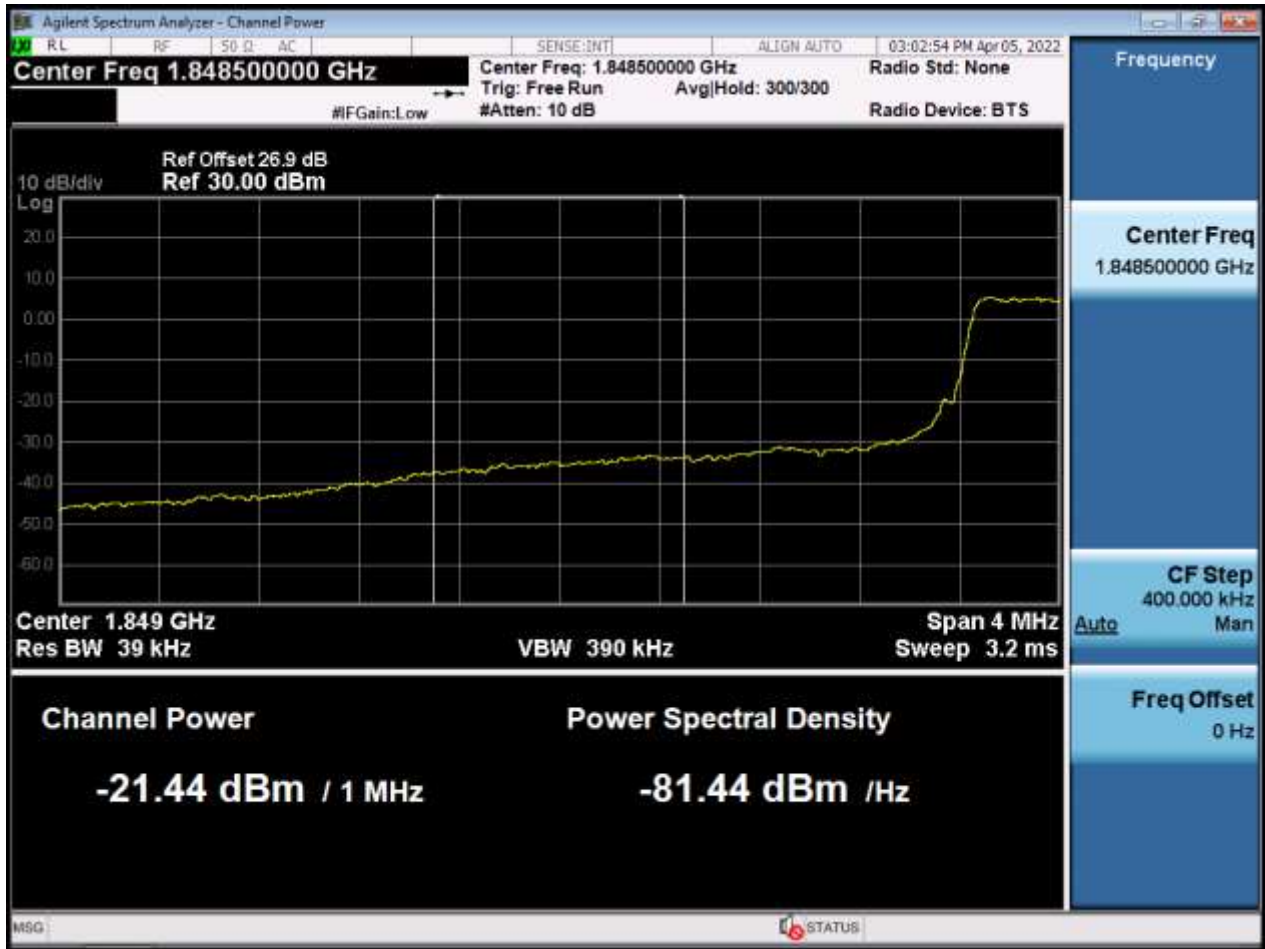


BW3 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Main2 Ant)




BW3 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Main2 Ant)

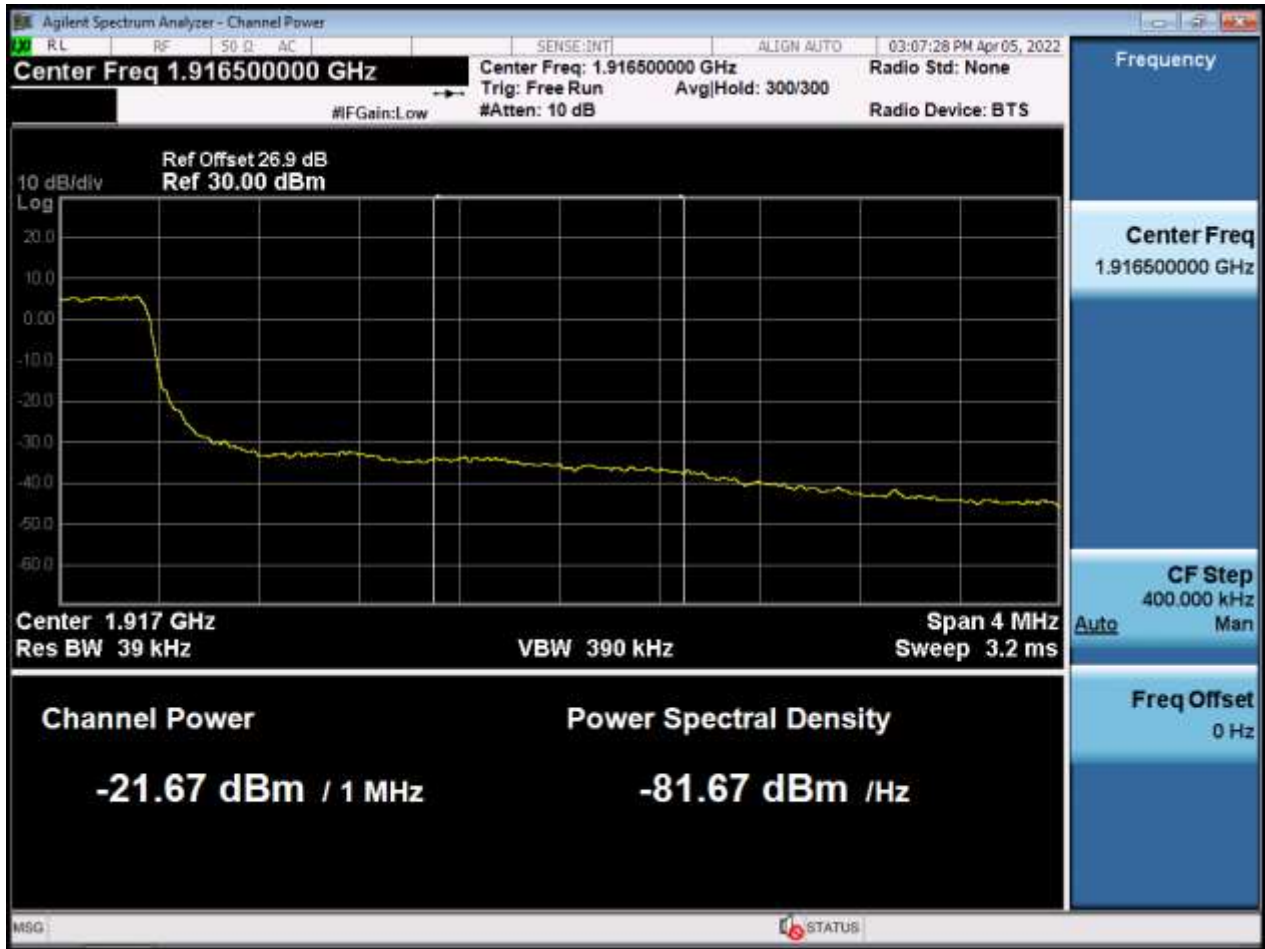

BW3 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)

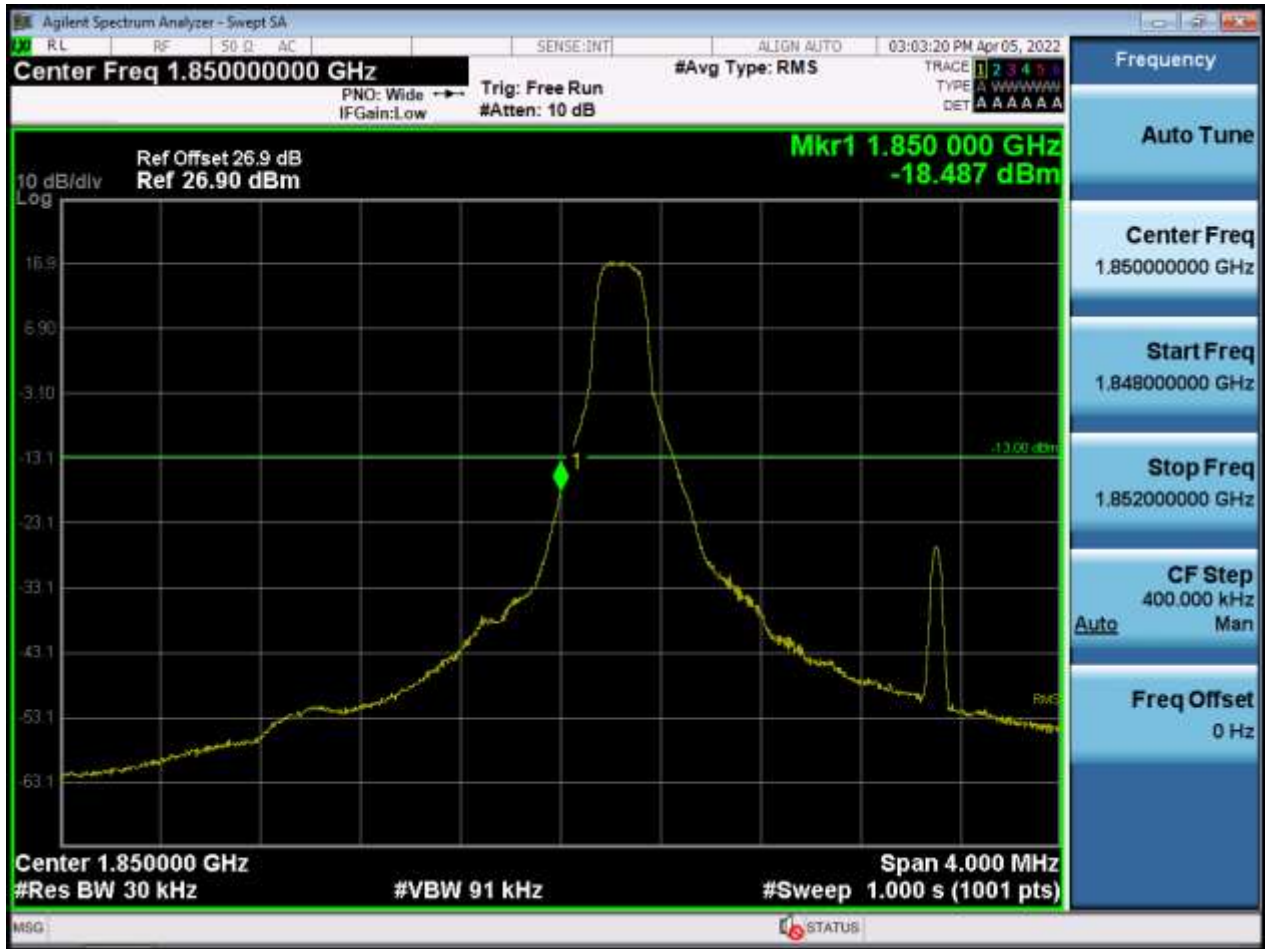

BW3 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)

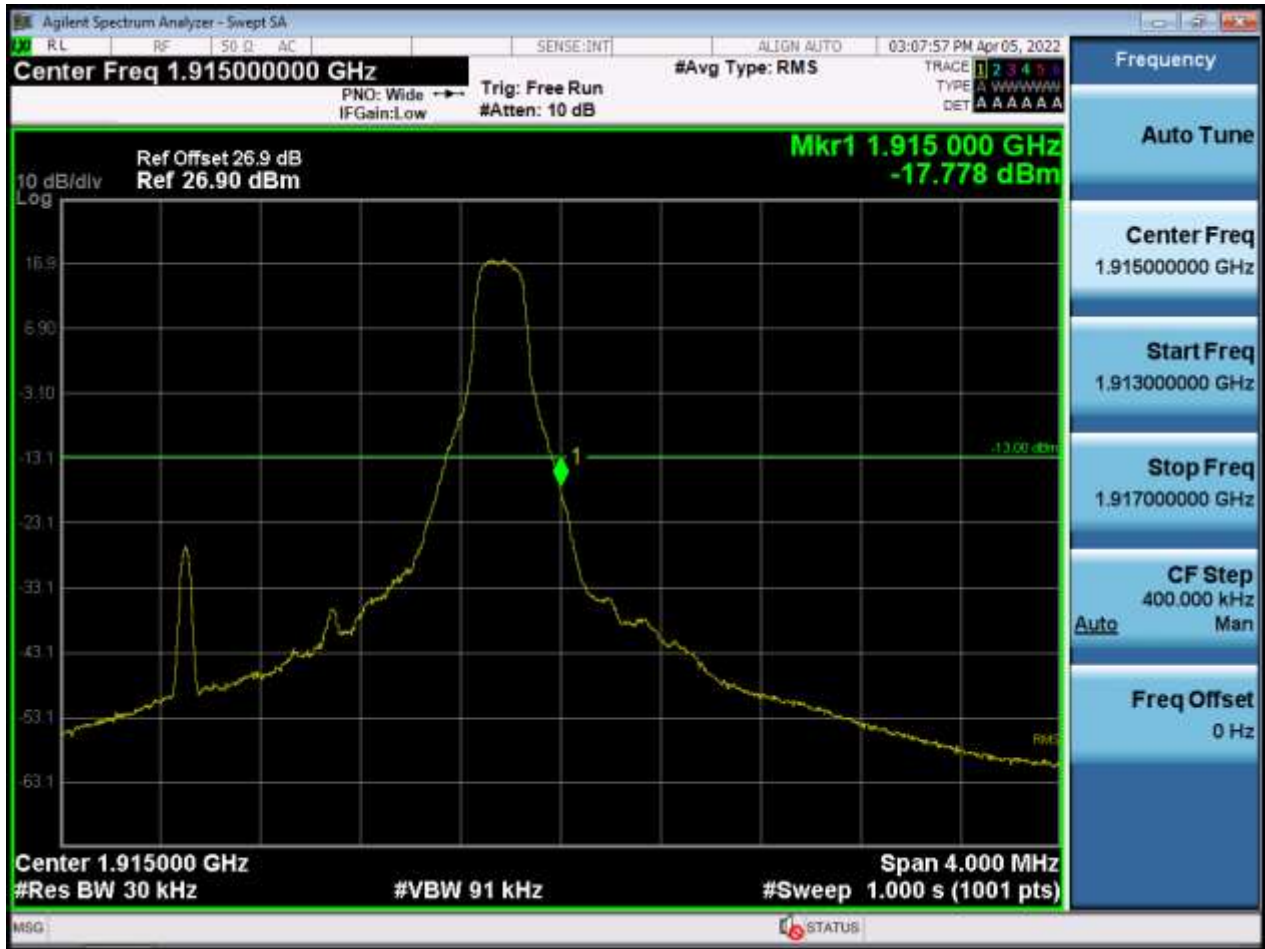

BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Main2 Ant)




BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Main2 Ant)




BW5 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Main2 Ant)



BW5 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Main2 Ant)

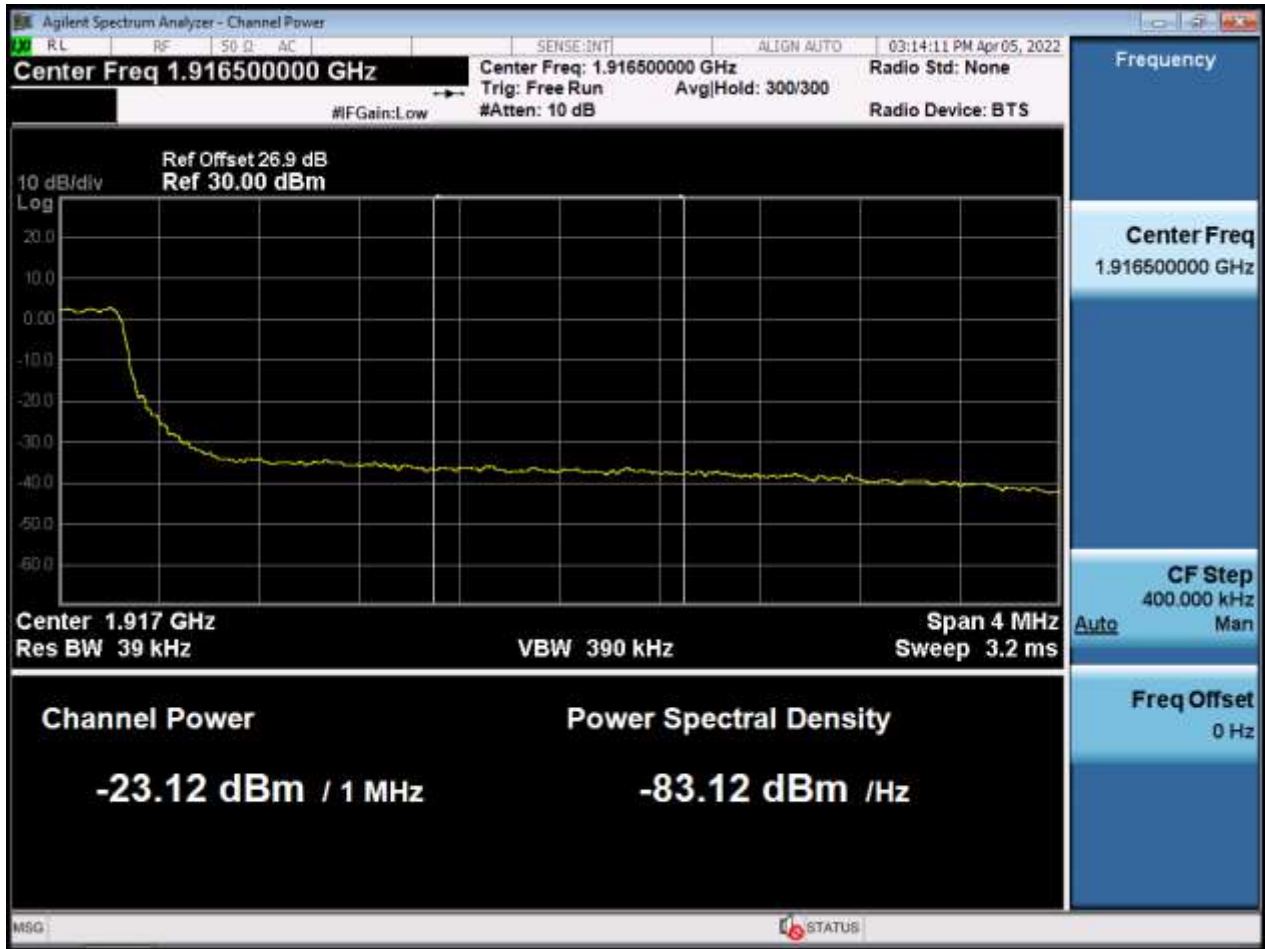

BW5 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)

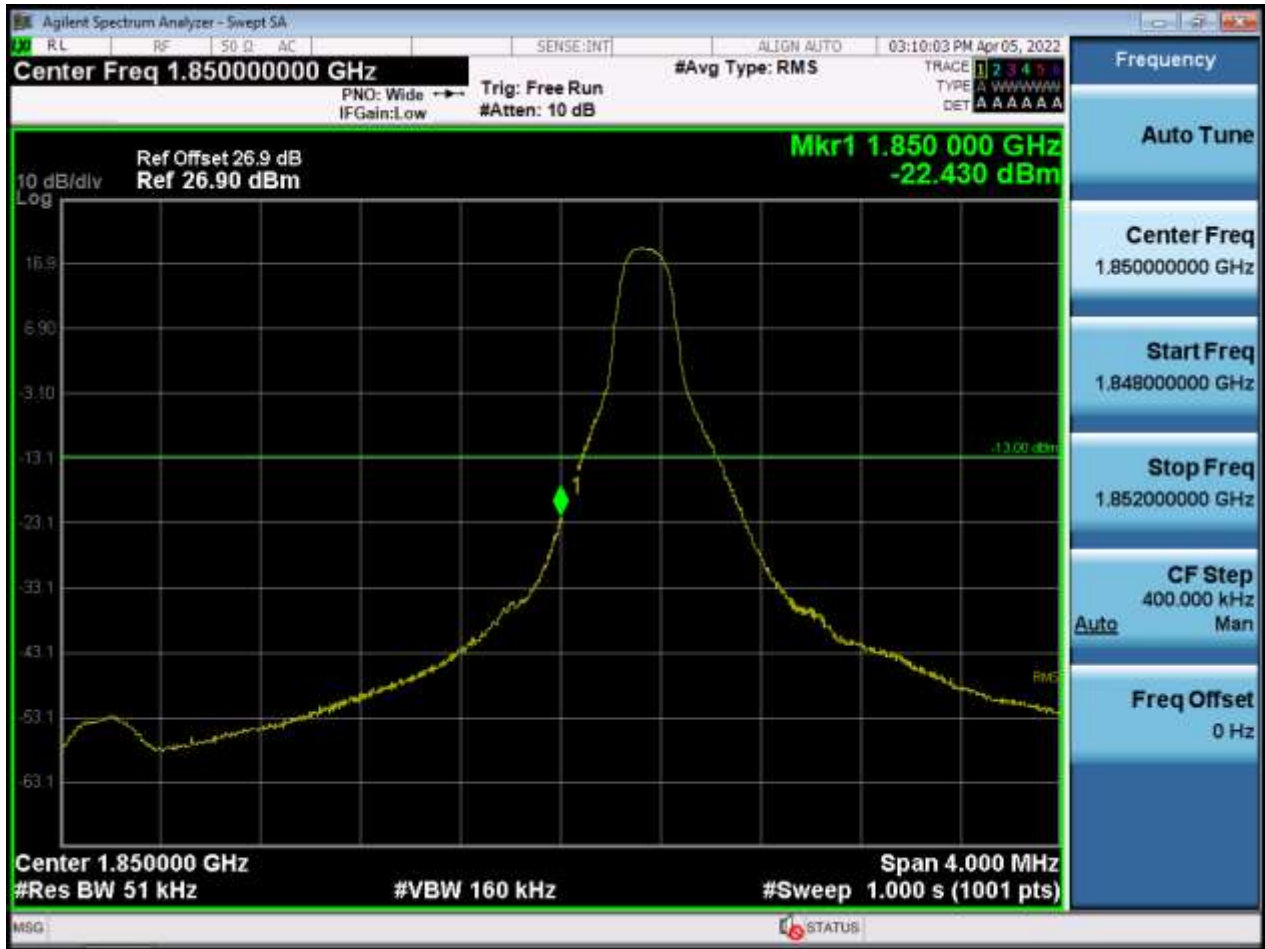

BW5 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)

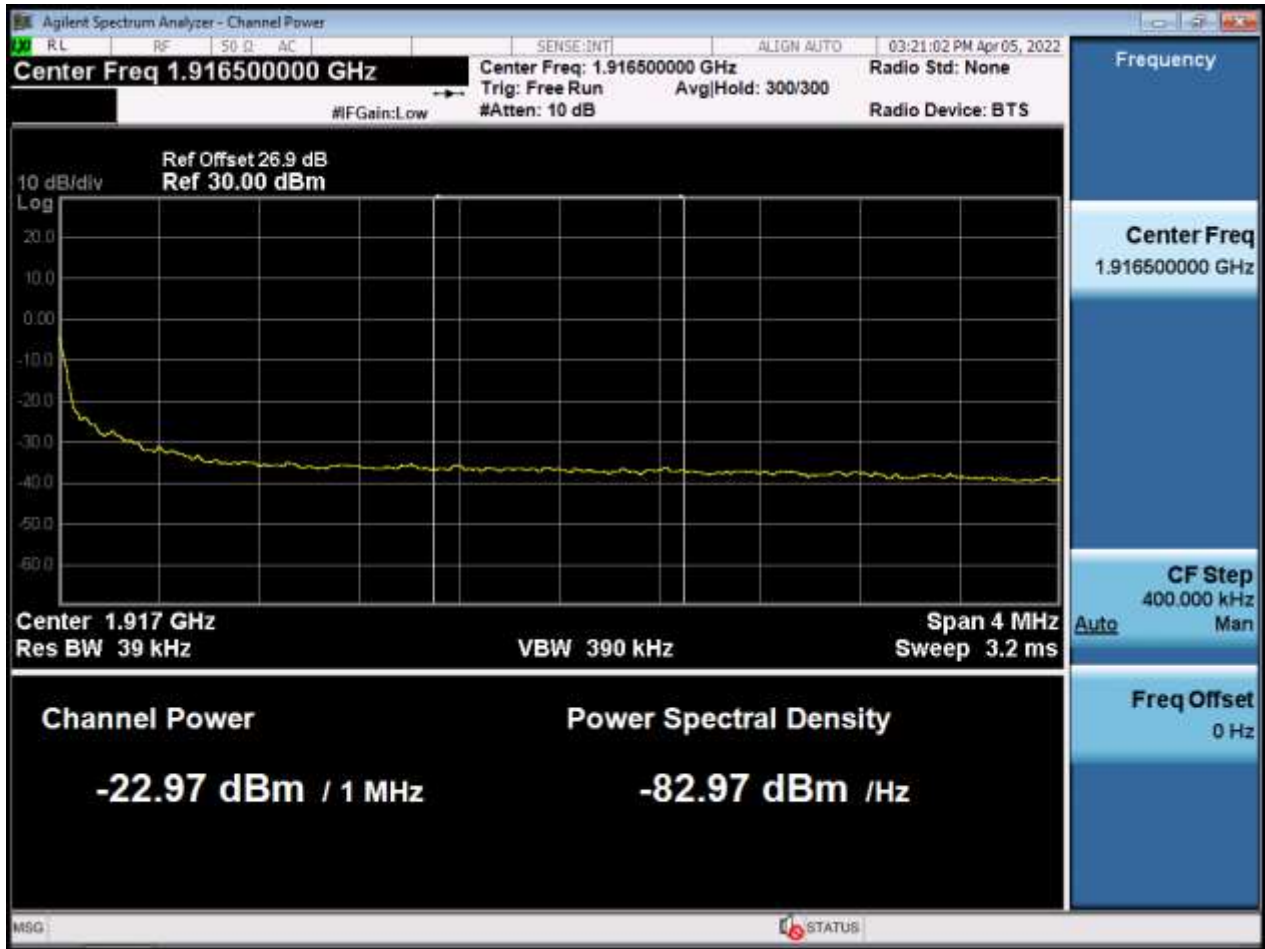

BW10 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)



BW20 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Sub1 Ant)




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Sub1 Ant)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)

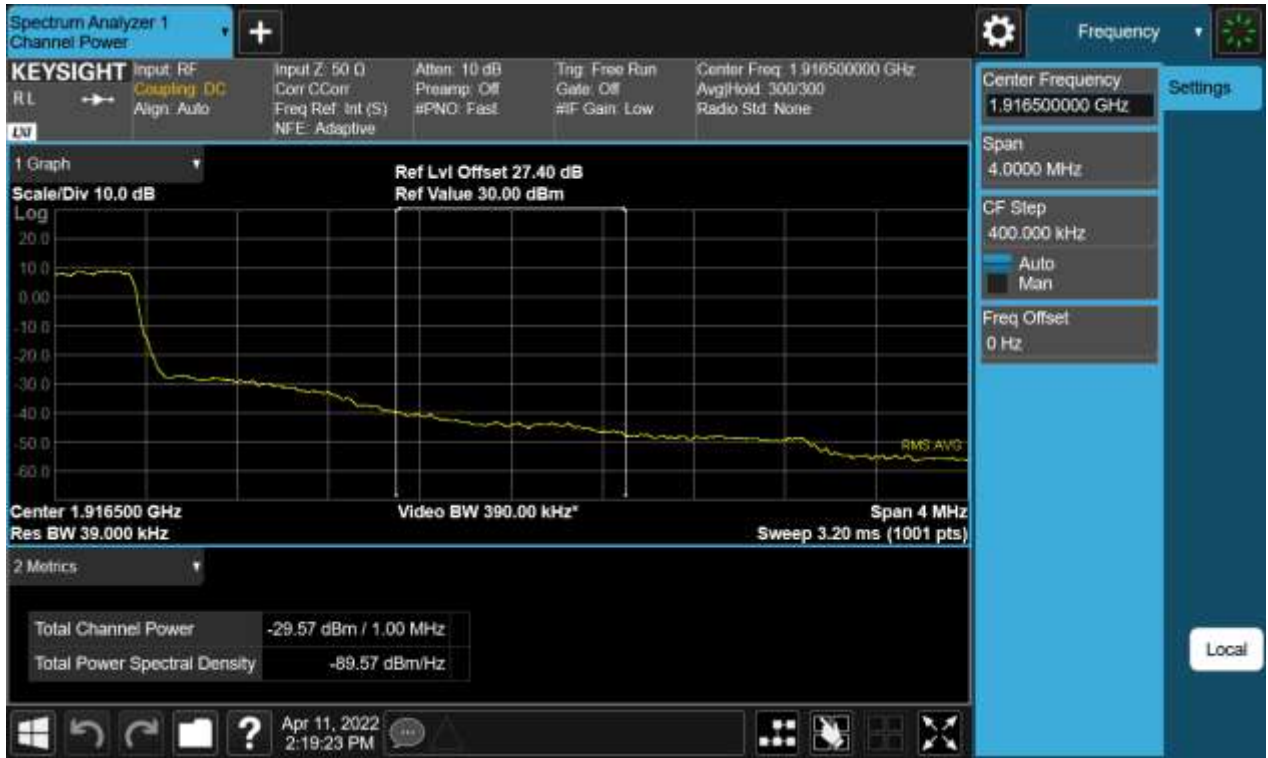

BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)

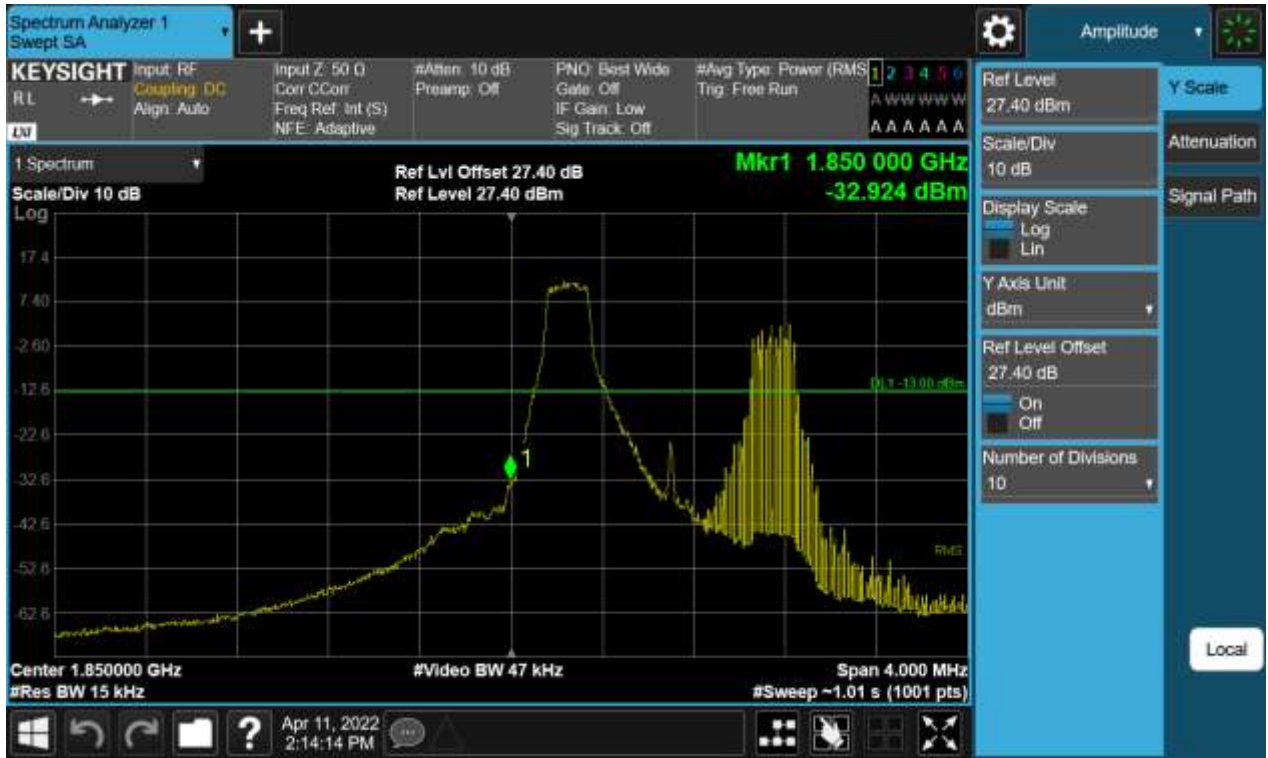

BW1.4 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)



BW3 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Sub1 Ant)

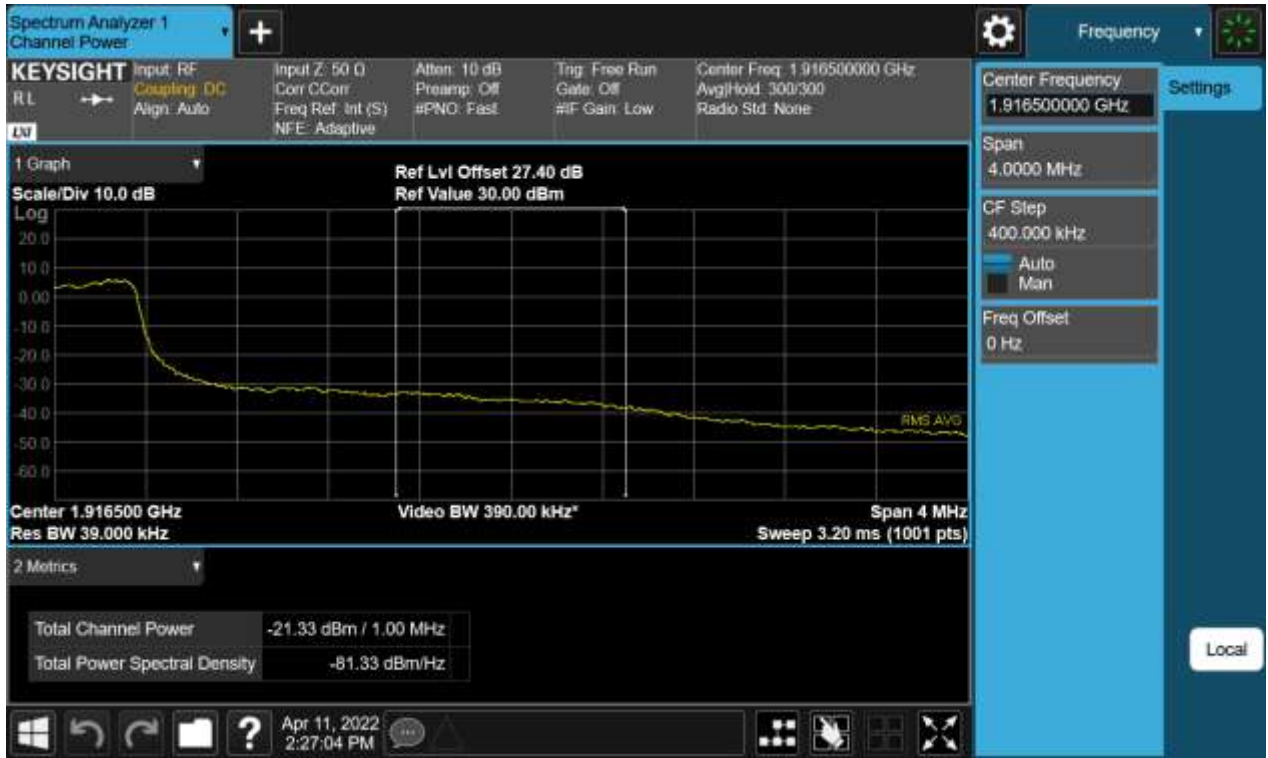

BW3 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW3 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

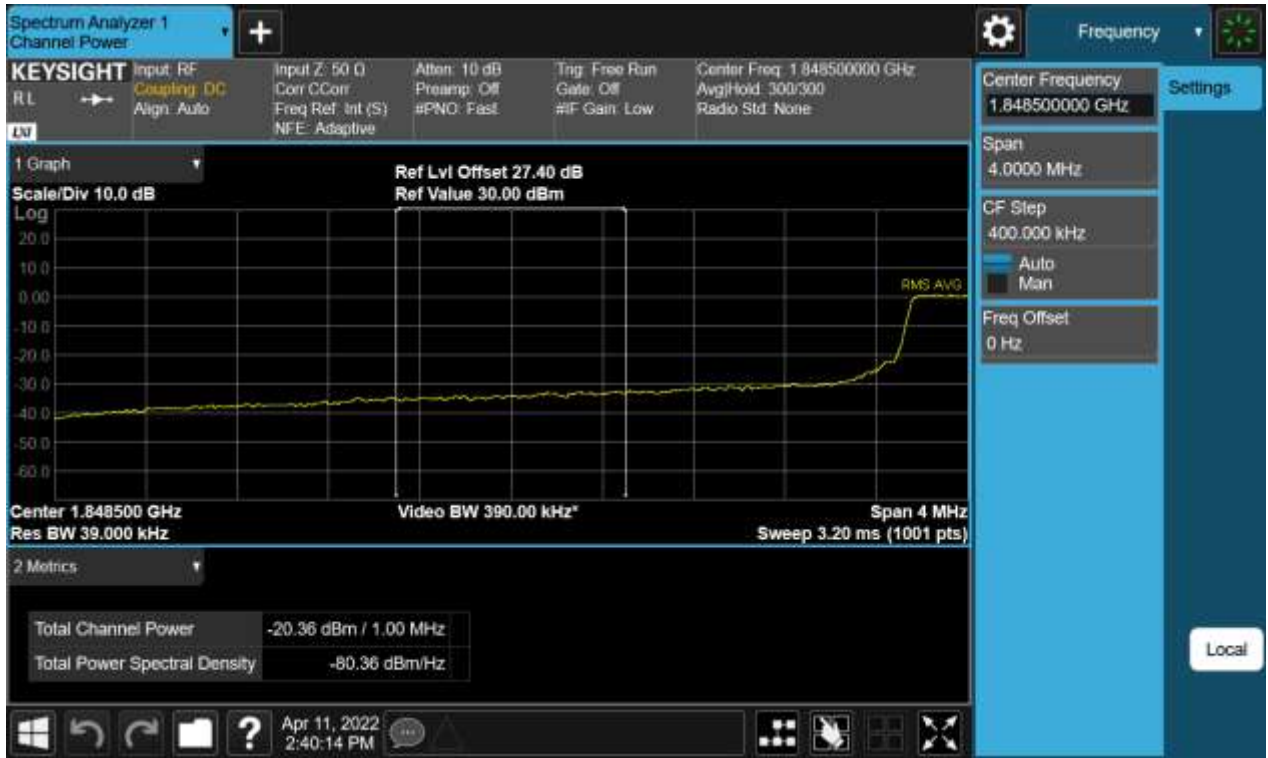

BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Sub1 Ant)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Sub1 Ant)

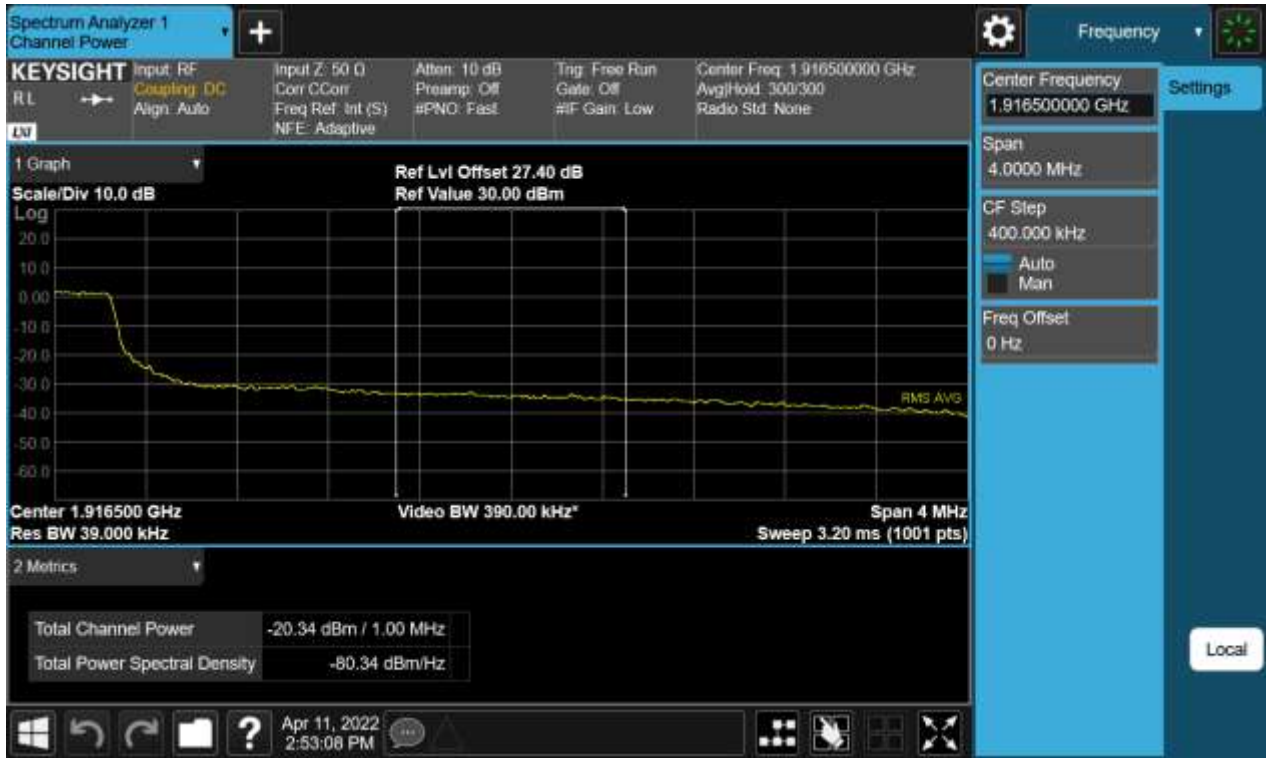

BW5 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW5 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

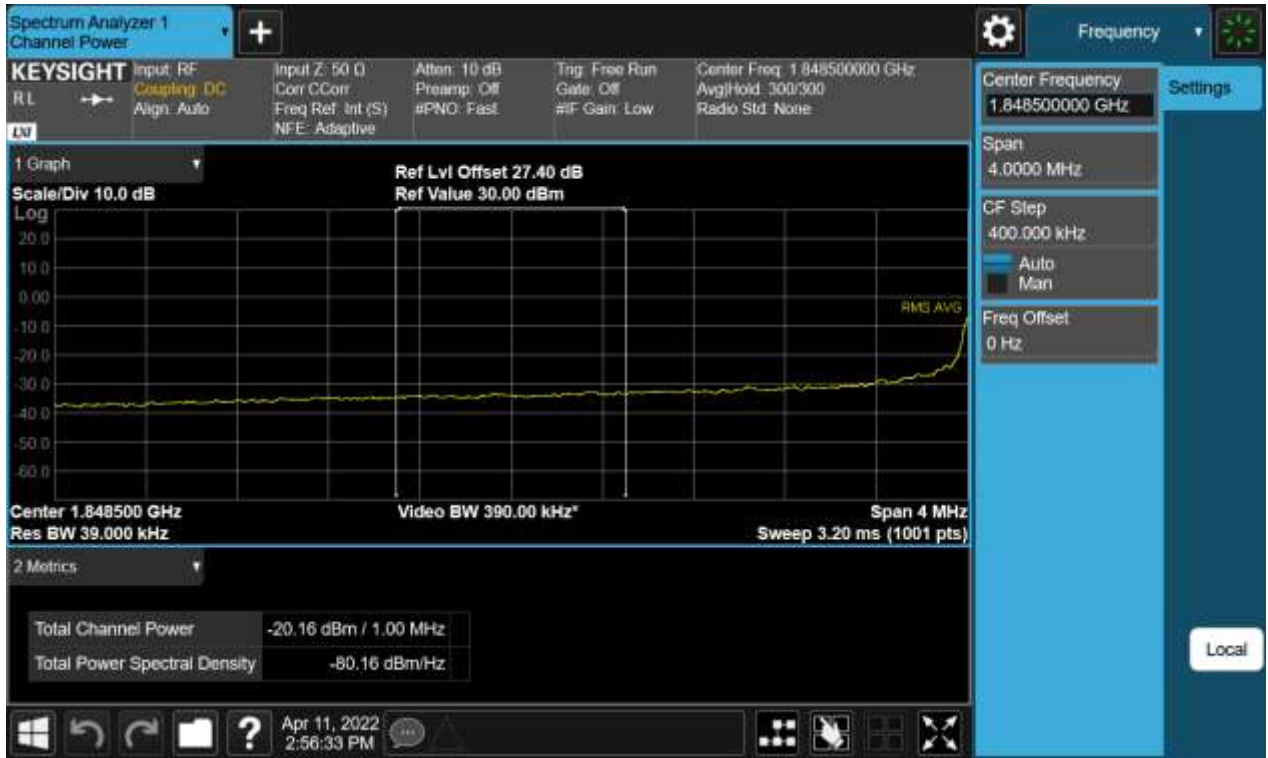

BW10 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Sub1 Ant)

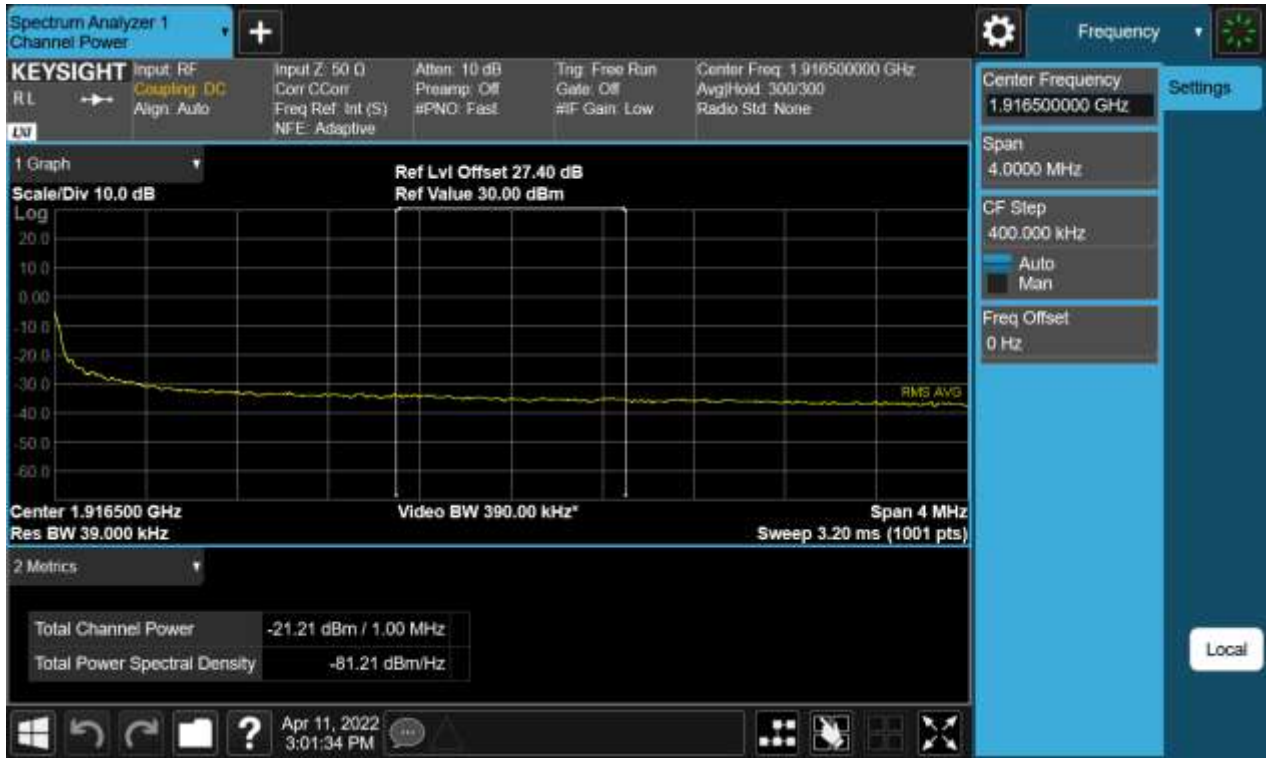

BW10 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW10 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

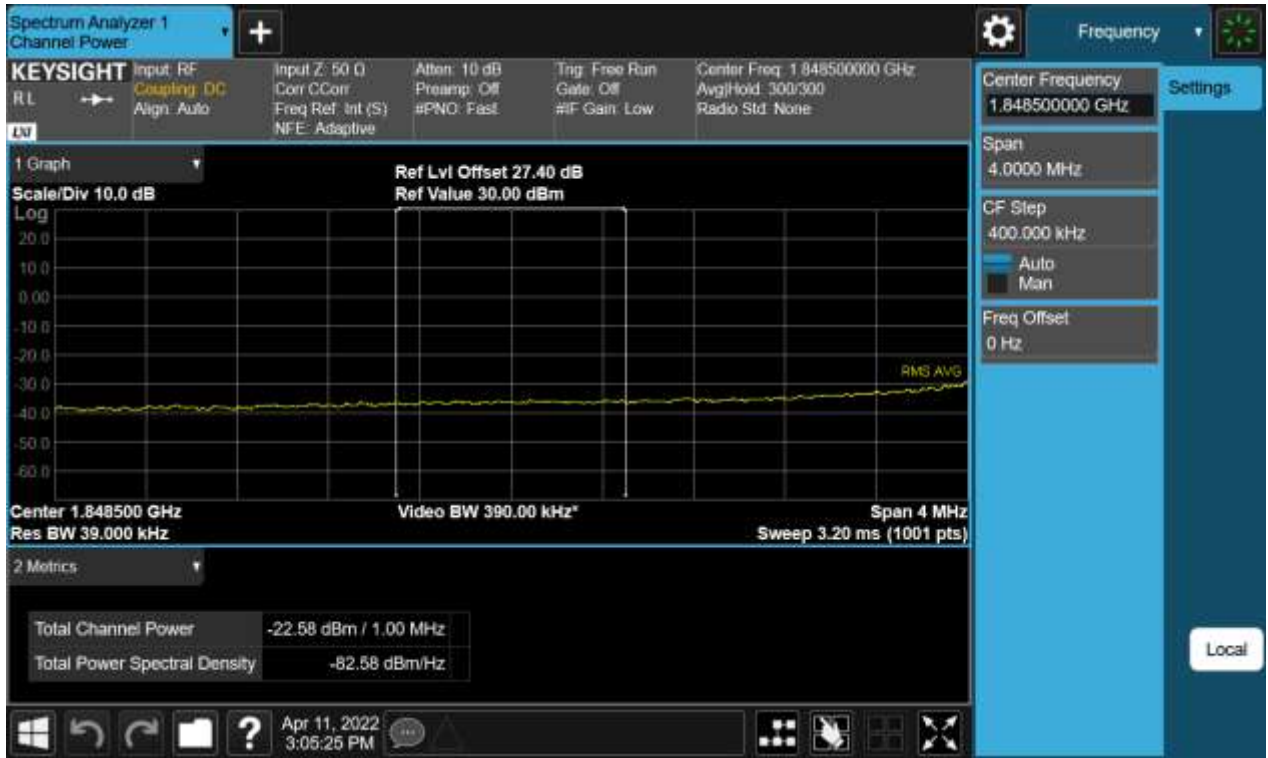

BW15 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)

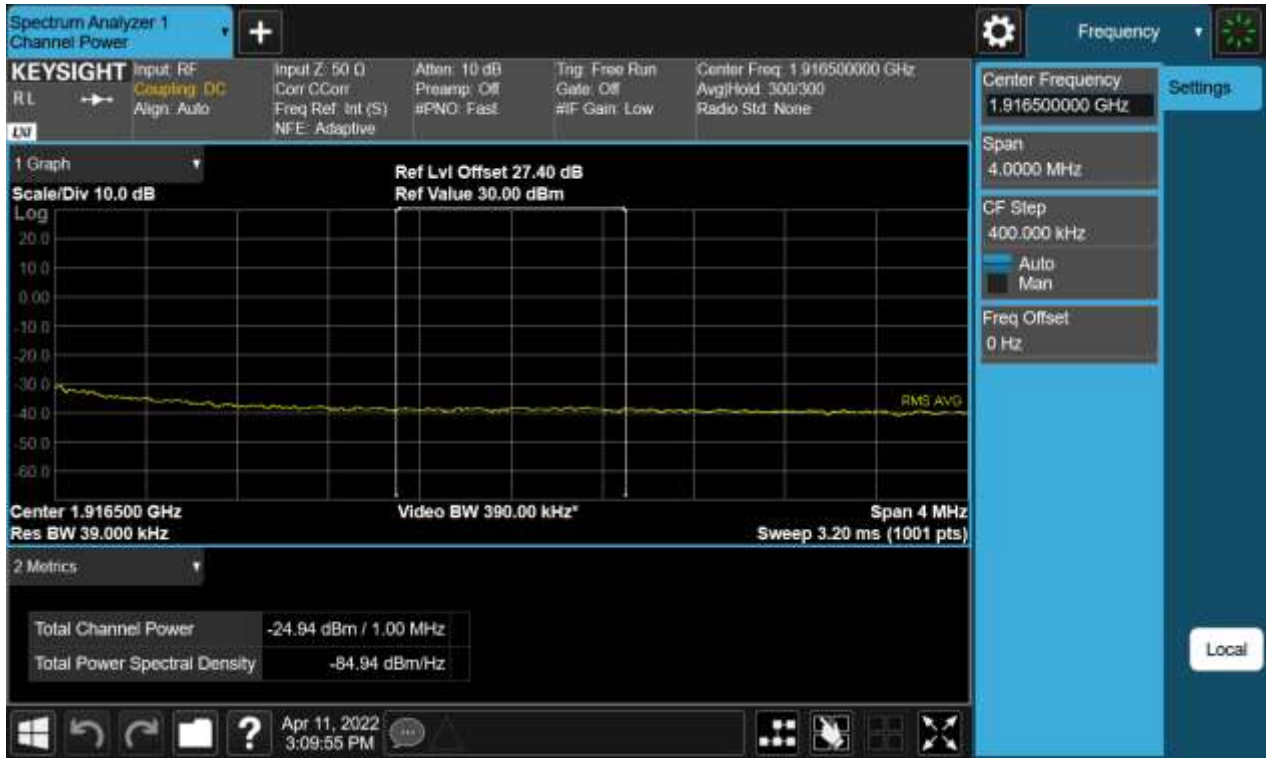

BW15 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW15 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

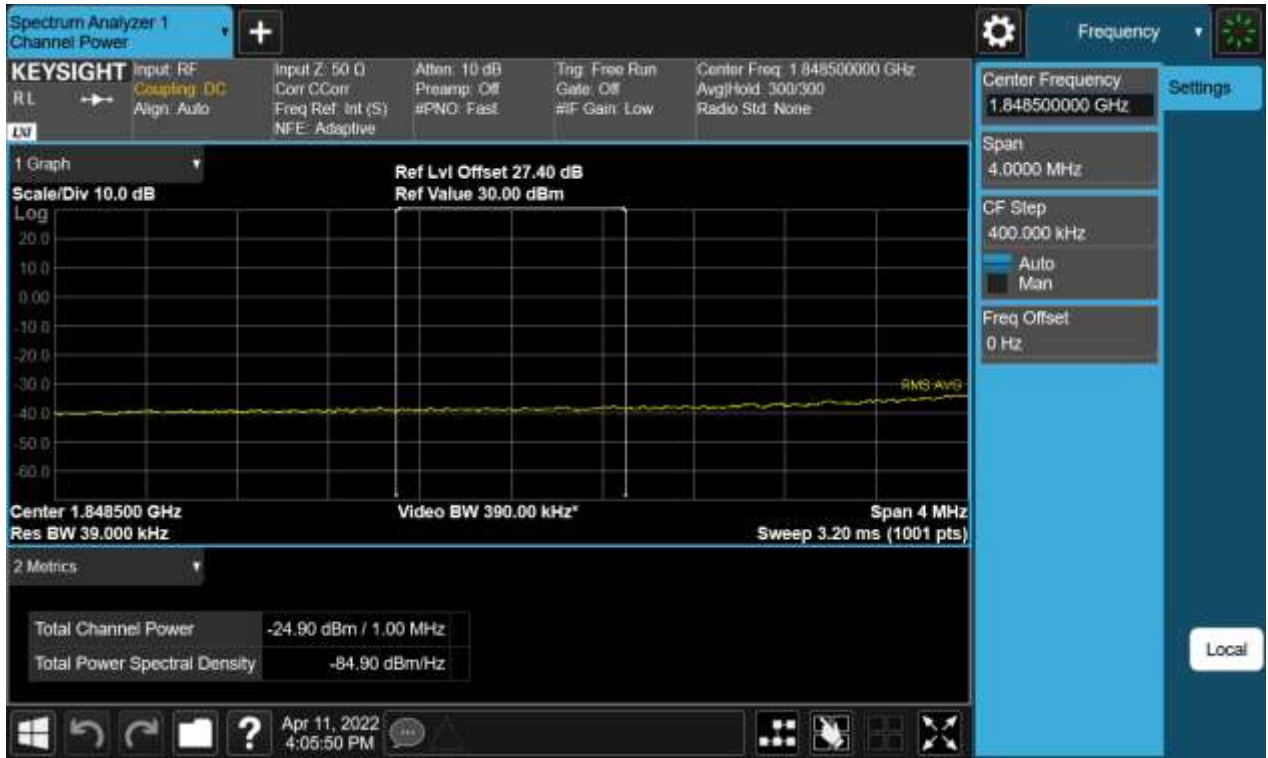

BW20 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW20 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)

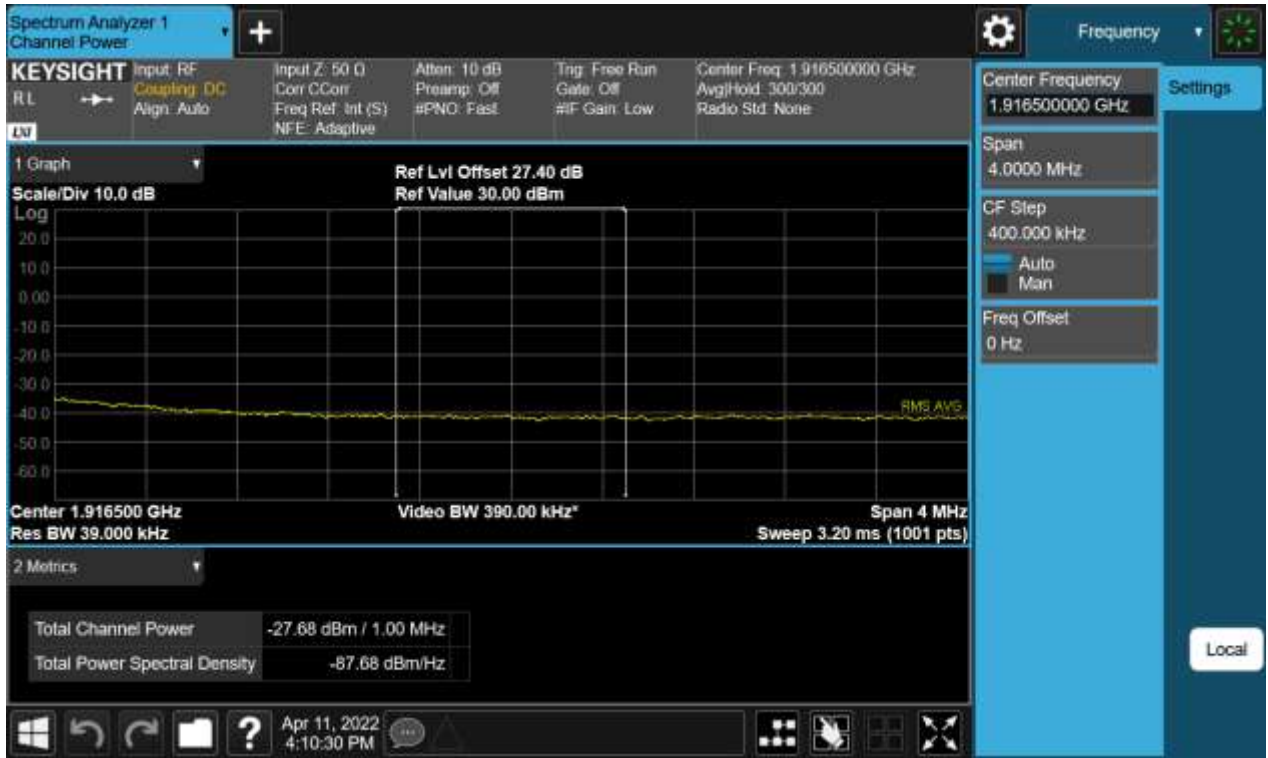


BW20 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW20 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)




BW1.4 M_OBW_Middle Channel_QPSK_FullIRB(Main2 Ant)

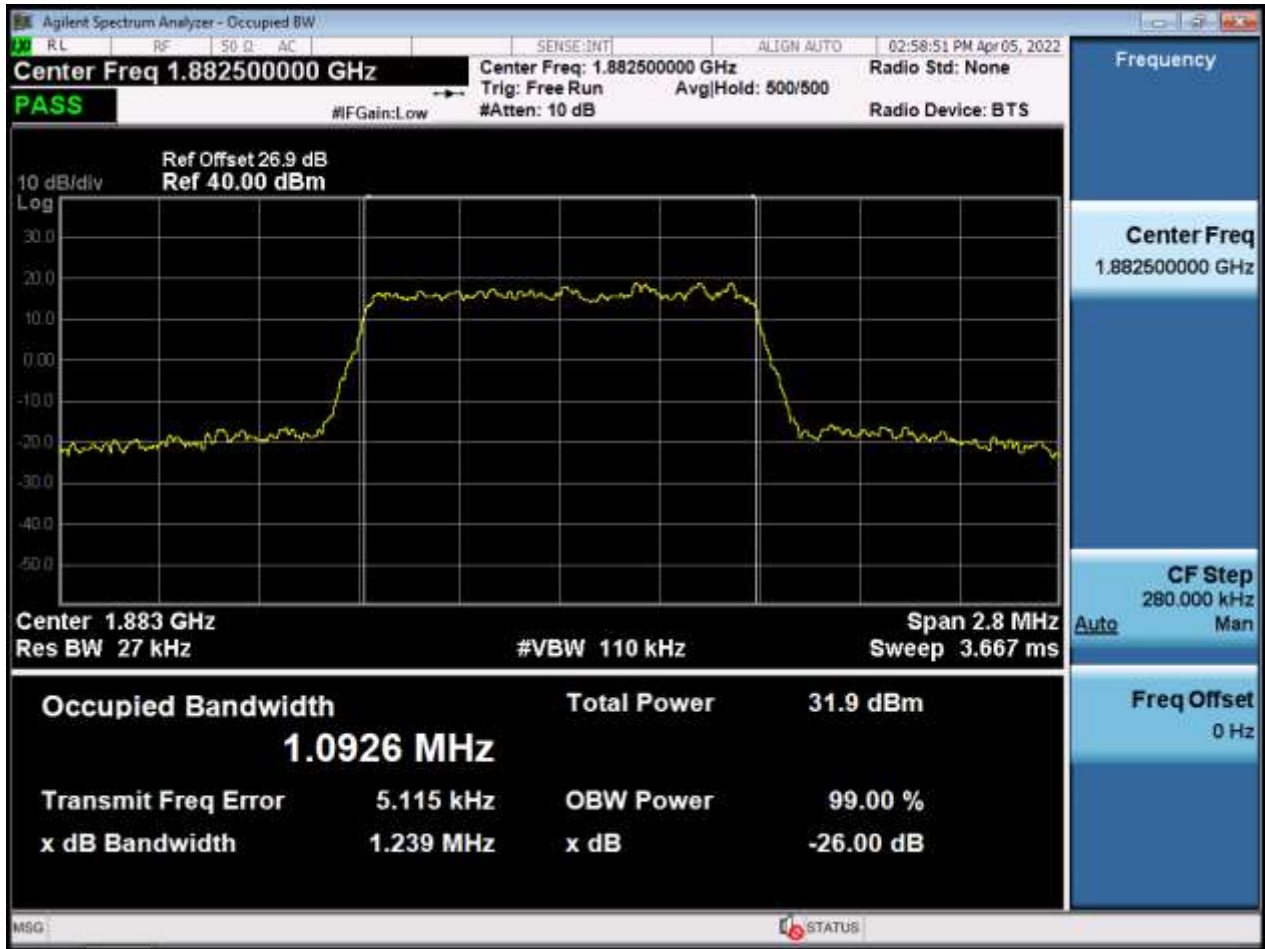


BW1.4 M_OBW_Middle Channel_16QAM_FullRB(Main2 Ant)

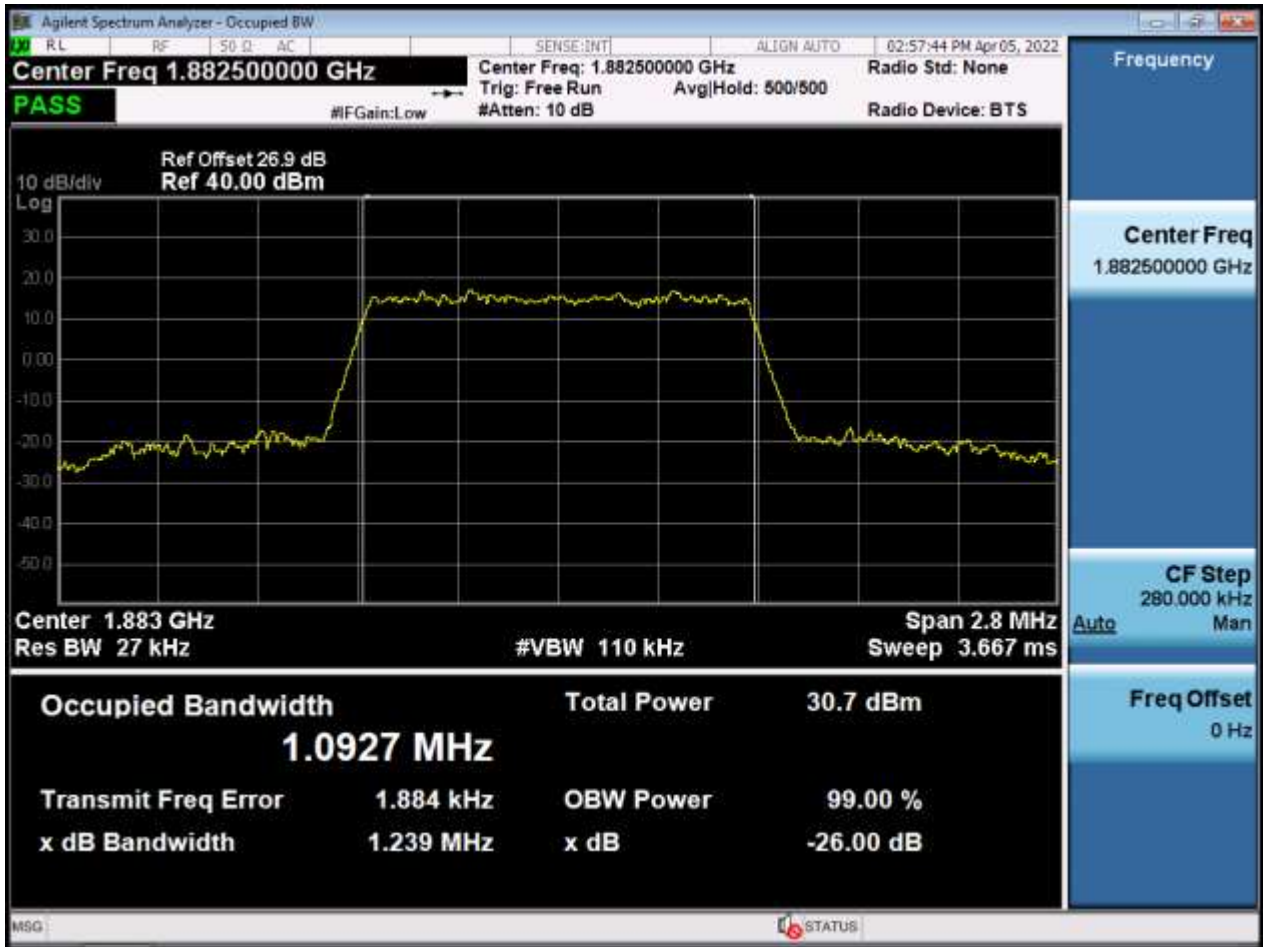


BW1.4 M_OBW_Middle Channel_64QAM_FullRB(Main2 Ant)

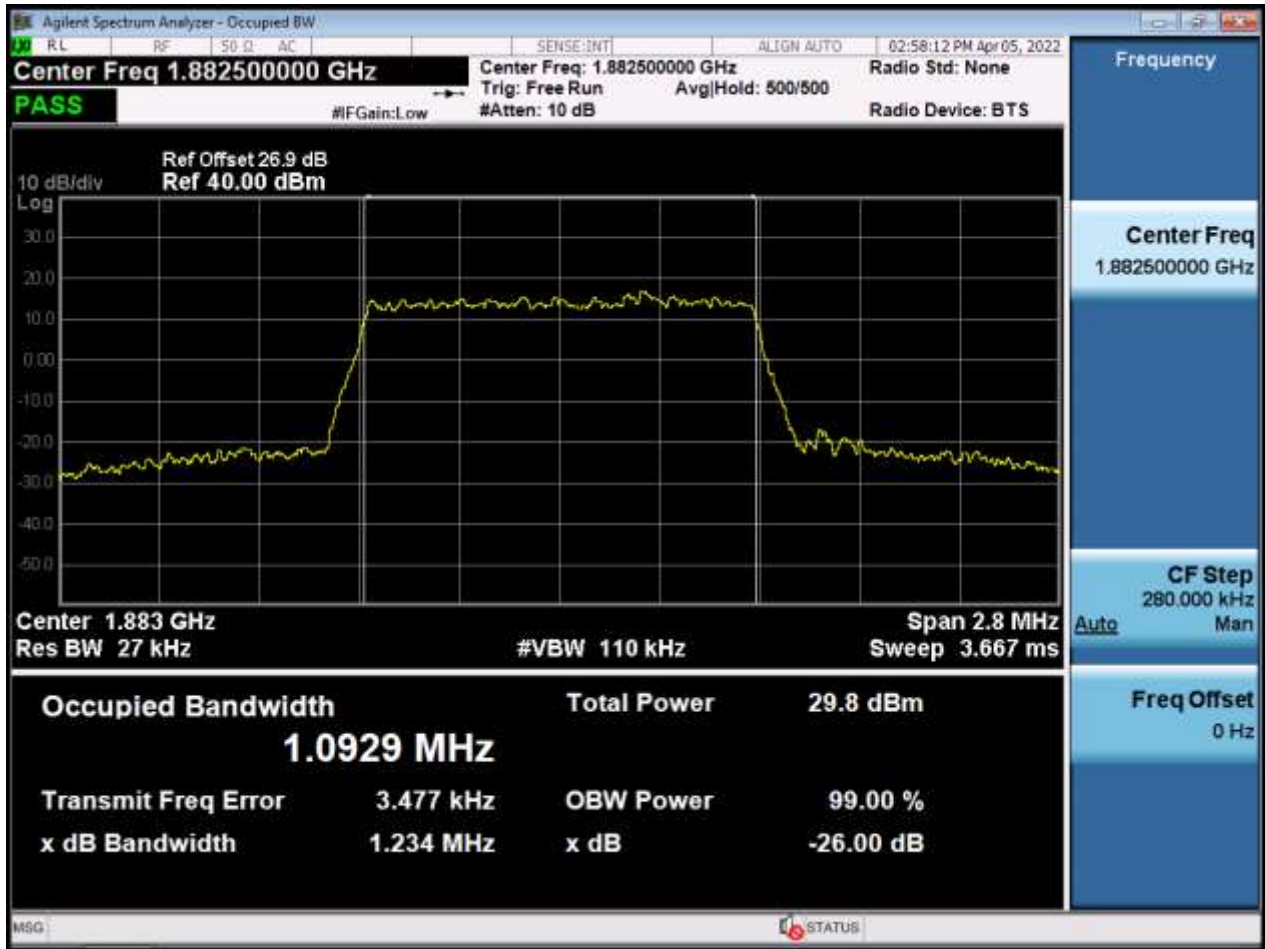


BW1.4 M_OBW_Middle Channel_256QAM_FullRB(Main2 Ant)

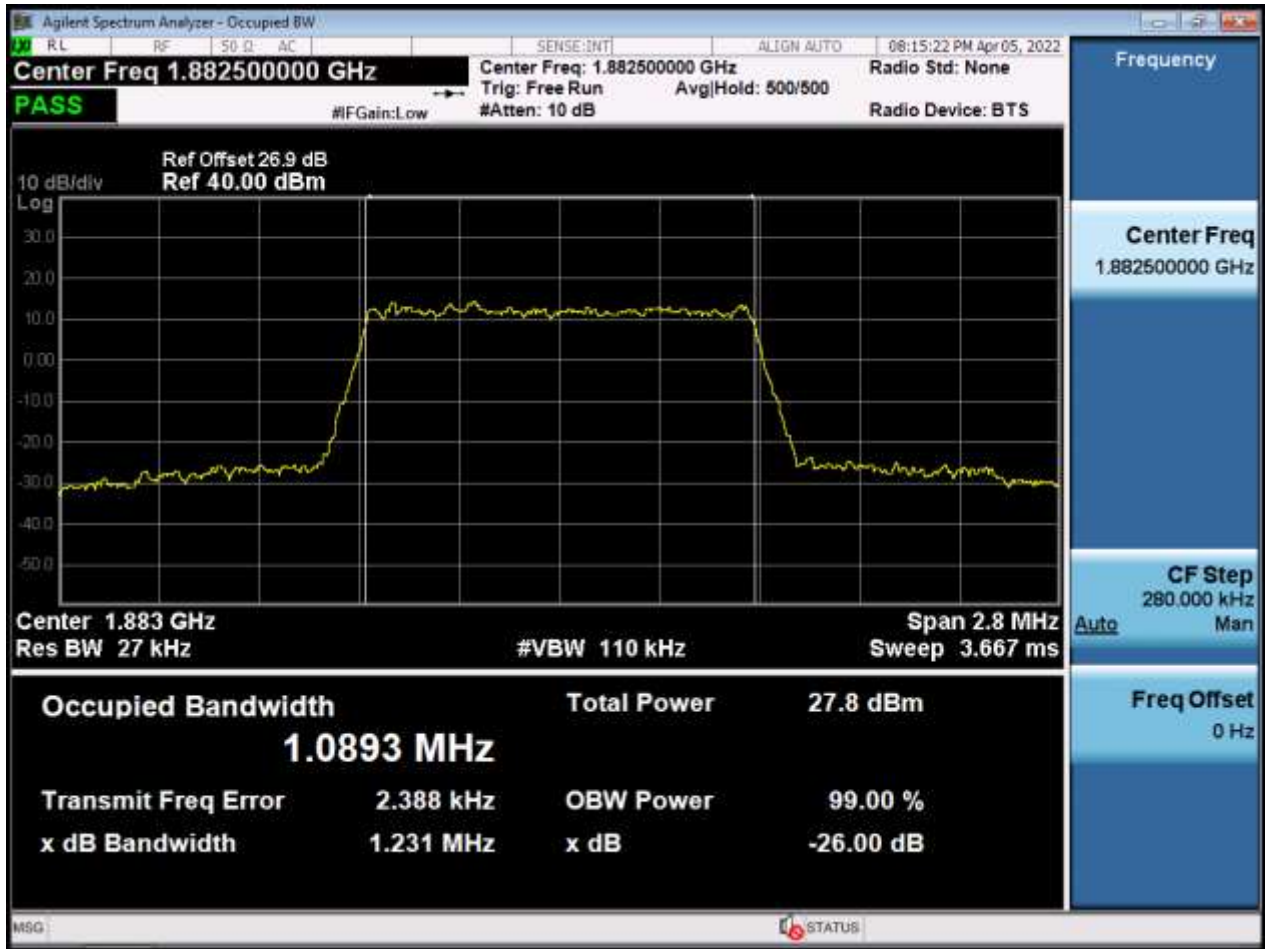


BW3 M_OBW_Middle Channel_QPSK_FullIRB(Main2 Ant)

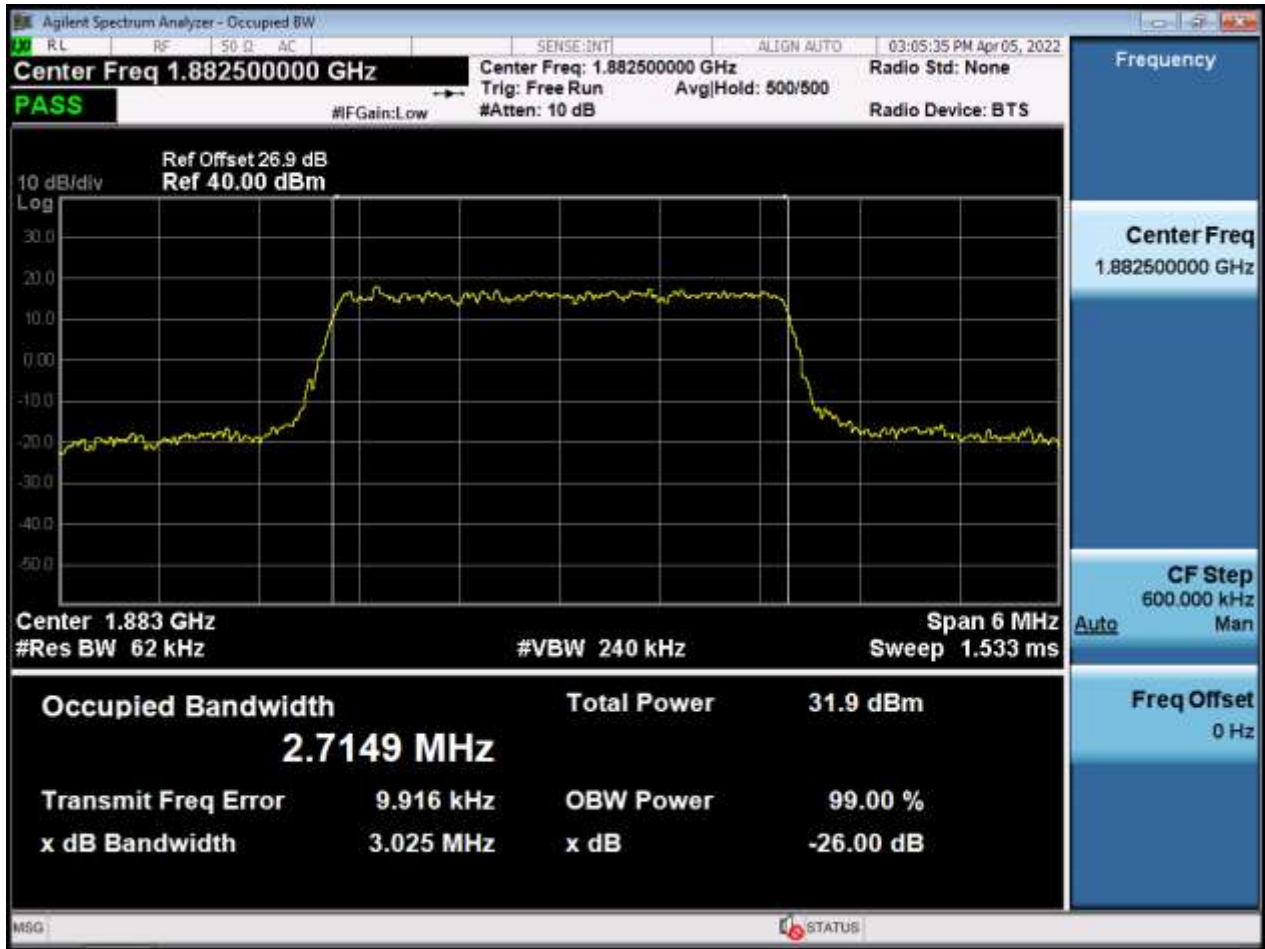


BW3 M_OBW_Middle Channel_16QAM_FullRB(Main2 Ant)

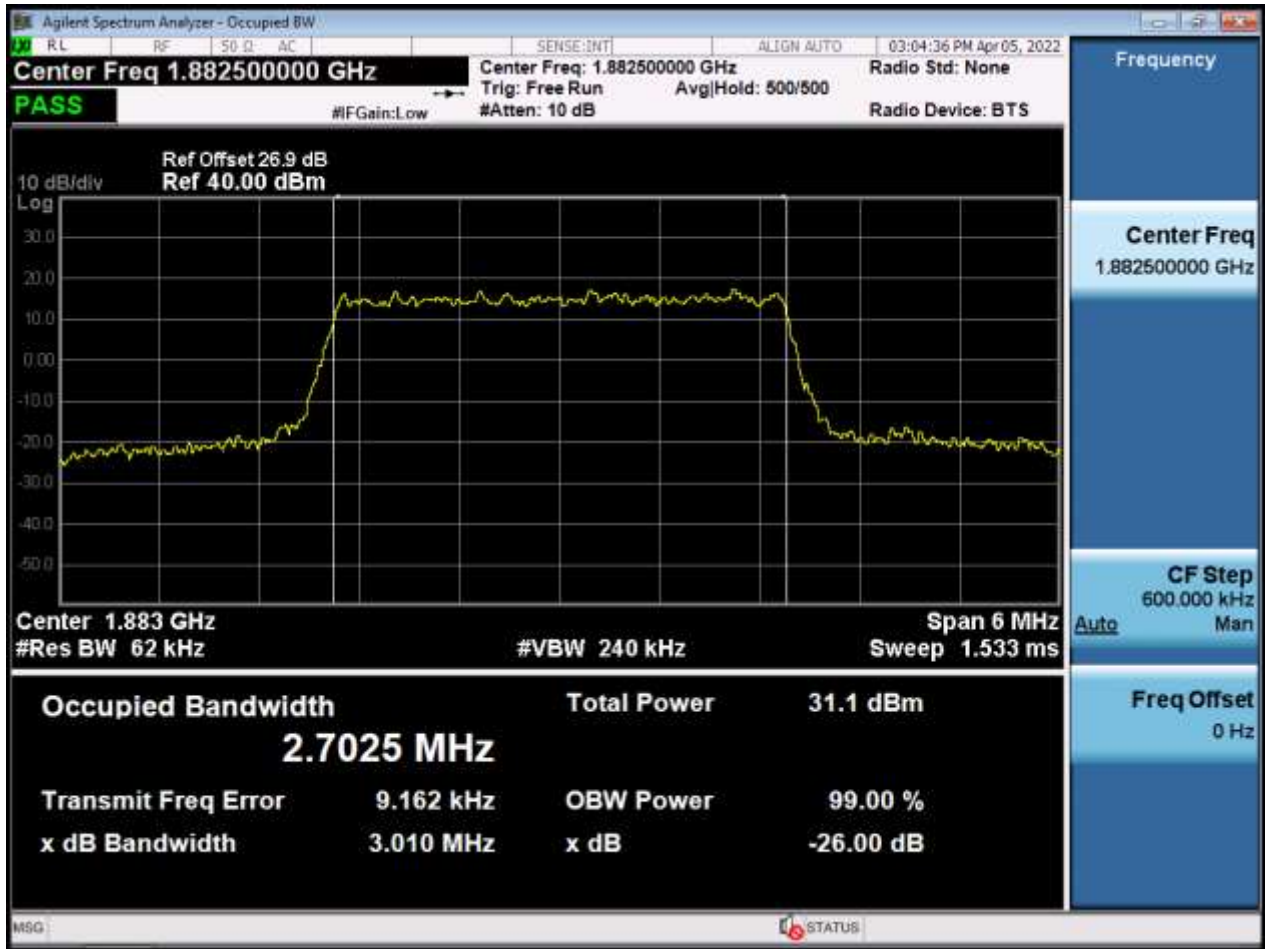


BW3 M_OBW_Middle Channel_64QAM_FullRB(Main2 Ant)

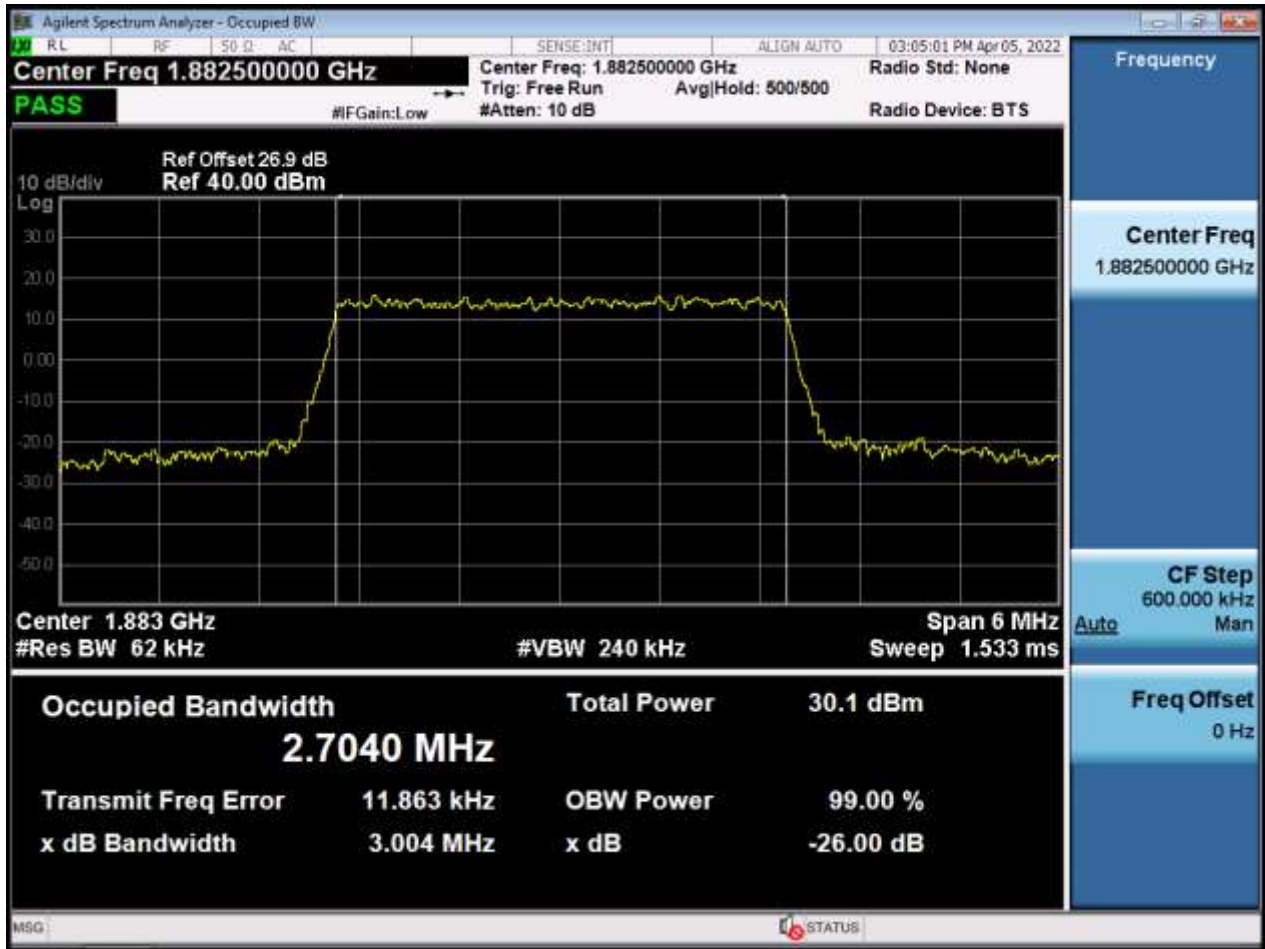


BW3 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

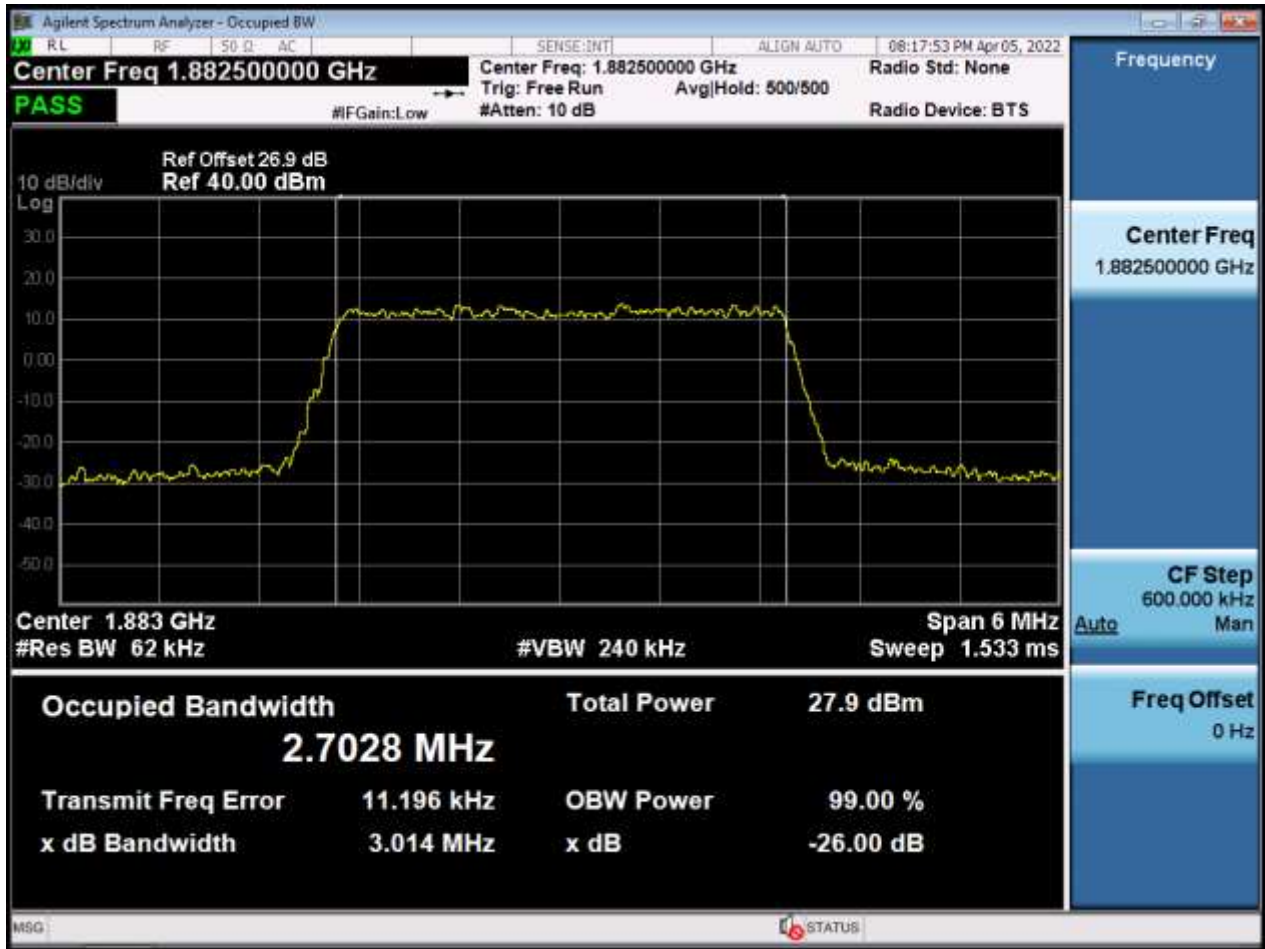


BW5 M_OBW_Middle Channel_QPSK_FullIRB(Main2 Ant)

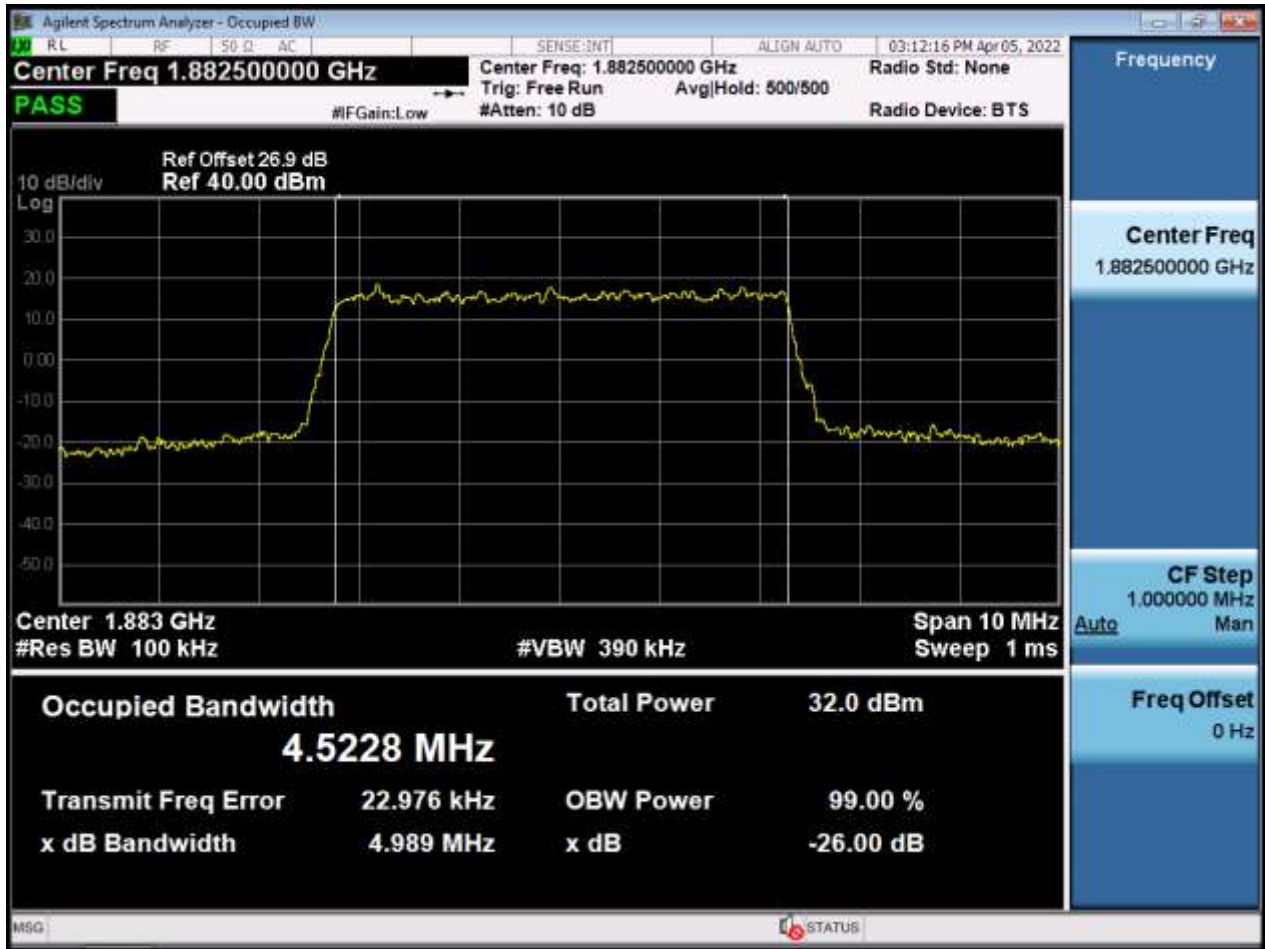


BW5 M_OBW_Middle Channel_16QAM_FullRB(Main2 Ant)

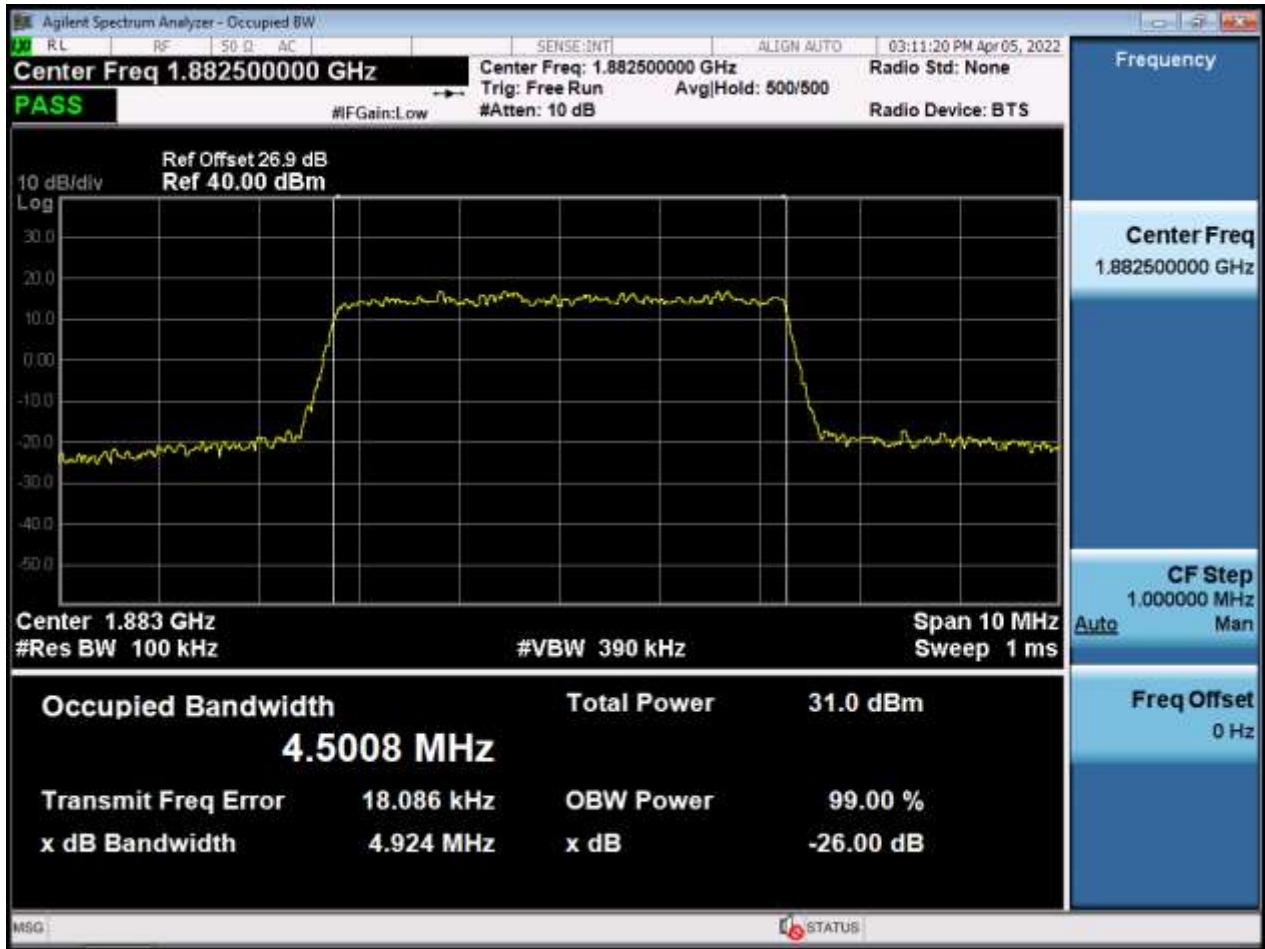


BW5 M_OBW_Middle Channel_64QAM_FullRB(Main2 Ant)

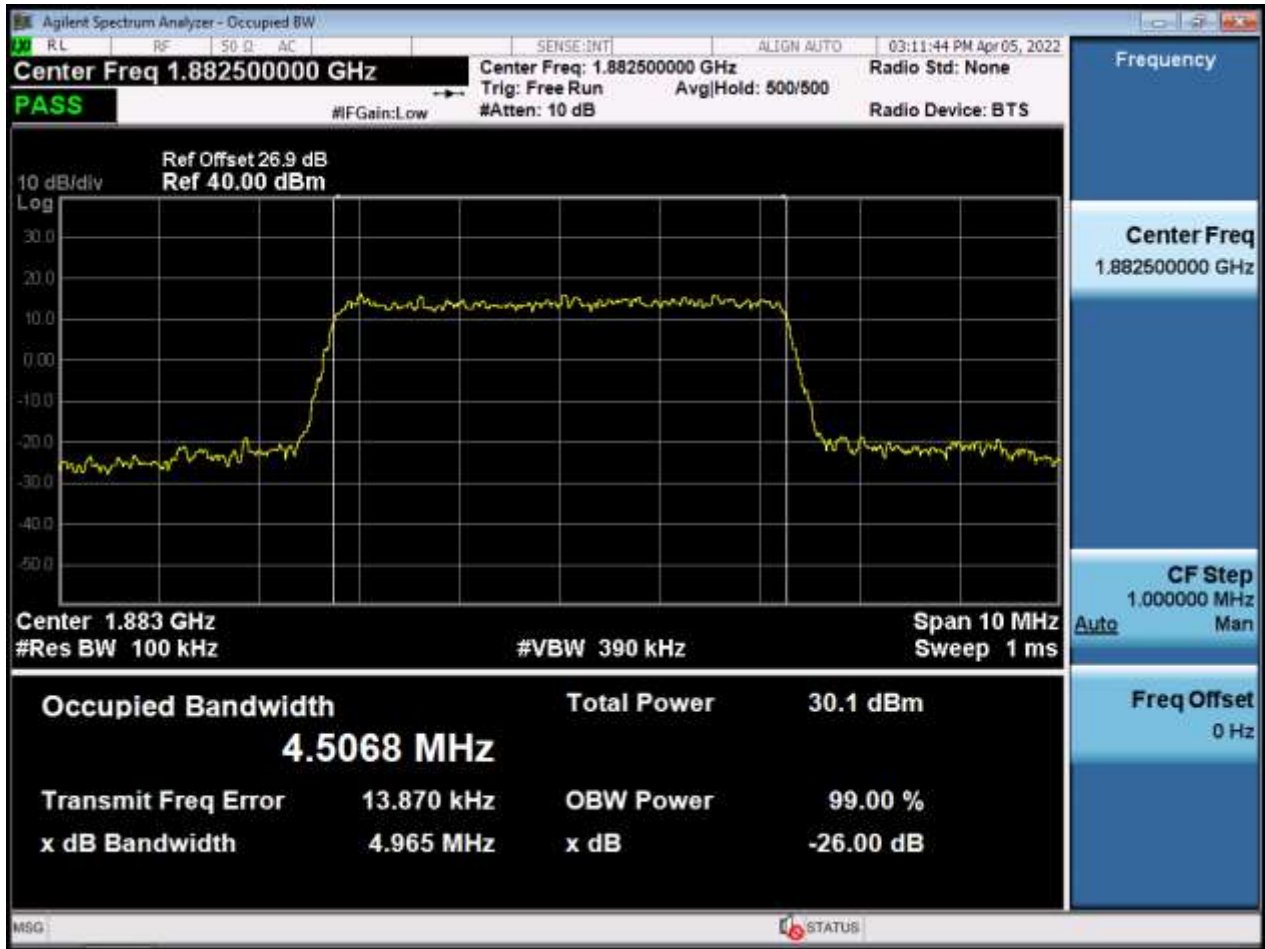


BW5 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

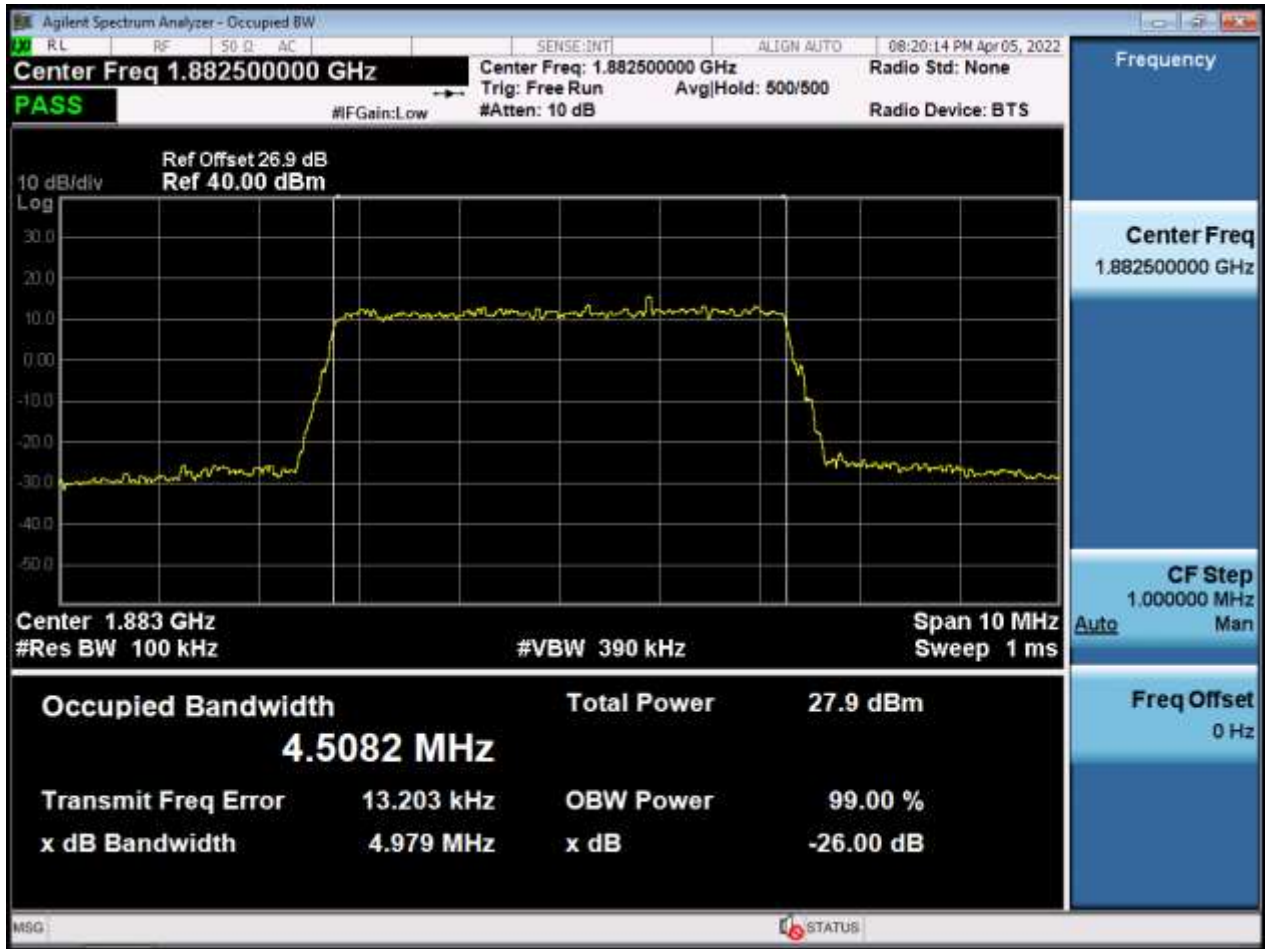


BW10 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

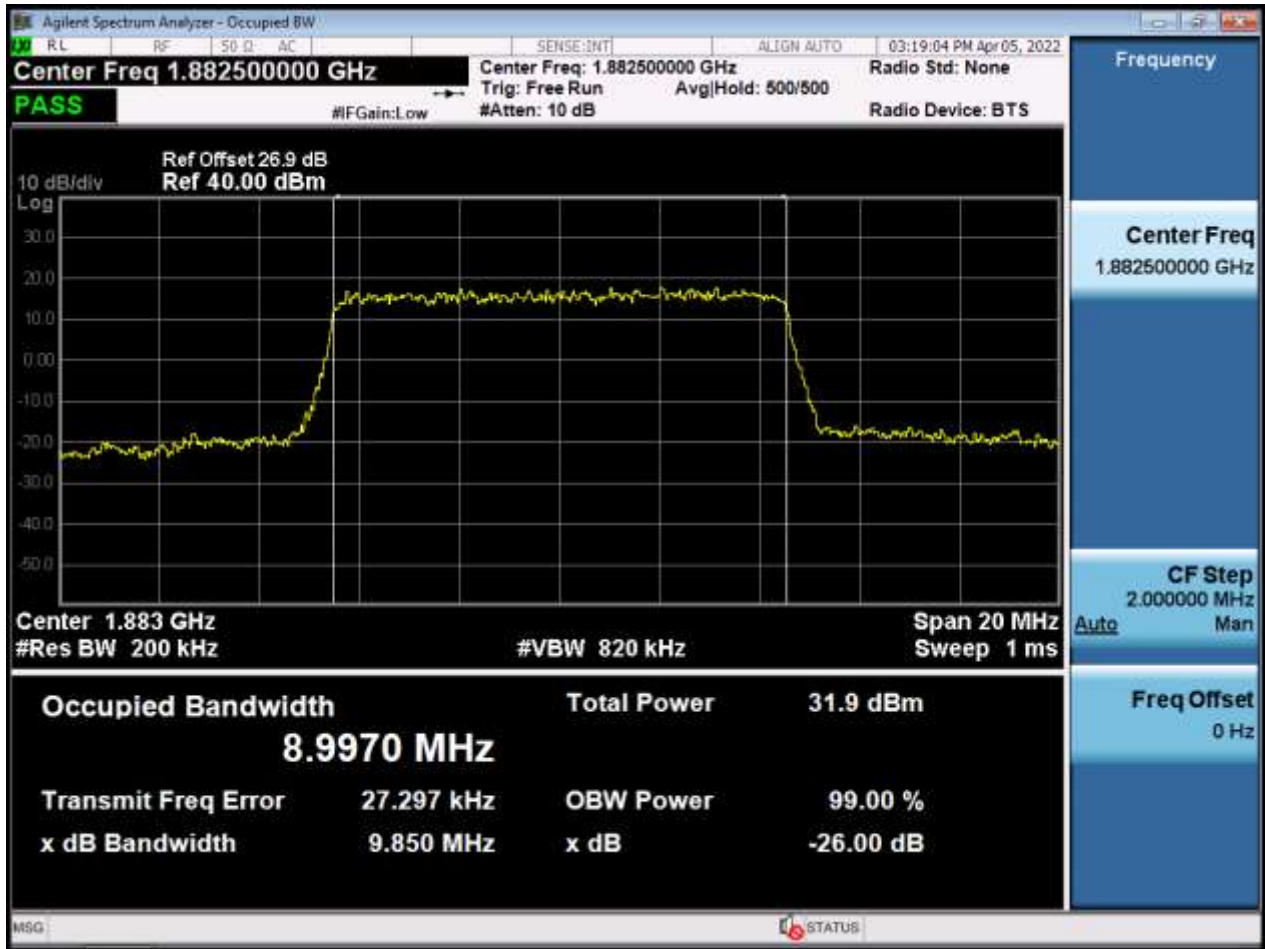


BW10 M_OBW_Middle Channel_16QAM_FullIRB(Main2 Ant)

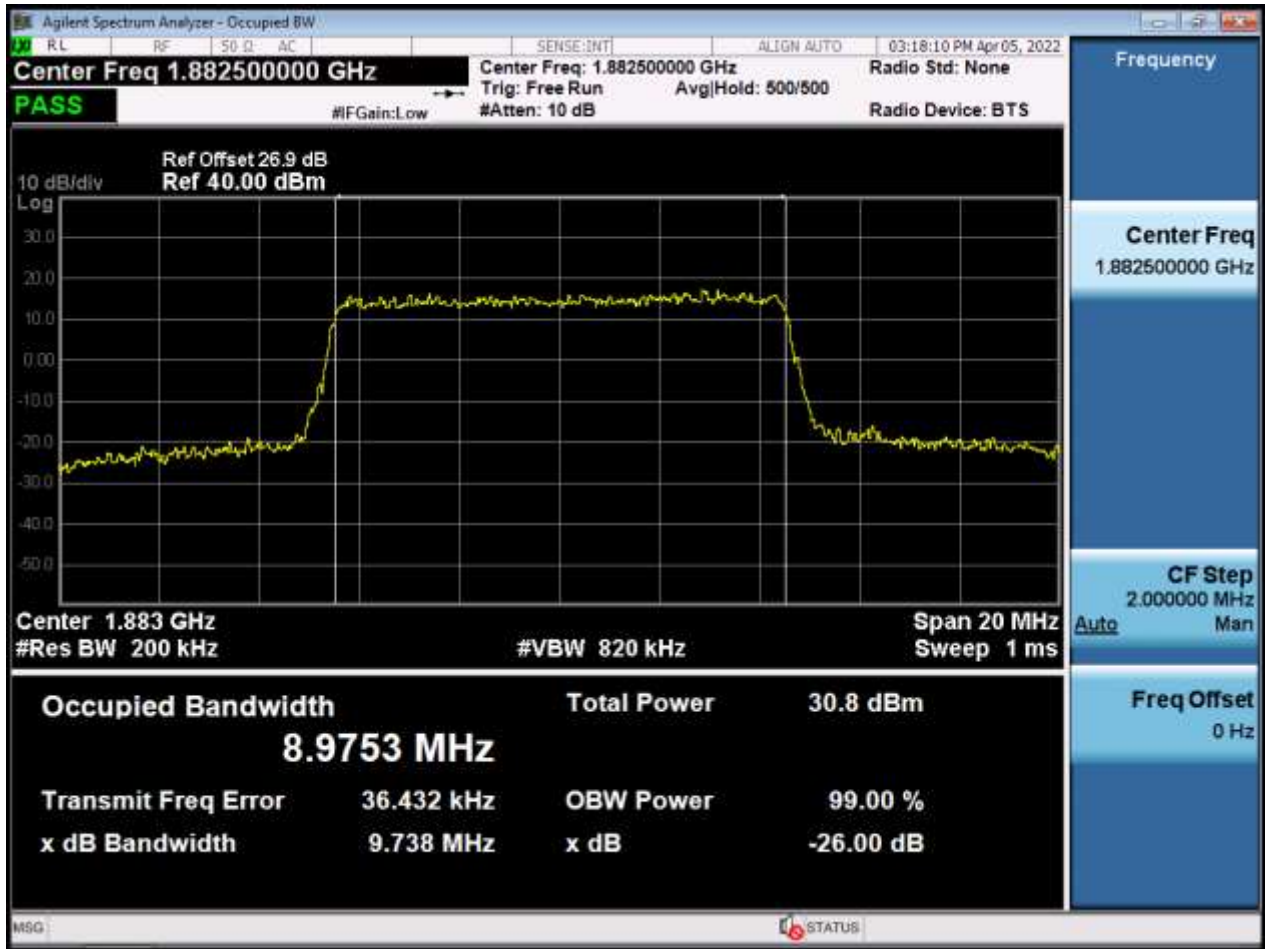


BW10 M_OBW_Middle Channel_64QAM_FullIRB(Main2 Ant)

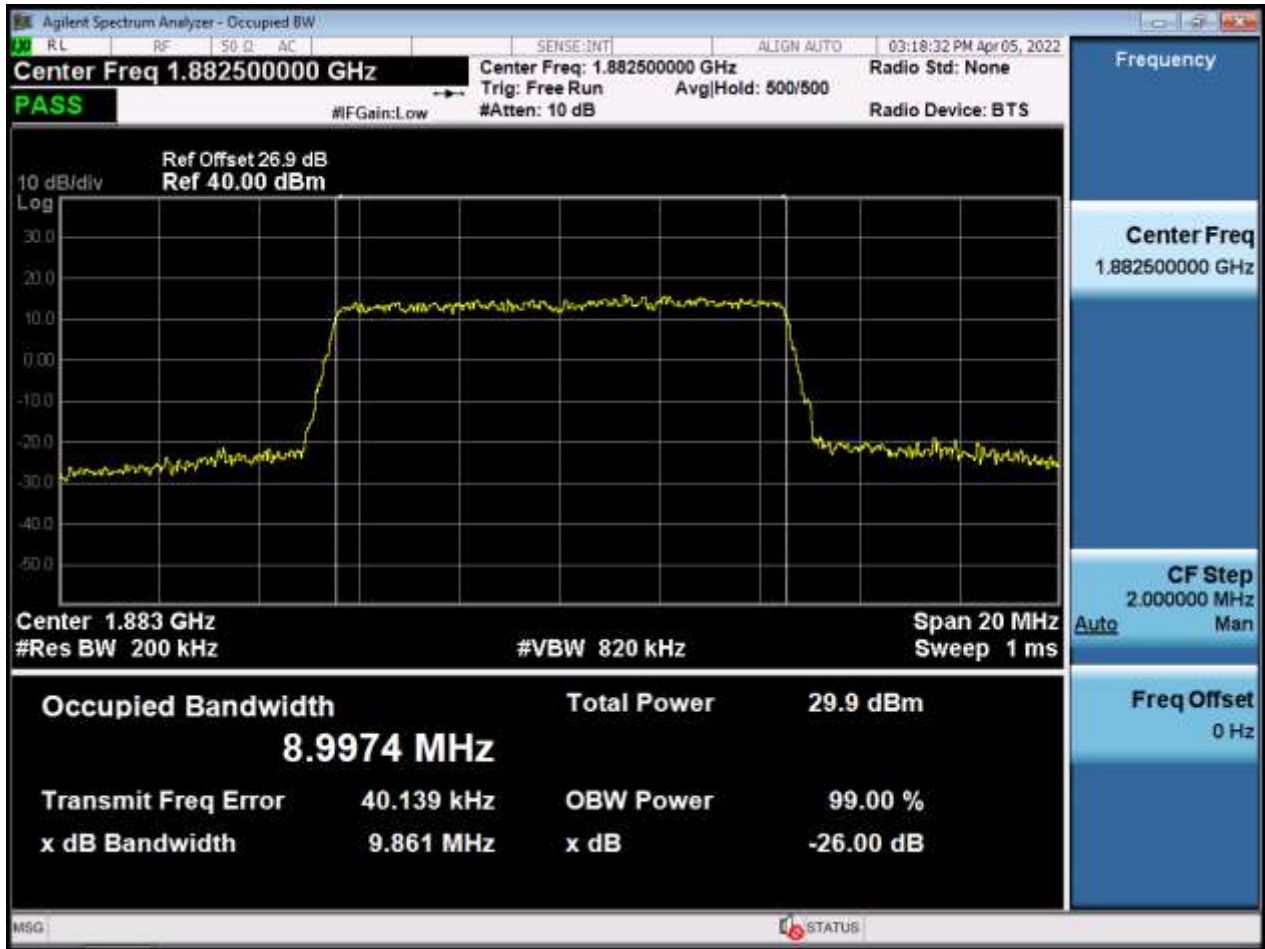


BW10 M_OBW_Middle Channel_256QAM_FullRB(Main2 Ant)

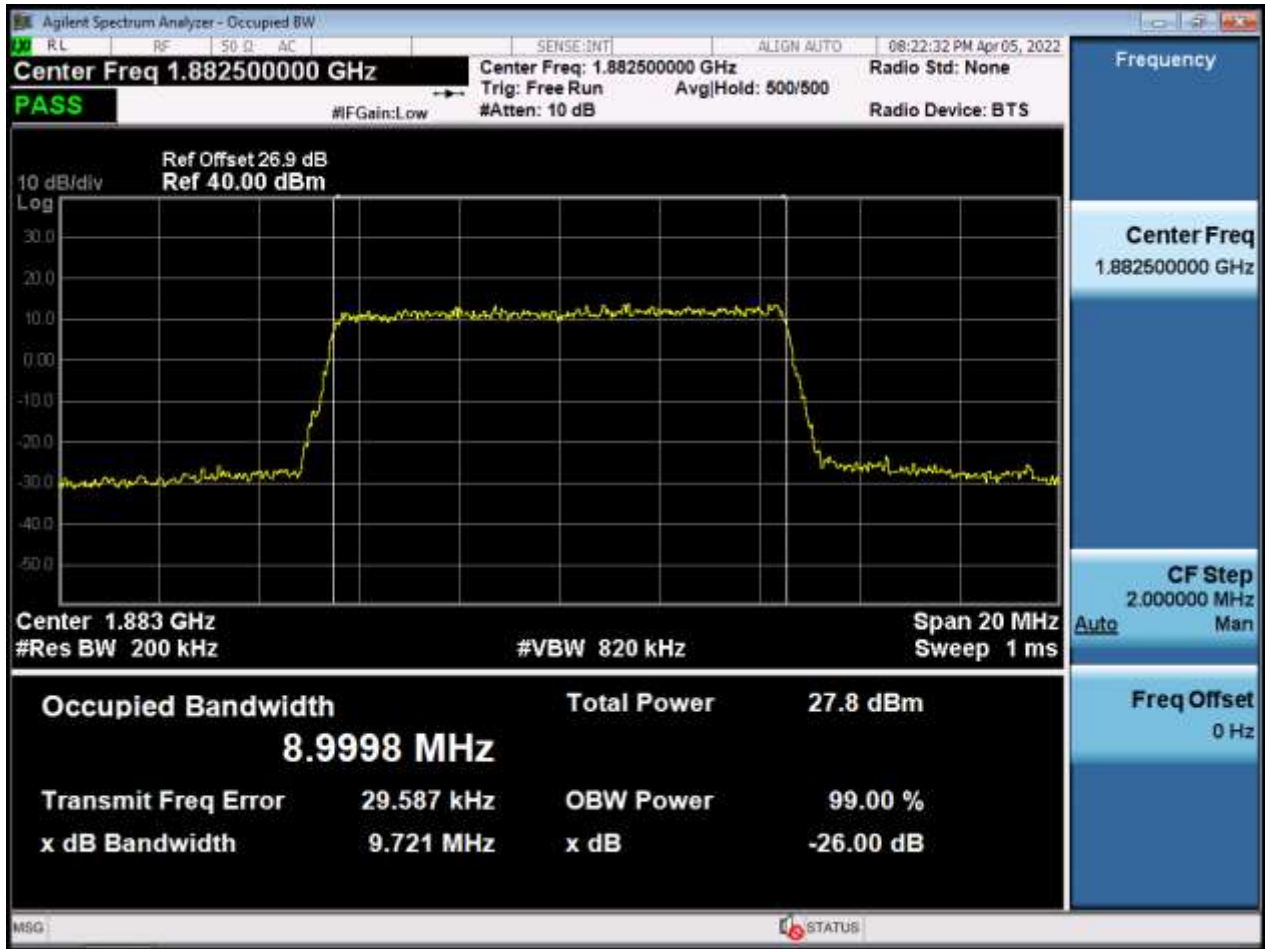


BW15 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

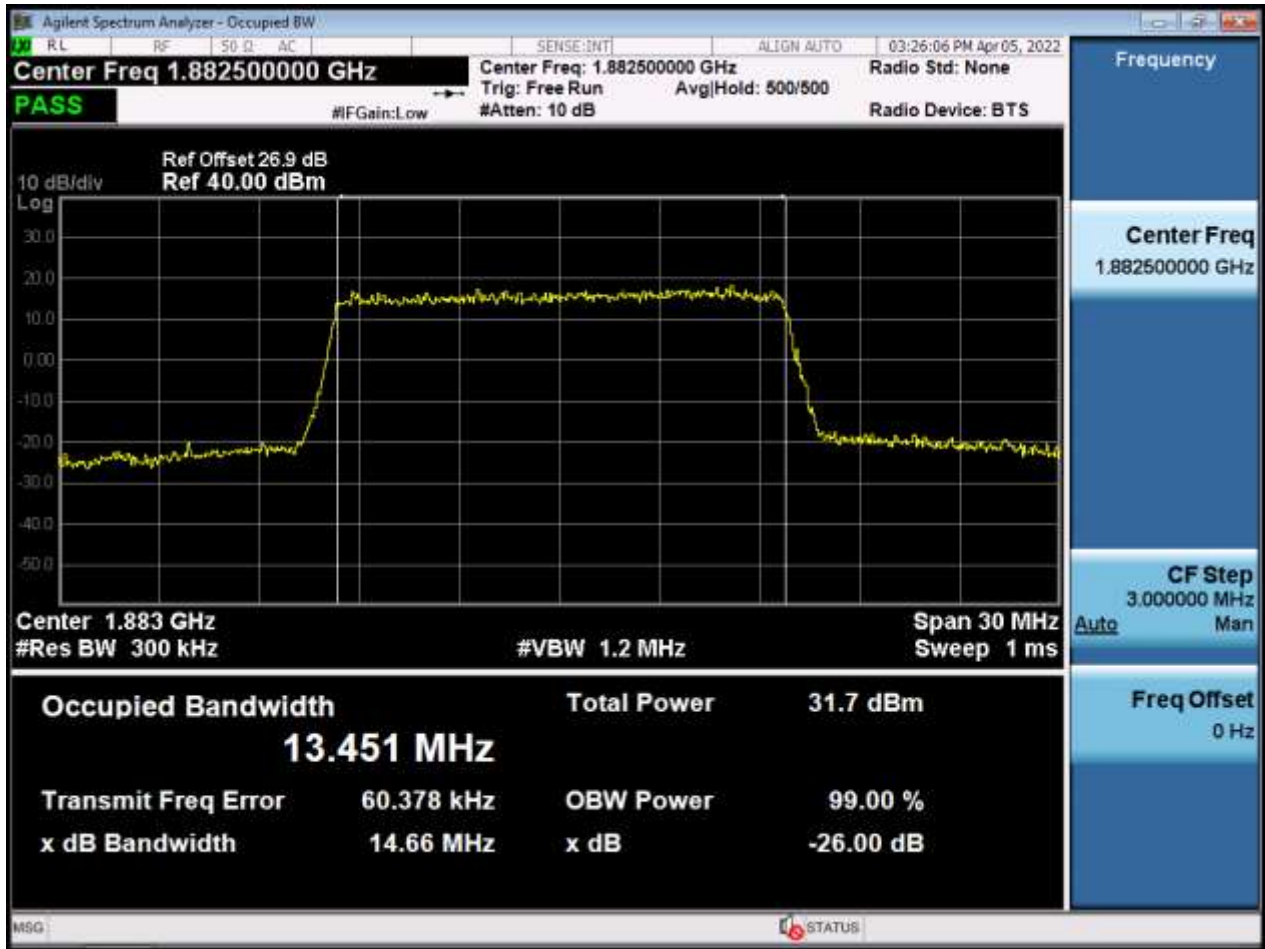


BW15 M_OBW_Middle Channel_16QAM_FullIRB(Main2 Ant)

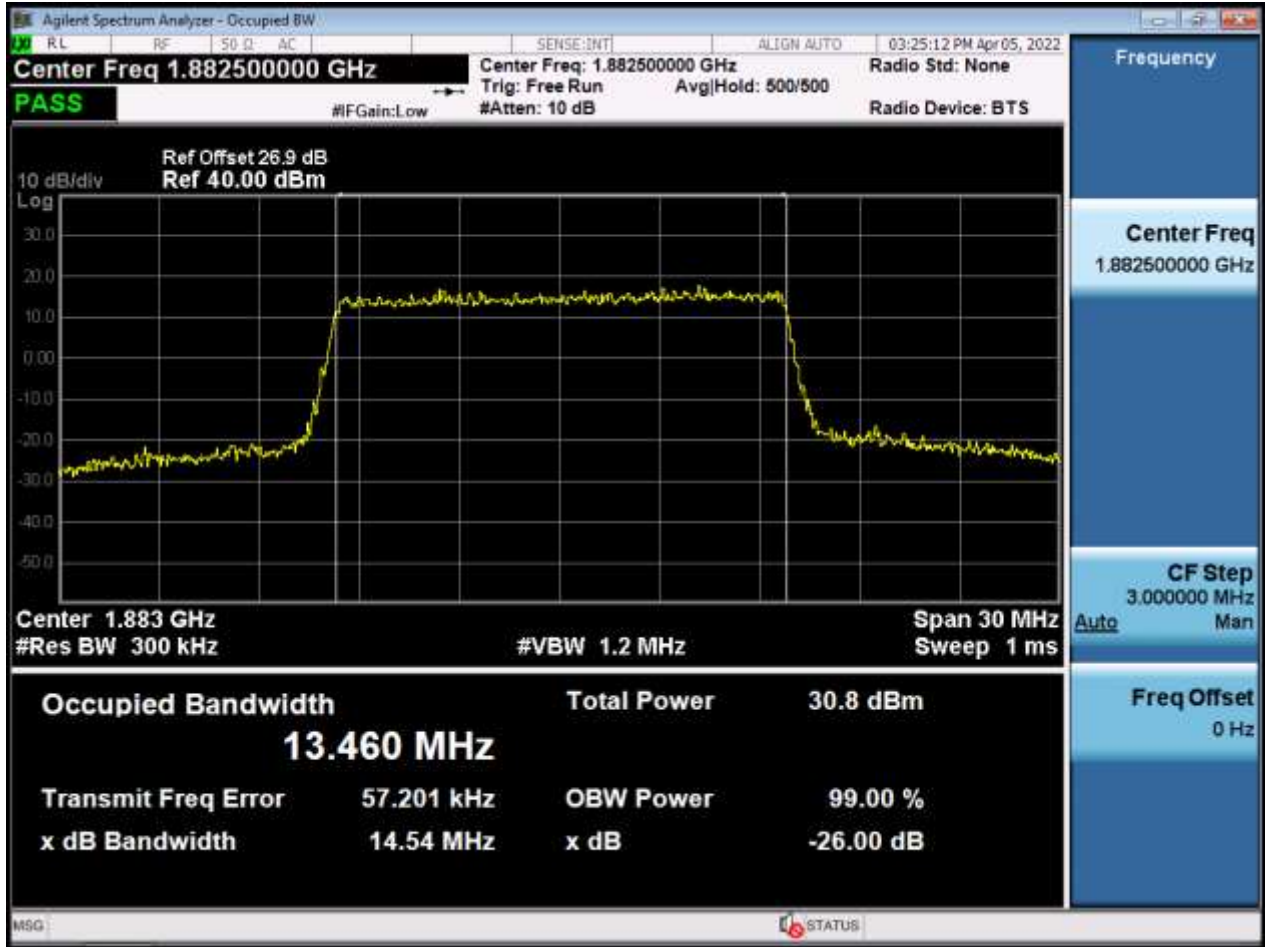


BW15 M_OBW_Middle Channel_64QAM_FullIRB(Main2 Ant)

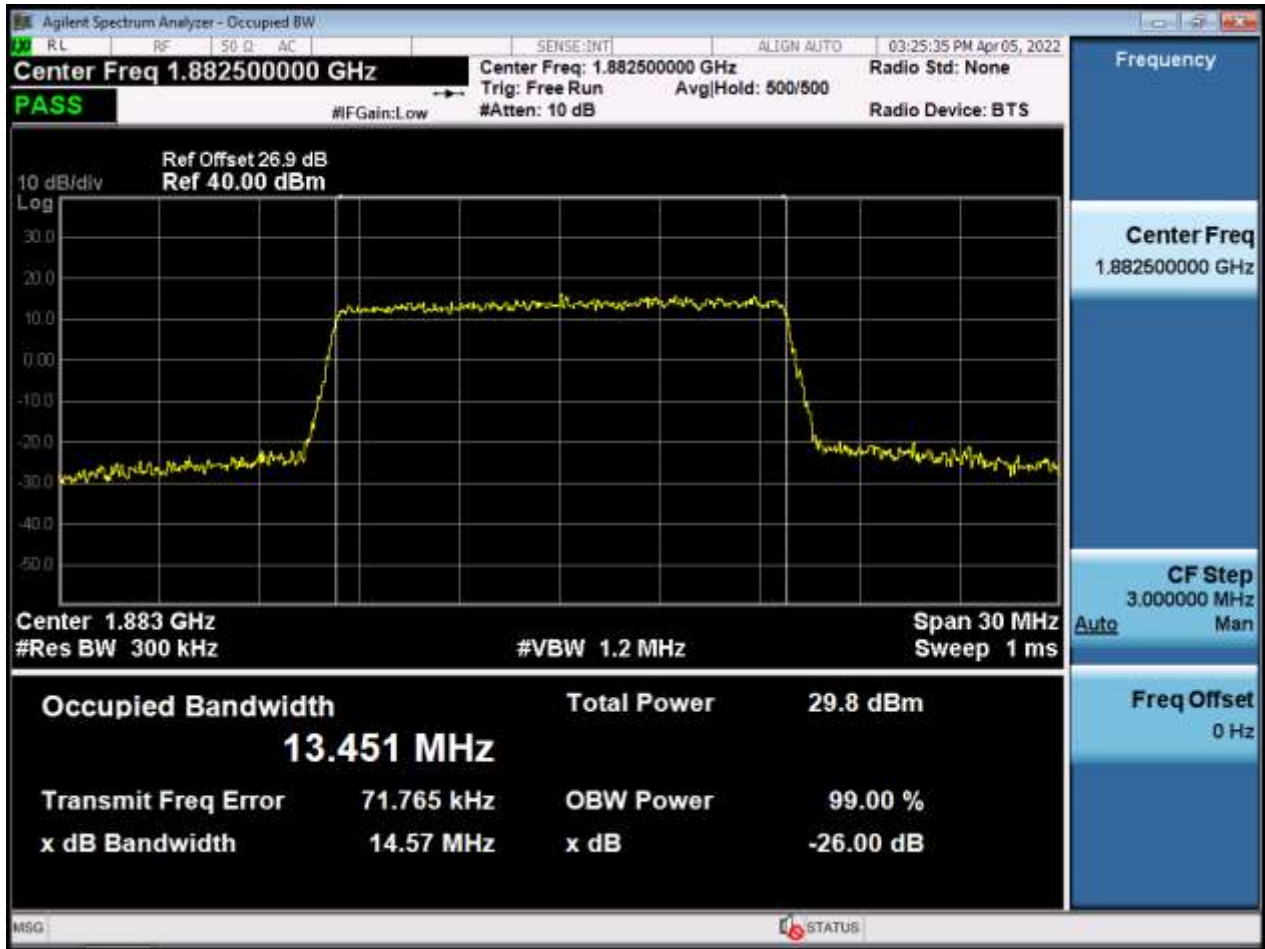


BW15 M_OBW_Middle Channel_256QAM_FullRB(Main2 Ant)

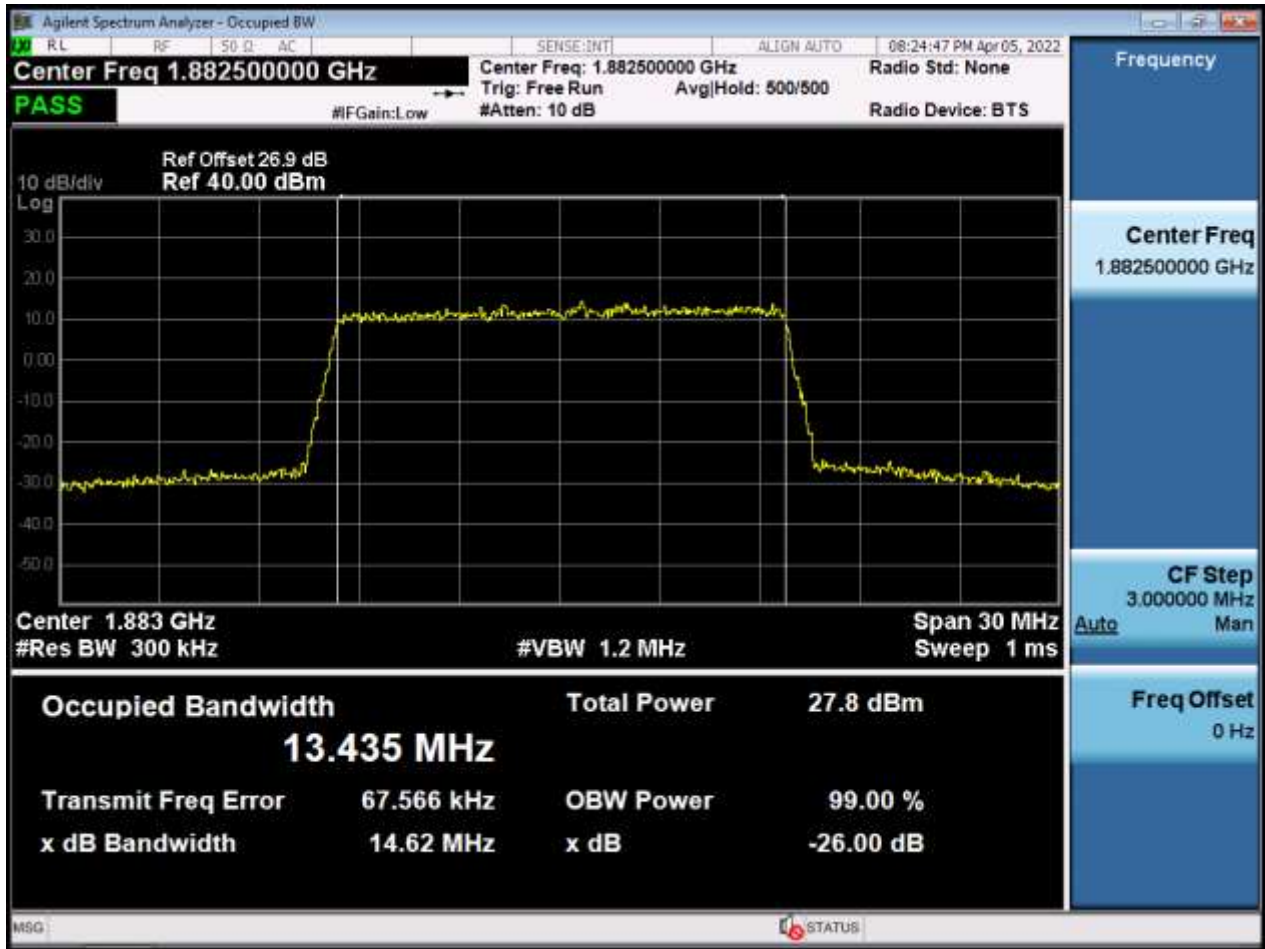


BW20 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

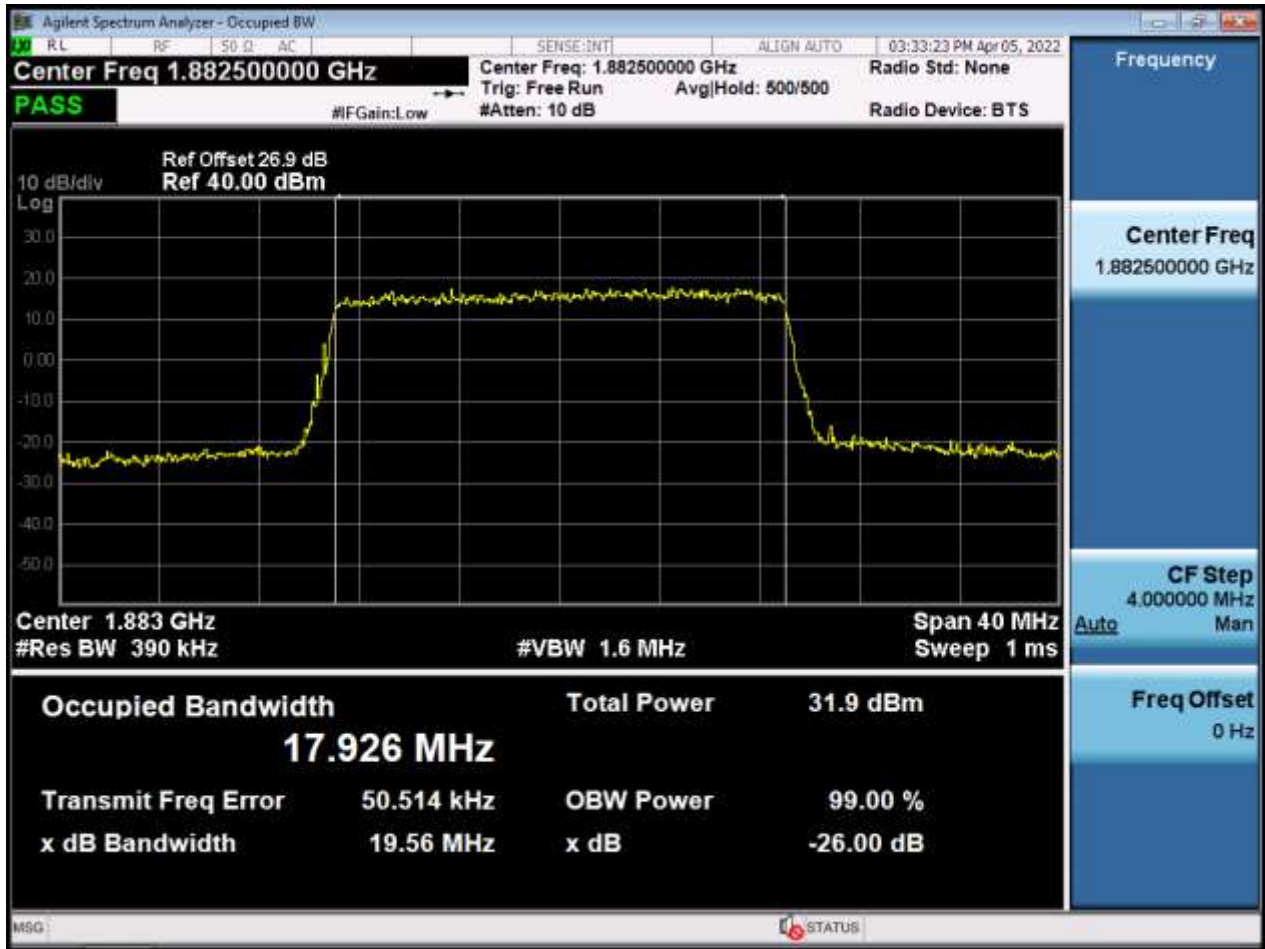


BW20 M_OBW_Middle Channel_16QAM_FullIRB(Main2 Ant)

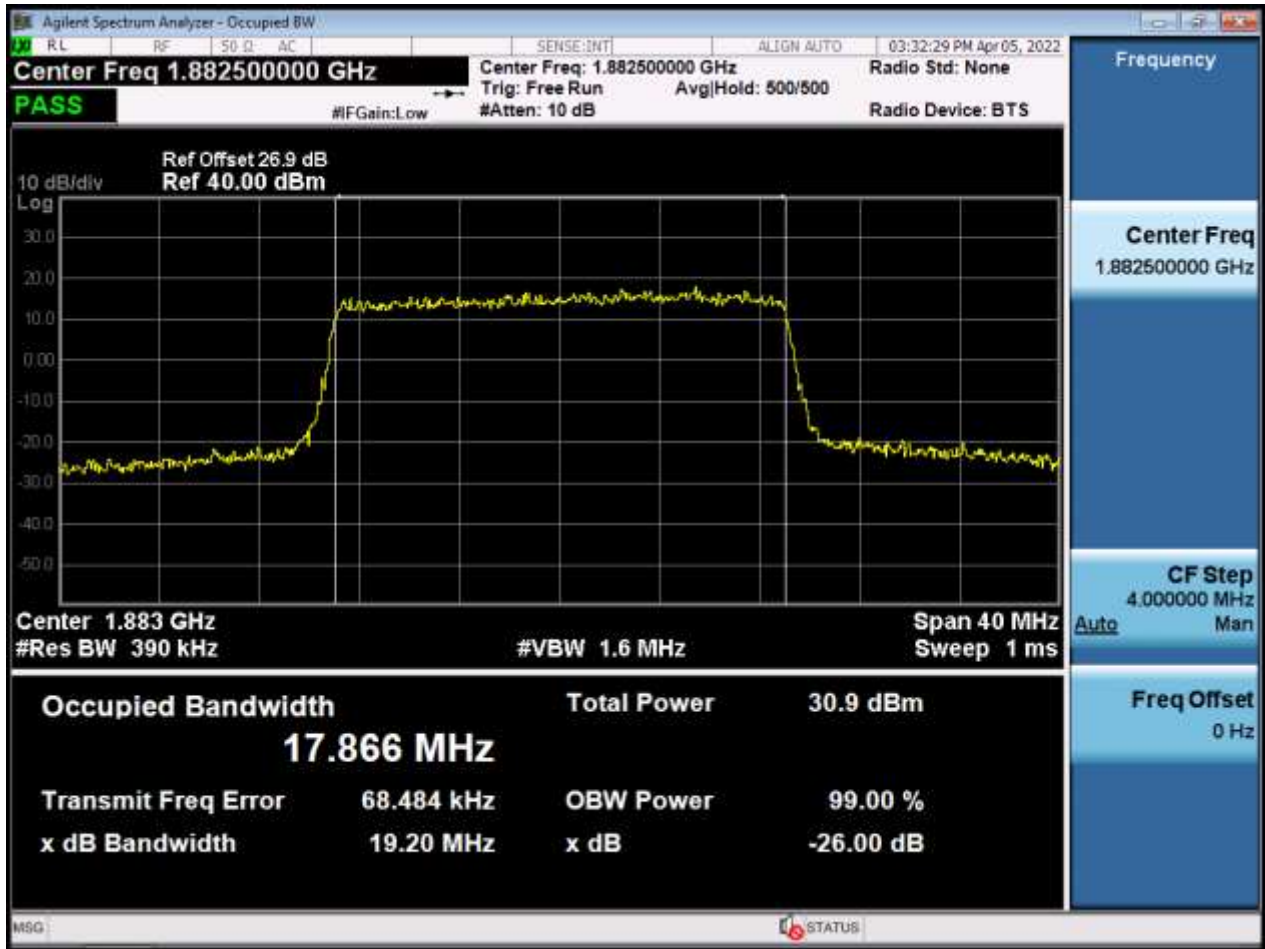

BW20 M_OBW_Middle Channel_64QAM_FullIRB(Main2 Ant)

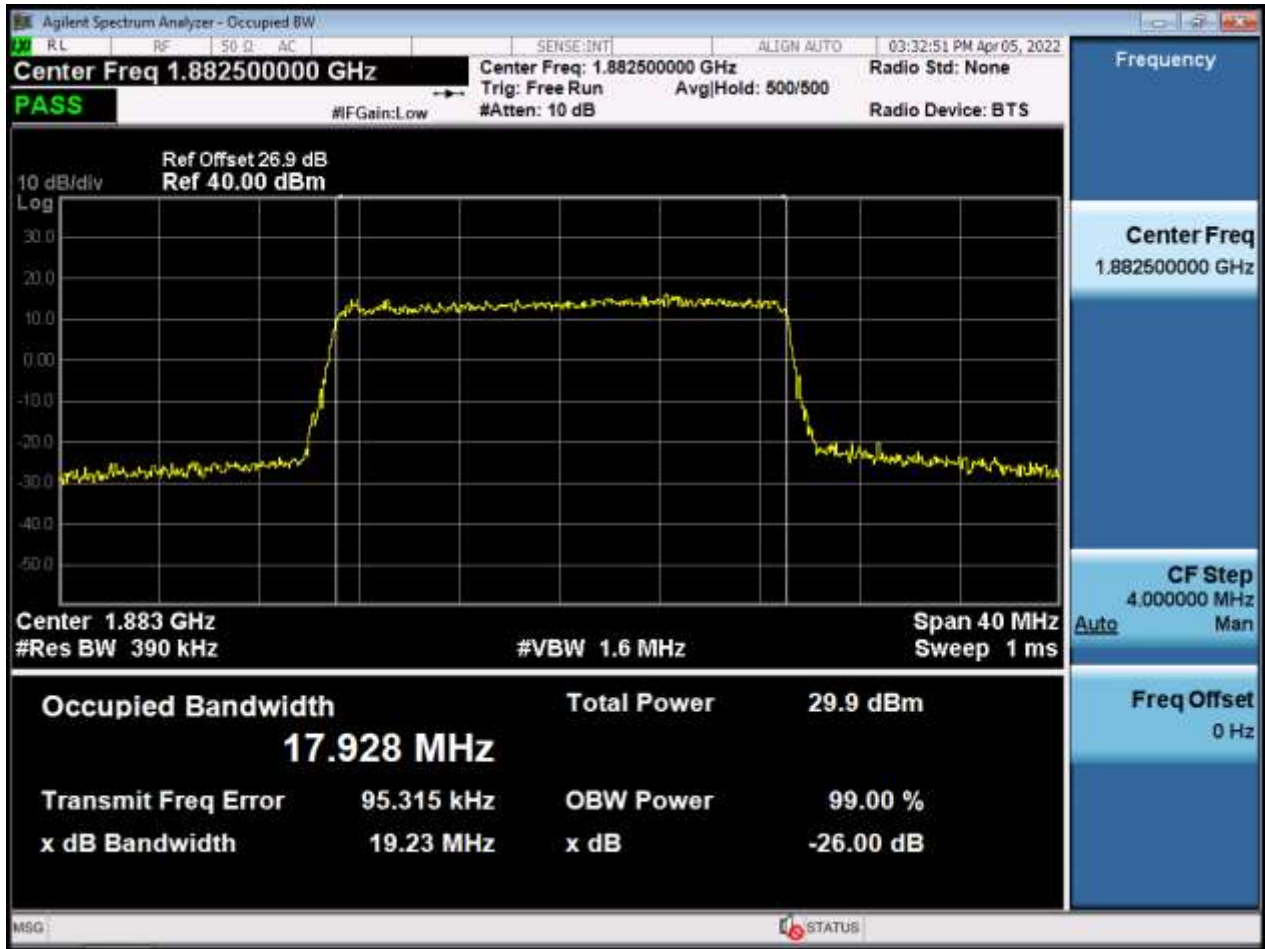


BW20 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

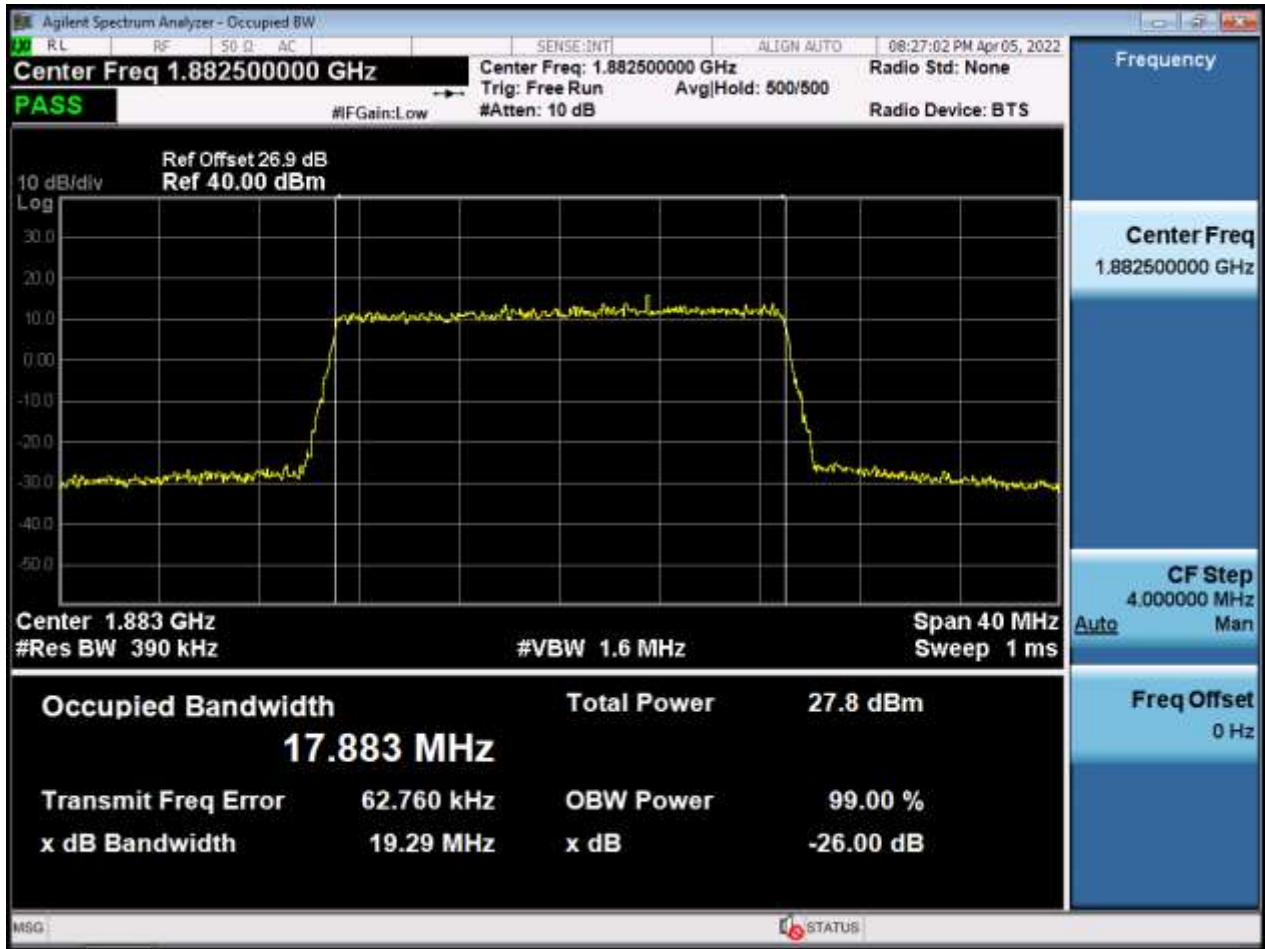

BW1.4 M_OBW_Middle Channel_QPSK_FullRB(Sub1 Ant)



BW1.4 M_OBW_Middle Channel_16QAM_FullRB(Sub1 Ant)

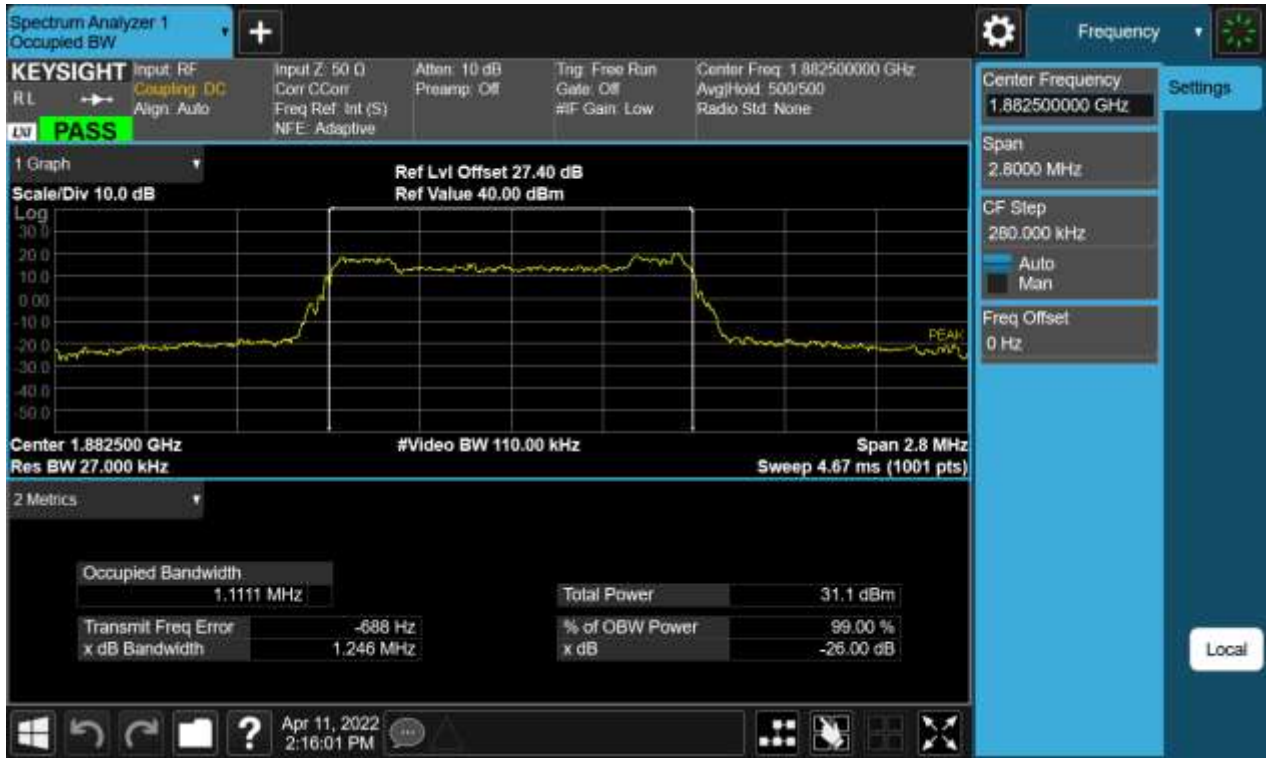

BW1.4 M_OBW_Middle Channel_64QAM_FullRB(Sub1 Ant)




BW1.4 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)




BW3 M_OBW_Middle Channel_QPSK_FullIRB(Sub1 Ant)



BW3 M_OBW_Middle Channel_16QAM_FullIRB(Sub1 Ant)

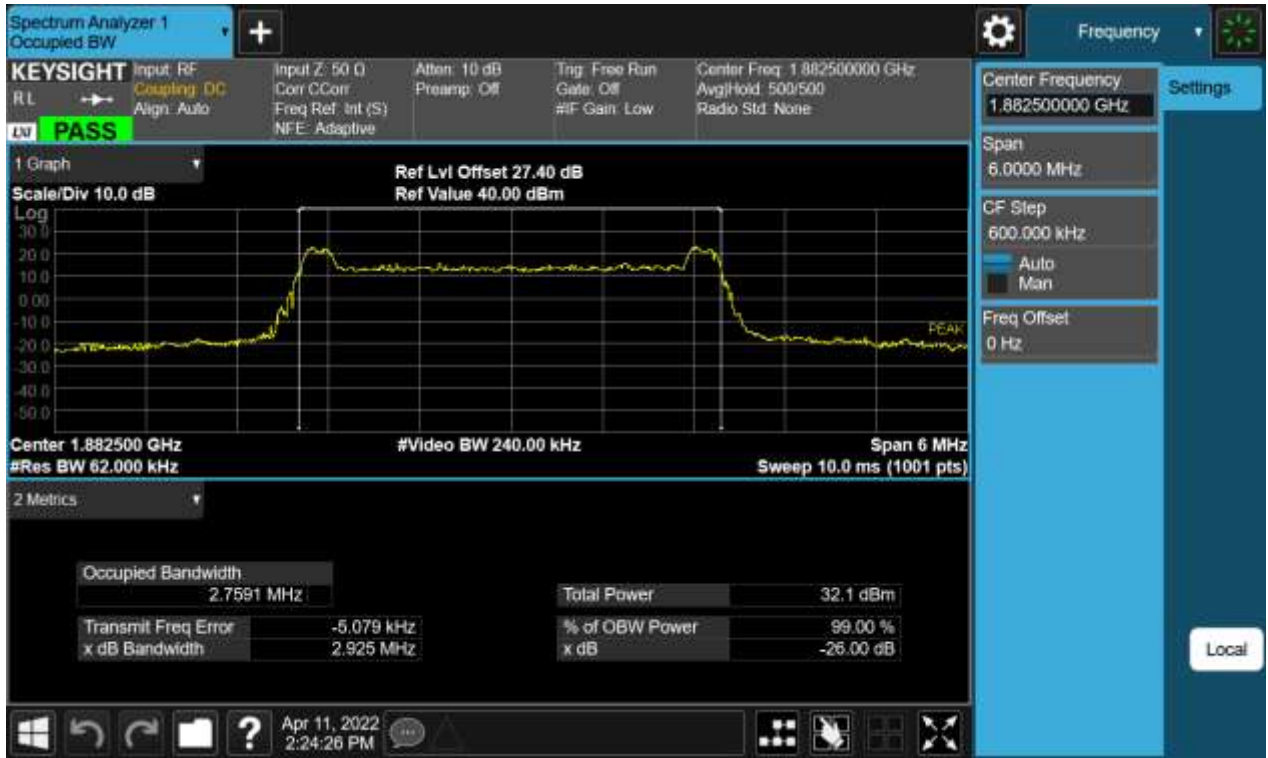

BW3 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

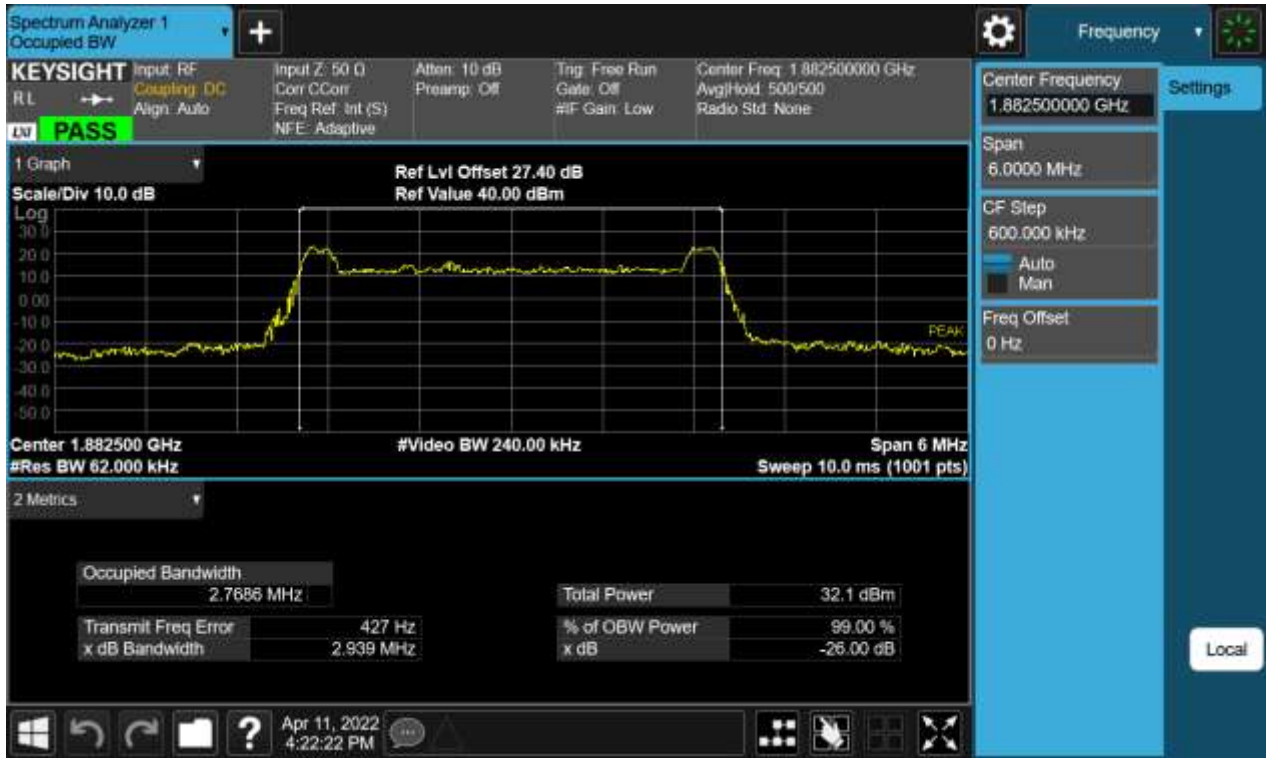


BW3 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)




BW5 M_OBW_Middle Channel_QPSK_FullIRB(Sub1 Ant)




BW5 M_OBW_Middle Channel_16QAM_FullIRB(Sub1 Ant)

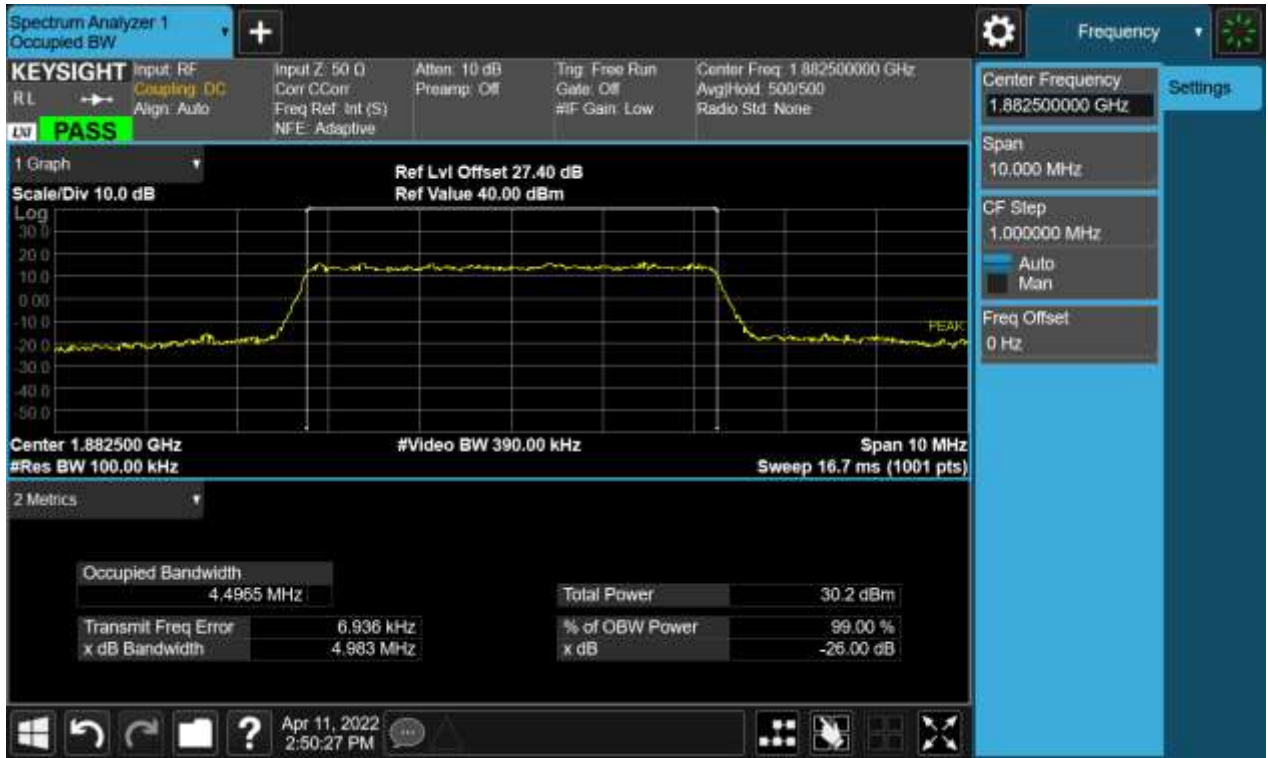

BW5 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

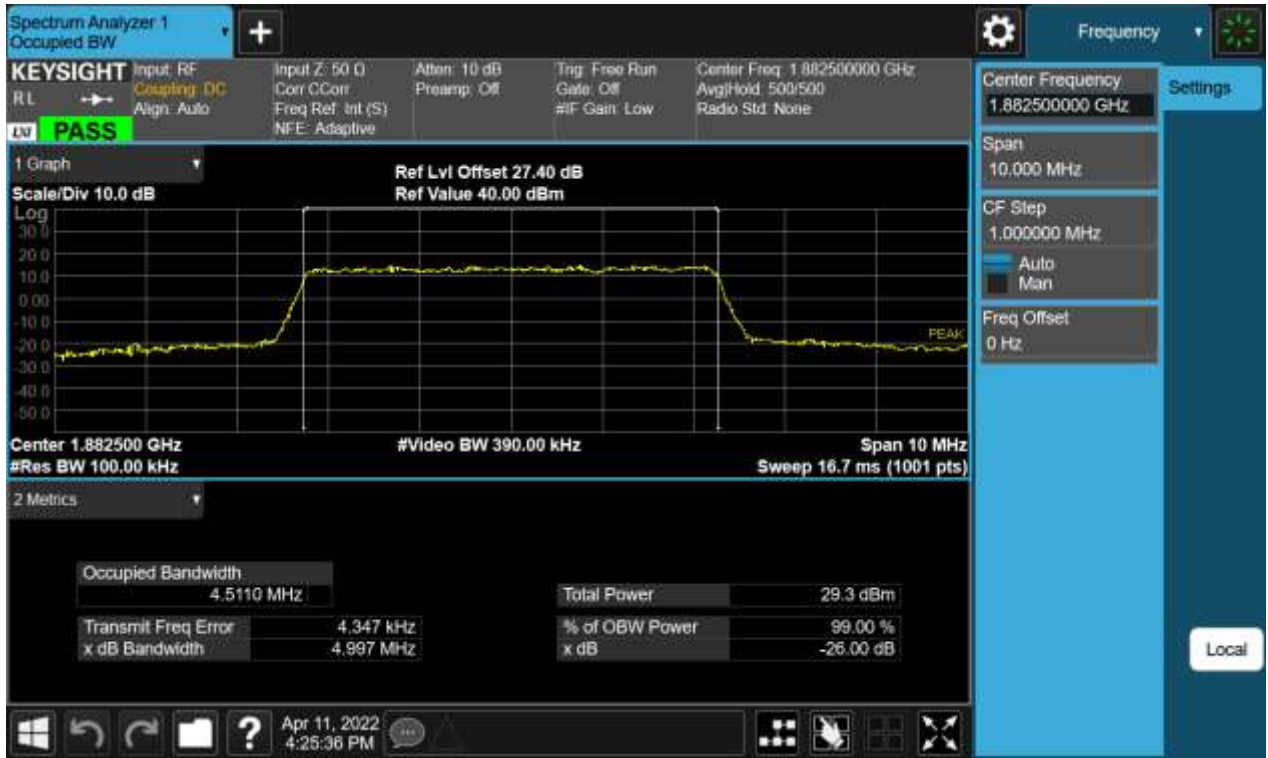


BW5 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)

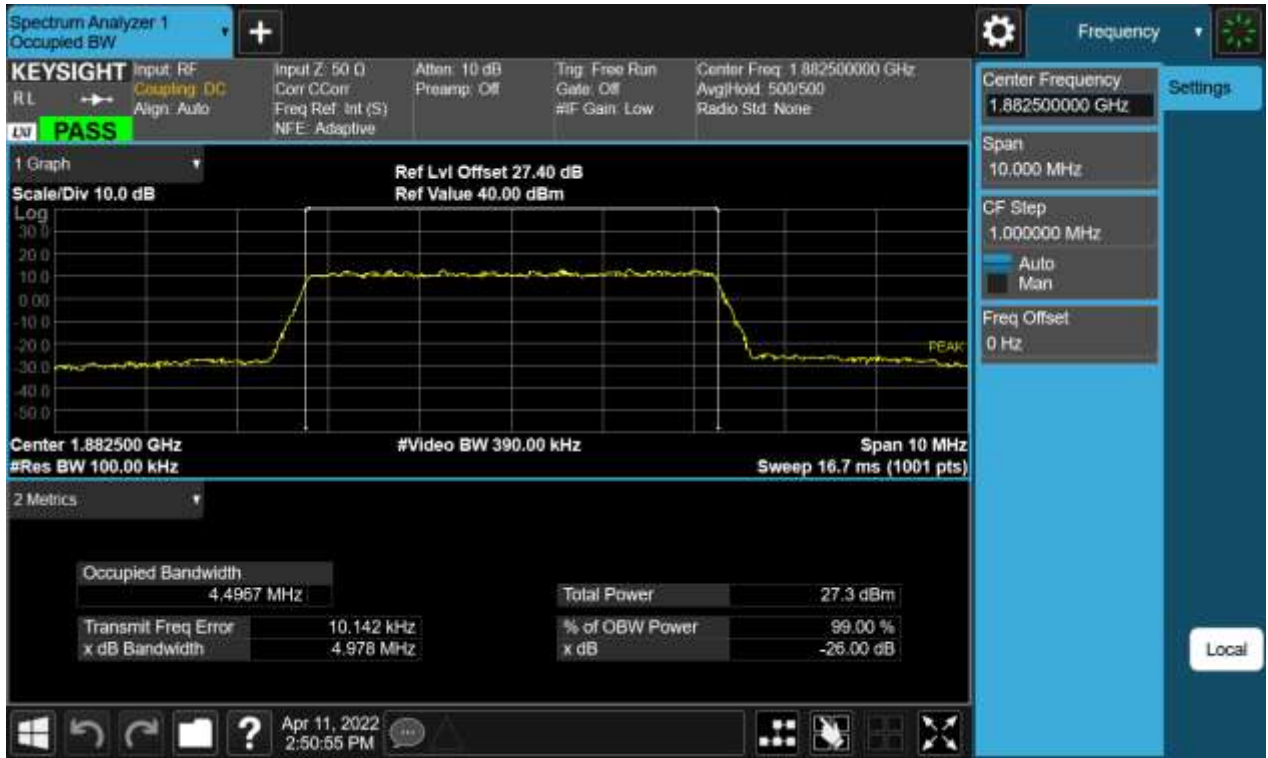


BW10 M_OBW_Middle Channel_QPSK_FullIRB(Sub1 Ant)



BW10 M_OBW_Middle Channel_16QAM_FullIRB(Sub1 Ant)

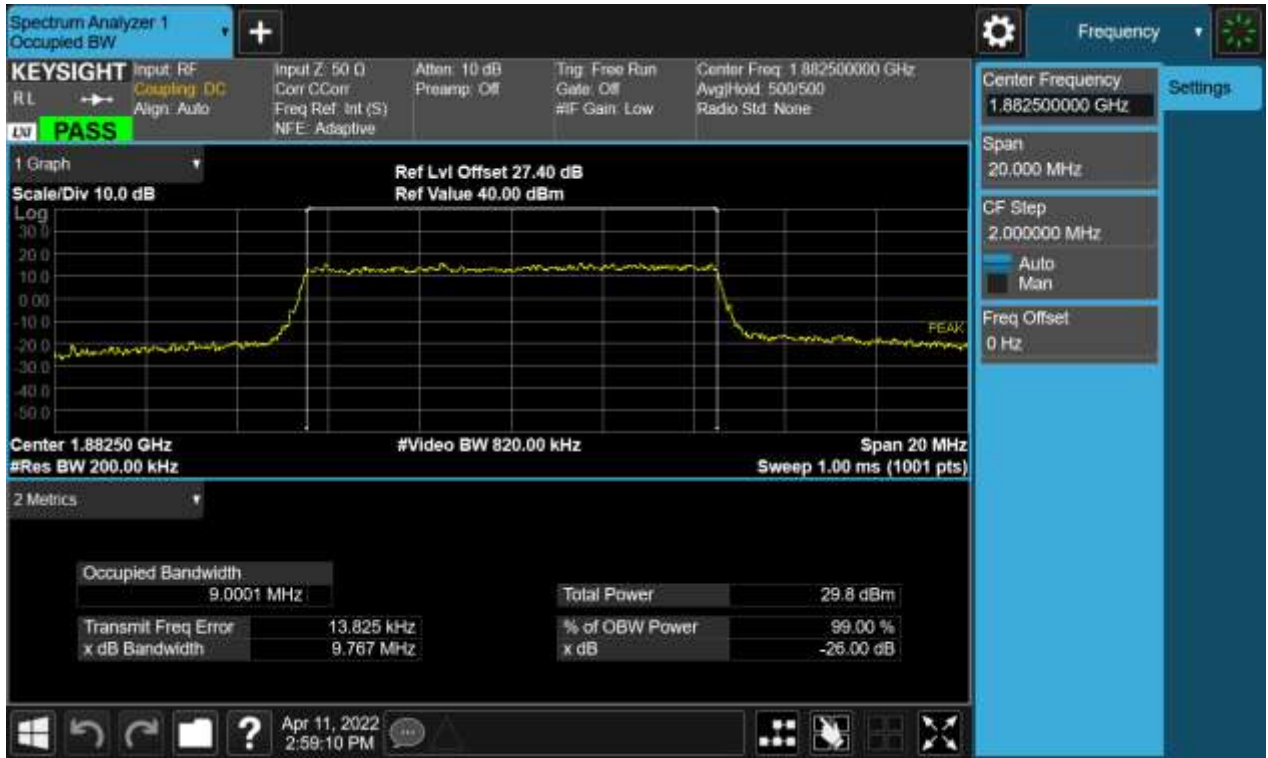

BW10 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

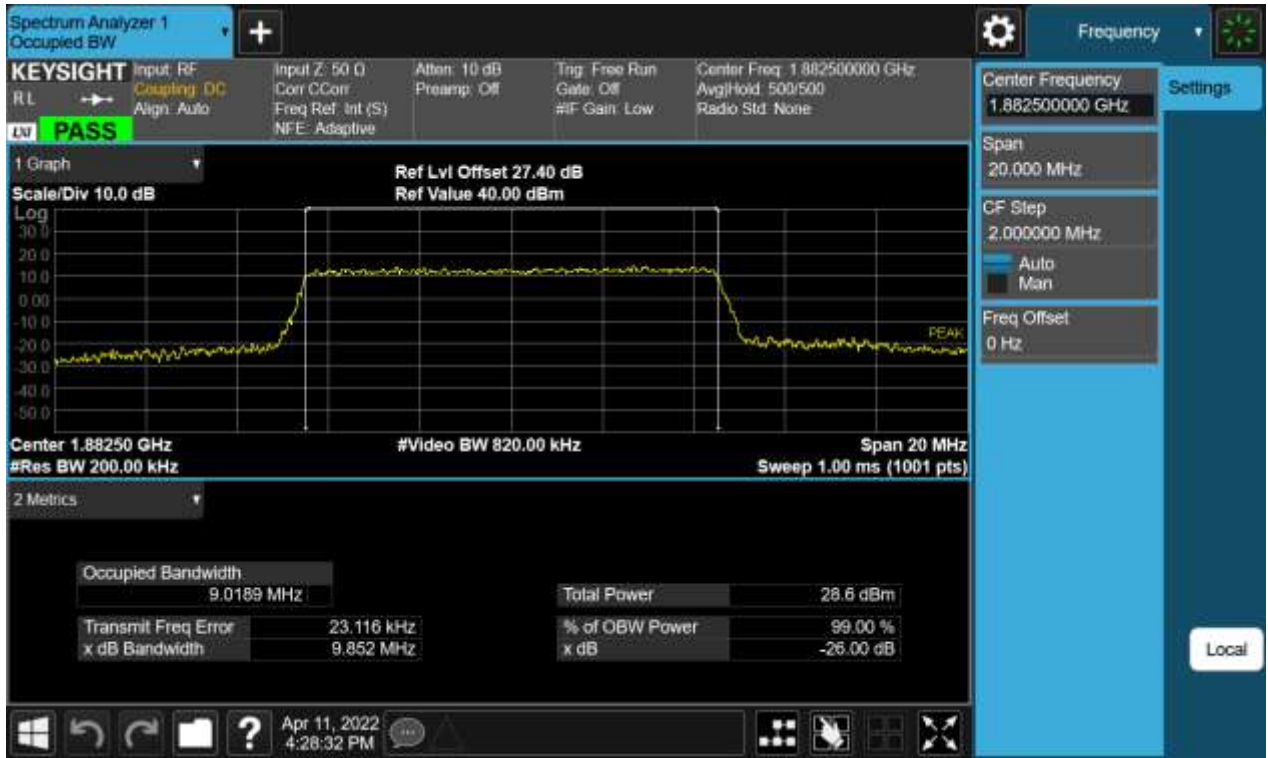

BW10 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)




BW15 M_OBW_Middle Channel_QPSK_FullIRB(Sub1 Ant)



BW15 M_OBW_Middle Channel_16QAM_FullRB(Sub1 Ant)



BW15 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

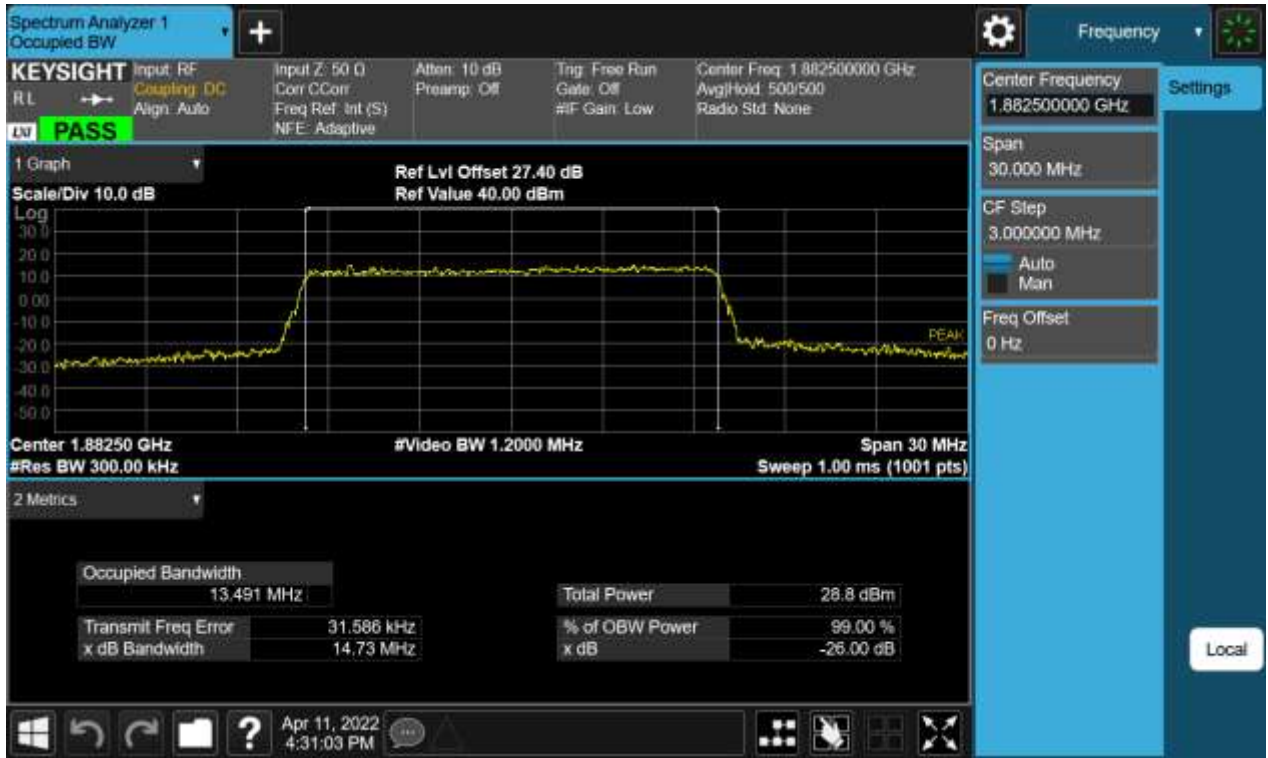

BW15 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)

