

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 16, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2205-FC066

FCC ID: A3LSMG736U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G736U
 Additional Model(s): SM-G736U1
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

-Main2 Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M09G7D	QPSK	0.350	25.44
		1M09W7D	16QAM	0.301	24.78
		1M09W7D	64QAM	0.237	23.75
		1M09W7D	256QAM	0.118	20.71
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.360	25.56
		2M70W7D	16QAM	0.309	24.90
		2M71W7D	64QAM	0.239	23.78
		2M70W7D	256QAM	0.119	20.77
LTE – Band66/4 (5)	1712.5 – 1777.5	4M51G7D	QPSK	0.355	25.50
		4M50W7D	16QAM	0.307	24.87
		4M51W7D	64QAM	0.237	23.74
		4M51W7D	256QAM	0.118	20.71
LTE – Band66/4 (10)	1715.0 – 1775.0	8M99G7D	QPSK	0.329	25.17
		8M97W7D	16QAM	0.282	24.51
		9M00W7D	64QAM	0.222	23.46
		9M00W7D	256QAM	0.110	20.41
LTE – Band66/4 (15)	1717.5 – 1772.5	13M4G7D	QPSK	0.336	25.26
		13M5W7D	16QAM	0.296	24.71
		13M5W7D	64QAM	0.223	23.49
		13M5W7D	256QAM	0.105	20.22
LTE – Band66/4 (20)	1720.0 – 1770.0	17M9G7D	QPSK	0.328	25.16
		17M9W7D	16QAM	0.286	24.56
		17M9W7D	64QAM	0.217	23.37
		17M9W7D	256QAM	0.098	19.91

-Sub1 Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M11G7D	QPSK	0.115	20.61
		1M11W7D	16QAM	0.104	20.16
		1M12W7D	64QAM	0.093	19.67
		1M12W7D	256QAM	0.045	16.53
LTE – Band66/4 (3)	1711.5 – 1778.5	2M76G7D	QPSK	0.105	20.21
		2M76W7D	16QAM	0.104	20.19
		2M76W7D	64QAM	0.083	19.21
		2M78W7D	256QAM	0.043	16.29
LTE – Band66/4 (5)	1712.5 – 1777.5	4M51G7D	QPSK	0.098	19.93
		4M51W7D	16QAM	0.098	19.91
		4M52W7D	64QAM	0.079	18.97
		4M50W7D	256QAM	0.039	15.88
LTE – Band66/4 (10)	1715.0 – 1775.0	9M00G7D	QPSK	0.095	19.80
		9M02W7D	16QAM	0.095	19.79
		9M02W7D	64QAM	0.076	18.83
		9M00W7D	256QAM	0.038	15.80
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.102	20.07
		13M5W7D	16QAM	0.101	20.05
		13M5W7D	64QAM	0.085	19.30
		13M5W7D	256QAM	0.040	16.07
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.113	20.52
		17M9W7D	16QAM	0.112	20.50
		17M9W7D	64QAM	0.094	19.75
		17M9W7D	256QAM	0.045	16.49

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2205-FC066

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2205-FC066	May 16, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH.	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 BAND EDGE	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	25
8.1.1 Main2 Ant	25
8.1.2 Sub1 Ant.....	28
8.2 RADIATED SPURIOUS EMISSIONS	31
8.2.1 Main2 Ant	31
8.2.2 Sub1 Ant.....	32
8.3 PEAK-TO-AVERAGE RATIO.....	33
8.3.1 Main2 Ant	33
8.3.2 Sub1 Ant.....	34
8.4 OCCUPIED BANDWIDTH	35
8.4.1 Main2 Ant	35
8.4.2 Sub1 Ant.....	36
8.5 CONDUCTED SPURIOUS EMISSIONS	37
8.5.1 Main2 Ant	37
8.5.2 Sub1 Ant.....	38

8.6 BAND EDGE	39
8.6.1 Main2 Ant	39
8.6.2 Sub1 Ant	39
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	40
8.7.1 Main2 Ant	40
8.7.2 Sub1 Ant	58
9. TEST PLOTS.....	76
10. ANNEX A_ TEST SETUP PHOTO.....	317

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG736U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-G736U
Additional Model(s):	SM-G736U1
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	April 01, 2022 ~ May 10, 2022
Serial number:	Radiated: R3CT30RXNKH Conducted: R3CT30RXHWD

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), Bluetooth, BT LE, NFC, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

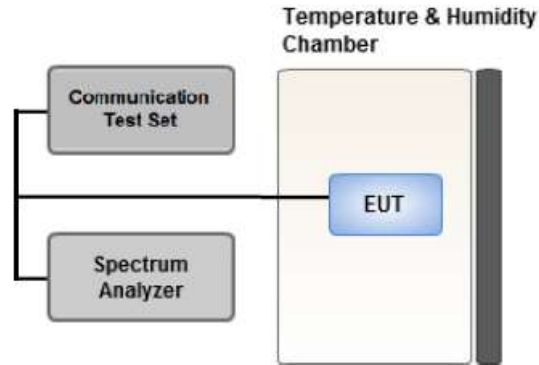

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

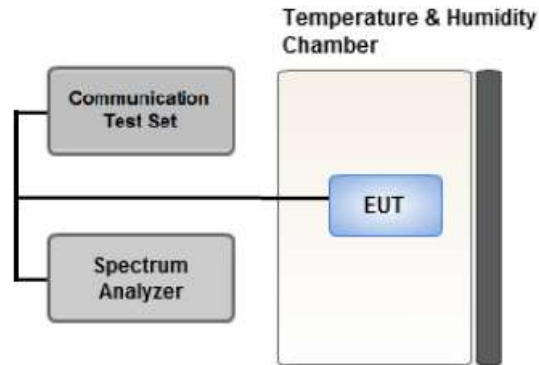

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

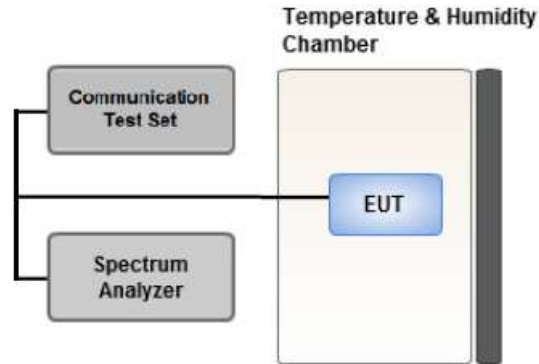

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

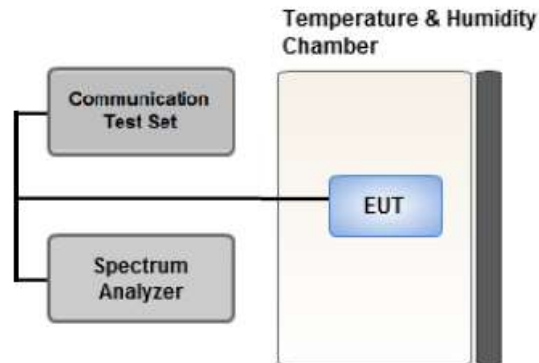

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

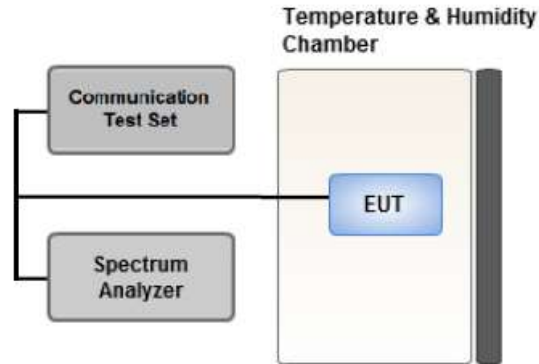

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
 - We were performed the RSE test in condition of co-location. There has no significant emission raised.
 - WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
 - In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz(Main2 Ant), 1.4 MHz(Sub1 Ant))
 - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
 - Please refer to the table below.
 - The test results below, the Main2 Antenna is the Sub1 antenna, and the Sub1 Antenna is the Main2 antenna.
 - LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power.
- Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SM-G736U & additional models were tested and the worst case results are reported.
 (Worst case : SM-G736U)

[Main2 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

[Sub1 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
 - The test results below, the Main2 Antenna is the Sub1 antenna, and the Sub1 Antenna is the Main2 antenna.
 - LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power.
- Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SM-G736U & additional models were tested and the worst case results are reported.
- (Worst case : SM-G736U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

8.1.1 Main2 Ant

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-17.24	16.55	10.04	2.05	V	< 1.00	0.284	24.54
		16-QAM	-17.95	15.84	10.04	2.05	V		0.241	23.83
		64-QAM	-18.96	14.83	10.04	2.05	V		0.191	22.82
		256-QAM	-22.01	11.78	10.04	2.05	V		0.095	19.77
1745.0		QPSK	-17.27	16.45	10.18	2.06	V		0.286	24.57
		16-QAM	-17.89	15.83	10.18	2.06	V		0.248	23.95
		64-QAM	-18.95	14.77	10.18	2.06	V		0.195	22.89
		256-QAM	-21.97	11.75	10.18	2.06	V		0.097	19.87
1779.3		QPSK	-16.43	17.25	10.26	2.07	V		0.350	25.44
		16-QAM	-17.09	16.59	10.26	2.07	V		0.301	24.78
		64-QAM	-18.12	15.56	10.26	2.07	V		0.237	23.75
		256-QAM	-21.16	12.52	10.26	2.07	V		0.118	20.71

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B66/ B4 3 MHz	QPSK	-17.15	16.64	10.04	2.05	V	< 1.00	0.290	24.63
		16-QAM	-17.87	15.92	10.04	2.05	V		0.246	23.91
		64-QAM	-18.85	14.94	10.04	2.05	V		0.196	22.93
		256-QAM	-21.95	11.84	10.04	2.05	V		0.096	19.83
1745.0		QPSK	-17.18	16.54	10.18	2.06	V		0.292	24.66
		16-QAM	-17.84	15.88	10.18	2.06	V		0.251	24.00
		64-QAM	-18.90	14.82	10.18	2.06	V		0.197	22.94
		256-QAM	-21.93	11.79	10.18	2.06	V		0.098	19.91
1778.5		QPSK	-16.31	17.37	10.26	2.07	V		0.360	25.56
		16-QAM	-16.97	16.71	10.26	2.07	V		0.309	24.90
		64-QAM	-18.09	15.59	10.26	2.07	V		0.239	23.78
		256-QAM	-21.10	12.58	10.26	2.07	V		0.119	20.77

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-17.20	16.59	10.04	2.05	V	< 1.00	0.287	24.58
		16-QAM	-17.93	15.86	10.04	2.05	V		0.242	23.85
		64-QAM	-18.93	14.86	10.04	2.05	V		0.193	22.85
		256-QAM	-22.03	11.76	10.04	2.05	V		0.094	19.75
1745.0		QPSK	-17.32	16.40	10.18	2.06	V		0.283	24.52
		16-QAM	-17.96	15.76	10.18	2.06	V		0.244	23.88
		64-QAM	-19.01	14.71	10.18	2.06	V		0.192	22.83
		256-QAM	-22.06	11.66	10.18	2.06	V		0.095	19.78
1777.5		QPSK	-16.37	17.31	10.26	2.07	V		0.355	25.50
		16-QAM	-17.00	16.68	10.26	2.07	V		0.307	24.87
		64-QAM	-18.13	15.55	10.26	2.07	V		0.237	23.74
		256-QAM	-21.16	12.52	10.26	2.07	V		0.118	20.71

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-17.56	16.19	10.06	2.05	V	< 1.00	0.263	24.20
		16-QAM	-18.24	15.51	10.06	2.05	V		0.225	23.52
		64-QAM	-19.30	14.45	10.06	2.05	V		0.176	22.46
		256-QAM	-22.38	11.37	10.06	2.05	V		0.087	19.38
1745.0		QPSK	-17.63	16.09	10.18	2.06	V		0.264	24.21
		16-QAM	-18.29	15.43	10.18	2.06	V		0.227	23.55
		64-QAM	-19.36	14.36	10.18	2.06	V		0.177	22.48
		256-QAM	-22.42	11.30	10.18	2.06	V		0.088	19.42
1775.0		QPSK	-16.70	16.99	10.25	2.07	V		0.329	25.17
		16-QAM	-17.36	16.33	10.25	2.07	V		0.282	24.51
		64-QAM	-18.41	15.28	10.25	2.07	V		0.222	23.46
		256-QAM	-21.46	12.23	10.25	2.07	V		0.110	20.41

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-17.46	16.25	10.08	2.05	V	< 1.00	0.268	24.28
		16-QAM	-18.00	15.71	10.08	2.05	V		0.237	23.74
		64-QAM	-19.26	14.45	10.08	2.05	V		0.177	22.48
		256-QAM	-22.39	11.32	10.08	2.05	V		0.086	19.35
1745.0		QPSK	-17.53	16.19	10.18	2.06	V		0.270	24.31
		16-QAM	-18.07	15.65	10.18	2.06	V		0.238	23.77
		64-QAM	-19.29	14.43	10.18	2.06	V		0.180	22.55
		256-QAM	-22.37	11.35	10.18	2.06	V		0.089	19.47
1772.5		QPSK	-16.60	17.09	10.24	2.07	V		0.336	25.26
		16-QAM	-17.15	16.54	10.24	2.07	V		0.296	24.71
		64-QAM	-18.37	15.32	10.24	2.07	V		0.223	23.49
		256-QAM	-21.64	12.05	10.24	2.07	V		0.105	20.22

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-17.68	16.03	10.08	2.05	V	< 1.00	0.255	24.06
		16-QAM	-18.21	15.50	10.08	2.05	V		0.226	23.53
		64-QAM	-19.46	14.25	10.08	2.05	V		0.169	22.28
		256-QAM	-22.56	11.15	10.08	2.05	V		0.083	19.18
1745.0		QPSK	-17.71	16.01	10.18	2.06	V		0.259	24.13
		16-QAM	-18.21	15.51	10.18	2.06	V		0.231	23.63
		64-QAM	-19.53	14.19	10.18	2.06	V		0.170	22.31
		256-QAM	-22.59	11.13	10.18	2.06	V		0.084	19.25
1770.0		QPSK	-16.70	16.99	10.24	2.07	V		0.328	25.16
		16-QAM	-17.30	16.39	10.24	2.07	V		0.286	24.56
		64-QAM	-18.49	15.20	10.24	2.07	V		0.217	23.37
		256-QAM	-21.95	11.74	10.24	2.07	V		0.098	19.91

8.1.2 Sub1 Ant

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-21.42	11.44	9.76	2.08	V	< 1.00	0.082	19.12
		16-QAM	-21.45	11.41	9.76	2.08	V		0.081	19.09
		64-QAM	-22.54	10.32	9.76	2.08	V		0.063	18.00
		256-QAM	-25.99	6.87	9.76	2.08	V		0.029	14.55
1745.0		QPSK	-21.40	11.73	9.97	1.99	V		0.094	19.71
		16-QAM	-21.43	11.70	9.97	1.99	V		0.093	19.68
		64-QAM	-22.45	10.68	9.97	1.99	V		0.073	18.66
		256-QAM	-25.40	7.73	9.97	1.99	V		0.037	15.71
1779.3		QPSK	-20.50	12.64	10.12	2.15	V		0.115	20.61
		16-QAM	-20.95	12.19	10.12	2.15	V		0.104	20.16
		64-QAM	-21.44	11.70	10.12	2.15	V		0.093	19.67
		256-QAM	-24.58	8.56	10.12	2.15	V		0.045	16.53

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B66/ B4 3 MHz	QPSK	-21.25	11.61	9.76	2.08	V	< 1.00	0.085	19.29
		16-QAM	-21.30	11.56	9.76	2.08	V		0.084	19.24
		64-QAM	-21.60	11.26	9.76	2.08	V		0.078	18.94
		256-QAM	-25.28	7.58	9.76	2.08	V		0.034	15.26
1745.0		QPSK	-21.14	11.99	9.97	1.99	V		0.099	19.97
		16-QAM	-21.15	11.98	9.97	1.99	V		0.099	19.96
		64-QAM	-22.17	10.96	9.97	1.99	V		0.078	18.94
		256-QAM	-25.17	7.96	9.97	1.99	V		0.039	15.94
1778.5		QPSK	-20.90	12.24	10.12	2.15	V		0.105	20.21
		16-QAM	-20.92	12.22	10.12	2.15	V		0.104	20.19
		64-QAM	-21.90	11.24	10.12	2.15	V		0.083	19.21
		256-QAM	-24.82	8.32	10.12	2.15	V		0.043	16.29

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-21.15	11.71	9.76	2.08	V	< 1.00	0.087	19.39
		16-QAM	-21.18	11.68	9.76	2.08	V		0.086	19.36
		64-QAM	-21.57	11.29	9.76	2.08	V		0.079	18.97
		256-QAM	-25.42	7.44	9.76	2.08	V		0.033	15.12
1745.0		QPSK	-21.18	11.95	9.97	1.99	V		0.098	19.93
		16-QAM	-21.20	11.93	9.97	1.99	V		0.098	19.91
		64-QAM	-22.22	10.91	9.97	1.99	V		0.077	18.89
		256-QAM	-25.23	7.90	9.97	1.99	V		0.039	15.88
1777.5		QPSK	-21.25	11.89	10.12	2.15	V		0.097	19.86
		16-QAM	-21.28	11.86	10.12	2.15	V		0.096	19.83
		64-QAM	-22.27	10.87	10.12	2.15	V		0.077	18.84
		256-QAM	-25.25	7.89	10.12	2.15	V		0.039	15.86

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-21.45	11.57	9.79	2.07	V	< 1.00	0.085	19.29
		16-QAM	-21.47	11.55	9.79	2.07	V		0.085	19.27
		64-QAM	-22.25	10.77	9.79	2.07	V		0.071	18.49
		256-QAM	-25.69	7.33	9.79	2.07	V		0.032	15.05
1745.0		QPSK	-21.45	11.68	9.97	1.99	V		0.092	19.66
		16-QAM	-21.48	11.65	9.97	1.99	V		0.092	19.63
		64-QAM	-22.48	10.65	9.97	1.99	V		0.073	18.63
		256-QAM	-25.53	7.60	9.97	1.99	V		0.036	15.58
1775.0		QPSK	-21.39	11.84	10.10	2.14	V		0.095	19.80
		16-QAM	-21.40	11.83	10.10	2.14	V		0.095	19.79
		64-QAM	-22.36	10.87	10.10	2.14	V		0.076	18.83
		256-QAM	-25.39	7.84	10.10	2.14	V		0.038	15.80

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-21.60	11.39	9.82	2.07	V	< 1.00	0.082	19.14
		16-QAM	-21.68	11.31	9.82	2.07	V		0.081	19.06
		64-QAM	-22.30	10.69	9.82	2.07	V		0.070	18.44
		256-QAM	-25.68	7.31	9.82	2.07	V		0.032	15.06
1745.0		QPSK	-21.45	11.68	9.97	1.99	V		0.092	19.66
		16-QAM	-21.48	11.65	9.97	1.99	V		0.092	19.63
		64-QAM	-22.51	10.62	9.97	1.99	V		0.072	18.60
		256-QAM	-25.57	7.56	9.97	1.99	V		0.036	15.54
1772.5		QPSK	-21.20	12.12	10.08	2.13	V		0.102	20.07
		16-QAM	-21.22	12.10	10.08	2.13	V		0.101	20.05
		64-QAM	-21.97	11.35	10.08	2.13	V		0.085	19.30
		256-QAM	-25.20	8.12	10.08	2.13	V		0.040	16.07

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-21.40	11.77	9.82	2.05	V	< 1.00	0.090	19.54
		16-QAM	-21.43	11.74	9.82	2.05	V		0.089	19.51
		64-QAM	-22.37	10.80	9.82	2.05	V		0.072	18.57
		256-QAM	-25.56	7.61	9.82	2.05	V		0.035	15.38
1745.0		QPSK	-21.20	11.93	9.97	1.99	V		0.098	19.91
		16-QAM	-21.22	11.91	9.97	1.99	V		0.097	19.89
		64-QAM	-22.28	10.85	9.97	1.99	V		0.076	18.83
		256-QAM	-25.42	7.71	9.97	1.99	V		0.037	15.69
1770.0		QPSK	-20.75	12.57	10.08	2.13	V		0.113	20.52
		16-QAM	-20.77	12.55	10.08	2.13	V		0.112	20.50
		64-QAM	-21.52	11.80	10.08	2.13	V		0.094	19.75
		256-QAM	-24.78	8.54	10.08	2.13	V		0.045	16.49

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Main2 Ant

- ▣ OPERATING FREQUENCY: 1745.0 MHz
- ▣ MEASURED OUTPUT POWER: 25.56 dBm = 0.360 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 38.56 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131987 (1711.5)	3 423.00	-54.83	12.56	-61.56	2.95	V	-51.95	77.52
	5 134.50	-56.57	12.27	-54.07	3.67	V	-45.46	71.02
	6 846.00	-56.01	12.00	-49.33	4.25	H	-41.58	67.14
132322 (1745.0)	3 490.00	-54.26	12.42	-60.36	2.97	V	-50.91	76.47
	5 235.00	-51.55	12.71	-50.75	3.70	H	-41.73	67.29
	6 980.00	-55.61	11.52	-47.43	4.28	H	-40.19	65.75
132657 (1778.5)	3 557.00	-55.40	12.38	-61.24	3.01	H	-51.87	77.43
	5 335.50	-56.08	13.00	-55.37	3.74	H	-46.10	71.66
	7 114.00	-56.65	10.87	-47.55	4.34	V	-41.02	66.58

8.2.2 Sub1 Ant

- ▣ OPERATING FREQUENCY: 1745.0 MHz
- ▣ MEASURED OUTPUT POWER: 20.61 dBm = 0.115 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.61 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131979 (1710.7)	3 421.40	-60.41	11.30	-61.88	2.99	V	-53.57	74.18
	5 132.10	-60.09	11.32	-54.17	3.78	V	-46.63	67.25
	6 842.80	-62.58	11.18	-50.98	4.30	V	-44.10	64.72
	8 553.50	-62.13	11.00	-48.65	4.82	V	-42.47	63.08
	10 264.20	-63.51	11.63	-45.54	5.38	V	-39.29	59.90
132322 (1745.0)	3 490.00	-60.51	11.46	-61.82	3.05	V	-53.41	74.02
	5 235.00	-58.92	11.57	-53.61	3.79	V	-45.83	66.44
	6 980.00	-63.68	11.16	-51.45	4.51	V	-44.80	65.41
	8 725.00	-62.08	11.10	-48.11	4.92	V	-41.93	62.54
	10 470.00	-63.24	11.80	-45.86	5.45	V	-39.51	60.12
132665 (1779.3)	3 558.60	-60.15	11.74	-61.98	3.10	H	-53.34	73.95
	5 337.90	-61.43	11.78	-56.60	3.78	H	-48.60	69.21
	7 117.20	-63.03	10.92	-48.73	4.34	H	-42.15	62.76
	8 896.50	-62.68	11.09	-48.74	4.96	H	-42.61	63.22
	10 675.80	-63.30	11.70	-44.13	5.56	H	-37.99	58.60

8.3 PEAK-TO-AVERAGE RATIO

8.3.1 Main2 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	4.78
			16-QAM			5.56
			64-QAM			6.20
			256-QAM			6.46
	3 MHz		QPSK	15		4.83
			16-QAM			5.59
			64-QAM			6.20
			256-QAM			6.49
	5 MHz		QPSK	25		4.82
			16-QAM			5.56
			64-QAM			6.18
			256-QAM			6.49
	10 MHz		QPSK	50		4.85
			16-QAM			5.58
			64-QAM			6.20
			256-QAM			6.48
	15 MHz		QPSK	75		4.79
			16-QAM			5.53
			64-QAM			6.18
			256-QAM			6.45
20 MHz	QPSK	100	4.74			
	16-QAM		5.52			
	64-QAM		6.17			
	256-QAM		6.46			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 197 ~ 220.

8.3.2 Sub1 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	4.68
			16-QAM			5.30
			64-QAM			5.91
			256-QAM			6.29
	3 MHz		QPSK	15		4.63
			16-QAM			5.34
			64-QAM			5.98
			256-QAM			6.33
	5 MHz		QPSK	25		4.64
			16-QAM			5.43
			64-QAM			6.10
			256-QAM			6.58
	10 MHz		QPSK	50		4.78
			16-QAM			5.54
			64-QAM			6.16
			256-QAM			6.57
	15 MHz		QPSK	75		4.71
			16-QAM			5.46
			64-QAM			6.19
			256-QAM			6.50
20 MHz	QPSK	100	4.70			
	16-QAM		5.45			
	64-QAM		6.17			
	256-QAM		6.52			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 221 ~ 244.

8.4 OCCUPIED BANDWIDTH

8.4.1 Main2 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0933
			16-QAM			1.0911
			64-QAM			1.0903
			256-QAM			1.0877
	3 MHz		QPSK	15		2.7129
			16-QAM			2.7025
			64-QAM			2.7119
			256-QAM			2.7030
	5 MHz		QPSK	25		4.5129
			16-QAM			4.4988
			64-QAM			4.5052
			256-QAM			4.5140
	10 MHz		QPSK	50		8.9849
			16-QAM			8.9718
			64-QAM			8.9969
			256-QAM			9.0032
	15 MHz		QPSK	75		13.433
			16-QAM			13.458
			64-QAM			13.449
			256-QAM			13.456
20 MHz	QPSK	100	17.930			
	16-QAM		17.860			
	64-QAM		17.884			
	256-QAM		17.877			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 149 ~ 172.

8.4.2 Sub1 Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.1094
			16-QAM			1.1093
			64-QAM			1.1184
			256-QAM			1.1172
	3 MHz		QPSK	15		2.7588
			16-QAM			2.7611
			64-QAM			2.7606
			256-QAM			2.7804
	5 MHz		QPSK	25		4.5067
			16-QAM			4.5119
			64-QAM			4.5185
			256-QAM			4.4960
	10 MHz		QPSK	50		8.9998
			16-QAM			9.0207
			64-QAM			9.0193
			256-QAM			8.9983
	15 MHz		QPSK	75		13.523
			16-QAM			13.461
			64-QAM			13.465
			256-QAM			13.490
20 MHz	QPSK	100	17.970			
	16-QAM		17.911			
	64-QAM		17.918			
	256-QAM		17.924			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 173 ~ 196.

8.5 CONDUCTED SPURIOUS EMISSIONS

8.5.1 Main2 Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4208	27.976	-74.435	-46.459	-13.00
		1745.0	3.4896	27.976	-73.399	-45.423	
		1779.3	3.5604	27.976	-74.171	-46.195	
	3	1711.5	3.4213	27.976	-73.144	-45.168	
		1745.0	3.4881	27.976	-73.330	-45.354	
		1778.5	3.5604	27.976	-74.996	-47.020	
	5	1712.5	3.4213	27.976	-72.307	-44.331	
		1745.0	3.4861	27.976	-73.129	-45.153	
		1777.5	3.5599	27.976	-74.344	-46.368	
	10	1715.0	3.4218	27.976	-74.484	-46.508	
		1745.0	3.4816	27.976	-74.238	-46.262	
		1775.0	3.5594	27.976	-75.316	-47.340	
	15	1717.5	3.4223	27.976	-73.455	-45.479	
		1745.0	3.4771	27.976	-73.930	-45.954	
		1772.5	3.5589	27.976	-74.582	-46.606	
	20	1720.0	3.4228	27.976	-74.885	-46.909	
		1745.0	3.4726	27.976	-73.546	-45.570	
		1770.0	3.5584	27.976	-74.575	-46.599	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 245 ~ 280.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.5.2 Sub1 Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4203	30.200	-66.703	-36.503	-13.00
		1745.0	3.4891	30.200	-60.269	-30.069	
		1779.3	3.5594	30.200	-60.301	-30.101	
	3	1711.5	3.4203	30.200	-65.386	-35.186	
		1745.0	3.4876	30.200	-59.421	-29.221	
		1778.5	3.5594	30.200	-60.303	-30.103	
	5	1712.5	3.4208	30.200	-65.401	-35.201	
		1745.0	3.4856	30.200	-60.468	-30.268	
		1777.5	3.5594	30.200	-59.815	-29.615	
	10	1715.0	3.4213	30.200	-66.130	-35.930	
		1745.0	3.4811	30.200	-60.336	-30.136	
		1775.0	3.5589	30.200	-61.276	-31.076	
	15	1717.5	2.1122	30.200	-74.815	-44.615	
		1745.0	2.1397	30.200	-75.398	-45.198	
		1772.5	2.1770	30.200	-74.276	-44.076	
	20	1720.0	3.4223	30.200	-66.852	-36.652	
		1745.0	3.4721	30.200	-63.144	-32.944	
		1770.0	3.5579	30.200	-60.294	-30.094	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 281 ~ 316.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20(26.5)	32.355

8.6 BAND EDGE

8.6.1 Main2 Ant

- Plots of the EUT's Band Edge are shown Page 77 ~ 112.

8.6.2 Sub1 Ant


- Plots of the EUT's Band Edge are shown Page 113 ~ 148.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

8.7.1 Main2 Ant


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710.700.000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 003	0.0	0.000 000	0.000
100 %		-30	1710 700 009	6.3	0.000 000	0.004
100 %		-20	1710 700 007	4.2	0.000 000	0.002
100 %		-10	1710 700 004	1.7	0.000 000	0.001
100 %		0	1710 700 000	-2.3	0.000 000	-0.001
100 %		+10	1710 700 008	5.3	0.000 000	0.003
100 %		+30	1710 700 000	-2.4	0.000 000	-0.001
100 %		+40	1710 700 000	-2.8	0.000 000	-0.002
100 %		+50	1710 699 999	-3.4	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1710 700 006	3.4	0.000 000

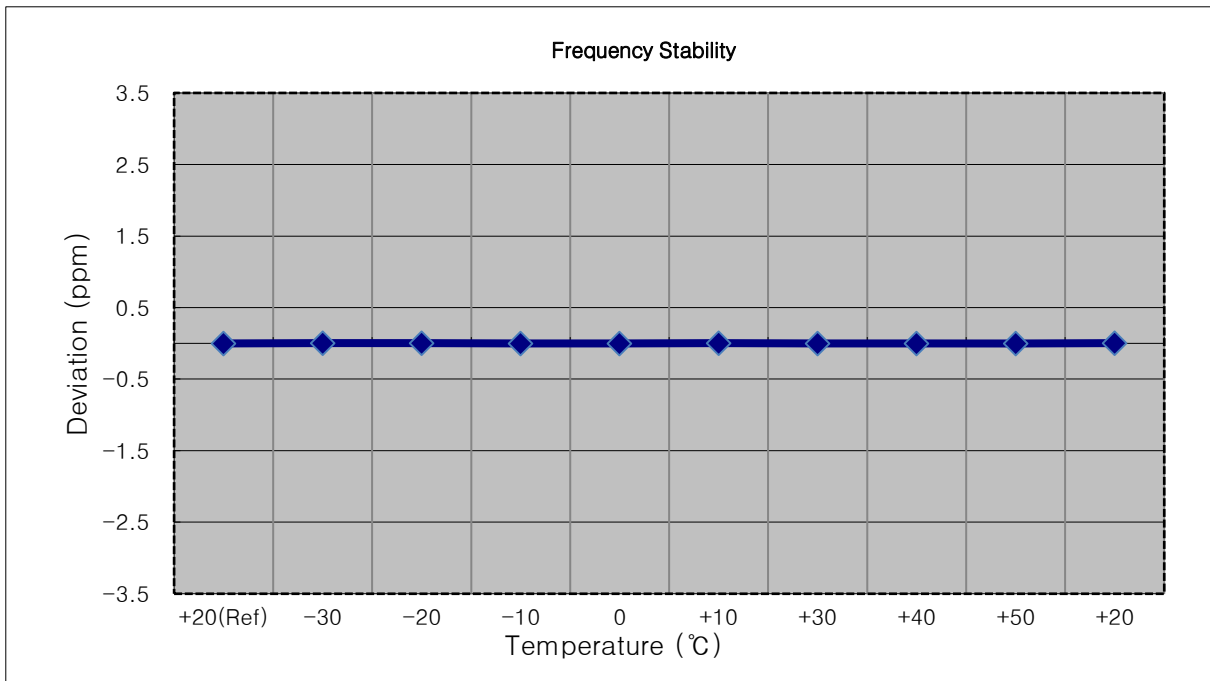


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 500 002	0.0	0.000 000	0.000
100 %		-30	1711 500 005	3.0	0.000 000	0.002
100 %		-20	1711 500 000	-2.8	0.000 000	-0.002
100 %		-10	1711 500 006	3.7	0.000 000	0.002
100 %		0	1711 500 009	6.8	0.000 000	0.004
100 %		+10	1711 500 006	3.9	0.000 000	0.002
100 %		+30	1711 499 998	-4.6	0.000 000	-0.003
100 %		+40	1711 500 008	5.5	0.000 000	0.003
100 %		+50	1711 499 999	-3.1	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1711 499 999	-3.0	0.000 000	-0.002

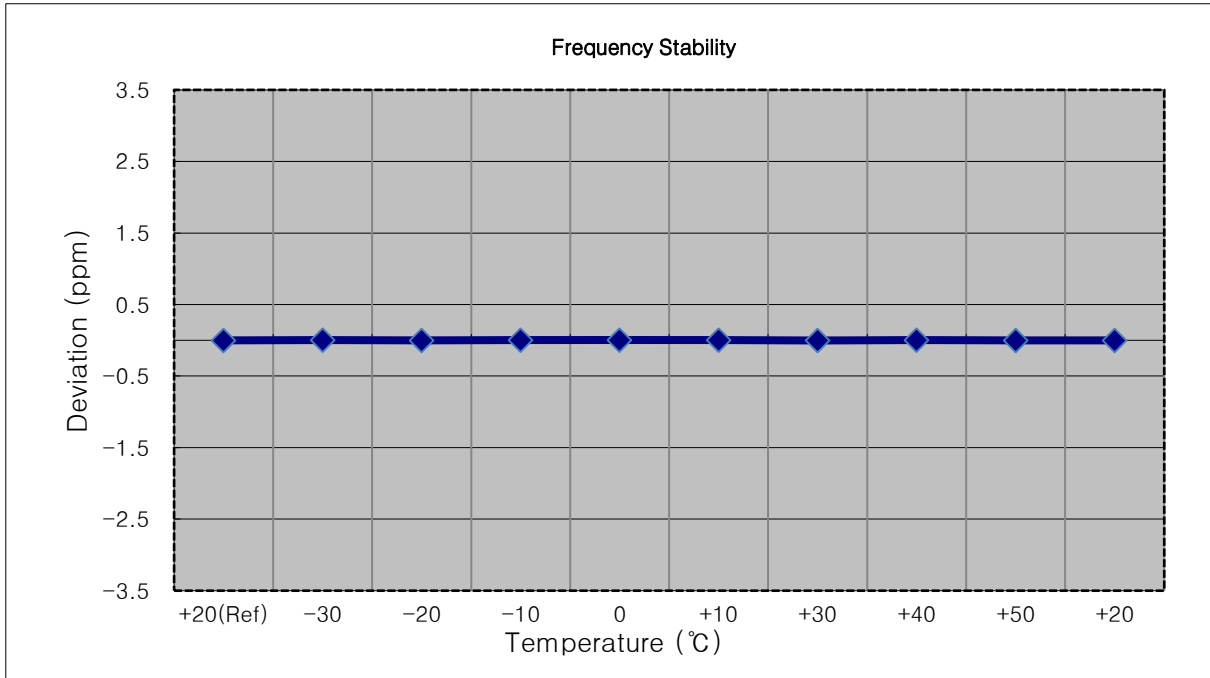


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712.500.000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 499 996	0.0	0.000 000	0.000
100 %		-30	1712 499 998	2.3	0.000 000	0.001
100 %		-20	1712 500 000	4.3	0.000 000	0.003
100 %		-10	1712 499 999	2.8	0.000 000	0.002
100 %		0	1712 499 998	1.9	0.000 000	0.001
100 %		+10	1712 499 998	2.4	0.000 000	0.001
100 %		+30	1712 499 998	2.4	0.000 000	0.001
100 %		+40	1712 499 999	2.8	0.000 000	0.002
100 %		+50	1712 499 992	1712 499 992	-3.9	0.000 000
Batt. Endpoint	3.400	+20	1712 499 999	3.0	0.000 000	0.002

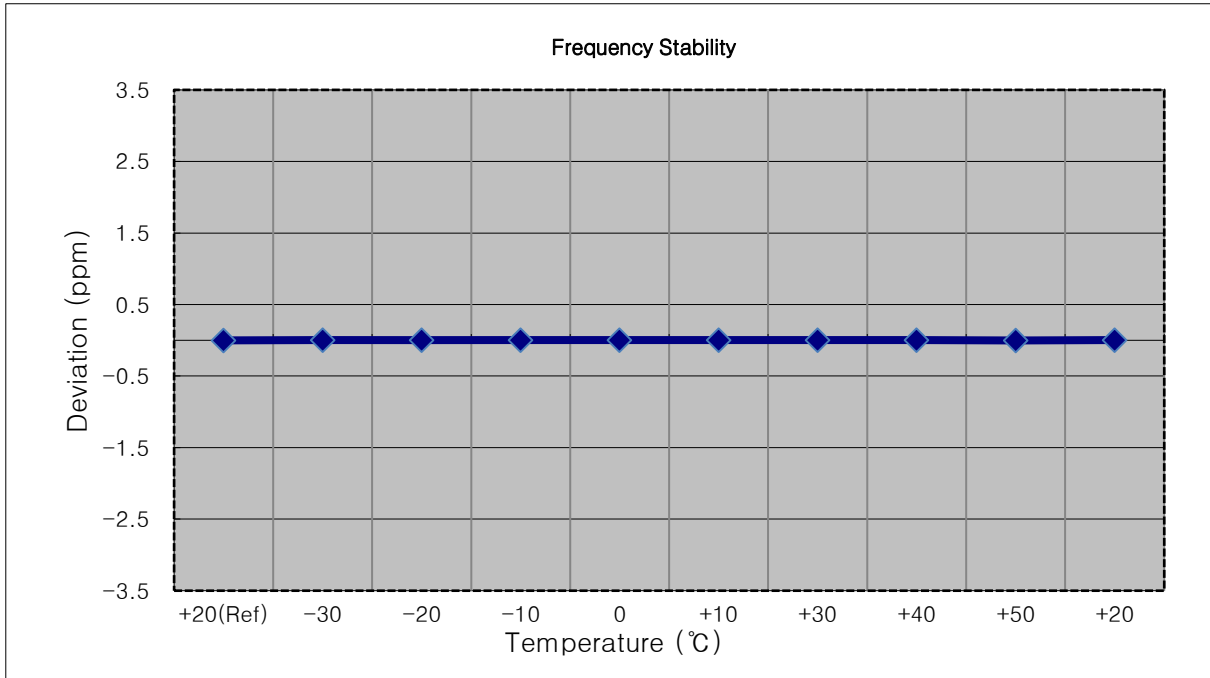


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1714 999 996	0.0	0.000 000	0.000
100 %		-30	1714 999 992	-3.1	0.000 000	-0.002
100 %		-20	1714 999 993	-2.1	0.000 000	-0.001
100 %		-10	1714 999 993	-3.0	0.000 000	-0.002
100 %		0	1714 999 993	-2.1	0.000 000	-0.001
100 %		+10	1714 999 999	3.2	0.000 000	0.002
100 %		+30	1714 999 992	-3.3	0.000 000	-0.002
100 %		+40	1714 999 999	3.0	0.000 000	0.002
100 %		+50	1714 999 997	1.6	0.000 000	0.001
Batt. Endpoint	3.400	+20	1714 999 991	-4.4	0.000 000	-0.003

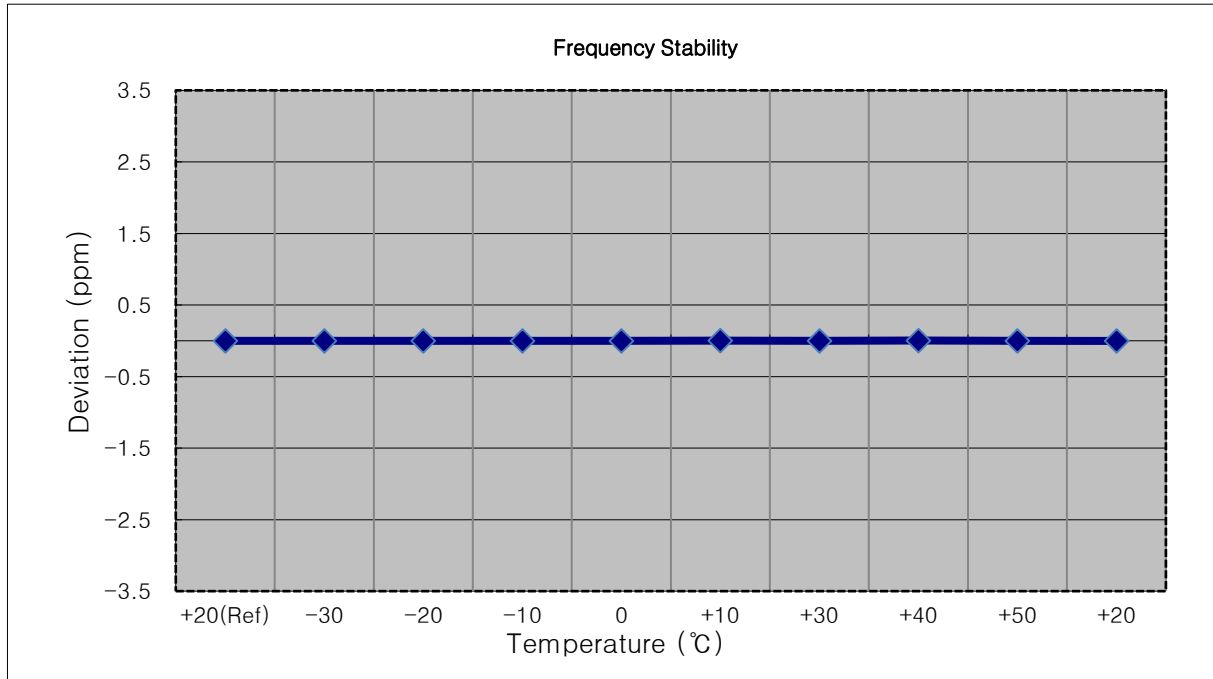


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717.500.000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 499 998	0.0	0.000 000	0.000
100 %		-30	1717 500 000	2.7	0.000 000	0.002
100 %		-20	1717 500 000	2.5	0.000 000	0.001
100 %		-10	1717 500 000	2.0	0.000 000	0.001
100 %		0	1717 499 996	-2.0	0.000 000	-0.001
100 %		+10	1717 499 996	-1.4	0.000 000	-0.001
100 %		+30	1717 499 996	-2.2	0.000 000	-0.001
100 %		+40	1717 499 995	-2.6	0.000 000	-0.002
100 %		+50	1717 499 996	-2.1	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1717 499 995	-2.4	0.000 000	-0.001

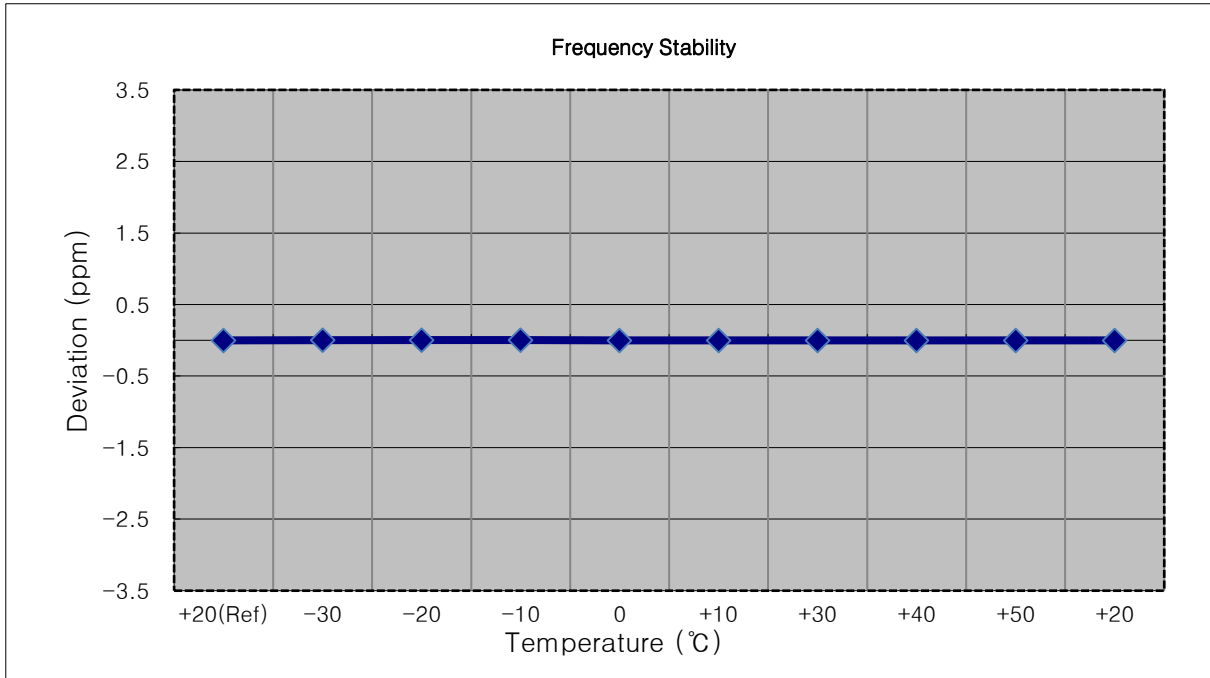


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1719 999 997	0.0	0.000 000	0.000
100 %		-30	1719 999 994	-2.7	0.000 000	-0.002
100 %		-20	1719 999 993	-3.3	0.000 000	-0.002
100 %		-10	1719 999 993	-3.6	0.000 000	-0.002
100 %		0	1719 999 993	-3.4	0.000 000	-0.002
100 %		+10	1720 000 000	3.2	0.000 000	0.002
100 %		+30	1719 999 995	-1.3	0.000 000	-0.001
100 %		+40	1719 999 994	-2.5	0.000 000	-0.001
100 %		+50	1719 999 993	-4.1	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1719 999 993	-3.7	0.000 000

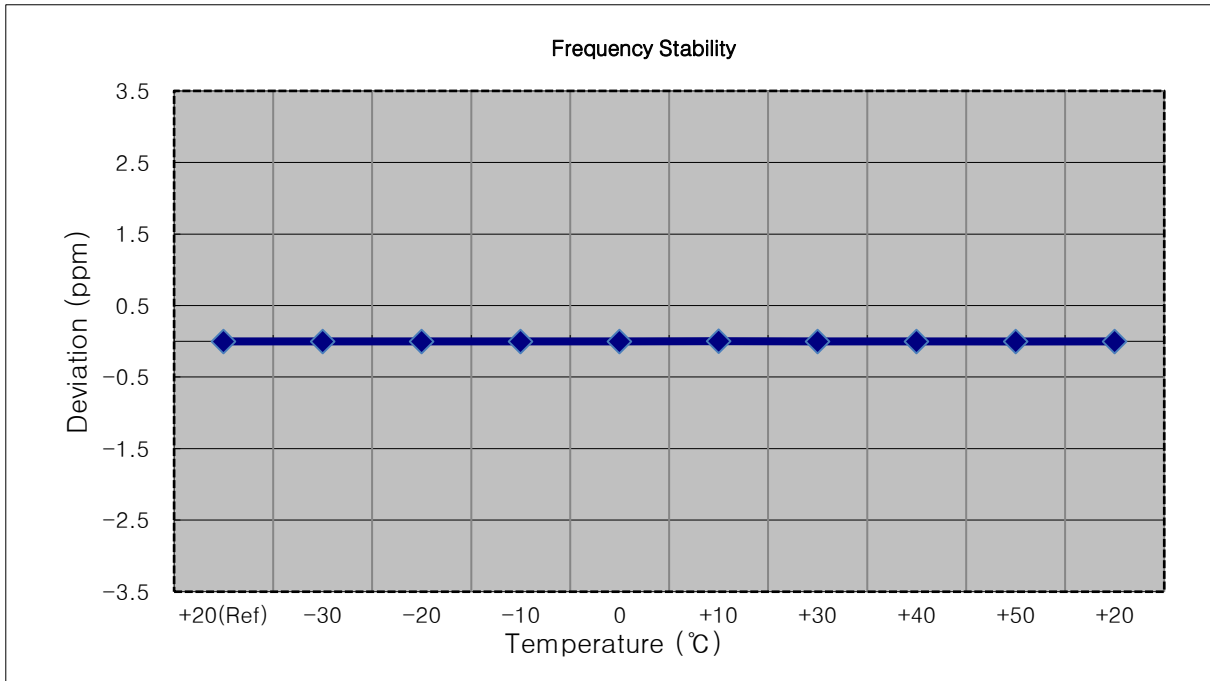


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 008	4.2	0.000 000	0.002
100 %		-20	1745 000 007	3.3	0.000 000	0.002
100 %		-10	1745 000 001	-2.3	0.000 000	-0.001
100 %		0	1745 000 001	-2.7	0.000 000	-0.002
100 %		+10	1745 000 001	-2.5	0.000 000	-0.001
100 %		+30	1745 000 002	-1.9	0.000 000	-0.001
100 %		+40	1745 000 008	4.1	0.000 000	0.002
100 %		+50	1745 000 006	2.4	0.000 000	0.001
Batt. Endpoint	3.400	+20	1745 000 007	3.5	0.000 000	0.002

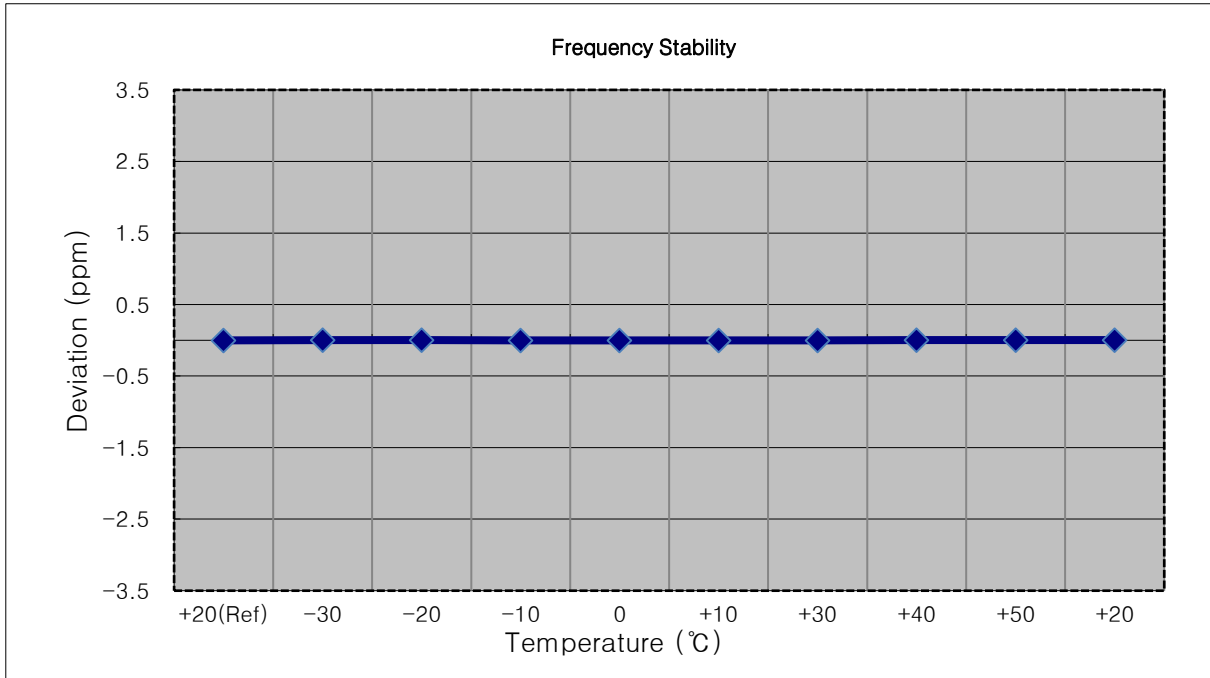


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 008	4.6	0.000 000	0.003
100 %		-20	1745 000 008	4.8	0.000 000	0.003
100 %		-10	1745 000 007	3.9	0.000 000	0.002
100 %		0	1745 000 007	3.3	0.000 000	0.002
100 %		+10	1745 000 006	2.6	0.000 000	0.001
100 %		+30	1745 000 005	1.6	0.000 000	0.001
100 %		+40	1745 000 006	2.1	0.000 000	0.001
100 %		+50	1745 000 005	2.0	0.000 000	0.001
Batt. Endpoint	3.400	+20	1745 000 006	2.2	0.000 000	0.001

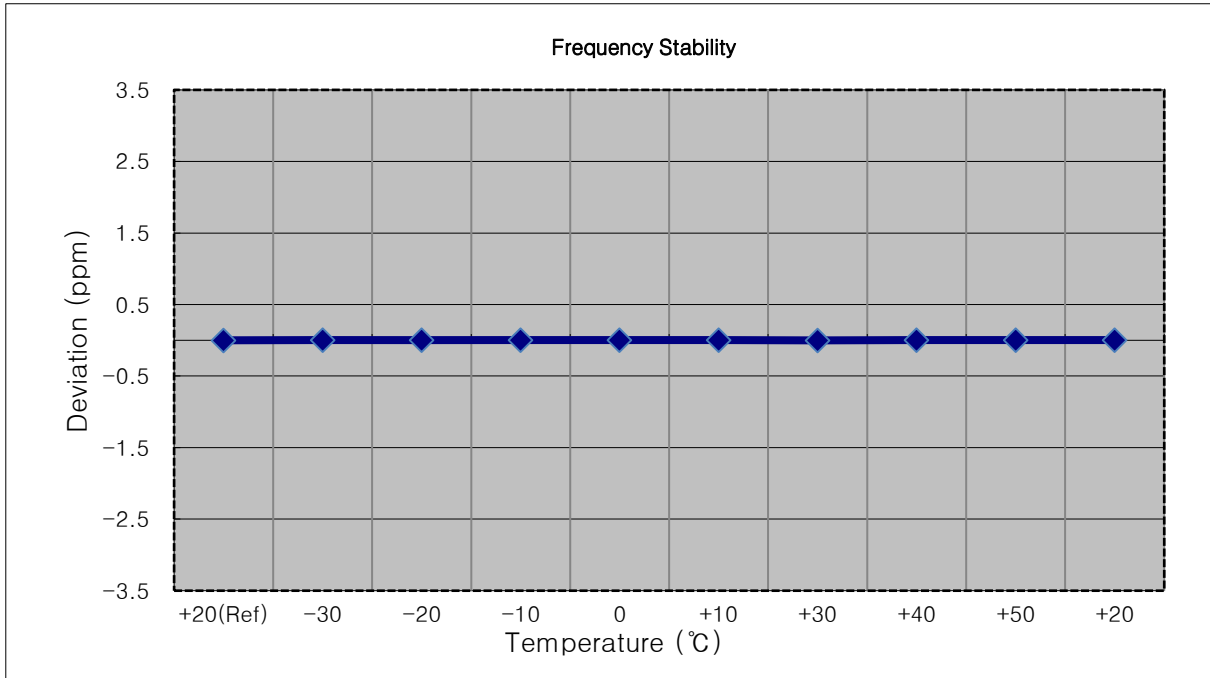


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 998	0.0	0.000 000	0.000
100 %		-30	1744 999 996	-1.5	0.000 000	-0.001
100 %		-20	1744 999 995	-3.1	0.000 000	-0.002
100 %		-10	1744 999 996	-2.0	0.000 000	-0.001
100 %		0	1744 999 995	-3.2	0.000 000	-0.002
100 %		+10	1744 999 994	-3.7	0.000 000	-0.002
100 %		+30	1744 999 995	-2.5	0.000 000	-0.001
100 %		+40	1744 999 996	-1.8	0.000 000	-0.001
100 %		+50	1745 000 000	2.2	0.000 000	0.001
Batt. Endpoint	3.400	+20	1744 999 996	-2.0	0.000 000	-0.001

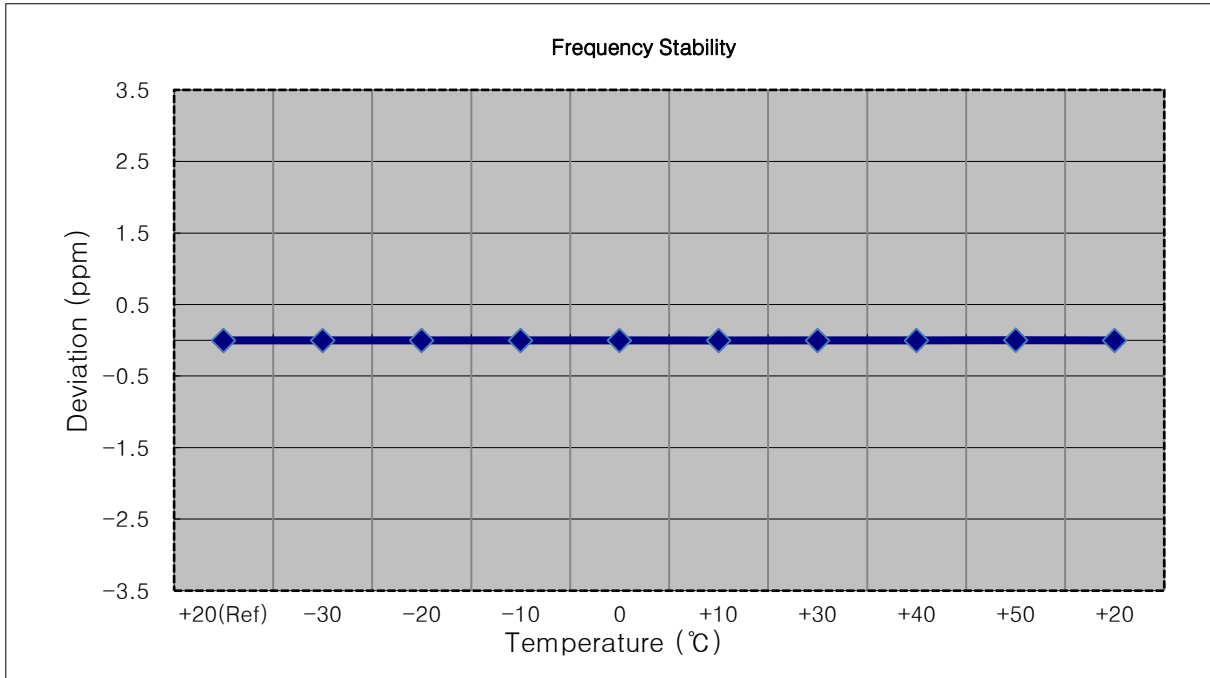


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 999	0.0	0.000 000	0.000
100 %		-30	1744 999 995	-3.7	0.000 000	-0.002
100 %		-20	1745 000 001	2.2	0.000 000	0.001
100 %		-10	1744 999 997	-2.1	0.000 000	-0.001
100 %		0	1744 999 997	-1.7	0.000 000	-0.001
100 %		+10	1745 000 000	1.5	0.000 000	0.001
100 %		+30	1744 999 996	-2.2	0.000 000	-0.001
100 %		+40	1745 000 000	1.3	0.000 000	0.001
100 %		+50	1744 999 997	-2.1	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1745 000 002	2.9	0.000 000	0.002

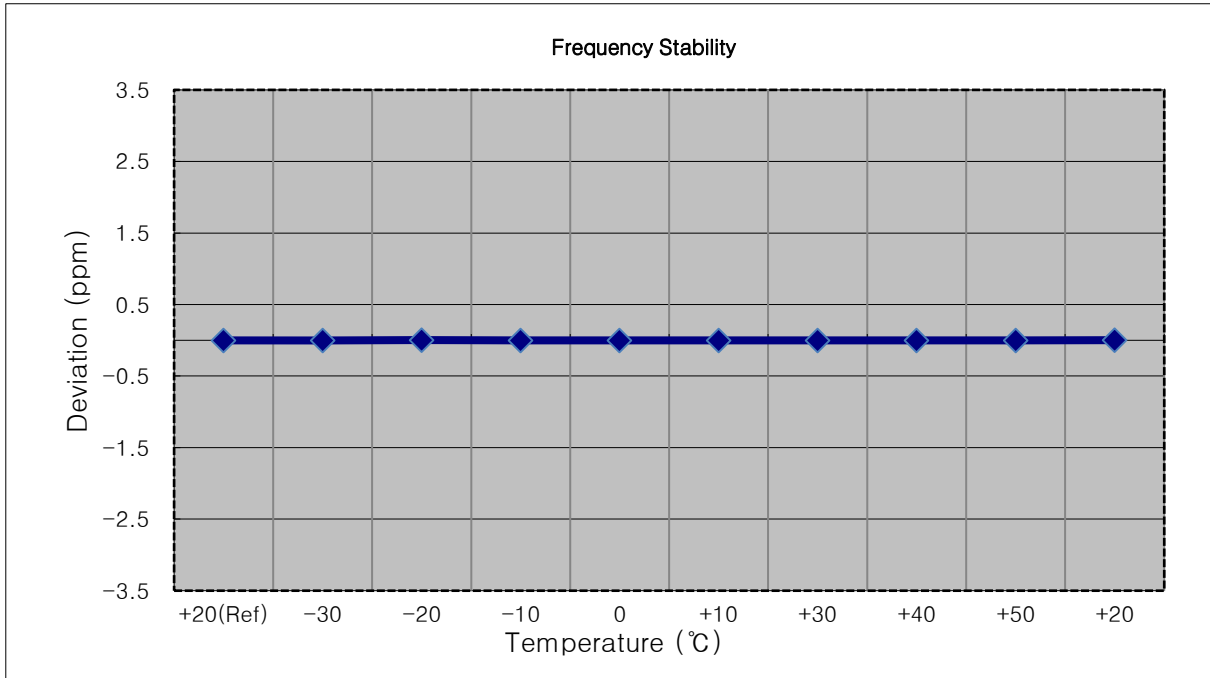


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 992	-4.8	0.000 000	-0.003
100 %		-20	1744 999 994	-3.4	0.000 000	-0.002
100 %		-10	1744 999 994	-3.0	0.000 000	-0.002
100 %		0	1744 999 993	-3.8	0.000 000	-0.002
100 %		+10	1744 999 994	-3.0	0.000 000	-0.002
100 %		+30	1744 999 995	-2.0	0.000 000	-0.001
100 %		+40	1744 999 995	-2.4	0.000 000	-0.001
100 %		+50	1744 999 994	-3.4	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1744 999 995	-1.7	0.000 000	-0.001

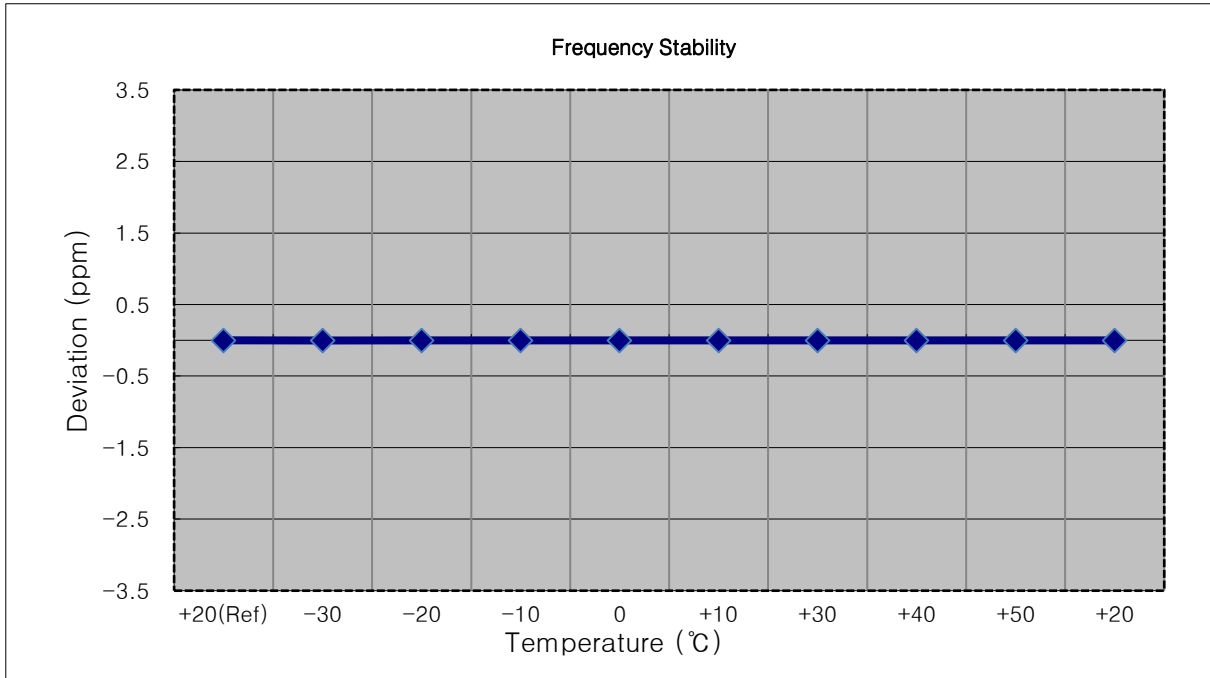


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 998	0.0	0.000 000	0.000
100 %		-30	1744 999 996	-2.4	0.000 000	-0.001
100 %		-20	1744 999 995	-3.7	0.000 000	-0.002
100 %		-10	1745 000 000	1.6	0.000 000	0.001
100 %		0	1744 999 995	-3.1	0.000 000	-0.002
100 %		+10	1745 000 001	3.0	0.000 000	0.002
100 %		+30	1745 000 000	1.7	0.000 000	0.001
100 %		+40	1745 000 001	2.3	0.000 000	0.001
100 %		+50	1745 000 000	1.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1745 000 001	3.2	0.000 000	0.002

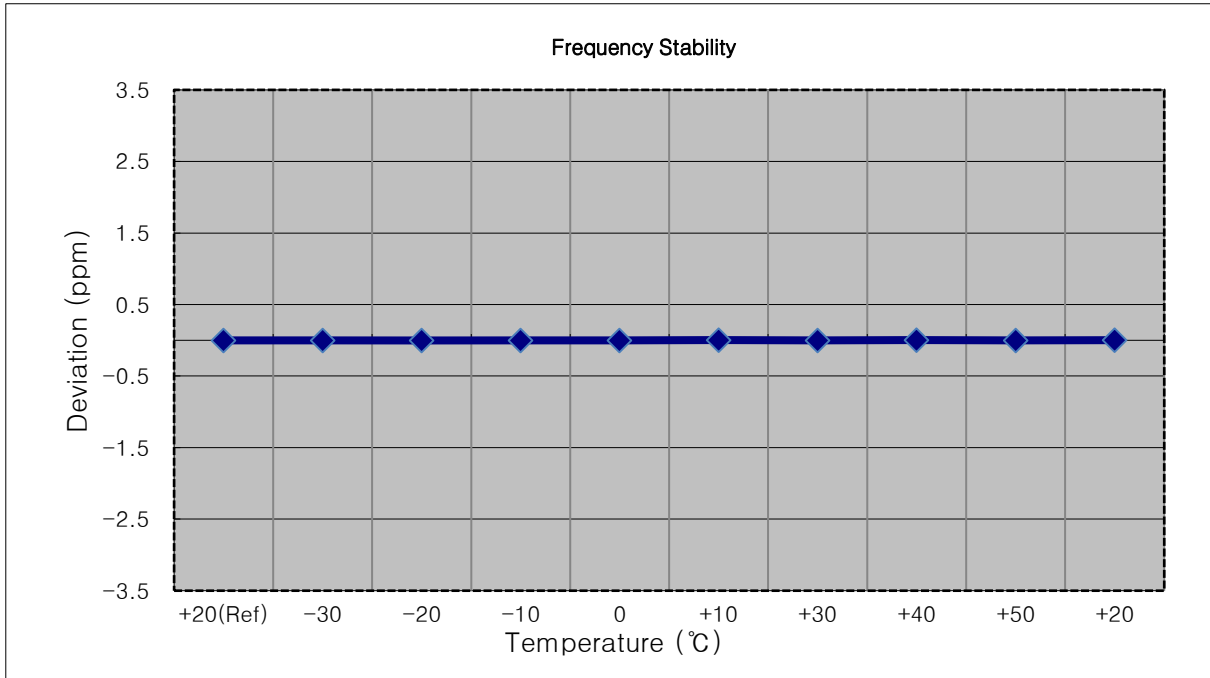


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 300 005	0.0	0.000 000	0.000
100 %		-30	1779 300 003	-2.5	0.000 000	-0.001
100 %		-20	1779 300 009	4.0	0.000 000	0.002
100 %		-10	1779 300 008	2.5	0.000 000	0.001
100 %		0	1779 300 010	4.3	0.000 000	0.002
100 %		+10	1779 300 007	1.7	0.000 000	0.001
100 %		+30	1779 300 010	4.7	0.000 000	0.003
100 %		+40	1779 300 002	-2.8	0.000 000	-0.002
100 %		+50	1779 300 003	-2.1	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1779 300 003	-2.3	0.000 000	-0.001

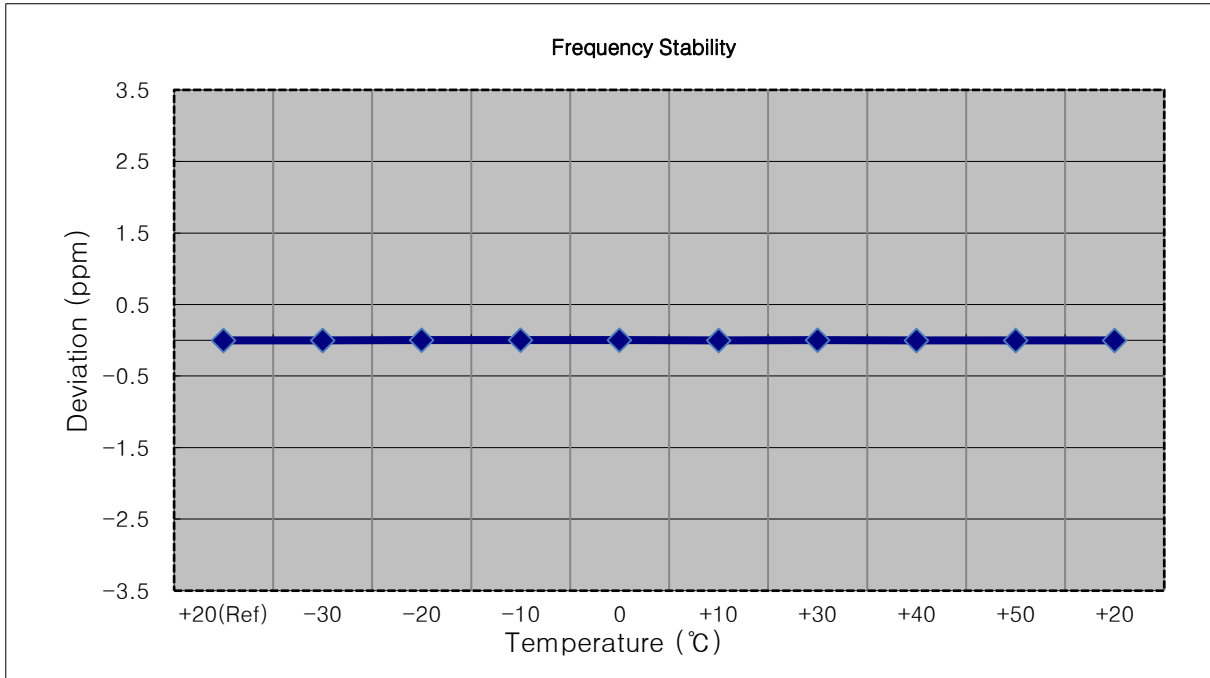


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 008	0.0	0.000 000	0.000
100 %		-30	1778 500 018	9.8	0.000 001	0.006
100 %		-20	1778 499 998	-10.6	-0.000 001	-0.006
100 %		-10	1778 500 020	11.7	0.000 001	0.007
100 %		0	1778 500 019	11.1	0.000 001	0.006
100 %		+10	1778 500 015	7.1	0.000 000	0.004
100 %		+30	1778 499 998	-10.2	-0.000 001	-0.006
100 %		+40	1778 500 020	11.5	0.000 001	0.006
100 %		+50	1778 499 998	-10.3	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	1778 500 019	10.9	0.000 001	0.006

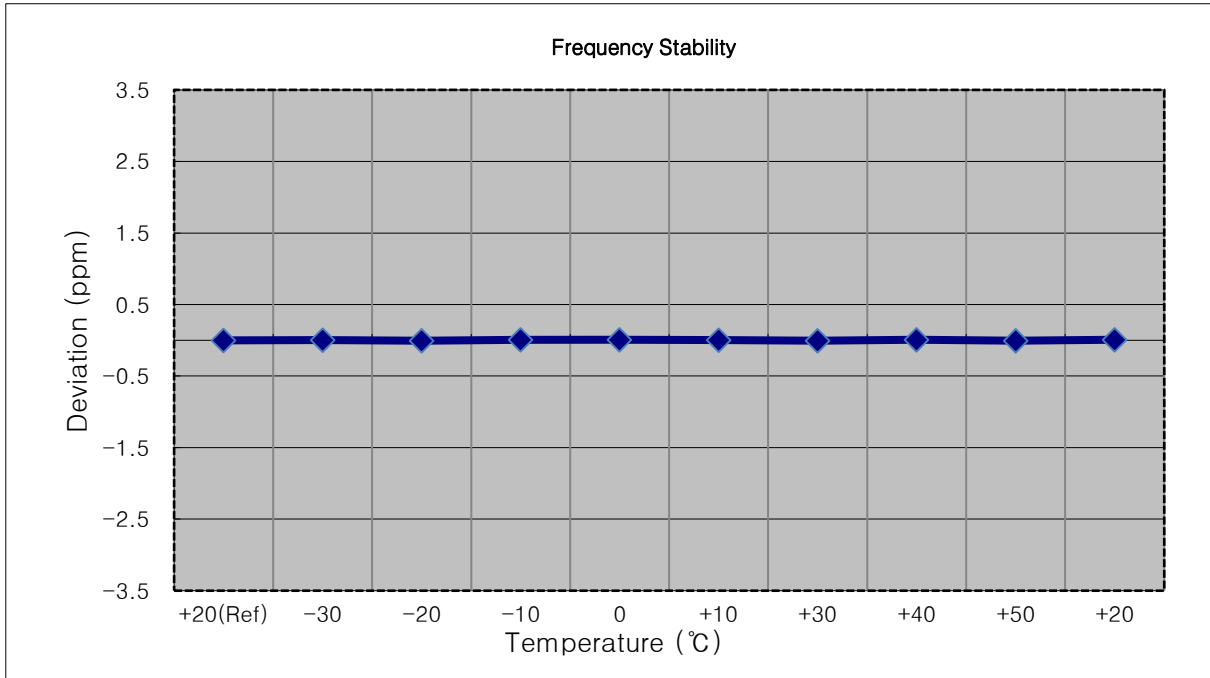


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777.500.000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 500 004	0.0	0.000 000	0.000
100 %		-30	1777 500 005	1.7	0.000 000	0.001
100 %		-20	1777 500 002	-1.9	0.000 000	-0.001
100 %		-10	1777 500 001	-2.9	0.000 000	-0.002
100 %		0	1777 500 008	4.0	0.000 000	0.002
100 %		+10	1777 500 008	4.1	0.000 000	0.002
100 %		+30	1777 500 005	1.4	0.000 000	0.001
100 %		+40	1777 500 005	1.5	0.000 000	0.001
100 %		+50	1777 500 002	-1.6	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1777 500 001	-2.7	0.000 000	-0.002

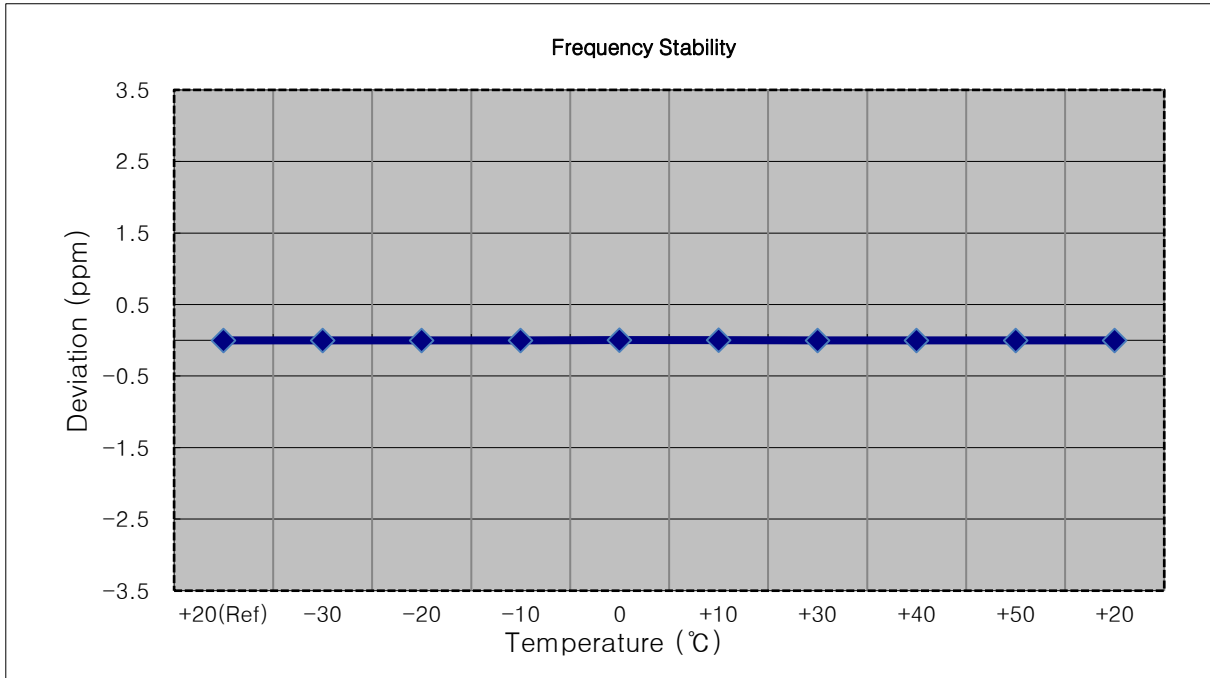


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1774 999 997	0.0	0.000 000	0.000
100 %		-30	1774 999 995	-2.2	0.000 000	-0.001
100 %		-20	1774 999 995	-2.6	0.000 000	-0.001
100 %		-10	1774 999 999	2.1	0.000 000	0.001
100 %		0	1774 999 995	-1.9	0.000 000	-0.001
100 %		+10	1774 999 996	-1.8	0.000 000	-0.001
100 %		+30	1775 000 000	2.5	0.000 000	0.001
100 %		+40	1774 999 994	-2.9	0.000 000	-0.002
100 %		+50	1774 999 994	-3.6	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1774 999 995	-2.3	0.000 000

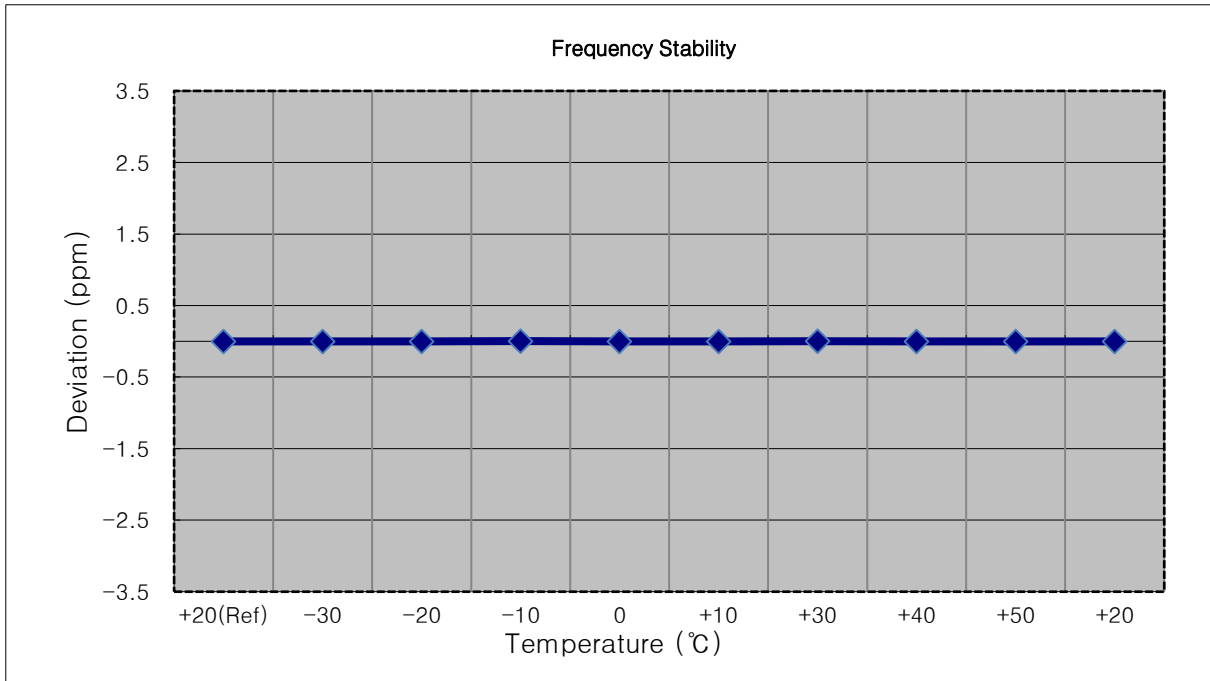


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772.500.000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 994	0.0	0.000 000	0.000
100 %		-30	1772 499 988	-5.9	0.000 000	-0.003
100 %		-20	1772 499 987	-7.1	0.000 000	-0.004
100 %		-10	1772 499 987	-6.3	0.000 000	-0.004
100 %		0	1772 499 988	-5.5	0.000 000	-0.003
100 %		+10	1772 499 987	-6.6	0.000 000	-0.004
100 %		+30	1772 499 988	-6.1	0.000 000	-0.003
100 %		+40	1772 499 987	-6.2	0.000 000	-0.003
100 %		+50	1772 499 988	-5.4	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1772 499 985	-8.7	0.000 000

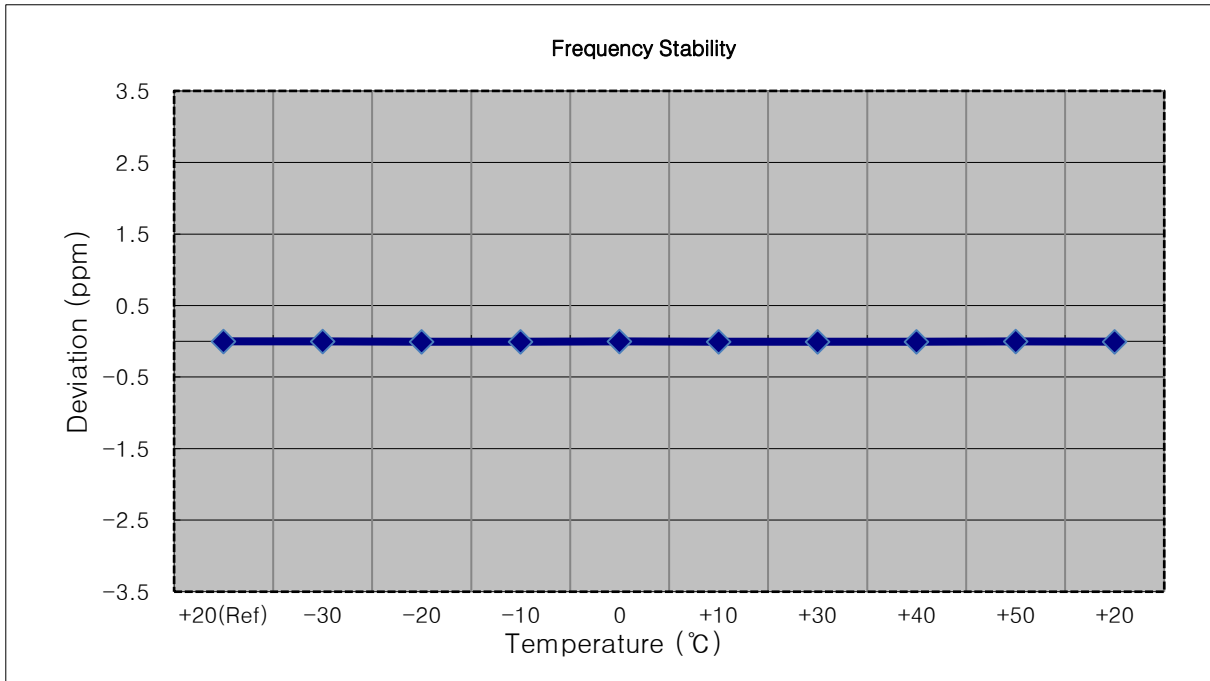

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1769 999 995	0.0	0.000 000	0.000
100 %		-30	1769 999 990	-4.9	0.000 000	-0.003
100 %		-20	1769 999 989	-6.1	0.000 000	-0.003
100 %		-10	1769 999 990	-4.2	0.000 000	-0.002
100 %		0	1769 999 988	-6.8	0.000 000	-0.004
100 %		+10	1769 999 990	-4.9	0.000 000	-0.003
100 %		+30	1769 999 989	-5.7	0.000 000	-0.003
100 %		+40	1769 999 990	-4.6	0.000 000	-0.003
100 %		+50	1769 999 988	-6.6	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1769 999 987	-7.7	0.000 000	-0.004

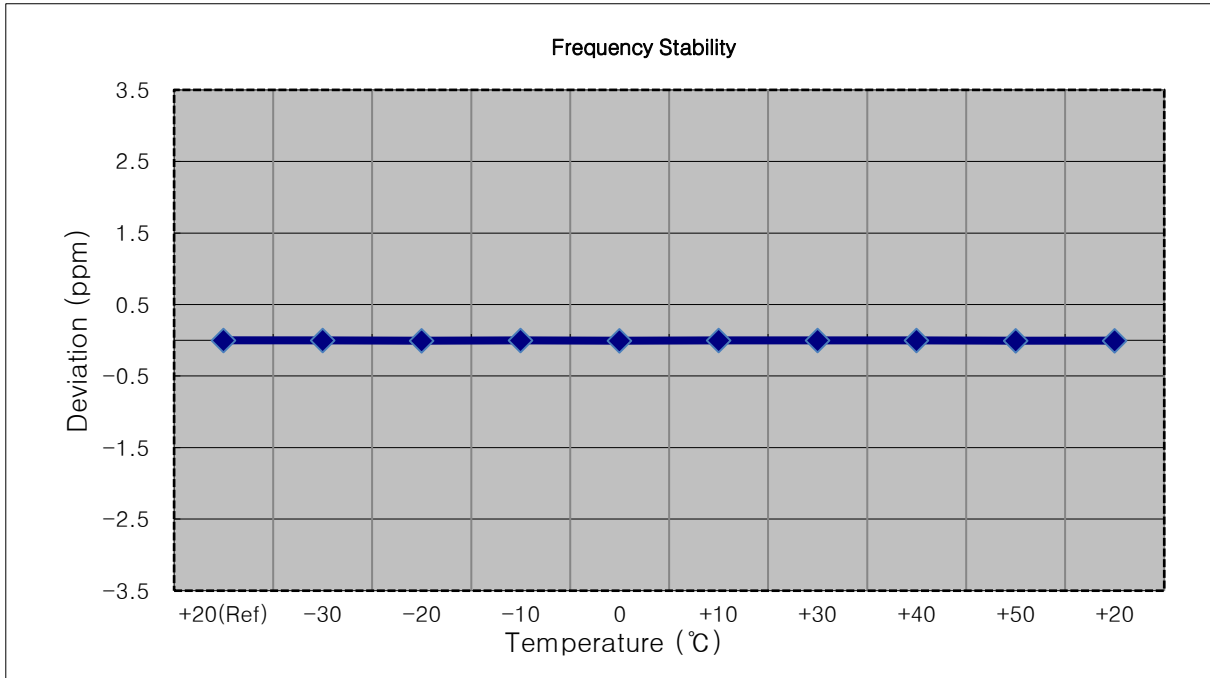

8.7.2 Sub1 Ant


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710.700.000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 000	0.0	0.000 000	0.000
100 %		-30	1710 700 005	4.7	0.000 000	0.003
100 %		-20	1710 700 002	1.8	0.000 000	0.001
100 %		-10	1710 700 015	14.7	0.000 001	0.009
100 %		0	1710 700 002	1.3	0.000 000	0.001
100 %		+10	1710 700 009	8.5	0.000 000	0.005
100 %		+30	1710 700 012	11.9	0.000 001	0.007
100 %		+40	1710 700 014	13.6	0.000 001	0.008
100 %		+50	1710 700 007	6.2	0.000 000	0.004
Batt. Endpoint		3.400	+20	1710 700 014	14.0	0.000 001

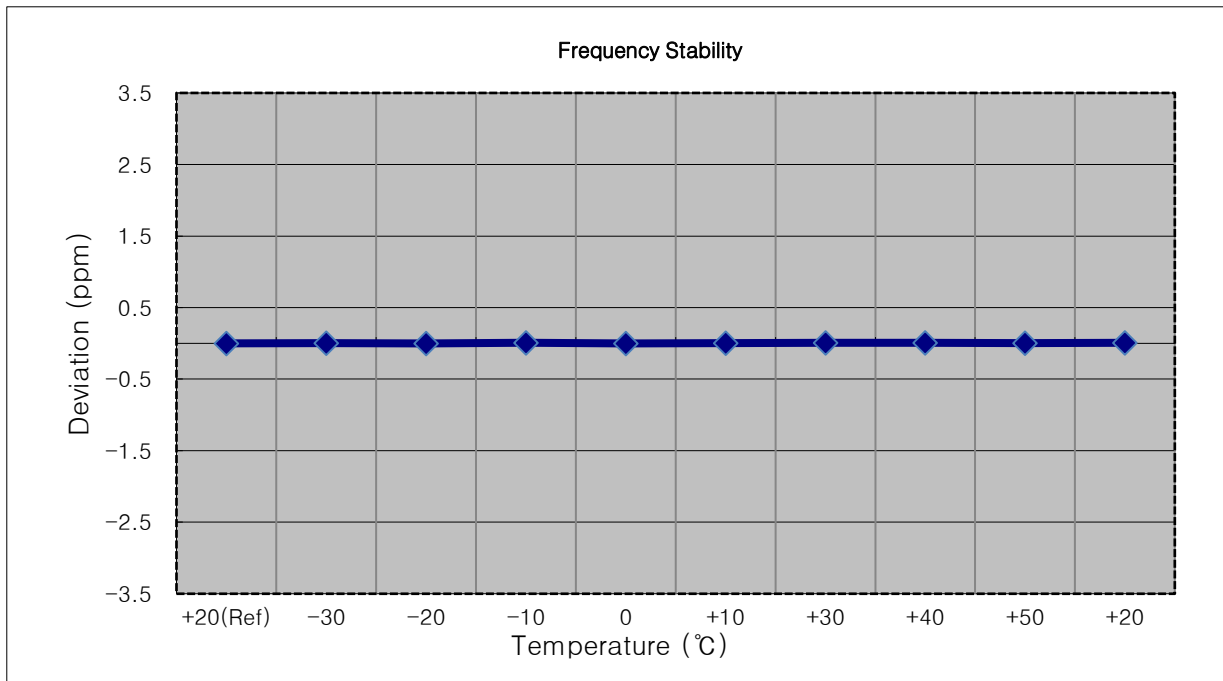


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 500 010	0.0	0.000 000	0.000
100 %		-30	1711 500 020	10.2	0.000 001	0.006
100 %		-20	1711 500 019	8.7	0.000 001	0.005
100 %		-10	1711 500 025	15.3	0.000 001	0.009
100 %		0	1711 500 009	-0.6	0.000 000	0.000
100 %		+10	1711 500 026	16.0	0.000 001	0.009
100 %		+30	1711 500 018	8.5	0.000 000	0.005
100 %		+40	1711 500 024	14.4	0.000 001	0.008
100 %		+50	1711 500 016	5.8	0.000 000	0.003
Batt. Endpoint	3.400	+20	1711 500 021	11.3	0.000 001	0.007

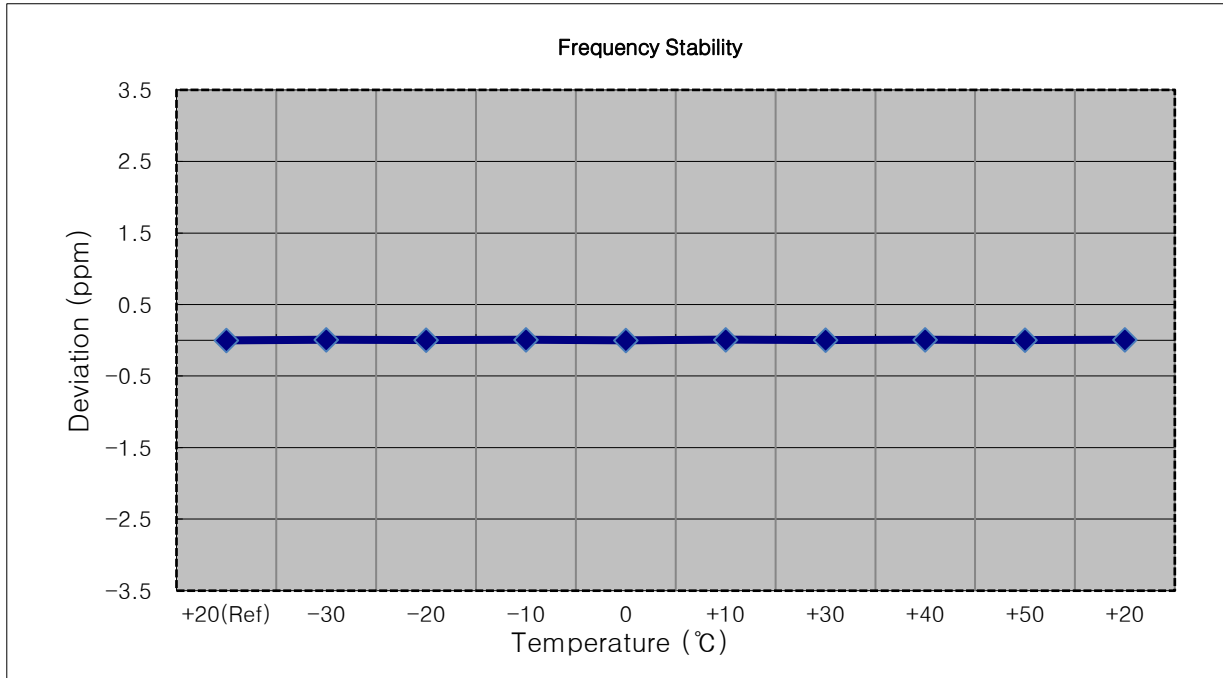


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712.500.000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 500 013	0.0	0.000 000	0.000
100 %		-30	1712 500 019	6.2	0.000 000	0.004
100 %		-20	1712 500 014	1.1	0.000 000	0.001
100 %		-10	1712 500 017	4.3	0.000 000	0.003
100 %		0	1712 500 015	2.2	0.000 000	0.001
100 %		+10	1712 500 025	12.2	0.000 001	0.007
100 %		+30	1712 500 022	9.1	0.000 001	0.005
100 %		+40	1712 500 022	9.1	0.000 001	0.005
100 %		+50	1712 500 029	15.5	0.000 001	0.009
Batt. Endpoint	3.400	+20	1712 500 018	5.2	0.000 000	0.003

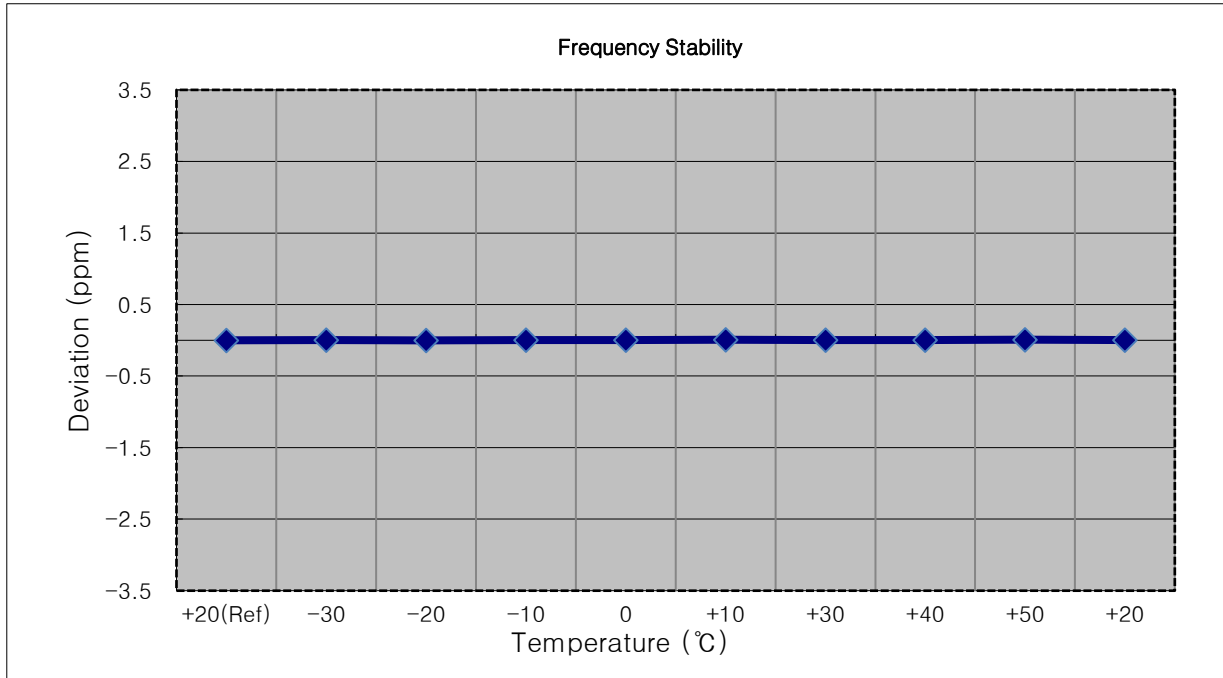


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1715 000 004	0.0	0.000 000	0.000
100 %		-30	1715 000 004	0.0	0.000 000	0.000
100 %		-20	1715 000 009	5.2	0.000 000	0.003
100 %		-10	1715 000 013	8.5	0.000 000	0.005
100 %		0	1715 000 012	8.1	0.000 000	0.005
100 %		+10	1715 000 013	8.7	0.000 001	0.005
100 %		+30	1715 000 009	5.4	0.000 000	0.003
100 %		+40	1715 000 003	-0.6	0.000 000	0.000
100 %		+50	1715 000 019	15.4	0.000 001	0.009
Batt. Endpoint	3.400	+20	1715 000 015	10.9	0.000 001	0.006

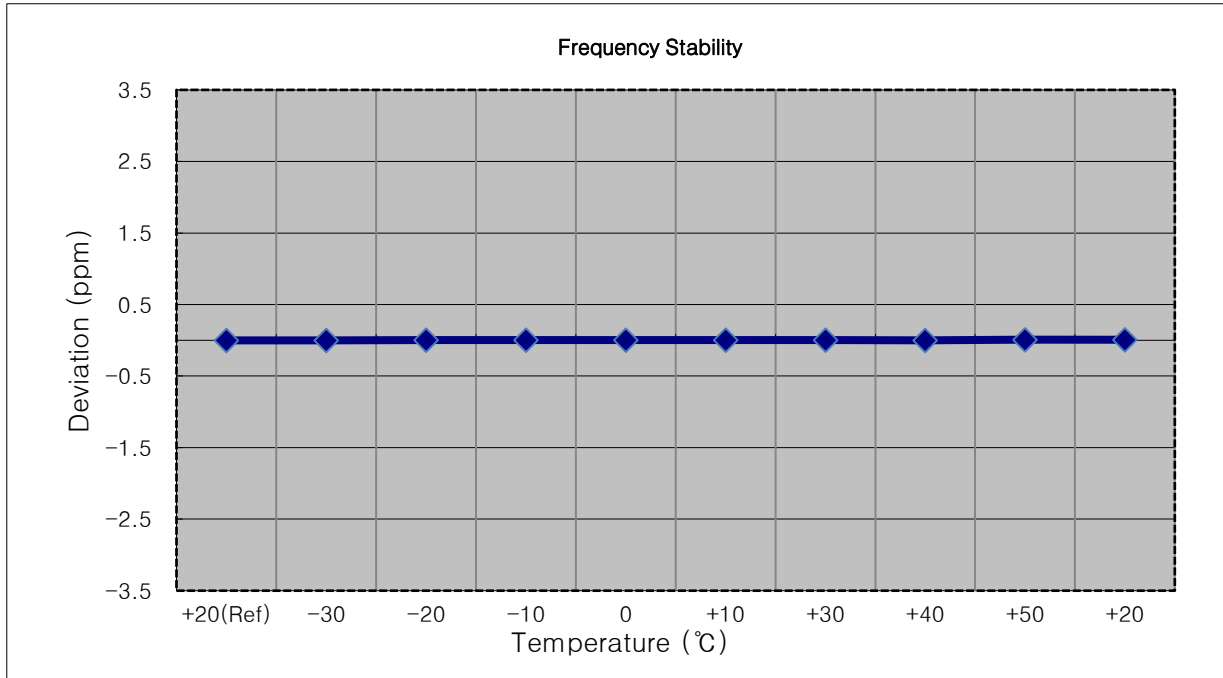


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717.500.000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 500 001	0.0	0.000 000	0.000
100 %		-30	1717 500 005	4.1	0.000 000	0.002
100 %		-20	1717 500 006	5.2	0.000 000	0.003
100 %		-10	1717 500 009	8.0	0.000 000	0.005
100 %		0	1717 500 002	1.1	0.000 000	0.001
100 %		+10	1717 500 013	12.2	0.000 001	0.007
100 %		+30	1717 500 010	8.7	0.000 001	0.005
100 %		+40	1717 500 013	11.9	0.000 001	0.007
100 %		+50	1717 500 007	6.1	0.000 000	0.004
Batt. Endpoint	3.400	+20	1717 500 010	9.2	0.000 001	0.005

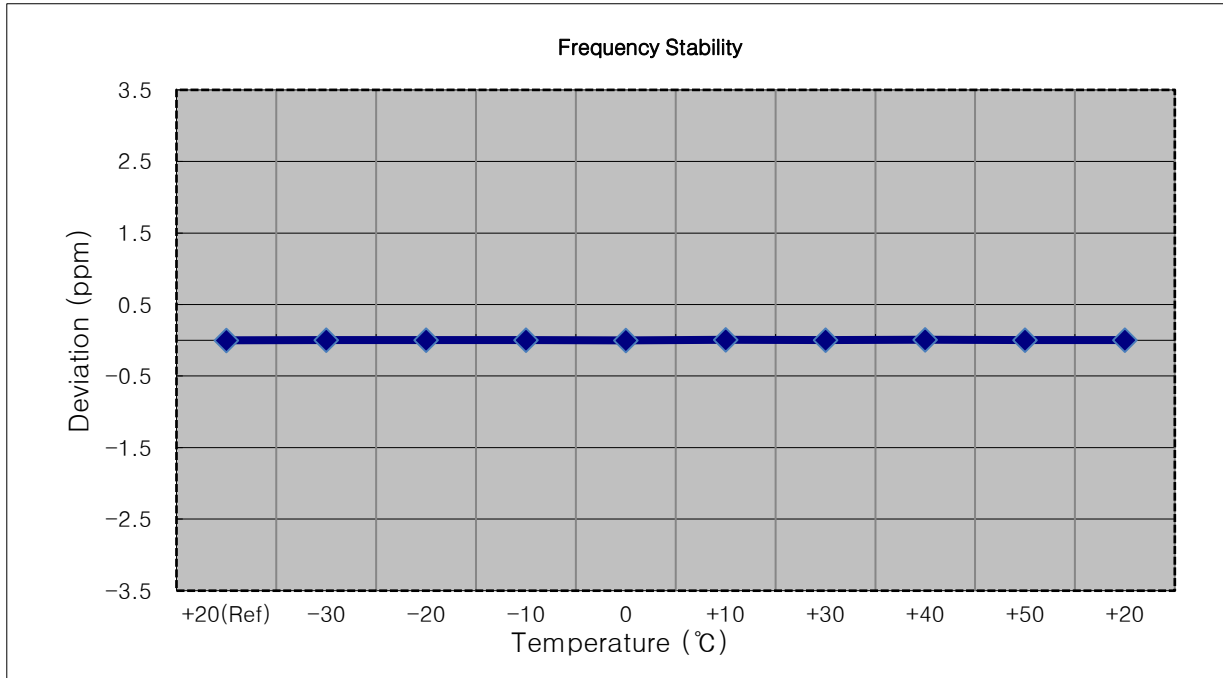


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1720 000 008	0.0	0.000 000	0.000
100 %		-30	1720 000 021	13.3	0.000 001	0.008
100 %		-20	1720 000 017	9.0	0.000 001	0.005
100 %		-10	1720 000 016	7.9	0.000 000	0.005
100 %		0	1720 000 023	14.8	0.000 001	0.009
100 %		+10	1720 000 015	7.4	0.000 000	0.004
100 %		+30	1720 000 022	13.7	0.000 001	0.008
100 %		+40	1720 000 019	11.4	0.000 001	0.007
100 %		+50	1720 000 006	-1.6	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1720 000 015	7.1	0.000 000

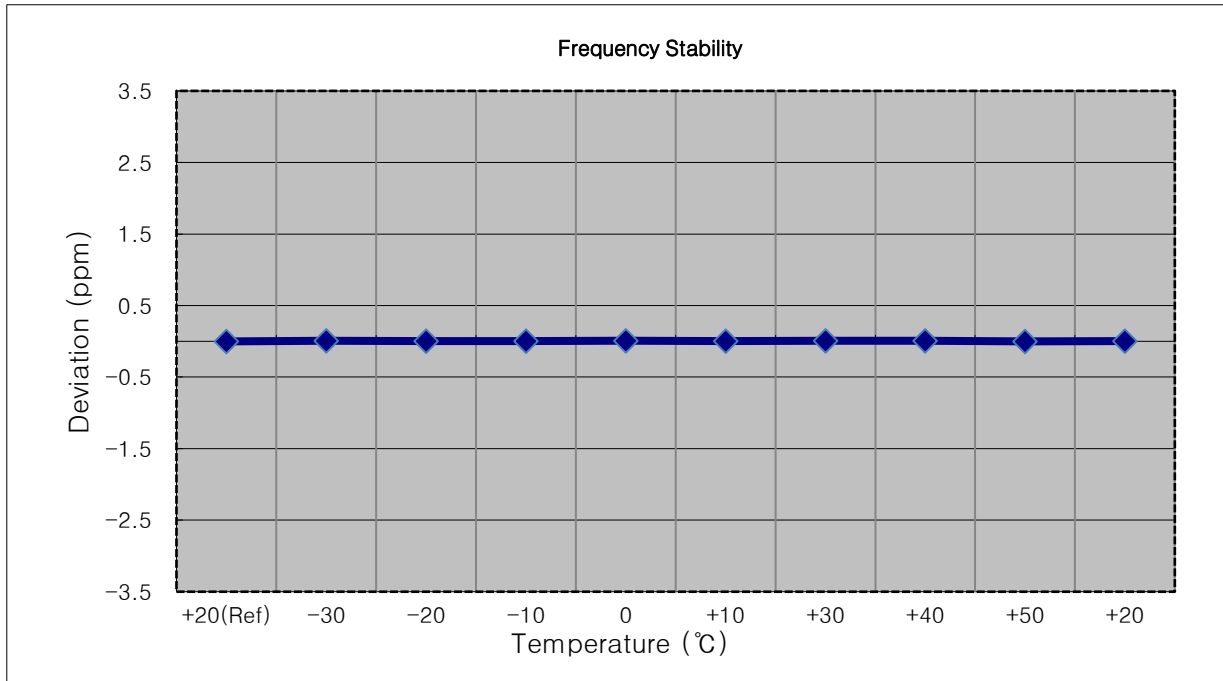


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 010	6.1	0.000 000	0.003
100 %		-20	1745 000 019	14.9	0.000 001	0.009
100 %		-10	1745 000 005	1.4	0.000 000	0.001
100 %		0	1745 000 009	4.7	0.000 000	0.003
100 %		+10	1745 000 016	12.2	0.000 001	0.007
100 %		+30	1745 000 014	9.6	0.000 001	0.005
100 %		+40	1745 000 016	12.3	0.000 001	0.007
100 %		+50	1745 000 004	-0.4	0.000 000	0.000
Batt. Endpoint	3.400	+20	1745 000 009	4.9	0.000 000	0.003

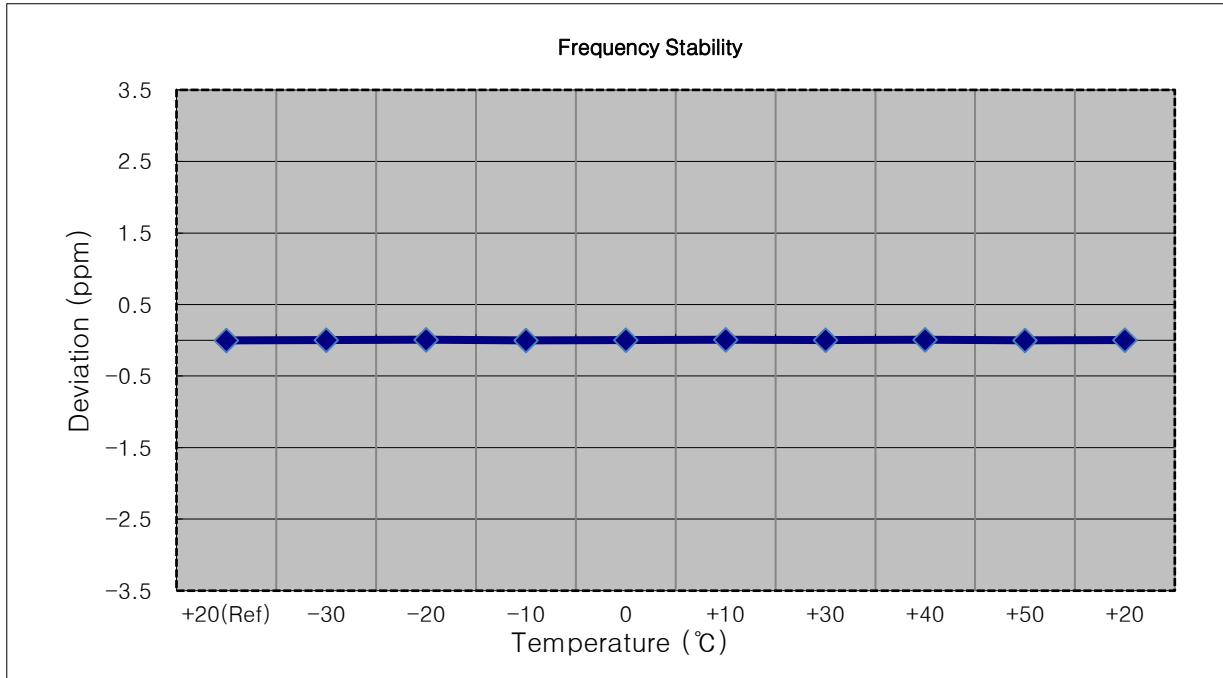


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 008	0.0	0.000 000	0.000
100 %		-30	1745 000 019	11.4	0.000 001	0.007
100 %		-20	1745 000 011	3.0	0.000 000	0.002
100 %		-10	1745 000 015	7.0	0.000 000	0.004
100 %		0	1745 000 017	9.1	0.000 001	0.005
100 %		+10	1745 000 008	0.2	0.000 000	0.000
100 %		+30	1745 000 010	2.4	0.000 000	0.001
100 %		+40	1745 000 007	-0.5	0.000 000	0.000
100 %		+50	1745 000 011	3.6	0.000 000	0.002
Batt. Endpoint	3.400	+20	1745 000 023	14.8	0.000 001	0.008

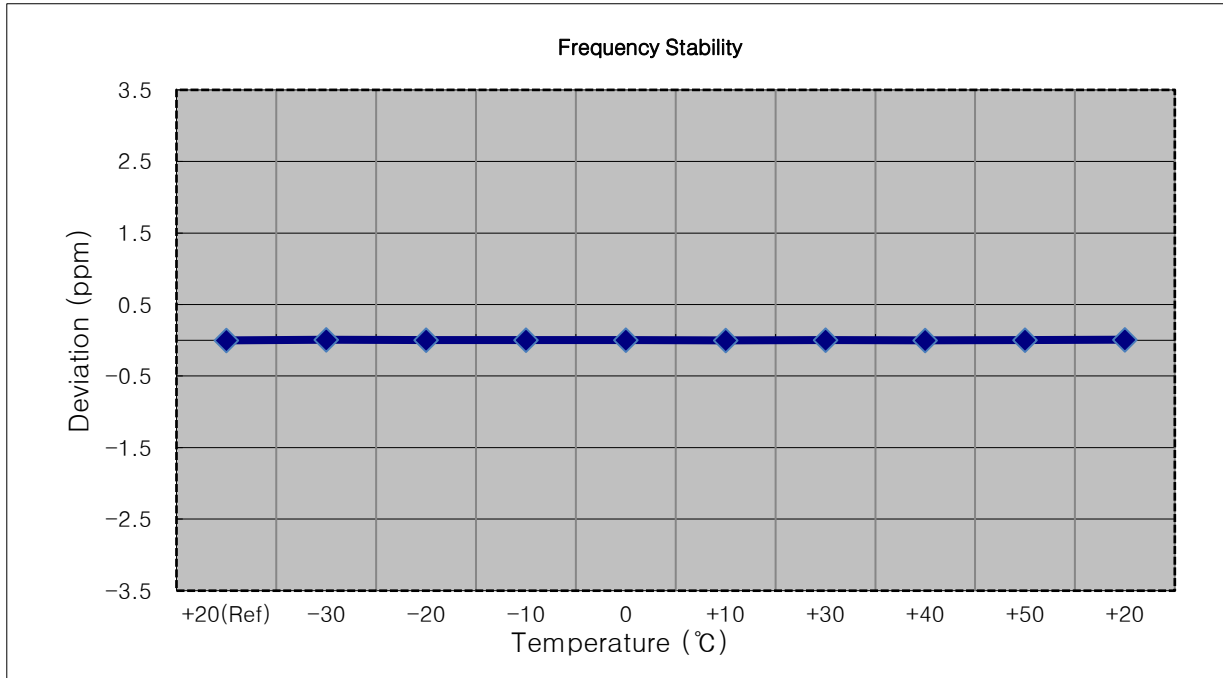


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 002	-0.6	0.000 000	0.000
100 %		-20	1745 000 013	10.2	0.000 001	0.006
100 %		-10	1745 000 010	7.6	0.000 000	0.004
100 %		0	1745 000 014	11.0	0.000 001	0.006
100 %		+10	1745 000 015	11.9	0.000 001	0.007
100 %		+30	1745 000 005	1.9	0.000 000	0.001
100 %		+40	1745 000 015	12.0	0.000 001	0.007
100 %		+50	1745 000 002	-0.5	0.000 000	0.000
Batt. Endpoint	3.400	+20	1745 000 001	-1.8	0.000 000	-0.001

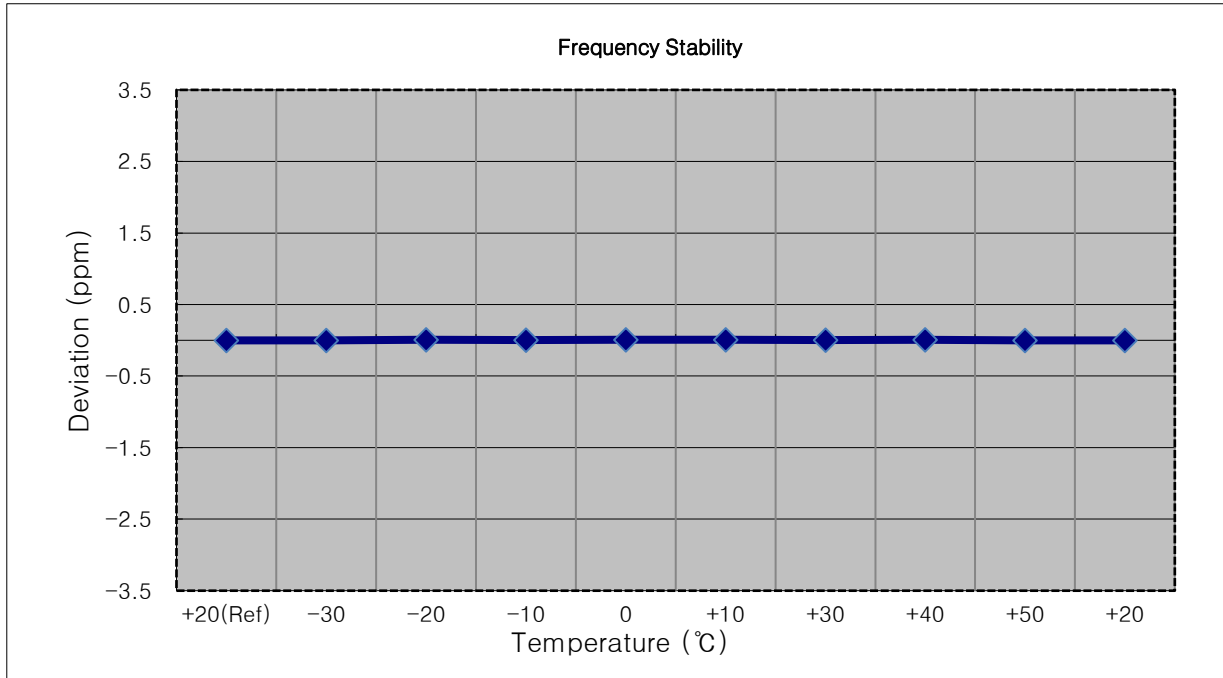


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 011	0.0	0.000 000	0.000
100 %		-30	1745 000 021	9.4	0.000 001	0.005
100 %		-20	1745 000 020	8.3	0.000 000	0.005
100 %		-10	1745 000 015	3.7	0.000 000	0.002
100 %		0	1745 000 020	8.3	0.000 000	0.005
100 %		+10	1745 000 023	11.7	0.000 001	0.007
100 %		+30	1745 000 024	13.1	0.000 001	0.007
100 %		+40	1745 000 013	1.8	0.000 000	0.001
100 %		+50	1745 000 010	1745 000 010	-1.6	0.000 000
Batt. Endpoint	3.400	+20	1745 000 013	1.1	0.000 000	0.001

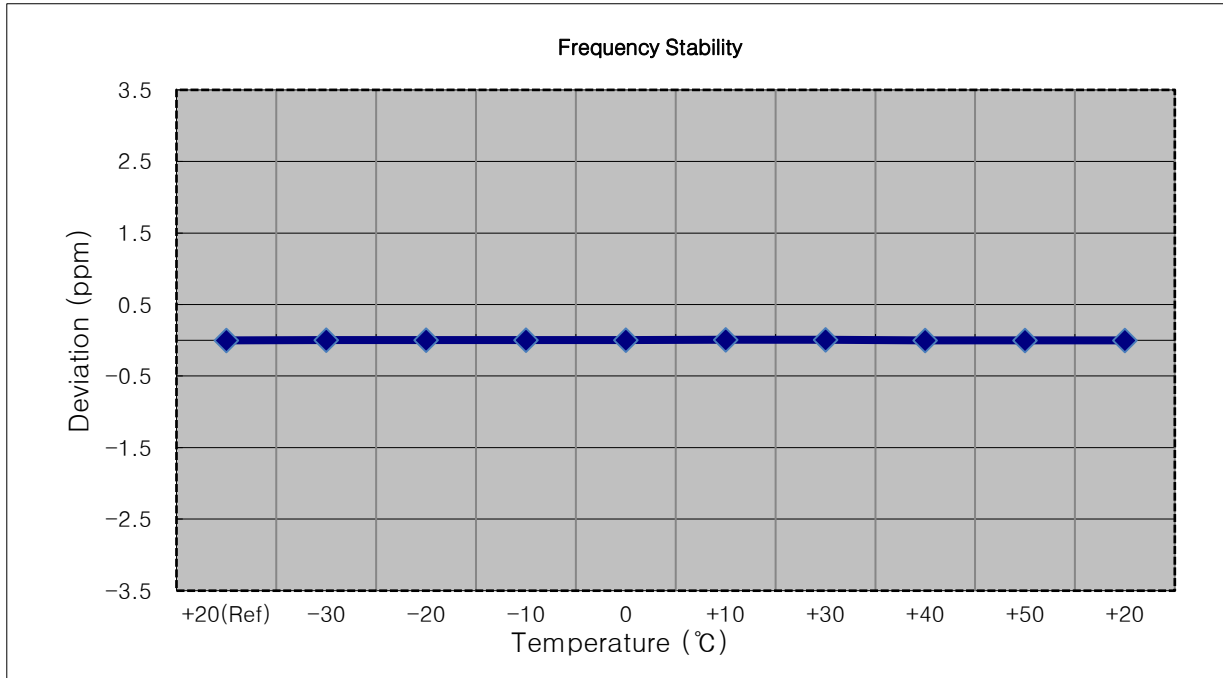


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 008	0.0	0.000 000	0.000
100 %		-30	1745 000 016	7.6	0.000 000	0.004
100 %		-20	1745 000 023	14.6	0.000 001	0.008
100 %		-10	1745 000 010	2.2	0.000 000	0.001
100 %		0	1745 000 008	0.3	0.000 000	0.000
100 %		+10	1745 000 018	10.0	0.000 001	0.006
100 %		+30	1745 000 010	1.7	0.000 000	0.001
100 %		+40	1745 000 024	15.5	0.000 001	0.009
100 %		+50	1745 000 015	7.3	0.000 000	0.004
Batt. Endpoint	3.400	+20	1745 000 022	13.6	0.000 001	0.008

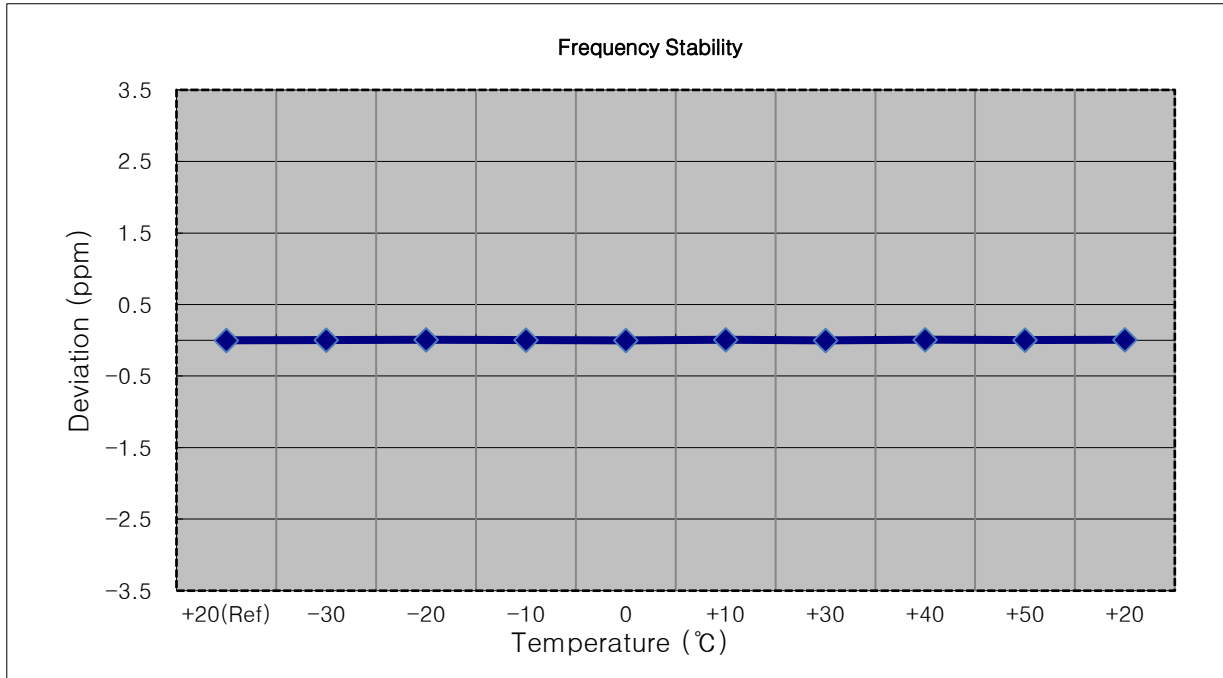


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 011	0.0	0.000 000	0.000
100 %		-30	1745 000 018	7.5	0.000 000	0.004
100 %		-20	1745 000 012	1.4	0.000 000	0.001
100 %		-10	1745 000 011	0.2	0.000 000	0.000
100 %		0	1745 000 026	15.0	0.000 001	0.009
100 %		+10	1745 000 016	4.9	0.000 000	0.003
100 %		+30	1745 000 027	15.9	0.000 001	0.009
100 %		+40	1745 000 015	4.4	0.000 000	0.003
100 %		+50	1745 000 024	13.3	0.000 001	0.008
Batt. Endpoint	3.400	+20	1745 000 022	10.9	0.000 001	0.006

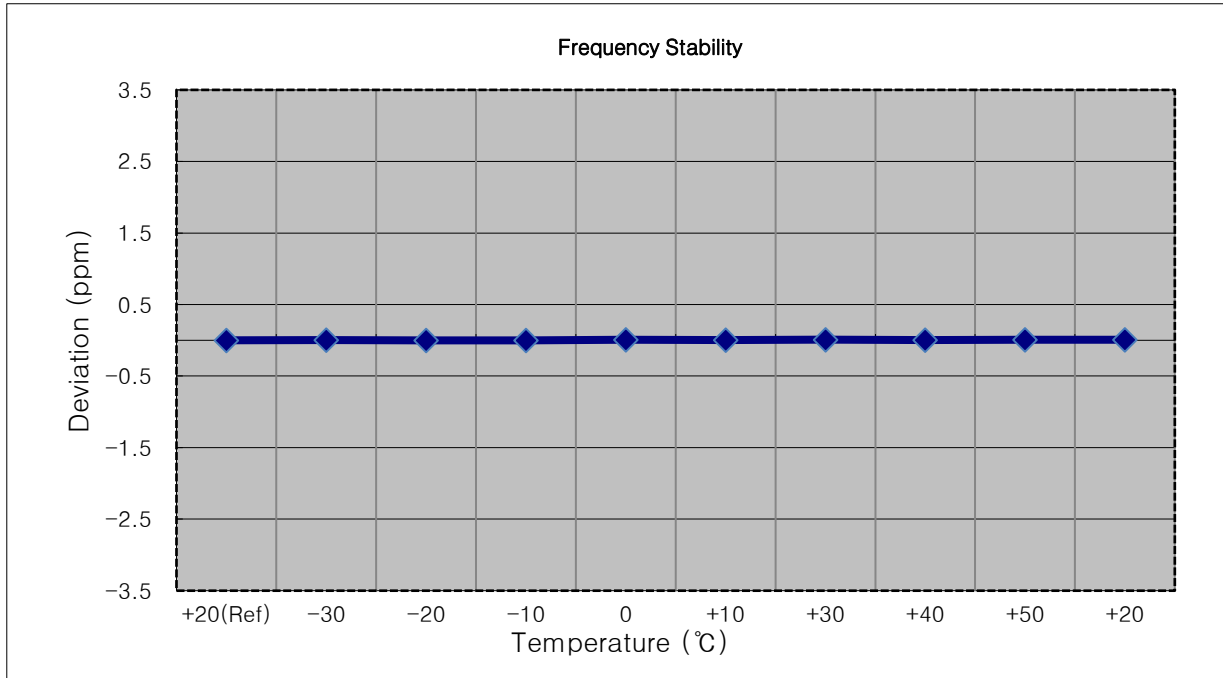


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 300 012	0.0	0.000 000	0.000
100 %		-30	1779 300 014	2.8	0.000 000	0.002
100 %		-20	1779 300 025	13.9	0.000 001	0.008
100 %		-10	1779 300 027	15.5	0.000 001	0.009
100 %		0	1779 300 014	2.5	0.000 000	0.001
100 %		+10	1779 300 024	11.9	0.000 001	0.007
100 %		+30	1779 300 022	10.8	0.000 001	0.006
100 %		+40	1779 300 020	8.3	0.000 000	0.005
100 %		+50	1779 300 020	8.2	0.000 000	0.005
Batt. Endpoint	3.400	+20	1779 300 011	-0.3	0.000 000	0.000

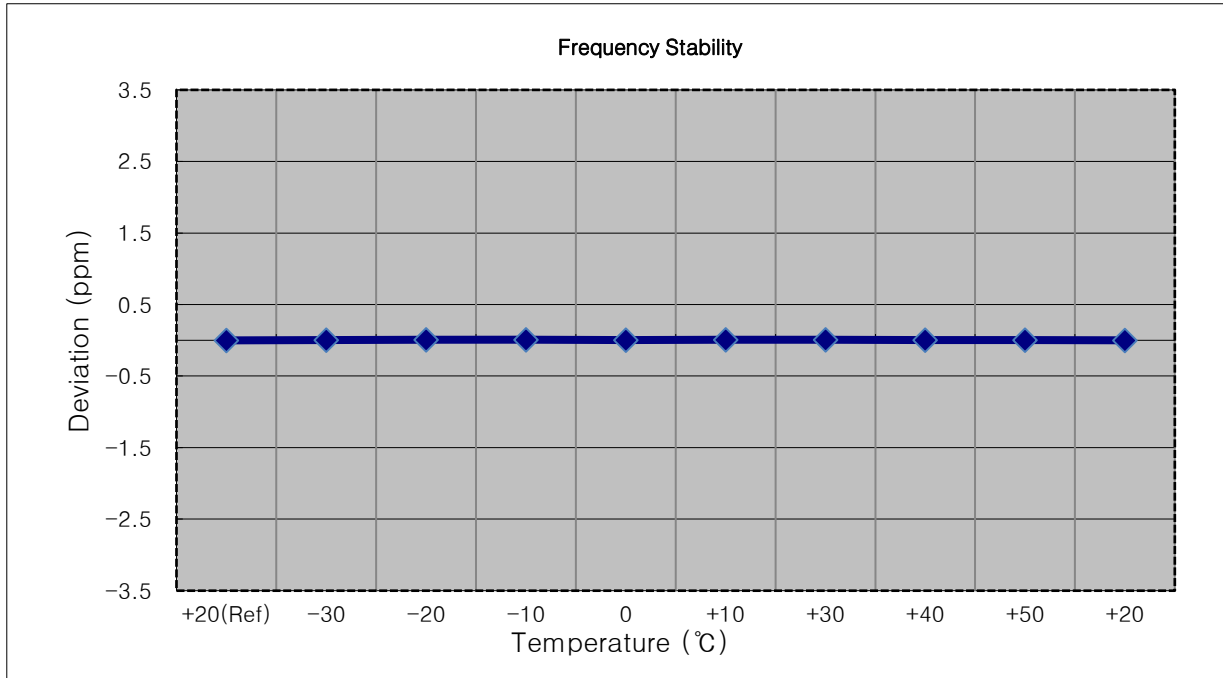


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 008	0.0	0.000 000	0.000
100 %		-30	1778 500 012	4.4	0.000 000	0.002
100 %		-20	1778 500 015	7.2	0.000 000	0.004
100 %		-10	1778 500 015	7.7	0.000 000	0.004
100 %		0	1778 500 019	11.5	0.000 001	0.006
100 %		+10	1778 500 007	-1.0	0.000 000	-0.001
100 %		+30	1778 500 021	13.3	0.000 001	0.007
100 %		+40	1778 500 019	11.5	0.000 001	0.006
100 %		+50	1778 500 017	9.8	0.000 001	0.005
Batt. Endpoint	3.400	+20	1778 500 017	9.1	0.000 001	0.005

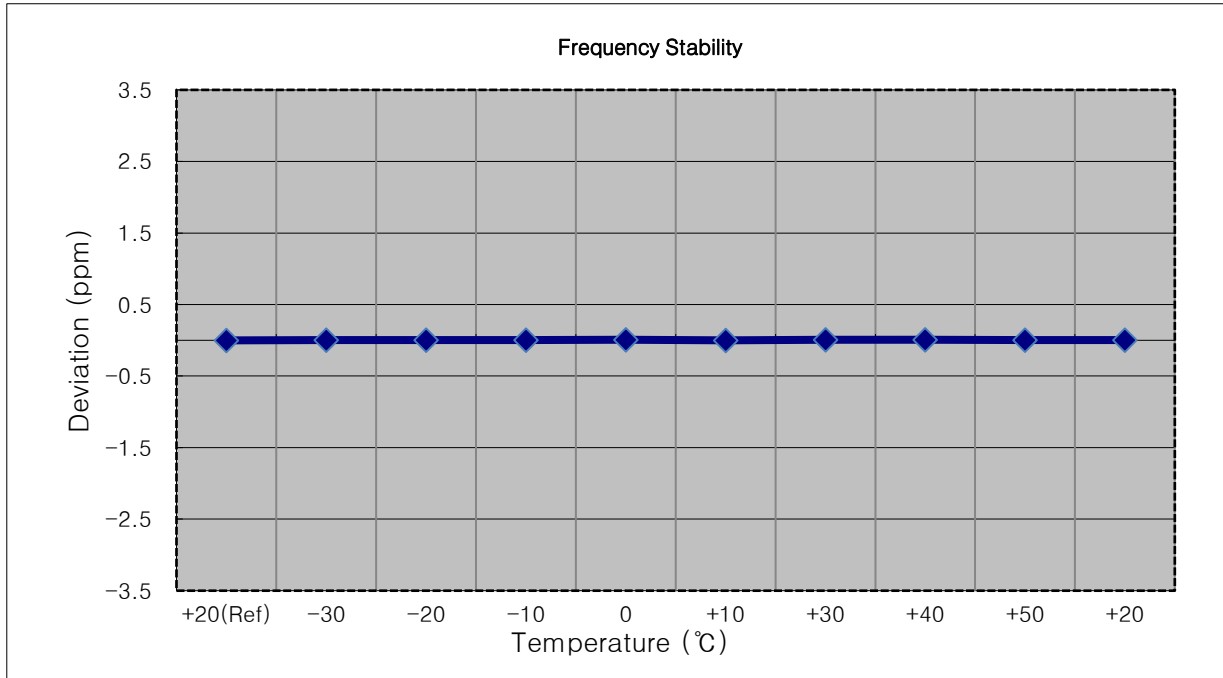


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777.500.000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 500 013	0.0	0.000 000	0.000
100 %		-30	1777 500 018	4.6	0.000 000	0.003
100 %		-20	1777 500 017	3.7	0.000 000	0.002
100 %		-10	1777 500 022	8.5	0.000 000	0.005
100 %		0	1777 500 013	0.0	0.000 000	0.000
100 %		+10	1777 500 028	14.8	0.000 001	0.008
100 %		+30	1777 500 027	13.9	0.000 001	0.008
100 %		+40	1777 500 021	7.5	0.000 000	0.004
100 %		+50	1777 500 023	9.6	0.000 001	0.005
Batt. Endpoint	3.400	+20	1777 500 018	4.4	0.000 000	0.002

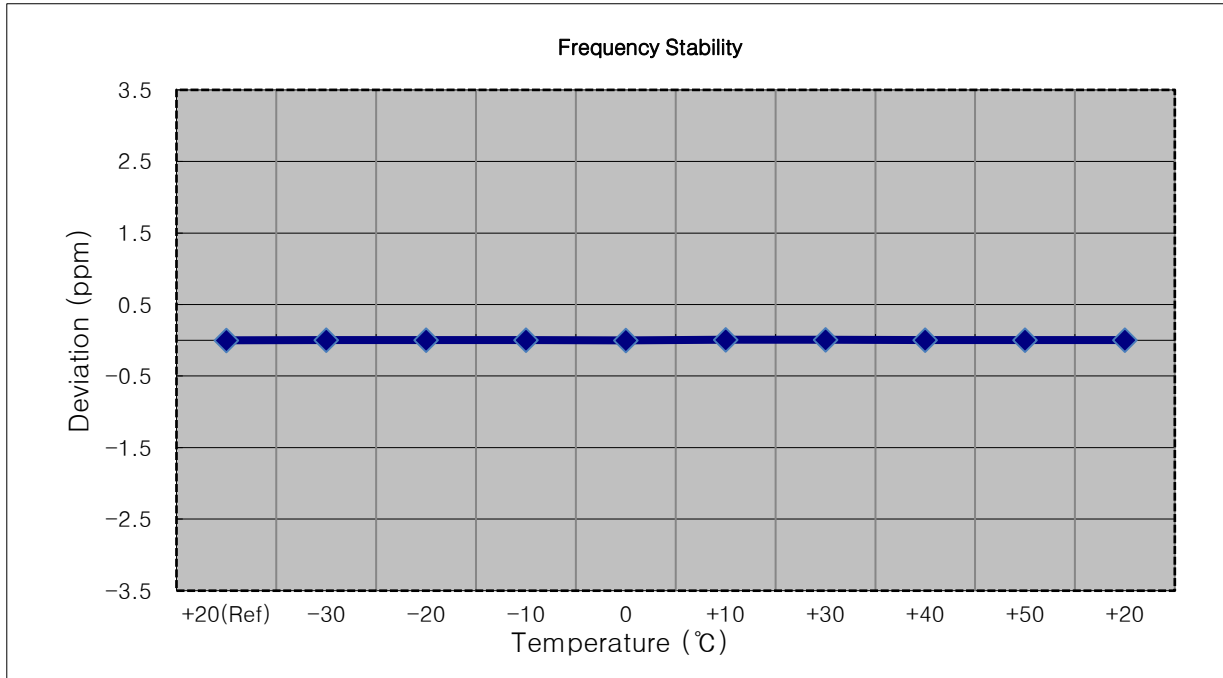


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1775 000 004	0.0	0.000 000	0.000
100 %		-30	1775 000 014	9.6	0.000 001	0.005
100 %		-20	1775 000 011	6.9	0.000 000	0.004
100 %		-10	1775 000 011	7.0	0.000 000	0.004
100 %		0	1775 000 020	15.6	0.000 001	0.009
100 %		+10	1775 000 013	9.0	0.000 001	0.005
100 %		+30	1775 000 011	6.5	0.000 000	0.004
100 %		+40	1775 000 006	1.8	0.000 000	0.001
100 %		+50	1775 000 007	2.2	0.000 000	0.001
Batt. Endpoint		3.400	+20	1775 000 021	16.2	0.000 001

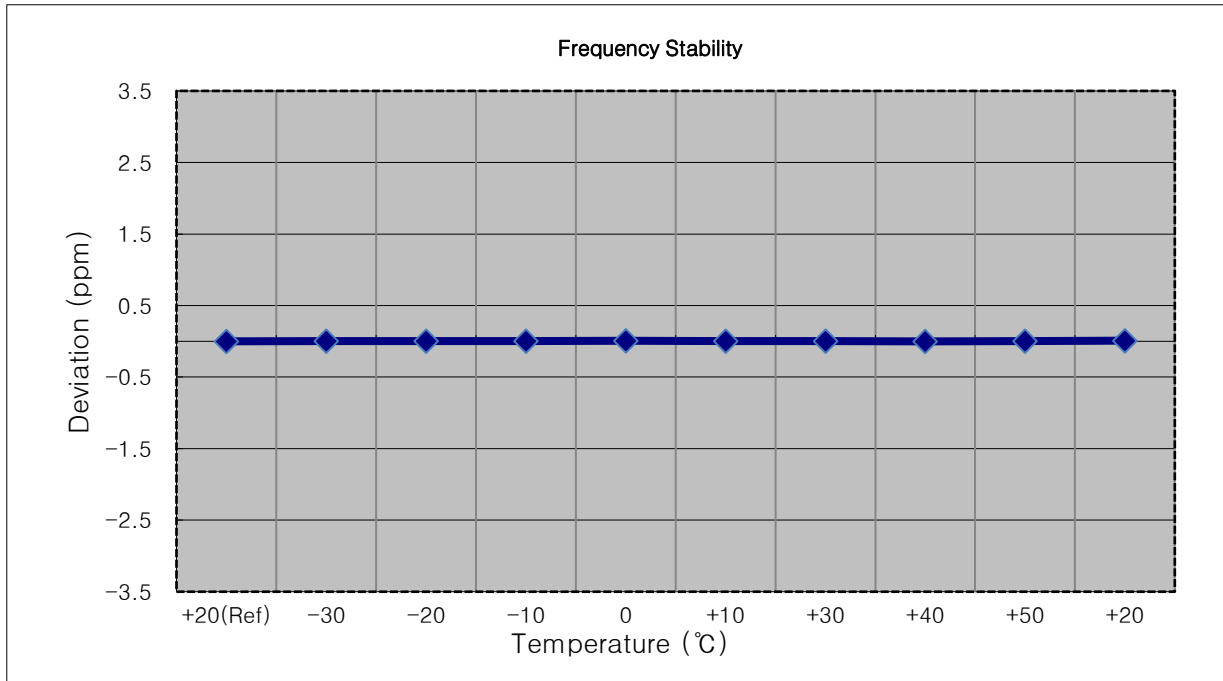


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772.500.000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 500 004	0.0	0.000 000	0.000
100 %		-30	1772 500 014	10.1	0.000 001	0.006
100 %		-20	1772 500 004	0.1	0.000 000	0.000
100 %		-10	1772 500 012	8.2	0.000 000	0.005
100 %		0	1772 500 007	3.6	0.000 000	0.002
100 %		+10	1772 500 003	-0.2	0.000 000	0.000
100 %		+30	1772 500 019	15.0	0.000 001	0.008
100 %		+40	1772 500 006	2.5	0.000 000	0.001
100 %		+50	1772 500 014	10.7	0.000 001	0.006
Batt. Endpoint		3.400	+20	1772 500 016	12.4	0.000 001

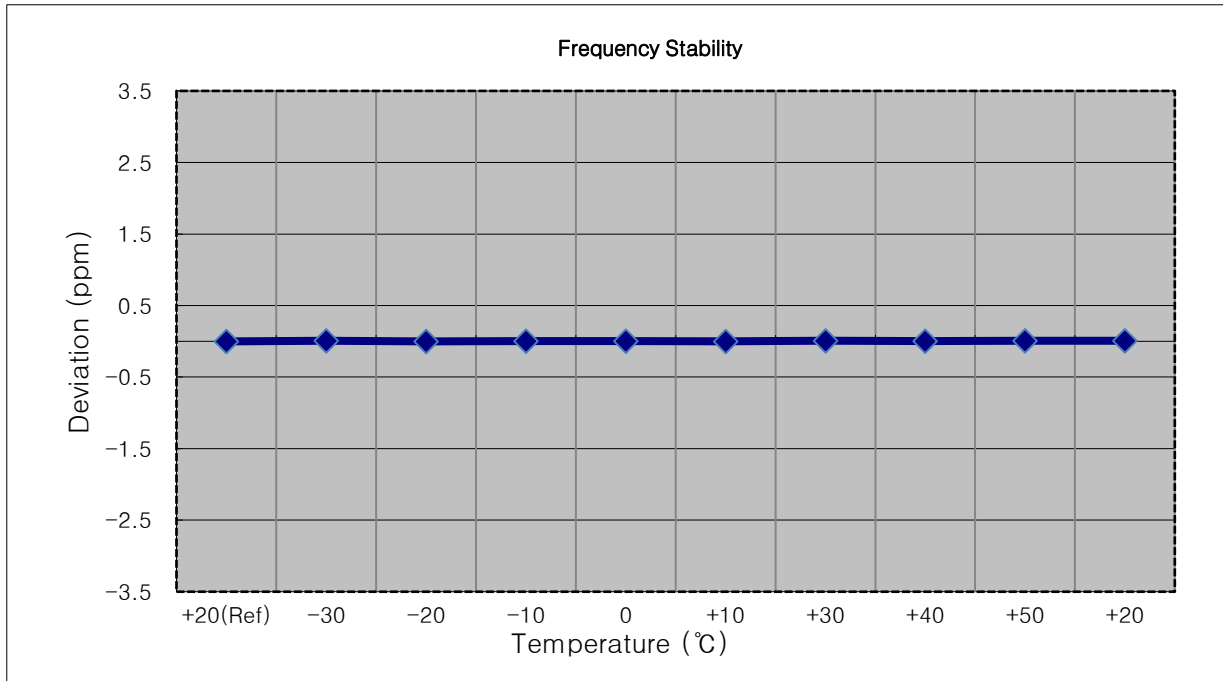

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1770 000 006	0.0	0.000 000	0.000
100 %		-30	1770 000 017	10.4	0.000 001	0.006
100 %		-20	1770 000 006	-0.5	0.000 000	0.000
100 %		-10	1770 000 017	10.4	0.000 001	0.006
100 %		0	1770 000 016	10.2	0.000 001	0.006
100 %		+10	1770 000 016	10.3	0.000 001	0.006
100 %		+30	1770 000 014	7.7	0.000 000	0.004
100 %		+40	1770 000 012	5.4	0.000 000	0.003
100 %		+50	1770 000 006	-0.2	0.000 000	0.000
Batt. Endpoint	3.400	+20	1770 000 015	9.0	0.000 001	0.005

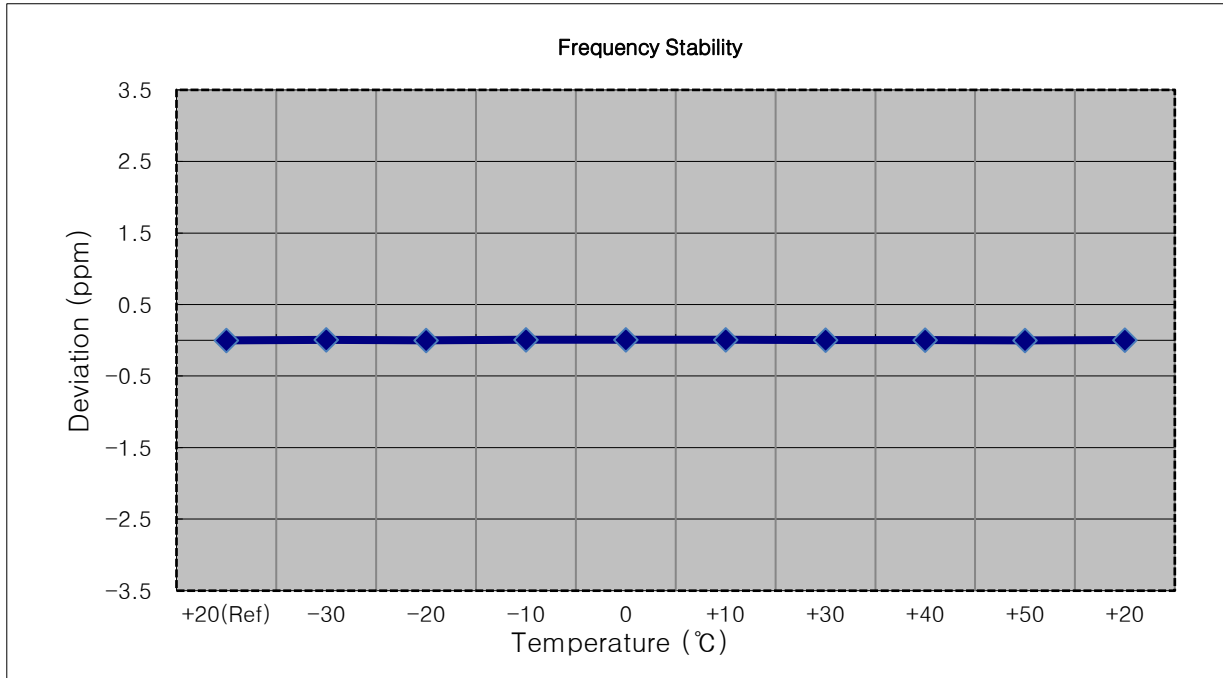

9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Main2 Ant)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)



BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)

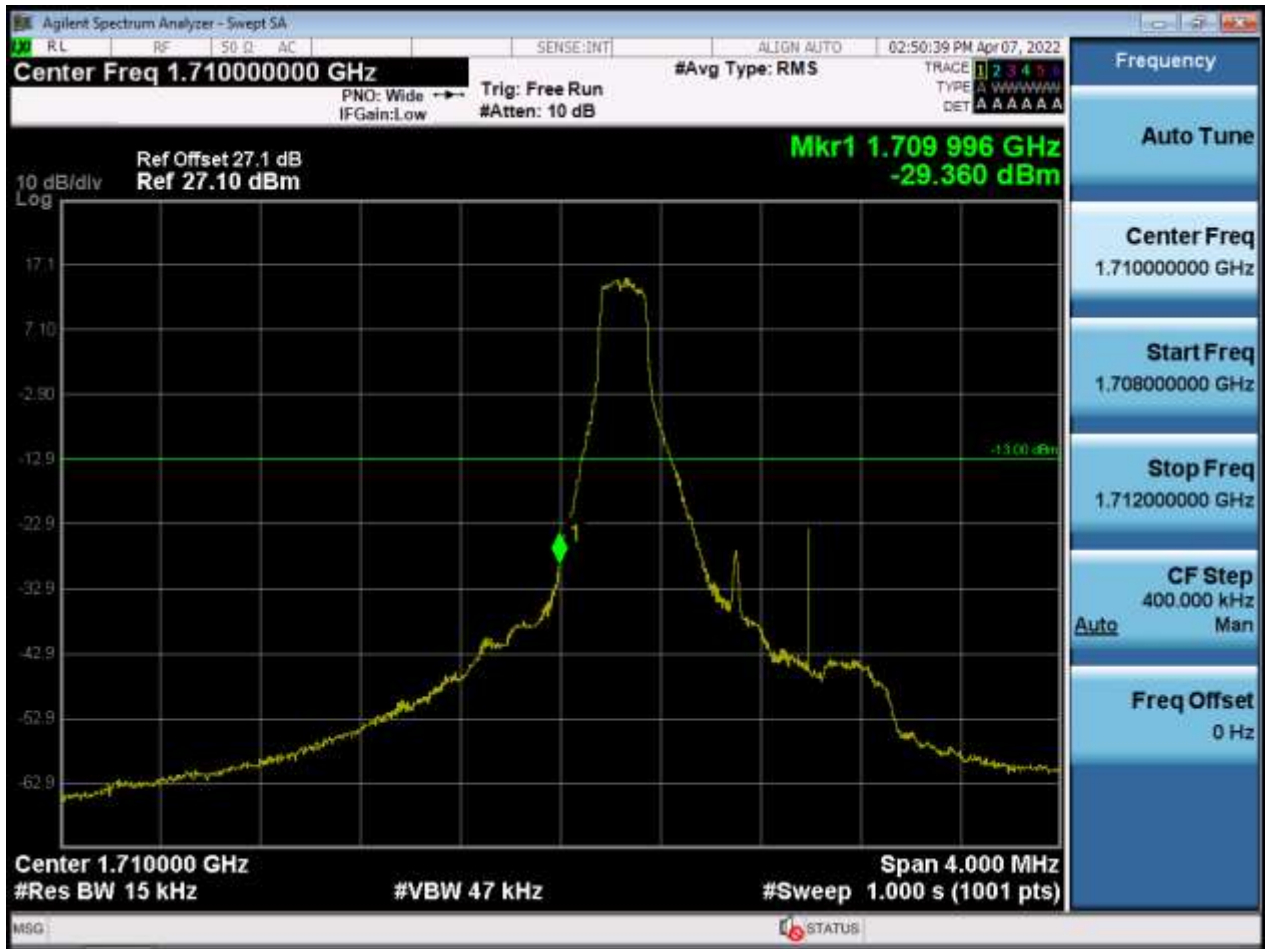


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Main2 Ant)



BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Main2 Ant)

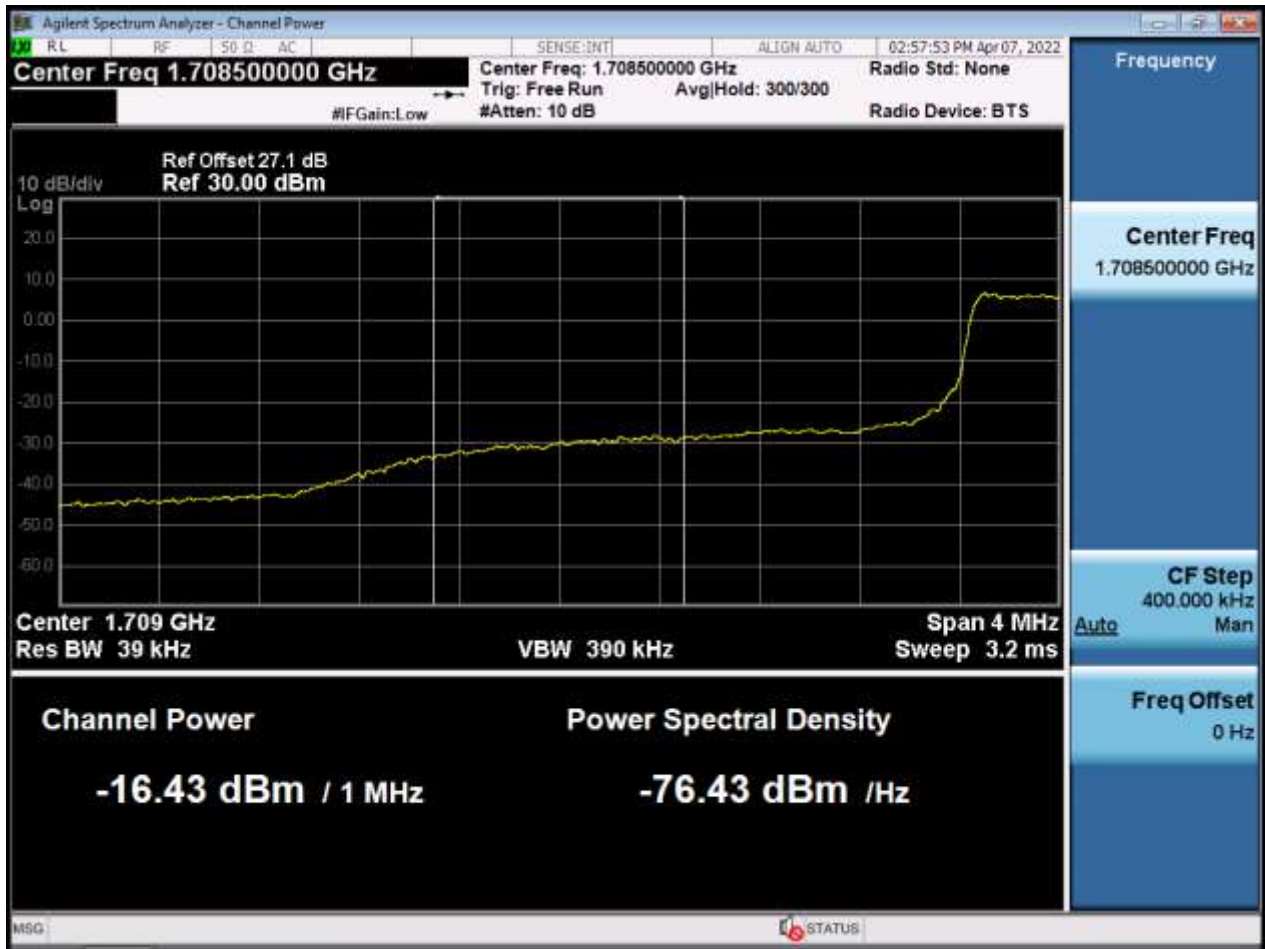


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)




BW3 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)

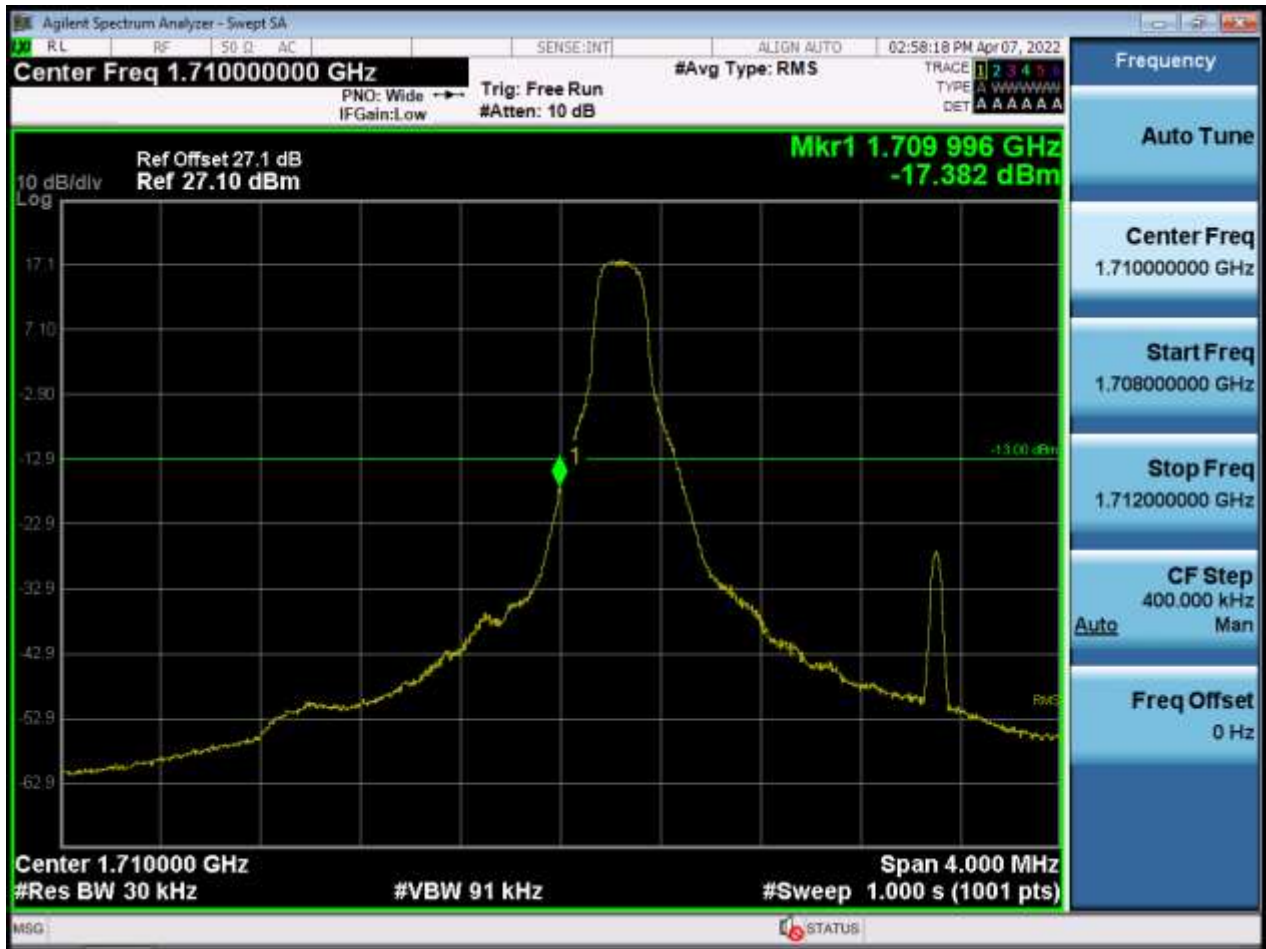

BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Main2 Ant)




BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Main2 Ant)

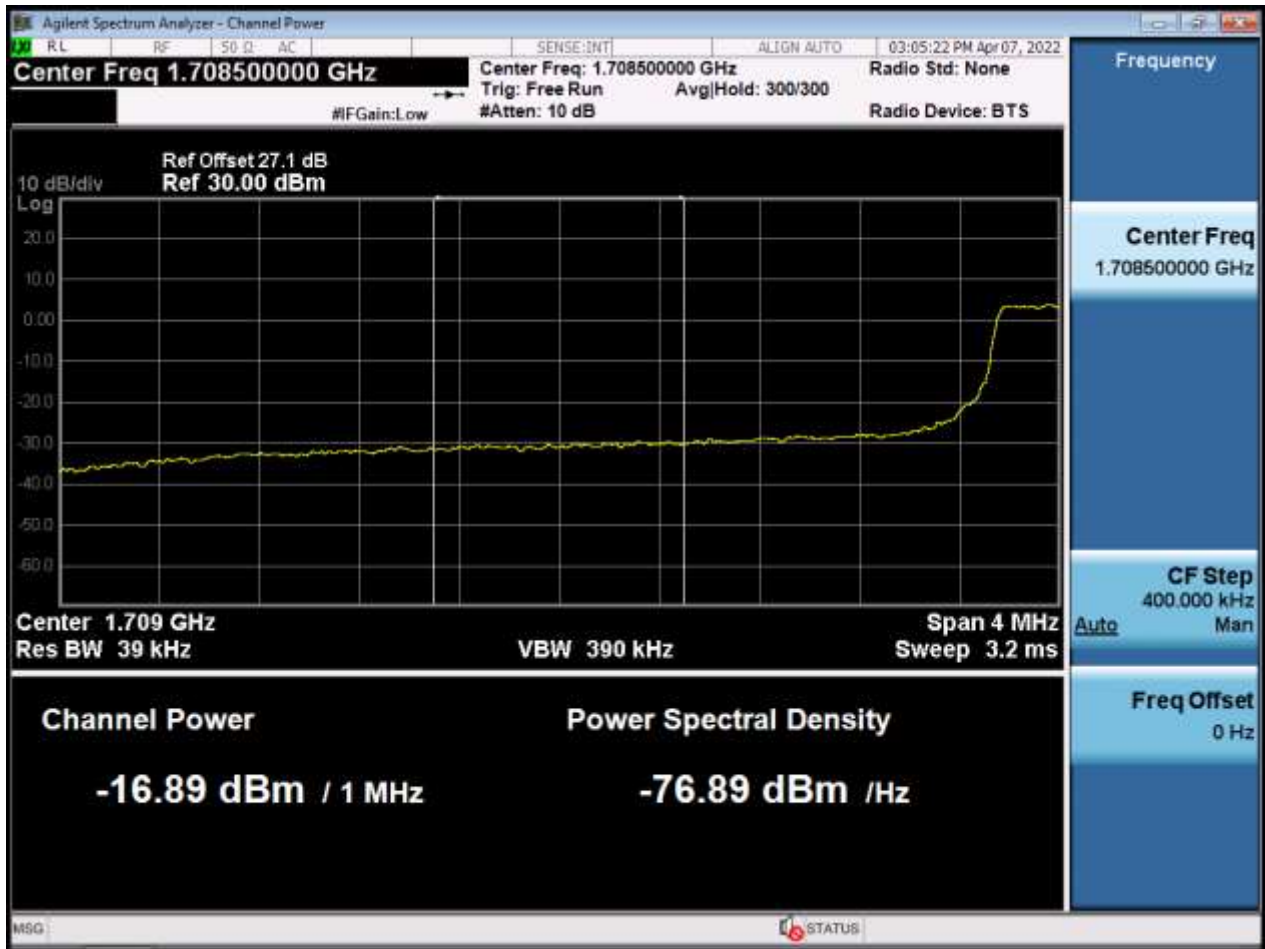


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)

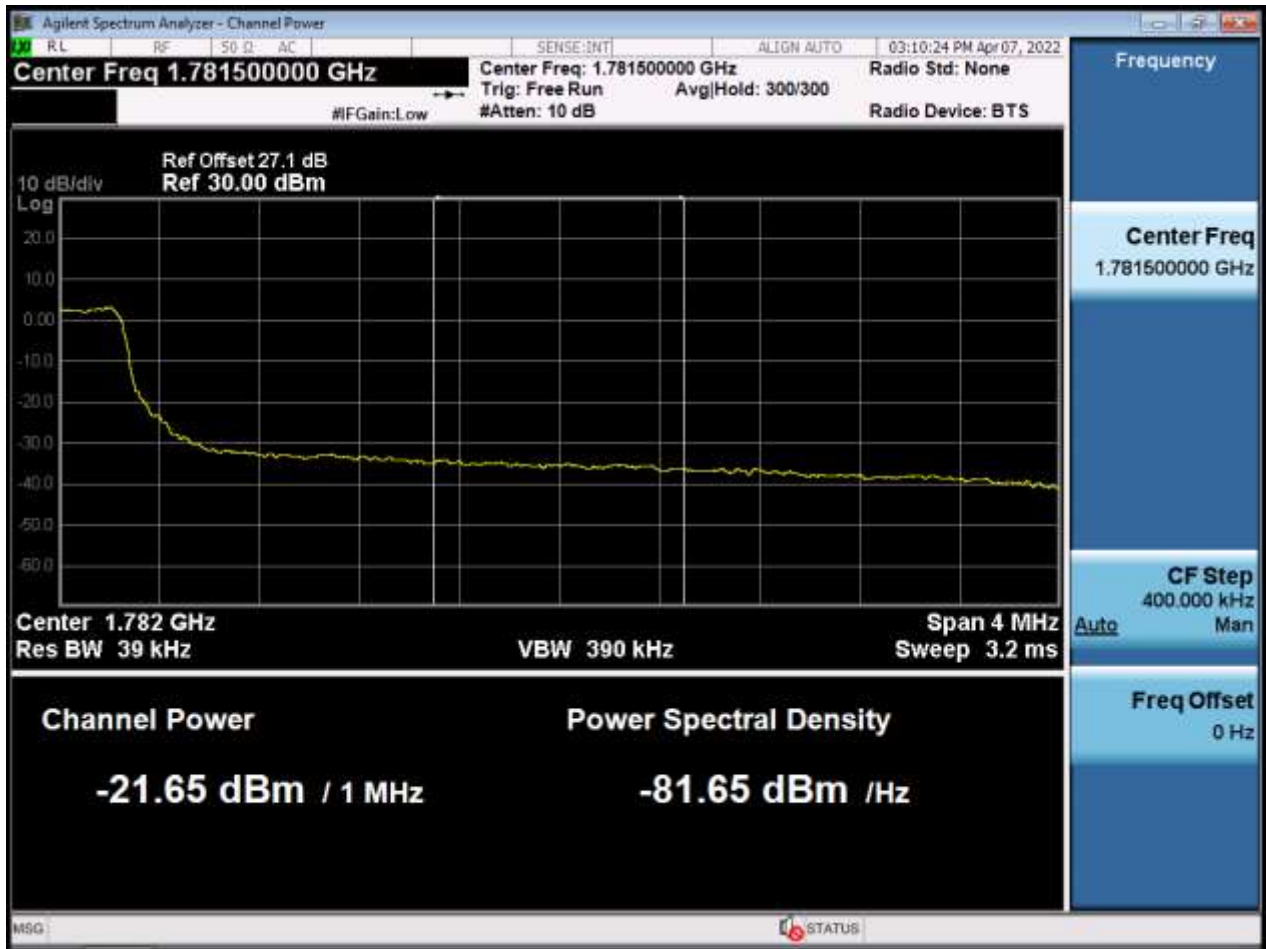

BW5 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)

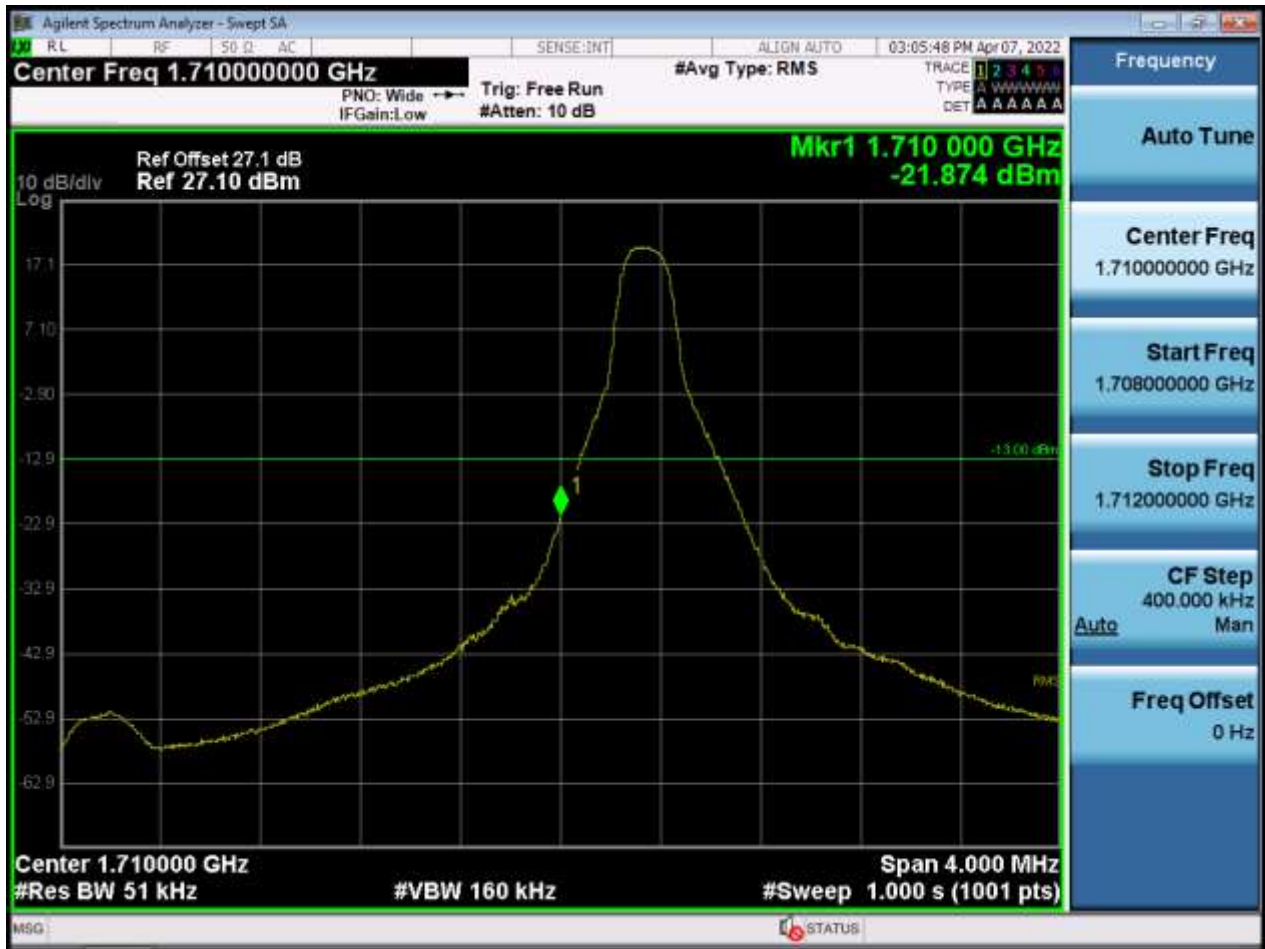


BW5 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)

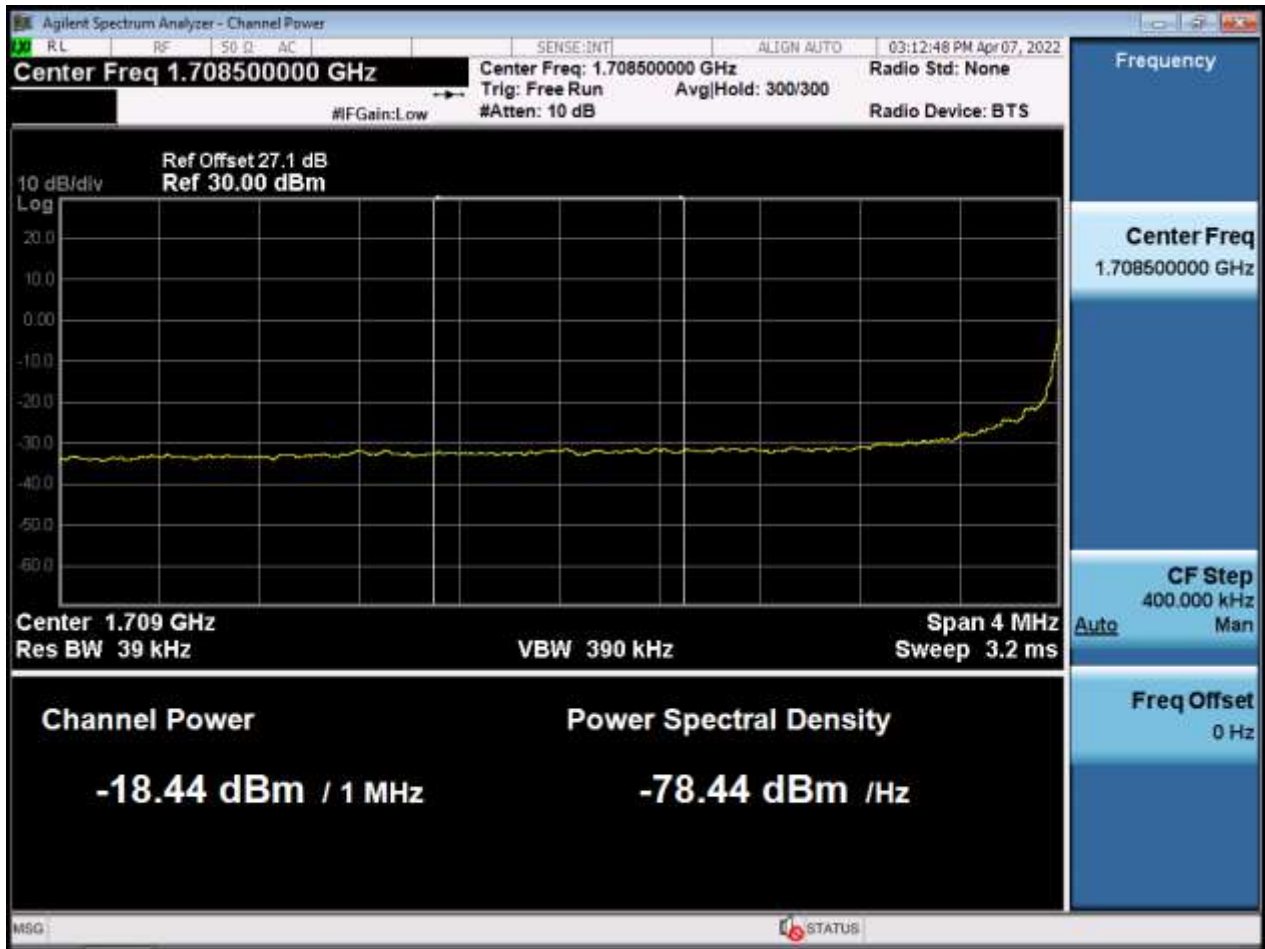

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)



BW10 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)




BW15 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Main2 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Main2 Ant)

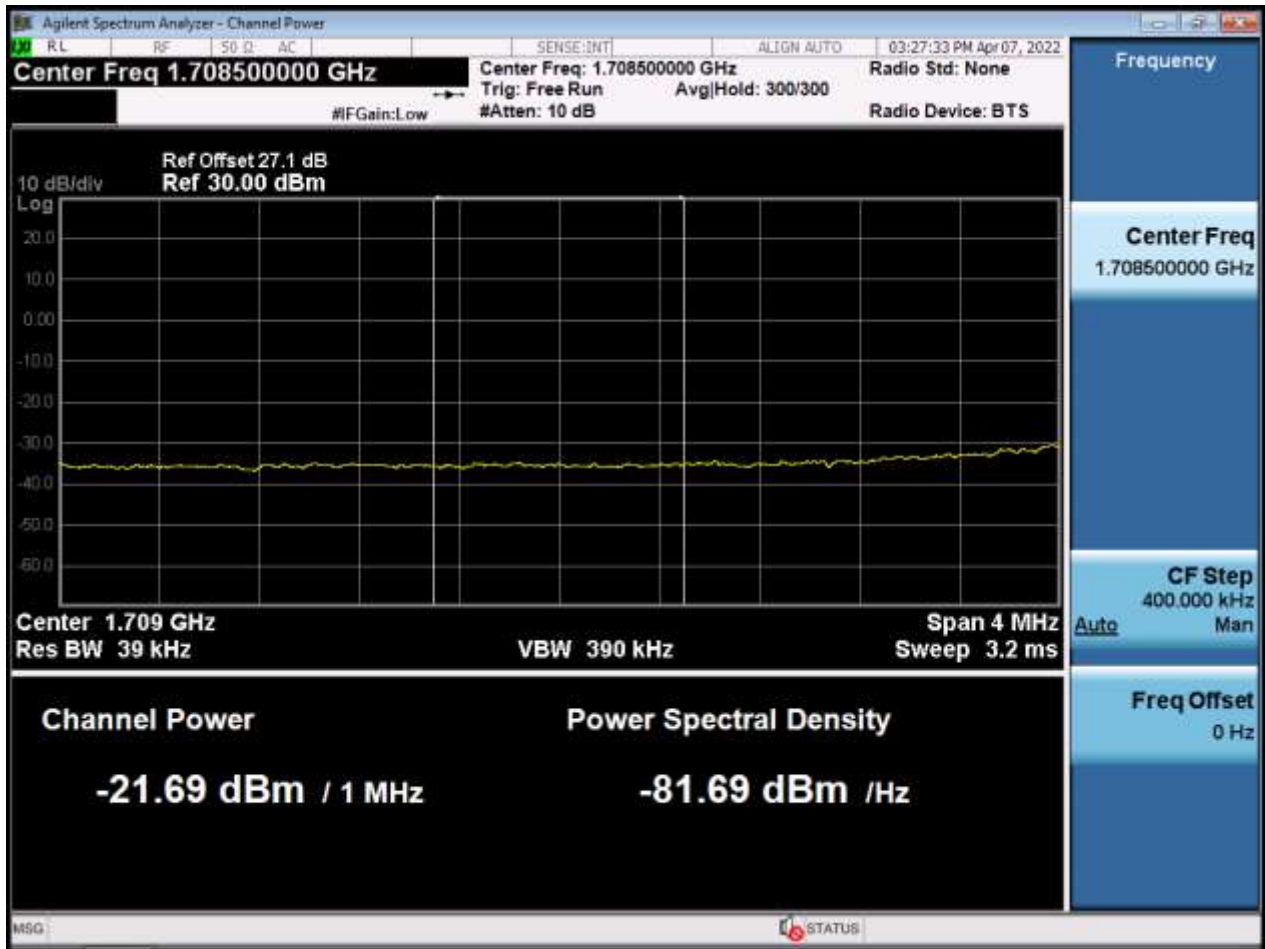

BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Main2 Ant)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Main2 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_1RB(Main2 Ant)



BW20 M_BandEdge_Highest Channel_QPSK_1RB(Main2 Ant)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Sub1 Ant)




BW1.4 M_BandEdge_Lowest Channel_QPSK_FullIRB(2) (Sub1 Ant)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)

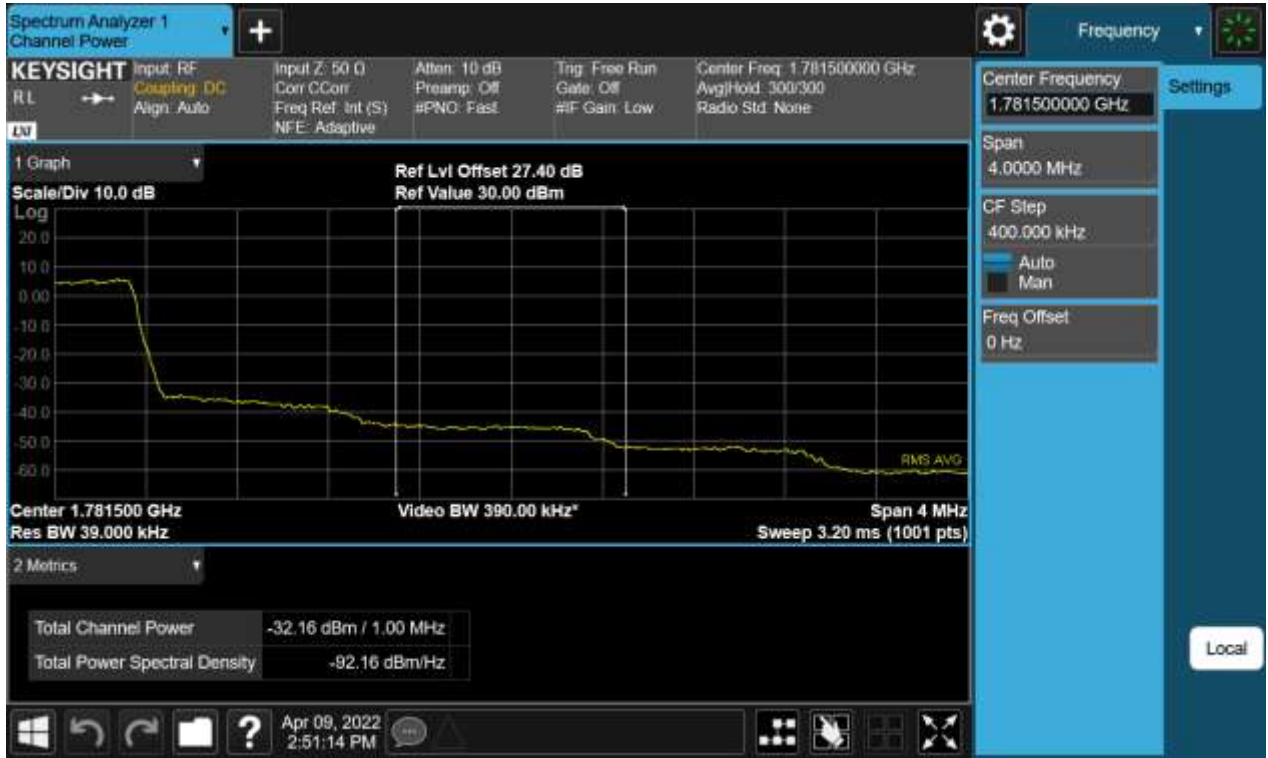

BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)

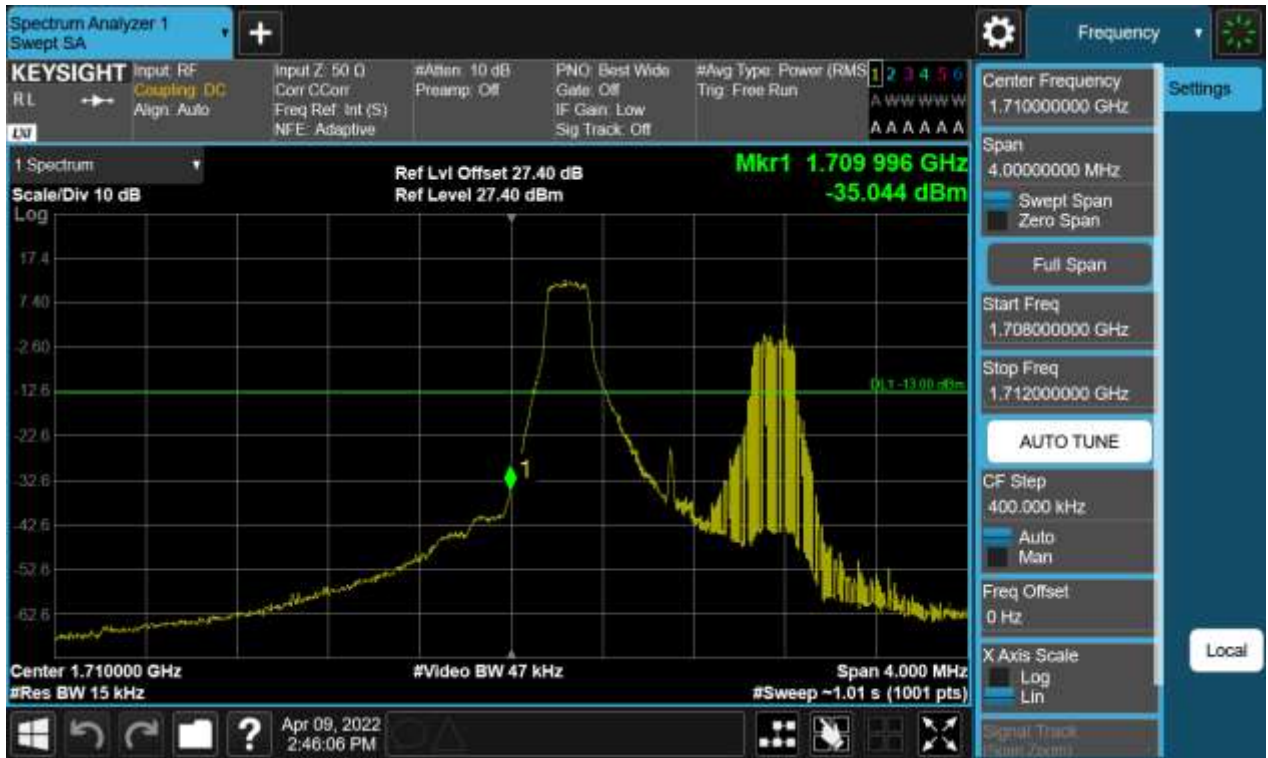


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW3 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

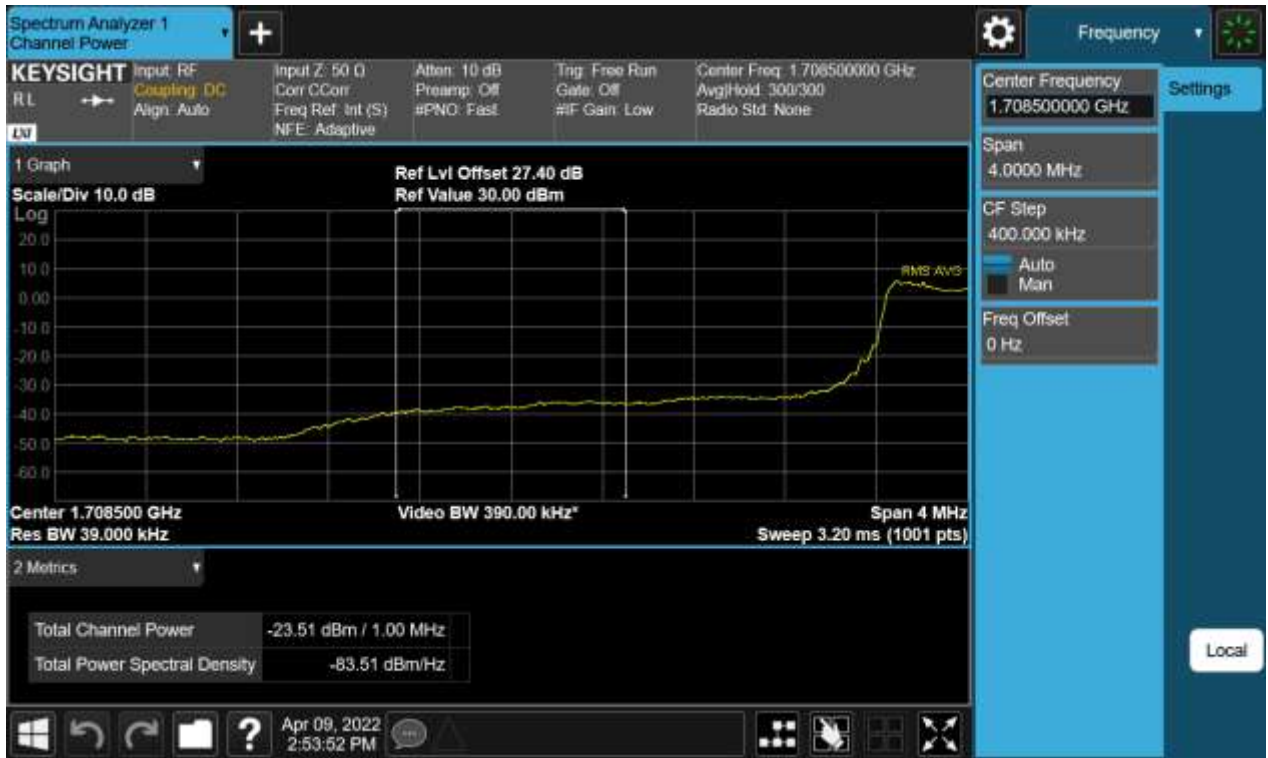

BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1) (Sub1 Ant)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Sub1 Ant)

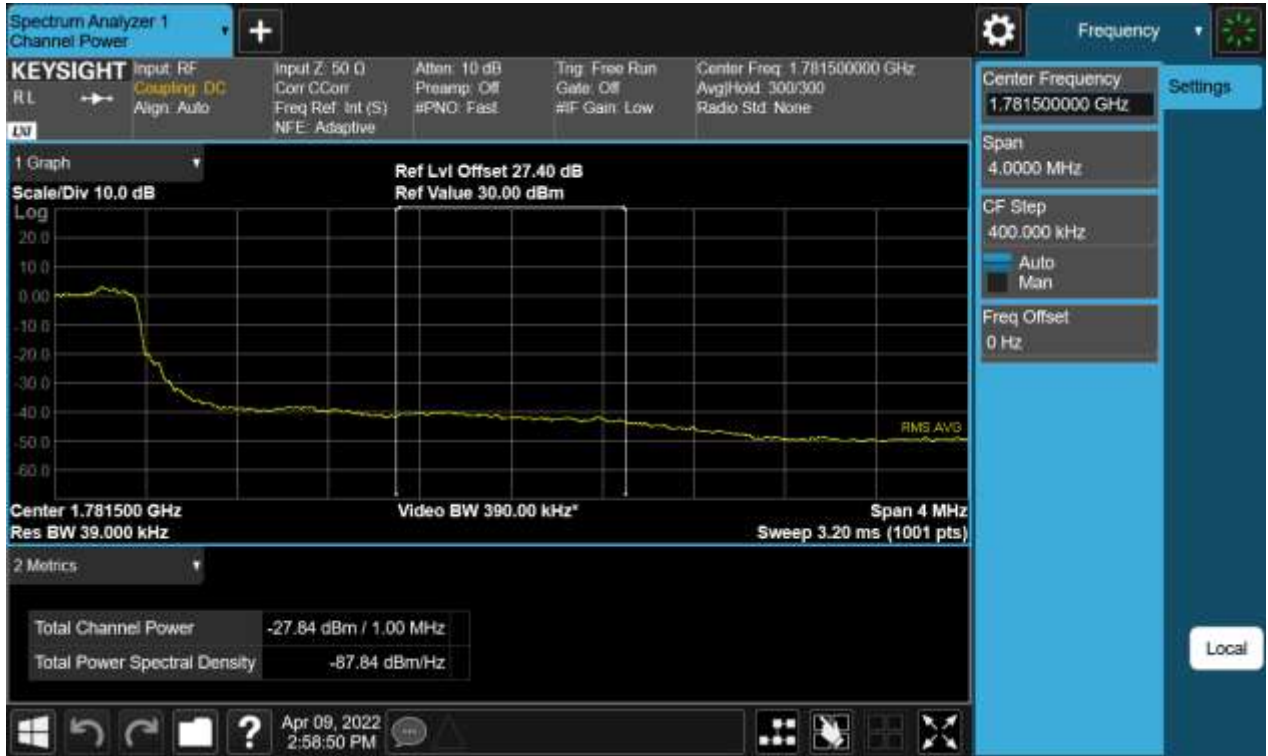

BW3 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW3 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW5 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

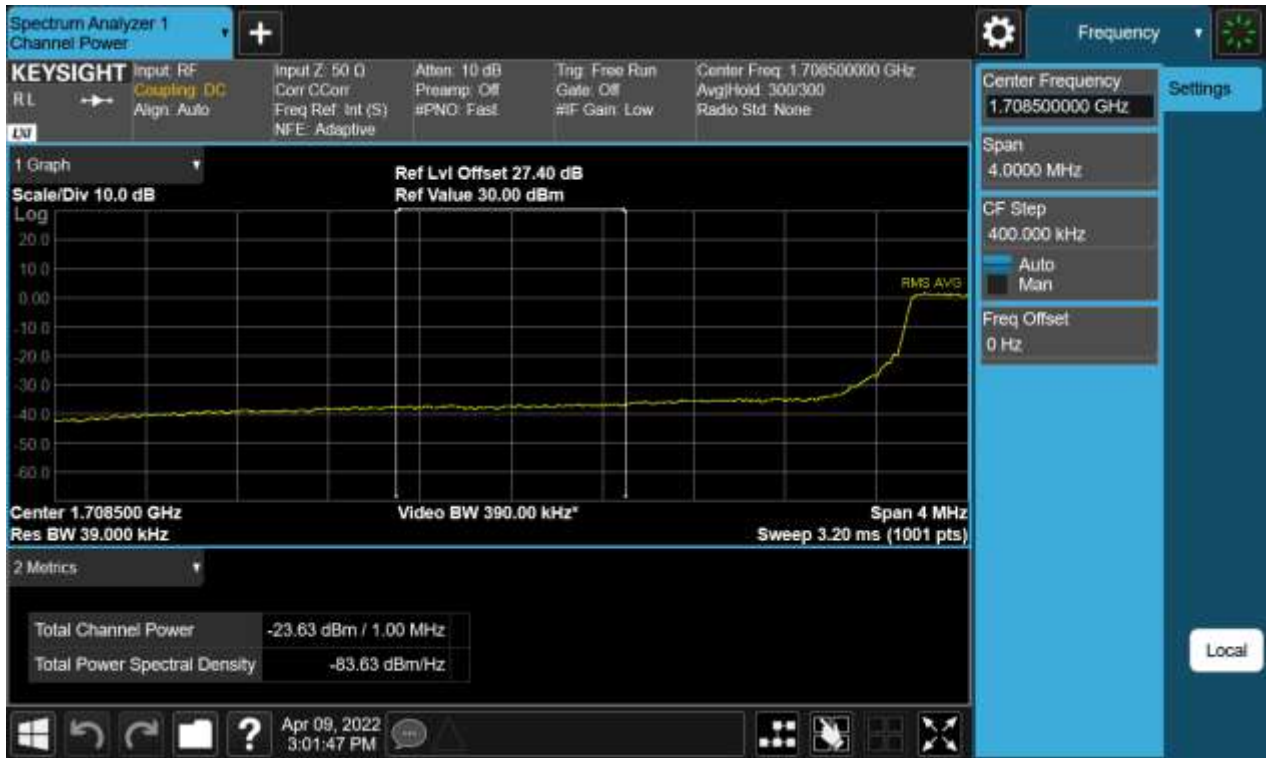


BW5 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2) (Sub1 Ant)



BW5 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)

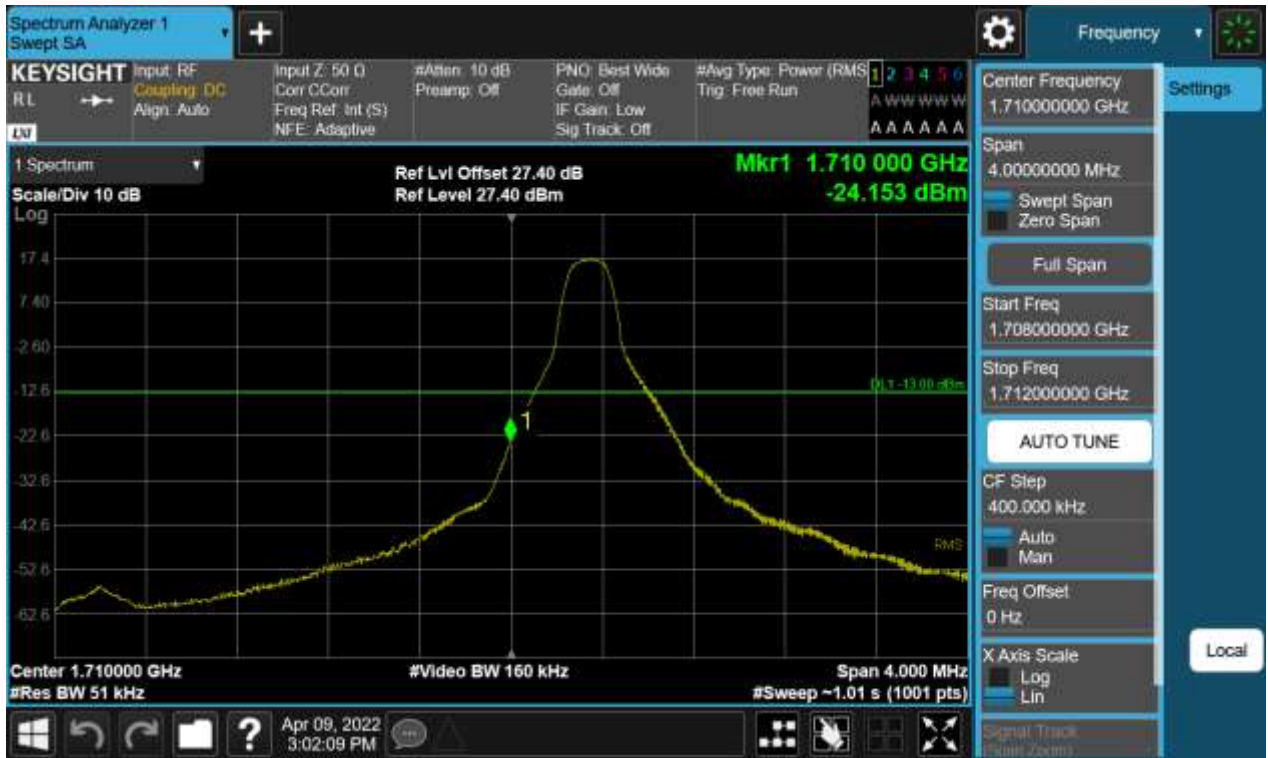


BW5 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

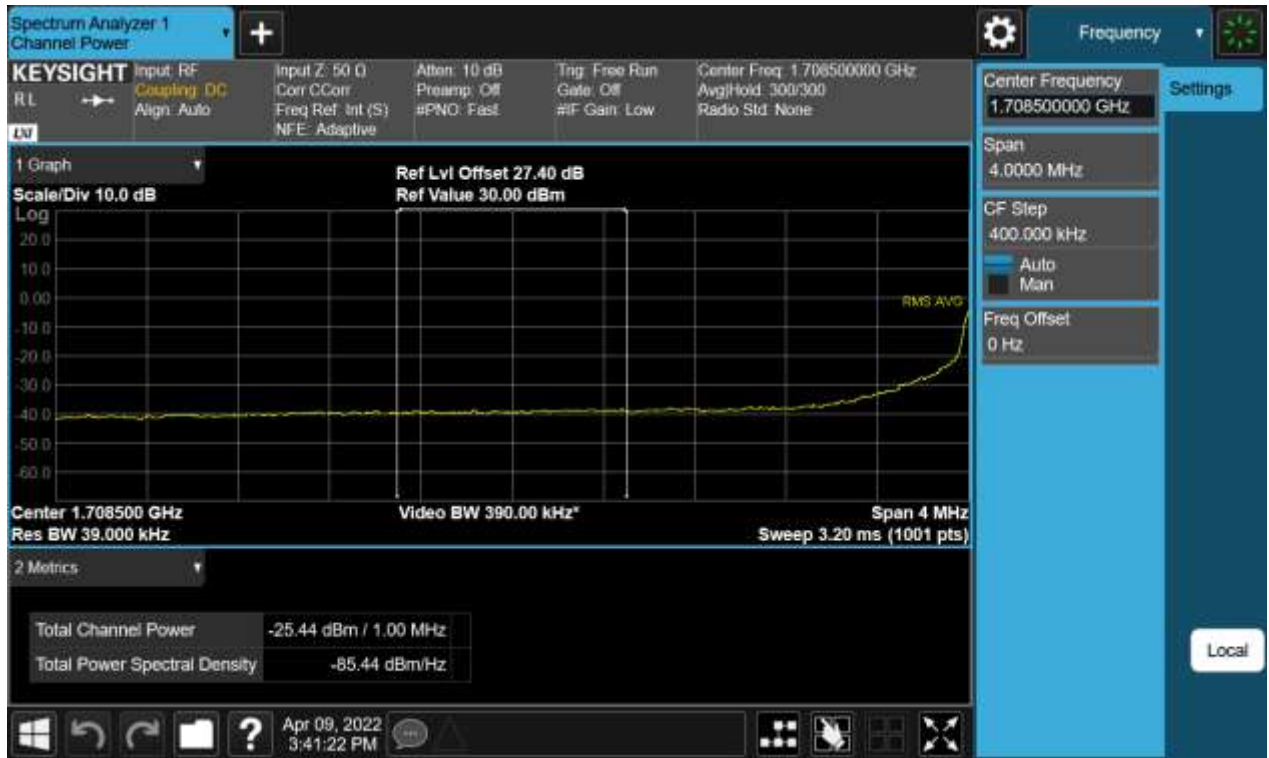

BW10 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW10 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)

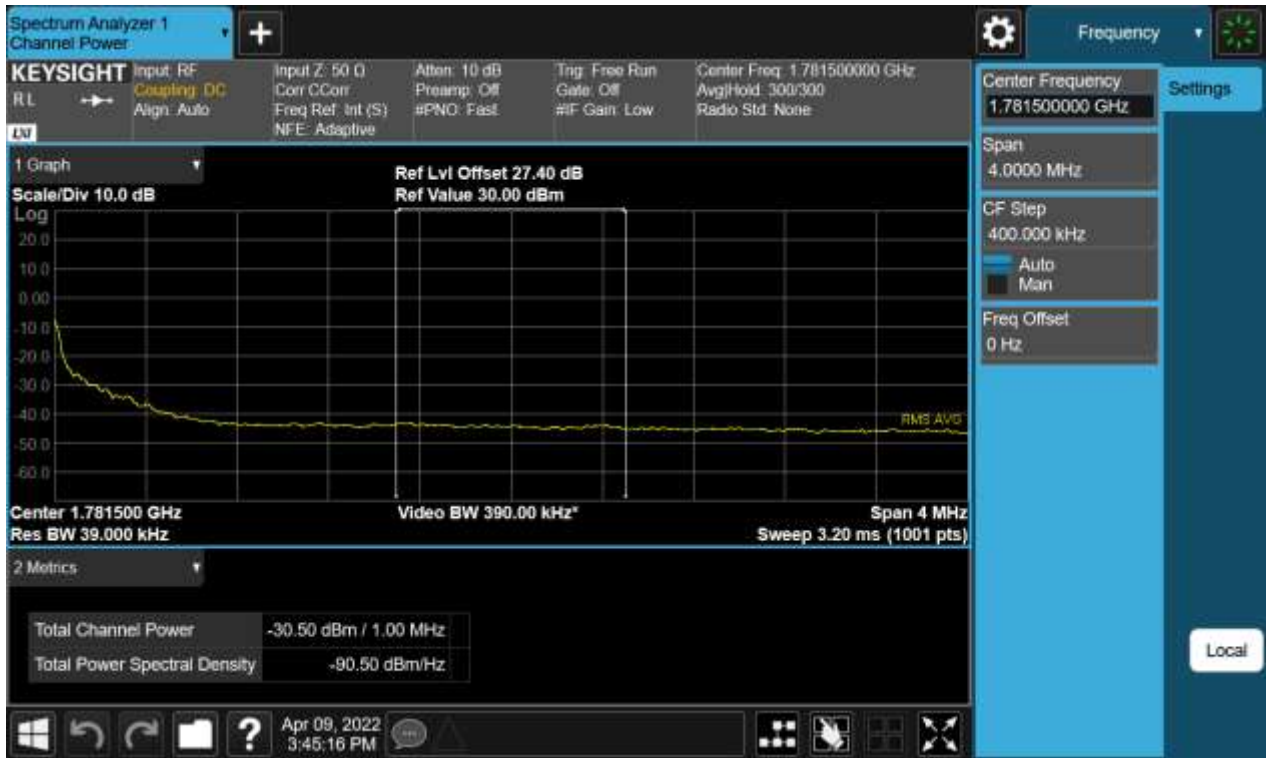

BW10 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)




BW10 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)




BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)

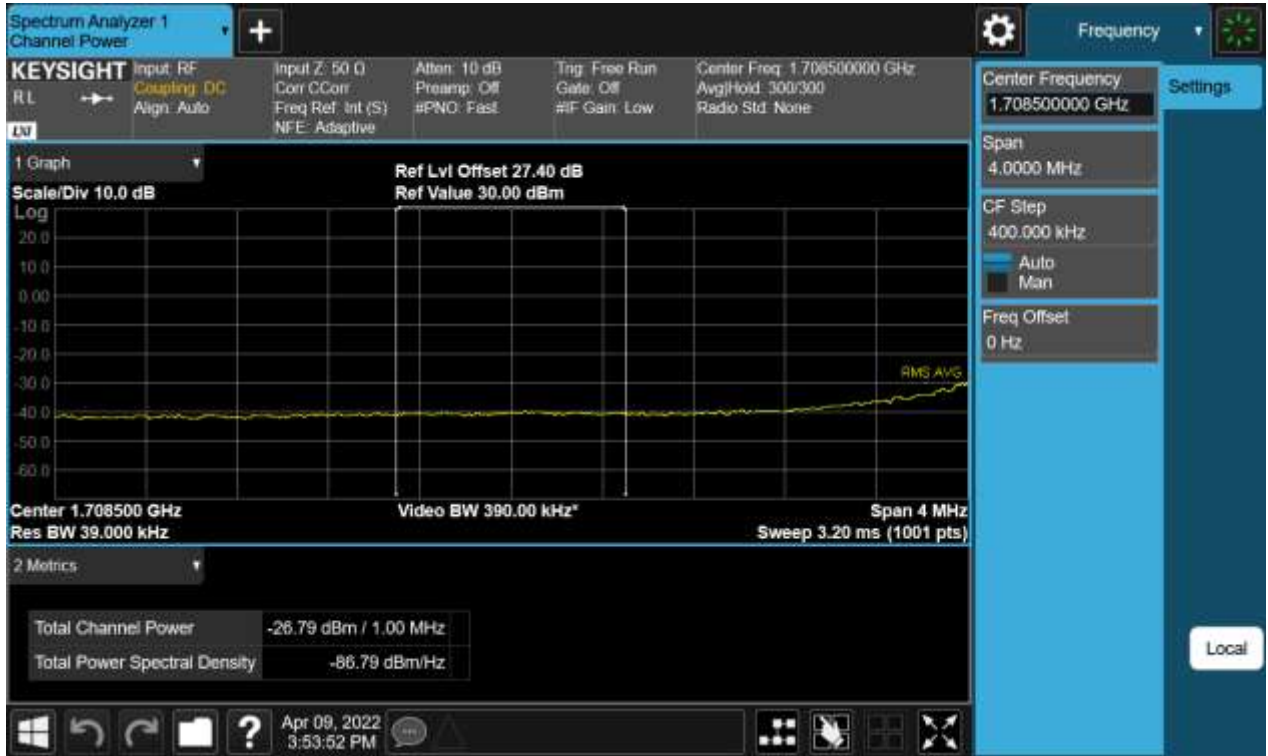

BW15 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)

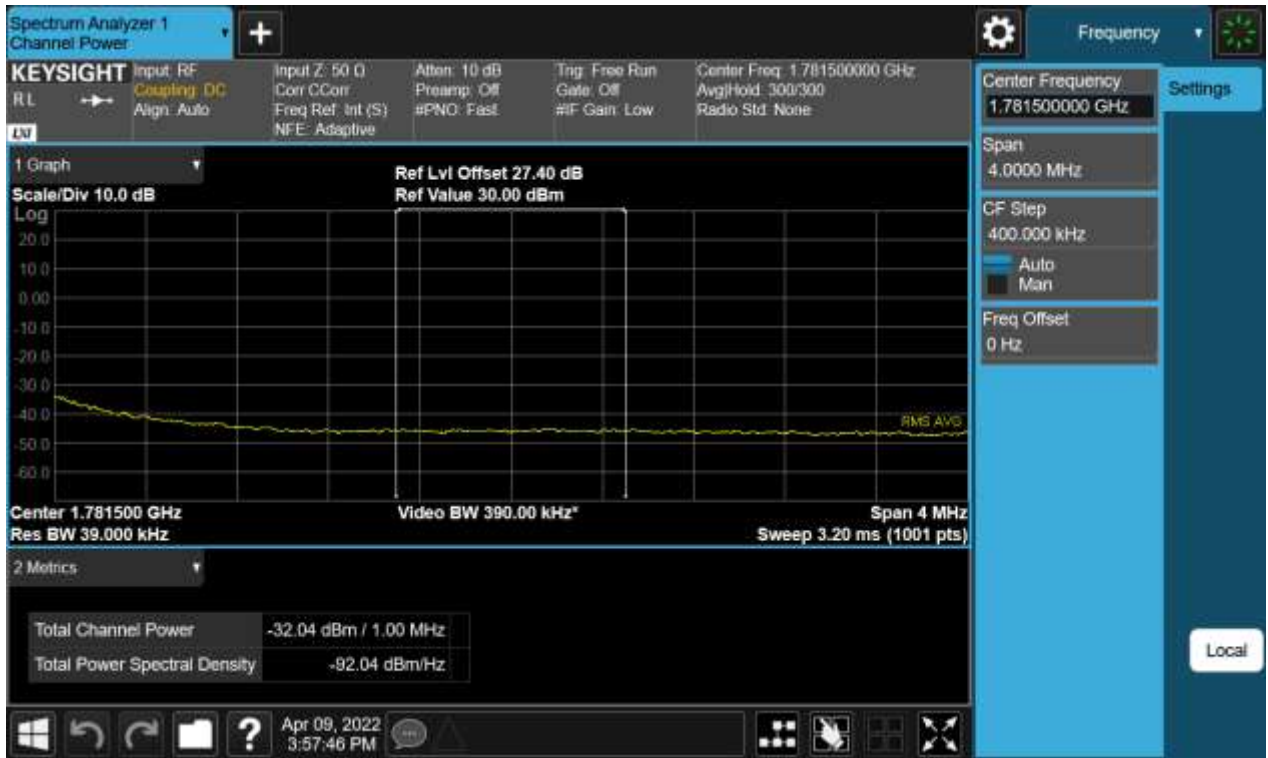

BW15 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)



BW15 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1) (Sub1 Ant)



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2) (Sub1 Ant)




BW20 M_BandEdge_Highest Channel_QPSK_FullIRB(1) (Sub1 Ant)



BW20 M_BandEdge_Highest Channel_QPSK_FullIRB(2) (Sub1 Ant)




BW20 M_BandEdge_Lowest Channel_QPSK_1RB(Sub1 Ant)

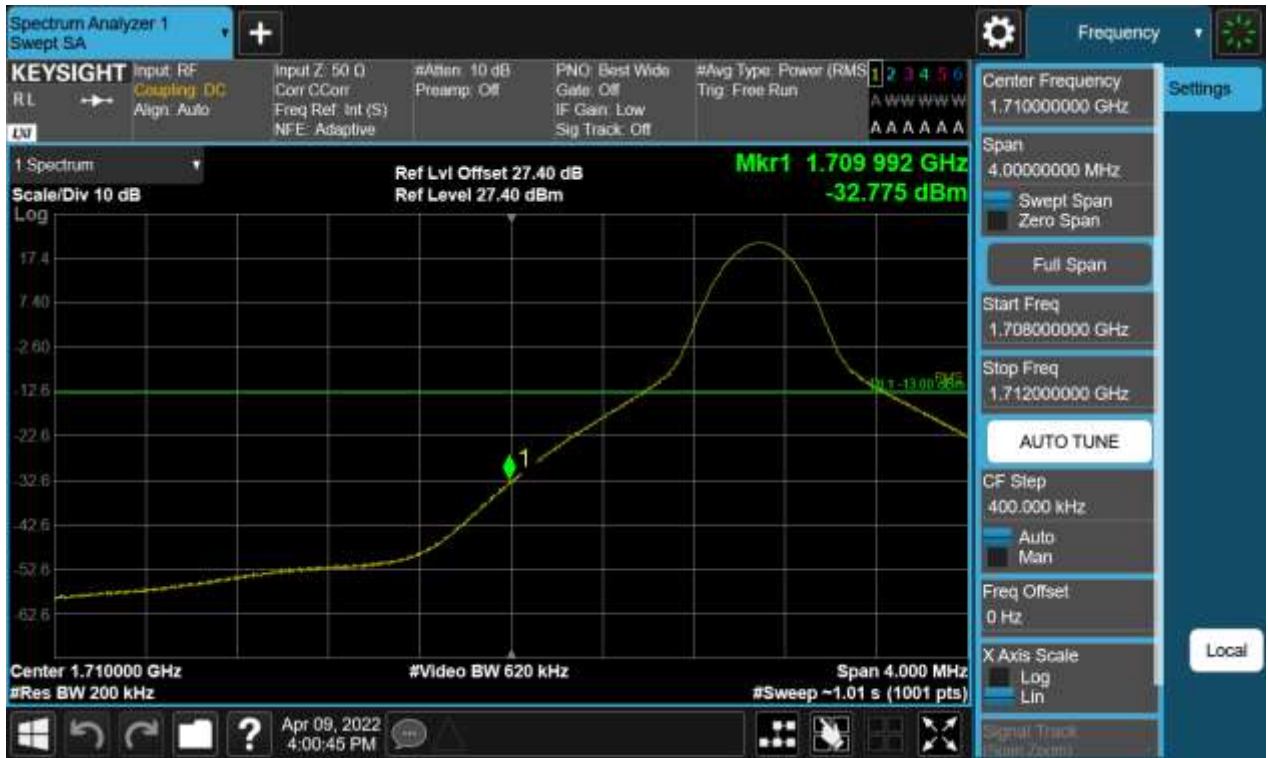


BW20 M_BandEdge_Highest Channel_QPSK_1RB(Sub1 Ant)




BW1.4 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

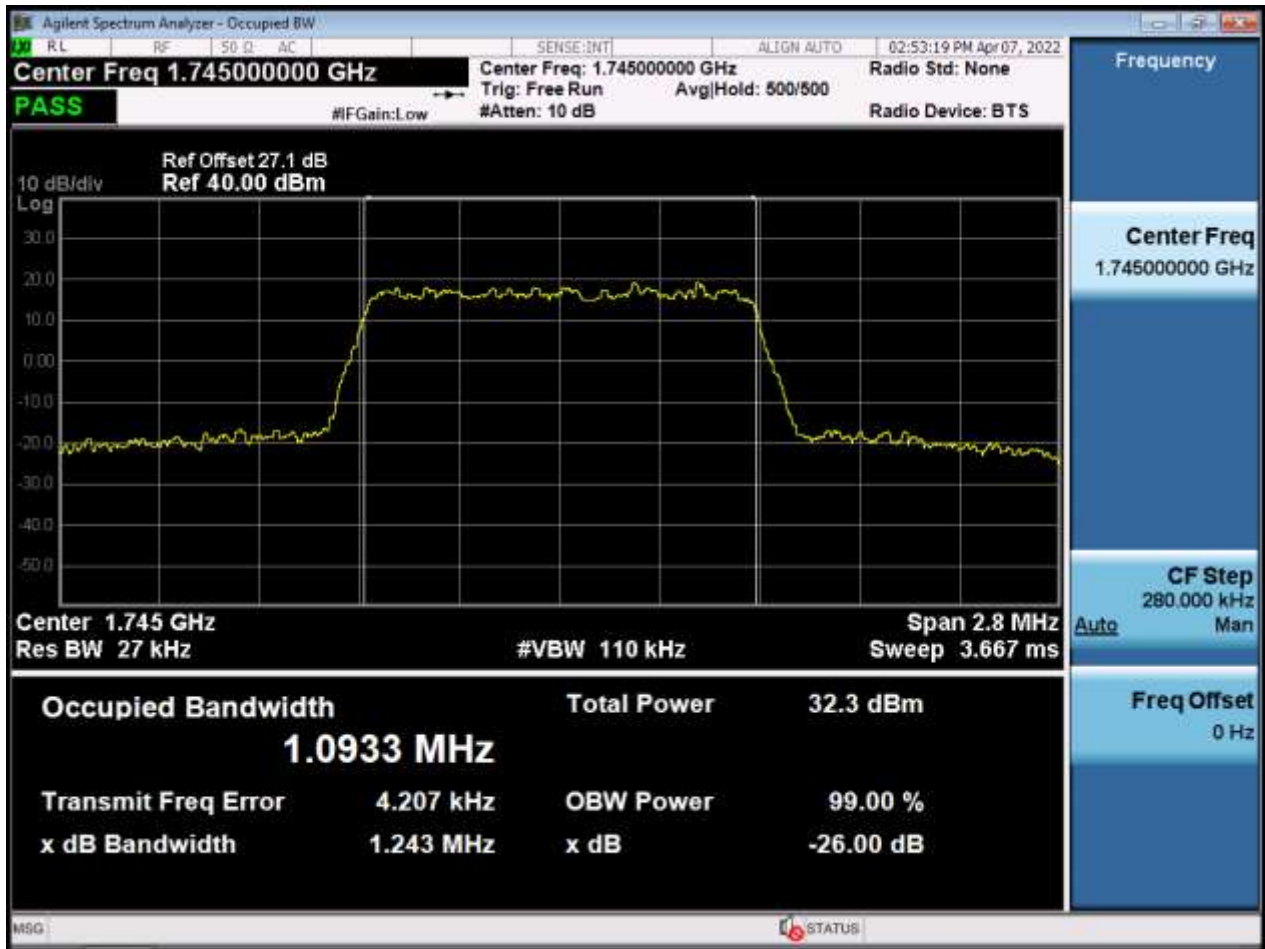


BW1.4 M_OBW_Middle Channel_16QAM_FullRB(Main2 Ant)

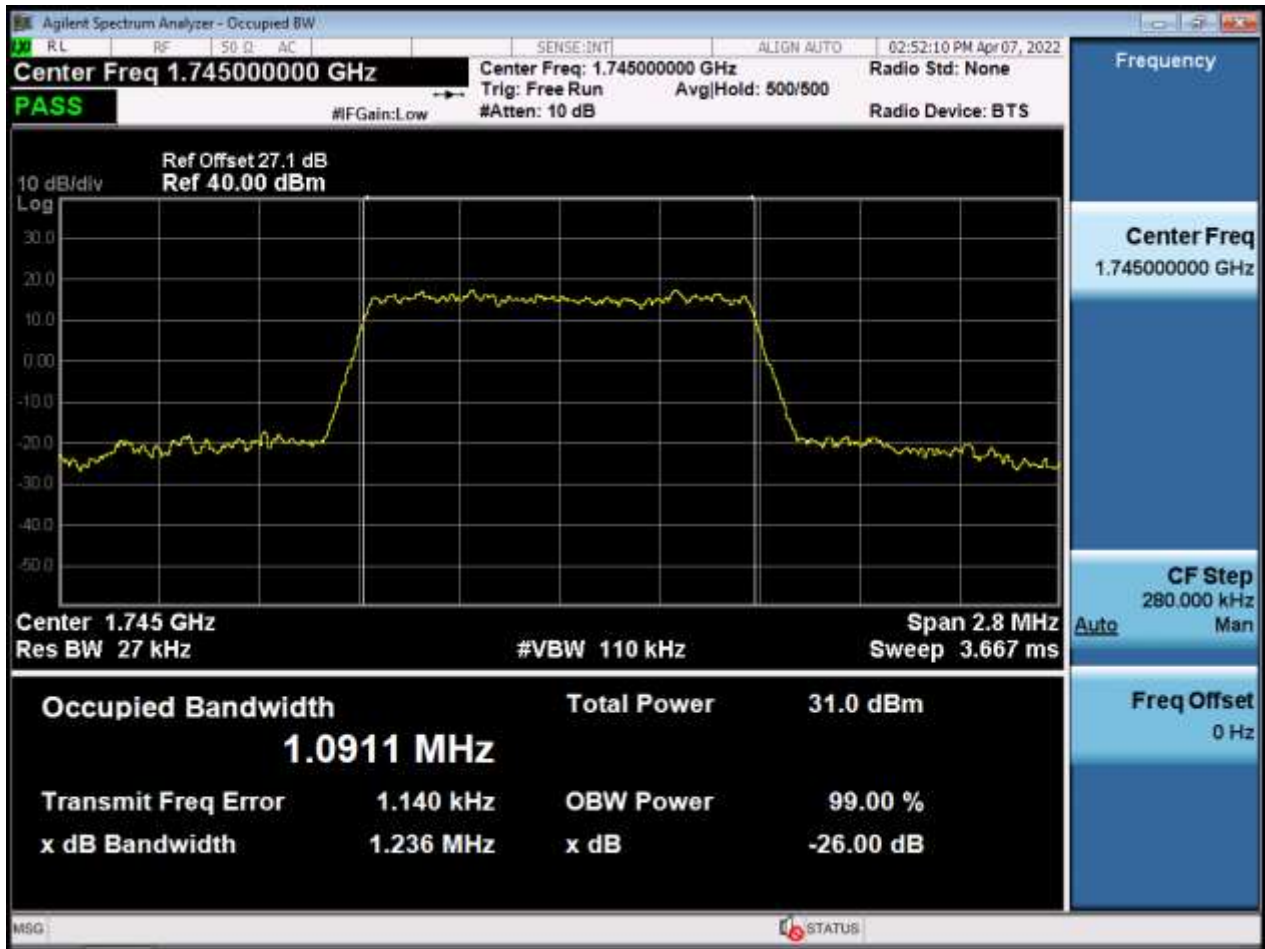


BW1.4 M_OBW_Middle Channel_64QAM_FullRB(Main2 Ant)

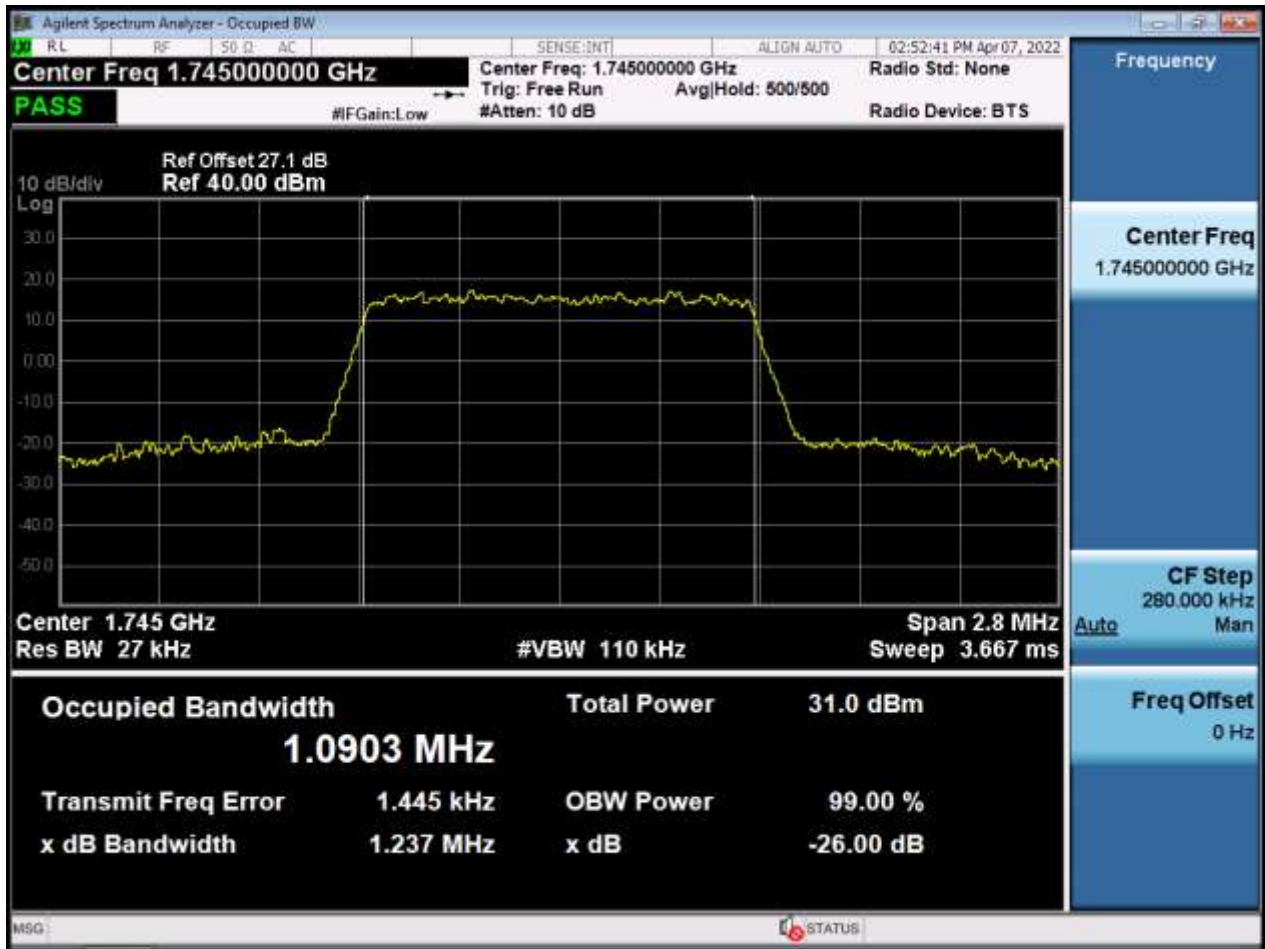


BW1.4 M_OBW_Middle Channel_256QAM_FullRB(Main2 Ant)

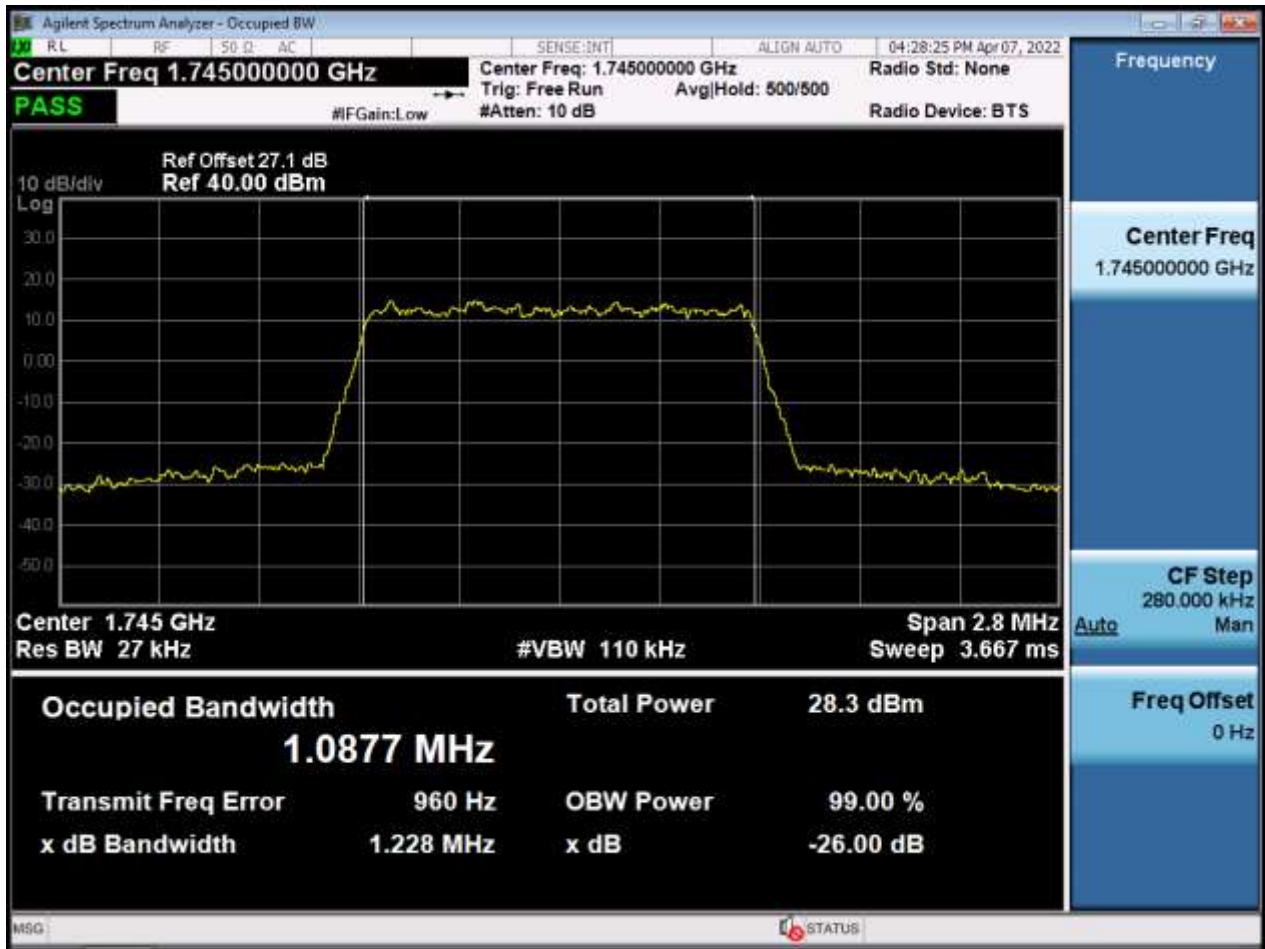


BW3 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

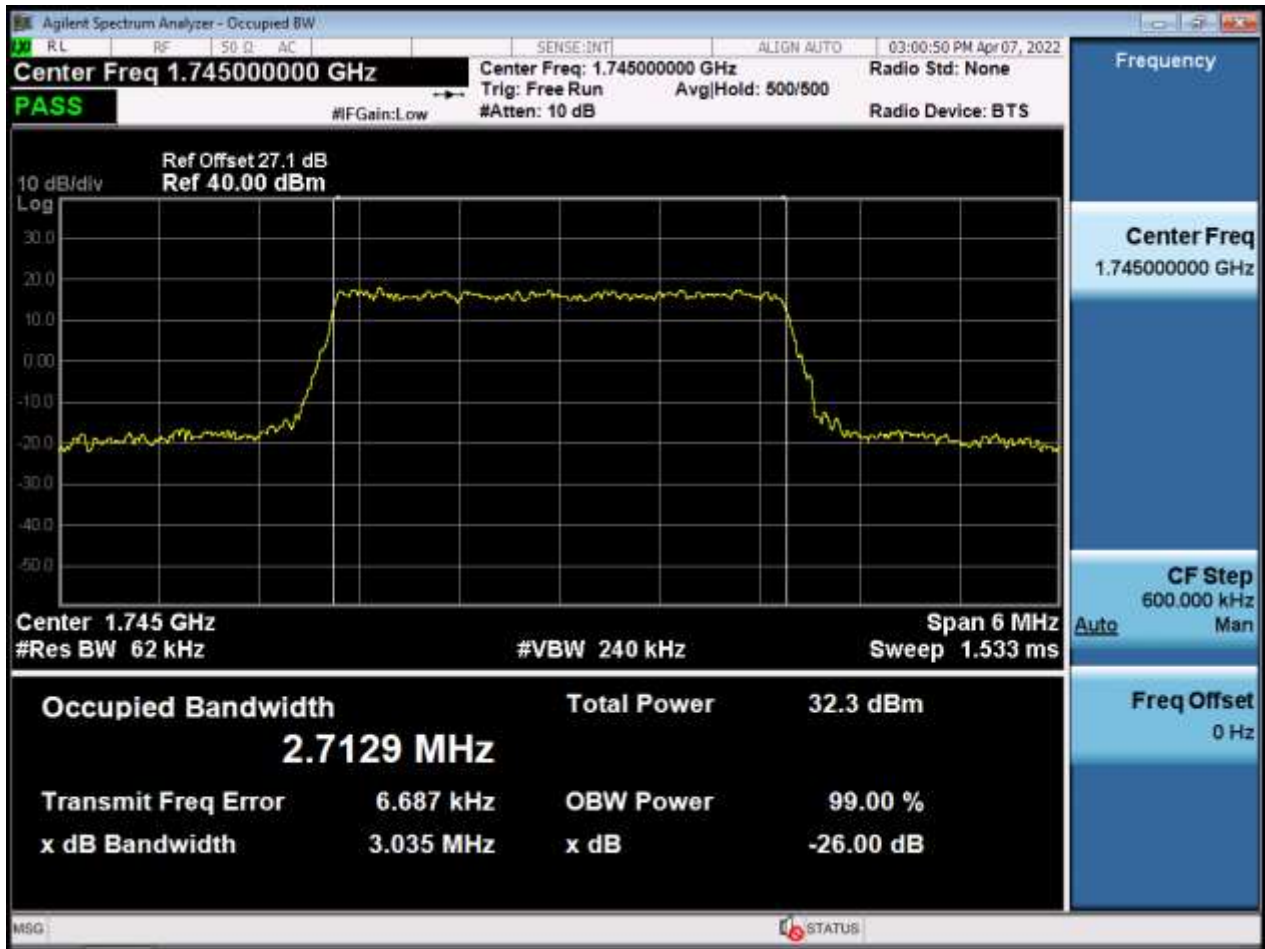


BW3 M_OBW_Middle Channel_16QAM_FullRB(Main2 Ant)

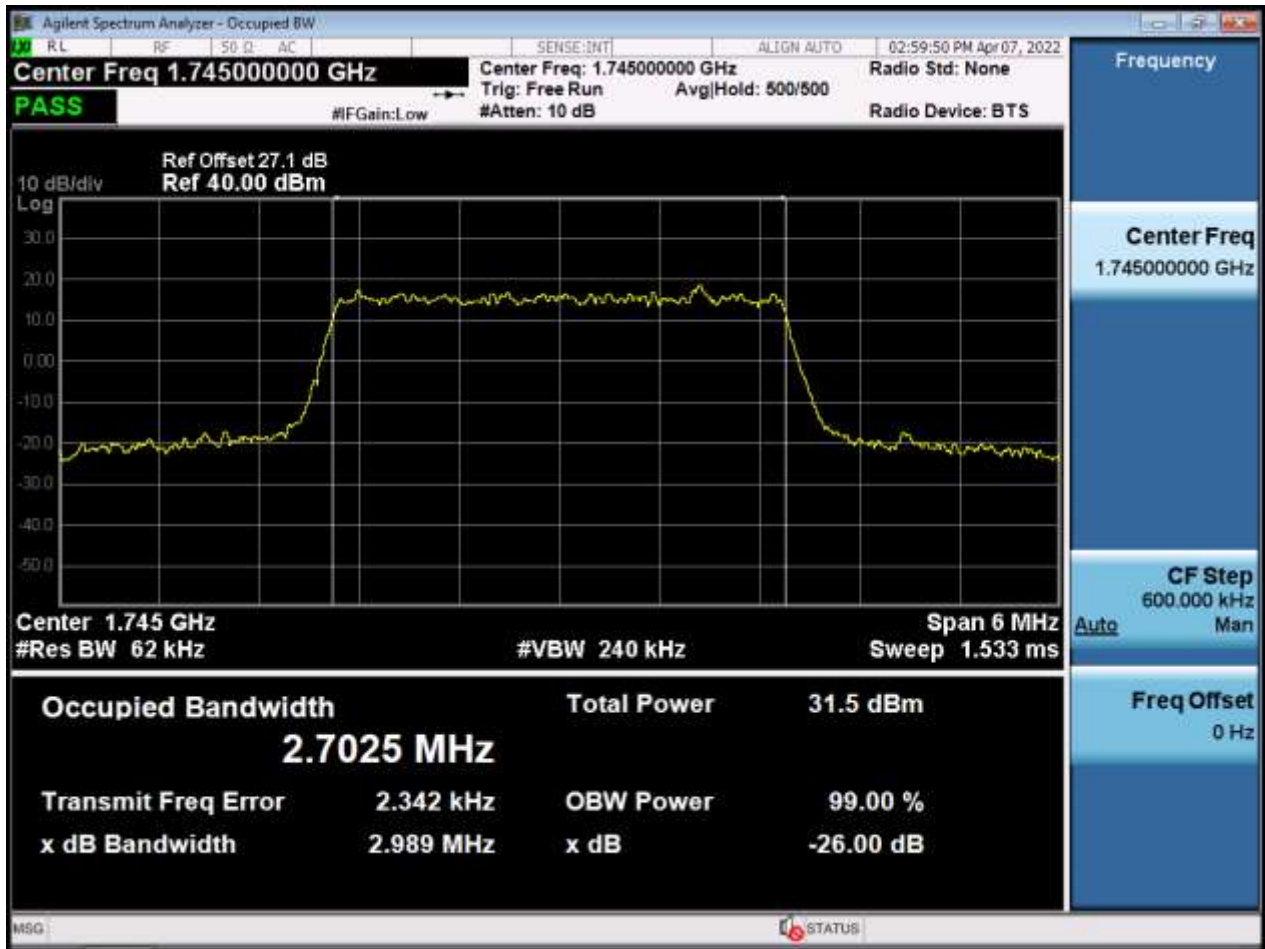


BW3 M_OBW_Middle Channel_64QAM_FullRB(Main2 Ant)

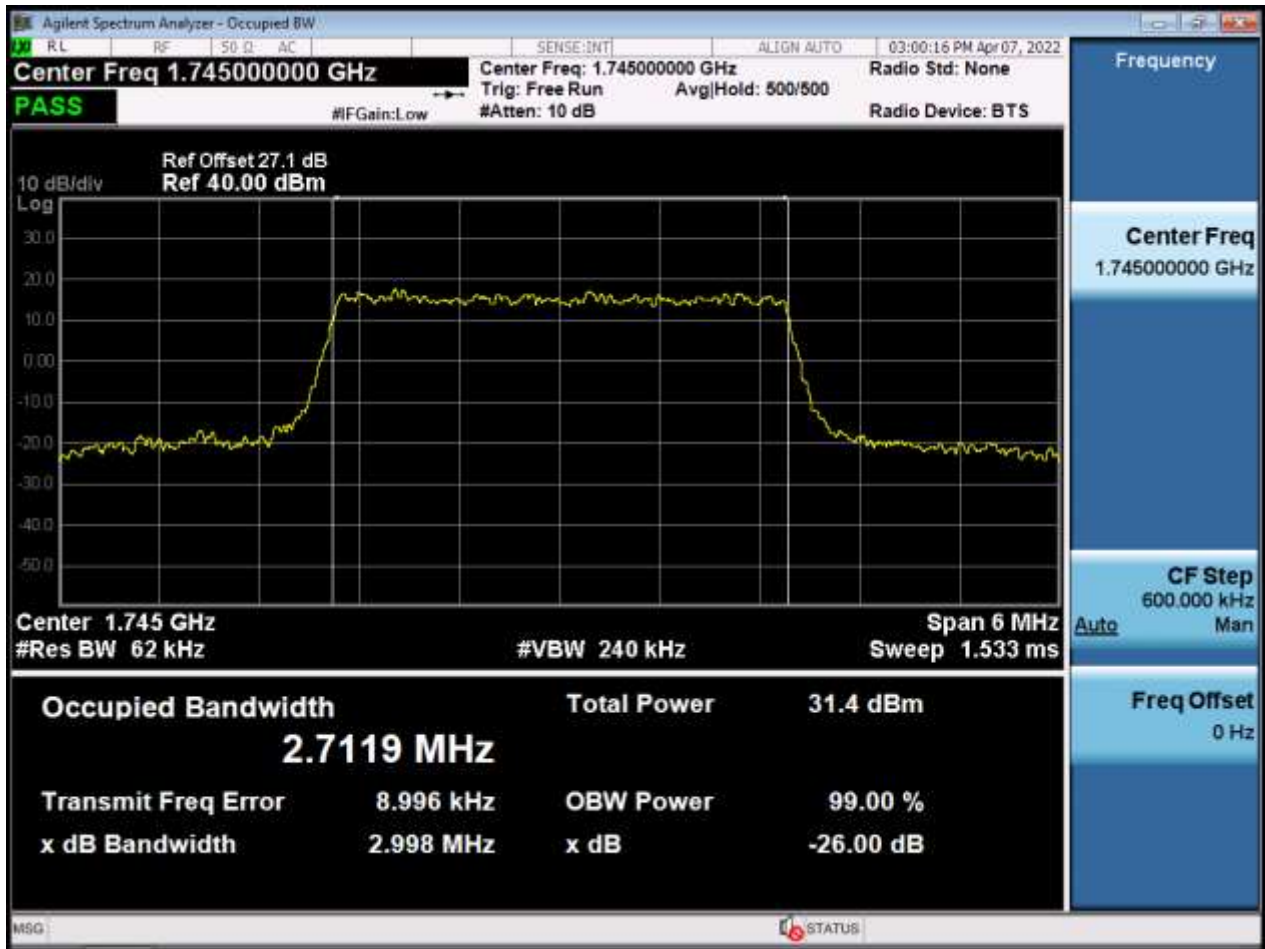


BW3 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

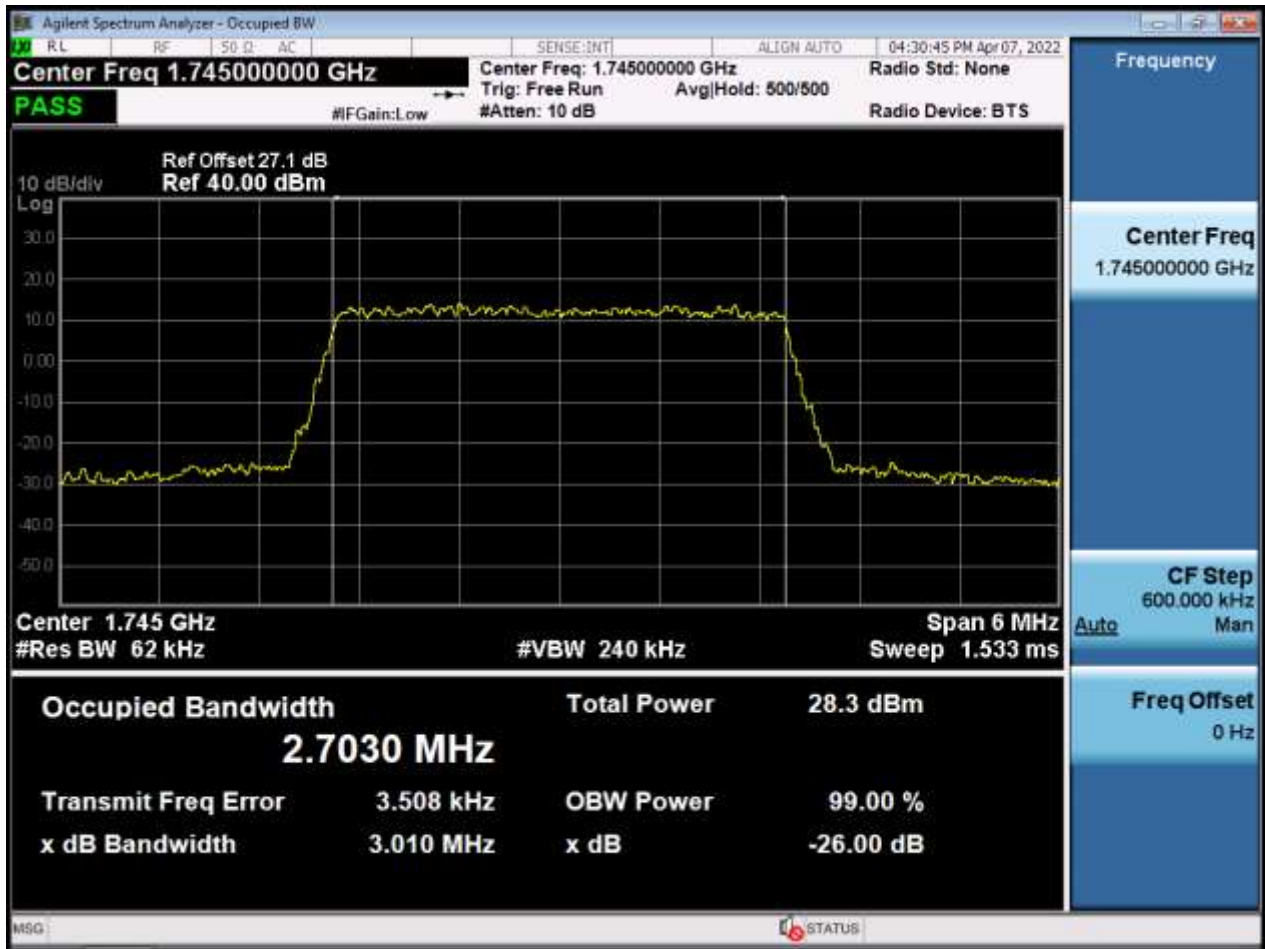


BW5 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

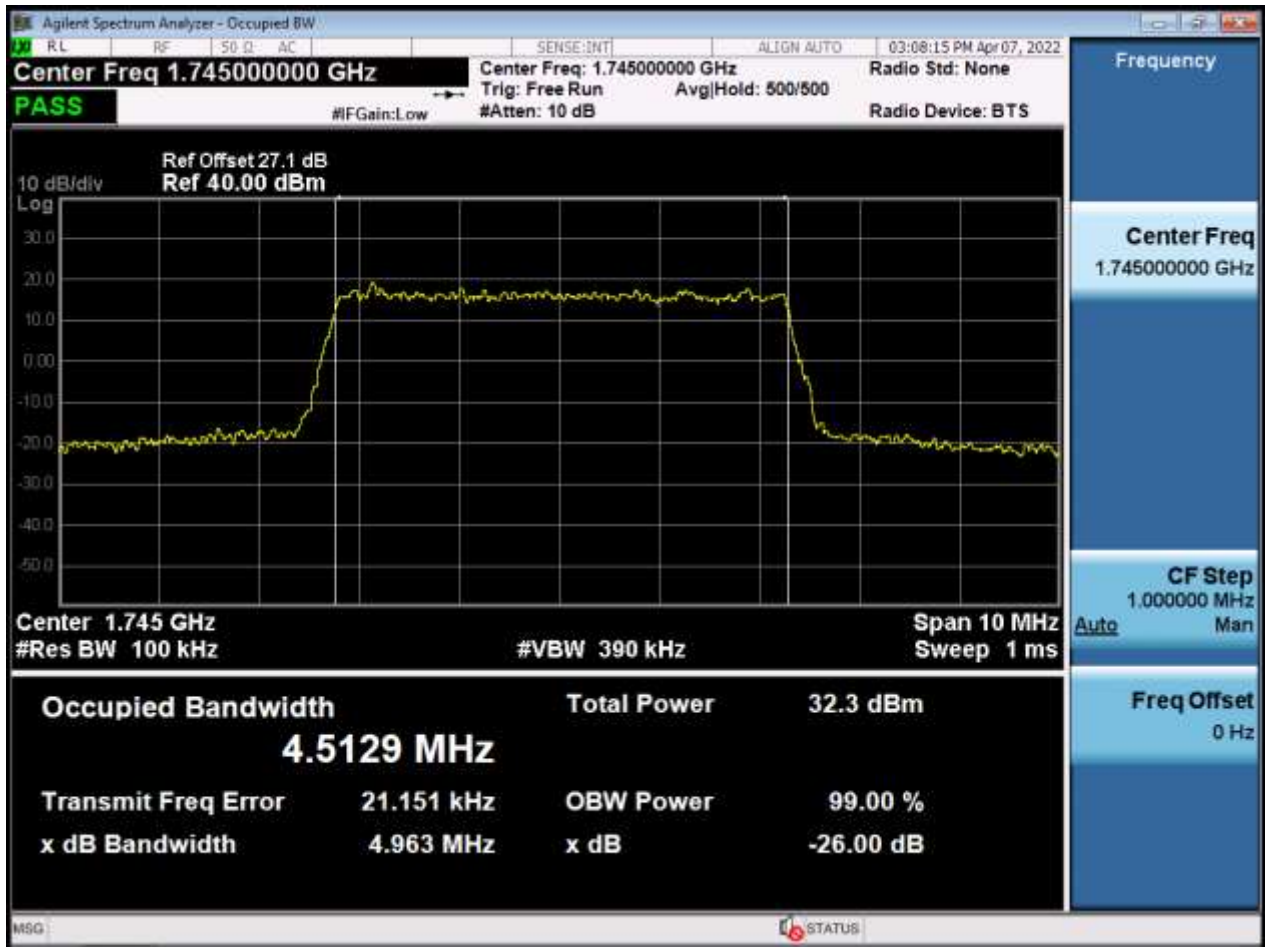


BW5 M_OBW_Middle Channel_16QAM_FullRB(Main2 Ant)

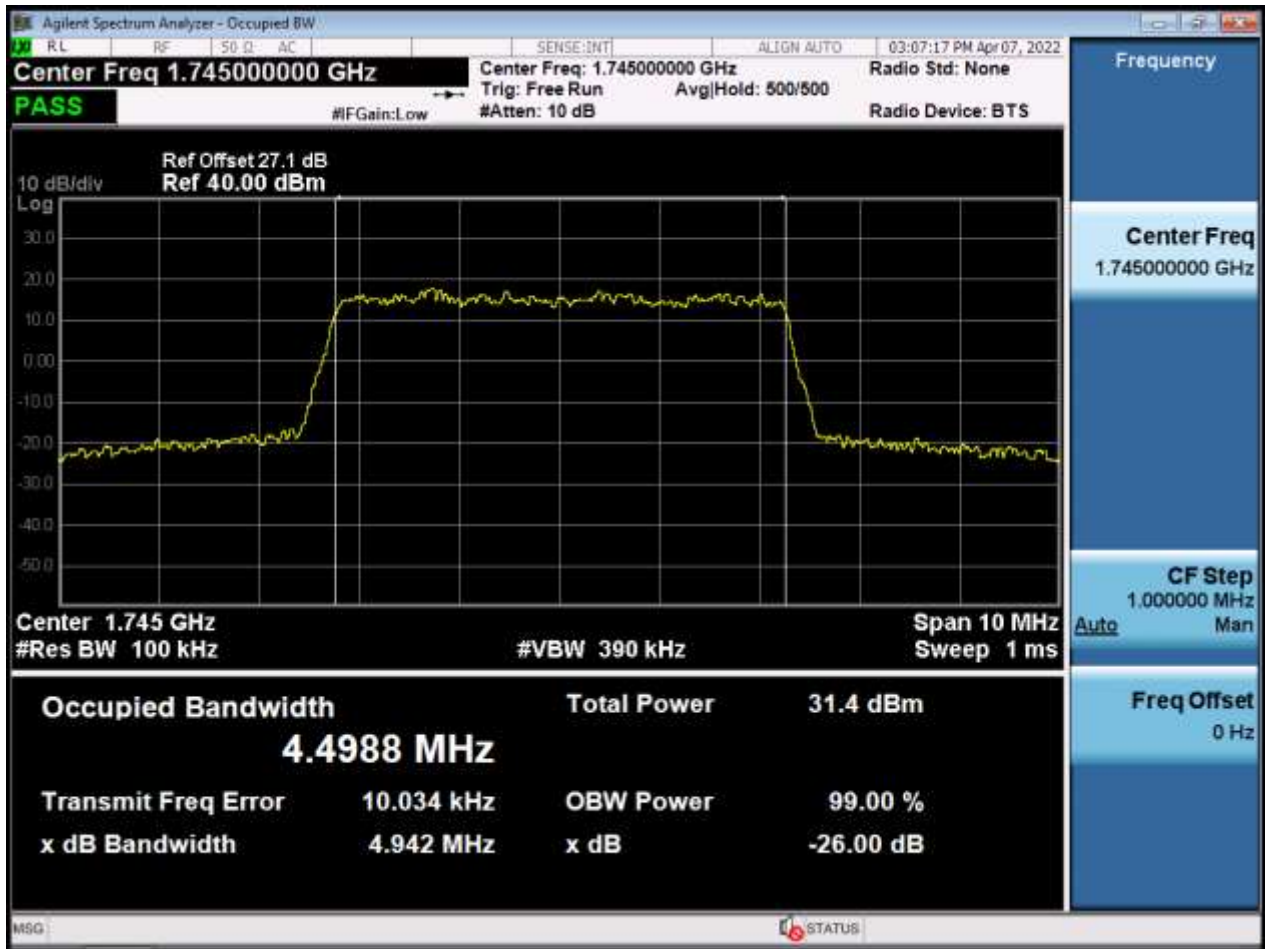


BW5 M_OBW_Middle Channel_64QAM_FullRB(Main2 Ant)

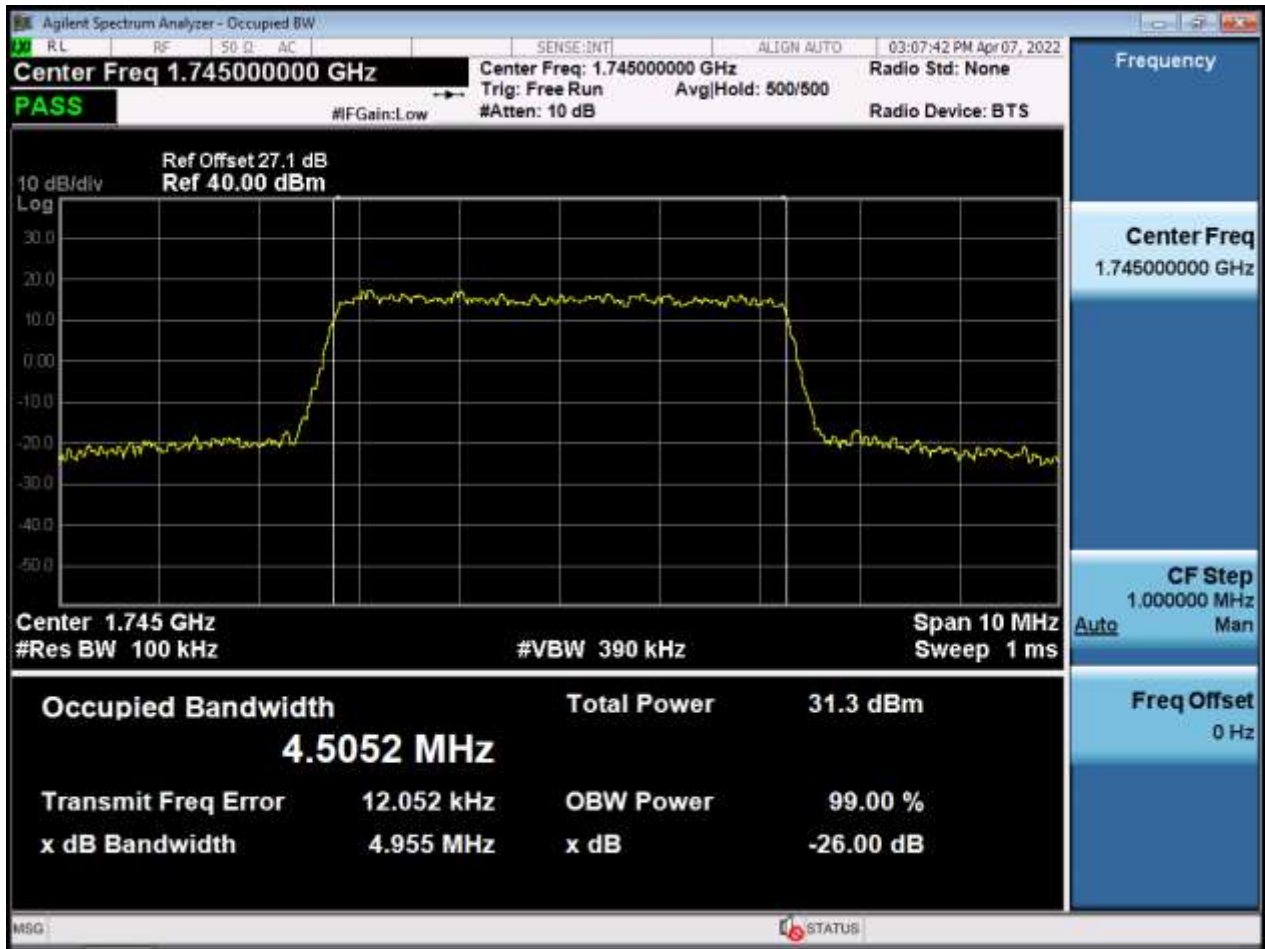


BW5 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

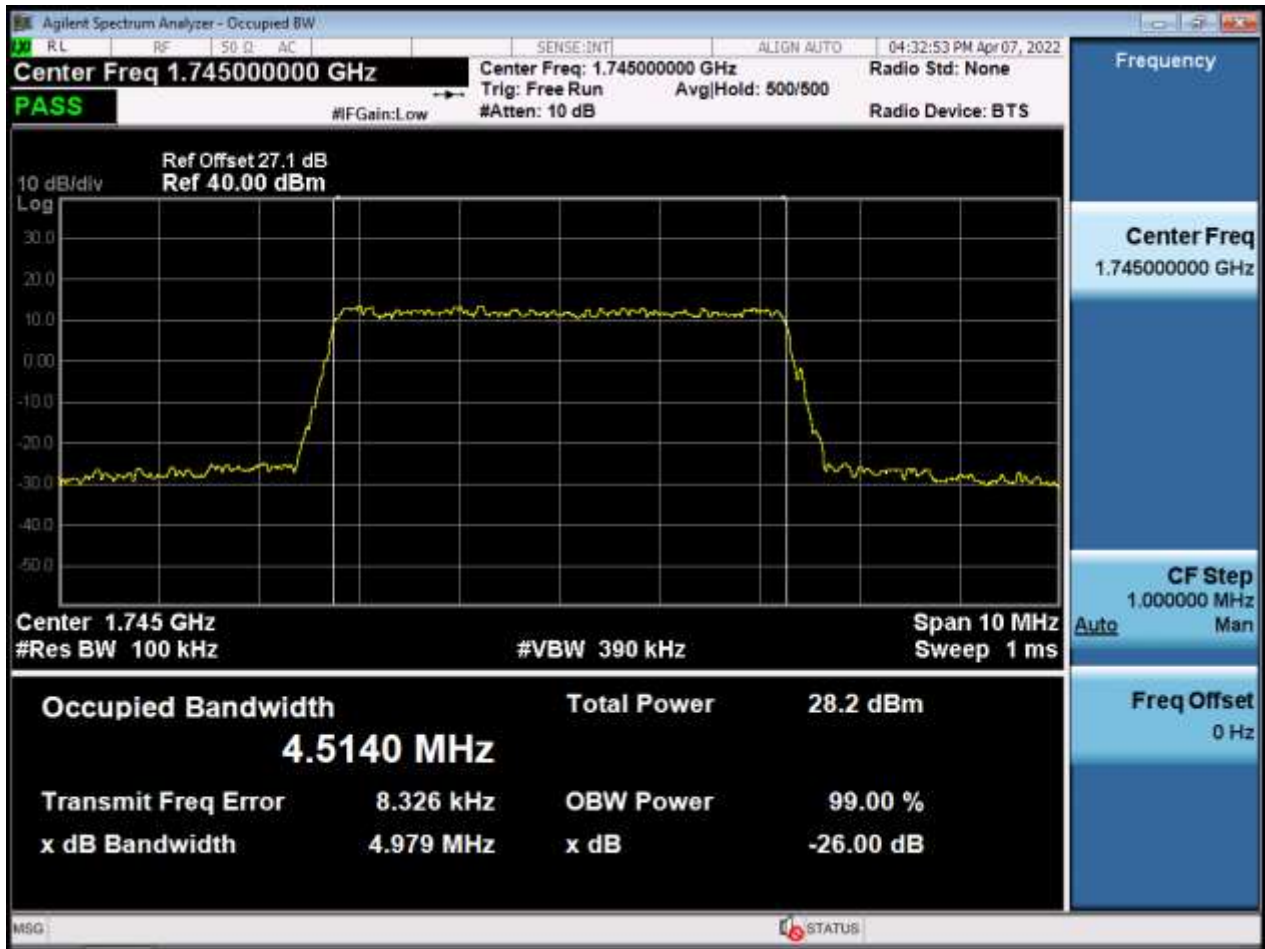


BW10 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

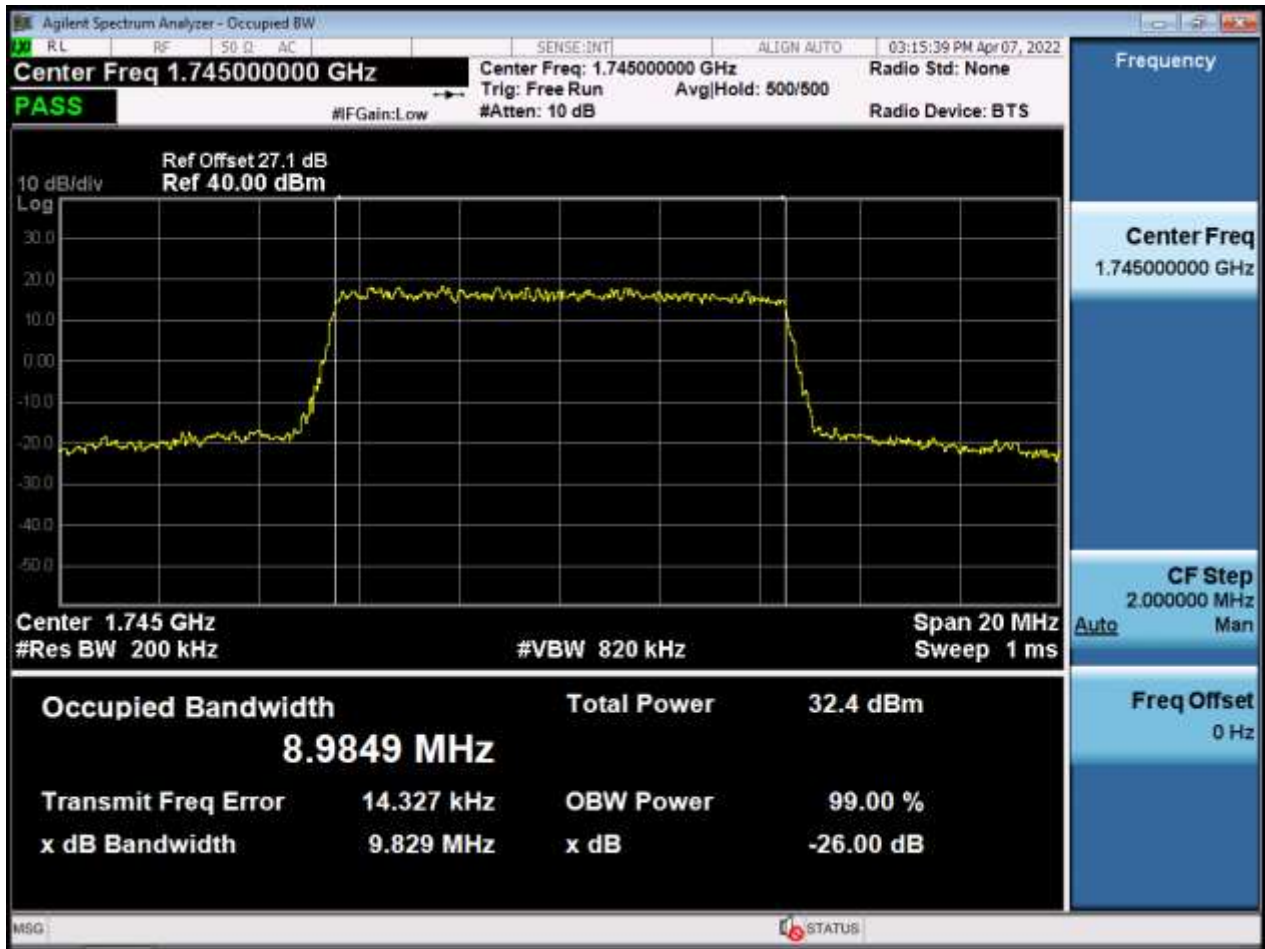


BW10 M_OBW_Middle Channel_16QAM_FullIRB(Main2 Ant)

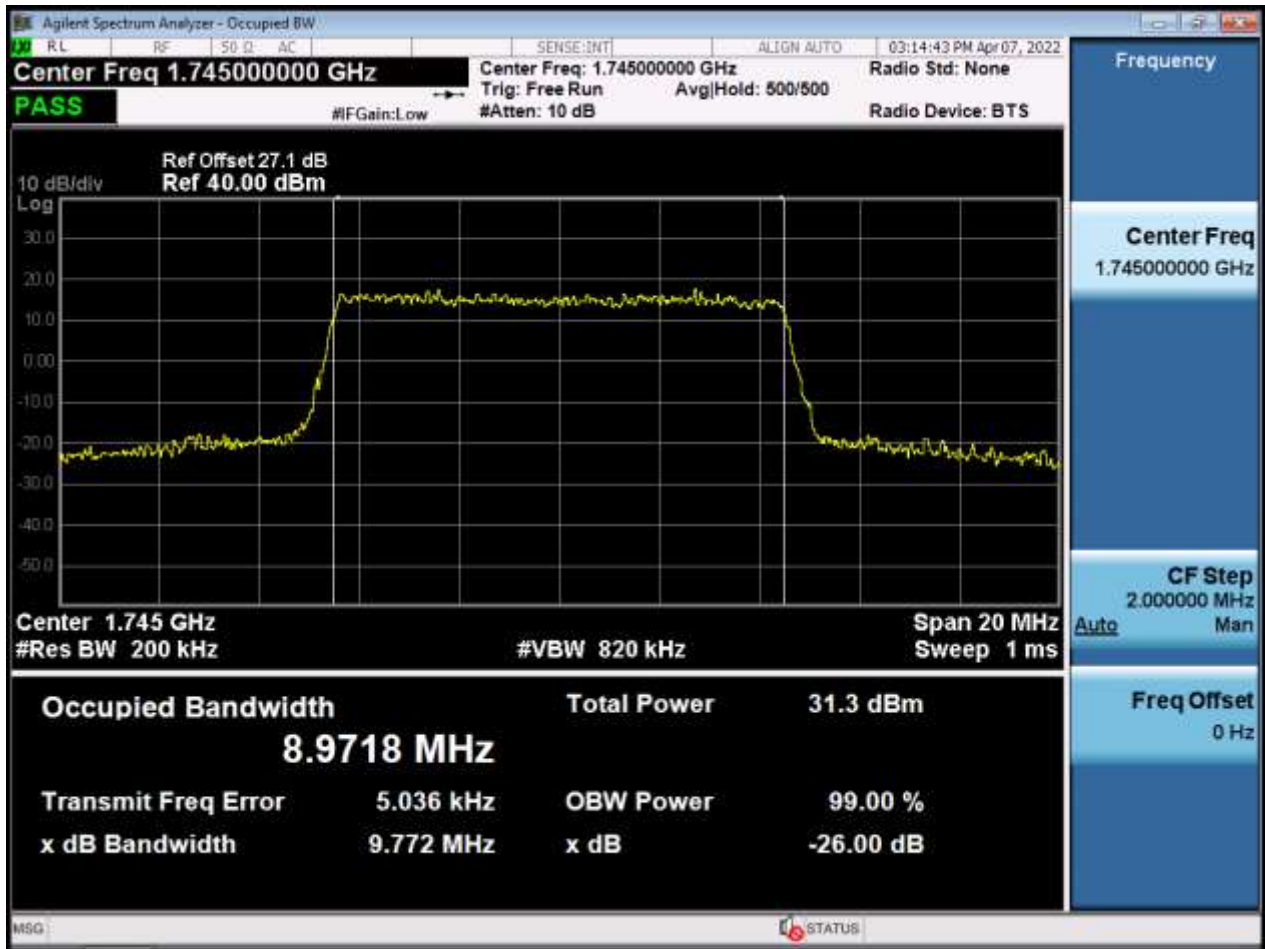


BW10 M_OBW_Middle Channel_64QAM_FullIRB(Main2 Ant)

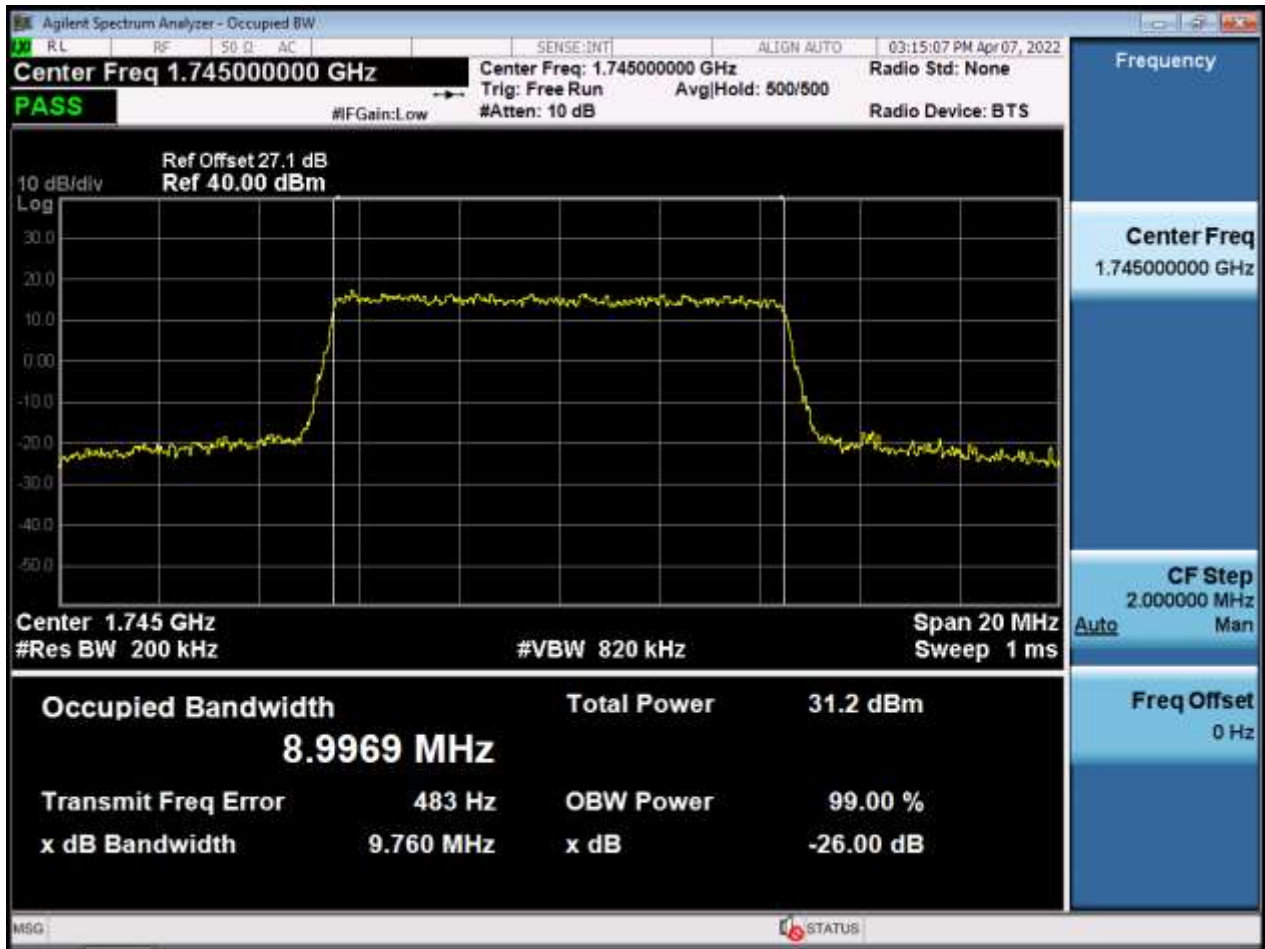


BW10 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

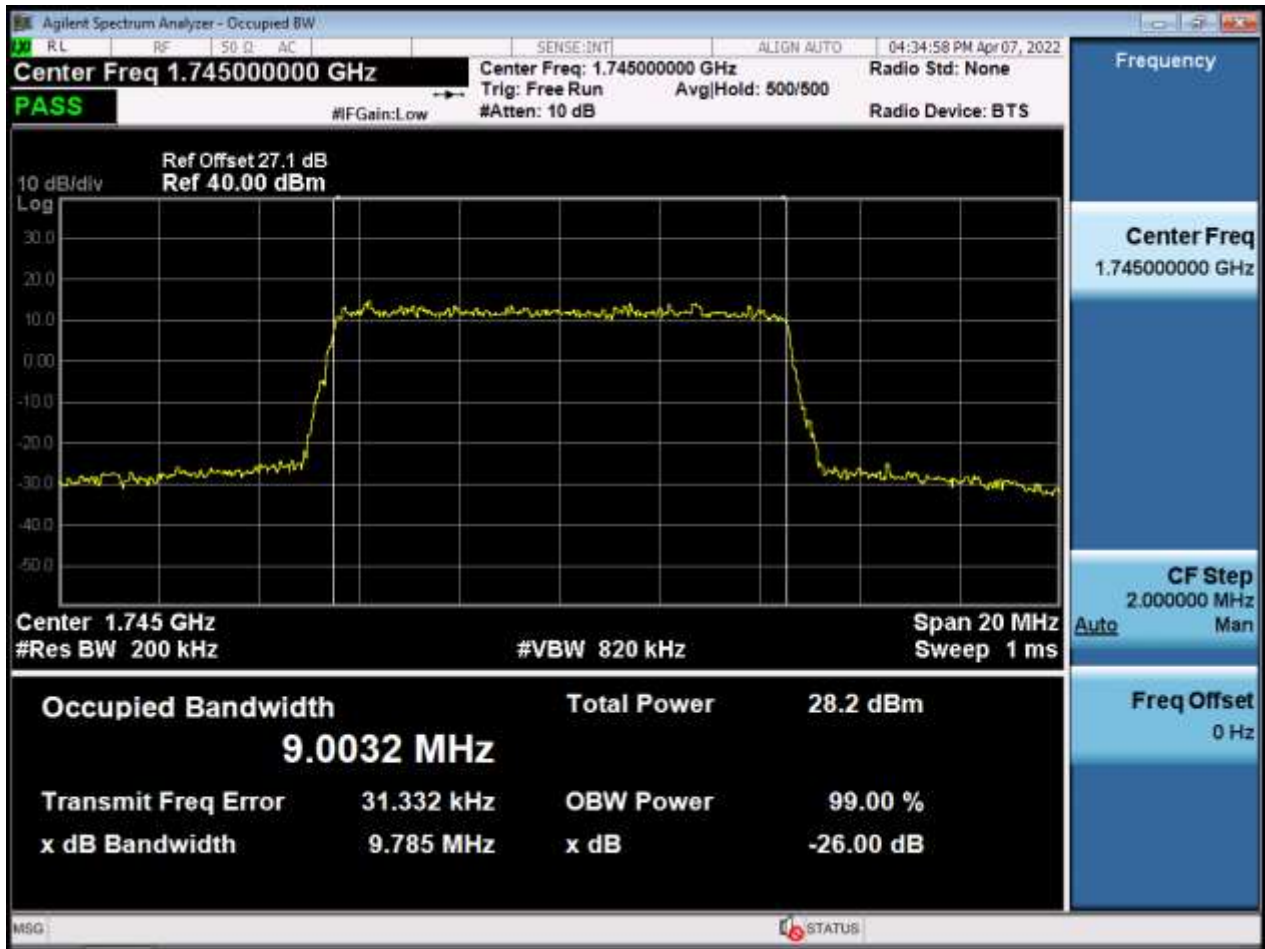


BW15 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

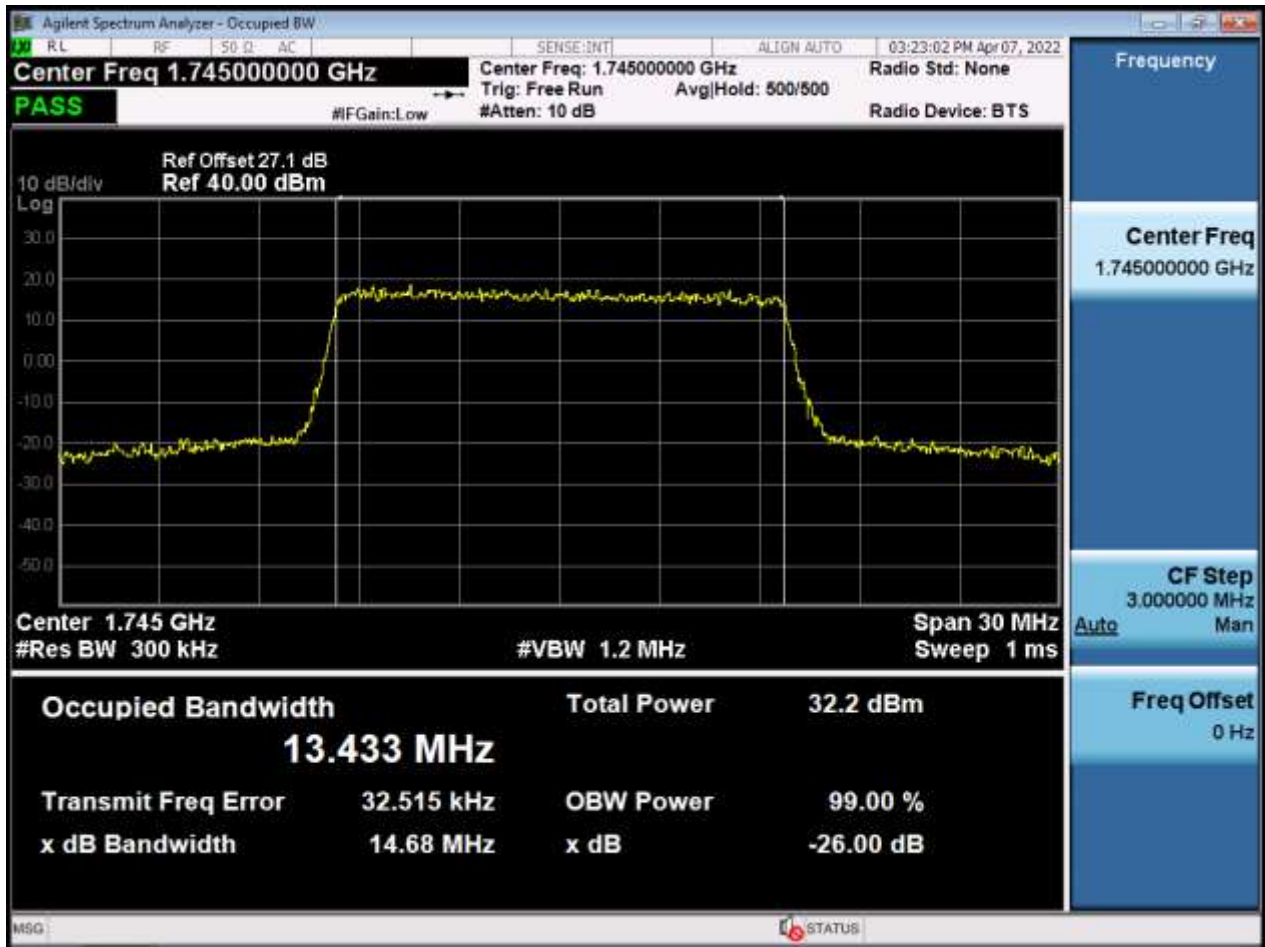


BW15 M_OBW_Middle Channel_16QAM_FullIRB(Main2 Ant)

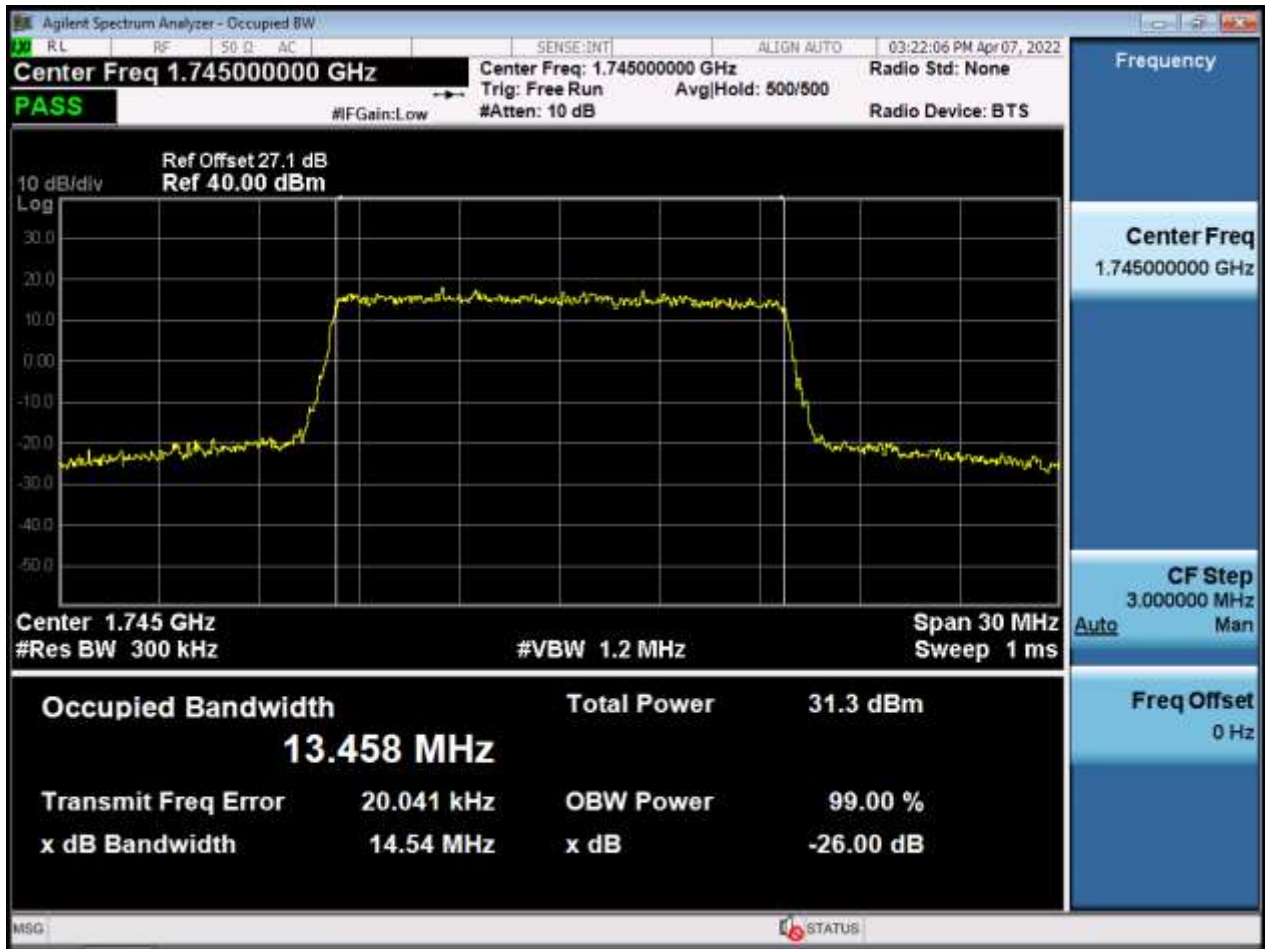


BW15 M_OBW_Middle Channel_64QAM_FullIRB(Main2 Ant)

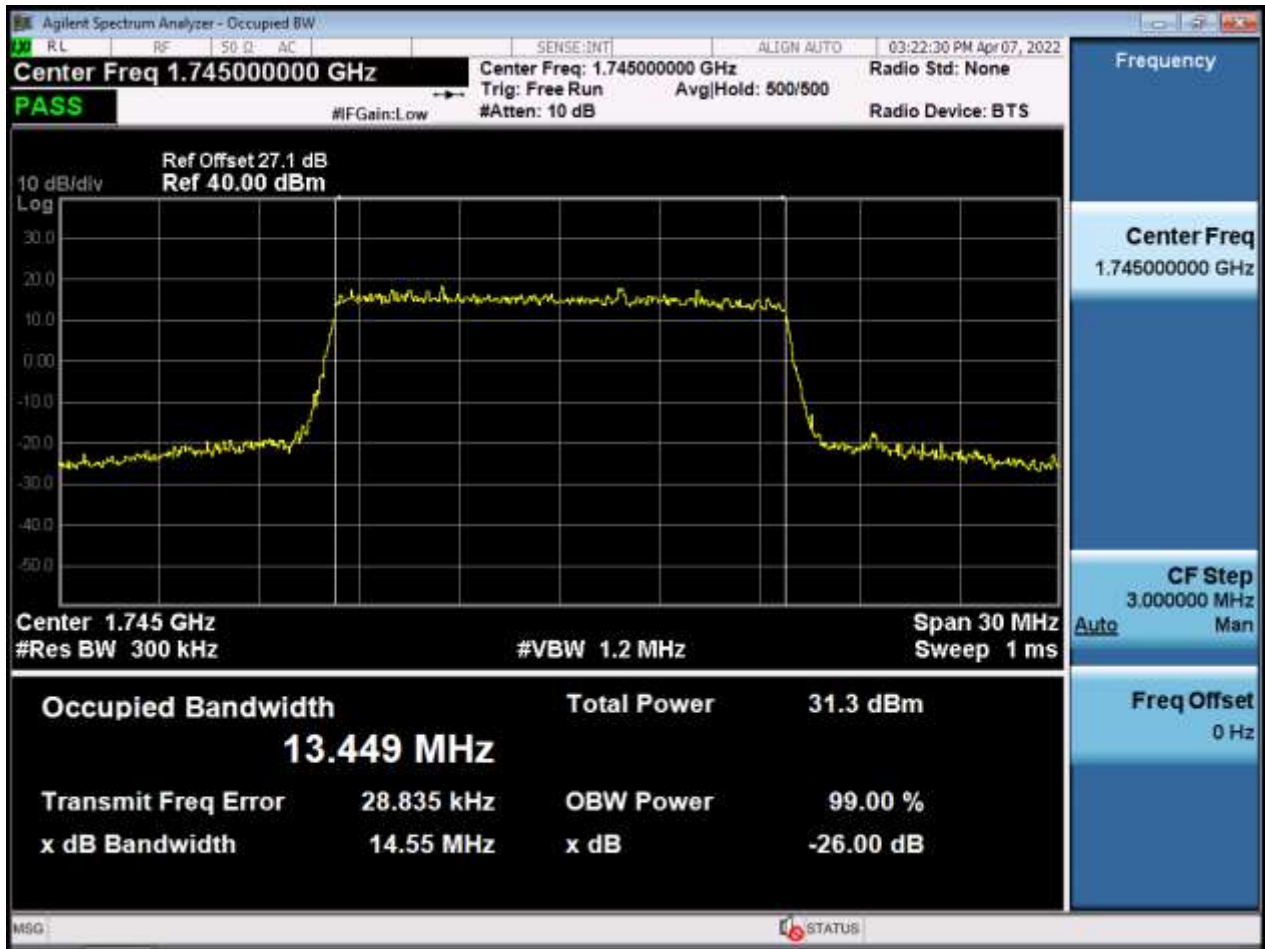


BW15 M_OBW_Middle Channel_256QAM_FullRB(Main2 Ant)

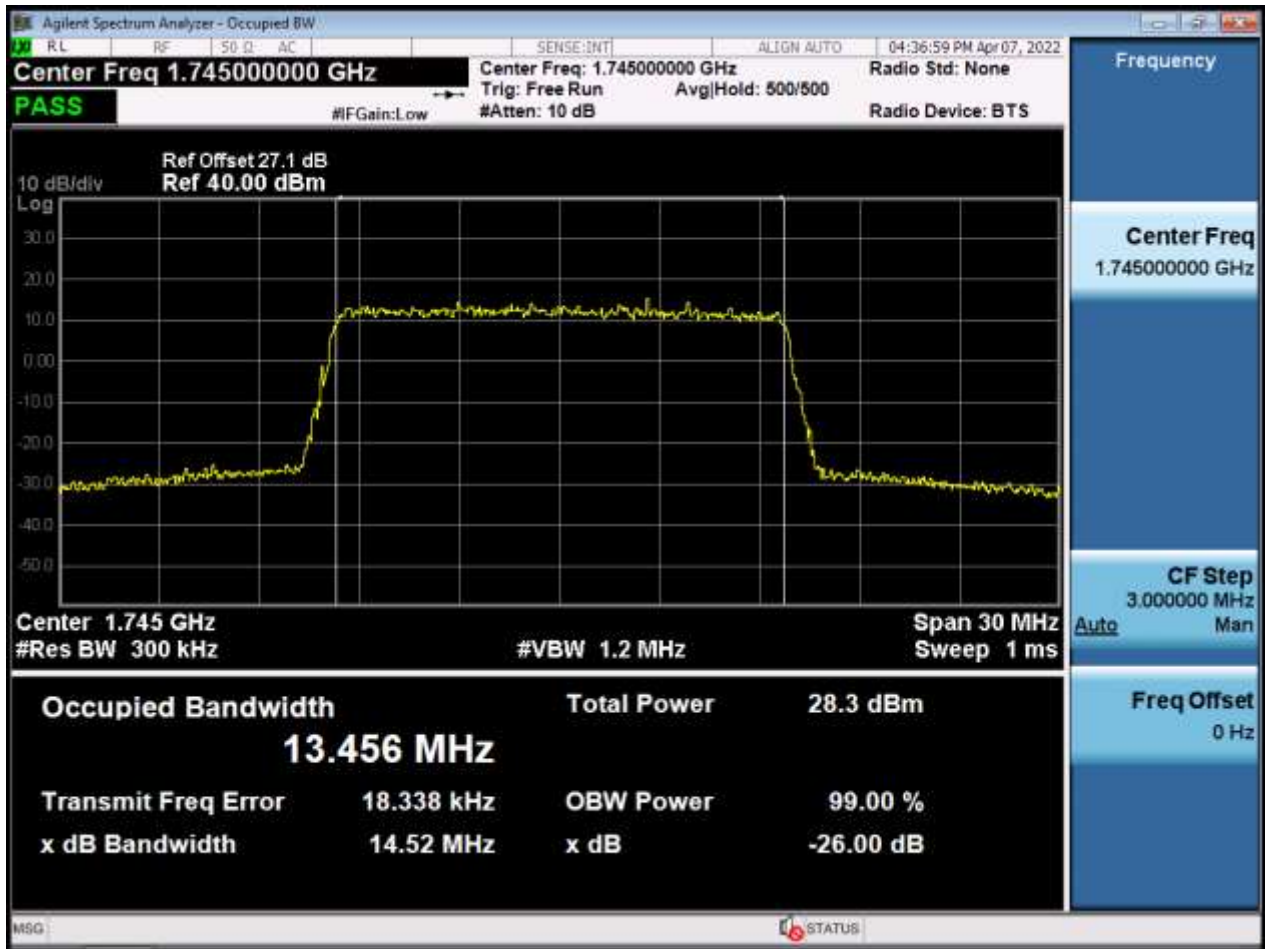


BW20 M_OBW_Middle Channel_QPSK_FullRB(Main2 Ant)

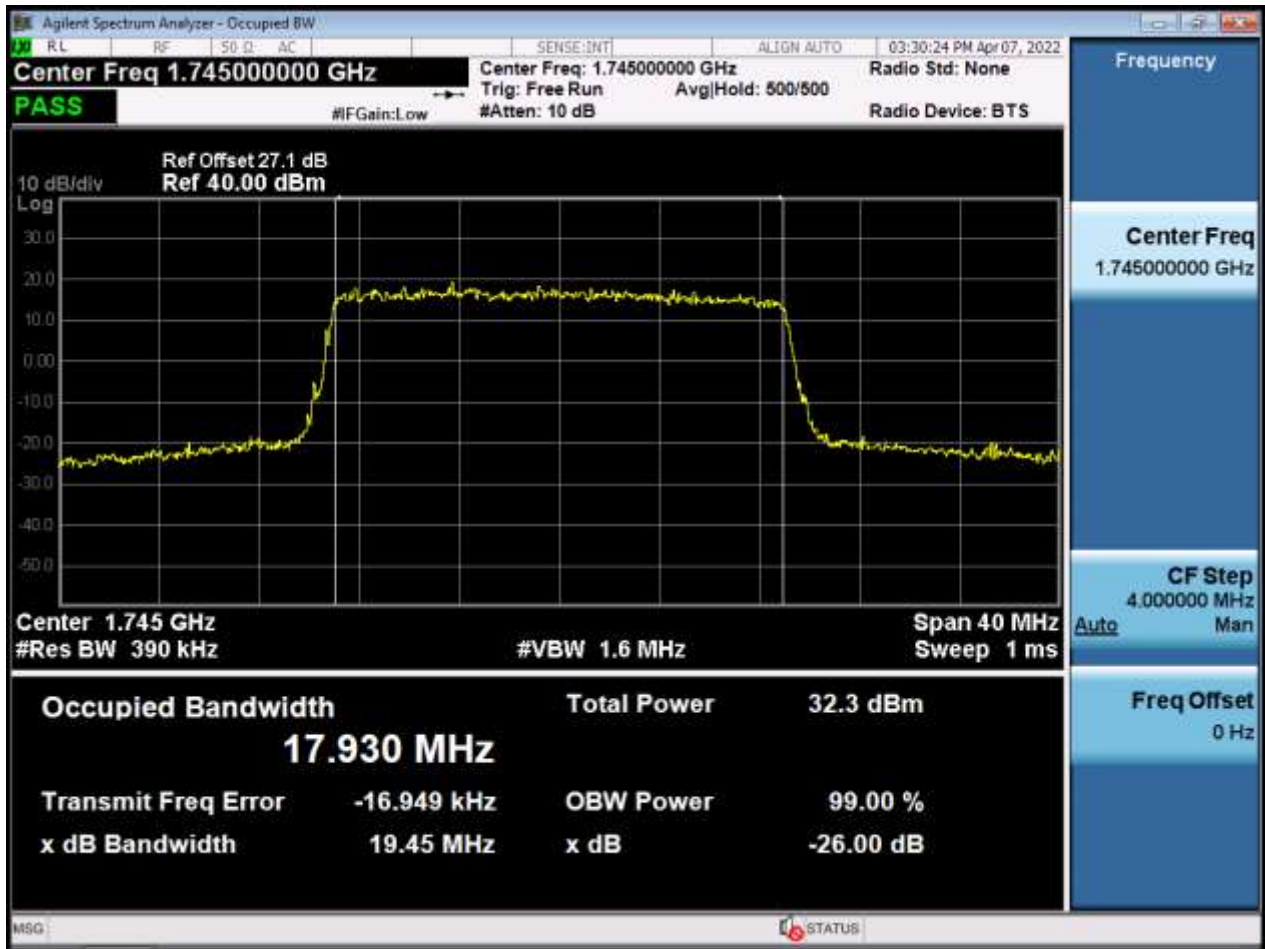


BW20 M_OBW_Middle Channel_16QAM_FullIRB(Main2 Ant)

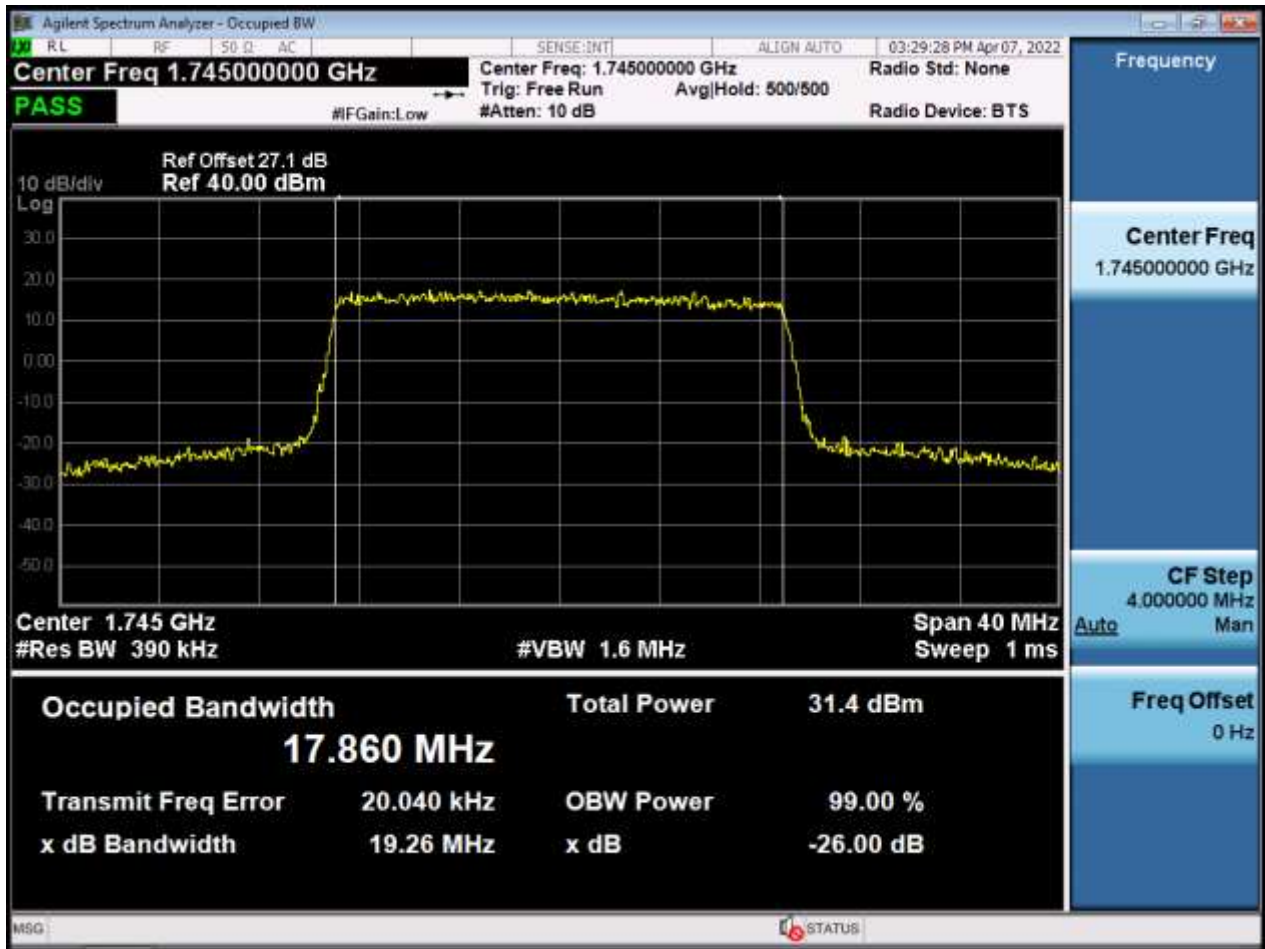

BW20 M_OBW_Middle Channel_64QAM_FullIRB(Main2 Ant)

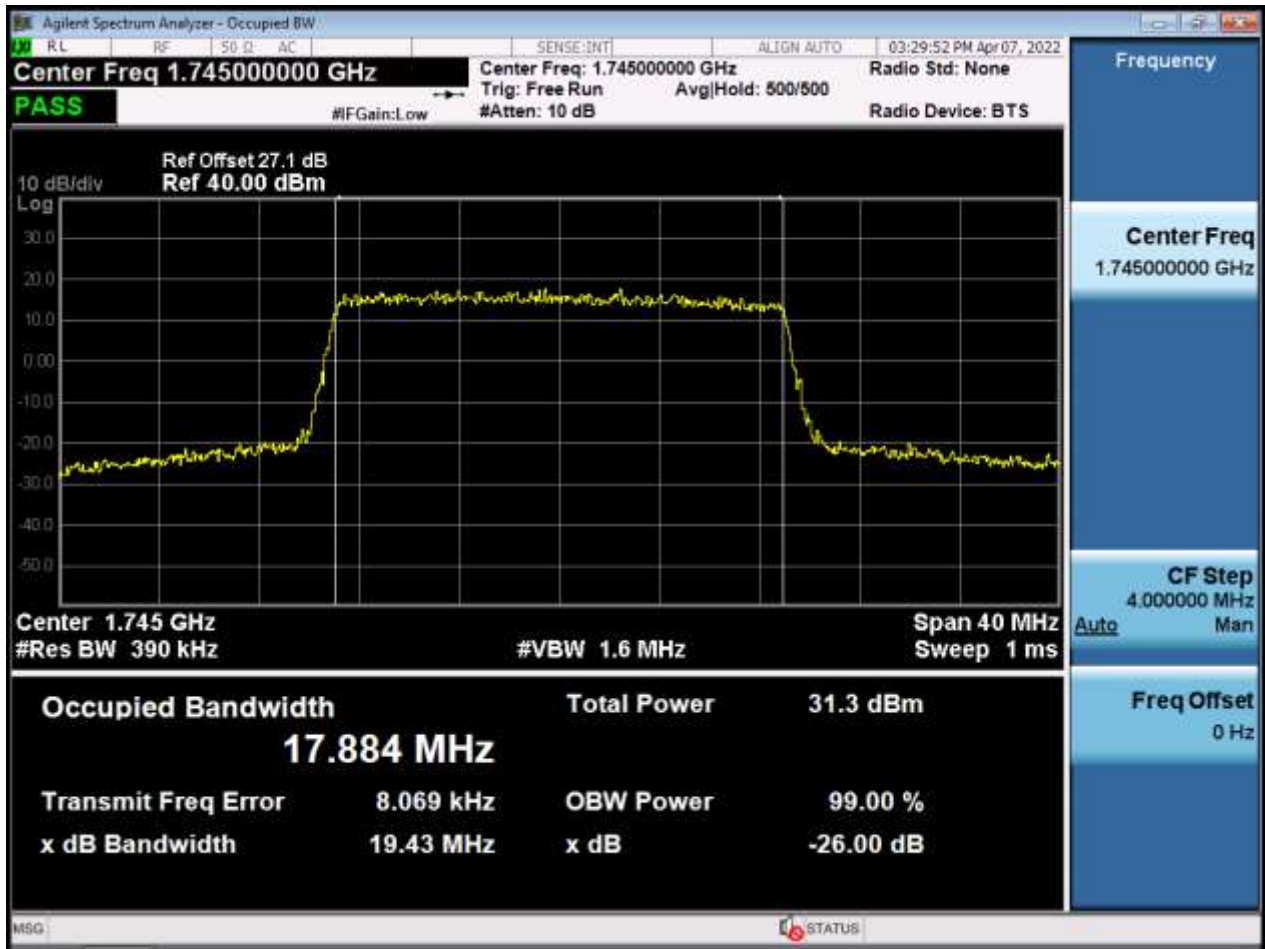


BW20 M_OBW_Middle Channel_256QAM_FullIRB(Main2 Ant)

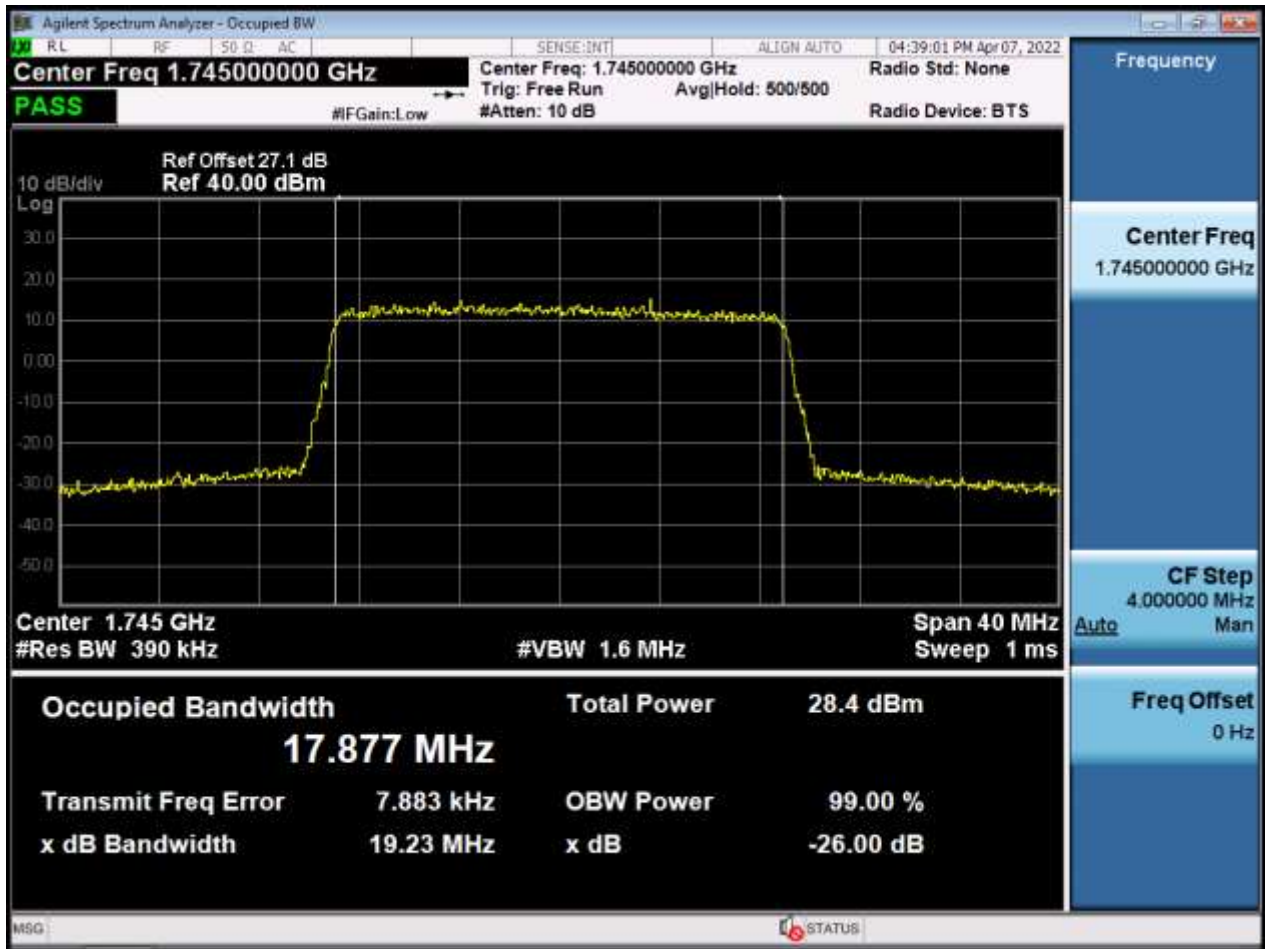

BW1.4 M_OBW_Middle Channel_QPSK_FullRB(Sub1 Ant)




BW1.4 M_OBW_Middle Channel_16QAM_FullRB(Sub1 Ant)

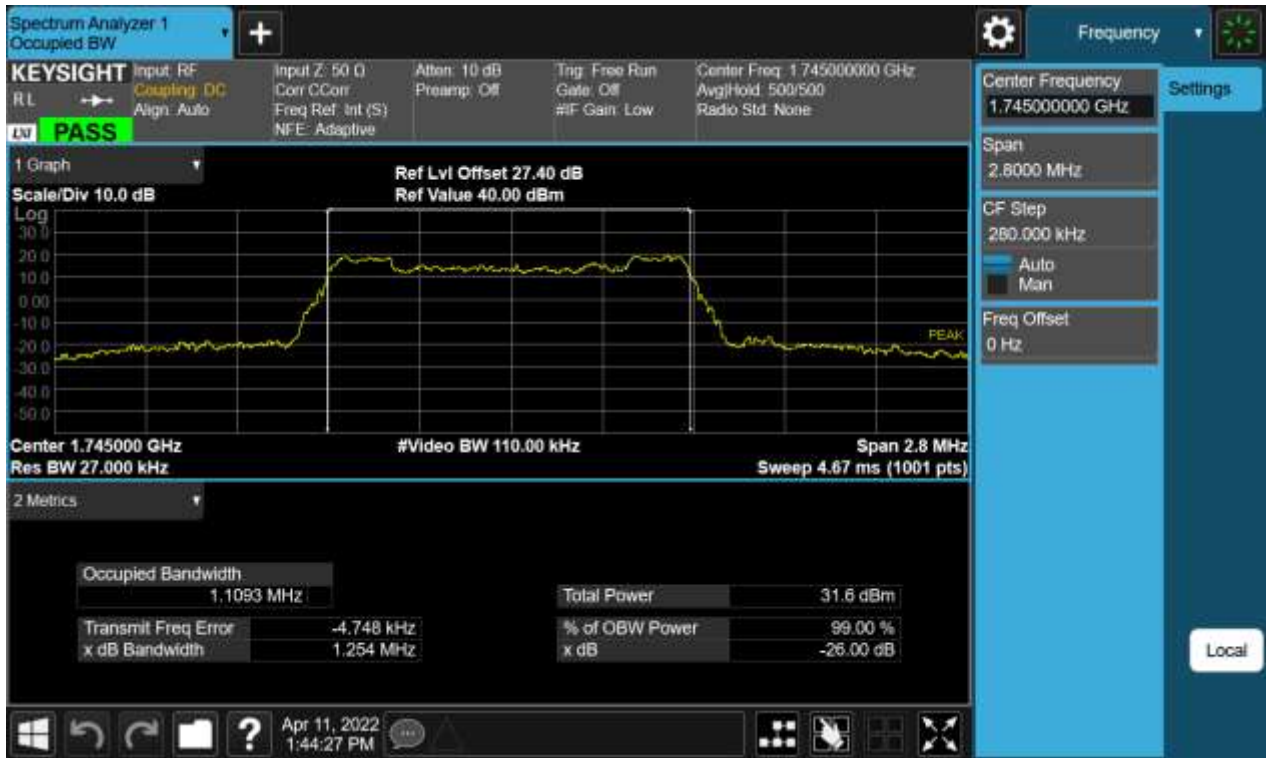

BW1.4 M_OBW_Middle Channel_64QAM_FullRB(Sub1 Ant)




BW1.4 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)

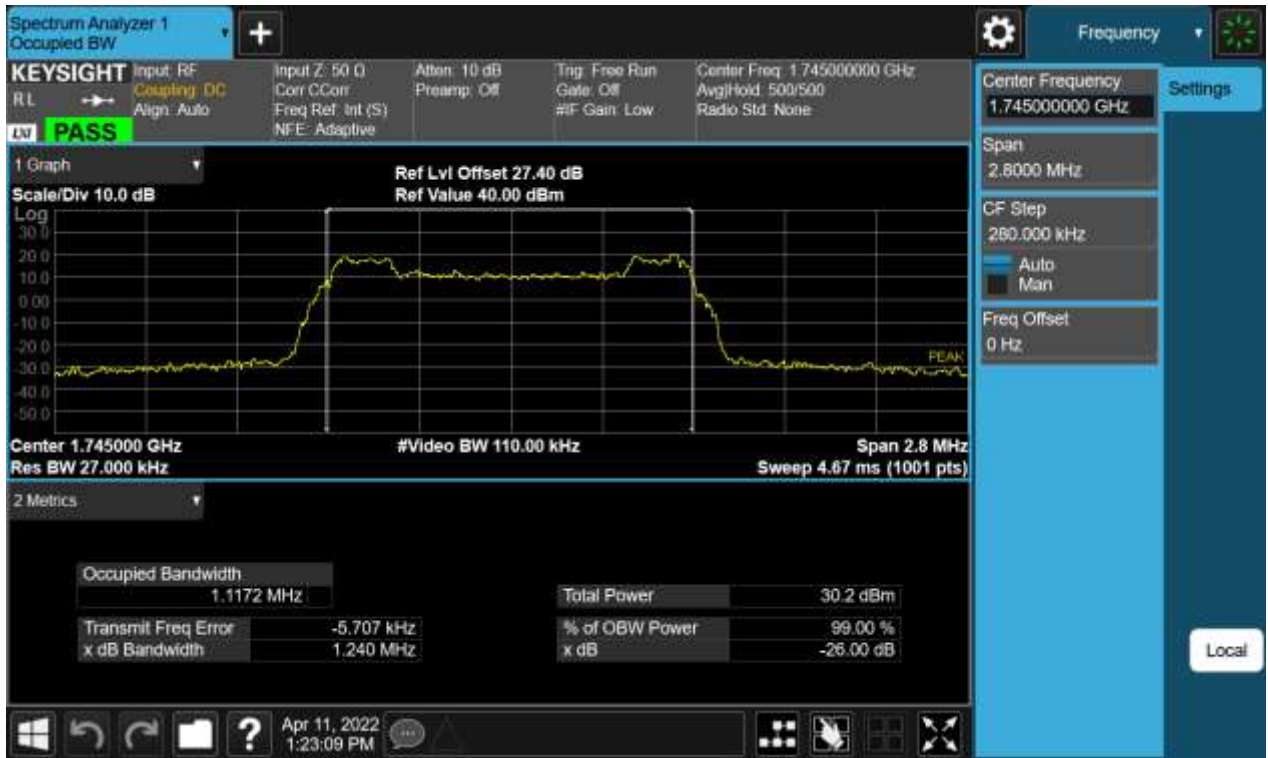


BW3 M_OBW_Middle Channel_QPSK_FullRB(Sub1 Ant)



BW3 M_OBW_Middle Channel_16QAM_FullIRB(Sub1 Ant)

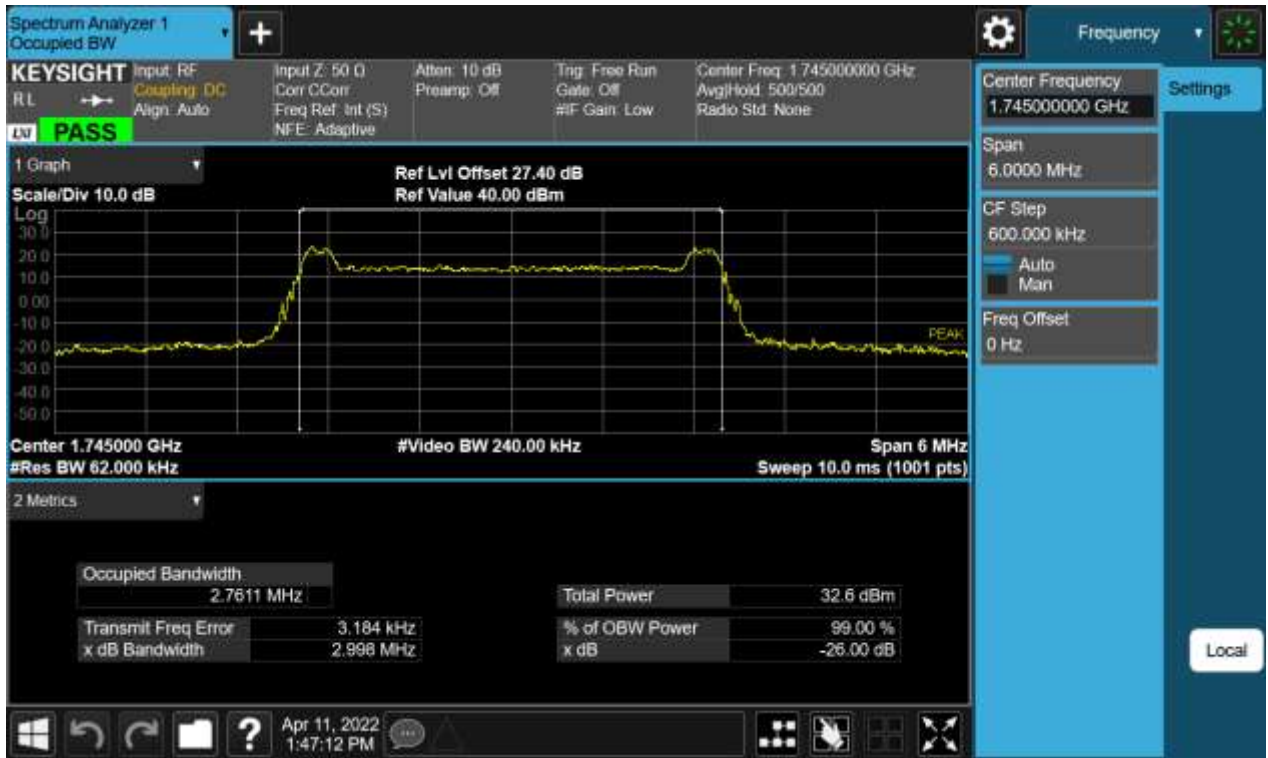

BW3 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

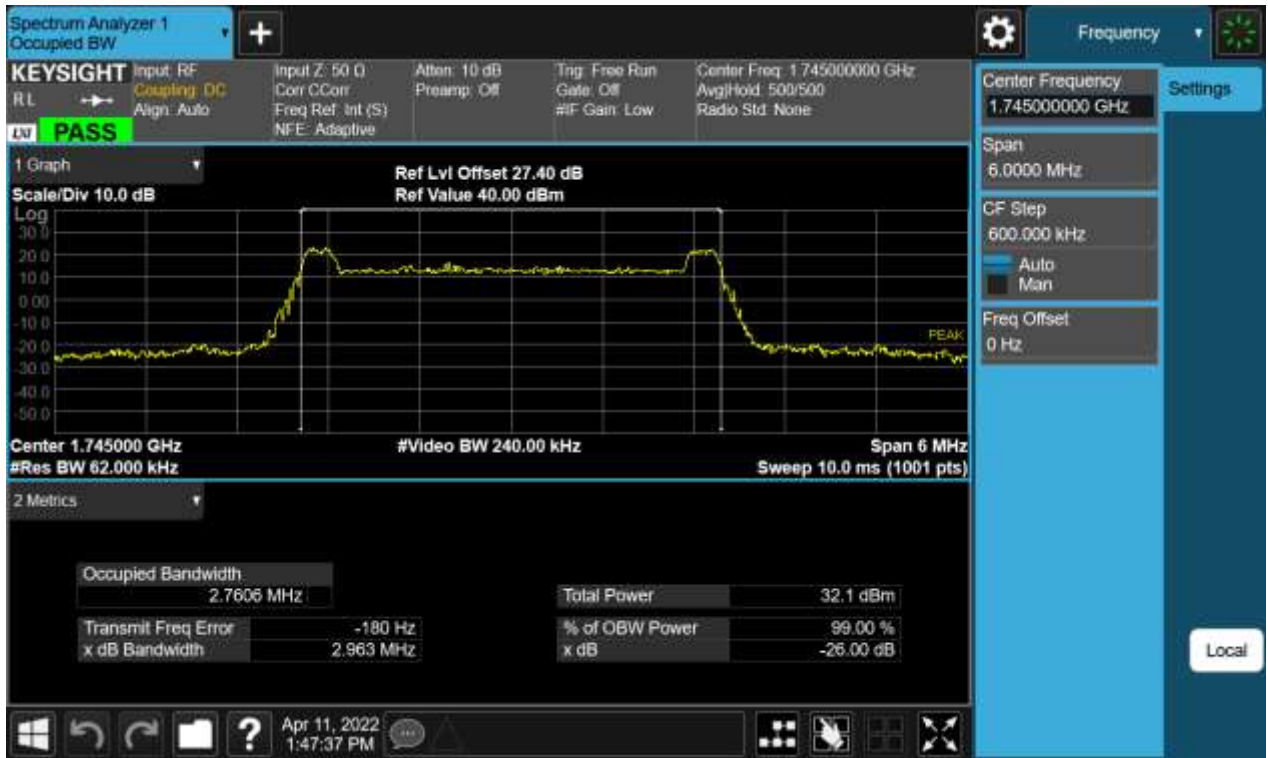

BW3 M_OBW_Middle Channel_256QAM_FullRB(Sub1 Ant)




BW5 M_OBW_Middle Channel_QPSK_FullRB(Sub1 Ant)




BW5 M_OBW_Middle Channel_16QAM_FullIRB(Sub1 Ant)



BW5 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

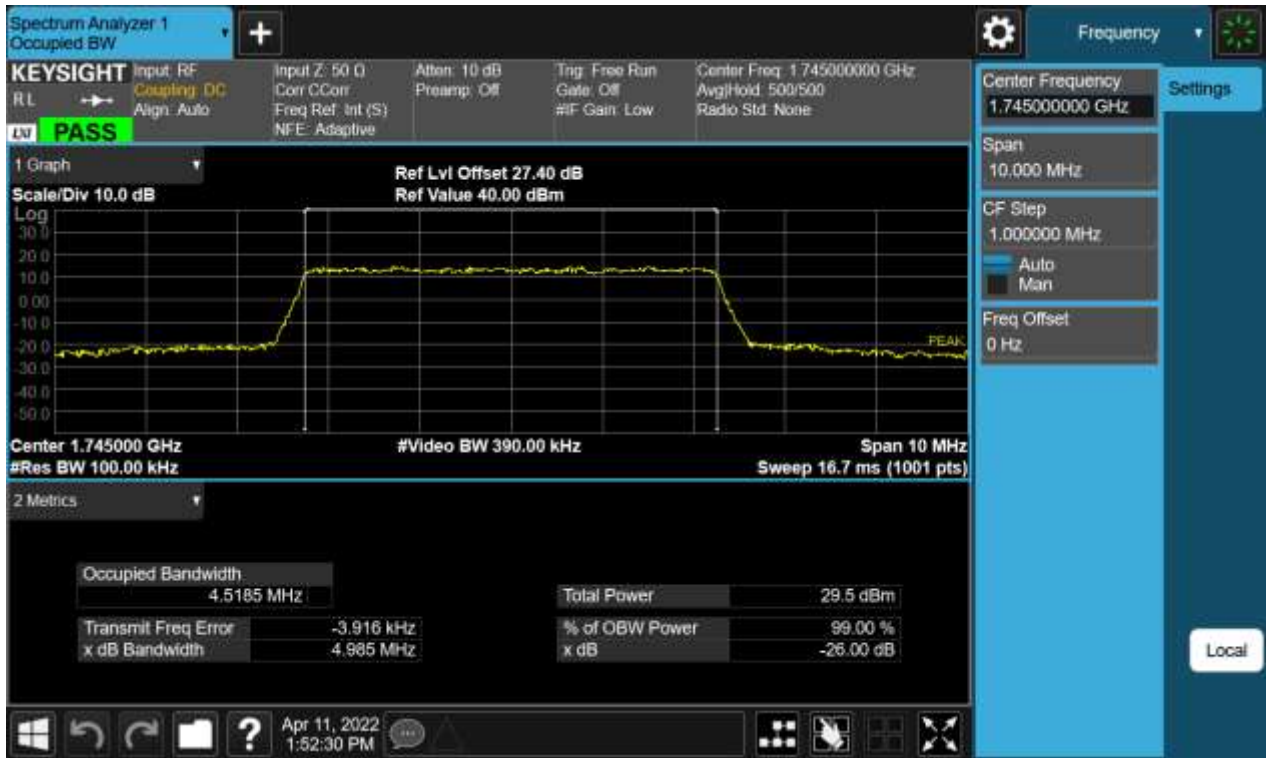


BW5 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)

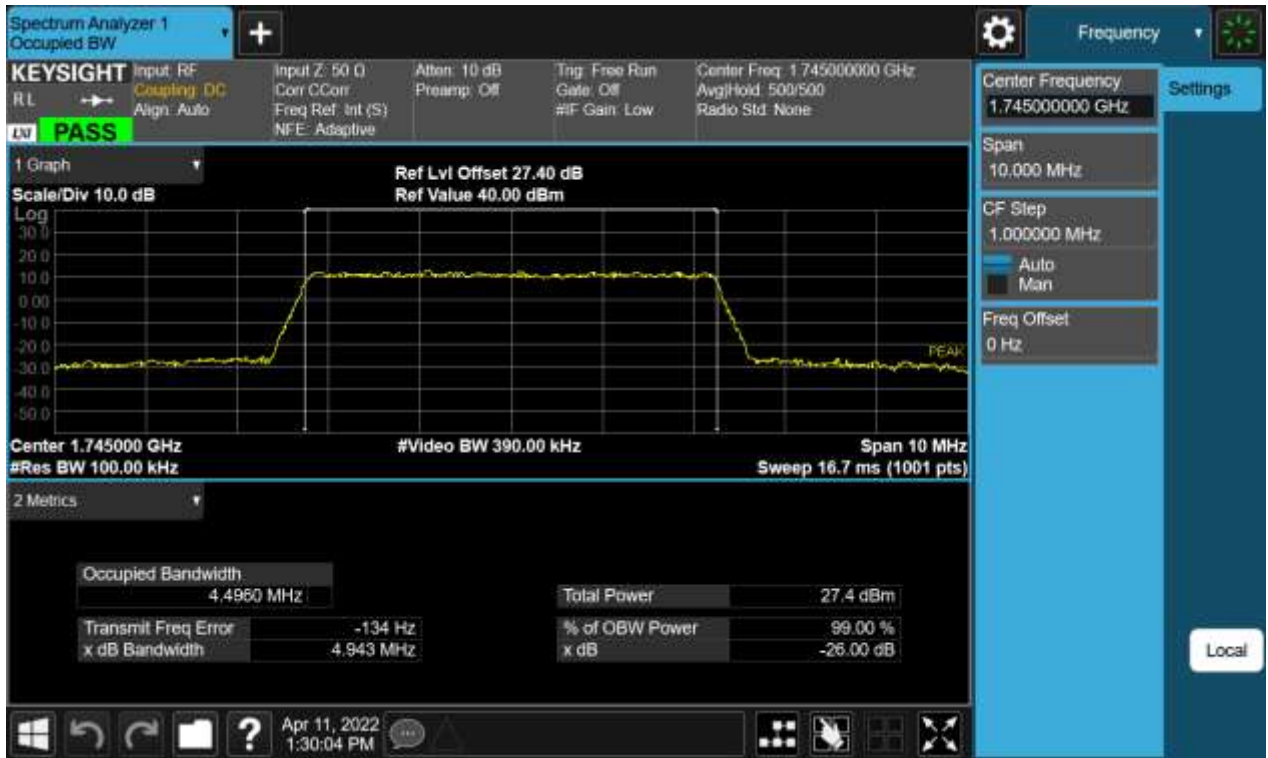


BW10 M_OBW_Middle Channel_QPSK_FullIRB(Sub1 Ant)



BW10 M_OBW_Middle Channel_16QAM_FullIRB(Sub1 Ant)

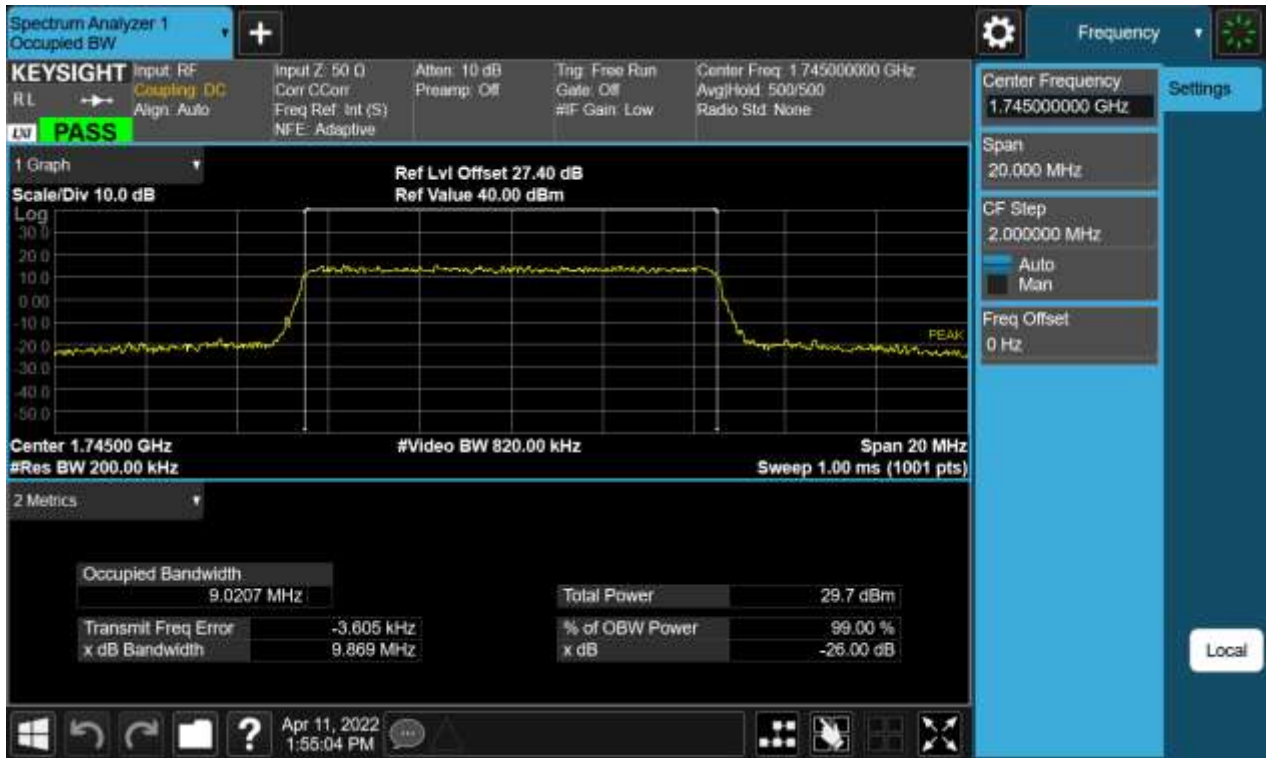


BW10 M_OBW_Middle Channel_64QAM_FullRB(Sub1 Ant)

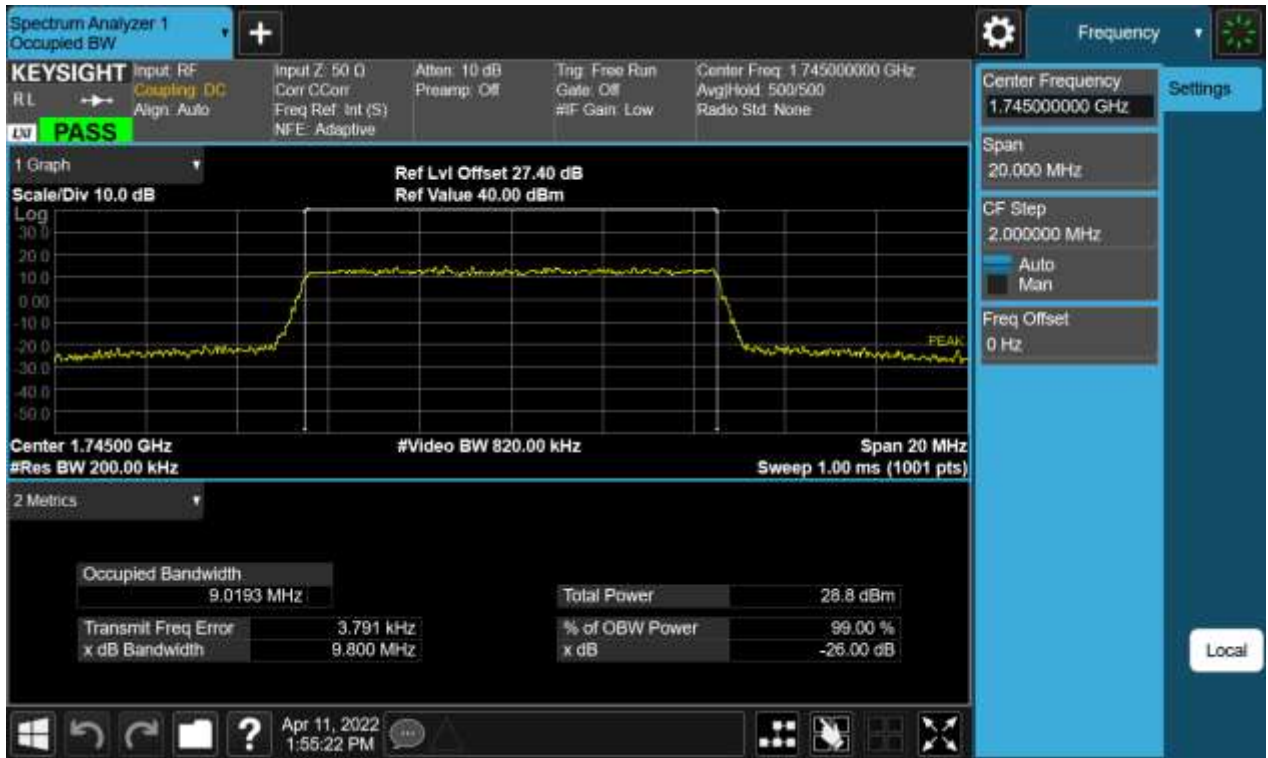


BW10 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)




BW15 M_OBW_Middle Channel_QPSK_FullIRB(Sub1 Ant)

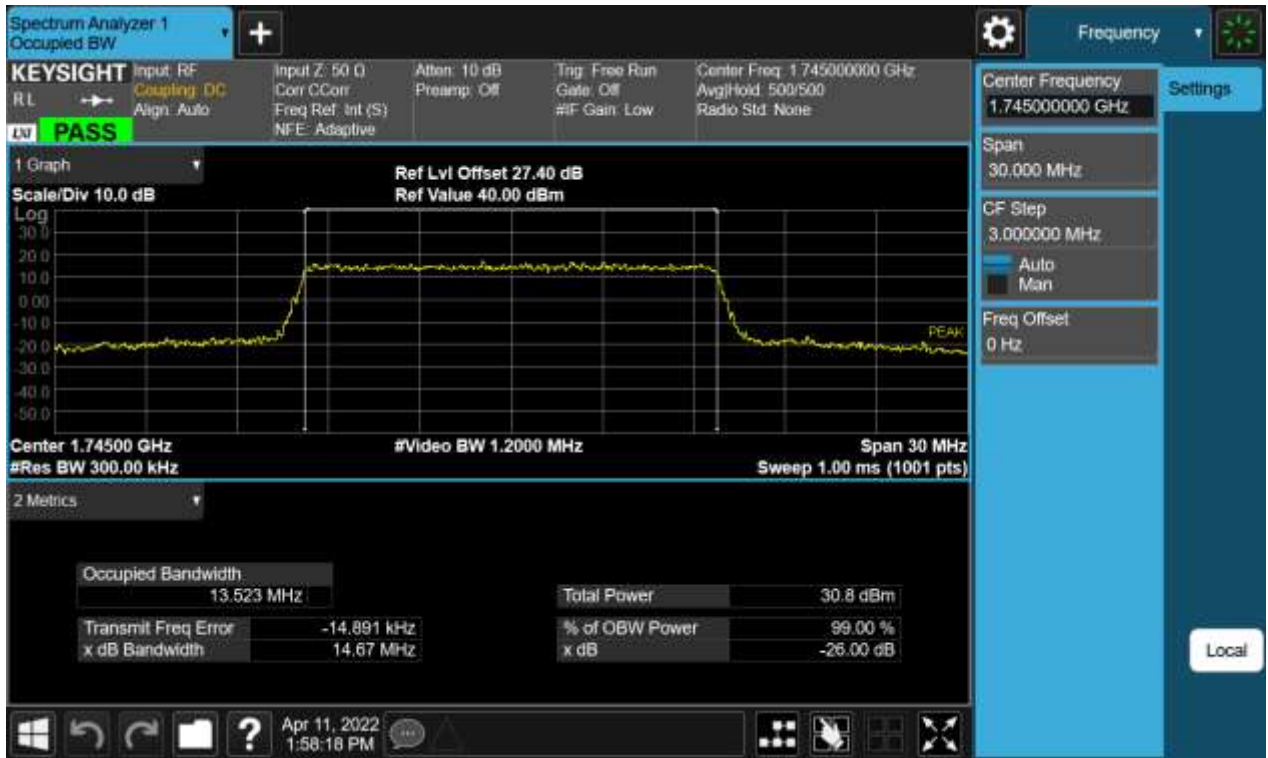

BW15 M_OBW_Middle Channel_16QAM_FullRB(Sub1 Ant)

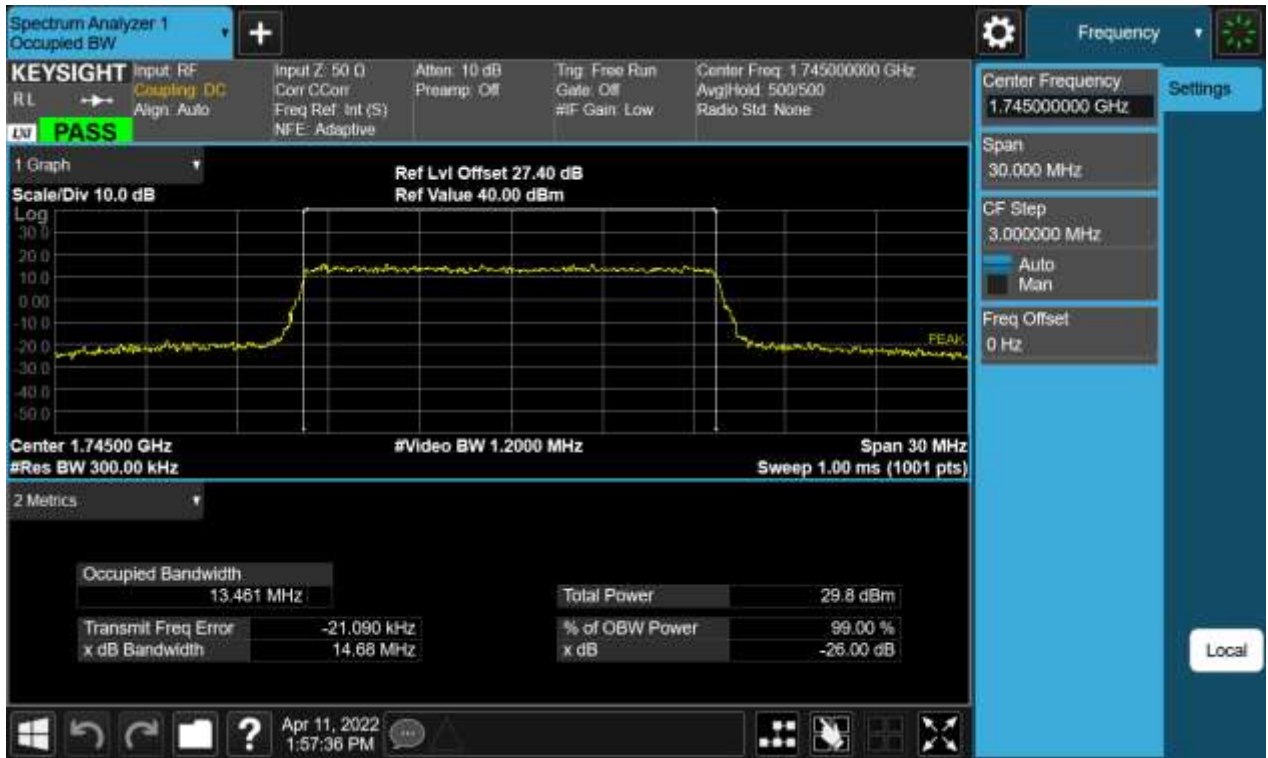

BW15 M_OBW_Middle Channel_64QAM_FullIRB(Sub1 Ant)

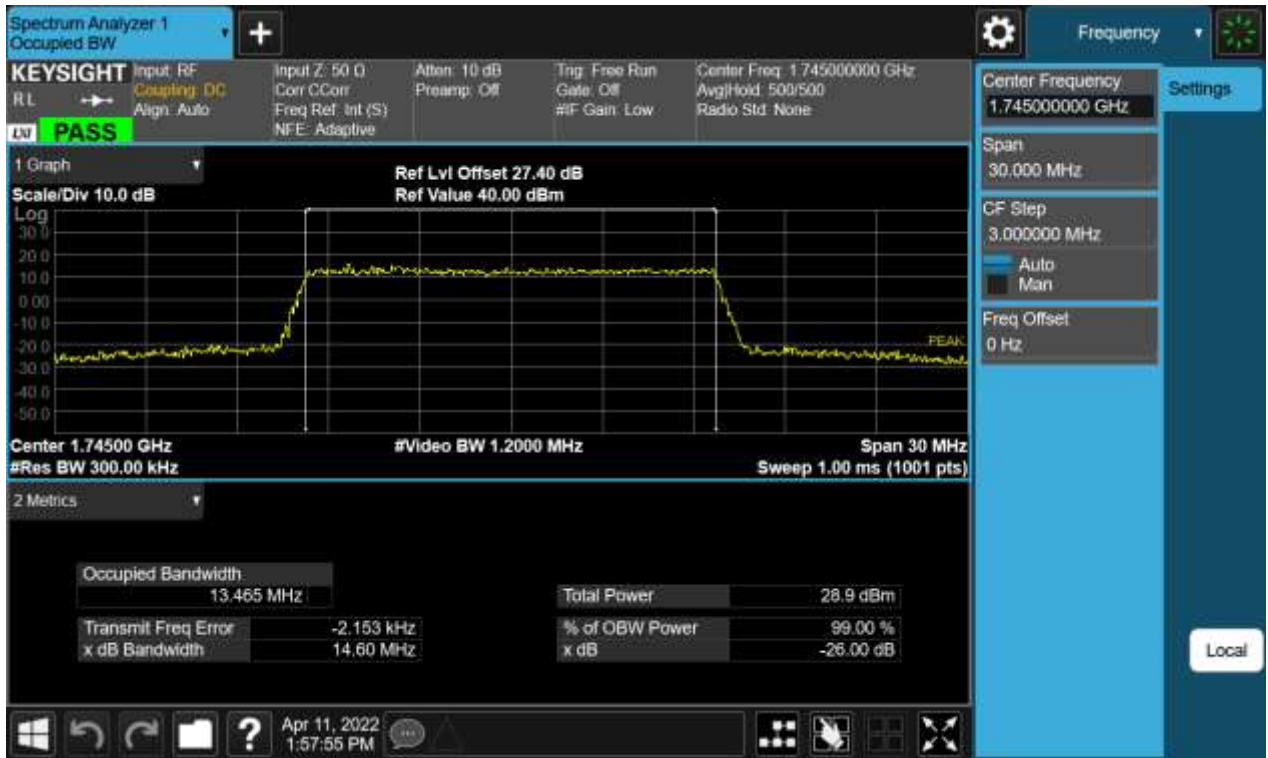

BW15 M_OBW_Middle Channel_256QAM_FullIRB(Sub1 Ant)

