



CERTIFICATION TEST REPORT

Report Number. : 4790047196-E6V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-G780G/DSM, SM-G780G/DS, SM-G780G

FCC ID : A3LSMG780G1

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
WPT and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:
2021-08-18

Prepared by:
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Testing Laboratory
TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2021-08-18	Initial issue	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>SAMPLE CALCULATION</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	7
4.4. <i>DECISION RULE</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	12
5.3. <i>List of test reduction and modes covering other modes:</i>	12
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	13
5.5. <i>DESCRIPTION OF TEST SETUP</i>	16
6. TEST AND MEASUREMENT EQUIPMENT	18
7. SUMMARY TABLE	19
8. MEASUREMENT METHODS	20
9. REFERENCE MEASUREMENTS RESULTS	21
9.1. <i>ON TIME AND DUTY CYCLE RESULTS</i>	21
9.2. <i>DUTY CYCLE PLOTS</i>	22
9.3. <i>26 dB BANDWIDTH</i>	27
9.3.1. <i>5.2 GHz BAND</i>	29
9.3.2. <i>5.3 GHz BAND</i>	29
9.3.3. <i>5.5 GHz BAND</i>	30
9.3.4. <i>STRADDLE CHANNEL</i>	30
9.3.5. <i>802.11ax 5.2 GHz BAND(RU)</i>	31
9.3.6. <i>802.11ax 5.3 GHz BAND(RU)</i>	31
9.3.7. <i>802.11ax 5.5 GHz BAND(RU)</i>	32
9.3.8. <i>802.11ax STRADDLE CHANNEL(RU)</i>	32
10. ANTENNA PORT TEST RESULTS	33
10.1. <i>6 dB BANDWIDTH</i>	33
10.1.1. <i>5.8 GHz BAND</i>	35
10.1.2. <i>802.11ax 5.8 GHz Band(RU)</i>	35

10.2.	OUTPUT POWER AND PPSD	36
10.2.1.	2Tx MODE IN THE 5.2 GHz BAND.....	37
10.2.2.	2Tx MODE IN THE 5.3 GHz BAND.....	39
10.2.3.	2Tx MODE IN THE 5.5 GHz BAND.....	41
10.2.4.	2Tx MODE IN THE 5.8 GHz BAND.....	43
10.2.5.	2Tx Mode Straddle channel IN THE 5.5 GHz BAND	44
10.2.6.	2Tx Mode Straddle channel IN THE 5.8 GHz BAND	45
10.2.7.	802.11ax 2Tx (MIMO) MODE 5.2 GHz BAND	46
10.2.8.	802.11ax 2Tx (MIMO) MODE 5.3 GHz BAND.....	50
10.2.9.	802.11ax 2Tx (MIMO) MODE 5.5 GHz BAND.....	54
10.2.10.	802.11ax 2Tx (MIMO) MODE STRADDLE CHANNEL.....	59
10.2.11.	802.11ax 2Tx (MIMO) MODE 5.8 GHz BAND.....	61
10.2.12.	OUTPUT POWER AND PPSD PLOTS(WORST CASE).....	65
11.	TRANSMITTER ABOVE 1 GHz.....	79
11.1.	TX ABOVE 1GHz 2Tx MODE IN THE 5.2GHz BAND.....	82
11.2.	TX ABOVE 1GHz 2Tx MODE IN THE 5.3GHz BAND.....	86
11.3.	TX ABOVE 1GHz 2Tx MODE IN THE 5.5 GHz BAND.....	90
11.4.	TX ABOVE 1GHz 2Tx MODE IN THE 5.8 GHz BAND.....	95
11.5.	Spurious Emissions for Simultaneous Transmission	99
11.5.1.	Worst test case RSDB condition	99
11.5.2.	Worst test case RSDB + Bluetooth condition	99
11.5.3.	Test Results.....	100
12.	WORST-CASE BELOW 1 GHz	102
13.	AC POWER LINE CONDUCTED EMISSIONS.....	103
14.	DYNAMIC FREQUENCY SELECTION.....	106
14.1.	OVERVIEW.....	106
14.1.1.	LIMITS.....	106
14.1.2.	TEST AND MEASUREMENT SYSTEM.....	109
14.1.3.	SETUP OF EUT.....	112
14.1.4.	DESCRIPTION OF EUT	113
14.2.	RESULTS FOR 80 MHz BANDWIDTH (UNII-2A BAND).....	114
14.2.1.	TEST CHANNEL	114
14.2.2.	RADAR WAVEFORM AND TRAFFIC.....	114
14.2.3.	OVERLAPPING CHANNEL TESTS.....	115
14.2.4.	MOVE AND CLOSING TIME	115
14.3.	RESULTS FOR 80 MHz BANDWIDTH (UNII-2C BAND).....	118
14.3.1.	TEST CHANNEL	118
14.3.2.	RADAR WAVEFORM AND TRAFFIC.....	118
14.3.3.	OVERLAPPING CHANNEL TESTS.....	119
14.3.4.	MOVE AND CLOSING TIME	119

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC

MODEL NUMBER: SM-G780G/DSM, SM-G780G/DS, SM-G780G

SERIAL NUMBER: R38R301JNJM, R38R301JPNJ (CONDUCTED);
R38R301JNSD, R38R301JPWD, R38R301JR3B (RADIATED);

DATE TESTED: 2021-08-08 ~ 2021-08-18;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. KDB 662911 D01 v02r01
7. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input checked="" type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC. This test report addresses the NII (WLAN) operational mode.

This report covers the Samsung models SM-G780G/DSM, SM-G780G/DS and SM-G780G. These models are identical in hardware except SM-G780G/DSM is supported MST and SMG780G/DS has dual SIM tray and SM-G780G has single SIM tray. All series model was same hardware thus, SM-G780G/DS(Dual SIM tray) was set for final test.

Note. This EUT does not support channel puncturing.

WiFi operating mode

Frequency rage	Mode	ANT1	ANT2
5GHz (5180 MHz ~ 5825 MHz)	802.11a SISO	TX/RX	TX/RX
	802.11a MIMO	TX/RX	TX/RX
	802.11n SISO	TX/RX	TX/RX
	802.11n MIMO	TX/RX	TX/RX
	802.11ac SISO	TX/RX	TX/RX
	802.11ac MIMO	TX/RX	TX/RX
	802.11ax SISO	TX/RX	TX/RX
	802.11ax MIMO	TX/RX	TX/RX

Simultaneous TX Condition


Simultaneous Tx Condition - RSDB

Mode	# of TX	5GHz WLAN		2.4GHz WLAN		Test Case
		ANT1	ANT2	ANT1	ANT2	
2.4GHz + 5GHz RSDB MIMO	4	○	○	○	○	○


Simultaneous Tx Condition - RSDB + Bluetooth

Mode	# of TX	5GHz WLAN		2.4GHz Bluetooth	2.4GHz WLAN	Test Case
		ANT1	ANT2	ANT1	ANT2	
2.4GHz + 5GHz MIMO RSDB & Bluetooth	4	○	○	○	○	○


802.11ax RU allocations

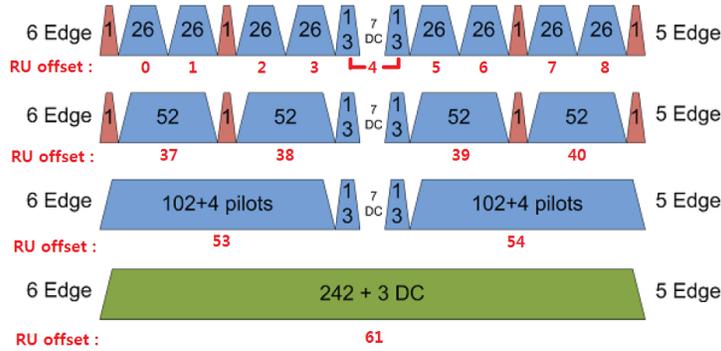

- HE 20 Mode -

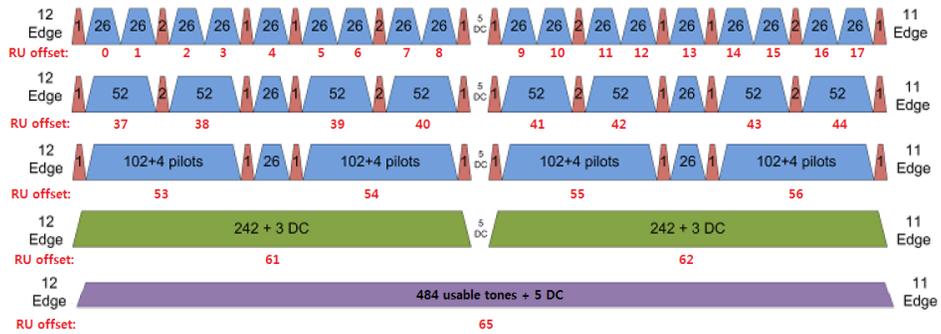

- HE 40 Mode -

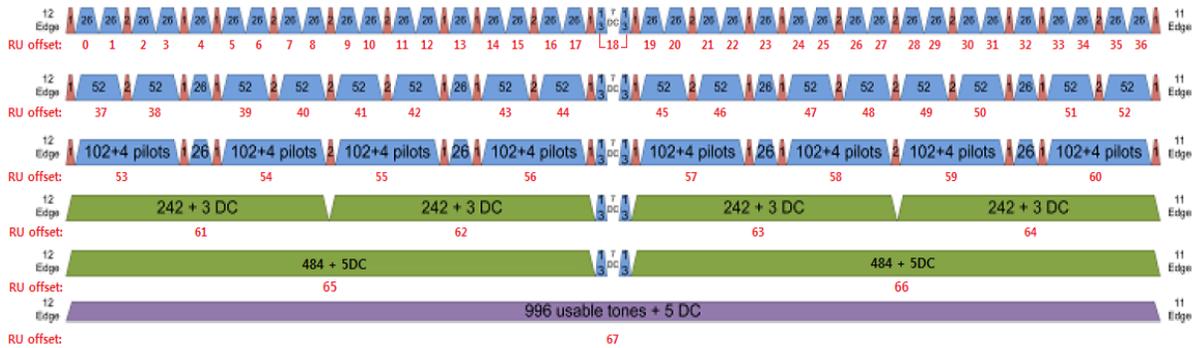

- HE 80 Mode -

Test RU offset for tones in each modes

Mode	Tones	RU offset
HE20	26T	0
		4
		8
	52T	37
		38
		40
	106T	53
		54
242T / SU <small>Note</small>	61 / -	
HE40	26T	0
		9
		17
	52T	37
		41
		44
	106T	53
		54
		56
	242T	61
		62
484T / SU <small>Note</small>	63 / -	
HE80	26T	0
		18
		36
	52T	37
		45
		52
	106T	53
		57
		60
	242T	61
		62
		64
	484T	65
		66
996T / SU <small>Note</small>	67 / -	

Note: Full RU(Resource Unit) 242T mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the SU mode with highest output power in MIMO.

Band portion of RU allocation about straddle channels

Mode	Channel	Tones	RU offset	Portion
HE20	Straddle 5720 MHz	26T	6	UNII 2C & UNII 3
		242T / SU	61 / -	
HE40	Straddle 5710 MHz	26T	15	UNII 2C & UNII 3
		484T / SU	65 / -	
HE80	Straddle 5690 MHz	26T	34	UNII 2C & UNII 3
		996T / SU	67 / -	

Note: In case of RU straddle channel, test was performed overlapping RU position.

MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
UNII-1	5180 - 5240	802.11a MIMO	18.96	78.70
		802.11n(HT20) MIMO	18.66	73.45
		802.11ax(HE20) MIMO	17.59	57.41
	5190 - 5230	802.11n(HT40) MIMO	18.96	78.70
		802.11ax(HE40) MIMO	17.29	53.58
	5210	802.11ac(VHT80) MIMO	16.50	44.67
802.11ax(HE80) MIMO		15.95	39.36	
UNII-2A	5260 - 5320	802.11a MIMO	19.24	83.95
		802.11n(HT20) MIMO	18.93	78.16
		802.11ax(HE20) MIMO	17.89	61.52
	5190 - 5230	802.11n(HT40) MIMO	19.10	81.28
		802.11ax(HE40) MIMO	17.57	57.15
	5270 - 5310	802.11ac(VHT80) MIMO	16.07	40.46
802.11ax(HE80) MIMO		16.08	40.55	
UNII-2C	5500 - 5720	802.11a MIMO	19.16	82.41
		802.11n(HT20) MIMO	18.83	76.38
		802.11ax(HE20) MIMO	18.42	69.50
	5510 - 5710	802.11n(HT40) MIMO	19.19	82.99
		802.11ax(HE40) MIMO	17.32	53.95
	5530 - 5690	802.11ac(VHT80) MIMO	16.16	41.30
802.11ax(HE80) MIMO		16.33	42.95	
UNII-3	5745 - 5825	802.11a MIMO	18.91	77.80
		802.11n(HT20) MIMO	18.62	72.78
		802.11ax(HE20) MIMO	17.96	62.52
	5755 - 5795	802.11n(HT40) MIMO	18.96	78.70
		802.11ax(HE40) MIMO	16.95	49.55
	5775	802.11ac(VHT80) MIMO	15.53	35.73
802.11ax(HE80) MIMO		15.57	36.06	

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain [dBi]
UNII 1 5150 - 5250	-6.72	-6.31	-3.50
UNII 2A 5250 - 5350	-6.72	-6.31	-3.50
UNII 2C 5470 - 5725	-6.47	-6.27	-3.36
UNII 3 5725 - 5850	-8.36	-6.01	-4.10

“WIFI0” and “WIFI1” as indicated in antenna specification are written as ANT 1 and ANT 2 in this report.

5.3. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

Authorized Frequency Band			
Mode	Antenna Stream	Mode	Covered by
802.11a	MIMO	802.11a 2TX	
802.11n HT20		802.11n HT20 2TX	
802.11ac VHT20		802.11ac VHT20 2TX	802.11n HT20 2TX
802.11ax HE20(SU)		802.11ax HE20 RU(242T) 2TX	802.11ax HE20 SU 2TX
802.11n HT40		802.11n HT40 2TX	
802.11ac VHT40		802.11ac VHT40 2TX	802.11n HT40 2TX
802.11ax HE40(SU)		802.11ax HE40 RU(484T) 2TX	802.11ax HE40 SU 2TX
802.11ac VHT80		802.11ac VHT80 2TX	
802.11ax HE80(SU)		802.11ax HE80 RU(996T) 2TX	802.11ax HE80 SU 2TX

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

- Worst case condition

ANT1	ANT2	ANT ALL
Axis	Axis	Axis
Y	Y	Y

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps 2Tx 802.11n HT20 mode: MCS0 2Tx 802.11ax HE20 mode: MCS0 2Tx
802.11n HT40 mode: MCS0 2Tx 802.11ax HE40 mode: MCS0 2Tx
802.11ac VHT80 mode: MCS0 2Tx 802.11ax HE80 mode: MCS0 2Tx

Radiation test for 802.11a / n HT20 & HT40 / ac VHT80 / ax HE20 & HE40 & HE80 were evaluated at MIMO mode.

Note : All radiated and power line conducted tests were performed connected with charger for evaluation of worst case mode.

Worst-case selection criteria for 802.11ax test items :

- For the 6dB Bandwidth, it was tested at the RU allocation with lowest tones number for each bandwidth.

Note : All radiated and power line conducted tests were performed connected with charger for evaluation of worst case mode.

Test case configuration for 802.11a, 802.11n HT20 & 40, 802.11ac VHT20 & 40 & 80, 802.11ax HE20 & 40 & 80 (SU) modes :

Mode	Band	SISO Target[dBm]				MIMO Target[dBm]			
		802.11a	802.11n	802.11ac	802.11ax (SU)	802.11a	802.11n	802.11ac	802.11ax (SU)
5GHZ (20 MHz)	UNII-1	16	16	16	15	19	19	19	18
	UNII-2A	16	16	16	15	19	19	19	18
	UNII-2C	16	16	16	15	19	19	19	18
	UNII-3	16	16	16	15	19	19	19	18
5GHZ (40 MHz)	UNII-1		16	14	14		19	17	17
	UNII-2A		16	14	14		19	17	17
	UNII-2C		16	14	14		19	17	17
	UNII-3		16	14	14		19	17	17
5GHZ (80 MHz)	UNII-1			13	13			16	16
	UNII-2A			13	13			16	16
	UNII-2C			13	13			16	16
	UNII-3			13	13			16	16

 Band-Edge & Spurious Emission
 Band-Edge & Spurious Emission Spot-check

Note. Compared to the 802.11a mode, target power is the same or lower and the density is low, so only the spot-check test was performed in the 802.11n & 802.11ac & 802.11ax mode. Spot check test was performed in the worst tested band of 802.11a mode.

Test case configuration for 802.11ax HE20 & 40 & 80 (RU) modes :

Band	Mode	Freq.	Tone	RU offset	Test Case		
					ANT1	ANT2	MIMO
UNII-1	HE20	5180	26 T	0			
				4			
				8			
		0		-	-	O	
		4		-	-	-	
		8		-	-	-	
	5240	0					
		4					
		8					
	HE40	5190		0			
				9			
				17			
		0		-	-	O	
		9		-	-	-	
		17		-	-	-	
5230	0						
	9						
	17						
HE80	5210	0					
		18					
		36			O		
	0						
	18						
	36						
UNII-2A	HE20	5260	0				
			4				
			8				
		0					
		4					
		8					
	5320	0			O		
		4			-		
		8			-		
UNII-2C	HE20	5500	0				
			4				
			8				
		0	-	-	O		
		4	-	-	-		
		8	-	-	-		
	5700	0					
		4					
		8					
UNII-3	HE20	5745	0				
			4				
			8				
		0	-	-	-		
		4	-	-	-		
		8	-	-	O		
	5825	0					
		4					
		8					

Note1. Radiated spurious test was performed on the lower tone(26T) with worst average power.
 Note2. Since the target of 26 tones are all the same, spurious test was performed once in each UNII band.
 Note3. Spot-check test was performed in HE40, HE80 modes.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37M194G2J1SE3	N/A
Data Cable	SAMSUNG	EP-DR140AWE	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
 Test software exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

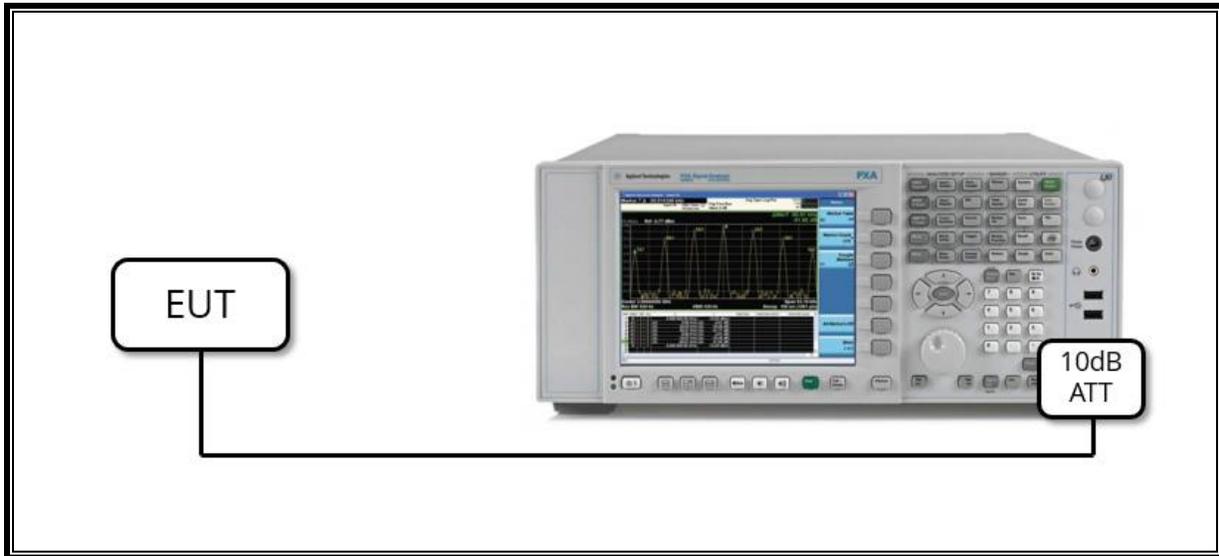

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

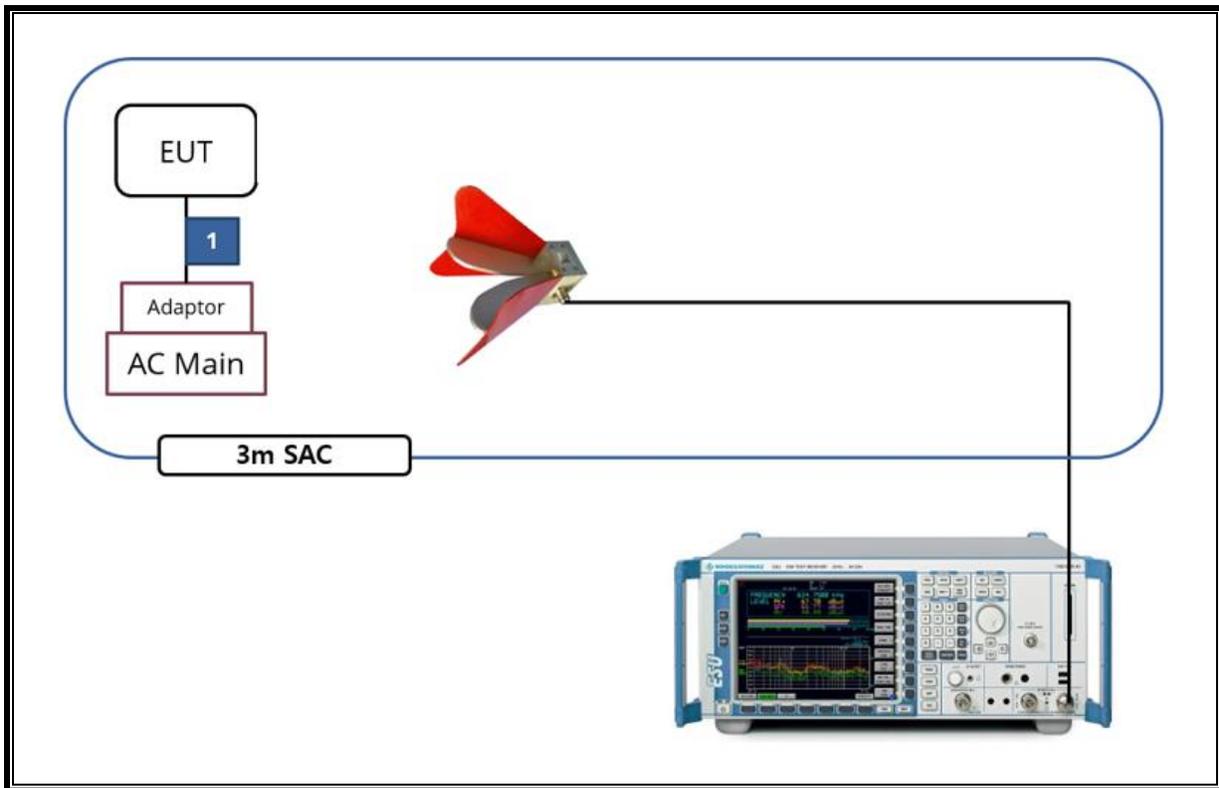

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00218957	2023-01-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2023-01-15
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2021-10-02
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2022-08-04
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54270007	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54260010	2022-08-04
Attenuator	PASTERNAK	PE7087-10	A001	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2022-08-03
Attenuator	PASTERNAK	PE7004-10	2	2022-08-02
Attenuator	PASTERNAK	PE7087-10	A009	2022-08-03
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV-216	101837	2022-08-05
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2021-10-02
Termination	WEINSCHL	M1406A	T09	2022-08-03
Attenuator	WEINSCHL	WA76-30-21	A015	2022-08-03
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8GHz)	500kHz	Condcuted	PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	< 24dBm or 11+10Log(26dB BW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 13	Radiated	PASS
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	PASS ^{Note}

Note. This EUT does not support channel puncturing.

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section II.B.

6dB Emission BW : KDB 789033 D02 v02r01, Section II.C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section II.C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section II.D.

Conducted Output Power : KDB 789033 D02 v02r01, Section II.E.3.b(Method PM-G)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):

KDB 789033 D02 v02r01, Section II.E.2.b(Method SA-1)

Power Spectral Density : KDB 789033 D02 v02r01, Section II.F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]
802.11a SISO	1.464	1.482	0.988	98.785	-
802.11n(HT20) SISO	5.429	5.449	0.996	99.633	-
802.11n(HT40) SISO	5.425	5.448	0.996	99.578	-
802.11ac(VHT80) SISO	5.426	5.444	0.997	99.669	-
802.11a MIMO	1.464	1.482	0.988	98.785	-
802.11n(HT20) MIMO	5.424	5.449	0.995	99.541	-
802.11n(HT40) MIMO	5.418	5.440	0.996	99.596	-
802.11ac(VHT80) MIMO	5.425	5.450	0.995	99.541	-

Mode	ANT.	Tone	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]
802.11ax HE20	SISO	26T	5.079	5.105	0.995	99.491	-
		52T	5.075	5.094	0.996	99.627	-
		106T	4.766	4.785	0.996	99.603	-
		SU	5.445	5.464	0.997	99.652	-
	MIMO	26T	2.595	2.614	0.993	99.273	-
		52T	2.591	2.609	0.993	99.310	-
		106T	2.436	2.454	0.993	99.267	-
		SU	5.452	5.469	0.997	99.689	-
802.11ax HE40	SISO	26T	5.080	5.106	0.995	99.491	-
		52T	5.062	5.099	0.993	99.274	-
		106T	4.766	4.784	0.996	99.624	-
		242T	4.667	4.685	0.996	99.616	-
		SU	5.444	5.462	0.997	99.670	-
	MIMO	26T	2.594	2.611	0.993	99.349	-
		52T	2.591	2.609	0.993	99.310	-
		106T	2.435	2.453	0.993	99.266	-
		242T	2.388	2.404	0.993	99.334	-
		SU	5.452	5.469	0.997	99.689	-
802.11ax HE80	SISO	26T	5.063	5.104	0.992	99.197	-
		52T	5.059	5.094	0.993	99.313	-
		106T	4.765	4.784	0.996	99.603	-
		242T	4.666	4.684	0.996	99.616	-
		484T	4.661	4.679	0.996	99.615	-
		SU	5.443	5.461	0.997	99.670	-
	MIMO	26T	2.593	2.612	0.993	99.273	-
		52T	2.590	2.608	0.993	99.310	-
		106T	2.435	2.453	0.993	99.266	-
		242T	2.387	2.404	0.993	99.293	-
		484T	2.383	2.401	0.993	99.250	-
		SU	5.451	5.468	0.997	99.689	-

Note. If the duty cycle is over 98%, compensation is not included in average measurement.

LIMITS


None; for reporting purposes only.


PROCEDURE


KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.


9.2. DUTY CYCLE PLOTS



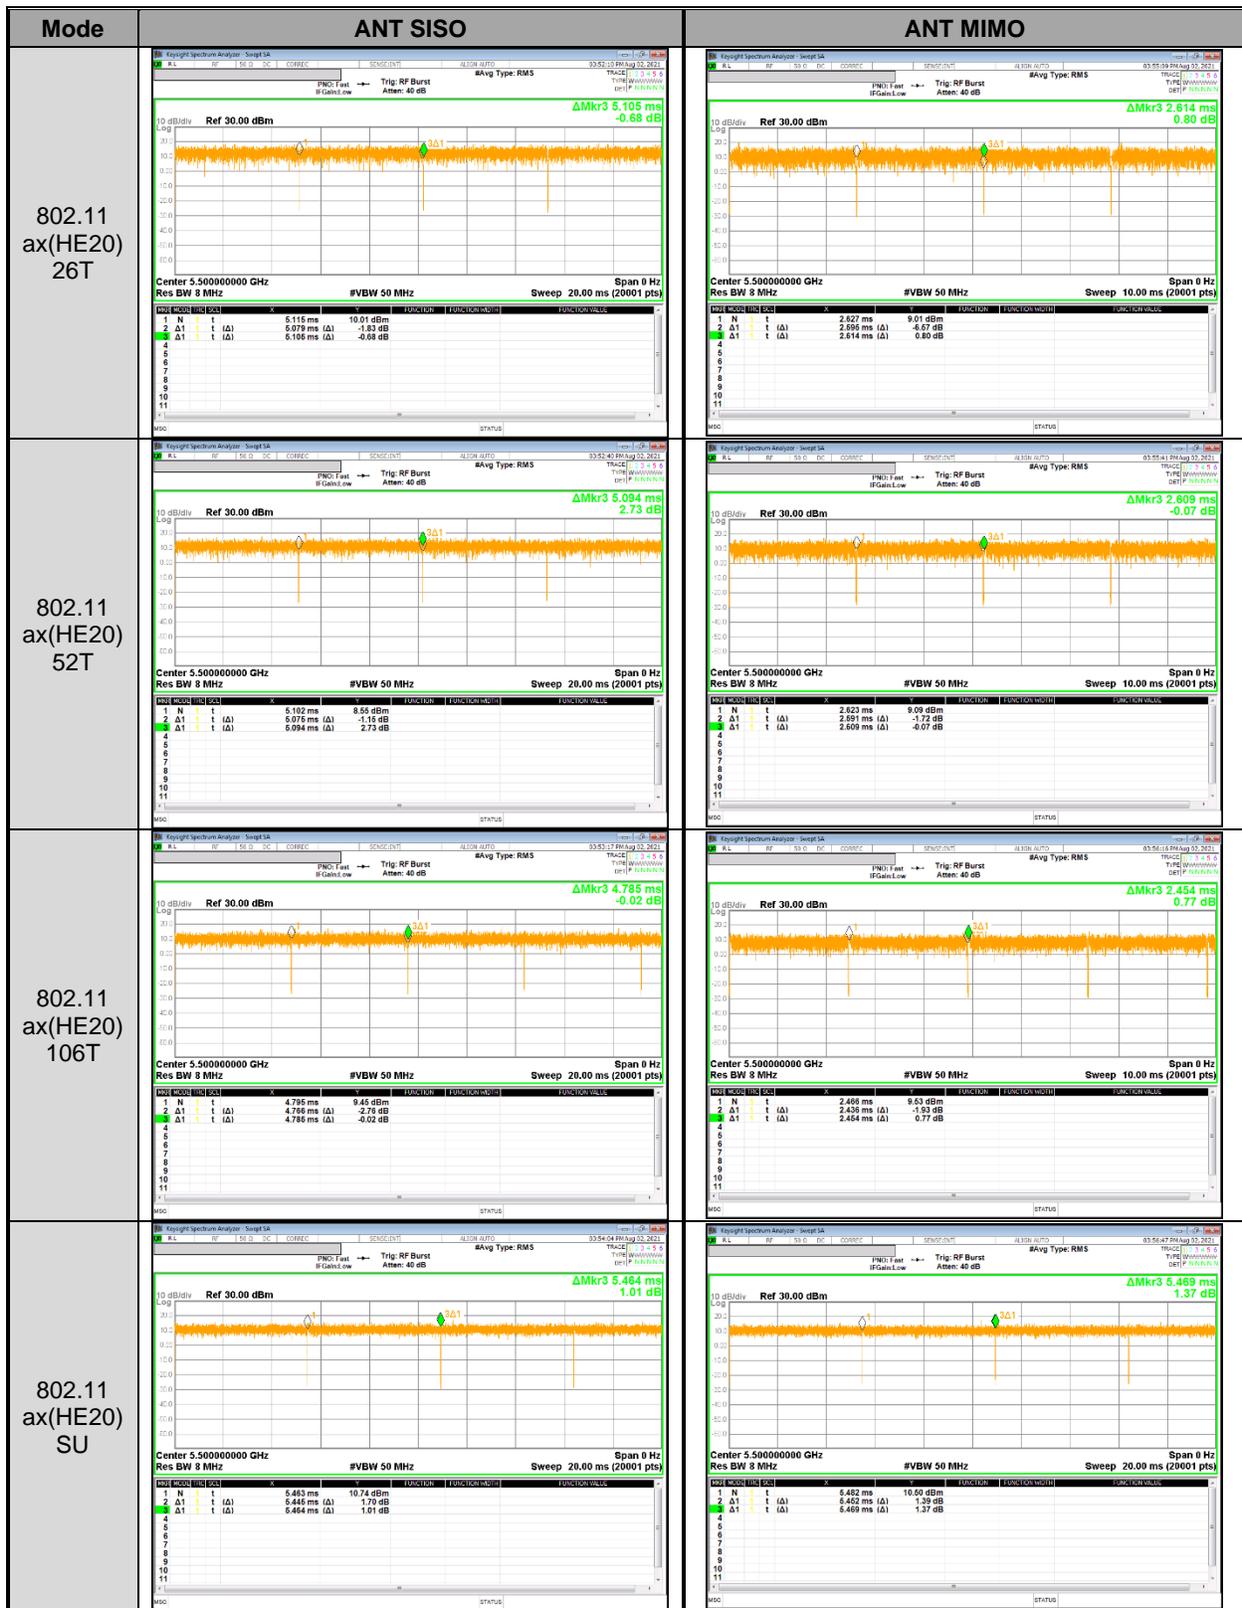

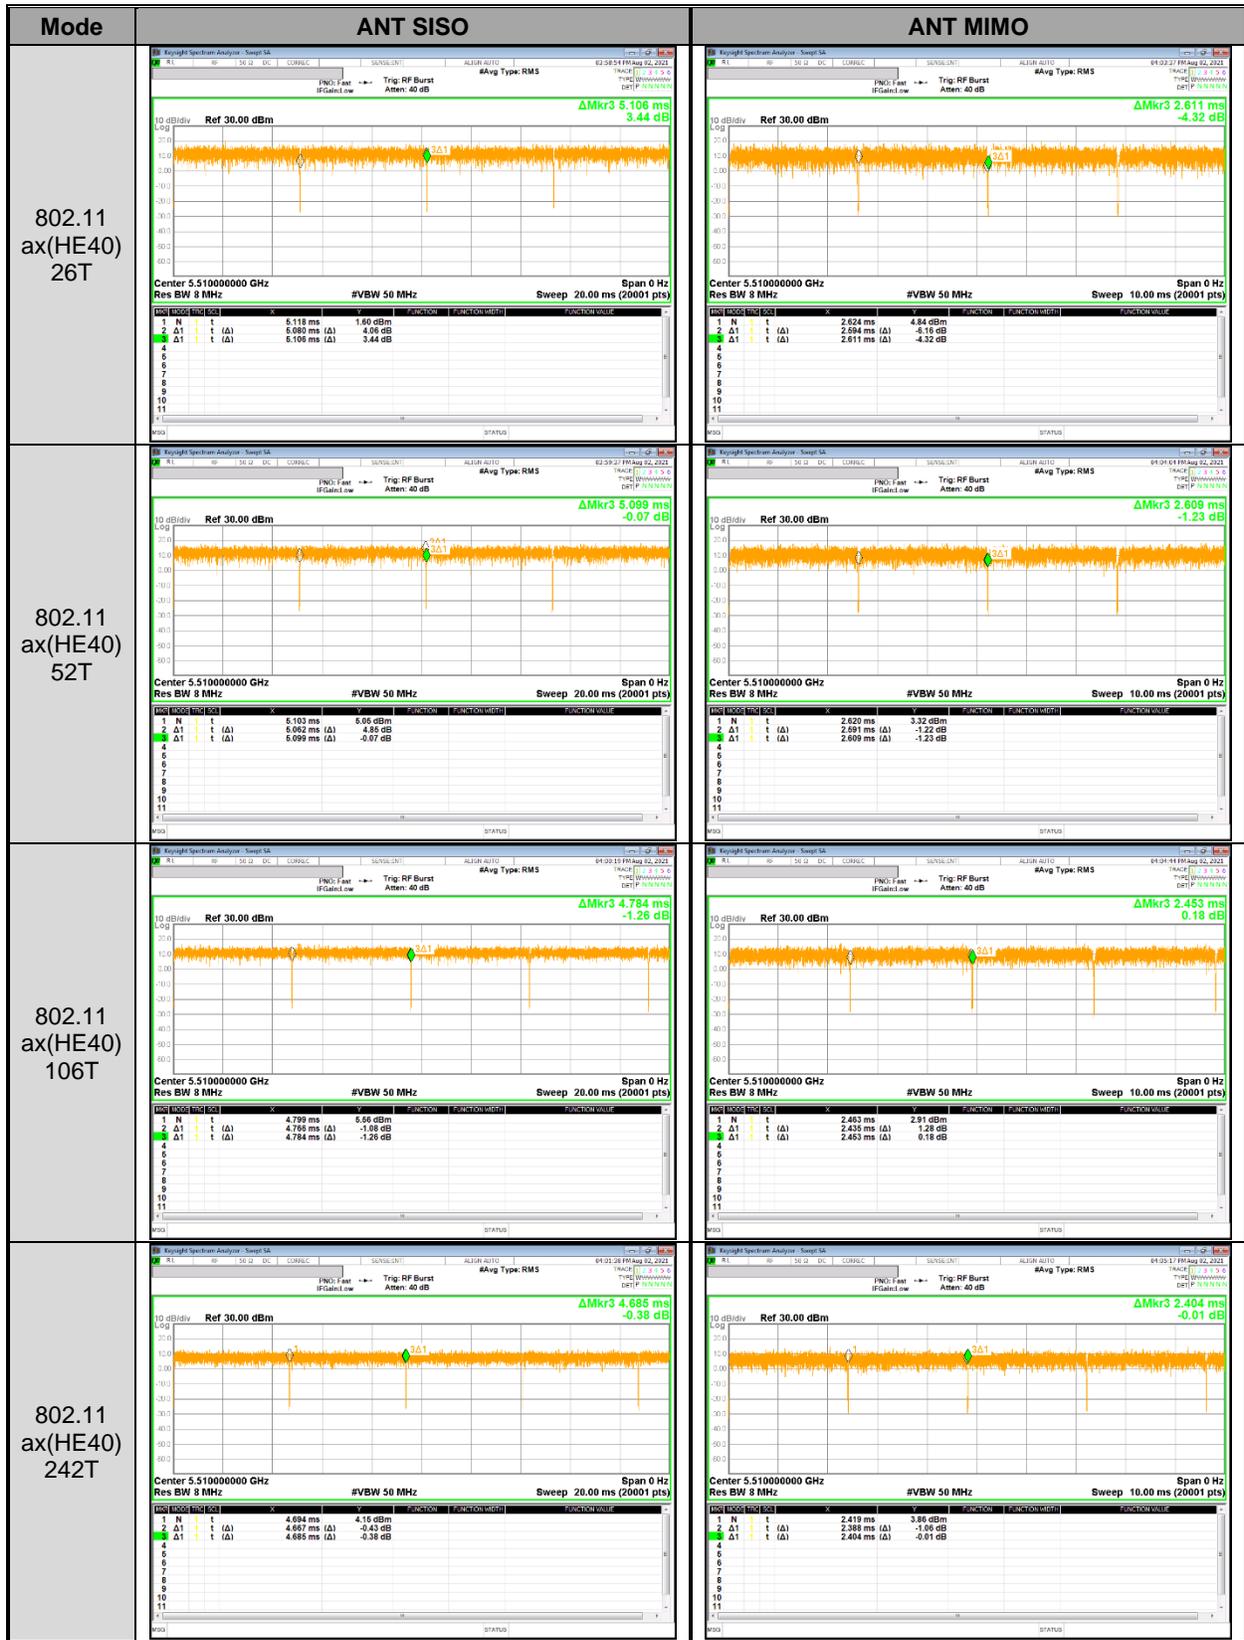

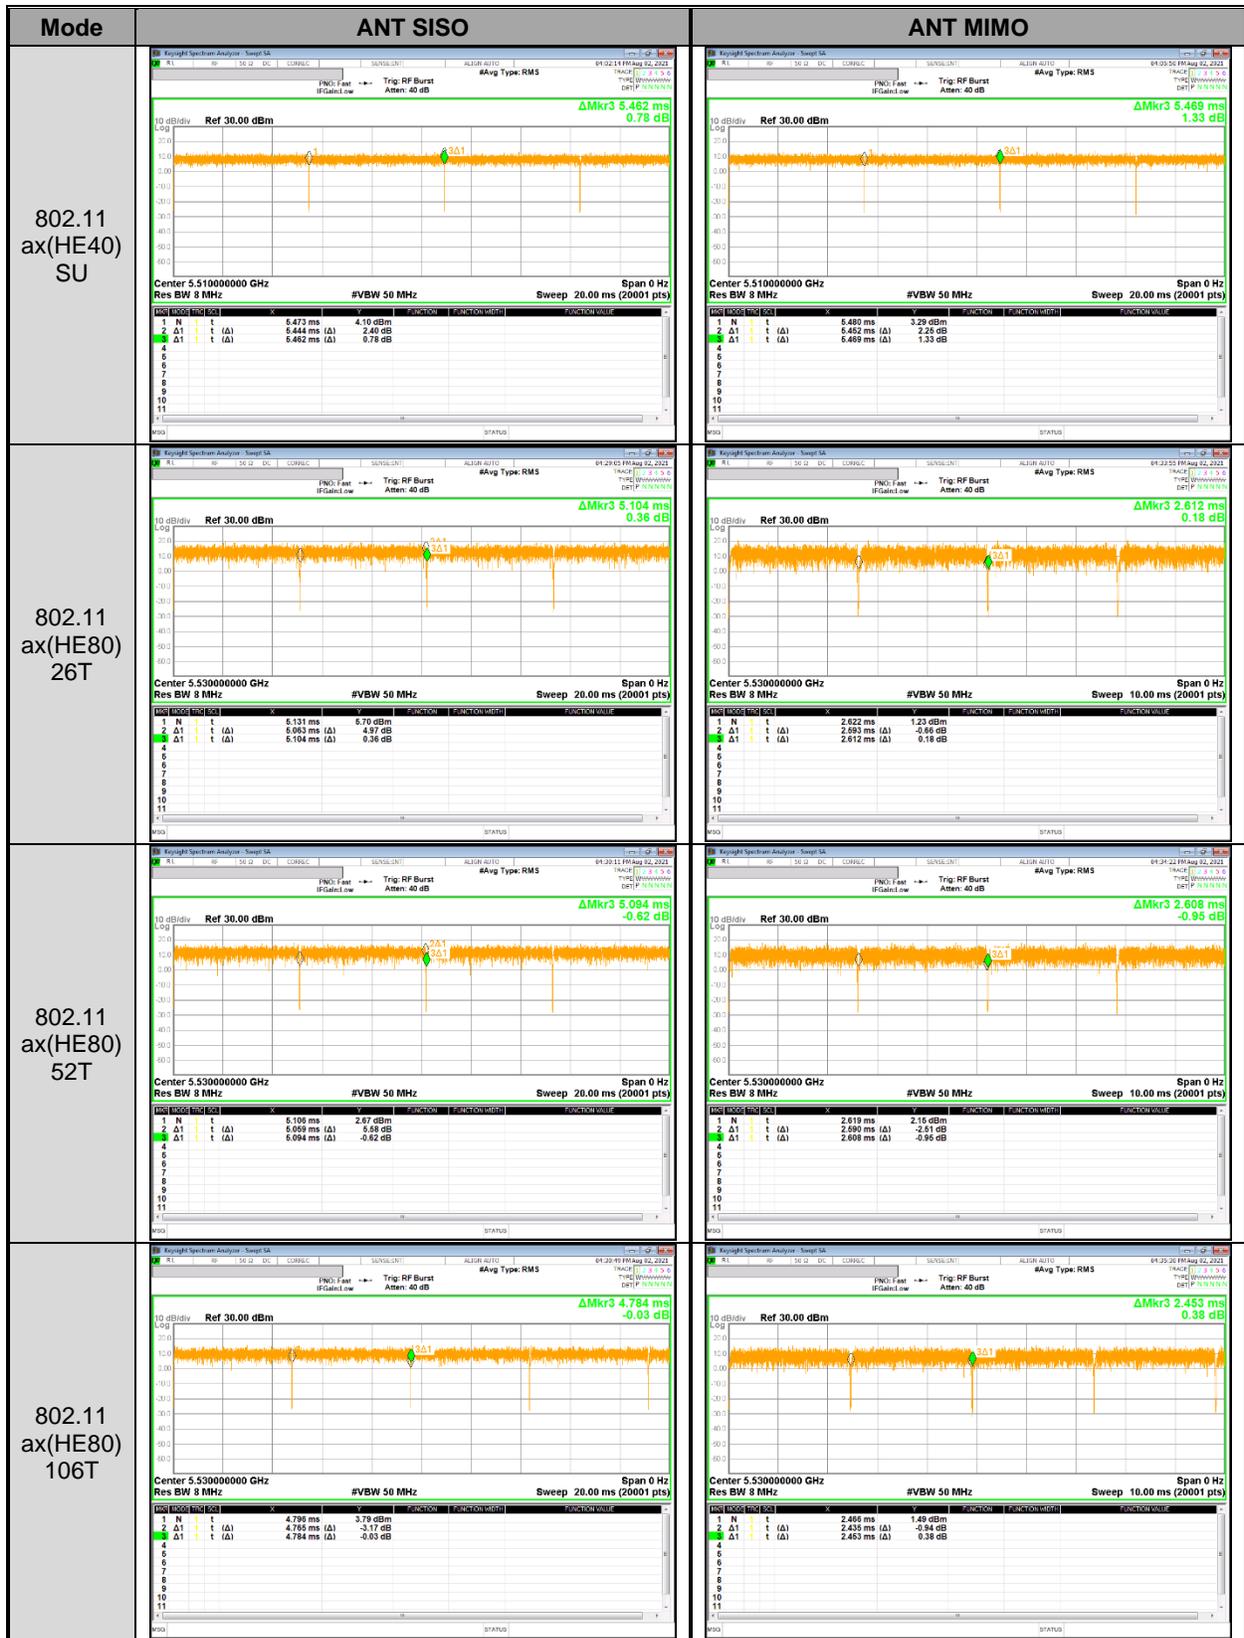

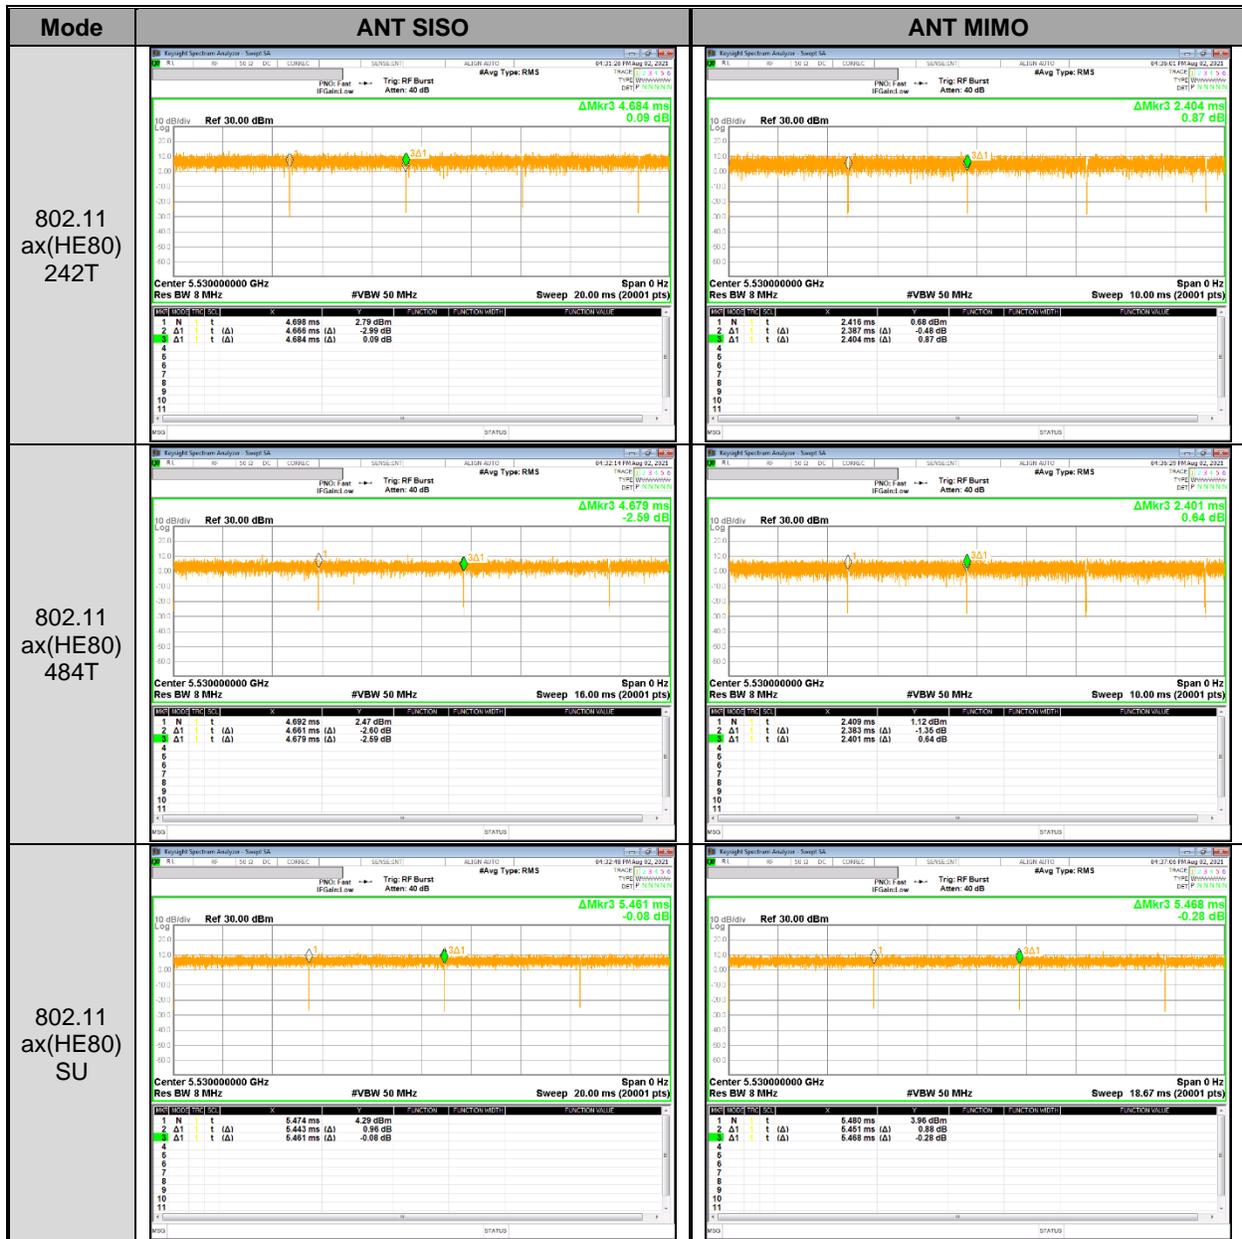

9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE







Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

RESULTS

- Please refer to the next page

WORST CASE TEST PLOTS

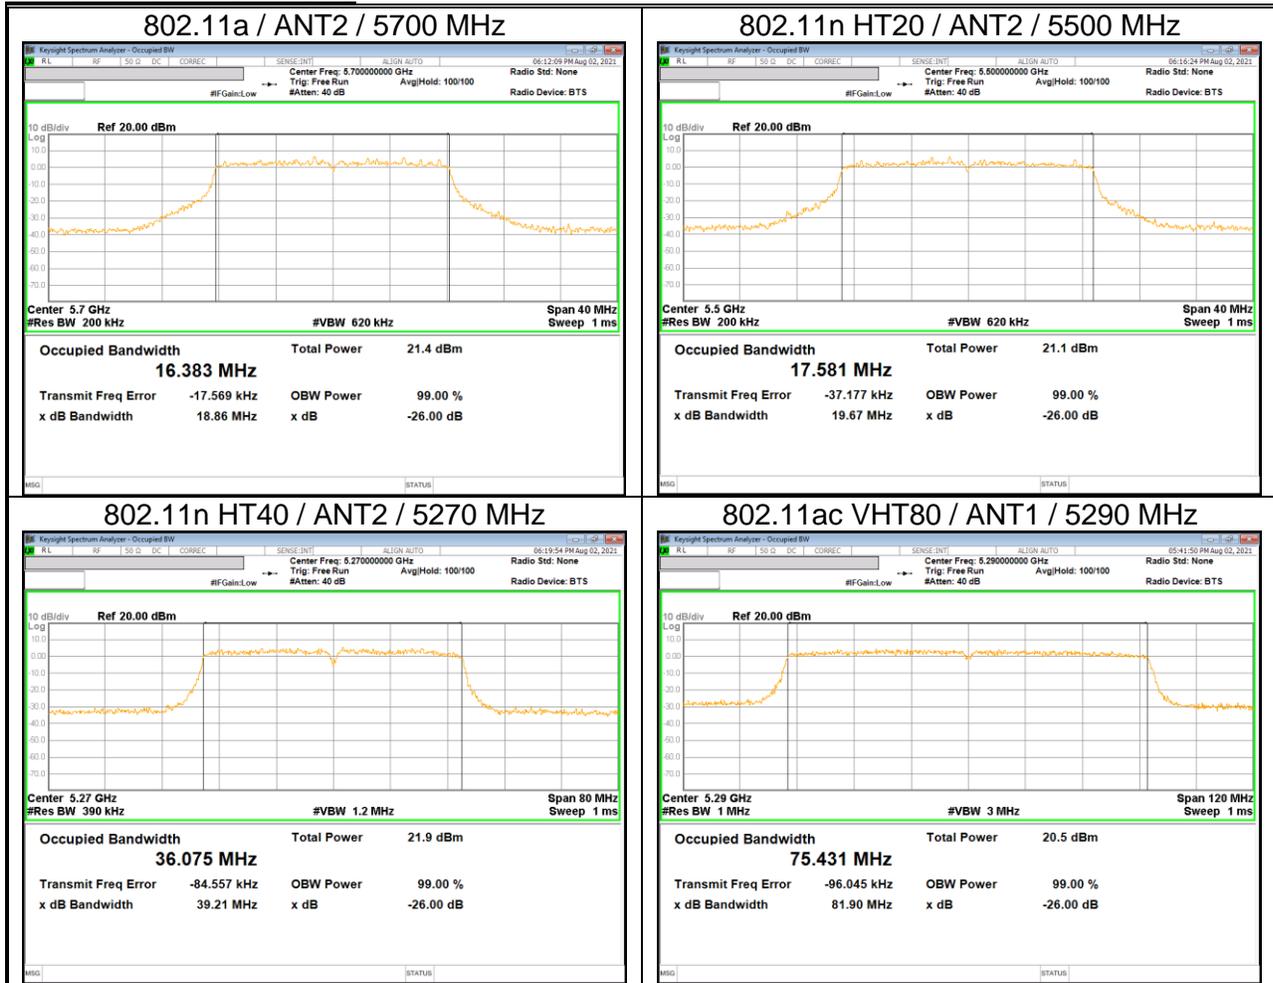

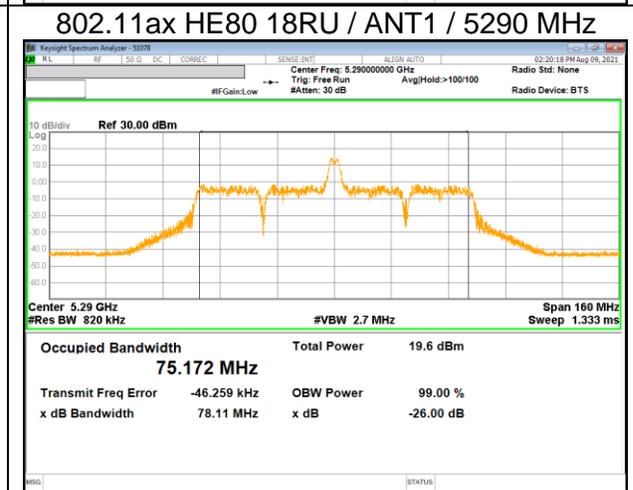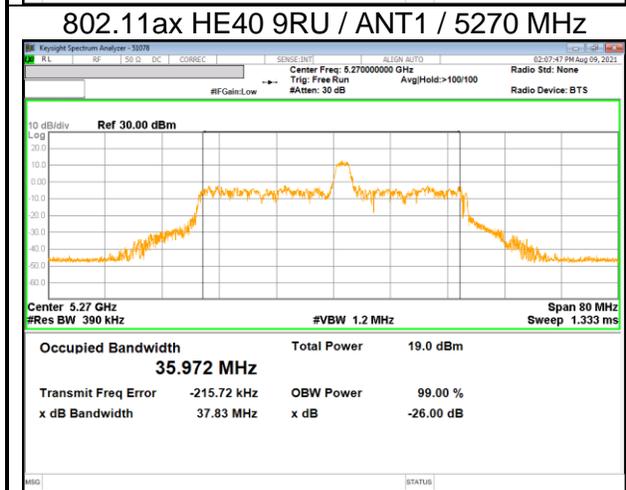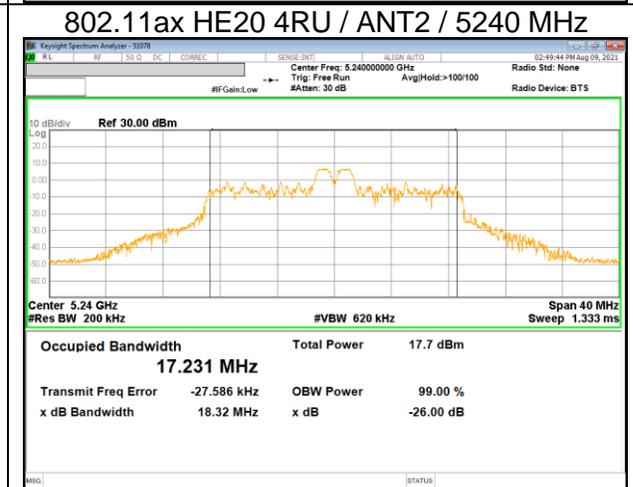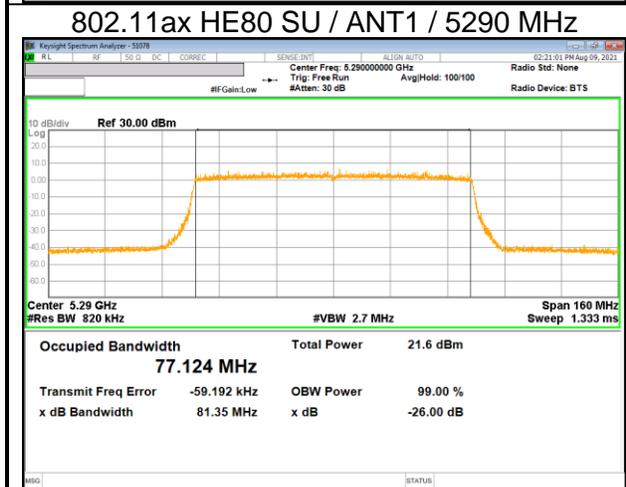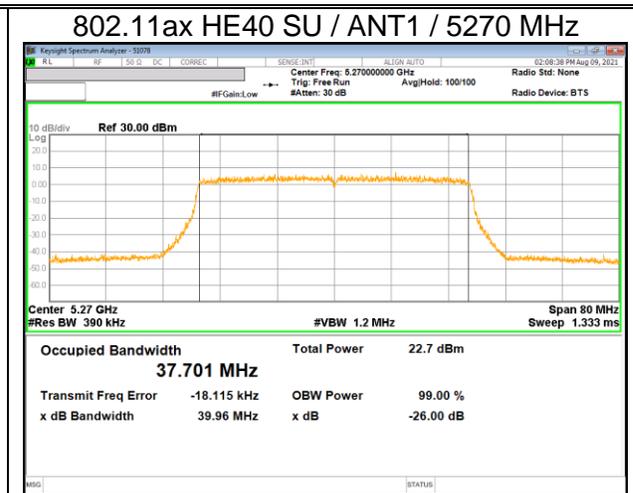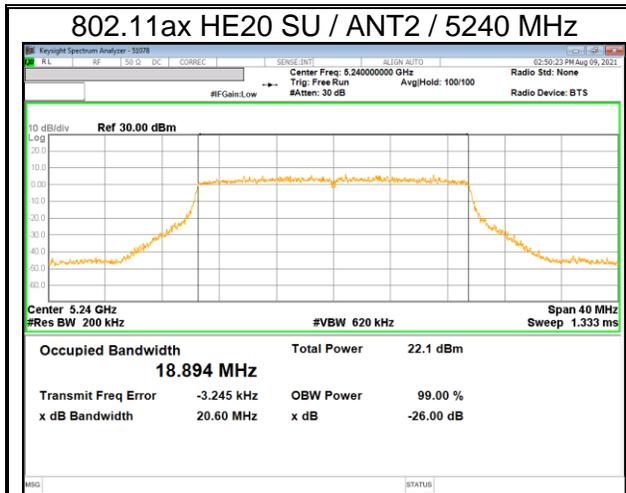

9.3.1. 5.2 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst	99% BW [MHz](Note1)	
				ANT1	ANT2		ANT1	ANT2
UNII-1	802.11a	Low	5180	19.58	19.39	19.05	16.36	16.40
		Mid	5200	19.97	19.27		16.37	16.41
		High	5240	19.05	19.32		16.38	16.40
	802.11n HT20	Low	5180	21.14	20.06	20.06	17.61	17.60
		Mid	5200	20.70	20.54		17.60	17.60
		High	5240	20.16	20.32		17.61	17.58
	802.11n HT40	Low	5190	39.33	39.58	39.33	36.12	36.04
		High	5230	39.67	39.67		36.10	36.07
	802.11ac VHT80	Mid	5210	82.05	82.26	82.05	75.41	75.44
	802.11ax HE20(SU)	Low	5180	21.18	20.69	20.60	18.89	18.92
		Mid	5200	21.15	20.77		18.90	18.91
		High	5240	20.75	20.60		18.91	18.89
	802.11ax HE40(SU)	Low	5190	40.24	40.44	40.21	37.70	37.67
		High	5230	40.21	40.25		37.68	37.72
802.11ax HE80(SU)	Mid	5210	81.73	81.79	81.73	77.09	77.11	

Note1. As a result of 99% bandwidth test, the bandwidth of UNII-1 does not interfere with UNII-2A.

9.3.2. 5.3 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst	99% BW [MHz](Note2)	
				ANT1	ANT2		ANT1	ANT2
UNII-2A	802.11a	Low	5260	18.99	20.10	18.99	16.38	16.40
		Mid	5300	19.44	19.47		16.38	16.38
		High	5320	19.50	19.44		16.40	16.40
	802.11n HT20	Low	5260	20.16	20.86	20.12	17.59	17.64
		Mid	5300	20.12	20.28		17.60	17.59
		High	5320	20.70	20.73		17.60	17.62
	802.11n HT40	Low	5270	40.03	39.21	39.21	36.12	36.08
		High	5310	39.64	39.26		36.07	36.07
	802.11ac VHT80	Mid	5290	81.90	81.95	81.90	75.43	75.44
	802.11ax HE20(SU)	Low	5260	21.09	20.93	20.82	18.89	18.90
		Mid	5300	20.93	20.97		18.91	18.87
		High	5320	20.82	20.83		18.90	18.91
	802.11ax HE40(SU)	Low	5270	39.96	40.03	39.96	37.70	37.72
		High	5310	40.43	40.13		37.68	37.74
802.11ax HE80(SU)	Mid	5290	81.35	82.10	81.35	77.12	77.16	

Note2. As a result of 99% bandwidth test, the bandwidth of UNII-2A does not interfere with UNII-1.

9.3.3. 5.5 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst
				ANT1	ANT2	
UNII-2C	802.11a	Low	5500	20.39	19.23	18.86
		Mid	5580	19.96	19.34	
		High	5700	20.17	18.86	
	802.11n HT20	Low	5500	21.32	19.67	19.67
		Mid	5580	21.02	20.44	
		High	5700	20.61	20.14	
	802.11n HT40	Low	5510	39.43	39.61	39.39
		Mid	5590	39.65	39.45	
		High	5670	40.27	39.39	
	802.11ac VHT80	Low	5530	82.33	82.22	82.00
		High	5610	82.90	82.00	
	802.11ax HE20(SU)	Low	5500	21.04	21.11	20.87
		Mid	5580	20.99	20.87	
		High	5700	21.03	21.05	
	802.11ax HE40(SU)	Low	5510	40.55	40.60	40.10
Mid		5590	40.23	40.10		
High		5670	40.53	40.31		
802.11ax HE80(SU)	Low	5530	81.72	82.29	81.61	
	High	5610	82.31	81.61		

9.3.4. STRADDLE CHANNEL

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]			
				ANT1		ANT2	
				UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	802.11a	Straddle	5720	15.052	5.006	14.456	4.434
	802.11n HT20	Straddle	5720	14.982	4.978	15.058	4.918
	802.11n HT40	Straddle	5710	35.036	4.776	34.606	4.790
	802.11ac VHT80	Straddle	5690	75.884	5.848	75.160	5.126
	802.11ax HE20(SU)	Straddle	5720	15.434	5.424	15.320	5.460
	802.11ax HE40(SU)	Straddle	5710	35.020	5.004	34.948	4.988
	802.11ax HE80(SU)	Straddle	5690	75.824	5.976	76.208	5.896

9.3.5. 802.11ax 5.2 GHz BAND(RU)

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]		99% BW [MHz] ^(Note1)	
					ANT1	ANT2	ANT1	ANT2
UNII-1	HE20	5180	26T	0	20.08	20.13	18.38	18.41
				4	18.76	18.46	17.12	17.22
				8	20.06	19.86	18.47	18.37
		5200		0	20.00	20.14	18.38	18.36
				4	18.67	18.72	17.19	17.23
				8	19.98	20.04	18.43	18.47
	5240	0		20.05	20.03	18.33	18.36	
		4		18.53	18.32	17.19	17.23	
		8		20.12	20.03	18.39	18.43	
	HE40	5190		0	39.76	40.40	37.69	38.02
				9	38.04	37.91	36.23	36.24
				17	39.84	39.93	37.83	37.98
		5230		0	40.02	39.76	37.84	37.47
				9	37.94	37.94	36.07	36.10
				17	39.83	40.08	37.87	37.94
	HE80	5210		0	81.72	81.43	78.60	78.04
				18	78.48	78.32	75.47	75.26
				36	80.91	80.53	78.27	78.34

Note1. As a result of 99% bandwidth test, the bandwidth of UNII-1 does not interfere with UNII-2A.

9.3.6. 802.11ax 5.3 GHz BAND(RU)

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]		99% BW [MHz] ^(Note2)	
					ANT1	ANT2	ANT1	ANT2
UNII-2A	HE20	5260	26T	0	19.88	20.20	18.36	18.39
				4	18.68	18.80	17.25	17.20
				8	20.10	20.06	18.38	18.52
		5300		0	19.80	19.82	18.41	18.36
				4	18.81	18.68	17.18	17.26
				8	19.86	20.04	18.40	18.37
	5320	0		19.71	19.98	18.38	18.36	
		4		18.73	18.60	17.27	17.00	
		8		20.15	20.01	18.51	18.33	
	HE40	5270		0	39.97	39.96	37.80	37.73
				9	37.83	37.96	35.97	36.09
				17	39.73	39.83	37.79	37.84
		5310		0	40.00	39.63	37.75	37.79
				9	37.94	37.91	35.98	36.12
				17	40.08	39.76	38.01	37.76
	HE80	5290		0	81.69	81.64	78.64	78.50
				18	78.11	78.27	75.17	75.26
				36	80.81	80.94	78.27	78.04

Note2. As a result of 99% bandwidth test, the bandwidth of UNII-2A does not interfere with UNII-1.

9.3.7. 802.11ax 5.5 GHz BAND(RU)

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]	
					ANT1	ANT2
UNII-2C	HE20	5500	26T	0	20.07	20.17
				4	18.76	18.41
				8	20.22	19.97
		5580		0	20.03	20.15
				4	18.70	18.59
				8	20.12	19.99
		5700		0	19.92	20.01
				4	18.63	18.79
				8	19.98	20.06
	HE40	5510		0	39.83	40.09
				9	38.05	37.93
				17	39.84	40.11
		5590		0	39.89	39.85
				9	38.01	38.04
				17	39.98	39.93
		5670		0	39.93	39.83
				9	37.96	37.83
				17	39.94	39.97
	HE80	5530		0	80.95	81.36
				18	78.11	78.17
				36	80.94	80.73
		5610		0	81.71	81.45
				18	78.12	78.21
				36	80.82	80.65

9.3.8. 802.11ax STRADDLE CHANNEL(RU)

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]			
					ANT1		ANT2	
					UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	HE20	5720	26T	6	14.238	4.518	14.402	4.428
	HE40	5710		15	34.100	3.984	34.052	3.976
	HE80	5690		34	74.120	4.088	73.992	3.848

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

- Please refer to the next page

WORST CASE TEST PLOTS

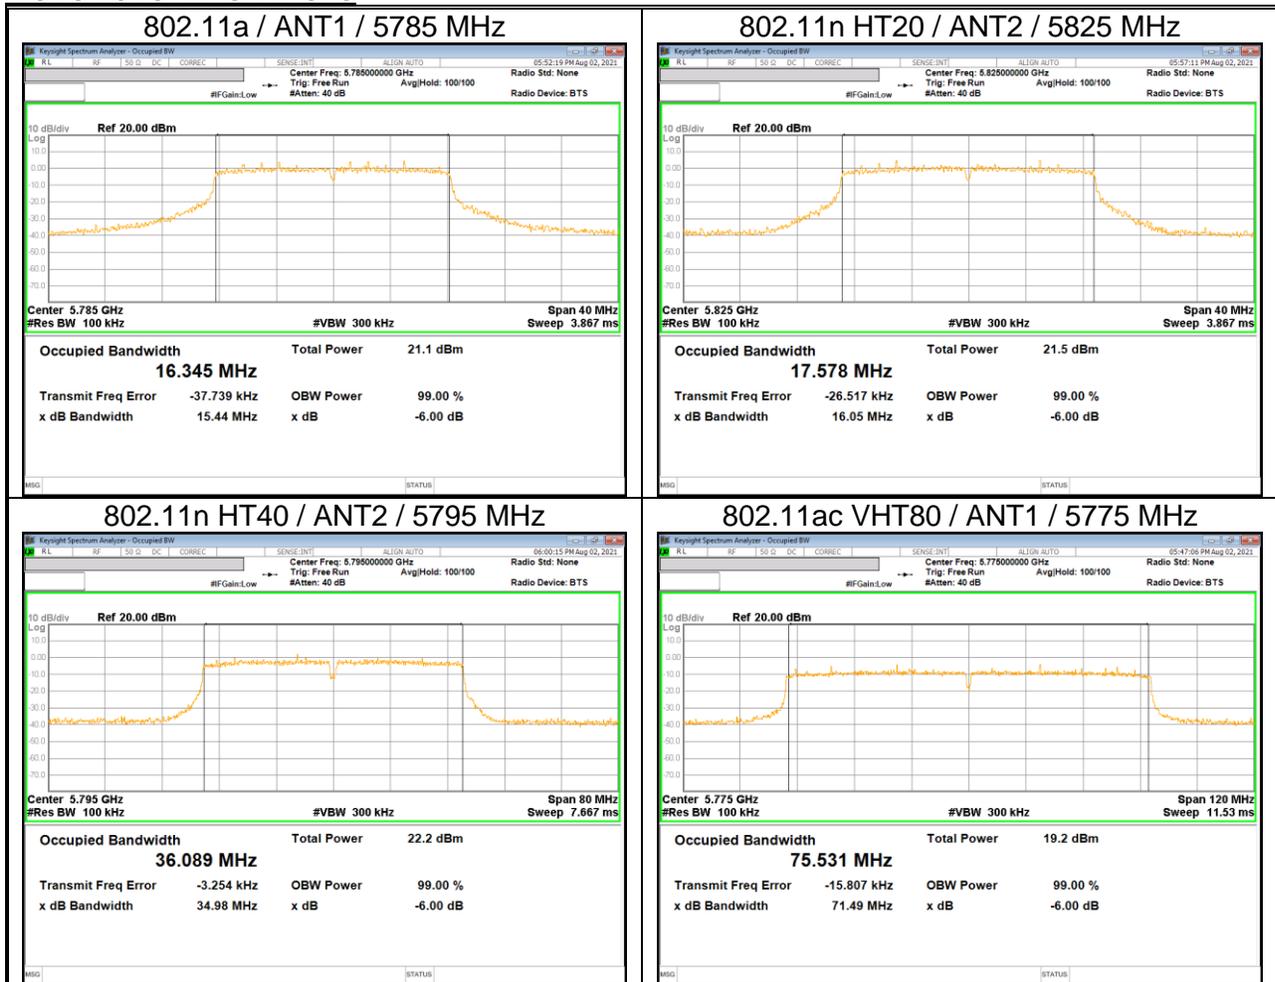

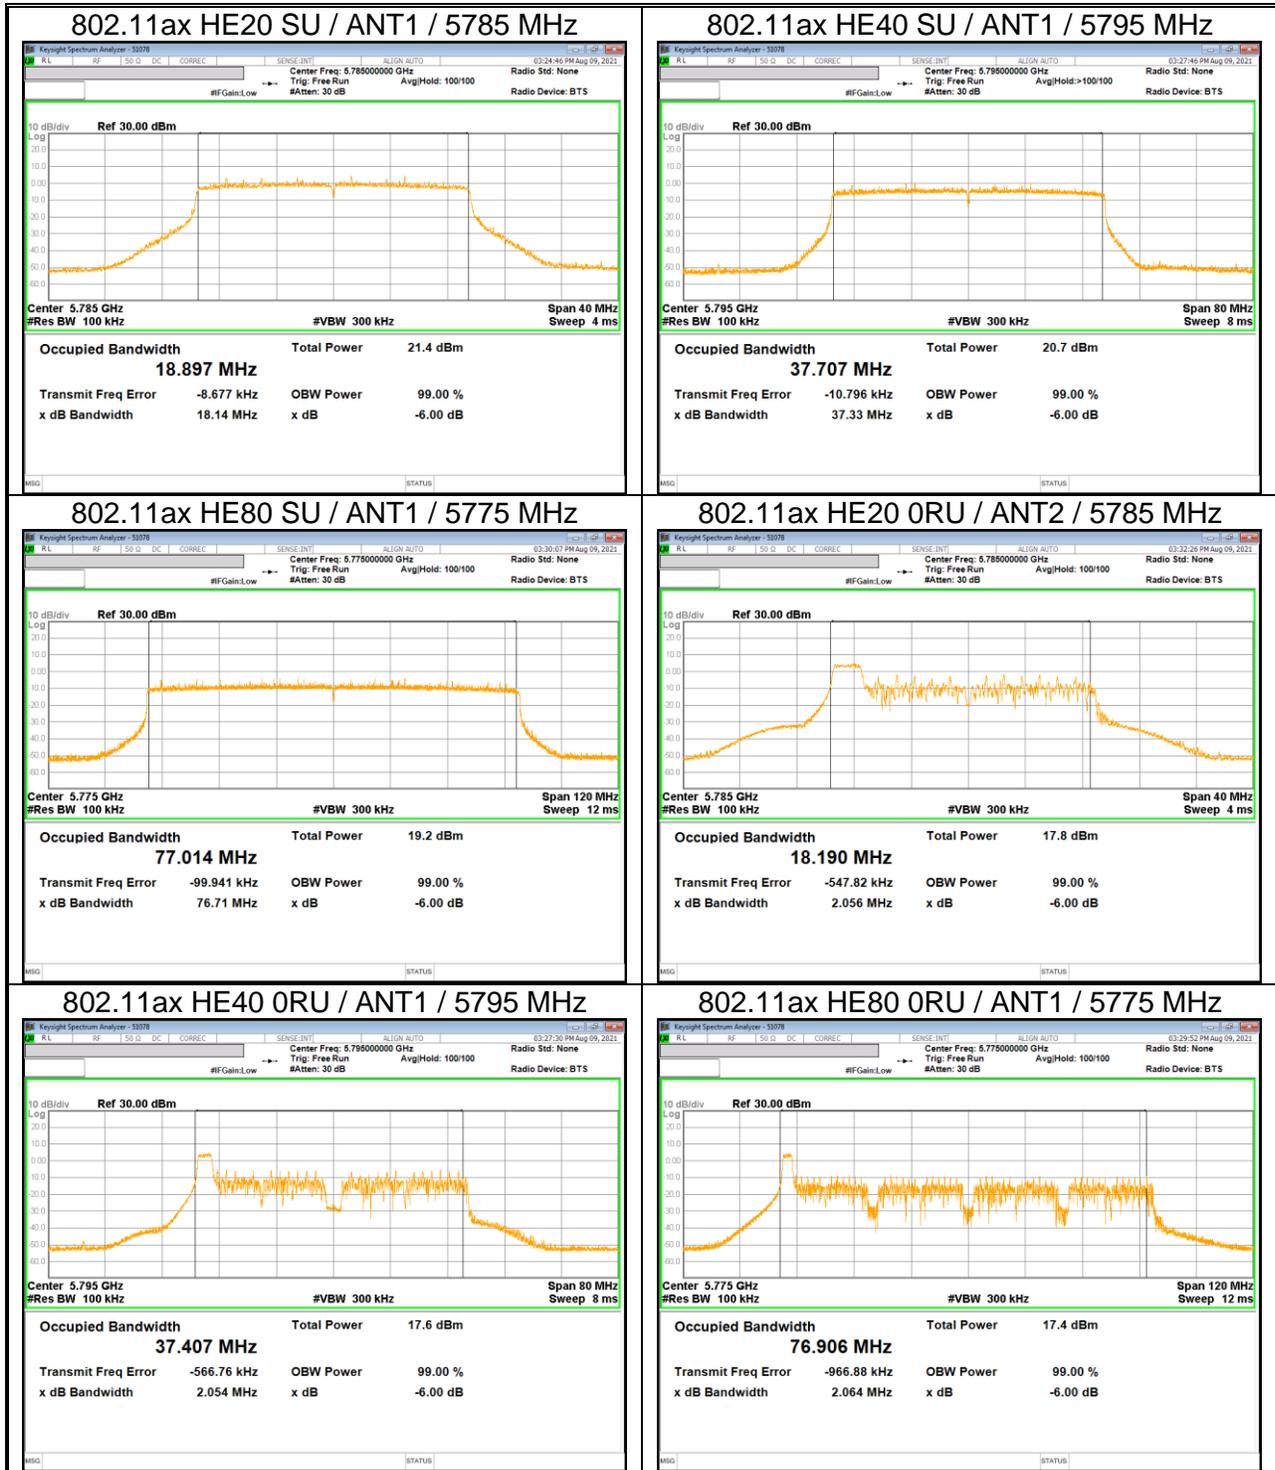

10.1.1. 5.8 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	6 dB BW [MHz]		Worst	Minimum Limit [MHz]
				ANT1	ANT2		
UNII-3	802.11a	Low	5745	15.69	16.28	15.44	0.5
		Mid	5785	15.44	15.93		
		High	5825	16.27	16.32		
	802.11n HT20	Low	5745	16.82	17.64	16.05	
		Mid	5785	17.29	16.94		
		High	5825	16.94	16.05		
	802.11n HT40	Low	5755	36.40	36.37	34.98	
		High	5795	35.25	34.98		
	802.11ac VHT80	Mid	5775	71.49	75.87	71.49	
	802.11ax HE20(SU)	Low	5745	18.76	18.57	18.14	
		Mid	5785	18.14	18.54		
		High	5825	18.38	18.15		
	802.11ax HE40(SU)	Low	5755	37.61	37.79	37.33	
		High	5795	37.33	37.75		
	802.11ax HE80(SU)	Mid	5775	76.71	77.66	76.71	

10.1.2. 802.11ax 5.8 GHz Band(RU)

Band	Mode	Channel	Tones	RU offset	6 dB BW [MHz]		Minimum Limit [MHz]
					ANT1	ANT2	
UNII-3	HE20	Low	26T	0	2.099	2.058	0.5
		Mid			2.116	2.056	
		High			2.111	2.087	
	Minimum 6dB Bandwidth				2.056		
	HE40	Low	26T	0	2.096	2.075	
		High			2.054	2.056	
		Minimum 6dB Bandwidth				2.054	
	HE80	Mid	26T	0	2.064	2.068	
		Minimum 6dB Bandwidth				2.064	

10.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3)

FCC

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

TEST PROCEDURE

KDB 789033 Method PM is used for output power.

KDB 789033 Method SA-2 is used for only power of straddle Ch. and PPSD. RBW set to 1MHz(500kHz for the band 5.725-5.85 GHz, the VBW >= 3 x RBW, RMS detector and trace averaging). Band power function used for power and peak marker value of the spectrum is used for PSD.

DIRECTIONAL ANTENNA GAIN

For OUTPUT POWER and PSD: The TX chains are correlated and the antenna gains are unequal among the chains. The directional gain is:

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain [dBi]
UNII 1 5150 - 5250	-6.72	-6.31	-3.50
UNII 2A 5250 - 5350	-6.72	-6.31	-3.50
UNII 2C 5470 - 5725	-6.47	-6.27	-3.36
UNII 3 5725 - 5850	-8.36	-6.01	-4.10

10.2.1. 2Tx MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-1	802.11a	Low	5180	19.05	-3.50	23.98	11.00
		Mid	5200				
		High	5240				
	802.11n HT20	Low	5180	20.06		23.98	11.00
		Mid	5200				
		High	5240				
	802.11n HT40	Low	5190	39.33		23.98	11.00
		High	5230				
	802.11ac VHT80	Mid	5210	82.05		23.98	11.00
	Included in Calculations of Corr'd Power & PPSD						
Duty Cycle CF [dB]			802.11a			0.00	dB
			802.11n HT20			0.00	dB
			802.11n HT40			0.00	dB
			802.11ac VHT80			0.00	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Average Power [dBm]		Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
UNII-1	802.11a	Low	5180	15.89	15.91	18.91	23.98
		Mid	5200	15.87	15.94	18.92	
		High	5240	15.86	16.04	18.96	
	802.11n HT20	Low	5180	15.57	15.63	18.61	23.98
		Mid	5200	15.55	15.66	18.62	
		High	5240	15.54	15.75	18.66	
	802.11n HT40	Low	5190	15.91	15.81	18.87	23.98
		High	5230	15.84	16.06	18.96	
	802.11ac VHT80	Mid	5210	13.24	13.72	16.50	23.98

* Calculation of Output Power : Average Power = Meas Power + Duty CF[dB]
 Corr'd Power = Ant1 Average Power + Ant2 Average Power

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]		Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
				ANT1	ANT2		
UNII-1	802.11a	Low	5180	5.026	4.783	7.916	11.00
		Mid	5200	5.461	4.714	8.114	
		High	5240	5.461	5.243	8.364	
	802.11n HT20	Low	5180	4.616	4.206	7.426	
		Mid	5200	4.740	4.384	7.576	
		High	5240	4.793	4.665	7.740	
	802.11n HT40	Low	5190	2.689	2.138	5.433	
		High	5230	3.235	2.676	5.975	
	802.11ac VHT80	Mid	5210	-3.099	-4.157	-0.586	

* Calculation of PPSD result : Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB]

10.2.2. 2Tx MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-2A	802.11a	Low	5260	18.99	-3.50	23.79	11.00
		Mid	5300				
		High	5320				
	802.11n HT20	Low	5260	20.12		23.98	11.00
		Mid	5300				
		High	5320				
	802.11n HT40	Low	5270	39.21		23.98	11.00
		High	5310				
	802.11ac VHT80	Mid	5290	81.90		23.98	11.00
	Included in Calculations of Corr'd Power & PPSD						
Duty Cycle CF [dB]			802.11a			0.00	dB
			802.11n HT20			0.00	dB
			802.11n HT40			0.00	dB
			802.11ac VHT80			0.00	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Average Power [dBm]		Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
UNII-2A	802.11a	Low	5260	15.83	16.12	18.99	23.79
		Mid	5300	16.17	16.29	19.24	
		High	5320	16.27	16.17	19.23	
	802.11n HT20	Low	5260	15.61	15.92	18.78	23.98
		Mid	5300	15.83	16.01	18.93	
		High	5320	15.91	15.87	18.90	
	802.11n HT40	Low	5270	16.13	16.04	19.10	23.98
		High	5310	15.99	15.94	18.98	
	802.11ac VHT80	Mid	5290	12.82	13.29	16.07	23.98

* Calculation of Output Power : Average Power = Meas Power + Duty CF[dB]

Corr'd Power = Ant1 Average Power + Ant2 Average Power

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]		Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
				ANT1	ANT2		
UNII-2A	802.11a	Low	5260	5.361	5.104	8.245	11.00
		Mid	5300	5.675	5.511	8.604	
		High	5320	6.032	5.182	8.638	
	802.11n HT20	Low	5260	4.965	4.744	7.866	
		Mid	5300	5.460	4.859	8.180	
		High	5320	5.631	5.142	8.404	
	802.11n HT40	Low	5270	3.534	2.711	6.152	
		High	5310	3.404	2.451	5.964	
	802.11ac VHT80	Mid	5290	-3.468	-3.440	-0.444	

* Calculation of PPSD result : Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB]

10.2.3. 2Tx MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-2C	802.11a	Low	5500	18.86	-3.36	23.76	11.00
		Mid	5580				
		High	5700				
	802.11n HT20	Low	5500	19.67		23.94	11.00
		Mid	5580				
		High	5700				
	802.11n HT40	Low	5510	39.39		23.98	11.00
		Mid	5590				
		High	5670				
	802.11ac VHT80	Low	5530	82.00		23.98	11.00
		High	5610				
	Included in Calculations of Corr'd Power & PPSD						
Duty Cycle CF [dB]			802.11a			0.00	dB
			802.11n HT20			0.00	dB
			802.11n HT40			0.00	dB
			802.11ac VHT80			0.00	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Average Power [dBm]		Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
UNII-2C	802.11a	Low	5500	15.61	16.31	18.98	23.76
		Mid	5580	15.91	16.38	19.16	
		High	5700	15.54	16.37	18.99	
	802.11n HT20	Low	5500	15.26	16.00	18.66	23.94
		Mid	5580	15.56	16.07	18.83	
		High	5700	15.30	16.09	18.72	
	802.11n HT40	Low	5510	15.24	16.26	18.79	23.98
		Mid	5590	15.99	16.19	19.10	
		High	5670	16.05	16.31	19.19	
	802.11ac VHT80	Low	5530	12.70	12.96	15.84	23.98
		High	5610	12.93	13.36	16.16	

* Calculation of Output Power : Average Power = Meas Power + Duty CF[dB]

Corr'd Power = Ant1 Average Power + Ant2 Average Power

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]		Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
				ANT1	ANT2		
UNII-2C	802.11a	Low	5500	4.780	5.170	7.990	11.00
		Mid	5580	5.234	5.389	8.322	
		High	5700	5.016	5.514	8.282	
	802.11n HT20	Low	5500	4.747	4.719	7.743	
		Mid	5580	4.572	4.560	7.576	
		High	5700	4.584	4.804	7.706	
	802.11n HT40	Low	5510	2.176	2.637	5.423	
		Mid	5590	2.786	2.190	5.509	
		High	5670	2.739	2.711	5.735	
	802.11ac VHT80	Low	5530	-4.027	-4.029	-1.018	
		High	5610	-3.852	-3.727	-0.779	

* Calculation of PPSD result : Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB]

10.2.4. 2Tx MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain, Limits

Included in Calculations of Corr'd Power & PPSD				
Duty Cycle CF [dB]	802.11a		0.00	dB
	802.11n HT20		0.00	dB
	802.11n HT40		0.00	dB
	802.11ac VHT80		0.00	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Average Power [dBm]		Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
UNII-3	802.11a	Low	5745	15.56	15.93	18.76	30.00
		Mid	5785	15.51	16.26	18.91	
		High	5825	15.90	15.89	18.91	
	802.11n HT20	Low	5745	15.32	15.66	18.50	
		Mid	5785	15.20	15.96	18.61	
		High	5825	15.61	15.61	18.62	
	802.11n HT40	Low	5755	15.57	16.15	18.88	
		High	5795	15.67	16.21	18.96	
	802.11ac VHT80	Mid	5775	12.00	12.99	15.53	

* Calculation of Output Power : Average Power = Meas Power + Duty CF[dB]
 Corr'd Power = Ant1 Average Power + Ant2 Average Power

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/500kHz]		Total Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]
				ANT1	ANT2		
UNII-3	802.11a	Low	5745	1.719	1.755	4.747	30.00
		Mid	5785	1.322	2.125	4.752	
		High	5825	1.816	2.104	4.973	
	802.11n HT20	Low	5745	1.244	1.528	4.399	
		Mid	5785	1.188	1.803	4.517	
		High	5825	1.461	1.464	4.473	
	802.11n HT40	Low	5755	-0.455	0.041	2.810	
		High	5795	-0.560	-0.091	2.691	
	802.11ac VHT80	Mid	5775	-6.773	-5.853	-3.278	

* Calculation of PPSD result : Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB]

10.2.5. 2Tx Mode Straddle channel IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-2C	802.11a	Straddle	5720	15.052	-3.36	22.78	11.00
	802.11n HT20	Straddle	5720	14.982		22.76	11.00
	802.11n HT40	Straddle	5710	35.036		23.98	11.00
	802.11ac VHT80	Straddle	5690	75.884		23.98	11.00
Included in Calculations of Corr'd Power & PPSD							
Duty Cycle CF [dB]			802.11a			0.00	dB
			802.11n HT20			0.00	dB
			802.11n HT40			0.00	dB
			802.11ac VHT80			0.00	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
UNII-2C	802.11a	Straddle	5720	13.87	14.21	17.05	22.78
	802.11n HT20	Straddle	5720	13.38	13.82	16.62	22.76
	802.11n HT40	Straddle	5710	15.23	15.75	18.51	23.98
	802.11ac VHT80	Straddle	5690	12.47	12.80	15.65	23.98

* Calculation of Output Power : Total Corr'd Power = Meas Power + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]		Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
				ANT1	ANT2		
UNII-2C	802.11a	Straddle	5720	3.966	4.583	7.296	11.00
	802.11n HT20	Straddle	5720	3.664	4.245	6.975	
	802.11n HT40	Straddle	5710	1.039	1.838	4.467	
	802.11ac VHT80	Straddle	5690	-4.584	-3.835	-1.183	

* Calculation of PPSD result : Corr'd PPSD = Meas PPSD + Duty CF

10.2.6. 2Tx Mode Straddle channel IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/500kHz]
UNII-3	802.11a	Straddle	5720	5.006	-4.10	30.00	30.00
	802.11n HT20	Straddle	5720	4.978			
	802.11n HT40	Straddle	5710	4.776			
	802.11ac VHT80	Straddle	5690	5.848			
Included in Calculations of Corr'd Power & PSD							
Duty Cycle CF [dB]			802.11a			0.00	dB
			802.11n HT20			0.00	dB
			802.11n HT40			0.00	dB
			802.11ac VHT80			0.00	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
UNII-3	802.11a	Straddle	5720	7.46	7.66	10.57	30.00
	802.11n HT20	Straddle	5720	6.96	7.96	10.50	
	802.11n HT40	Straddle	5710	3.80	5.09	7.50	
	802.11ac VHT80	Straddle	5690	-2.38	-1.71	0.98	

* Calculation of Output Power : Total Corr'd Power = Meas Power + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PSD [dBm/500kHz]		Total Corr'd PSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]
				ANT1	ANT2		
UNII-3	802.11a	Straddle	5720	0.799	1.320	4.078	30.00
	802.11n HT20	Straddle	5720	-0.238	0.463	3.137	
	802.11n HT40	Straddle	5710	-3.315	-2.321	0.221	
	802.11ac VHT80	Straddle	5690	-10.164	-9.480	-6.798	

* Calculation of PSD result : Corr'd PSD = Meas PSD + Duty CF

10.2.7. 802.11ax 2Tx (MIMO) MODE 5.2 GHz BAND

Bandwidth and Antenna Gain, Limits

Mode	Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
HE20	Low	5180	18.32	-3.50	23.98	11.00
	Mid	5200				
	High	5240				
HE40	Low	5190	37.91		23.98	
	High	5230				
HE80	Mid	5210	78.32			

Included in Calculations of Corr'd [Power & PPSD]				
Duty Cycle CF [dB]	HE20	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		SU	0.00	dB
	HE40	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		SU	0.00	dB
	HE80	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		484T	0.00	dB
		SU	0.00	dB

Output Power Results

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE20	36	5180	26T	0	9.31	9.07	12.20	23.98
				4	8.79	8.70	11.76	
				8	9.39	9.01	12.21	
			52T	37	11.69	11.37	14.54	
				38	11.56	11.01	14.30	
				40	11.74	11.35	14.56	
			106T	53	12.25	11.92	15.10	
				54	12.18	12.01	15.11	
			SU	-	14.79	14.35	17.59	
	40	5200	26T	0	9.19	9.22	12.22	
				4	8.64	8.85	11.76	
				8	9.29	9.09	12.20	
			52T	37	11.61	11.44	14.54	
				38	11.50	11.08	14.31	
				40	11.63	11.38	14.52	
			106T	53	12.18	11.98	15.09	
				54	12.10	12.06	15.09	
			SU	-	14.73	14.39	17.57	
	48	5240	26T	0	9.14	9.25	12.21	
				4	8.51	8.87	11.70	
				8	9.10	9.17	12.15	
			52T	37	11.52	11.51	14.53	
				38	11.38	11.13	14.27	
				40	11.49	11.42	14.47	
106T			53	12.03	12.04	15.05		
			54	11.93	12.12	15.04		
SU			-	14.65	14.35	17.51		

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE40	38	5190	26T	0	9.29	9.17	12.24	23.98
				9	9.17	8.92	12.06	
				17	9.39	9.14	12.28	
			52T	37	11.75	11.57	14.67	
				41	11.73	11.28	14.52	
				44	11.99	11.48	14.75	
			106T	53	12.35	12.30	15.34	
				54	12.35	12.09	15.23	
				56	12.44	12.32	15.39	
			242T	61	13.33	13.14	16.25	
				62	13.37	13.09	16.24	
			SU	-	14.55	13.97	17.28	
	46	5230	26T	0	9.30	9.33	12.33	
				9	9.06	9.13	12.11	
				17	9.34	9.20	12.28	
			52T	37	11.67	11.80	14.75	
				41	11.59	11.49	14.55	
				44	11.78	11.58	14.69	
			106T	53	12.24	12.53	15.40	
				54	12.22	12.30	15.27	
				56	12.28	12.48	15.39	
			242T	61	13.08	13.18	16.14	
				62	13.12	13.13	16.14	
			SU	-	14.39	14.17	17.29	
HE80	42	5210	26T	0	9.08	9.13	12.12	
				18	8.86	9.14	12.01	
				36	9.14	9.13	12.15	
			52T	37	9.96	10.23	13.11	
				45	9.94	10.11	13.04	
				52	10.19	10.10	13.16	
			106T	53	10.91	11.34	14.14	
				57	10.95	11.16	14.07	
				60	10.99	11.33	14.17	
			242T	61	12.12	12.26	15.20	
				62	12.22	12.07	15.16	
				64	12.21	12.25	15.24	
			484T	65	12.21	12.22	15.23	
				66	12.25	12.21	15.24	
			SU	-	12.94	12.93	15.95	

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

PPSD Results

Actual RBW	Ref. Bandwidth	Corr'd factor
100 kHz	1000 kHz	10.00 dB

Mode	Channel	Frequency [MHz]	Tones	RU offset	Meas PPSD [dBm/100kHz]		Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
					ANT1	ANT2		
HE20	36	5180	26T	0	-3.167	-2.890	9.984	11.00
				4	-3.164	-3.429	9.716	
				8	-2.885	-3.042	10.048	
			SU	-	-6.461	-6.656	6.453	
	40	5200	26T	0	-3.103	-2.995	9.962	
				4	-3.317	-3.405	9.650	
				8	-2.949	-2.903	10.084	
			SU	-	-6.305	-6.485	6.616	
	48	5240	26T	0	-3.218	-2.753	10.031	
				4	-3.554	-3.335	9.567	
				8	-2.808	-2.941	10.136	
			SU	-	-6.415	-6.436	6.585	
HE40	38	5190	26T	0	-2.963	-2.785	10.137	
				9	-3.350	-2.891	9.896	
				17	-3.175	-2.928	9.961	
			SU	-	-9.883	-9.852	3.143	
	46	5230	26T	0	-3.076	-2.783	10.083	
				9	-3.315	-3.002	9.855	
HE80	42	5210	26T	17	-3.050	-2.930	10.021	
				36	-3.055	-2.944	10.011	
				SU	-	-9.928	-9.637	3.230
			0	-3.149	-3.107	9.882		
				18	-3.336	-3.084	9.802	
				36	-3.055	-2.944	10.011	
			SU	-	-14.255	-14.174	-1.204	

* Calculation of PPSD result : Total Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB] + Corr'd factor [dB]

10.2.8. 802.11ax 2Tx (MIMO) MODE 5.3 GHz BAND

Bandwidth and Antenna Gain, Limits

Mode	Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
HE20	Low	5260	18.60	-3.50	23.70	11.00
	Mid	5300				
	High	5320				
HE40	Low	5270	37.83		23.98	
	High	5310				
HE80	Mid	5290	78.11		23.98	

Included in Calculations of Corr'd [Power & PPSD]				
Duty Cycle CF [dB]	HE20	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		SU	0.00	dB
	HE40	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		SU	0.00	dB
	HE80	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		484T	0.00	dB
		SU	0.00	dB

Output Power Results

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE20	52	5260	26T	0	9.26	9.43	12.36	23.70
				4	8.68	9.04	11.87	
				8	9.24	9.30	12.28	
			52T	37	11.65	11.62	14.65	
				38	11.51	11.25	14.39	
				40	11.60	11.52	14.57	
			106T	53	12.17	12.15	15.17	
				54	12.06	12.20	15.14	
			SU	-	14.77	14.49	17.64	
	60	5300	26T	0	9.60	9.45	12.54	
				4	9.03	9.03	12.04	
				8	9.53	9.31	12.43	
			52T	37	11.84	11.93	14.90	
				38	11.69	11.58	14.65	
				40	11.76	11.84	14.81	
			106T	53	12.37	12.46	15.43	
				54	12.22	12.52	15.38	
			SU	-	14.98	14.77	17.89	
	64	5320	26T	0	9.69	9.42	12.57	
				4	9.03	9.03	12.04	
				8	9.61	9.26	12.45	
			52T	37	11.99	11.79	14.90	
				38	11.82	11.43	14.64	
				40	11.88	11.65	14.78	
106T			53	12.50	12.31	15.42		
			54	12.33	12.34	15.35		
SU			-	15.07	14.60	17.85		

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE40	54	5270	26T	0	9.47	9.53	12.51	23.98
				9	9.27	9.29	12.29	
				17	9.46	9.38	12.43	
			52T	37	11.59	11.53	14.57	
				41	11.42	11.22	14.33	
				44	11.54	11.28	14.42	
			106T	53	12.12	12.30	15.22	
				54	12.08	12.02	15.06	
				56	12.08	12.15	15.13	
	242T	61	13.01	13.10	16.07			
		62	12.99	13.01	16.01			
	SU	-	14.72	14.39	17.57			
	62	5310	26T	0	9.66	9.33	12.51	
				9	9.35	9.01	12.19	
				17	9.49	9.06	12.29	
			52T	37	11.53	11.32	14.44	
				41	11.29	10.96	14.14	
				44	11.38	11.00	14.20	
106T			53	12.06	12.06	15.07		
			54	11.98	11.80	14.90		
			56	11.92	11.90	14.92		
242T	61	12.91	12.87	15.90				
	62	12.85	12.75	15.81				
SU	-	14.56	14.18	17.38				
HE80	58	5290	26T	0	9.71	9.74	12.74	
				18	9.36	9.56	12.47	
				36	9.43	9.42	12.44	
			52T	37	10.58	10.84	13.72	
				45	10.39	10.58	13.50	
				52	10.45	10.47	13.47	
			106T	53	11.10	11.47	14.30	
				57	10.95	11.17	14.07	
				60	10.84	11.24	14.05	
			242T	61	12.19	12.44	15.33	
				62	12.22	12.18	15.21	
				64	12.00	12.22	15.12	
484T	65	12.23	12.37	15.31				
	66	12.10	12.22	15.17				
SU	-	12.97	13.17	16.08				

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

PPSD Results

Actual RBW	Ref. Bandwidth	Corr'd factor
100 kHz	1000 kHz	10.00 dB

Mode	Channel	Frequency [MHz]	Tones	RU offset	Meas PPSD [dBm/100kHz]		Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
					ANT1	ANT2		
HE20	52	5260	26T	0	-3.001	-2.699	10.163	11.00
				4	-3.150	-3.223	9.824	
				8	-2.879	-2.891	10.125	
			SU	-	-6.471	-6.486	6.532	
	60	5300	26T	0	-2.513	-2.740	10.385	
				4	-2.891	-3.138	9.998	
				8	-2.570	-2.803	10.325	
			SU	-	-6.140	-6.190	6.845	
	64	5320	26T	0	-2.458	-2.676	10.445	
				4	-3.057	-3.135	9.914	
				8	-2.504	-2.810	10.356	
			SU	-	-6.122	-6.458	6.724	
HE40	54	5270	26T	0	-2.817	-2.690	10.257	
				9	-3.052	-2.815	10.078	
				17	-2.870	-2.681	10.236	
			SU	-	-9.555	-9.489	3.488	
	62	5310	26T	0	-2.616	-2.820	10.293	
				9	-3.037	-2.863	10.061	
HE80	58	5290	26T	17	-2.709	-2.791	10.260	
				36	-2.871	-2.787	10.182	
				SU	-	-9.584	-9.621	3.408
			0	-2.506	-2.552	10.481		
			18	-2.796	-2.802	10.211		
			36	-2.871	-2.787	10.182		
			SU	-	-13.676	-14.039	-0.843	

* Calculation of PPSD result : Total Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB] + Corr'd factor [dB]

10.2.9. 802.11ax 2Tx (MIMO) MODE 5.5 GHz BAND

Bandwidth and Antenna Gain, Limits

Mode	Channel	Frequency [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
HE20	Low	5500	18.41	-3.36	23.65	11.00
	Mid	5580				
	High	5700				
HE40	Low	5510	37.83			
	Mid	5590				
	High	5670				
HE80	Low	5530	78.11		23.98	
	High	5610				

Included in Calculations of Corr'd [Power & PPSD]				
Duty Cycle CF [dB]	HE20	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		SU	0.00	dB
	HE40	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		SU	0.00	dB
	HE80	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		484T	0.00	dB
		SU	0.00	dB

Output Power Results

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE20	100	5500	26T	0	8.67	9.27	11.99	23.65
				4	8.01	8.82	11.44	
				8	8.51	9.07	11.81	
			52T	37	11.10	11.47	14.30	
				38	10.91	11.12	14.03	
				40	10.97	11.39	14.20	
			106T	53	11.48	12.05	14.78	
				54	11.30	12.06	14.71	
			SU	-	14.99	15.22	18.12	
	116	5580	26T	0	9.14	9.52	12.34	
				4	8.48	9.10	11.81	
				8	8.96	9.37	12.18	
			52T	37	11.54	11.70	14.63	
				38	11.38	11.34	14.37	
				40	11.43	11.61	14.53	
			106T	53	11.93	12.23	15.09	
				54	11.75	12.25	15.02	
			SU	-	15.38	15.44	18.42	
	140	5700	26T	0	8.68	9.35	12.04	
				4	8.00	9.00	11.54	
				8	8.51	9.27	11.92	
			52T	37	10.85	11.80	14.36	
				38	10.67	11.44	14.08	
				40	10.71	11.79	14.29	
106T			53	11.30	12.30	14.84		
			54	11.16	12.35	14.81		
SU			-	14.82	15.58	18.23		

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE40	102	5510	26T	0	8.64	9.61	12.16	23.98
				9	8.24	9.30	11.81	
				17	8.30	9.39	11.89	
			52T	37	10.47	11.61	14.09	
				41	10.26	11.23	13.78	
				44	10.37	11.32	13.88	
			106T	53	10.96	12.35	14.72	
				54	11.22	12.42	14.87	
				56	11.09	12.55	14.89	
	242T	61	12.33	13.50	15.96			
		62	12.17	13.40	15.84			
	SU	-	13.56	14.35	16.98			
	118	5590	26T	0	9.33	9.55	12.45	
				9	8.90	9.26	12.09	
				17	9.00	9.38	12.20	
			52T	37	11.67	11.84	14.77	
				41	11.44	11.48	14.47	
				44	11.51	11.58	14.56	
			106T	53	12.13	12.56	15.36	
				54	12.00	12.28	15.15	
				56	11.84	12.40	15.14	
	242T	61	13.06	13.36	16.22			
		62	12.90	13.25	16.09			
	SU	-	14.32	14.28	17.31			
	134	5670	26T	0	9.36	9.53	12.46	
				9	8.96	9.24	12.11	
				17	9.00	9.41	12.22	
52T			37	11.68	11.92	14.81		
			41	11.42	11.69	14.57		
			44	11.46	11.82	14.65		
106T			53	12.14	12.66	15.42		
			54	12.02	12.39	15.22		
			56	11.88	12.58	15.25		
242T	61	13.11	13.45	16.29				
	62	12.94	13.40	16.19				
SU	-	14.29	14.32	17.32				

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE80	106	5530	26T	0	9.31	9.43	12.38	23.98
				18	8.68	9.16	11.94	
				36	8.62	8.96	11.80	
			52T	37	10.25	10.46	13.37	
				45	9.79	10.07	12.94	
				52	9.67	9.97	12.83	
			106T	53	11.10	11.53	14.33	
				57	10.70	11.12	13.93	
				60	10.41	11.19	13.83	
			242T	61	12.17	12.28	15.24	
				62	12.05	12.00	15.04	
				64	11.61	11.98	14.81	
			484T	65	12.14	12.20	15.18	
				66	11.76	11.99	14.89	
			SU	-	12.88	12.98	15.94	
	122	5610	26T	0	9.67	9.86	12.78	
				18	9.00	9.60	12.32	
				36	8.93	9.43	12.20	
			52T	37	10.64	10.85	13.76	
				45	10.15	10.45	13.31	
				52	10.00	10.40	13.21	
			106T	53	11.59	11.81	14.71	
				57	11.17	11.40	14.30	
				60	10.86	11.50	14.20	
			242T	61	12.52	12.70	15.62	
				62	12.37	12.42	15.41	
				64	11.92	12.44	15.20	
484T			65	12.48	12.61	15.56		
			66	12.05	12.42	15.25		
SU			-	13.19	13.44	16.33		

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

PPSD Results

Actual RBW	Ref. Bandwidth	Corr'd factor
100 kHz	1000 kHz	10.00 dB

Mode	Channel	Frequency [MHz]	Tones	RU offset	Meas PPSD [dBm/100kHz]		Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
					ANT1	ANT2		
HE20	100	5500	26T	0	-3.335	-2.852	9.924	11.00
				4	-4.192	-3.571	9.140	
				8	-3.816	-3.027	9.607	
			SU	-	-6.099	-6.005	6.959	
	116	5580	26T	0	-3.034	-2.704	10.144	
				4	-3.211	-3.097	9.857	
				8	-3.061	-2.722	10.122	
			SU	-	-6.205	-5.744	7.042	
	140	5700	26T	0	-3.466	-2.751	9.916	
				4	-3.839	-2.902	9.665	
				8	-3.381	-2.685	9.991	
			SU	-	-6.190	-5.945	6.945	
HE40	102	5510	26T	0	-3.293	-2.722	10.012	
				9	-3.421	-2.733	9.947	
				17	-3.371	-2.684	9.996	
			SU	-	-9.919	-9.574	3.267	
	118	5590	26T	0	-2.713	-2.540	10.385	
				9	-2.826	-2.877	10.159	
				17	-2.733	-2.904	10.193	
			SU	-	-9.374	-9.482	3.583	
	134	5670	26T	0	-2.449	-2.803	10.388	
				9	-2.760	-2.731	10.265	
				17	-2.770	-2.654	10.299	
			SU	-	-9.254	-9.652	3.562	
HE80	106	5530	26T	0	-2.586	-2.788	10.324	
				18	-2.846	-3.196	9.993	
				36	-3.065	-2.853	10.053	
			SU	-	-13.808	-14.078	-0.931	
	122	5610	26T	0	-2.106	-2.883	10.533	
				18	-2.501	-2.886	10.321	
				36	-2.571	-3.015	10.223	
			SU	-	-13.263	-14.059	-0.632	

* Calculation of PPSD result : Total Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB] + Corr'd factor [dB]

10.2.10. 802.11ax 2Tx (MIMO) MODE STRADDLE CHANNEL

Bandwidth and Antenna Gain, Limits

Frequency [MHz]	Portion	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit	
5720(HE20)	UNII-2C	14.238	-3.36	22.53	11.00 [dBm/MHz]	
	UNII-3	4.428	-4.10	30.00	30.00 [dBm/500kHz]	
5710(HE40)	UNII-2C	34.052	-3.36	23.98	11.00 [dBm/MHz]	
	UNII-3	3.976	-4.10	30.00	30.00 [dBm/500kHz]	
5690(HE80)	UNII-2C	73.992	-3.36	23.98	11.00 [dBm/MHz]	
	UNII-3	3.848	-4.10	30.00	30.00 [dBm/500kHz]	
Included in Calculations of Corr'd Power & PPSD						
Duty Cycle CF [dB]			HE20	26T	0.00	dB
				SU	0.00	dB
			HE40	26T	0.00	dB
				SU	0.00	dB
			HE80	26T	0.00	dB
				SU	0.00	dB

Output Power Results

Frequency [MHz]	Portion	Tones	RU offset	Meas Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
				ANT1	ANT2		
5720	UNII-2C	26T	6	7.96	8.17	11.08	22.53
		SU	-	13.97	14.06	17.03	
	UNII-3	26T	6	1.68	2.03	4.87	30.00
		SU	-	8.37	8.57	11.48	
5710	UNII-2C	26T	15	8.31	8.77	11.56	23.98
		SU	-	13.53	13.72	16.64	
	UNII-3	26T	15	-5.18	-4.47	-1.80	30.00
		SU	-	3.31	3.65	6.50	
5690	UNII-2C	26T	34	8.91	9.00	11.96	23.98
		SU	-	13.09	12.85	15.98	
	UNII-3	26T	34	-4.84	-4.23	-1.51	30.00
		SU	-	-1.11	-1.06	1.93	

* Calculation of Output Power : Total Corr'd Power = Ant1 Power + Ant2 Power + Duty CF [dB]

PPSD Results

Frequency [MHz]	Portion	Tones	RU offset	Meas PPSD [dBm/MHz]		Total Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
				ANT1	ANT2		
5720	UNII-2C	26T	6	7.348	7.249	10.309	11.00
		SU	-	4.766	4.842	7.814	
	*UNII-3	26T	6	3.877	4.342	7.126	30.00
		SU	-	1.437	1.879	4.674	
5710	UNII-2C	26T	15	7.032	7.239	10.147	11.00
		SU	-	0.757	1.050	3.916	
	*UNII-3	26T	15	-3.629	-3.128	-0.361	30.00
		SU	-	-3.402	-3.142	-0.260	
5690	UNII-2C	26T	34	7.381	7.236	10.319	11.00
		SU	-	-3.075	-3.213	-0.133	
	*UNII-3	26T	34	-3.034	-2.924	0.032	30.00
		SU	-	-8.018	-7.816	-4.906	

Note: * For UNII-3, the unit of PPSD is [dBm/500kHz].

Calculation of PPSD result : Total Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB] + Corr'd factor [dB]

10.2.11. 802.11ax 2Tx (MIMO) MODE 5.8 GHz BAND

Bandwidth and Antenna Gain, Limits

Mode	Channel	Frequency [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/500kHz]
HE20	Low	5745	-4.10	30.00	30.00
	Mid	5785			
	High	5825			
HE40	Low	5755			
	High	5795			
HE80	Mid	5775			

Included in Calculations of Corr'd [Power & PPSD]				
Duty Cycle CF [dB]	HE20	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		SU	0.00	dB
	HE40	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		SU	0.00	dB
	HE80	26T	0.00	dB
		52T	0.00	dB
		106T	0.00	dB
		242T	0.00	dB
		484T	0.00	dB
		SU	0.00	dB

Output Power Results

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE20	149	5745	26T	0	8.38	9.02	11.72	30.00
				4	8.22	9.08	11.68	
				8	8.73	9.37	12.07	
			52T	37	10.51	11.39	13.98	
				38	10.35	11.06	13.73	
				40	10.38	11.37	13.91	
			106T	53	11.59	12.40	15.02	
				54	11.42	12.40	14.95	
			SU	-	14.52	15.17	17.87	
	157	5785	26T	0	8.15	9.56	11.92	
				4	8.09	9.54	11.89	
				8	8.62	9.83	12.28	
			52T	37	10.37	11.70	14.10	
				38	10.22	11.35	13.83	
				40	10.26	11.66	14.03	
			106T	53	11.44	12.71	15.13	
				54	11.33	12.71	15.08	
			SU	-	14.36	15.44	17.94	
	165	5825	26T	0	8.70	9.07	11.90	
				4	8.04	8.67	11.38	
				8	8.58	8.99	11.80	
			52T	37	10.89	11.44	14.18	
				38	10.73	11.10	13.93	
				40	10.78	11.38	14.10	
106T			53	11.46	11.94	14.72		
			54	11.36	11.94	14.67		
SU			-	14.70	15.19	17.96		

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

Mode	Channel	Frequency [MHz]	Tones	RU offset	Average Power [dBm]		Total Corr'd Power [dBm]	Power Limit [dBm]
					ANT1	ANT2		
HE40	151	5755	26T	0	8.66	9.47	12.09	30.00
				9	8.28	9.17	11.76	
				17	8.36	9.30	11.87	
			52T	37	10.83	11.83	14.37	
				41	10.54	11.56	14.09	
				44	10.62	11.68	14.19	
			106T	53	11.38	12.53	15.00	
				54	11.27	12.26	14.80	
				56	11.16	12.43	14.85	
			242T	61	12.38	13.31	15.88	
				62	12.26	13.25	15.79	
			SU	-	13.46	14.29	16.91	
	159	5795	26T	0	8.62	9.58	12.14	
				9	8.25	9.34	11.84	
				17	8.42	9.40	11.95	
			52T	37	10.82	11.97	14.44	
				41	10.60	11.65	14.17	
				44	10.73	11.76	14.29	
			106T	53	11.43	12.66	15.10	
				54	11.35	12.37	14.90	
				56	11.28	12.51	14.95	
			242T	61	12.39	13.43	15.95	
				62	12.30	13.35	15.87	
			SU	-	13.44	14.39	16.95	
HE80	155	5775	26T	0	8.26	9.47	11.92	
				18	7.70	9.31	11.59	
				36	7.75	9.21	11.55	
			52T	37	9.24	10.52	12.94	
				45	8.85	10.23	12.60	
				52	8.86	10.15	12.56	
			106T	53	10.23	11.59	13.97	
				57	9.93	11.24	13.64	
				60	9.78	11.33	13.63	
			242T	61	11.27	12.36	14.86	
				62	11.17	12.12	14.68	
				64	10.90	12.16	14.59	
			484T	65	11.26	12.30	14.82	
				66	11.01	12.15	14.63	
			SU	-	11.92	13.11	15.57	

* Calculation of Output Power :

Average Power = Measured Power + Duty CF [dB]

Total Corr'd Power = Ant1's Average Power + Ant2's Average Power

PPSD Results


Actual RBW	Ref. Bandwidth	Corr'd factor
100 kHz	500 kHz	6.99 dB


Mode	Channel	Frequency [MHz]	Tones	RU offset	Meas PPSD [dBm/100kHz]		Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]
					ANT1	ANT2		
HE20	149	5745	26T	0	-3.577	-3.197	6.617	30.00
				4	-3.476	-3.775	6.377	
				8	-3.311	-3.094	6.799	
			SU	-	-6.492	-5.959	3.783	
	157	5785	26T	0	-3.381	-2.664	6.993	
				4	-3.863	-3.065	6.555	
				8	-3.272	-2.668	7.041	
			SU	-	-6.957	-6.005	3.545	
	165	5825	26T	0	-3.327	-3.158	6.759	
				4	-3.712	-3.483	6.404	
				8	-3.051	-3.152	6.899	
			SU	-	-6.092	-6.023	3.943	
HE40	151	5755	26T	0	-2.440	-2.621	7.471	
				9	-2.566	-2.779	7.329	
				17	-2.599	-2.790	7.307	
			SU	-	-9.606	-9.789	0.304	
	159	5795	26T	0	-2.613	-2.828	7.281	
				9	-2.596	-2.856	7.276	
				17	-2.694	-2.680	7.313	
			SU	-	-9.558	-9.580	0.431	
HE80	155	5775	26T	0	-2.588	-2.635	7.389	
				18	-3.139	-3.185	6.838	
				36	-3.503	-2.920	6.799	
			SU	-	-13.820	-13.973	-3.896	


* Calculation of PPSD result : Total Corr'd PPSD = Ant1 PPSD + Ant2 PPSD + Duty CF [dB] + Corr'd factor [dB]

10.2.12. OUTPUT POWER AND PPSD PLOTS(WORST CASE)

UNII-1 & 2A & 2C

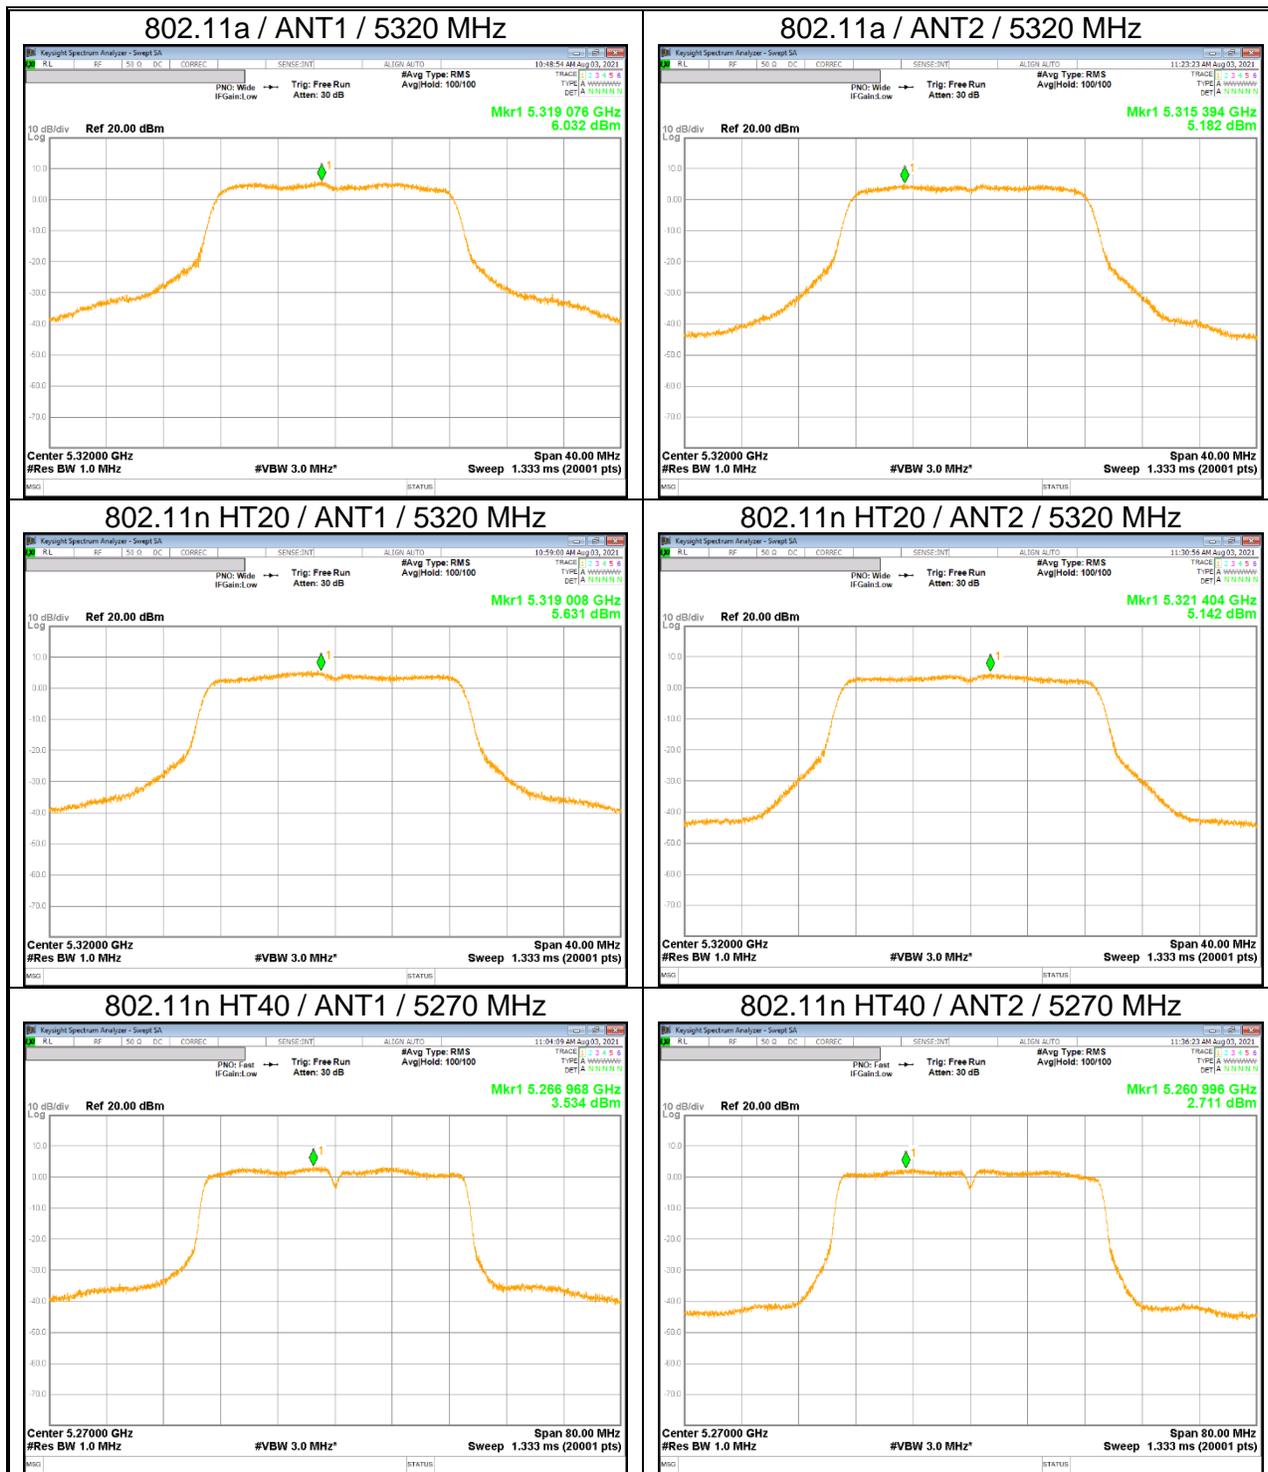

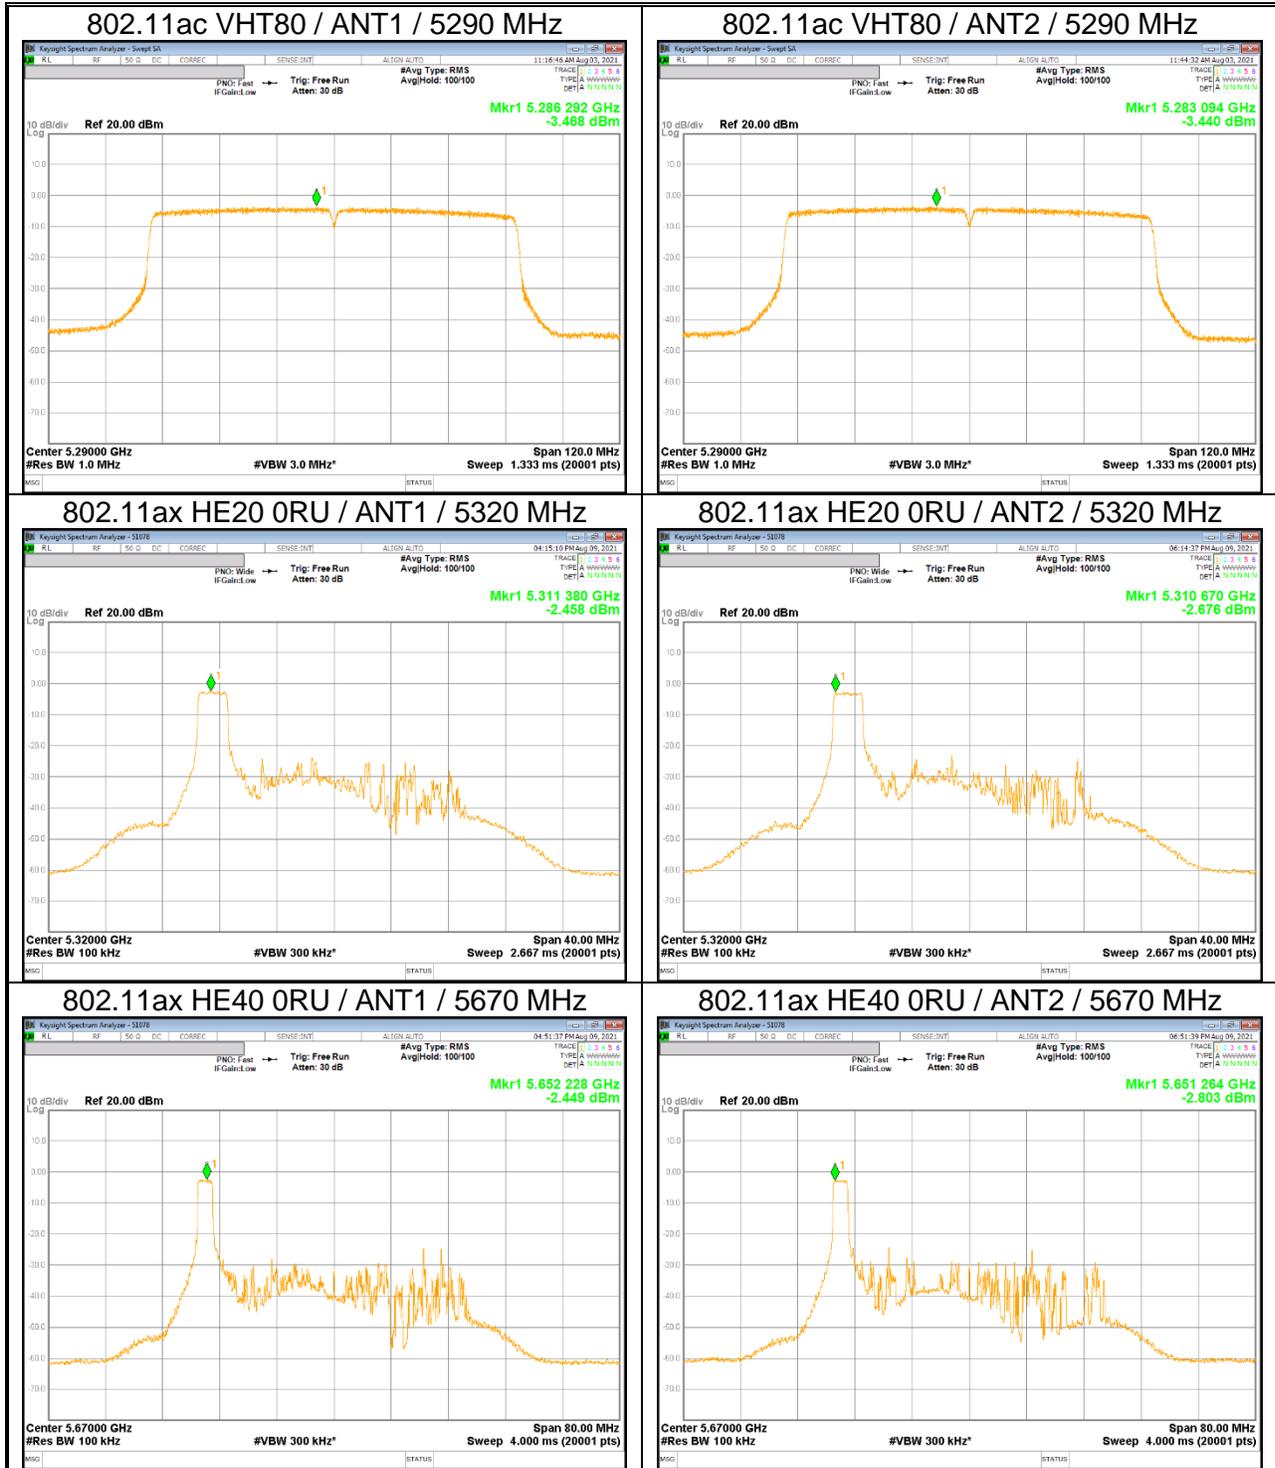

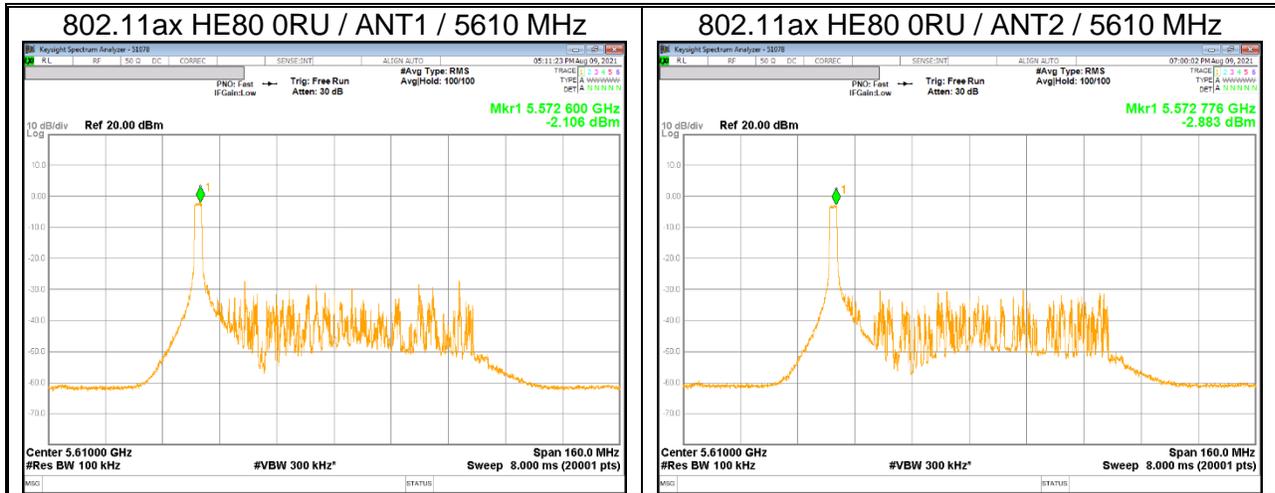

UNII-3

