

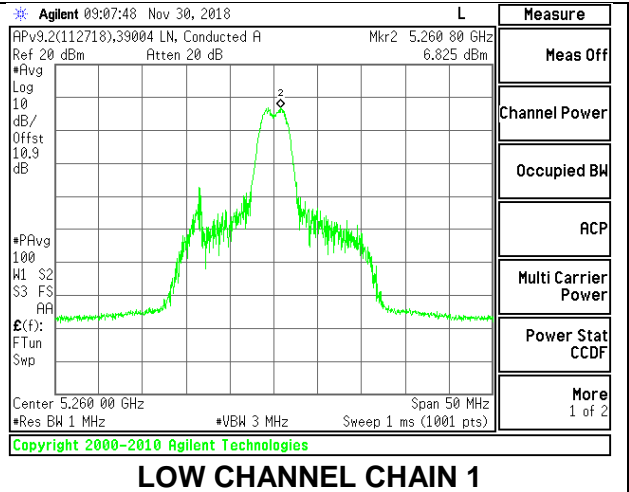
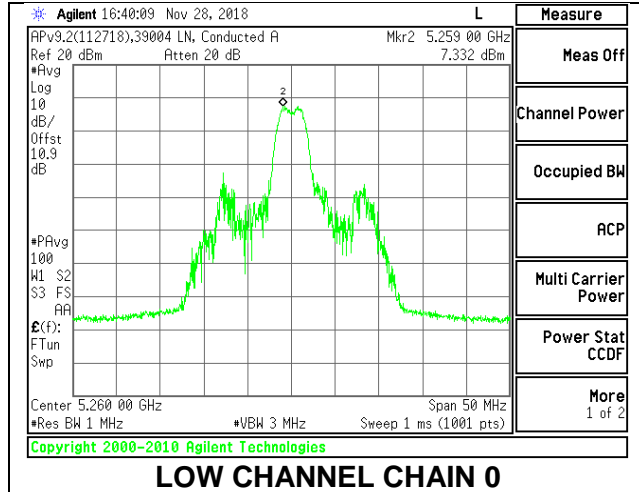




**LOW CHANNEL**

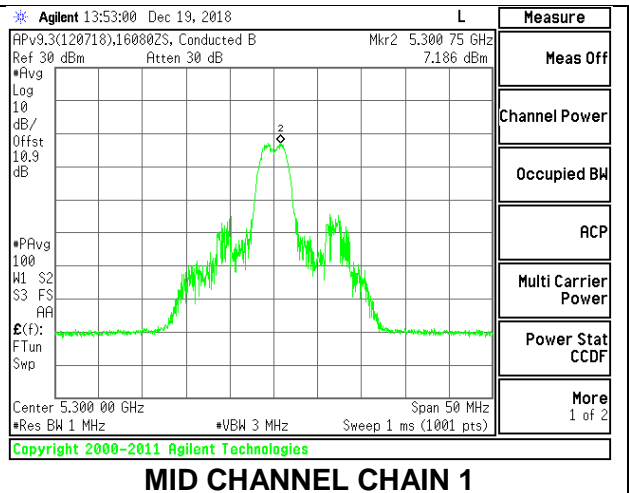

**MID CHANNEL**

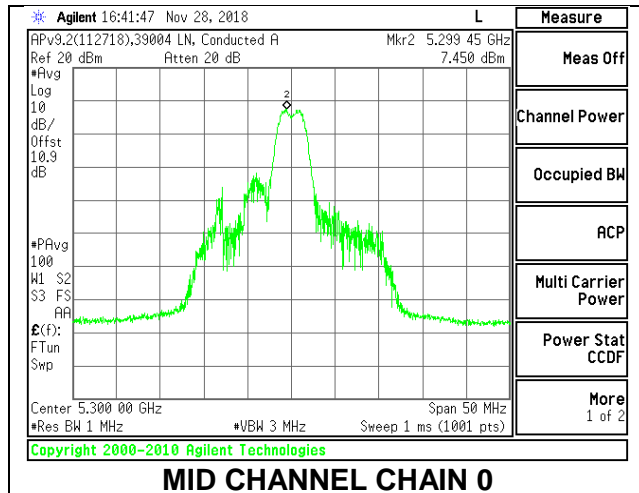

**HIGH CHANNEL**

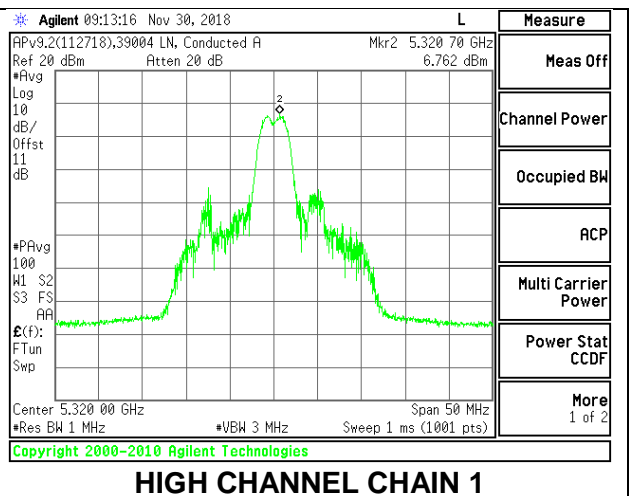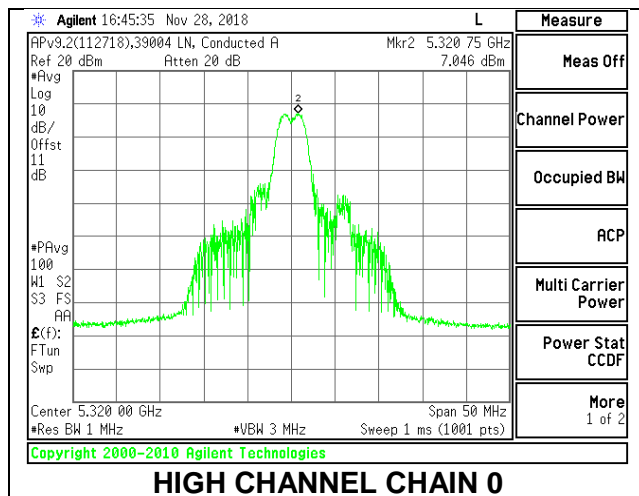

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5260	20.25	-1.02	1.93	24.00	11.00
Mid	5300	20.20	-1.02	1.93	24.00	11.00
High	5320	20.15	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	10.37	9.52	12.98	24.00	-11.02
Mid	5300	10.40	9.50	12.98	24.00	-11.02
High	5320	10.40	9.51	12.99	24.00	-11.01



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5260	7.529	7.042	10.40	11.00	-0.60
Mid	5300	7.416	7.221	10.43	11.00	-0.57
High	5320	7.531	6.960	10.37	11.00	-0.63



### LOW CHANNEL

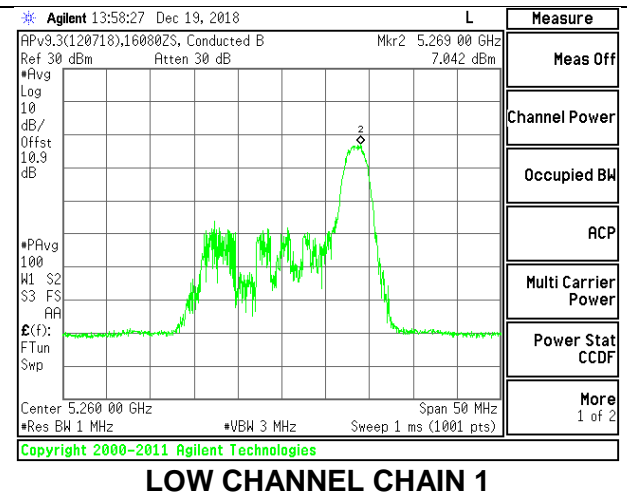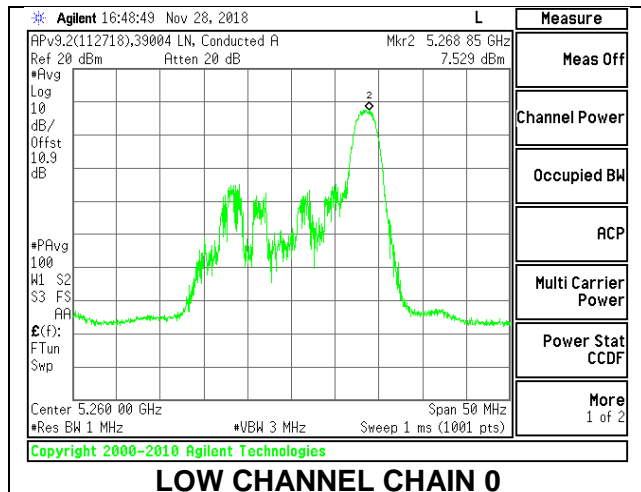

### MID CHANNEL

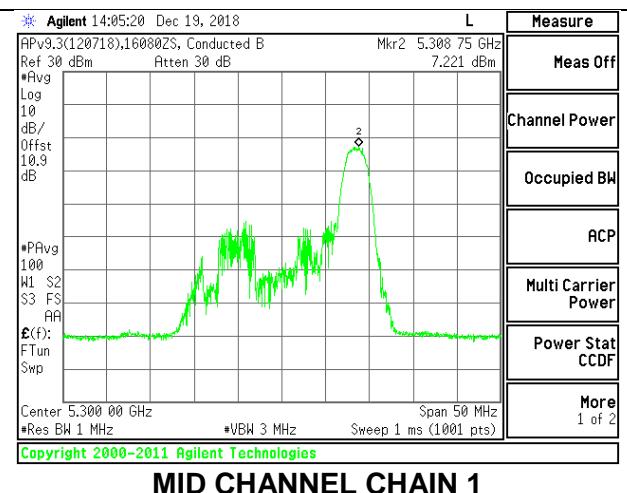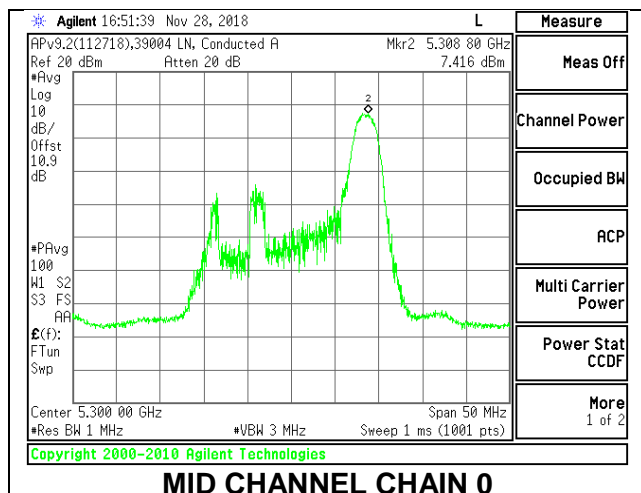

### HIGH CHANNEL

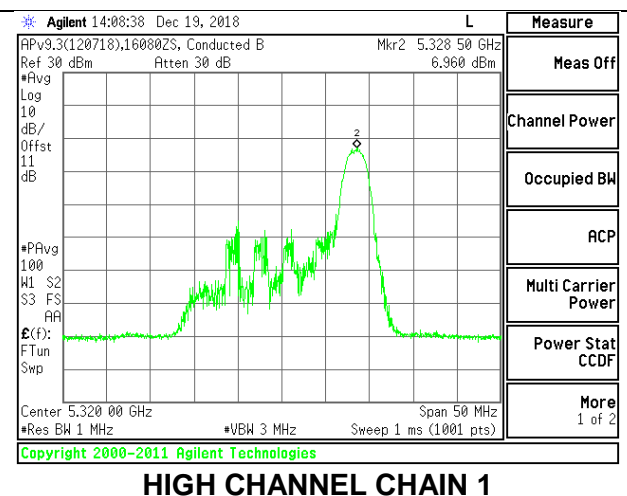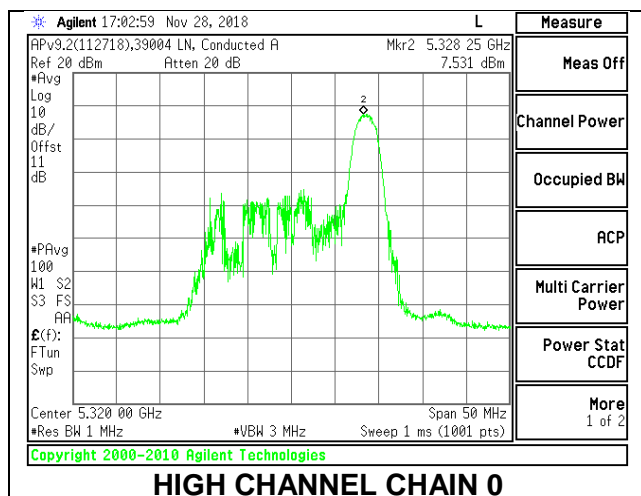

### 9.5.13. 802.11ax HE40 MODE IN THE 5.3 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65

##### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	41.80	-1.02	1.93	24.00	11.00
High	5310	41.40	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.13	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.98	15.25	18.64	24.00	-5.36
High	5310	15.67	14.92	18.32	24.00	-5.68



##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	2.144	1.981	6.20	11.00	-4.80
High	5310	2.169	1.750	6.10	11.00	-4.90

### LOW CHANNEL

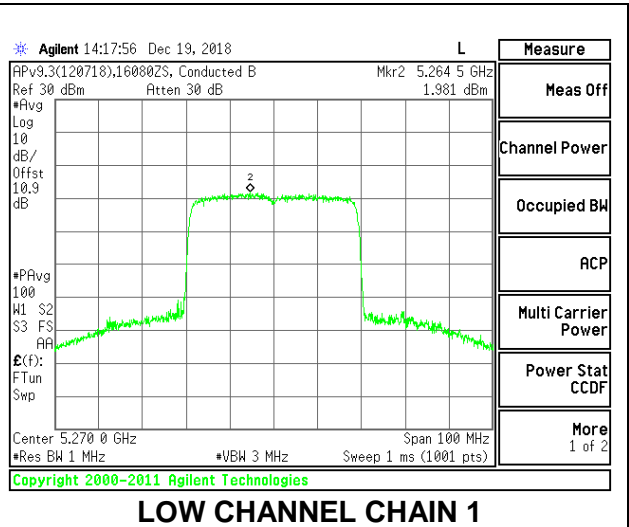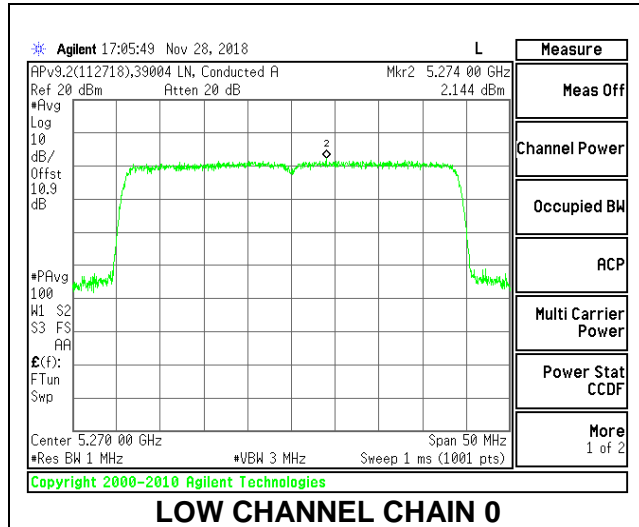

### HIGH CHANNEL

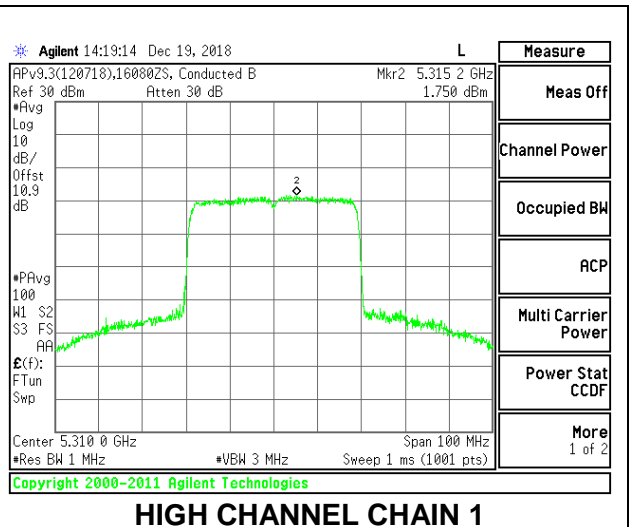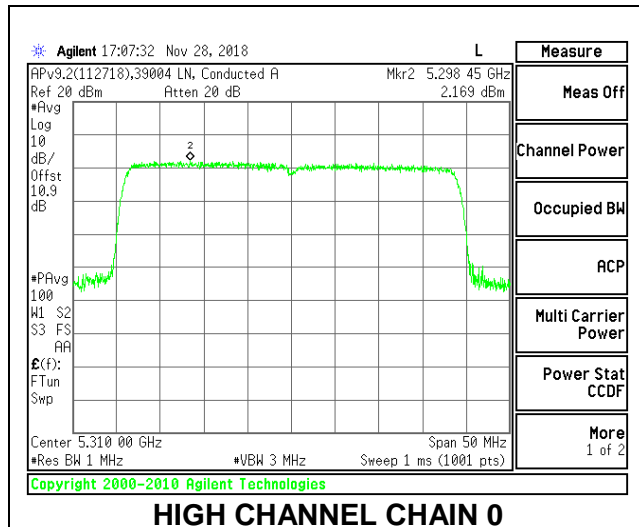

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	34.00	-1.02	1.93	24.00	11.00
High	5310	30.50	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.67	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.92	16.00	19.49	24.00	-4.51
High	5310	16.66	15.95	19.33	24.00	-4.67



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.167	5.313	9.44	11.00	-1.56
High	5310	6.209	5.563	9.58	11.00	-1.42

### LOW CHANNEL

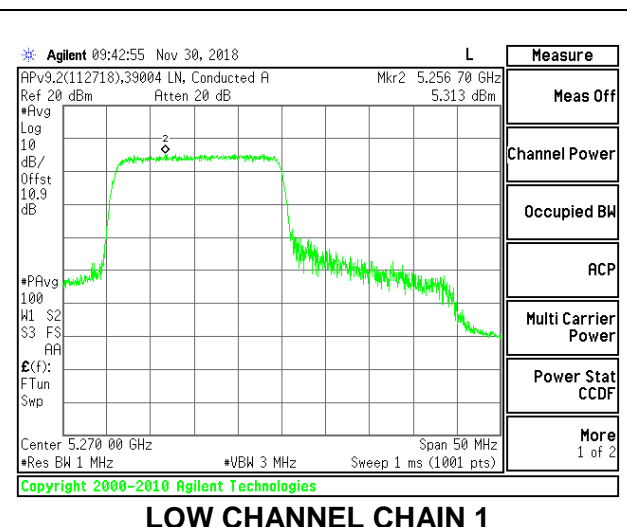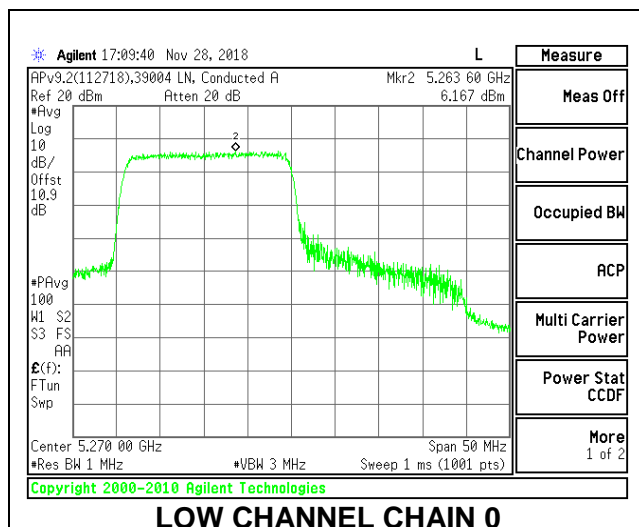

### HIGH CHANNEL

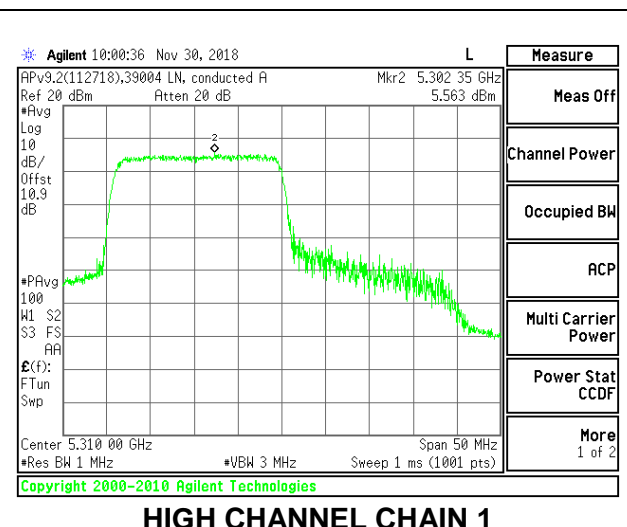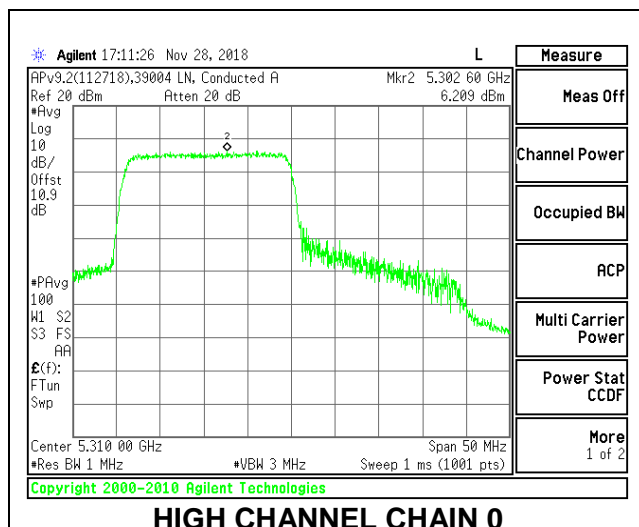

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	30.90	-1.02	1.93	24.00	11.00
High	5310	33.80	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.67	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	16.95	16.02	19.52	24.00	-4.48
High	5310	16.77	15.98	19.40	24.00	-4.60

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.701	6.110	10.10	11.00	-0.90
High	5310	6.530	5.844	9.88	11.00	-1.12



### LOW CHANNEL

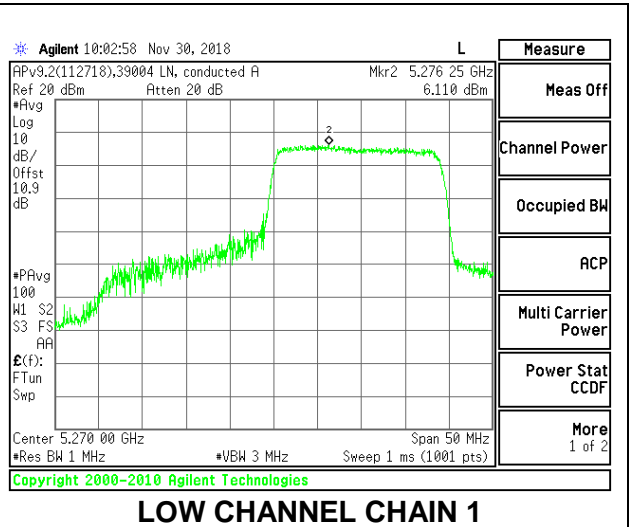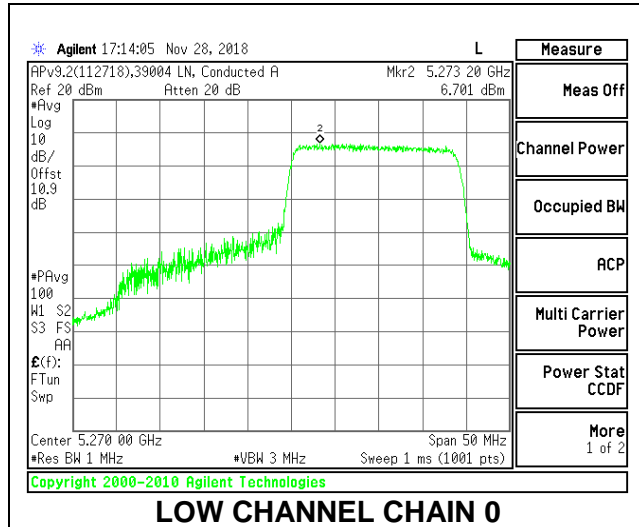

### HIGH CHANNEL

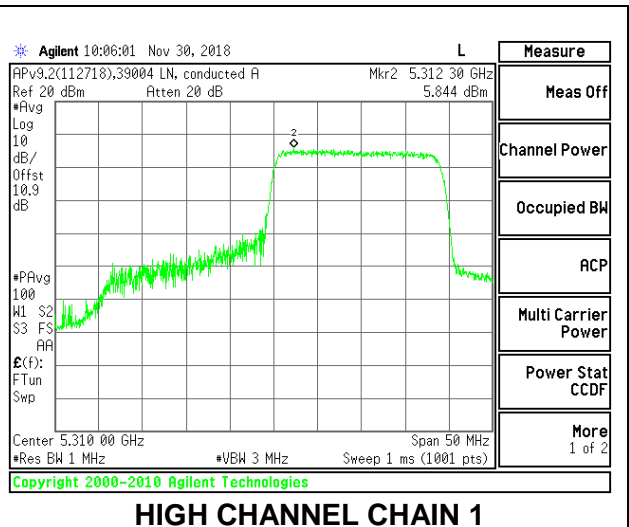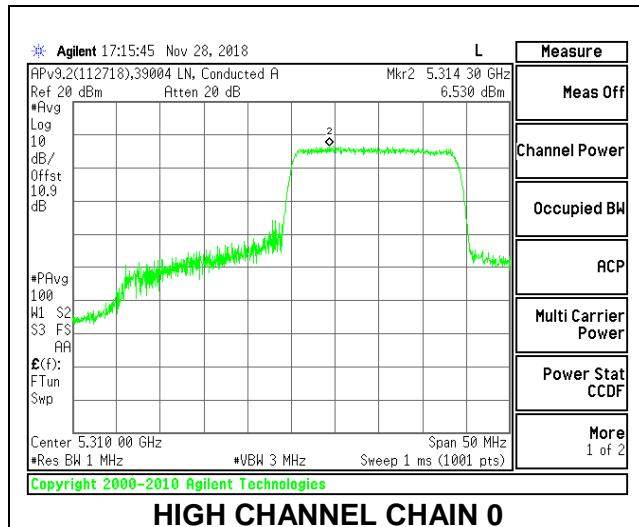

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.20	-1.02	1.93	24.00	11.00
High	5310	21.30	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.41	14.58	18.03	24.00	-5.97
High	5310	15.42	14.59	18.04	24.00	-5.96



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.358	7.189	10.64	11.00	-0.36
High	5310	7.598	7.344	10.84	11.00	-0.16

### LOW CHANNEL

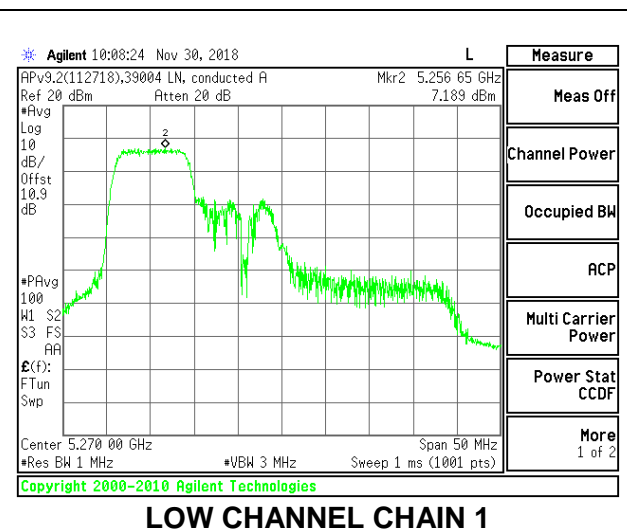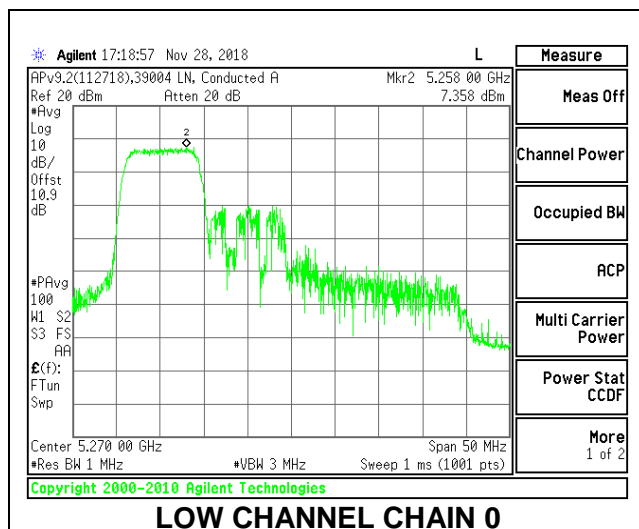

### HIGH CHANNEL

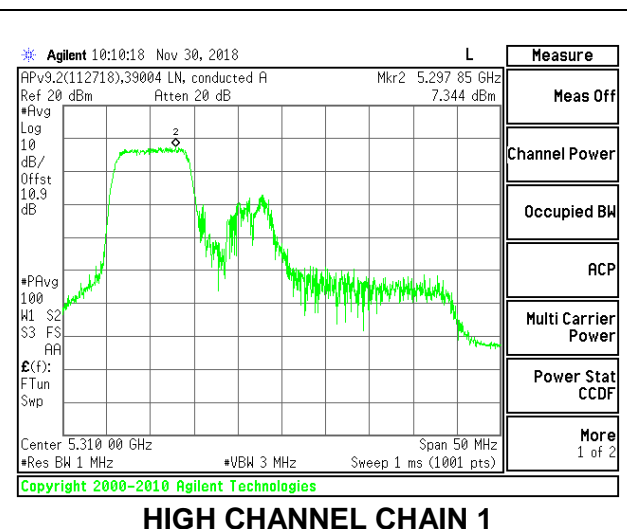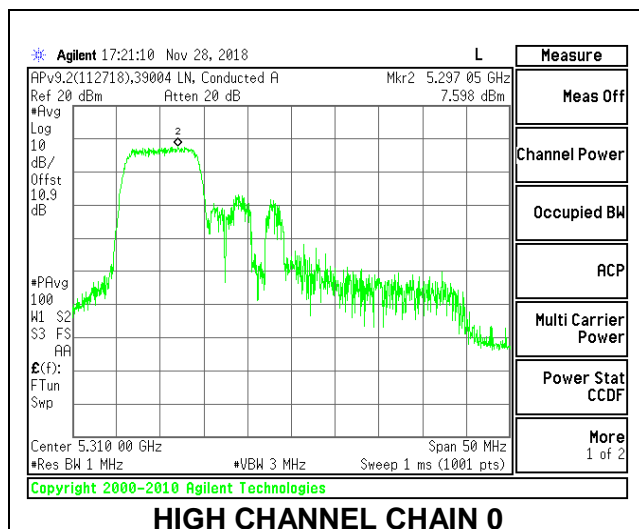

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 54**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	27.90	-1.02	1.93	24.00	11.00
High	5310	28.10	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.38	14.57	18.00	24.00	-6.00
High	5310	15.39	14.55	18.00	24.00	-6.00



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.714	7.460	10.96	11.00	-0.04
High	5310	7.857	7.231	10.93	11.00	-0.07

### LOW CHANNEL

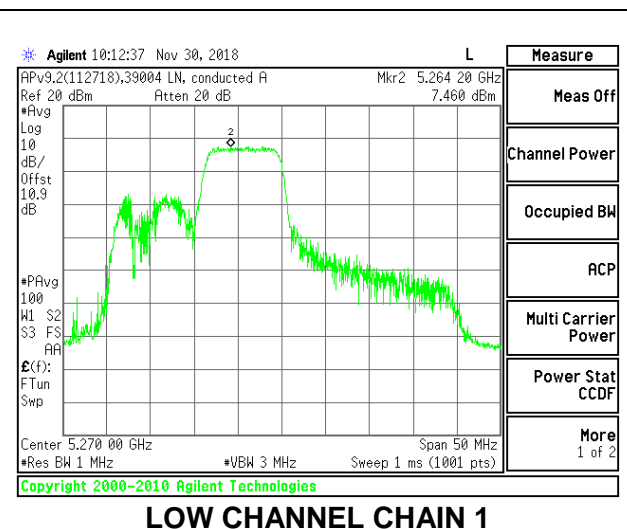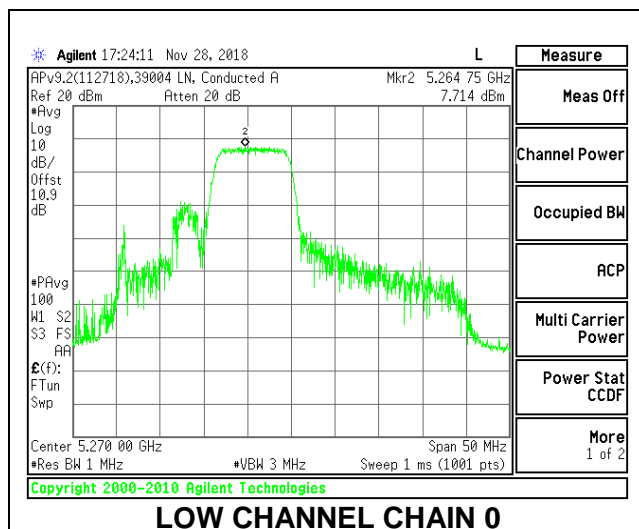

### HIGH CHANNEL

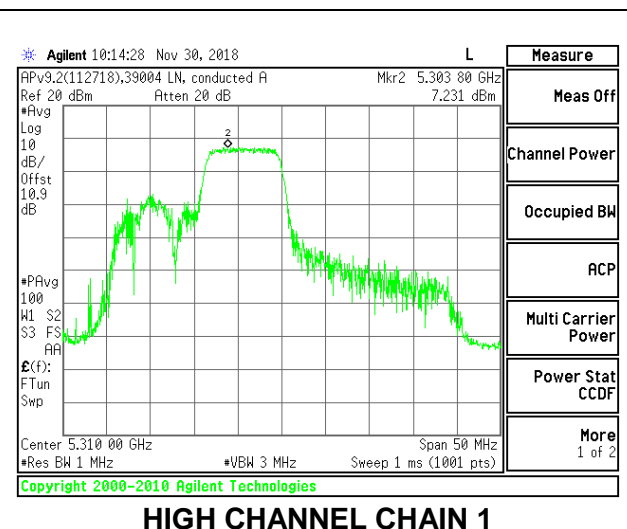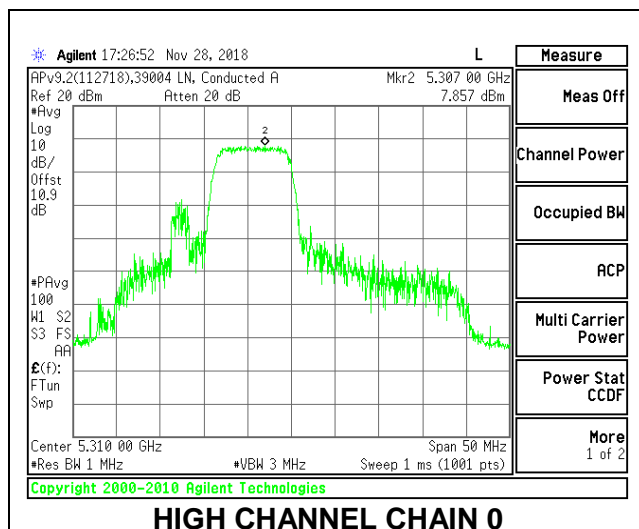

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	21.50	-1.02	1.93	24.00	11.00
High	5310	20.70	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.41	14.55	18.01	24.00	-5.99
High	5310	15.37	14.55	17.99	24.00	-6.01



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.294	7.503	10.77	11.00	-0.23
High	5310	7.391	6.713	10.44	11.00	-0.56

### LOW CHANNEL

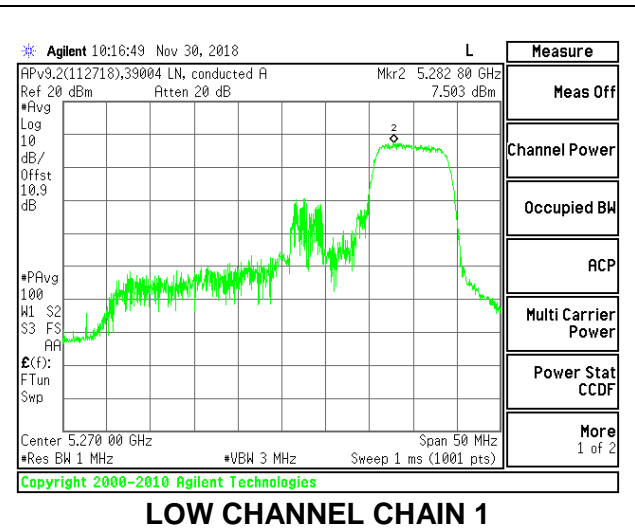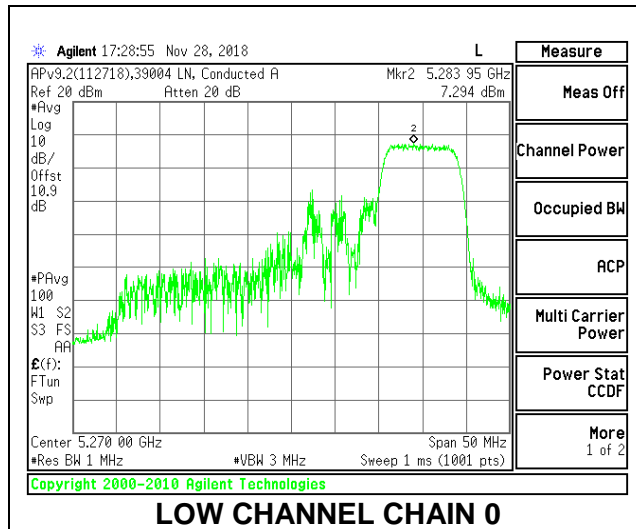

### HIGH CHANNEL

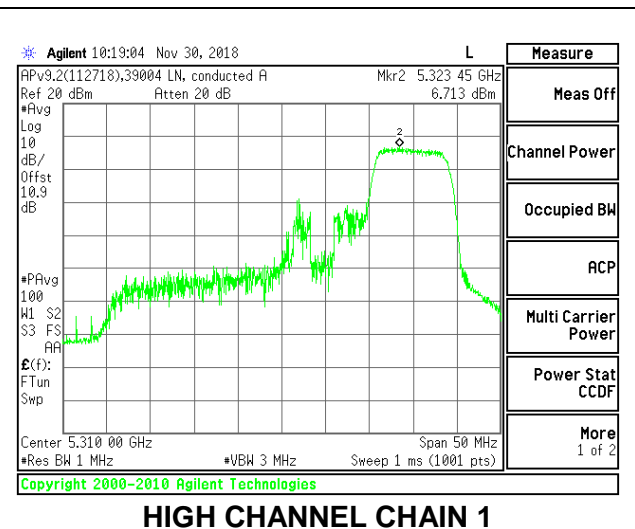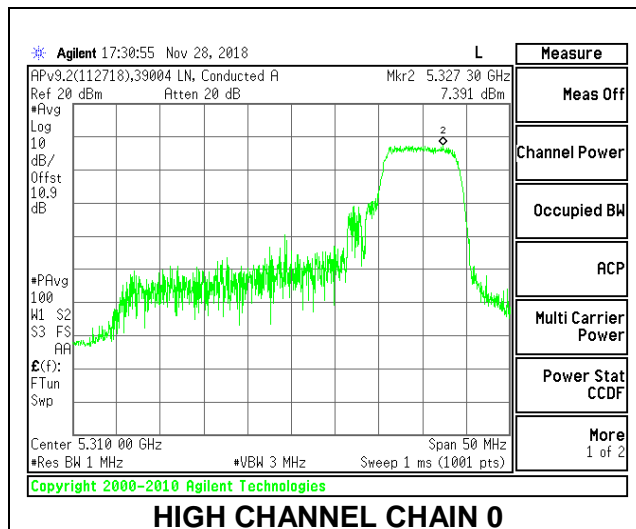

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	20.60	-1.02	1.93	24.00	11.00
High	5310	20.60	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.90	11.05	14.51	24.00	-9.49
High	5310	11.90	11.07	14.52	24.00	-9.48

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.337	6.940	10.32	11.00	-0.68
High	5310	7.298	6.930	10.30	11.00	-0.70



### LOW CHANNEL

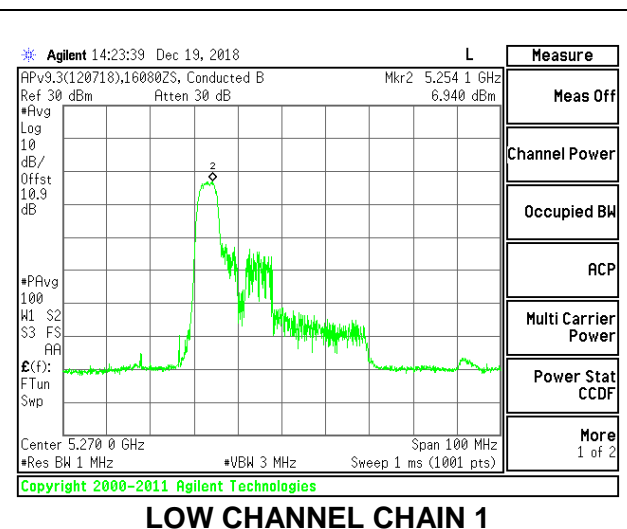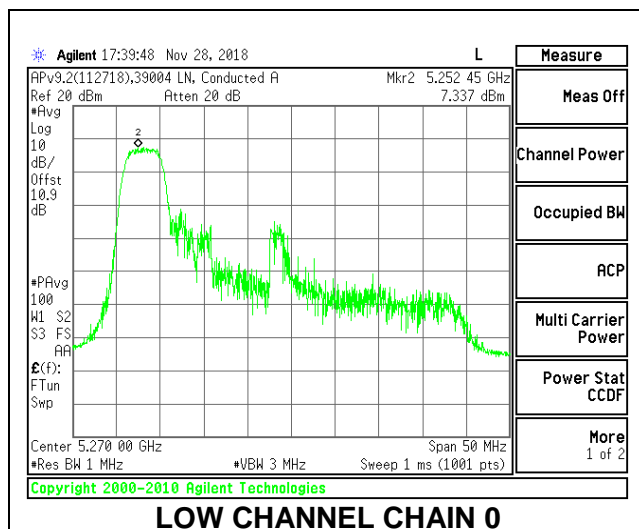

### HIGH CHANNEL

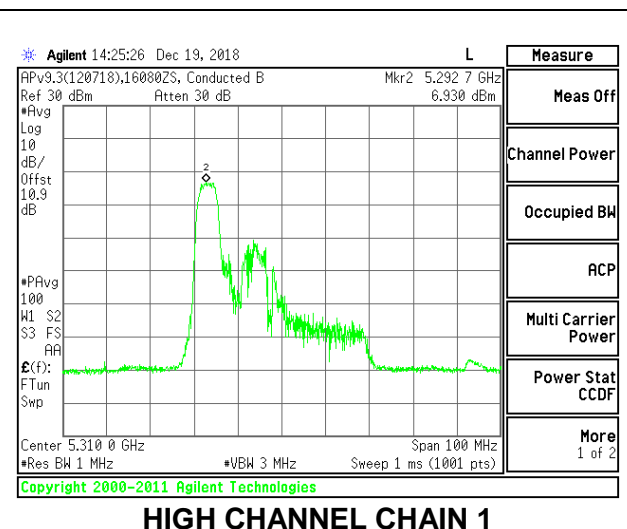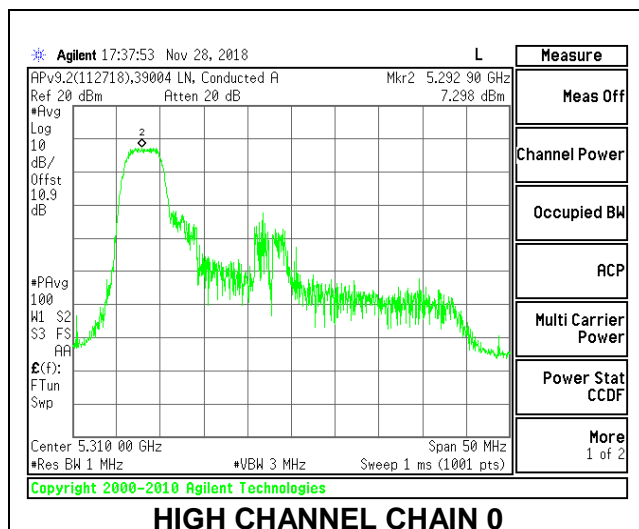

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 40**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	25.60	-1.02	1.93	24.00	11.00
High	5310	25.60	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.90	11.10	14.53	24.00	-9.47
High	5310	11.90	11.05	14.51	24.00	-9.49



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.562	6.975	10.46	11.00	-0.54
High	5310	7.765	7.413	10.77	11.00	-0.23

### LOW CHANNEL

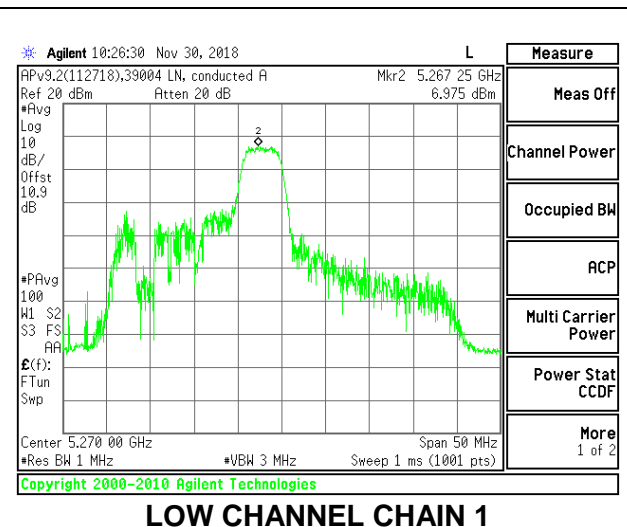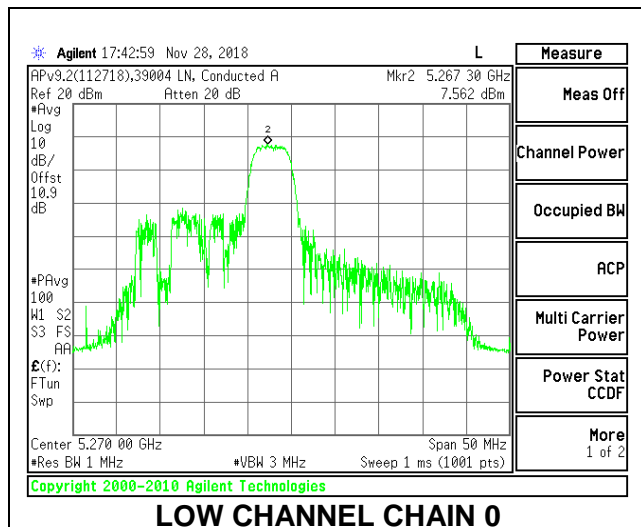

### HIGH CHANNEL

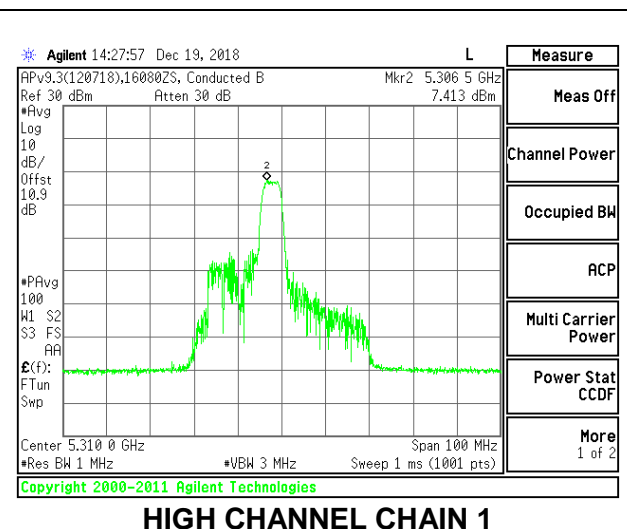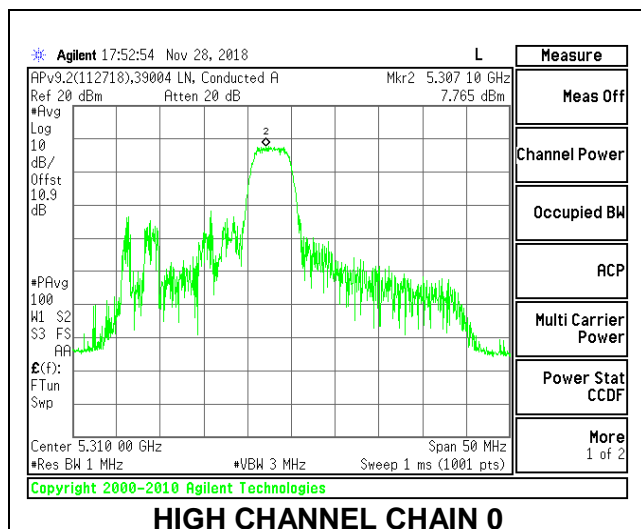

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	20.10	-1.02	1.93	24.00	11.00
High	5310	20.00	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	11.90	11.05	14.51	24.00	-9.49
High	5310	11.90	11.05	14.51	24.00	-9.49



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	6.990	6.482	9.92	11.00	-1.08
High	5310	7.335	6.720	10.22	11.00	-0.78

### LOW CHANNEL

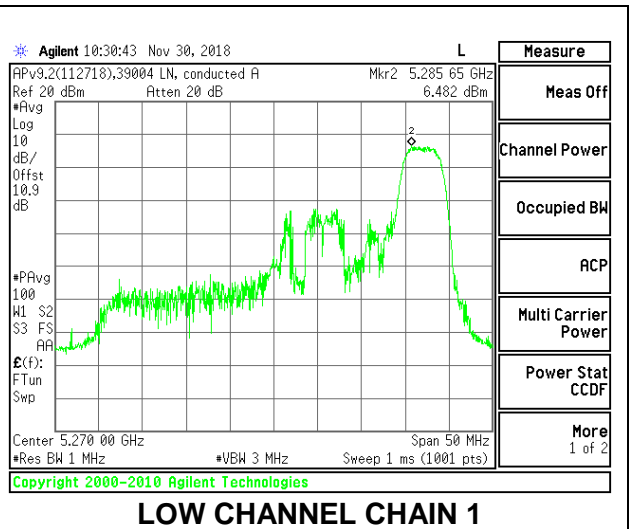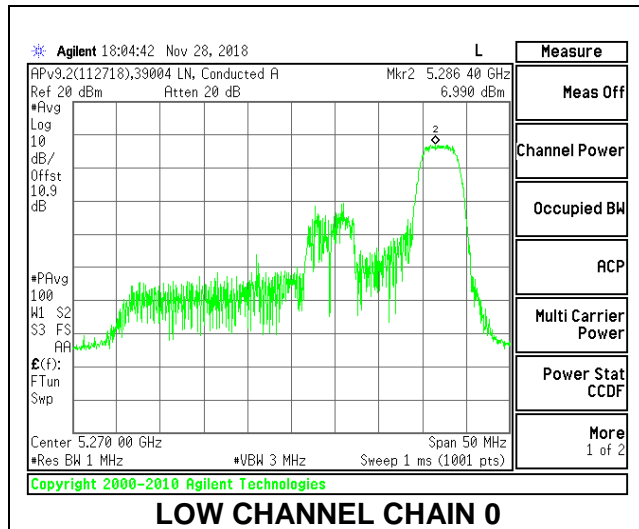

### HIGH CHANNEL

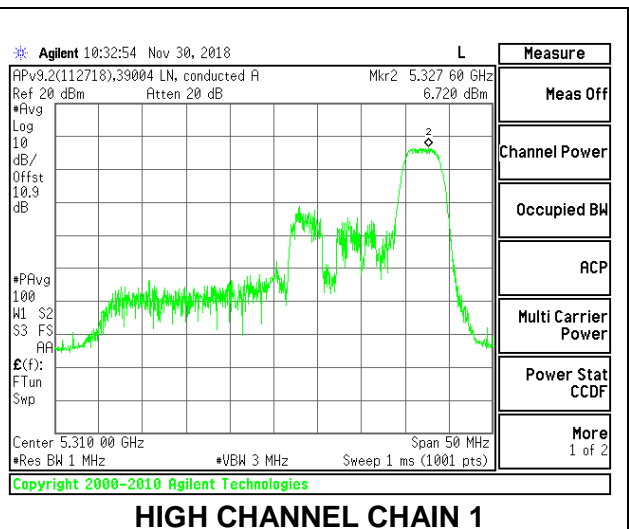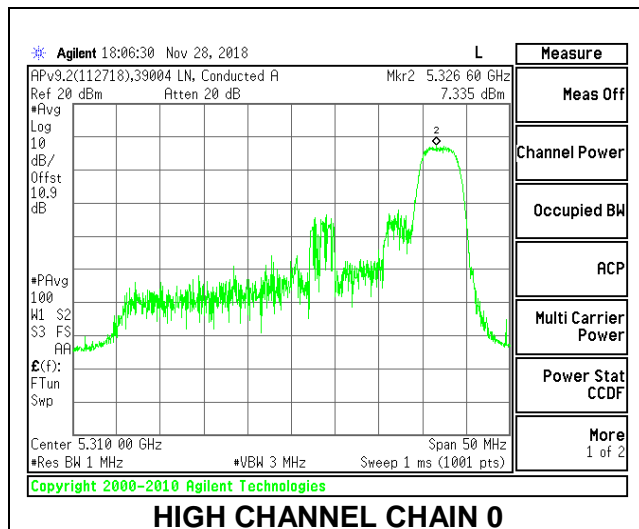

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	20.10	-1.02	1.93	24.00	11.00
High	5310	20.40	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.11	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	9.55	8.57	12.10	24.00	-11.90
High	5310	9.52	8.58	12.09	24.00	-11.91



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.362	7.299	10.45	11.00	-0.55
High	5310	7.744	7.344	10.67	11.00	-0.33

### LOW CHANNEL

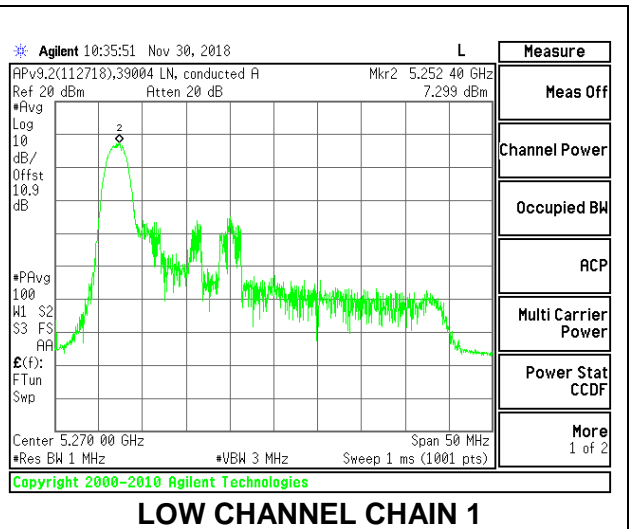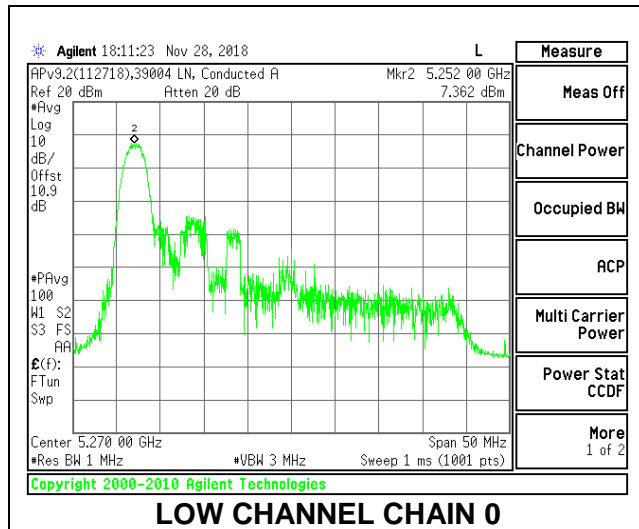

### HIGH CHANNEL

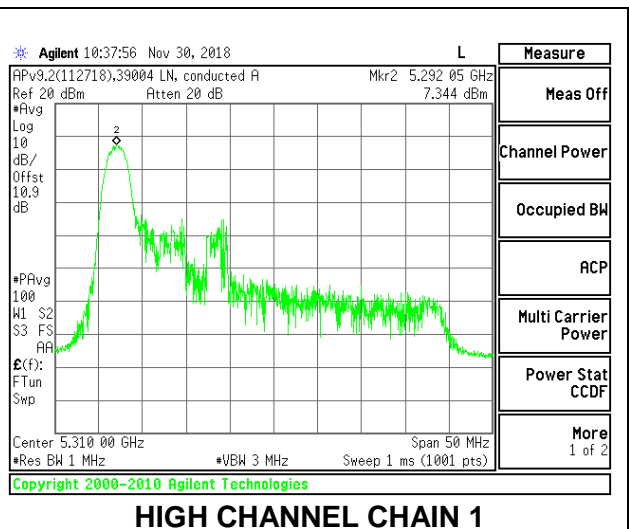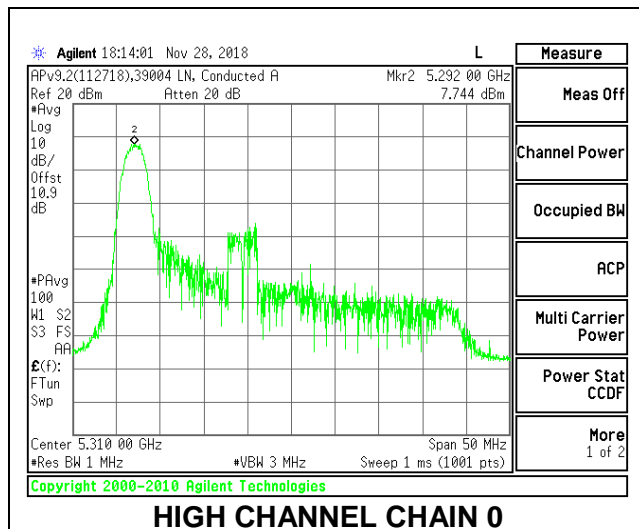

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	25.60	-1.02	1.93	24.00	11.00
High	5310	24.50	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.11	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	8.72	8.54	11.64	24.00	-12.36
High	5310	8.70	8.51	11.62	24.00	-12.38

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.629	7.370	10.62	11.00	-0.38
High	5310	7.245	7.216	10.35	11.00	-0.65



### LOW CHANNEL

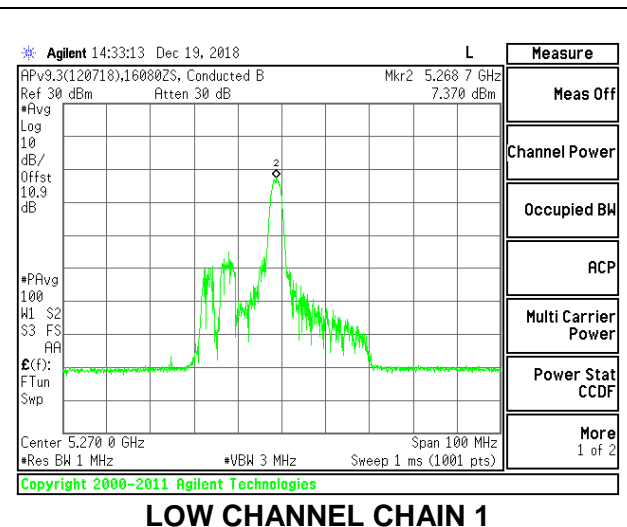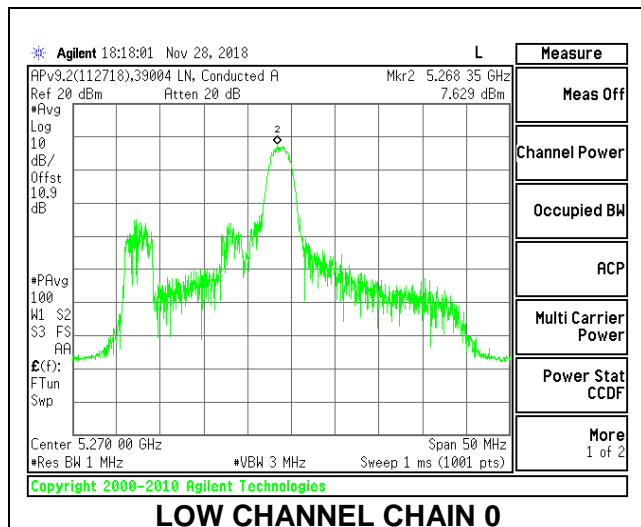

### HIGH CHANNEL

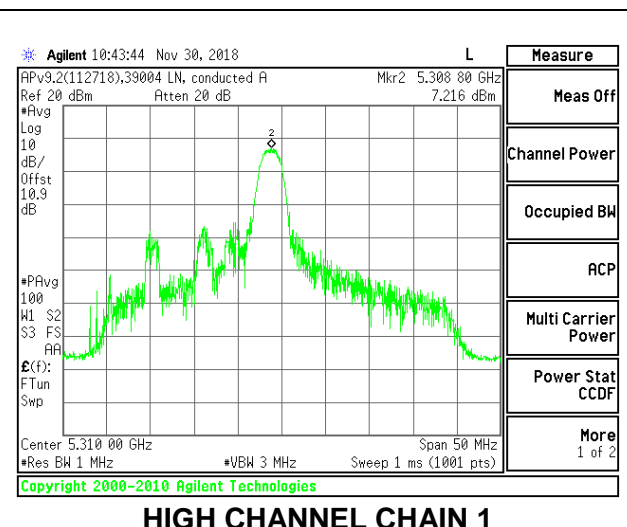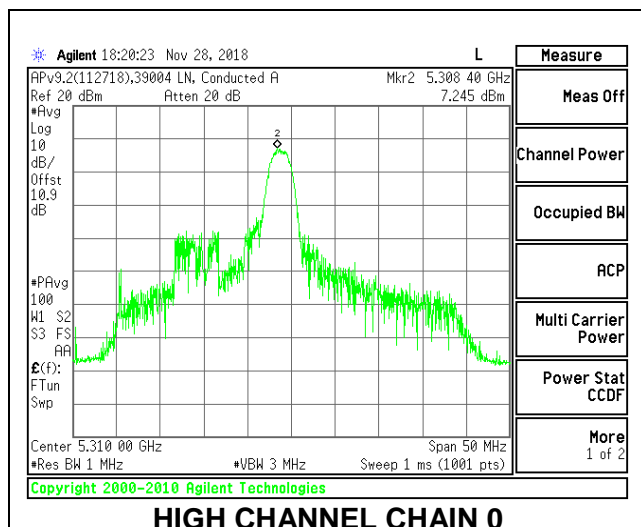

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 17**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Low	5270	19.90	-1.02	1.93	23.99	11.00
High	5310	19.90	-1.02	1.93	23.99	11.00

<b>Duty Cycle CF (dB)</b>	0.11	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	9.50	8.59	12.08	23.99	-11.91
High	5310	9.50	8.59	12.08	23.99	-11.91



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5270	7.506	7.557	10.65	11.00	-0.35
High	5310	7.666	7.268	10.59	11.00	-0.41

### LOW CHANNEL

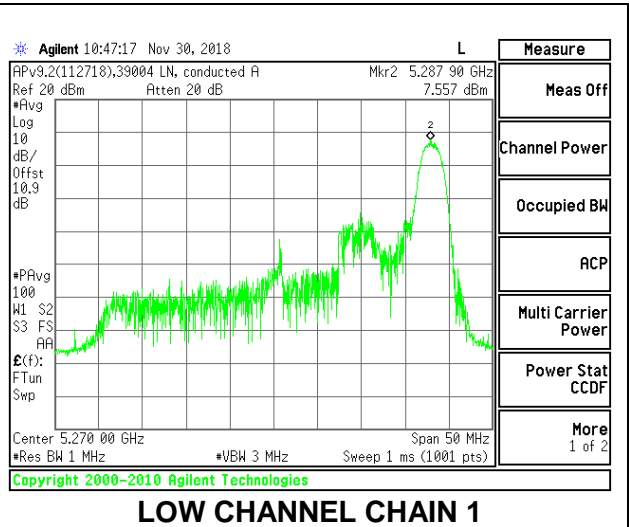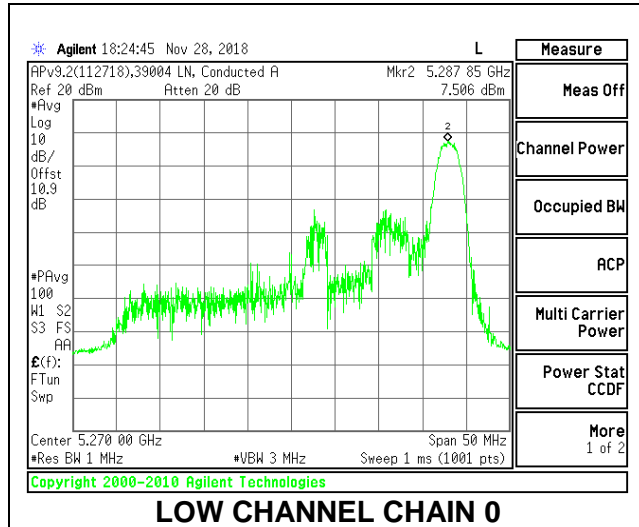

### HIGH CHANNEL

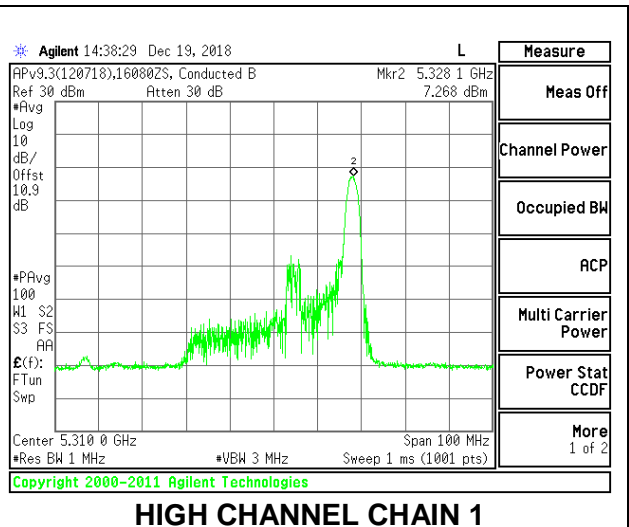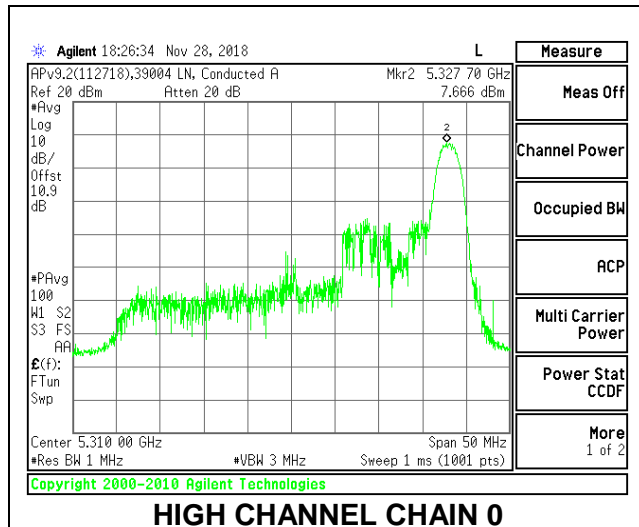

**9.5.14. 802.11ax HE80 MODE IN THE 5.3 GHz BAND**

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	84.20	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.89	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	14.96	13.94	17.49	24.00	-6.51

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	-1.701	-3.719	2.31	11.00	-8.69

### MID CHANNEL

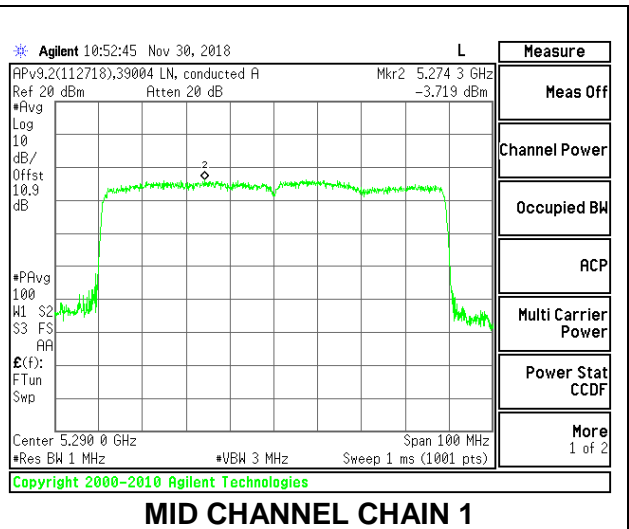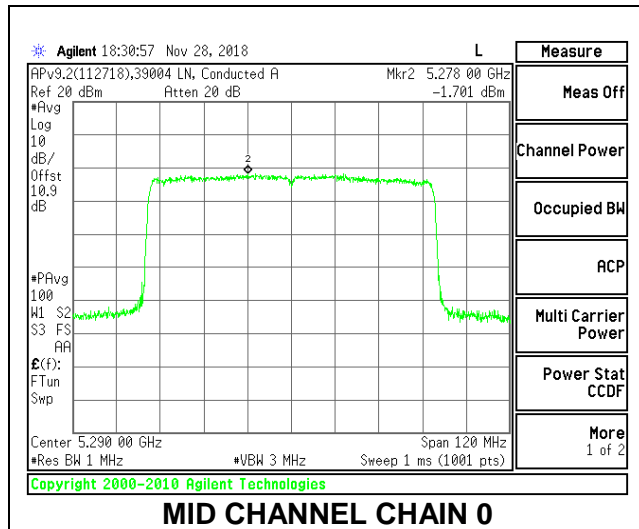

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	60.00	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.92	14.86	18.43	24.00	-5.57

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	1.383	0.843	5.35	11.00	-5.65

### MID CHANNEL

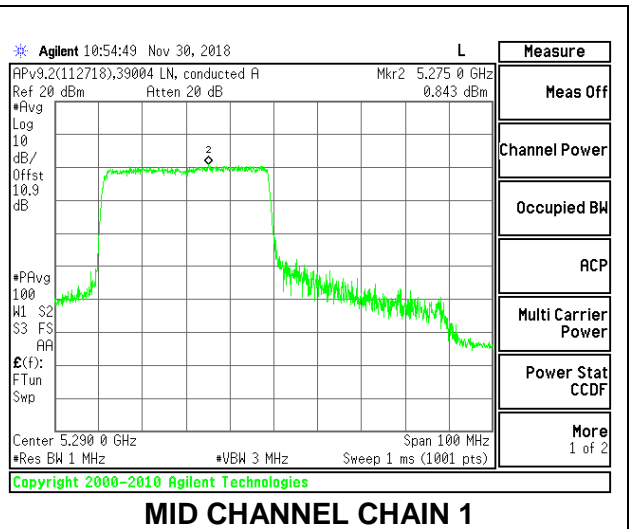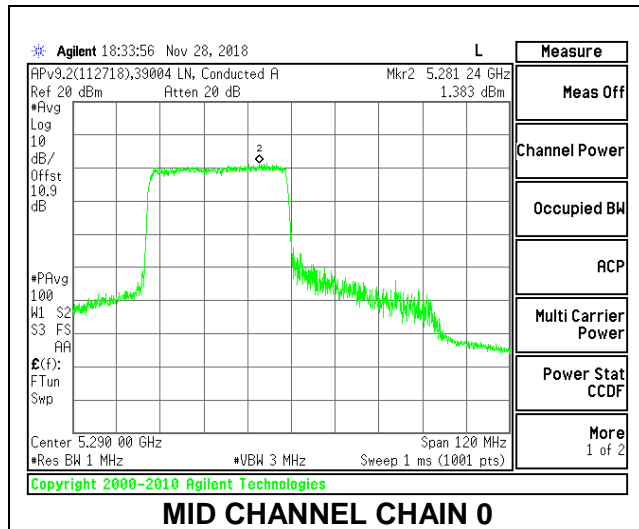

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 66**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	62.80	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.98	14.9	18.48	24.00	-5.52

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	1.191	0.964	5.31	11.00	-5.69



### MID CHANNEL

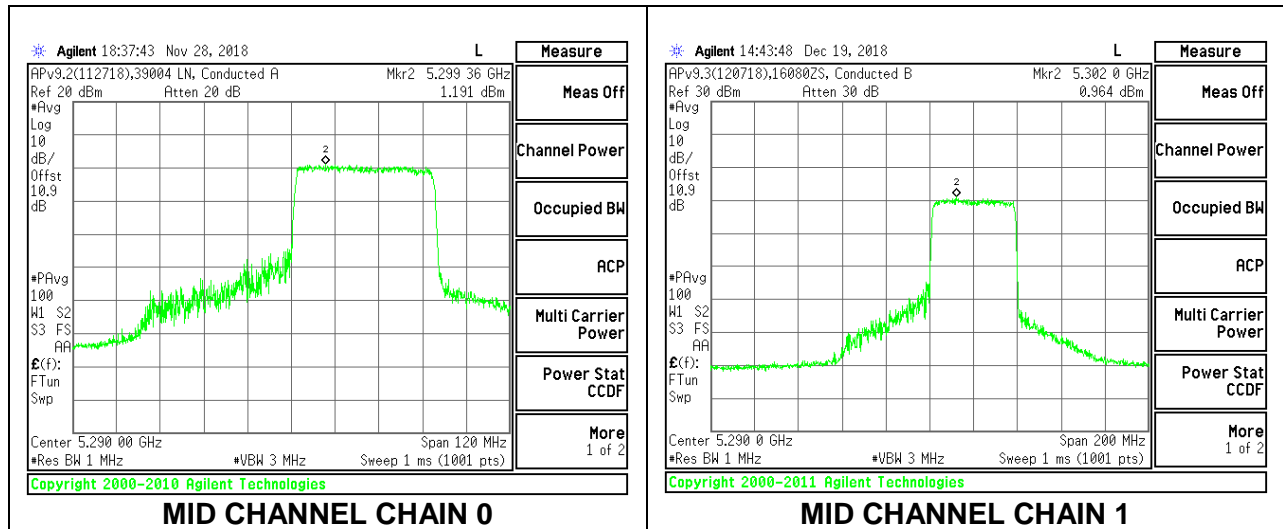

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	40.40	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.72	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	16.9	15.88	19.43	24.00	-4.57

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	5.679	5.018	9.09	11.00	-1.91

### MID CHANNEL

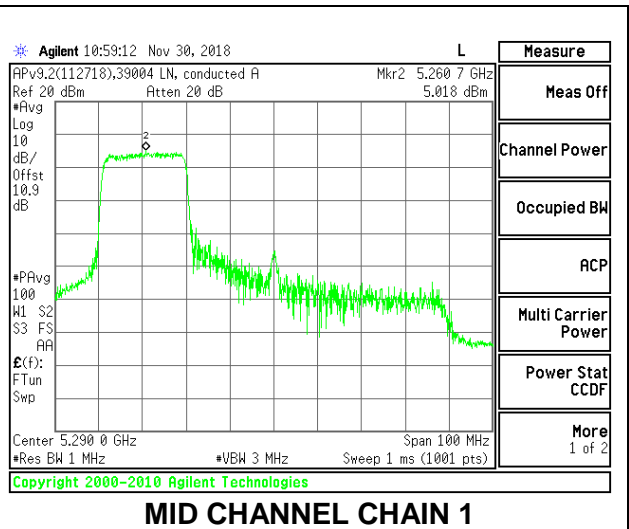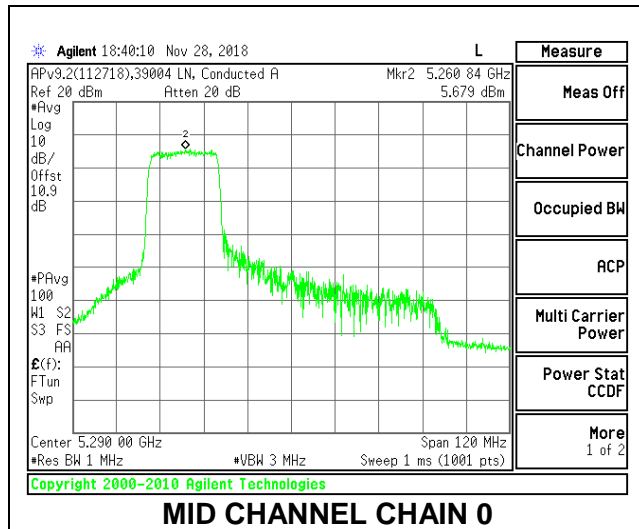

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62**

	(MHz)	BW (MHz)	for Power (dBi)	for PSD (dBi)	(dBm)	(dBm/1MHz)
Mid	5290	57.00	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	--



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	16.88	15.94	19.45	24.00	-4.55

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	6.425	5.505	9.72	11.00	-1.28

### MID CHANNEL

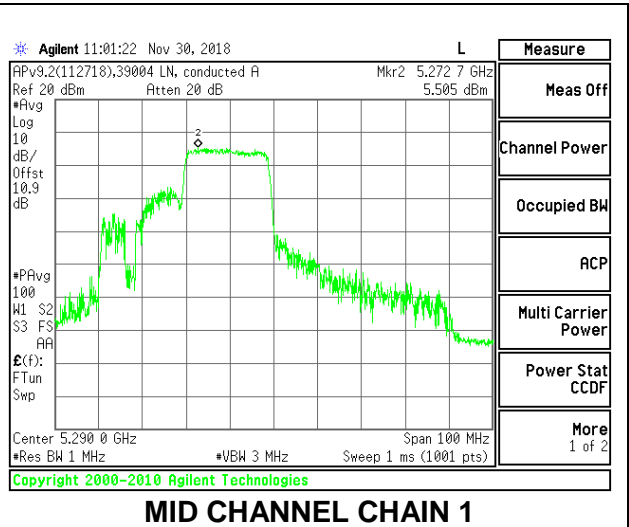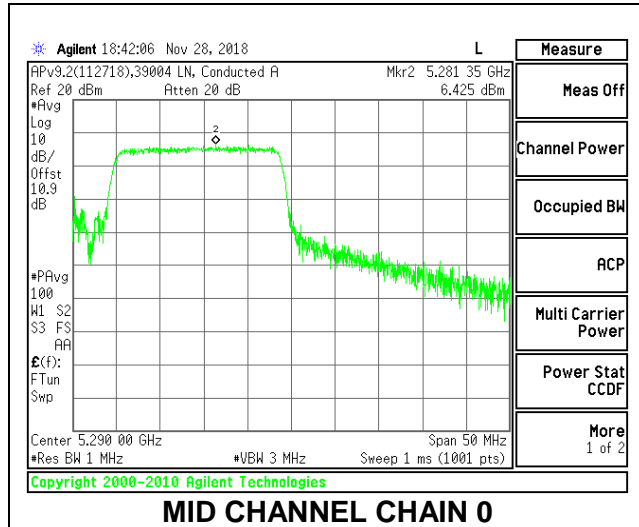

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 64**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	42.40	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.72	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	16.78	15.83	19.34	24.00	-4.66

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	5.399	4.938	8.90	11.00	-2.10

### MID CHANNEL

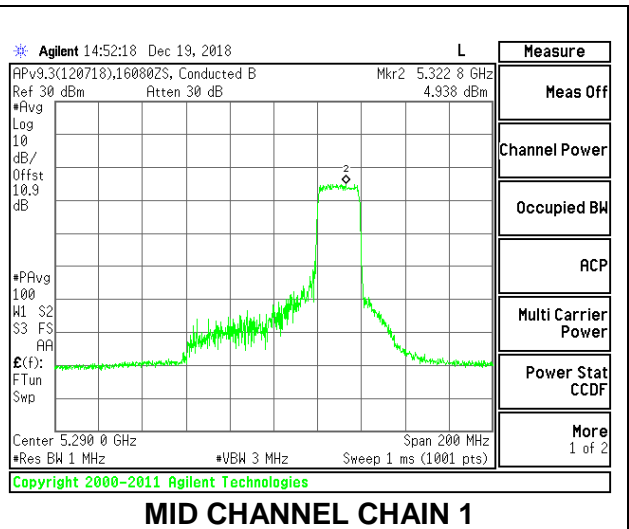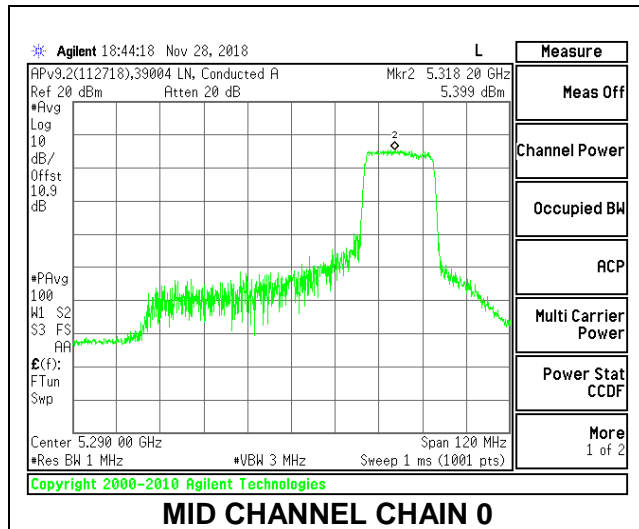

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	26.20	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.85	14.74	18.34	24.00	-5.66

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.059	7.123	10.46	11.00	-0.54



### MID CHANNEL

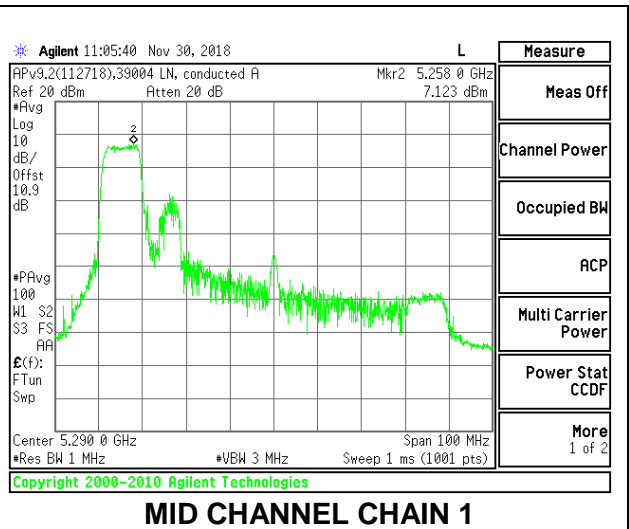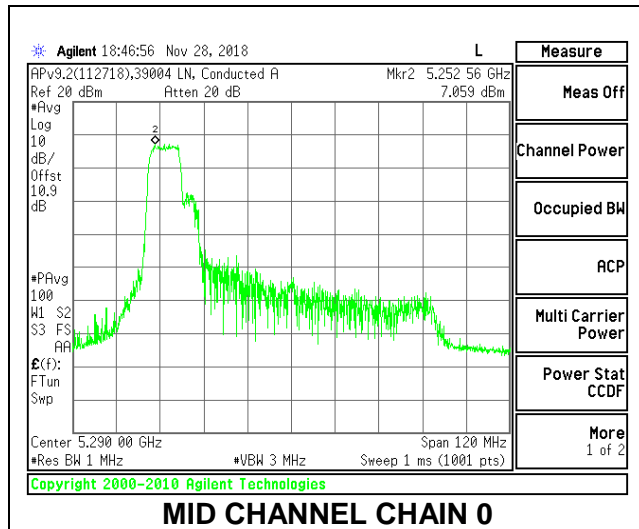

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	33.40	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.77	14.73	18.29	24.00	-5.71

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.315	7.156	10.61	11.00	-0.39

### MID CHANNEL

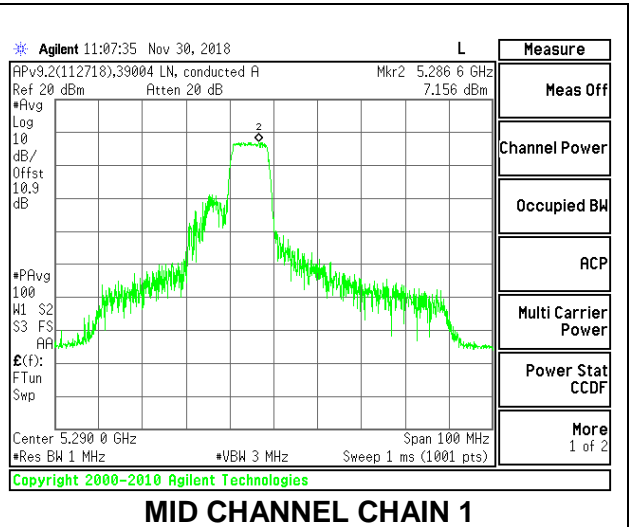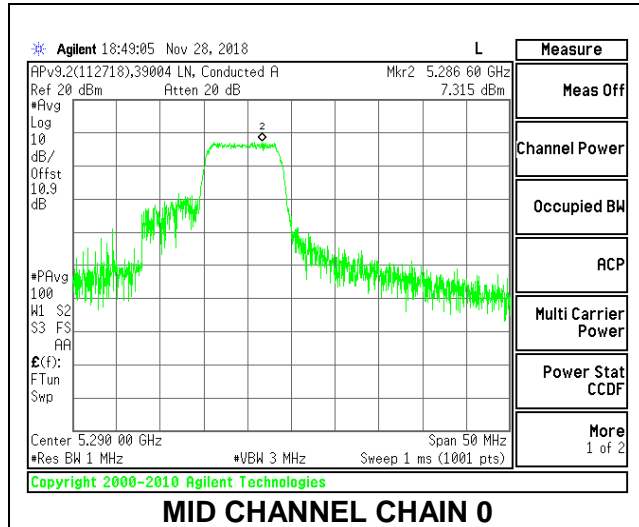

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 60**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	27.60	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	15.83	14.92	18.41	24.00	-5.59

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.017	6.747	10.25	11.00	-0.75

### MID CHANNEL

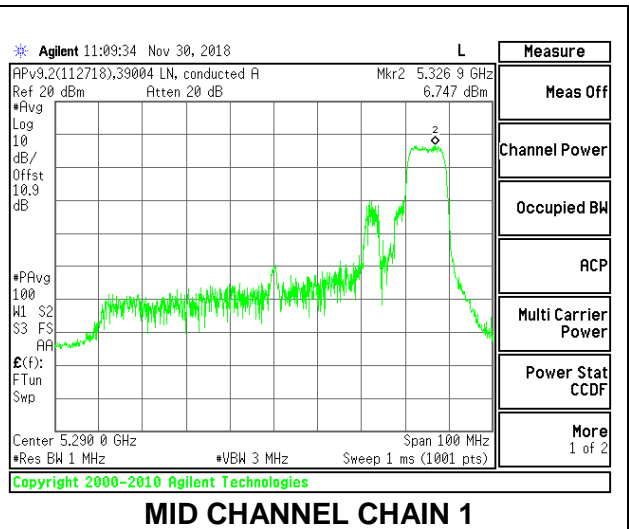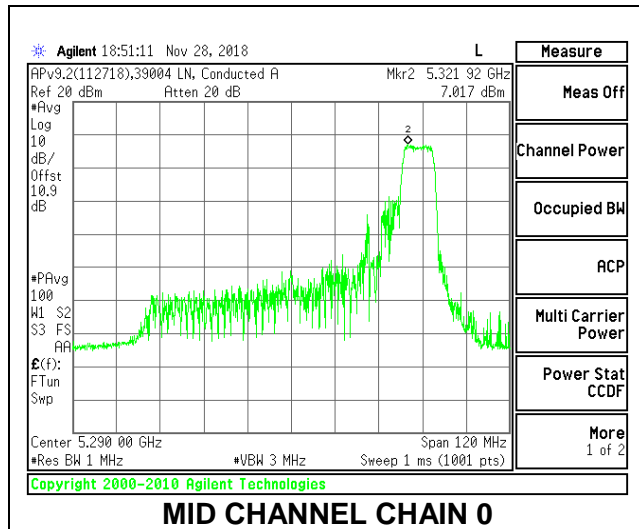

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	21.80	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.16	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	12.4	11.4	14.94	24.00	-9.06

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.215	7.044	10.30	11.00	-0.70

### MID CHANNEL

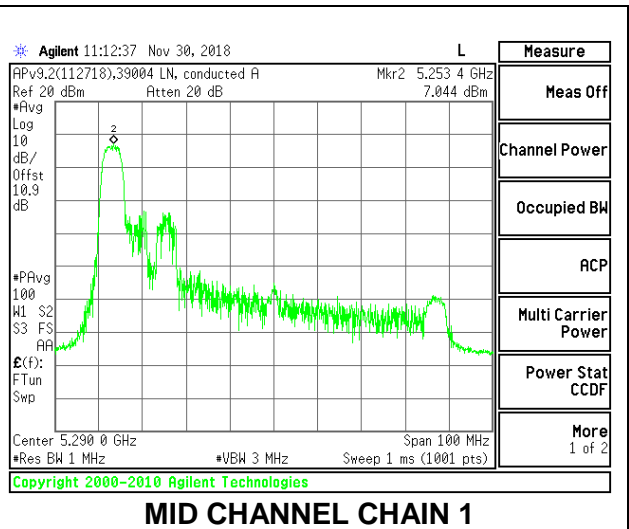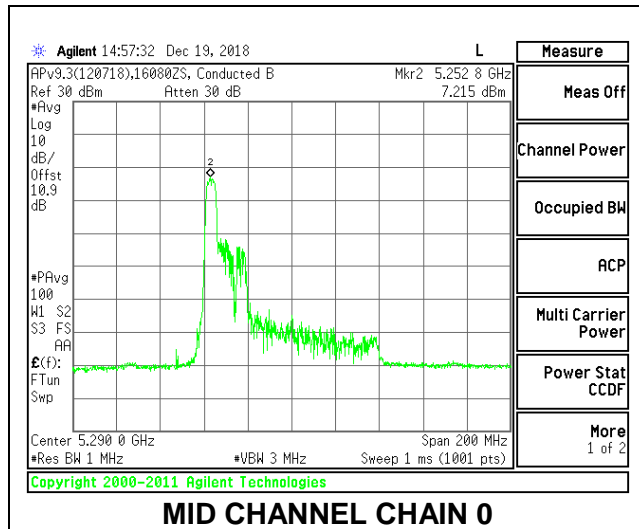

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	31.00	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.16	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	12.45	11.45	14.99	24.00	-9.01

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.588	7.063	10.50	11.00	-0.50



### MID CHANNEL

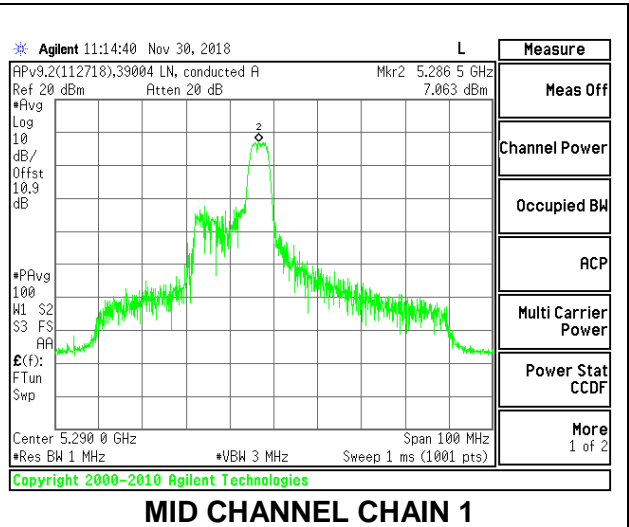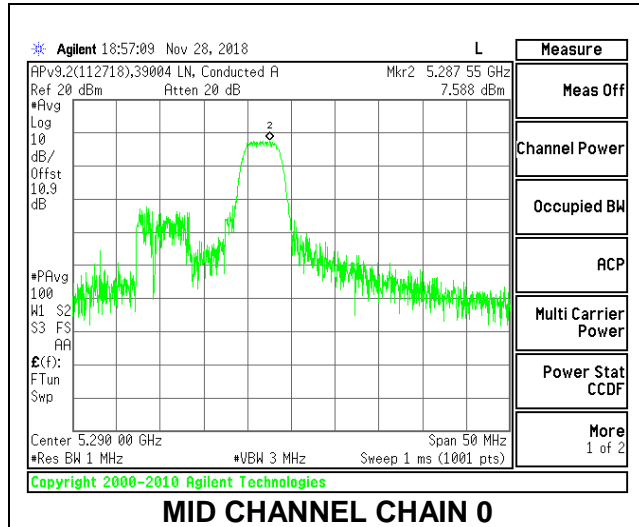

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 52**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	22.20	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.16	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	12.29	11.29	14.83	24.00	-9.17

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.56	6.961	10.44	11.00	-0.56

### MID CHANNEL

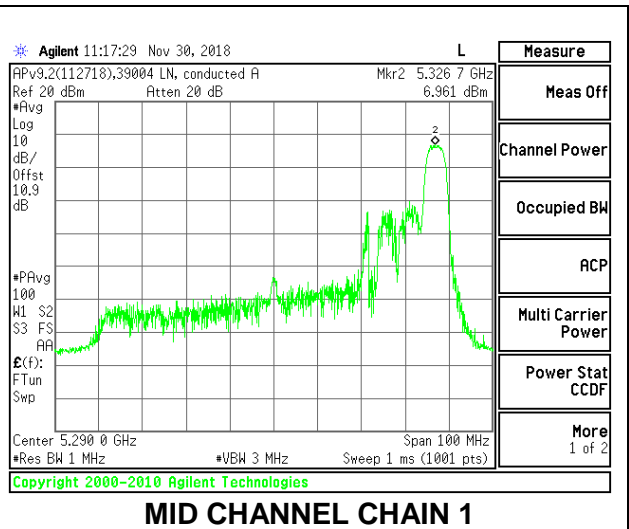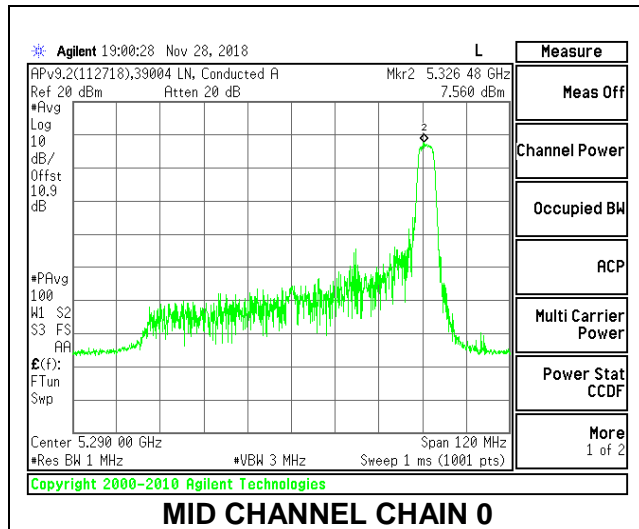

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	21.40	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.12	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	10.42	9.5	12.99	24.00	-11.01

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.373	7.179	10.41	11.00	-0.59

### MID CHANNEL

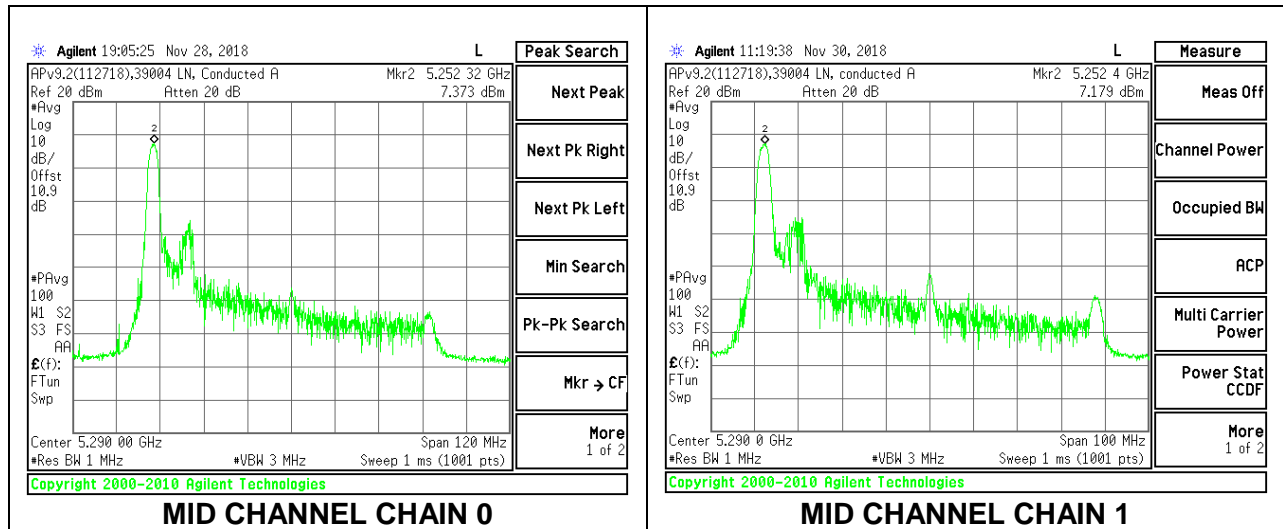

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 18**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	39.80	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.12	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	10.43	9.51	13.00	24.00	-11.00

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.36	6.465	10.07	11.00	-0.93

### MID CHANNEL

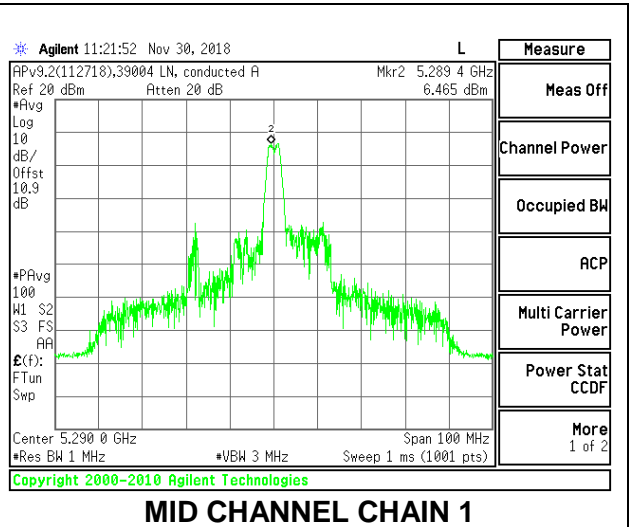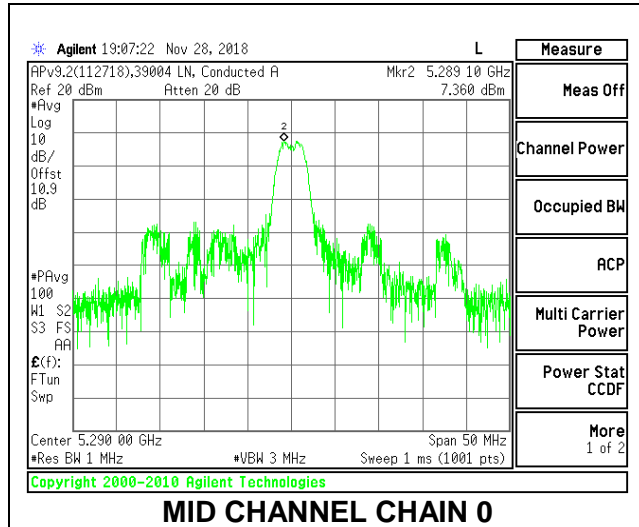

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 36**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/1MHz)
Mid	5290	22.00	-1.02	1.93	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.12	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	10.78	9.78	13.32	24.00	-10.68

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5290	7.173	6.995	10.22	11.00	-0.78



### MID CHANNEL

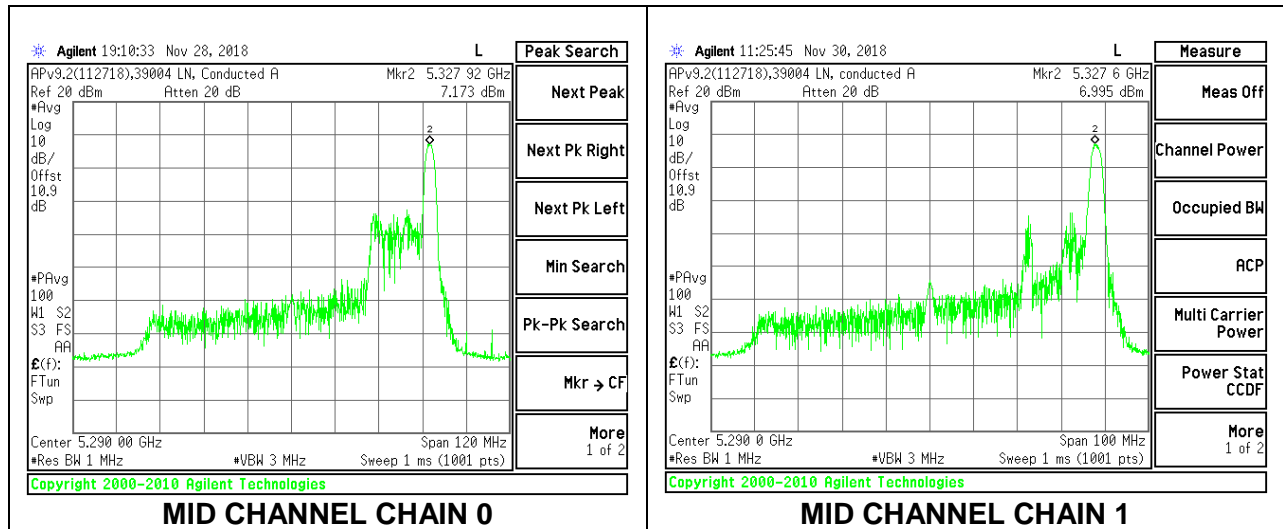

**9.5.15. 802.11a MODE IN THE 5.6 GHz BAND**

**2TX Antenna 1 + Antenna 2 CDD MODE (FCC)**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	21.85	-2.30	0.71	24.00	11.00
Mid	5580	21.85	-2.30	0.71	24.00	11.00
High	5700	22.05	-2.30	0.71	24.00	11.00
144	5720	21.75	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.29	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.9	15.5	19.27	24.00	-4.73
Mid	5580	16.9	15.52	19.27	24.00	-4.73
High	5700	16.89	15.5	19.26	24.00	-4.74
144	5720	16.6	15.57	19.13	24.00	-4.87



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	5.88	5.77	9.13	11.00	-1.87
Mid	5580	6.26	6.16	9.51	11.00	-1.49
High	5700	5.85	5.86	9.16	11.00	-1.84
144	5720	5.57	6.15	9.17	11.00	-1.83



### LOW CHANNEL

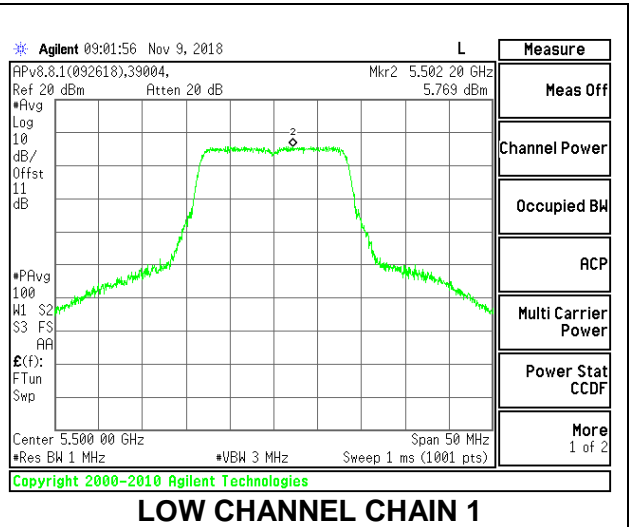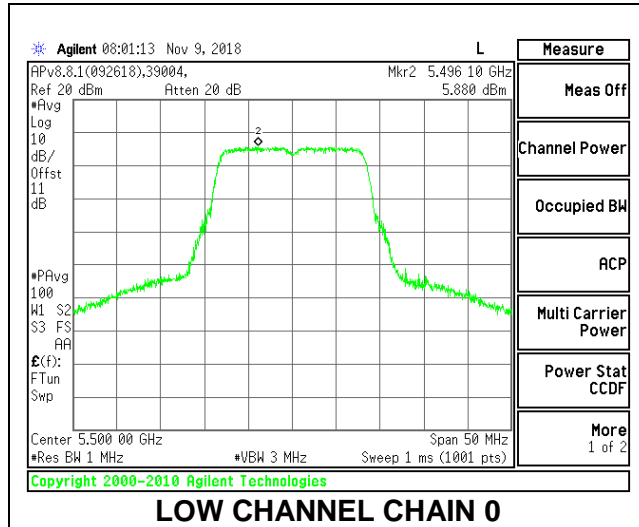



### MID CHANNEL

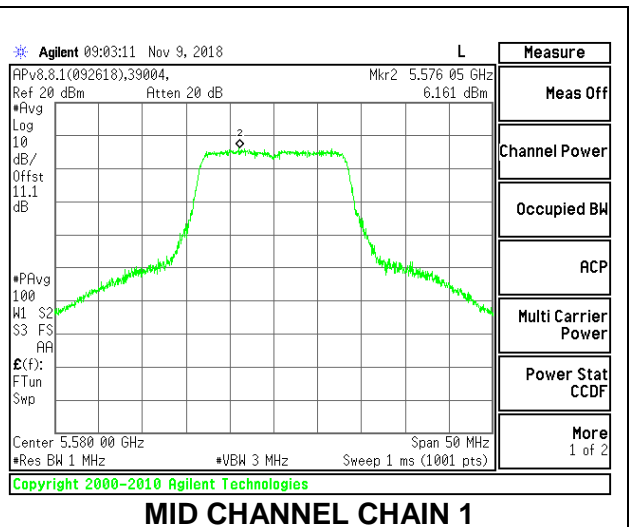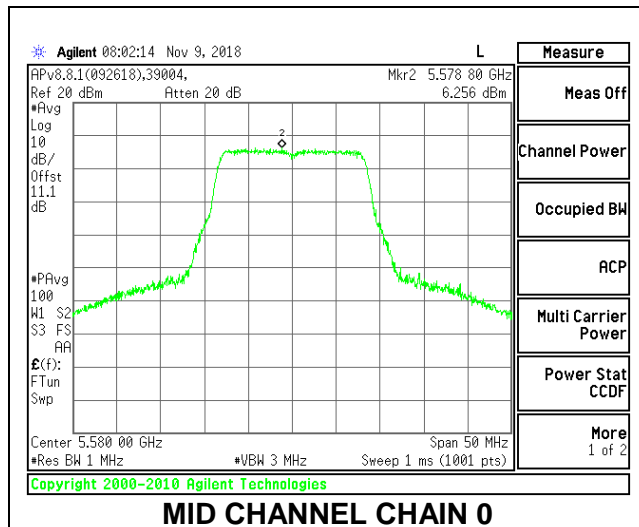

### HIGH CHANNEL

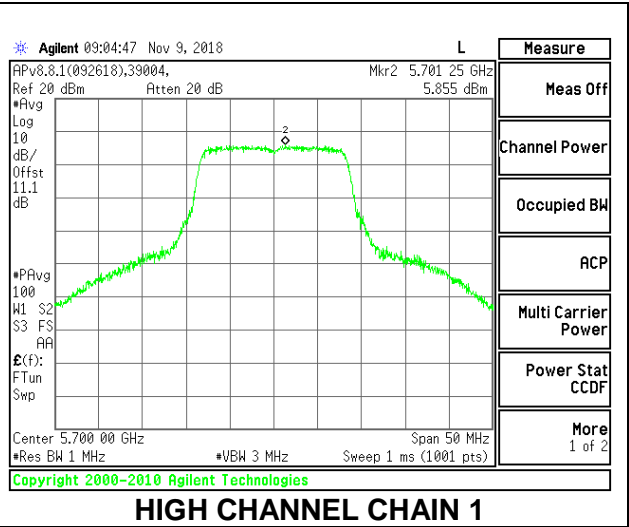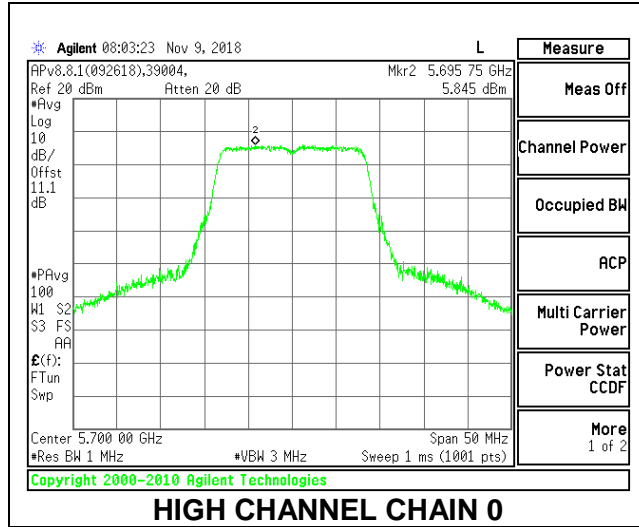

### CHANNEL 144

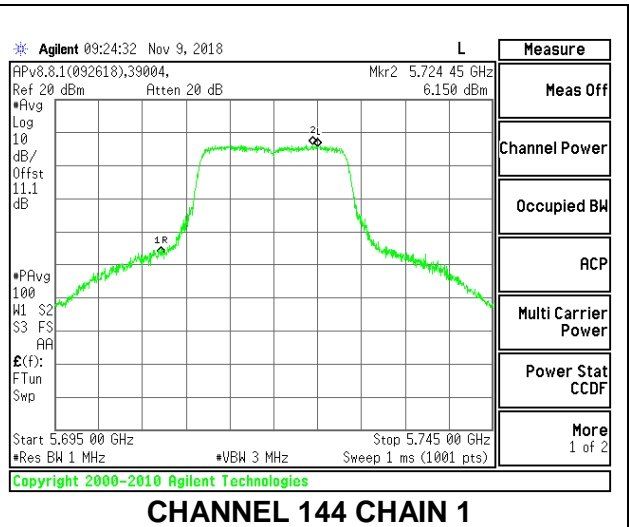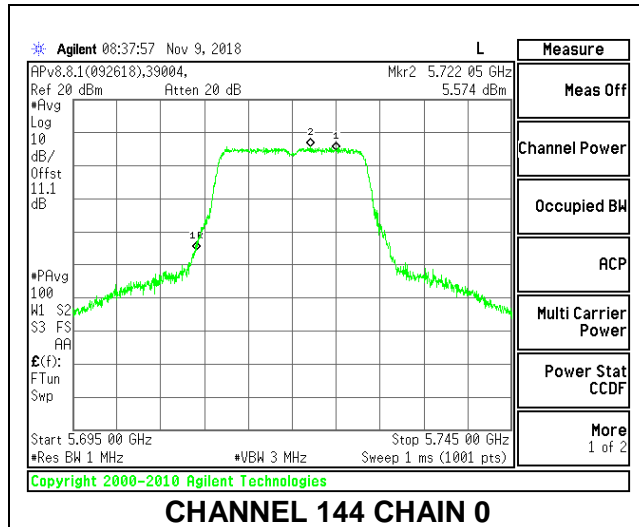

**9.5.16. 802.11n HT20 MODE IN THE 5.6 GHz BAND**

**2TX Antenna 1 + Antenna 2 CDD MODE (FCC)**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	22.55	-2.30	0.71	24.00	11.00
Mid	5580	22.90	-2.30	0.71	24.00	11.00
High	5700	23.95	-2.30	0.71	24.00	11.00
144	5720	23.90	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.31	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.83	15.58	19.26	24.00	-4.74
Mid	5580	16.8	15.57	19.24	24.00	-4.76
High	5700	16.82	15.53	19.23	24.00	-4.77
144	5720	16.6	15.6	19.14	24.00	-4.86



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	5.63	5.47	8.87	11.00	-2.13
Mid	5580	5.78	5.28	8.86	11.00	-2.14
High	5700	5.81	5.75	9.10	11.00	-1.90
144	5720	5.52	5.85	9.01	11.00	-1.99



### LOW CHANNEL

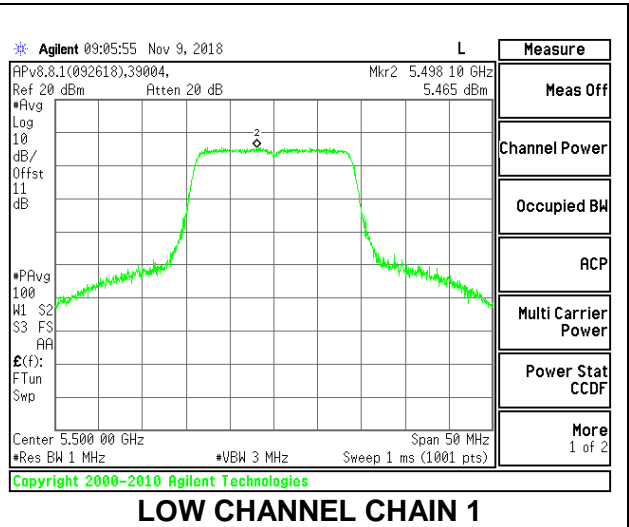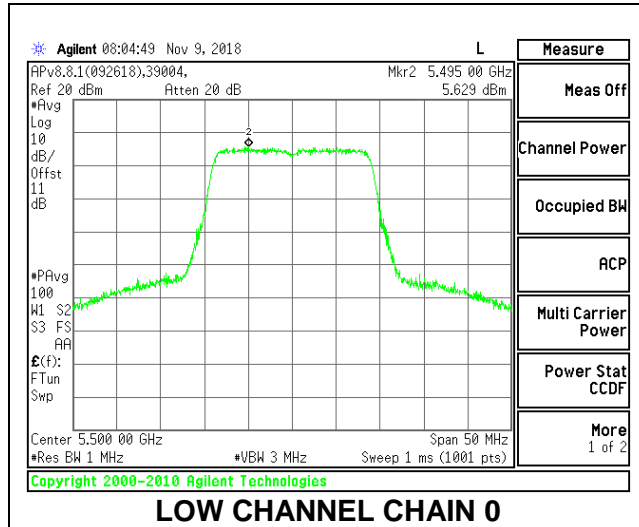



### MID CHANNEL

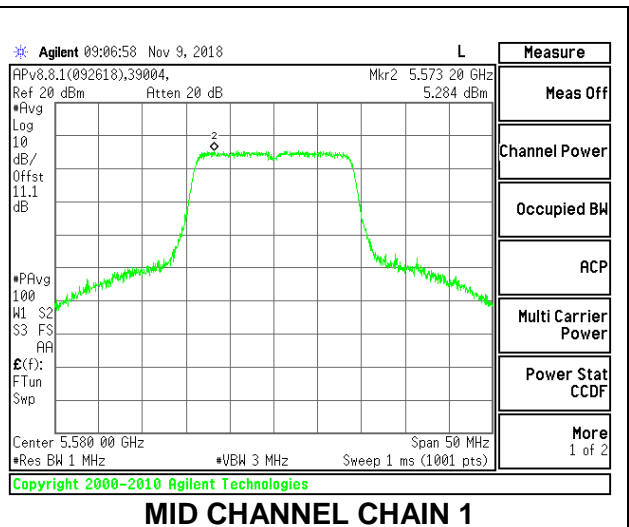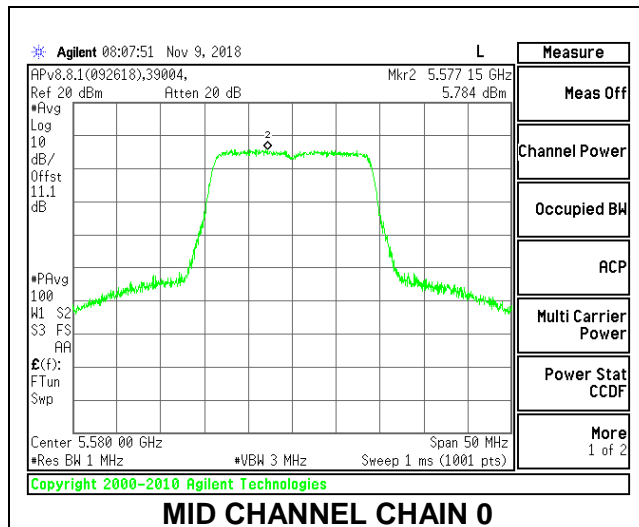

### HIGH CHANNEL

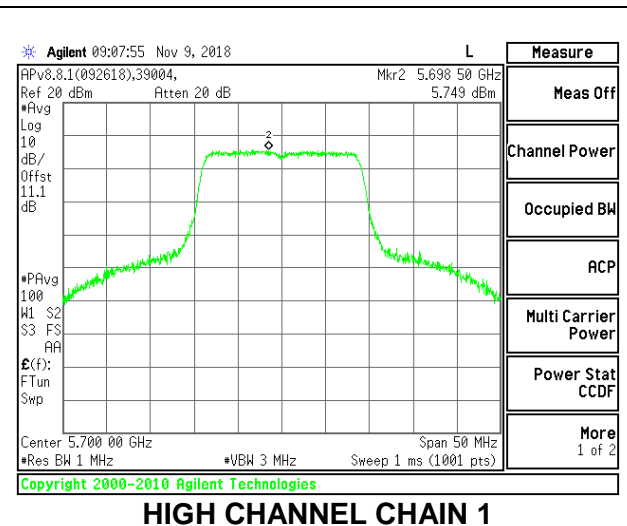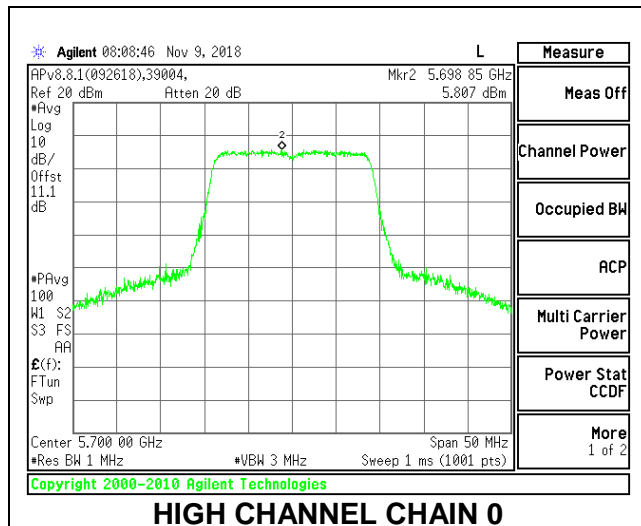

### CHANNEL 144

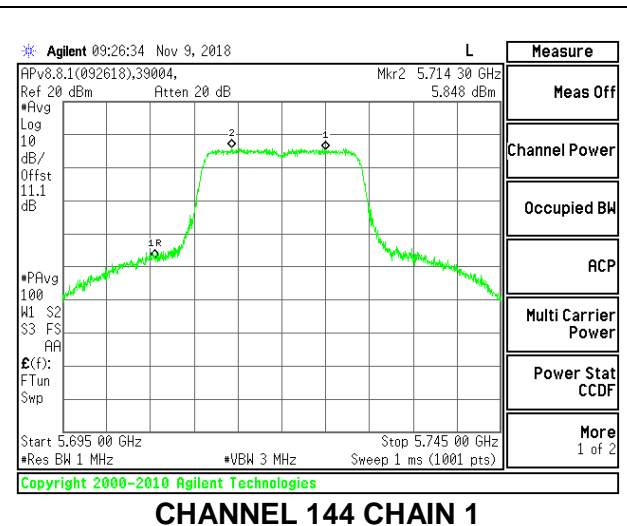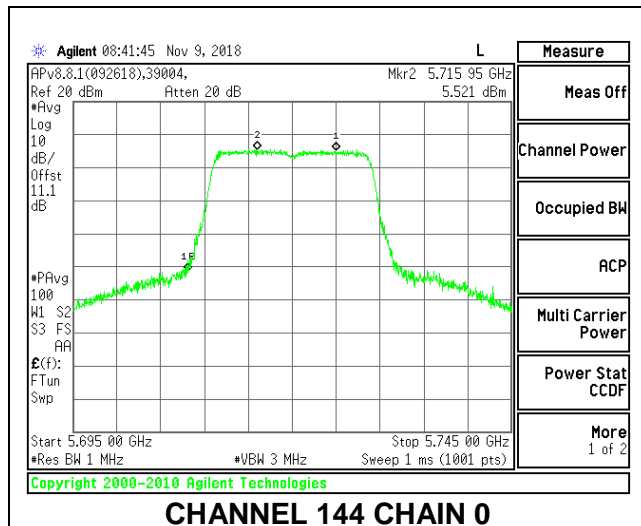

**9.5.17. 802.11n HT40 MODE IN THE 5.6 GHz BAND**

**2TX Antenna 1 + Antenna 2 CDD MODE (FCC)**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	42.30	-2.30	0.71	24.00	11.00
Mid	5550	42.10	-2.30	0.71	24.00	11.00
High	5670	42.80	-2.30	0.71	24.00	11.00
142	5710	43.40	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.60	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.92	14.56	18.30	24.00	-5.70
Mid	5550	15.6	14.52	18.10	24.00	-5.90
High	5670	15.92	14.8	18.41	24.00	-5.59
142	5710	15.99	14.78	18.44	24.00	-5.56

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	1.52	1.9	5.32	11.00	-5.68
Mid	5550	1.88	1.87	5.49	11.00	-5.51
High	5670	2.04	1.74	5.50	11.00	-5.50
142	5710	1.47	1.8	5.25	11.00	-5.75





### LOW CHANNEL

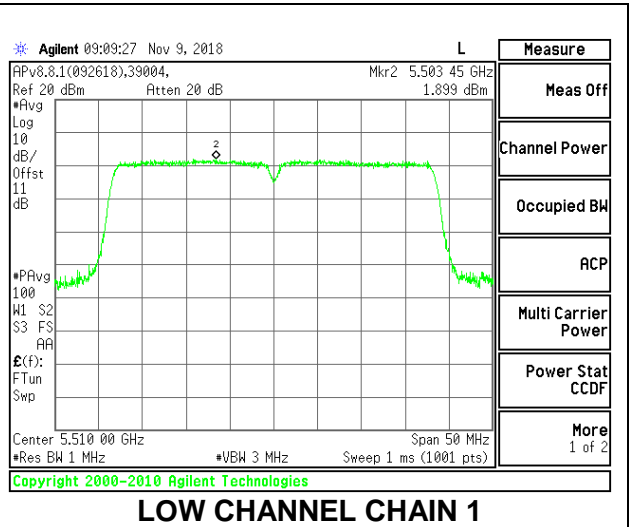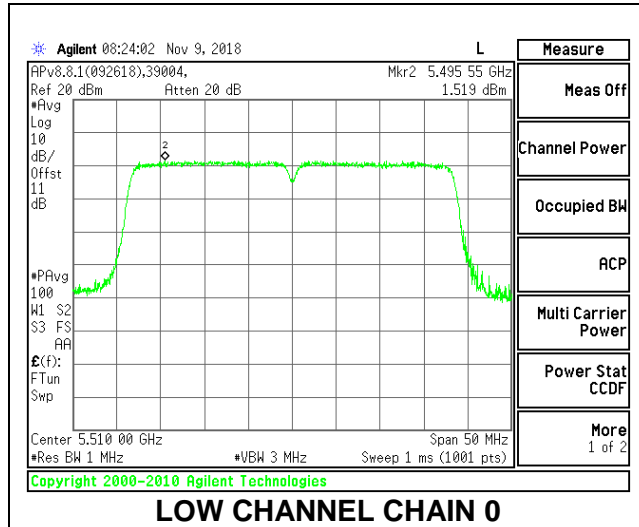



### MID CHANNEL

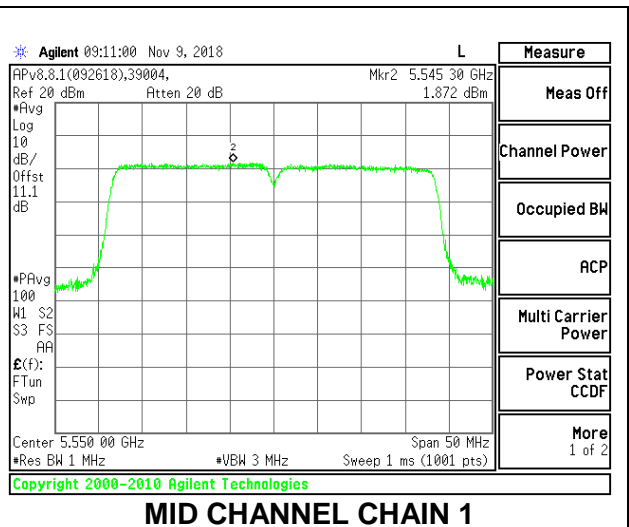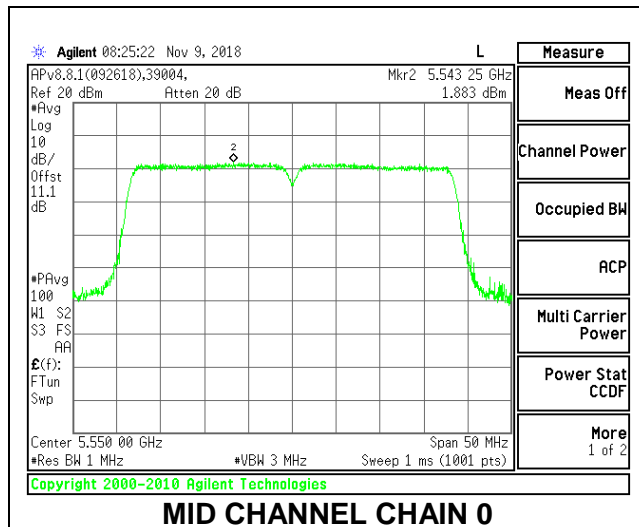

### HIGH CHANNEL

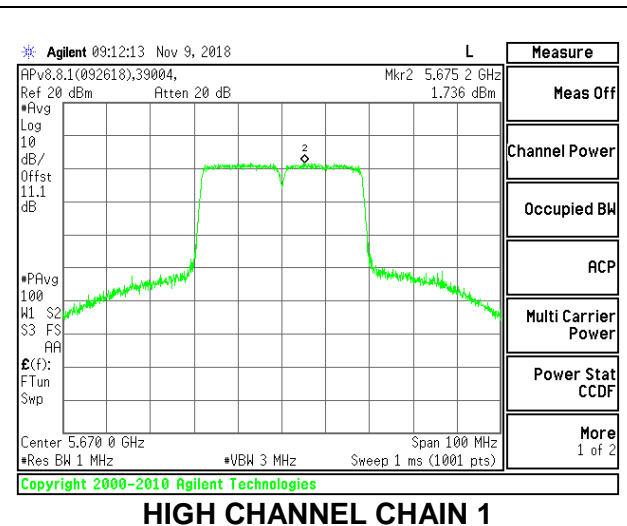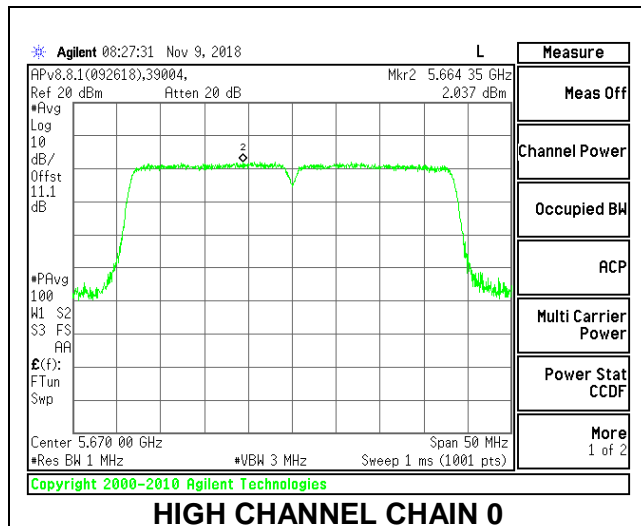

### CHANNEL 142

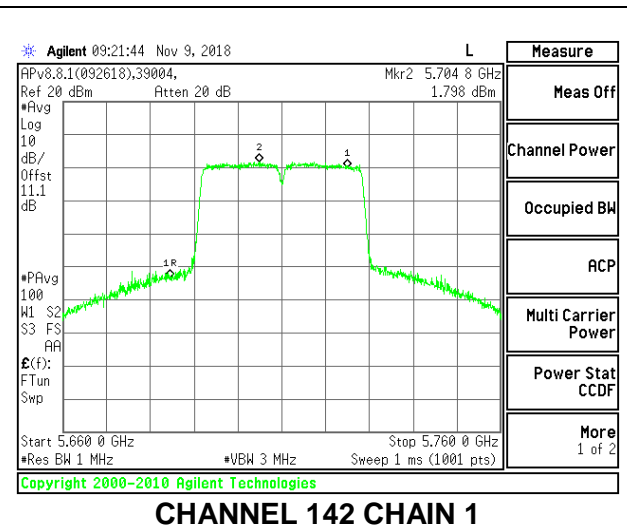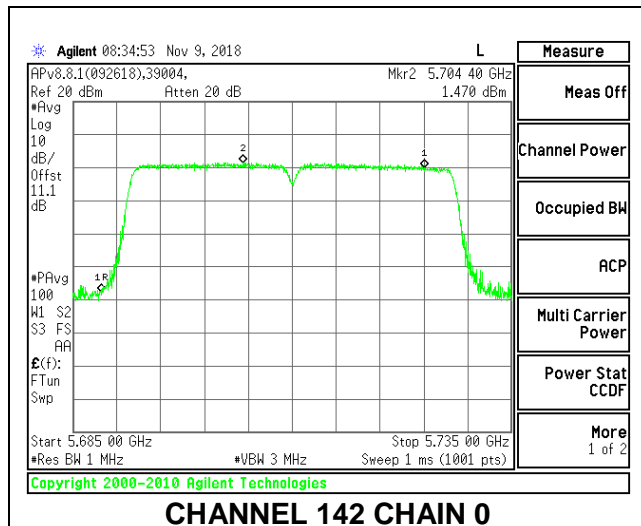

**9.5.18. 802.11ac VHT80 MODE IN THE 5.6 GHz BAND**

**2TX Antenna 1 + Antenna 2 CDD MODE (FCC)**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	85.20	-2.30	0.71	24.00	11.00
High	5610	85.40	-2.30	0.71	24.00	11.00
138	5690	84.60	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.95	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15	13.78	17.44	24.00	-6.56
High	5610	14.95	13.8	17.42	24.00	-6.58
138	5690	14.92	13.7	17.36	24.00	-6.64



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	-3.57	-2.82	1.78	11.00	-9.22
High	5610	-3.18	-3.31	1.72	11.00	-9.28
138	5690	-3.14	-3.12	1.83	11.00	-9.17



**LOW CHANNEL**

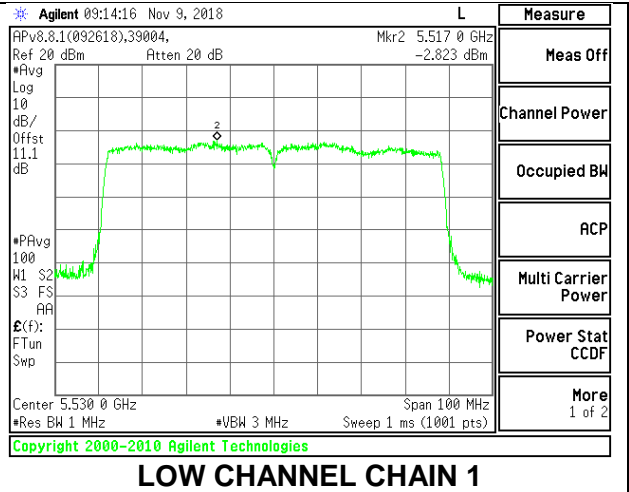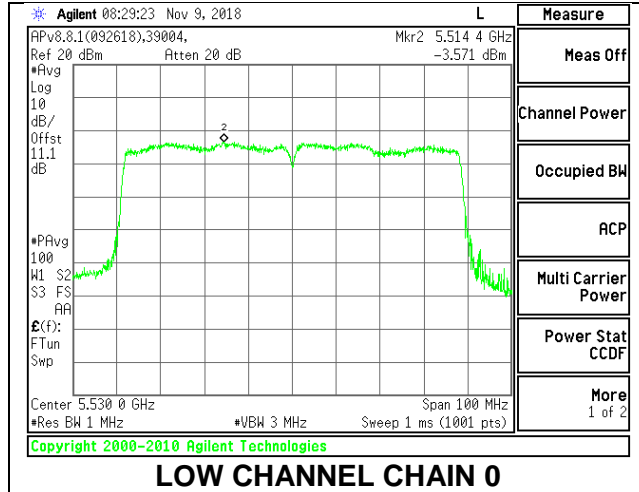

**HIGH CHANNEL**

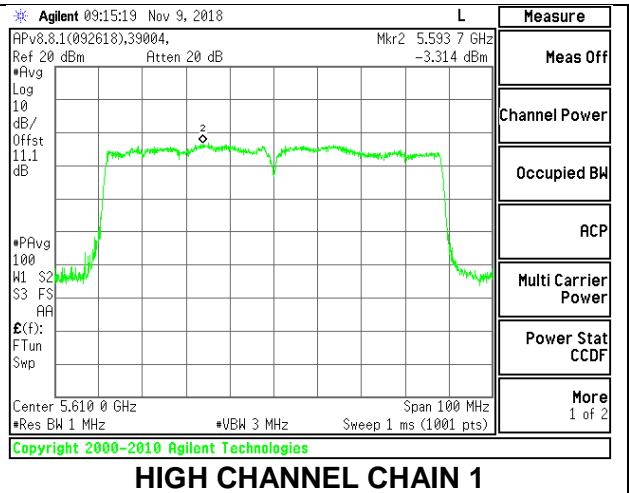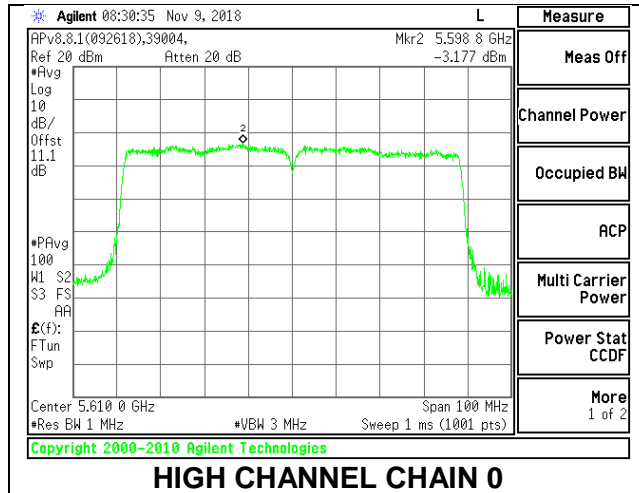

**CHANNEL 138**

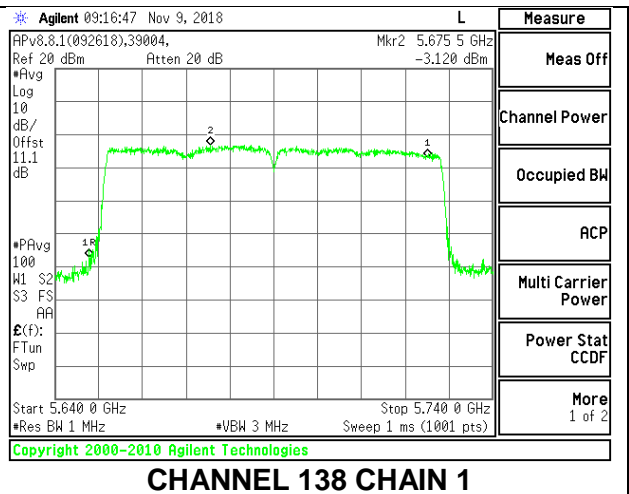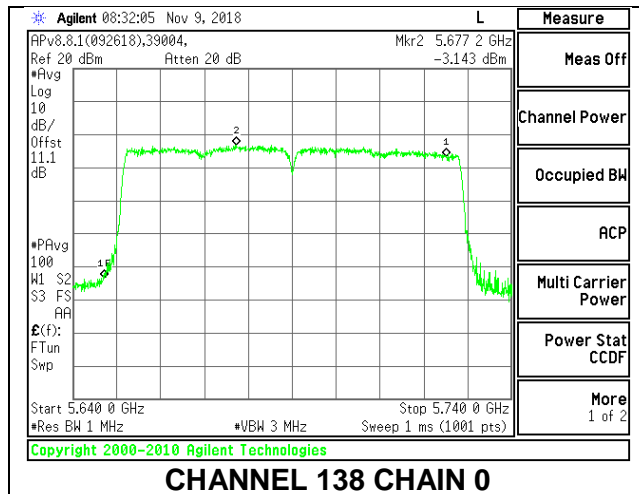

**9.5.19. 802.11ax HE20 MODE IN THE 5.6 GHz BAND**

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	21.90	-2.30	0.71	24.00	11.00
Mid	5580	22.20	-2.30	0.71	24.00	11.00
High	5700	23.25	-2.30	0.71	24.00	11.00
144	5720	22.20	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.67	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	16.97	15.95	19.50	24.00	-4.50
Mid	5580	16.9	15.82	19.40	24.00	-4.60
High	5700	16.95	15.92	19.48	24.00	-4.52
144	5720	16.88	15.9	19.43	24.00	-4.57



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	4.859	3.894	8.08	11.00	-2.92
Mid	5580	4.813	3.763	8.00	11.00	-3.00
High	5700	4.456	3.947	7.89	11.00	-3.11
144	5720	4.243	3.931	7.77	11.00	-3.23



### LOW CHANNEL

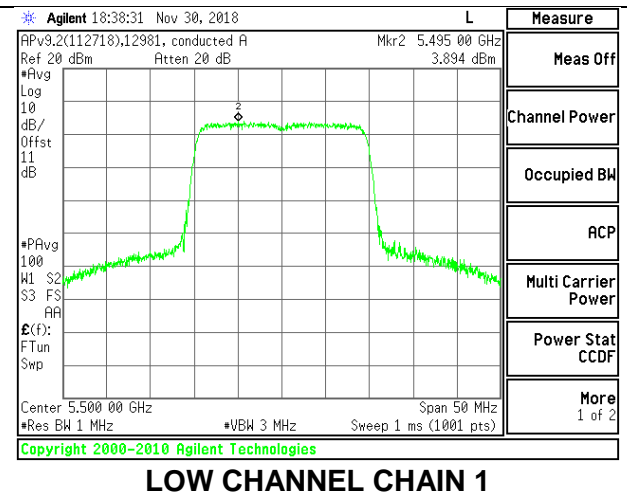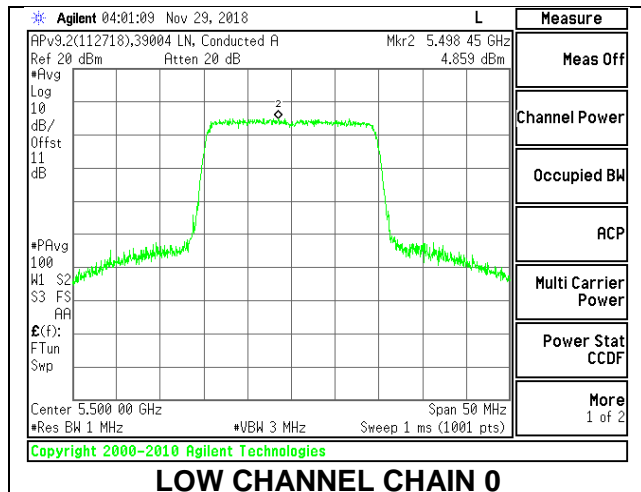



### MID CHANNEL

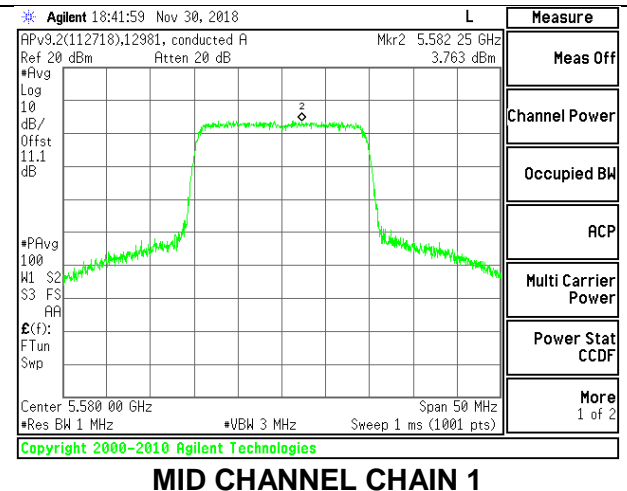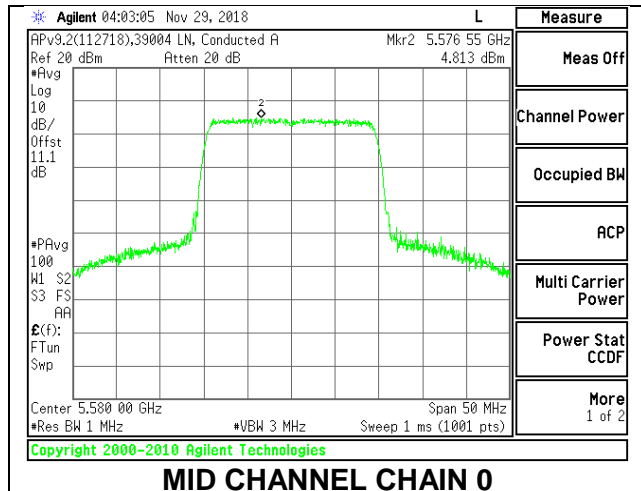

### HIGH CHANNEL

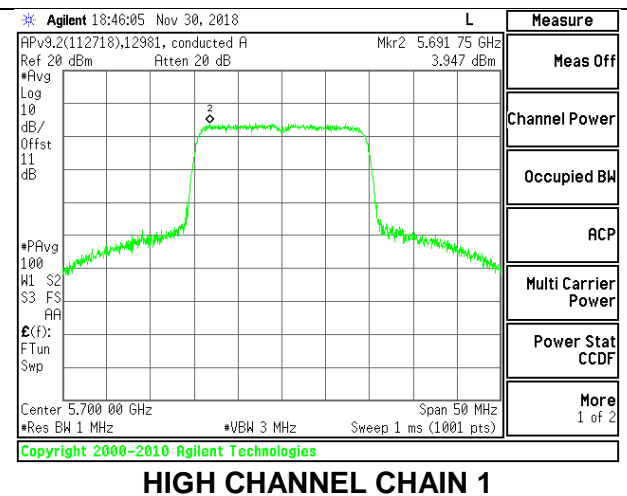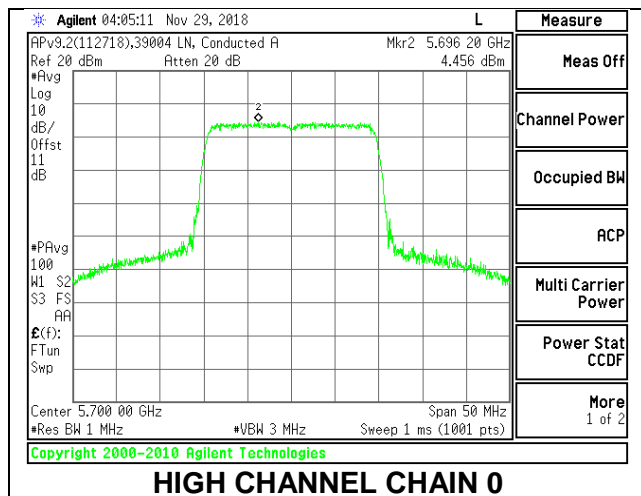

### PSD, CHANNEL 144

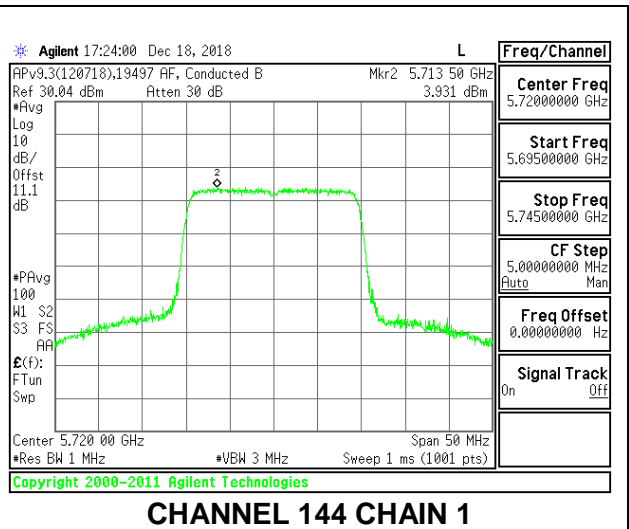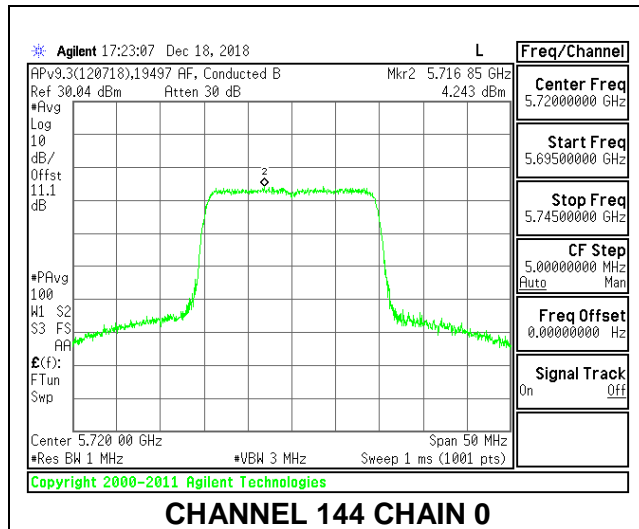

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

	(MHz)	26 dB BW (MHz)	Gain for Power (dBi)	Gain for PSD (dBi)	Limit (dBm)	Limit (dBm/1MHz)
Low	5500	20.55	-2.30	0.71	24.00	11.00
Mid	5580	20.40	-2.30	0.71	24.00	11.00
High	5700	20.50	-2.30	0.71	24.00	11.00
144	5720	20.45	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.34	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	15.45	14.51	18.02	24.00	-5.98
Mid	5580	15.46	14.53	18.03	24.00	-5.97
High	5700	15.45	14.52	18.02	24.00	-5.98
144	5720	15.44	14.51	18.01	24.00	-5.99

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5500	6.500	6.178	9.69	11.00	-1.31
Mid	5580	6.399	6.007	9.56	11.00	-1.44
High	5700	6.609	6.264	9.79	11.00	-1.21
144	5720	6.602	6.377	9.84	11.00	-1.16





**LOW CHANNEL**

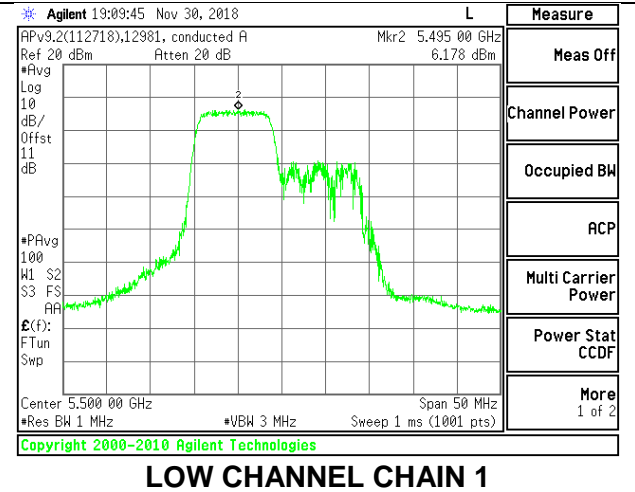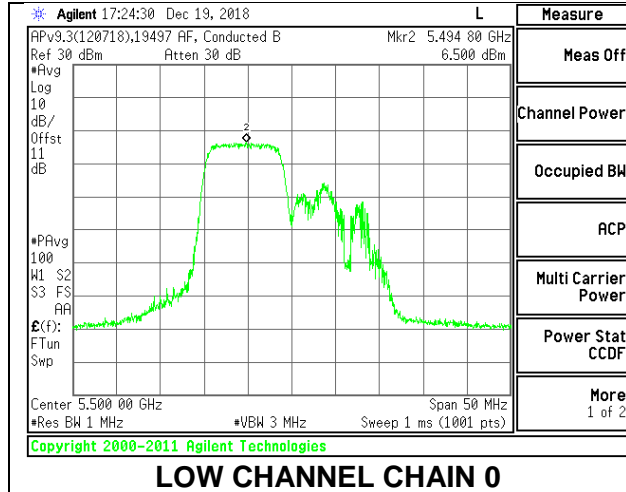



**MID CHANNEL**

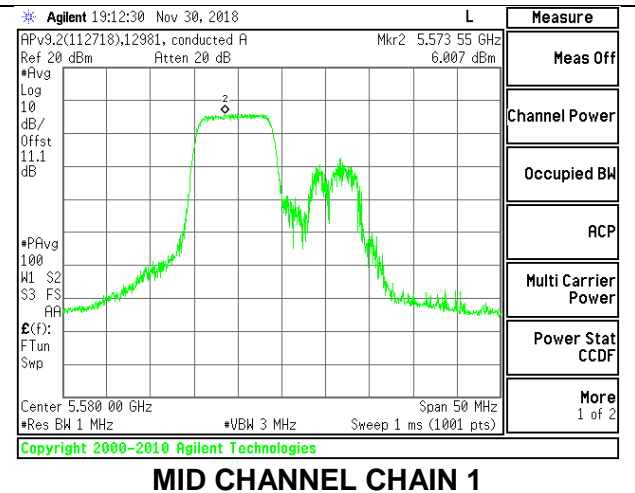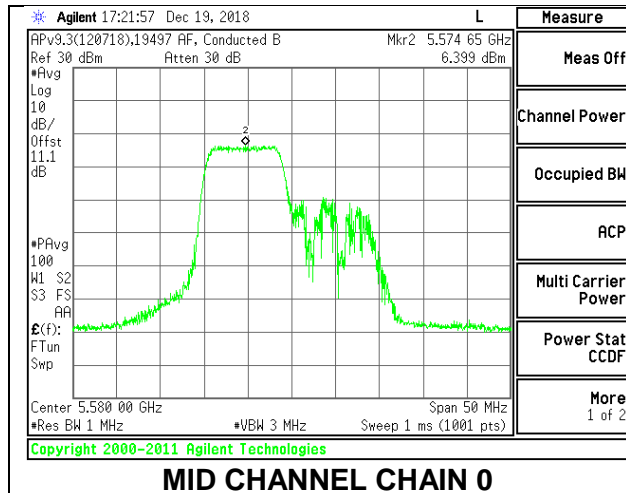

**HIGH CHANNEL**

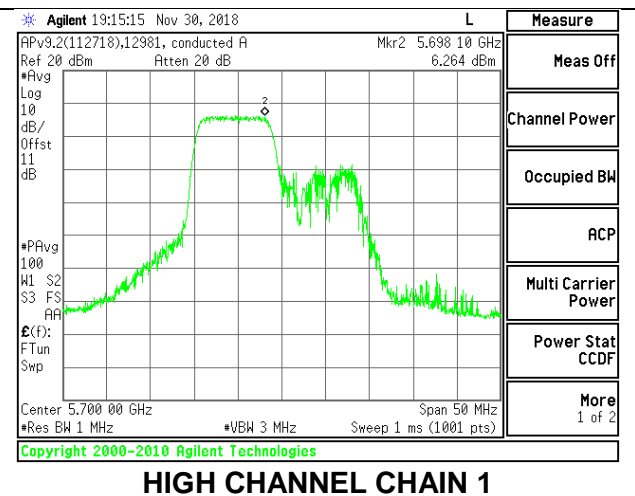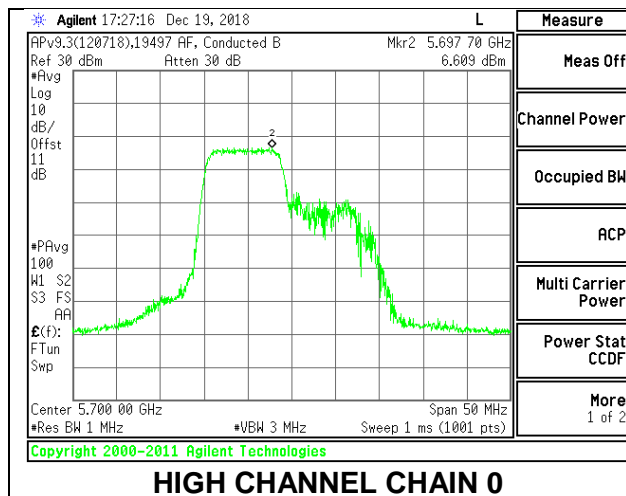

### CHANNEL 144

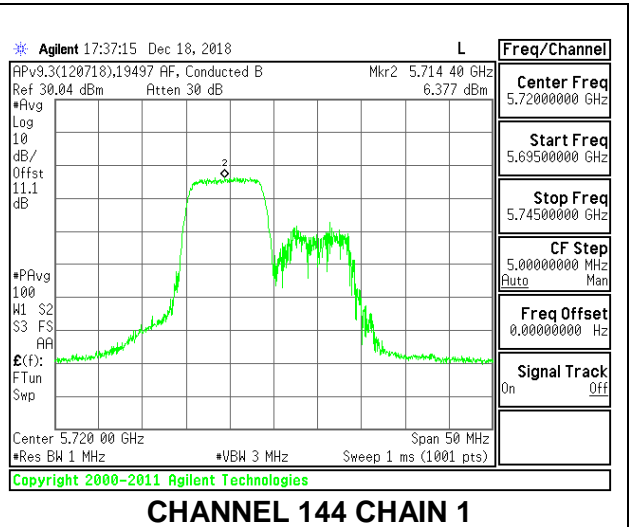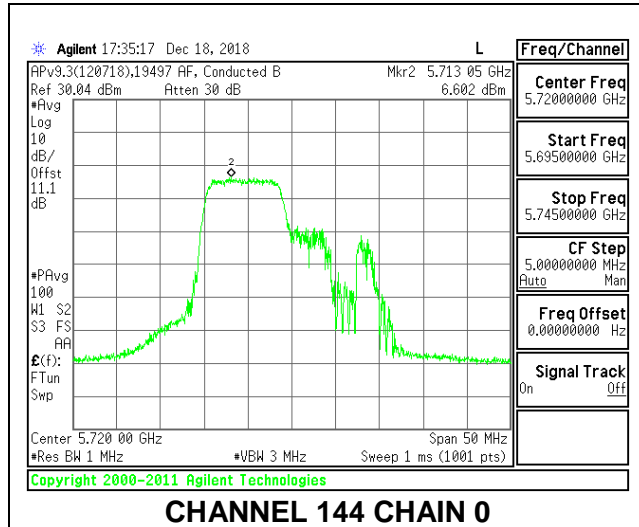

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 54**

	(MHz)	26 dB BW (MHz)	Gain for Power (dBi)	Gain for PSD (dBi)	Limit (dBm)	Limit (dBm/1MHz)
Low	5500	20.55	-2.30	0.71	24.00	11.00
Mid	5580	20.40	-2.30	0.71	24.00	11.00
High	5700	20.50	-2.30	0.71	24.00	11.00
144	5720	20.45	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.34	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	15.45	14.52	18.02	24.00	-5.98
Mid	5580	15.45	14.5	18.01	24.00	-5.99
High	5700	15.47	14.49	18.02	24.00	-5.98
144	5720	15.45	14.49	18.01	24.00	-5.99



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Low	5500	6.429	6.109	9.62	11.00	-1.38
Mid	5580	6.524	6.119	9.68	11.00	-1.32
High	5700	6.522	6.051	9.64	11.00	-1.36
144	5720	6.532	6.406	9.82	11.00	-1.18



### LOW CHANNEL

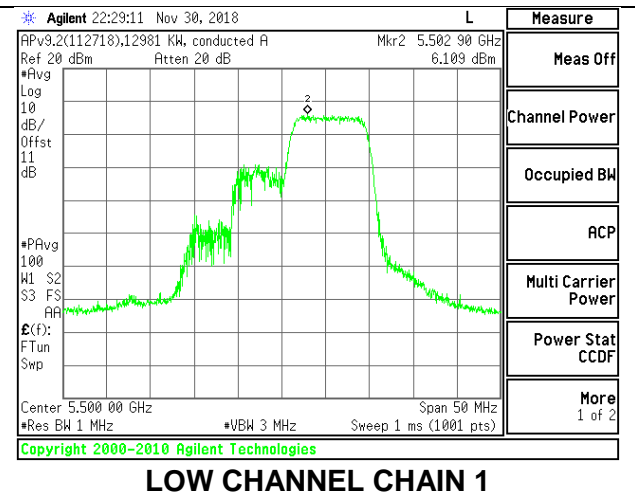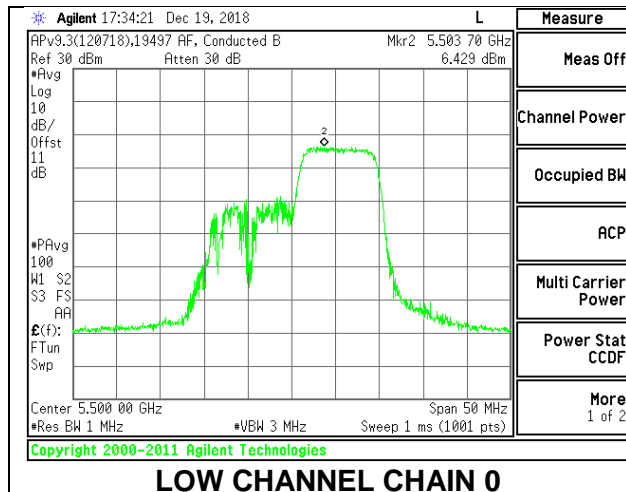


### MID CHANNEL

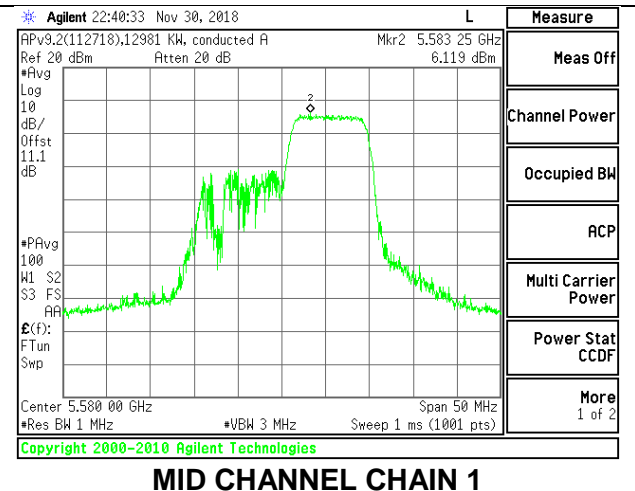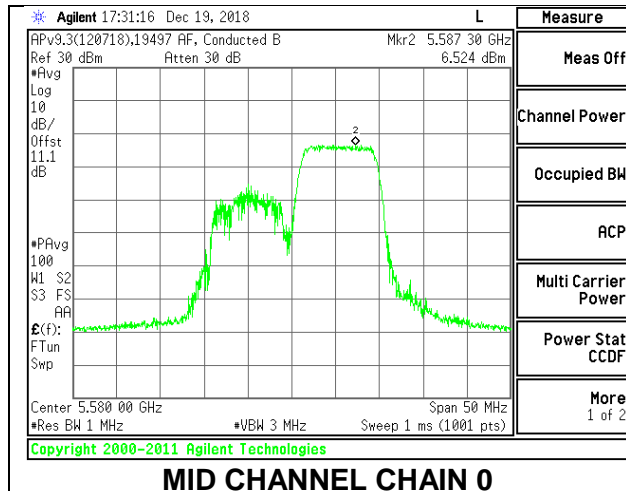

### HIGH CHANNEL

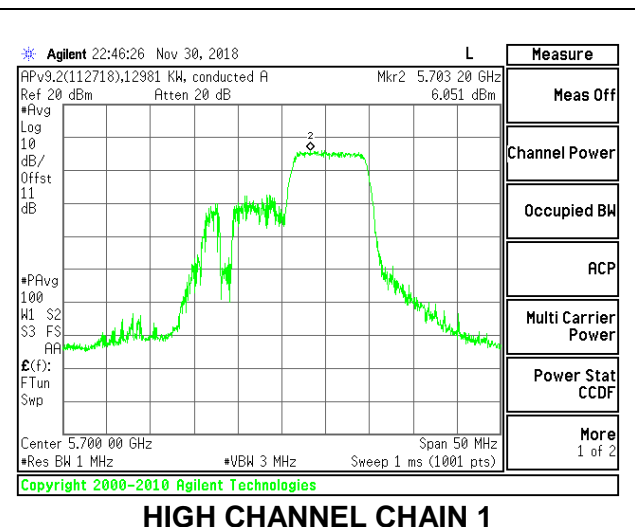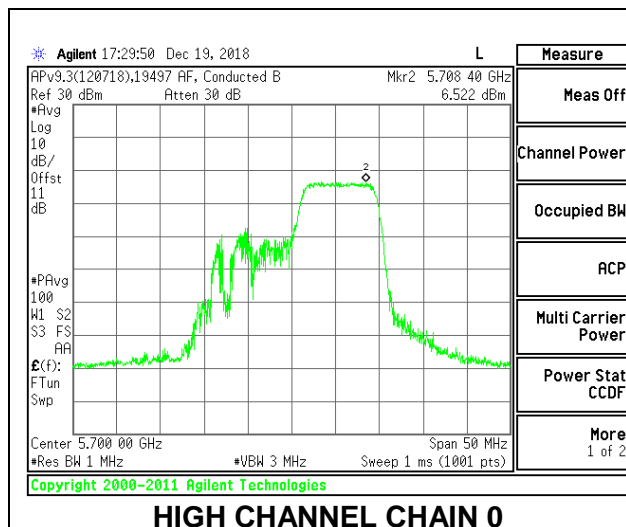

### CHANNEL 144

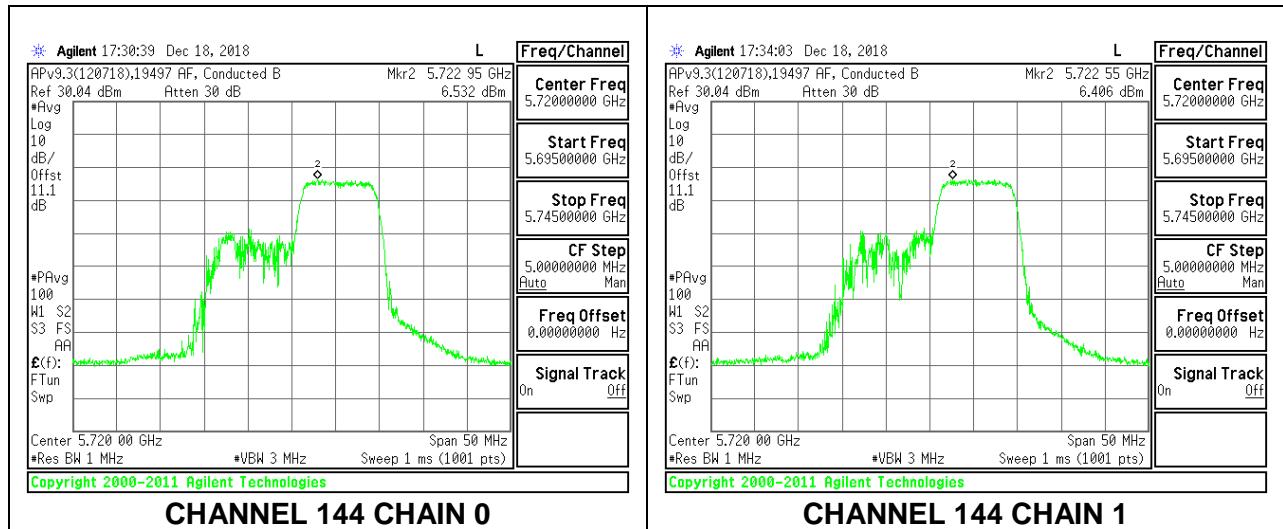

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	20.20	-2.30	0.71	24.00	11.00
Mid	5580	20.25	-2.30	0.71	24.00	11.00
High	5700	20.10	-2.30	0.71	24.00	11.00
144	5720	20.25	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	11.93	11	14.50	24.00	-9.50
Mid	5580	11.94	11	14.51	24.00	-9.49
High	5700	11.95	11	14.51	24.00	-9.49
144	5720	11.93	10.99	14.50	24.00	-9.50



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.464	7	10.42	11.00	-0.58
Mid	5580	7.146	7.174	10.34	11.00	-0.66
High	5700	7.066	7.355	10.39	11.00	-0.61
144	5720	6.469	6.271	9.55	11.00	-1.45



### LOW CHANNEL

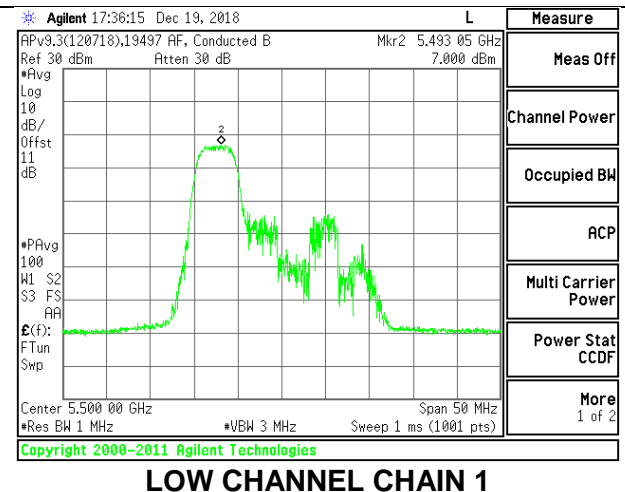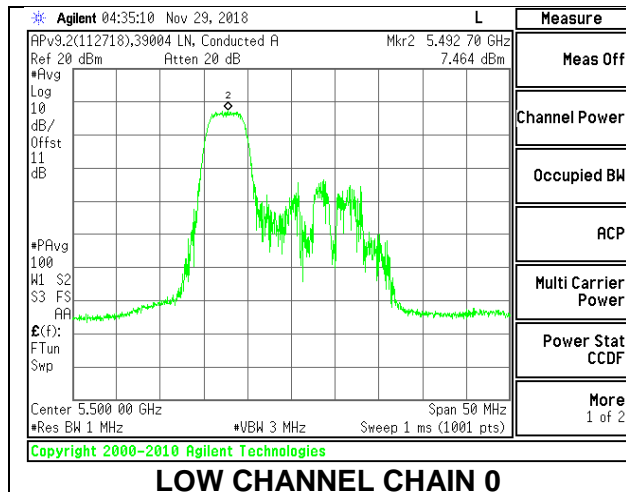



### MID CHANNEL

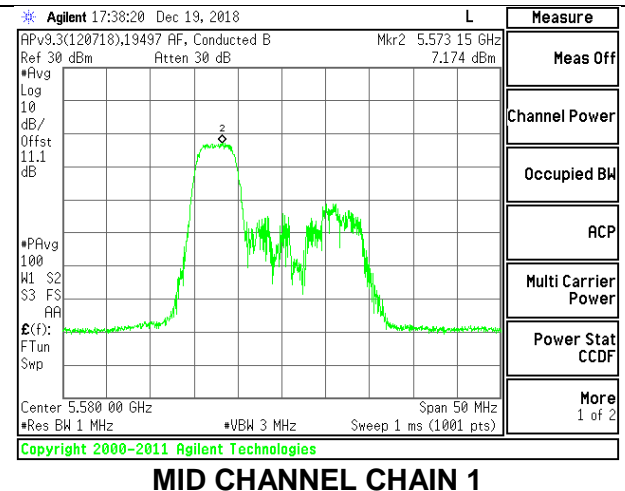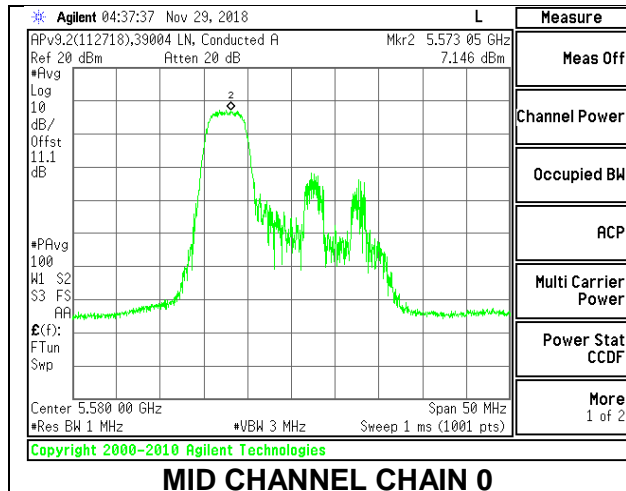

### HIGH CHANNEL

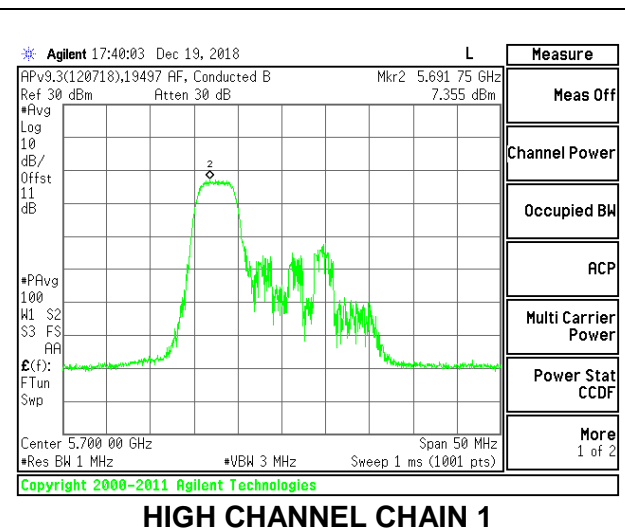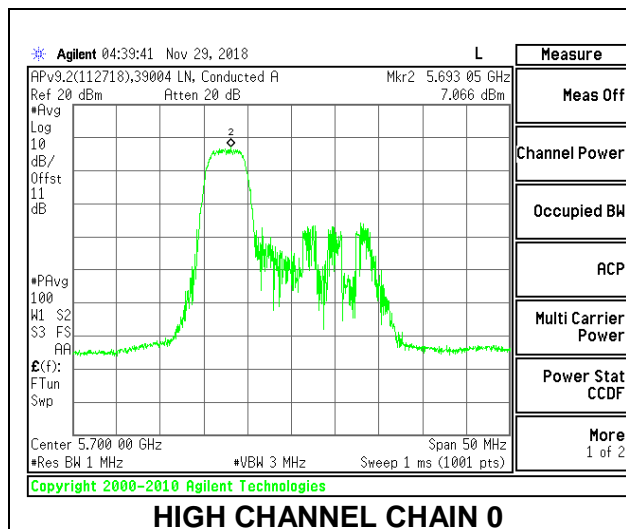

### CHANNEL 144

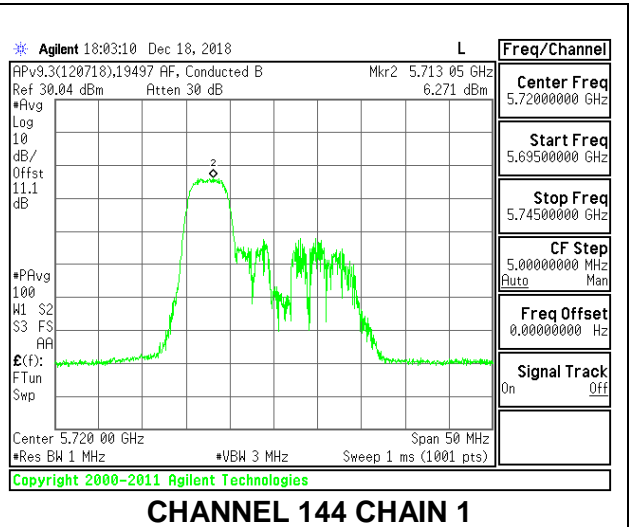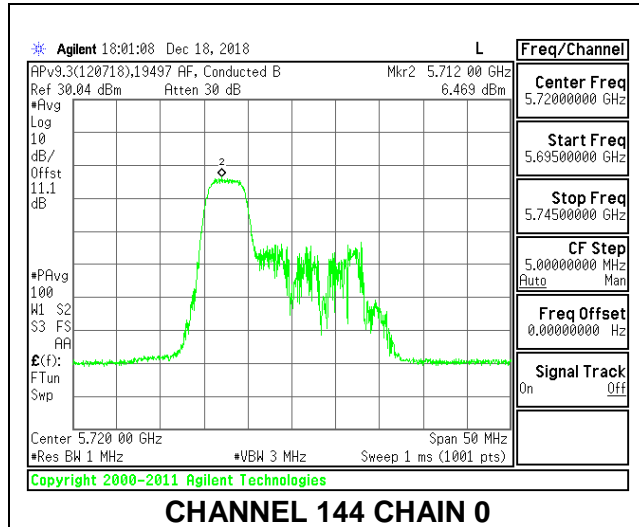



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 38**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	19.10	-2.30	0.71	23.81	11.00
Mid	5580	19.00	-2.30	0.71	23.79	11.00
High	5700	19.15	-2.30	0.71	23.82	11.00
144	5720	18.90	-2.30	0.71	23.76	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	11.95	10.99	14.51	23.81	-9.30
Mid	5580	11.92	10.98	14.49	23.79	-9.30
High	5700	11.94	10.99	14.50	23.82	-9.32
144	5720	11.95	10.99	14.51	23.76	-9.26



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.121	6.928	10.21	11.00	-0.79
Mid	5580	7.297	7.214	10.44	11.00	-0.56
High	5700	6.79	7.148	10.15	11.00	-0.85
144	5720	6.368	6.502	9.62	11.00	-1.38



**LOW CHANNEL**

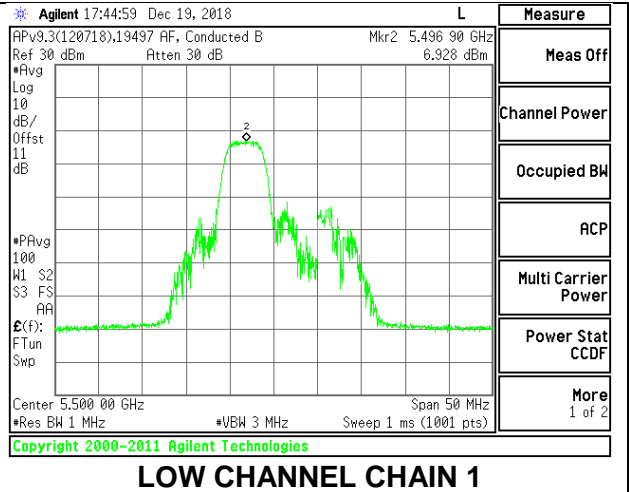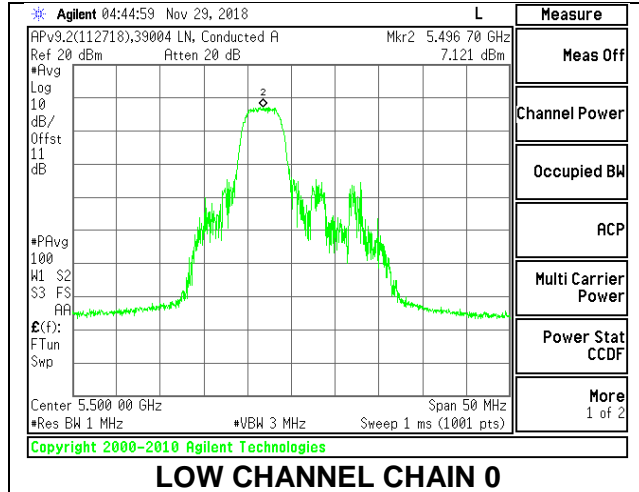



**MID CHANNEL**

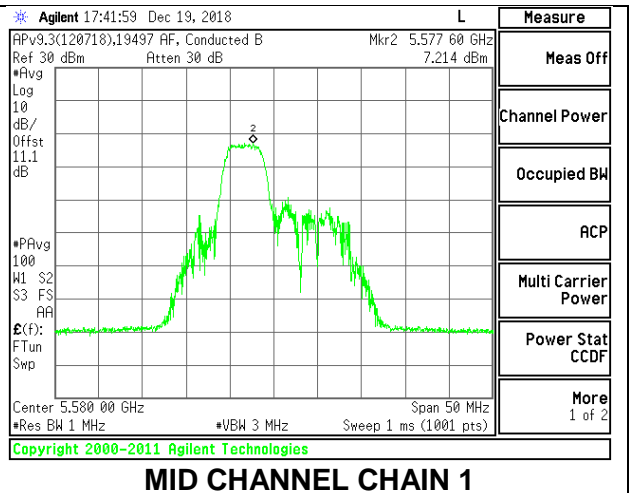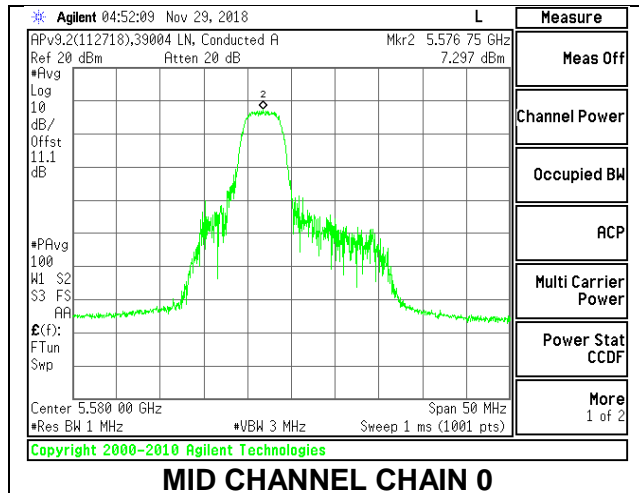

**HIGH CHANNEL**

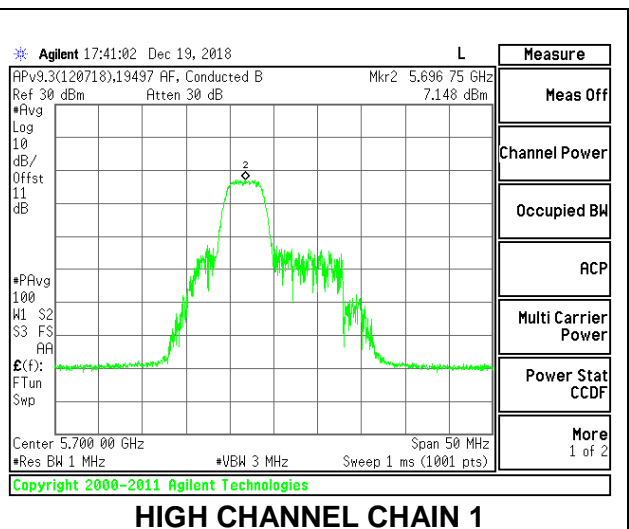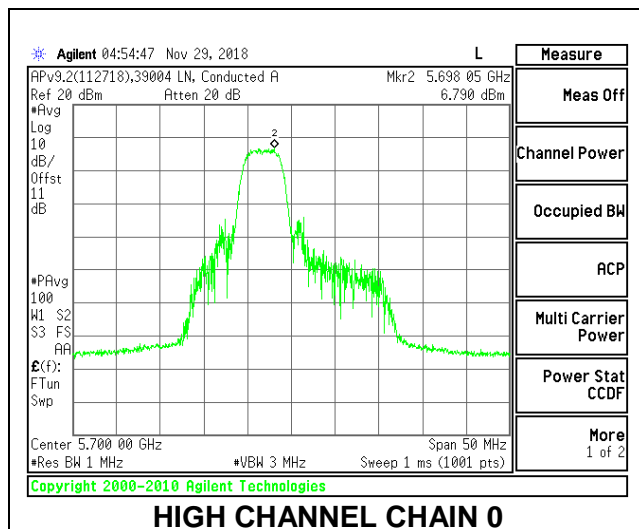

### CHANNEL 144

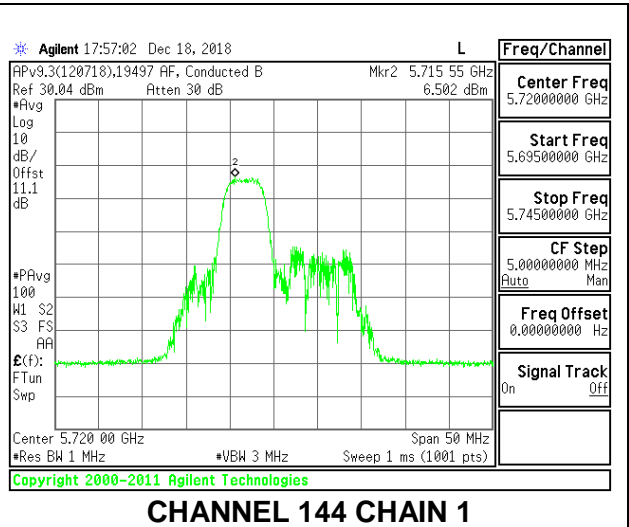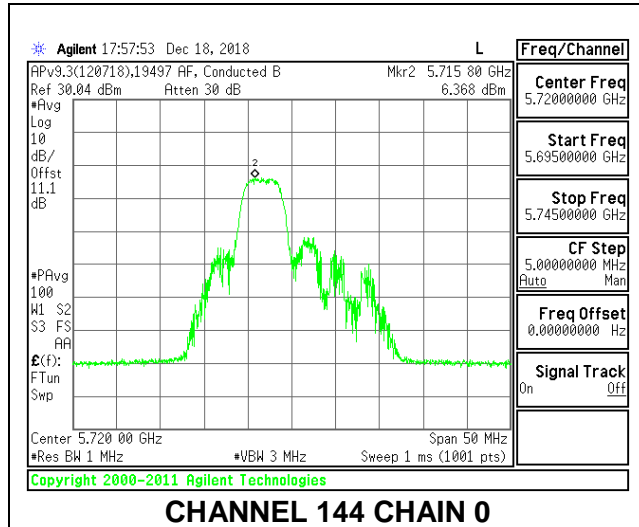

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 40**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	20.40	-2.30	0.71	24.00	11.00
Mid	5580	20.45	-2.30	0.71	24.00	11.00
High	5700	20.35	-2.30	0.71	24.00	11.00
144	5720	20.50	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	11.96	11.00	14.52	24.00	-9.48
Mid	5580	11.94	10.99	14.50	24.00	-9.50
High	5700	11.95	10.99	14.51	24.00	-9.49
144	5720	11.95	10.99	14.51	24.00	-9.49



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.113	6.925	10.20	11.00	-0.80
Mid	5580	6.813	7.198	10.19	11.00	-0.81
High	5700	6.800	6.986	10.07	11.00	-0.93
144	5720	6.420	6.234	9.51	11.00	-1.49



**LOW CHANNEL**

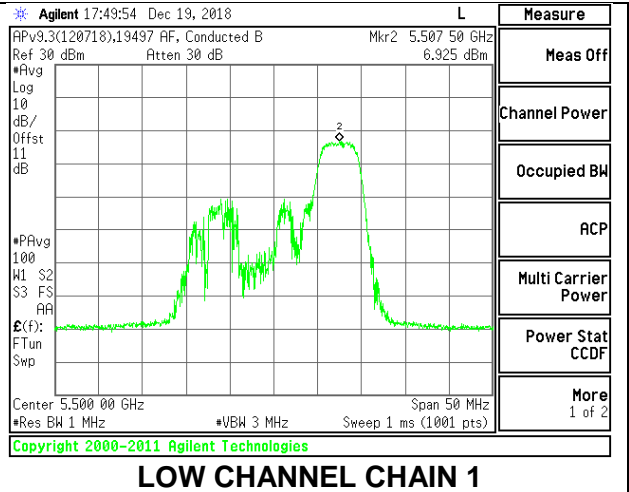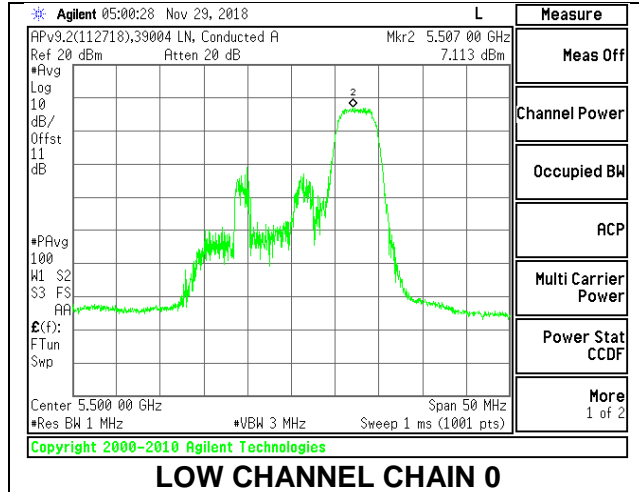



**MID CHANNEL**

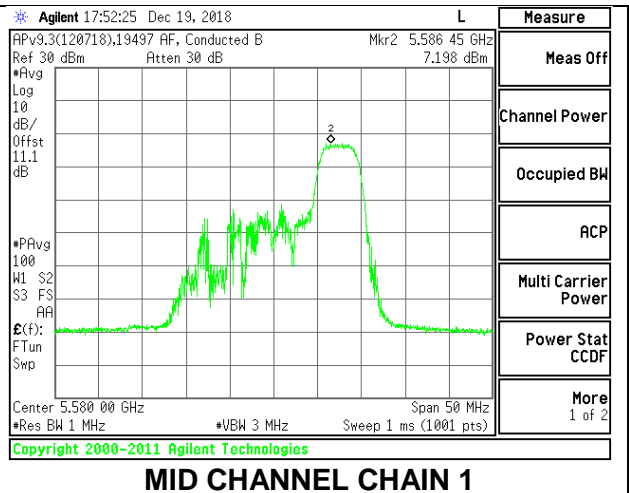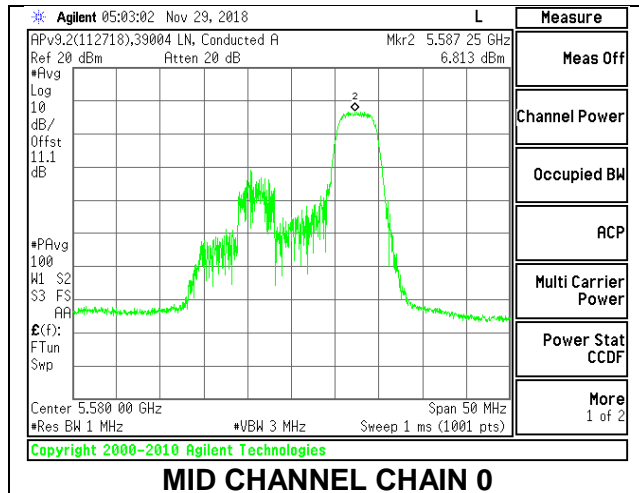

**HIGH CHANNEL**

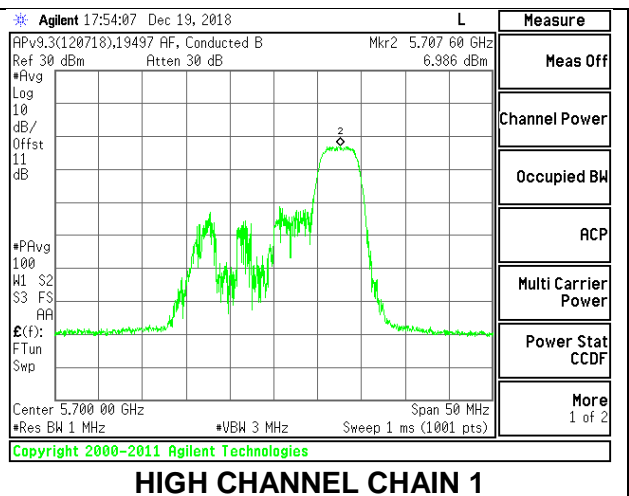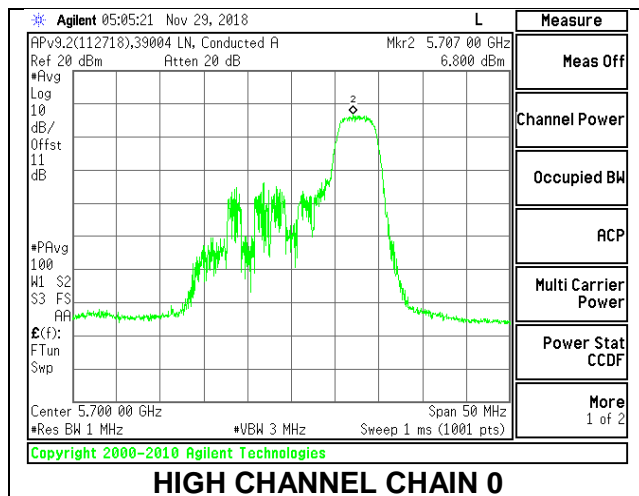

**CHANNEL 144**

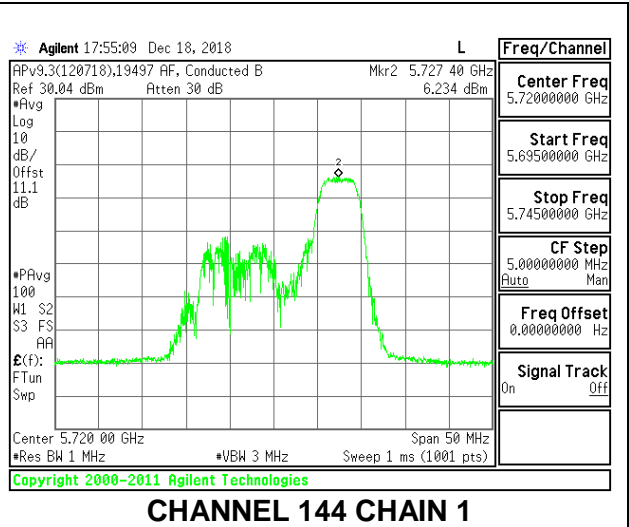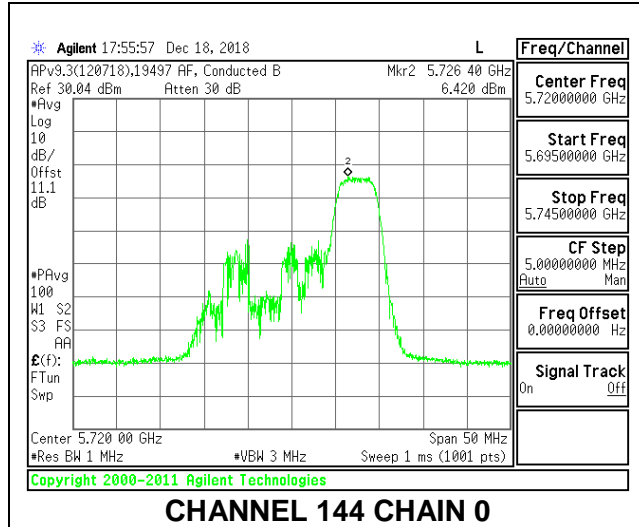

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	20.00	-2.30	0.71	24.00	11.00
Mid	5580	19.80	-2.30	0.71	23.97	11.00
High	5700	19.95	-2.30	0.71	24.00	11.00
144	5720	19.90	-2.30	0.71	23.99	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	9.94	8.92	12.47	24.00	-11.53
Mid	5580	9.94	8.93	12.47	23.97	-11.49
High	5700	9.95	8.99	12.51	24.00	-11.49
144	5720	9.95	8.92	12.48	23.99	-11.51



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.284	6.473	10.01	11.00	-0.99
Mid	5580	7.181	6.638	10.03	11.00	-0.97
High	5700	7.257	6.895	10.19	11.00	-0.81
144	5720	6.779	6.641	9.82	11.00	-1.18



**LOW CHANNEL**

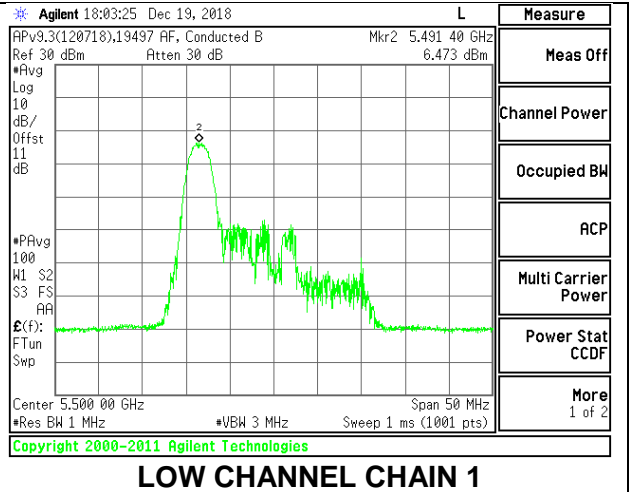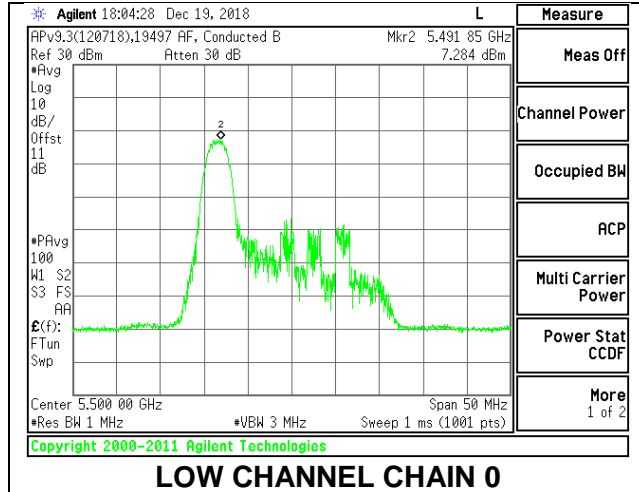

**MID CHANNEL**

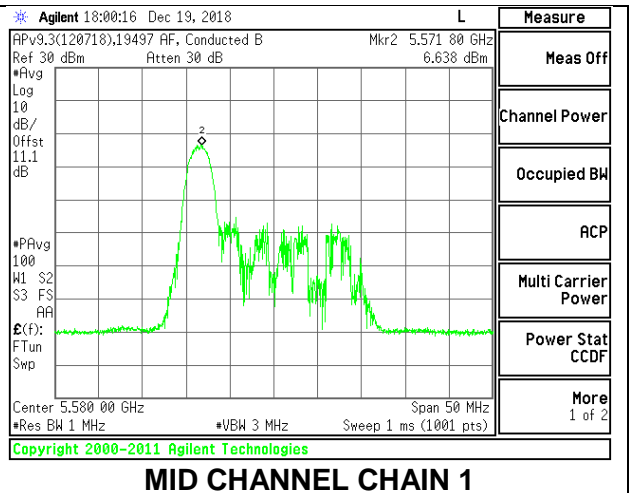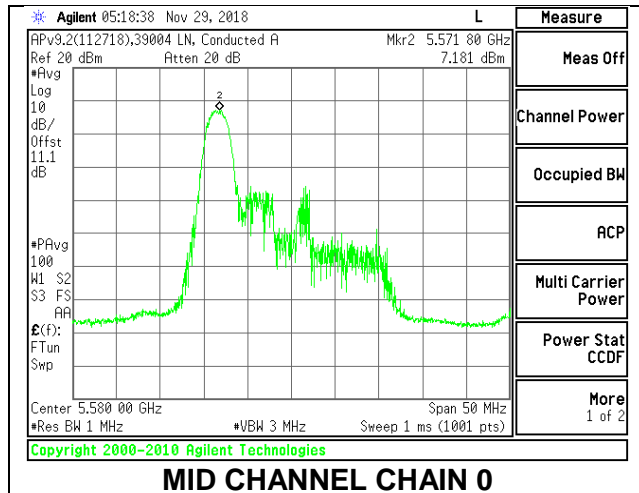


**HIGH CHANNEL**

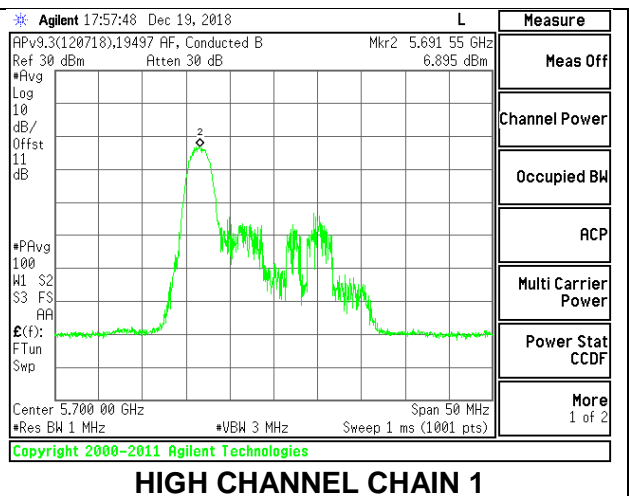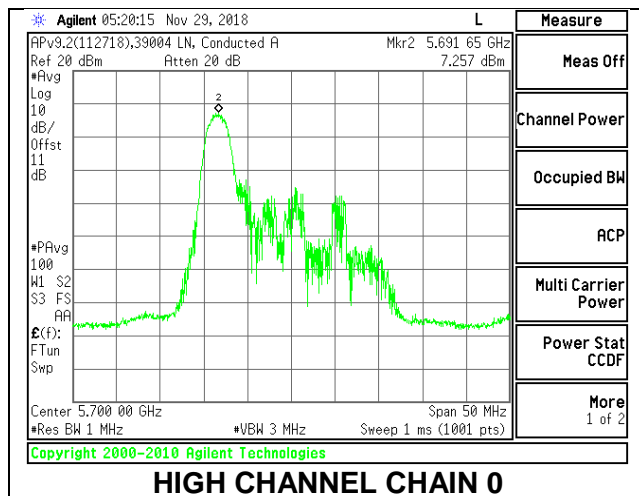



**CHANNEL 144**

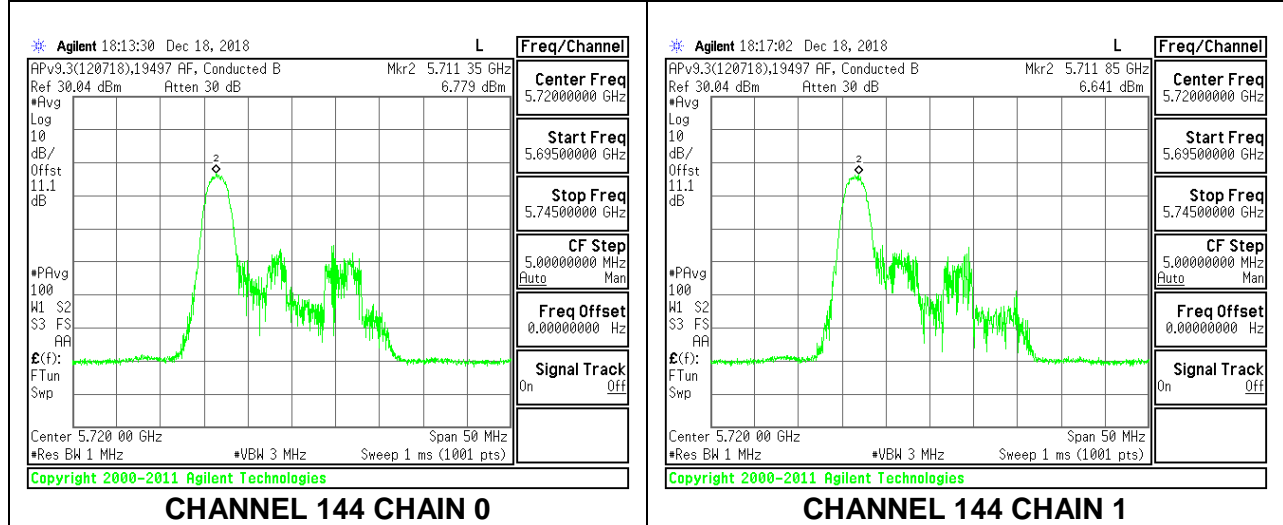

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 4**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	18.30	-2.30	0.71	23.62	11.00
Mid	5580	18.40	-2.30	0.71	23.65	11.00
High	5700	18.45	-2.30	0.71	23.66	11.00
144	5720	18.45	-2.30	0.71	23.66	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	10.95	9.99	13.51	23.62	-10.12
Mid	5580	10.95	9.99	13.51	23.65	-10.14
High	5700	10.95	9.99	13.51	23.66	-10.15
144	5720	10.95	9.99	13.51	23.66	-10.15



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.49	6.973	10.35	11.00	-0.65
Mid	5580	7.464	7.209	10.45	11.00	-0.55
High	5700	7.117	7.262	10.30	11.00	-0.70
144	5720	6.909	6.896	10.01	11.00	-0.99



**LOW CHANNEL**

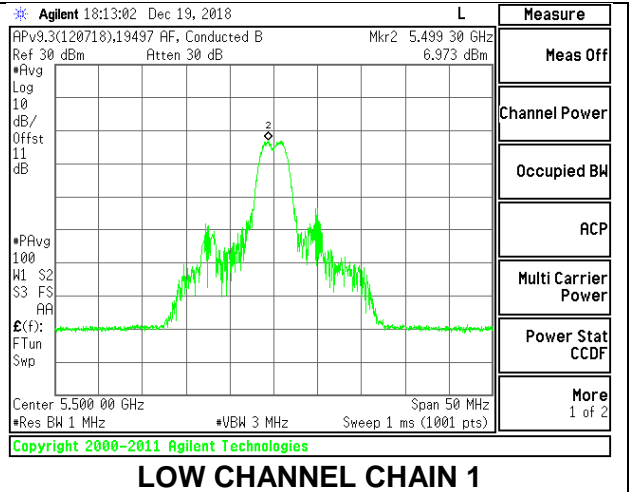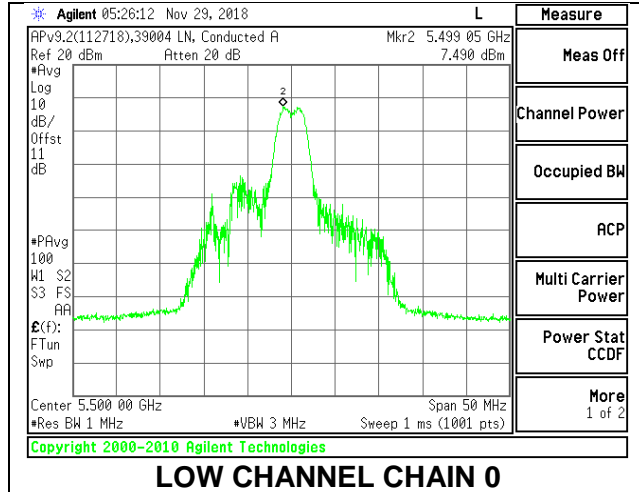



**MID CHANNEL**

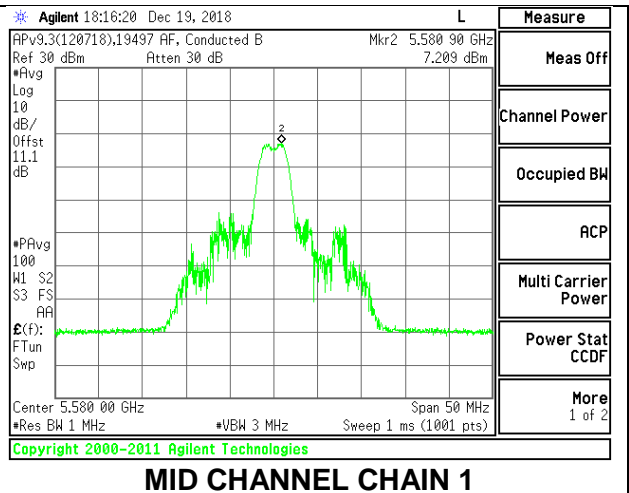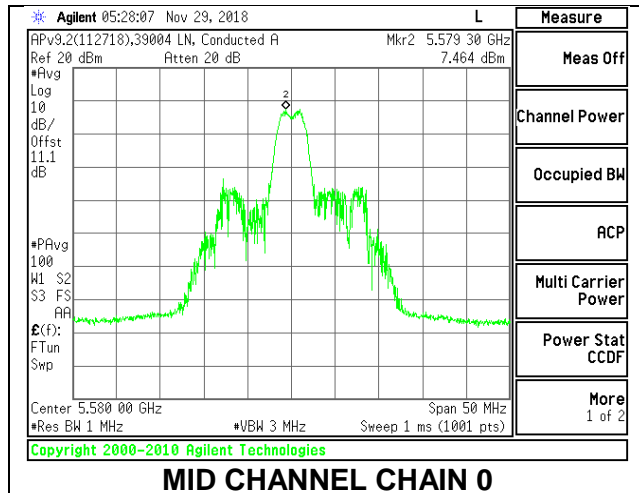

**HIGH CHANNEL**

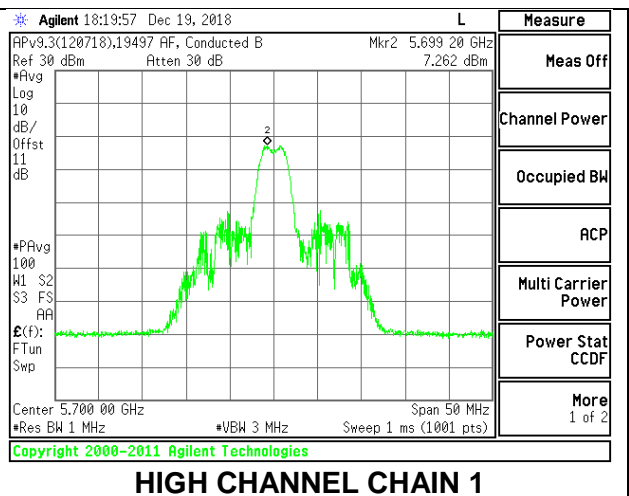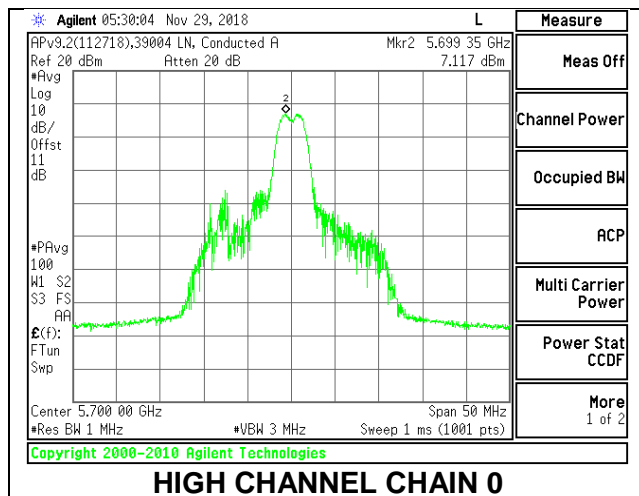

**CHANNEL 144**

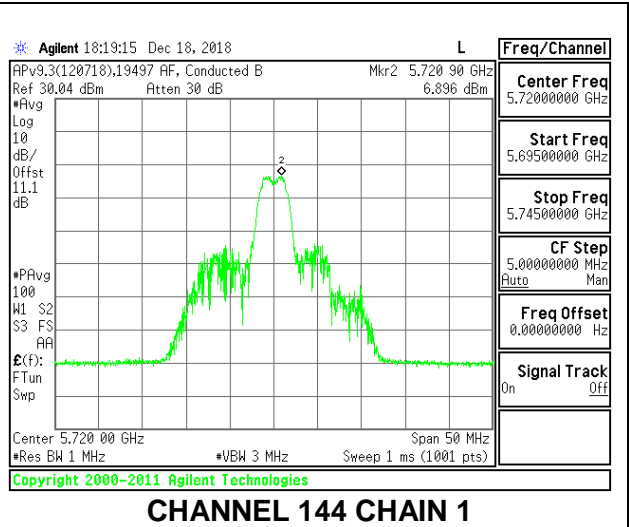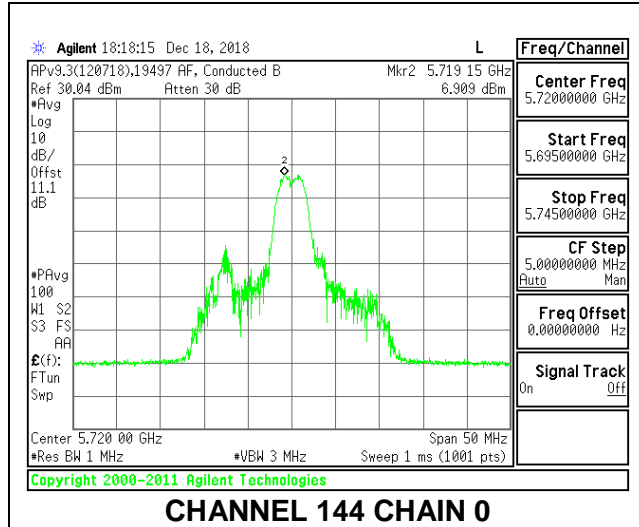

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5500	19.95	-2.30	0.71	24.00	11.00
Mid	5580	20.15	-2.30	0.71	24.00	11.00
High	5700	20.20	-2.30	0.71	24.00	11.00
144	5720	20.05	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.10	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	9.96	8.85	12.45	24.00	-11.55
Mid	5580	9.95	8.87	12.45	24.00	-11.55
High	5700	9.95	8.84	12.44	24.00	-11.56
144	5720	9.95	8.86	12.45	24.00	-11.55



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5500	7.254	6.927	10.20	11.00	-0.80
Mid	5580	7.268	7.186	10.34	11.00	-0.66
High	5700	7.454	7.336	10.51	11.00	-0.49
144	5720	6.662	6.204	9.55	11.00	-1.45



**LOW CHANNEL**

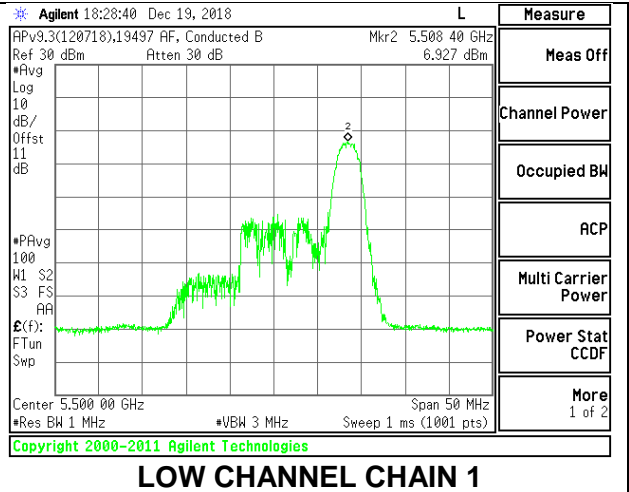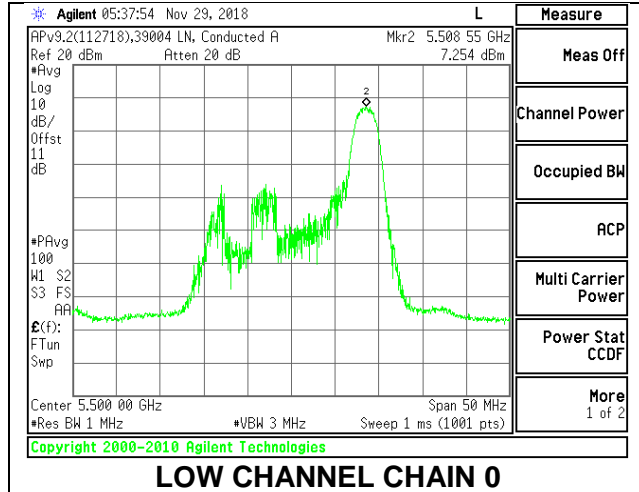



**MID CHANNEL**

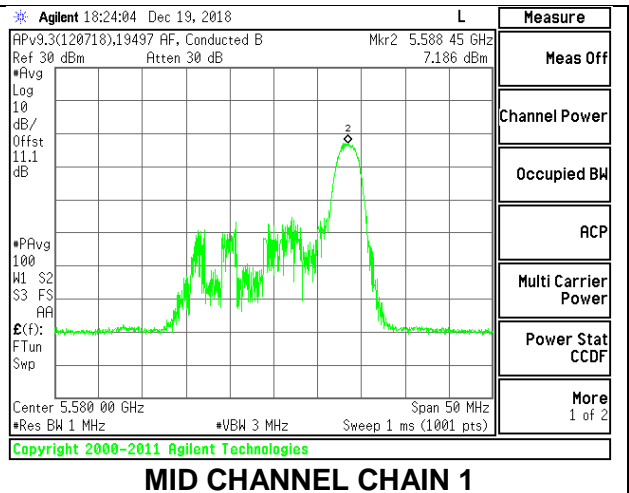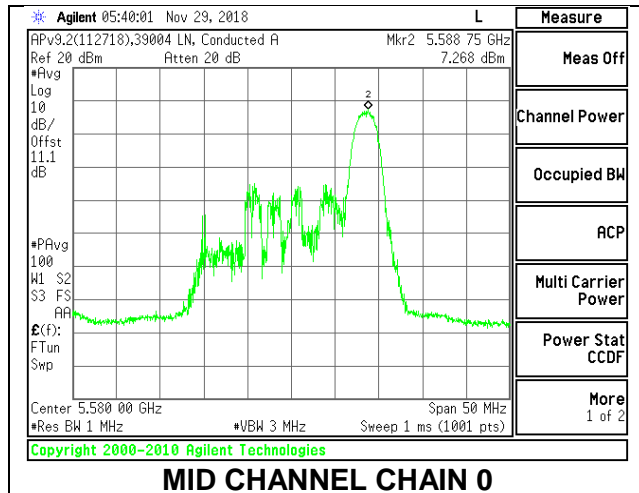

**HIGH CHANNEL**

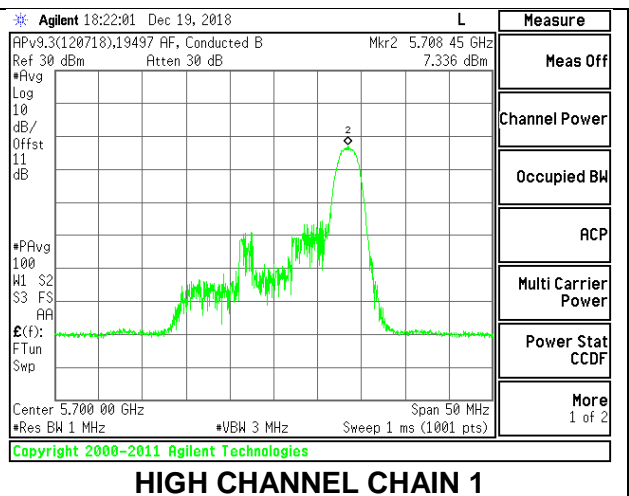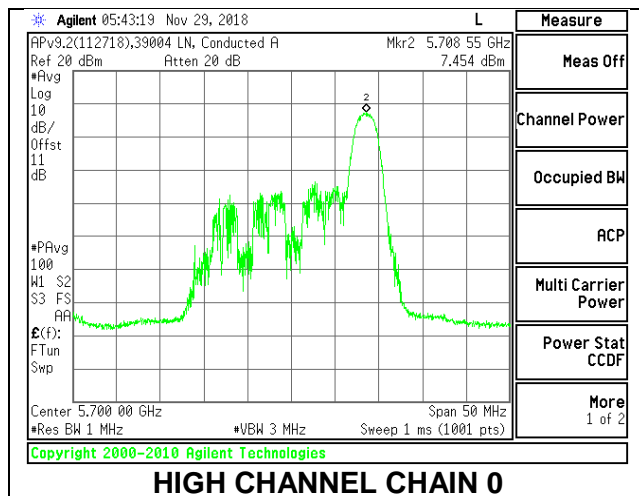

**CHANNEL 144**

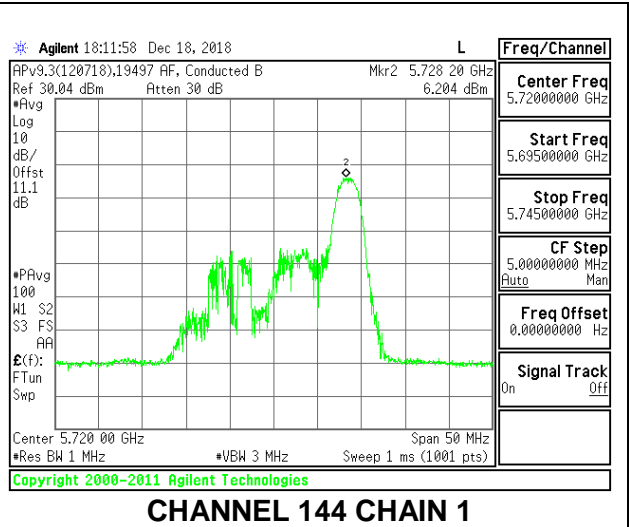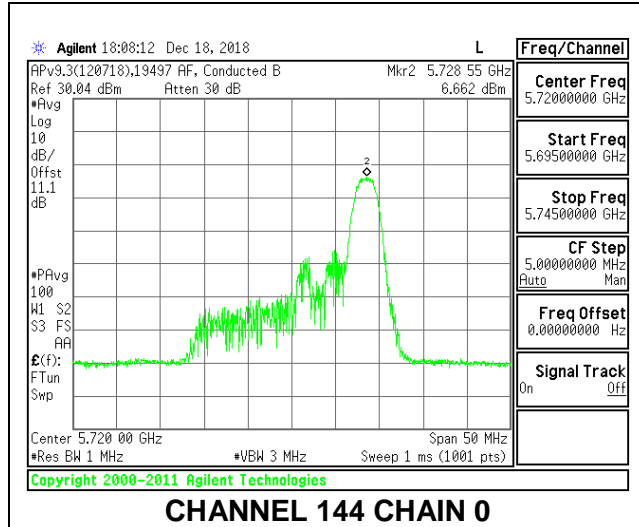

**9.5.20. 802.11ax HE40 MODE IN THE 5.6 GHz BAND**

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	41.70	-2.30	0.71	24.00	11.00
Mid	5550	41.00	-2.30	0.71	24.00	11.00
High	5670	41.20	-2.30	0.71	24.00	11.00
142	5710	41.30	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.13	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.96	15.05	18.54	24.00	-5.46
Mid	5550	15.95	14.97	18.50	24.00	-5.50
High	5670	15.92	15.02	18.50	24.00	-5.50
142	5710	15.9	14.89	19.56	24.00	-4.44

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	0.978	0.971	5.11	11.00	-5.89
Mid	5550	0.687	0.975	4.97	11.00	-6.03
High	5670	0.939	1.018	5.12	11.00	-5.88
142	5710	1.75	1.855	5.94	11.00	-5.06





### LOW CHANNEL

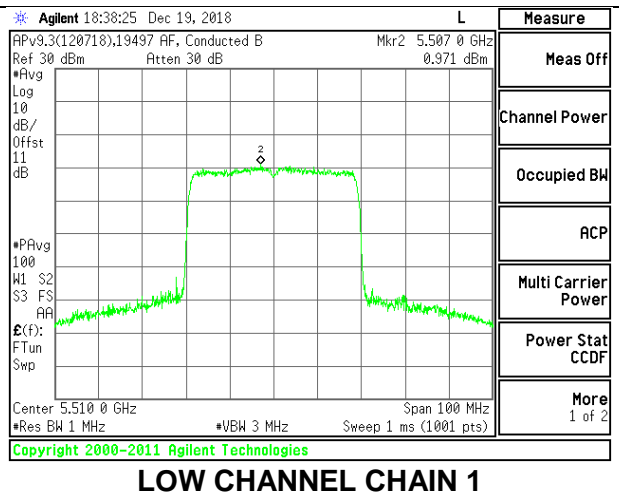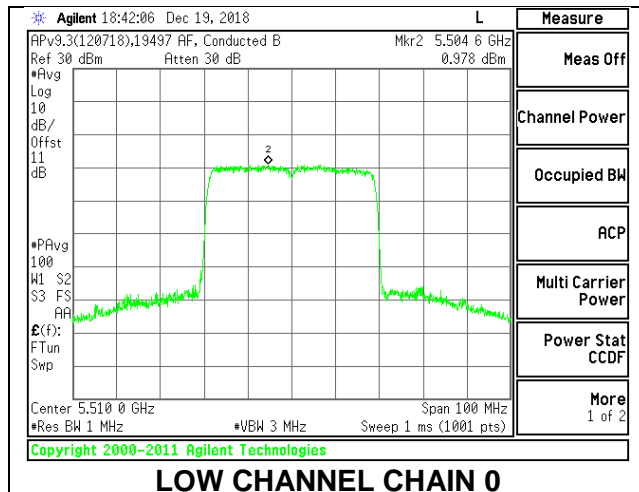



### MID CHANNEL

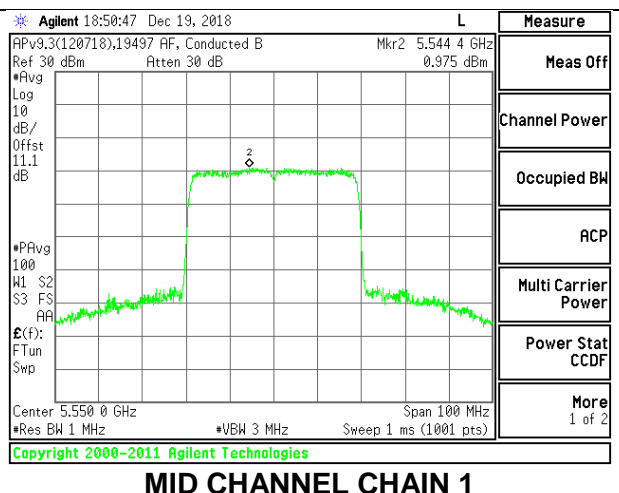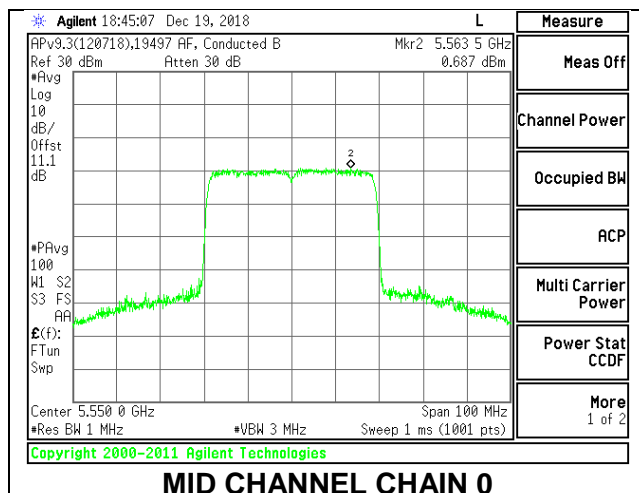

### HIGH CHANNEL

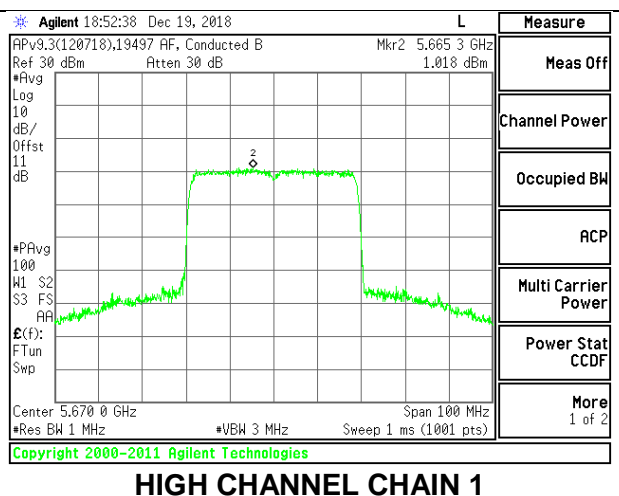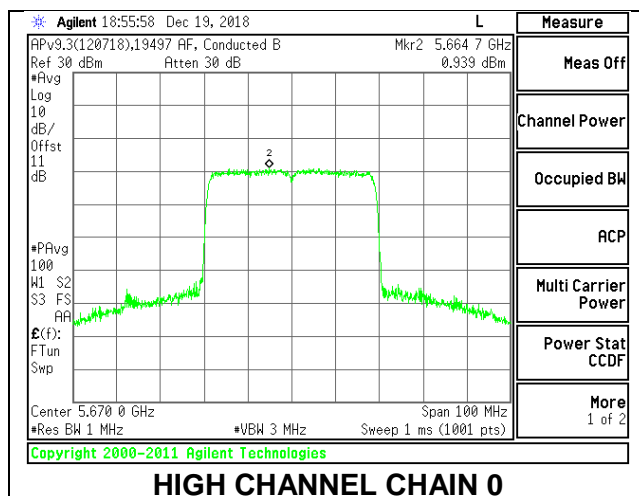

### PSD, CHANNEL 142

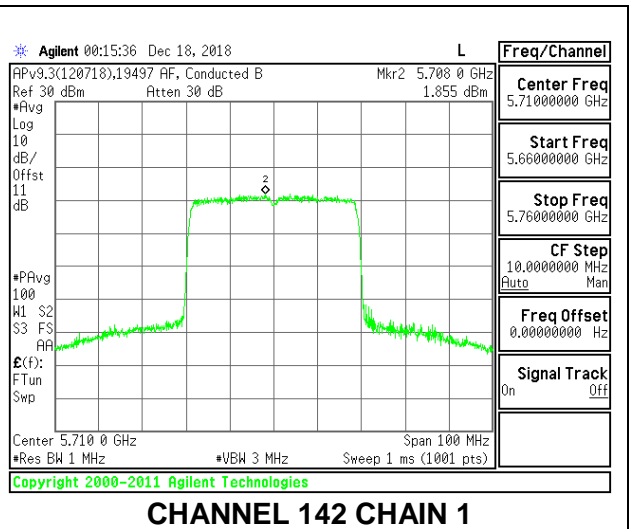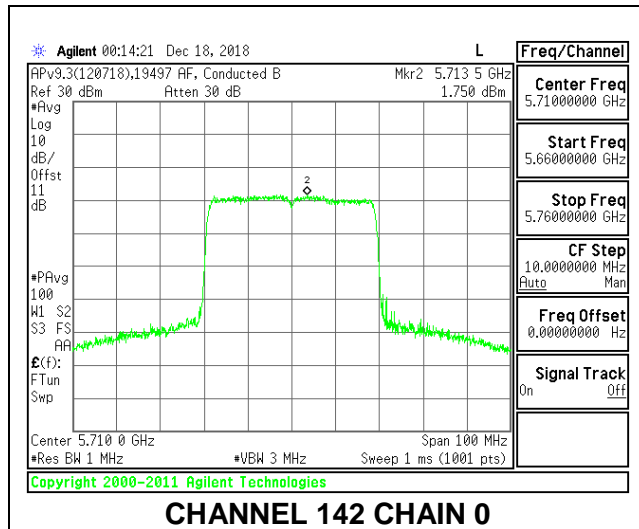

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	30.60	-2.30	0.71	24.00	11.00
Mid	5550	31.80	-2.30	0.71	24.00	11.00
High	5670	33.10	-2.30	0.71	24.00	11.00
142	5710	33.10	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.67	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	16.89	15.95	19.46	24.00	-4.54
Mid	5550	16.92	15.82	19.42	24.00	-4.58
High	5670	16.94	15.8	19.42	24.00	-4.58
142	5710	16.9	15.87	19.43	24.00	-4.57



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	5.81	5.644	9.41	11.00	-1.59
Mid	5550	5.757	5.28	9.21	11.00	-1.79
High	5670	5.048	5.3	8.86	11.00	-2.14
142	5710	4.395	4.7	8.23	11.00	-2.77



**LOW CHANNEL**

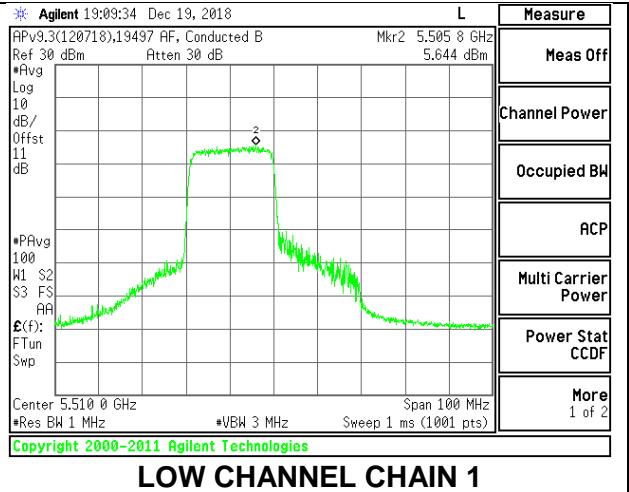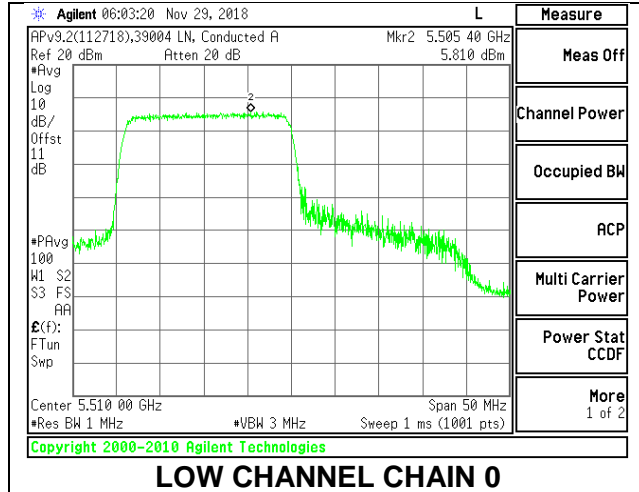



**MID CHANNEL**

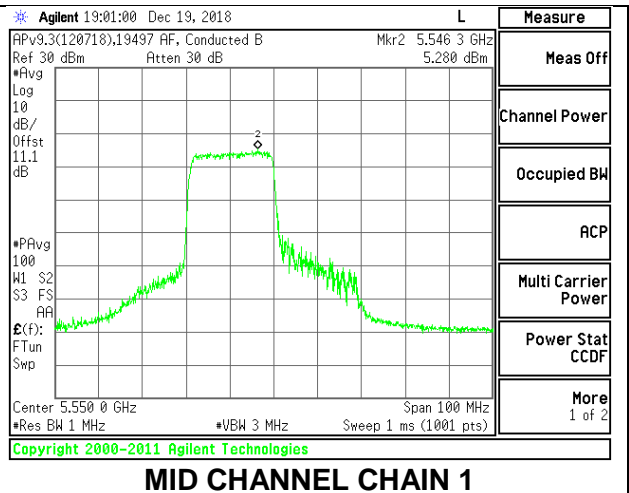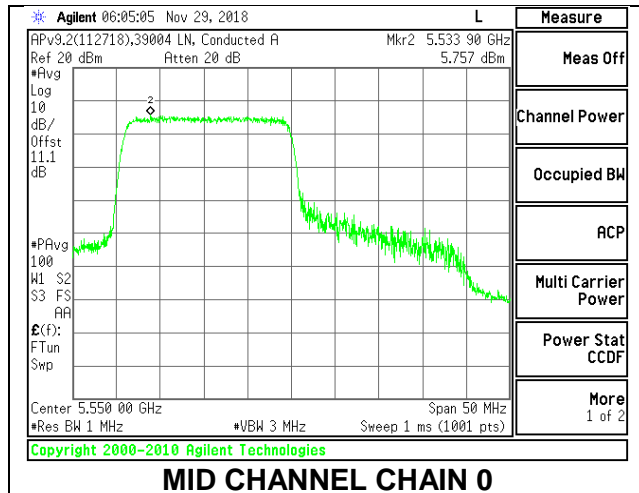

**HIGH CHANNEL**

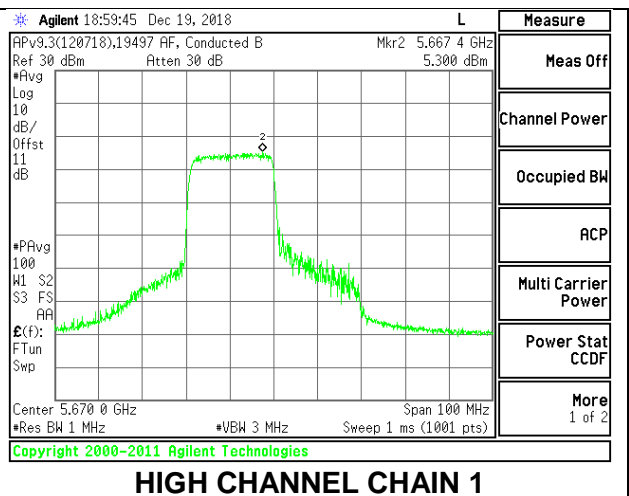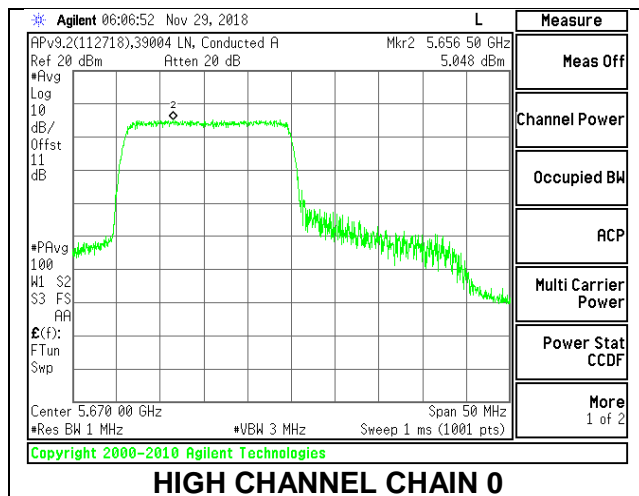

**CHANNEL 142**

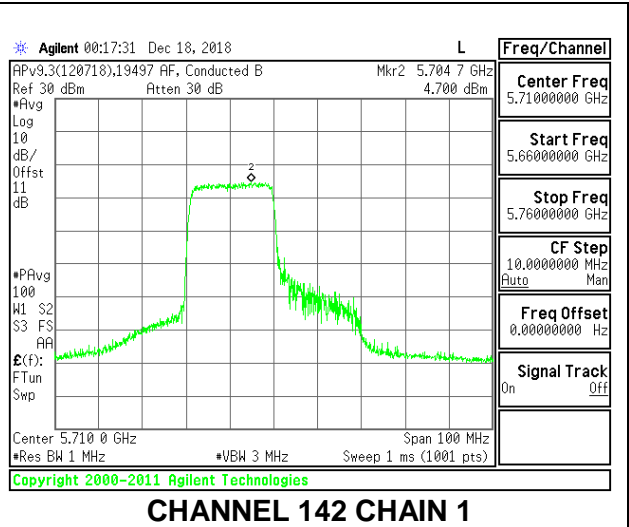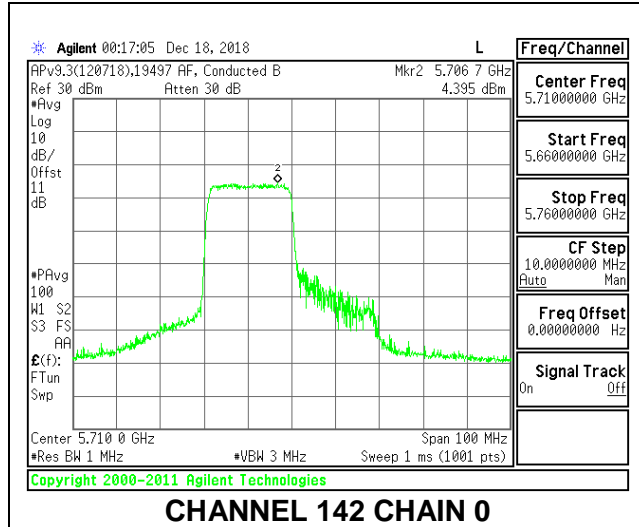

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	35.80	-2.30	0.71	24.00	11.00
Mid	5550	36.20	-2.30	0.71	24.00	11.00
High	5670	34.80	-2.30	0.71	24.00	11.00
142	5710	35.60	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.67	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	16.96	15.97	19.50	24.00	-4.50
Mid	5550	16.88	15.9	19.43	24.00	-4.57
High	5670	16.97	15.94	19.50	24.00	-4.50
142	5710	16.9	15.88	19.43	24.00	-4.57



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	5.981	5.765	9.55	11.00	-1.45
Mid	5550	5.889	5.727	9.49	11.00	-1.51
High	5670	5.292	5.337	8.99	11.00	-2.01
142	5710	4.958	4.491	8.41	11.00	-2.59



**LOW CHANNEL**

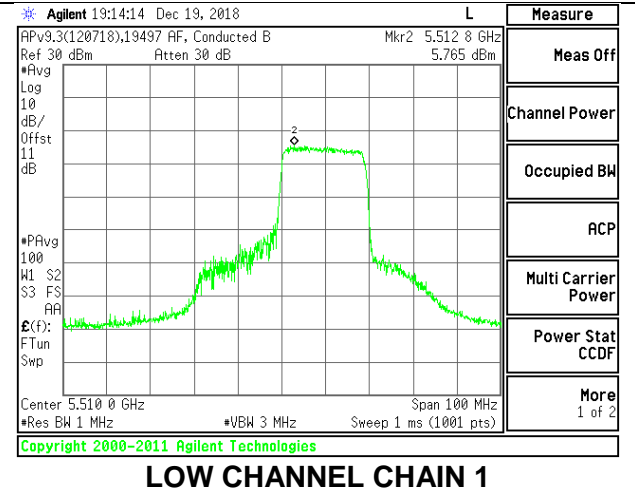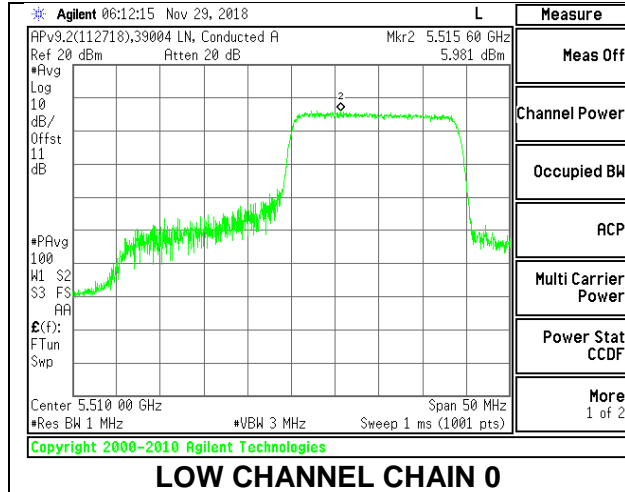



**MID CHANNEL**

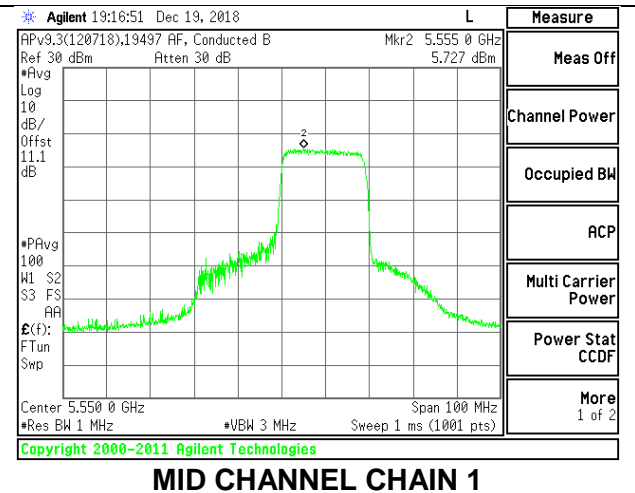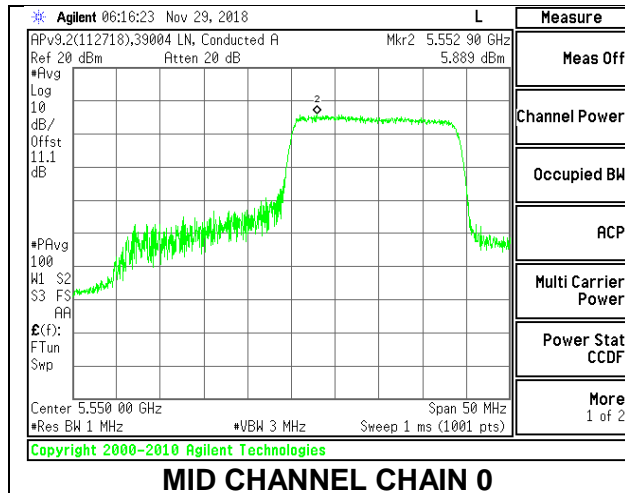

**HIGH CHANNEL**

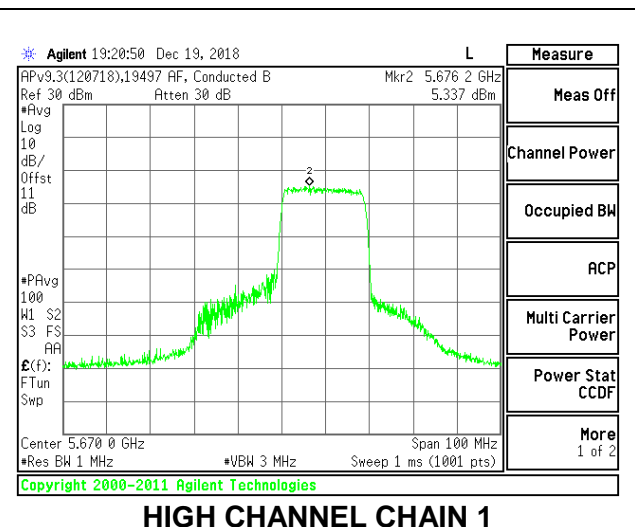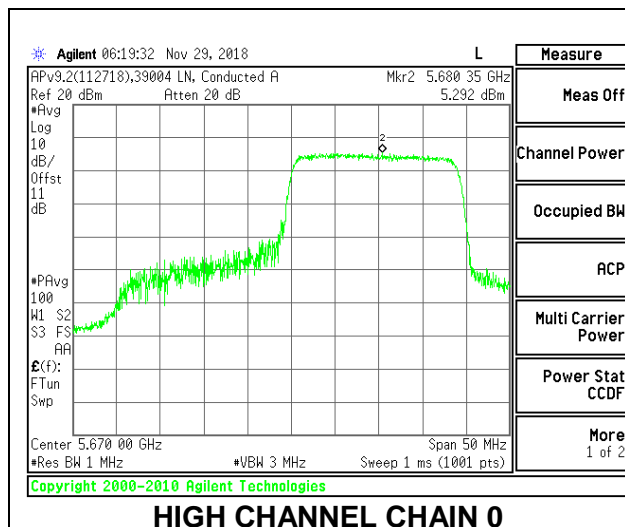

### CHANNEL 142

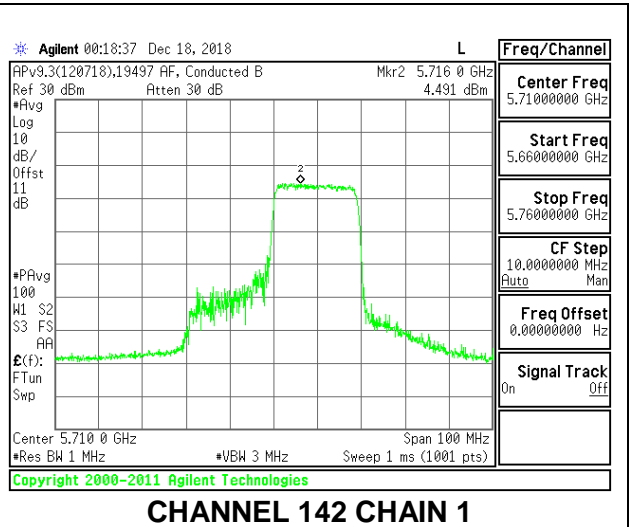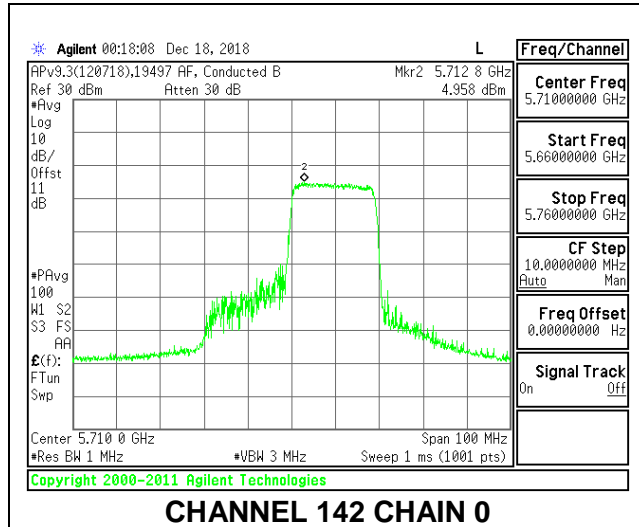



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	21.00	-2.30	0.71	24.00	11.00
Mid	5550	21.30	-2.30	0.71	24.00	11.00
High	5670	22.30	-2.30	0.71	24.00	11.00
142	5710	21.40	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.89	14.98	18.47	24.00	-5.53
Mid	5550	15.42	14.5	17.99	24.00	-6.01
High	5670	15.41	14.48	17.98	24.00	-6.02
142	5710	15.42	14.47	17.98	24.00	-6.02



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.582	7.208	10.77	11.00	-0.23
Mid	5550	7.494	7.05	10.65	11.00	-0.35
High	5670	7.326	7.325	10.70	11.00	-0.30
142	5710	7.145	6.901	10.40	11.00	-0.60



**LOW CHANNEL**

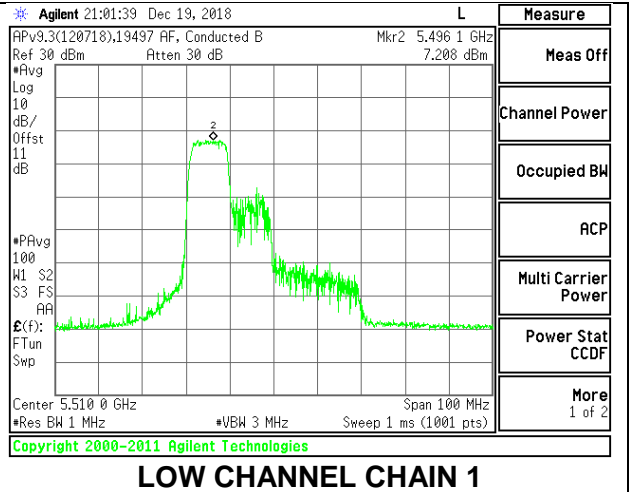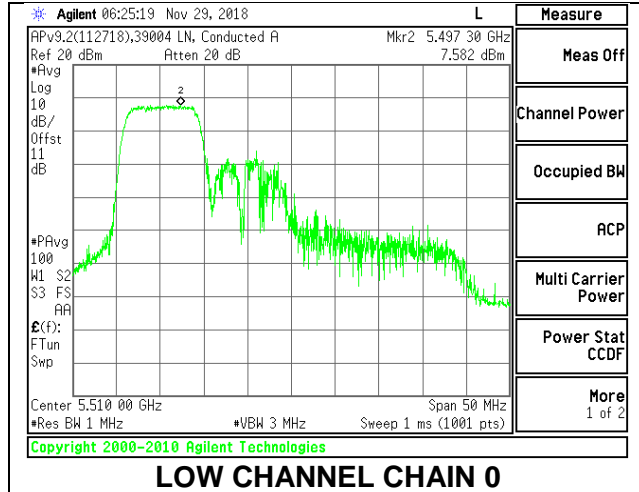



**MID CHANNEL**

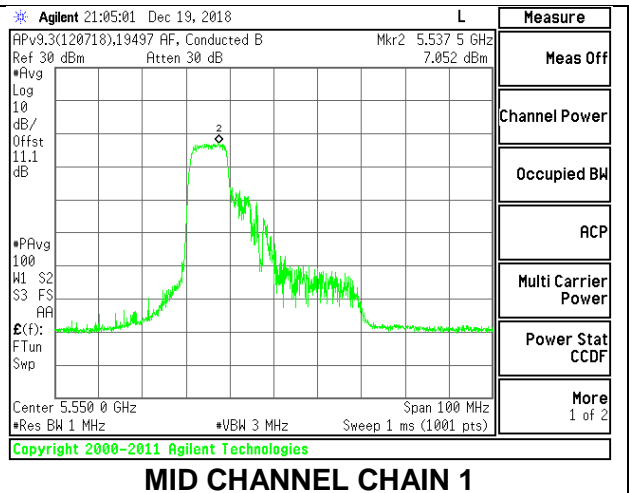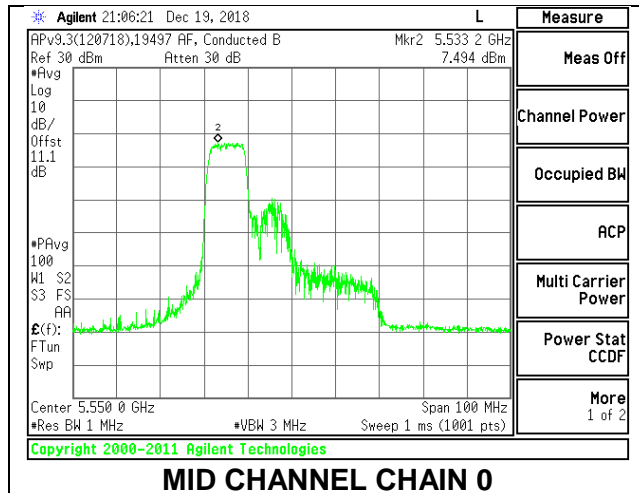

**HIGH CHANNEL**

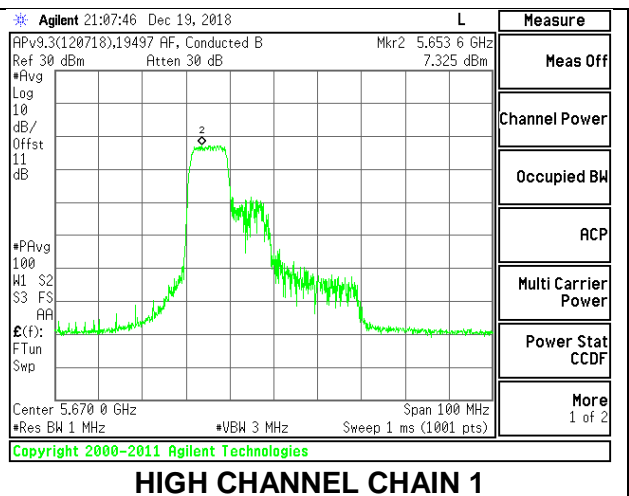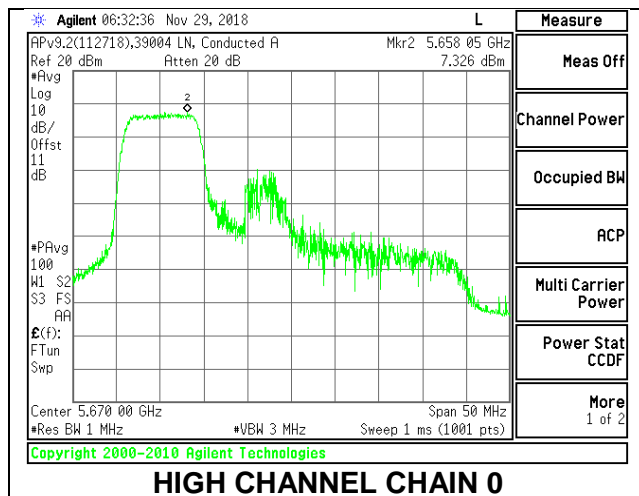

**CHANNEL 142**

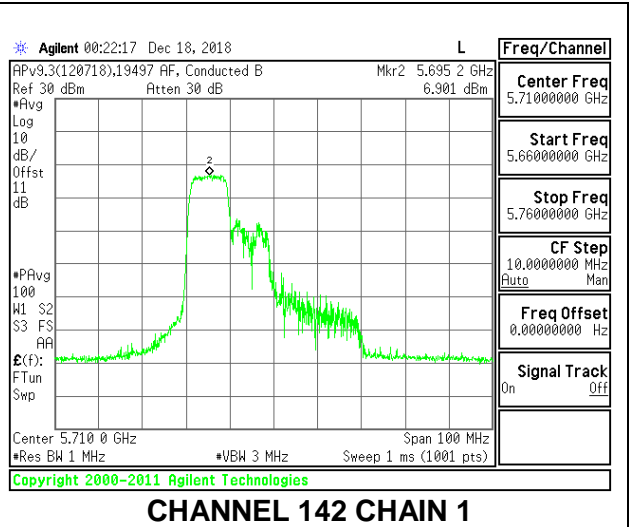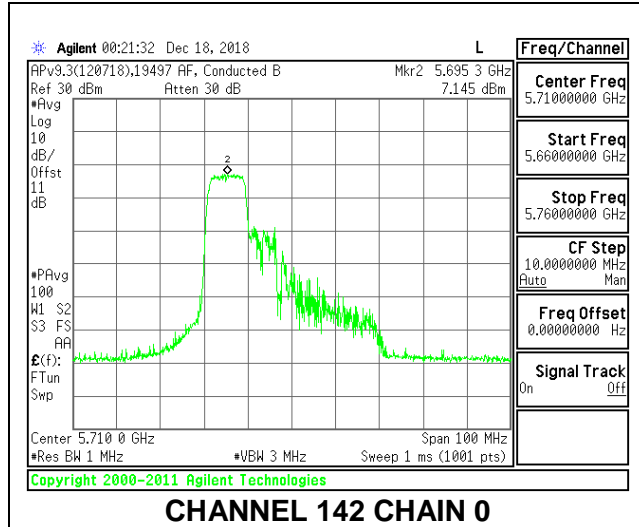

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 54**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	27.10	-2.30	0.71	24.00	11.00
Mid	5550	25.80	-2.30	0.71	24.00	11.00
High	5670	27.70	-2.30	0.71	24.00	11.00
142	5710	27.60	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.4	14.46	17.97	24.00	-6.03
Mid	5550	15.41	14.46	17.97	24.00	-6.03
High	5670	15.43	14.44	17.97	24.00	-6.03
142	5710	15.45	14.43	17.98	24.00	-6.02



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.669	7.266	10.84	11.00	-0.16
Mid	5550	7.685	7.219	10.83	11.00	-0.17
High	5670	7.239	7.319	10.65	11.00	-0.35
142	5710	7.183	7.341	10.63	11.00	-0.37



**LOW CHANNEL**

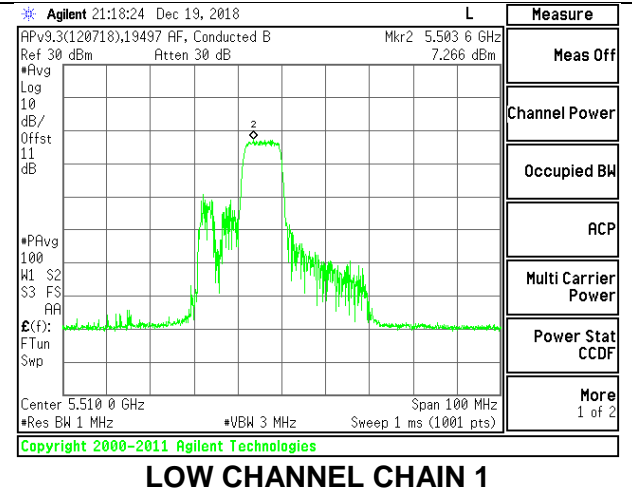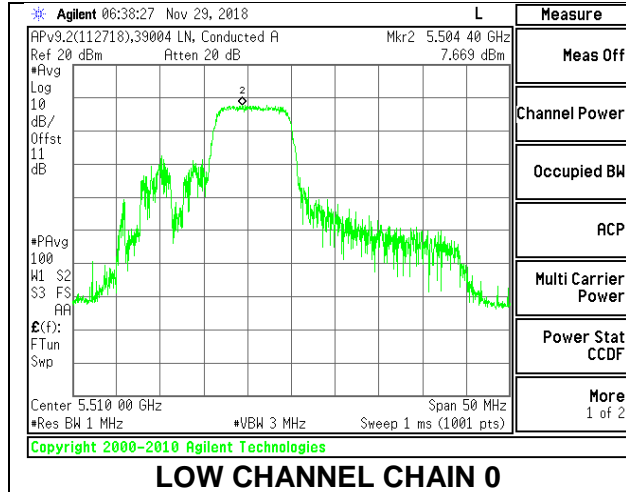



**MID CHANNEL**

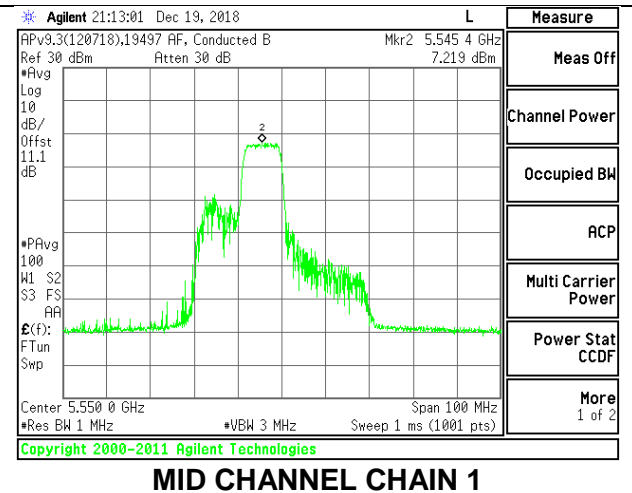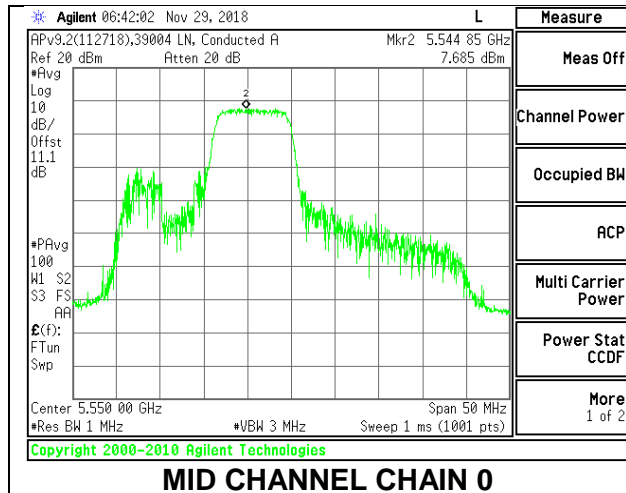

**HIGH CHANNEL**

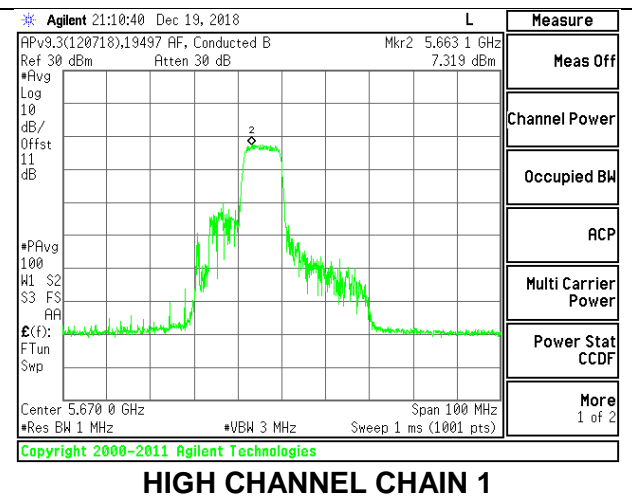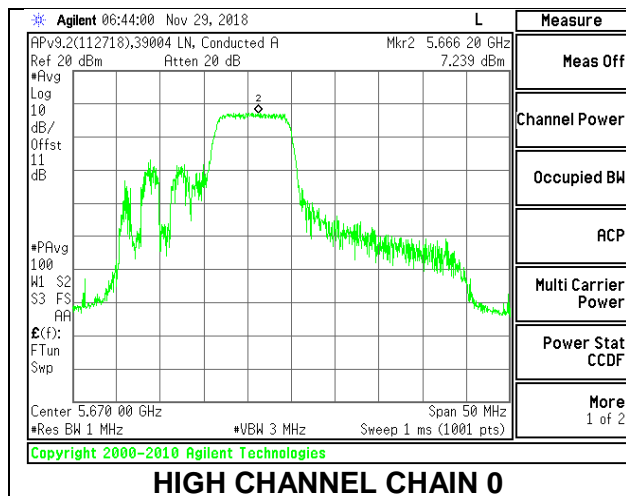

**CHANNEL 142**

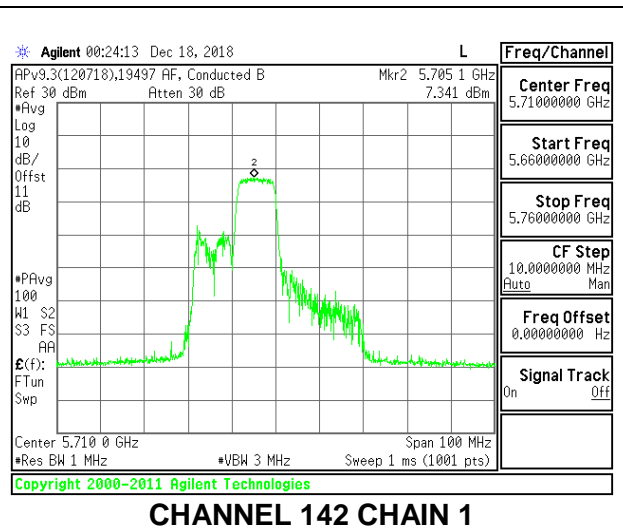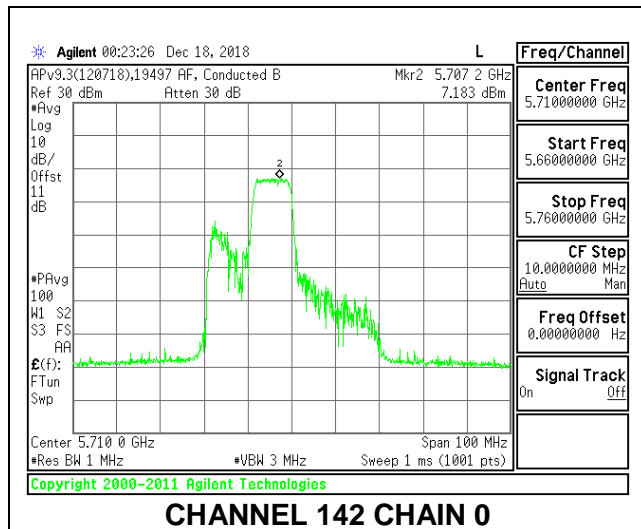

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	22.10	-2.30	0.71	24.00	11.00
Mid	5550	21.20	-2.30	0.71	24.00	11.00
High	5670	20.90	-2.30	0.71	24.00	11.00
142	5710	21.40	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.36	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	15.38	14.53	17.99	24.00	-6.01
Mid	5550	15.37	14.52	17.98	24.00	-6.02
High	5670	15.39	14.46	17.96	24.00	-6.04
142	5710	15.41	14.48	17.98	24.00	-6.02



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.308	6.942	10.50	11.00	-0.50
Mid	5550	7.232	7.201	10.59	11.00	-0.41
High	5670	6.993	6.83	10.28	11.00	-0.72
142	5710	7.069	6.99	10.40	11.00	-0.60



### LOW CHANNEL

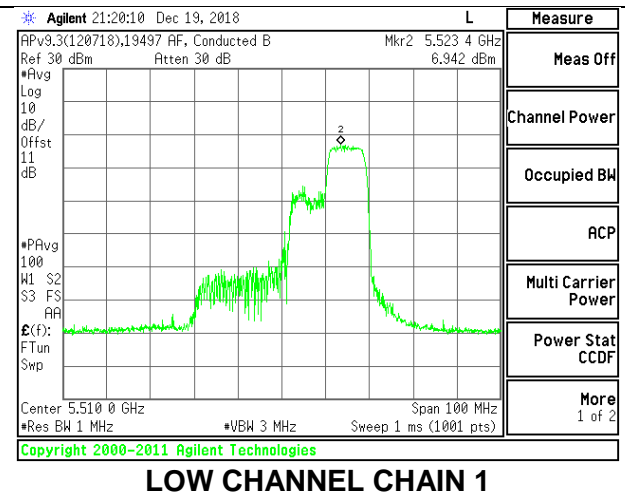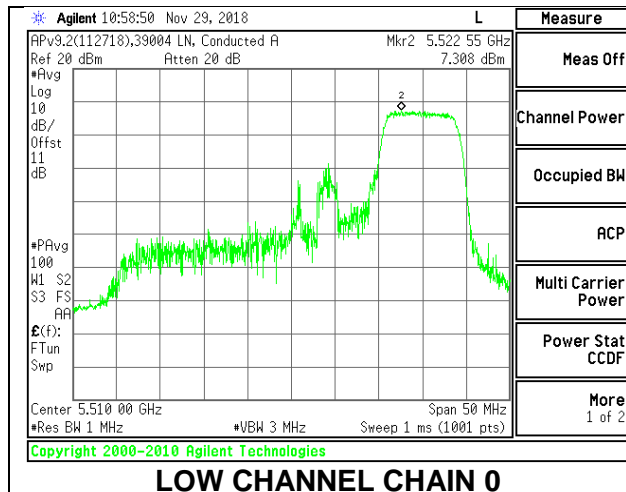

### MID CHANNEL

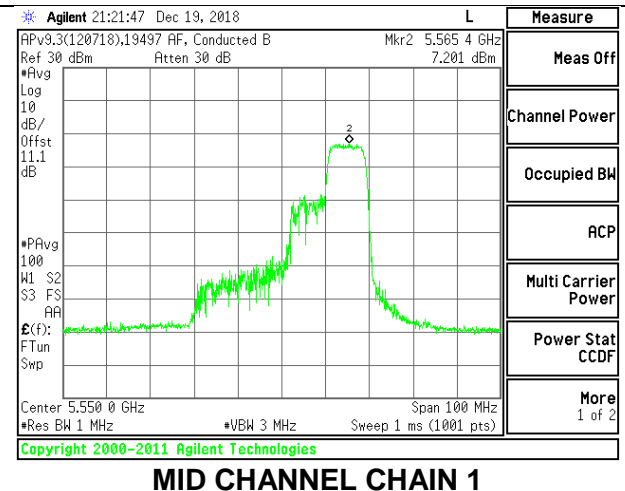
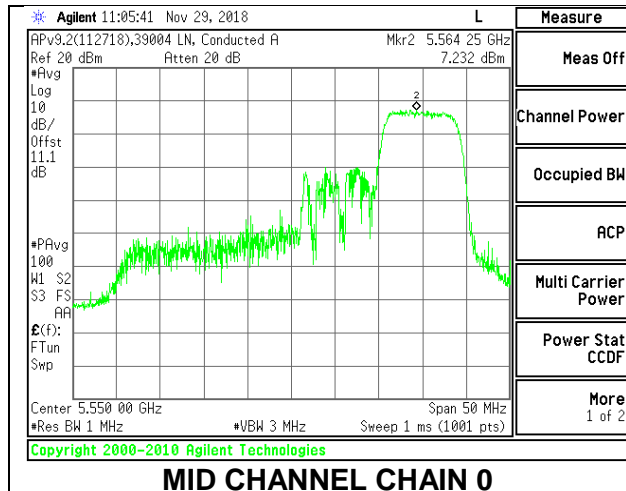


### HIGH CHANNEL

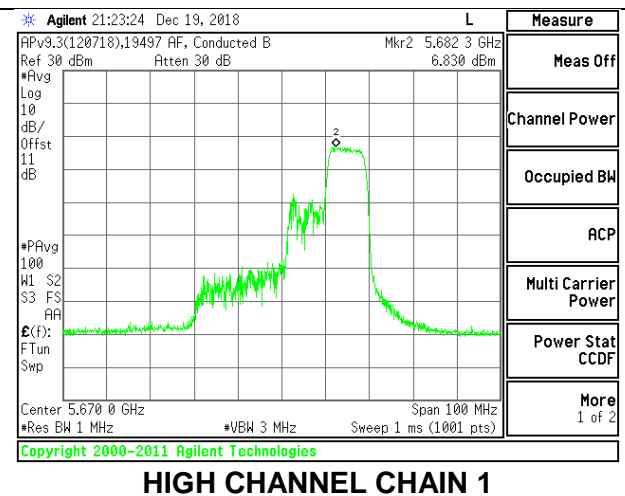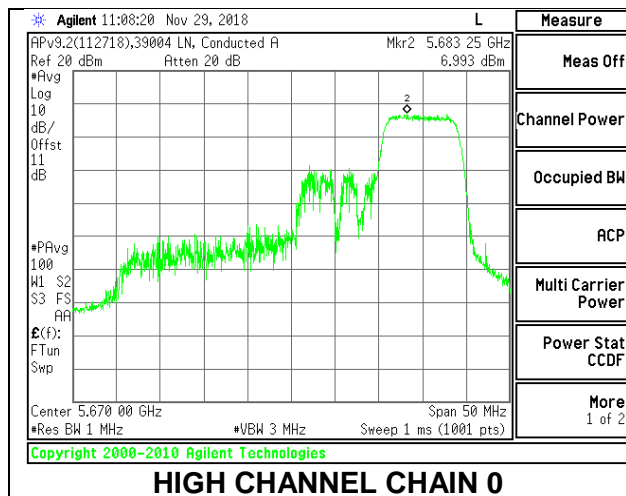



**CHANNEL 142**

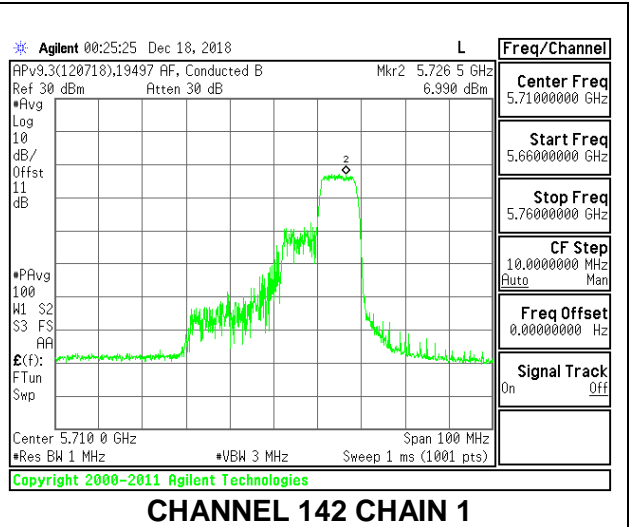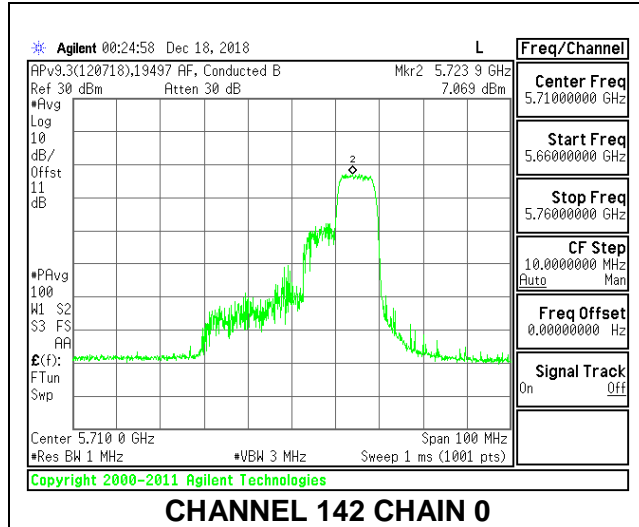

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	20.70	-2.30	0.71	24.00	11.00
Mid	5550	20.20	-2.30	0.71	24.00	11.00
High	5670	20.60	-2.30	0.71	24.00	11.00
142	5710	20.60	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.42	11.55	15.02	24.00	-8.98
Mid	5550	12.4	11.53	15.00	24.00	-9.00
High	5670	12.39	11.48	14.97	24.00	-9.03
142	5710	12.41	11.49	14.98	24.00	-9.02



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.007	6.71	10.04	11.00	-0.96
Mid	5550	7.204	6.772	10.17	11.00	-0.83
High	5670	7.083	6.966	10.21	11.00	-0.79
142	5710	7.361	6.974	10.35	11.00	-0.65



**LOW CHANNEL**

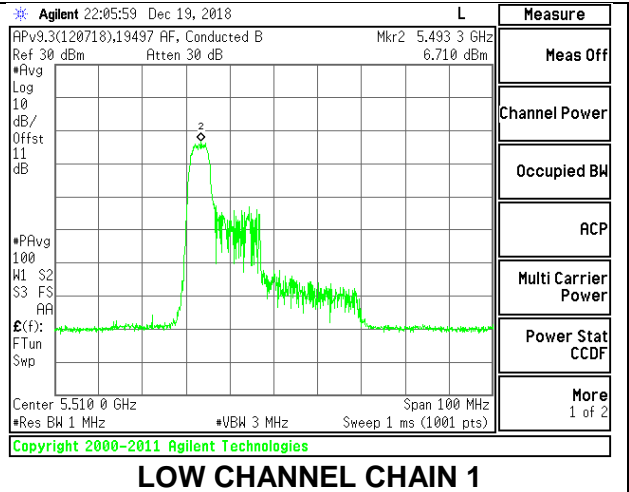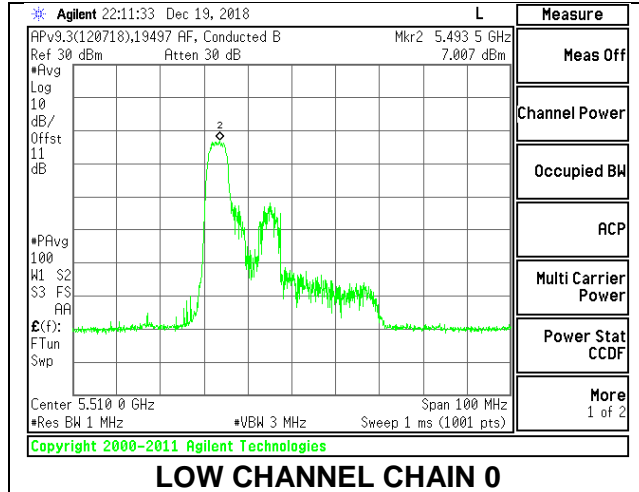



**MID CHANNEL**

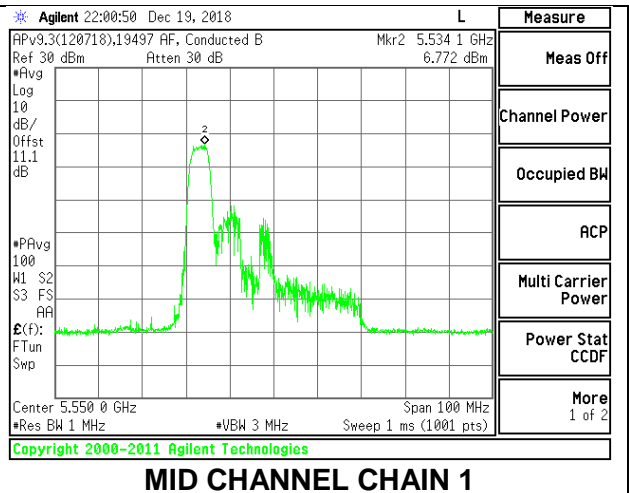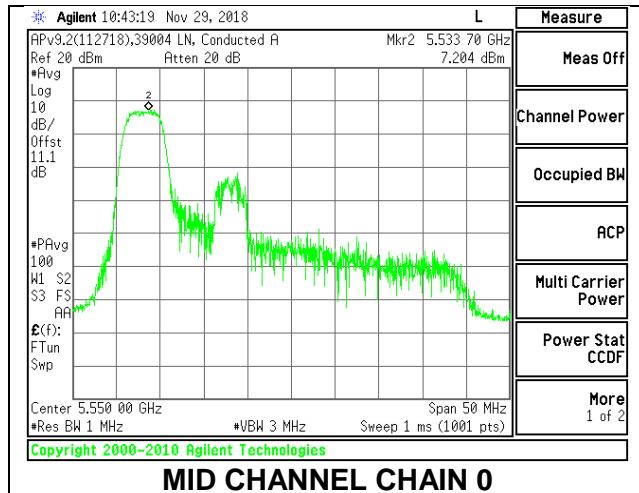

**HIGH CHANNEL**

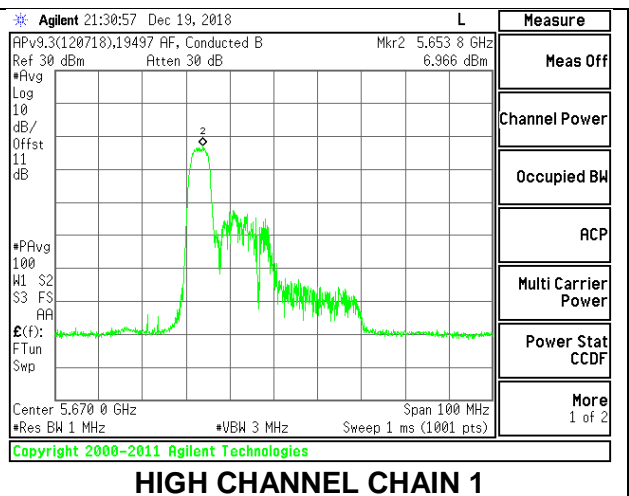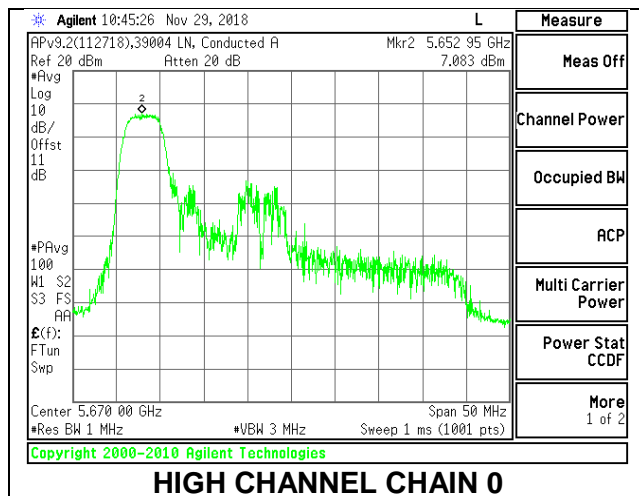

**CHANNEL 142**

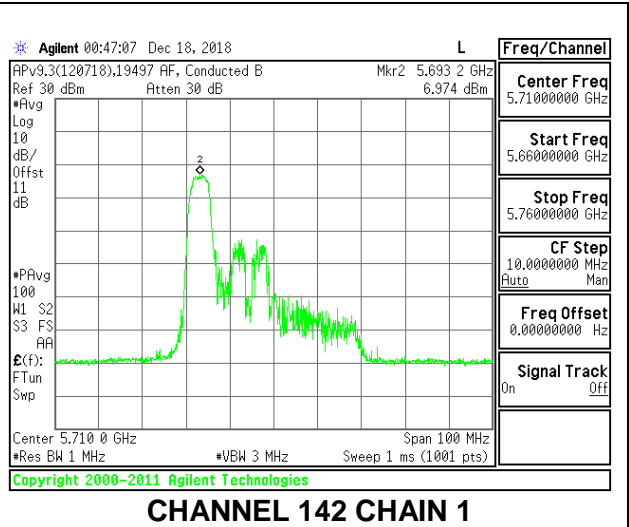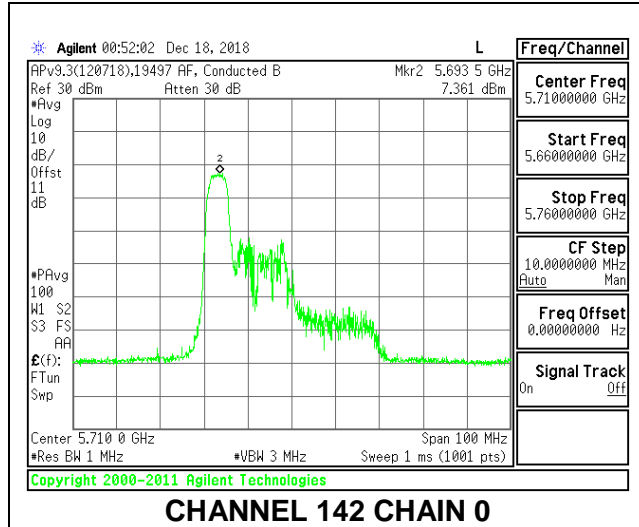

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 40**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	25.30	-2.30	0.71	24.00	11.00
Mid	5550	26.10	-2.30	0.71	24.00	11.00
High	5670	25.80	-2.30	0.71	24.00	11.00
142	5710	26.40	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.42	11.55	15.02	24.00	-8.98
Mid	5550	12.43	11.52	15.01	24.00	-8.99
High	5670	12.41	11.49	14.98	24.00	-9.02
142	5710	12.38	11.5	14.97	24.00	-9.03



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.416	7.367	10.57	11.00	-0.43
Mid	5550	7.632	7.159	10.58	11.00	-0.42
High	5670	7.513	7.021	10.45	11.00	-0.55
142	5710	7.465	7.04	10.44	11.00	-0.56



### LOW CHANNEL

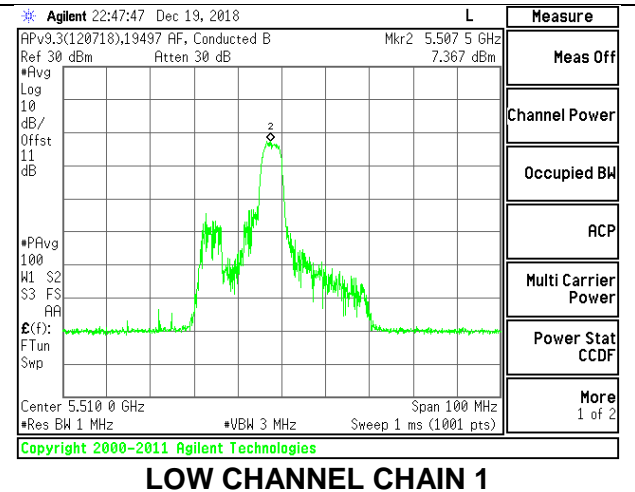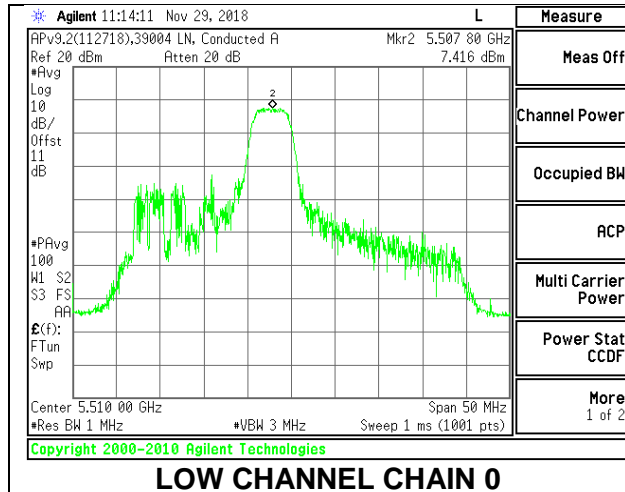



### MID CHANNEL

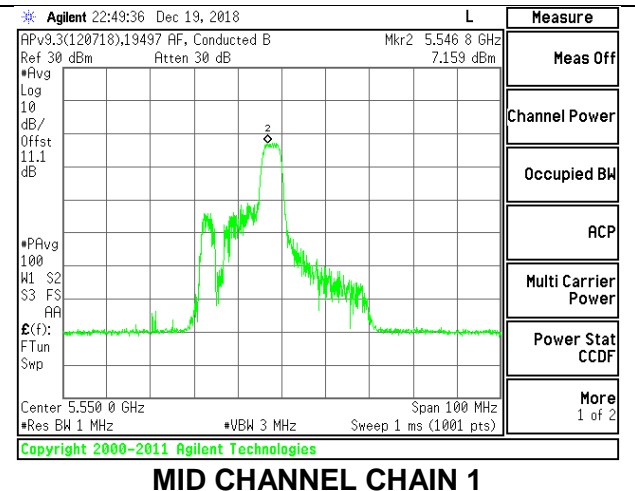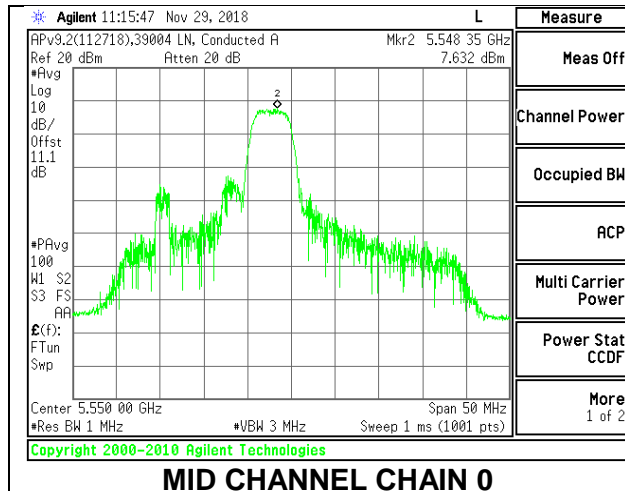

### HIGH CHANNEL

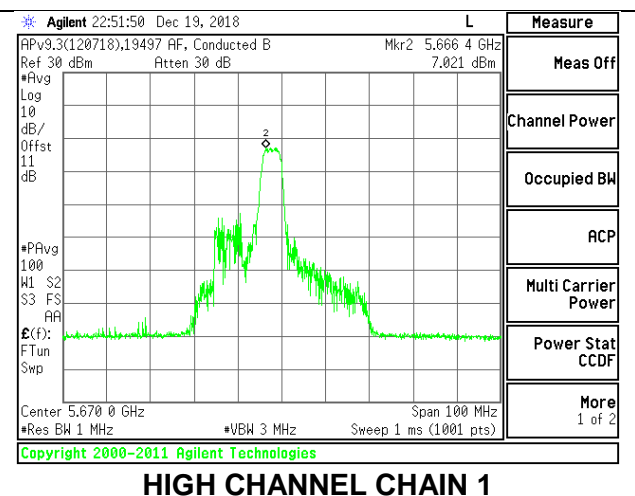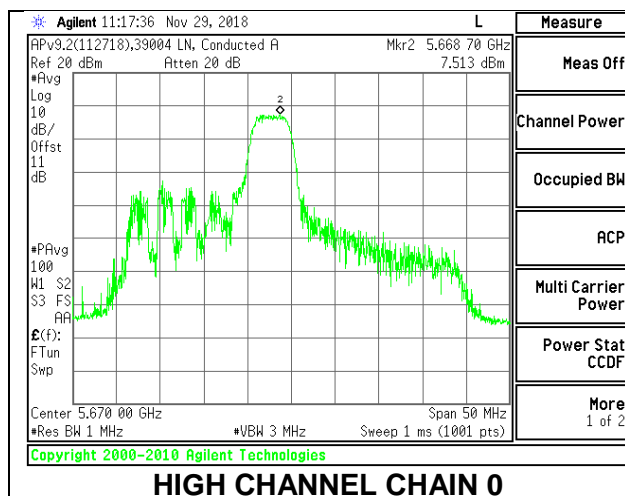

**CHANNEL 142**

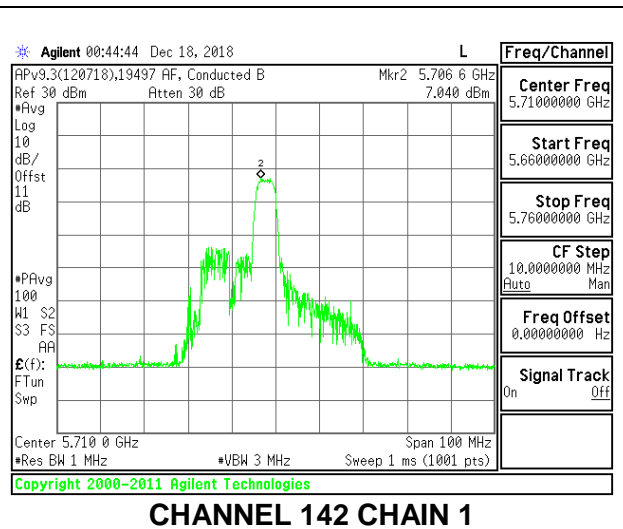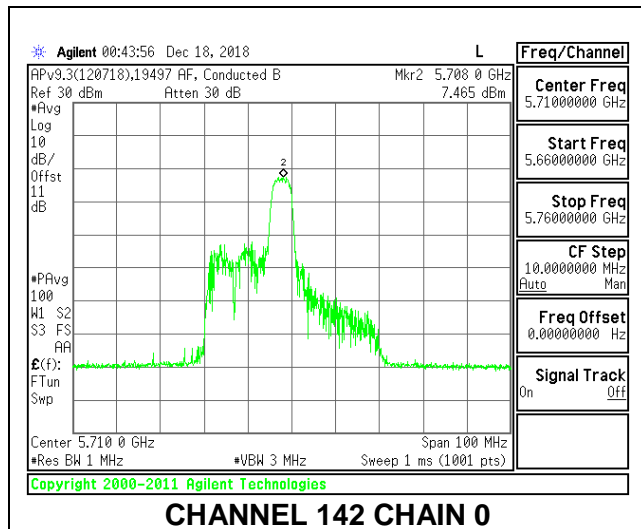

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	20.00	-2.30	0.71	24.00	11.00
Mid	5550	20.00	-0.56	2.35	24.00	11.00
High	5670	20.00	-0.56	2.35	24.00	11.00
142	5710	20.30	-0.56	2.35	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.17	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.4	11.5	14.98	24.00	-9.02
Mid	5550	12.4	11.52	14.99	24.00	-9.01
High	5670	12.4	11.48	14.97	24.00	-9.03
142	5710	12.38	11.47	14.96	24.00	-9.04

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.266	6.924	10.28	11.00	-0.72
Mid	5550	6.854	6.973	10.09	11.00	-0.91
High	5670	6.575	7.097	10.02	11.00	-0.98
142	5710	7.421	7.25	10.52	11.00	-0.48




**LOW CHANNEL**

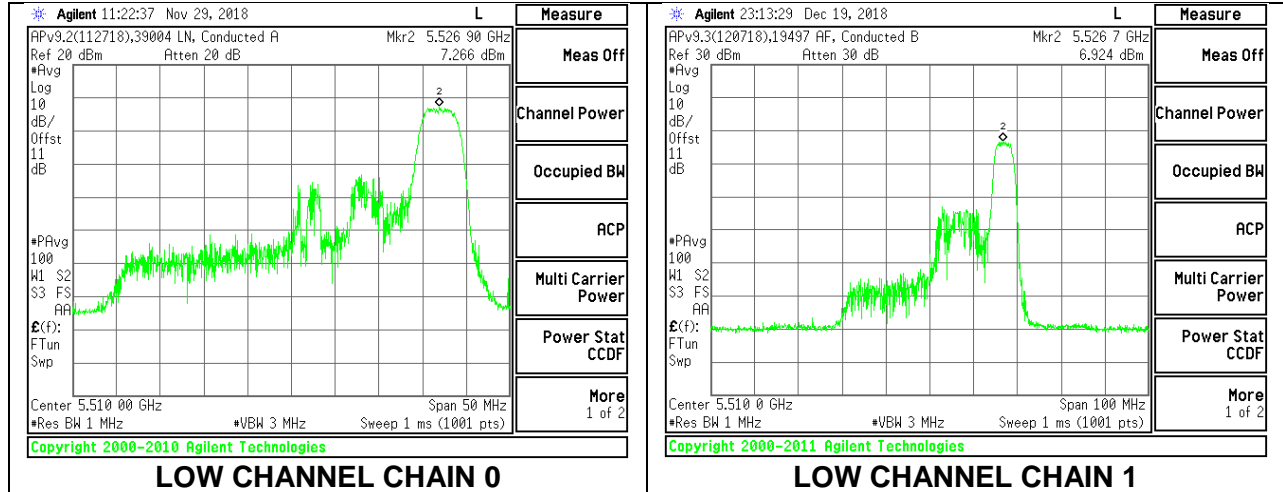



**MID CHANNEL**

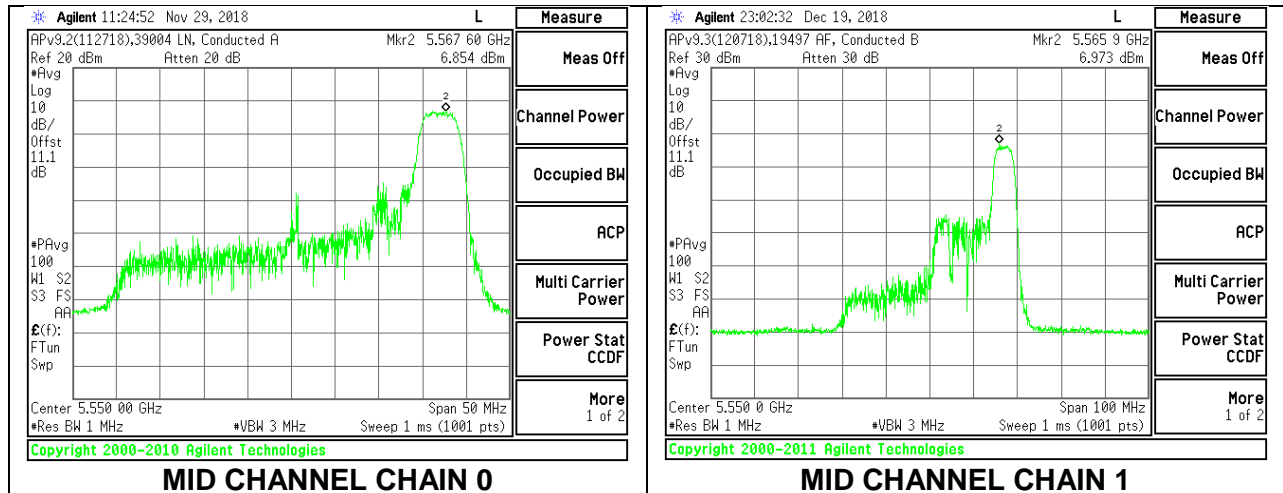

**HIGH CHANNEL**

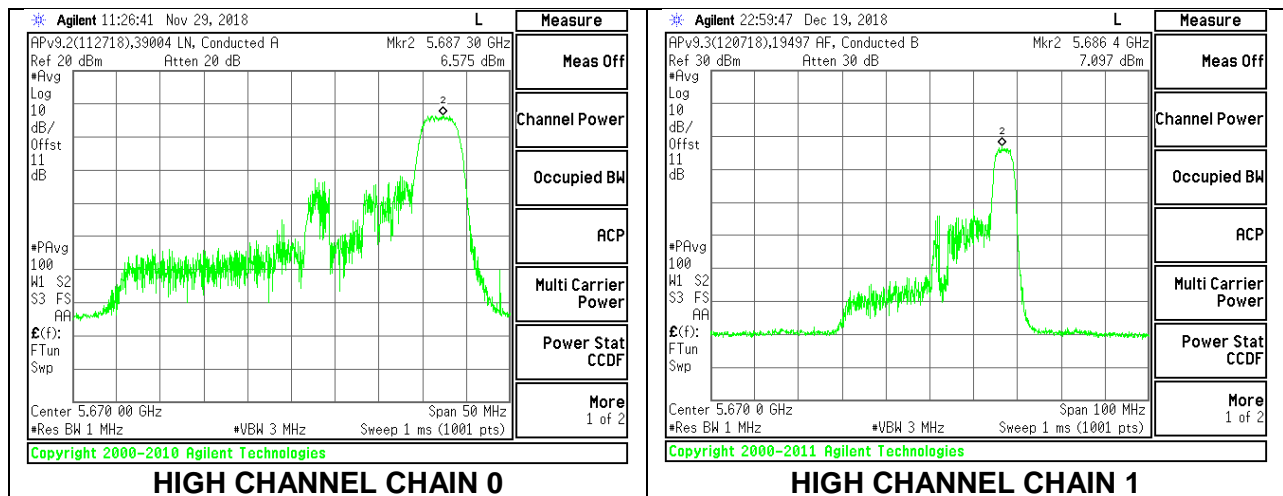

**CHANNEL 142**

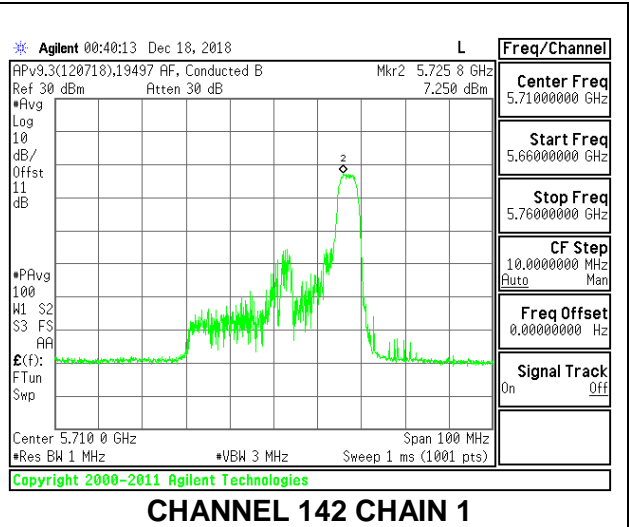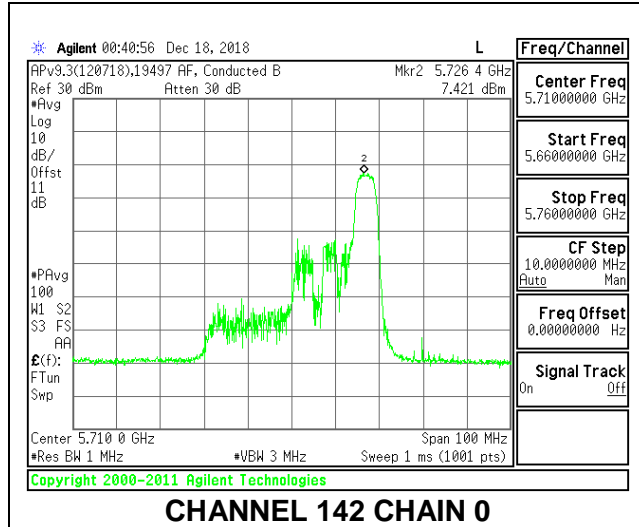

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	20.00	-2.30	0.71	24.00	11.00
Mid	5550	20.30	-2.30	0.71	24.00	11.00
High	5670	19.90	-2.30	0.71	23.99	11.00
142	5710	20.50	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.11	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	10.91	9.99	13.48	24.00	-10.52
Mid	5550	10.92	9.97	13.48	24.00	-10.52
High	5670	10.93	9.96	13.48	23.99	-10.51
142	5710	10.90	9.96	13.47	24.00	-10.53



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.189	6.963	10.20	11.00	-0.80
Mid	5550	6.865	6.906	10.01	11.00	-0.99
High	5670	7.129	7.076	10.22	11.00	-0.78
142	5710	7.31	7.3	10.43	11.00	-0.57



### LOW CHANNEL

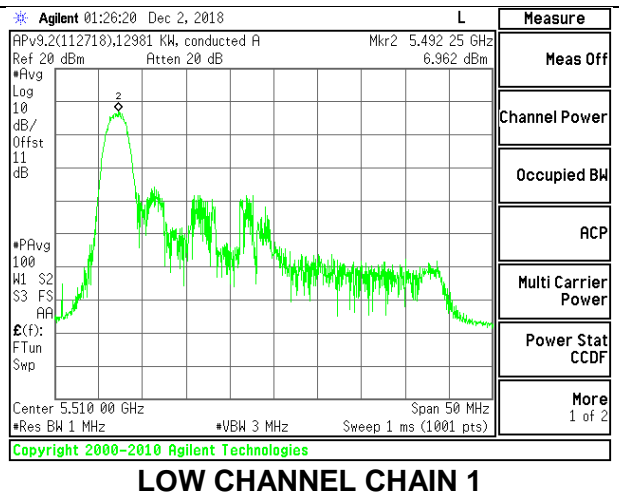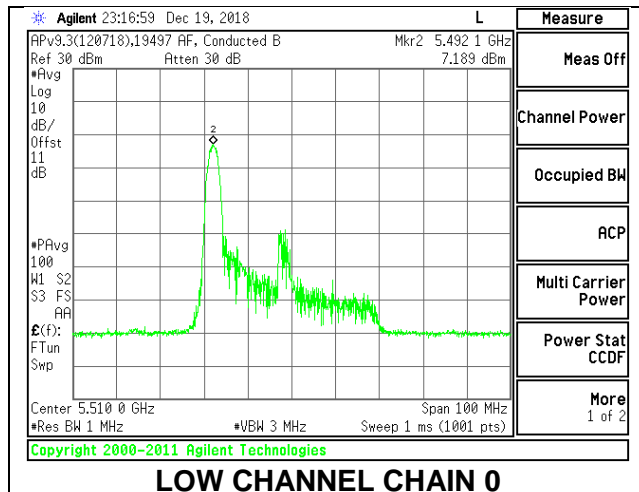



### MID CHANNEL

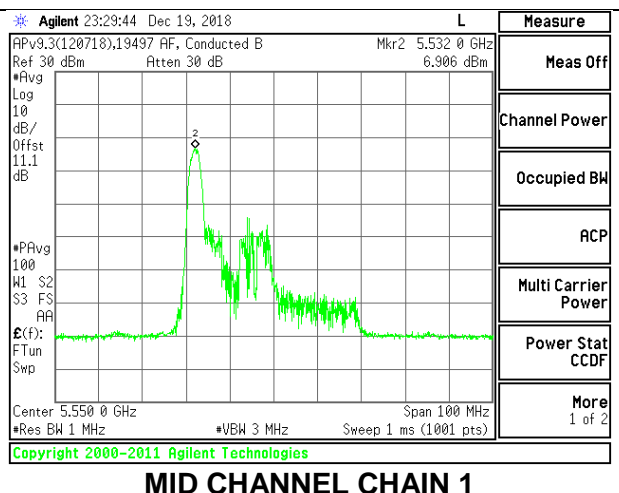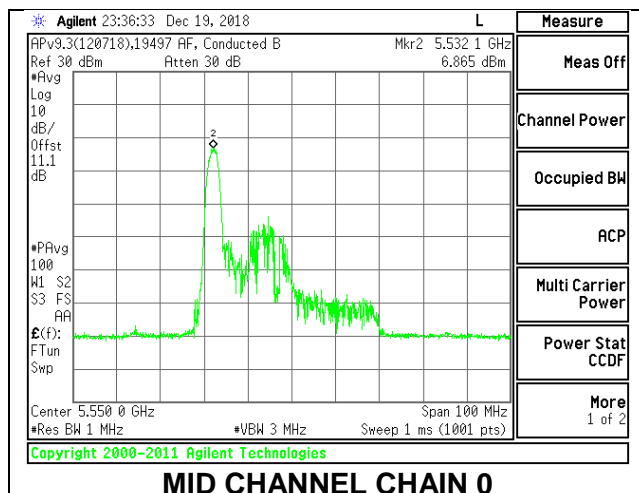

### HIGH CHANNEL

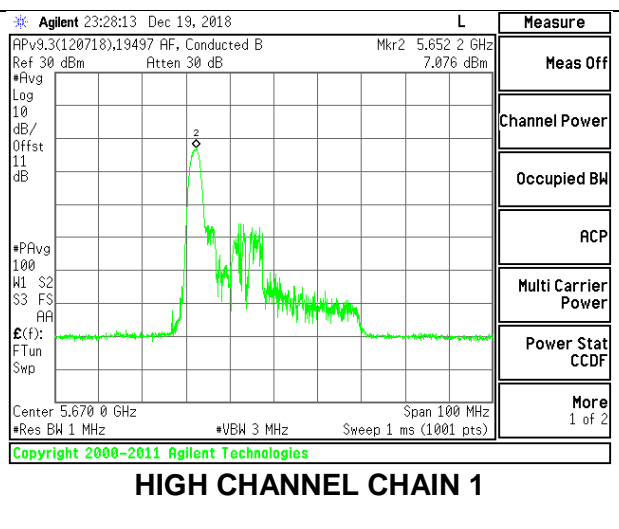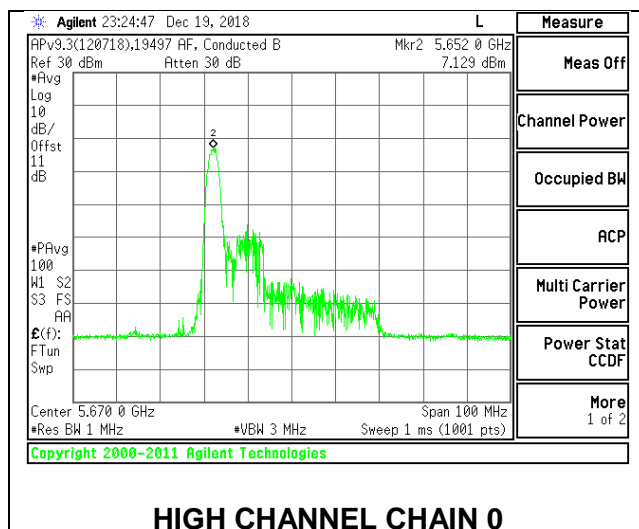

### CHANNEL 142

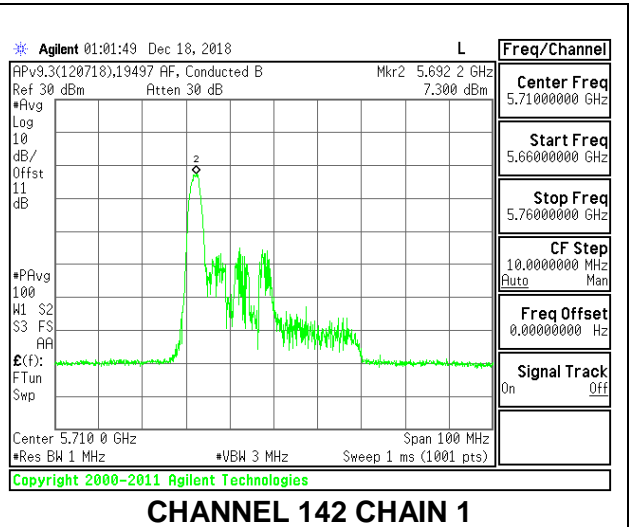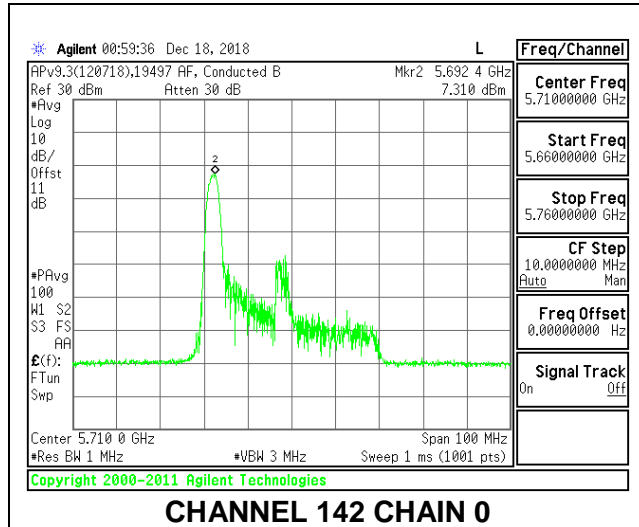

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	24.70	-2.30	0.71	24.00	11.00
Mid	5550	24.60	-2.30	0.71	24.00	11.00
High	5670	23.90	-2.30	0.71	24.00	11.00
142	5710	25.20	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.11	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	9.51	8.5	12.04	24.00	-11.96
Mid	5550	9.53	8.51	12.06	24.00	-11.94
High	5670	9.5	8.49	12.03	24.00	-11.97
142	5710	9.53	8.53	12.07	24.00	-11.93


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	7.269	6.858	10.19	11.00	-0.81
Mid	5550	7.244	7.094	10.29	11.00	-0.71
High	5670	7.079	7.194	10.26	11.00	-0.74
142	5710	7.312	7.331	10.44	11.00	-0.56


**LOW CHANNEL**

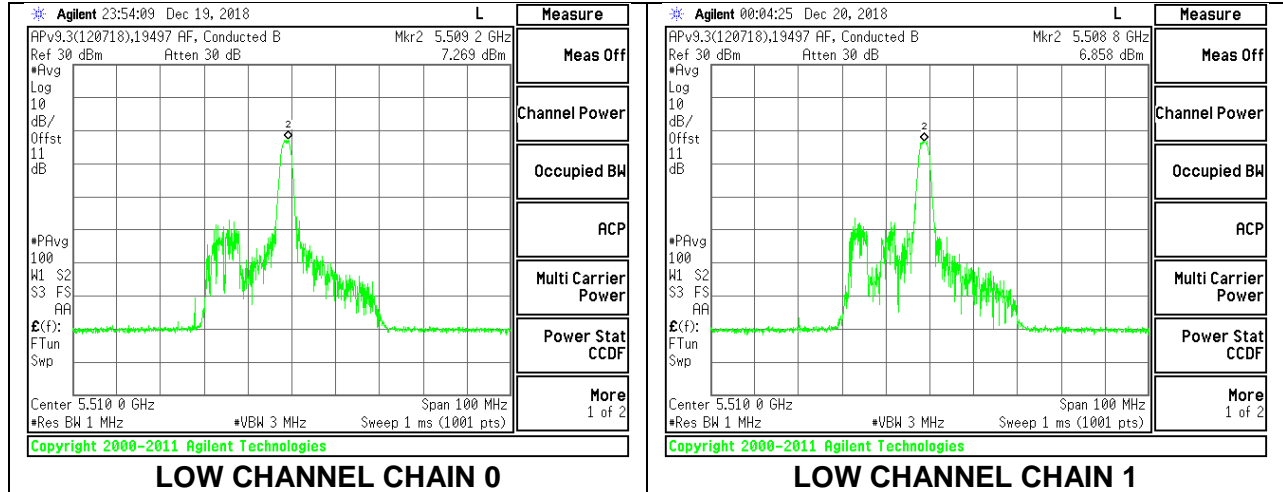


**MID CHANNEL**

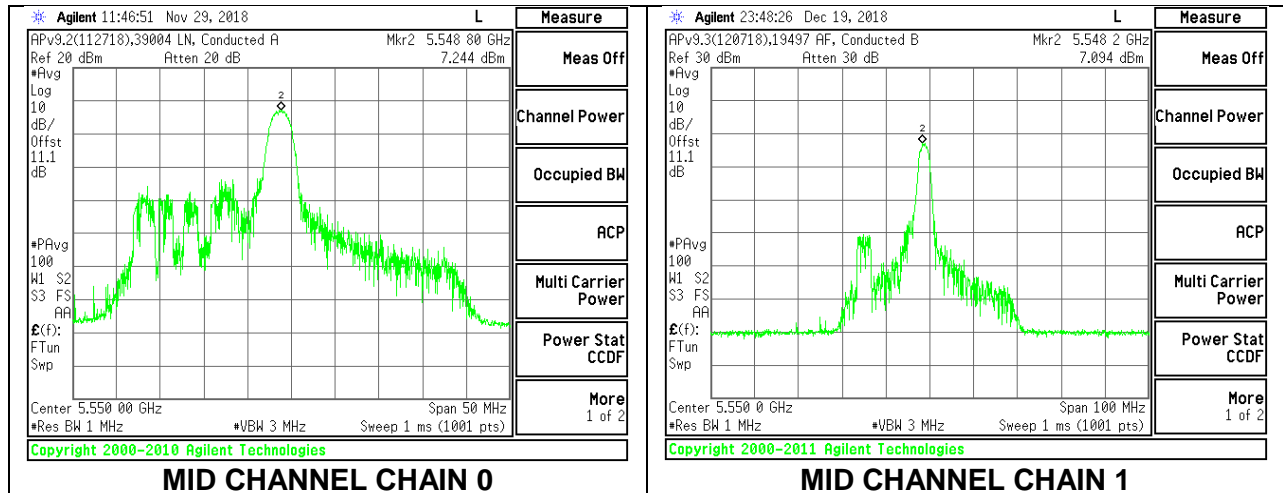

**HIGH CHANNEL**

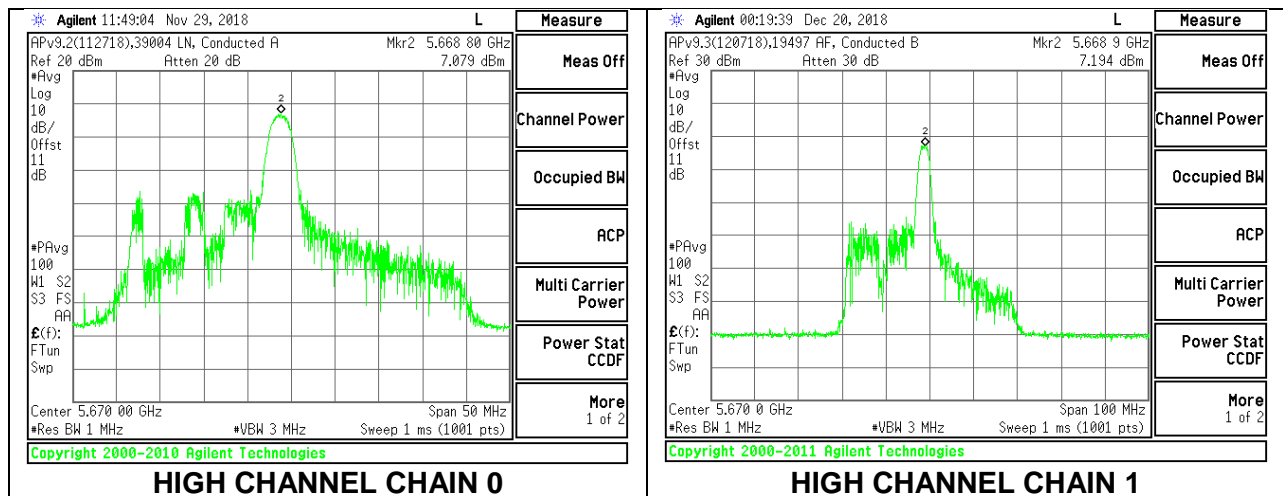

**CHANNEL 142**

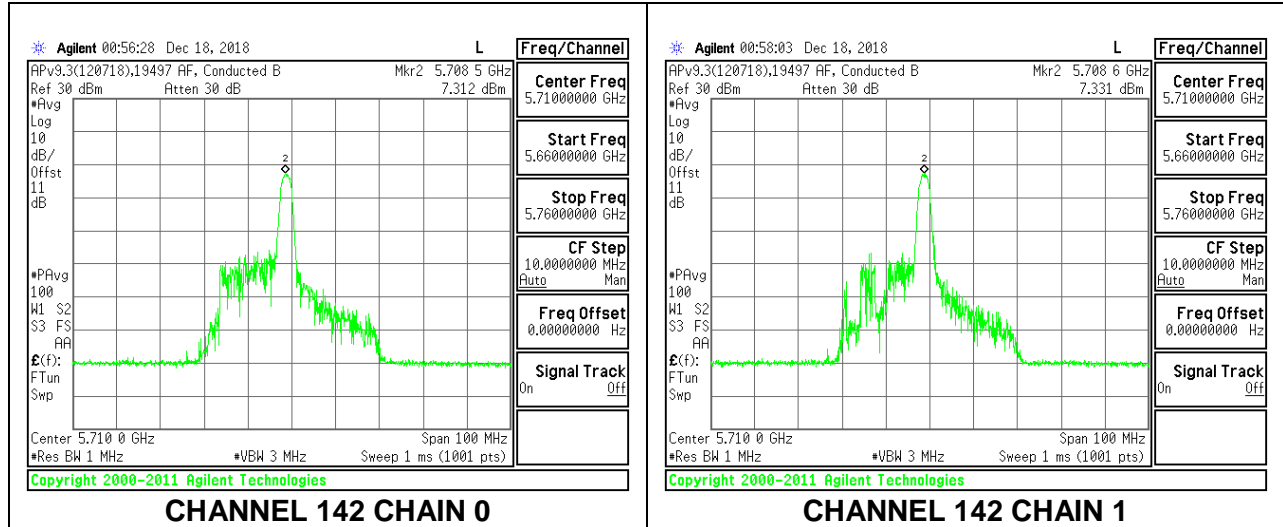



**2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 17**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5510	19.80	-2.30	0.71	23.97	11.00
Mid	5550	19.40	-2.30	0.71	23.88	11.00
High	5670	20.00	-2.30	0.71	24.00	11.00
142	5710	19.90	-2.30	0.71	23.99	11.00

<b>Duty Cycle CF (dB)</b>	0.11	<b>Included in Calculations of Corr'd Power &amp; PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	9.92	8.96	12.48	23.97	-11.49
Mid	5550	9.93	8.96	12.48	23.88	-11.40
High	5670	9.91	8.96	12.47	24.00	-11.53
142	5710	9.9	8.96	12.58	23.99	-11.41


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5510	6.497	6.505	9.62	11.00	-1.38
Mid	5550	6.217	6.695	9.58	11.00	-1.42
High	5670	6.366	6.392	9.50	11.00	-1.50
142	5710	7.415	7.435	10.55	11.00	-0.45


**LOW CHANNEL**

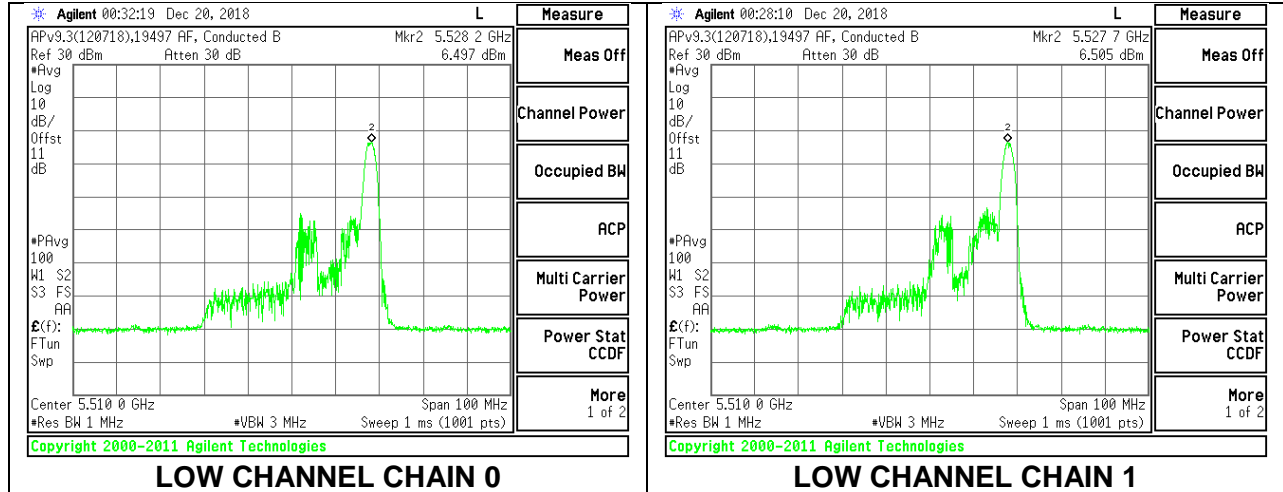



**MID CHANNEL**

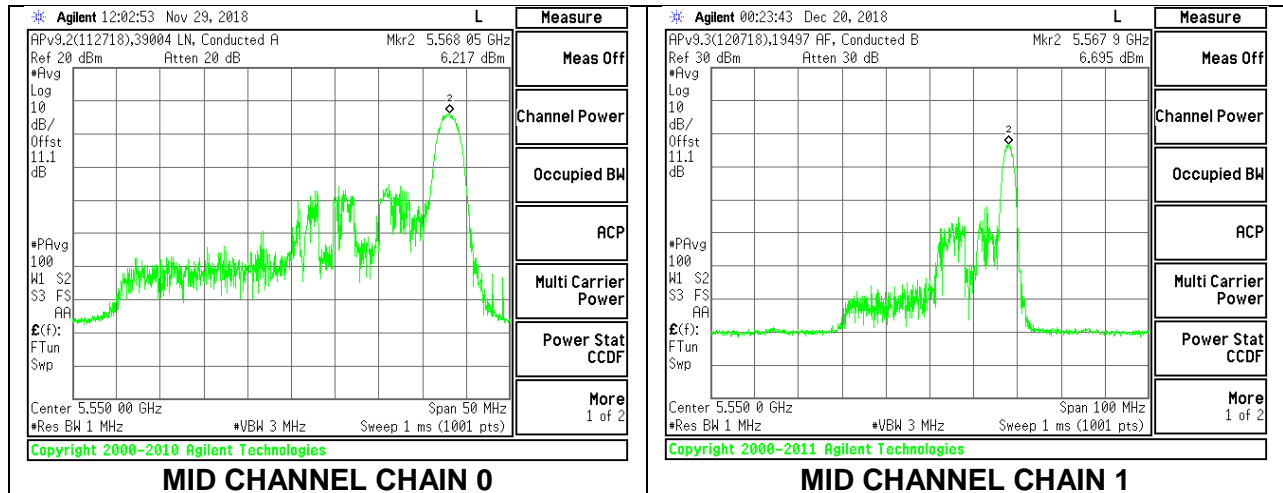

**HIGH CHANNEL**

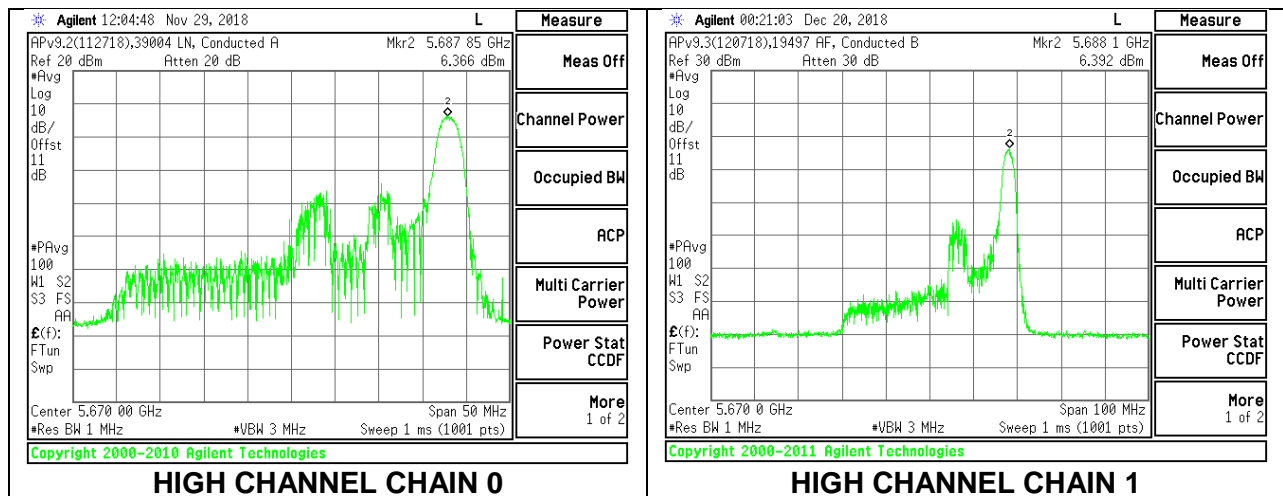

**CHANNEL 142**

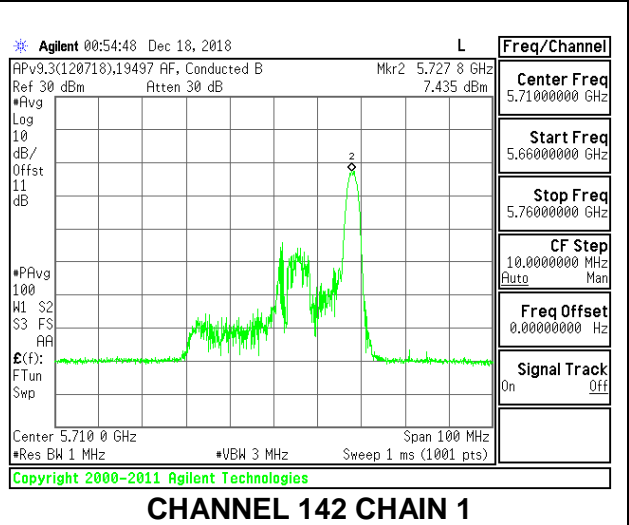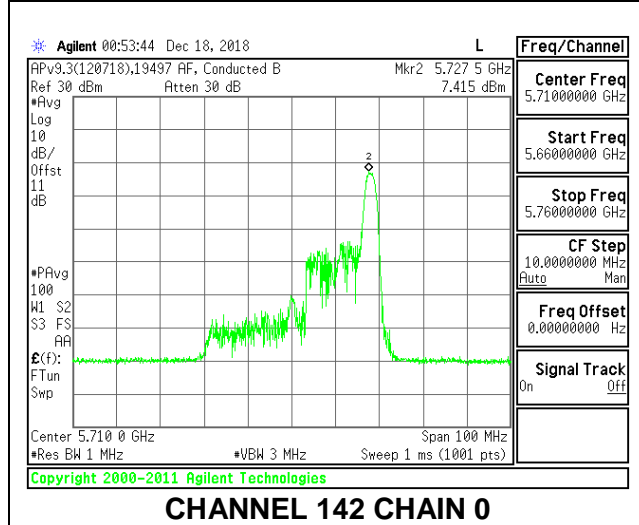

### 9.5.21. 802.11ax HE80 MODE IN THE 5.6 GHz BAND

#### 2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67

##### Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	83.40	-2.30	0.71	24.00	11.00
High	5610	83.60	-2.30	0.71	24.00	11.00
138	5690	83.60	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.89	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	14.86	13.78	17.36	24.00	-6.64
High	5610	14.92	13.82	17.42	24.00	-6.58
138	5690	14.89	13.76	17.37	24.00	-6.63



##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	-2.368	-2.68	2.38	11.00	-8.62
High	5610	-3.104	-3.12	1.79	11.00	-9.21
138	5690	-4.896	-4.153	0.39	11.00	-10.61



**LOW CHANNEL**

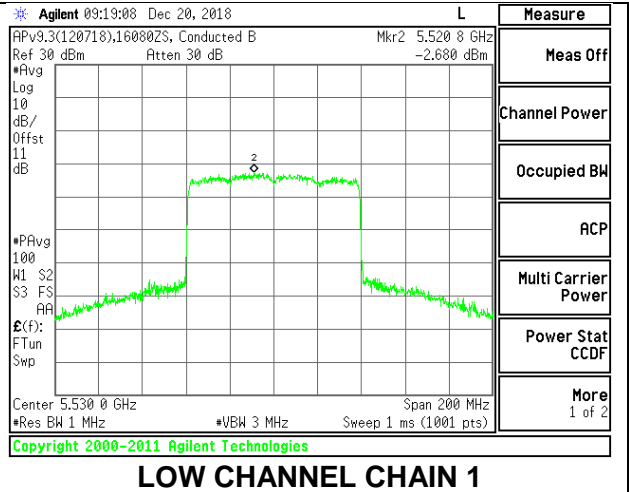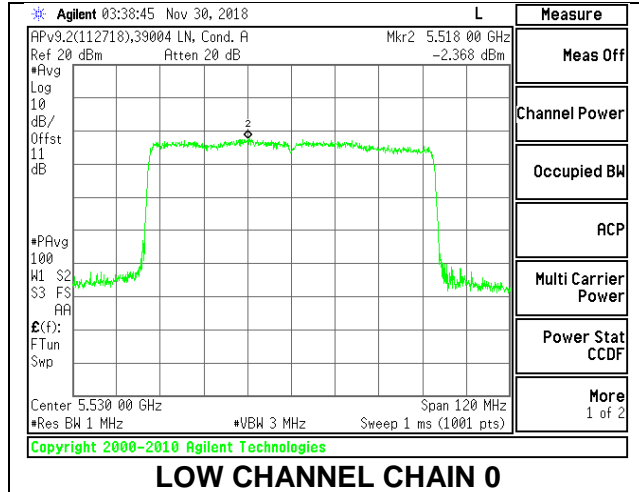

**HIGH CHANNEL**

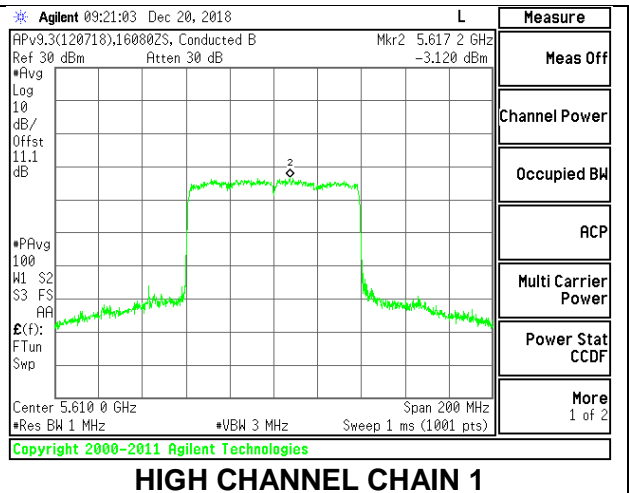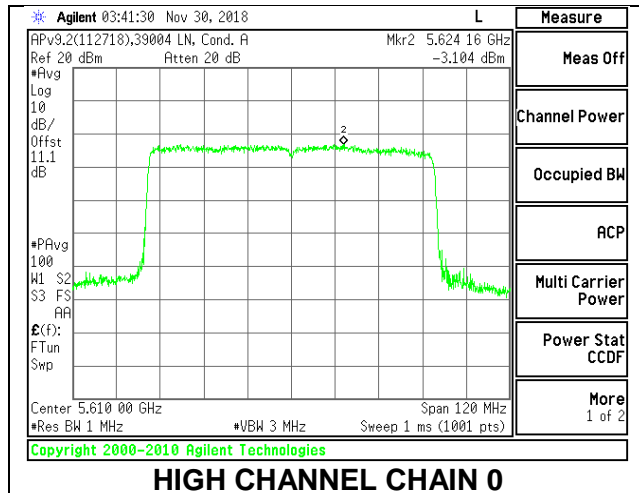

**CHANNEL 138**

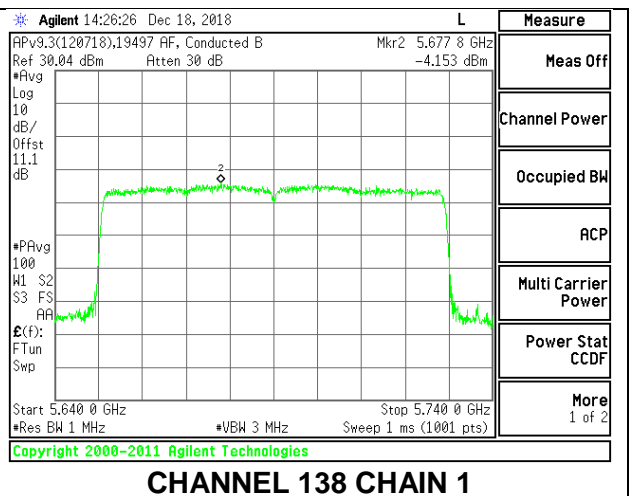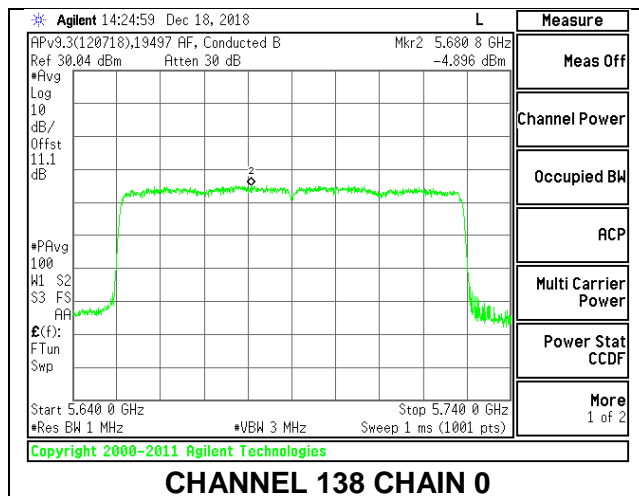

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	57.40	-2.30	0.71	24.00	11.00
High	5610	63.20	-2.30	0.71	24.00	11.00
138	5690	61.60	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.97	14.92	18.49	24.00	-5.51
High	5610	15.93	14.87	18.44	24.00	-5.56
138	5690	15.9	14.8	18.40	24.00	-5.60



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	1.287	0.793	5.28	11.00	-5.72
High	5610	0.742	0.478	4.84	11.00	-6.16
138	5690	0.159	-0.172	4.23	11.00	-6.77



**LOW CHANNEL**

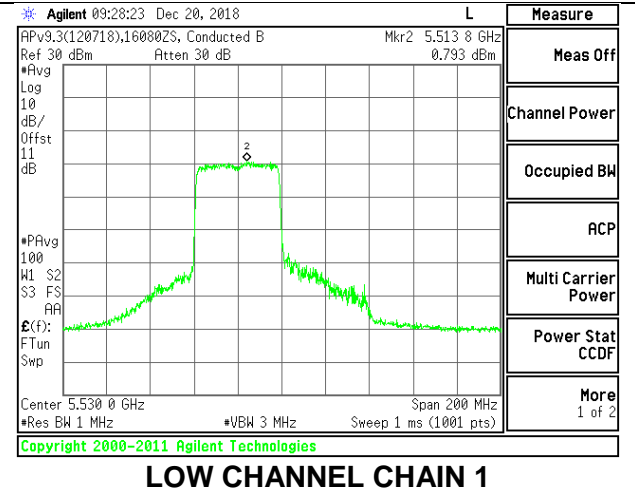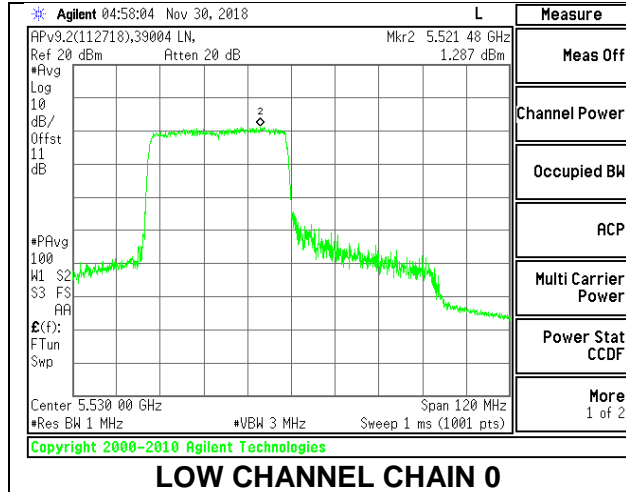

**HIGH CHANNEL**

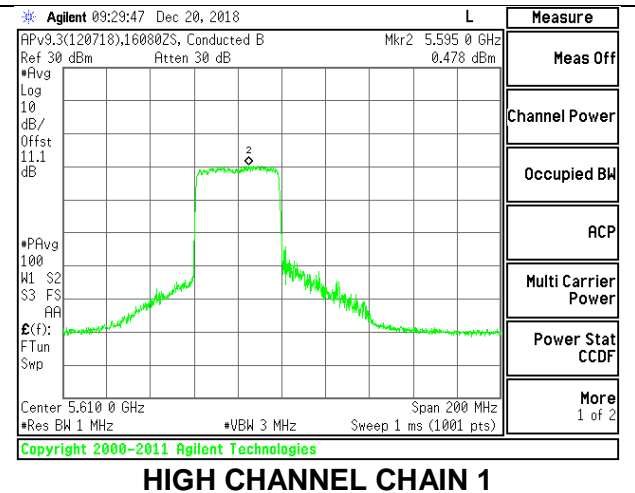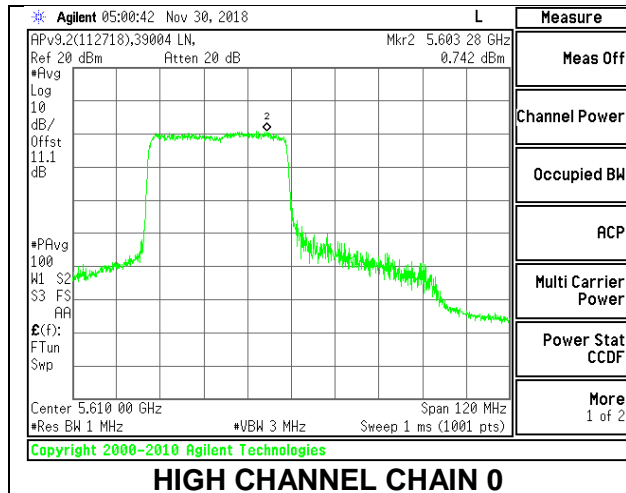

**CHANNEL 138**

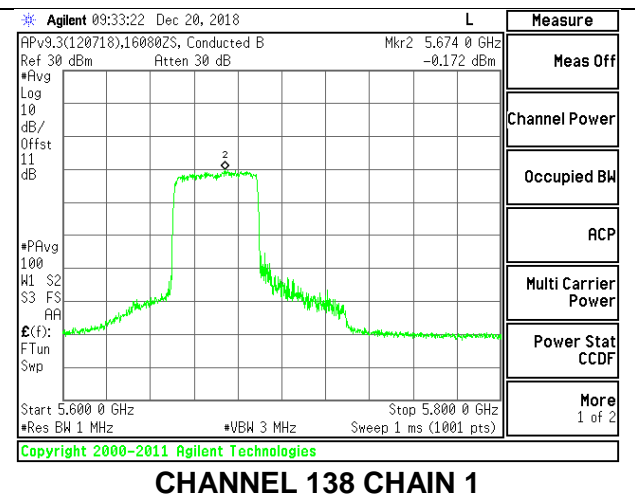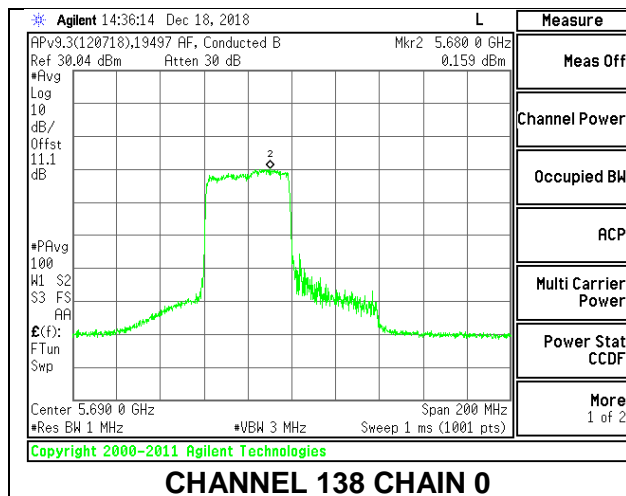

**2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 66**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	71.40	-2.30	0.71	24.00	11.00
High	5610	66.40	-2.30	0.71	24.00	11.00
138	5690	69.20	-2.30	0.71	24.00	11.00

<b>Duty Cycle CF (dB)</b>	1.22	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.87	14.9	18.42	24.00	-5.58
High	5610	15.89	14.85	18.41	24.00	-5.59
138	5690	15.9	14.82	18.40	24.00	-5.60

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	1.811	0.934	5.62	11.00	-5.38
High	5610	1.073	0.922	5.23	11.00	-5.77
138	5690	0.183	0.117	4.38	11.00	-6.62