

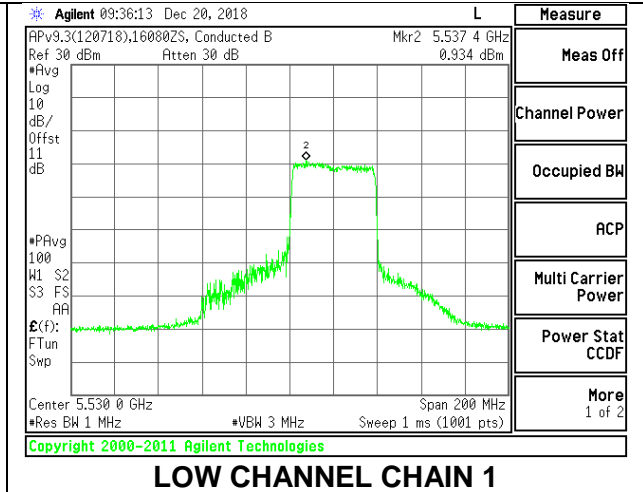
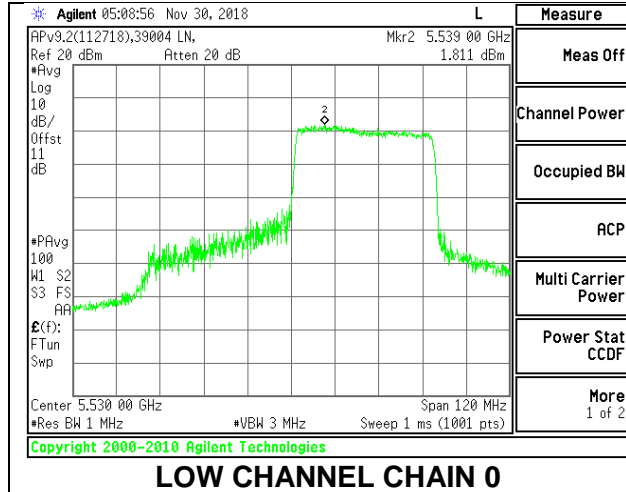




LOW CHANNEL

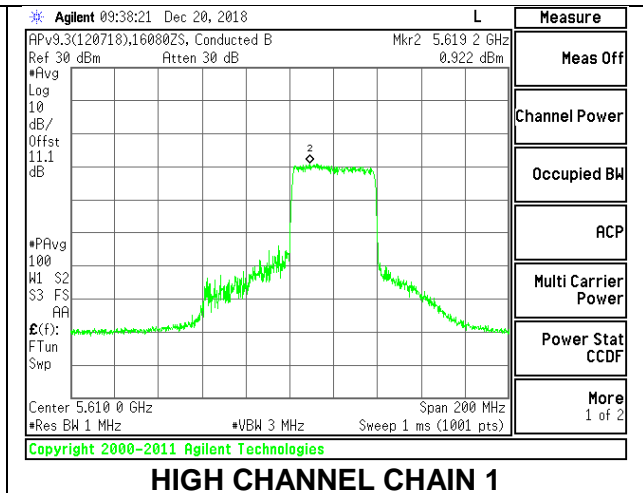

HIGH CHANNEL

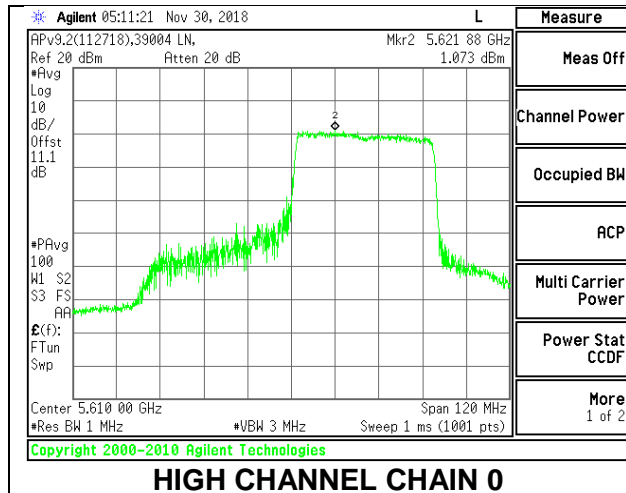

CHANNEL 138

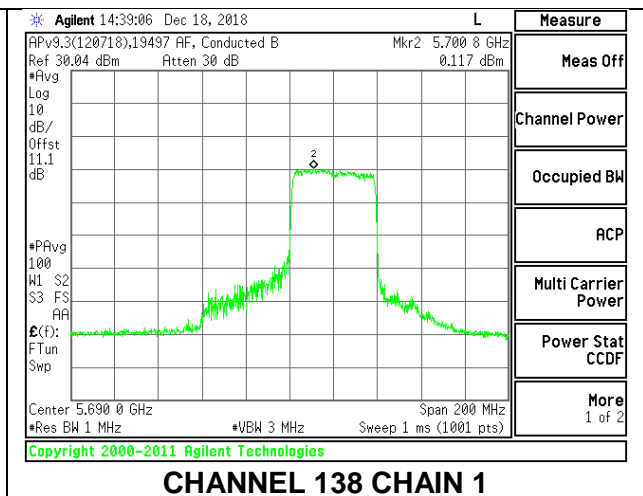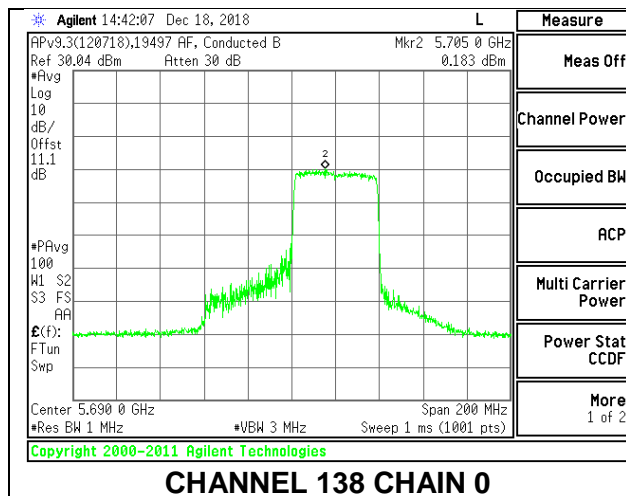

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	41.80	-2.30	0.71	24.00	11.00
High	5610	38.40	-2.30	0.71	24.00	11.00
138	5690	41.00	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	16.89	15.85	19.41	24.00	-4.59
High	5610	16.91	15.82	19.41	24.00	-4.59
138	5690	16.85	15.77	19.35	24.00	-4.65



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	4.954	4.491	8.46	11.00	-2.54
High	5610	5.075	4.946	8.74	11.00	-2.26
138	5690	3.750	4.151	7.69	11.00	-3.31



LOW CHANNEL

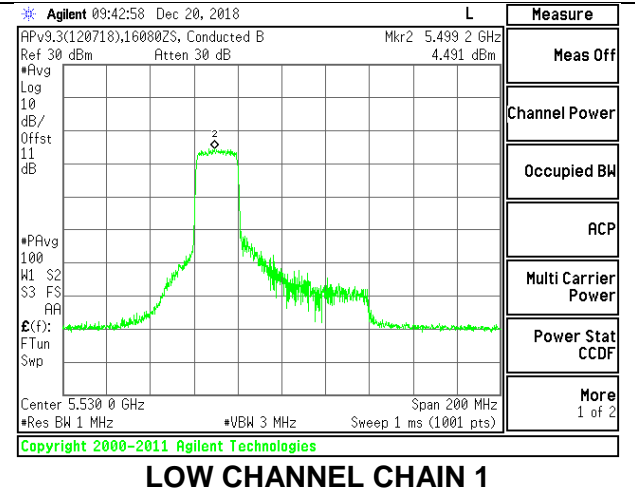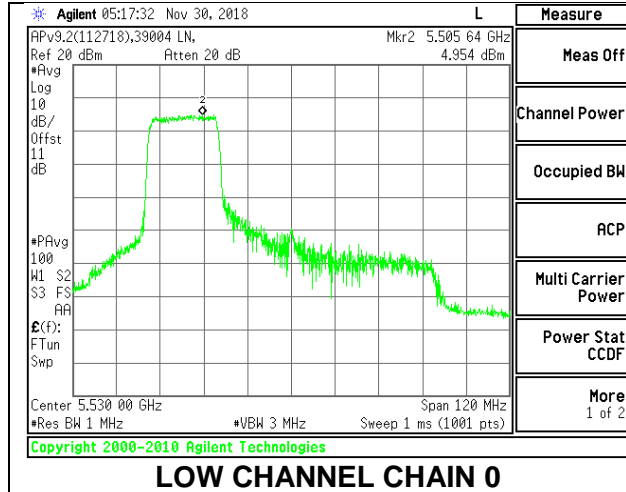

HIGH CHANNEL

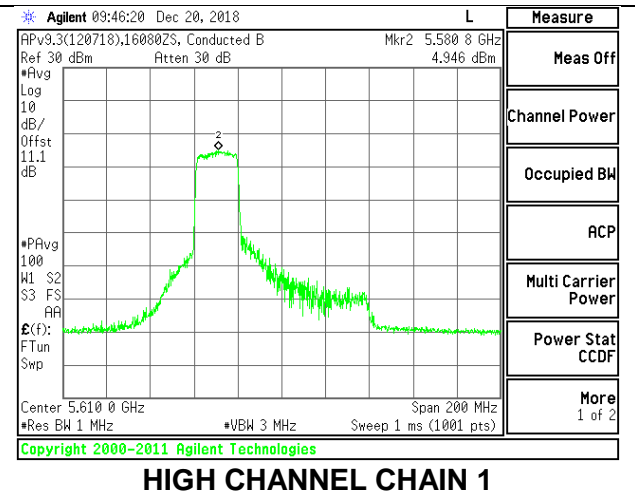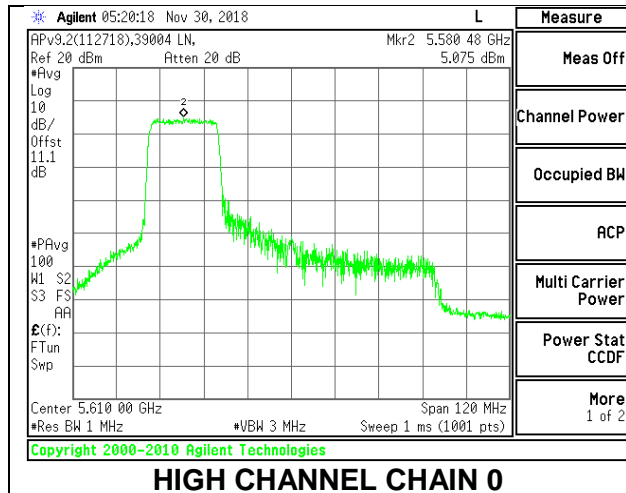

CHANNEL 138

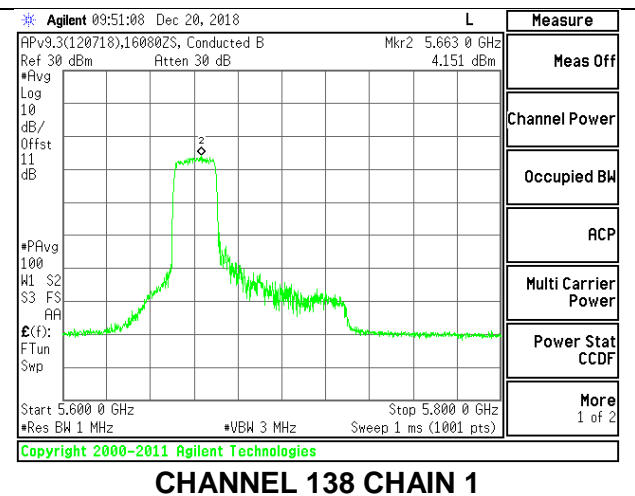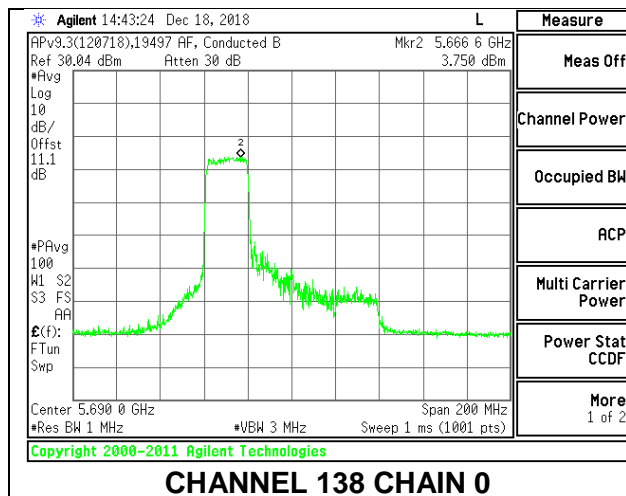

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	53.40	-2.30	0.71	24.00	11.00
High	5610	53.20	-2.30	0.71	24.00	11.00
138	5690	52.40	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	16.87	15.78	19.37	24.00	-4.63
High	5610	16.91	15.7	19.36	24.00	-4.64
138	5690	16.92	15.67	19.35	24.00	-4.65



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	5.149	4.725	8.67	11.00	-2.33
High	5610	5.313	5.217	9.00	11.00	-2.00
138	5690	4.463	4.057	8.00	11.00	-3.00



LOW CHANNEL

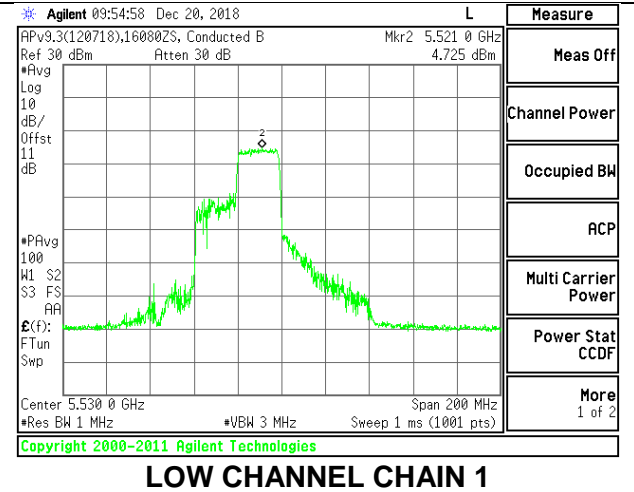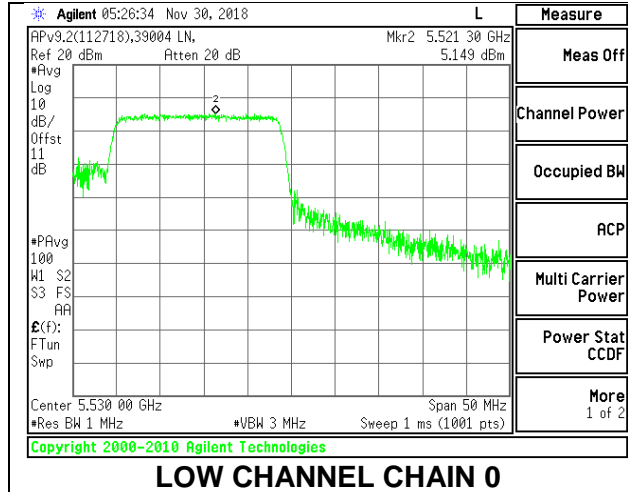

HIGH CHANNEL

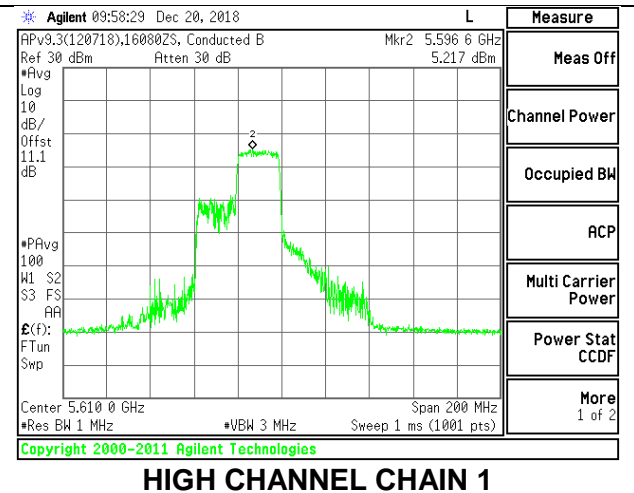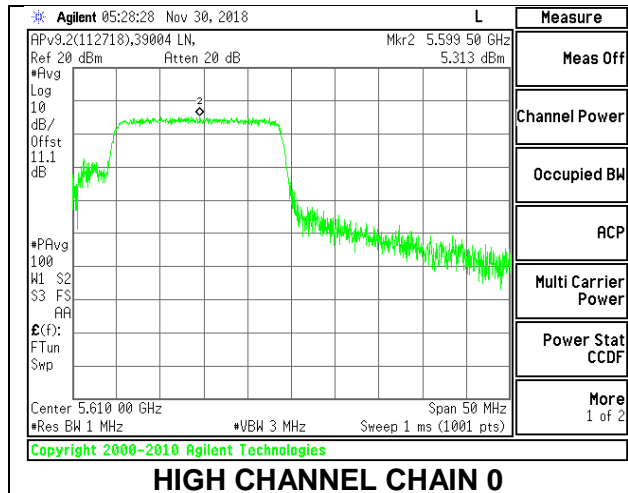

CHANNEL 138

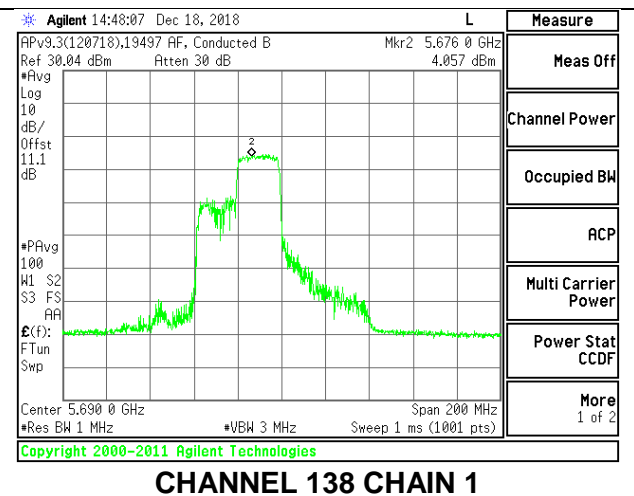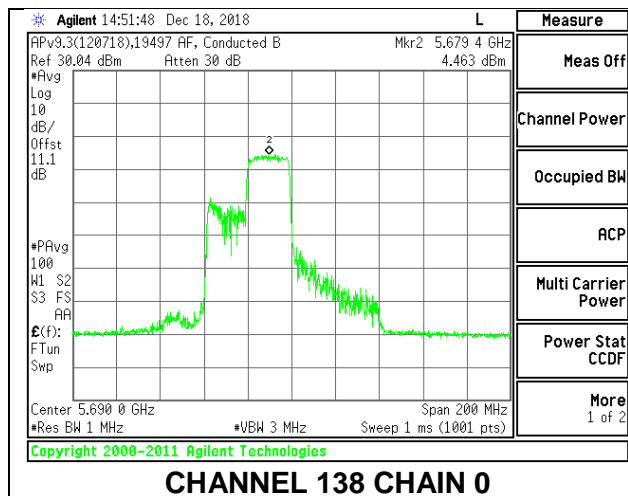

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 64

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	41.60	-2.30	0.71	24.00	11.00
High	5610	47.00	-2.30	0.71	24.00	11.00
138	5690	43.60	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	16.72	15.45	19.14	24.00	-4.86
High	5610	16.63	15.40	19.07	24.00	-4.93
138	5690	16.54	15.37	19.00	24.00	-5.00



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	4.948	4.450	8.44	11.00	-2.56
High	5610	4.361	4.282	8.05	11.00	-2.95
138	5690	4.171	4.739	8.19	11.00	-2.81



LOW CHANNEL

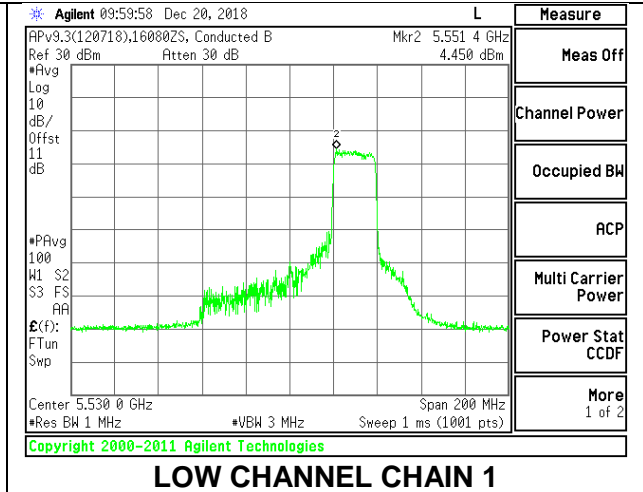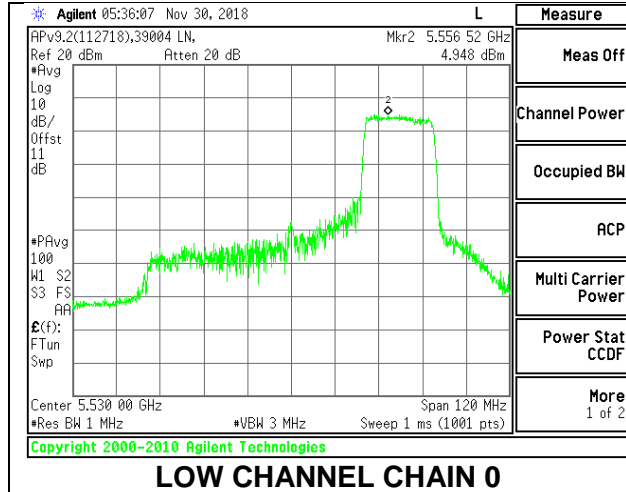

HIGH CHANNEL

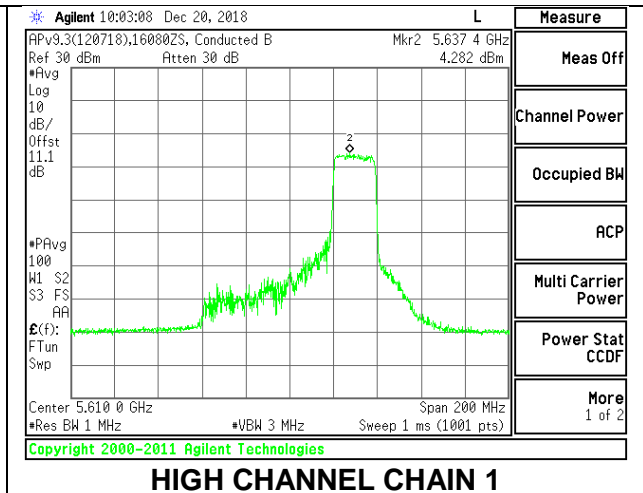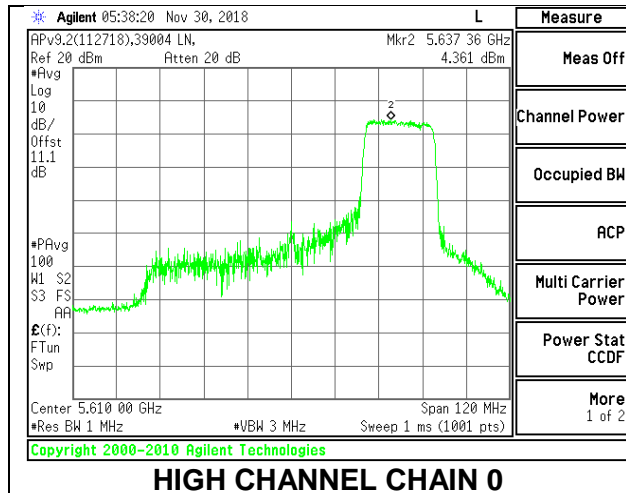

CHANNEL 138

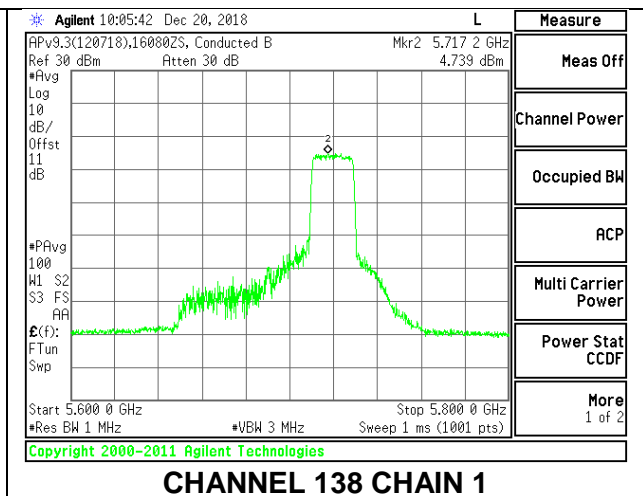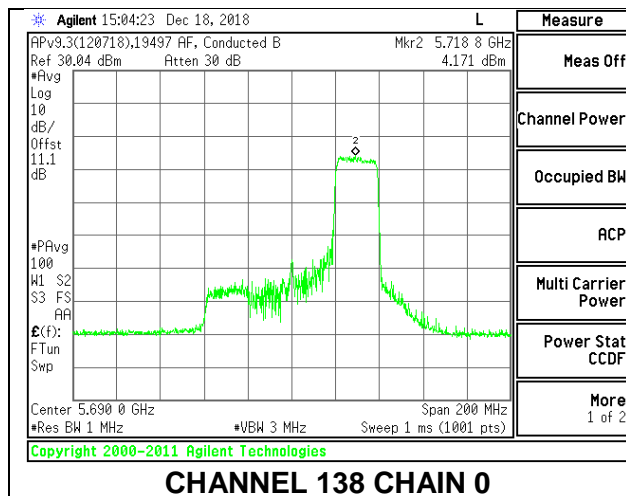

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	25.60	-2.30	0.71	24.00	11.00
High	5610	24.60	-2.30	0.71	24.00	11.00
138	5690	22.60	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.84	14.87	18.39	24.00	-5.61
High	5610	15.82	14.8	18.35	24.00	-5.65
138	5690	15.89	14.82	18.40	24.00	-5.60



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.086	6.708	10.27	11.00	-0.73
High	5610	6.93	6.609	10.14	11.00	-0.86
138	5690	6.33	6.496	9.78	11.00	-1.22



LOW CHANNEL

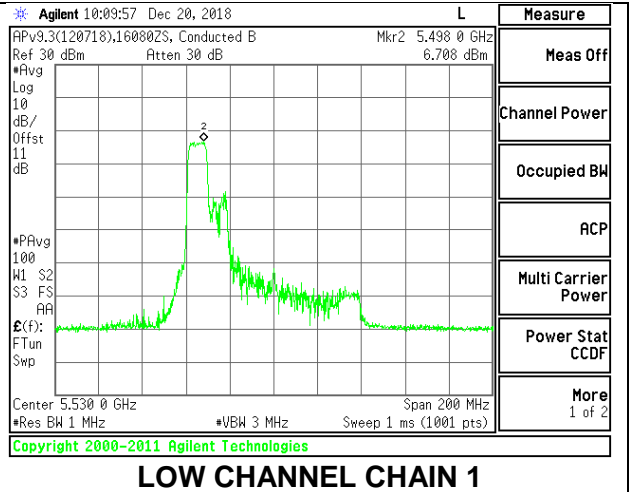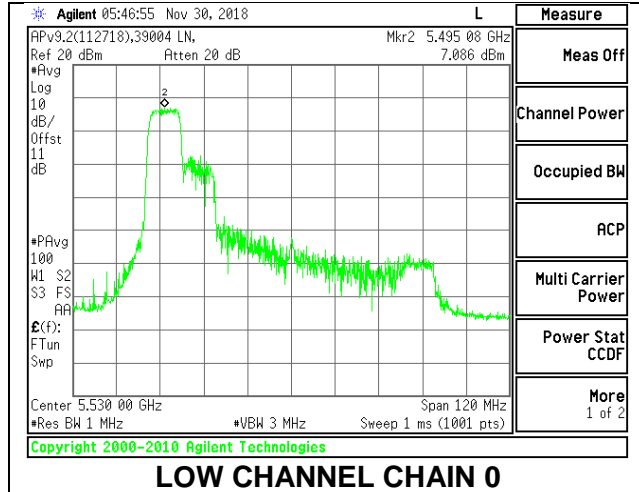

HIGH CHANNEL

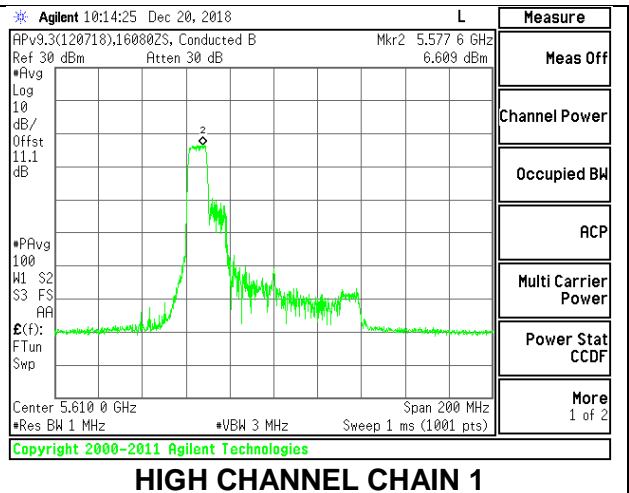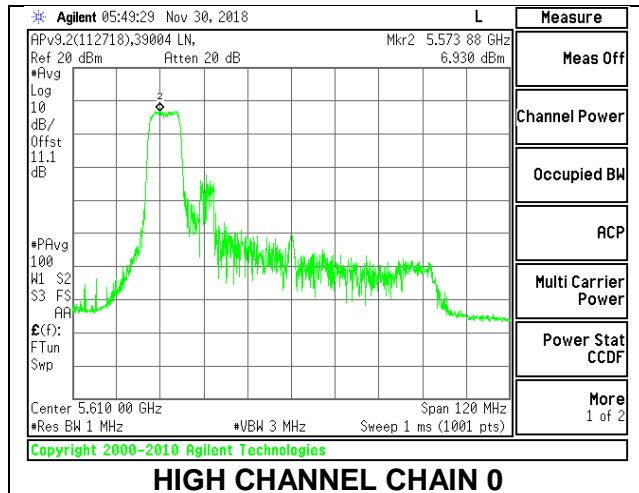

CHANNEL 138

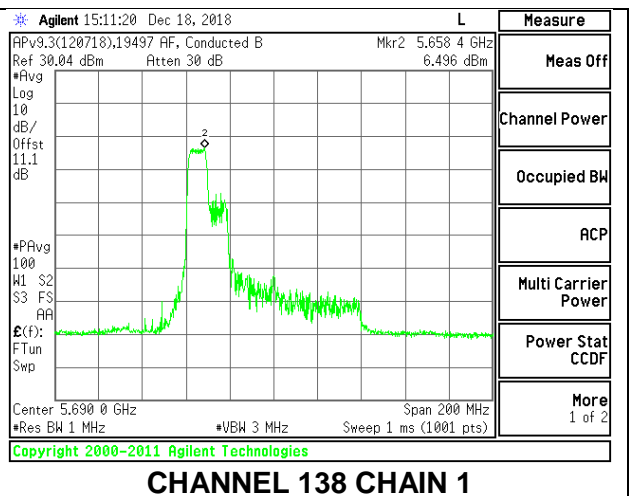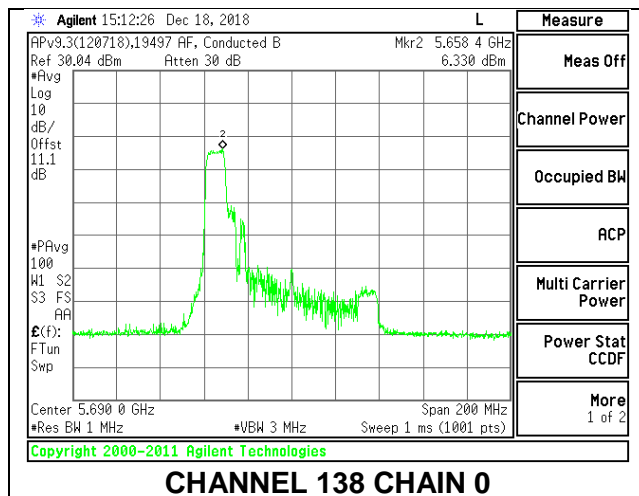

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	39.00	-2.30	0.71	24.00	11.00
High	5610	31.80	-2.30	0.71	24.00	11.00
138	5690	33.80	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.96	14.9	18.47	24.00	-5.53
High	5610	15.92	14.85	18.43	24.00	-5.57
138	5690	15.9	14.82	18.40	24.00	-5.60



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.737	6.697	10.62	11.00	-0.38
High	5610	6.783	6.406	9.97	11.00	-1.03
138	5690	6.548	6.591	9.94	11.00	-1.06



LOW CHANNEL

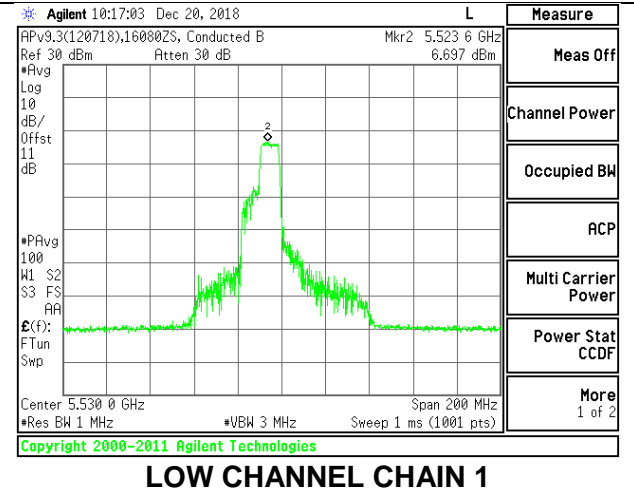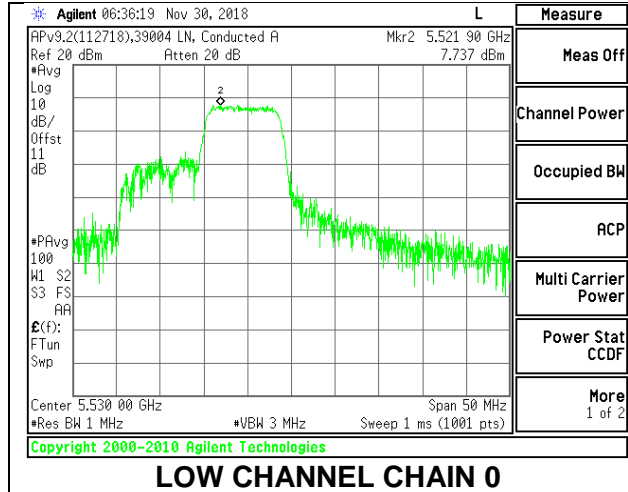

HIGH CHANNEL

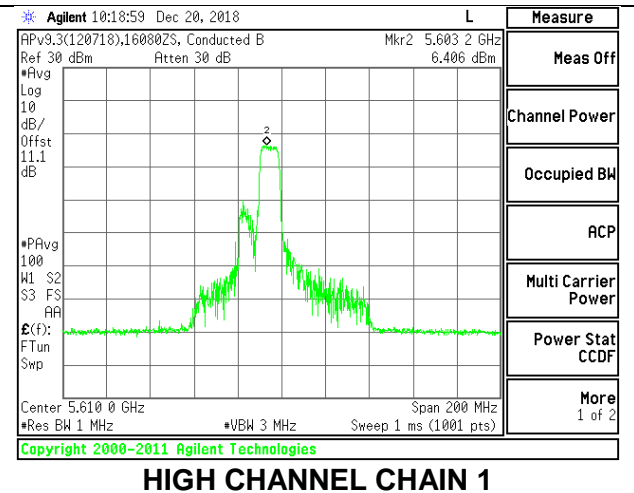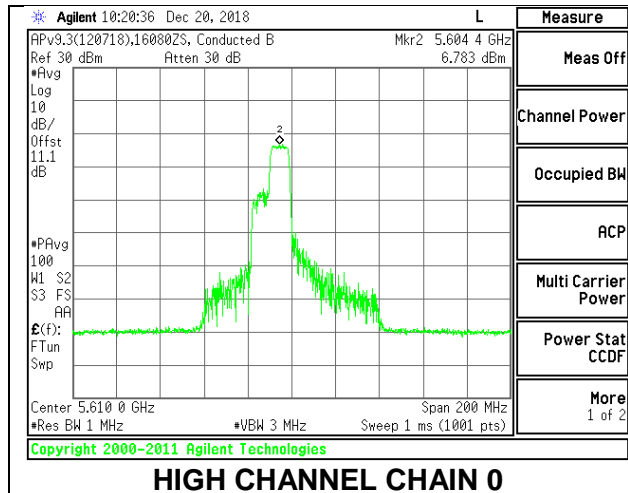

CHANNEL 138

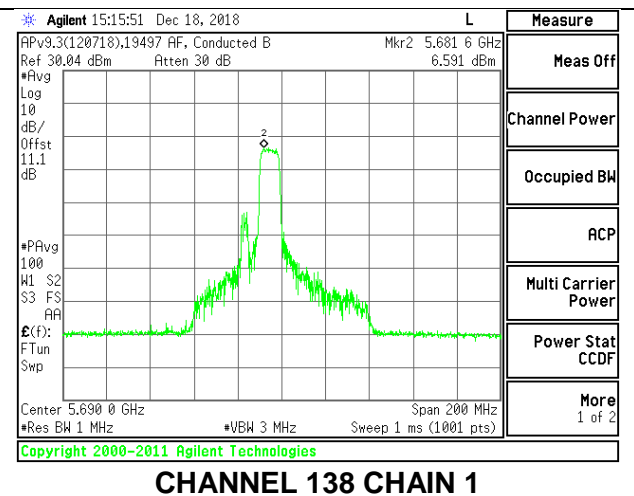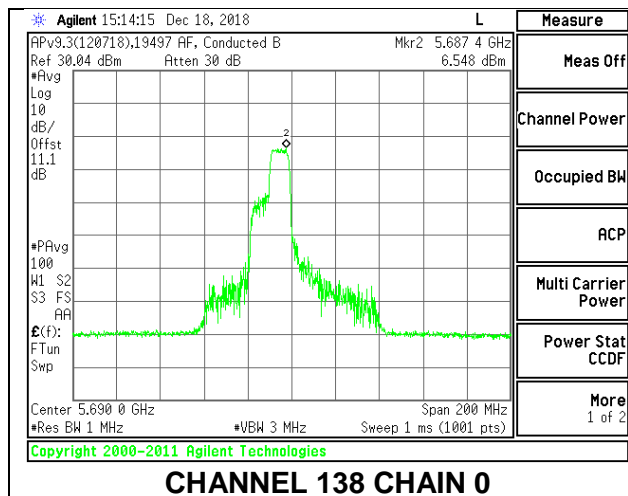

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 60

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	27.20	-2.30	0.71	24.00	11.00
High	5610	27.20	-2.30	0.71	24.00	11.00
138	5690	25.40	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	15.78	14.72	18.29	24.00	-5.71
High	5610	15.81	14.68	18.29	24.00	-5.71
138	5690	15.73	14.62	18.22	24.00	-5.78



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.278	6.905	10.47	11.00	-0.53
High	5610	7.622	7.22	10.80	11.00	-0.20
138	5690	6.567	6.905	10.11	11.00	-0.89



LOW CHANNEL

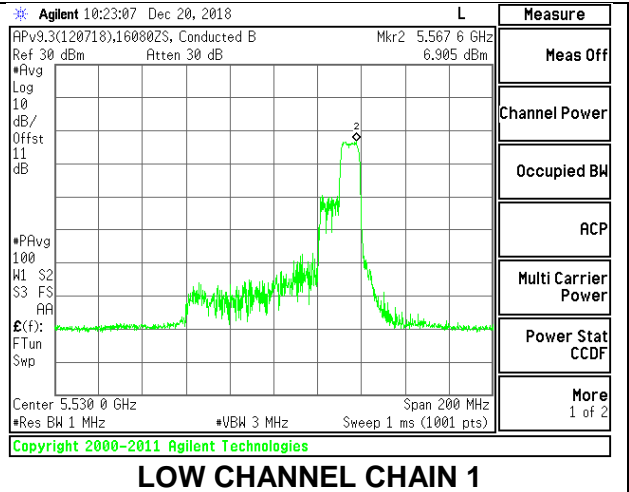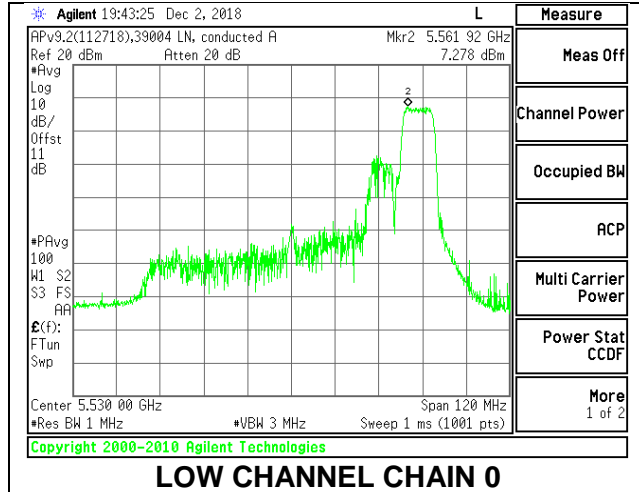

HIGH CHANNEL

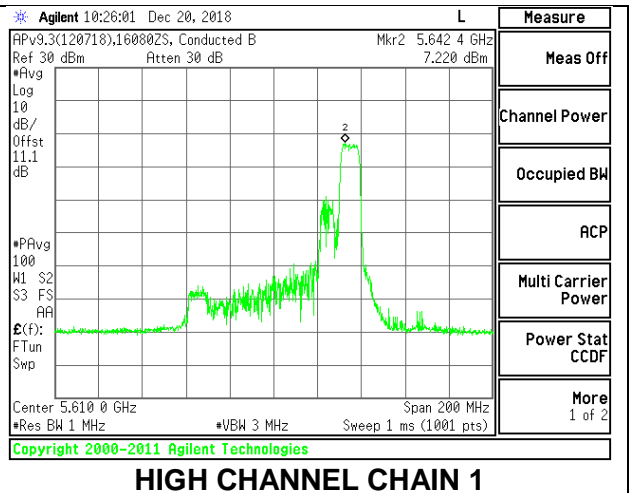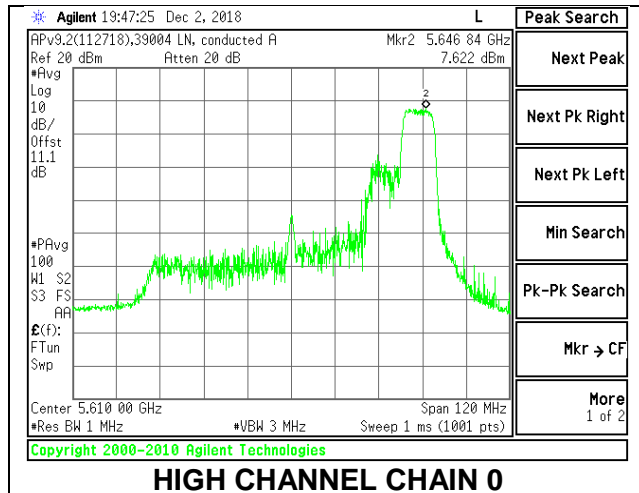

CHANNEL 138

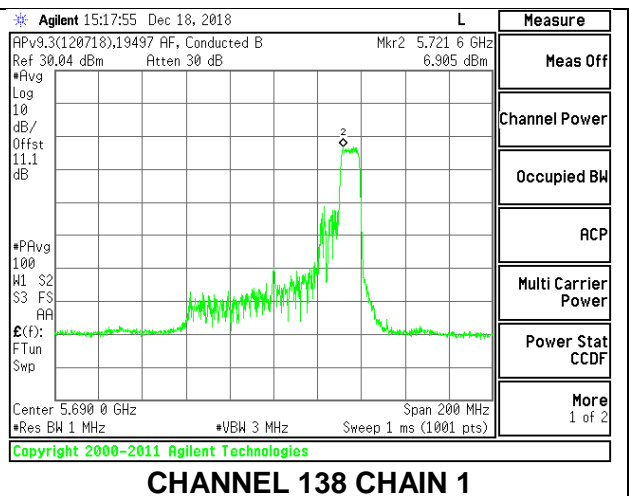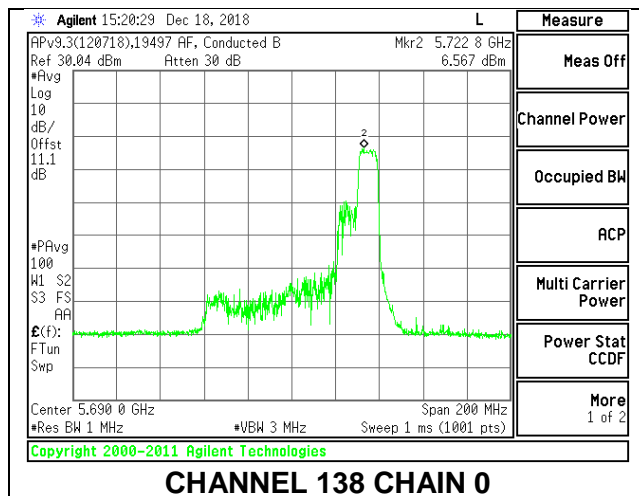

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	22.20	-2.30	0.71	24.00	11.00
High	5610	22.20	-2.30	0.71	24.00	11.00
138	5690	22.20	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.89	11.82	15.40	24.00	-8.60
High	5610	12.92	11.78	15.40	24.00	-8.60
138	5690	12.91	11.75	15.38	24.00	-8.62



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	6.482	6.438	9.63	11.00	-1.37
High	5610	6.881	7.036	10.13	11.00	-0.87
138	5690	6.382	6.308	9.52	11.00	-1.48



LOW CHANNEL

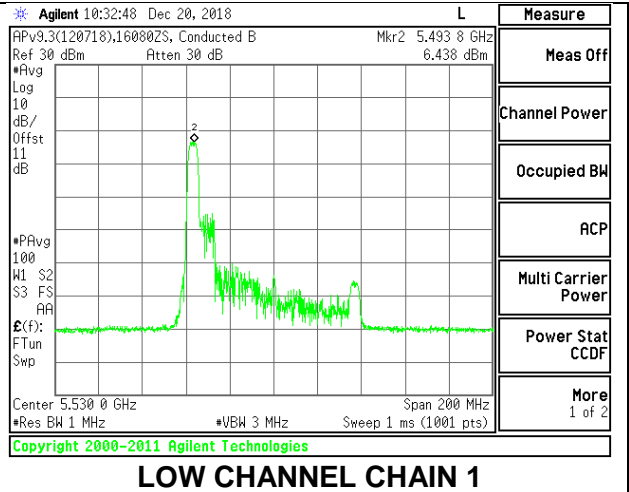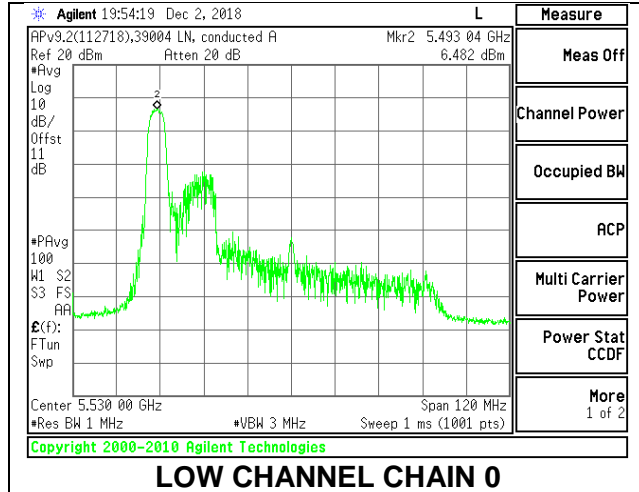

HIGH CHANNEL

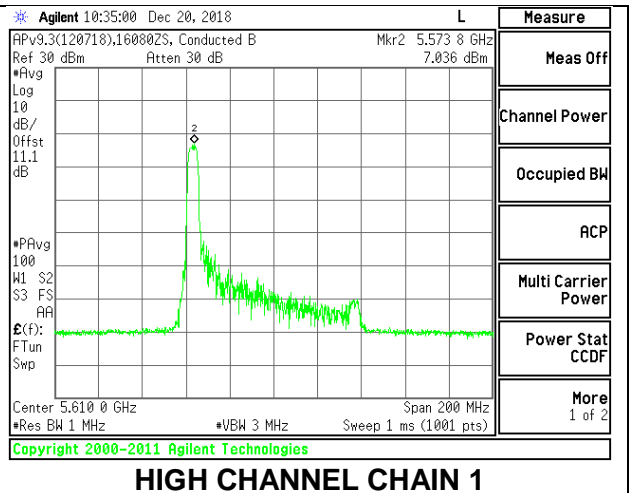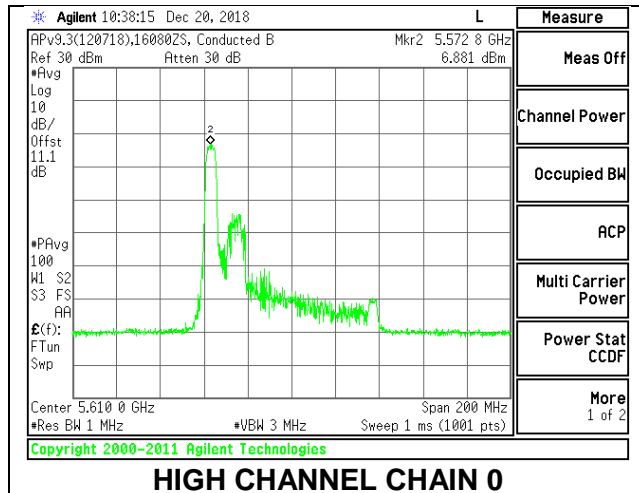

CHANNEL 138

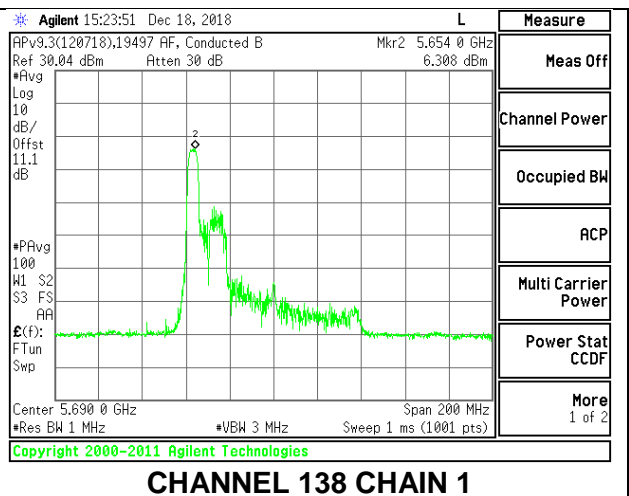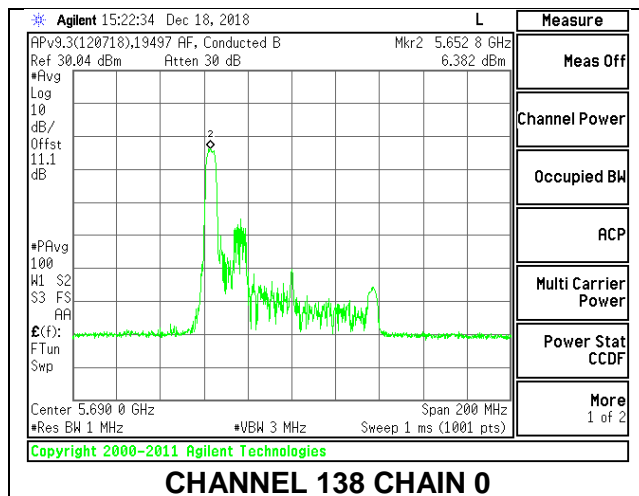

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	29.80	-2.30	0.71	24.00	11.00
High	5610	29.40	-2.30	0.71	24.00	11.00
138	5690	29.20	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.85	11.73	15.34	24.00	-8.66
High	5610	12.88	11.68	15.33	24.00	-8.67
138	5690	12.8	11.7	15.30	24.00	-8.70



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	6.547	6.546	9.72	11.00	-1.28
High	5610	7.524	6.932	10.41	11.00	-0.59
138	5690	6.208	6.137	9.34	11.00	-1.66



LOW CHANNEL

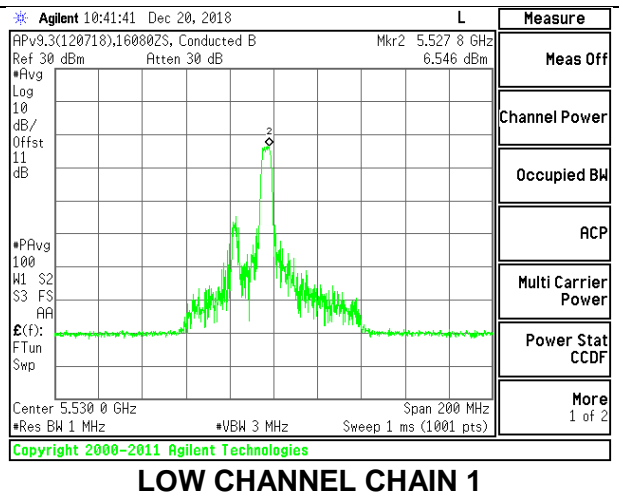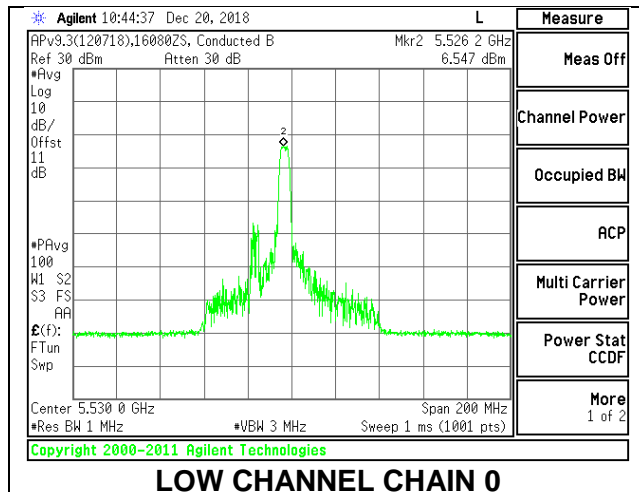

HIGH CHANNEL

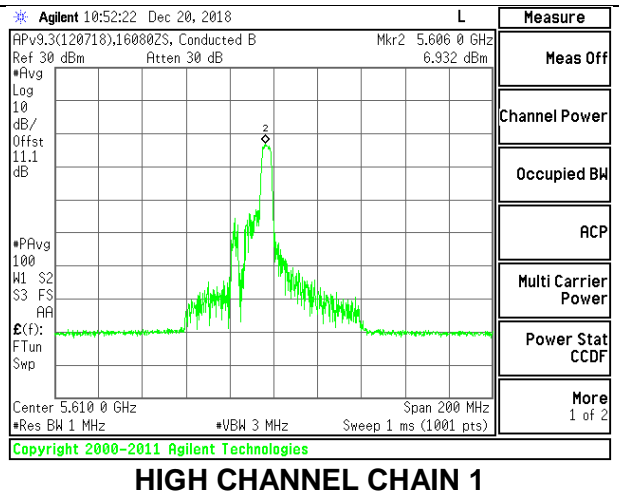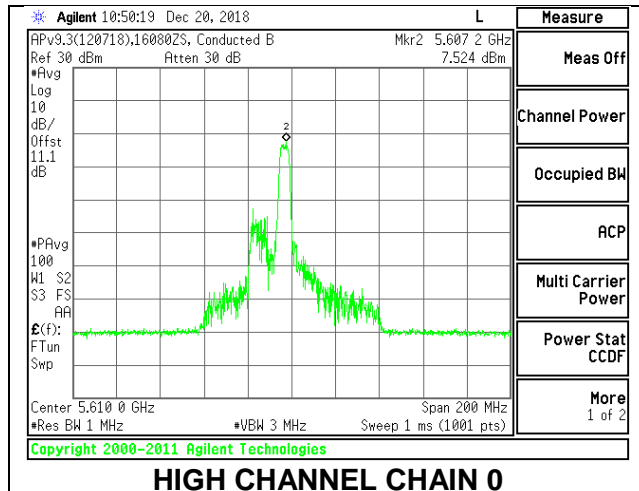

CHANNEL 138

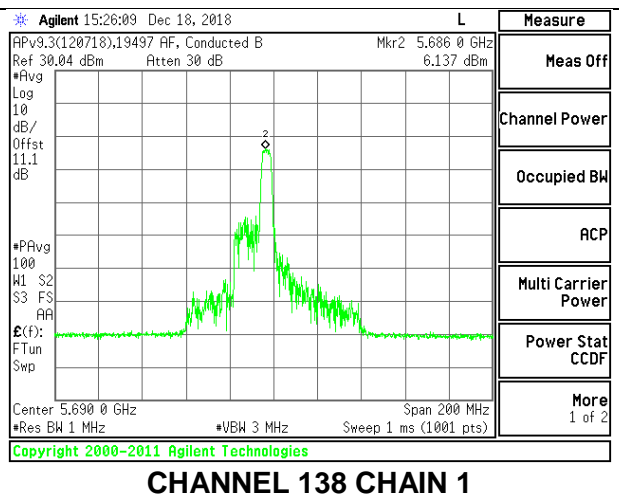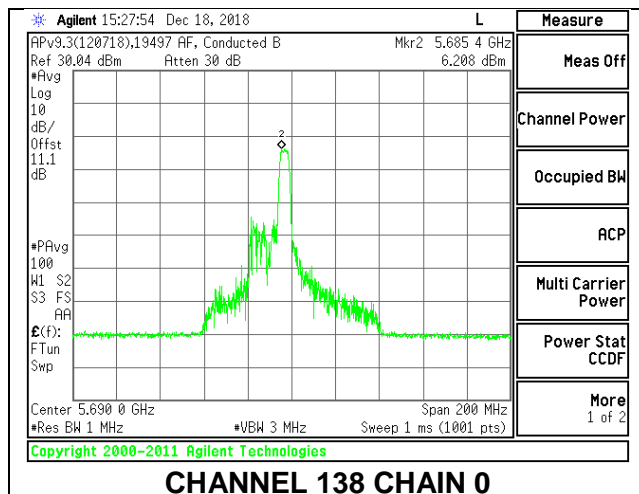

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 52

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	23.00	-2.30	0.71	24.00	11.00
High	5610	22.20	-2.30	0.71	24.00	11.00
138	5690	23.00	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	12.45	11.15	14.86	24.00	-9.14
High	5610	12.4	11.1	14.81	24.00	-9.19
138	5690	12.34	11.14	14.79	24.00	-9.21



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.149	6.74	10.12	11.00	-0.88
High	5610	7.524	6.933	10.41	11.00	-0.59
138	5690	7.535	6.939	10.42	11.00	-0.58



LOW CHANNEL

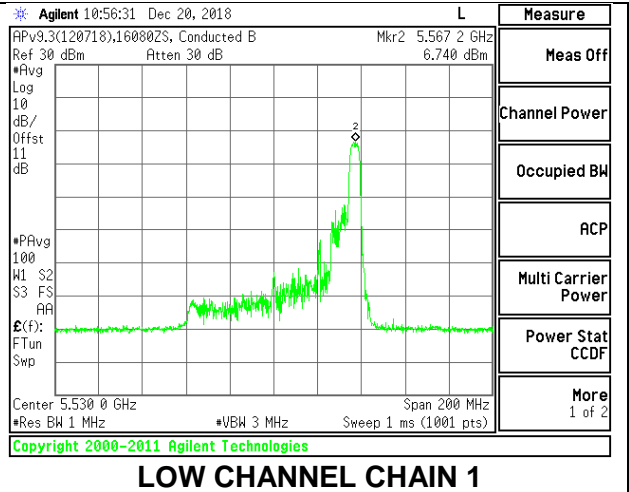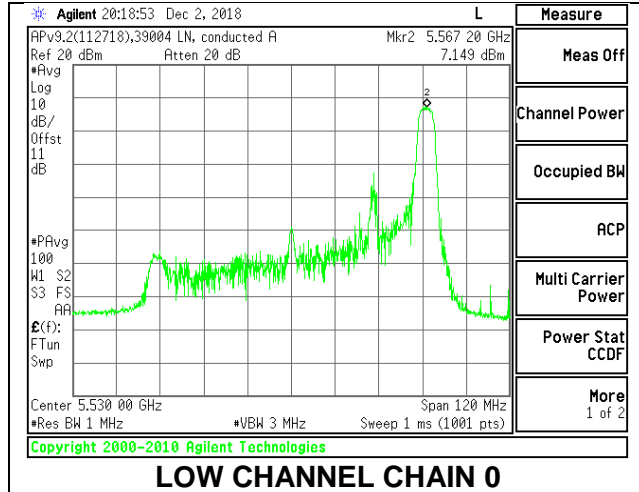

HIGH CHANNEL

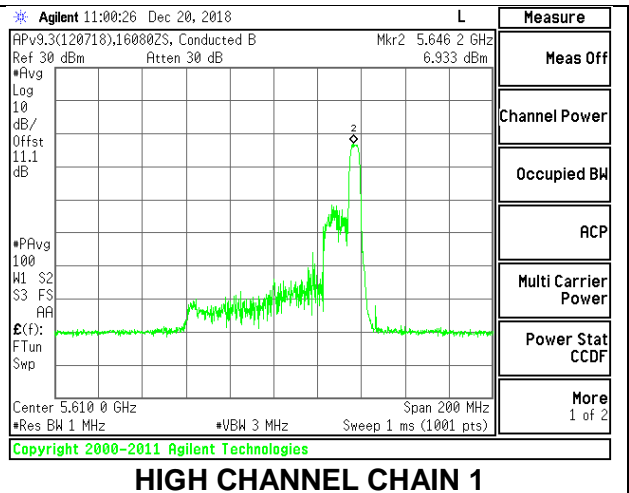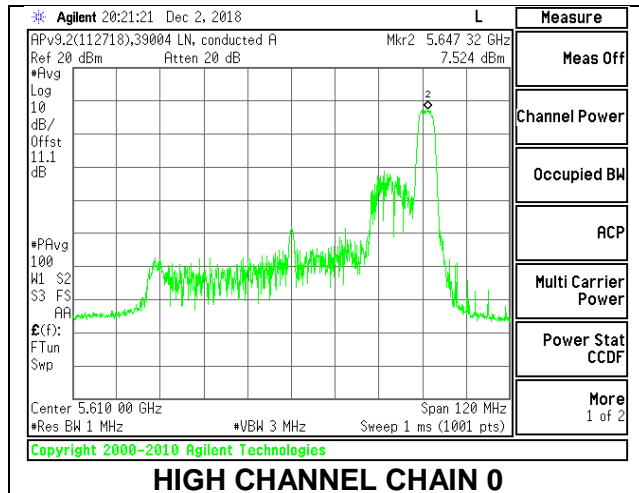

CHANNEL 138

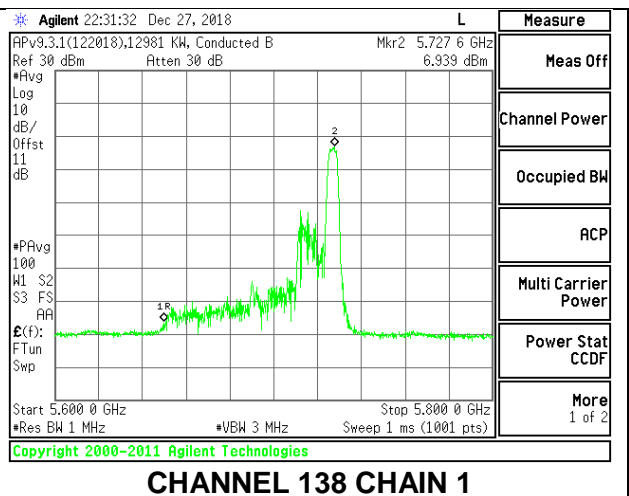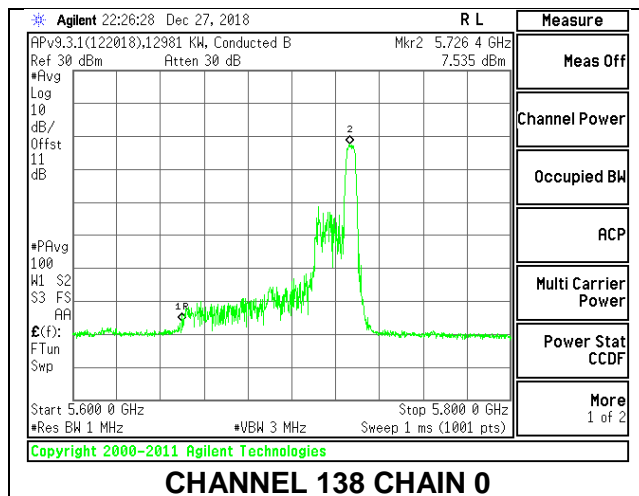

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	21.00	-2.30	0.71	24.00	11.00
High	5610	21.60	-2.30	0.71	24.00	11.00
138	5690	21.00	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.97	10.93	14.49	24.00	-9.51
High	5610	11.96	10.9	14.47	24.00	-9.53
138	5690	11.9	10.96	14.47	24.00	-9.53



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.601	7.435	10.65	11.00	-0.35
High	5610	7.103	7.077	10.22	11.00	-0.78
138	5690	7.693	7.727	10.84	11.00	-0.16



LOW CHANNEL

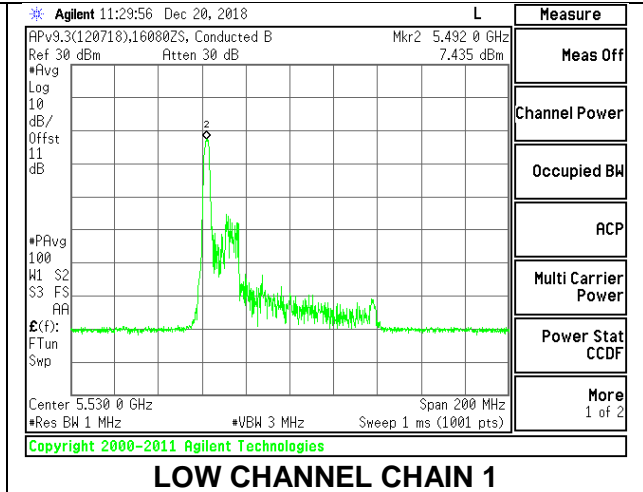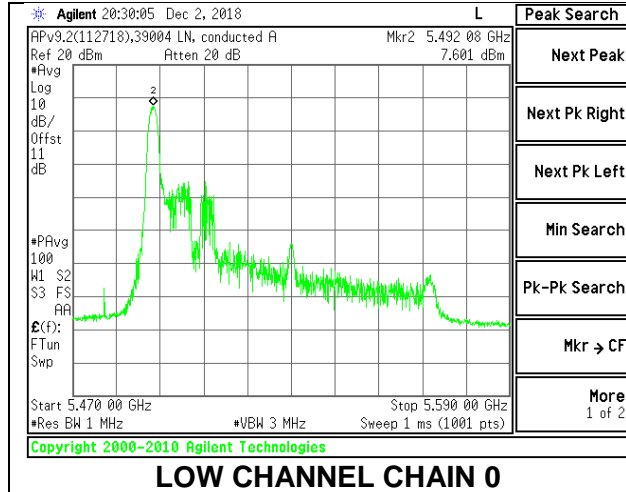

HIGH CHANNEL

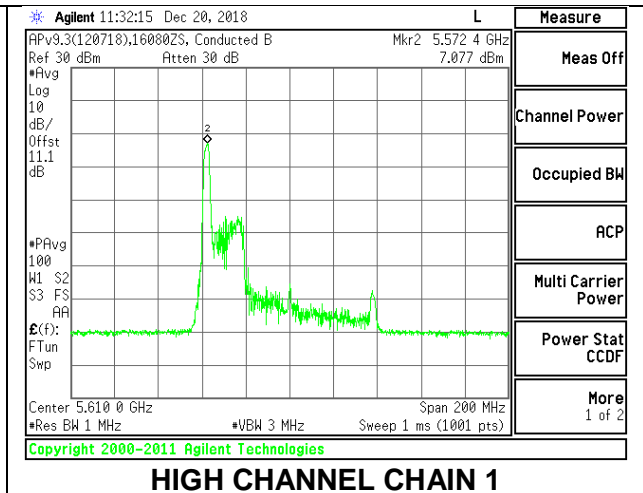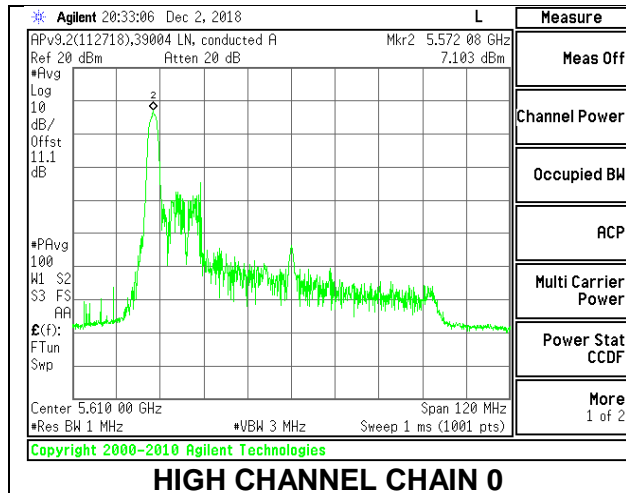

CHANNEL 138

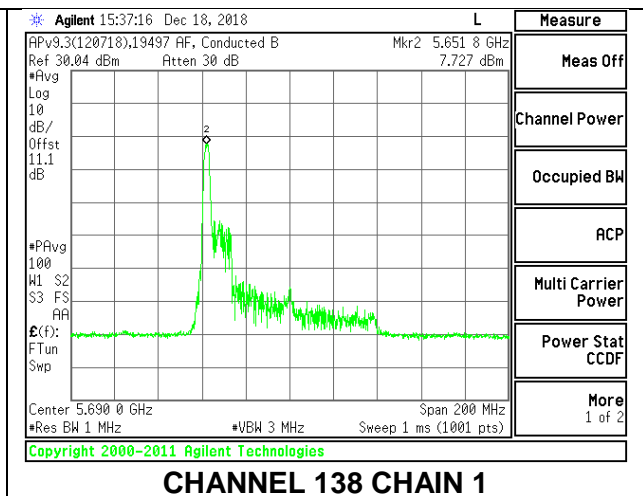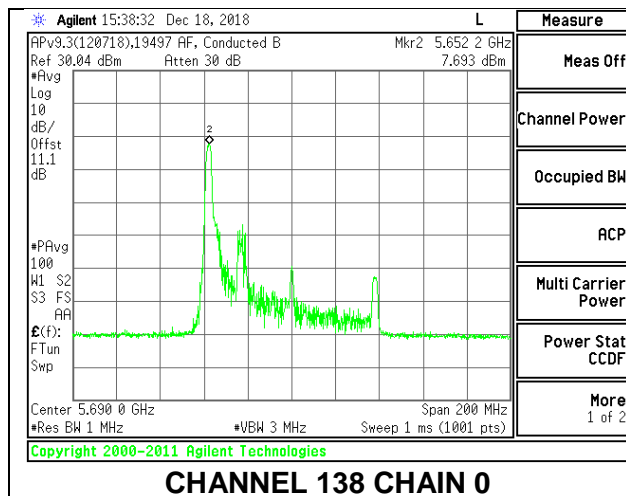

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 18

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	39.60	-2.30	0.71	24.00	11.00
High	5610	39.60	-2.30	0.71	24.00	11.00
138	5690	39.00	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.89	10.75	14.37	24.00	-9.63
High	5610	11.92	10.7	14.36	24.00	-9.64
138	5690	11.85	10.67	14.31	24.00	-9.69



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	6.927	6.315	9.76	11.00	-1.24
High	5610	6.78	6.466	9.76	11.00	-1.24
138	5690	6.872	6.838	9.99	11.00	-1.01



LOW CHANNEL

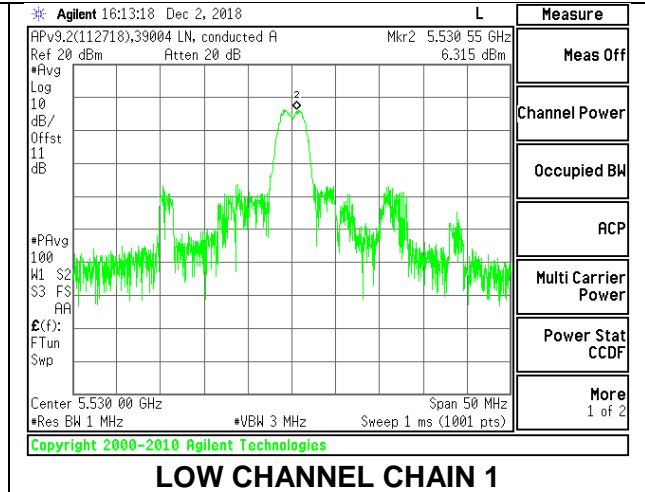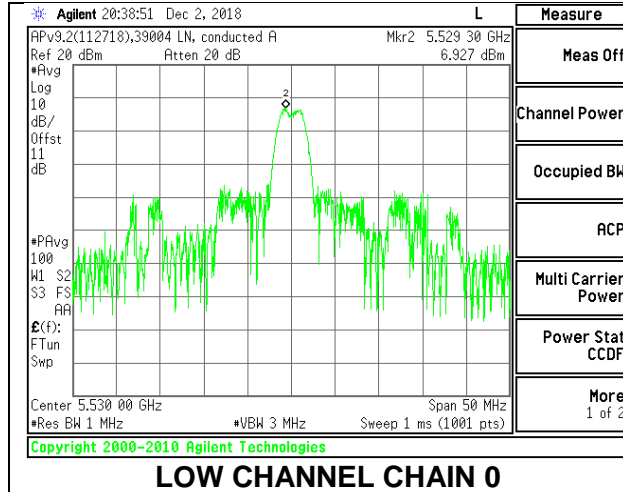

HIGH CHANNEL

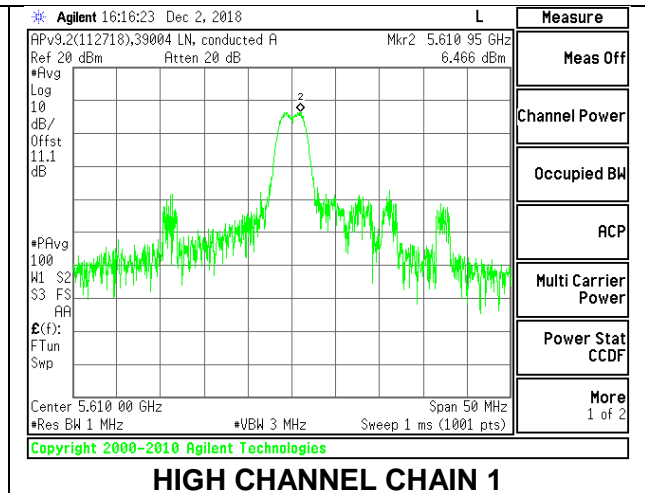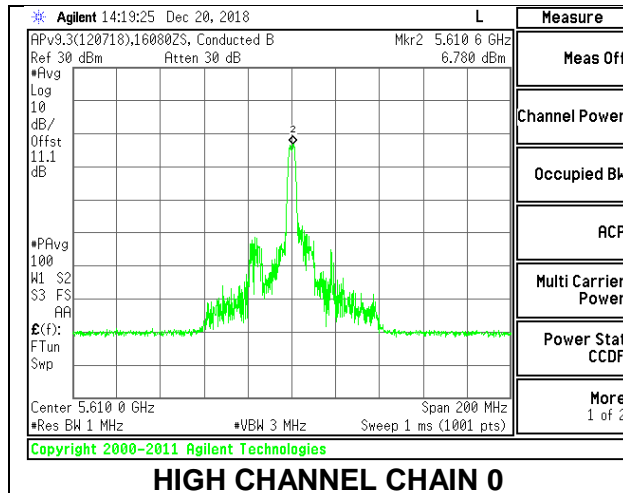

CHANNEL 138

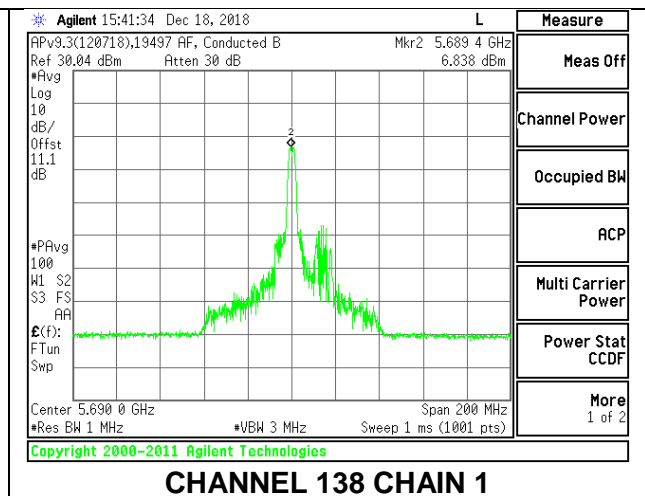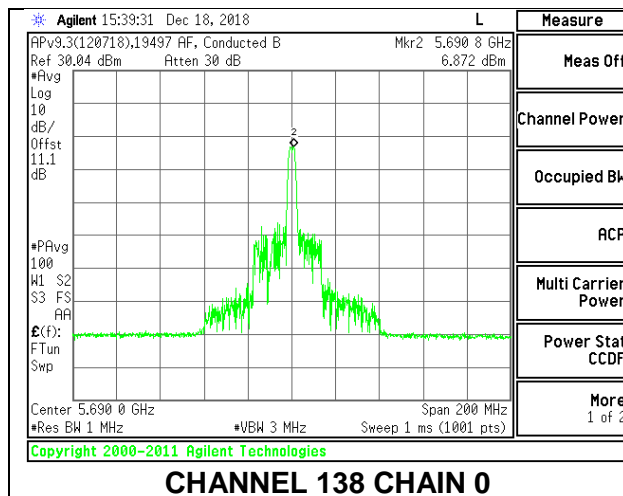

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 36

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5530	22.00	-2.30	0.71	24.00	11.00
High	5610	22.20	-2.30	0.71	24.00	11.00
138	5690	22.40	-2.30	0.71	24.00	11.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.8	10.65	14.27	24.00	-9.73
High	5610	11.86	10.68	14.32	24.00	-9.68
138	5690	11.78	10.62	14.25	24.00	-9.75



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5530	7.04	6.745	10.03	11.00	-0.97
High	5610	6.806	6.67	9.87	11.00	-1.13
138	5690	6.917	6.678	9.93	11.00	-1.07



LOW CHANNEL

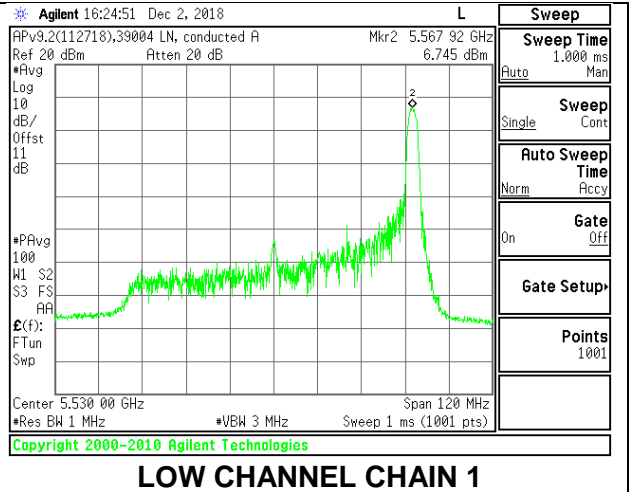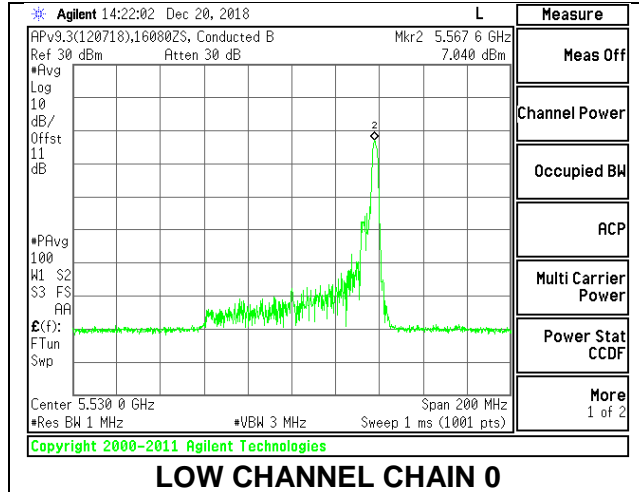

HIGH CHANNEL

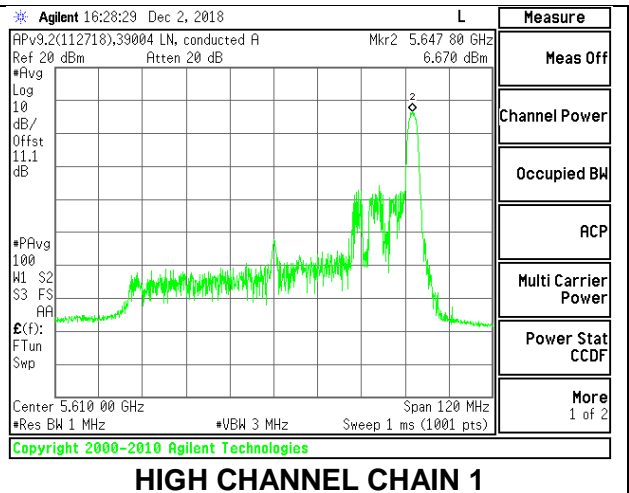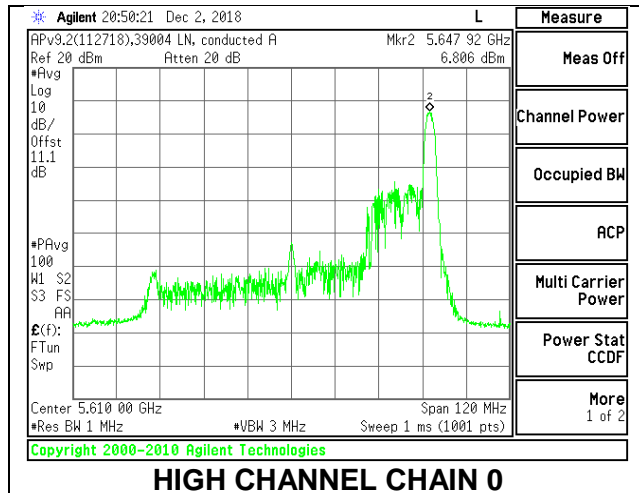

CHANNEL 138

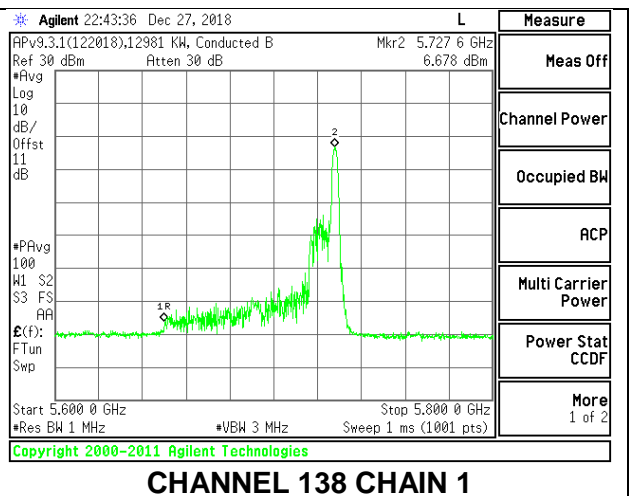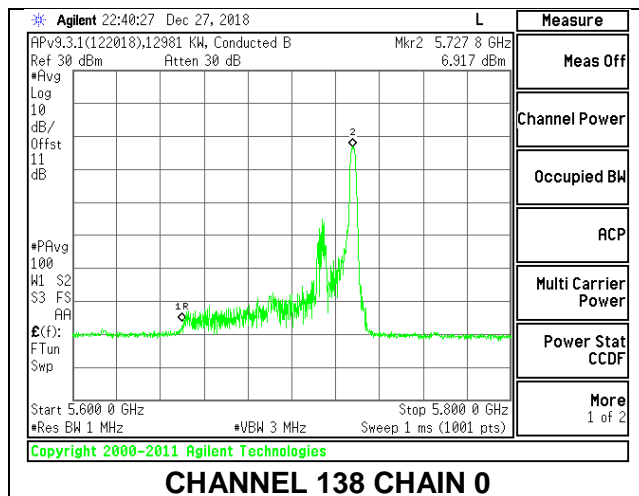

9.5.22. 802.11a MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE (FCC)

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.29	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.91	16.52	19.73	30.00	-10.27
Mid	5785	16.90	16.56	19.74	30.00	-10.26
High	5825	16.91	16.53	19.73	30.00	-10.27



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500kHz)	Chain 1 Meas PSD (dBm/ 500kHz)	Total Corr'd PSD (dBm/ 500kHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	3.68	4.11	7.20	30.00	-22.80
Mid	5785	3.61	4.21	7.22	30.00	-22.78
High	5825	3.62	4.23	7.23	30.00	-22.77



LOW CHANNEL

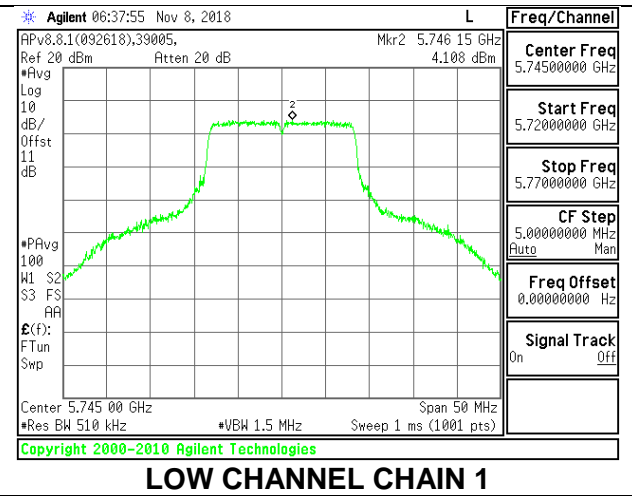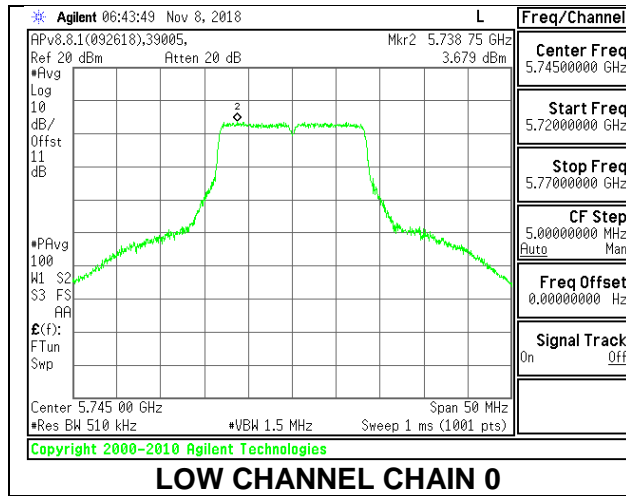

MID CHANNEL

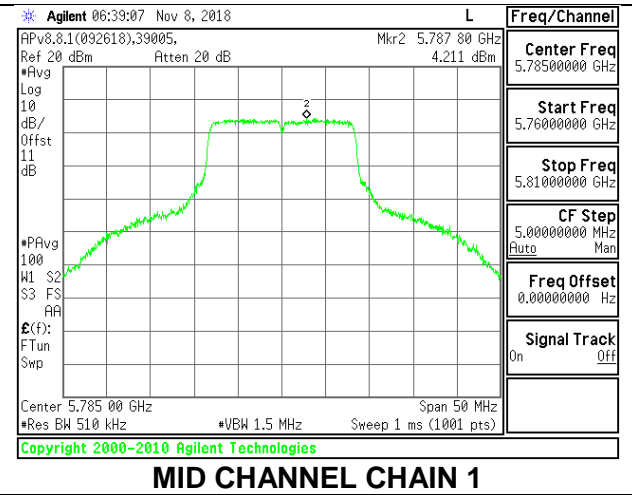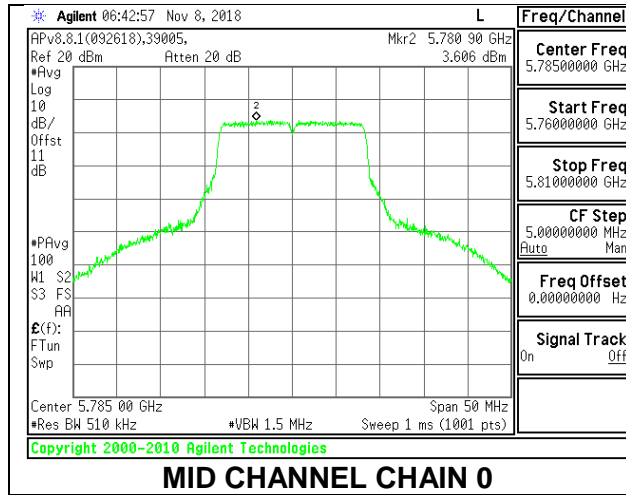

HIGH CHANNEL

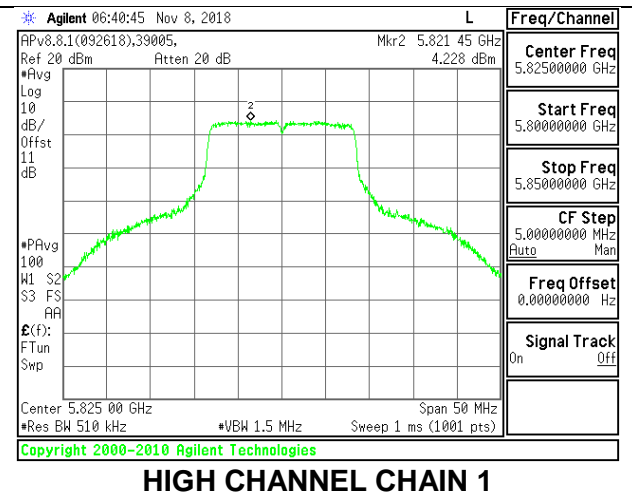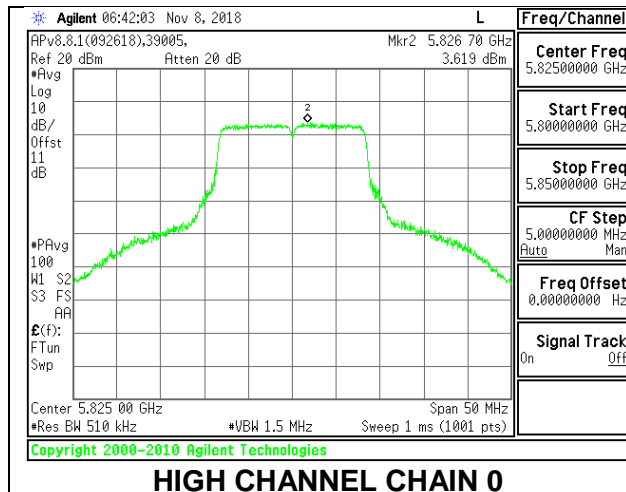

9.5.23. 802.11n HT20 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE (FCC)

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.90	16.42	19.68	30.00	-10.32
Mid	5785	16.89	16.52	19.72	30.00	-10.28
High	5825	16.88	16.50	19.70	30.00	-10.30



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500kHz)	Chain 1 Meas PSD (dBm/ 500kHz)	Total Corr'd PSD (dBm/ 500kHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	3.17	3.98	6.91	30.00	-23.09
Mid	5785	3.27	3.96	6.95	30.00	-23.05
High	5825	3.37	3.79	6.90	30.00	-23.10



LOW CHANNEL

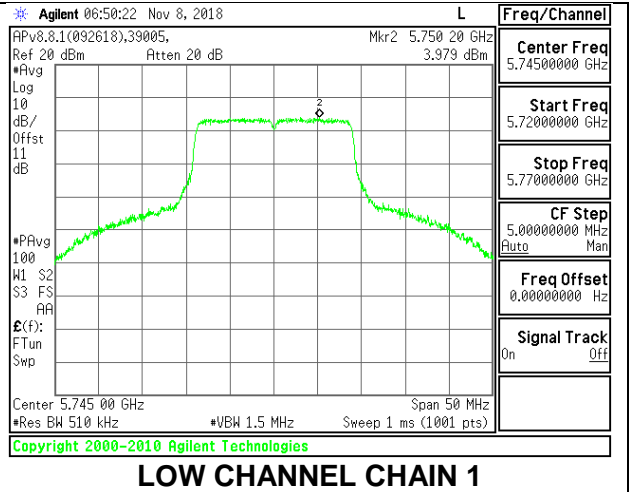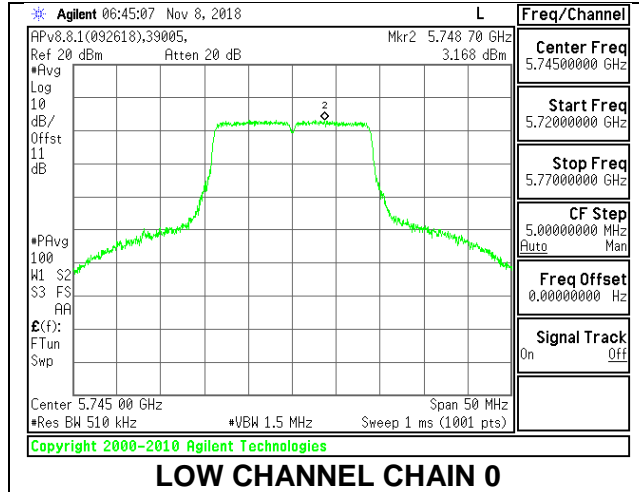

MID CHANNEL

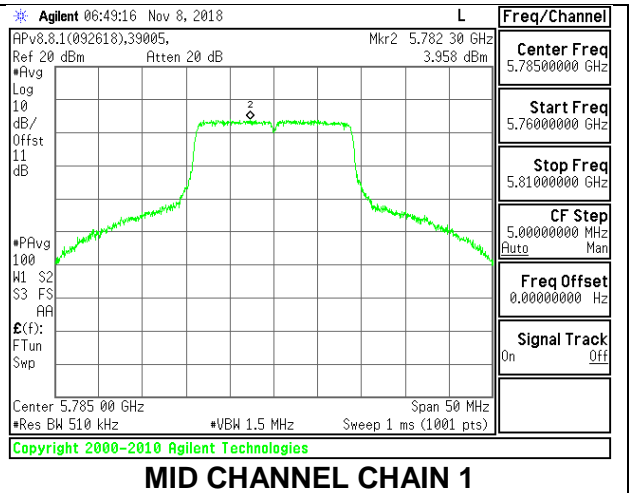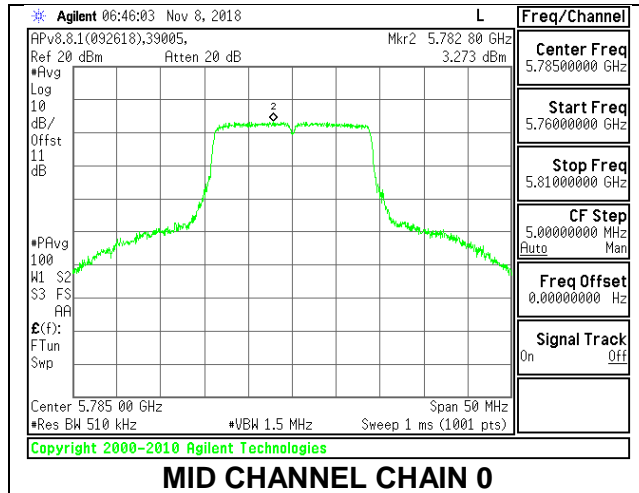

HIGH CHANNEL

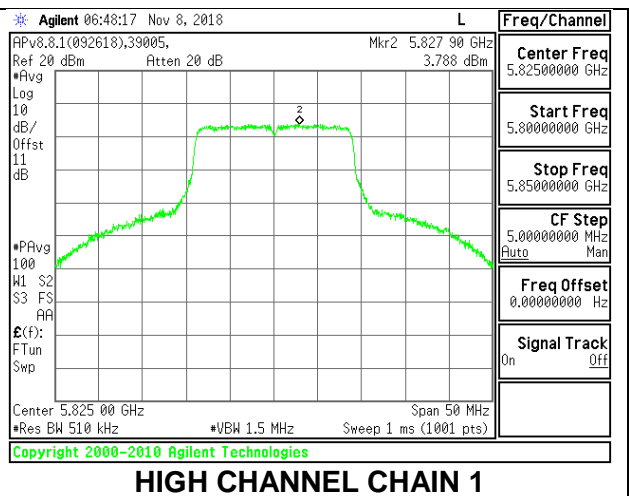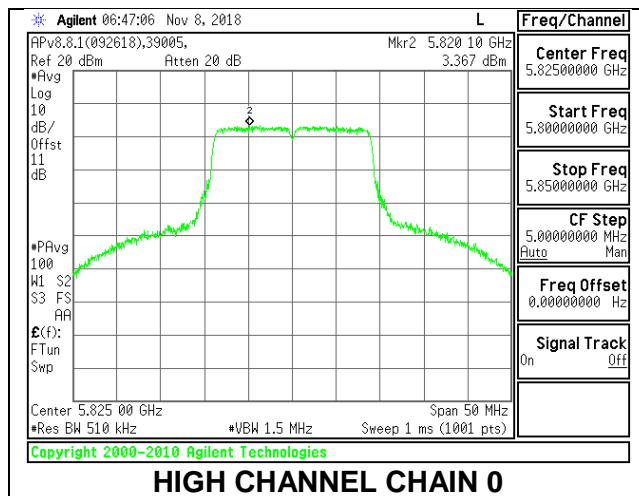

9.5.24. 802.11n HT40 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE (FCC)

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.60	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	15.68	14.69	18.22	30.00	-11.78
High	5795	15.60	14.68	18.17	30.00	-11.83



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500kHz)	Chain 1 Meas PSD (dBm/ 500kHz)	Total Corr'd PSD (dBm/ 500kHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	-0.90	-0.23	3.06	30.00	-26.94
High	5795	-1.17	-0.18	2.96	30.00	-27.04

LOW CHANNEL

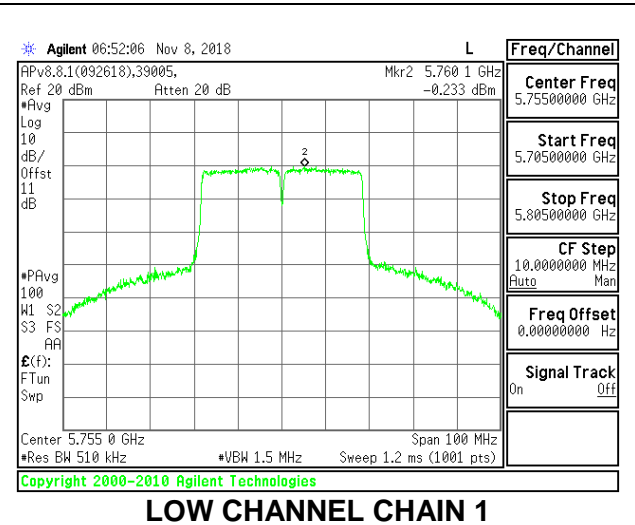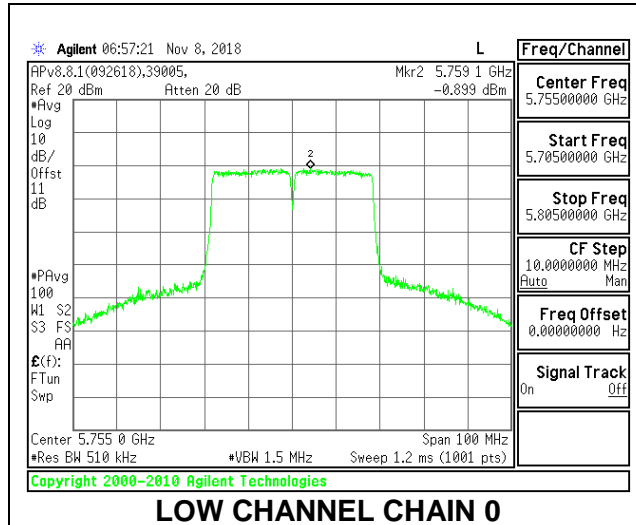

HIGH CHANNEL

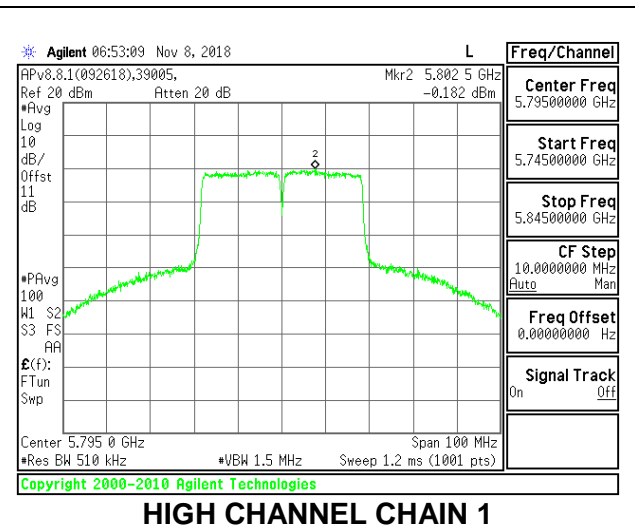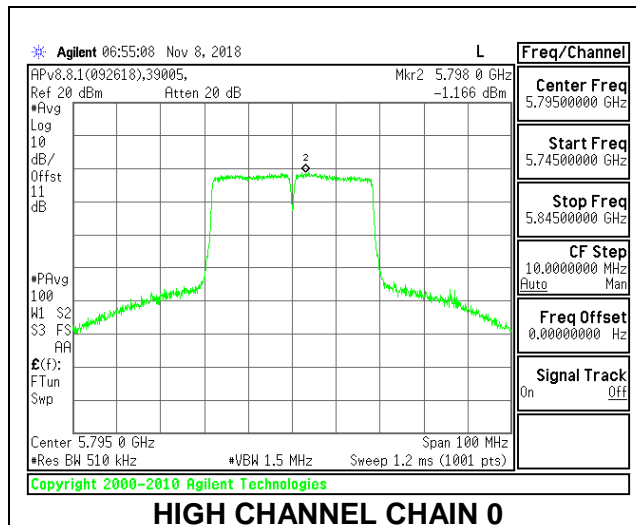

9.5.25. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE (FCC)

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	1.95	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.80	13.83	17.35	30.00	-12.65

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 500kHz)	Chain 1 Meas PSD (dBm/ 500kHz)	Total Corr'd PSD (dBm/ 500kHz)	PSD Limit (dBm/ 500kHz)	PSD Margin (dB)
Mid	5775	-6.19	-5.33	-0.78	30.00	-30.78

MID CHANNEL

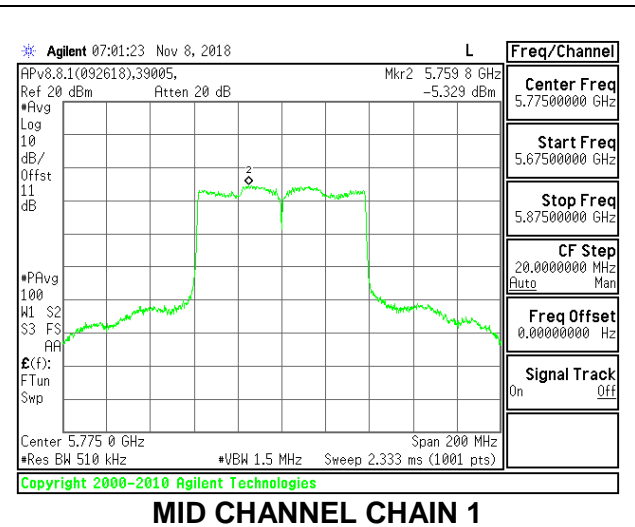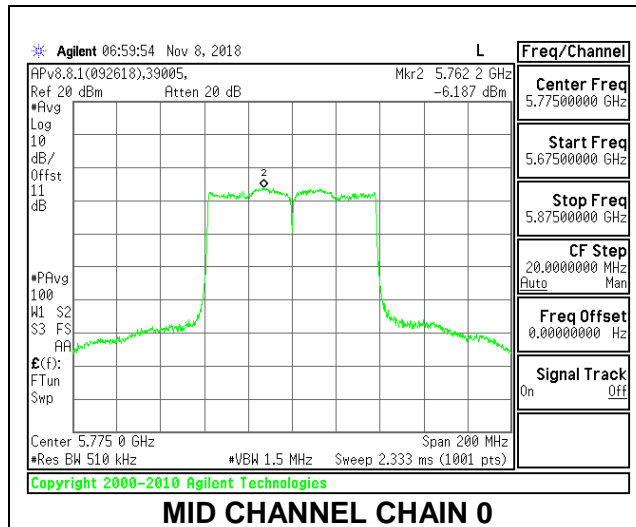

9.5.26. 802.11ax HE20 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.67	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	16.85	15.6	19.28	30.00	-10.72
Mid	5785	16.84	15.6	19.27	30.00	-10.73
High	5825	16.7	15.48	19.14	30.00	-10.86



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	1.312	0.617	4.66	30.00	-25.34
Mid	5785	1.911	0.862	5.10	30.00	-24.90
High	5825	1.276	1.149	4.89	30.00	-25.11



LOW CHANNEL

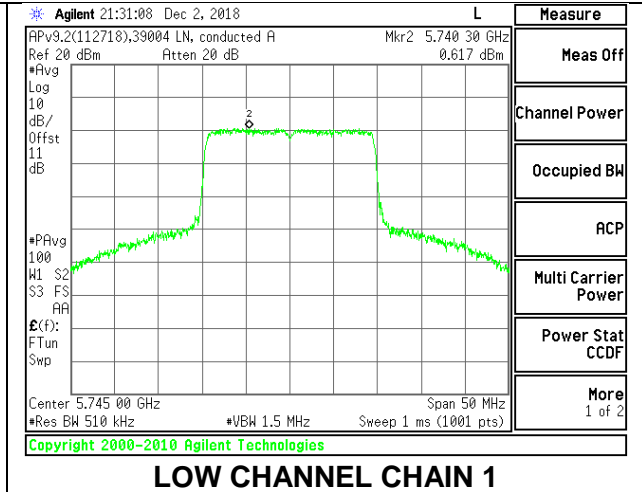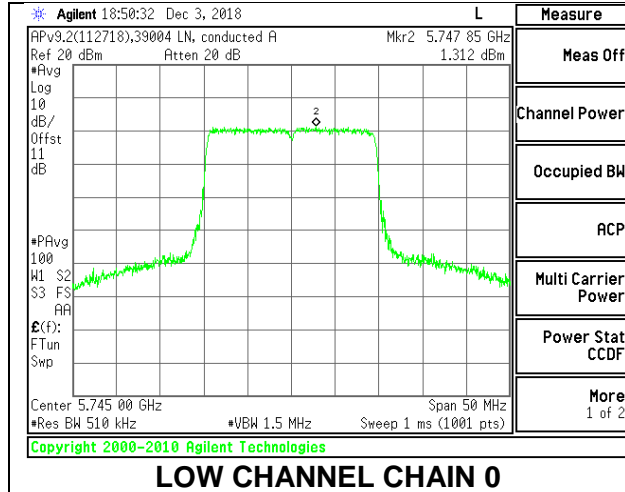

MID CHANNEL

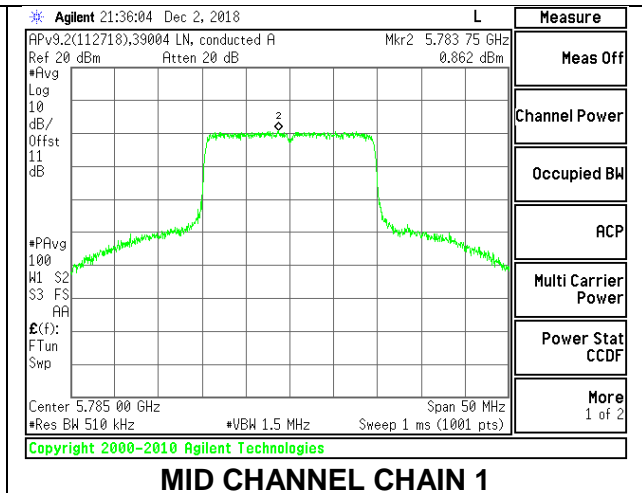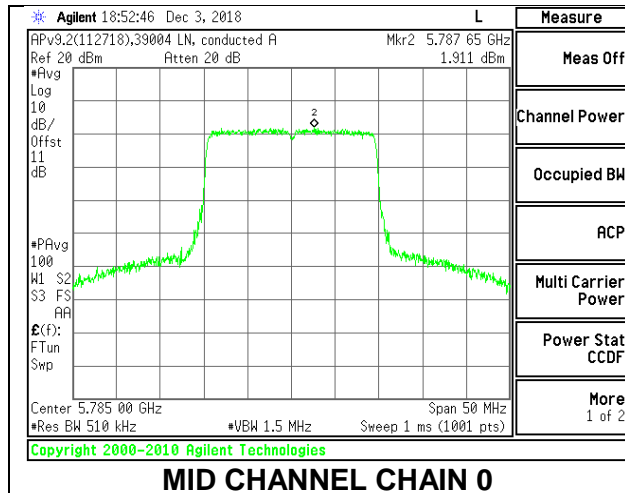

HIGH CHANNEL

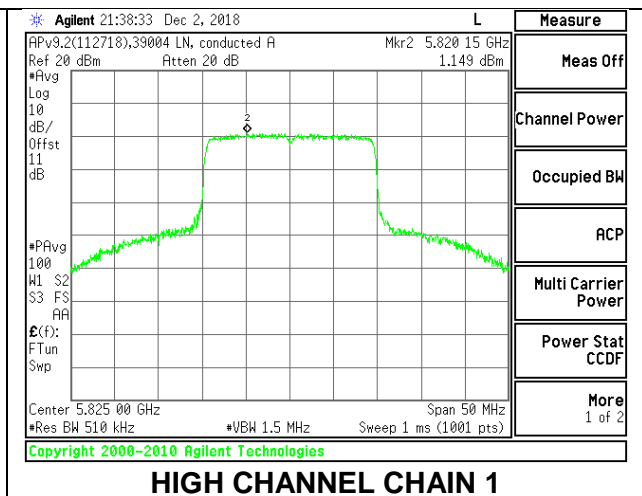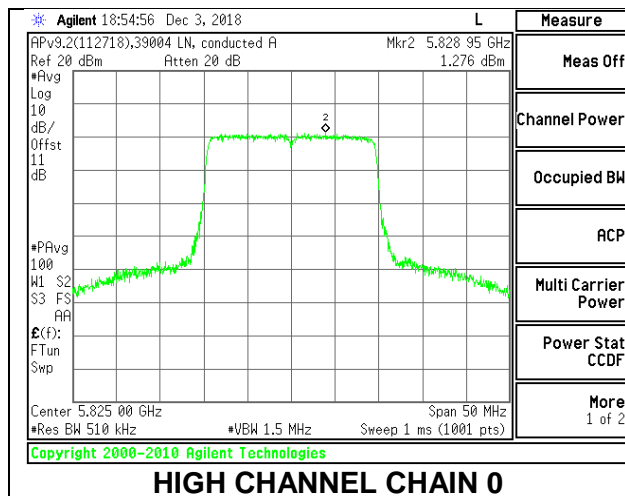

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	3.91	30.00	30.00
Mid	5785	-6.91	3.91	30.00	30.00
High	5825	-6.91	3.91	30.00	30.00

Duty Cycle CF (dB)	0.34	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	15.96	14.75	18.41	30.00	-11.59
Mid	5785	15.81	14.59	18.25	30.00	-11.75
High	5825	15.7	14.44	18.13	30.00	-11.87



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	3.928	3.42	7.03	30.00	-22.97
Mid	5785	4.168	3.651	7.27	30.00	-22.73
High	5825	4.253	3.94	7.45	30.00	-22.55



LOW CHANNEL

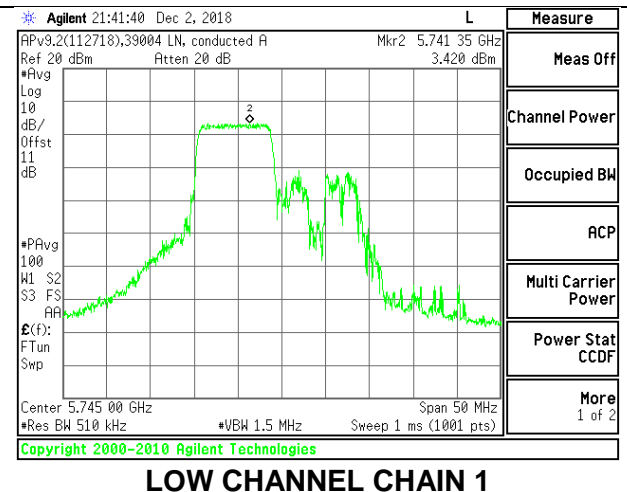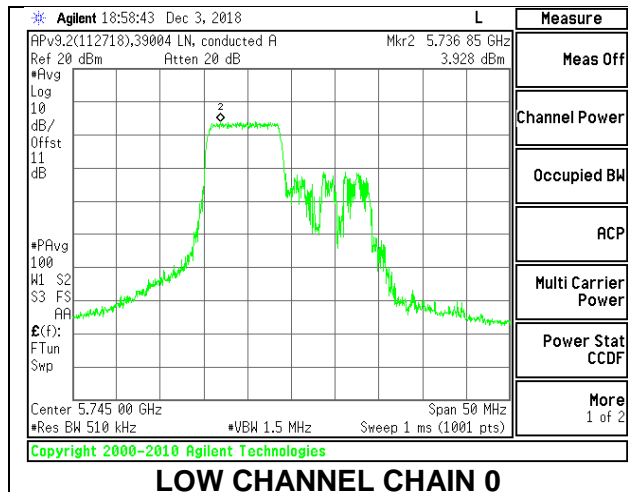

MID CHANNEL

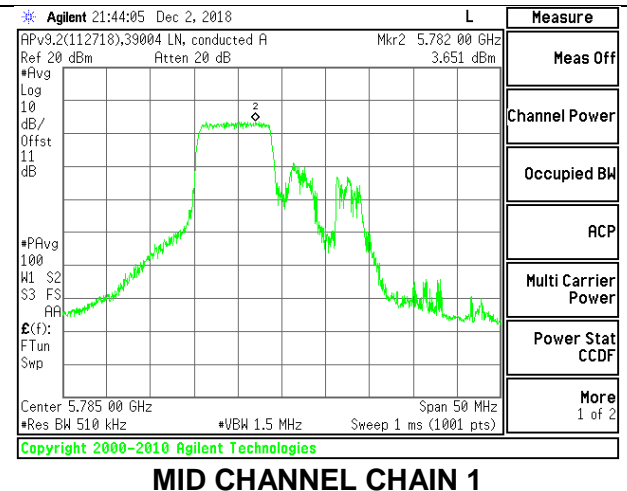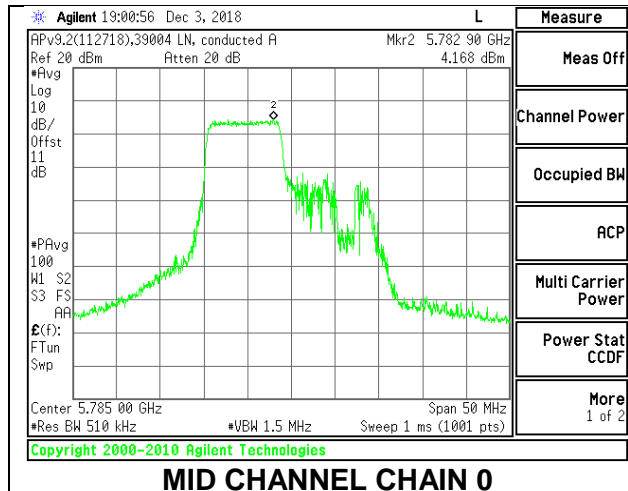

HIGH CHANNEL

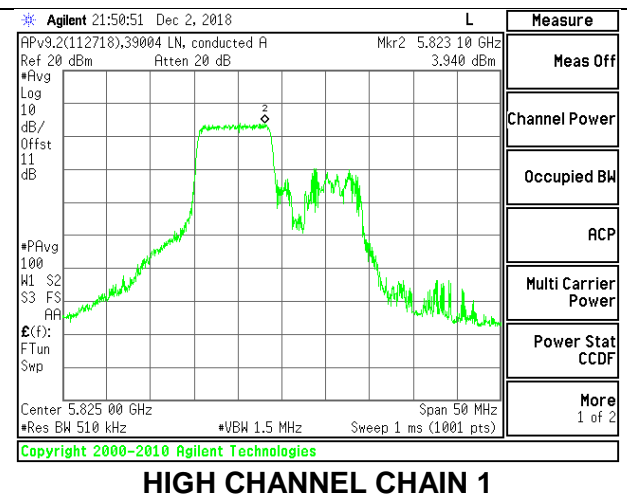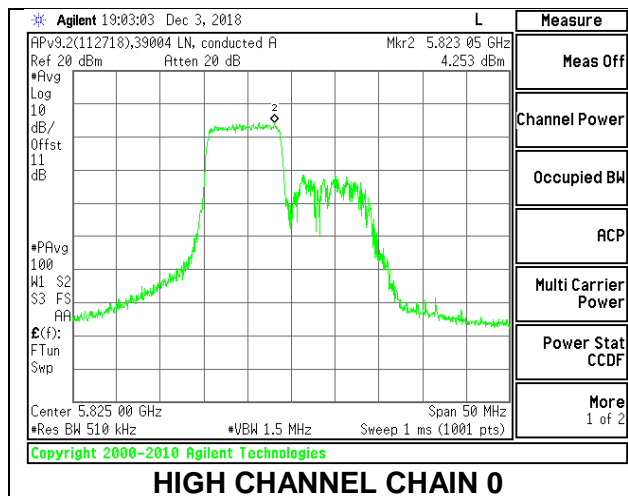

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 54

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.34	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	15.71	14.48	18.15	30.00	-11.85
Mid	5785	15.74	14.53	18.19	30.00	-11.81
High	5825	15.7	14.48	18.14	30.00	-11.86



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	3.689	3.416	6.90	30.00	-23.10
Mid	5785	4.481	4.023	7.61	30.00	-22.39
High	5825	4.014	3.924	7.32	30.00	-22.68



LOW CHANNEL

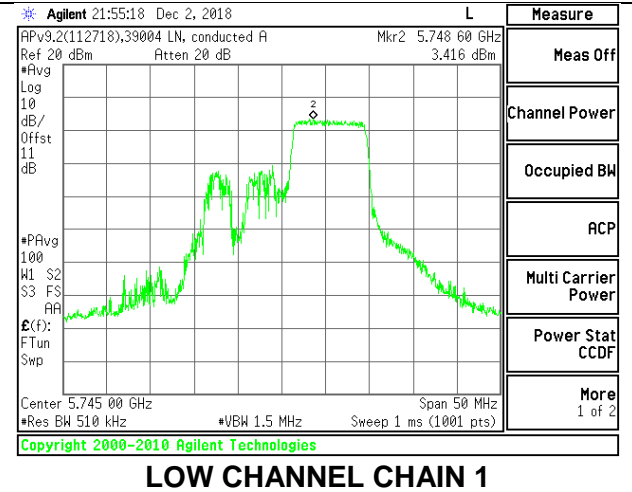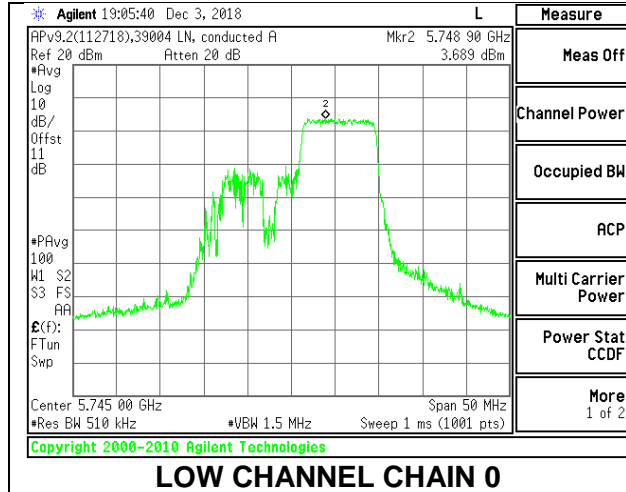

MID CHANNEL

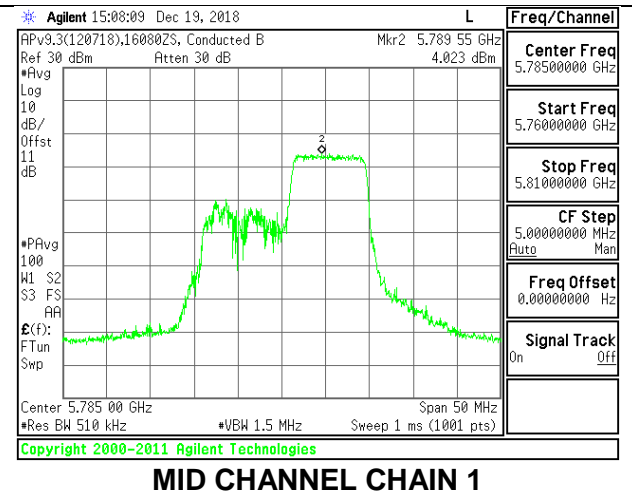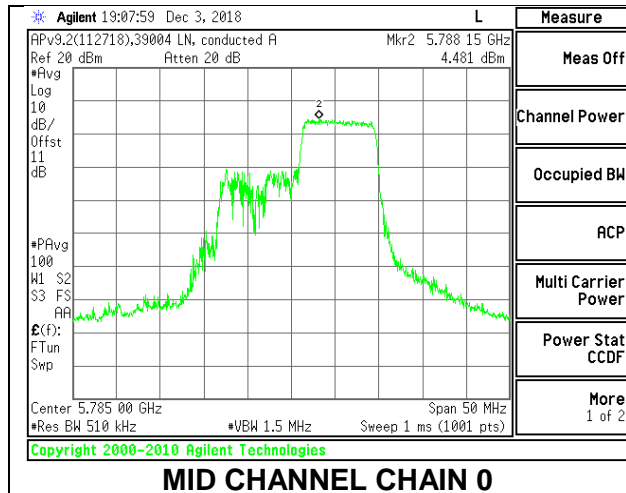

HIGH CHANNEL

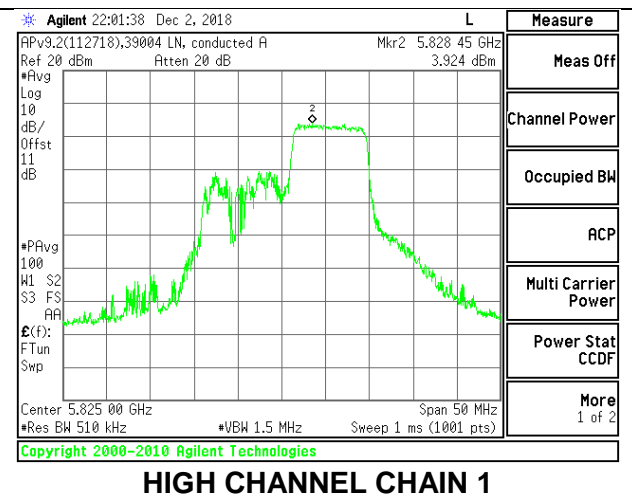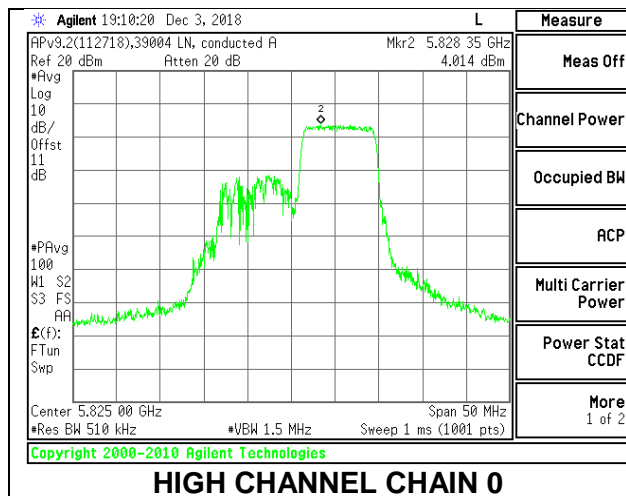

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	12.85	11.61	15.28	30.00	-14.72
Mid	5785	12.74	11.52	15.18	30.00	-14.82
High	5825	12.6	11.37	15.04	30.00	-14.96



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	4.344	3.817	7.27	30.00	-22.73
Mid	5785	4.6	4.269	7.62	30.00	-22.38
High	5825	4.424	3.987	7.39	30.00	-22.61



LOW CHANNEL

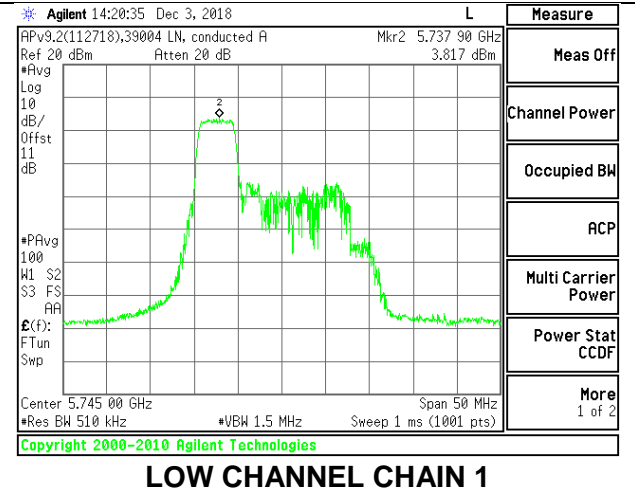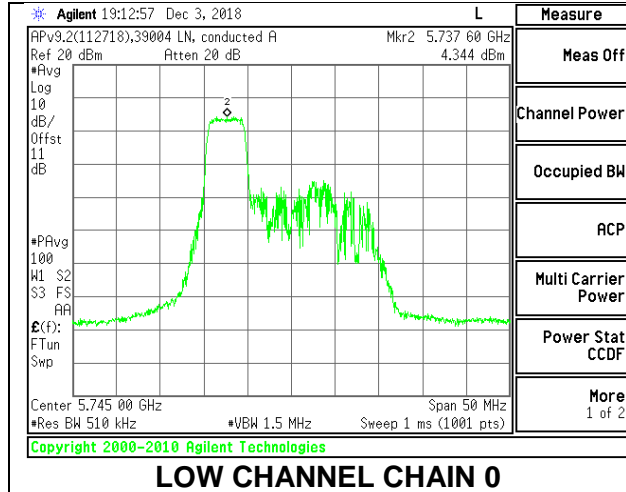

MID CHANNEL

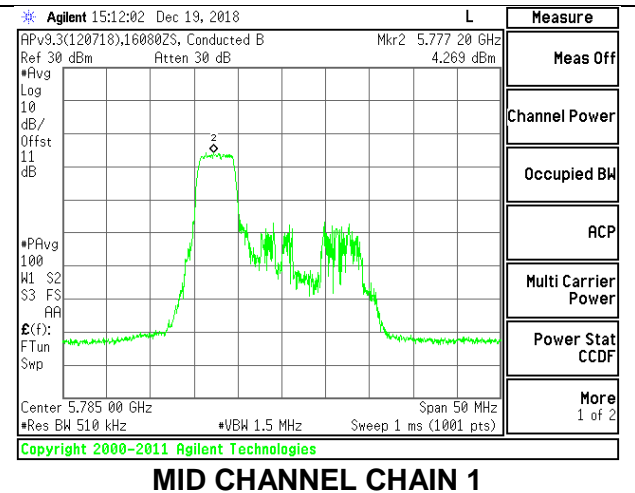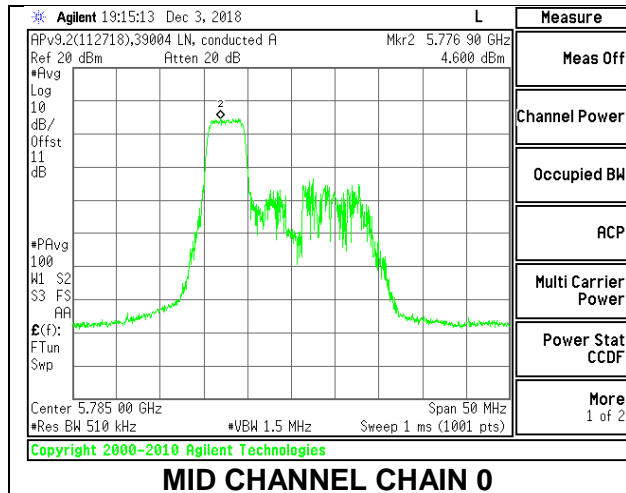

HIGH CHANNEL

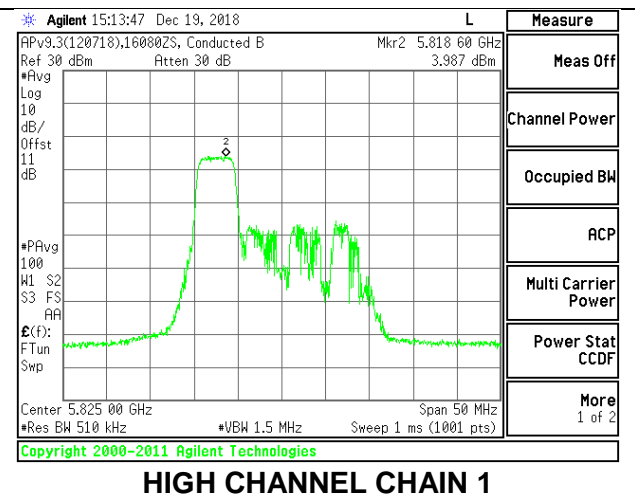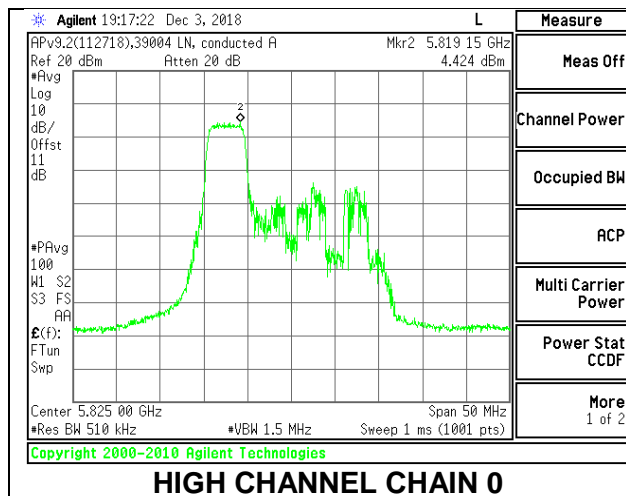

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 38/39

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	12.98	11.84	15.46	30.00	-14.54
Mid	5785	12.77	11.59	15.23	30.00	-14.77
High	5825	12.72	11.55	15.18	30.00	-14.82



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	4.441	4.196	7.50	30.00	-22.50
Mid	5785	4.541	4.015	7.47	30.00	-22.53
High	5825	3.846	3.328	6.78	30.00	-23.22



LOW CHANNEL

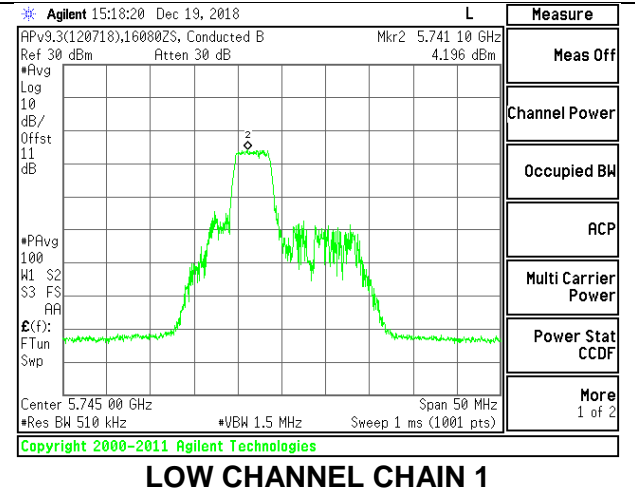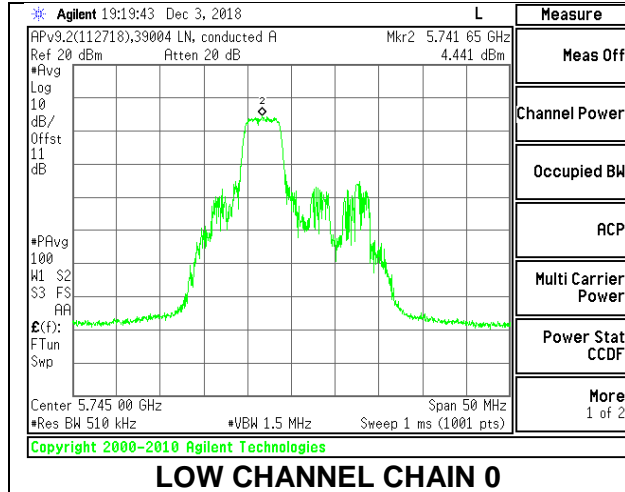

MID CHANNEL

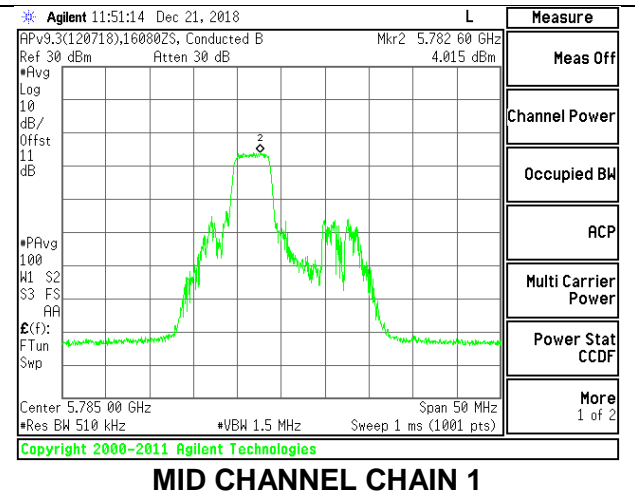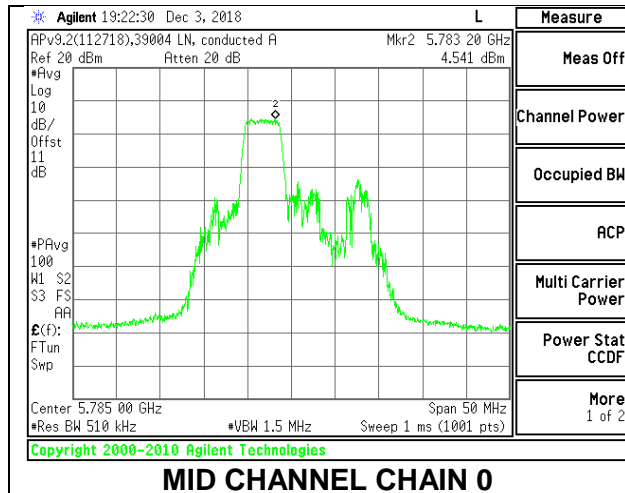

HIGH CHANNEL

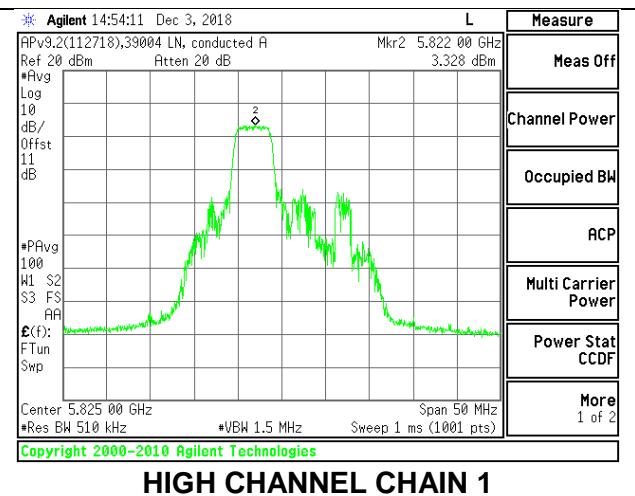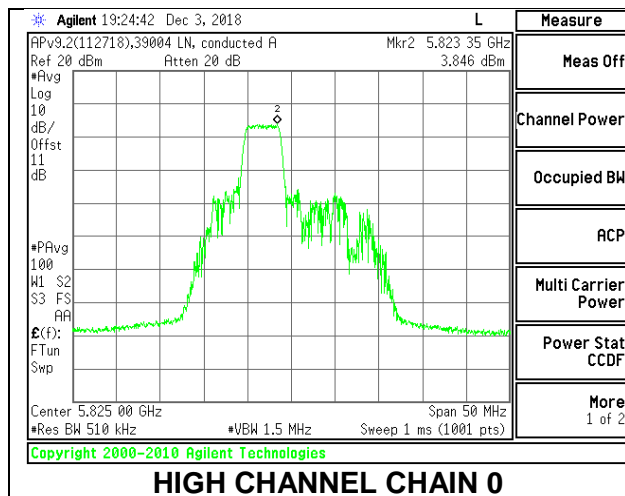

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 40

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	12.65	11.43	15.09	30.00	-14.91
Mid	5785	12.73	11.51	15.17	30.00	-14.83
High	5825	12.6	11.41	15.06	30.00	-14.94



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	3.736	2.914	6.52	30.00	-23.48
Mid	5785	4.004	3.969	7.17	30.00	-22.83
High	5825	3.71	3.035	6.57	30.00	-23.43



LOW CHANNEL

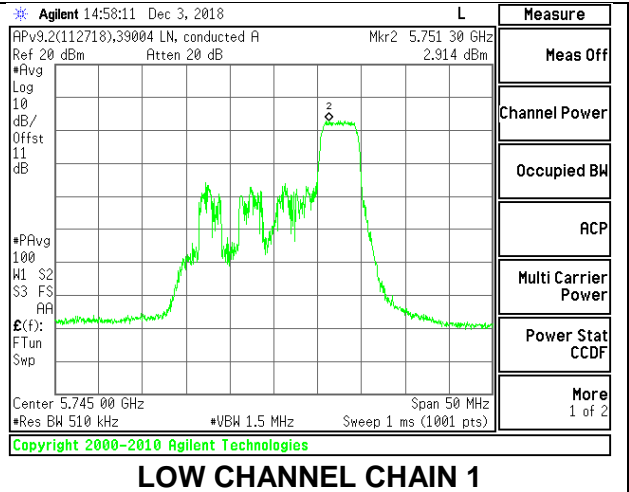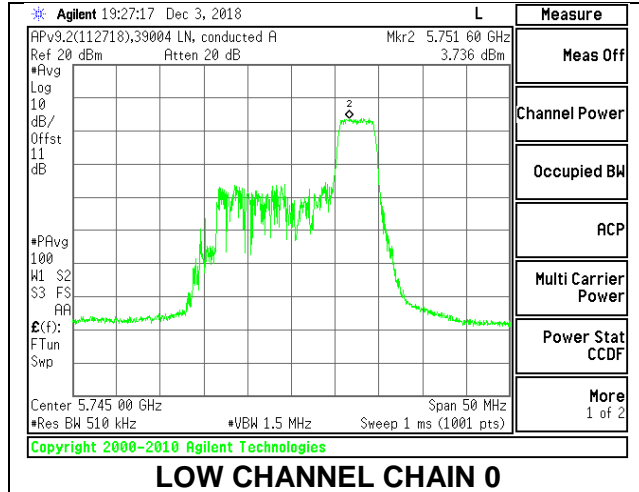

MID CHANNEL

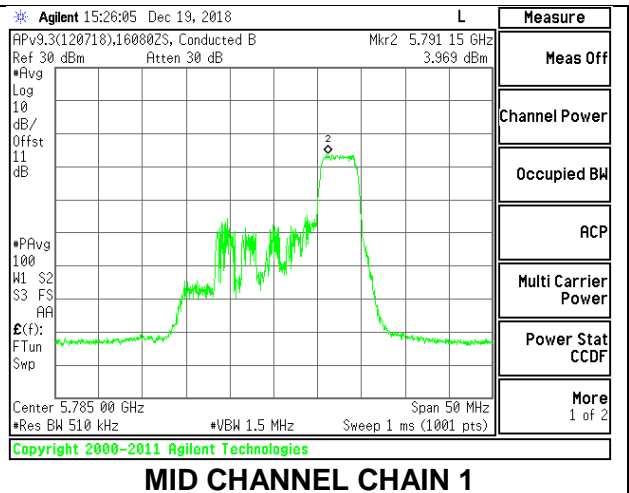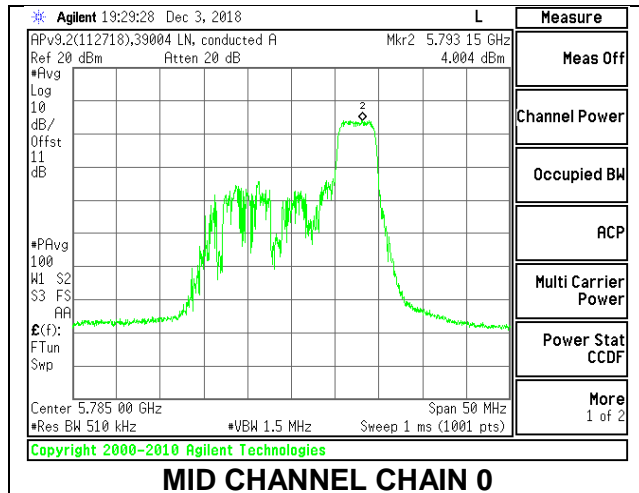

HIGH CHANNEL

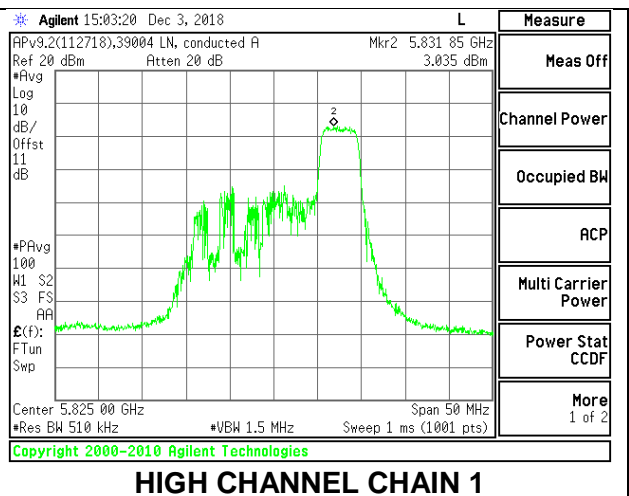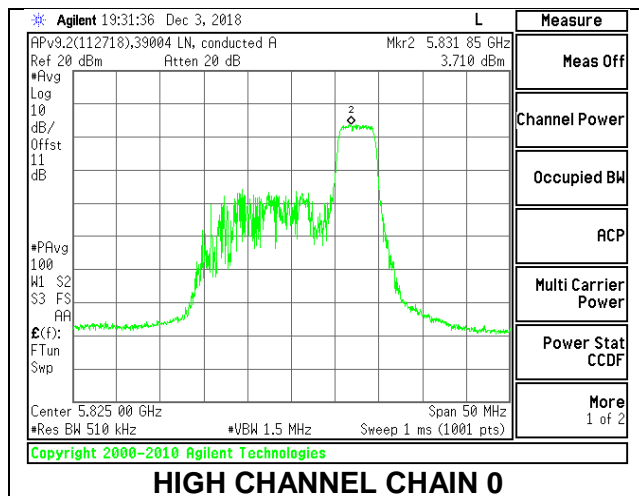

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	11.87	10.69	14.33	30.00	-15.67
Mid	5785	11.83	10.63	14.28	30.00	-15.72
High	5825	11.72	10.52	14.17	30.00	-15.83



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	7.036	6.132	9.72	30.00	-20.28
Mid	5785	7.2	6.035	9.77	30.00	-20.23
High	5825	6.759	6.043	9.53	30.00	-20.47



LOW CHANNEL

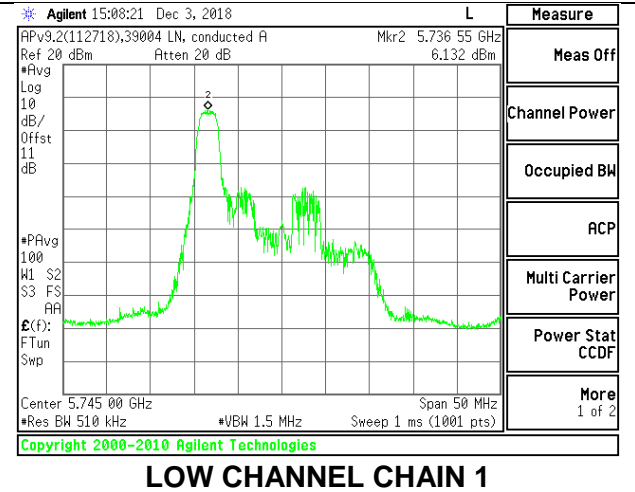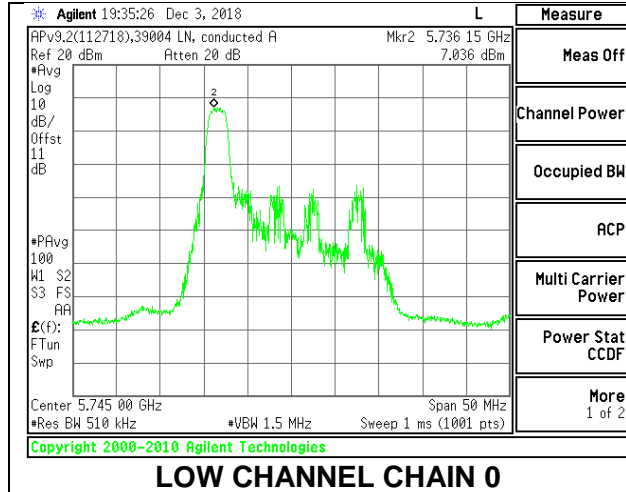

MID CHANNEL

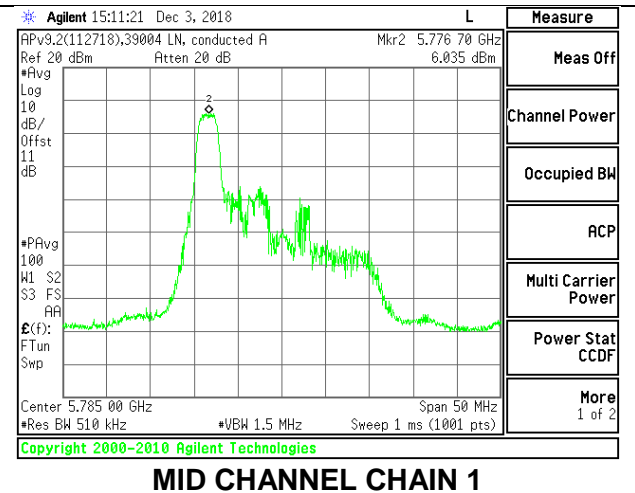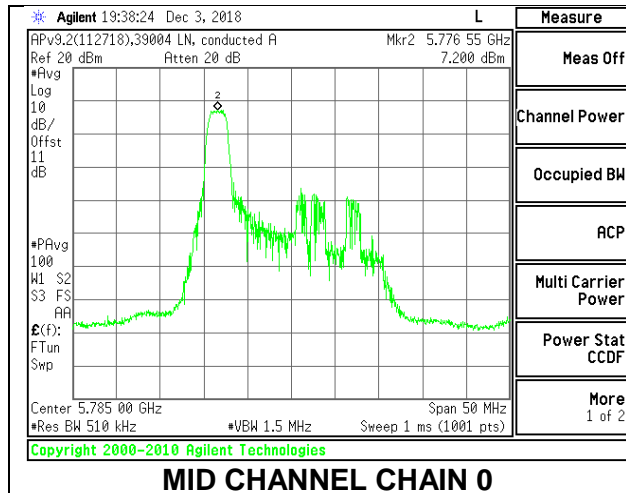

HIGH CHANNEL

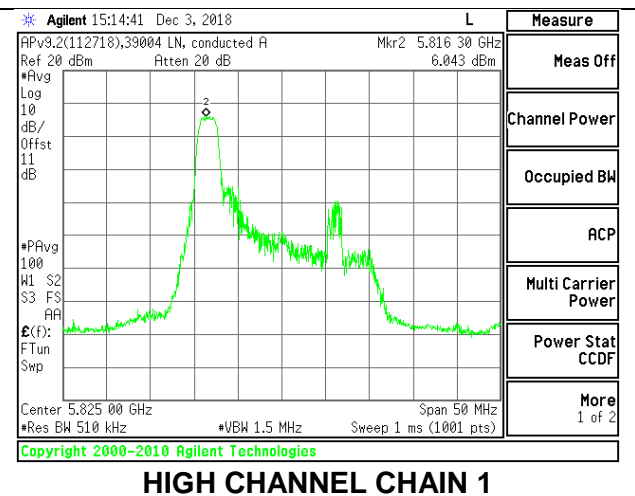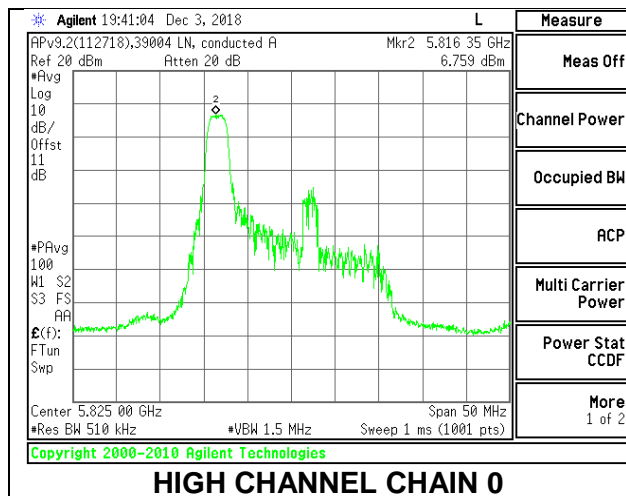

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 4

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	11.74	10.54	14.19	30.00	-15.81
Mid	5785	11.76	10.54	14.20	30.00	-15.80
High	5825	11.78	10.59	14.24	30.00	-15.76



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	6.898	6.036	9.60	30.00	-20.40
Mid	5785	7.044	6.086	9.70	30.00	-20.30
High	5825	6.574	6.074	9.44	30.00	-20.56



LOW CHANNEL

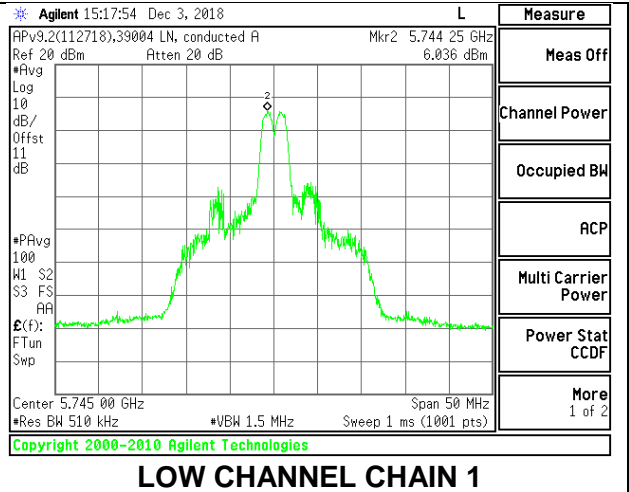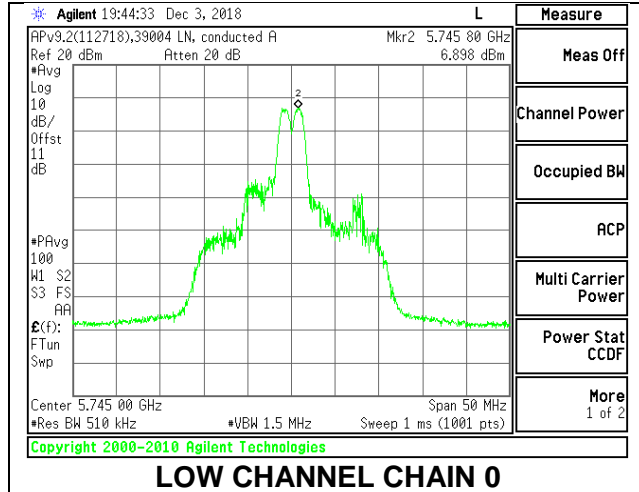

MID CHANNEL

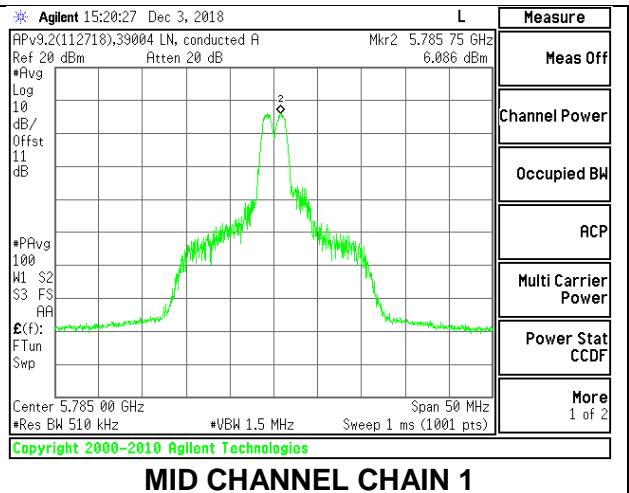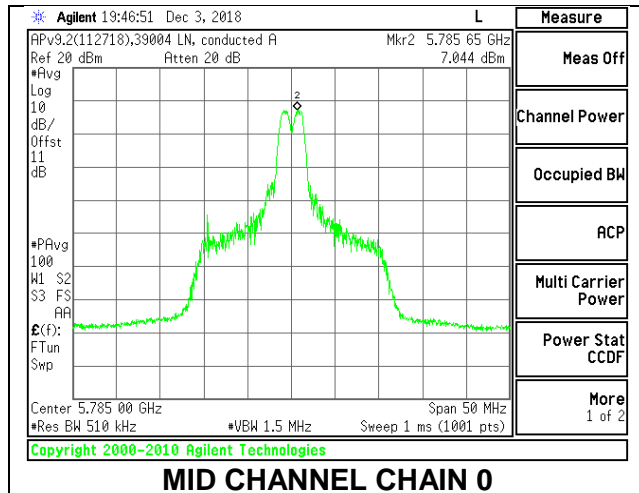

HIGH CHANNEL

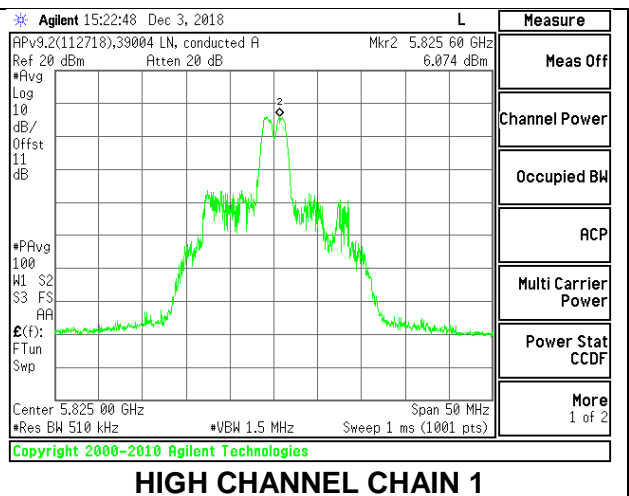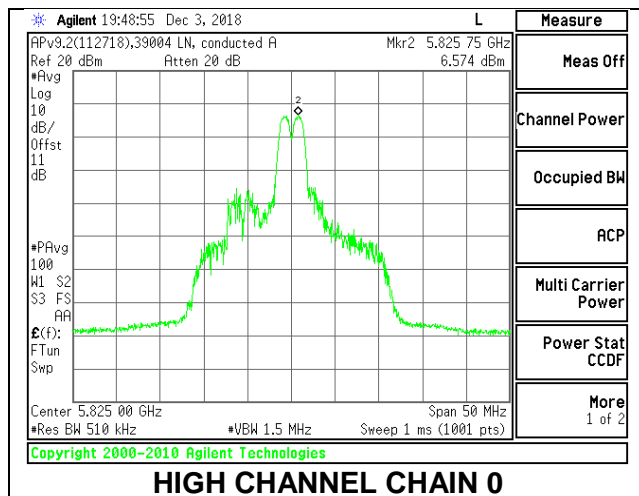

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5745	-6.91	-3.91	30.00	30.00
Mid	5785	-6.91	-3.91	30.00	30.00
High	5825	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	11.61	10.59	14.14	30.00	-15.86
Mid	5785	11.62	10.67	14.18	30.00	-15.82
High	5825	11.65	10.6	14.17	30.00	-15.83



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5745	6.745	6.352	9.66	30.00	-20.34
Mid	5785	7.214	6.055	9.78	30.00	-20.22
High	5825	6.723	6.514	9.73	30.00	-20.27



LOW CHANNEL

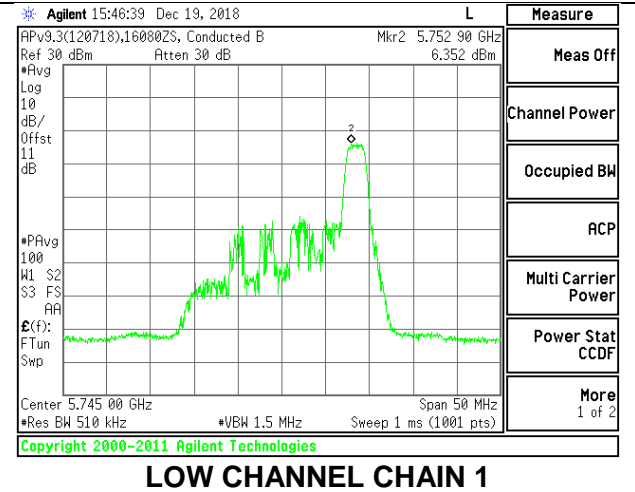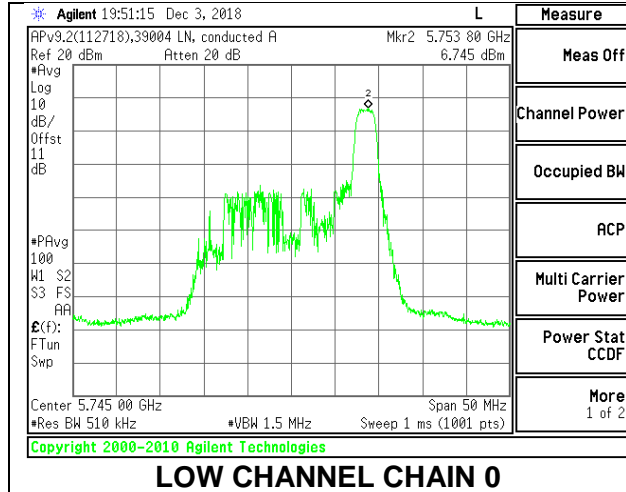

MID CHANNEL

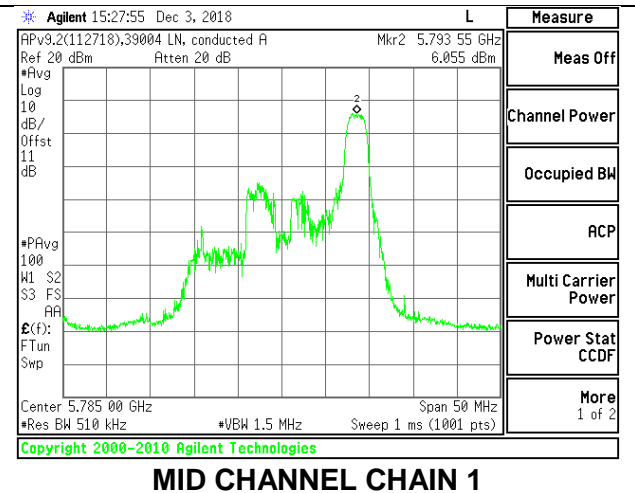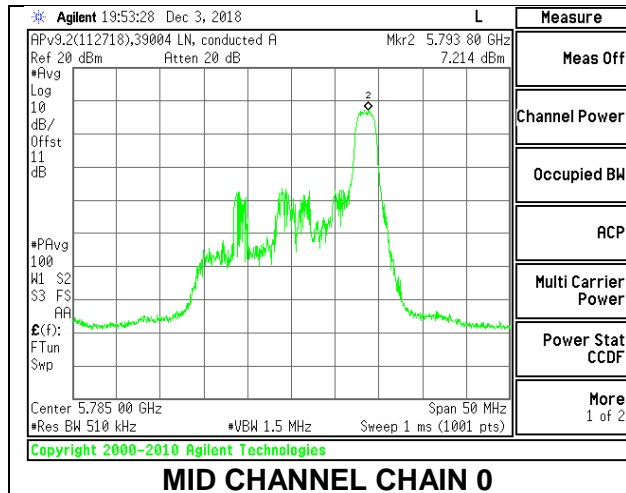

HIGH CHANNEL

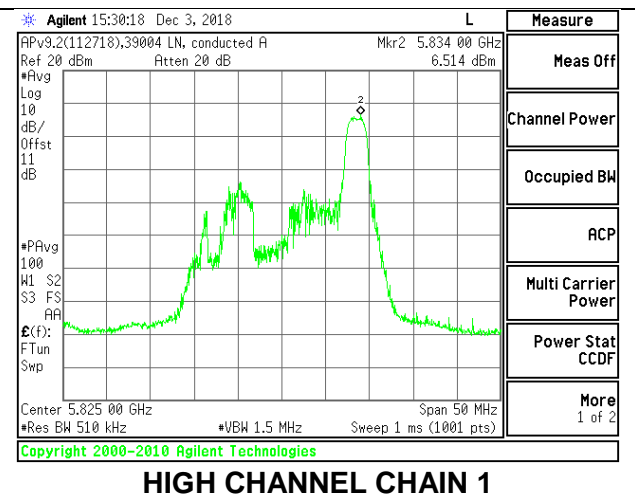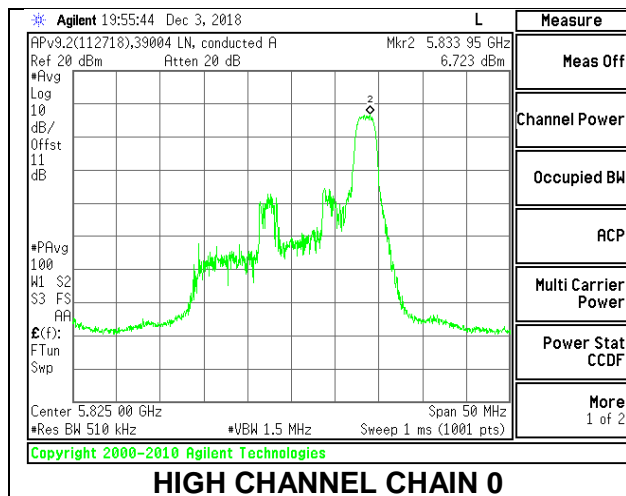

9.5.27. 802.11ax HE40 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	1.13	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	15.98	14.65	18.38	30.00	-11.62
High	5795	15.95	14.68	18.37	30.00	-11.63



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	-2.058	-3.087	1.60	30.00	-28.40
High	5795	-1.812	-1.735	2.37	30.00	-27.63

LOW CHANNEL

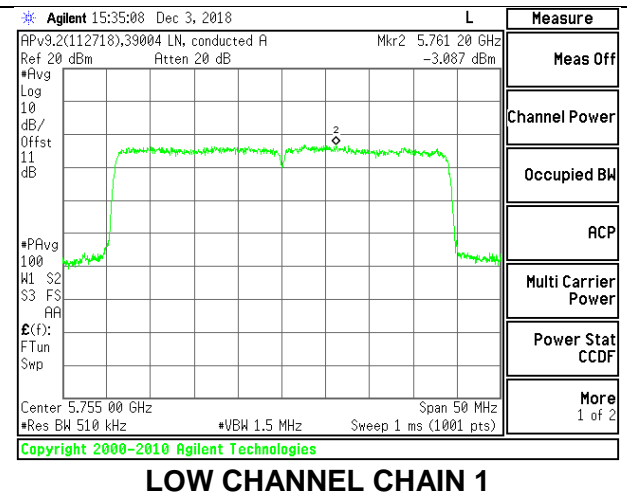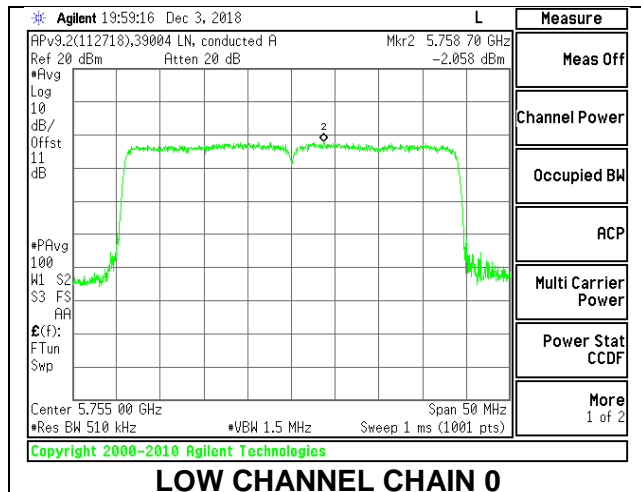

HIGH CHANNEL

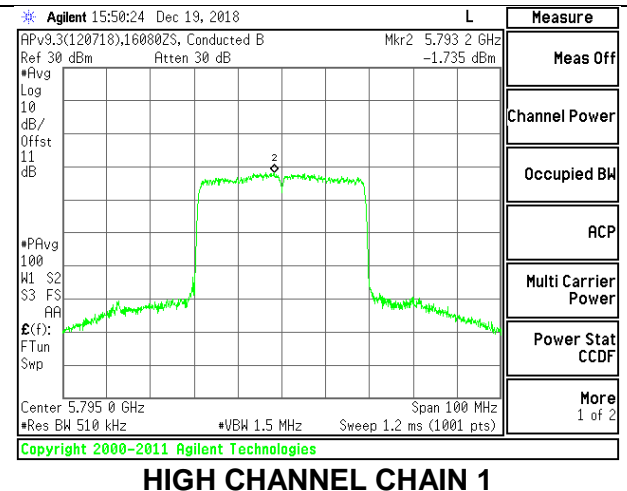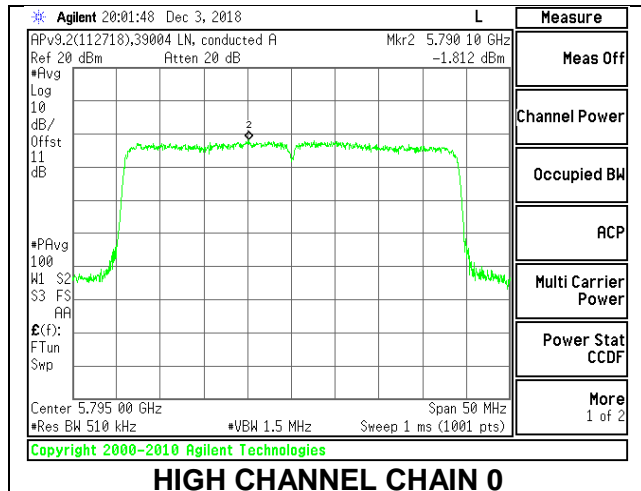

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.67	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	16.9	15.65	19.33	30.00	-10.67
High	5795	16.7	15.45	19.13	30.00	-10.87



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	2.393	1.825	5.80	30.00	-24.20
High	5795	3.177	2.847	6.70	30.00	-23.30

LOW CHANNEL

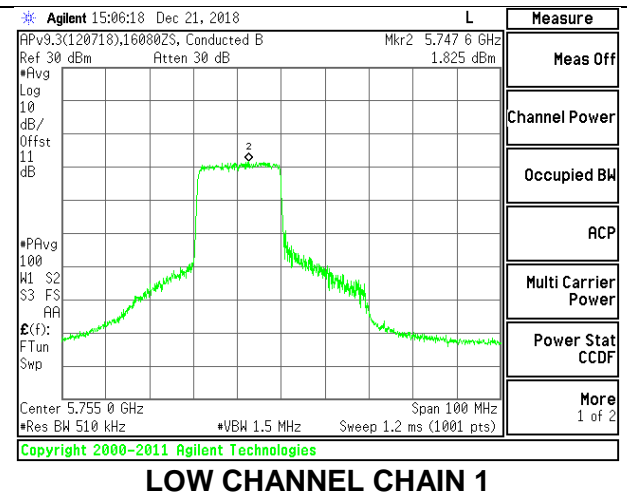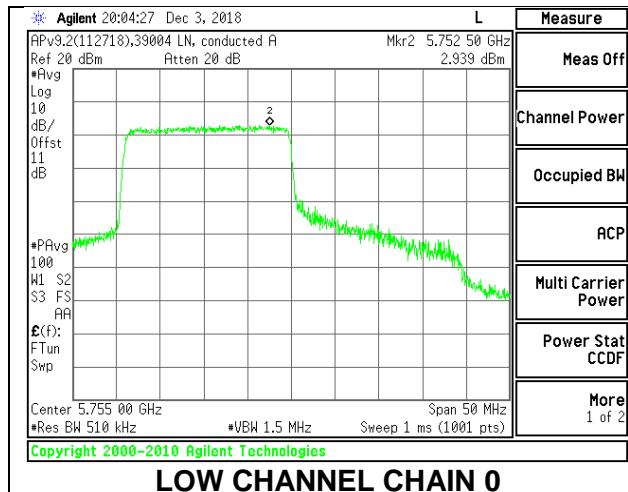

HIGH CHANNEL

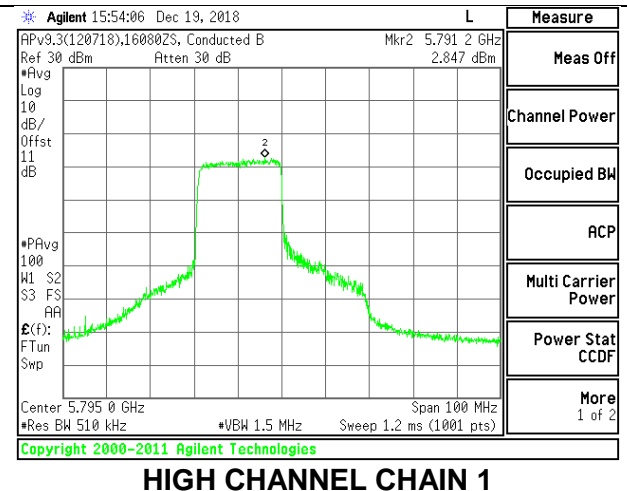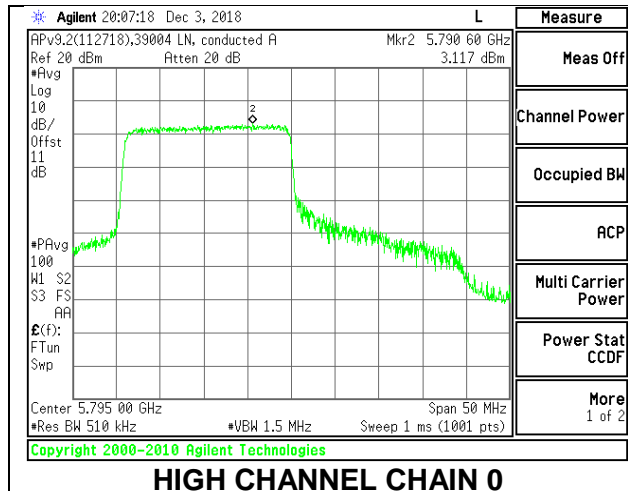

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.67	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	16.96	15.68	19.38	30.00	-10.62
High	5795	16.92	15.66	19.35	30.00	-10.65



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	3.402	2.809	6.80	30.00	-23.20
High	5795	3.076	2.892	6.67	30.00	-23.33

LOW CHANNEL

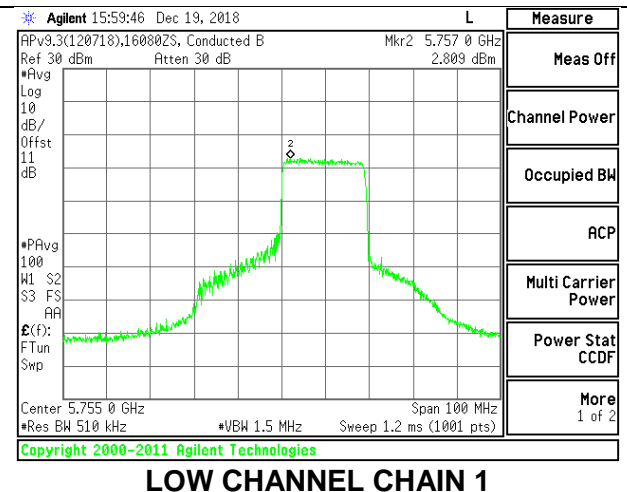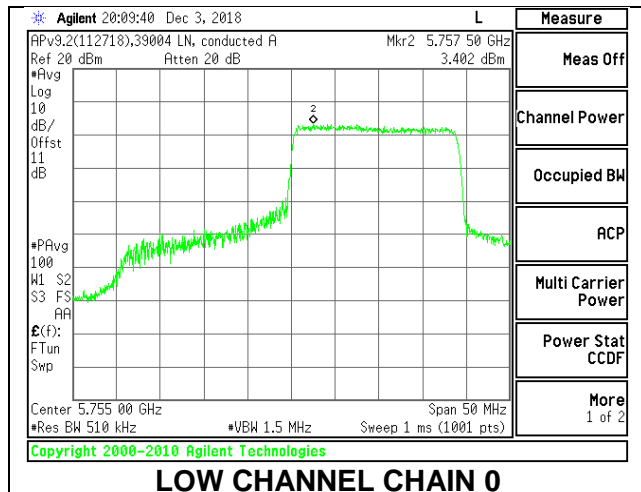

HIGH CHANNEL

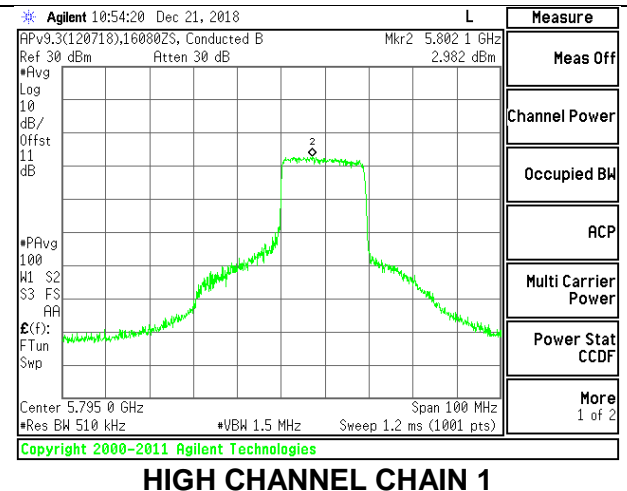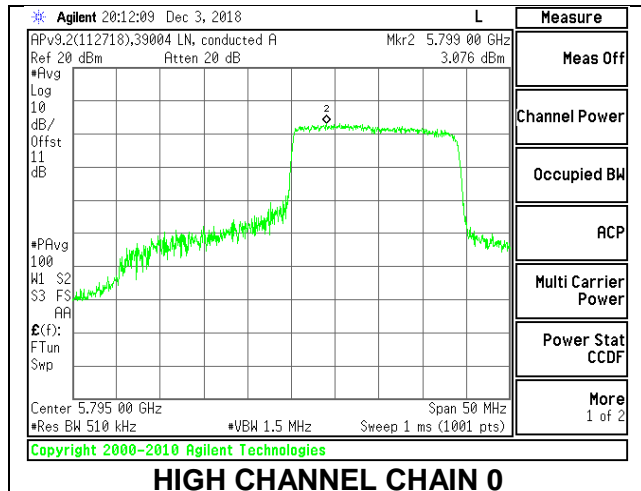

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	15.78	14.49	18.19	30.00	-11.81
High	5795	15.65	14.38	18.07	30.00	-11.93



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	4.656	4.251	7.83	30.00	-22.17
High	5795	5.025	4.655	8.21	30.00	-21.79

LOW CHANNEL

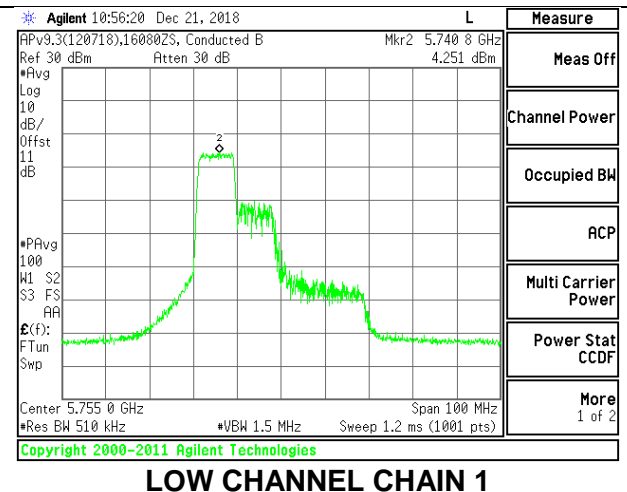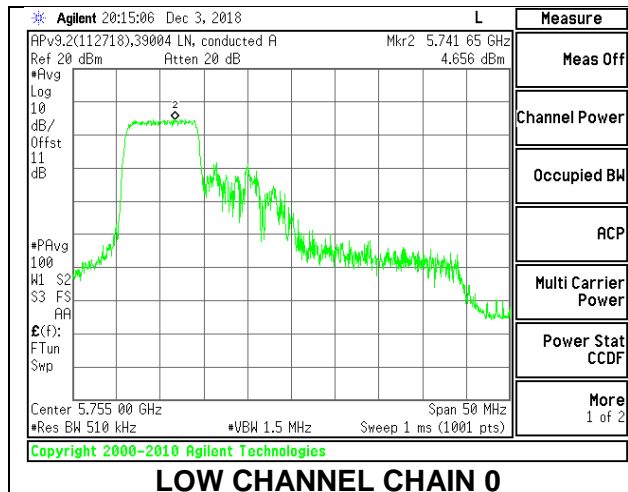

HIGH CHANNEL

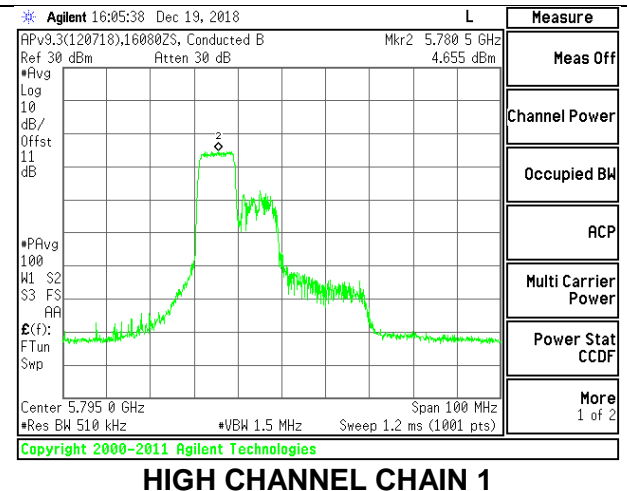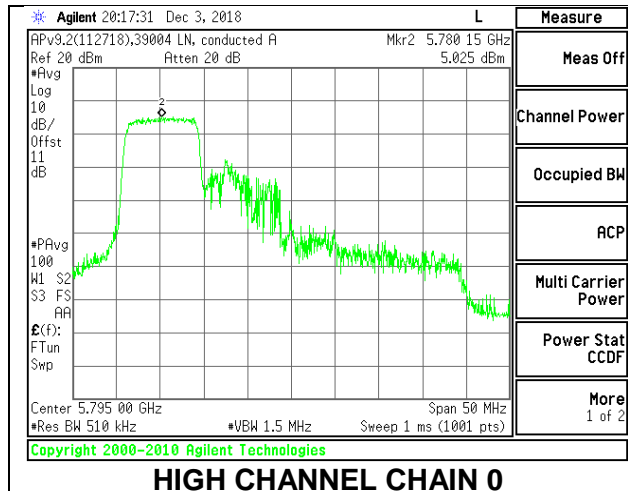

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 54/55

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	15.78	14.49	18.19	30.00	-11.81
High	5795	15.72	14.48	18.15	30.00	-11.85



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	4.938	4.526	8.11	30.00	-21.89
High	5795	5.262	4.272	8.17	30.00	-21.83

LOW CHANNEL

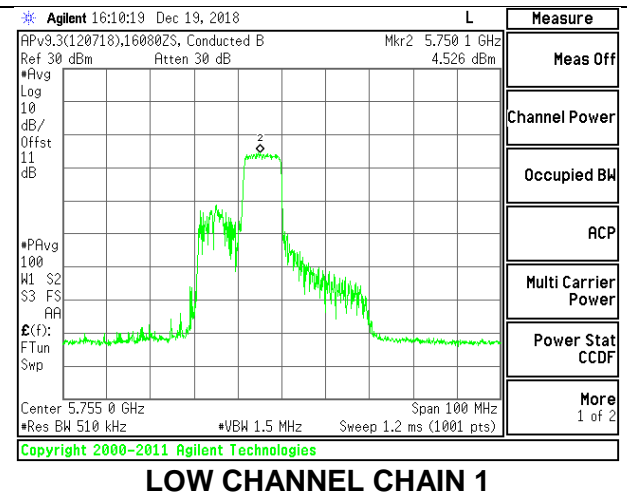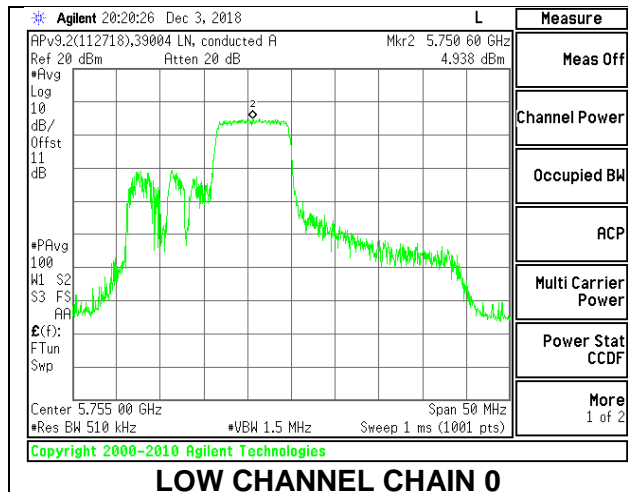

HIGH CHANNEL

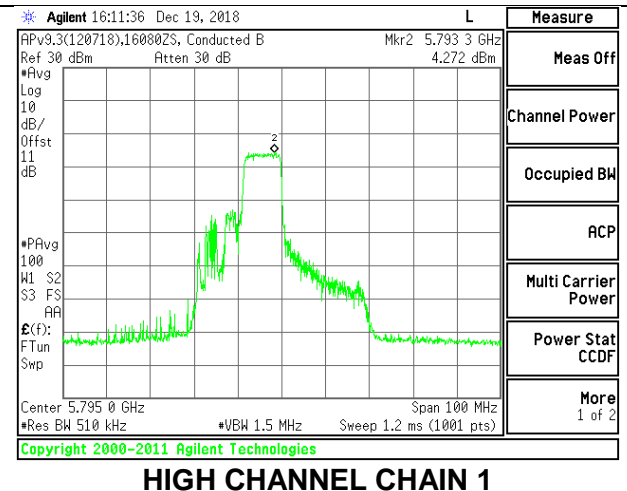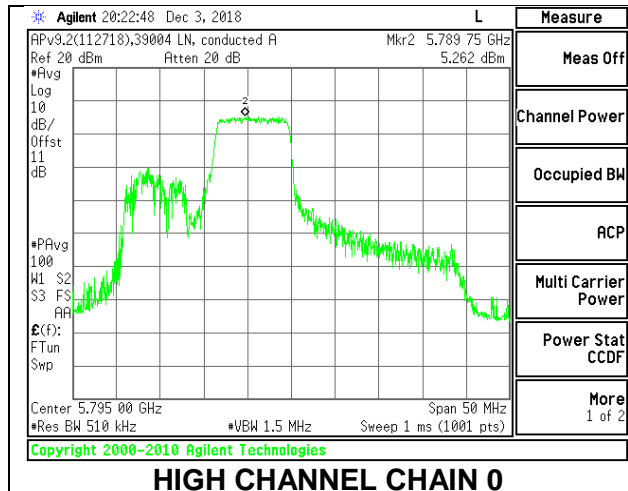

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	15.72	14.46	18.15	30.00	-11.85
High	5795	15.5	14.25	17.93	30.00	-12.07



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	5.141	4.6	8.25	30.00	-21.75
High	5795	4.576	3.989	7.66	30.00	-22.34

LOW CHANNEL

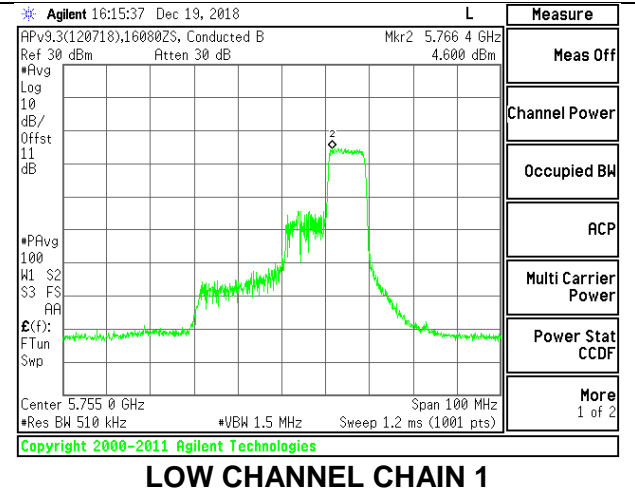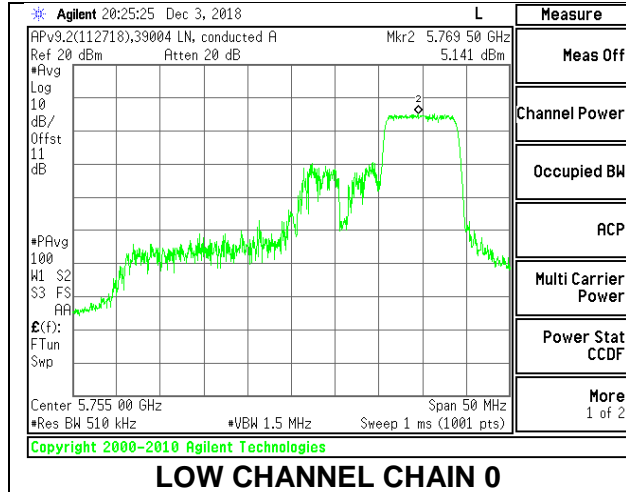

HIGH CHANNEL

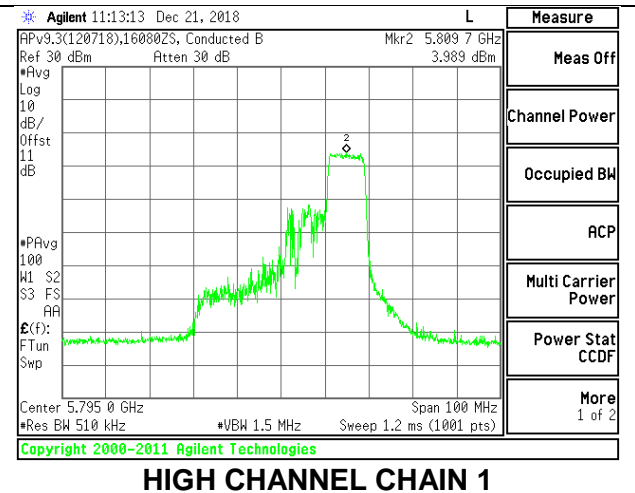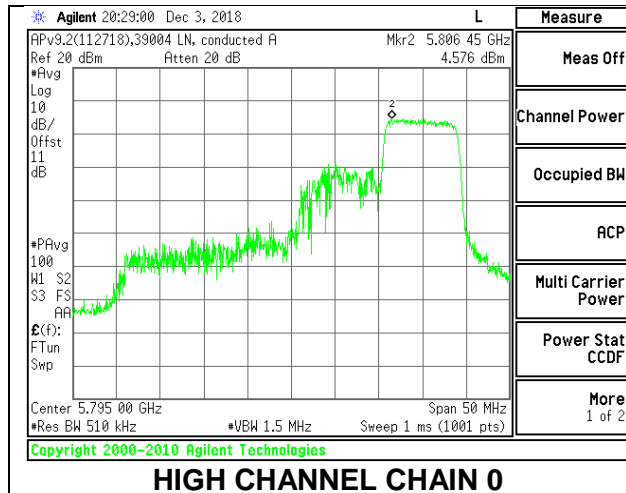

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.6	11.35	15.03	30.00	-14.97
High	5795	12.6	11.35	15.03	30.00	-14.97



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	4.853	4.143	7.69	30.00	-22.31
High	5795	4.957	4.063	7.71	30.00	-22.29

LOW CHANNEL

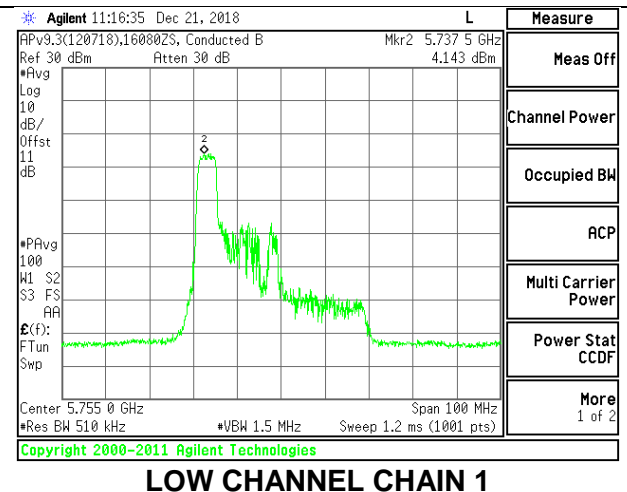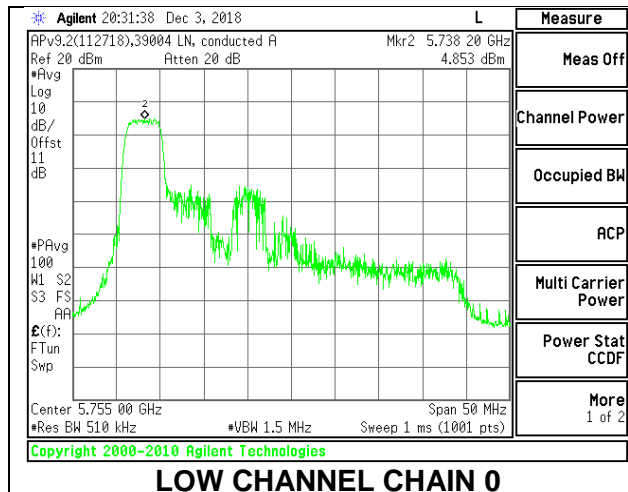

HIGH CHANNEL

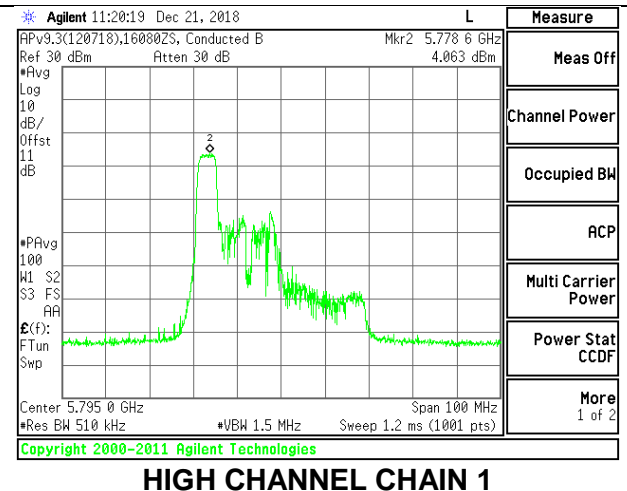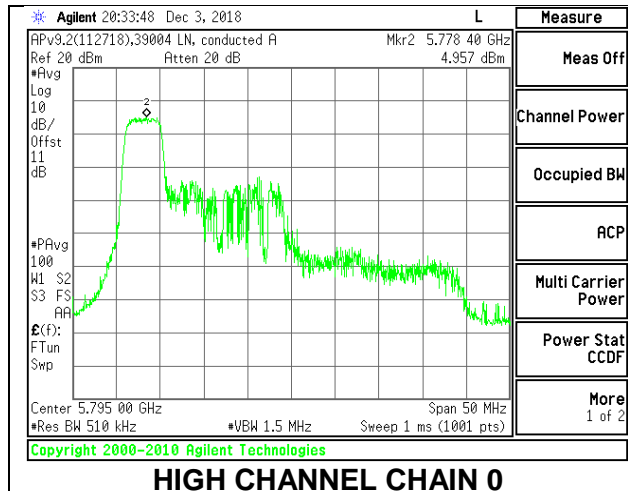

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 40/41

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.98	11.69	15.39	30.00	-14.61
High	5795	12.99	11.71	15.41	30.00	-14.59



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	5.97	5.679	9.01	30.00	-20.99
High	5795	5.833	5.412	8.81	30.00	-21.19

LOW CHANNEL

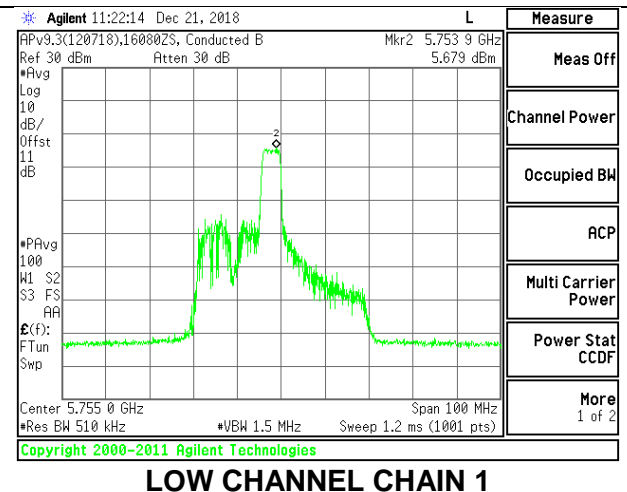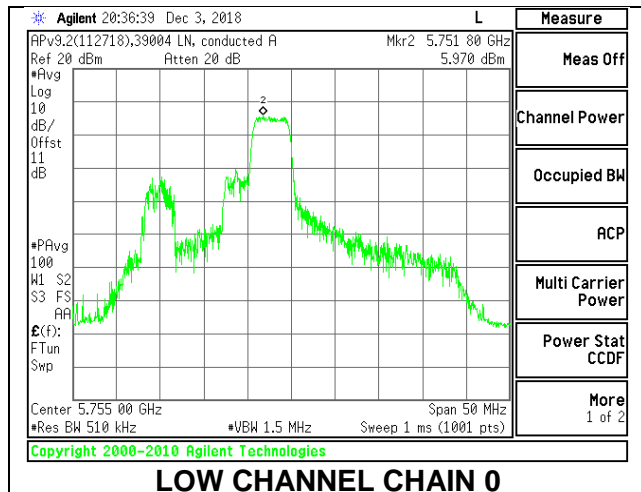

HIGH CHANNEL

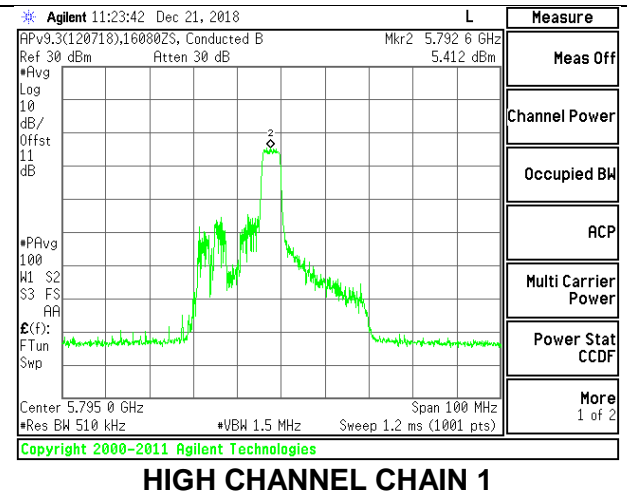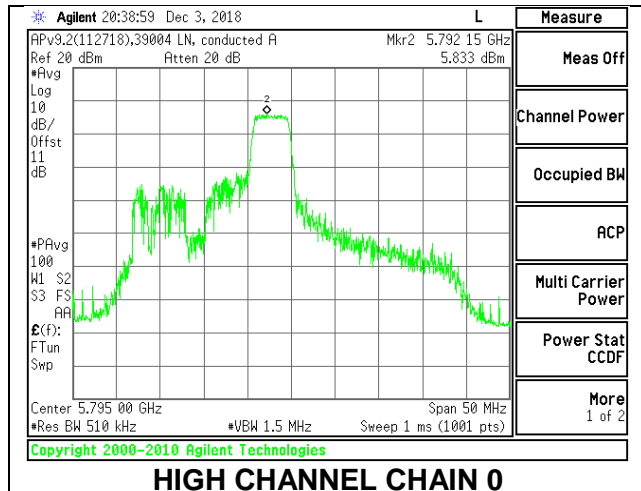

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.85	11.55	15.26	30.00	-14.74
High	5795	12.51	11.25	14.94	30.00	-15.06



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	5.227	4.763	8.18	30.00	-21.82
High	5795	4.751	4.341	7.73	30.00	-22.27

LOW CHANNEL

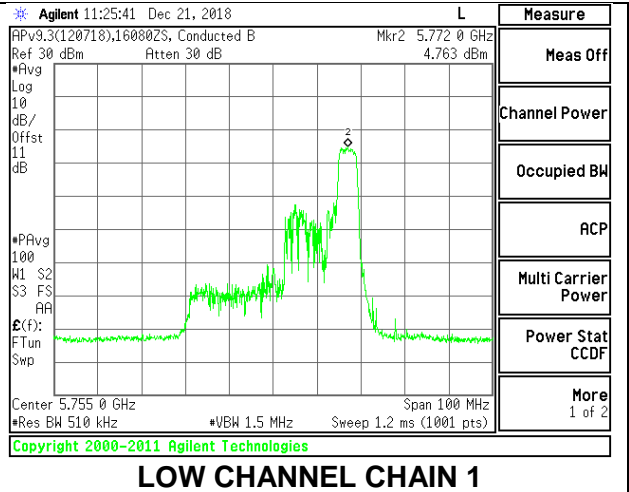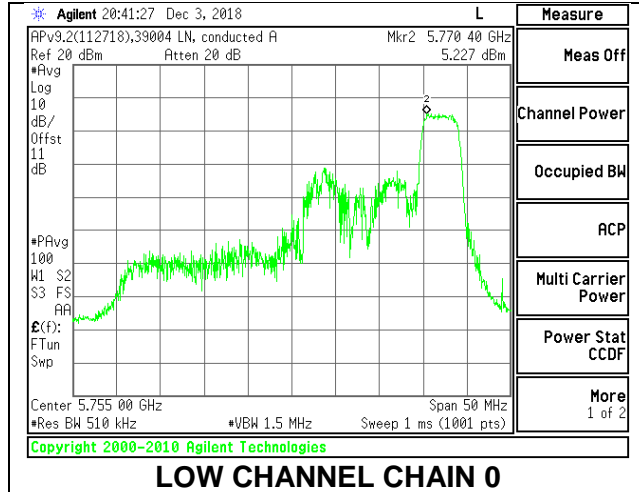

HIGH CHANNEL

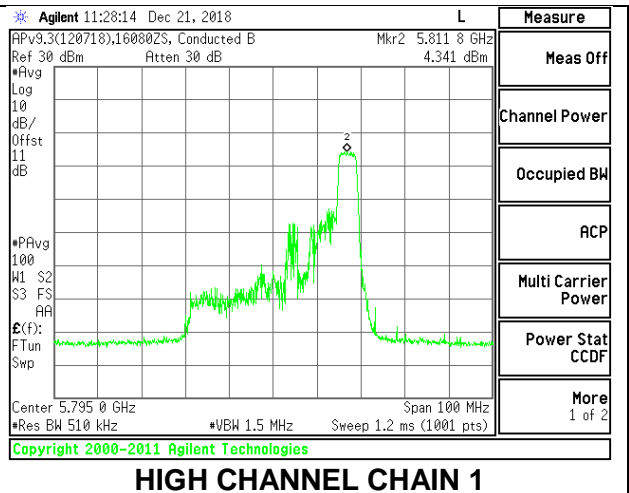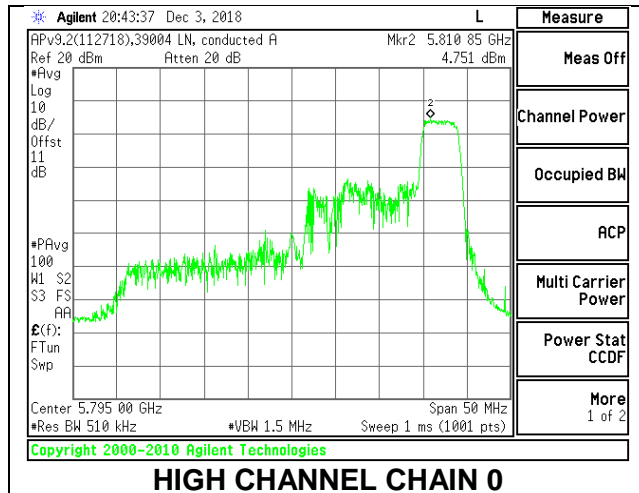

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.8	10.5	14.21	30.00	-15.79
High	5795	11.6	10.3	14.01	30.00	-15.99



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	5.714	5.258	8.61	30.00	-21.39
High	5795	5.348	5.246	8.42	30.00	-21.58

LOW CHANNEL

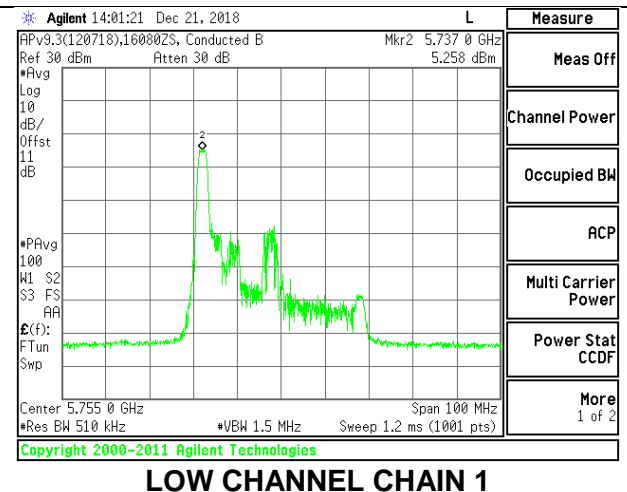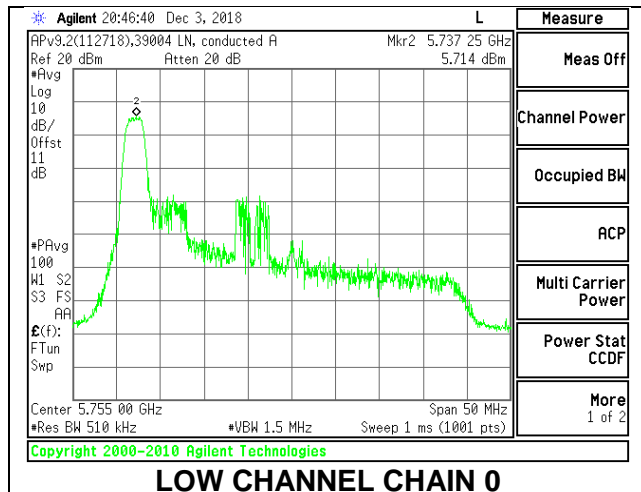

HIGH CHANNEL

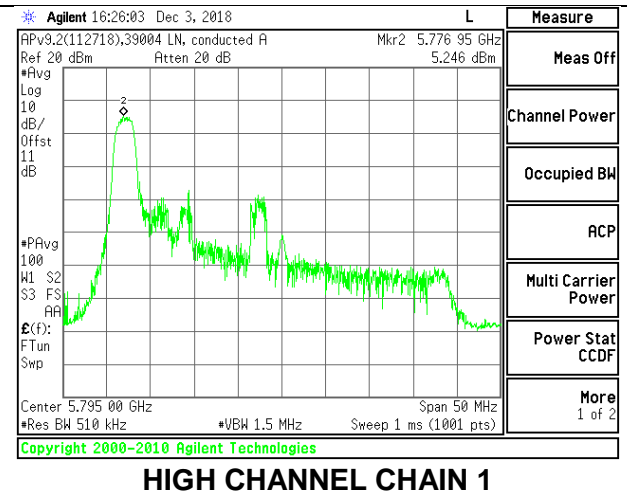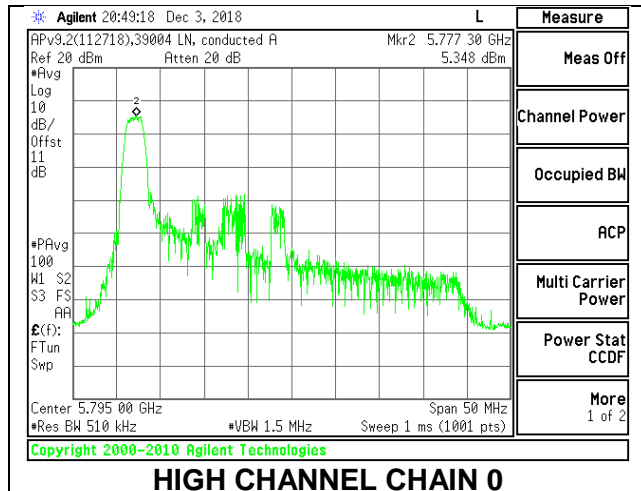

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 8/9

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.8	10.54	14.23	30.00	-15.77
High	5795	11.65	10.35	14.06	30.00	-15.94



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	5.934	5.421	8.81	30.00	-21.19
High	5795	6.621	6.125	9.50	30.00	-20.50

LOW CHANNEL

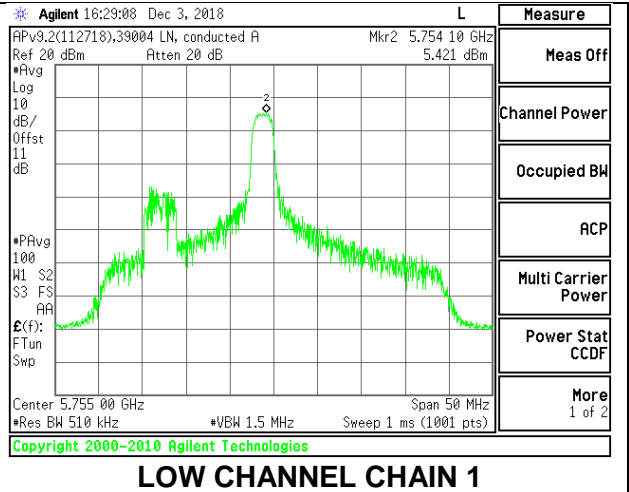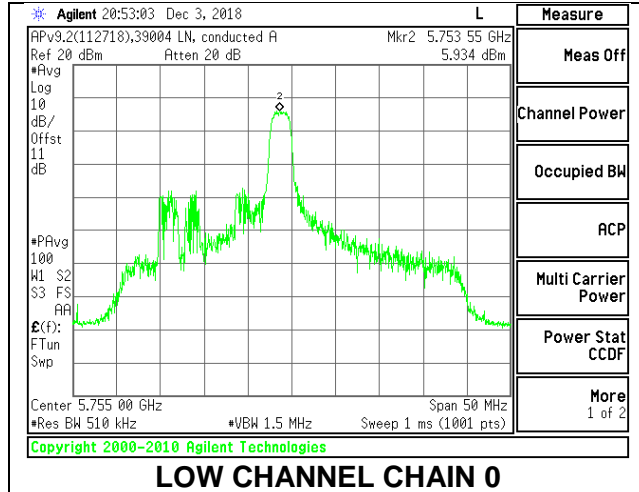

HIGH CHANNEL

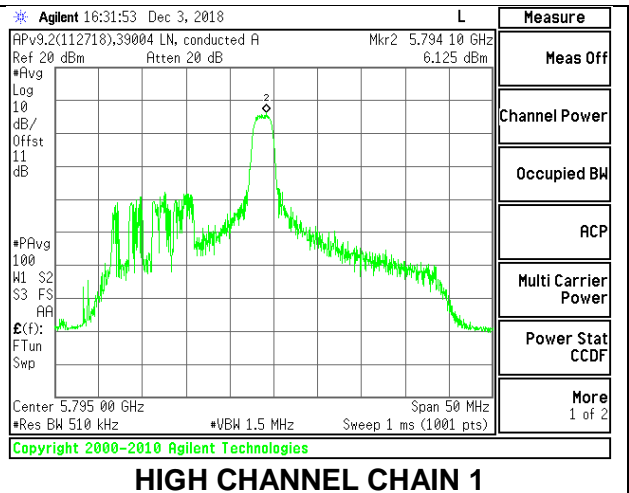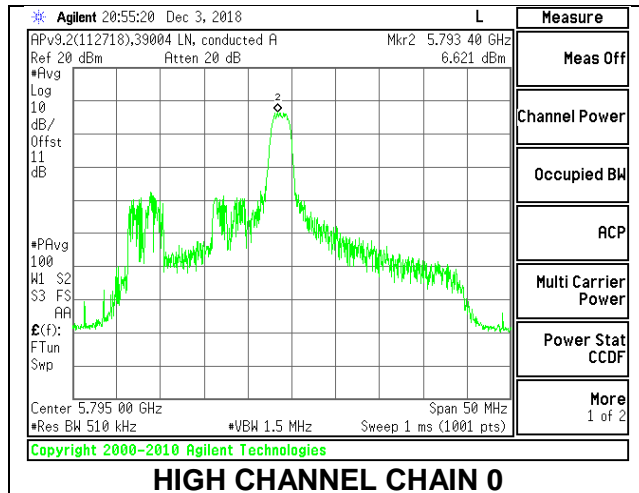

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 17

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Low	5755	-6.91	-3.91	30.00	30.00
High	5795	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	11.86	10.55	14.26	30.00	-15.74
High	5795	11.7	10.5	14.15	30.00	-15.85



PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Low	5755	5.409	4.811	8.24	30.00	-21.76
High	5795	5.036	4.777	8.03	30.00	-21.97

LOW CHANNEL

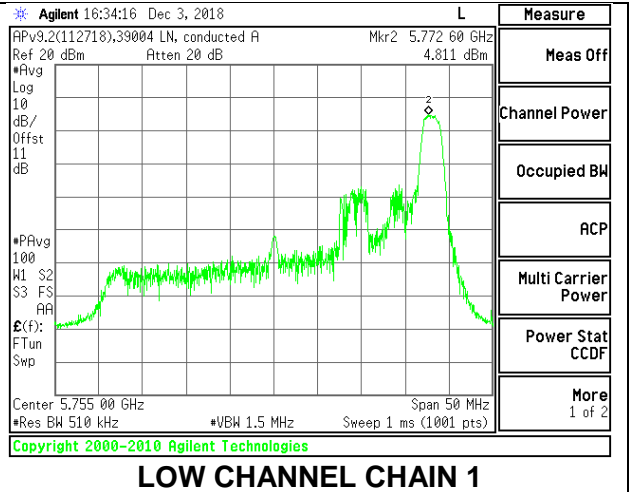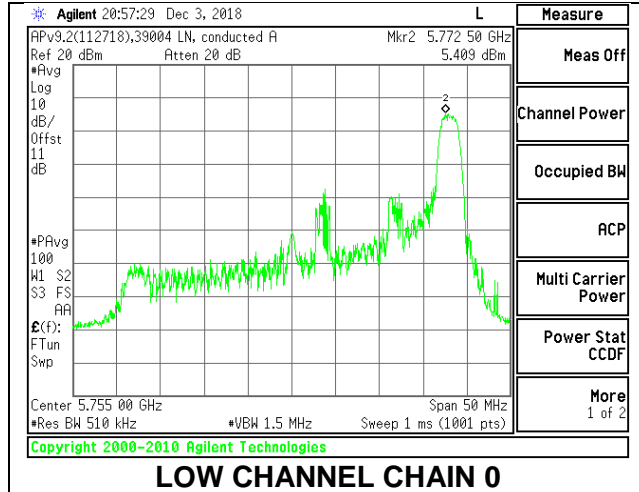

HIGH CHANNEL

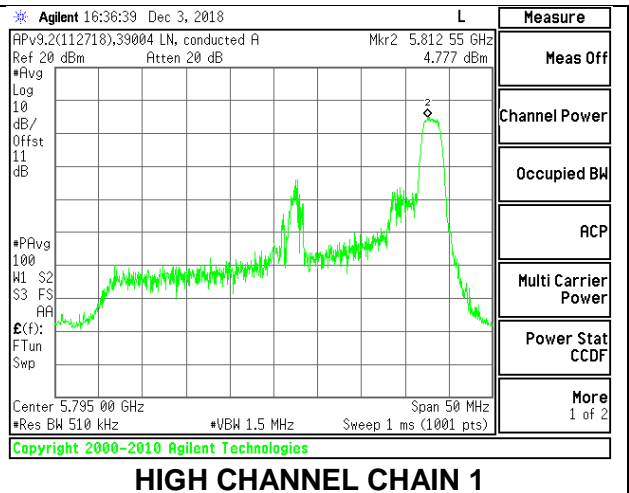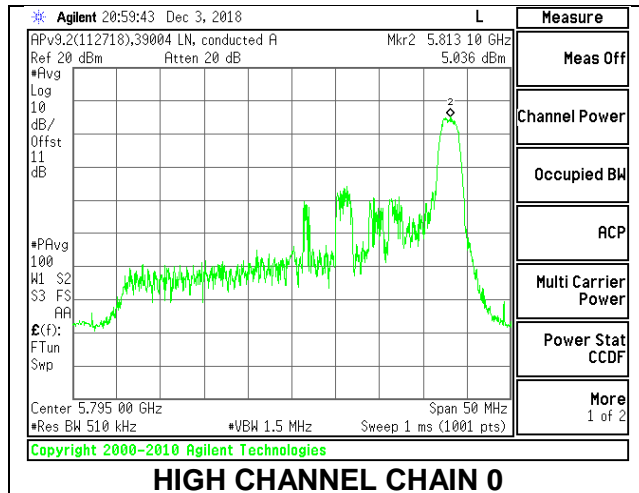

9.5.28. 802.11ax HE80 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE – 996-Tones, RU Index 67

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	1.89	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	14.7	13.52	17.16	30.00	-12.84

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	-6.919	-7.729	-2.40	30.00	-32.40

MID CHANNEL

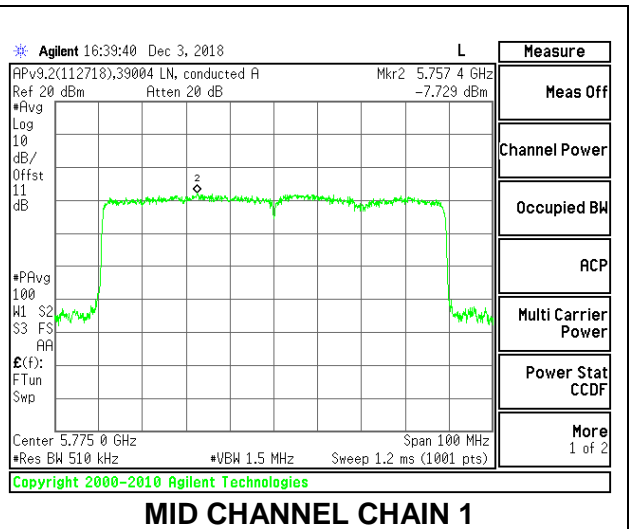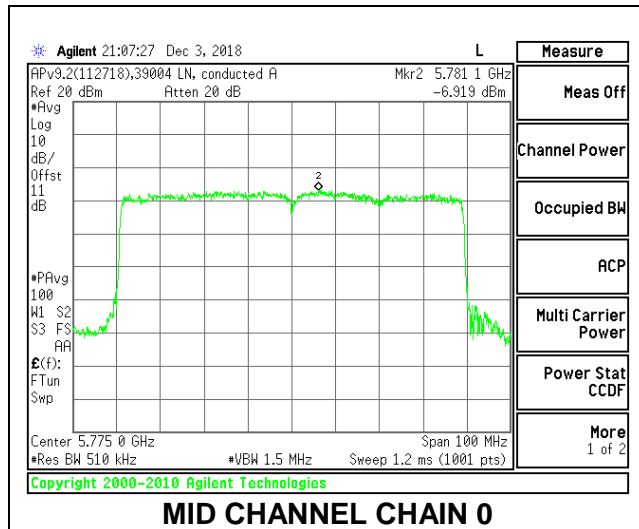

2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 65

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	1.22	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.89	14.76	18.37	30.00	-11.63

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	-2.191	-2.847	1.72	30.00	-28.28

MID CHANNEL

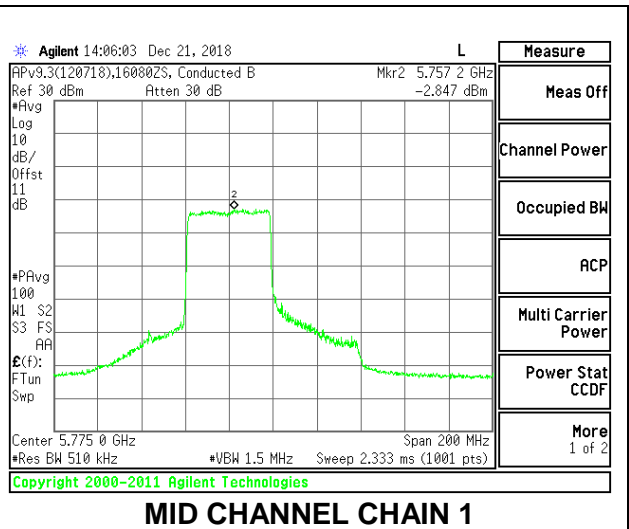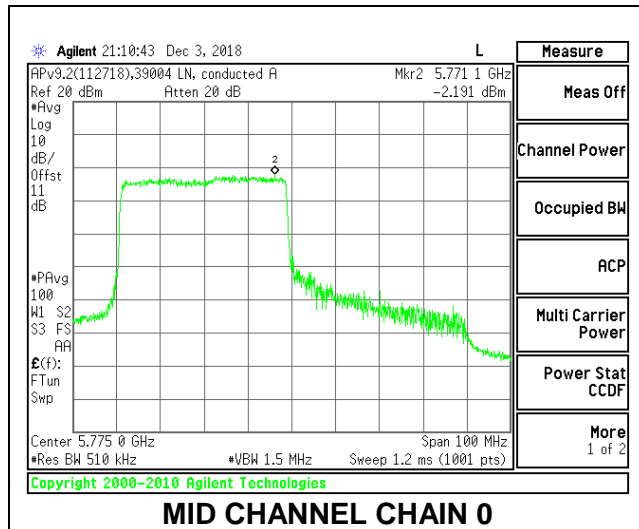

2TX Antenna 1 + Antenna 2 OFDMA MODE – 484-Tones, RU Index 66

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	1.22	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.94	14.82	18.43	30.00	-11.57

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	-2.163	-2.793	1.76	30.00	-28.24

MID CHANNEL

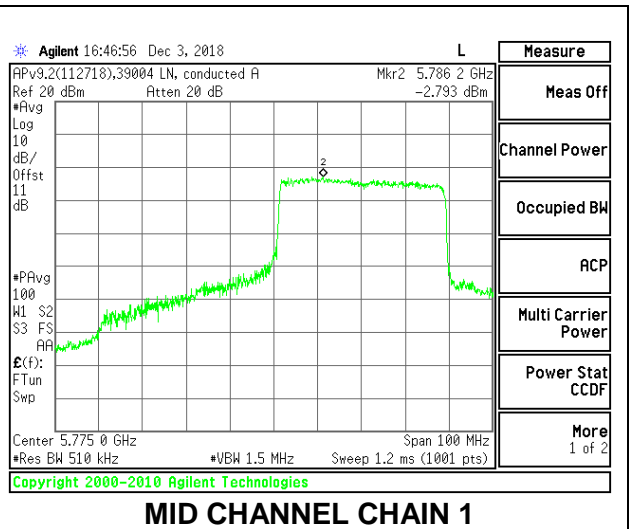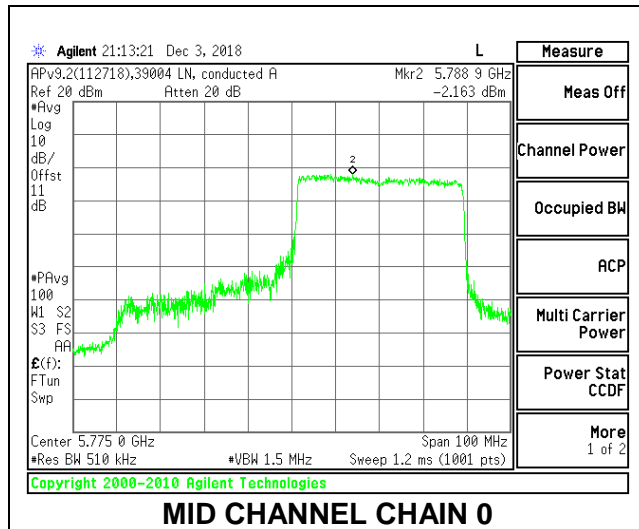

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	16.9	15.75	19.37	30.00	-10.63

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	1.383	1.17	5.01	30.00	-24.99

MID CHANNEL

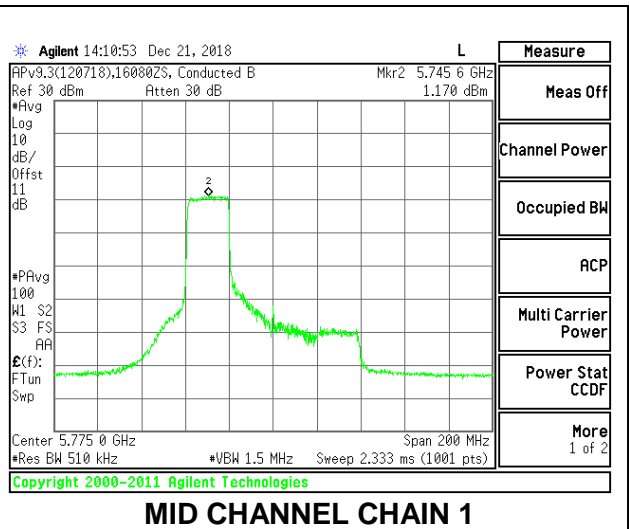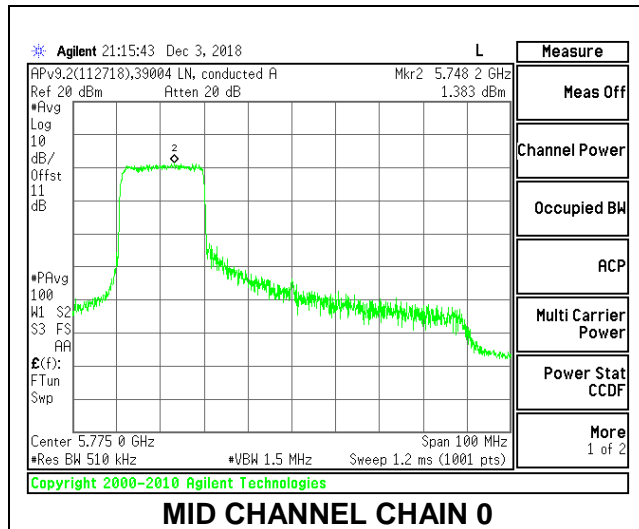

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 62/63

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	16.92	15.75	19.38	30.00	-10.62

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	2.141	1.965	5.78	30.00	-24.22

MID CHANNEL

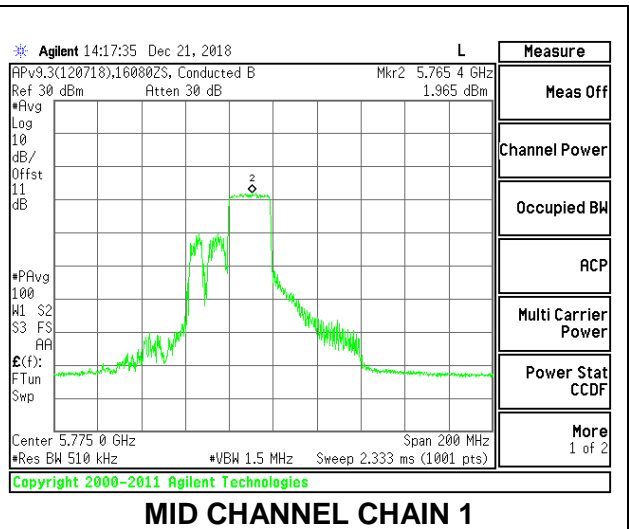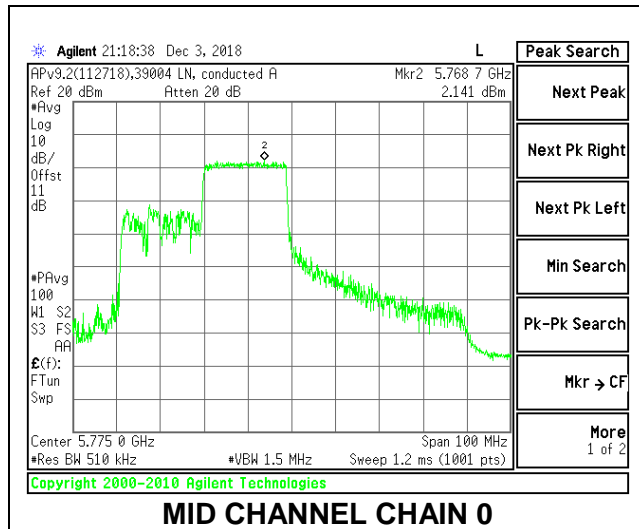

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 64

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.72	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	16.83	15.7	19.31	30.00	-10.69

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	2.171	1.922	5.78	30.00	-24.22

MID CHANNEL

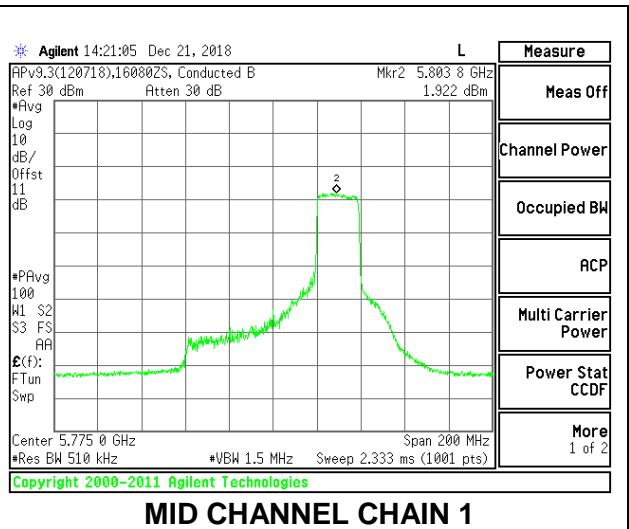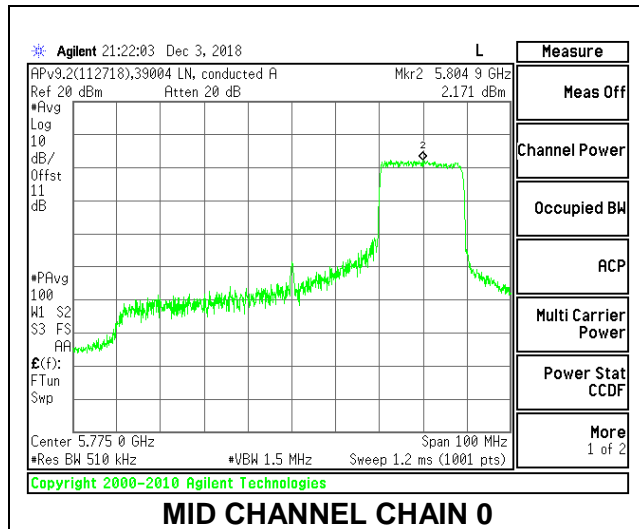

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.65	14.51	18.13	30.00	-11.87

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	3.927	3.617	7.15	30.00	-22.85

MID CHANNEL

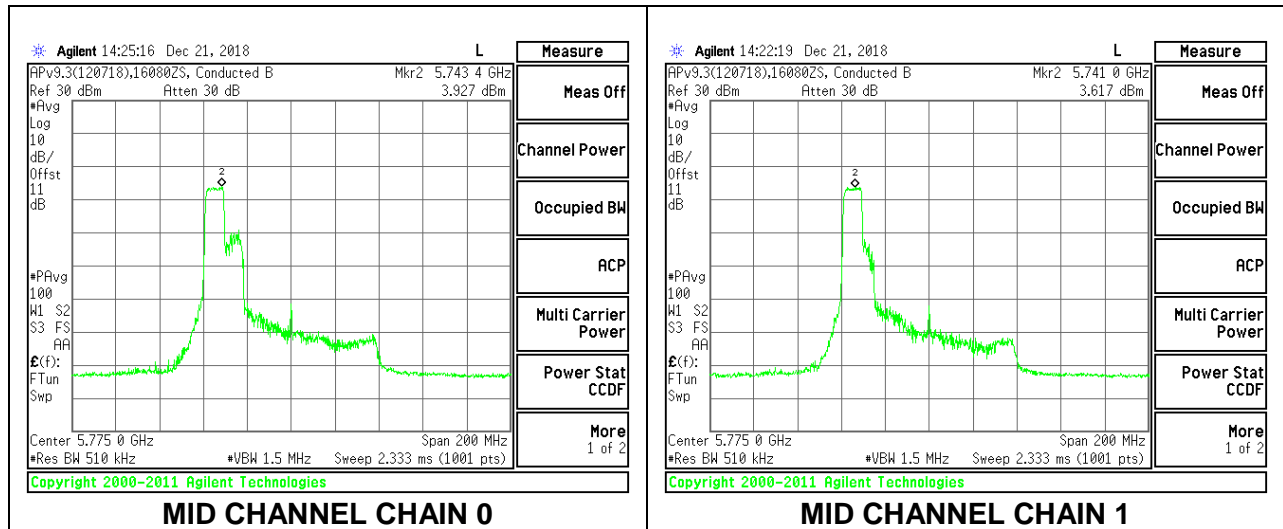

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 56/57

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.74	14.62	18.23	30.00	-11.77

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	3.511	3.568	6.91	30.00	-23.09

MID CHANNEL

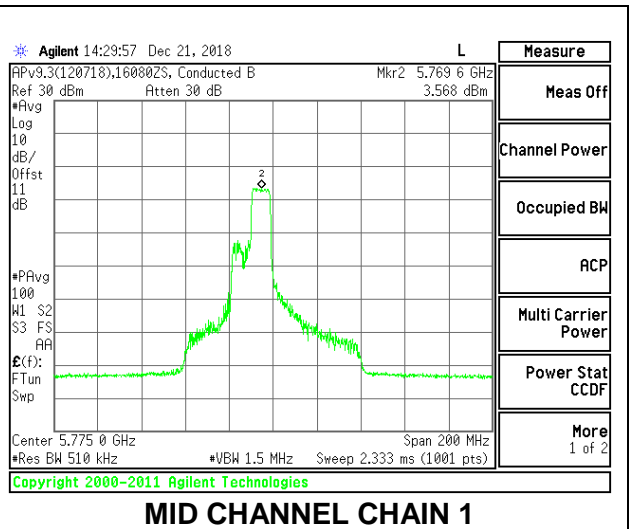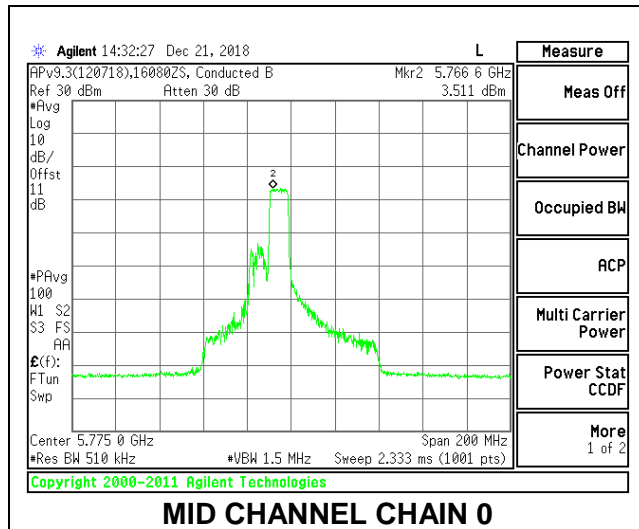

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 60

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.36	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	15.92	14.78	18.40	30.00	-11.60

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	4.89	4.03	7.85	30.00	-22.15

MID CHANNEL

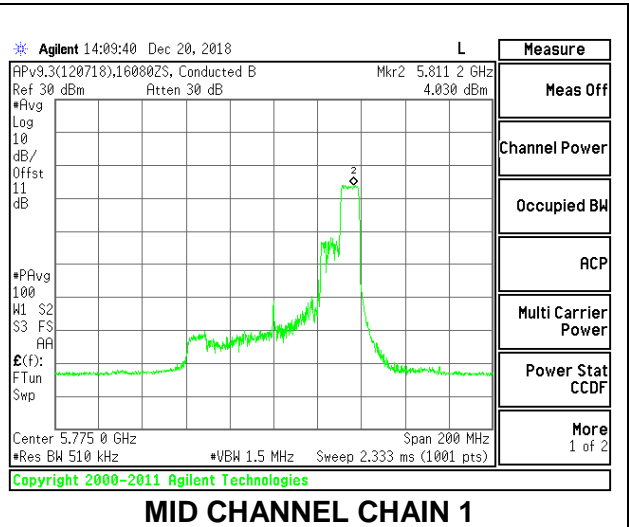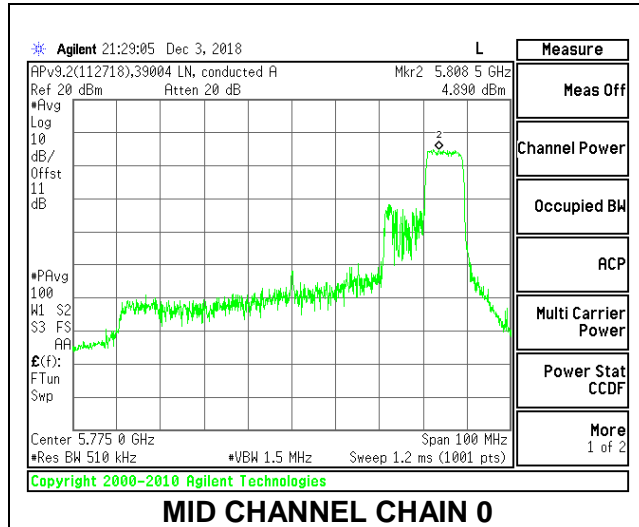

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 37

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	12.96	11.84	15.45	30.00	-14.55

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	3.281	2.806	6.22	30.00	-23.78

MID CHANNEL

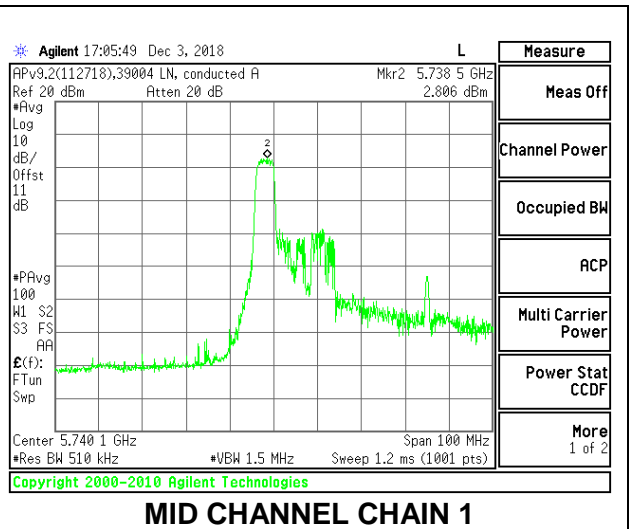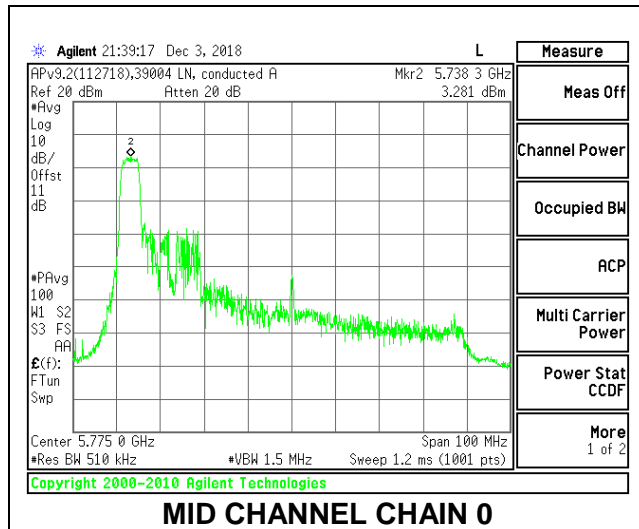

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 44/45

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	12.82	11.68	15.30	30.00	-14.70

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	6.62	6.275	9.62	30.00	-20.38

MID CHANNEL

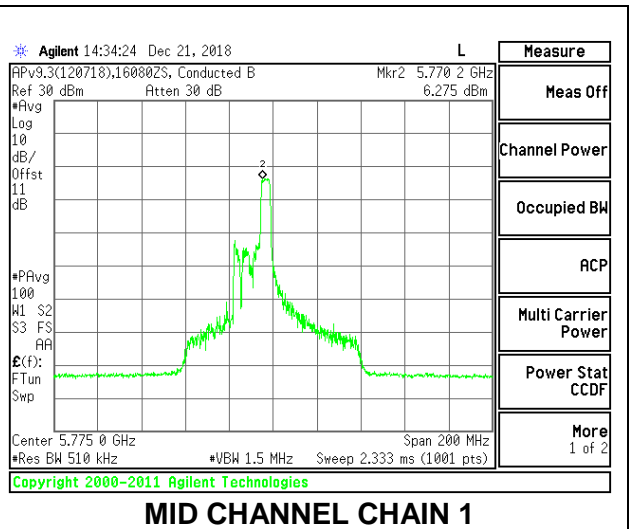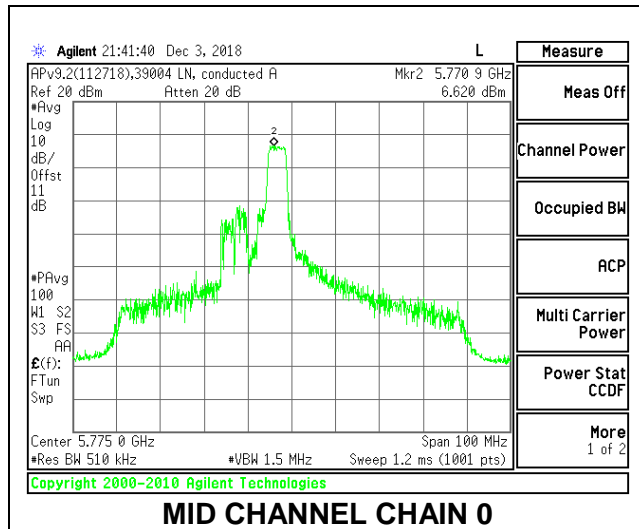

2TX Antenna 1 + Antenna 2 OFDMA MODE – 52-Tones, RU Index 52

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.16	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	12.88	11.74	15.36	30.00	-14.64

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	4.882	4.255	7.75	30.00	-22.25

MID CHANNEL

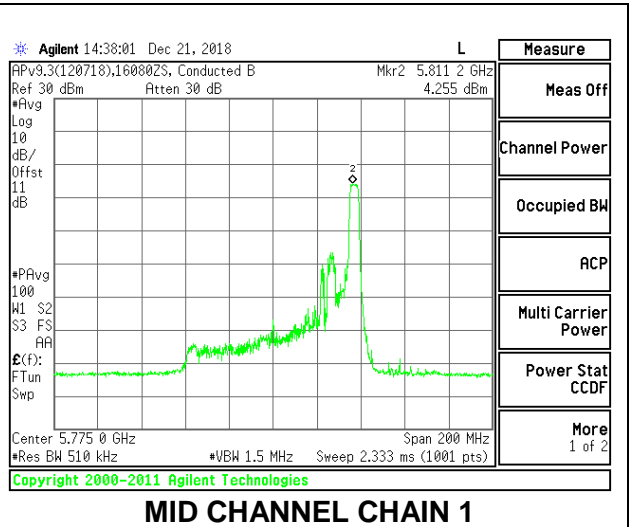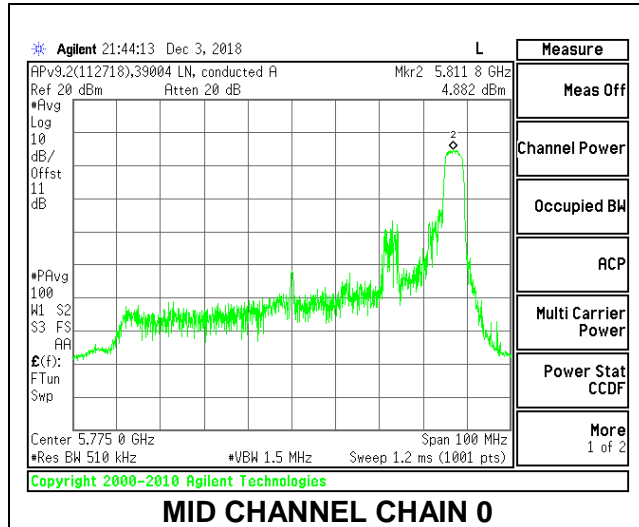

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 0

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	11.85	10.72	14.33	30.00	-15.67

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	6.382	6.027	9.34	30.00	-20.66

MID CHANNEL

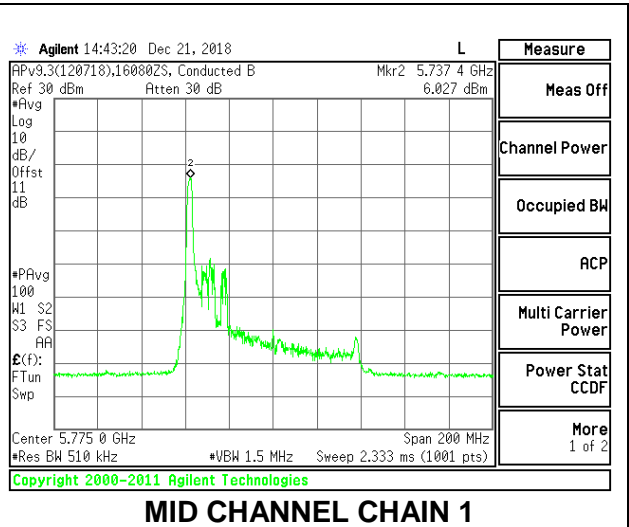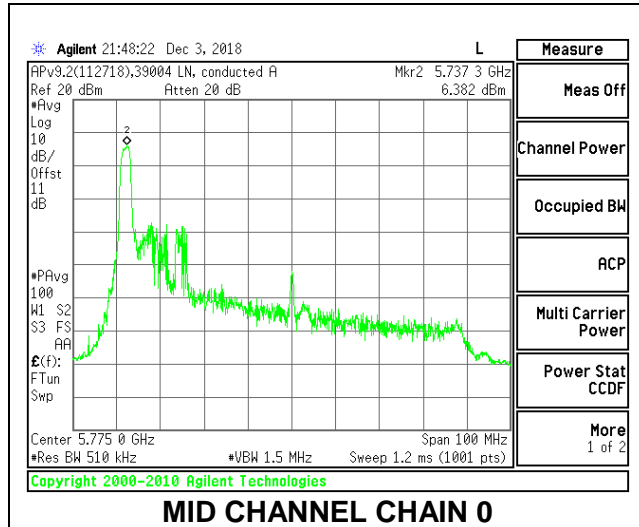

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 18

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm/ 1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	11.8	10.55	14.23	30.00	-15.77

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/ 1MHz)	Chain 1 Meas PSD (dBm/ 1MHz)	Total Corr'd PSD (dBm/ 1MHz)	PSD Limit (dBm/ 1MHz)	PSD Margin (dB)
Mid	5775	5.977	5.144	8.71	30.00	-21.29

MID CHANNEL

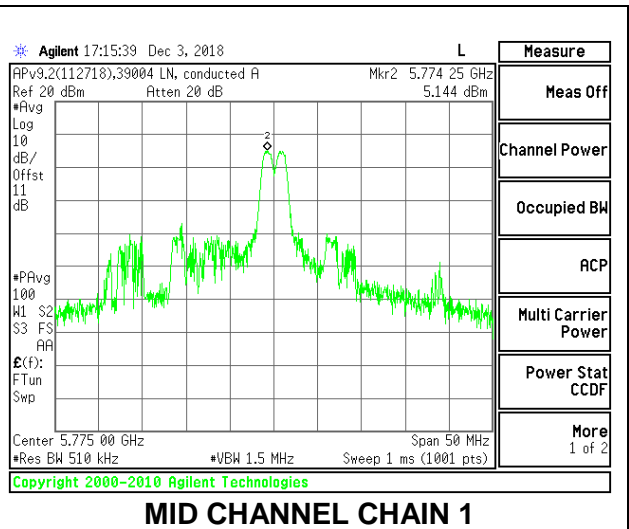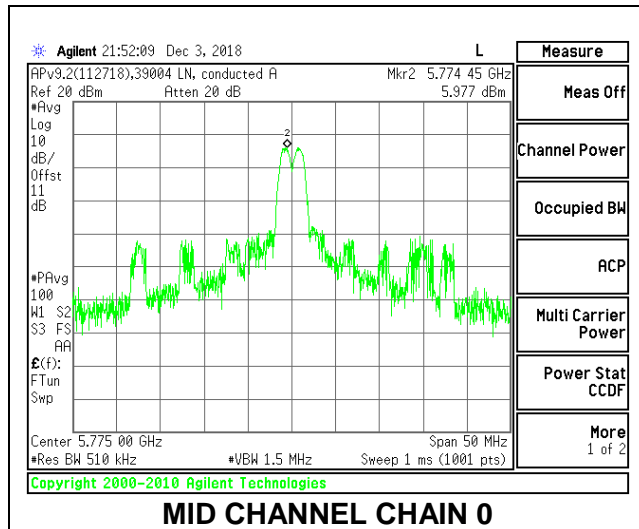

2TX Antenna 1 + Antenna 2 OFDMA MODE – 26-Tones, RU Index 36

	(MHz)	For Power (dBi)	For PSD (dBi)	(dBm)	(dBm/1MHz)
Mid	5775	-6.91	-3.91	30.00	30.00

Duty Cycle CF (dB)	0.12	Included in Calculations of Corr'd PSD
---------------------------	------	---



Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	11.8	10.5	14.21	30.00	-15.79

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm/1MHz)	Chain 1 Meas PSD (dBm/1MHz)	Total Corr'd PSD (dBm/1MHz)	PSD Limit (dBm/1MHz)	PSD Margin (dB)
Mid	5775	5.945	5.714	8.96	30.00	-21.04

MID CHANNEL

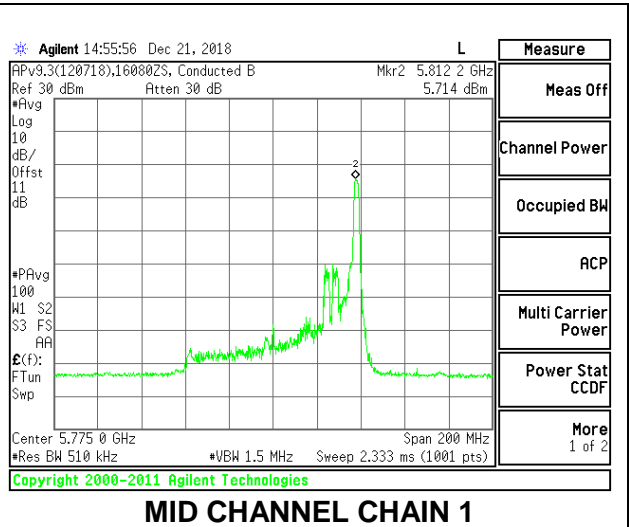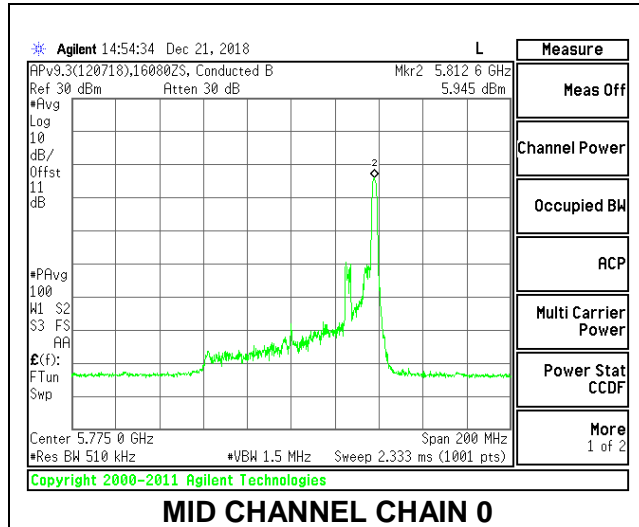

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209 -Restricted bands

FCC §15.407(b)(1-3) -Un-Restricted bands

After January 01, 2019 for Outside of the Restricted Bands Emissions

6.2.1.2 (for 5150-5250 MHz band)

6.2.2.2 (for 5250-5350 MHz band)

6.2.3.2 (for 5470-5600 MHz and 5650-5725 MHz bands)

6.2.4.2 (for 5725-5850 MHz band)

NCC LP0002 §2.7 and §2.8

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 1GHz and 18GHz to 40 GHz is investigated with the transmitter set to transmit at the channel with highest output power as worst-case scenario. 1GHz to 18GHz was set to the lowest, middle, and highest channels in the 5 GHz bands.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

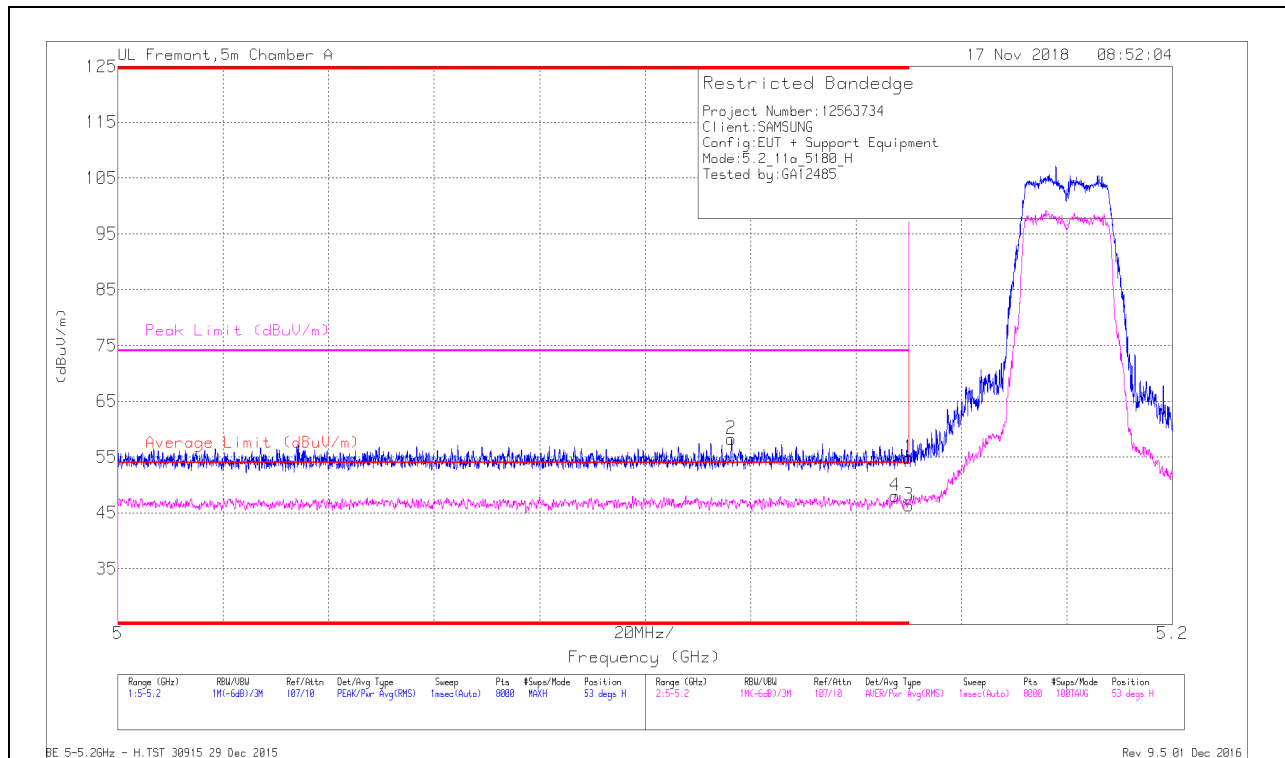


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbi/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	38.17	Pk	34.4	-17.7	0	54.87	-	-	74	-19.13	53	116	H
2	* 5.116	41.58	Pk	34.4	-17.7	0	58.28	-	-	74	-15.72	53	116	H
3	* 5.15	29.6	RMS	34.4	-17.7	.29	46.59	54	-7.41	-	-	53	116	H
4	* 5.147	31.41	RMS	34.4	-17.7	.29	48.4	54	-5.6	-	-	53	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

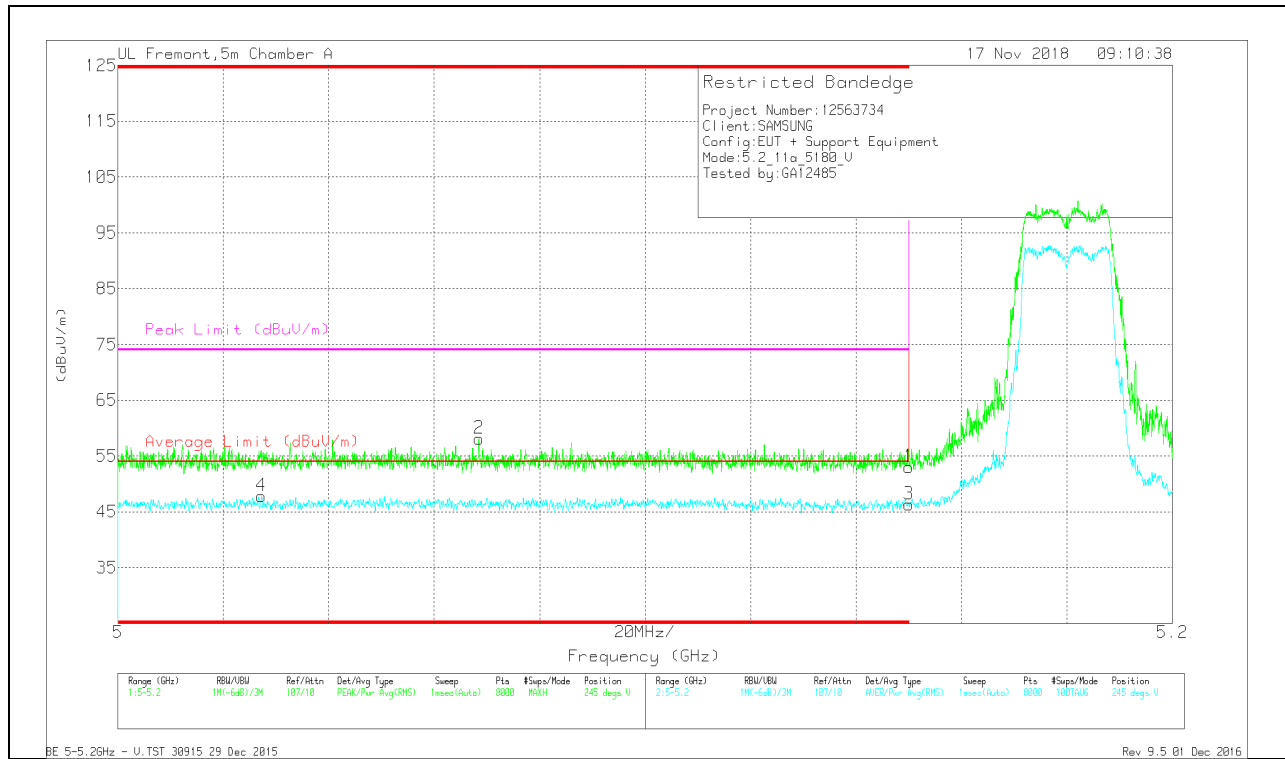


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cou/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	36.36	Pk	34.4	-17.7	0	53.06	-	-	74	-20.94	245	102	V
2	* 5.068	41.54	Pk	34.4	-17.8	0	58.14	-	-	74	-15.86	245	102	V
3	* 5.15	29.34	RMS	34.4	-17.7	.29	46.33	54	-7.67	-	-	245	102	V
4	* 5.027	31.13	RMS	34.3	-17.9	.29	47.82	54	-6.18	-	-	245	102	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

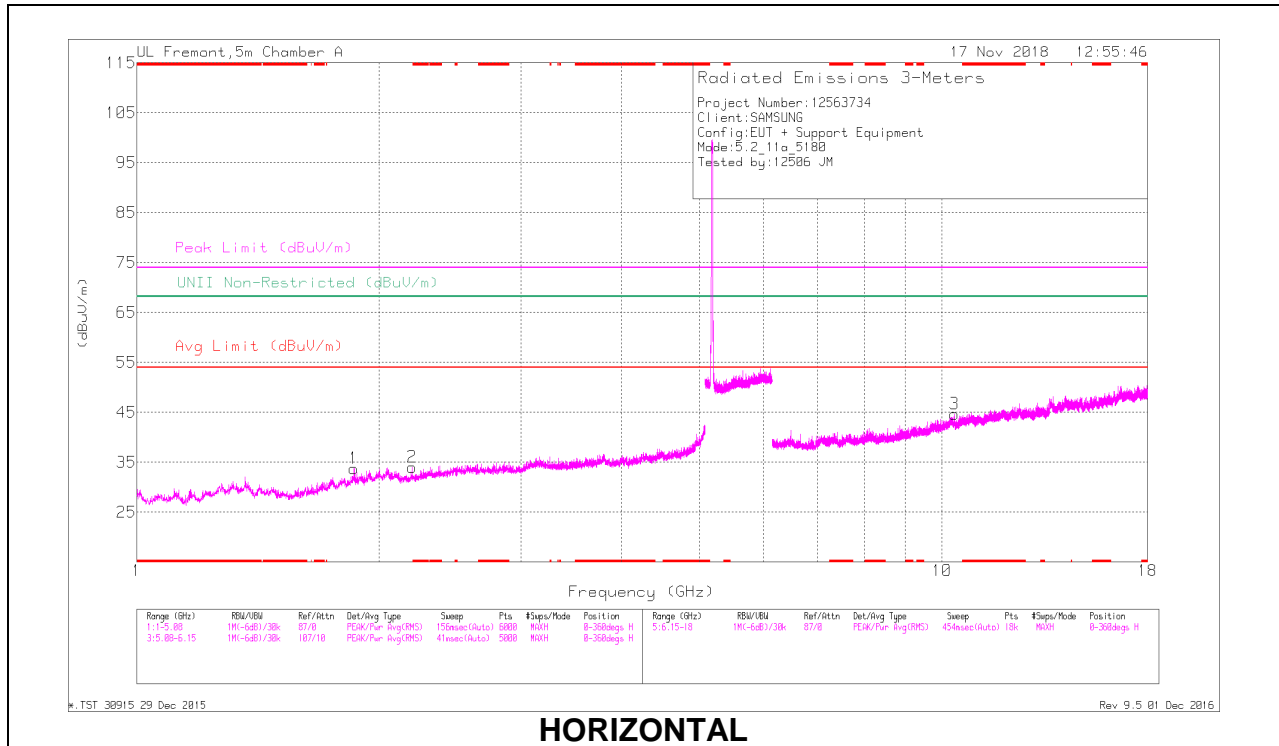

HORIZONTAL

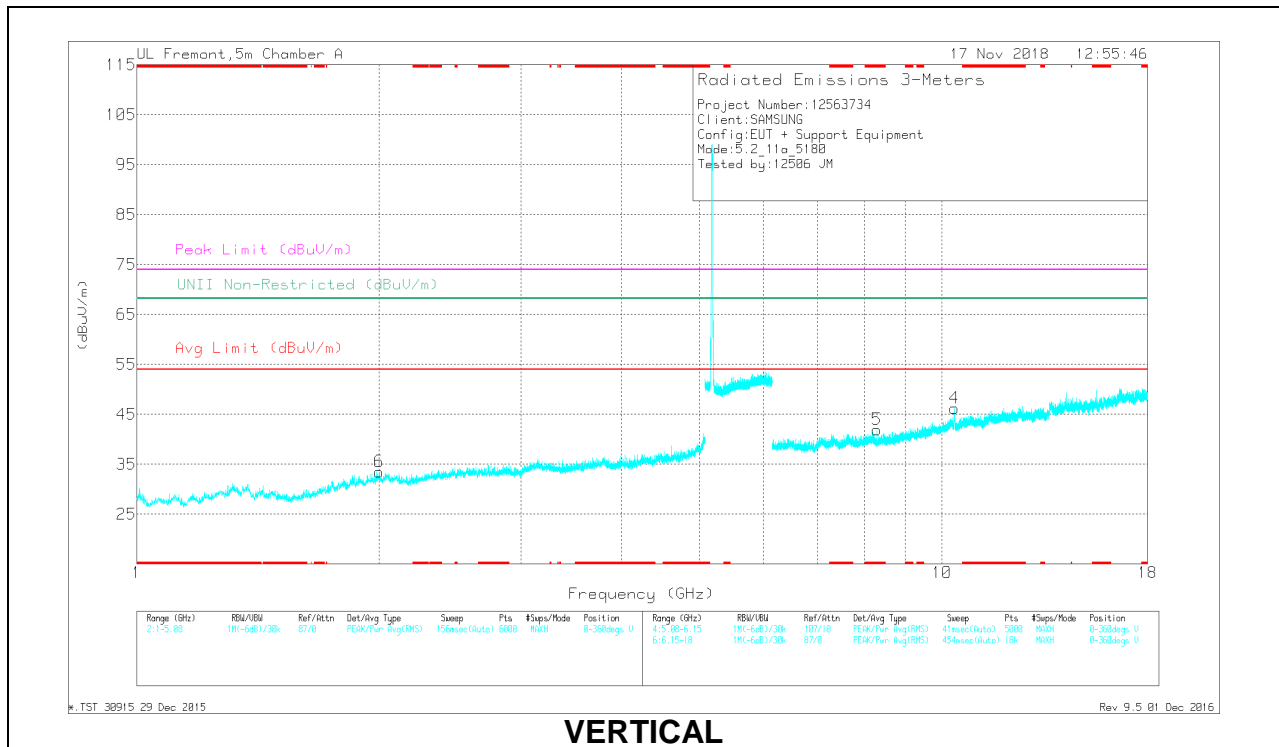

VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 8.297	32.74	PK-U	35.9	-22.5	0	46.14	-	-	74	-27.86	-	-	171	118	V
* 8.298	21.86	ADR	35.9	-22.5	.29	35.55	54	-18.45	-	-	-	-	171	118	V
1.861	39.31	PK-U	30.9	-31.5	0	38.71	-	-	-	-	68.2	-29.49	40	129	H
2	39.25	PK-U	31.4	-30.5	0	40.15	-	-	-	-	68.2	-28.05	44	175	V
2.195	39.23	PK-U	31.1	-30.9	0	39.43	-	-	-	-	68.2	-28.77	42	154	H
10.355	31.73	PK-U	37.5	-19.5	0	49.73	-	-	-	-	68.2	-18.47	45	166	H
10.361	37.26	PK-U	37.5	-19.5	0	55.26	-	-	-	-	68.2	-12.94	164	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

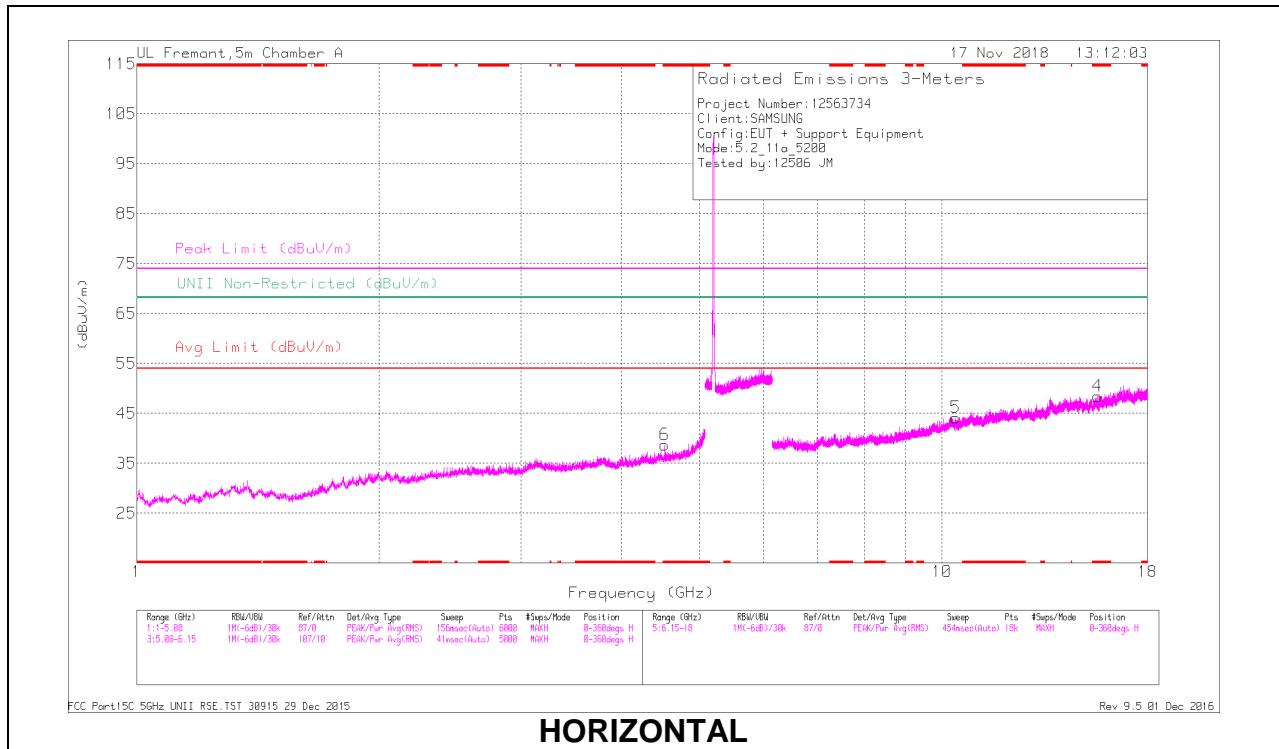

HORIZONTAL

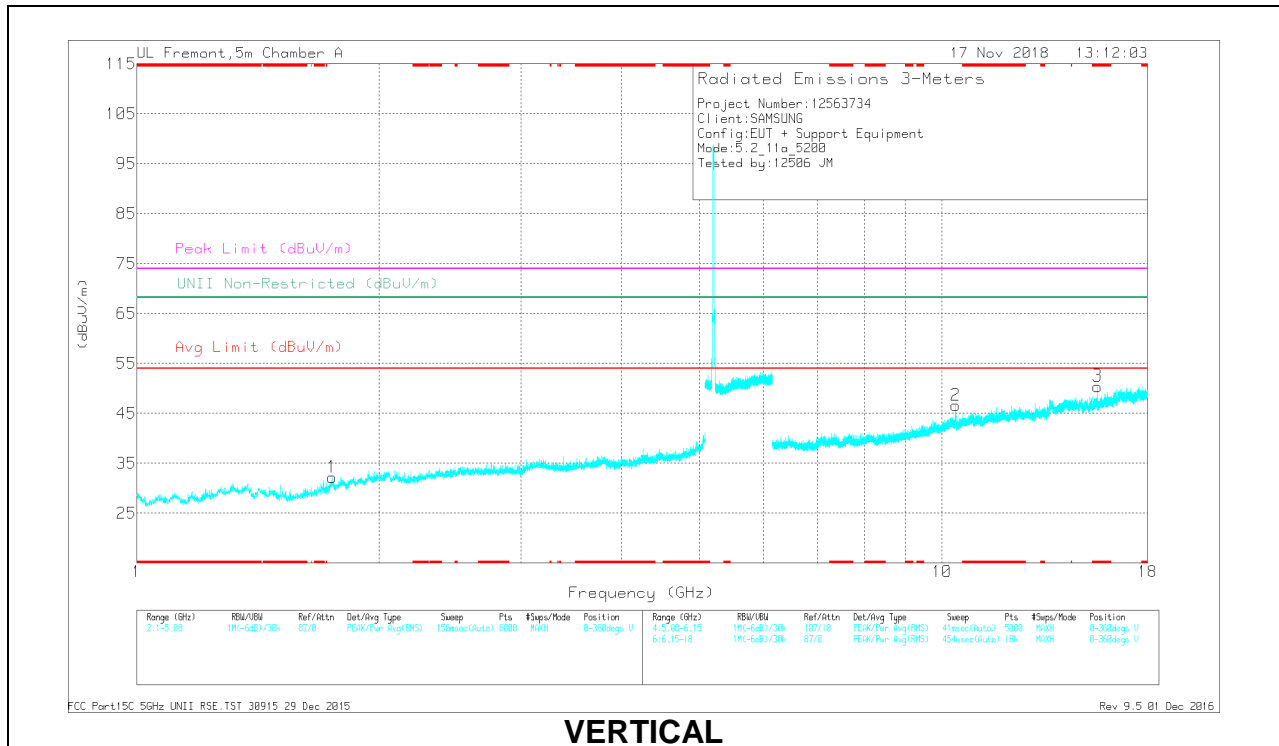


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Arg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.525	35.8	PK-U	33.9	-27.4	0	42.3	-	-	74	-31.7	-	-	151	259	H
* 4.524	24.55	ADR	33.9	-27.4	29	31.34	54	-22.66	-	-	-	-	151	259	H
* 15.599	33.02	PK-U	40	-18.2	0	54.82	-	-	74	-19.18	-	-	278	114	H
* 15.599	21.18	ADR	40	-18.2	29	43.27	54	-10.73	-	-	-	-	278	114	H
* 15.595	34.14	PK-U	40	-18.1	0	56.04	-	-	74	-17.96	-	-	224	108	V
* 15.595	22.64	ADR	40	-18.1	29	44.83	54	-9.17	-	-	-	-	224	108	V
1.749	39.32	PK-U	29.7	-30.9	0	38.12	-	-	-	-	68.2	-30.08	155	194	V
10.396	33.35	PK-U	37.6	-19.9	0	51.05	-	-	-	-	68.2	-17.15	59	102	H
10.401	35.87	PK-U	37.6	-19.9	0	53.57	-	-	-	-	68.2	-14.63	161	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

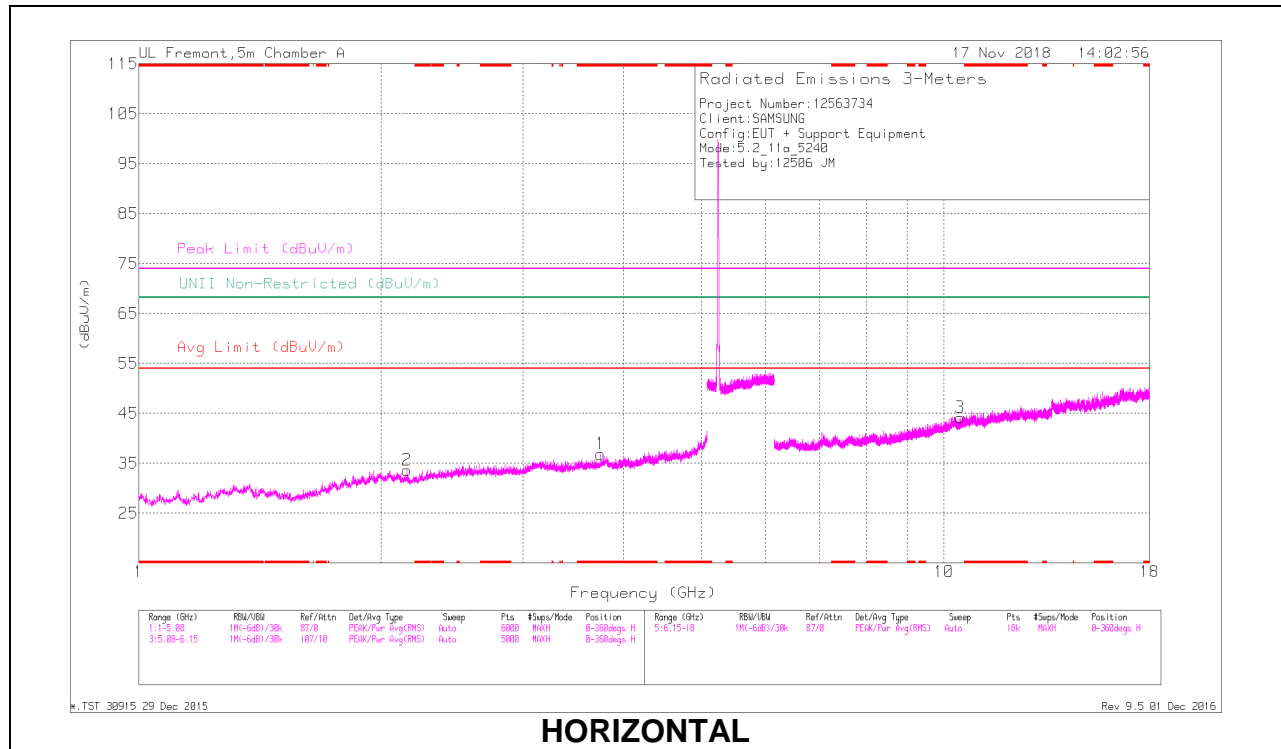

HORIZONTAL

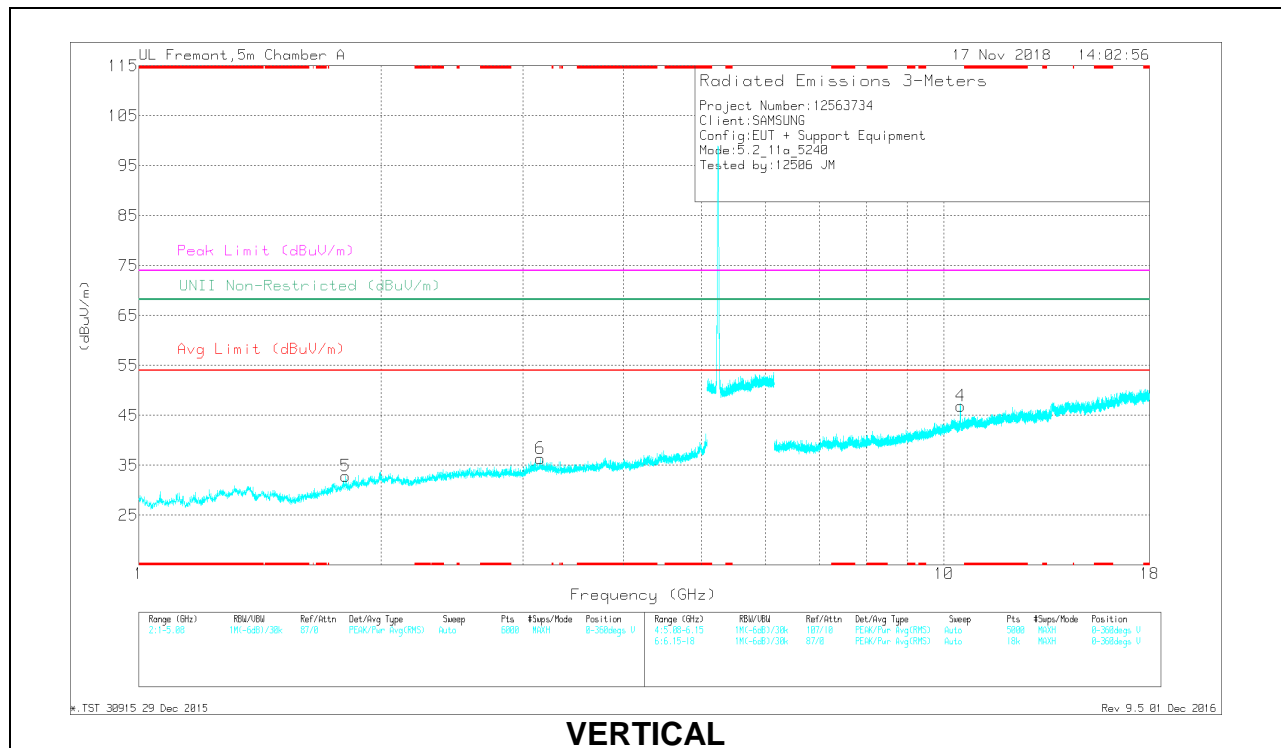

VERTICAL

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Co/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.744	36.62	PK-U	33.1	-28.3	0	41.42	-	-	74	-32.58	-	-	304	255	H
* 3.744	25.11	ADR	33.1	-28.3	.29	30.2	54	-23.8	-	-	-	-	304	255	H
1.808	39.21	PK-U	30.3	-31	0	38.51	-	-	-	-	68.2	-29.69	297	142	V
2.154	39.14	PK-U	31.1	-30.8	0	39.44	-	-	-	-	68.2	-28.76	299	153	H
3.155	37.24	PK-U	32.8	-28.3	0	41.74	-	-	-	-	68.2	-26.46	302	160	V
10.474	32.71	PK-U	37.6	-19.8	0	50.51	-	-	-	-	68.2	-17.69	55	127	H
10.481	36.39	PK-U	37.6	-19.8	0	54.19	-	-	-	-	68.2	-14.01	168	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

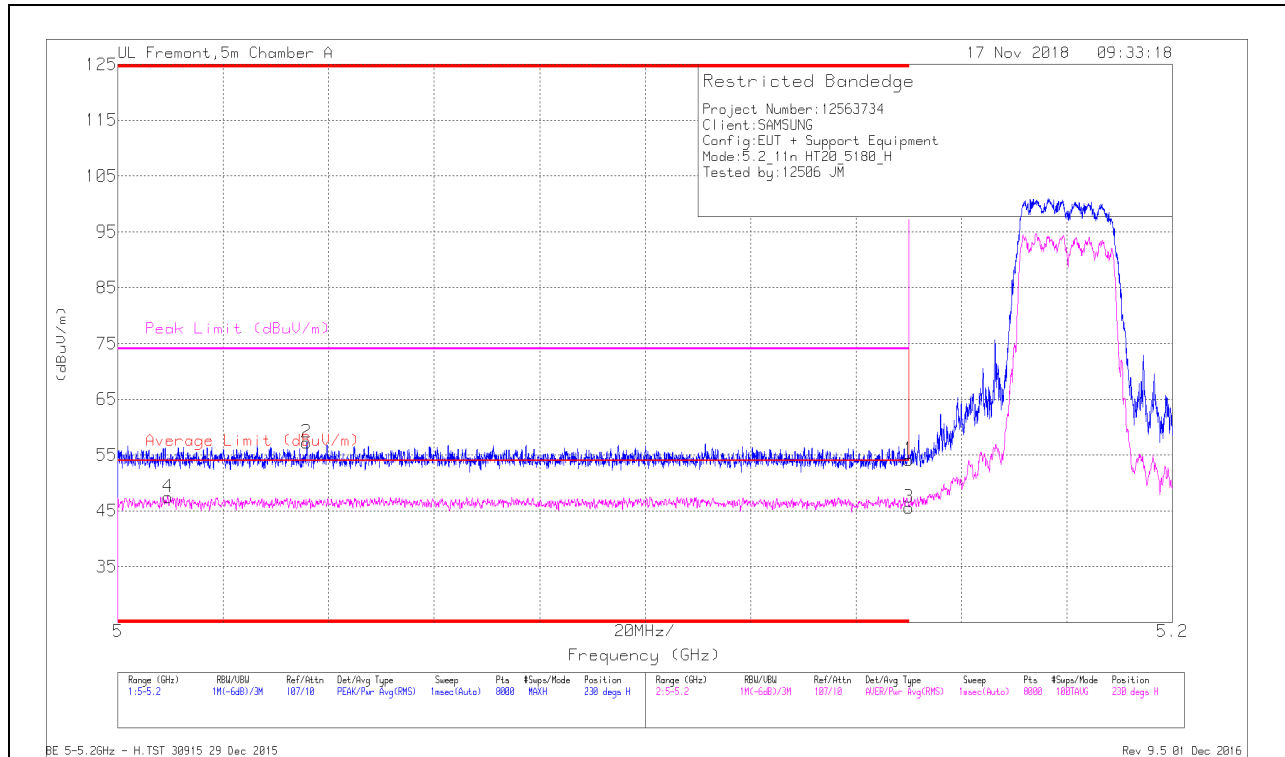


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Chl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37.41	Pk	34.4	-17.7	0	54.11	-	-	74	-19.89	230	112	H
2	* 5.036	40.89	Pk	34.3	-17.9	0	57.29	-	-	74	-16.71	230	112	H
3	* 5.15	28.89	RMS	34.4	-17.7	.31	46.9	54	-8.1	-	-	230	112	H
4	* 5.009	31.17	RMS	34.3	-18	.31	47.78	54	-6.22	-	-	230	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

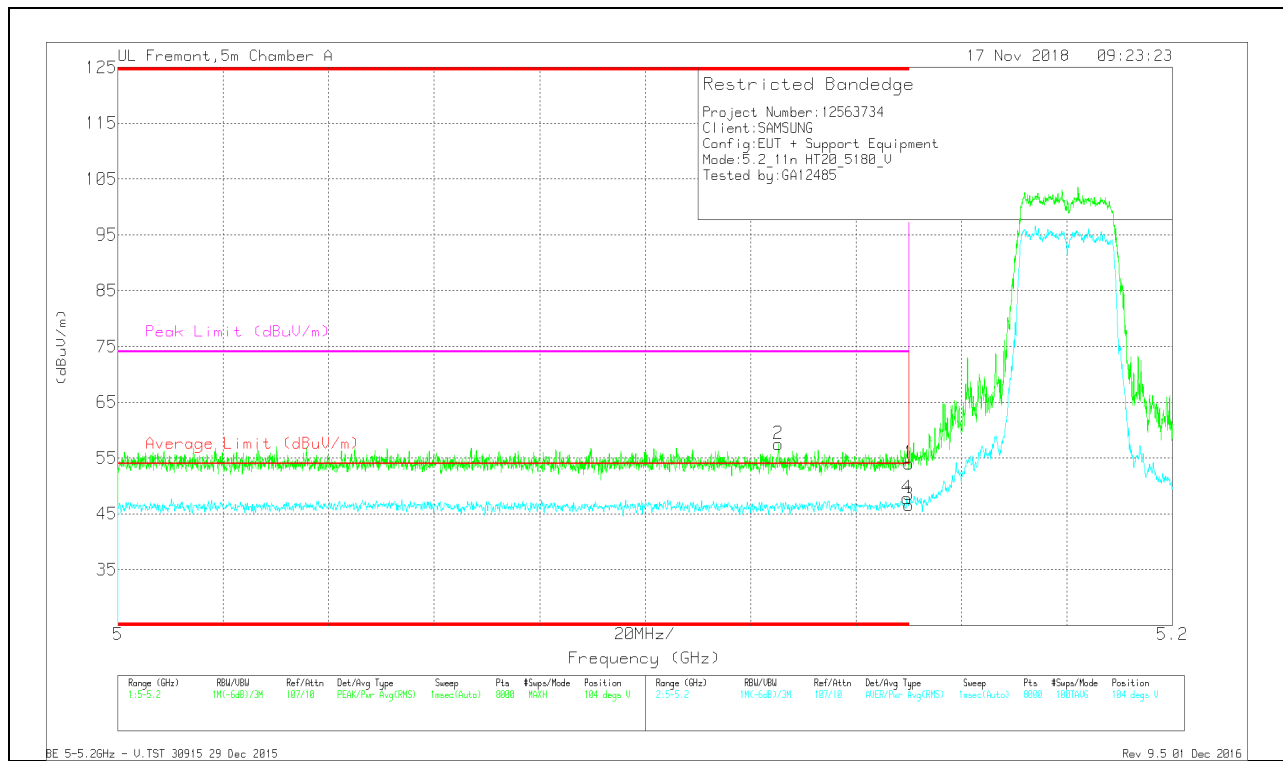


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ch/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37.31	Pk	34.4	-17.7	0	54.01	-	-	74	-19.99	104	318	V
2	* 5.125	40.67	Pk	34.4	-17.6	0	57.47	-	-	74	-16.53	104	318	V
3	* 5.15	29.58	RMS	34.4	-17.7	.31	46.59	54	-7.41	-	-	104	318	V
4	* 5.15	30.78	RMS	34.4	-17.7	.31	47.79	54	-6.21	-	-	104	318	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

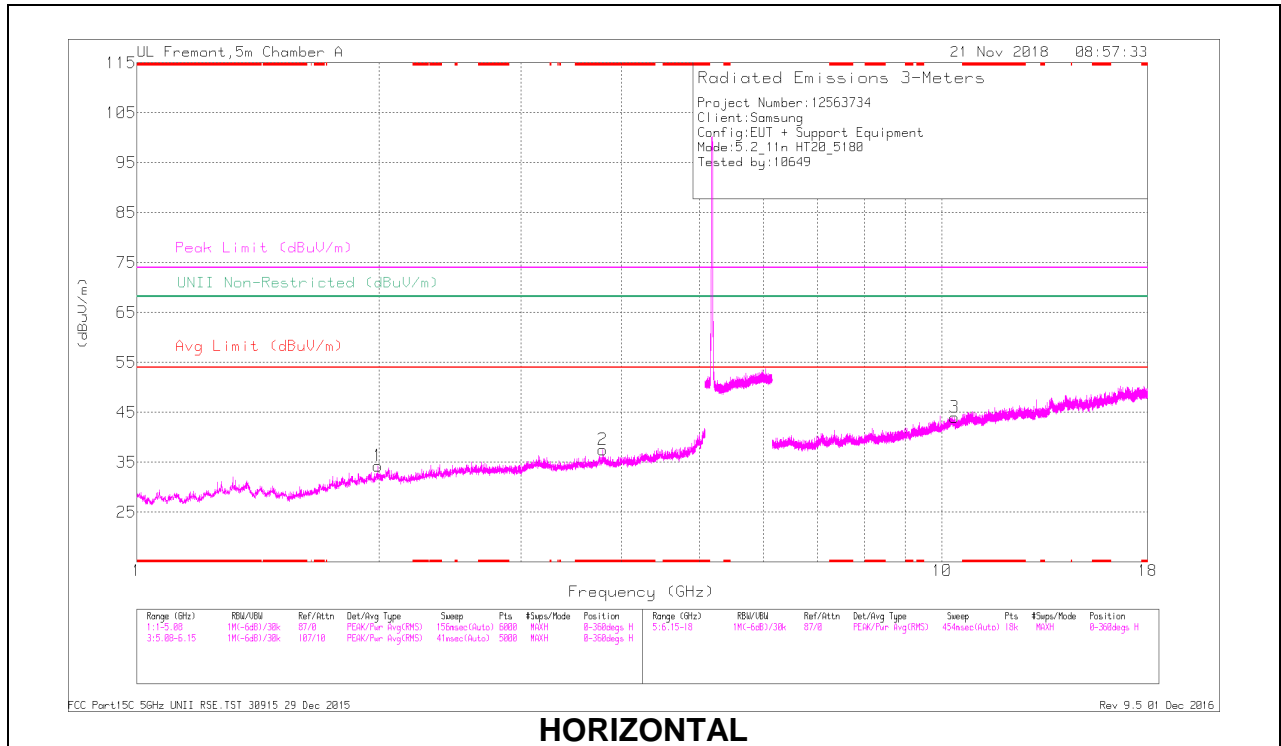

HORIZONTAL

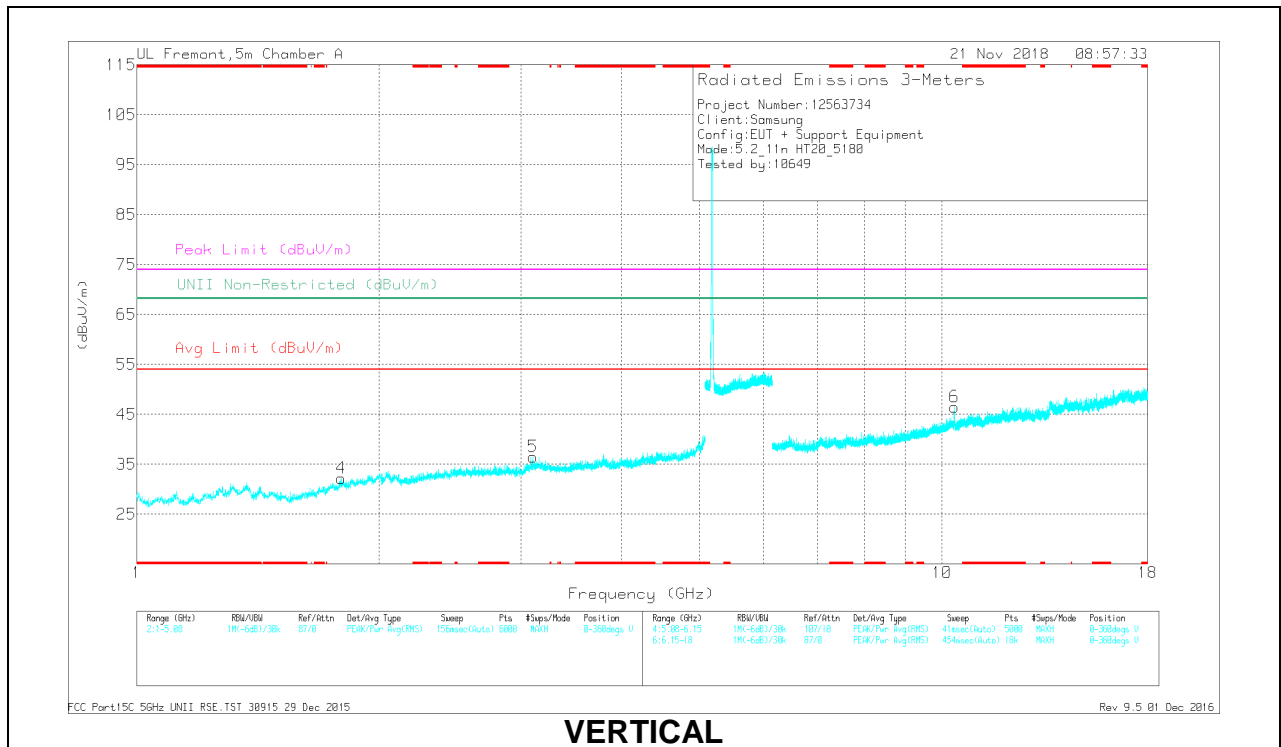

VERTICAL

RADIATED EMISSIONS


Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	AmpCoeff/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.794	37.42	PK-U	33.2	-27.5	0	43.12	-	-	74	-30.88	-	-	270	137	H
	* 3.791	25.74	ADR	33.2	-27.5	.31	31.75	54	-22.25	-	-	-	-	270	137	H
4	1.794	38.91	PK-U	30.1	-30.9	0	38.11	-	-	-	-	68.2	-30.09	191	253	V
1	1.953	39.23	PK-U	31.4	-30.7	0	39.93	-	-	-	-	68.2	-28.27	228	153	H
5	3.103	36.9	PK-U	32.9	-28.4	0	41.4	-	-	-	-	68.2	-26.8	217	303	V
6	10.353	35.32	PK-U	37.5	-19.5	0	53.32	-	-	-	-	68.2	-14.88	73	110	V
3	10.357	32.83	PK-U	37.5	-19.5	0	50.83	-	-	-	-	68.2	-17.37	323	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

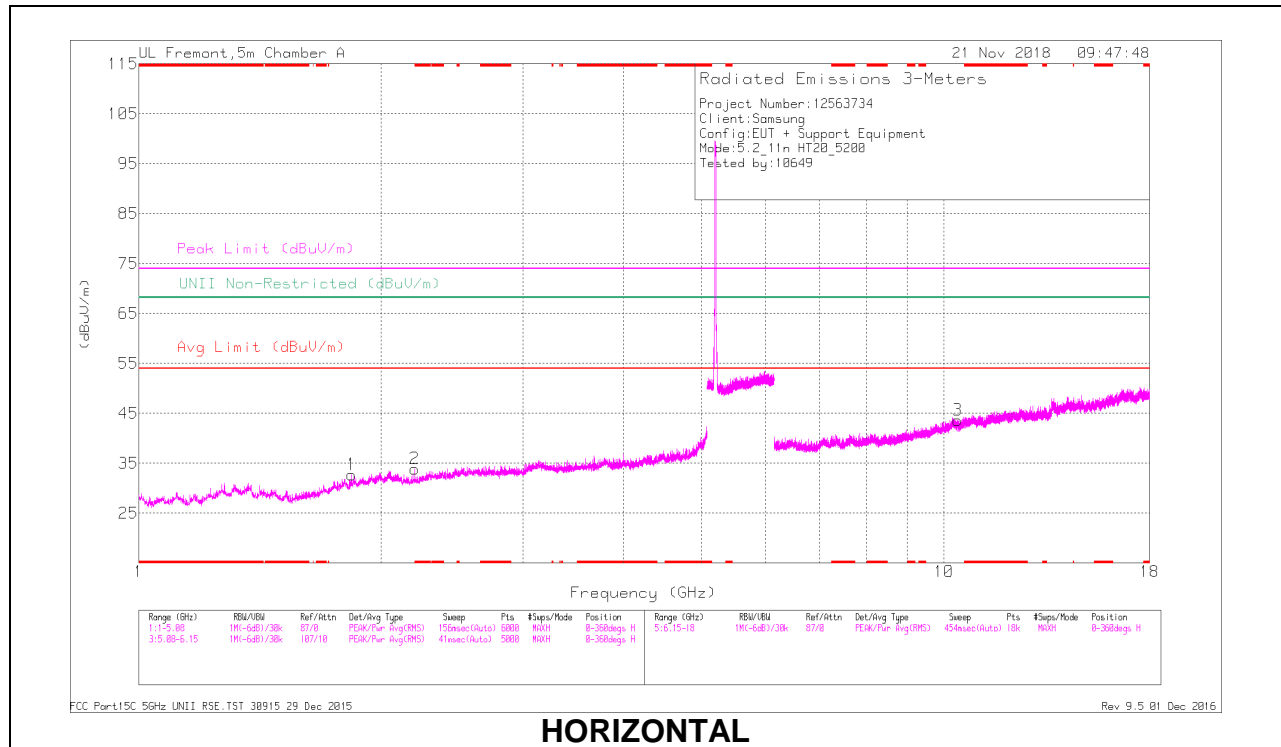

HORIZONTAL

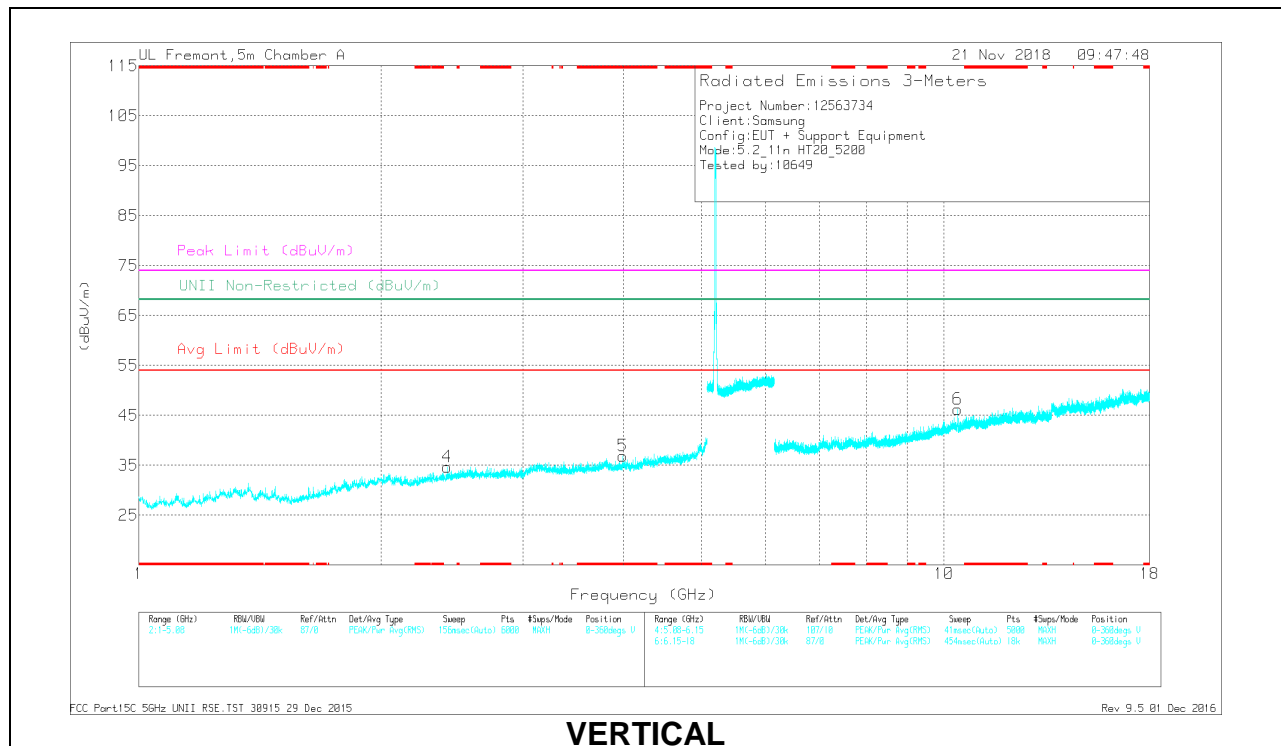

VERTICAL

RADIATED EMISSIONS


Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	AmpCoeff/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.215	38.83	PK-U	31.2	-30.9	0	39.13	-	-	74	-34.87	-	-	29	129	H
	* 2.239	26.8	ADR	31.4	-31	.31	27.51	54	-26.49	-	-	-	-	29	129	H
5	* 3.991	36.13	PK-U	33.3	-27.7	0	41.73	-	-	74	-32.27	-	-	303	185	V
	* 3.992	25.08	ADR	33.4	-27.7	.31	31.1	54	-22.9	-	-	-	-	303	185	V
1	1.837	38.82	PK-U	30.7	-31.3	0	38.22	-	-	-	-	68.2	-29.98	187	180	H
4	2.414	38.59	PK-U	31.9	-30.3	0	40.19	-	-	-	-	68.2	-28.01	321	207	V
6	10.399	32.74	PK-U	37.6	-19.9	0	50.44	-	-	-	-	68.2	-17.76	339	106	H
3	10.4	33.35	PK-U	37.6	-19.9	0	51.05	-	-	-	-	68.2	-17.15	267	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

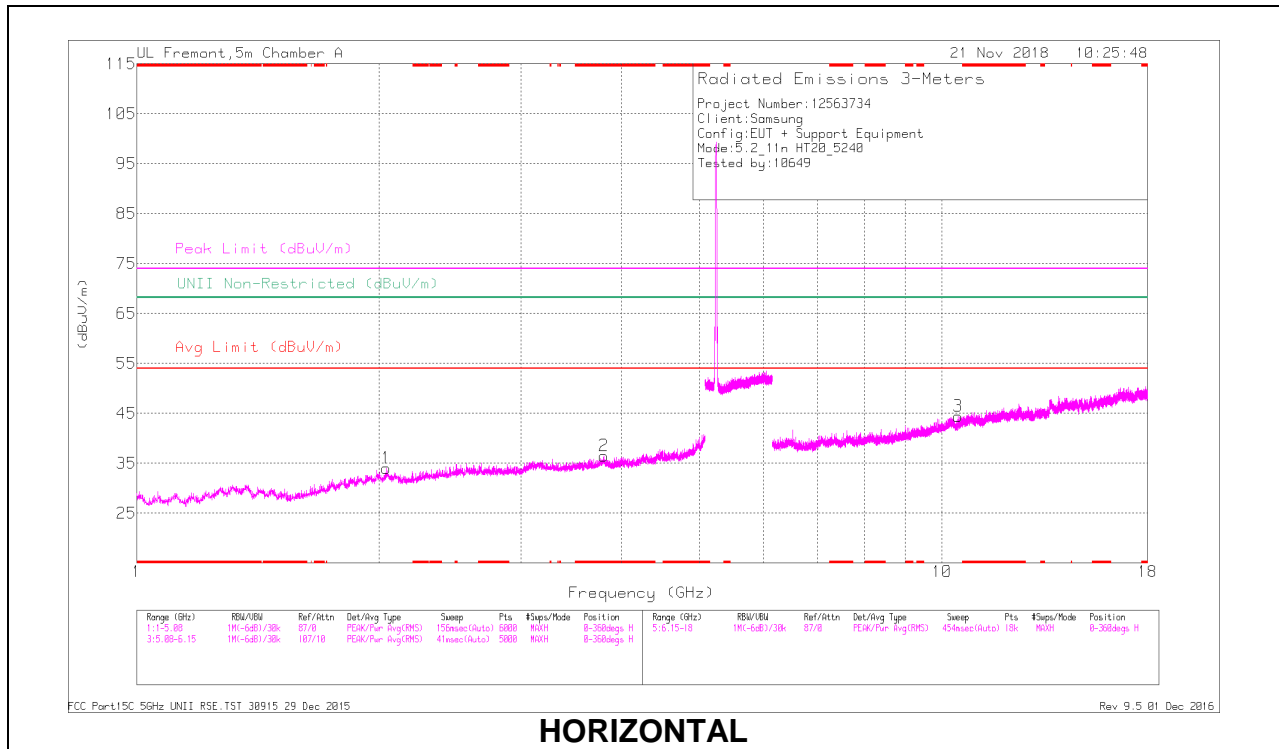

HORIZONTAL

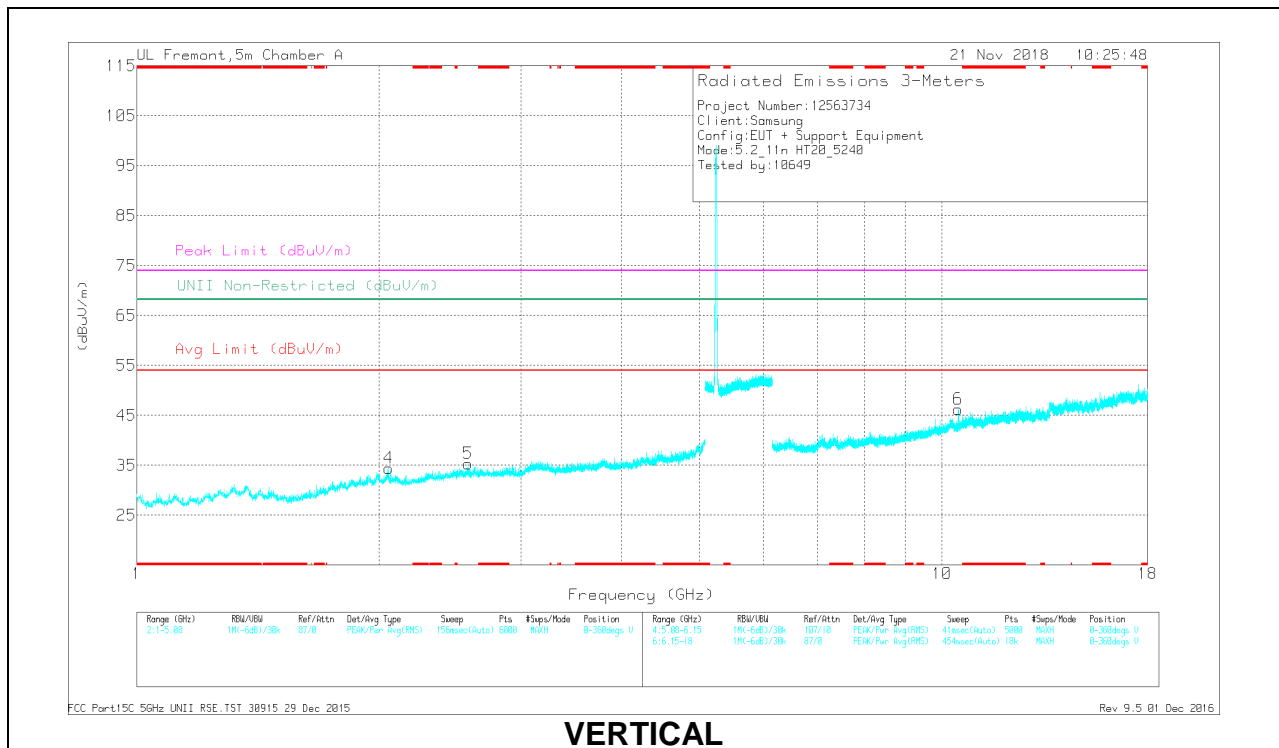

VERTICAL

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	AmpCblFtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.806	36.81	PK-U	33.2	-27.5	0	42.51	-	-	74	-31.49	-	-	324	257	H
	* 3.806	25.99	ADR	33.2	-27.5	31	32	54	-22	-	-	-	-	324	257	H
1	2.04	38.77	PK-U	31.4	-30	0	40.17	-	-	-	-	68.2	-28.03	215	183	H
4	2.053	38.8	PK-U	31.4	-30.1	0	40.1	-	-	-	-	68.2	-28.1	244	220	V
5	2.577	38.79	PK-U	32.4	-29.9	0	41.29	-	-	-	-	68.2	-26.91	271	170	V
6	10.475	35.68	PK-U	37.6	-19.8	0	53.48	-	-	-	-	68.2	-14.72	75	103	V
2	10.479	33.29	PK-U	37.6	-19.8	0	51.09	-	-	-	-	68.2	-17.11	61	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

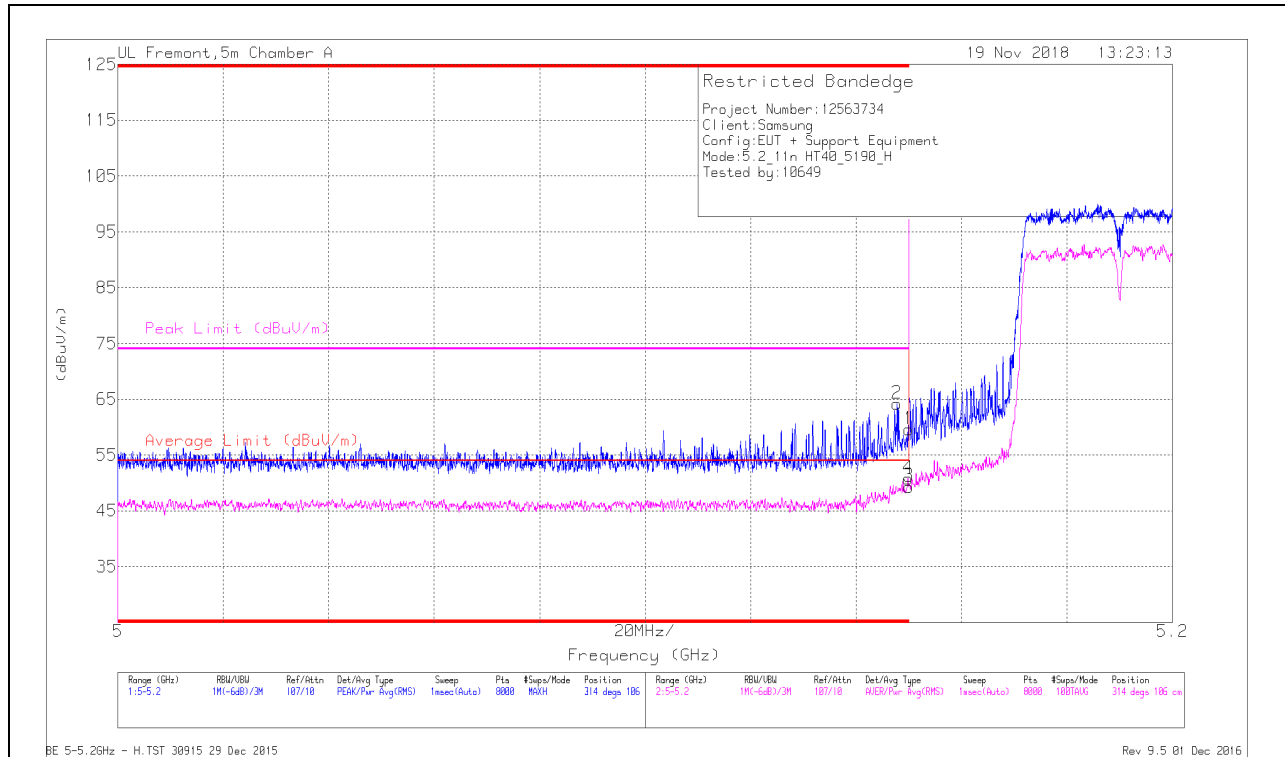


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	42.95	Pk	34.4	-17.7	0	59.65	-	-	74	-14.35	314	106	H
2	* 5.148	47.52	Pk	34.4	-17.7	0	64.22	-	-	74	-9.78	314	106	H
3	* 5.15	32.66	RMS	34.4	-17.7	.6	49.96	54	-4.04	-	-	314	106	H
4	* 5.15	34.13	RMS	34.4	-17.7	.6	51.43	54	-2.67	-	-	314	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

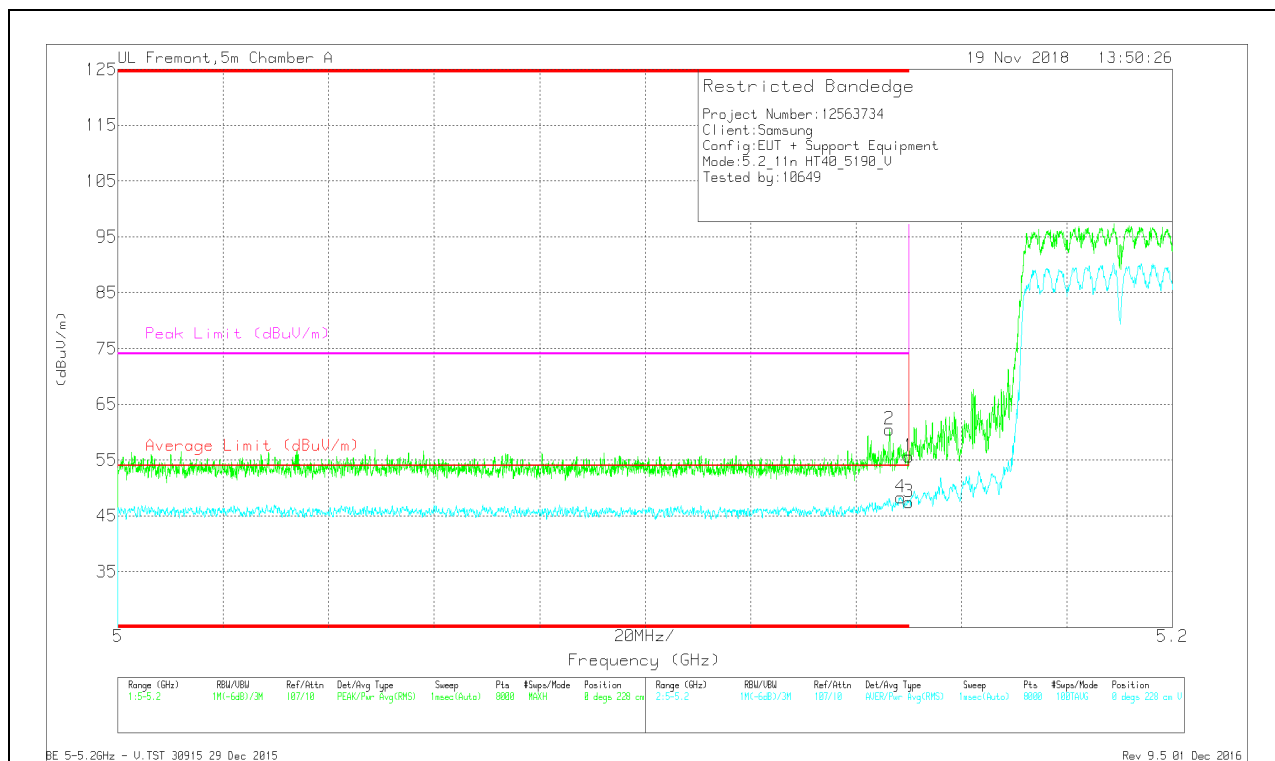

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	38.96	Pk	34.4	-17.7	0	55.66	-	-	74	-18.34	0	228	V
2	* 5.146	43.73	Pk	34.4	-17.7	0	60.43	-	-	74	-13.57	0	228	V
3	* 5.15	30.77	RMS	34.4	-17.7	.6	48.07	54	-4.93	-	-	0	228	V
4	* 5.148	31.56	RMS	34.4	-17.7	.6	48.86	54	-5.14	-	-	0	228	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

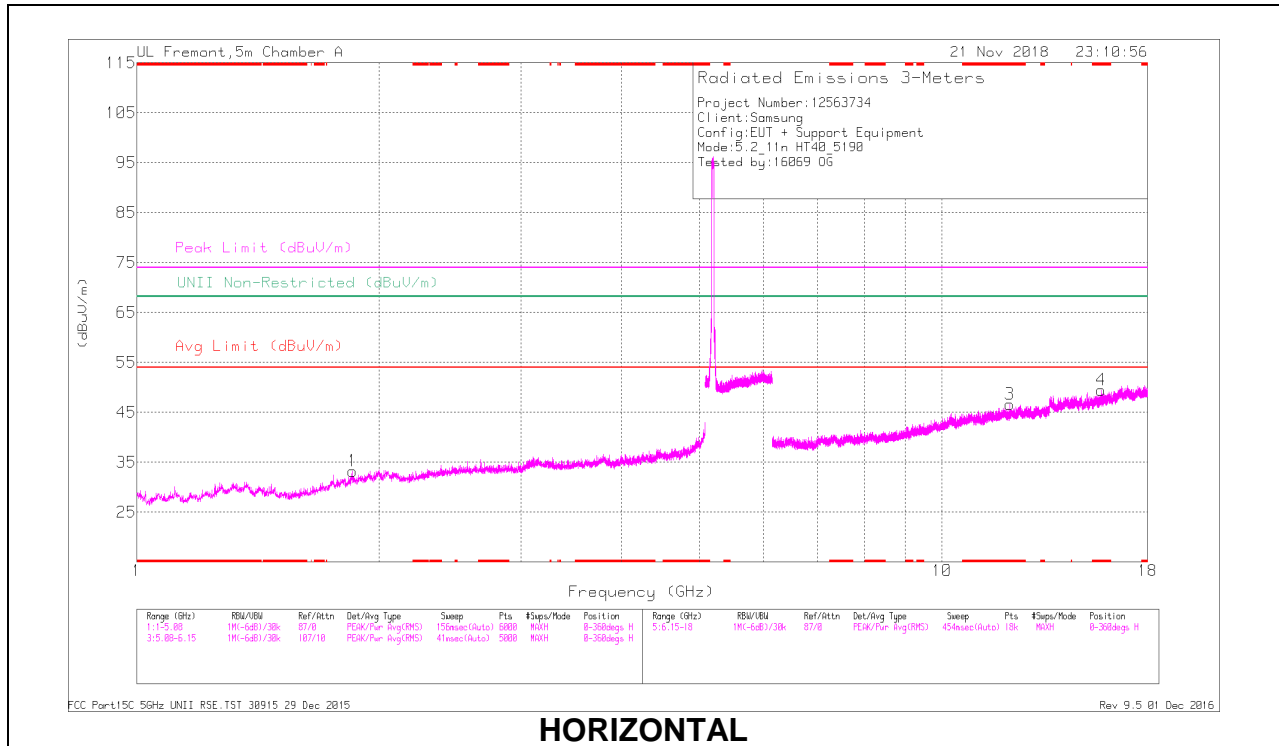

HORIZONTAL

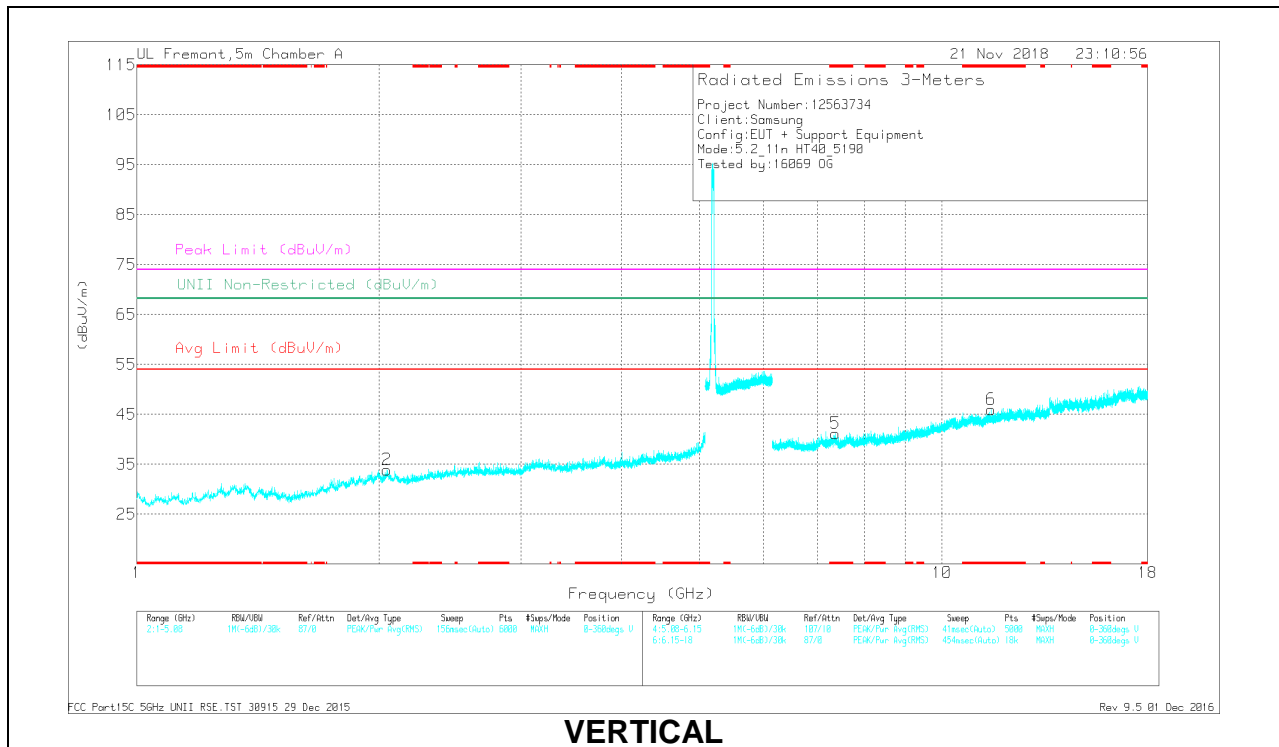


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Arg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 12.132	31.38	PK-U	39	-19	0	51.38	-	-	74	-22.62	-	-	326	257	H
* 12.135	19.35	ADR	39	-19	.6	39.95	54	-14.05	-	-	-	-	326	257	H
* 15.762	31.78	PK-U	40.2	-18	0	53.98	-	-	74	-20.02	-	-	121	377	H
* 15.762	20.32	ADR	40.2	-18	.6	43.12	54	-10.88	-	-	-	-	121	377	H
* 7.366	32.48	PK-U	35.7	-21.8	0	46.38	-	-	74	-27.62	-	-	297	125	V
* 7.368	20.81	ADR	35.7	-21.8	.6	35.31	54	-18.69	-	-	-	-	297	125	V
* 11.513	30.63	PK-U	38.3	-18.9	0	50.03	-	-	74	-23.97	-	-	358	241	V
* 11.515	19.64	ADR	38.3	-18.9	.6	39.64	54	-14.36	-	-	-	-	358	241	V
1.853	39.82	PK-U	30.9	-31.5	0	39.22	-	-	-	-	68.2	-28.98	30	132	H
2.045	38.91	PK-U	31.4	-30	0	40.31	-	-	-	-	68.2	-27.89	348	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

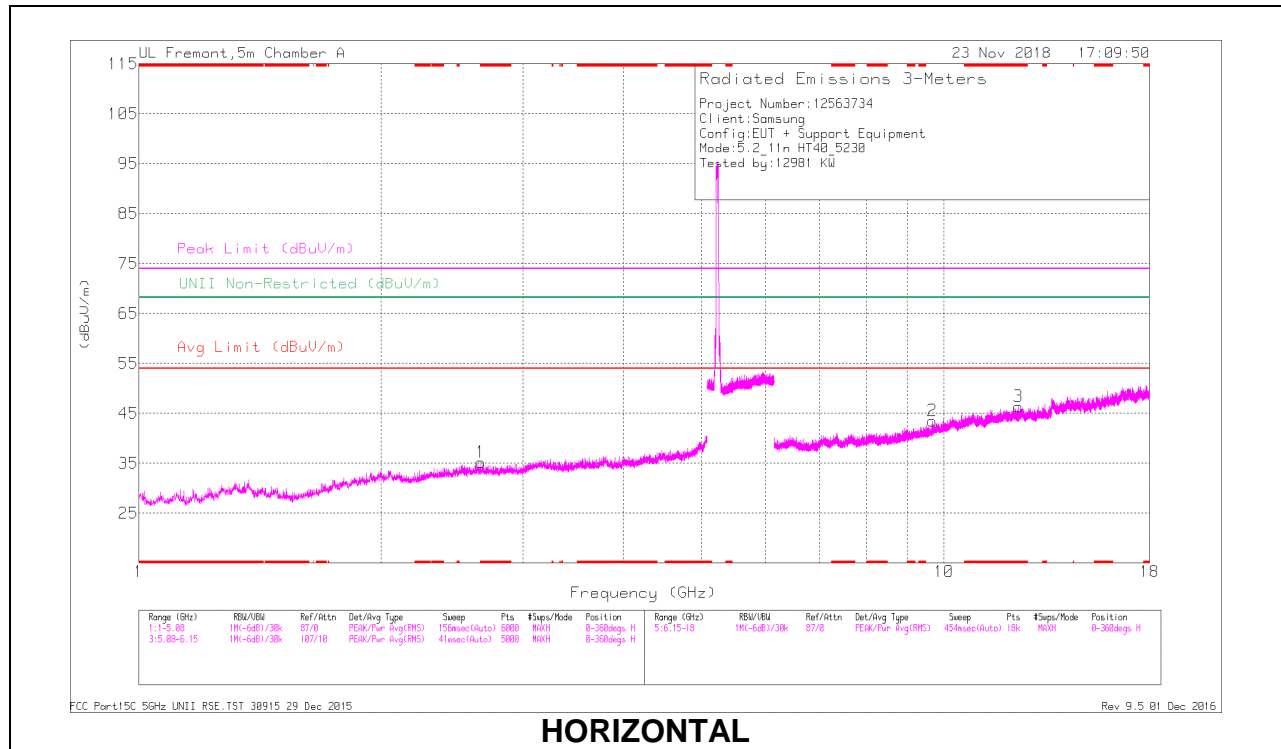

HORIZONTAL

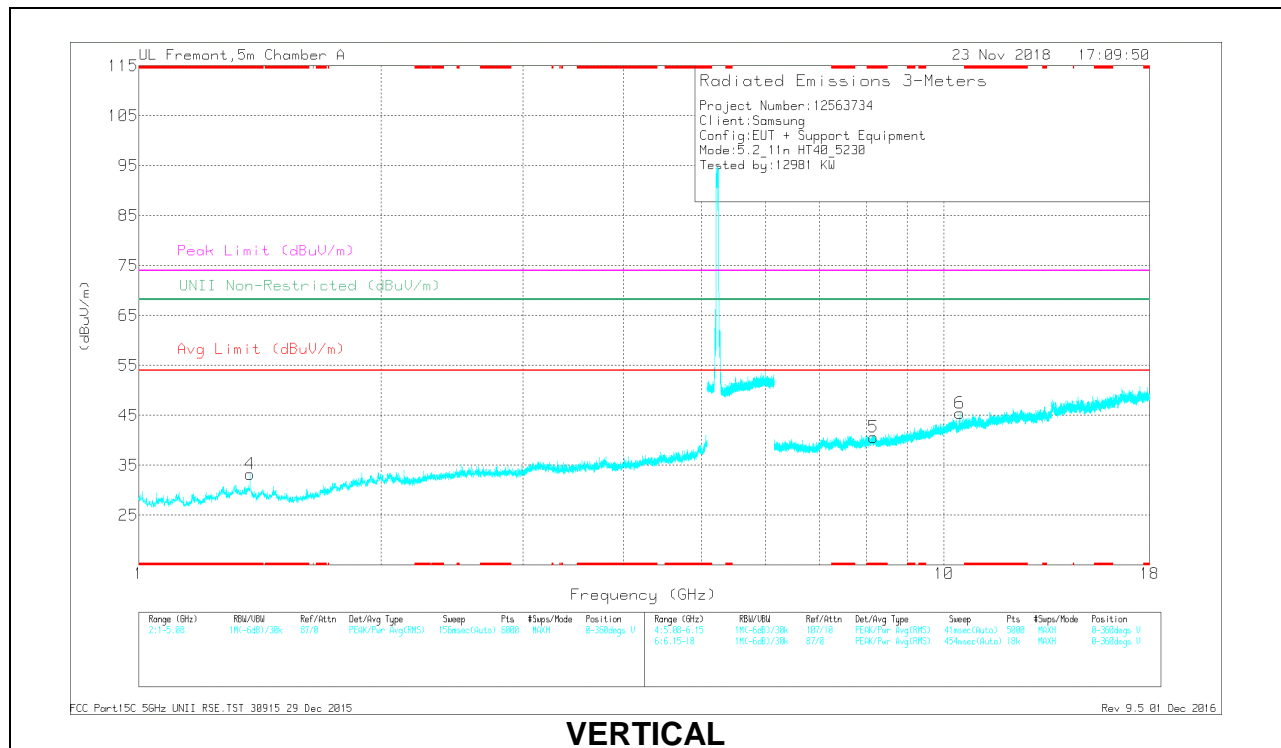

VERTICAL

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Chk/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.658	38.4	PK-U	32.5	-30.2	0	40.7	-	-	74	-33.3	-	-	288	128	H
* 2.659	26.93	ADR	32.5	-30.2	.8	29.53	54	-24.17	-	-	-	-	288	128	H
* 1.375	39.63	PK-U	29.1	-31.2	0	37.53	-	-	74	-36.47	-	-	244	175	V
* 1.374	28.36	ADR	29.1	-31.2	.8	26.96	54	-27.14	-	-	-	-	244	175	V
* 12.376	31.94	PK-U	38.9	-19	0	51.94	-	-	74	-22.16	-	-	247	205	H
* 12.377	20.53	ADR	38.9	-19	.8	41.03	54	-12.97	-	-	-	-	247	205	H
* 8.172	33.03	PK-U	35.8	-21.9	0	46.93	-	-	74	-27.07	-	-	269	161	V
* 8.175	21.75	ADR	35.8	-21.9	.8	36.25	54	-17.75	-	-	-	-	269	161	V
9.679	32.24	PK-U	36.8	-20.5	0	48.54	-	-	-	-	68.2	-19.66	175	116	H
10.459	31.69	PK-U	37.6	-19.7	0	49.79	-	-	-	-	68.2	-18.41	145	161	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.4. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

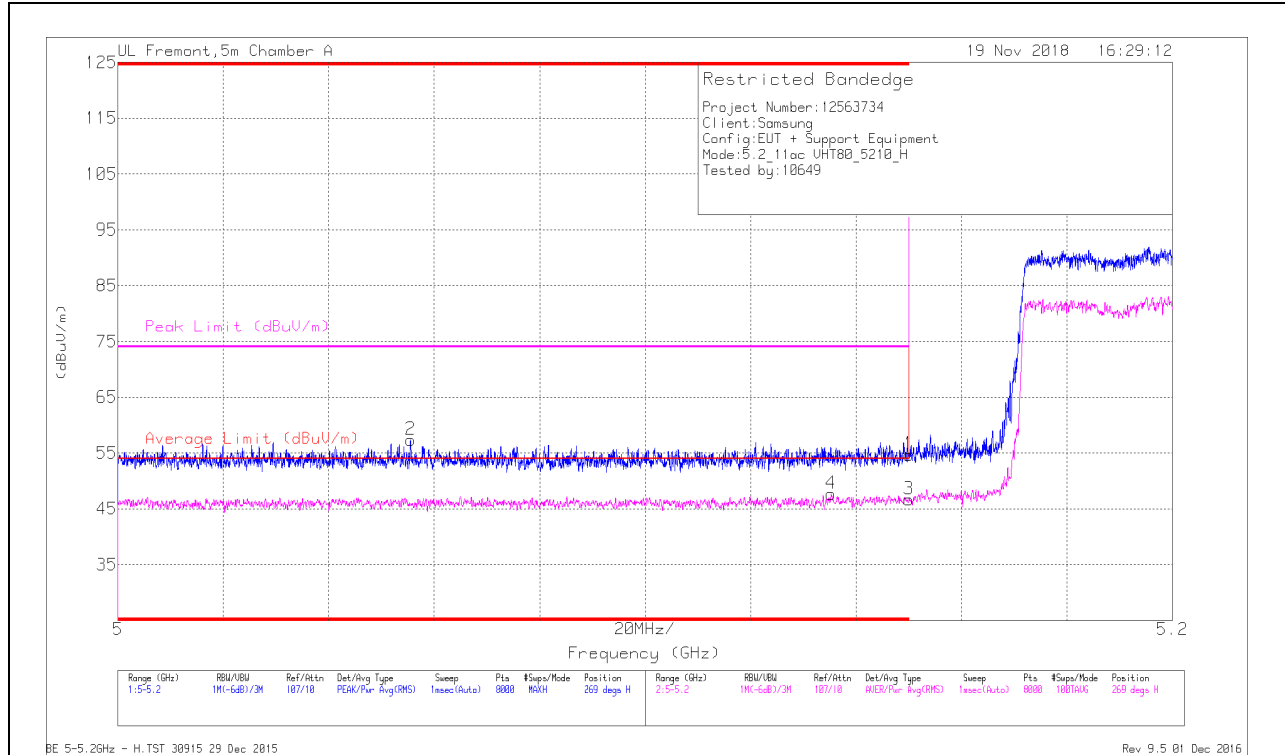


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fitr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	38	Pk	34.4	-17.7	0	54.7	-	-	74	-19.3	269	125	H
2	* 5.056	40.75	Pk	34.4	-17.8	0	57.35	-	-	74	-16.65	269	125	H
3	* 5.15	30.02	RMS	34.4	-17.7	1.95	48.67	54	-5.33	-	-	269	125	H
4	* 5.135	30.9	RMS	34.4	-17.6	1.95	49.65	54	-4.35	-	-	269	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

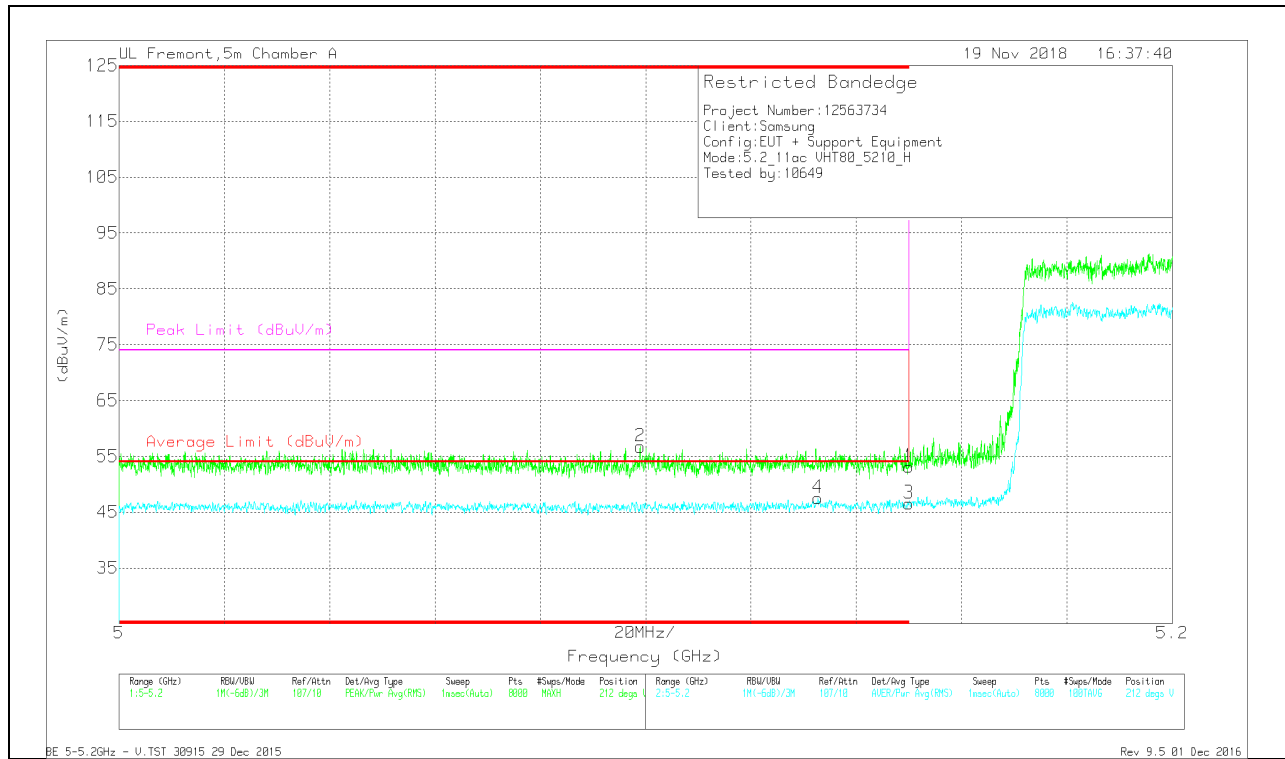

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.099	39.95	Pk	34.4	-17.6	0	56.75	-	-	74	-17.25	212	113	V
4	* 5.133	30.85	RMS	34.4	-17.7	1.95	49.50	54	-4.5	-	-	212	113	V
1	* 5.15	36.45	Pk	34.4	-17.7	0	53.15	-	-	74	-20.85	212	113	V
3	* 5.15	29.86	RMS	34.4	-17.7	1.95	48.51	54	-5.49	-	-	212	113	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

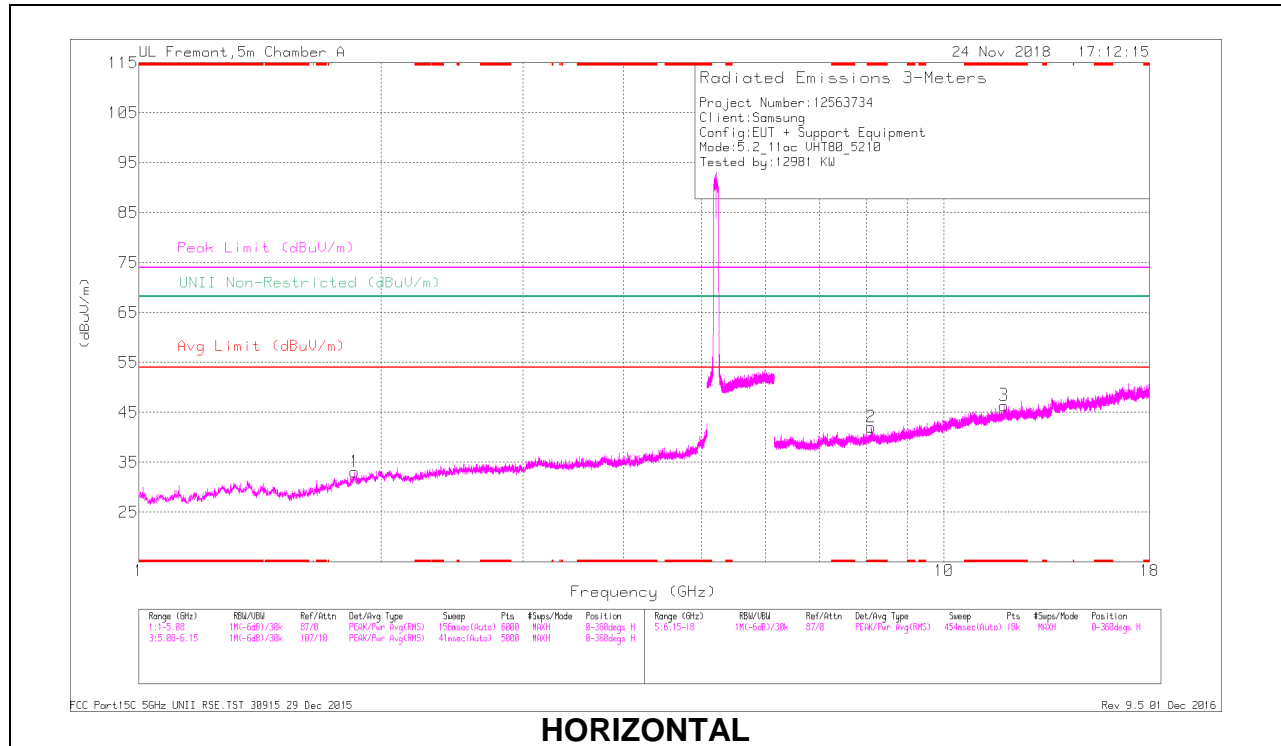

HORIZONTAL

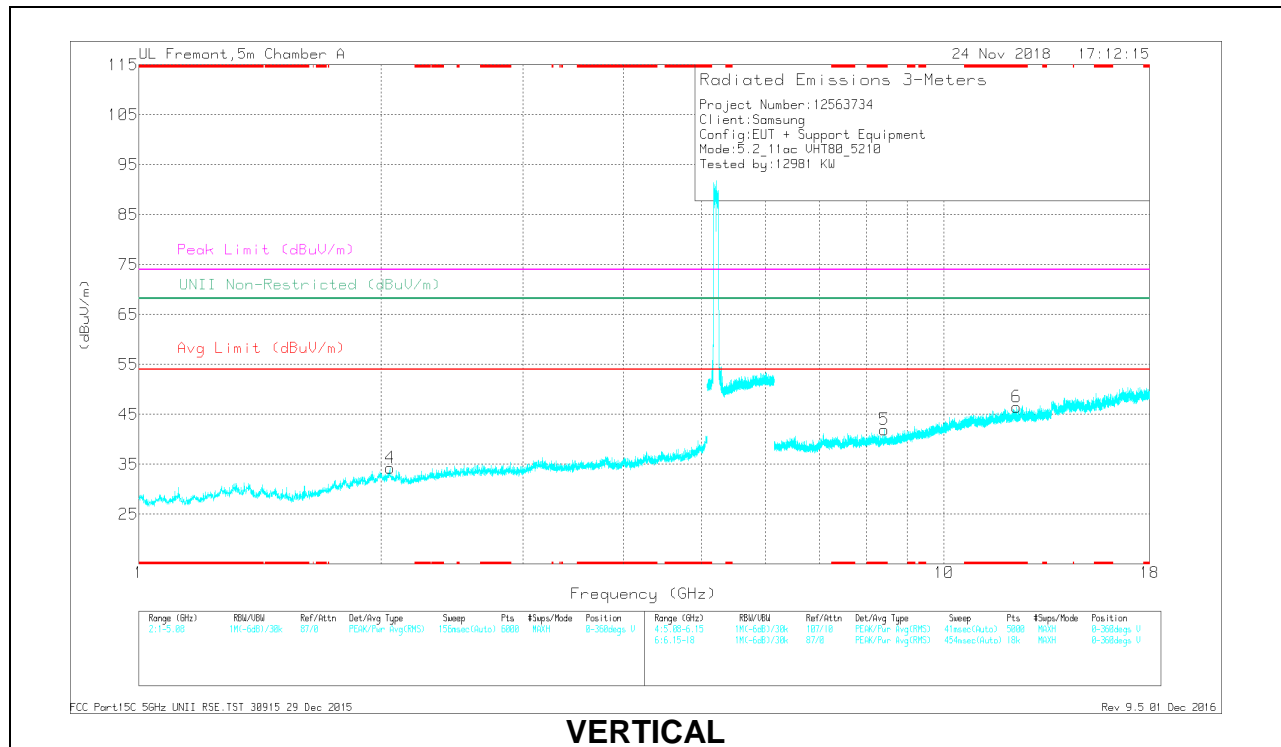

VERTICAL

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1862 (dB/m)	Amp/Chk/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 8.122	33.08	PK-U	35.8	-22.2	0	46.68	-	-	74	-27.32	-	-	229	204	H
* 8.121	22.08	ADR	35.8	-22.2	1.95	37.63	54	-16.37	-	-	-	-	229	204	H
* 11.871	31.83	PK-U	38.8	-18.7	0	51.93	-	-	74	-22.07	-	-	182	141	H
* 11.871	20.36	ADR	38.8	-18.7	1.95	42.41	54	-11.59	-	-	-	-	182	141	H
* 8.431	33.28	PK-U	35.8	-22.1	0	46.98	-	-	74	-27.02	-	-	135	116	V
* 8.431	21.98	ADR	35.8	-22.1	1.95	37.63	54	-16.37	-	-	-	-	135	116	V
* 12.301	31.44	PK-U	38.9	-19.1	0	51.24	-	-	74	-22.76	-	-	190	176	V
* 12.3	20.59	ADR	38.9	-19.1	1.95	42.34	54	-11.66	-	-	-	-	190	176	V
1.852	40.32	PK-U	30.9	-31.5	0	39.72	-	-	-	-	68.2	-28.48	279	121	H
2.049	39.04	PK-U	31.4	-30	0	40.44	-	-	-	-	68.2	-27.76	241	165	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 OFDMA MODE – 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

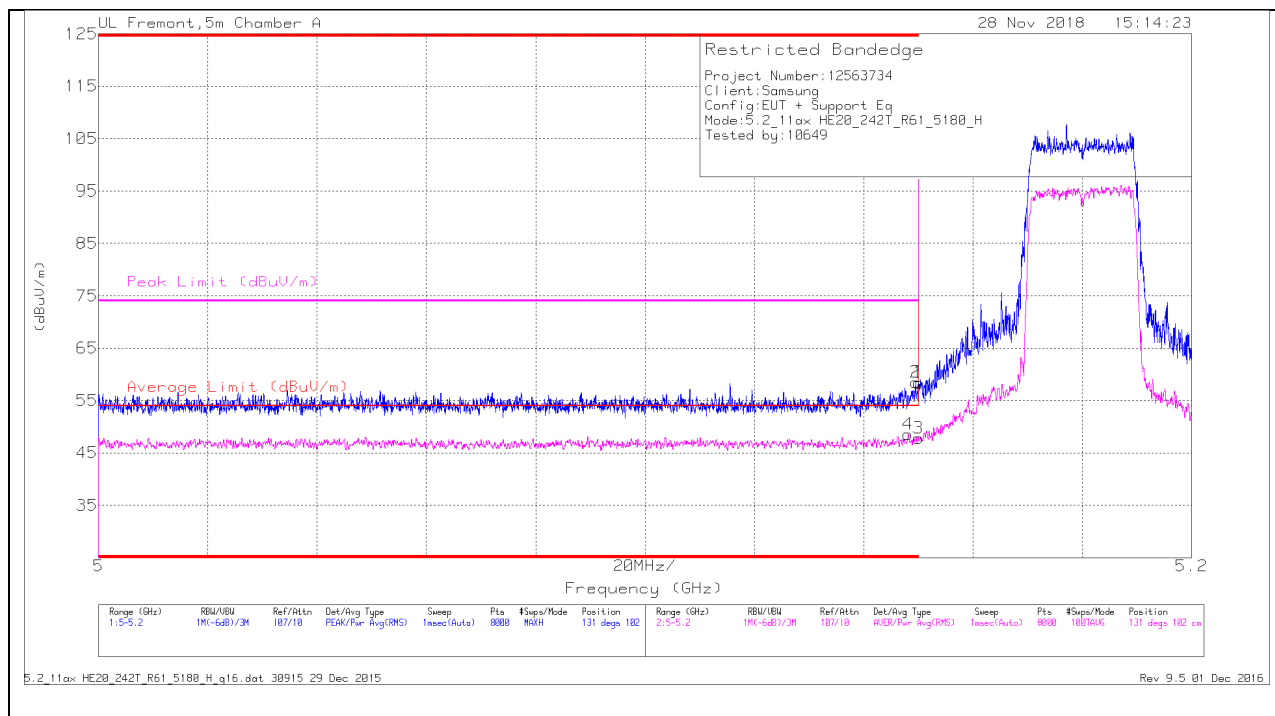

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT862 (dB/m)	Amp/GB/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.148	31.3	RMS	34.4	-17.7	0.67	48.67	54	-5.33	-	-	131	102	H
1	* 5.15	41.72	PK	34.4	-17.7	0	58.42	-	-	74	-15.58	131	102	H
2	* 5.15	41.78	PK	34.4	-17.7	0	58.48	-	-	74	-15.52	131	102	H
3	* 5.15	30.58	RMS	34.4	-17.7	0.67	47.95	54	-6.05	-	-	131	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

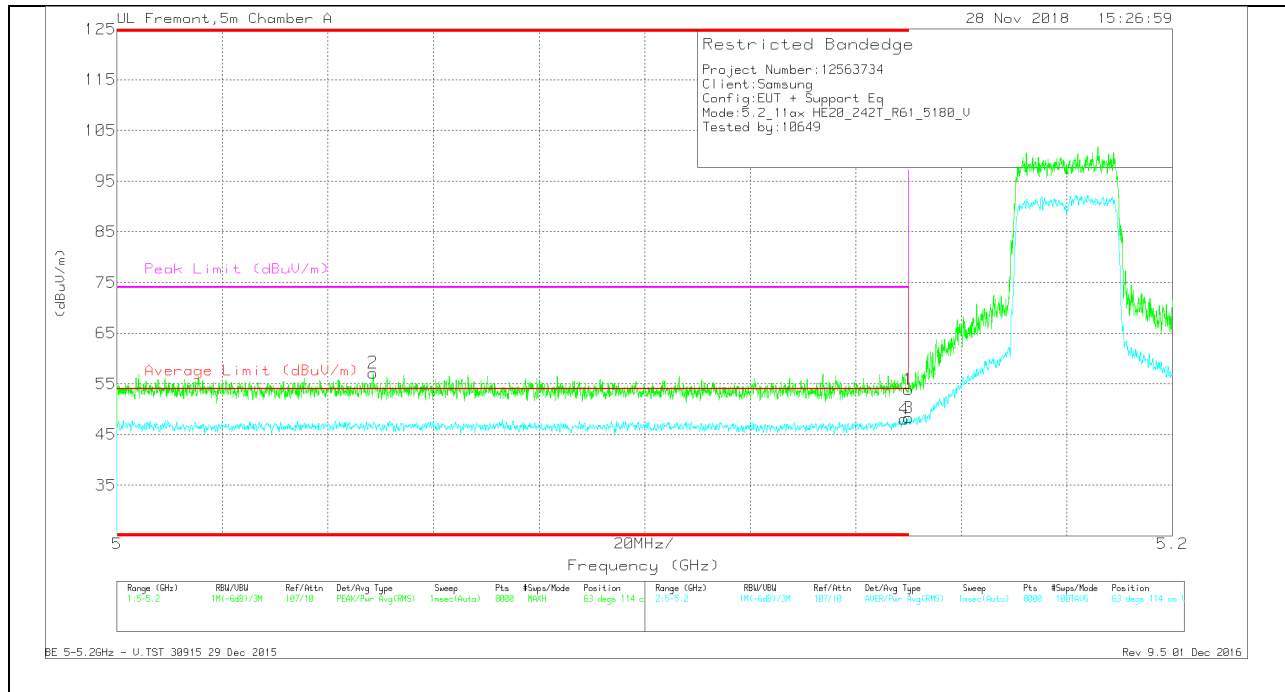

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/PtR/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37.22	Pk	34.4	-17.7	0	53.92	-	-	74	-20.08	63	114	V
2	* 5.049	40.48	Pk	34.4	-17.7	0	57.18	-	-	74	-16.82	63	114	V
3	* 5.15	31.01	RMS	34.4	-17.7	0.67	48.38	54	-5.62	-	-	63	114	V
4	* 5.149	30.8	RMS	34.4	-17.7	0.67	48.17	54	-5.83	-	-	63	114	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

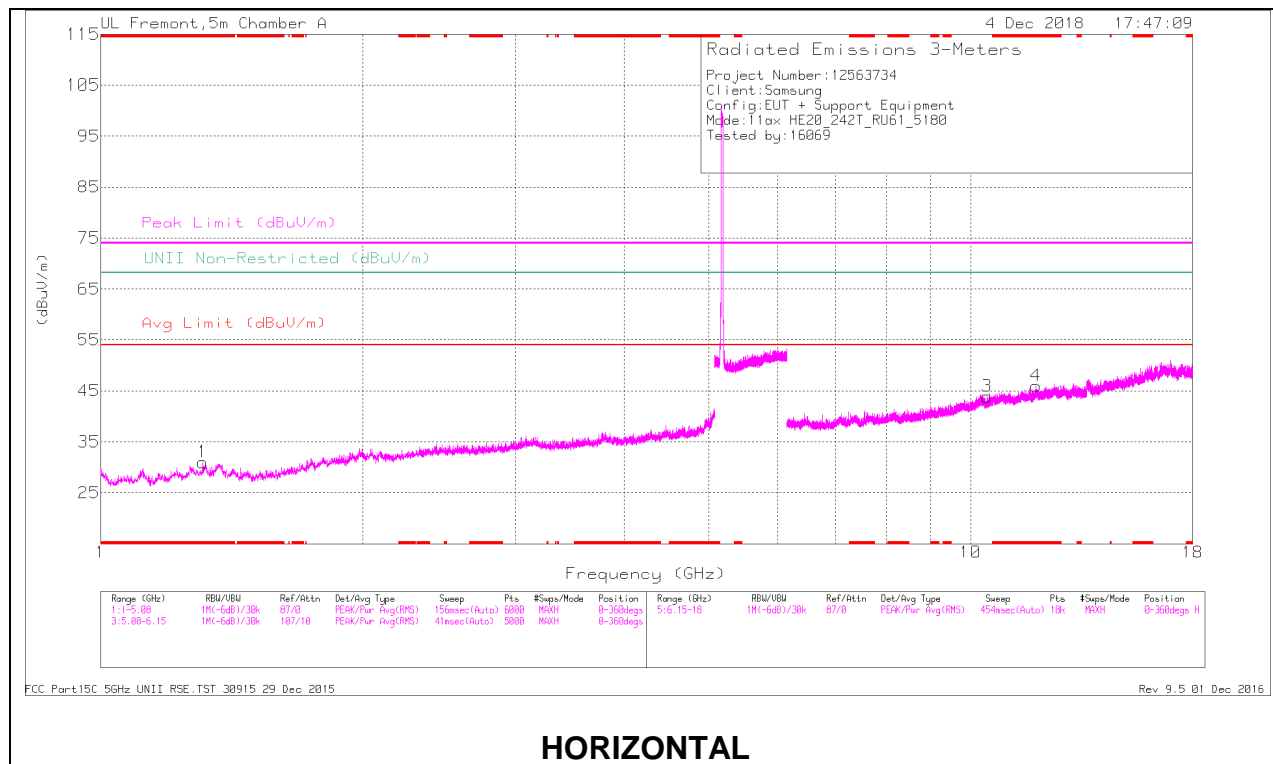

HORIZONTAL

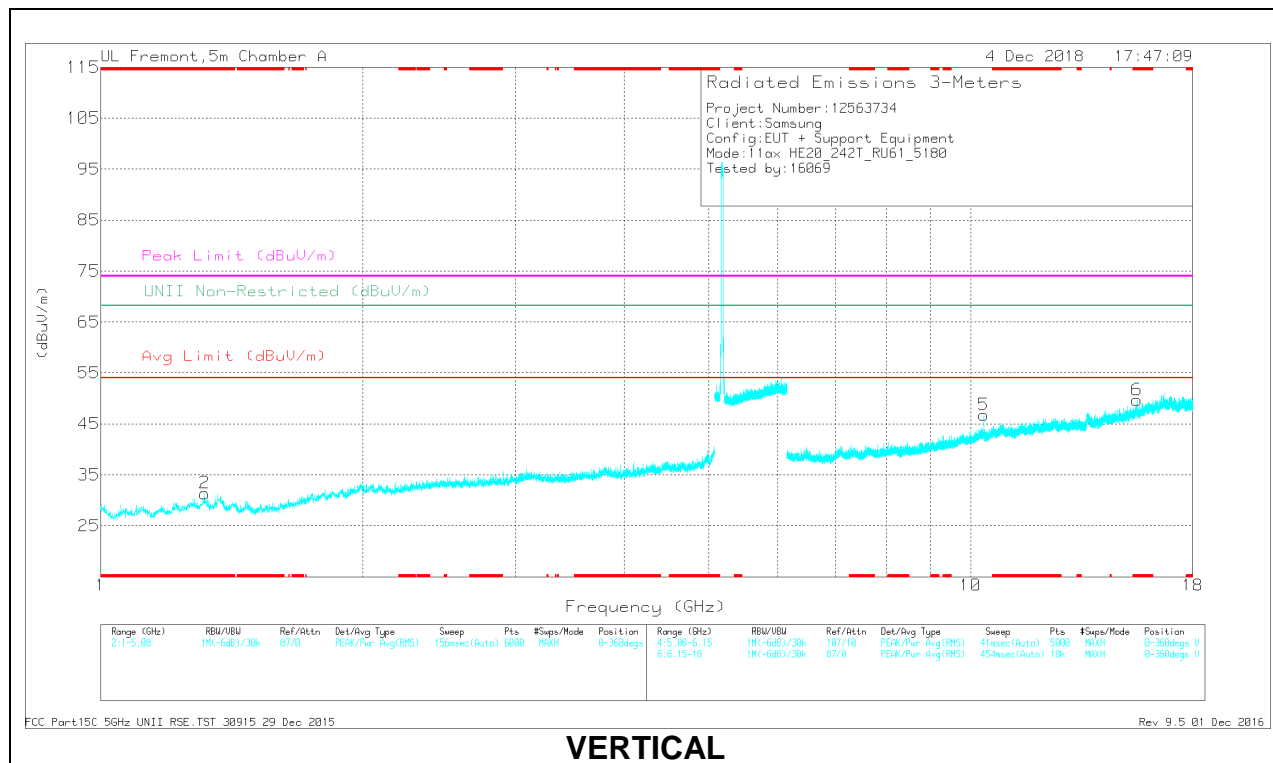

**VERTICAL
 RADIATED EMISSIONS**


Frequency (GHz)	Miter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cu/Fir/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Aug Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	ULM Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
* 1.313	39.56	PK-U	29	-31.8	0	36.76	-	-	74	-37.24	-	-	221	185	H
* 1.313	27.69	ADR	29	-31.8	.67	25.56	54	-28.44	-	-	-	-	221	185	H
* 1.319	39.66	PK-U	29	-31.8	0	36.86	-	-	74	-37.14	-	-	134	278	V
* 1.315	27.81	ADR	29	-31.8	.67	25.68	54	-28.32	-	-	-	-	134	278	V
* 11.896	31.69	PK-U	38.6	-18.7	0	51.59	-	-	74	-22.41	-	-	302	210	H
* 11.896	19.65	ADR	38.6	-18.7	.67	40.22	54	-13.78	-	-	-	-	302	210	H
* 15.535	33.32	PK-U	40.2	-17.6	0	55.92	-	-	74	-18.08	-	-	307	124	V
* 15.537	21.06	ADR	40.2	-17.6	.67	44.33	54	-9.67	-	-	-	-	307	124	V
10.359	34.2	PK-U	37.5	-19.5	0	52.2	-	-	-	-	68.2	-16	209	101	V
10.441	31.94	PK-U	37.6	-19.8	0	49.74	-	-	-	-	68.2	-18.46	214	320	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

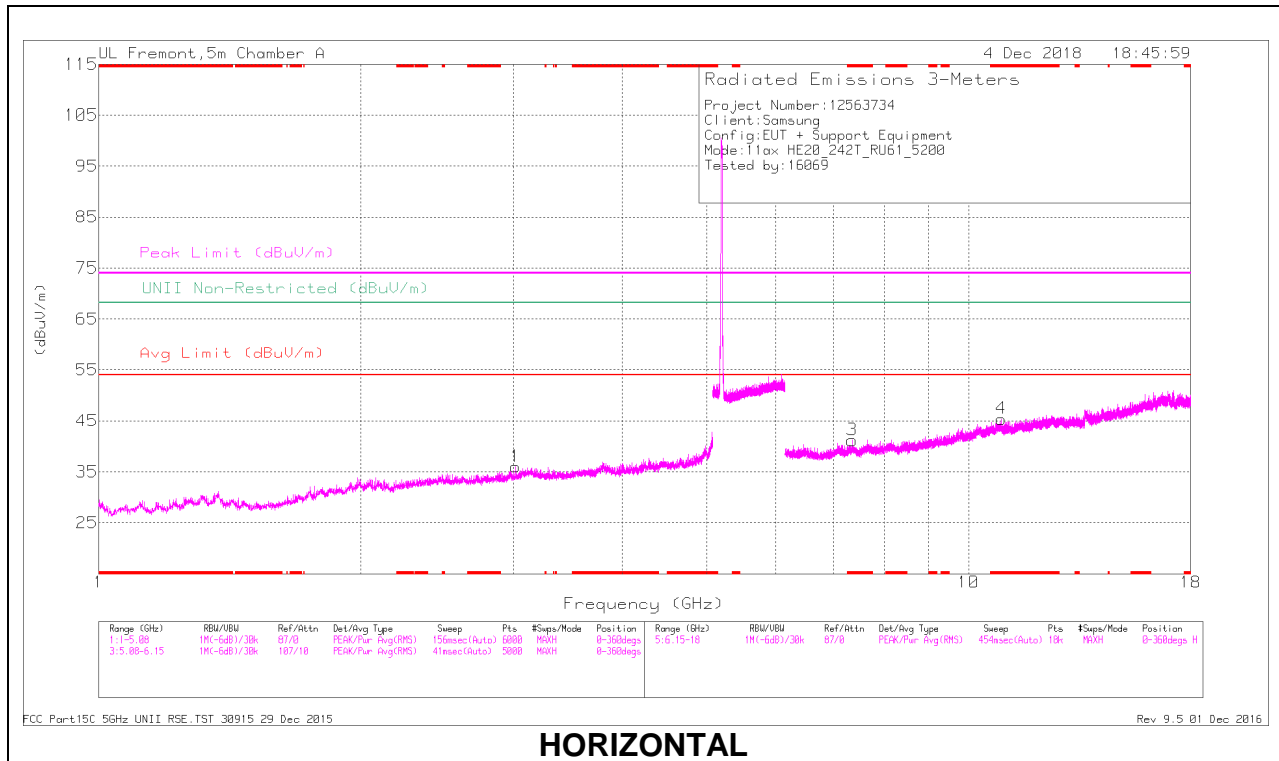

HORIZONTAL

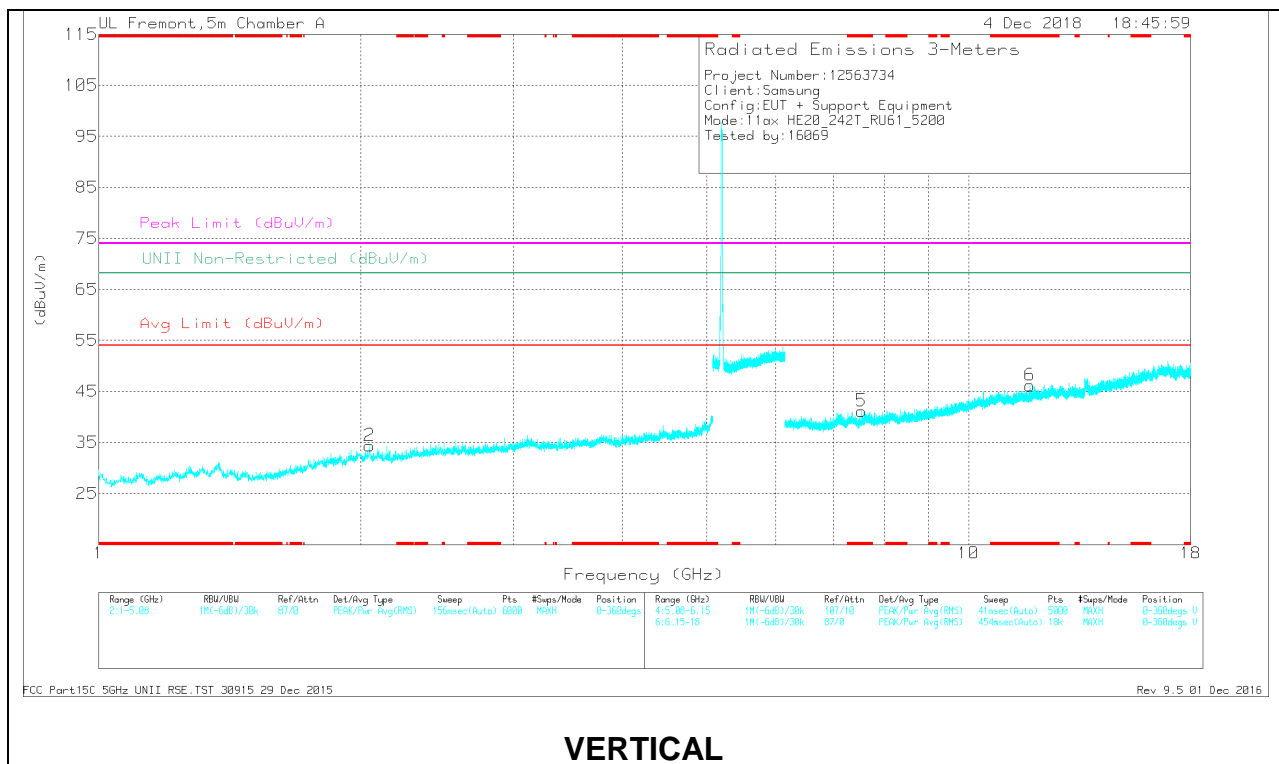


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
* 7.348	32.97	PK-U	35.6	-21.7	0	46.87	-	-	74	-27.13	-	-	315	179	H
* 7.348	20.99	ADR	35.6	-21.7	.67	35.56	54	-18.44	-	-	-	-	315	179	H
* 10.904	32.11	PK-U	37.9	-18.6	0	51.41	-	-	74	-22.59	-	-	140	288	H
* 10.904	19.59	ADR	37.9	-18.6	.67	39.56	54	-14.44	-	-	-	-	140	288	H
* 7.53	32.99	PK-U	35.7	-22.8	0	45.89	-	-	74	-28.11	-	-	116	103	V
* 7.53	21.3	ADR	35.7	-22.8	.67	34.87	54	-19.13	-	-	-	-	116	103	V
* 11.771	31.53	PK-U	38.5	-18.9	0	51.13	-	-	74	-22.87	-	-	4	400	V
* 11.771	19.75	ADR	38.4	-18.9	.67	39.92	54	-14.08	-	-	-	-	4	400	V
2.048	38.4	PK-U	31.3	-30	0	39.7	-	-	-	-	68.2	-28.5	347	148	V
3.018	37.72	PK-U	33	-29.7	0	41.02	-	-	-	-	68.2	-27.18	17	283	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

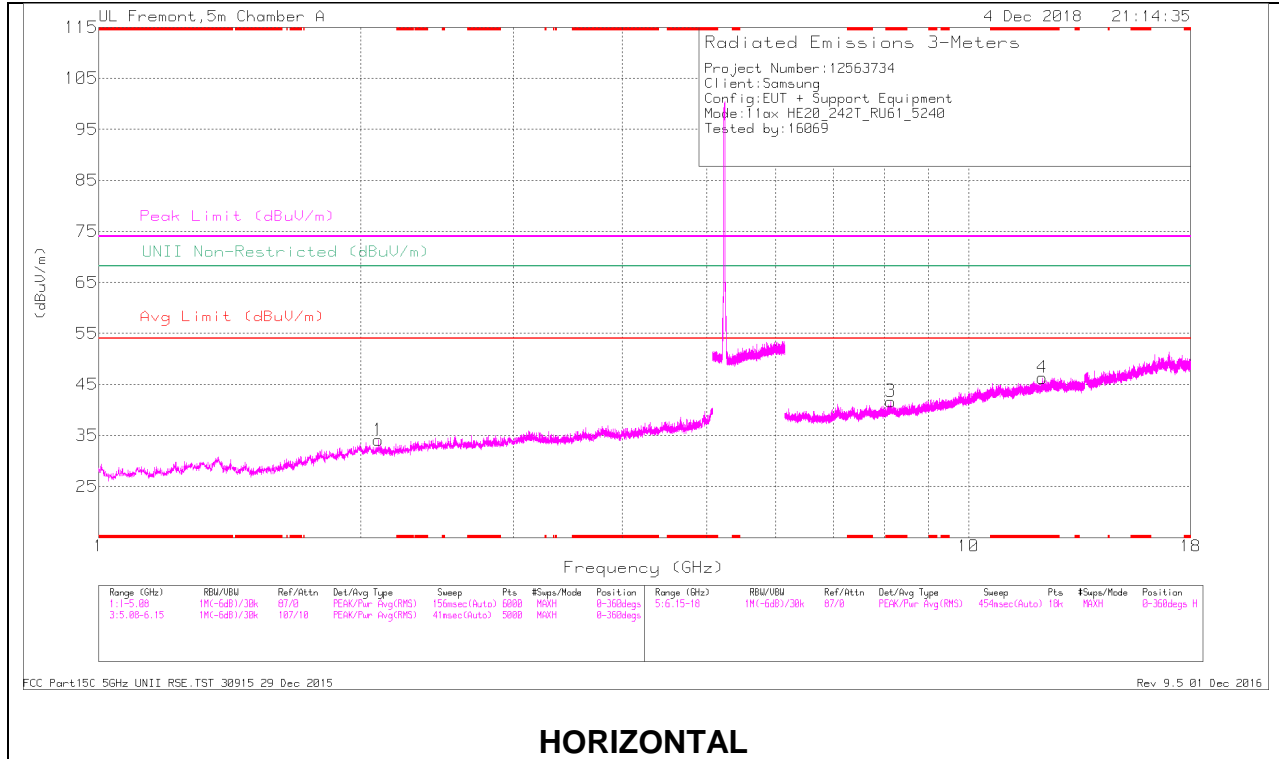

HORIZONTAL

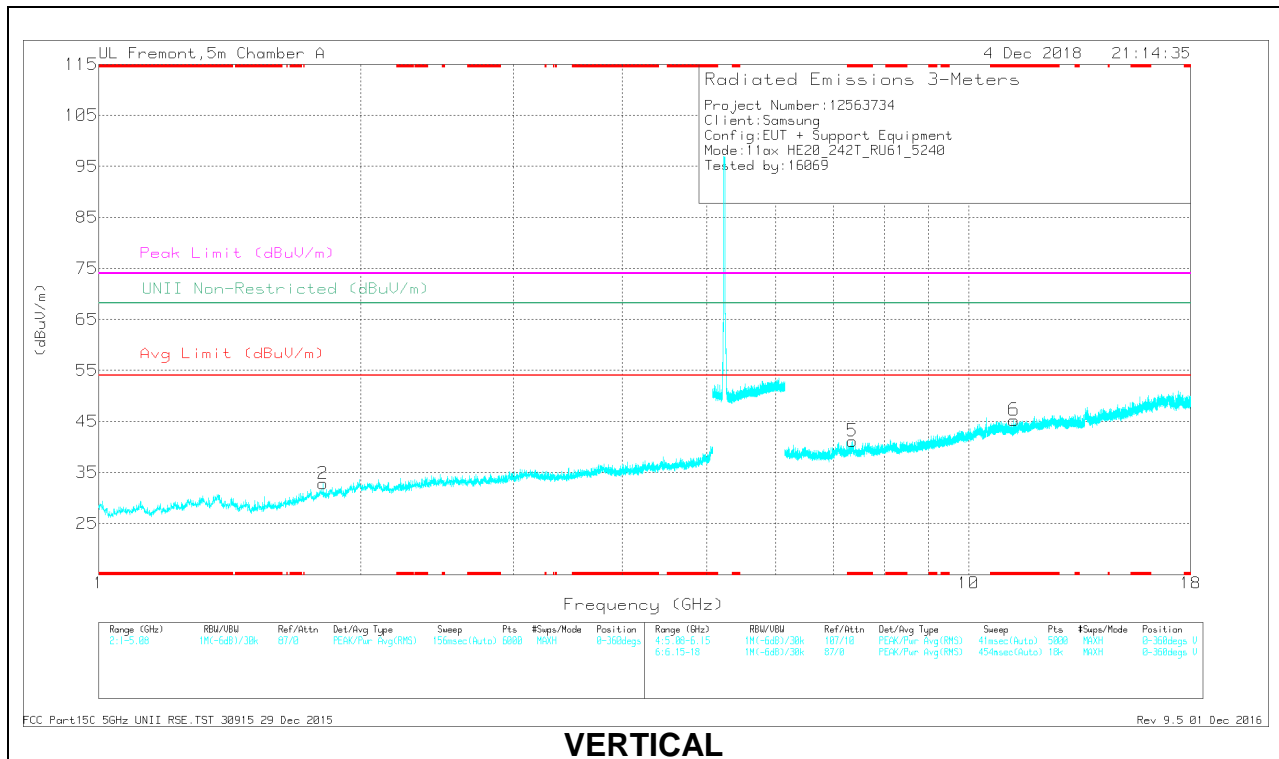

VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (m)	Polarity
* 8.141	32.85	PK-U	35.8	-21.7	0	46.95	-	-	74	-27.05	-	-	196	121	H
* 8.143	21.23	ADR	35.8	-21.7	.67	36	54	-18	-	-	-	-	196	121	H
* 12.155	32.18	PK-U	38.9	-18.7	0	52.38	-	-	74	-21.62	-	-	211	284	H
* 12.155	19.48	ADR	38.9	-18.7	.67	40.35	54	-13.65	-	-	-	-	211	284	H
* 7.35	32.59	PK-U	35.6	-21.6	0	46.59	-	-	74	-27.41	-	-	291	153	V
* 7.349	20.94	ADR	35.6	-21.6	.67	35.61	54	-18.39	-	-	-	-	291	153	V
* 11.276	31.04	PK-U	38	-19	0	50.04	-	-	74	-23.96	-	-	209	278	V
* 11.277	19.44	ADR	38	-19	.67	39.11	54	-14.89	-	-	-	-	209	278	V
1.813	39	PK-U	30.5	-31.2	0	38.3	-	-	-	-	68.2	-29.9	277	146	V
2.098	38.6	PK-U	31.3	-30.2	0	39.7	-	-	-	-	68.2	-28.5	42	354	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 2 OFDMA MODE – 106-Tones, RU Index 53

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

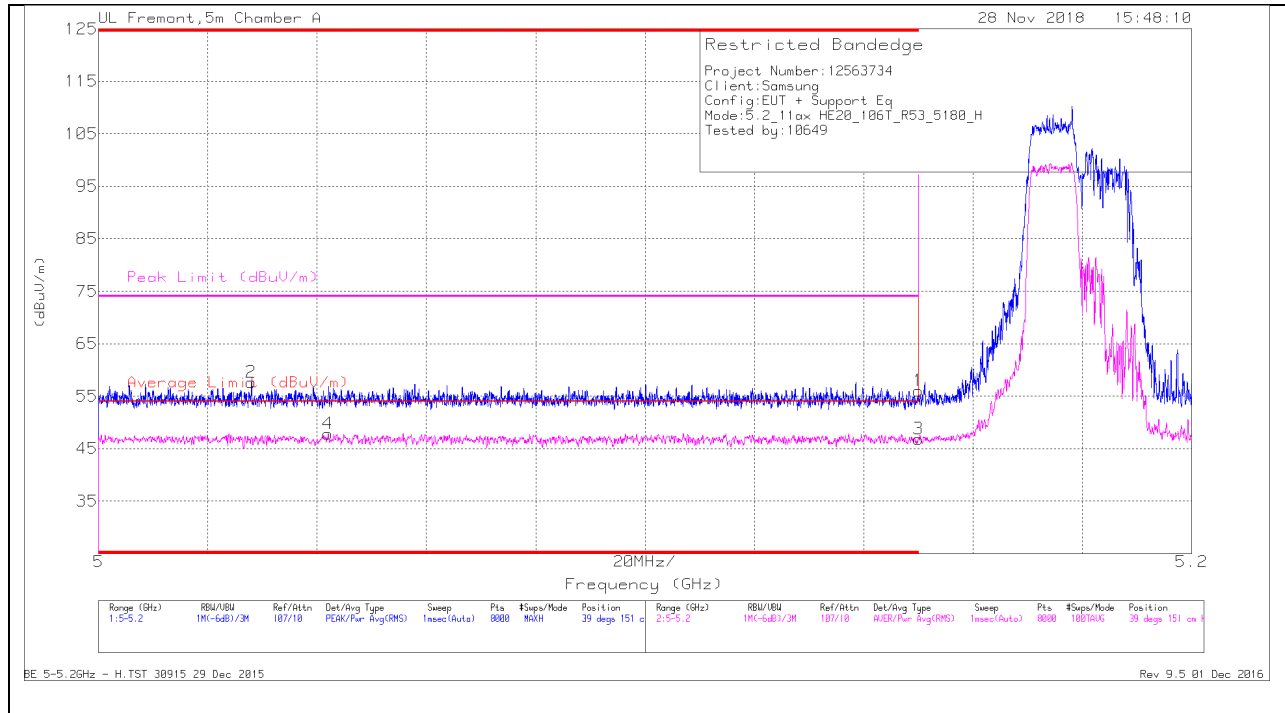

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 5.028	41.19	Pk	34.3	-17.9	0	57.59	-	-	74	-16.41	39	151	H
4	* 5.042	30.75	RMS	34.3	-17.8	0.34	47.59	54	-6.41	-	-	39	151	H
1	* 5.15	39.35	Pk	34.4	-17.7	0	56.05	-	-	74	-17.95	39	151	H
3	* 5.15	29.54	RMS	34.4	-17.7	0.34	46.58	54	-7.42	-	-	39	151	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection