

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



MEASUREMENT REPORT FCC PART 15.407 UNII 802.11ax OFDMA

Applicant Name: Samsung Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si Gyeonggi-do, 16677, Korea

Date of Testing: 10/31/2018-1/17/2019 **Test Site/Location:** PCTEST Lab. Columbia, MD, USA **Test Report Serial No.:** 1M1811120202-15.A3L

FCC ID: **A3LSMG9750**

APPLICANT: Samsung Electronics Co., Ltd.

Application Type: Certification Model: SM-G9750 Additional Model(s): SM-G9758

EUT Type: Portable Handset Frequency Range: 5180 - 5825MHz

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15 Subpart E (15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02 v02r01,

KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 1 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 1 of 516




TABLE OF CONTENTS

1.0	INTR	ODUCTIO	N	4	
	1.1	Scope	9	4	
	1.2	PCTE	ST Test Location	4	
	1.3	Test F	Facility / Accreditations	4	
2.0	PROI	DUCT INF	FORMATION	5	
	2.1	Equip	ment Description	5	
	2.2	Devic	e Capabilities	5	
	2.3	Test C	Configuration	8	
	2.4	EMI S	Suppression Device(s)/Modifications	8	
3.0	DESC	CRIPTION	N OF TESTS	9	
	3.1	Evalu	ation Procedure	9	
	3.2	AC Li	ne Conducted Emissions	9	
	3.3	Radia	ted Emissions	10	
	3.4	Enviro	onmental Conditions	10	
4.0	ANTE	NNA RE	QUIREMENTS	11	
5.0	MEAS	SUREME	NT UNCERTAINTY	12	
6.0	TEST	EQUIPM	MENT CALIBRATION DATA	13	
7.0	TEST RESULTS1				
	7.1	Summ	nary	14	
	7.2	26dB	Bandwidth Measurement – 802.11ax OFDMA	15	
	7.3	6dB B	Bandwidth Measurement – 802.11ax OFDMA	64	
	7.4	UNII (Output Power Measurement – 802.11ax OFDMA	83	
	7.5	Maxin	num Power Spectral Density – 802.11ax OFDMA	103	
	7.6	Radia	ted Spurious Emission Measurements – Above 1GHz	396	
		7.6.1	SISO Antenna-1 Radiated Spurious Emission Measurements	399	
		7.6.2	SISO Antenna-2 Radiated Spurious Emission Measurements	421	
		7.6.3	MIMO Radiated Spurious Emission Measurements	443	
		7.6.4	SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW)	465	
		7.6.5	SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW)	470	
		7.6.6	SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW)	475	
		7.6.7	SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW)	480	
		7.6.8	SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW)	485	
		7.6.9	SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW)	490	
		7.6.10	MIMO Radiated Band Edge Measurements (20MHz BW)	495	
		7.6.11	MIMO Radiated Band Edge Measurements (40MHz BW)	500	
		7.6.12	MIMO Radiated Band Edge Measurements (80MHz BW)	505	
	7.7	Radia	ted Spurious Emissions Measurements – Below 1GHz	510	
8.0	CON	ICLUS	I O N	516	

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 2 01 510





MEASUREMENT REPORT



	01		AN	JT1	AN	IT2	MII	MO
UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1		5180 - 5240	36.392	15.61	39.264	15.94	75.683	18.79
2A	20	5260 - 5320	39.174	15.93	38.994	15.91	78.163	18.93
2C	20	5500 - 5720	38.107	15.81	39.355	15.95	74.302	18.71
3		5745 - 5825	37.411	15.73	38.107	15.81	74.817	18.74
1		5190 - 5230	24.491	13.89	24.155	13.83	47.315	16.75
2A	40	5270 - 5310	24.889	13.96	24.660	13.92	48.529	16.86
2C	40	5510 - 5710	24.717	13.93	24.660	13.92	49.091	16.91
3		5755 - 5795	24.946	13.97	24.831	13.95	49.774	16.97
1		5210	19.724	12.95	19.770	12.96	38.905	15.90
2A	80	5290	19.679	12.94	18.836	12.75	37.931	15.79
2C		5530 - 5690	19.861	12.98	19.770	12.96	39.355	15.95
3		5775	19.143	12.82	19.409	12.88	38.019	15.80

EUT Overview

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 3 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 3 01 310



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 **PCTEST Test Location**

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG9750	PETEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 4 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 4 of 516



PRODUCT INFORMATION 2.0

2.1 **Equipment Description**

The Equipment Under Test (EUT) is the Samsung Portable Handset FCC ID: A3LSMG9750. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 0505M, 0218M, 0193M, 0181M, 0543M

2.2 **Device Capabilities**

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

	Band 1
Ch.	Frequency (MHz)
36	5180
• •	•
42	5210
• •	•
48	5240

Ch.	Frequency (MHz)
52	5260
:	:
56	5280
:	:
64	5320

Band 2A

Band 2A

	Dana 20
Ch.	Frequency (MHz)
100	5500
:	:
120	5600
:	:
144	5720

Rand 2C

Band 2C

Ch.	Frequency (MHz)
149	5745
:	:
157	5785
:	:
165	5825

Band 3

Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations

Band '	1
--------	---

Ch.	Frequency (MHz)
38	5190
:	:
46	5230

Ch.	Frequency (MHz)
54	5270
:	:
62	5310

Ch.	Frequency (MHz)
102	5510
:	:
118	5590
:	:
142	5710

Ch.	Frequency (MHz)
151	5755
:	:
159	5795

Band 3

Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations

Balla i		
Ch.	Frequency (MHz)	
42	5210	

Rand 1

Dana ZA		
Ch.	Frequency (MHz)	
58	5290	

Rand 2A

Ch.	Frequency (MHz)	
106	5530	
:	•	
138	5690	

Band 2C

Ch.	Frequency (MHz)		
155	5775		
<u> </u>			

Band 3

Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 5 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 5 01 510



Notes:

1. 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

	Maximum Achievable Duty Cycles				
002 11 Mada / Dand		Duty Cycle [%]			
802.11 IVI	802.11 Mode/Band		ANT2	МІМО	
	а	98.8	98.9	98.7	
	n (HT20)	98.7	98.7	98.7	
	ac (HT20)	98.8	98.7	97.5	
5GHz	n (HT40)	97.4	97.3	98.1	
	ac (HT40)	97.1	97.3	98.1	
	ac (HT80)	94.4	94.5	98.0	
	ax (HE80)	99.2	99.9	99.5	

Table 2-4. Measured Duty Cycles

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
	11a	✓	✓	*	*	✓	✓
5GHz	11n (20/40MHz)	✓	✓	✓	✓	✓	✓
	11ac (20/40/80MHz)	✓	✓	✓	✓	✓	✓
	11ax (20/40/80MHz)	✓	✓	✓	✓	✓	✓

Table 2-5. Frequency / Channel Operations

✓= Support ; × = NOT Support **SISO** = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity - 2Tx Function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 6 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 6 01 516



Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	165
Operating Frequency (MHz)	2437	5825
Data Rate (Mbps)	1Mbps	MCS0
Mode	802.11b	802.11ac

Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Configuration 2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	144
Operating Frequency (MHz)	2437	5720
Data Rate (Mbps)	1Mbps	MCS0
Mode	802.11b	802.11ac

Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

Configuration 3: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	1	144
Operating Frequency (MHz)	2412	5720
Data Rate (Mbps)	MCS0	MCS8
Mode	802.11n	802.11ac

Table 2-8. Config-3 (ANT1 MIMO & ANT2 MIMO)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 7 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 7 01 510



2.3 **Test Configuration**

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.8 for AC line conducted emissions test setups, Section 7.6 and 7.7 for radiated emissions test setups, and Section 7.2, 7.3, 7.4, and 7.5 for conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying on an authorized wireless charging pad (WCP) FCC ID: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 **EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.



3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure......None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, $50\Omega/50\mu$ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 0 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 9 of 516



3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).



ANTENNA REQUIREMENTS 4.0

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 11 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 11 of 516



5.0 **MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 10 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 12 of 516



TEST EQUIPMENT CALIBRATION DATA 6.0

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	1/23/2018	Annual	1/23/2019	WL25-1
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	846215
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
COM-Power	PAM-103	Pre-Amplifier (1-1000MHz)	9/17/2018	Annual	9/17/2019	441119
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	6/7/2018	Triennial	6/7/2021	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	12/27/2016	Biennial	12/27/2018	114451
Huber + Suhner	Sucoflex 102A	40GHz Radiated Cable Set	1/23/2018	Annual	1/23/2019	251425001
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/23/2018	Annual	1/23/2019	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/21/2018	Annual	5/21/2019	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/18/2018	Annual	6/18/2019	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/25/2018	Annual	6/25/2019	102133
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	1/24/2018	Annual	1/24/2019	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	1/24/2018	Annual	1/24/2019	100037
Seekonk	NC-100	Torque Wrench	12/28/2017	Annual	12/28/2018	N/A
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 13 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 13 01 510



7.0 TEST RESULTS

7.1 Summary

Company Name: <u>Samsung Electronics Co., Ltd.</u>

FCC ID: <u>A3LSMG9750</u>

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	26dB Bandwidth	N/A		PASS	Section 7.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)	CONDUCTED	PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a)		PASS	Section 7.5
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)		PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Section 7.6, 7.7
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	See UNII Test Report

Table 7-1. Summary of Test Results

Notes:

- 1.) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2.) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3.) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4.) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.6.
- 5.) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 0.2.16.
- 6.) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
- 7.) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 8.) Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 14 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 14 of 516



7.2 26dB Bandwidth Measurement – 802.11ax OFDMA

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4 KDB 789033 D02 v02r01 – Section C

Test Settings

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = approximately 1% of the emission bandwidth
- 3. VBW \geq 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMG9750	PCTEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 15 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 15 of 516



SISO Antenna-1 26 dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
	5180	36	ax (20MHz)	26T	MCS0	19.45
_	5200	40	ax (20MHz)	26T	MCS0	19.55
1 b	5240	48	ax (20MHz)	26T	MCS0	19.84
Band	5190	38	ax (40MHz)	26T	MCS0	19.52
	5230	46	ax (40MHz)	26T	MCS0	19.50
	5210	42	ax (80MHz)	26T	MCS0	19.26
	5260	52	ax (20MHz)	26T	MCS0	19.00
4	5280	56	ax (20MHz)	26T	MCS0	19.54
d 2A	5320	64	ax (20MHz)	26T	MCS0	20.08
Band	5270	54	ax (40MHz)	26T	MCS0	19.89
ш	5310	62	ax (40MHz)	26T	MCS0	22.06
	5290	58	ax (80MHz)	26T	MCS0	21.14
	5500	100	ax (20MHz)	26T	MCS0	19.13
	5600	120	ax (20MHz)	26T	MCS0	19.80
	5720	144	ax (20MHz)	26T	MCS0	20.09
2C	5510	102	ax (40MHz)	26T	MCS0	18.75
Band	5590	118	ax (40MHz)	26T	MCS0	19.28
Ba	5710	142	ax (40MHz)	26T	MCS0	19.86
	5530	106	ax (80MHz)	26T	MCS0	21.65
	5610	122	ax (80MHz)	26T	MCS0	20.53
	5690	138	ax (80MHz)	26T	MCS0	19.32

Table 7-2. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 16 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 10 01 510






Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)



Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 17 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 17 01 510



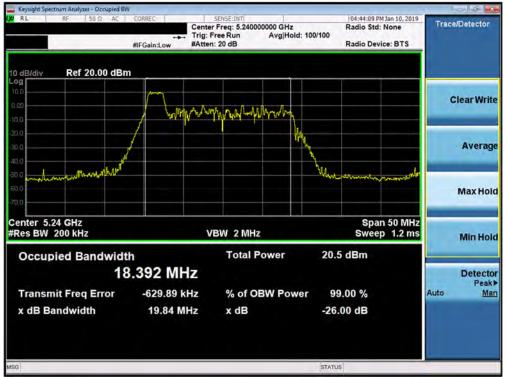

Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)



Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 38)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 18 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 10 01 510





Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)



Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 42)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 19 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 19 01 510





Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 52)



Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 56)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 20 01 510





Plot 7-9. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 64)



Plot 7-10. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 54)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 21 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 21 01 510





Plot 7-11. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 62)




Plot 7-12. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 58)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 22 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 22 01 510





Plot 7-13. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 100)

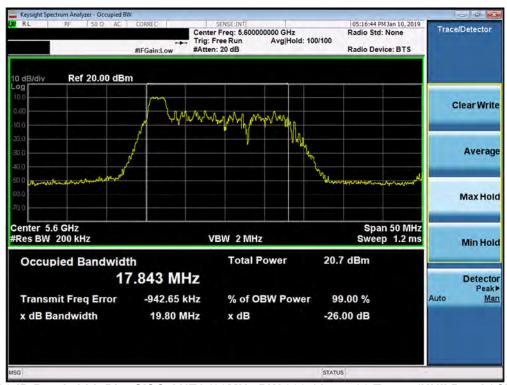

Plot 7-14. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 120)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 23 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 23 01 3 10






Plot 7-15. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 144)



Plot 7-16. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 102)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 24 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 24 01 510



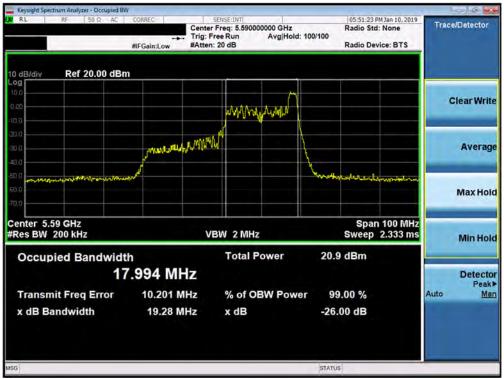


Plot 7-17. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 118)



Plot 7-18. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 142)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 25 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 25 01 5 10



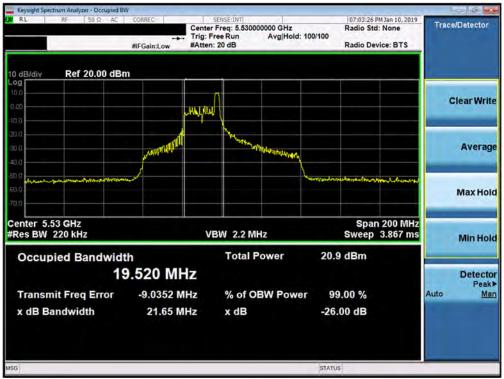

Plot 7-19. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 106)



Plot 7-20. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 122)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 20 01 5 10





Plot 7-21. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 27 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 27 01 510



SISO Antenna-1 26 dB Bandwidth Measurements (242 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
1	5180	36	ax (20MHz)	242T	MCS0	21.72
Band	5200	40	ax (20MHz)	242T	MCS0	21.56
Ä	5240	48	ax (20MHz)	242T	MCS0	21.56
2A	5260	52	ax (20MHz)	242T	MCS0	21.49
Band	5280	56	ax (20MHz)	242T	MCS0	21.76
Ва	5320	64	ax (20MHz)	242T	MCS0	21.62
2C	5500	100	ax (20MHz)	242T	MCS0	21.49
Band 2C	5600	120	ax (20MHz)	242T	MCS0	21.45
Ва	5720	144	ax (20MHz)	242T	MCS0	21.54


Table 7-3. Conducted Bandwidth Measurements SISO ANT1 (242 Tones)



Plot 7-22. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 1) - Ch. 36)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 28 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 26 01 510



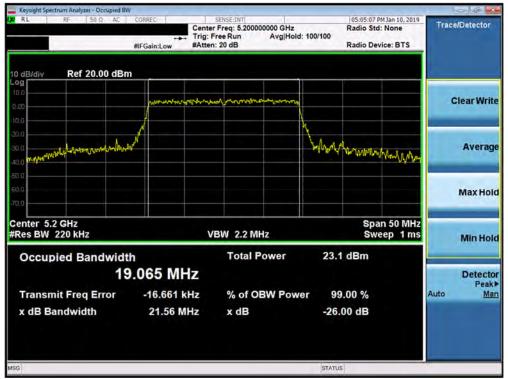


Plot 7-23. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 1) - Ch. 40)




Plot 7-24. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 1) - Ch. 48)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 29 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 29 01 5 10



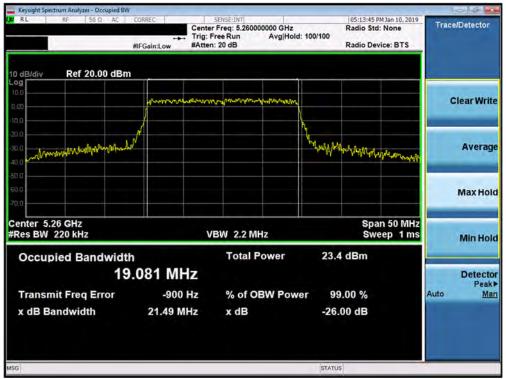

Plot 7-25. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 2A) - Ch. 52)

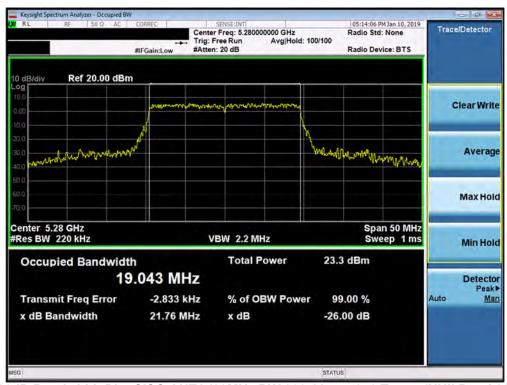

Plot 7-26. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 2A) - Ch. 56)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 30 of 310





Plot 7-27. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 2A) - Ch. 64)




Plot 7-28. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 2C) - Ch. 100)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 31 01 310





Plot 7-29. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 2C) - Ch. 120)

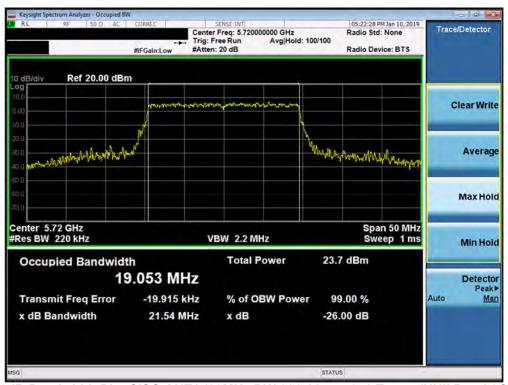

Plot 7-30. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 2C) - Ch. 144)


FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 32 01 3 10



SISO Antenna-1 26 dB Bandwidth Measurements (484 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5190	38	ax (40MHz)	484T	MCS0	40.11
Ba	5230	46	ax (40MHz)	484T	MCS0	39.76
Band 2A	5270	54	ax (40MHz)	484T	MCS0	39.68
Ba 2	5310	62	ax (40MHz)	484T	MCS0	40.22
2C	5510	102	ax (40MHz)	484T	MCS0	40.02
Band	5590	118	ax (40MHz)	484T	MCS0	40.35
Ва	5710	142	ax (40MHz)	484T	MCS0	40.25

Table 7-4. Conducted Bandwidth Measurements SISO ANT1 (484 Tones)

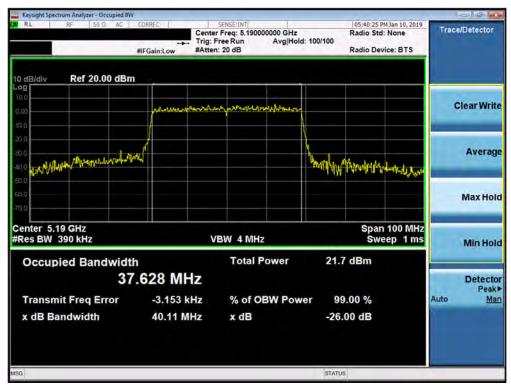

Plot 7-31. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 1) - Ch. 38)

FCC ID: A3LSMG9750	PCTEST"	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 33 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 33 01 310






Plot 7-32. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 1) - Ch. 46)




Plot 7-33. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 2A) - Ch. 54)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 34 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 34 of 510



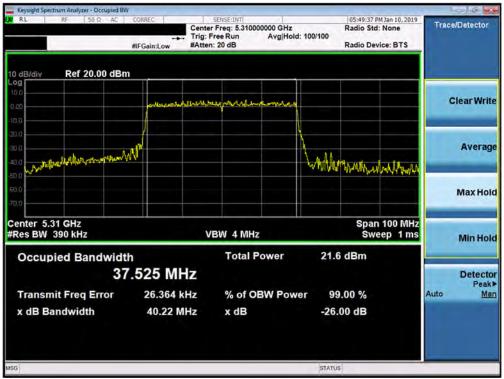


Plot 7-34. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 2A) - Ch. 62)

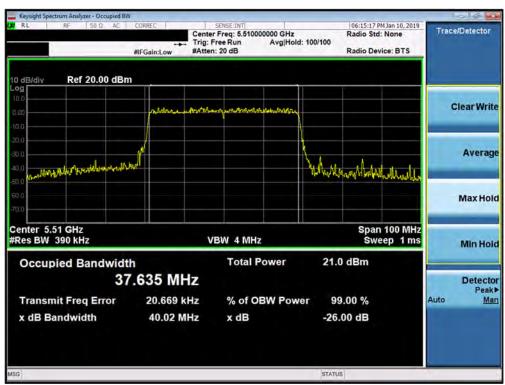

Plot 7-35. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 33 of 3 fo



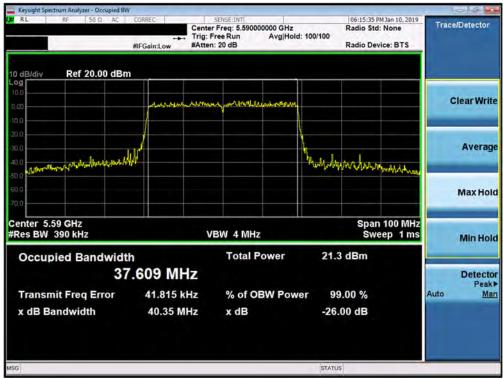

Plot 7-36. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 2C) - Ch. 118)



Plot 7-37. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 2C) - Ch. 142)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 30 of 310



SISO Antenna-1 26 dB Bandwidth Measurements (996 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5210	42	ac (80MHz)	996T	MCS0	80.76
Band 2A	5290	58	ac (80MHz)	996T	MCS0	80.63
2C	5530	106	ac (80MHz)	996T	MCS0	80.74
Band 2C	5610	122	ac (80MHz)	996T	MCS0	81.26
Ва	5690	138	ac (80MHz)	996T	MCS0	80.83

Table 7-5. Conducted Bandwidth Measurements SISO ANT1 (996 Tones)



Plot 7-38. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 1) - Ch. 42)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 37 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 37 01 310





Plot 7-39. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 2A) - Ch. 58)




Plot 7-40. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 2C) - Ch. 106)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 38 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 30 of 310





Plot 7-41. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 2C) - Ch. 122)

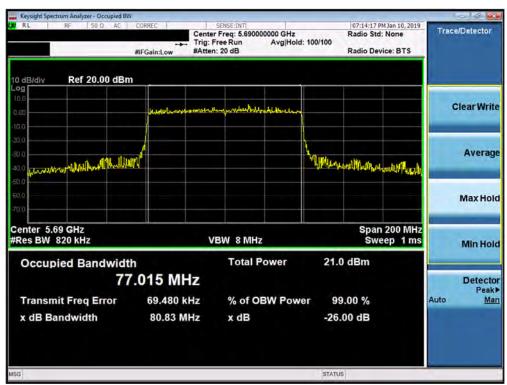

Plot 7-42. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 2C) - Ch. 138)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 39 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 39 of 3 fo




SISO Antenna-2 26 dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
	5180	36	ax (20MHz)	26T	MCS0	19.74
	5200	40	ax (20MHz)	26T	MCS0	19.68
Band 1	5240	48	ax (20MHz)	26T	MCS0	19.75
Bar	5190	38	ax (40MHz)	26T	MCS0	21.52
	5230	46	ax (40MHz)	26T	MCS0	18.76
	5210	42	ax (80MHz)	26T	MCS0	19.25
	5260	52	ax (20MHz)	26T	MCS0	19.68
∢	5280	56	ax (20MHz)	26T	MCS0	19.73
d 2,	5320	64	ax (20MHz)	26T	MCS0	19.67
Band 2A	5270	54	ax (40MHz)	26T	MCS0	18.72
ш	5310	62	ax (40MHz)	26T	MCS0	18.82
	5290	58	ax (80MHz)	26T	MCS0	19.26
	5500	100	ax (20MHz)	26T	MCS0	18.23
	5600	120	ax (20MHz)	26T	MCS0	18.04
	5720	144	ax (20MHz)	26T	MCS0	18.20
2C	5510	102	ax (40MHz)	26T	MCS0	18.89
Band	5590	118	ax (40MHz)	26T	MCS0	18.92
Ва	5710	142	ax (40MHz)	26T	MCS0	18.89
	5530	106	ax (80MHz)	26T	MCS0	19.32
	5610	122	ax (80MHz)	26T	MCS0	18.84
	5690	138	ax (80MHz)	26T	MCS0	19.28


Table 7-6. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 40 of 546
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 40 of 516



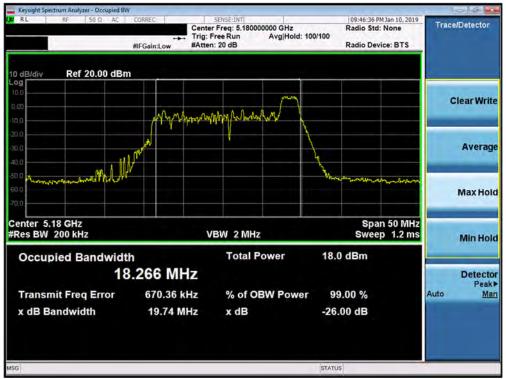


Plot 7-43. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)

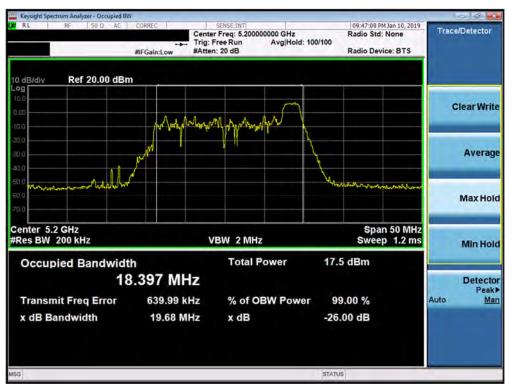

Plot 7-44. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 41 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 41 01 510



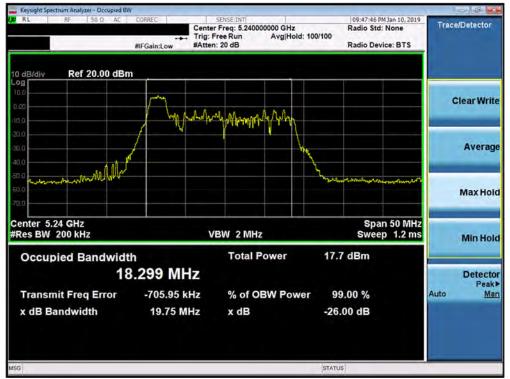


Plot 7-45. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)




Plot 7-46. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 38)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 42 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 42 01 510



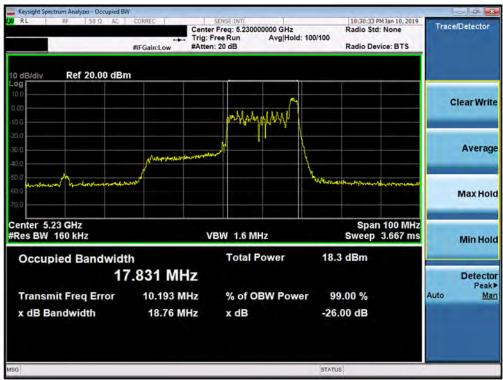

Plot 7-47. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)

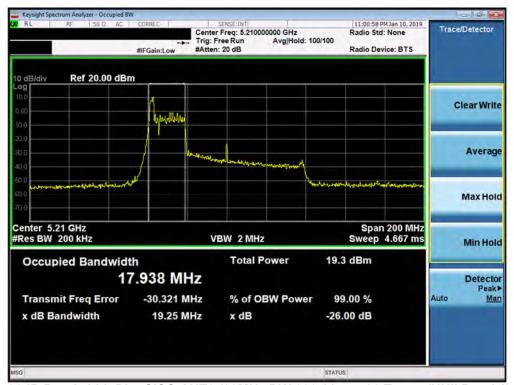

Plot 7-48. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 42)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 43 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 43 01 310






Plot 7-49. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 52)




Plot 7-50. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 56)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 44 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 44 01 510



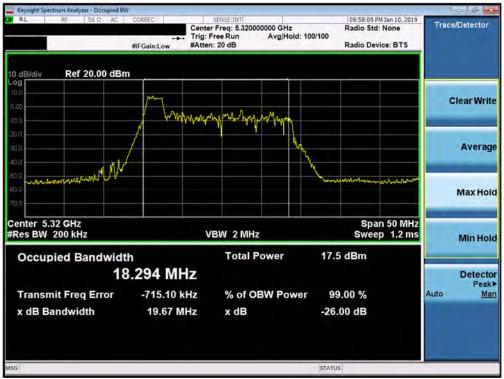


Plot 7-51. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 64)

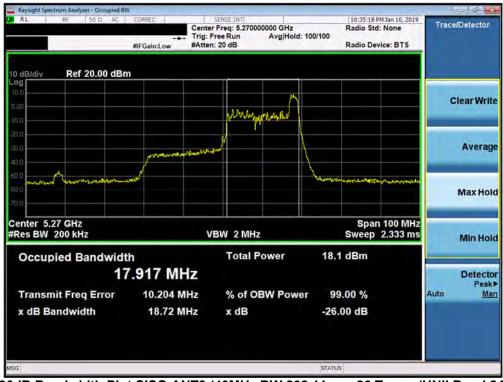

Plot 7-52. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 54)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 45 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 45 01 5 10



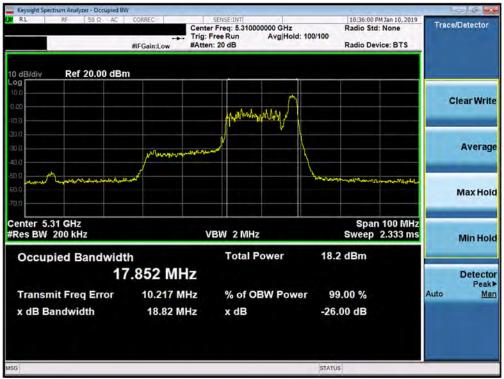

Plot 7-53. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 62)



Plot 7-54. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 58)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 46 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 40 01 5 10






Plot 7-55. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 100)




Plot 7-56. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 120)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 47 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 47 01 510



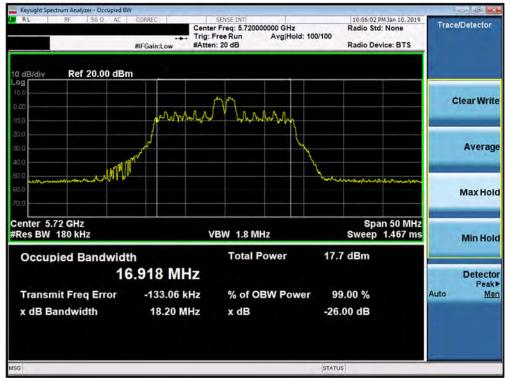

Plot 7-57. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 144)

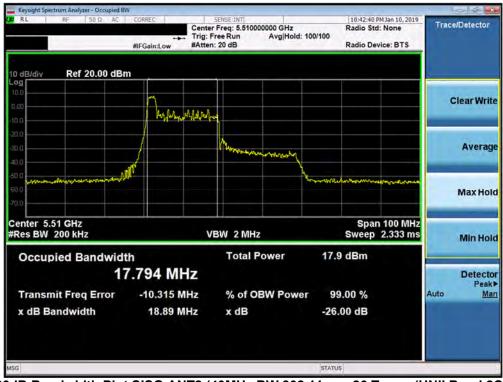

Plot 7-58. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 102)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 48 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 40 01 5 10






Plot 7-59. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 118)



Plot 7-60. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 142)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 49 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 49 01 510



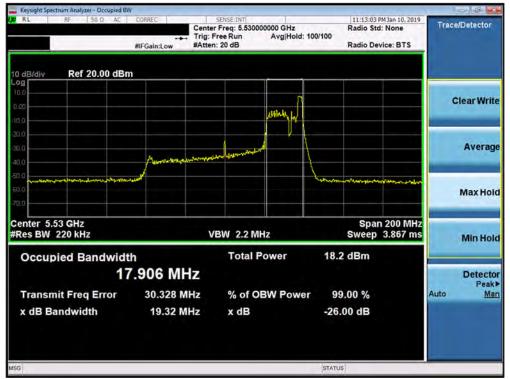

Plot 7-61. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 106)



Plot 7-62. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 122)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 50 of 516





Plot 7-63. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)


FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 51 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 51 of 516



SISO Antenna-2 26 dB Bandwidth Measurements (242 Tones)

		Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
_		5180	36	ax (20MHz)	242T	MCS0	21.20
Band		5200	40	ax (20MHz)	242T	MCS0	21.18
ä		5240	48	ax (20MHz)	242T	MCS0	20.91
2A		5260	52	ax (20MHz)	242T	MCS0	21.14
Band		5280	56	ax (20MHz)	242T	MCS0	21.17
Ba		5320	64	ax (20MHz)	242T	MCS0	21.30
2C	j	5500	100	ax (20MHz)	242T	MCS0	21.11
Band		5600	120	ax (20MHz)	242T	MCS0	20.89
Ba		5720	144	ax (20MHz)	242T	MCS0	21.41


Table 7-7. Conducted Bandwidth Measurements SISO ANT2 (242 Tones)

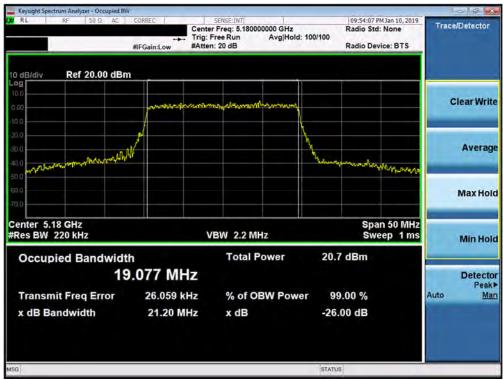

Plot 7-64. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 1) - Ch. 36)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 52 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 52 01 510



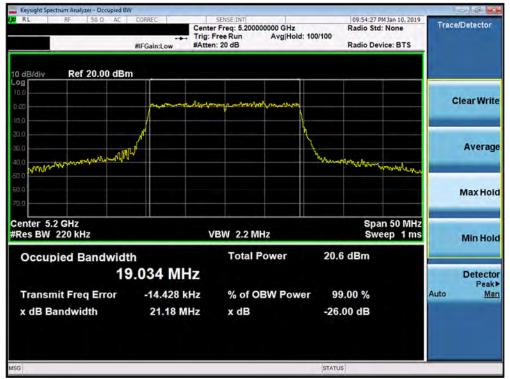

Plot 7-65. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 1) - Ch. 40)




Plot 7-66. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 1) - Ch. 48)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 53 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 55 of 516





Plot 7-67. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 2A) - Ch. 52)

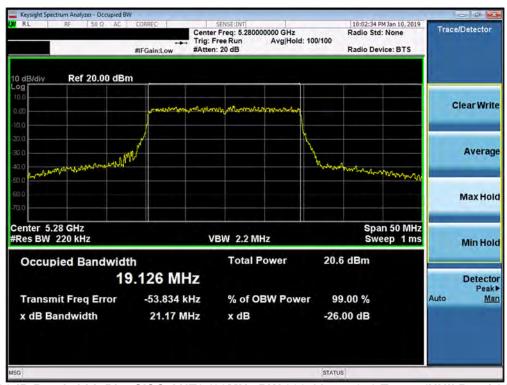

Plot 7-68. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 2A) - Ch. 56)

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 54 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 34 01 310






Plot 7-69. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 2A) - Ch. 64)



Plot 7-70. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 2C) - Ch. 100)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 55 of 5 fo



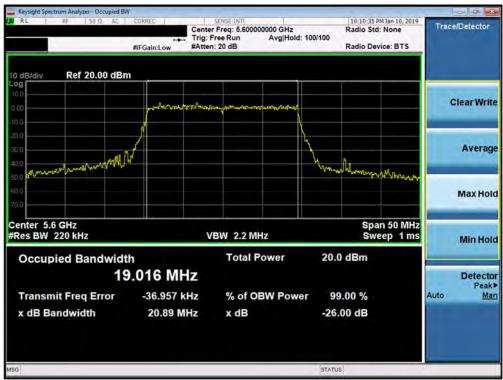

Plot 7-71. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 2C) - Ch. 120)



Plot 7-72. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 2C) - Ch. 144)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 50 of 510



SISO Antenna-2 26 dB Bandwidth Measurements (484 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5190	38	ax (40MHz)	484T	MCS0	40.11
Ba	5230	46	ax (40MHz)	484T	MCS0	39.76
Band 2A	5270	54	ax (40MHz)	484T	MCS0	39.68
Ba 2	5310	62	ax (40MHz)	484T	MCS0	40.22
2C	5510	102	ax (40MHz)	484T	MCS0	40.02
Band 2C	5590	118	ax (40MHz)	484T	MCS0	40.35
Ва	5710	142	ax (40MHz)	484T	MCS0	40.25

Table 7-8. Conducted Bandwidth Measurements SISO ANT2 (484 Tones)



Plot 7-73. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 1) - Ch. 38)

FCC ID: A3LSMG9750	PCTEST"	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 57 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 57 01 510






Plot 7-74. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 1) - Ch. 46)




Plot 7-75. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 2A) - Ch. 54)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 58 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 56 of 516



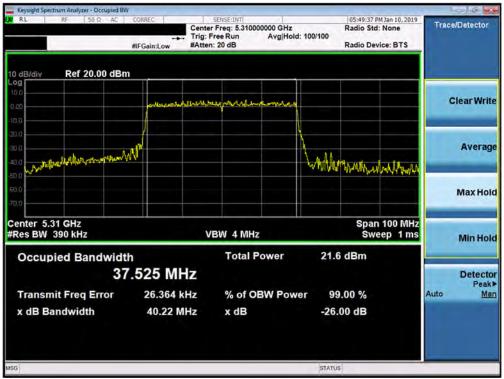

Plot 7-76. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 2A) - Ch. 62)

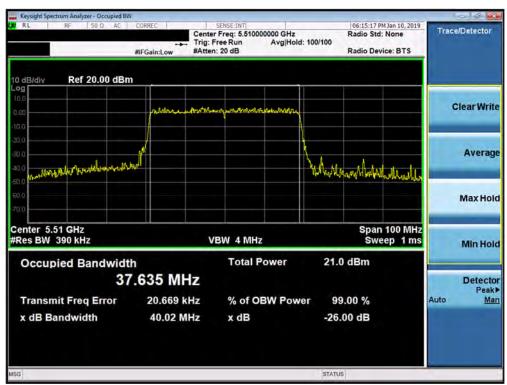

Plot 7-77. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 59 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 59 of 516





Plot 7-78. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 2C) - Ch. 118)



Plot 7-79. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 142)


FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 60 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage ou of 510



SISO Antenna-2 26 dB Bandwidth Measurements (996 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5210	42	ax (80MHz)	996T	MCS0	80.61
Band 2A	5290	58	ax (80MHz)	996T	MCS0	80.49
2C	5530	106	ax (80MHz)	996T	MCS0	80.98
Band 2C	5610	122	ax (80MHz)	996T	MCS0	80.96
Ва	5690	138	ax (80MHz)	996T	MCS0	80.71

Table 7-9. Conducted Bandwidth Measurements SISO ANT2 (996 Tones)

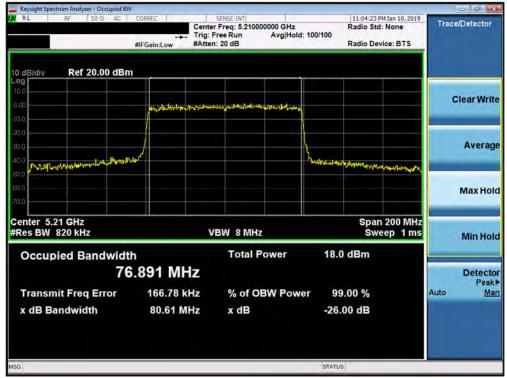

Plot 7-80. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 1) - Ch. 42)

FCC ID: A3LSMG9750	PCTEST"	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 61 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 01 01 510





Plot 7-81. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 2A) - Ch. 58)



Plot 7-82. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 2C) - Ch. 106)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 62 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 02 01 5 10





Plot 7-83. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 2C) - Ch. 122)



Plot 7-84. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 2C) - Ch. 138)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 63 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 03 01 3 10



7.3 6dB Bandwidth Measurement – 802.11ax OFDMA §15.407 (e);

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2 KDB 789033 D02 v02r01 – Section C

Test Settings

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 100 kHz
- 3. VBW \geq 3 x RBW
- 4. Detector = Peak
- Trace mode = max hold
- 6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 64 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 04 01 510




SISO Antenna-1 6 dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	ax (20MHz)	26T	MCS0	2.097
	5785	157	ax (20MHz)	26T	MCS0	2.648
9 July 3	5825	165	ax (20MHz)	26T	MCS0	2.092
Band	5755	151	ax (40MHz)	26T	MCS0	2.149
	5795	159	ax (40MHz)	26T	MCS0	2.120
	5775	155	ax (80MHz)	26T	MCS0	2.202


Table 7-10. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo GE of E16
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 65 of 516



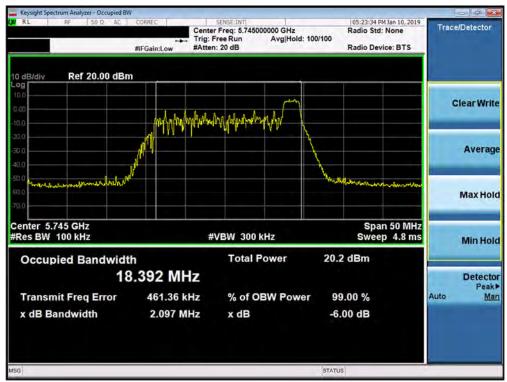


Plot 7-85. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

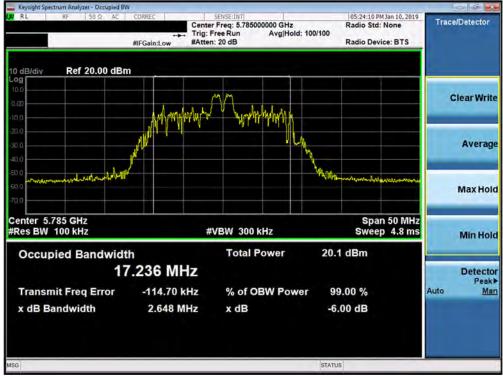

Plot 7-86. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 66 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 00 01 510



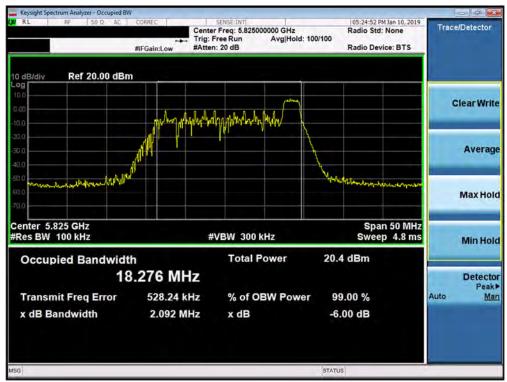

Plot 7-87. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)




Plot 7-88. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 67 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 67 01 516





Plot 7-89. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)

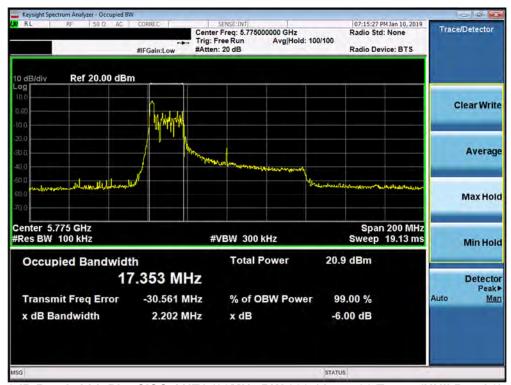

Plot 7-90. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 68 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 66 01 516



SISO Antenna-1 6 dB Bandwidth Measurements (242 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
3	5745	149	ax (20MHz)	242T	MCS0	19.05
Band	5785	157	ax (20MHz)	242T	MCS0	19.01
Ä	5825	165	ax (20MHz)	242T	MCS0	19.02

Table 7-11. Conducted Bandwidth Measurements SISO ANT1 (242 Tones)




Plot 7-91. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 149)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 69 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 09 01 510





Plot 7-92. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 157)

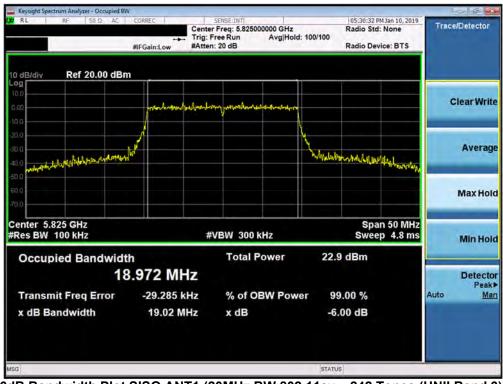

Plot 7-93. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 165)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 70 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 70 of 510



SISO Antenna-1 6 dB Bandwidth Measurements (484 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5755	151	n (40MHz)	484T	MCS0	37.84
Ba	5795	159	n (40MHz)	484T	MCS0	37.73


Table 7-12. Conducted Bandwidth Measurements SISO ANT1 (484 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 71 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage / 1 01 510





Plot 7-94. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 484 Tones (UNII Band 3) - Ch. 151)

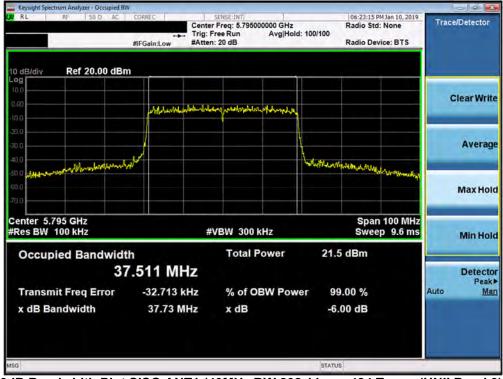

Plot 7-95. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 159)


FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 72 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 72 01 510



SISO Antenna-1 6 dB Bandwidth Measurements (996 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5775	155	ac (80MHz)	996T	MCS0	77.85

Table 7-13. Conducted Bandwidth Measurements SISO ANT1 (996 Tones)

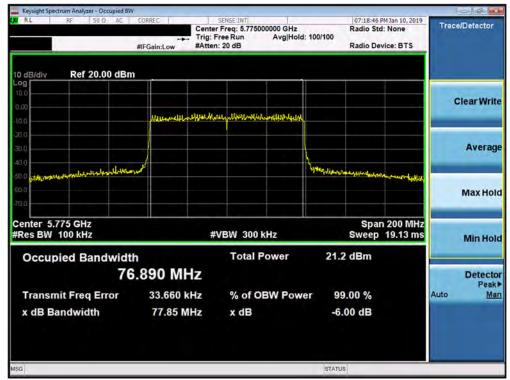

Plot 7-96. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 996 Tones (UNII Band 3) - Ch. 155)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 73 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 73 01 510



SISO Antenna-2 6 dB Bandwidth Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	ax (20MHz)	26T	MCS0	2.699
	5785	157	ax (20MHz)	26T	MCS0	2.148
9 pt	5825	165	ax (20MHz)	26T	MCS0	2.656
Band	5755	151	ax (40MHz)	26T	MCS0	2.181
	5795	159	ax (40MHz)	26T	MCS0	2.124
	5775	155	ax (80MHz)	26T	MCS0	2.900


Table 7-14. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

FCC ID: A3LSMG9750	PCTEST"	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dog 74 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 74 of 516





Plot 7-97. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)

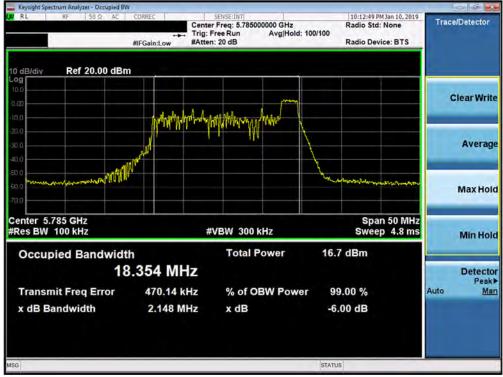


Plot 7-98. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

FCC ID: A3LSMG9750		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 75 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 75 01 510





Plot 7-99. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)

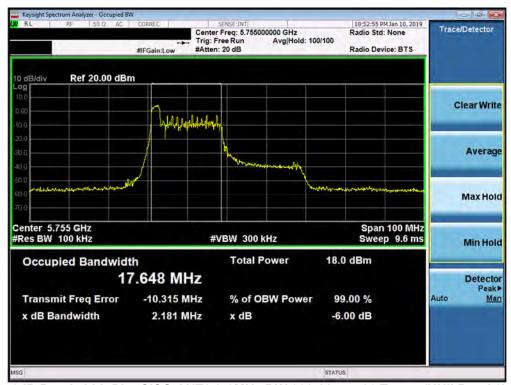


Plot 7-100. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 76 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 70 01 510





Plot 7-101. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)

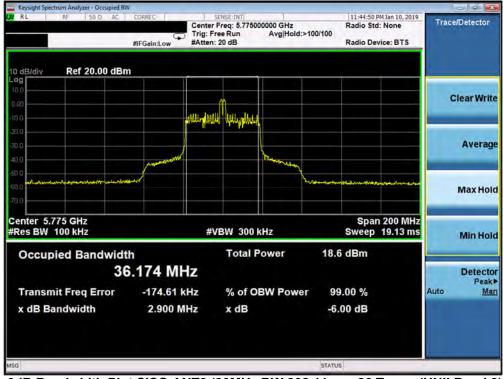

Plot 7-102. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)


FCC ID: A3LSMG9750		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: Test Dates:		EUT Type:	Page 77 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 77 OI 510



SISO Antenna-2 6 dB Bandwidth Measurements (242 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
က	5745	149	ax (20MHz)	242T	MCS0	18.99
Band	5785	157	ax (20MHz)	242T	MCS0	19.08
ä	5825	165	ax (20MHz)	242T	MCS0	18.94

Table 7-15. Conducted Bandwidth Measurements SISO ANT2 (242 Tones)

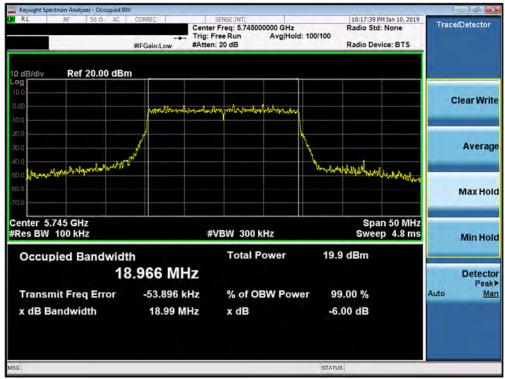

Plot 7-103. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 149)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 78 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 76 01 510





Plot 7-104. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 157)



Plot 7-105. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 242 Tones (UNII Band 3) - Ch. 165)

FCC ID: A3LSMG9750		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 79 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 79 01 510



SISO Antenna-2 6 dB Bandwidth Measurements (484 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5755	151	n (40MHz)	484T	MCS0	37.38
Ba	5795	159	n (40MHz)	484T	MCS0	37.09

Table 7-16. Conducted Bandwidth Measurements SISO ANT2 (484 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 80 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 60 01 510





Plot 7-106. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 3) - Ch. 151)



Plot 7-107. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 484 Tones (UNII Band 3) - Ch. 159)


FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 81 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage of 01510



SISO Antenna-2 6 dB Bandwidth Measurements (996 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5775	155	ac (80MHz)	996T	MCS0	76.32

Table 7-17. Conducted Bandwidth Measurements SISO ANT2 (996 Tones)

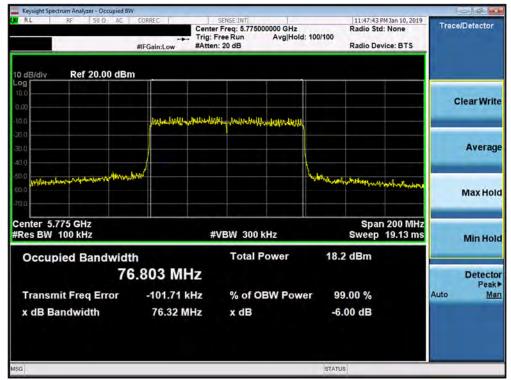

Plot 7-108. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 996 Tones (UNII Band 3) - Ch. 155)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 82 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 62 01 510



7.4 UNII Output Power Measurement – 802.11ax OFDMA §15.407(a.1.iv) §15.407(a.2) §15.407(a.3);

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 - 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). For ISED operation, the maximum e.i.r.p. shall not exceed the lesser of 200 mW(23.01dBm) or $10 + 10 \log 10(19.45) = 22.89$ dBm.

In the 5.25 - 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm + $10log_{10}(26$ dB BW) = 11 dBm + $10log_{10}(18.72) = 23.72$ dBm. For ISED operation, the maximum e.i.r.p. shall not exceed the lesser of 1.0 W(30dBm) or 17 + 10 log10(18.72) = 29.72dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm + $10\log_{10}(26dB\ BW) = 11\ dBm + 10\log_{10}(18.04) = 23.56dBm$. For ISED operation, the maximum e.i.r.p. shall not exceed the lesser of 1.0 W(30dBm) or 17 + 10 log10(18.04) = 29.56dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). For ISED operation, the maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 83 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	rage 63 01 3 10



SISO Antenna-1 Conducted Output Power Measurements (26 Tones)

th)	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit		Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
<u> </u>					0	4	8	[dBm]	Margin [dB]	• •			
<u>\<u>\</u></u>	5180	36	AVG	26T	10.87	10.75	10.64	23.98	-13.11	-7.25	3.62	22.89	-19.27
Þ	5200	40	AVG	26T	10.85	10.76	10.64	23.98	-13.13	-7.55	3.30	22.89	-19.59
a	5240	48	AVG	26T	10.85	10.77	10.77	23.98	-13.13	-7.33	3.52	22.89	-19.37
<u> </u>	5260	52	AVG	26T	10.52	10.98	10.93	23.72	-12.74	-7.95	3.03	29.72	-26.69
N	5280	56	AVG	26T	10.70	10.46	10.58	23.72	-13.02	-7.95	2.75	29.72	-26.97
Σ	5320	64	AVG	26T	10.88	10.74	10.55	23.72	-12.84	-7.44	3.44	29.72	-26.28
6	5500	100	AVG	26T	10.53	10.83	10.69	23.56	-12.73	-8.01	2.82	29.56	-26.74
5	5600	120	AVG	26T	10.81	10.64	10.54	23.56	-12.75	-8.01	2.80	29.56	-26.76
N	5720	144	AVG	26T	10.94	10.76	10.59	23.56	-12.62	-8.01	2.93	29.56	-26.63
I	5745	149	AVG	26T	10.48	10.69	10.87	30.00	-19.13	-7.10	3.77	-	-
5G	5785	157	AVG	26T	10.83	10.96	10.50	30.00	-19.04	-7.10	3.86	-	-
4)	5825	165	AVG	26T	10.70	10.79	10.84	30.00	-19.16	-7.67	3.17	-	-

Table 7-18. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

	Freq [MHz]	Channel Detector	Tones		RU Index		Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]	
N _					0	8	17	[dBm]	Margin [dB]		[]		
$\exists \subseteq$	5190	38	AVG	26T	10.66	10.65	10.57	23.98	-13.32	-7.55	3.11	22.89	-19.78
₹ ₹	5230	46	AVG	26T	10.67	10.67	10.63	23.98	-13.31	-7.33	3.34	22.89	-19.55
4 ×	5270	54	AVG	26T	10.95	10.77	10.83	23.72	-12.77	-7.95	3.00	29.72	-26.72
z (br	5310	62	AVG	26T	10.67	10.92	10.85	23.72	-12.80	-7.44	3.48	29.72	-26.24
a ‡	5510	102	AVG	26T	10.72	10.86	10.99	23.56	-12.70	-8.01	2.85	29.56	-26.71
C m	5590	118	AVG	26T	10.81	10.84	10.85	23.56	-12.72	-8.01	2.83	29.56	-26.73
5	5710	142	AVG	26T	10.97	10.63	10.55	23.56	-12.59	-7.10	3.87	29.56	-25.69
	5755	151	AVG	26T	10.52	10.70	10.70	30.00	-19.30	-7.10	3.60	-	-
	5795	159	AVG	AVG	10.94	10.68	10.76	30.00	-19.06	-8.41	2.53	-	-

Table 7-19. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

	Freq [MHz]	Hz] Channel [Detector	Tones		RU Index		Conducted Power Limit	I IdBil	Max e.i.r.p.		e.i.r.p. Margin [dB]	
fh (0	17	36	[dBm]	Margin [dB]	[ubi]	[ubiii]		
o Maria	5210	42	AVG	26T	10.83	10.71	10.79	23.98	-13.19	-7.55	3.24	22.89	-19.65
® ≩	5290	58	AVG	26T	10.48	10.92	10.90	23.72	-12.82	-7.44	3.46	29.72	-26.26
보 호	5530	106	AVG	26T	10.68	10.85	10.83	23.56	-12.73	-8.01	2.82	29.56	-26.74
5G B	5610	122	AVG	26T	10.72	10.80	10.88	23.56	-12.68	-8.01	2.87	29.56	-26.69
-	5690	138	AVG	26T	10.84	10.87	10.96	23.56	-12.60	-8.01	2.95	29.56	-26.61
	5775	155	AVG	26T	10.90	10.63	10.60	30.00	-19.40	-7.10	3.50	-	-

Table 7-20. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 84 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 64 01 510



SISO Antenna-1 Conducted Output Power Measurements (52 Tones)

th)	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
<u> </u>					37	38	40	[dBm]	Margin [dB]	• •			
<u>\<u>\</u></u>	5180	36	AVG	52T	12.91	12.60	12.71	23.98	-11.07	-7.25	5.66	22.89	-17.23
nd	5200	40	AVG	52T	12.89	12.58	12.70	23.98	-11.09	-7.55	5.34	22.89	-17.55
Ø	5240	48	AVG	52T	12.96	12.63	12.77	23.98	-11.02	-7.33	5.63	22.89	-17.26
<u> </u>	5260	52	AVG	52T	12.64	12.84	12.86	23.72	-10.86	-7.95	4.91	29.72	-24.81
N	5280	56	AVG	52T	12.73	12.95	12.58	23.72	-10.77	-7.95	5.00	29.72	-24.72
Ξ	5320	64	AVG	52T	12.94	12.69	12.61	23.72	-10.78	-7.44	5.50	29.72	-24.22
6	5500	100	AVG	52T	12.56	12.61	12.66	23.56	-10.90	-8.01	4.65	29.56	-24.91
5	5600	120	AVG	52T	12.91	12.95	12.90	23.56	-10.61	-8.01	4.94	29.56	-24.62
N	5720	144	AVG	52T	12.85	12.97	12.87	23.56	-10.59	-8.01	4.96	29.56	-24.60
工	5745	149	AVG	52T	12.86	12.87	12.70	30.00	-17.13	-7.10	5.77	-	-
Ď	5785	157	AVG	52T	12.75	12.50	12.54	30.00	-17.25	-7.10	5.65	-	-
5	5825	165	AVG	52T	12.62	12.94	12.74	30.00	-17.06	-7.67	5.27	-	-

Table 7-21. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

	Freq [MHz] Ch	Channel Detector	Detector	Tones	IEEE	Transmission	Mode	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
N _					37	40	44	[dBm]	Margin [dB]		[]		
$\Xi \subseteq$	5190	38	AVG	52T	11.47	11.70	11.67	23.98	-12.28	-7.55	4.15	22.89	-18.74
ੋਂ ਵੋ	5230	46	AVG	52T	11.59	11.75	11.89	23.98	-12.23	-7.33	4.42	22.89	-18.47
4 ×	5270	54	AVG	52T	11.93	11.91	11.54	23.72	-11.79	-7.95	3.98	29.72	-25.74
z (br	5310	62	AVG	52T	11.96	11.66	11.60	23.72	-11.76	-7.44	4.52	29.72	-25.20
a ‡	5510	102	AVG	52T	11.73	11.94	11.64	23.56	-11.62	-8.01	3.93	29.56	-25.63
C m	5590	118	AVG	52T	11.87	11.93	11.51	23.56	-11.63	-8.01	3.92	29.56	-25.64
5	5710	142	AVG	52T	11.97	11.63	11.69	23.56	-11.59	-7.10	4.87	29.56	-24.69
	5755	151	AVG	52T	11.68	11.67	11.85	30.00	-18.32	-7.10	4.58	-	-
	5795	159	AVG	52T	11.61	11.63	11.45	30.00	-18.37	-8.41	3.22	-	-

Table 7-22. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

	Freq [MHz]	Channel	Detector	ctor Tones Power Lin		Conducted Power Limit	Power IdBil	Ant. Gain	· ·		e.i.r.p. Margin [dB]		
fh (37	44	52	[dBm]	Margin [dB]	[0.5.]	[]	. []	a.g [uD]
o Maria	5210	42	AVG	52T	10.63	10.64	10.88	23.98	-13.10	-7.55	3.33	22.89	-19.56
® ≩	5290	58	AVG	52T	10.69	10.95	10.54	23.72	-13.18	-7.44	3.10	29.72	-26.62
보 호	5530	106	AVG	52T	10.84	10.85	10.92	23.56	-12.64	-8.01	2.91	29.56	-26.65
5G B	5610	122	AVG	52T	10.85	10.70	10.99	23.56	-12.57	-8.01	2.98	29.56	-26.58
-	5690	138	AVG	52T	10.51	10.84	10.50	23.56	-13.06	-8.01	2.49	29.56	-27.07
	5775	155	AVG	52T	10.49	10.65	10.80	30.00	-19.20	-7.10	3.70	-	-

Table 7-23. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 85 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 65 01 516



SISO Antenna-1 Conducted Output Power Measurements (106 Tones)

th)	Freq [MHz]	Channel	Detector	Tones	RU II	ndex	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
<u>.</u>					53	54	[dBm]	Margin [dB]				
dwid	5180	36	AVG	106T	14.98	14.73	23.98	-9.00	-7.25	7.73	22.89	-15.16
D	5200	40	AVG	106T	14.44	14.77	23.98	-9.21	-7.55	7.22	22.89	-15.67
an	5240	48	AVG	106T	14.50	14.75	23.98	-9.23	-7.33	7.42	22.89	-15.47
<u>m</u>	5260	52	AVG	106T	14.70	14.73	23.72	-8.99	-7.95	6.78	29.72	-22.94
N	5280	56	AVG	106T	14.70	14.91	23.72	-8.81	-7.95	6.96	29.72	-22.76
Ŧ	5320	64	AVG	106T	14.88	14.42	23.72	-8.84	-7.44	7.44	29.72	-22.28
∑	5500	100	AVG	106T	14.97	14.51	23.56	-8.59	-8.01	6.96	29.56	-22.60
(20	5600	120	AVG	106T	14.65	14.64	23.56	-8.91	-8.01	6.64	29.56	-22.92
N	5720	144	AVG	106T	14.64	14.70	23.56	-8.86	-8.01	6.69	29.56	-22.87
I	5745	149	AVG	106T	14.85	14.72	30.00	-15.15	-7.10	7.75	-	-
Ö	5785	157	AVG	106T	14.88	14.99	30.00	-15.01	-7.10	7.89	-	-
Ŋ	5825	165	AVG	106T	14.74	14.81	30.00	-15.19	-7.67	7.14	-	-

Table 7-24. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

	Freq [MHz]	Channel	Detector	Tones	IEEE	Transmission	Mode	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
N					53	54	56	[dBm]	Margin [dB]				
∃ ≘	5190	38	AVG	106T	12.68	12.58	12.90	23.98	-11.30	-7.55	5.13	22.89	-17.76
돌	5230	46	AVG	106T	12.73	12.60	12.99	23.98	-11.25	-7.33	5.40	22.89	-17.49
45 15	5270	54	AVG	106T	12.96	12.93	12.74	23.72	-10.76	-7.95	5.01	29.72	-24.71
z (p	5310	62	AVG	106T	12.70	12.45	12.68	23.72	-11.02	-7.44	5.26	29.72	-24.46
a H	5510	102	AVG	106T	12.93	12.67	12.74	23.56	-10.63	-8.01	4.92	29.56	-24.64
O m	5590	118	AVG	106T	12.56	12.73	12.69	23.56	-10.83	-8.01	4.72	29.56	-24.84
5	5710	142	AVG	106T	12.78	12.44	12.84	23.56	-10.78	-7.10	5.68	29.56	-23.88
	5755	151	AVG	106T	12.88	12.61	12.97	30.00	-17.12	-7.10	5.78	-	-
	5795	159	AVG	106T	12.49	12.59	12.67	30.00	-17.41	-8.41	4.18	-	-

Table 7-25. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

	Freq [MHz]	Channel	Detector	Tones				Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
HZ (u					53	56	60	[dBm]	Margin [dB]		[]		
ig S	5210	42	AVG	106T	11.78	11.65	11.99	23.98	-11.99	-7.55	4.44	22.89	-18.45
(8) (8)	5290	58	AVG	106T	11.97	11.98	11.67	23.72	-12.05	-7.44	4.23	29.72	-25.49
Hz	5530	106	AVG	106T	11.90	11.88	11.59	23.56	-11.97	-8.01	3.58	29.56	-25.98
5G Ba	5610	122	AVG	106T	11.94	11.89	11.51	23.56	-12.05	-8.01	3.50	29.56	-26.06
	5690	138	AVG	106T	11.58	11.89	11.77	23.56	-11.79	-8.01	3.76	29.56	-25.80
	5775	155	AVG	106T	11.62	11.72	11.91	30.00	-18.09	-7.10	4.81	-	-

Table 7-26. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 86 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 80 01 510



SISO Antenna-1 Conducted Output Power Measurements (242 Tones)

width)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
<u>.0</u>					61	[ubiii]	wargiii [ub]				
≥	5180	36	AVG	242T	15.55	23.98	-8.43	-7.25	8.30	22.89	-14.59
O	5200	40	AVG	242T	15.59	23.98	-8.39	-7.55	8.04	22.89	-14.85
an	5240	48	AVG	242T	15.61	23.98	-8.37	-7.33	8.28	22.89	-14.61
<u> </u>	5260	52	AVG	242T	15.72	23.72	-8.00	-7.95	7.77	29.72	-21.95
7	5280	56	AVG	242T	15.82	23.72	-7.90	-7.95	7.87	29.72	-21.85
Ξ	5320	64	AVG	242T	15.93	23.72	-7.79	-7.44	8.49	29.72	-21.23
6	5500	100	AVG	242T	15.81	23.56	-7.75	-8.01	7.80	29.56	-21.76
(2)	5600	120	AVG	242T	15.42	23.56	-8.14	-8.01	7.41	29.56	-22.15
N	5720	144	AVG	242T	15.40	23.56	-8.16	-8.01	7.39	29.56	-22.17
エ	5745	149	AVG	242T	15.64	30.00	-14.36	-7.10	8.54	-	-
D _O	5785	157	AVG	242T	15.73	30.00	-14.27	-7.10	8.63	-	-
5	5825	165	AVG	242T	15.66	30.00	-14.34	-7.67	7.99	-	-

Table 7-27. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU I	ndex	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
N _					61	62	[dBm]	Margin [dB]				5 1 1
I Ξ Ξ	5190	38	AVG	242T	13.66	13.52	23.98	-10.32	-7.55	6.11	22.89	-16.78
ĕ₩	5230	46	AVG	242T	13.68	13.67	23.98	-10.30	-7.33	6.35	22.89	-16.54
(40 wic	5270	54	AVG	242T	13.91	13.96	23.72	-9.76	-7.95	6.01	29.72	-23.71
z þ	5310	62	AVG	242T	13.47	13.41	23.72	-10.25	-7.44	6.03	29.72	-23.69
I I	5510	102	AVG	242T	13.65	13.88	23.56	-9.68	-8.01	5.87	29.56	-23.69
O M	5590	118	AVG	242T	13.83	13.81	23.56	-9.73	-8.01	5.82	29.56	-23.74
5	5710	142	AVG	242T	13.93	13.89	23.56	-9.63	-7.10	6.83	29.56	-22.73
	5755	151	AVG	242T	13.97	13.77	30.00	-16.03	-7.10	6.87	-	-
	5795	159	AVG	242T	13.87	13.97	30.00	-16.03	-8.41	5.56	-	-

Table 7-28. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
MHz dth)					61	62	64	[dBm]	Margin [dB]		[]		
id id	5210	42	AVG	242T	12.67	12.43	12.59	23.98	-11.39	-7.55	5.04	22.89	-17.85
(80) dwic	5290	58	AVG	242T	12.73	12.49	12.85	23.72	-10.87	-7.44	5.41	29.72	-24.31
H Z E	5530	106	AVG	242T	12.68	12.95	12.80	23.56	-10.76	-8.01	4.79	29.56	-24.77
5G B,	5610	122	AVG	242T	12.61	12.96	12.78	23.56	-10.78	-8.01	4.77	29.56	-24.79
	5690	138	AVG	242T	12.77	12.97	12.84	23.56	-10.72	-8.01	4.83	29.56	-24.73
	5775	155	AVG	242T	12.82	12.68	12.44	30.00	-17.56	-7.10	5.34	-	-

Table 7-29. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 87 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 87 01 510



SISO Antenna-1 Conducted Output Power Measurements (484 Tones)

N _	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
E E	5190	38	AVG	484T	13.61	23.98	-10.37	-7.55	6.06	22.89	-16.83
₹	5230	46	AVG	484T	13.89	23.98	-10.09	-7.33	6.56	22.89	-16.33
(40M) width	5270	54	AVG	484T	13.60	23.72	-10.12	-7.95	5.65	29.72	-24.07
z (p	5310	62	AVG	484T	13.74	23.72	-9.98	-7.44	6.30	29.72	-23.42
a II	5510	102	AVG	484T	13.45	23.56	-10.11	-8.01	5.44	29.56	-24.12
ന് വ	5590	118	AVG	484T	13.56	23.56	-10.00	-8.01	5.55	29.56	-24.01
5	5710	142	AVG	484T	13.61	23.56	-9.95	-7.10	6.51	29.56	-23.05
	5755	151	AVG	484T	13.74	30.00	-16.26	-7.10	6.64	-	-
	5795	159	AVG	484T	13.68	30.00	-16.32	-8.41	5.27	-	-

Table 7-30. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU II	ndex	Conducted Power Limit		Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
7 E					65	66	[dBm]	Margin [dB]	[]	[]		
OMH; idth)	5210	42	AVG	484T	12.80	12.91	23.98	-11.07	-7.55	5.36	22.89	-17.53
® ≥	5290	58	AVG	484T	12.92	12.94	23.72	-10.78	-7.44	5.50	29.72	-24.22
¥	5530	106	AVG	484T	12.93	12.55	23.56	-11.01	-8.01	4.54	29.56	-25.02
5G B, B	5610	122	AVG	484T	12.91	12.62	23.56	-10.94	-8.01	4.61	29.56	-24.95
-	5690	138	AVG	484T	12.93	12.77	23.56	-10.79	-8.01	4.76	29.56	-24.80
	5775	155	AVG	484T	12.75	12.74	30.00	-17.26	-7.10	5.64	-	-

Table 7-31. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 88 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 66 01 516



SISO Antenna-1 Conducted Output Power Measurements (996 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p.	e.i.r.p. Margin [dB]
# (Hz					67	[dBm]	Margin [dB]				0 1 1
o M	5210	42	AVG	996T	12.95	23.98	-11.03	-7.55	5.40	22.89	-17.49
∞ <u>≷</u>	5290	58	AVG	996T	12.56	23.72	-11.16	-7.44	5.12	29.72	-24.60
N -	5530	106	AVG	996T	12.86	23.56	-10.70	-8.01	4.85	29.56	-24.71
5GH Bar	5610	122	AVG	996T	12.98	23.56	-10.58	-8.01	4.97	29.56	-24.59
	5690	138	AVG	996T	12.94	23.56	-10.62	-8.01	4.93	29.56	-24.63
	5775	155	AVG	996T	12.64	30.00	-17.36	-7.10	5.54	-	-

Table 7-32. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 89 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 69 01 510



SISO Antenna-2 Conducted Output Power Measurements (26 Tones)

dth)	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
<u>0</u>					0	4	8	[dBm]	Margin [dB]	[0.5.]	[4.2]		
Š	5180	36	AVG	26T	10.48	10.82	10.75	23.98	-13.16	-8.43	2.39	22.89	-20.50
ğ	5200	40	AVG	26T	10.44	10.78	10.70	23.98	-13.20	-8.34	2.44	22.89	-20.45
an	5240	48	AVG	26T	10.53	10.84	10.71	23.98	-13.14	-7.99	2.85	22.89	-20.04
<u>m</u>	5260	52	AVG	26T	10.87	10.54	10.95	23.72	-12.77	-7.32	3.63	29.72	-26.09
Ž	5280	56	AVG	26T	10.86	10.69	10.98	23.72	-12.74	-7.32	3.66	29.72	-26.06
Σ	5320	64	AVG	26T	10.99	10.69	10.61	23.72	-12.73	-7.64	3.35	29.72	-26.37
6	5500	100	AVG	26T	10.68	10.90	10.64	23.56	-12.66	-7.27	3.63	29.56	-25.93
(5	5600	120	AVG	26T	10.86	10.97	10.68	23.56	-12.59	-7.27	3.70	29.56	-25.86
N	5720	144	AVG	26T	10.60	10.77	10.48	23.56	-12.79	-7.27	3.50	29.56	-26.06
Į	5745	149	AVG	26T	10.73	10.79	10.49	30.00	-19.21	-7.69	3.10	-	-
Ω̈́	5785	157	AVG	26T	10.50	10.72	10.66	30.00	-19.28	-7.69	3.03	-	-
5	5825	165	AVG	26T	10.70	10.63	10.60	30.00	-19.30	-7.33	3.37	-	-

Table 7-33. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
N _					0	9	17	[dBm]	Margin [dB]		[]		
$\exists \subseteq$	5190	38	AVG	26T	10.53	10.89	10.74	23.98	-13.09	-8.34	2.55	22.89	-20.34
₹ ₹	5230	46	AVG	26T	10.93	10.83	10.71	23.98	-13.05	-7.99	2.94	22.89	-19.95
4 ×	5270	54	AVG	26T	10.73	10.77	10.85	23.72	-12.95	-7.32	3.45	29.72	-26.27
z (br	5310	62	AVG	26T	10.79	10.77	10.82	23.72	-12.93	-7.64	3.15	29.72	-26.57
a ‡	5510	102	AVG	26T	10.64	10.95	10.88	23.56	-12.61	-7.27	3.68	29.56	-25.88
C m	5590	118	AVG	26T	10.66	10.96	10.61	23.56	-12.60	-7.27	3.69	29.56	-25.87
5	5710	142	AVG	26T	10.56	10.66	10.40	23.56	-12.90	-7.69	2.97	29.56	-26.59
	5755	151	AVG	26T	10.62	10.65	10.51	30.00	-19.35	-7.69	2.96	-	-
	5795	159	AVG	26T	10.70	10.94	10.49	30.00	-19.06	-7.11	3.83	-	-

Table 7-34. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit		Ant. Gain [dBi]	Max e.i.r.p.		e.i.r.p. Margin [dB]
fh (0	17	36	[dBm]	Margin [dB]	[0.5.]	[]		a.g [a.5]
o Maria	5210	42	AVG	26T	10.92	10.75	10.99	23.98	-12.99	-8.34	2.65	22.89	-20.24
® ≩	5290	58	AVG	26T	10.51	10.91	10.75	23.72	-12.97	-7.32	3.43	29.72	-26.29
보 호	5530	106	AVG	26T	10.64	10.80	10.59	23.56	-12.97	-7.27	3.32	29.56	-26.24
5G B	5610	122	AVG	26T	10.65	10.70	10.55	23.56	-13.01	-7.27	3.28	29.56	-26.28
-	5690	138	AVG	26T	10.63	10.56	10.56	23.56	-13.00	-7.27	3.29	29.56	-26.27
	5775	155	AVG	26T	10.57	10.99	10.43	30.00	-19.57	-7.69	2.74	-	-

Table 7-35. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 90 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 90 01 510



SISO Antenna-2 Conducted Output Power Measurements (52 Tones)

dth)	Freq [MHz]	Freq [MHz] Channel Detector	Detector	Tones	RO IIIdex			Power Limit Power	[dBi]		Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
<u> </u>					37	38	40	[dBm]	Margin [dB]	[0.5.]	[]		
Š	5180	36	AVG	52T	12.43	12.65	12.61	23.98	-11.33	-8.43	4.22	22.89	-18.67
ğ	5200	40	AVG	52T	12.50	12.54	12.61	23.98	-11.37	-8.34	4.27	22.89	-18.62
an	5240	48	AVG	52T	12.44	12.71	12.61	23.98	-11.27	-7.99	4.72	22.89	-18.17
<u>m</u>	5260	52	AVG	52T	12.71	12.98	12.80	23.72	-10.74	-7.32	5.66	29.72	-24.06
N	5280	56	AVG	52T	12.76	12.44	12.92	23.72	-10.80	-7.32	5.60	29.72	-24.12
Ξ	5320	64	AVG	52T	12.85	12.53	12.53	23.72	-10.87	-7.64	5.21	29.72	-24.51
6	5500	100	AVG	52T	12.68	12.86	12.60	23.56	-10.70	-7.27	5.59	29.56	-23.97
1 2	5600	120	AVG	52T	12.92	12.61	12.80	23.56	-10.64	-7.27	5.65	29.56	-23.91
N	5720	144	AVG	52T	12.56	12.75	12.49	23.56	-10.81	-7.27	5.48	29.56	-24.08
I	5745	149	AVG	52T	12.63	12.63	12.73	30.00	-17.27	-7.69	5.04	-	-
Ö	5785	157	AVG	52T	12.78	12.95	12.57	30.00	-17.05	-7.69	5.26	-	-
12	5825	165	AVG	52T	12.85	12.44	12.61	30.00	-17.15	-7.33	5.52	-	-

Table 7-36. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

	Freq [MHz]	Channel	Detector	Tones	IEEE	Transmission	Mode	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
N _					37	40	44	[dBm]	Margin [dB]		[]		
∃	5190	38	AVG	52T	11.71	11.91	11.81	23.98	-12.07	-8.34	3.57	22.89	-19.32
OM id	5230	46	AVG	52T	11.66	11.83	11.87	23.98	-12.15	-7.99	3.84	22.89	-19.05
4 ≥ ×	5270	54	AVG	52T	11.44	11.41	11.96	23.72	-12.28	-7.32	4.12	29.72	-25.60
N O	5310	62	AVG	52T	11.51	11.52	11.52	23.72	-12.20	-7.64	3.88	29.72	-25.84
a II	5510	102	AVG	52T	11.90	11.72	11.50	23.56	-11.66	-7.27	4.63	29.56	-24.93
C m	5590	118	AVG	52T	11.89	11.63	11.89	23.56	-11.67	-7.27	4.62	29.56	-24.94
5	5710	142	AVG	52T	11.83	11.44	11.64	23.56	-11.73	-7.69	4.14	29.56	-25.42
	5755	151	AVG	52T	11.80	11.50	11.54	30.00	-18.20	-7.69	4.11	-	-
	5795	159	AVG	52T	11.56	11.56	11.80	30.00	-18.44	-7.11	4.45	-	-

Table 7-37. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

	Freq [MHz]	Channel	Detector Tones Power Limit Power	r Ant. Gain	Max e.i.r.p. [dBm]		e.i.r.p. Margin [dB]						
f Hz					37	44	52	[dBm]	Margin [dB]	[]	[]		a.g [a.2]
o Maria	5210	42	AVG	52T	10.64	10.63	10.68	23.98	-13.30	-8.34	2.34	22.89	-20.55
® ≩	5290	58	AVG	52T	10.70	10.86	10.91	23.72	-12.81	-7.32	3.59	29.72	-26.13
보 호	5530	106	AVG	52T	10.69	10.66	10.71	23.56	-12.85	-7.27	3.44	29.56	-26.12
5G B	5610	122	AVG	52T	10.77	10.52	10.62	23.56	-12.94	-7.27	3.35	29.56	-26.21
-	5690	138	AVG	52T	10.81	10.92	10.78	23.56	-12.78	-7.27	3.51	29.56	-26.05
	5775	155	AVG	52T	10.95	10.75	10.54	30.00	-19.46	-7.69	2.85	-	-

Table 7-38. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 91 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 91 01 510



SISO Antenna-2 Conducted Output Power Measurements (106 Tones)

dwidth)	Freq [MHz]	Channel	Detector	Tones	RU II	ndex	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
<u> </u>					53	54	[dBm]	Margin [dB]				•
}	5180	36	AVG	106T	14.41	14.57	23.98	-9.41	-8.43	6.14	22.89	-16.75
	5200	40	AVG	106T	14.41	14.54	23.98	-9.44	-8.34	6.20	22.89	-16.69
an	5240	48	AVG	106T	14.86	14.47	23.98	-9.12	-7.99	6.87	22.89	-16.02
<u>m</u>	5260	52	AVG	106T	14.67	14.91	23.72	-8.81	-7.32	7.59	29.72	-22.13
N	5280	56	AVG	106T	14.77	14.91	23.72	-8.81	-7.32	7.59	29.72	-22.13
Ŧ	5320	64	AVG	106T	14.83	14.49	23.72	-8.89	-7.64	7.19	29.72	-22.53
∑	5500	100	AVG	106T	14.58	14.62	23.56	-8.94	-7.27	7.35	29.56	-22.21
(20	5600	120	AVG	106T	14.91	14.86	23.56	-8.65	-7.27	7.64	29.56	-21.92
N	5720	144	AVG	106T	14.59	14.57	23.56	-8.97	-7.27	7.32	29.56	-22.24
エ	5745	149	AVG	106T	14.90	14.67	30.00	-15.10	-7.69	7.21	-	-
Ö	5785	157	AVG	106T	14.74	14.57	30.00	-15.26	-7.69	7.05	-	-
5	5825	165	AVG	106T	14.70	14.64	30.00	-15.30	-7.33	7.37	-	-

Table 7-39. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

	Freq [MHz]	Channel	Detector	Tones	IEEE	Transmission	Mode	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
N					53	54	56	[dBm]	Margin [dB]				
∃ ≘	5190	38	AVG	106T	12.86	12.75	12.88	23.98	-11.12	-8.34	4.52	22.89	-18.37
돌	5230	46	AVG	106T	12.87	12.79	12.93	23.98	-11.11	-7.99	4.88	22.89	-18.01
45 15	5270	54	AVG	106T	12.62	12.61	12.68	23.72	-11.10	-7.32	5.30	29.72	-24.42
z (p	5310	62	AVG	106T	12.67	12.69	12.69	23.72	-11.03	-7.64	5.05	29.72	-24.67
a H	5510	102	AVG	106T	12.53	12.87	12.65	23.56	-10.69	-7.27	5.60	29.56	-23.96
O m	5590	118	AVG	106T	12.57	12.78	12.45	23.56	-10.78	-7.27	5.51	29.56	-24.05
5	5710	142	AVG	106T	12.43	12.44	12.88	23.56	-11.12	-7.69	4.75	29.56	-24.81
	5755	151	AVG	106T	12.79	12.91	12.71	30.00	-17.09	-7.69	5.22	-	-
	5795	159	AVG	106T	12.78	12.70	12.58	30.00	-17.22	-7.11	5.67	-	-

Table 7-40. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

	Freq [MHz]	Channel	Detector	Tones				Conducted Power Limit		Ant. Gain [dBi]	Max e.i.r.p.		e.i.r.p. Margin [dB]
F E					53	56	60	[dBm]	Margin [dB]	į	[]		
I ≥ ≍	5210	42	AVG	106T	11.83	11.57	11.79	23.98	-12.19	-8.34	3.45	22.89	-19.44
(80 dwic	5290	58	AVG	106T	11.51	11.79	11.52	23.72	-12.20	-7.32	4.20	29.72	-25.52
HZ a	5530	106	AVG	106T	11.92	11.64	11.97	23.56	-11.59	-7.27	4.70	29.56	-24.86
5G B	5610	122	AVG	106T	11.99	11.61	11.86	23.56	-11.70	-7.27	4.59	29.56	-24.97
	5690	138	AVG	106T	11.91	11.97	11.52	23.56	-12.04	-7.27	4.25	29.56	-25.31
	5775	155	AVG	106T	11.73	11.71	11.68	30.00	-18.32	-7.69	3.99	-	-

Table 7-41. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMG9750	PCTEST"	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 92 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 92 01 510



SISO Antenna-2 Conducted Output Power Measurements (242 Tones)

width)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
<u>.0</u>					61	[dBiii]	Margin [ub]				
≥	5180	36	AVG	242T	15.49	23.98	-8.49	-8.43	7.06	22.89	-15.83
O	5200	40	AVG	242T	15.51	23.98	-8.47	-8.34	7.17	22.89	-15.72
an	5240	48	AVG	242T	15.94	23.98	-8.04	-7.99	7.95	22.89	-14.94
<u>m</u>	5260	52	AVG	242T	15.74	23.72	-7.98	-7.32	8.42	29.72	-21.30
Z	5280	56	AVG	242T	15.86	23.72	-7.86	-7.32	8.54	29.72	-21.18
_	5320	64	AVG	242T	15.91	23.72	-7.81	-7.64	8.27	29.72	-21.45
Σο	5500	100	AVG	242T	15.58	23.56	-7.98	-7.27	8.31	29.56	-21.25
(2	5600	120	AVG	242T	15.83	23.56	-7.73	-7.27	8.56	29.56	-21.00
N	5720	144	AVG	242T	15.95	23.56	-7.61	-7.27	8.68	29.56	-20.88
エ	5745	149	AVG	242T	15.81	30.00	-14.19	-7.69	8.12	-	-
Ö	5785	157	AVG	242T	15.71	30.00	-14.29	-7.69	8.02	-	-
5	5825	165	AVG	242T	15.72	30.00	-14.28	-7.33	8.39	-	-

Table 7-42. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU II	ndex	Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
N _					61	62	[dBm]	Margin [dB]				5 1 1
I E €	5190	38	AVG	242T	13.82	13.63	23.98	-10.16	-8.34	5.48	22.89	-17.41
ĕ₩	5230	46	AVG	242T	13.80	13.74	23.98	-10.18	-7.99	5.81	22.89	-17.08
(40 wic	5270	54	AVG	242T	13.77	13.74	23.72	-9.95	-7.32	6.45	29.72	-23.27
z þ	5310	62	AVG	242T	13.92	13.81	23.72	-9.80	-7.64	6.28	29.72	-23.44
I I	5510	102	AVG	242T	13.77	13.92	23.56	-9.64	-7.27	6.65	29.56	-22.91
O M	5590	118	AVG	242T	13.76	13.83	23.56	-9.73	-7.27	6.56	29.56	-23.00
5	5710	142	AVG	242T	13.56	13.50	23.56	-10.00	-7.69	5.87	29.56	-23.69
	5755	151	AVG	242T	13.95	13.91	30.00	-16.05	-7.69	6.26	-	-
	5795	159	AVG	242T	13.87	13.91	30.00	-16.09	-7.11	6.80	-	-

Table 7-43. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

	Freq [MHz]	Channel	Detector	Tones		RU Index		Conducted Power Limit	Conducted Power	Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p.	e.i.r.p. Margin [dB]
MHz dth)					61	62	64	[dBm]	Margin [dB]	į	[]		
id id	5210	42	AVG	242T	12.58	12.8	12.96	23.98	-11.02	-8.34	4.62	22.89	-18.27
(80) dwic	5290	58	AVG	242T	12.75	12.51	12.7	23.72	-11.02	-7.32	5.38	29.72	-24.34
무효	5530	106	AVG	242T	12.54	12.5	12.71	22.80	-10.09	-7.27	5.44	29.56	-24.12
5G B	5610	122	AVG	242T	12.62	12.47	12.59	22.80	-10.21	-7.27	5.32	29.56	-24.24
	5690	138	AVG	242T	12.54	12.77	12.78	22.80	-10.02	-7.27	5.51	29.56	-24.05
	5775	155	AVG	242T	12.76	12.5	12.46	30.00	-17.54	-7.69	4.77	-	-

Table 7-44. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 93 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 93 01 510



SISO Antenna-2 Conducted Output Power Measurements (484 Tones)

N	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
I ₹	5190	38	AVG	484T	13.83	23.98	-10.15	-8.34	5.49	22.89	-17.40
ĕ₩	5230	46	AVG	484T	13.42	23.98	-10.56	-7.99	5.43	22.89	-17.46
(40M) widtl	5270	54	AVG	484T	13.84	23.72	-9.88	-7.32	6.52	29.72	-23.20
z (p	5310	62	AVG	484T	13.71	23.72	-10.01	-7.64	6.07	29.72	-23.65
a II	5510	102	AVG	484T	13.60	23.56	-9.96	-7.27	6.33	29.56	-23.23
ന് വ	5590	118	AVG	484T	13.58	23.56	-9.98	-7.27	6.31	29.56	-23.25
5	5710	142	AVG	484T	13.55	23.56	-10.01	-7.69	5.86	29.56	-23.70
	5755	151	AVG	484T	13.72	30.00	-16.28	-7.69	6.03	-	-
	5795	159	AVG	484T	13.86	30.00	-16.14	-7.11	6.75	-	-

Table 7-45. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU II	ndex	Conducted Power Limit		Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
7 E					65	66	[dBm]	Margin [dB]	[]	[]		
OMH; idth)	5210	42	AVG	484T	12.87	12.87	23.98	-11.11	-8.34	4.53	22.89	-18.36
® ≥	5290	58	AVG	484T	12.58	12.62	23.72	-11.10	-7.32	5.30	29.72	-24.42
¥	5530	106	AVG	484T	12.94	12.54	23.56	-11.02	-7.27	5.27	29.56	-24.29
5G B, B	5610	122	AVG	484T	12.96	12.34	23.56	-11.22	-7.27	5.07	29.56	-24.49
-	5690	138	AVG	484T	12.84	12.79	23.56	-10.77	-7.27	5.52	29.56	-24.04
	5775	155	AVG	484T	12.56	12.53	30.00	-17.47	-7.69	4.84	-	-

Table 7-46. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMG9750	PETEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 04 of 546
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 94 of 516



SISO Antenna-2 Conducted Output Power Measurements (996 Tones)

	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit		Ant. Gain [dBi]	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
HZ (h					67	[dBm]	Margin [dB]				
OMP idth	5210	42	AVG	996T	12.66	23.98	-11.32	-8.34	4.32	22.89	-18.57
® ≥	5290	58	AVG	996T	12.62	23.72	-11.10	-7.32	5.30	29.72	-24.42
Hz	5530	106	AVG	996T	12.87	23.56	-10.69	-7.27	5.60	29.56	-23.96
5GHz Banc	5610	122	AVG	996T	12.83	23.56	-10.73	-7.27	5.56	29.56	-24.00
	5690	138	AVG	996T	12.62	23.56	-10.94	-7.27	5.35	29.56	-24.21
	5775	155	AVG	996T	12.88	30.00	-17.12	-7.69	5.19	-	-

Table 7-47. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 95 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 95 01 510



MIMO Conducted Output Power Measurements (26 Tones)

								RU Index					Conducted	Conducted	Directional	l	l	
Freq [MHz]	Channel	Detector	Tones		0			4			8		Power Limit	Power	Ant. Gain	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		
5180	36	AVG	26T	10.87	10.48	13.69	10.75	10.82	13.80	10.64	10.75	13.71	23.98	-10.27	-3.91	9.80	22.89	-13.09
5200	40	AVG	26T	10.85	10.44	13.66	10.76	10.78	13.78	10.64	10.70	13.68	23.98	-10.30	-3.97	9.71	22.89	-13.18
5240	48	AVG	26T	10.85	10.53	13.70	10.77	10.84	13.82	10.77	10.71	13.75	23.98	-10.23	-3.83	9.92	22.89	-12.97
5260	52	AVG	26T	10.52	10.87	13.71	10.98	10.54	13.78	10.93	10.95	13.95	23.72	-9.77	-3.81	10.14	29.72	-19.58
5280	56	AVG	26T	10.70	10.86	13.79	10.46	10.69	13.59	10.58	10.98	13.79	23.72	-9.93	-3.81	9.98	29.72	-19.74
5320	64	AVG	26T	10.88	10.99	13.95	10.74	10.69	13.73	10.55	10.61	13.59	23.72	-10.13	-3.77	9.82	29.72	-19.90
5500	100	AVG	26T	10.53	10.68	13.62	10.83	10.90	13.88	10.69	10.64	13.68	23.56	-9.88	-3.82	9.86	29.56	-19.70
5600	120	AVG	26T	10.81	10.86	13.85	10.64	10.97	13.82	10.54	10.68	13.62	23.56	-9.94	-3.82	9.80	29.56	-19.76
5720	144	AVG	26T	10.94	10.60	13.78	10.76	10.77	13.78	10.59	10.48	13.55	23.56	-10.01	-3.82	9.73	29.56	-19.83
5745	149	AVG	26T	10.48	10.73	13.62	10.69	10.79	13.75	10.87	10.49	13.69	30.00	-16.31	-3.69	10.00	-	-
5785	157	AVG	26T	10.83	10.50	13.68	10.96	10.72	13.85	10.50	10.66	13.59	30.00	-16.41	-3.69	9.90	-	-
5825	165	AVG	26T	10.70	10.70	13.71	10.79	10.63	13.72	10.84	10.60	13.73	30.00	-16.27	-3.75	9.98	-	-

Table 7-48. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

									RU Index					Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		0			9			17		Power Limit	Power	Ant. Gain	Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
N _					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		5 []
프로	5190	38	AVG	26T	10.66	10.53	13.61	10.65	10.89	13.78	10.57	10.74	13.67	23.98	-10.31	-3.97	6.77	22.89	-16.12
를	5230	46	AVG	26T	10.67	10.93	13.81	10.67	10.83	13.76	10.63	10.71	13.68	23.98	-10.30	-3.83	6.88	22.89	-16.01
4 .≥	5270	54	AVG	26T	10.95	10.73	13.85	10.77	10.77	13.78	10.83	10.85	13.85	23.72	-9.87	-3.81	7.04	29.72	-22.68
N E	5310	62	AVG	26T	10.67	10.79	13.74	10.92	10.77	13.86	10.85	10.82	13.85	23.72	-9.87	-3.77	7.08	29.72	-22.64
∓ =	5510	102	AVG	26T	10.72	10.64	13.69	10.86	10.95	13.92	10.99	10.88	13.95	23.56	-9.61	-3.82	7.17	29.56	-22.39
は路	5590	118	AVG	26T	10.81	10.66	13.75	10.84	10.96	13.91	10.85	10.61	13.74	23.56	-9.82	-3.82	7.03	29.56	-22.53
ر م	5710	142	AVG	26T	10.97	10.56	13.78	10.63	10.66	13.66	10.55	10.40	13.49	23.56	-10.07	-3.69	6.86	29.56	-22.70
	5755	151	AVG	26T	10.52	10.62	13.58	10.70	10.65	13.69	10.70	10.51	13.62	30.00	-16.38	-3.69	7.01	-	-
	5795	159	AVG	26T	10.94	10.70	13.83	10.68	10.94	13.82	10.76	10.49	13.64	30.00	-16.36	-3.87	6.89	-	-

Table 7-49. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

									RU Index					Conducted	Conducted				
	Freq [MHz]	Channel	Detector	Tones		0			17			36		Power Limit		[dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
보 순					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	11	[]		
₽₽	5210	42	AVG	26T	10.83	10.92	13.89	10.71	10.75	13.74	10.79	10.99	13.90	23.98	-10.08	-3.97	9.93	22.89	-12.96
dwic	5290	58	AVG	26T	10.48	10.51	13.51	10.92	10.91	13.93	10.90	10.75	13.84	23.72	-9.88	-3.69	10.15	29.72	-19.57
모두	5530	106	AVG	26T	10.68	10.64	13.67	10.85	10.80	13.84	10.83	10.59	13.72	23.56	-9.84	-3.82	9.91	29.56	-19.65
2 g	5610	122	AVG	26T	10.72	10.65	13.70	10.80	10.70	13.76	10.88	10.55	13.73	23.56	-9.83	-3.82	9.91	29.56	-19.65
	5690	138	AVG	26T	10.84	10.63	13.75	10.87	10.56	13.73	10.96	10.56	13.77	23.56	-9.79	-3.82	9.96	29.56	-19.60
	5775	155	AVG	26T	10.90	10.57	13.75	10.63	10.99	13.82	10.60	10.43	13.53	30.00	-16.47	-3.69	9.83	-	-

Table 7-50. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 96 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 90 01 510



MIMO Conducted Output Power Measurements (52 Tones)

								RU Index					Conducted	Conducted	Directional			
Freq [MHz]	Channel	Detector	Tones		37			38			40		Power Limit	Power	Ant. Gain	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		
5180	36	AVG	52T	12.91	12.43	15.69	12.60	12.65	15.64	12.71	12.61	15.67	23.98	-8.31	-3.91	11.76	22.89	-11.13
5200	40	AVG	52T	12.89	12.50	15.71	12.58	12.54	15.57	12.70	12.61	15.67	23.98	-8.31	-3.97	11.70	22.89	-11.19
5240	48	AVG	52T	12.96	12.44	15.72	12.63	12.71	15.68	12.77	12.61	15.70	23.98	-8.28	-3.83	11.87	22.89	-11.02
5260	52	AVG	52T	12.64	12.71	15.69	12.84	12.98	15.92	12.86	12.80	15.84	23.72	-7.88	-3.81	12.03	29.72	-17.69
5280	56	AVG	52T	12.73	12.76	15.76	12.95	12.44	15.71	12.58	12.92	15.76	23.72	-7.96	-3.81	11.95	29.72	-17.77
5320	64	AVG	52T	12.94	12.85	15.91	12.69	12.53	15.62	12.61	12.53	15.58	23.72	-8.14	-3.77	11.81	29.72	-17.91
5500	100	AVG	52T	12.56	12.68	15.63	12.61	12.86	15.75	12.66	12.60	15.64	23.56	-7.92	-3.82	11.82	29.56	-17.74
5600	120	AVG	52T	12.91	12.92	15.93	12.95	12.61	15.79	12.90	12.80	15.86	23.56	-7.70	-3.82	12.04	29.56	-17.52
5720	144	AVG	52T	12.85	12.56	15.72	12.97	12.75	15.87	12.87	12.49	15.69	23.56	-7.87	-3.82	11.88	29.56	-17.68
5745	149	AVG	52T	12.86	12.63	15.76	12.87	12.63	15.76	12.70	12.73	15.73	30.00	-14.27	-3.69	12.03	-	-
5785	157	AVG	52T	12.75	12.78	15.78	12.50	12.95	15.74	12.54	12.57	15.57	30.00	-14.43	-3.69	11.87	-	-
5825	165	AVG	52T	12.62	12.85	15.75	12.94	12.44	15.71	12.74	12.61	15.69	30.00	-14.31	-3.75	11.94	-	-

Table 7-51. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

									RU Index					Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		37			40			44		Power Limit	Power	Ant. Gain	max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
N _					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		
三三	5190	38	AVG	52T	11.47	11.71	14.60	11.70	11.91	14.82	11.67	11.81	14.75	23.98	-12.17	-3.97	7.84	22.89	-15.05
ĕ ĕ	5230	46	AVG	52T	11.59	11.66	14.64	11.75	11.83	14.80	11.89	11.87	14.89	23.98	-12.09	-3.83	8.06	22.89	-14.83
4 .≥	5270	54	AVG	52T	11.93	11.44	14.70	11.91	11.41	14.68	11.54	11.96	14.77	23.72	-11.76	-3.81	8.15	29.72	-21.57
z (p	5310	62	AVG	52T	11.96	11.51	14.75	11.66	11.52	14.60	11.60	11.52	14.57	23.72	-12.12	-3.77	7.83	29.72	-21.89
≖ ≒	5510	102	AVG	52T	11.73	11.90	14.83	11.94	11.72	14.84	11.64	11.50	14.58	23.56	-11.92	-3.82	7.82	29.56	-21.74
യ്	5590	118	AVG	52T	11.87	11.89	14.89	11.93	11.63	14.79	11.51	11.89	14.71	23.56	-11.67	-3.82	8.07	29.56	-21.49
5 _	5710	142	AVG	52T	11.97	11.83	14.91	11.63	11.44	14.55	11.69	11.64	14.68	23.56	-11.87	-3.69	8.00	29.56	-21.56
	5755	151	AVG	52T	11.68	11.80	14.75	11.67	11.50	14.60	11.85	11.54	14.71	30.00	-18.15	-3.69	8.16	-	-
	5795	159	AVG	52T	11.61	11.56	14.60	11.63	11.56	14.61	11.45	11.80	14.64	30.00	-18.20	-3.87	7.93	-	-

Table 7-52. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

									RU Index					Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		37			44			52		Power Limit			Max e.i.r.p.	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin (dB)
보 순					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		
ĕ ₽	5210	42	AVG	52T	10.63	10.64	13.65	10.64	10.63	13.65	10.88	10.68	13.79	23.98	-10.19	-3.97	9.82	22.89	-13.07
(80 dwic	5290	58	AVG	52T	10.69	10.70	13.71	10.95	10.86	13.92	10.54	10.91	13.74	23.72	-9.98	-3.69	10.05	29.72	-19.67
보호	5530	106	AVG	52T	10.84	10.69	13.78	10.85	10.66	13.77	10.92	10.71	13.83	23.56	-9.73	-3.82	10.01	29.56	-19.55
<u>6</u> 8	5610	122	AVG	52T	10.85	10.77	13.82	10.70	10.52	13.62	10.99	10.62	13.82	23.56	-9.74	-3.82	10.00	29.56	-19.56
	5690	138	AVG	52T	10.51	10.81	13.67	10.84	10.92	13.89	10.50	10.78	13.65	23.56	-9.91	-3.82	9.84	29.56	-19.72
	5775	155	AVG	52T	10.49	10.95	13.74	10.65	10.75	13.71	10.80	10.54	13.68	30.00	-16.32	-3.69	9.99	-	-

Table 7-53. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 97 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 97 Of 516



MIMO Conducted Output Power Measurements (106 Tones)

							RU I	ndex			Conducted	Conducted	Directional			
÷	Freq [MHz]	Channel	Detector	Tones		53			54		Power Limit	Power	Ant. Gain	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
<u> </u>					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]			
wid	5180	36	AVG	106T	14.98	14.41	17.71	14.73	14.57	17.66	23.98	-6.32	-3.91	13.75	22.89	-9.14
and	5200	40	AVG	106T	14.44	14.41	17.44	14.77	14.54	17.67	23.98	-6.31	-3.97	13.70	22.89	-9.19
ä	5240	48	AVG	106T	14.50	14.86	17.69	14.75	14.47	17.62	23.98	-6.36	-3.83	13.80	22.89	-9.09
<u> </u>	5260	52	AVG	106T	14.70	14.67	17.70	14.73	14.91	17.83	23.72	-5.89	-3.81	14.02	29.72	-15.70
¥	5280	56	AVG	106T	14.70	14.77	17.75	14.91	14.91	17.92	23.72	-5.80	-3.81	14.11	29.72	-15.61
	5320	64	AVG	106T	14.88	14.83	17.87	14.42	14.49	17.47	23.72	-6.25	-3.77	13.70	29.72	-16.02
6	5500	100	AVG	106T	14.97	14.58	17.79	14.51	14.62	17.58	23.56	-5.98	-3.82	13.76	29.56	-15.80
(20M	5600	120	AVG	106T	14.65	14.91	17.79	14.64	14.86	17.76	23.56	-5.80	-3.82	13.95	29.56	-15.61
N	5720	144	AVG	106T	14.64	14.59	17.63	14.70	14.57	17.65	23.56	-5.91	-3.82	13.83	29.56	-15.73
I	5745	149	AVG	106T	14.85	14.90	17.89	14.72	14.67	17.71	30.00	-12.29	-3.69	14.01	-	-
5 G	5785	157	AVG	106T	14.88	14.74	17.82	14.99	14.57	17.80	30.00	-12.20	-3.69	14.10	-	•
4)	5825	165	AVG	106T	14.74	14.70	17.73	14.81	14.64	17.74	30.00	-12.26	-3.75	13.99	-	-

Table 7-54. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

									RU Index					Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		53			54			56		Power Limit	Power	Ant. Gain	max e.i.r.p.	Max e.i.r.p. Limit [dBm]	
N _					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		
프로	5190	38	AVG	106T	12.68	12.86	15.78	12.58	12.75	15.68	12.90	12.88	15.90	22.89	-9.99	-3.97	8.93	22.39	-13.46
를	5230	46	AVG	106T	12.73	12.87	15.81	12.60	12.79	15.71	12.99	12.93	15.97	22.89	-9.90	-3.83	9.16	22.39	-13.23
4 .≥	5270	54	AVG	106T	12.96	12.62	15.80	12.93	12.61	15.78	12.74	12.68	15.72	23.72	-10.98	-3.81	8.93	29.72	-20.79
~ €	5310	62	AVG	106T	12.70	12.67	15.70	12.45	12.69	15.58	12.68	12.69	15.70	23.72	-11.03	-3.77	8.92	29.72	-20.80
i	5510	102	AVG	106T	12.93	12.53	15.74	12.67	12.87	15.78	12.74	12.65	15.71	23.56	-10.82	-3.82	8.92	29.56	-20.64
可留	5590	118	AVG	106T	12.56	12.57	15.58	12.73	12.78	15.77	12.69	12.45	15.58	23.56	-10.87	-3.82	8.87	29.56	-20.69
ω	5710	142	AVG	106T	12.78	12.43	15.62	12.44	12.44	15.45	12.84	12.88	15.87	23.56	-10.68	-3.69	9.19	29.56	-20.37
	5755	151	AVG	106T	12.88	12.79	15.85	12.61	12.91	15.77	12.97	12.71	15.85	30.00	-17.03	-3.69	9.28	-	-
	5795	159	AVG	106T	12.49	12.78	15.65	12.59	12.70	15.66	12.67	12.58	15.64	30.00	-17.33	-3.87	8.80	-	-

Table 7-55. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

									RU Index					Conducted	Conducted	Directional		Max e.i.r.p.	
	Freq [MHz]	Channel	Detector	Tones		53			56			60		Power Limit			Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin (dB)
보 순					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		
<u> </u>	5210	42	AVG	106T	11.78	11.83	14.82	11.65	11.57	14.62	11.99	11.79	14.90	22.89	-7.99	-3.97	10.93	22.39	-11.46
dwic	5290	58	AVG	106T	11.97	11.51	14.76	11.98	11.79	14.90	11.67	11.52	14.61	23.72	-9.11	-3.69	10.92	29.72	-18.80
ΞΞ	5530	106	AVG	106T	11.90	11.92	14.92	11.88	11.64	14.77	11.59	11.97	14.79	23.56	-8.77	-3.82	10.98	29.56	-18.58
25 g	5610	122	AVG	106T	11.94	11.99	14.98	11.89	11.61	14.76	11.51	11.86	14.70	23.56	-8.86	-3.82	10.88	29.56	-18.68
	5690	138	AVG	106T	11.58	11.91	14.76	11.89	11.97	14.94	11.77	11.52	14.66	23.56	-8.90	-3.82	10.84	29.56	-18.72
	5775	155	AVG	106T	11.62	11.73	14.69	11.72	11.71	14.73	11.91	11.68	14.81	30.00	-15.19	-3.69	11.11	-	-

Table 7-56. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 00 of E16
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 98 of 516



MIMO Conducted Output Power Measurements (242 Tones)

						RU Index		Conducted	Conducted	Directional			
두	Freq [MHz]	Channel	Detector	Tones		61		Power Limit	Power	Ant. Gain	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
<u>0</u>					ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]			
<u>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</u>	5180	36	AVG	242T	15.55	15.49	18.53	23.98	-5.45	-3.91	14.62	22.89	-8.27
Þ	5200	40	AVG	242T	15.59	15.51	18.56	23.98	-5.42	-3.97	14.59	22.89	-8.30
an	5240	48	AVG	242T	15.61	15.94	18.79	23.98	-5.19	-3.83	14.96	22.89	-7.93
<u> </u>	5260	52	AVG	242T	15.72	15.74	18.74	23.72	-4.98	-3.81	14.93	29.72	-14.79
N	5280	56	AVG	242T	15.82	15.86	18.85	23.72	-4.87	-3.81	15.04	29.72	-14.68
Ŧ	5320	64	AVG	242T	15.93	15.91	18.93	23.72	-4.79	-3.77	15.16	29.47	-14.31
∑ 0	5500	100	AVG	242T	15.81	15.58	18.71	23.56	-4.85	-3.82	14.89	29.56	-14.67
1 2 3	5600	120	AVG	242T	15.42	15.83	18.64	23.56	-4.92	-3.82	14.82	29.56	-14.74
N	5720	144	AVG	242T	15.40	15.95	18.69	23.56	-4.87	-3.82	14.88	29.56	-14.68
エ	5745	149	AVG	242T	15.64	15.81	18.74	30.00	-11.26	-3.69	15.04	-	-
56	5785	157	AVG	242T	15.73	15.71	18.73	30.00	-11.27	-3.69	15.04	-	-
4)	5825	165	AVG	242T	15.66	15.72	18.70	30.00	-11.30	-3.75	14.95	-	-

Table 7-57. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

							RU I	ndex			Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		61			62		Power Limit	Power	Ant. Gain	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p.
N _					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[u.S.m]	Linit [abin]	margin [ab]
를 즐	5190	38	AVG	242T	13.66	13.82	16.75	13.52	13.63	16.59	23.98	-7.39	-3.97	12.62	22.89	-10.27
2 5	5230	46	AVG	242T	13.68	13.80	16.75	13.67	13.74	16.72	23.98	-7.26	-3.83	12.89	22.89	-10.00
4 ₹	5270	54	AVG	242T	13.91	13.77	16.85	13.96	13.74	16.86	23.72	-6.86	-3.81	13.05	29.72	-16.67
<u>,, 6</u>	5310	62	AVG	242T	13.47	13.92	16.71	13.41	13.81	16.62	23.72	-7.10	-3.77	12.86	29.72	-16.86
l∺≅	5510	102	AVG	242T	13.65	13.77	16.72	13.88	13.92	16.91	23.56	-6.65	-3.82	13.09	29.56	-16.47
Ba	5590	118	AVG	242T	13.83	13.76	16.81	13.81	13.83	16.83	23.56	-6.73	-3.82	13.01	29.56	-16.55
5 _	5710	142	AVG	242T	13.93	13.56	16.76	13.89	13.50	16.71	23.56	-6.85	-3.69	13.01	29.56	-16.55
	5755	151	AVG	242T	13.97	13.95	16.97	13.77	13.91	16.85	30.00	-13.15	-3.69	13.16	-	-
	5795	159	AVG	242T	13.87	13.87	16.88	13.97	13.91	16.95	30.00	-13.05	-3.87	13.08	-	-

Table 7-58. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

				RU Index			Conducted	Conducted	Directional Ma										
	Freq [MHz]	Channel	Detector	Tones		61			62			64		Power Limit			Max e.i.r.p. [dBm]	Limit [dBm]	e.i.r.p. Margin [dB]
Ξ Έ					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]			
₹ 5	5210	42	AVG	242T	12.67	12.58	15.64	12.43	12.80	15.63	12.59	12.96	15.79	23.98	-8.19	-3.97	11.82	22.89	-11.07
∞ ≥	5290	58	AVG	242T	12.73	12.75	15.75	12.49	12.51	15.51	12.85	12.70	15.79	23.72	-7.93	-3.69	12.10	29.72	-17.62
Z Z	5530	106	AVG	242T	12.68	12.54	15.62	12.95	12.50	15.74	12.80	12.71	15.77	23.56	-7.79	-3.82	11.95	29.56	-17.61
<u>1</u> 20	5610	122	AVG	242T	12.61	12.62	15.63	12.96	12.47	15.73	12.78	12.59	15.70	23.56	-7.86	-3.82	11.88	29.56	-17.68
	5690	138	AVG	242T	12.77	12.54	15.67	12.97	12.77	15.88	12.84	12.78	15.82	23.56	-7.74	-3.82	12.00	29.56	-17.56
	5775	155	AVG	242T	12.82	12.76	15.80	12.68	12.50	15.60	12.44	12.46	15.46	30.00	-14.54	-3.69	11.77	-	-

Table 7-59. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 00 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 99 of 516



MIMO Conducted Output Power Measurements (484 Tones)

						RU Index		Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		65		Power Limit		Ant. Gain	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
N					ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]	[]		9[1
∃ €	5190	38	AVG	484T	13.61	13.83	16.73	23.98	-7.25	-3.97	12.76	22.89	-10.13
OM idt	5230	46	AVG	484T	13.89	13.42	16.67	23.98	-7.31	-3.83	12.84	22.89	-10.05
4) W	5270	54	AVG	484T	13.60	13.84	16.73	23.72	-6.99	-3.81	12.92	29.72	-16.80
z (p	5310	62	AVG	484T	13.74	13.71	16.74	23.72	-6.98	-3.77	12.97	29.72	-16.75
	5510	102	AVG	484T	13.45	13.60	16.54	23.56	-7.02	-3.82	12.72	29.56	-16.84
D W	5590	118	AVG	484T	13.56	13.58	16.58	23.56	-6.98	-3.82	12.76	29.56	-16.80
2	5710	142	AVG	484T	13.61	13.55	16.59	23.56	-6.97	-3.69	12.90	29.56	-16.66
	5755	151	AVG	484T	13.74	13.72	16.74	30.00	-13.26	-3.69	13.05	-	-
	5795	159	AVG	484T	13.68	13.86	16.78	30.00	-13.22	-3.87	12.91	-	-

Table 7-60. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

							RU I	ndex			Conducted	Conducted	Directional			
	Freq [MHz]	Channel	Detector	Tones		65			66		Power Limit	Power	Ant. Gain		Max e.i.r.p. Limit [dBm]	
로 (c					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBm]	Margin [dB]	[dBi]			
ĕ <u>₹</u>	5210	42	AVG	484T	12.80	12.87	15.85	12.91	12.87	15.90	23.98	-8.08	-3.97	11.93	22.89	-10.96
(80 Vic	5290	58	AVG	484T	12.92	12.58	15.76	12.94	12.62	15.79	23.72	-7.93	-3.69	12.10	29.72	-17.62
HZ au c	5530	106	AVG	484T	12.93	12.94	15.95	12.55	12.54	15.56	23.56	-8.00	-3.82	11.74	29.56	-17.82
Pa SG	5610	122	AVG	484T	12.91	12.96	15.95	12.62	12.34	15.49	23.56	-8.07	-3.82	11.68	29.56	-17.88
	5690	138	AVG	484T	12.93	12.84	15.90	12.77	12.79	15.79	23.56	-7.77	-3.82	11.97	29.56	-17.59
	5775	155	AVG	484T	12.75	12.56	15.67	12.74	12.53	15.65	30.00	-14.35	-3.69	11.95	-	-

Table 7-61. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMG9750	PETEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 100 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 100 01 510



MIMO Conducted Output Power Measurements (996 Tones)

						RU Index		Conducted	Conducted	Directional	M !	Manadan	
	Freq [MHz]	Channel	Detector	Tones	67			Power Limit		Ant. Gain	[dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
F (F					ANT1	NT1 ANT2 MIMO [dBm] Margin		Margin [dB]	[dBi]				
ĕ	5210	42	AVG	996T	12.95	12.66	15.82	23.98	-8.16	-3.97	11.85	22.89	-11.04
∞ ≥	5290	58	AVG	996T	12.56	12.62	15.60	23.72	-8.12	-3.69	11.91	29.72	-17.81
2 2	5530	106	AVG	996T	12.86	12.87	15.88	23.56	-7.68	-3.82	12.06	29.56	-17.50
5G Ba	5610	122	AVG	996T	12.98	12.83	15.92	23.56	-7.64	-3.82	12.10	29.56	-17.46
-	5690	138	AVG	996T	12.94	12.62	15.79	23.56	-7.77	-3.82	11.98	29.56	-17.58
	5775	155	AVG	996T	12.64	12.88	15.77	30.00	-14.23	-3.69	12.08	-	-

Table 7-62. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 101 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 101 01 510



Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT}, the total number of antennas used.

Directional gain =
$$10 \log[(10^{G_1/20} + 10^{G_2/20} + ... + 10^{G_N/20})^2 / N_{ANT}] dBi$$

Sample Directional Gain Calculation:

Assuming the antenna gain is -8.61 dBi for Antenna-1 and -7.68 dBi for Antenna-2.

Directional gain =
$$10 \log[(10^{G_1/20} + 10^{G_2/20} + ... + 10^{G_N/20})^2 / N_{ANT}] dBi$$

= $10 \log[(10^{-8.61/20} + 10^{-7.68/20} / 2] dBi$
= $(-5.12) dBi$

Sample MIMO Calculation:

Assuming the average conducted output power was measured to be 8.13 dBm for Antenna-1 and 7.48 dBm for Antenna-2.

$$(8.13 \text{ dBm} + 7.48 \text{ dBm}) = (6.50 \text{ mW} + 5.60 \text{ mW}) = 12.10 \text{ mW} = 10.83 \text{ dBm}$$

Sample e.i.r.p. Calculation:

Assuming the average MIMO conducted power was calculated to be 10.83 dBm with directional gain of -5.12 dBi.

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 102 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 102 01 510



7.5 Maximum Power Spectral Density – 802.11ax OFDMA §15.407(a.1.iv) §15.407(a.2) §15.407(a.3);

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, 5.47 - 5.725 GHz bands, the maximum permissible power spectral density is 11 dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2 KDB 789033 D02 v02r01 – Section F ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

- 1. Analyzer was set to the center frequency of the UNII channel under investigation
- 2. Span was set to encompass the entire emission bandwidth of the signal
- 3. RBW = 1MHz
- 4. VBW = 3MHz
- 5. Number of sweep points > 2 x (span/RBW)
- 6. Sweep time = auto
- 7. Detector = power averaging (RMS)
- 8. Trigger was set to free run for all modes
- 9. Trace was averaged over 100 sweeps
- 10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

The power spectral density for each channel was measured with the RU index showing the highest conducted power

FCC ID: A3LSMG9750	PCTEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 103 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 103 01 510



SISO Antenna-1 Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
	5180	36	ax (20MHz)	26T	MCS0	8.31	11.0	-2.69
	5200	40	ax (20MHz)	26T	MCS0	8.95	11.0	-2.05
d 1	5240	48	ax (20MHz)	26T	MCS0	8.63	11.0	-2.37
Band 1	5190	38	ax (40MHz)	26T	MCS0	8.65	11.0	-2.35
_	5230	46	ax (40MHz)	26T	MCS0	8.53	11.0	-2.47
	5210	42	ax (80MHz)	26T	MCS0	8.43	11.0	-2.57
	5260	52	ax (20MHz)	26T	MCS0	7.75	11.0	-3.25
-	5280	56	ax (20MHz)	26T	MCS0	8.42	11.0	-2.58
1 2A	5320	64	ax (20MHz)	26T	MCS0	8.59	11.0	-2.41
Band	5270	54	ax (40MHz)	26T	MCS0	9.14	11.0	-1.86
ш	5310	62	ax (40MHz)	26T	MCS0	8.81	11.0	-2.19
	5290	58	ax (80MHz)	26T	MCS0	8.57	11.0	-2.43
	5500	100	ax (20MHz)	26T	MCS0	7.74	11.0	-3.26
	5600	120	ax (20MHz)	26T	MCS0	8.37	11.0	-2.63
	5720	144	ax (20MHz)	26T	MCS0	8.88	11.0	-2.12
2C	5510	102	ax (40MHz)	26T	MCS0	8.69	11.0	-2.31
Band	5590	118	ax (40MHz)	26T	MCS0	8.90	11.0	-2.10
Ba	5710	142	ax (40MHz)	26T	MCS0	8.88	11.0	-2.12
	5530	106	ax (80MHz)	26T	MCS0	7.68	11.0	-3.32
	5610	122	ax (80MHz)	26T	MCS0	8.35	11.0	-2.65
	5690	138	ax (80MHz)	26T	MCS0	6.66	11.0	-4.34

Table 7-63. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	i Antenna Gain	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density	Margin [dB]
	5180	36	ax (20MHz)	26T	MCS0	8.31	-7.25	1.06	10.0	-8.94
	5200	40	ax (20MHz)	26T	MCS0	8.95	-7.55	1.40	10.0	-8.60
۵ 1	5240	48	ax (20MHz)	26T	MCS0	8.63	-7.33	1.30	10.0	-8.70
Ban	5190	38	ax (40MHz)	26T	MCS0	8.65	-7.25	1.40	10.0	-8.60
_	5230	46	ax (40MHz)	26T	MCS0	8.53	-7.55	0.98	10.0	-9.02
	5210	42	ax (80MHz)	26T	MCS0	8.43	-7.33	1.10	10.0	-8.90

Table 7-64. Bands 1 e.i.r.p Conducted Power Spectral Density Measurements (ISED 26 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 104 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 104 of 516






Plot 7-109. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)




Plot 7-110. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 105 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 103 01 310



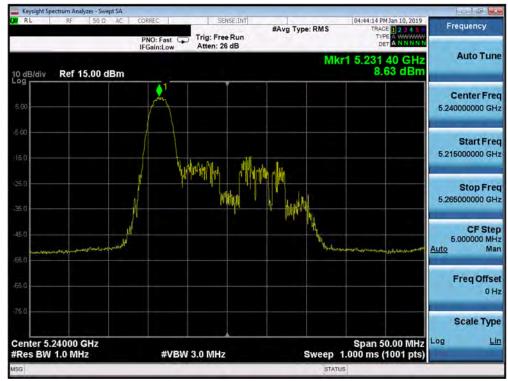


Plot 7-111. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

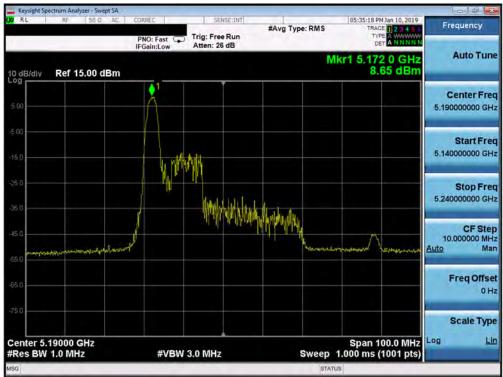


Plot 7-112. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 106 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 100 01 510



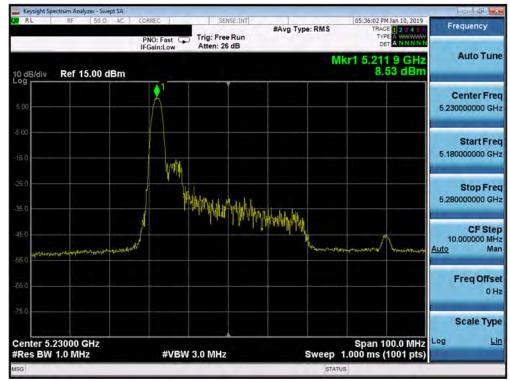

Plot 7-113. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

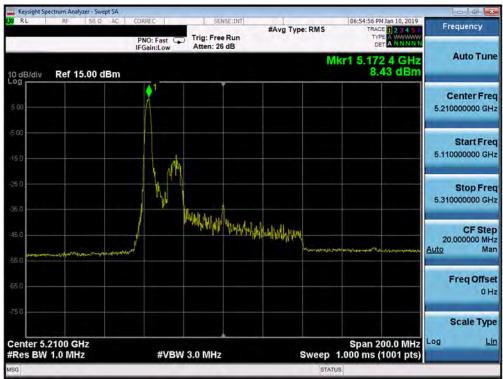


Plot 7-114. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMG9750	PETEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 107 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 107 01 510






Plot 7-115. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

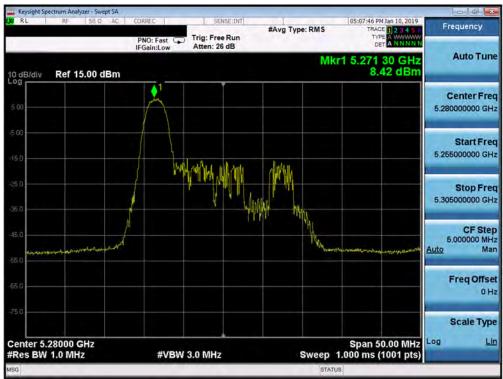

Plot 7-116. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 108 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 106 01 510



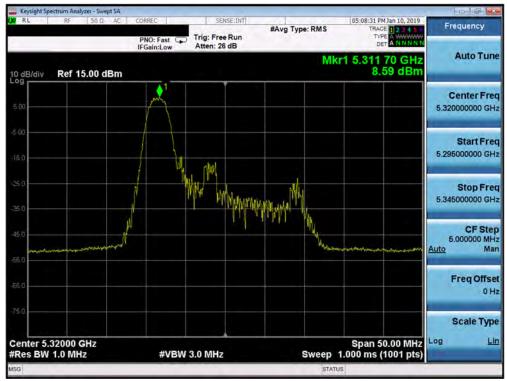

Plot 7-117. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)




Plot 7-118. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 109 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 109 01 510






Plot 7-119. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

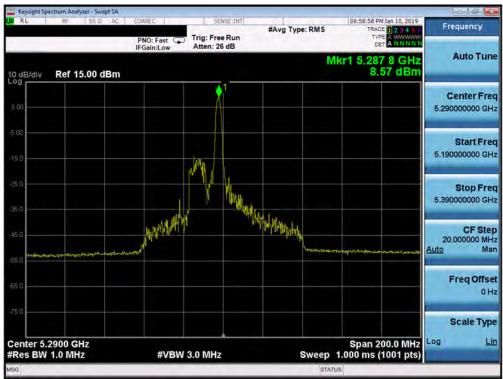


Plot 7-120. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 110 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 110 01 510



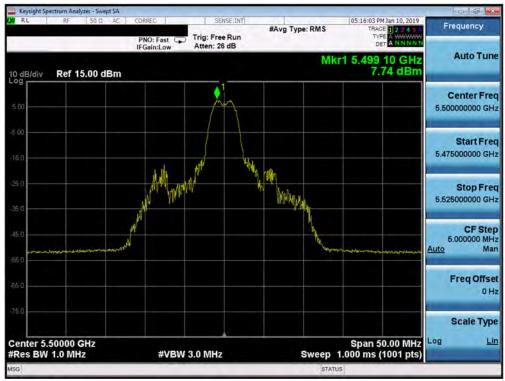


Plot 7-121. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

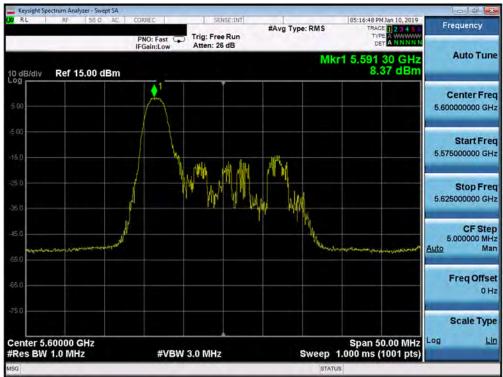


Plot 7-122. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 111 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Page 111 01510



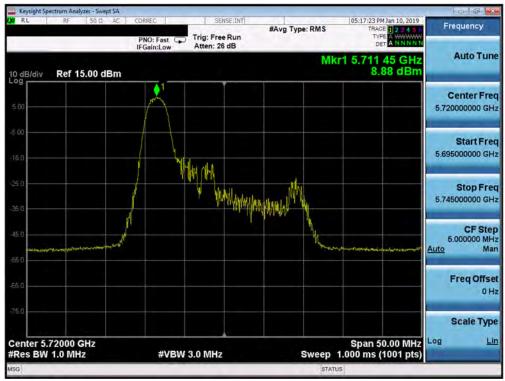


Plot 7-123. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

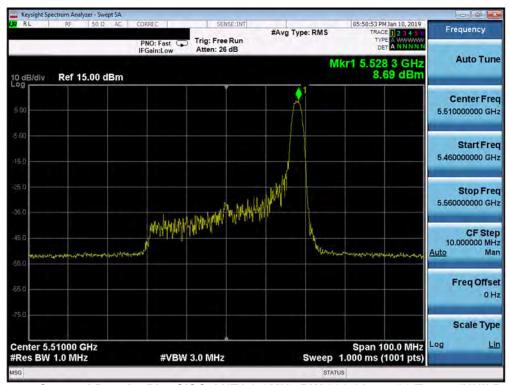


Plot 7-124. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 112 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 112 01 510



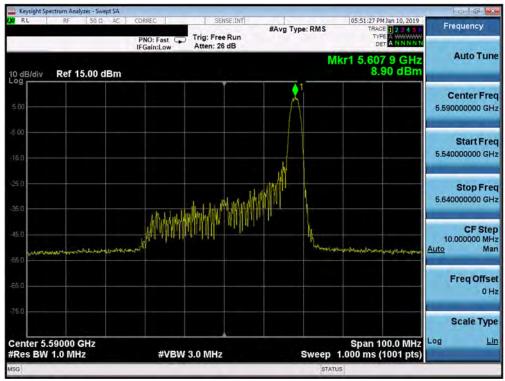

Plot 7-125. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

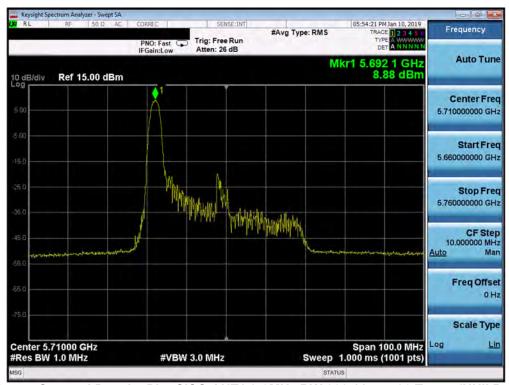


Plot 7-126. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 113 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 113 01 310






Plot 7-127. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

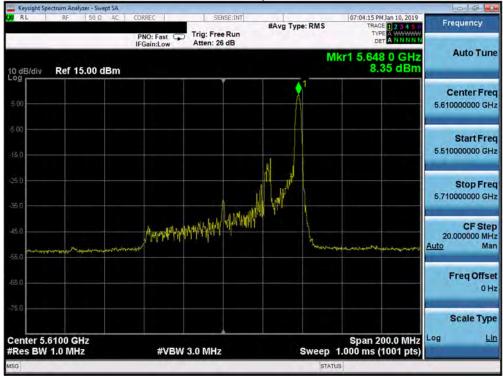

Plot 7-128. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMG9750	PETEST"	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 114 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 114 01 510



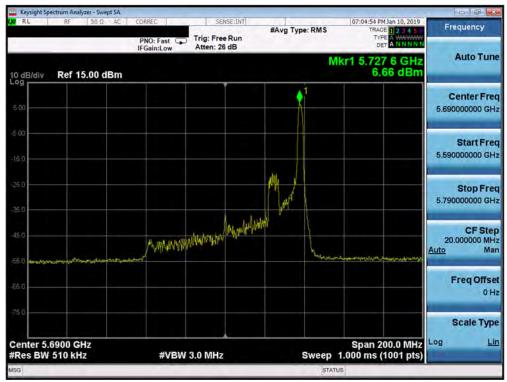

Plot 7-129. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 115 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 115 01510



	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
	5745	149	ax (20MHz)	26T	MCS0	5.87	30.0	-24.13
	5785	157	ax (20MHz)	26T	MCS0	5.82	30.0	-24.18
d 3	5825	165	ax (20MHz)	26T	MCS0	5.74	30.0	-24.26
Band	5755	151	ax (40MHz)	26T	MCS0	5.92	30.0	-24.08
_	5795	159	ax (40MHz)	26T	MCS0	6.38	30.0	-23.62
	5775	155	ax (80MHz)	26T	MCS0	8.50	30.0	-21.50


Table 7-65. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)




Plot 7-130. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 116 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 110 01 510



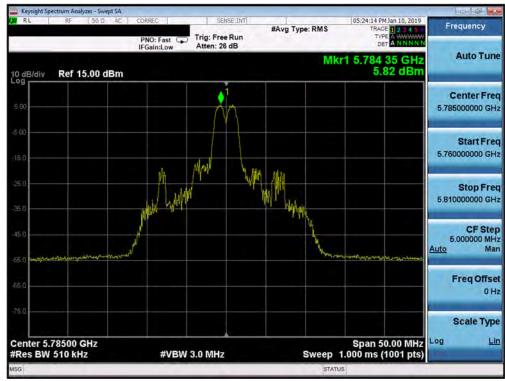


Plot 7-131. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

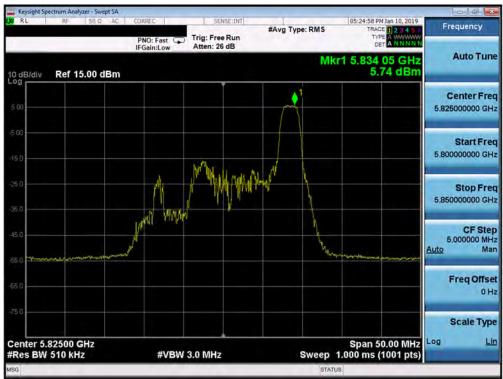


Plot 7-132. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)

FCC ID: A3LSMG9750	PETEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 117 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 117 01510



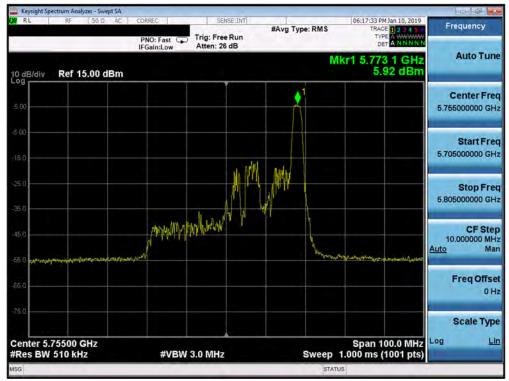


Plot 7-133. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

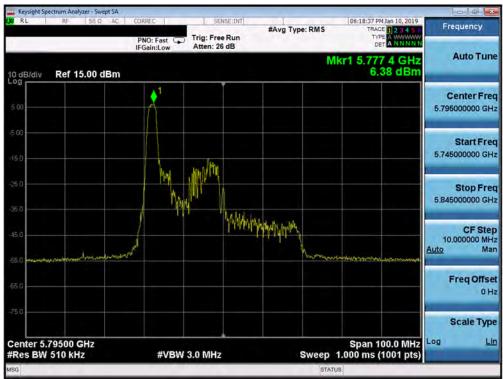

Plot 7-134. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

FCC ID: A3LSMG9750	PETEST*	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 118 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Page 116 01 510



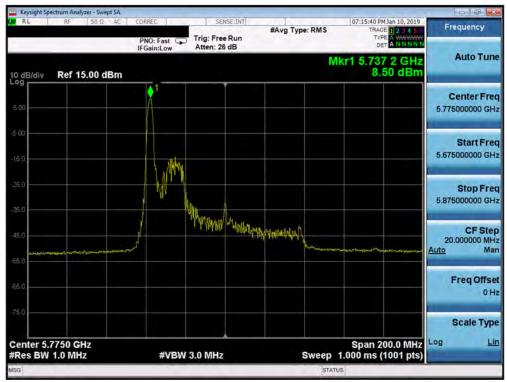

Plot 7-135. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG9750	PETEST'	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 119 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset	Fage 119 01 510



SISO Antenna-1 Power Spectral Density Measurements (52 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	52T	MCS0	8.02	11.0	-2.98
	5200	40	ax (20MHz)	52T	MCS0	7.93	11.0	-3.07
	5240	48	ax (20MHz)	52T	MCS0	7.72	11.0	-3.28
	5190	38	ax (40MHz)	52T	MCS0	6.82	11.0	-4.18
_	5230	46	ax (40MHz)	52T	MCS0	7.32	11.0	-3.68
	5210	42	ax (80MHz)	52T	MCS0	6.15	11.0	-4.85
	5260	52	ax (20MHz)	52T	MCS0	8.26	11.0	-2.74
Band 2A	5280	56	ax (20MHz)	52T	MCS0	8.14	11.0	-2.86
	5320	64	ax (20MHz)	52T	MCS0	8.26	11.0	-2.74
	5270	54	ax (40MHz)	52T	MCS0	6.94	11.0	-4.06
	5310	62	ax (40MHz)	52T	MCS0	7.07	11.0	-3.93
	5290	58	ax (80MHz)	52T	MCS0	5.82	11.0	-5.18
	5500	100	ax (20MHz)	52T	MCS0	8.13	11.0	-2.87
	5600	120	ax (20MHz)	52T	MCS0	7.91	11.0	-3.09
	5720	144	ax (20MHz)	52T	MCS0	8.28	11.0	-2.72
Band 2C	5510	102	ax (40MHz)	52T	MCS0	6.57	11.0	-4.43
	5590	118	ax (40MHz)	52T	MCS0	6.61	11.0	-4.39
	5710	142	ax (40MHz)	52T	MCS0	7.12	11.0	-3.88
	5530	106	ax (80MHz)	52T	MCS0	5.71	11.0	-5.29
	5610	122	ax (80MHz)	52T	MCS0	5.95	11.0	-5.05
	5690	138	ax (80MHz)	52T	MCS0	2.55	11.0	-8.45

Table 7-66. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (52 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density	Margin [dB]
Band 1	5180	36	ax (20MHz)	52T	MCS0	8.02	-7.25	0.77	10.0	-9.23
	5200	40	ax (20MHz)	52T	MCS0	7.93	-7.55	0.38	10.0	-9.62
	5240	48	ax (20MHz)	52T	MCS0	7.72	-7.33	0.39	10.0	-9.61
	5190	38	ax (40MHz)	52T	MCS0	6.82	-7.25	-0.43	10.0	-10.43
	5230	46	ax (40MHz)	52T	MCS0	7.32	-7.55	-0.23	10.0	-10.23
	5210	42	ax (80MHz)	52T	MCS0	6.15	-7.33	-1.18	10.0	-11.18

Table 7-67. Bands 1 e.i.r.p Conducted Power Spectral Density Measurements (ISED 52 Tones)

FCC ID: A3LSMG9750	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 120 of 516
1M1811120202-15.A3L	10/31/2018-1/17/2019	Portable Handset		Fage 120 01 510