

# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



# **MEASUREMENT REPORT** FCC PART 15.407 / ISED RSS-247 UNII 802.11ax OFDMA

**Applicant Name:** Samsung Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si Gyeonggi-do, 16677, Korea

**Date of Testing:** 10/11/19 - 01/15/20 **Test Site/Location:** PCTEST Lab. Columbia, MD, USA **Test Report Serial No.:** 

1M1910220166-09.A3L

FCC ID: A3LSMG986U

APPLICANT: Samsung Electronics Co., Ltd.

**Application Type:** Certification Model: SM-G986U

Additional Model(s): SM-G986U1, SM-G986XU

**EUT Type:** Portable Handset Frequency Range: 5180 - 5825MHz

**FCC Classification:** Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15 Subpart E (15.407)

ANSI C63.10-2013, KDB 789033 D02 v02r01, Test Procedure(s):

KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







| FCC ID: A3LSMG986U  | PCTEST              | MEASUREMENT REPORT<br>(CERTIFICATION) | SAMSUNG | Approved by: Quality Manager |
|---------------------|---------------------|---------------------------------------|---------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                             |         | Dogo 1 of 265                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                      |         | Page 1 of 265                |




# TABLE OF CONTENTS

| 1.0 | INTR | ODUCTIO  | DN  | 4   |
|-----|------|----------|---|-----|
|     | 1.1  | Scope    | )   | 4   |
|     | 1.2  | PCTE     | ST Test Location  | 4   |
|     | 1.3  | Test F   | Facility / Accreditations                                 | 4   |
| 2.0 | PROI | DUCT INF | FORMATION   | 5   |
|     | 2.1  | Equip    | ment Description  | 5   |
|     | 2.2  | Device   | e Capabilities  | 5   |
|     | 2.3  | Test C   | Configuration   | 8   |
|     | 2.4  | EMI S    | Suppression Device(s)/Modifications                       | 8   |
| 3.0 | DESC | RIPTION  | OF TESTS  | 9   |
|     | 3.1  | Evalua   | ation Procedure   | 9   |
|     | 3.2  | Radia    | ted Emissions   | 9   |
|     | 3.3  | Enviro   | onmental Conditions                                       | 9   |
| 4.0 | ANTE | NNA RE   | QUIREMENTS  | 10  |
| 5.0 | MEAS | SUREME   | NT UNCERTAINTY  | 11  |
| 6.0 | TEST | EQUIPM   | MENT CALIBRATION DATA                                     | 12  |
| 7.0 | TEST | RESULT   | 「S  | 13  |
|     | 7.1  | Summ     | nary  | 13  |
|     | 7.2  | 26dB     | Bandwidth Measurement – 802.11ax OFDMA                    | 14  |
|     | 7.3  | 6dB B    | andwidth Measurement – 802.11ax OFDMA                     | 39  |
|     | 7.4  | UNII C   | Output Power Measurement – 802.11ax OFDMA                 | 48  |
|     | 7.5  | Maxim    | num Power Spectral Density – 802.11ax OFDMA               | 64  |
|     | 7.6  | Radia    | ted Spurious Emission Measurements – Above 1GHz           | 186 |
|     |      | 7.6.1    | SISO Antenna-1 Radiated Spurious Emission Measurements    | 189 |
|     |      | 7.6.2    | SISO Antenna-2 Radiated Spurious Emission Measurements    | 207 |
|     |      | 7.6.3    | MIMO Radiated Spurious Emission Measurements              | 225 |
|     |      | 7.6.4    | SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW) | 243 |
|     |      | 7.6.5    | SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW) | 245 |
|     |      | 7.6.6    | SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW) | 247 |
|     |      | 7.6.7    | SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW) | 249 |
|     |      | 7.6.8    | SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW) | 251 |
|     |      | 7.6.9    | SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW) | 253 |
|     |      | 7.6.10   | MIMO Radiated Band Edge Measurements (20MHz BW)           | 255 |
|     |      | 7.6.11   | MIMO Radiated Band Edge Measurements (40MHz BW)           | 257 |
|     |      | 7.6.12   | MIMO Radiated Band Edge Measurements (80MHz BW)           | 259 |
|     | 7.7  | Radia    | ted Spurious Emissions Measurements – Below 1GHz          | 261 |
| 8.0 | CON  | CLUSION  | l   | 265 |

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 2 of 265                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 2 01 203                |





# **MEASUREMENT REPORT**



|           | Channal                       |                       | AN              | <b>Л</b> Т1         | ANT2            |                     | MIMO            |                  |
|-----------|-------------------------------|-----------------------|-----------------|---------------------|-----------------|---------------------|-----------------|------------------|
| UNII Band | Channel<br>Bandwidth<br>(MHz) | Tx Frequency<br>(MHz) | Max. Power (mW) | Max. Power<br>(dBm) | Max. Power (mW) | Max. Power<br>(dBm) | Max. Power (mW) | Max. Power (dBm) |
| 1         |                               | 5180 - 5240           | 36.559          | 15.63               | 39.264          | 15.94               | 36.736          | 15.65            |
| 2A        | 20                            | 5260 - 5320           | 33.806          | 15.29               | 34.277          | 15.35               | 39.434          | 15.96            |
| 2C        | 20                            | 5500 - 5720           | 35.481          | 15.50               | 37.411          | 15.73               | 39.135          | 15.93            |
| 3         |                               | 5745 - 5825           | 39.446          | 15.96               | 39.537          | 15.97               | 38.184          | 15.82            |
| 1         |                               | 5190 - 5230           | 21.979          | 13.42               | 24.322          | 13.86               | 22.336          | 13.49            |
| 2A        | 40                            | 5270 - 5310           | 24.434          | 13.88               | 24.889          | 13.96               | 24.195          | 13.84            |
| 2C        | 40                            | 5510 - 5710           | 24.946          | 13.97               | 24.946          | 13.97               | 24.986          | 13.98            |
| 3         |                               | 5755 - 5795           | 25.061          | 13.99               | 24.889          | 13.96               | 24.965          | 13.97            |
| 1         | 80                            | 5210                  | 18.493          | 12.67               | 19.679          | 12.94               | 19.363          | 12.87            |
| 2A        |                               | 5290                  | 19.861          | 12.98               | 19.724          | 12.95               | 19.787          | 12.96            |
| 2C        |                               | 5530 - 5690           | 19.588          | 12.92               | 18.880          | 12.76               | 19.874          | 12.98            |
| 3         |                               | 5775                  | 19.815          | 12.97               | 19.861          | 12.98               | 19.575          | 12.92            |

**EUT Overview** 

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 2 of 265                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 3 of 265                |



#### 1.0 INTRODUCTION

#### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

#### 1.2 **PCTEST Test Location**

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

#### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 4 of 205                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 4 of 265                |



#### PRODUCT INFORMATION 2.0

#### 2.1 **Equipment Description**

The Equipment Under Test (EUT) is the Samsung Portable Handset FCC ID: A3LSMG986U. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 0860M, 0439M, 0921H, 0842H, 0084M, 0858M, 0324M, 0402M, 0394M, 1392M

#### 2.2 **Device Capabilities**

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n5, n66, n2, n41, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

| Band 1 |  |
|--------|--|
|--------|--|

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 36  | 5180            |
| :   | :               |
| 42  | 5210            |
| :   |                 |
| 48  | 5240            |

# Band 2A

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 52  | 5260            |
|     | •               |
| 56  | 5280            |
| :   | :               |
| 64  | 5320            |

# Band 2C

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 100 | 5500            |
| :   | :               |
| 120 | 5600            |
| :   | :               |
| 144 | 5720            |

# Band 3

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 149 | 5745            |
| :   | :               |
| 157 | 5785            |
| :   | :               |
| 165 | 5825            |

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

### Band 1

| Ch. | Frequency<br>(MHz) |
|-----|--------------------|
| 38  | 5190               |
| :   | :                  |
| 46  | 5230               |
|     |                    |

# Band 2A

| Ch. | Frequency<br>(MHz) |
|-----|--------------------|
| 54  | 5270               |
| :   | :                  |
| 62  | 5310               |

## Band 2C

| Ch. | Frequency<br>(MHz) |
|-----|--------------------|
| 102 | 5510               |
| :   | :                  |
| 118 | 5590               |
| :   | :                  |
| 142 | 5710               |

# Band 3

| Ch. | Frequency<br>(MHz) |
|-----|--------------------|
| 151 | 5755               |
| • • | • •                |
| 159 | 5795               |
|     |                    |

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

### Band 1

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 42  | 5210            |

### Band 2A

| Ch. | Frequency (MHz) |  |
|-----|-----------------|--|
| 58  | 5290            |  |

### Band 2C

| Ch. | Frequency (MHz) |  |  |
|-----|-----------------|--|--|
| 106 | 5530            |  |  |
|     | • •             |  |  |
| 138 | 5690            |  |  |

# Band 3

| equency (MHz) |
|---------------|
| 5775          |
|               |

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

| FCC ID: A3LSMG986U  | PCTEST SINGLES LABORATORS. INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                     | EUT Type:                          | Page 5 of 265                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20             | Portable Handset                   | Page 5 01 265                |



### Notes:

1. 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Mode               | Antenna  | Bandwidth<br>[MHz] | Tone | Duty Cycle |
|--------------------|----------|--------------------|------|------------|
|                    |          |                    | 26T  | 99.5       |
| 802.11ax           | 1        |                    | 52T  | 99.7       |
| NII RU             |          |                    | 106T | 99.4       |
|                    |          | 20                 | 242T | 98.4       |
|                    |          | 20                 | 26T  | 99.5       |
| 802.11ax           | 2        |                    | 52T  | 99.7       |
| NII RU             | _        |                    | 106T | 99.4       |
|                    |          |                    | 242T | 98.5       |
|                    |          |                    | 26T  | 99.7       |
| 802.11ax           | MIMO CDD | 20                 | 52T  | 99.3       |
| NII RU             |          |                    | 106T | 98.6       |
|                    |          |                    | 242T | 96.9       |
|                    |          |                    | 26T  | 99.5       |
| 802.11ax           |          |                    | 52T  | 99.7       |
| NII RU             | 1        |                    | 106T | 99.4       |
|                    |          |                    | 242T | 98.4       |
|                    |          | 40                 | 484T | 97.2       |
|                    |          | .0                 | 26T  | 99.5       |
| 802.11ax           |          |                    | 52T  | 99.7       |
| NII RU             | 2        |                    | 106T | 99.3       |
| I WILLIAM          |          |                    | 242T | 98.4       |
|                    |          |                    | 484T | 96.9       |
| 802.11ax<br>NII RU |          | 40                 | 26T  | 99.6       |
|                    |          |                    | 52T  | 99.3       |
|                    | MIMO CDD |                    | 106T | 98.5       |
|                    |          |                    | 242T | 96.8       |
|                    |          |                    | 484T | 94.7       |
|                    |          |                    | 26T  | 99.4       |
|                    |          |                    | 52T  | 99.7       |
| 802.11ax           | 1        |                    | 106T | 99.3       |
| NII RU             | 1        |                    | 242T | 98.5       |
|                    |          |                    | 484T | 96.8       |
|                    |          | 80                 | 996T | 94.1       |
|                    |          |                    | 26T  | 99.5       |
|                    | 2        |                    | 52T  | 99.7       |
| 802.11ax<br>NII RU |          |                    | 106T | 99.3       |
|                    |          |                    | 242T | 98.3       |
|                    |          |                    | 484T | 96.8       |
|                    |          |                    | 996T | 94.1       |
|                    |          |                    | 26T  | 99.7       |
|                    |          |                    | 52T  | 99.3       |
| 802.11ax           | MIMO CDD | 80                 | 106T | 98.5       |
| NII RU             |          |                    | 242T | 96.8       |
|                    |          |                    | 484T | 94.5       |
|                    |          |                    | 996T | 93.9       |

**Table 2-4. Measured Duty Cycles** 

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 6 of 265                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 6 of 265                |



2. The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations |                   | SISO |      | SDM  |      | CDD/MIMO |      |
|---------------------|-------------------|------|------|------|------|----------|------|
|                     |                   | ANT1 | ANT2 | ANT1 | ANT2 | ANT1     | ANT2 |
|                     | 11a               | ✓    | ✓    | ×    | ×    | ✓        | ✓    |
| 5GHz                | 11n/ac/ax (20MHz) | ✓    | ✓    | ✓    | ✓    | ✓        | ✓    |
|                     | 11n/ac/ax (40MHz) | ✓    | ✓    | ✓    | ✓    | ✓        | ✓    |
|                     | 11ac/ax (80MHz)   | ✓    | ✓    | ✓    | ✓    | ✓        | ✓    |

Table 2-5. Frequency / Channel Operations

✓ = Support ; × = NOT Support SISO = Single Input Single Output

CDD = Cyclic Delay Diversity - MIMO function

**SDM** = Spatial Diversity Multiplexing – MIMO function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

| Description               | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna                   | 1                | 2              |
| Channel                   | 6                | 48             |
| Operating Frequency (MHz) | 2437             | 5240           |
| Data Rate (Mbps)          | 1                | 6              |
| Mode                      | 802.11b          | 802.11a        |

Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Configuration 2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

| Description               | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna                   | 2                | 1              |
| Channel                   | 6                | 120            |
| Operating Frequency (MHz) | 2437             | 5600           |
| Data Rate (Mbps)          | 1                | 6              |
| Mode                      | 802.11b          | 802.11a        |

Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 7 of 265                   |
| 1M1910220166-09.A3L | 10/11/19 – 01/15/20 | Portable Handset                   | rage / 0/ 200                   |



Configuration 3: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

| Description               | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna                   | 1, 2             | 1, 2           |
| Channel                   | 11               | 165            |
| Operating Frequency (MHz) | 2462             | 5825           |
| Data Rate (Mbps)          | 6                | 6              |
| Mode                      | 802.11g          | 802.11a        |

Table 2-8. Config-3 (ANT1 MIMO & ANT2 MIMO)

#### 2.3 **Test Configuration**

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

#### 2.4 **EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 8 of 265                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page o oi 200                |



## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure......None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo O of OCE                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 9 of 265                |



# 4.0 ANTENNA REQUIREMENTS

# Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The EUT complies with the requirement of §15.203.

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 10 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 10 of 265               |



#### **MEASUREMENT UNCERTAINTY** 5.0

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                        | Expanded Uncertainty (±dB) |
|-------------------------------------|----------------------------|
| Conducted Bench Top<br>Measurements | 1.13                       |
| Line Conducted Disturbance          | 3.09                       |
| Radiated Disturbance (<1GHz)        | 4.98                       |
| Radiated Disturbance (>1GHz)        | 5.07                       |
| Radiated Disturbance (>18GHz)       | 5.09                       |

| FCC ID: A3LSMG986U  | FOTEST (HIGHELPHIA LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|-------------------------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:                         | EUT Type:                          | Dog 44 of 205                   |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                 | Portable Handset                   | Page 11 of 265                  |



# 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer    | Model    | Description                          | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|-----------------|----------|--------------------------------------|-----------|--------------|-----------|---------------|
| -               | WL25-2   | Conducted Cable Set (25GHz)          | 6/3/2019  | Annual       | 6/3/2020  | WL25-2        |
| -               | WL25-1   | Conducted Cable Set (25GHz)          | 6/5/2019  | Annual       | 6/5/2020  | WL25-1        |
| =               | WL25-4   | Conducted Cable Set (25GHz)          | 6/4/2019  | Annual       | 6/4/2020  | WL25-4        |
| Agilent         | N9030A   | PXA Signal Analyzer (44GHz)          | 6/12/2019 | Annual       | 6/12/2020 | MY52350166    |
| Agilent         | N9020A   | MXA Signal Analyzer                  | 4/20/2019 | Annual       | 4/20/2020 | US46470561    |
| Emco            | 3115     | Horn Antenna (1-18GHz)               | 3/28/2018 | Biennial     | 3/28/2020 | 9704-5182     |
| Emco            | 3116     | Horn Antenna (18 - 40GHz)            | 6/7/2018  | Triennial    | 6/7/2021  | 9203-2178     |
| Emco            | 3160-09  | Small Horn (18 - 26.5GHz)            | 8/9/2018  | Biennial     | 8/9/2020  | 00135427      |
| Emco            | 3160-10  | Small Horn (26.5 - 40GHz)            | 8/9/2018  | Biennial     | 8/9/2020  | 00130993      |
| ETS Lindgren    | 3117     | 1-18 GHz DRG Horn (Medium)           | 2/14/2019 | Biennial     | 2/14/2021 | 125518        |
| ETS-Lindgren    | 3816/2NM | Line Impedance Stabilization Network | 6/18/2018 | Biennial     | 6/18/2020 | 114451        |
| Pasternack      | NMLC-2   | Line Conducted Emissions Cable (NM)  | 6/3/2019  | Annual       | 6/3/2020  | NMLC-2        |
| Rohde & Schwarz | ESU26    | EMI Test Receiver (26.5GHz)          | 6/5/2019  | Annual       | 6/5/2020  | 100342        |
| Rohde & Schwarz | FSW67    | Signal / Spectrum Analyzer           | 5/6/2019  | Annual       | 5/6/2020  | 103200        |
| Seekonk         | NC-100   | Torque Wrench 8in-lb                 | 5/9/2018  | Biennial     | 5/9/2020  | N/A           |
| Sunol           | JB5      | Bi-Log Antenna (30M - 5GHz)          | 4/19/2018 | Biennial     | 4/19/2020 | A051107       |

Table 6-1. Annual Test Equipment Calibration Schedule

### Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 42 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 12 of 265               |



## 7.0 TEST RESULTS

# 7.1 Summary

Company Name: <u>Samsung Electronics Co., Ltd.</u>

FCC ID: <u>A3LSMG986U</u>

FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part<br>Section(s)                   | RSS<br>Section(s) | Test Description   | Test Limit   | Test<br>Condition | Test<br>Result | Reference              |
|--|-------------------|--|--|-------------------|----------------|------------------------|
| N/A                                      | RSS-Gen [6.7]     | 26dB Bandwidth   | N/A  |                   | PASS           | Section 7.2            |
| 15.407(e)                                | RSS-Gen [6.7]     | 6dB Bandwidth  | >500kHz(5725-5850MHz)  |                   | PASS           | Section 7.3            |
| 15.407 (a.1.iv),<br>(a.2), (a.3)         | RSS-247 [6.2]     | Maximum Conducted<br>Output Power  | Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])                 | CONDUCTED         | PASS           | Section 7.4            |
| 15.407 (a.1.iv),<br>(a.2), (a.3)         | RSS-247 [6.2]     | Maximum Power<br>Spectral Density  | Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])           |                   | PASS           | Section 7.5            |
| 15.407(h)                                | RSS-247 [6.3]     | Dynamic Frequency<br>Selection   | See DFS Test Report  |                   | PASS           | See DFS<br>Test Report |
| 15.407(b.1), (2), (3), (4)               | RSS-247 [6.2]     | Undesirable Emissions  | Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])                     |                   | PASS           | Section 7.6            |
| 15.205,<br>15.407(b.1), (4),<br>(5), (6) | RSS-Gen [8.9]     | General Field Strength<br>Limits (Restricted Bands<br>and Radiated Emission<br>Limits) | Emissions in restricted bands must<br>meet the radiated limits detailed in<br>15.209 (RSS-Gen [8.9]) | RADIATED          | PASS           | Section 7.6,<br>7.7    |

Table 7-1. Summary of Test Results

#### Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 13 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 13 01 203               |



#### 26dB Bandwidth Measurement – 802.11ax OFDMA 7.2

RSS-Gen [6.2]

### **Test Overview and Limit**

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

### **Test Procedure Used**

ANSI C63.10-2013 - Section 12.4 KDB 789033 D02 v02r01 – Section C

### **Test Settings**

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = approximately 1% of the emission bandwidth
- 3.  $VBW > 3 \times RBW$
- 4. Detector = Peak
- 5. Trace mode = max hold

### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

#### **Test Notes**

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

| FCC ID: A3LSMG986U  | SINGLES LABORATORS. INC. | MEASUREMENT REPORT<br>(CERTIFICATION) | SAMSUNG | Approved by: Quality Manager |
|---------------------|--------------------------|---------------------------------------|---------|------------------------------|
| Test Report S/N:    | Test Dates:              | EUT Type:                             |         | Page 14 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20      | Portable Handset                      |         | Fage 14 01 265               |



# SISO Antenna-1 26 dB Bandwidth Measurements (26 Tones)

|          | Frequency<br>[MHz] | Channel<br>No. | 802.11 Mode | Tones | Data Rate<br>[Mbps] | Measured 26dB<br>Bandwidth<br>[MHz] |
|----------|--------------------|----------------|-------------|-------|---------------------|-------------------------------------|
|          | 5180               | 36             | ax (20MHz)  | 26T   | MCS0                | 19.03                               |
|          | 5200               | 40             | ax (20MHz)  | 26T   | MCS0                | 18.68                               |
| <u> </u> | 5240               | 48             | ax (20MHz)  | 26T   | MCS0                | 19.04                               |
| Band 1   | 5190               | 38             | ax (40MHz)  | 26T   | MCS0                | 22.09                               |
| _        | 5230               | 46             | ax (40MHz)  | 26T   | MCS0                | 22.39                               |
|          | 5210               | 42             | ax (80MHz)  | 26T   | MCS0                | 19.30                               |
|          | 5260               | 52             | ax (20MHz)  | 26T   | MCS0                | 18.91                               |
| ∢        | 5280               | 56             | ax (20MHz)  | 26T   | MCS0                | 19.12                               |
| Band 2A  | 5320               | 64             | ax (20MHz)  | 26T   | MCS0                | 18.59                               |
| San      | 5270               | 54             | ax (40MHz)  | 26T   | MCS0                | 18.88                               |
| ш        | 5310               | 62             | ax (40MHz)  | 26T   | MCS0                | 19.59                               |
|          | 5290               | 58             | ax (80MHz)  | 26T   | MCS0                | 19.43                               |
|          | 5500               | 100            | ax (20MHz)  | 26T   | MCS0                | 18.85                               |
|          | 5600               | 120            | ax (20MHz)  | 26T   | MCS0                | 18.61                               |
|          | 5720               | 144            | ax (20MHz)  | 26T   | MCS0                | 18.97                               |
| 2C       | 5510               | 102            | ax (40MHz)  | 26T   | MCS0                | 19.12                               |
| Band 2C  | 5590               | 118            | ax (40MHz)  | 26T   | MCS0                | 19.20                               |
| Ва       | 5710               | 142            | ax (40MHz)  | 26T   | MCS0                | 19.16                               |
|          | 5530               | 106            | ax (80MHz)  | 26T   | MCS0                | 19.51                               |
|          | 5610               | 122            | ax (80MHz)  | 26T   | MCS0                | 19.71                               |
|          | 5690               | 138            | ax (80MHz)  | 26T   | MCS0                | 38.80                               |

Table 7-2. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

| FCC ID: A3LSMG986U  | FOTEST (HIGHELPHIA LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|-------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                         | EUT Type:                          | Dog 45 of 205                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                 | Portable Handset                   | Page 15 of 265               |






Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)



Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 46 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 16 of 265               |



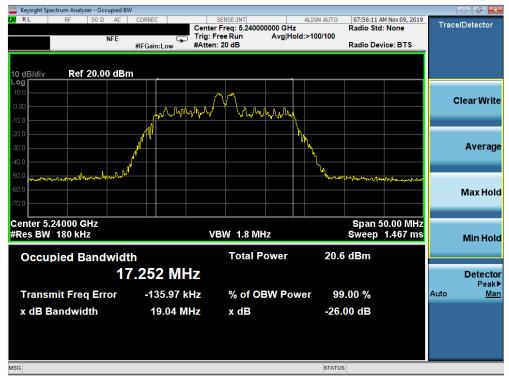

Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)



Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 38)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 47 of 205                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 17 of 265                  |






Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)



Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 42)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 40 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 18 of 265               |



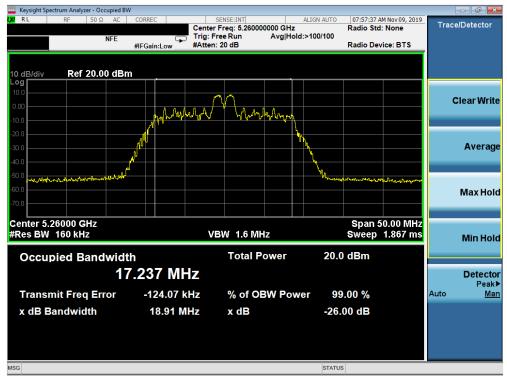

Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 52)



Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 10 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 19 of 265               |





Plot 7-9. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)



Plot 7-10. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 54)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dags 20 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 20 of 265               |






Plot 7-11. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 62)




Plot 7-12. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 58)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Domo 24 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 21 of 265               |



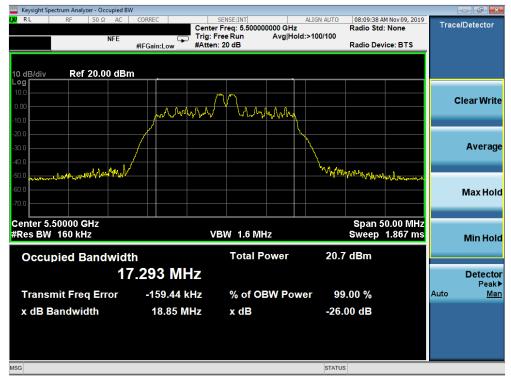


Plot 7-13. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 100)

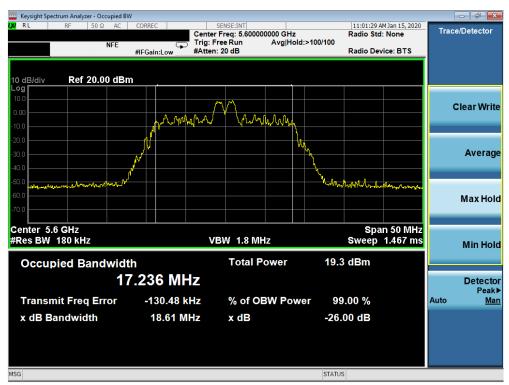


Plot 7-14. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 120)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|------------------------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogg 22 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 22 of 265                  |



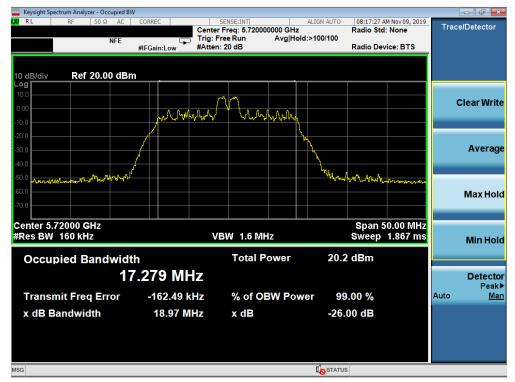


Plot 7-15. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 144)

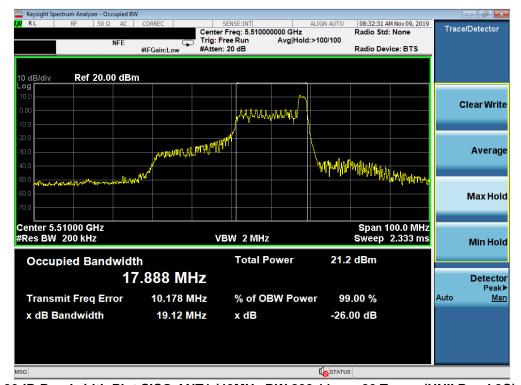

Plot 7-16. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Domo 22 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 23 of 265               |



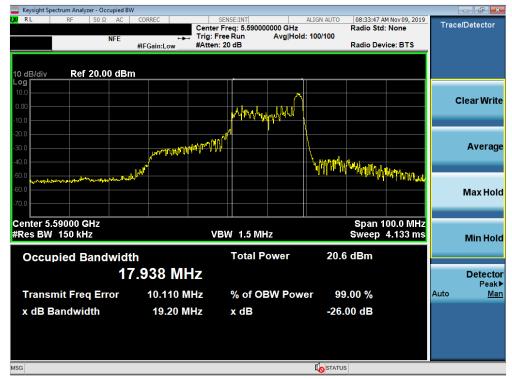

Plot 7-17. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 118)



Plot 7-18. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 24 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 24 01 205               |





Plot 7-19. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 106)



Plot 7-20. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|------------------------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogg 25 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 25 of 265                  |





Plot 7-21. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 26 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 26 of 265               |




# SISO Antenna-2 26dB Bandwidth Measurements (26 Tones)

|         | Frequency<br>[MHz] | Channel<br>No. | 802.11 Mode | Tones | Data Rate<br>[Mbps] | Measured 26dB<br>Bandwidth<br>[MHz] |
|---------|--------------------|----------------|-------------|-------|---------------------|-------------------------------------|
|         | 5180               | 36             | ax (20MHz)  | 26T   | MCS0                | 18.91                               |
|         | 5200               | 40             | ax (20MHz)  | 26T   | MCS0                | 18.79                               |
| Band 1  | 5240               | 48             | ax (20MHz)  | 26T   | MCS0                | 18.97                               |
| Bar     | 5190               | 38             | ax (40MHz)  | 26T   | MCS0                | 21.30                               |
| _       | 5230               | 46             | ax (40MHz)  | 26T   | MCS0                | 20.64                               |
|         | 5210               | 42             | ax (80MHz)  | 26T   | MCS0                | 38.66                               |
|         | 5260               | 52             | ax (20MHz)  | 26T   | MCS0                | 19.00                               |
| ∢       | 5280               | 56             | ax (20MHz)  | 26T   | MCS0                | 18.87                               |
| Band 2A | 5320               | 64             | ax (20MHz)  | 26T   | MCS0                | 18.80                               |
| gan     | 5270               | 54             | ax (40MHz)  | 26T   | MCS0                | 19.49                               |
| ш       | 5310               | 62             | ax (40MHz)  | 26T   | MCS0                | 19.18                               |
|         | 5290               | 58             | ax (80MHz)  | 26T   | MCS0                | 20.51                               |
|         | 5500               | 100            | ax (20MHz)  | 26T   | MCS0                | 18.96                               |
|         | 5600               | 120            | ax (20MHz)  | 26T   | MCS0                | 18.93                               |
|         | 5720               | 144            | ax (20MHz)  | 26T   | MCS0                | 18.65                               |
| 2C      | 5510               | 102            | ax (40MHz)  | 26T   | MCS0                | 19.61                               |
| Band 2C | 5590               | 118            | ax (40MHz)  | 26T   | MCS0                | 19.47                               |
| Ва      | 5710               | 142            | ax (40MHz)  | 26T   | MCS0                | 18.91                               |
|         | 5530               | 106            | ax (80MHz)  | 26T   | MCS0                | 20.33                               |
|         | 5610               | 122            | ax (80MHz)  | 26T   | MCS0                | 20.35                               |
|         | 5690               | 138            | ax (80MHz)  | 26T   | MCS0                | 19.80                               |


Table 7-3. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

| FCC ID: A3LSMG986U  | FOTEST (HIGHESTERS LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|-------------------------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:                         | EUT Type:                          | Page 27 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                 | Portable Handset                   | Page 27 01 200                  |



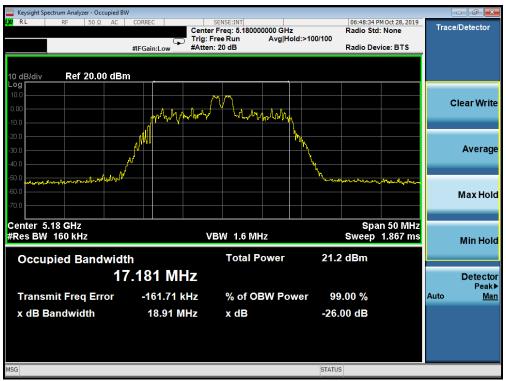


Plot 7-22. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)

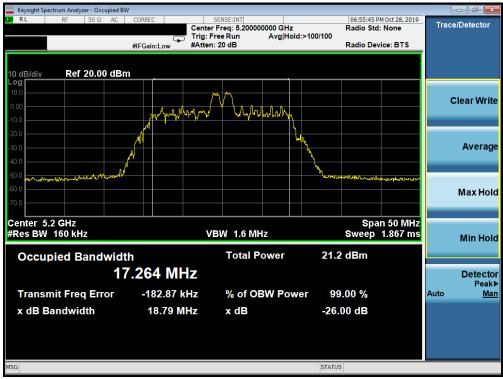


Plot 7-23. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 29 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 28 of 265               |



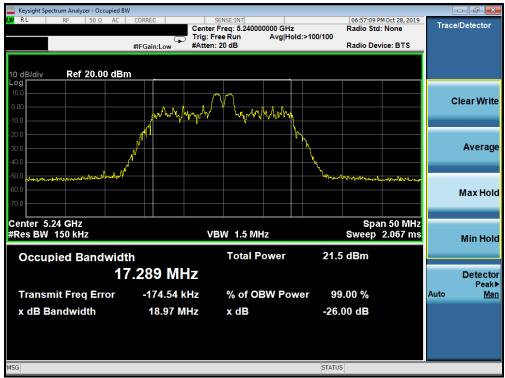

Plot 7-24. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)

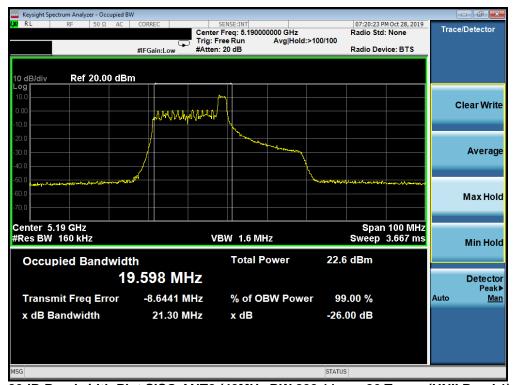

Plot 7-25. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 29 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 29 01 205               |





Plot 7-26. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)




Plot 7-27. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 30 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 30 01 263               |






Plot 7-28. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 52)

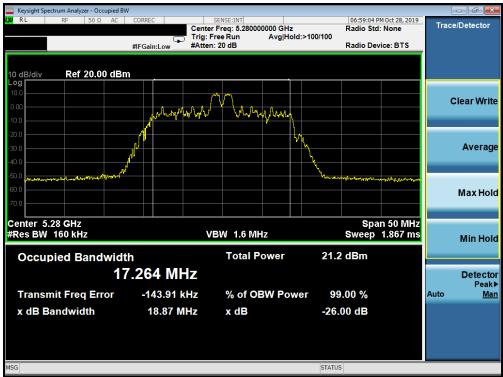

Plot 7-29. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 56)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 24 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 31 of 265                  |



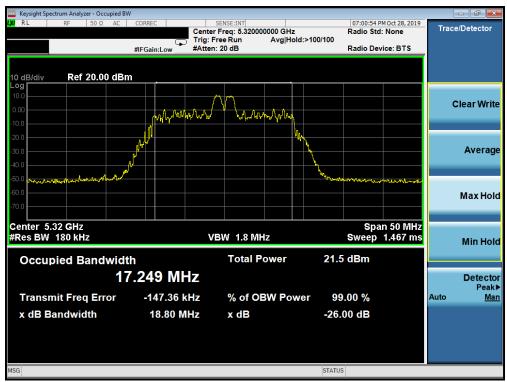

Plot 7-30. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 64)




Plot 7-31. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 54)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Domo 22 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 32 of 265               |






Plot 7-32. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 62)

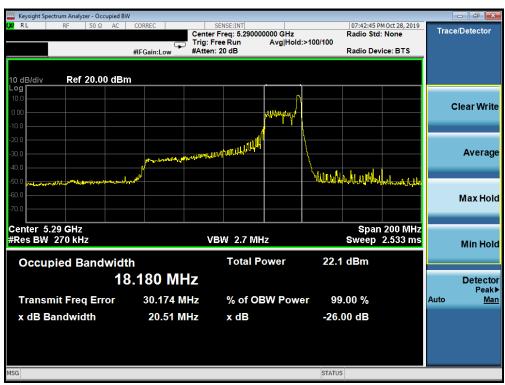


Plot 7-33. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 58)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Page 33 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | raye 33 UI 200               |



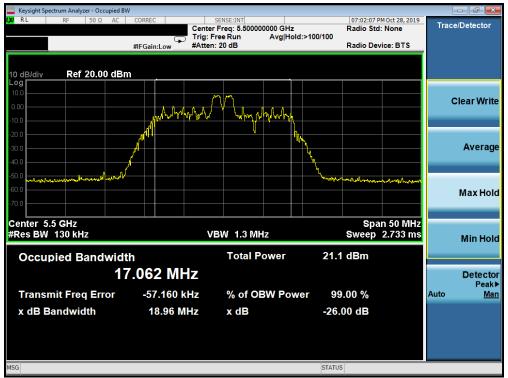


Plot 7-34. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 100)

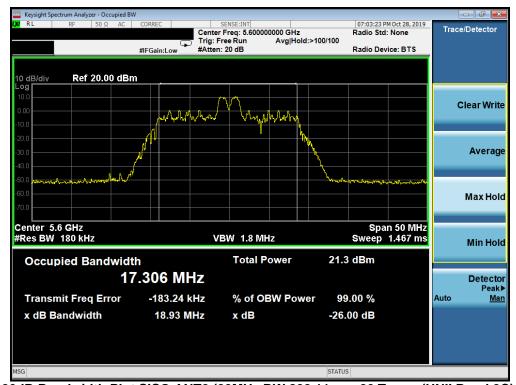


Plot 7-35. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 120)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Domo 24 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 34 of 265               |



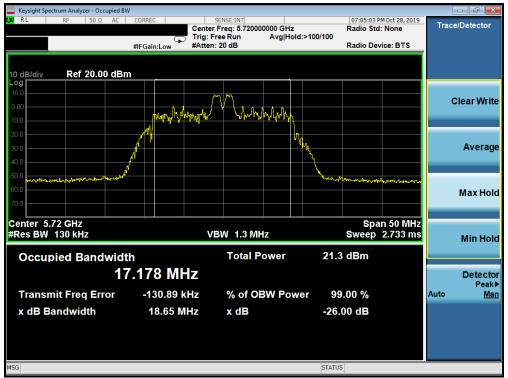


Plot 7-36. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 144)

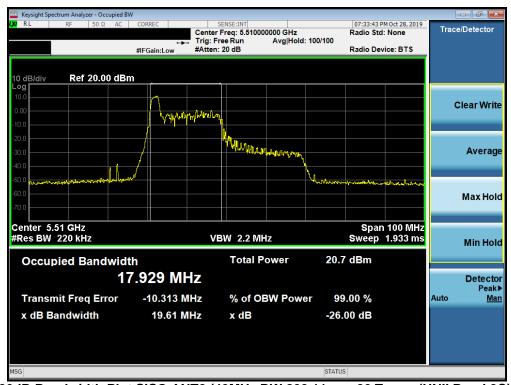


Plot 7-37. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dags 25 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 35 of 265               |



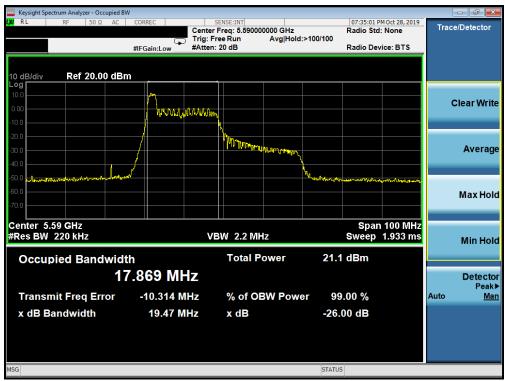


Plot 7-38. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 118)

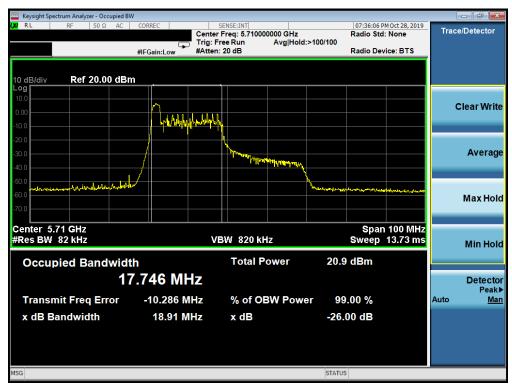


Plot 7-39. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 142)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogg 26 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 36 of 265               |



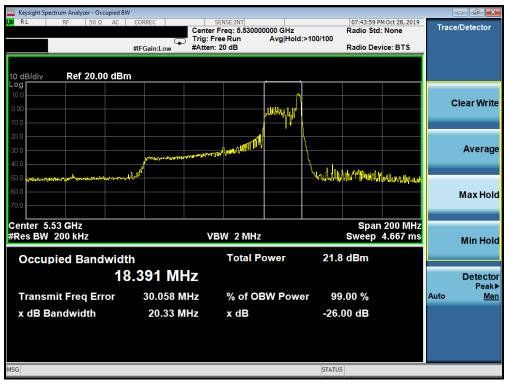


Plot 7-40. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 106)

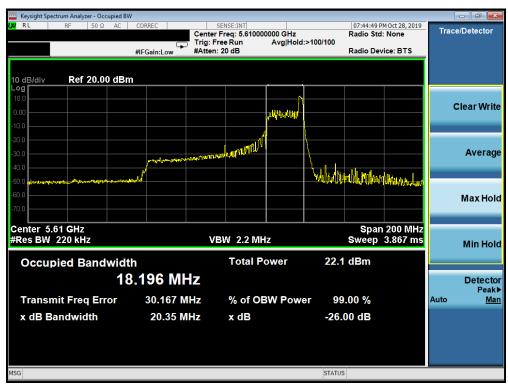

Plot 7-41. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 122)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 27 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 37 of 265               |



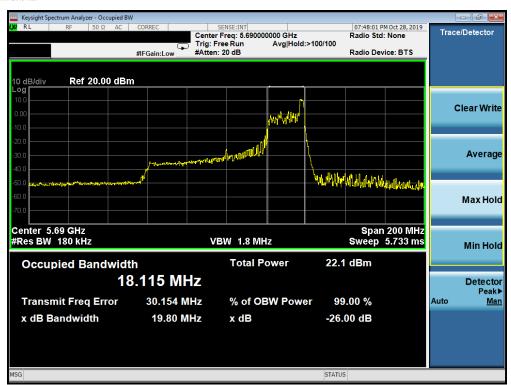

Plot 7-42. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 29 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 38 of 265               |



#### 6dB Bandwidth Measurement - 802.11ax OFDMA 7.3

§15.407 (e); RSS-Gen [6.7]

#### **Test Overview and Limit**

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.

#### **Test Procedure Used**

ANSI C63.10-2013 – Section 6.9.2 KDB 789033 D02 v02r01 - Section C

#### **Test Settings**

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 100 kHz
- 3.  $VBW \ge 3 \times RBW$
- 4. Detector = Peak
- Trace mode = max hold
- 6. Sweep = auto couple

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

#### **Test Notes**

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 20 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 39 of 265               |




## SISO Antenna-1 6 dB Bandwidth Measurements (26 Tones)

|        | Frequency<br>[MHz] | Channel<br>No. | 802.11 Mode | Tones | Data Rate<br>[Mbps] | Measured 6dB<br>Bandwidth<br>[MHz] |
|--------|--------------------|----------------|-------------|-------|---------------------|------------------------------------|
|        | 5745               | 149            | ax (20MHz)  | 26T   | MCS0                | 2.11                               |
| •      | 5785               | 157            | ax (20MHz)  | 26T   | MCS0                | 2.72                               |
| д<br>3 | 5825               | 165            | ax (20MHz)  | 26T   | MCS0                | 2.08                               |
| Band   | 5755               | 151            | ax (40MHz)  | 26T   | MCS0                | 2.13                               |
| _      | 5795               | 159            | ax (40MHz)  | 26T   | MCS0                | 2.16                               |
|        | 5775               | 155            | ax (80MHz)  | 26T   | MCS0                | 2.84                               |


Table 7-4. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 40 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 40 of 265               |



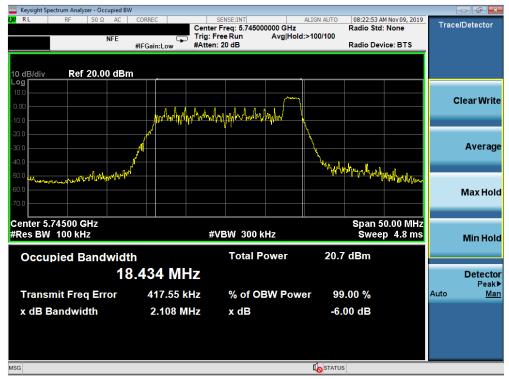

Plot 7-43. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)

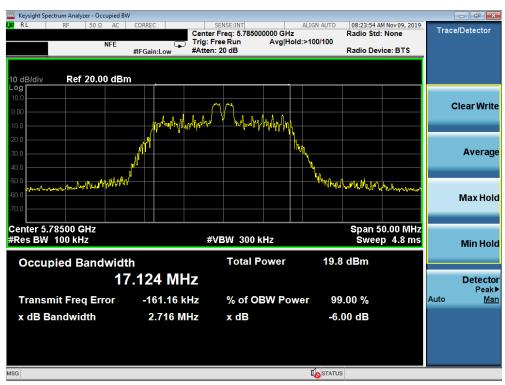

Plot 7-44. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 41 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 41 of 265               |






Plot 7-45. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)




Plot 7-46. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogg 42 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 42 of 265               |



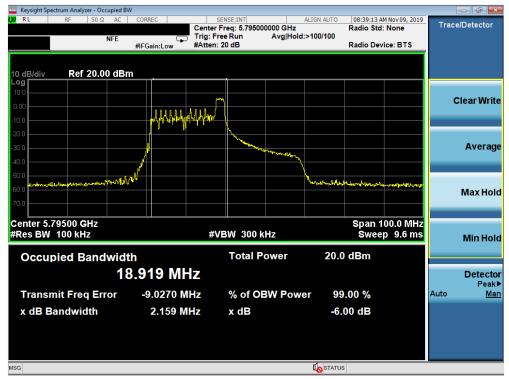

Plot 7-47. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)

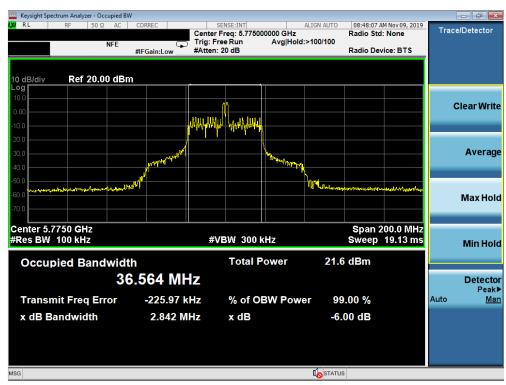

Plot 7-48. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 42 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 43 of 265               |

© 2020 PCTEST Engineering Laboratory, Inc.




## SISO Antenna-2 6dB Bandwidth Measurements (26 Tones)

|      | Frequency<br>[MHz] | Channel<br>No. | 802.11 Mode | Tones | Data Rate<br>[Mbps] | Measured 6dB<br>Bandwidth<br>[MHz] |
|------|--------------------|----------------|-------------|-------|---------------------|------------------------------------|
|      | 5745               | 149            | ax (20MHz)  | 26T   | MCS0                | 2.62                               |
|      | 5785               | 157            | ax (20MHz)  | 26T   | MCS0                | 2.72                               |
| р р. | 5825               | 165            | ax (20MHz)  | 26T   | MCS0                | 2.71                               |
| Band | 5755               | 151            | ax (40MHz)  | 26T   | MCS0                | 2.14                               |
| _    | 5795               | 159            | ax (40MHz)  | 26T   | MCS0                | 2.14                               |
|      | 5775               | 155            | ax (80MHz)  | 26T   | MCS0                | 2.23                               |


Table 7-5. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dags 44 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 44 of 265               |



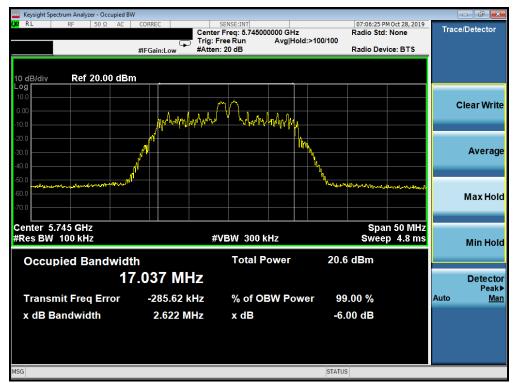


Plot 7-49. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)

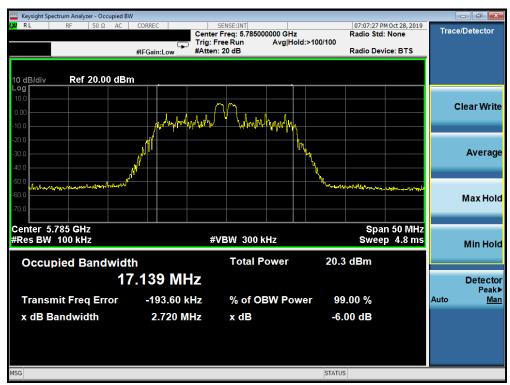

Plot 7-50. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 45 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 45 of 265               |



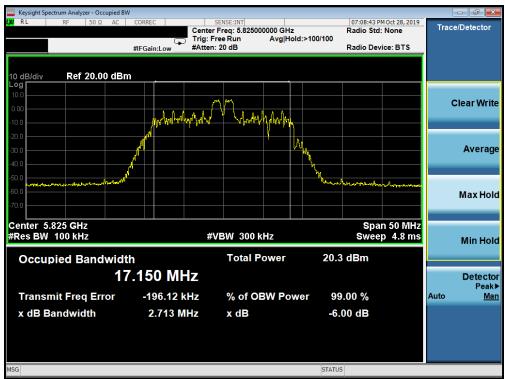

Plot 7-51. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)




Plot 7-52. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)


| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 46 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 46 of 265                  |

© 2020 PCTEST Engineering Laboratory, Inc.



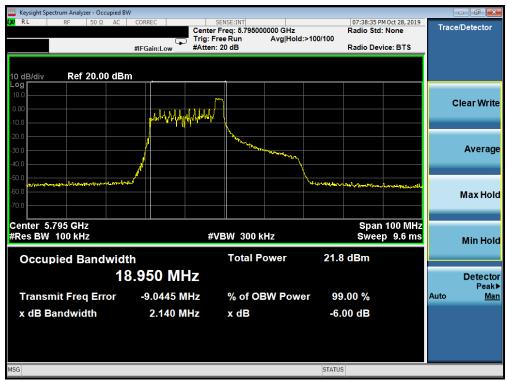

Plot 7-53. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)

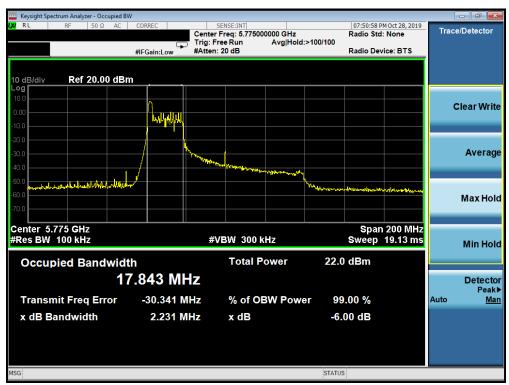

Plot 7-54. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 47 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 47 of 265               |



# 7.4 UNII Output Power Measurement – 802.11ax OFDMA §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

#### **Test Overview and Limits**

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or 10 + 10 log10B, dBm.

In the 5.25-5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm +  $10\log_{10}(26$ dB BW) = 11 dBm +  $10\log_{10}(29.58)$  = 25.71dBm. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or  $17 + 10\log_{10}(100)$  dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or 11 dBm +  $10\log_{10}(26dB \text{ BW}) = 11 \text{ dBm} + 10\log_{10}(23.20) = 24.65dBm$ . The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or 17 + 10 log10B, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

#### **Test Procedure Used**

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

#### **Test Settings**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 49 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 48 of 265                  |



### SISO Antenna-1 Conducted Output Power Measurements (26 Tones)

|            | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|--------------|-------------------------|
|            |            |         |          |       | 0     | 4        | 8     | [dBm]                    | Margin [dB]        | [uDi]     | [GDIII]      | Emili [GDin] | margin [ab]             |
| N _        | 5180       | 36      | AVG      | 26T   | 10.48 | 10.76    | 10.55 | 23.98                    | -13.22             | -6.45     | 4.31         | 22.39        | -18.08                  |
| I C        | 5200       | 40      | AVG      | 26T   | 10.41 | 10.65    | 10.40 | 23.98                    | -13.33             | -6.69     | 3.96         | 22.39        | -18.43                  |
| ≥ ∺        | 5240       | 48      | AVG      | 26T   | 10.35 | 10.62    | 10.36 | 23.98                    | -13.36             | -6.45     | 4.17         | 22.39        | -18.22                  |
| <u>Š</u>   | 5260       | 52      | AVG      | 26T   | 10.28 | 10.42    | 10.12 | 23.47                    | -13.05             | -6.45     | 3.97         | 29.47        | -25.50                  |
| <u>♥</u> ≥ | 5280       | 56      | AVG      | 26T   | 10.14 | 10.44    | 10.30 | 23.47                    | -13.03             | -6.61     | 3.83         | 29.47        | -25.64                  |
| N 2        | 5320       | 64      | AVG      | 26T   | 10.27 | 10.52    | 10.26 | 23.47                    | -12.95             | -6.55     | 3.97         | 29.47        | -25.50                  |
| 五声         | 5500       | 100     | AVG      | 26T   | 10.34 | 10.60    | 10.37 | 22.80                    | -12.20             | -6.99     | 3.61         | 28.80        | -25.19                  |
| OM         | 5600       | 120     | AVG      | 26T   | 10.77 | 10.97    | 10.64 | 22.80                    | -11.83             | -6.99     | 3.98         | 28.80        | -24.82                  |
| 5          | 5720       | 144     | AVG      | 26T   | 10.18 | 10.36    | 10.07 | 22.80                    | -12.44             | -6.99     | 3.37         | 28.80        | -25.43                  |
|            | 5745       | 149     | AVG      | 26T   | 10.04 | 10.05    | 10.87 | 30.00                    | -19.13             | -6.99     | 3.88         | -            | -                       |
|            | 5785       | 157     | AVG      | 26T   | 10.08 | 10.38    | 10.13 | 30.00                    | -19.62             | -6.99     | 3.39         | -            | -                       |
|            | 5825       | 165     | AVG      | 26T   | 10.96 | 10.33    | 10.90 | 30.00                    | -19.04             | -6.95     | 4.01         | -            | -                       |

Table 7-6. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| N              | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|----------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|--------------------|--------------|--------------|-------------------------|
| <del>   </del> |            |         |          |       | 0     | 8        | 17    | [dBm]                    | Margin [dB]        | [ubij              | [ubiiij      | Link [abin]  | wargin [ub]             |
| ₹ \$           | 5190       | 38      | AVG      | 26T   | 10.98 | 10.99    | 10.88 | 23.98                    | -12.99             | -6.69              | 4.30         | 22.39        | -18.09                  |
| 5.3            | 5230       | 46      | AVG      | 26T   | 10.90 | 10.98    | 10.76 | 23.98                    | -13.00             | -6.45              | 4.53         | 22.39        | -17.86                  |
| 4 3            | 5270       | 54      | AVG      | 26T   | 10.88 | 10.69    | 10.69 | 23.47                    | -12.59             | -6.61              | 4.27         | 29.47        | -25.20                  |
| <u>ن</u> خ     | 5310       | 62      | AVG      | 26T   | 10.77 | 10.76    | 10.69 | 23.47                    | -12.70             | -6.55              | 4.22         | 29.47        | -25.25                  |
| <b>2</b>       | 5510       | 102     | AVG      | 26T   | 10.84 | 10.84    | 10.98 | 22.80                    | -11.82             | -6.99              | 3.99         | 28.80        | -24.81                  |
| <b>运</b> 8     | 5590       | 118     | AVG      | 26T   | 10.98 | 10.97    | 10.98 | 22.80                    | -11.82             | -6.99              | 3.99         | 28.80        | -24.81                  |
| 50             | 5710       | 142     | AVG      | 26T   | 10.42 | 10.41    | 10.45 | 22.80                    | -12.35             | -6.86              | 3.59         | 28.80        | -25.21                  |
| ~,             | 5755       | 151     | AVG      | 26T   | 10.51 | 10.47    | 10.66 | 30.00                    | -19.34             | -6.86              | 3.80         | -            | -                       |
|                | 5795       | 159     | AVG      | 26T   | 10.17 | 10.73    | 10.28 | 30.00                    | -19.27             | -6.95              | 3.78         | -            | -                       |

Table 7-7. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| ZH (              | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       |       | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p.    | e.i.r.p.<br>Margin [dB] |
|-------------------|------------|---------|----------|-------|-------|----------|-------|-------|--------------------|--------------------|--------------|-----------------|-------------------------|
| ₹ €               |            |         |          |       | 0     | 18       | 36    | [dBm] | Margin [dB]        | [ubij              | [ubiii]      | Littiit [GBIII] | wargin [ub]             |
| 5 B               | 5210       | 42      | AVG      | 26T   | 10.97 | 10.51    | 10.72 | 23.98 | -13.01             | -6.45              | 4.52         | 22.39           | -17.87                  |
| <u>⊗</u> <u>≅</u> | 5290       | 58      | AVG      | 26T   | 10.72 | 10.26    | 10.58 | 23.47 | -12.75             | -6.55              | 4.17         | 29.47           | -25.30                  |
| 후                 | 5530       | 106     | AVG      | 26T   | 10.85 | 10.71    | 10.90 | 22.80 | -11.90             | -6.99              | 3.91         | 28.80           | -24.89                  |
| 15 g              | 5610       | 122     | AVG      | 26T   | 10.95 | 10.73    | 10.98 | 22.80 | -11.82             | -6.99              | 3.99         | 28.80           | -24.81                  |
| 5 _               | 5690       | 138     | AVG      | 26T   | 10.32 | 10.93    | 10.27 | 22.80 | -11.87             | -6.86              | 4.07         | 28.80           | -24.73                  |
|                   | 5775       | 155     | AVG      | 26T   | 10.34 | 10.95    | 10.76 | 30.00 | -19.05             | -6.86              | 4.09         | -               | -                       |

Table 7-8. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dags 40 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 49 of 265               |



### SISO Antenna-1 Conducted Output Power Measurements (52 Tones)

|            | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|--------------|-------------------------|
|            |            |         |          |       | 37    | 39       | 40    | [dBm]                    | Margin [dB]        | [GDI]     | [ubiii]      | Limit [abin] | margin [ab]             |
| N _        | 5180       | 36      | AVG      | 52T   | 12.46 | 12.60    | 12.48 | 23.98                    | -11.38             | -6.45     | 6.15         | 22.39        | -16.24                  |
| I C        | 5200       | 40      | AVG      | 52T   | 12.36 | 12.53    | 12.41 | 23.98                    | -11.45             | -6.69     | 5.84         | 22.39        | -16.55                  |
| ≥ ∺        | 5240       | 48      | AVG      | 52T   | 12.29 | 12.44    | 12.31 | 23.98                    | -11.54             | -6.45     | 5.99         | 22.39        | -16.40                  |
| <u>Š</u>   | 5260       | 52      | AVG      | 52T   | 12.38 | 12.41    | 12.31 | 23.47                    | -11.06             | -6.45     | 5.96         | 29.47        | -23.51                  |
| <u>♥</u> ≥ | 5280       | 56      | AVG      | 52T   | 12.29 | 12.44    | 12.27 | 23.47                    | -11.03             | -6.61     | 5.83         | 29.47        | -23.64                  |
| N 2        | 5320       | 64      | AVG      | 52T   | 12.43 | 12.47    | 12.32 | 23.47                    | -11.00             | -6.55     | 5.92         | 29.47        | -23.55                  |
| 五声         | 5500       | 100     | AVG      | 52T   | 12.47 | 12.52    | 12.32 | 22.80                    | -10.28             | -6.99     | 5.53         | 28.80        | -23.27                  |
| OM         | 5600       | 120     | AVG      | 52T   | 12.58 | 12.75    | 12.59 | 22.80                    | -10.05             | -6.99     | 5.76         | 28.80        | -23.04                  |
| 5          | 5720       | 144     | AVG      | 52T   | 12.93 | 12.97    | 12.96 | 22.80                    | -9.83              | -6.99     | 5.98         | 28.80        | -22.82                  |
|            | 5745       | 149     | AVG      | 52T   | 12.96 | 12.92    | 12.75 | 30.00                    | -17.04             | -6.99     | 5.97         | -            | -                       |
|            | 5785       | 157     | AVG      | 52T   | 12.96 | 12.33    | 12.96 | 30.00                    | -17.04             | -6.99     | 5.97         | -            | -                       |
|            | 5825       | 165     | AVG      | 52T   | 12.90 | 12.28    | 12.95 | 30.00                    | -17.05             | -6.95     | 6.00         | -            | -                       |

Table 7-9. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| Z        | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|----------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|--------------------|--------------|----------------|-------------------------|
| 1 7 a    | <u> </u>   |         |          |       | 37    | 40       | 44    | [dBm]                    | Margin [dB]        | [иы]               | Lapini       | Lillin [abilij | wargin [ub]             |
| <b>₹</b> | 5190       | 38      | AVG      | 52T   | 11.20 | 11.94    | 11.08 | 23.98                    | -12.04             | -6.69              | 5.25         | 22.39          | -17.14                  |
| 8 3      | 5230       | 46      | AVG      | 52T   | 11.08 | 11.99    | 11.95 | 23.98                    | -11.99             | -6.45              | 5.54         | 22.39          | -16.85                  |
| 4 3      | 5270       | 54      | AVG      | 52T   | 11.94 | 11.85    | 11.88 | 23.47                    | -11.53             | -6.61              | 5.33         | 29.47          | -24.14                  |
| ·        | 5310       | 62      | AVG      | 52T   | 11.97 | 11.79    | 11.85 | 23.47                    | -11.50             | -6.55              | 5.42         | 29.47          | -24.05                  |
| <b>4</b> | 5510       | 102     | AVG      | 52T   | 11.99 | 11.85    | 11.26 | 22.80                    | -10.81             | -6.99              | 5.00         | 28.80          | -23.80                  |
| कं र     | 5590       | 118     | AVG      | 52T   | 11.17 | 11.95    | 11.16 | 22.80                    | -10.85             | -6.99              | 4.96         | 28.80          | -23.84                  |
|          | 5710       | 142     | AVG      | 52T   | 11.61 | 11.47    | 11.69 | 22.80                    | -11.11             | -6.86              | 4.83         | 28.80          | -23.97                  |
|          | 5755       | 151     | AVG      | 52T   | 11.76 | 11.53    | 11.74 | 30.00                    | -18.24             | -6.86              | 4.90         | -              | -                       |
|          | 5795       | 159     | AVG      | 52T   | 11.22 | 11.68    | 11.45 | 30.00                    | -18.32             | -6.95              | 4.73         | -              | -                       |

Table 7-10. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| Hz (t   | Freq [MHz] | MHz] Channel Detector To |     | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|---|------------|--------------------------|-----|-------|-------|----------|-------|--------------------------|--------------------|--------------------|--------------|--------------|-------------------------|
| ₹<br>E  |            |                          |     |       | 37    | 44       | 52    | [dBm]                    | Margin [dB]        | [ubij              | Lapini       | Limit [abin] | wargin [ub]             |
| ᅙᅙ  | 5210       | 42                       | AVG | 52T   | 10.18 | 10.41    | 10.87 | 23.98                    | -13.11             | -6.45              | 4.42         | 22.39        | -17.97                  |
| ® '₹  | 5290       | 58                       | AVG | 52T   | 10.81 | 10.16    | 10.73 | 23.47                    | -12.66             | -6.55              | 4.26         | 29.47        | -25.21                  |
| 고   | 5530       | 106                      | AVG | 52T   | 10.95 | 10.37    | 10.94 | 22.80                    | -11.85             | -6.99              | 3.96         | 28.80        | -24.84                  |
| E B   | 5610       | 122                      | AVG | 52T   | 10.14 | 10.45    | 10.20 | 22.80                    | -12.35             | -6.99              | 3.46         | 28.80        | -25.34                  |
| \cdot | 5690       | 138                      | AVG | 52T   | 10.34 | 10.72    | 10.46 | 22.80                    | -12.08             | -6.86              | 3.86         | 28.80        | -24.94                  |
|   | 5775       | 155                      | AVG | 52T   | 10.53 | 10.98    | 10.81 | 30.00                    | -19.02             | -6.86              | 4.12         | 1            | -                       |

Table 7-11. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 50 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 50 of 265               |



### SISO Antenna-1 Conducted Output Power Measurements (106 Tones)

|            | Freq [MHz] | Channel | Detector | Tones | RU I  | ndex  | Conducted Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|------------|------------|---------|----------|-------|-------|-------|-----------------------|--------------------|-----------|--------------|--------------|-------------------------|
|            |            |         |          |       | 53    | 54    | [dBm]                 | Margin [dB]        | [dDi]     | [GDIII]      | Emili (GDin) | Margin [ab]             |
| N _        | 5180       | 36      | AVG      | 106T  | 14.57 | 14.67 | 23.98                 | -9.31              | -6.45     | 8.22         | 22.39        | -14.17                  |
| II C       | 5200       | 40      | AVG      | 106T  | 14.52 | 14.52 | 23.98                 | -9.46              | -6.69     | 7.83         | 22.39        | -14.56                  |
| \ <u>₹</u> | 5240       | 48      | AVG      | 106T  | 14.48 | 14.49 | 23.98                 | -9.49              | -6.45     | 8.04         | 22.39        | -14.35                  |
| O .=       | 5260       | 52      | AVG      | 106T  | 14.56 | 14.39 | 23.47                 | -8.91              | -6.45     | 8.11         | 29.47        | -21.36                  |
| <u>S</u> ≥ | 5280       | 56      | AVG      | 106T  | 14.50 | 14.57 | 23.47                 | -8.90              | -6.61     | 7.96         | 29.47        | -21.51                  |
| N S        | 5320       | 64      | AVG      | 106T  | 14.49 | 14.48 | 23.47                 | -8.98              | -6.55     | 7.94         | 29.47        | -21.53                  |
| 五声         | 5500       | 100     | AVG      | 106T  | 14.50 | 14.45 | 22.80                 | -8.30              | -6.99     | 7.51         | 28.80        | -21.29                  |
| C M        | 5600       | 120     | AVG      | 106T  | 14.71 | 14.73 | 22.80                 | -8.07              | -6.99     | 7.74         | 28.80        | -21.06                  |
| 5          | 5720       | 144     | AVG      | 106T  | 14.88 | 14.88 | 22.80                 | -7.92              | -6.99     | 7.89         | 28.80        | -20.91                  |
|            | 5745       | 149     | AVG      | 106T  | 14.94 | 14.84 | 30.00                 | -15.06             | -6.99     | 7.95         | -            | _                       |
|            | 5785       | 157     | AVG      | 106T  | 14.99 | 14.95 | 30.00                 | -15.01             | -6.99     | 8.00         | -            | -                       |
|            | 5825       | 165     | AVG      | 106T  | 14.91 | 14.90 | 30.00                 | -15.09             | -6.95     | 7.96         | -            | -                       |

Table 7-12. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| Z            | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|--------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|--------------------|--------------|----------------|-------------------------|
| iii 🗢        |            |         |          |       | 53    | 54       | 56    | [dBm]                    | Margin [dB]        | [ubij              | [ubiii]      | Lillin [ubili] | wargin [ub]             |
| <b>₹</b>     | 5190       | 38      | AVG      | 106T  | 12.35 | 12.98    | 12.26 | 23.98                    | -11.00             | -6.69              | 6.29         | 22.39          | -16.10                  |
| <b>5 5</b>   | 5230       | 46      | AVG      | 106T  | 12.33 | 12.91    | 12.13 | 23.98                    | -11.07             | -6.45              | 6.46         | 22.39          | -15.93                  |
| 4 3          | 5270       | 54      | AVG      | 106T  | 12.20 | 12.74    | 12.19 | 23.47                    | -10.73             | -6.61              | 6.13         | 29.47          | -23.34                  |
| <del>5</del> | 5310       | 62      | AVG      | 106T  | 12.22 | 12.77    | 12.03 | 23.47                    | -10.70             | -6.55              | 6.22         | 29.47          | -23.25                  |
| ₽ ⊆          | 5510       | 102     | AVG      | 106T  | 12.24 | 12.79    | 12.42 | 22.80                    | -10.01             | -6.99              | 5.80         | 28.80          | -23.00                  |
| ig 8         | 5590       | 118     | AVG      | 106T  | 12.34 | 12.91    | 12.36 | 22.80                    | -9.89              | -6.99              | 5.92         | 28.80          | -22.88                  |
| 5G<br>B      | 5710       | 142     | AVG      | 106T  | 12.78 | 12.41    | 12.81 | 22.80                    | -9.99              | -6.86              | 5.95         | 28.80          | -22.85                  |
| ~,           | 5755       | 151     | AVG      | 106T  | 12.92 | 12.42    | 12.93 | 30.00                    | -17.07             | -6.86              | 6.07         | -              | -                       |
|              | 5795       | 159     | AVG      | 106T  | 12.52 | 12.53    | 12.74 | 30.00                    | -17.26             | -6.95              | 5.79         | -              | -                       |

Table 7-13. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| 1 <sub>Z</sub> | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|----------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|--------------------|--------------|----------------|-------------------------|
| ₹ £            |            |         |          |       | 53    | 56       | 60    | [dBm]                    | Margin [dB]        | [ubij              | [ubiii]      | Lillin [GBIII] | wargin [ub]             |
| <u> 5 5</u>    | 5210       | 42      | AVG      | 106T  | 11.25 | 11.43    | 11.05 | 23.98                    | -12.55             | -6.45              | 4.98         | 22.39          | -17.41                  |
| ∞ <u>≥</u>     | 5290       | 58      | AVG      | 106T  | 11.98 | 11.31    | 11.86 | 23.47                    | -11.49             | -6.55              | 5.43         | 29.47          | -24.04                  |
| 무입             | 5530       | 106     | AVG      | 106T  | 11.20 | 11.46    | 11.20 | 22.80                    | -11.34             | -6.99              | 4.47         | 28.80          | -24.33                  |
| Ba G           | 5610       | 122     | AVG      | 106T  | 11.21 | 11.61    | 11.35 | 22.80                    | -11.19             | -6.99              | 4.62         | 28.80          | -24.18                  |
| 5              | 5690       | 138     | AVG      | 106T  | 11.44 | 11.80    | 11.63 | 22.80                    | -11.00             | -6.86              | 4.94         | 28.80          | -23.86                  |
|                | 5775       | 155     | AVG      | 106T  | 11.63 | 11.96    | 11.82 | 30.00                    | -18.04             | -6.86              | 5.10         | -              | -                       |

Table 7-14. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg E4 of 20E               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 51 of 265               |



### SISO Antenna-1 Conducted Output Power Measurements (242 Tones)

|                   | Freq [MHz] | Channel | Detector | Tones | RU Index | Conducted<br>Power Limit<br>[dBm] | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p.<br>[dBm] | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.<br>Margin [dB] |
|-------------------|------------|---------|----------|-------|----------|-----------------------------------|--------------------|--------------------|-----------------------|-----------------------------|-------------------------|
|                   |            |         |          |       | 61       | [abiii]                           | Margin [dB]        |                    |                       |                             |                         |
| N                 | 5180       | 36      | AVG      | 242T  | 15.63    | 23.98                             | -8.35              | -6.45              | 9.18                  | 22.39                       | -13.21                  |
| 王<br>三            | 5200       | 40      | AVG      | 242T  | 15.54    | 23.98                             | -8.44              | -6.69              | 8.85                  | 22.39                       | -13.54                  |
| <b>₹</b>          | 5240       | 48      | AVG      | 242T  | 15.50    | 23.98                             | -8.48              | -6.45              | 9.05                  | 22.39                       | -13.34                  |
| <b>O</b>          | 5260       | 52      | AVG      | 242T  | 15.20    | 23.47                             | -8.27              | -6.45              | 8.75                  | 29.47                       | -20.72                  |
| <u>S</u> <u>S</u> | 5280       | 56      | AVG      | 242T  | 15.29    | 23.47                             | -8.18              | -6.61              | 8.68                  | 29.47                       | -20.79                  |
| z<br>pc           | 5320       | 64      | AVG      | 242T  | 15.26    | 23.47                             | -8.21              | -6.55              | 8.71                  | 29.47                       | -20.76                  |
| 一方 一方             | 5500       | 100     | AVG      | 242T  | 15.22    | 22.80                             | -7.58              | -6.99              | 8.23                  | 28.80                       | -20.57                  |
| (D) m             | 5600       | 120     | AVG      | 242T  | 15.48    | 22.80                             | -7.32              | -6.99              | 8.49                  | 28.80                       | -20.31                  |
| 5                 | 5720       | 144     | AVG      | 242T  | 15.50    | 22.80                             | -7.30              | -6.99              | 8.51                  | 28.80                       | -20.29                  |
|                   | 5745       | 149     | AVG      | 242T  | 15.76    | 30.00                             | -14.24             | -6.99              | 8.77                  | -                           | -                       |
|                   | 5785       | 157     | AVG      | 242T  | 15.96    | 30.00                             | -14.04             | -6.99              | 8.97                  | -                           | -                       |
|                   | 5825       | 165     | AVG      | 242T  | 15.82    | 30.00                             | -14.18             | -6.95              | 8.87                  | -                           | -                       |

Table 7-15. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| N |          | Freq [MHz] | Channel | Detector | Tones | RU I  | ndex  | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.<br>Margin [dB] |
|---|----------|------------|---------|----------|-------|-------|-------|--------------------------|--------------------|-----------|--------------|-----------------------------|-------------------------|
| ÷ | (        |            |         |          |       | 61    | 62    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Limit [abin]                | wargin [ub]             |
| ₹ | t        | 5190       | 38      | AVG      | 242T  | 13.16 | 13.42 | 23.98                    | -10.56             | -6.69     | 6.73         | 22.39                       | -15.66                  |
| 5 | <u>0</u> | 5230       | 46      | AVG      | 242T  | 13.37 | 13.31 | 23.98                    | -10.61             | -6.45     | 6.92         | 22.39                       | -15.47                  |
| 4 | . ≅      | 5270       | 54      | AVG      | 242T  | 13.32 | 13.35 | 23.47                    | -10.12             | -6.61     | 6.74         | 29.47                       | -22.73                  |
|   | Ó        | 5310       | 62      | AVG      | 242T  | 13.35 | 13.25 | 23.47                    | -10.12             | -6.55     | 6.80         | 29.47                       | -22.67                  |
| 7 | ⊑        | 5510       | 102     | AVG      | 242T  | 13.45 | 13.72 | 22.80                    | -9.08              | -6.99     | 6.73         | 28.80                       | -22.07                  |
| 六 | Sa       | 5590       | 118     | AVG      | 242T  | 13.64 | 13.62 | 22.80                    | -9.16              | -6.99     | 6.65         | 28.80                       | -22.15                  |
| 2 | Ш        | 5710       | 142     | AVG      | 242T  | 13.97 | 13.96 | 22.80                    | -8.83              | -6.86     | 7.11         | 28.80                       | -21.69                  |
|   |          | 5755       | 151     | AVG      | 242T  | 13.91 | 13.99 | 30.00                    | -16.01             | -6.86     | 7.13         | -                           | -                       |
|   |          | 5795       | 159     | AVG      | 242T  | 13.73 | 13.94 | 30.00                    | -16.06             | -6.95     | 6.99         | -                           | -                       |

Table 7-16. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| z                 | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|-------------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|--------------------|--------------|----------------|-------------------------|
| ₹ <del>(</del> :  |            |         |          |       | 61    | 62       | 64    | [dBm]                    | Margin [dB]        | [ubij              | [ubiii]      | Lillin [GBIII] | wargin [ub]             |
| 5 5               | 5210       | 42      | AVG      | 242T  | 12.51 | 12.67    | 12.32 | 23.98                    | -11.31             | -6.45              | 6.22         | 22.39          | -16.17                  |
| <u>∞</u> <u>≥</u> | 5290       | 58      | AVG      | 242T  | 12.17 | 12.39    | 12.15 | 23.47                    | -11.08             | -6.55              | 5.84         | 29.47          | -23.63                  |
| 무일                | 5530       | 106     | AVG      | 242T  | 12.41 | 12.56    | 12.49 | 22.80                    | -10.24             | -6.99              | 5.57         | 28.80          | -23.23                  |
| 15 B              | 5610       | 122     | AVG      | 242T  | 12.38 | 12.73    | 12.64 | 22.80                    | -10.07             | -6.99              | 5.74         | 28.80          | -23.06                  |
| , S               | 5690       | 138     | AVG      | 242T  | 12.74 | 12.92    | 12.73 | 22.80                    | -9.88              | -6.86              | 6.06         | 28.80          | -22.74                  |
|                   | 5775       | 155     | AVG      | 242T  | 12.86 | 12.97    | 12.83 | 30.00                    | -17.03             | -6.86              | 6.11         | -              | -                       |

Table 7-17. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dago E2 of 26E               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 52 of 265               |



### SISO Antenna-1 Conducted Output Power Measurements (484 Tones)

| Z           | Freq [MHz] | Channel | Detector | Tones | RU Index | Conducted<br>Power Limit<br>[dBm] | Conducted<br>Power<br>Margin [dB] | Ant. Gain<br>[dBi] | Max e.i.r.p.<br>[dBm] | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.<br>Margin [dB] |
|-------------|------------|---------|----------|-------|----------|-----------------------------------|-----------------------------------|--------------------|-----------------------|-----------------------------|-------------------------|
| <b>王</b> '三 | 5190       | 38      | AVG      | 484T  | 13.26    | 23.98                             | -10.72                            | -6.69              | 6.57                  | 22.39                       | -15.82                  |
| <b>₹</b>    | 5230       | 46      | AVG      | 484T  | 13.18    | 23.98                             | -10.80                            | -6.45              | 6.73                  | 22.39                       | -15.66                  |
| 46<br>× i × | 5270       | 54      | AVG      | 484T  | 13.20    | 23.47                             | -10.27                            | -6.61              | 6.59                  | 29.47                       | -22.88                  |
| <u>``</u>   | 5310       | 62      | AVG      | 484T  | 13.88    | 23.47                             | -9.59                             | -6.55              | 7.33                  | 29.47                       | -22.14                  |
|             | 5510       | 102     | AVG      | 484T  | 13.40    | 22.80                             | -9.40                             | -6.99              | 6.41                  | 28.80                       | -22.39                  |
| Ŧ ē         | 5590       | 118     | AVG      | 484T  | 13.39    | 22.80                             | -9.41                             | -6.99              | 6.40                  | 28.80                       | -22.40                  |
|             | 5710       | 142     | AVG      | 484T  | 13.70    | 22.80                             | -9.10                             | -6.86              | 6.84                  | 28.80                       | -21.96                  |
| <u> 7</u>   | 5755       | 151     | AVG      | 484T  | 13.75    | 30.00                             | -16.25                            | -6.86              | 6.89                  | -                           | -                       |
|             | 5795       | 159     | AVG      | 484T  | 13.61    | 30.00                             | -16.39                            | -6.95              | 6.66                  | -                           | -                       |

Table 7-18. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

| N               | Freq [MHz] | Channel | Detector | Tones | RU I  | ndex  | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain<br>[dBi] | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|-----------------|------------|---------|----------|-------|-------|-------|--------------------------|--------------------|--------------------|--------------|---------------|-------------------------|
| ₹ £             |            |         |          |       | 65    | 66    | [dBm]                    | Margin [dB]        | [dbi]              | [GDIII]      | Liniit [GBin] | war giri [ub]           |
| 0.0             | 5210       | 42      | AVG      | 484T  | 12.27 | 12.12 | 23.98                    | -11.71             | -6.45              | 5.82         | 22.39         | -16.57                  |
| 8 \( \bar{2} \) | 5290       | 58      | AVG      | 484T  | 12.94 | 12.88 | 23.47                    | -10.53             | -6.55              | 6.39         | 29.47         | -23.08                  |
| 무               | 5530       | 106     | AVG      | 484T  | 12.28 | 12.41 | 22.80                    | -10.39             | -6.99              | 5.42         | 28.80         | -23.38                  |
| Ba G            | 5610       | 122     | AVG      | 484T  | 12.31 | 12.53 | 22.80                    | -10.27             | -6.99              | 5.54         | 28.80         | -23.26                  |
| 5 _             | 5690       | 138     | AVG      | 484T  | 12.60 | 12.69 | 22.80                    | -10.11             | -6.86              | 5.83         | 28.80         | -22.97                  |
|                 | 5775       | 155     | AVG      | 484T  | 12.57 | 12.73 | 30.00                    | -17.27             | -6.86              | 5.87         | -             | -                       |

Table 7-19. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

### SISO Antenna-1 Conducted Output Power Measurements (996 Tones)

| Hz<br>h)          | Freq [MHz] | Channel | Detector | Tones | RU Index | Conducted<br>Power Limit<br>[dBm] | Conducted<br>Power<br>Margin [dB] | Ant. Gain<br>[dBi] | Max e.i.r.p.<br>[dBm] | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.<br>Margin [dB] |
|-------------------|------------|---------|----------|-------|----------|-----------------------------------|-----------------------------------|--------------------|-----------------------|-----------------------------|-------------------------|
| OM<br>id t        | 5210       | 42      | AVG      | 996T  | 12.15    | 23.98                             | -11.83                            | -6.45              | 5.70                  | 22.39                       | -16.69                  |
| <u>®</u> <u>≥</u> | 5290       | 58      | AVG      | 996T  | 12.98    | 23.47                             | -10.49                            | -6.55              | 6.43                  | 29.47                       | -23.04                  |
| 42                | 5530       | 106     | AVG      | 996T  | 12.18    | 22.80                             | -10.62                            | -6.99              | 5.19                  | 28.80                       | -23.61                  |
| G G               | 5610       | 122     | AVG      | 996T  | 12.20    | 22.80                             | -10.60                            | -6.99              | 5.21                  | 28.80                       | -23.59                  |
| 5                 | 5690       | 138     | AVG      | 996T  | 12.50    | 22.80                             | -10.30                            | -6.86              | 5.64                  | 28.80                       | -23.16                  |
|                   | 5775       | 155     | AVG      | 996T  | 12.61    | 30.00                             | -17.39                            | -6.86              | 5.75                  | -                           | -                       |

Table 7-20. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dags F2 of 20F               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 53 of 265               |



### SISO Antenna-2 Conducted Output Power Measurements (26 Tones)

|              | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|--------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|---------------|-------------------------|
|              |            |         |          |       | 0     | 4        | 8     | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Liniit [abin] | wargiii [GB]            |
| N _          | 5180       | 36      | AVG      | 26T   | 10.61 | 10.97    | 10.94 | 23.98                    | -13.01             | -6.45     | 4.52         | 22.39         | -17.87                  |
| I C          | 5200       | 40      | AVG      | 26T   | 10.59 | 10.85    | 10.72 | 23.98                    | -13.13             | -6.69     | 4.16         | 22.39         | -18.23                  |
| きま           | 5240       | 48      | AVG      | 26T   | 10.59 | 10.97    | 10.75 | 23.98                    | -13.01             | -6.45     | 4.52         | 22.39         | -17.87                  |
| 0 .=         | 5260       | 52      | AVG      | 26T   | 10.72 | 10.87    | 10.61 | 23.47                    | -12.60             | -6.45     | 4.42         | 29.47         | -25.05                  |
| <u>≤</u> (2) | 5280       | 56      | AVG      | 26T   | 10.66 | 10.98    | 10.71 | 23.47                    | -12.49             | -6.61     | 4.37         | 29.47         | -25.10                  |
| N S          | 5320       | 64      | AVG      | 26T   | 10.93 | 10.96    | 10.78 | 23.47                    | -12.51             | -6.55     | 4.41         | 29.47         | -25.06                  |
| 一声           | 5500       | 100     | AVG      | 26T   | 10.47 | 10.61    | 10.42 | 22.80                    | -12.19             | -6.99     | 3.62         | 28.80         | -25.18                  |
| 5G<br>B      | 5600       | 120     | AVG      | 26T   | 10.92 | 10.93    | 10.49 | 22.80                    | -11.87             | -6.99     | 3.94         | 28.80         | -24.86                  |
| 5            | 5720       | 144     | AVG      | 26T   | 10.91 | 10.97    | 10.63 | 22.80                    | -11.83             | -6.99     | 3.98         | 28.80         | -24.82                  |
|              | 5745       | 149     | AVG      | 26T   | 10.53 | 10.55    | 10.07 | 30.00                    | -19.45             | -6.99     | 3.56         | 1             | -                       |
|              | 5785       | 157     | AVG      | 26T   | 10.40 | 10.47    | 10.25 | 30.00                    | -19.53             | -6.99     | 3.48         | ī             | -                       |
|              | 5825       | 165     | AVG      | 26T   | 10.25 | 10.46    | 10.05 | 30.00                    | -19.54             | -6.95     | 3.51         | -             | -                       |

Table 7-21. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| Z              | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|----------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|---------------|-------------------------|
| ΪĒ             |            |         |          |       | 0     | 8        | 17    | [dBm]                    | Margin [dB]        | [GDI]     | [GDIII]      | Liniit [abin] | war giri [ab]           |
| ₹<br>₹         | 5190       | 38      | AVG      | 26T   | 10.46 | 10.54    | 10.40 | 23.98                    | -13.44             | -6.69     | 3.85         | 22.39         | -18.54                  |
| <u>e</u>       | 5230       | 46      | AVG      | 26T   | 10.47 | 10.57    | 10.45 | 23.98                    | -13.41             | -6.45     | 4.12         | 22.39         | -18.27                  |
| 4 ≥            | 5270       | 54      | AVG      | 26T   | 10.40 | 10.30    | 10.37 | 23.47                    | -13.07             | -6.61     | 3.79         | 29.47         | -25.68                  |
| ~ <del>6</del> | 5310       | 62      | AVG      | 26T   | 10.53 | 10.44    | 10.37 | 23.47                    | -12.94             | -6.55     | 3.98         | 29.47         | -25.49                  |
| ₽ ⊆            | 5510       | 102     | AVG      | 26T   | 10.33 | 10.29    | 10.31 | 22.80                    | -12.47             | -6.99     | 3.34         | 28.80         | -25.46                  |
| 二              | 5590       | 118     | AVG      | 26T   | 10.41 | 10.40    | 10.25 | 22.80                    | -12.39             | -6.99     | 3.42         | 28.80         | -25.38                  |
| 5G<br>B        | 5710       | 142     | AVG      | 26T   | 10.40 | 10.18    | 10.17 | 22.80                    | -12.40             | -6.86     | 3.54         | 28.80         | -25.26                  |
| 4,             | 5755       | 151     | AVG      | 26T   | 10.94 | 10.80    | 10.87 | 30.00                    | -19.06             | -6.86     | 4.08         | -             | -                       |
|                | 5795       | 159     | AVG      | 26T   | 10.39 | 10.85    | 10.21 | 30.00                    | -19.15             | -6.95     | 3.90         | ·             | -                       |

Table 7-22. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| N                 | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|-------------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|----------------|-------------------------|
| 를 를               |            |         |          |       | 0     | 18       | 36    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Lillik [GBIII] | iviai giii [ub]         |
| 5 B               | 5210       | 42      | AVG      | 26T   | 10.22 | 10.85    | 10.11 | 23.98                    | -13.13             | -6.45     | 4.40         | 22.39          | -17.99                  |
| <u>⊗</u> <u>≅</u> | 5290       | 58      | AVG      | 26T   | 10.02 | 10.65    | 10.90 | 23.47                    | -12.57             | -6.55     | 4.35         | 29.47          | -25.12                  |
| 무입                | 5530       | 106     | AVG      | 26T   | 10.08 | 10.75    | 10.87 | 22.80                    | -11.93             | -6.99     | 3.88         | 28.80          | -24.92                  |
| Ba G              | 5610       | 122     | AVG      | 26T   | 10.03 | 10.52    | 10.78 | 22.80                    | -12.02             | -6.99     | 3.79         | 28.80          | -25.01                  |
| 5                 | 5690       | 138     | AVG      | 26T   | 10.11 | 10.52    | 10.72 | 22.80                    | -12.08             | -6.86     | 3.86         | 28.80          | -24.94                  |
|                   | 5775       | 155     | AVG      | 26T   | 10.64 | 10.27    | 10.39 | 30.00                    | -19.36             | -6.86     | 3.78         | -              | -                       |

Table 7-23. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| FCC ID: A3LSMG986U  | FOTEST (HIGHESTERS LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|-------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                         | EUT Type:                          | Page 54 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                 | Portable Handset                   | Page 34 01 203               |



# SISO Antenna-2 Conducted Output Power Measurements (52 Tones)

|            | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|--------------|-------------------------|
|            |            |         |          |       | 37    | 39       | 40    | [dBm]                    | Margin [dB]        | [GDI]     | [GDIII]      | Limit [abin] | war girr [ub]           |
| N _        | 5180       | 36      | AVG      | 52T   | 12.80 | 12.98    | 12.90 | 23.98                    | -11.00             | -6.45     | 6.53         | 22.39        | -15.86                  |
| I C        | 5200       | 40      | AVG      | 52T   | 12.87 | 12.94    | 12.92 | 23.98                    | -11.04             | -6.69     | 6.25         | 22.39        | -16.14                  |
| <b>5</b> # | 5240       | 48      | AVG      | 52T   | 12.94 | 12.90    | 12.97 | 23.98                    | -11.01             | -6.45     | 6.52         | 22.39        | -15.87                  |
|            | 5260       | 52      | AVG      | 52T   | 12.04 | 12.17    | 12.02 | 23.47                    | -11.30             | -6.45     | 5.72         | 29.47        | -23.75                  |
| <u> </u>   | 5280       | 56      | AVG      | 52T   | 12.15 | 12.33    | 12.25 | 23.47                    | -11.14             | -6.61     | 5.72         | 29.47        | -23.75                  |
| N S        | 5320       | 64      | AVG      | 52T   | 12.34 | 12.48    | 12.33 | 23.47                    | -10.99             | -6.55     | 5.93         | 29.47        | -23.54                  |
| 声 工        | 5500       | 100     | AVG      | 52T   | 12.21 | 12.40    | 12.20 | 22.80                    | -10.40             | -6.99     | 5.41         | 28.80        | -23.39                  |
| C m        | 5600       | 120     | AVG      | 52T   | 12.70 | 12.65    | 12.46 | 22.80                    | -10.10             | -6.99     | 5.71         | 28.80        | -23.09                  |
| 5          | 5720       | 144     | AVG      | 52T   | 12.77 | 12.96    | 12.79 | 22.80                    | -9.84              | -6.99     | 5.97         | 28.80        | -22.83                  |
|            | 5745       | 149     | AVG      | 52T   | 12.48 | 12.38    | 12.10 | 30.00                    | -17.52             | -6.99     | 5.49         | -            | -                       |
|            | 5785       | 157     | AVG      | 52T   | 12.46 | 12.58    | 12.26 | 30.00                    | -17.42             | -6.99     | 5.59         | -            | -                       |
|            | 5825       | 165     | AVG      | 52T   | 12.09 | 12.34    | 12.04 | 30.00                    | -17.66             | -6.95     | 5.39         | -            | -                       |

Table 7-24. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| N  | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|--|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|----------------|-------------------------|
| ÷ 🖘  |            |         |          |       | 37    | 40       | 44    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Liniii [abiii] | wargin [ub]             |
| ₹  | 5190       | 38      | AVG      | 52T   | 11.56 | 11.57    | 11.62 | 23.98                    | -12.36             | -6.69     | 4.93         | 22.39          | -17.46                  |
| 등 호  | 5230       | 46      | AVG      | 52T   | 11.61 | 11.48    | 11.61 | 23.98                    | -12.37             | -6.45     | 5.16         | 22.39          | -17.23                  |
| <u>4</u> ≦   | 5270       | 54      | AVG      | 52T   | 11.50 | 11.44    | 11.43 | 23.47                    | -11.97             | -6.61     | 4.89         | 29.47          | -24.58                  |
| <u></u> 6  | 5310       | 62      | AVG      | 52T   | 11.62 | 11.52    | 11.43 | 23.47                    | -11.85             | -6.55     | 5.07         | 29.47          | -24.40                  |
| 우호   | 5510       | 102     | AVG      | 52T   | 11.56 | 11.22    | 11.62 | 22.80                    | -11.18             | -6.99     | 4.63         | 28.80          | -24.17                  |
| さい こうしゅう こうしゅう こうしゅう こうしゅう こうしゅう こうしゅう こうしゅう しゅうしゅ しゅうしゅう こうしゅう しゅうしゅう しゅう | 5590       | 118     | AVG      | 52T   | 11.59 | 11.28    | 11.39 | 22.80                    | -11.21             | -6.99     | 4.60         | 28.80          | -24.20                  |
| 5G<br>B  | 5710       | 142     | AVG      | 52T   | 11.58 | 11.29    | 11.45 | 22.80                    | -11.22             | -6.86     | 4.72         | 28.80          | -24.08                  |
| 4,   | 5755       | 151     | AVG      | 52T   | 11.70 | 11.68    | 11.84 | 30.00                    | -18.16             | -6.86     | 4.98         | -              | -                       |
|  | 5795       | 159     | AVG      | 52T   | 11.38 | 11.65    | 11.30 | 30.00                    | -18.35             | -6.95     | 4.70         | -              | -                       |

Table 7-25. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| N                 | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.    |
|-------------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|--------------|-------------|
| ₹ £               |            |         |          |       | 37    | 44       | 52    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Limit [ubin] | wargin [ub] |
| 5 B               | 5210       | 42      | AVG      | 52T   | 10.30 | 10.67    | 10.30 | 23.98                    | -13.31             | -6.45     | 4.22         | 22.39        | -18.17      |
| <u>⊗</u> <u>≅</u> | 5290       | 58      | AVG      | 52T   | 10.14 | 10.55    | 10.10 | 23.47                    | -12.92             | -6.55     | 4.00         | 29.47        | -25.47      |
| 무입                | 5530       | 106     | AVG      | 52T   | 10.17 | 10.25    | 10.06 | 22.80                    | -12.55             | -6.99     | 3.26         | 28.80        | -25.54      |
| B G               | 5610       | 122     | AVG      | 52T   | 10.14 | 10.26    | 10.97 | 22.80                    | -11.83             | -6.99     | 3.98         | 28.80        | -24.82      |
| 5                 | 5690       | 138     | AVG      | 52T   | 10.29 | 10.34    | 10.96 | 22.80                    | -11.84             | -6.86     | 4.10         | 28.80        | -24.70      |
|                   | 5775       | 155     | AVG      | 52T   | 10.83 | 10.98    | 10.60 | 30.00                    | -19.02             | -6.86     | 4.12         | -            | -           |

Table 7-26. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo EE of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 55 of 265               |



### SISO Antenna-2 Conducted Output Power Measurements (106 Tones)

|             | Freq [MHz] | Channel | Detector | Tones | RU I  | ndex  | Conducted Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|-------------|------------|---------|----------|-------|-------|-------|-----------------------|--------------------|-----------|--------------|---------------|-------------------------|
|             |            |         |          |       | 53    | 54    | [dBm]                 | Margin [dB]        | [GDI]     | [GDIII]      | Liniit [abin] | wargin [ub]             |
| N _         | 5180       | 36      | AVG      | 106T  | 14.90 | 14.95 | 23.98                 | -9.03              | -6.45     | 8.50         | 22.39         | -13.89                  |
| I<br>I<br>I | 5200       | 40      | AVG      | 106T  | 14.03 | 14.11 | 23.98                 | -9.87              | -6.69     | 7.42         | 22.39         | -14.97                  |
| ≥ ∺         | 5240       | 48      | AVG      | 106T  | 14.13 | 14.14 | 23.98                 | -9.84              | -6.45     | 7.69         | 22.39         | -14.70                  |
|             | 5260       | 52      | AVG      | 106T  | 14.09 | 14.12 | 23.47                 | -9.35              | -6.45     | 7.67         | 29.47         | -21.80                  |
| <u>≥</u>    | 5280       | 56      | AVG      | 106T  | 14.21 | 14.17 | 23.47                 | -9.26              | -6.61     | 7.60         | 29.47         | -21.87                  |
| N S         | 5320       | 64      | AVG      | 106T  | 14.36 | 14.32 | 23.47                 | -9.11              | -6.55     | 7.81         | 29.47         | -21.66                  |
| 南 工         | 5500       | 100     | AVG      | 106T  | 14.35 | 14.29 | 22.80                 | -8.45              | -6.99     | 7.36         | 28.80         | -21.44                  |
| C M         | 5600       | 120     | AVG      | 106T  | 14.72 | 14.52 | 22.80                 | -8.08              | -6.99     | 7.73         | 28.80         | -21.07                  |
| 5           | 5720       | 144     | AVG      | 106T  | 14.80 | 14.68 | 22.80                 | -8.00              | -6.99     | 7.81         | 28.80         | -20.99                  |
|             | 5745       | 149     | AVG      | 106T  | 14.13 | 14.06 | 30.00                 | -15.87             | -6.99     | 7.14         | ī             | -                       |
|             | 5785       | 157     | AVG      | 106T  | 14.17 | 14.08 | 30.00                 | -15.83             | -6.99     | 7.18         | -             | -                       |
|             | 5825       | 165     | AVG      | 106T  | 14.84 | 14.78 | 30.00                 | -15.16             | -6.95     | 7.89         | -             | -                       |

Table 7-27. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| Z        | Freq [M | lz] Channe | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|----------|---------|------------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|--------------|-------------------------|
| <b>1</b> | _       |            |          |       | 53    | 54       | 56    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Limit [ubin] | wargin [ub]             |
| ₹ ;      | 5190    | 38         | AVG      | 106T  | 12.93 | 12.61    | 12.81 | 23.98                    | -11.05             | -6.69     | 6.24         | 22.39        | -16.15                  |
|          | 5230    | 46         | AVG      | 106T  | 12.90 | 12.54    | 12.85 | 23.98                    | -11.08             | -6.45     | 6.45         | 22.39        | -15.94                  |
| 4        | 5270    | 54         | AVG      | 106T  | 12.78 | 12.32    | 12.79 | 23.47                    | -10.68             | -6.61     | 6.18         | 29.47        | -23.29                  |
|          | 5310    | 62         | AVG      | 106T  | 12.94 | 12.41    | 12.83 | 23.47                    | -10.53             | -6.55     | 6.39         | 29.47        | -23.08                  |
| 7        | 5510    | 102        | AVG      | 106T  | 12.64 | 12.29    | 12.80 | 22.80                    | -10.00             | -6.99     | 5.81         | 28.80        | -22.99                  |
| 5        | 5590    | 118        | AVG      | 106T  | 12.72 | 12.23    | 12.64 | 22.80                    | -10.08             | -6.99     | 5.73         | 28.80        | -23.07                  |
| اي د     | 5710    | 142        | AVG      | 106T  | 12.74 | 12.16    | 12.56 | 22.80                    | -10.06             | -6.86     | 5.88         | 28.80        | -22.92                  |
| ~,       | 5755    | 151        | AVG      | 106T  | 12.37 | 12.85    | 12.23 | 30.00                    | -17.15             | -6.86     | 5.99         | -            | -                       |
|          | 5795    | 159        | AVG      | 106T  | 12.91 | 12.69    | 12.63 | 30.00                    | -17.09             | -6.95     | 5.96         | -            | -                       |

Table 7-28. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| Z                 | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.    |
|-------------------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|-----------------------------|-------------|
| 1 I               |            |         |          |       | 53    | 56       | 60    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Lillik [GBIII]              | wargin [ub] |
| ig S              | 5210       | 42      | AVG      | 106T  | 11.46 | 11.69    | 11.41 | 23.98                    | -12.29             | -6.45     | 5.24         | 22.39                       | -17.15      |
| <u>⊗</u> <u>≅</u> | 5290       | 58      | AVG      | 106T  | 11.18 | 11.52    | 11.17 | 23.47                    | -11.95             | -6.55     | 4.97         | 29.47                       | -24.50      |
| 무입                | 5530       | 106     | AVG      | 106T  | 11.33 | 11.44    | 11.27 | 22.80                    | -11.36             | -6.99     | 4.45         | 28.80                       | -24.35      |
| Ba G              | 5610       | 122     | AVG      | 106T  | 11.25 | 11.42    | 11.11 | 22.80                    | -11.38             | -6.99     | 4.43         | 28.80                       | -24.37      |
| 5 _               | 5690       | 138     | AVG      | 106T  | 11.39 | 11.39    | 11.14 | 22.80                    | -11.41             | -6.86     | 4.53         | 28.80                       | -24.27      |
|                   | 5775       | 155     | AVG      | 106T  | 11.77 | 11.95    | 11.61 | 30.00                    | -18.05             | -6.86     | 5.09         | 1                           | -           |

Table 7-29. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo E6 of 26E               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 56 of 265               |



### SISO Antenna-2 Conducted Output Power Measurements (242 Tones)

|              | Freq [MHz] | Channel | Detector | Tones | RU Index | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p.<br>[dBm] | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.<br>Margin [dB] |
|--------------|------------|---------|----------|-------|----------|--------------------------|--------------------|-----------|-----------------------|-----------------------------|-------------------------|
|              |            |         |          |       | 61       | [dBm]                    | Margin [dB]        |           |                       |                             |                         |
| N ~          | 5180       | 36      | AVG      | 242T  | 15.91    | 23.98                    | -8.07              | -6.45     | 9.46                  | 22.39                       | -12.93                  |
| 王<br>全       | 5200       | 40      | AVG      | 242T  | 15.94    | 23.98                    | -8.04              | -6.69     | 9.25                  | 22.39                       | -13.14                  |
| ĕ ₹          | 5240       | 48      | AVG      | 242T  | 15.93    | 23.98                    | -8.05              | -6.45     | 9.48                  | 22.39                       | -12.91                  |
| <b>-</b>     | 5260       | 52      | AVG      | 242T  | 15.11    | 23.47                    | -8.36              | -6.45     | 8.66                  | 29.47                       | -20.81                  |
| <u>≥</u> (2) | 5280       | 56      | AVG      | 242T  | 15.26    | 23.47                    | -8.21              | -6.61     | 8.65                  | 29.47                       | -20.82                  |
| N S          | 5320       | 64      | AVG      | 242T  | 15.35    | 23.47                    | -8.12              | -6.55     | 8.80                  | 29.47                       | -20.67                  |
| 西 王          | 5500       | 100     | AVG      | 242T  | 15.38    | 22.80                    | -7.42              | -6.99     | 8.39                  | 28.80                       | -20.41                  |
| (D) m        | 5600       | 120     | AVG      | 242T  | 15.57    | 22.80                    | -7.23              | -6.99     | 8.58                  | 28.80                       | -20.22                  |
| 5            | 5720       | 144     | AVG      | 242T  | 15.73    | 22.80                    | -7.07              | -6.99     | 8.74                  | 28.80                       | -20.06                  |
|              | 5745       | 149     | AVG      | 242T  | 15.90    | 30.00                    | -14.10             | -6.99     | 8.91                  | -                           | -                       |
|              | 5785       | 157     | AVG      | 242T  | 15.97    | 30.00                    | -14.03             | -6.99     | 8.98                  | -                           | -                       |
|              | 5825       | 165     | AVG      | 242T  | 15.79    | 30.00                    | -14.21             | -6.95     | 8.84                  | -                           | -                       |

Table 7-30. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| N       | Freq [MHz] | Channel | Detector | Tones | RU I  | ndex  | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|---------|------------|---------|----------|-------|-------|-------|--------------------------|--------------------|-----------|--------------|---------------|-------------------------|
| Ϊc      | •          |         |          |       | 61    | 62    | [dBm]                    | Margin [dB]        | [ubi]     | [ubiii]      | Liniit [ubin] | wargiii [ub]            |
| ₹ ₽     | 5190       | 38      | AVG      | 242T  | 13.25 | 13.29 | 23.98                    | -10.69             | -6.69     | 6.60         | 22.39         | -15.79                  |
| 면 전     | 5230       | 46      | AVG      | 242T  | 13.86 | 13.65 | 23.98                    | -10.12             | -6.45     | 7.41         | 22.39         | -14.98                  |
| 4 >     | 5270       | 54      | AVG      | 242T  | 13.80 | 13.70 | 23.47                    | -9.67              | -6.61     | 7.19         | 29.47         | -22.28                  |
|         | 5310       | 62      | AVG      | 242T  | 13.96 | 13.69 | 23.47                    | -9.51              | -6.55     | 7.41         | 29.47         | -22.06                  |
| 7       | 5510       | 102     | AVG      | 242T  | 13.67 | 13.97 | 22.80                    | -8.83              | -6.99     | 6.98         | 28.80         | -21.82                  |
| 注 ag    | 5590       | 118     | AVG      | 242T  | 13.65 | 13.59 | 22.80                    | -9.15              | -6.99     | 6.66         | 28.80         | -22.14                  |
| 5G<br>B | 5710       | 142     | AVG      | 242T  | 13.74 | 13.55 | 22.80                    | -9.06              | -6.86     | 6.88         | 28.80         | -21.92                  |
| 4,      | 5755       | 151     | AVG      | 242T  | 13.91 | 13.96 | 30.00                    | -16.04             | -6.86     | 7.10         | -             | -                       |
|         | 5795       | 159     | AVG      | 242T  | 13.79 | 13.82 | 30.00                    | -16.18             | -6.95     | 6.87         | -             | -                       |

Table 7-31. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| Z        | Freq [MHz] | Channel | Detector | Tones |       | RU Index |       | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.   | e.i.r.p.<br>Margin [dB] |
|----------|------------|---------|----------|-------|-------|----------|-------|--------------------------|--------------------|-----------|--------------|----------------|-------------------------|
| ₹ €      |            |         |          |       | 61    | 62       | 64    | [dBm]                    | Margin [dB]        | [ubij     | [ubiii]      | Lillik [GBIII] | iviai giii [ub]         |
| <b>₹</b> | 5210       | 42      | AVG      | 242T  | 12.62 | 12.94    | 12.62 | 23.98                    | -11.04             | -6.45     | 6.49         | 22.39          | -15.90                  |
| ∞ ≥      | 5290       | 58      | AVG      | 242T  | 12.51 | 12.76    | 12.47 | 23.47                    | -10.71             | -6.55     | 6.21         | 29.47          | -23.26                  |
| 모        | 5530       | 106     | AVG      | 242T  | 12.45 | 12.61    | 12.48 | 22.80                    | -10.19             | -6.99     | 5.62         | 28.80          | -23.18                  |
| 5G<br>Ba | 5610       | 122     | AVG      | 242T  | 12.42 | 12.55    | 12.36 | 22.80                    | -10.25             | -6.99     | 5.56         | 28.80          | -23.24                  |
| - 5      | 5690       | 138     | AVG      | 242T  | 12.39 | 12.42    | 12.40 | 22.80                    | -10.38             | -6.86     | 5.56         | 28.80          | -23.24                  |
|          | 5775       | 155     | AVG      | 242T  | 12.79 | 12.98    | 12.85 | 30.00                    | -17.02             | -6.86     | 6.12         | -              | -                       |

Table 7-32. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 57 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 57 of 265               |



### SISO Antenna-2 Conducted Output Power Measurements (484 Tones)

| N       | Freq [MHz]                                     | Channel | Detector | Tones | RU Index | Conducted Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p.<br>[dBm] | Max e.i.r.p. | e.i.r.p.<br>Margin [dB] |
|---------|--|---------|----------|-------|----------|-----------------------|--------------------|-----------|-----------------------|--------------|-------------------------|
| Î î     | <u>.                                      </u> |         |          |       | 65       | [dBm]                 | Margin [dB]        | [ubij     | [GDIII]               | Linia [abin] | margin [ab]             |
|         | 5190   | 38      | AVG      | 484T  | 13.05    | 23.98                 | -10.93             | -6.69     | 6.36                  | 22.39        | -16.03                  |
| ₩ i     |  | 46      | AVG      | 484T  | 13.68    | 23.98                 | -10.30             | -6.45     | 7.23                  | 22.39        | -15.16                  |
| 4 3     | F270   | 54      | AVG      | 484T  | 13.65    | 23.47                 | -9.82              | -6.61     | 7.04                  | 29.47        | -22.43                  |
|         | F210   | 62      | AVG      | 484T  | 13.44    | 23.47                 | -10.03             | -6.55     | 6.89                  | 29.47        | -22.58                  |
| 7       | 5510   | 102     | AVG      | 484T  | 13.51    | 22.80                 | -9.29              | -6.99     | 6.52                  | 28.80        | -22.28                  |
| 15 %    | 5590   | 118     | AVG      | 484T  | 13.32    | 22.80                 | -9.48              | -6.99     | 6.33                  | 28.80        | -22.47                  |
| 5G<br>B | 5710   | 142     | AVG      | 484T  | 13.42    | 22.80                 | -9.38              | -6.86     | 6.56                  | 28.80        | -22.24                  |
| ~       | 5755   | 151     | AVG      | 484T  | 13.95    | 30.00                 | -16.05             | -6.86     | 7.09                  | ī            | -                       |
|         | 5795   | 159     | AVG      | 484T  | 13.85    | 30.00                 | -16.15             | -6.95     | 6.90                  | -            | -                       |

Table 7-33. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

| N   | Freq [MHz] | Channel | Detector | Tones | RU II | ndex  | Conducted<br>Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|-----|------------|---------|----------|-------|-------|-------|--------------------------|--------------------|-----------|--------------|---------------|-------------------------|
| ₹ £ |            |         |          |       | 65    | 66    | [dBm]                    | Margin [dB]        | Lapil     | [ubiii]      | Liniit [ubin] | Iviai giii [ub]         |
| 그 호 | 5210       | 42      | AVG      | 484T  | 12.46 | 12.45 | 23.98                    | -11.52             | -6.45     | 6.01         | 22.39         | -16.38                  |
| ∞ ≥ | 5290       | 58      | AVG      | 484T  | 12.22 | 12.36 | 23.47                    | -11.11             | -6.55     | 5.81         | 29.47         | -23.66                  |
| 무입  | 5530       | 106     | AVG      | 484T  | 12.23 | 12.49 | 22.80                    | -10.31             | -6.99     | 5.50         | 28.80         | -23.30                  |
| E B | 5610       | 122     | AVG      | 484T  | 12.23 | 12.32 | 22.80                    | -10.48             | -6.99     | 5.33         | 28.80         | -23.47                  |
| 5   | 5690       | 138     | AVG      | 484T  | 12.33 | 12.45 | 22.80                    | -10.35             | -6.86     | 5.59         | 28.80         | -23.21                  |
|     | 5775       | 155     | AVG      | 484T  | 12.67 | 12.90 | 30.00                    | -17.10             | -6.86     | 6.04         | -             | -                       |

Table 7-34. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

### SISO Antenna-2 Conducted Output Power Measurements (996 Tones)

| N          | Freq [MHz] | Channel | Detector | Tones | RU Index | Conducted Power Limit | Conducted<br>Power | Ant. Gain | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|------------|------------|---------|----------|-------|----------|-----------------------|--------------------|-----------|--------------|---------------|-------------------------|
| ₹ £        |            |         |          |       | 67       | [dBm]                 | Margin [dB]        | [GDI]     | [ubiii]      | Liniat [abin] | margin [ab]             |
| id t       | 5210       | 42      | AVG      | 996T  | 12.29    | 23.98                 | -11.69             | -6.45     | 5.84         | 22.39         | -16.55                  |
| (8)<br>dwi | 5290       | 58      | AVG      | 996T  | 12.95    | 23.47                 | -10.52             | -6.55     | 6.40         | 29.47         | -23.07                  |
| I₽⊆        | 5530       | 106     | AVG      | 996T  | 12.76    | 22.80                 | -10.04             | -6.99     | 5.77         | 28.80         | -23.03                  |
| 5GI<br>Ba  | 5610       | 122     | AVG      | 996T  | 12.65    | 22.80                 | -10.15             | -6.99     | 5.66         | 28.80         | -23.14                  |
| 5          | 5690       | 138     | AVG      | 996T  | 12.66    | 22.80                 | -10.14             | -6.86     | 5.80         | 28.80         | -23.00                  |
|            | 5775       | 155     | AVG      | 996T  | 12.28    | 30.00                 | -17.72             | -6.86     | 5.42         | -             | -                       |

Table 7-35. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dags 50 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 58 of 265               |



### **MIMO Maximum Conducted Output Power Measurements (26 Tones)**

|      |            |         |          |       |      |      |       |      | RU Index |       |      |      |       | Conducted   | Conducted   | Directional | M      | M             | e.i.r.p.                |
|------|------------|---------|----------|-------|------|------|-------|------|----------|-------|------|------|-------|-------------|-------------|-------------|--------|---------------|-------------------------|
|      | Freq [MHz] | Channel | Detector | Tones |      | 0    |       |      | 4        |       |      | 8    |       | Power Limit | Power       | Ant. Gain   |        | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|      |            |         |          |       | ANT1 | ANT2 | MIMO  | ANT1 | ANT2     | MIMO  | ANT1 | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | Lapini | Liniit [GBin] | war giri [ub]           |
| ν _  | 5180       | 36      | AVG      | 26T   | 6.12 | 8.97 | 10.79 | 5.41 | 8.20     | 10.04 | 6.39 | 8.95 | 10.87 | 23.98       | -13.11      | -6.45       | 4.42   | 22.39         | -17.97                  |
|      | 5200       | 40      | AVG      | 26T   | 6.28 | 8.98 | 10.85 | 5.69 | 8.19     | 10.13 | 6.40 | 8.95 | 10.87 | 23.98       | -13.11      | -6.69       | 4.18   | 22.39         | -18.21                  |
| ≅≓   | 5240       | 48      | AVG      | 26T   | 5.64 | 7.98 | 9.98  | 5.98 | 8.27     | 10.28 | 6.66 | 8.97 | 10.98 | 23.98       | -13.00      | -6.45       | 4.53   | 22.39         | -17.86                  |
| ? .≅ | 5260       | 52      | AVG      | 26T   | 6.65 | 7.85 | 10.30 | 6.90 | 8.13     | 10.57 | 6.41 | 7.68 | 10.10 | 23.47       | -12.90      | -6.45       | 4.12   | 29.47         | -25.35                  |
| ≥ ב  | 5280       | 56      | AVG      | 26T   | 6.61 | 7.83 | 10.27 | 6.83 | 8.11     | 10.53 | 6.33 | 7.85 | 10.17 | 23.47       | -12.94      | -6.61       | 3.92   | 29.47         | -25.55                  |
| ے ا  | 5320       | 64      | AVG      | 26T   | 6.03 | 7.86 | 10.05 | 6.17 | 8.10     | 10.25 | 6.71 | 8.73 | 10.85 | 23.47       | -12.62      | -6.55       | 4.30   | 29.47         | -25.17                  |
| ă    | 5500       | 100     | AVG      | 26T   | 6.64 | 7.75 | 10.24 | 6.98 | 7.82     | 10.43 | 6.83 | 7.56 | 10.22 | 22.80       | -12.37      | -6.99       | 3.44   | 28.80         | -25.36                  |
| m    | 5600       | 120     | AVG      | 26T   | 7.06 | 7.79 | 10.45 | 7.10 | 7.91     | 10.53 | 6.64 | 7.46 | 10.08 | 22.80       | -12.27      | -6.99       | 3.54   | 28.80         | -25.26                  |
| , –  | 5720       | 144     | AVG      | 26T   | 6.87 | 7.74 | 10.34 | 7.15 | 7.86     | 10.53 | 6.99 | 7.41 | 10.22 | 22.80       | -12.27      | -6.99       | 3.54   | 28.80         | -25.26                  |
|      | 5745       | 149     | AVG      | 26T   | 6.06 | 8.41 | 10.40 | 6.44 | 8.76     | 10.76 | 6.27 | 8.19 | 10.35 | 30.00       | -19.24      | -6.99       | 3.77   | -             | -                       |
|      | 5785       | 157     | AVG      | 26T   | 6.89 | 8.38 | 10.71 | 6.43 | 7.83     | 10.20 | 7.19 | 8.12 | 10.69 | 30.00       | -19.29      | -6.99       | 3.72   | -             | -                       |
|      | 5825       | 165     | AVG      | 26T   | 7.44 | 8.35 | 10.93 | 6.76 | 7.77     | 10.30 | 7.38 | 8.02 | 10.72 | 30.00       | -19.07      | -6.95       | 3.98   | -             | -                       |

Table 7-36. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

|  |            |         |          |       |      |      |       |      | RU Index |       |      |      |       | Conducted   | Conducted   | Directional | Manualan | Manadan                     | -1            |
|--|------------|---------|----------|-------|------|------|-------|------|----------|-------|------|------|-------|-------------|-------------|-------------|----------|-----------------------------|---------------|
| N  | Freq [MHz] | Channel | Detector | Tones |      | 0    |       |      | 8        |       |      | 17   |       | Power Limit | Power       | Ant. Gain   |          | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.      |
| Ϋ́   |            |         |          |       | ANT1 | ANT2 | MIMO  | ANT1 | ANT2     | MIMO  | ANT1 | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiii]  | Liniit [ubin]               | war giri [ub] |
| ₹ ₽  | 5190       | 38      | AVG      | 26T   | 7.95 | 7.76 | 10.87 | 8.06 | 7.86     | 10.97 | 7.89 | 8.02 | 10.97 | 23.98       | -13.01      | -6.69       | 4.28     | 22.39                       | -18.11        |
| ᇊᆵ   | 5230       | 46      | AVG      | 26T   | 7.86 | 7.83 | 10.86 | 7.95 | 7.96     | 10.97 | 7.83 | 8.12 | 10.99 | 23.98       | -12.99      | -6.45       | 4.54     | 22.39                       | -17.85        |
| <u>4                                    </u> | 5270       | 54      | AVG      | 26T   | 7.67 | 6.74 | 10.24 | 7.41 | 6.60     | 10.03 | 7.30 | 6.71 | 10.03 | 23.47       | -13.23      | -6.61       | 3.63     | 29.47                       | -25.84        |
| ∵ ಕ  | 5310       | 62      | AVG      | 26T   | 7.37 | 6.83 | 10.12 | 8.18 | 7.58     | 10.90 | 8.12 | 7.41 | 10.79 | 23.47       | -12.57      | -6.55       | 4.35     | 29.47                       | -25.12        |
| ₽ ⊂  | 5510       | 102     | AVG      | 26T   | 7.93 | 6.80 | 10.41 | 7.82 | 6.71     | 10.31 | 7.79 | 6.87 | 10.36 | 22.80       | -12.39      | -6.99       | 3.42     | 28.80                       | -25.38        |
| <b>声</b> 窗                                   | 5590       | 118     | AVG      | 26T   | 7.48 | 6.67 | 10.10 | 8.19 | 7.45     | 10.85 | 8.20 | 7.68 | 10.96 | 22.80       | -11.84      | -6.99       | 3.97     | 28.80                       | -24.83        |
| БП   | 5710       | 142     | AVG      | 26T   | 7.91 | 6.73 | 10.37 | 8.00 | 6.36     | 10.27 | 8.22 | 6.69 | 10.53 | 22.80       | -12.27      | -6.86       | 3.67     | 28.80                       | -25.13        |
|  | 5755       | 151     | AVG      | 26T   | 7.33 | 7.52 | 10.44 | 7.26 | 7.57     | 10.43 | 7.53 | 7.41 | 10.48 | 30.00       | -19.52      | -6.86       | 3.62     | -                           | -             |
|  | 5795       | 159     | AVG      | 26T   | 7.91 | 8.01 | 10.97 | 7.49 | 7.53     | 10.52 | 7.94 | 7.69 | 10.83 | 30.00       | -19.03      | -6.95       | 4.02     | -                           | -             |

Table 7-37. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

|            |            |         |          |       |      |      |       |      | RU Index |       |      |      |       | Conducted   | Conducted   | Directional | Max e.i.r.p. |                | -1           |
|------------|------------|---------|----------|-------|------|------|-------|------|----------|-------|------|------|-------|-------------|-------------|-------------|--------------|----------------|--------------|
| N          | Freq [MHz] | Channel | Detector | Tones |      | 0    |       |      | 18       |       |      | 36   |       | Power Limit | Power       | Ant. Gain   |              | Limit [dBm]    | e.i.r.p.     |
| ਵੋਂ ≅      |            |         |          |       | ANT1 | ANT2 | MIMO  | ANT1 | ANT2     | MIMO  | ANT1 | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiiij      | Lillik [ubilij | war gin [ub] |
| 를 즐        | 5210       | 42      | AVG      | 26T   | 8.02 | 7.25 | 10.66 | 7.86 | 7.14     | 10.52 | 7.49 | 6.79 | 10.16 | 23.98       | -13.32      | -6.45       | 4.21         | 22.39          | -18.18       |
| <u>∞ ≥</u> | 5290       | 58      | AVG      | 26T   | 8.42 | 6.46 | 10.56 | 7.83 | 6.20     | 10.10 | 7.72 | 6.37 | 10.11 | 23.47       | -12.91      | -6.55       | 4.01         | 29.47          | -25.46       |
| 우유         | 5530       | 106     | AVG      | 26T   | 8.16 | 7.04 | 10.65 | 8.25 | 6.59     | 10.51 | 8.84 | 6.89 | 10.98 | 22.80       | -11.82      | -6.99       | 3.99         | 28.80          | -24.81       |
| 효율         | 5610       | 122     | AVG      | 26T   | 8.76 | 6.94 | 10.95 | 8.21 | 6.72     | 10.54 | 7.97 | 6.89 | 10.47 | 22.80       | -11.85      | -6.99       | 3.96         | 28.80          | -24.84       |
| - C        | 5690       | 138     | AVG      | 26T   | 8.11 | 7.16 | 10.67 | 7.48 | 6.67     | 10.10 | 8.19 | 7.14 | 10.71 | 22.80       | -12.09      | -6.86       | 3.85         | 28.80          | -24.95       |
|            | 5775       | 155     | AVG      | 26T   | 6.95 | 8.09 | 10.57 | 7.35 | 7.71     | 10.54 | 7.51 | 6.85 | 10.20 | 30.00       | -19.43      | -6.86       | 3.71         | -              | -            |

Table 7-38. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 59 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 59 01 265               |



### **MIMO Conducted Output Power Measurements (52 Tones)**

|            |            |         |          |       |       |      |       |       | RU Index |       |       |       |       | Conducted   | Conducted   | Directional |         | M             | -1                      |
|------------|------------|---------|----------|-------|-------|------|-------|-------|----------|-------|-------|-------|-------|-------------|-------------|-------------|---------|---------------|-------------------------|
|            | Freq [MHz] | Channel | Detector | Tones |       | 37   |       |       | 39       |       |       | 40    |       | Power Limit | Power       | Ant. Gain   |         | Max e.i.r.p.  | e.i.r.p.<br>Margin [dB] |
|            |            |         |          |       | ANT1  | ANT2 | MIMO  | ANT1  | ANT2     | MIMO  | ANT1  | ANT2  | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiiij | Liniit [GBin] | iviai giii [ub]         |
| <u> </u>   | 5180       | 36      | AVG      | 52T   | 9.52  | 9.48 | 12.51 | 9.91  | 9.67     | 12.80 | 9.77  | 9.49  | 12.64 | 23.98       | -11.18      | -6.45       | 6.35    | 22.39         | -16.04                  |
| ב ב        | 5200       | 40      | AVG      | 52T   | 9.69  | 9.49 | 12.60 | 9.95  | 9.75     | 12.86 | 9.71  | 9.59  | 12.66 | 23.98       | -11.12      | -6.69       | 6.17    | 22.39         | -16.22                  |
| ≅≓         | 5240       | 48      | AVG      | 52T   | 9.56  | 9.75 | 12.67 | 9.58  | 9.86     | 12.73 | 9.46  | 9.62  | 12.55 | 23.98       | -11.25      | -6.45       | 6.28    | 22.39         | -16.11                  |
| ₹          | 5260       | 52      | AVG      | 52T   | 10.36 | 9.53 | 12.98 | 9.49  | 8.70     | 12.12 | 10.26 | 9.48  | 12.90 | 23.47       | -10.49      | -6.45       | 6.53    | 29.47         | -22.94                  |
| ≥ د        | 5280       | 56      | AVG      | 52T   | 10.23 | 9.54 | 12.91 | 10.33 | 9.58     | 12.98 | 10.11 | 9.40  | 12.78 | 23.47       | -10.49      | -6.61       | 6.37    | 29.47         | -23.10                  |
| <b>,</b> 2 | 5320       | 64      | AVG      | 52T   | 10.04 | 9.34 | 12.71 | 10.06 | 9.46     | 12.78 | 9.82  | 9.22  | 12.54 | 23.47       | -10.69      | -6.55       | 6.23    | 29.47         | -23.24                  |
| <u></u>    | 5500       | 100     | AVG      | 52T   | 9.49  | 8.59 | 12.07 | 9.72  | 8.65     | 12.23 | 10.35 | 9.52  | 12.97 | 22.80       | -9.83       | -6.99       | 5.98    | 28.80         | -22.82                  |
| מה כ       | 5600       | 120     | AVG      | 52T   | 10.15 | 9.59 | 12.89 | 10.18 | 9.51     | 12.87 | 9.92  | 9.26  | 12.61 | 22.80       | -9.91       | -6.99       | 5.90    | 28.80         | -22.90                  |
| , —        | 5720       | 144     | AVG      | 52T   | 9.79  | 8.63 | 12.26 | 9.99  | 8.68     | 12.39 | 9.97  | 8.55  | 12.33 | 22.80       | -10.41      | -6.99       | 5.40    | 28.80         | -23.40                  |
|            | 5745       | 149     | AVG      | 52T   | 8.72  | 9.44 | 12.11 | 8.82  | 9.32     | 12.09 | 9.68  | 10.03 | 12.87 | 30.00       | -17.13      | -6.99       | 5.88    | -             | -                       |
|            | 5785       | 157     | AVG      | 52T   | 9.94  | 9.91 | 12.94 | 9.29  | 9.06     | 12.19 | 9.94  | 9.67  | 12.82 | 30.00       | -17.06      | -6.99       | 5.95    | -             | -                       |
|            | 5825       | 165     | AVG      | 52T   | 9.56  | 9.65 | 12.62 | 10.04 | 9.77     | 12.92 | 9.69  | 9.42  | 12.57 | 30.00       | -17.08      | -6.95       | 5.97    | -             | -                       |

Table 7-39. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

|  |            |         |          |       |      |      |       |      | RU Index |       |      |      |       | Conducted   | Conducted   | Directional | Manadan | Manadan                     | -1            |
|--|------------|---------|----------|-------|------|------|-------|------|----------|-------|------|------|-------|-------------|-------------|-------------|---------|-----------------------------|---------------|
| N  | Freq [MHz] | Channel | Detector | Tones |      | 37   |       |      | 40       |       |      | 44   |       | Power Limit | Power       | Ant. Gain   |         | Max e.i.r.p.<br>Limit [dBm] |               |
| ÷ =  |            |         |          |       | ANT1 | ANT2 | MIMO  | ANT1 | ANT2     | MIMO  | ANT1 | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiiij | Liniit [ubin]               | war girr [ub] |
| <b>ਵ</b> ⇒                                   | 5190       | 38      | AVG      | 52T   | 8.27 | 7.95 | 11.12 | 8.29 | 8.45     | 11.38 | 8.48 | 8.21 | 11.36 | 23.98       | -12.60      | -6.69       | 4.69    | 22.39                       | -17.70        |
| ᇊᅖ   | 5230       | 46      | AVG      | 52T   | 8.12 | 8.07 | 11.11 | 8.57 | 8.49     | 11.54 | 8.74 | 8.40 | 11.58 | 23.98       | -12.40      | -6.45       | 5.13    | 22.39                       | -17.26        |
| <u>4                                    </u> | 5270       | 54      | AVG      | 52T   | 9.08 | 7.87 | 11.53 | 9.65 | 8.12     | 11.96 | 9.56 | 8.17 | 11.93 | 23.47       | -11.51      | -6.61       | 5.35    | 29.47                       | -24.12        |
| ∵ ઇ  | 5310       | 62      | AVG      | 52T   | 8.66 | 7.93 | 11.32 | 9.17 | 8.11     | 11.68 | 9.01 | 8.06 | 11.57 | 23.47       | -11.79      | -6.55       | 5.13    | 29.47                       | -24.34        |
| 우호   | 5510       | 102     | AVG      | 52T   | 9.04 | 8.07 | 11.59 | 9.44 | 8.32     | 11.93 | 9.14 | 7.66 | 11.47 | 22.80       | -10.87      | -6.99       | 4.94    | 28.80                       | -23.86        |
| <b>声</b> 窗                                   | 5590       | 118     | AVG      | 52T   | 8.64 | 7.91 | 11.30 | 8.76 | 7.06     | 11.00 | 8.71 | 7.53 | 11.17 | 22.80       | -11.50      | -6.99       | 4.31    | 28.80                       | -24.49        |
| ЮП   | 5710       | 142     | AVG      | 52T   | 9.11 | 7.99 | 11.60 | 9.17 | 8.49     | 11.85 | 8.51 | 7.82 | 11.19 | 22.80       | -10.95      | -6.86       | 4.99    | 28.80                       | -23.81        |
| ٠,   | 5755       | 151     | AVG      | 52T   | 8.27 | 8.69 | 11.50 | 8.45 | 9.28     | 11.90 | 7.98 | 8.44 | 11.23 | 30.00       | -18.10      | -6.86       | 5.04    | -                           | -             |
|  | 5795       | 159     | AVG      | 52T   | 8.19 | 8.23 | 11.22 | 8.27 | 8.31     | 11.30 | 8.21 | 7.89 | 11.06 | 30.00       | -18.70      | -6.95       | 4.35    | -                           | -             |

Table 7-40. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

|            |            |         |          |       |      |      |       |      | RU Index |       |      |      |       | Conducted   | Conducted   | Directional | Max e.i.r.p. |                | e.i.r.p.      |
|------------|------------|---------|----------|-------|------|------|-------|------|----------|-------|------|------|-------|-------------|-------------|-------------|--------------|----------------|---------------|
| N          | Freq [MHz] | Channel | Detector | Tones |      | 37   |       |      | 44       |       |      | 52   |       | Power Limit | Power       | Ant. Gain   |              | Limit [dBm]    |               |
| <b>₹</b>   |            |         |          |       | ANT1 | ANT2 | MIMO  | ANT1 | ANT2     | MIMO  | ANT1 | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubilij      | Lillik [ubilij | war giri [ub] |
| 등등         | 5210       | 42      | AVG      | 52T   | 8.35 | 7.13 | 10.79 | 7.96 | 6.91     | 10.48 | 7.66 | 6.81 | 10.27 | 23.98       | -13.19      | -6.45       | 4.34         | 22.39          | -18.05        |
| ® <u>≥</u> | 5290       | 58      | AVG      | 52T   | 8.74 | 6.42 | 10.74 | 7.82 | 6.09     | 10.05 | 7.95 | 6.53 | 10.31 | 23.47       | -12.73      | -6.55       | 4.19         | 29.47          | -25.28        |
| 우          | 5530       | 106     | AVG      | 52T   | 8.42 | 7.09 | 10.82 | 8.26 | 6.45     | 10.46 | 8.10 | 6.02 | 10.19 | 22.80       | -11.98      | -6.99       | 3.83         | 28.80          | -24.97        |
| ag         | 5610       | 122     | AVG      | 52T   | 8.10 | 5.95 | 10.17 | 8.02 | 6.20     | 10.21 | 8.17 | 7.12 | 10.69 | 22.80       | -12.11      | -6.99       | 3.70         | 28.80          | -25.10        |
| - 2        | 5690       | 138     | AVG      | 52T   | 8.41 | 7.29 | 10.90 | 7.52 | 6.46     | 10.03 | 8.28 | 7.25 | 10.81 | 22.80       | -11.90      | -6.86       | 4.04         | 28.80          | -24.76        |
|            | 5775       | 155     | AVG      | 52T   | 7.27 | 8.30 | 10.83 | 7.39 | 7.45     | 10.43 | 7.77 | 6.93 | 10.38 | 30.00       | -19.17      | -6.86       | 3.97         | -              | -             |

Table 7-41. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 60 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 60 of 265               |



### **MIMO Conducted Output Power Measurements (106 Tones)**

|                 |            |         |          |       |       |       | RUI   | ndex  |       |       | Conducted   | Conducted   | Directional |                       | M                           | - !          |
|-----------------|------------|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------------|-------------|-------------|-----------------------|-----------------------------|--------------|
|                 | Freq [MHz] | Channel | Detector | Tones |       | 53    |       |       | 54    |       | Power Limit | Power       | Ant. Gain   | Max e.i.r.p.<br>[dBm] | Max e.i.r.p.<br>Limit [dBm] | e.i.r.p.     |
|                 |            |         |          |       | ANT1  | ANT2  | MIMO  | ANT1  | ANT2  | MIMO  | [dBm]       | Margin [dB] | [dBi]       | Lapini                | Limit [dbm]                 | Iwargin [ub] |
| <u>N</u> _      | 5180       | 36      | AVG      | 106T  | 11.67 | 11.35 | 14.52 | 11.72 | 11.23 | 14.49 | 23.98       | -9.46       | -6.45       | 8.07                  | 22.39                       | -14.32       |
| $\Xi \subseteq$ | 5200       | 40      | AVG      | 106T  | 11.79 | 11.56 | 14.69 | 11.75 | 11.61 | 14.69 | 23.98       | -9.29       | -6.69       | 8.00                  | 22.39                       | -14.39       |
| ⋝₩              | 5240       | 48      | AVG      | 106T  | 11.63 | 11.75 | 14.70 | 11.61 | 11.83 | 14.73 | 23.98       | -9.25       | -6.45       | 8.28                  | 22.39                       | -14.11       |
| ౭ౢౣౢ            | 5260       | 52      | AVG      | 106T  | 11.49 | 10.61 | 14.08 | 11.38 | 10.69 | 14.06 | 23.47       | -9.39       | -6.45       | 7.63                  | 29.47                       | -21.84       |
| છ ≥             | 5280       | 56      | AVG      | 106T  | 12.38 | 11.48 | 14.96 | 12.18 | 11.48 | 14.85 | 23.47       | -8.51       | -6.61       | 8.35                  | 29.47                       | -21.12       |
| N S             | 5320       | 64      | AVG      | 106T  | 12.02 | 11.27 | 14.67 | 12.03 | 11.29 | 14.69 | 23.47       | -8.78       | -6.55       | 8.14                  | 29.47                       | -21.33       |
| ゴーマ             | 5500       | 100     | AVG      | 106T  | 12.34 | 11.51 | 14.96 | 12.41 | 11.31 | 14.91 | 22.80       | -7.84       | -6.99       | 7.97                  | 28.80                       | -20.83       |
| CO M            | 5600       | 120     | AVG      | 106T  | 11.98 | 11.47 | 14.74 | 11.96 | 11.17 | 14.59 | 22.80       | -8.06       | -6.99       | 7.75                  | 28.80                       | -21.05       |
| ري<br>          | 5720       | 144     | AVG      | 106T  | 11.66 | 10.71 | 14.22 | 12.59 | 11.15 | 14.94 | 22.80       | -7.86       | -6.99       | 7.95                  | 28.80                       | -20.85       |
|                 | 5745       | 149     | AVG      | 106T  | 11.75 | 11.93 | 14.85 | 11.36 | 11.53 | 14.46 | 30.00       | -15.15      | -6.99       | 7.86                  | -                           | -            |
|                 | 5785       | 157     | AVG      | 106T  | 12.07 | 11.62 | 14.86 | 12.05 | 11.13 | 14.62 | 30.00       | -15.14      | -6.99       | 7.87                  | -                           | -            |
|                 | 5825       | 165     | AVG      | 106T  | 11.87 | 11.11 | 14.52 | 11.87 | 11.04 | 14 49 | 30.00       | -15.48      | -6.95       | 7.57                  | -                           | -            |

Table 7-42. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

|            |           |         |          |       |       |      |       |       | RU Index |       |       |      |       | Conducted   | Conducted   | Directional | Manadan               | Max e.i.r.p.  | e.i.r.p.     |
|------------|-----------|---------|----------|-------|-------|------|-------|-------|----------|-------|-------|------|-------|-------------|-------------|-------------|-----------------------|---------------|--------------|
| F          | req [MHz] | Channel | Detector | Tones |       | 53   |       |       | 54       |       |       | 56   |       | Power Limit | Power       | Ant. Gain   | Max e.i.r.p.<br>[dBm] | Limit [dBm]   |              |
| =          |           |         |          |       | ANT1  | ANT2 | MIMO  | ANT1  | ANT2     | MIMO  | ANT1  | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | Lapini                | Liniit [ubin] | war giri [ub |
| ÷□         | 5190      | 38      | AVG      | 106T  | 9.59  | 9.14 | 12.38 | 10.27 | 9.61     | 12.96 | 9.68  | 9.21 | 12.46 | 23.98       | -11.02      | -6.69       | 6.27                  | 22.39         | -16.12       |
| ᅙ          | 5230      | 46      | AVG      | 106T  | 9.56  | 9.03 | 12.31 | 9.62  | 8.87     | 12.27 | 9.98  | 9.43 | 12.72 | 23.98       | -11.26      | -6.45       | 6.27                  | 22.39         | -16.12       |
| ΣI         | 5270      | 54      | AVG      | 106T  | 9.96  | 8.19 | 12.17 | 10.54 | 8.71     | 12.73 | 9.87  | 8.27 | 12.15 | 23.47       | -10.74      | -6.61       | 6.12                  | 29.47         | -23.35       |
| <b>ਰ</b> □ | 5310      | 62      | AVG      | 106T  | 9.69  | 8.41 | 12.11 | 10.16 | 8.89     | 12.58 | 10.34 | 9.29 | 12.86 | 23.47       | -10.61      | -6.55       | 6.31                  | 29.47         | -23.16       |
| ⊆ □        | 5510      | 102     | AVG      | 106T  | 9.60  | 8.93 | 12.29 | 10.33 | 9.30     | 12.86 | 10.17 | 8.82 | 12.56 | 22.80       | -9.94       | -6.99       | 5.87                  | 28.80         | -22.93       |
| a          | 5590      | 118     | AVG      | 106T  | 10.27 | 8.75 | 12.59 | 10.71 | 9.06     | 12.97 | 9.92  | 8.81 | 12.41 | 22.80       | -9.83       | -6.99       | 5.98                  | 28.80         | -22.82       |
| ш          | 5710      | 142     | AVG      | 106T  | 9.53  | 9.20 | 12.38 | 9.92  | 9.63     | 12.79 | 9.48  | 9.13 | 12.32 | 22.80       | -10.01      | -6.86       | 5.93                  | 28.80         | -22.87       |
|            | 5755      | 151     | AVG      | 106T  | 8.70  | 9.72 | 12.25 | 9.34  | 10.10    | 12.75 | 9.13  | 9.51 | 12.33 | 30.00       | -17.25      | -6.86       | 5.89                  | -             | -            |
|            | 5795      | 159     | AVG      | 106T  | 8.92  | 9.38 | 12.17 | 8.98  | 9.21     | 12.11 | 9.41  | 9.11 | 12.27 | 30.00       | -17.73      | -6.95       | 5.32                  | -             | -            |

Table 7-43. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

|             |            |         |          |       |      |      |       |      | RU Index |       |      |      |       | Conducted   | Conducted   | Directional | Max e.i.r.p. |               | e.i.r.p.      |
|-------------|------------|---------|----------|-------|------|------|-------|------|----------|-------|------|------|-------|-------------|-------------|-------------|--------------|---------------|---------------|
| N _         | Freq [MHz] | Channel | Detector | Tones |      | 53   |       |      | 56       |       |      | 60   |       | Power Limit | Power       | Ant. Gain   |              | Limit [dBm]   |               |
| Ē €.        |            |         |          |       | ANT1 | ANT2 | MIMO  | ANT1 | ANT2     | MIMO  | ANT1 | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiii]      | Liniit [GBin] | war giri [ub] |
| ₹. <u>च</u> | 5210       | 42      | AVG      | 106T  | 8.57 | 7.44 | 11.05 | 9.06 | 7.91     | 11.53 | 8.97 | 8.03 | 11.54 | 23.98       | -12.44      | -6.45       | 5.09         | 22.39         | -17.30        |
| ∞ ≥         | 5290       | 58      | AVG      | 106T  | 9.81 | 7.72 | 11.90 | 9.02 | 7.01     | 11.14 | 9.08 | 7.98 | 11.58 | 23.47       | -11.57      | -6.55       | 5.35         | 29.47         | -24.12        |
| 우은          | 5530       | 106     | AVG      | 106T  | 9.45 | 8.41 | 11.97 | 9.18 | 7.71     | 11.52 | 9.27 | 7.40 | 11.45 | 22.80       | -10.83      | -6.99       | 4.98         | 28.80         | -23.82        |
| ᇏᄚ          | 5610       | 122     | AVG      | 106T  | 9.18 | 7.21 | 11.32 | 9.13 | 7.45     | 11.38 | 9.32 | 8.45 | 11.92 | 22.80       | -10.88      | -6.99       | 4.93         | 28.80         | -23.87        |
| ري<br>س     | 5690       | 138     | AVG      | 106T  | 9.40 | 8.45 | 11.96 | 8.49 | 7.73     | 11.14 | 9.27 | 8.63 | 11.97 | 22.80       | -10.83      | -6.86       | 5.11         | 28.80         | -23.69        |
|             | 5775       | 155     | AVG      | 106T  | 8.46 | 9.28 | 11.90 | 8.28 | 8.44     | 11.37 | 8.78 | 8.14 | 11.48 | 30.00       | -18.10      | -6.86       | 5.04         |               |               |

Table 7-44. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 61 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 61 of 265               |



### **MIMO Conducted Output Power Measurements (242 Tones)**

|                |            |         |          | _     |       | RU Index   |       | Conducted            | Conducted            | Directional        | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p. |
|----------------|------------|---------|----------|-------|-------|------------|-------|----------------------|----------------------|--------------------|--------------|--------------|----------|
|                | Freq [MHz] | Channel | Detector | Tones | ANT1  | 61<br>ANT2 | MIMO  | Power Limit<br>[dBm] | Power<br>Margin [dB] | Ant. Gain<br>[dBi] | [dBm]        | Limit [dBm]  |          |
| N _            | 5180       | 36      | AVG      | 242T  | 12.75 | 12.33      | 15.56 | 23.98                | -8.42                | -6.45              | 9.11         | 22.39        | -13.28   |
| I              | 5200       | 40      | AVG      | 242T  | 12.63 | 12.38      | 15.52 | 23.98                | -8.46                | -6.69              | 8.83         | 22.39        | -13.56   |
| $\geq \approx$ | 5240       | 48      | AVG      | 242T  | 12.57 | 12.71      | 15.65 | 23.98                | -8.33                | -6.45              | 9.20         | 22.39        | -13.19   |
|                | 5260       | 52      | AVG      | 242T  | 13.33 | 12.53      | 15.96 | 23.47                | -7.51                | -6.45              | 9.51         | 29.47        | -19.96   |
| <u>≤</u> (2)   | 5280       | 56      | AVG      | 242T  | 13.22 | 12.47      | 15.87 | 23.47                | -7.60                | -6.61              | 9.26         | 29.47        | -20.21   |
| N S            | 5320       | 64      | AVG      | 242T  | 13.06 | 12.21      | 15.67 | 23.47                | -7.80                | -6.55              | 9.12         | 29.47        | -20.35   |
| 一声             | 5500       | 100     | AVG      | 242T  | 13.36 | 12.42      | 15.93 | 22.80                | -6.87                | -6.99              | 8.94         | 28.80        | -19.86   |
| 5G<br>B        | 5600       | 120     | AVG      | 242T  | 13.37 | 12.39      | 15.92 | 22.80                | -6.88                | -6.99              | 8.93         | 28.80        | -19.87   |
| 5              | 5720       | 144     | AVG      | 242T  | 12.49 | 11.51      | 15.04 | 22.80                | -7.76                | -6.99              | 8.05         | 28.80        | -20.75   |
|                | 5745       | 149     | AVG      | 242T  | 12.66 | 12.81      | 15.75 | 30.00                | -14.25               | -6.99              | 8.76         | -            | -        |
|                | 5785       | 157     | AVG      | 242T  | 12.98 | 12.63      | 15.82 | 30.00                | -14.18               | -6.99              | 8.83         | -            | -        |
|                | 5825       | 165     | AVG      | 242T  | 12.68 | 12.35      | 15.53 | 30.00                | -14.47               | -6.95              | 8.58         | -            | -        |

Table 7-45. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

|              |            |         |          |       |       |       | RU I  | ndex  |       |       | Conducted   | Conducted   | Directional |                       | Max e.i.r.p.   |                         |
|--------------|------------|---------|----------|-------|-------|-------|-------|-------|-------|-------|-------------|-------------|-------------|-----------------------|----------------|-------------------------|
| N            | Freq [MHz] | Channel | Detector | Tones |       | 61    |       |       | 62    |       | Power Limit | Power       | Ant. Gain   | Max e.i.r.p.<br>[dBm] |                | e.i.r.p.<br>Margin [dB] |
| ii 🗢         |            |         |          |       | ANT1  | ANT2  | MIMO  | ANT1  | ANT2  | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiii]               | Cillin [ubilij | wargiii [ub]            |
| ₹            | 5190       | 38      | AVG      | 242T  | 10.97 | 9.74  | 13.41 | 10.23 | 10.71 | 13.49 | 23.98       | -10.49      | -6.69       | 6.80                  | 22.39          | -15.59                  |
| 를 필          | 5230       | 46      | AVG      | 242T  | 11.32 | 9.88  | 13.67 | 11.24 | 10.33 | 13.82 | 23.98       | -10.16      | -6.45       | 7.37                  | 22.39          | -15.02                  |
| <u>4</u> ≤   | 5270       | 54      | AVG      | 242T  | 11.42 | 9.05  | 13.41 | 11.21 | 9.25  | 13.35 | 23.47       | -10.06      | -6.61       | 6.80                  | 29.47          | -22.67                  |
| <del>6</del> | 5310       | 62      | AVG      | 242T  | 11.12 | 9.24  | 13.29 | 11.57 | 9.93  | 13.84 | 23.47       | -9.63       | -6.55       | 7.29                  | 29.47          | -22.18                  |
| 우호           | 5510       | 102     | AVG      | 242T  | 11.03 | 9.67  | 13.41 | 11.30 | 9.69  | 13.58 | 22.80       | -9.22       | -6.99       | 6.59                  | 28.80          | -22.21                  |
| 注 a          | 5590       | 118     | AVG      | 242T  | 11.39 | 9.47  | 13.55 | 11.25 | 9.63  | 13.53 | 22.80       | -9.25       | -6.99       | 6.56                  | 28.80          | -22.24                  |
|              | 5710       | 142     | AVG      | 242T  | 10.66 | 9.72  | 13.23 | 10.64 | 9.86  | 13.28 | 22.80       | -9.52       | -6.86       | 6.42                  | 28.80          | -22.38                  |
| 4,           | 5755       | 151     | AVG      | 242T  | 9.60  | 10.53 | 13.10 | 10.31 | 10.52 | 13.43 | 30.00       | -16.57      | -6.86       | 6.57                  | -              | -                       |
|              | 5795       | 159     | AVG      | 242T  | 10.48 | 10.53 | 13.52 | 10.84 | 10.58 | 13.72 | 30.00       | -16.28      | -6.95       | 6.77                  | -              | -                       |

Table 7-46. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

|      |            |         |          |       |       |      |       |       | RU Index |       |       |      |       | Conducted   | Conducted   | Directional | Max e.i.r.p. | M              | e.i.r.p.    |
|------|------------|---------|----------|-------|-------|------|-------|-------|----------|-------|-------|------|-------|-------------|-------------|-------------|--------------|----------------|-------------|
| N    | Freq [MHz] | Channel | Detector | Tones |       | 61   |       |       | 62       |       |       | 64   |       | Power Limit | Power       | Ant. Gain   |              | Limit [dBm]    |             |
| ≣ ≅  |            |         |          |       | ANT1  | ANT2 | MIMO  | ANT1  | ANT2     | MIMO  | ANT1  | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiiij      | Lillik [ubilij | wargin [ub] |
| 등 등  | 5210       | 42      | AVG      | 242T  | 9.96  | 8.86 | 12.46 | 10.12 | 9.26     | 12.72 | 10.25 | 9.43 | 12.87 | 23.98       | -11.11      | -6.45       | 6.42         | 22.39          | -15.97      |
| ∞ ≥  | 5290       | 58      | AVG      | 242T  | 10.16 | 8.15 | 12.28 | 10.16 | 8.35     | 12.36 | 10.61 | 9.18 | 12.96 | 23.47       | -10.51      | -6.55       | 6.41         | 29.47          | -23.06      |
| 유입   | 5530       | 106     | AVG      | 242T  | 9.84  | 8.72 | 12.33 | 10.34 | 8.89     | 12.68 | 10.53 | 8.89 | 12.80 | 22.80       | -10.00      | -6.99       | 5.81         | 28.80          | -22.99      |
| ig B | 5610       | 122     | AVG      | 242T  | 10.29 | 8.59 | 12.53 | 10.35 | 8.69     | 12.61 | 9.74  | 8.98 | 12.39 | 22.80       | -10.19      | -6.99       | 5.62         | 28.80          | -23.18      |
|      | 5690       | 138     | AVG      | 242T  | 9.59  | 8.80 | 12.22 | 9.61  | 8.87     | 12.27 | 9.67  | 9.09 | 12.40 | 22.80       | -10.40      | -6.86       | 5.54         | 28.80          | -23.26      |
|      | 5775       | 155     | AVG      | 242T  | 8 72  | 9.48 | 12.13 | 9.21  | 9.69     | 12 47 | 9.89  | 9.43 | 12.68 | 30.00       | -17 32      | -6.86       | 5.82         |                |             |

Table 7-47. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 62 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 62 of 265               |



### MIMO Conducted Output Power Measurements (484 Tones)

|            |                | FB#1-1     | 011     | Detector | <b>T</b> |       | RU Index   |       | Conducted            | Conducted            | Directional        | Max e.i.r.p. | Max e.i.r.p. | e.i.r.p.    |
|------------|----------------|------------|---------|----------|----------|-------|------------|-------|----------------------|----------------------|--------------------|--------------|--------------|-------------|
| Ÿ,         | _  '           | Freq [MHz] | Channel | Detector | Tones    | ANT1  | 65<br>ANT2 | MIMO  | Power Limit<br>[dBm] | Power<br>Margin [dB] | Ant. Gain<br>[dBi] | [dBm]        | Limit [dBm]  | Margin [dB] |
| <b>ŧ</b>   | ⊊⊢             | 5190       | 38      | AVG      | 484T     | 9.84  | 10.30      | 13.09 | 23.98                | -10.89               | -6.69              | 6.40         | 22.39        | -15.99      |
| <b>6</b> : | ᅙ              | 5230       | 46      | AVG      | 484T     | 10.98 | 9.81       | 13.44 | 23.98                | -10.53               | -6.45              | 6.99         | 22.39        | -15.40      |
| 4.         | ₹              | 5270       | 54      | AVG      | 484T     | 10.95 | 8.80       | 13.02 | 23.47                | -10.45               | -6.61              | 6.41         | 29.47        | -23.06      |
| <u> </u>   | <del>6</del> - | 5310       | 62      | AVG      | 484T     | 11.53 | 9.78       | 13.75 | 23.47                | -9.72                | -6.55              | 7.20         | 29.47        | -22.27      |
| Ţ          | ⊆ _            | 5510       | 102     | AVG      | 484T     | 10.86 | 9.38       | 13.19 | 22.80                | -9.61                | -6.99              | 6.20         | 28.80        | -22.60      |
| <b>杰</b>   | <u> </u>       | 5590       | 118     | AVG      | 484T     | 11.14 | 9.51       | 13.41 | 22.80                | -9.39                | -6.99              | 6.42         | 28.80        | -22.38      |
| <u>ე</u>   | ш              | 5710       | 142     | AVG      | 484T     | 11.33 | 10.57      | 13.98 | 22.80                | -8.82                | -6.86              | 7.12         | 28.80        | -21.68      |
| 4,         |                | 5755       | 151     | AVG      | 484T     | 10.69 | 11.22      | 13.97 | 30.00                | -16.03               | -6.86              | 7.11         | -            | -           |
|            |                | 5795       | 159     | AVG      | 484T     | 10.34 | 10.35      | 13.36 | 30.00                | -16.64               | -6.95              | 6.41         | _            | -           |

Table 7-48. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

|      |            |         |          |       |       |       | RU I  | ndex  |      |       | Conducted   | Conducted   | Directional | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.     |
|------|------------|---------|----------|-------|-------|-------|-------|-------|------|-------|-------------|-------------|-------------|--------------|---------------|--------------|
| N    | Freq [MHz] | Channel | Detector | Tones |       | 65    |       |       | 66   |       | Power Limit | Power       | Ant. Gain   |              | Limit [dBm]   |              |
| ₹ €  |            |         |          |       | ANT1  | ANT2  | MIMO  | ANT1  | ANT2 | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiii]      | Liniit [abin] | wargiii [ub] |
| € ₹  | 5210       | 42      | AVG      | 484T  | 9.48  | 8.84  | 12.18 | 9.79  | 9.22 | 12.52 | 23.98       | -11.45      | -6.45       | 6.07         | 22.39         | -16.32       |
| ∞ ≥  | 5290       | 58      | AVG      | 484T  | 10.71 | 9.02  | 12.96 | 10.45 | 9.13 | 12.85 | 23.47       | -10.51      | -6.55       | 6.41         | 29.47         | -23.06       |
| 우일   | 5530       | 106     | AVG      | 484T  | 9.82  | 8.51  | 12.22 | 10.29 | 8.69 | 12.57 | 22.80       | -10.23      | -6.99       | 5.58         | 28.80         | -23.22       |
| 15 B | 5610       | 122     | AVG      | 484T  | 9.98  | 8.43  | 12.28 | 9.65  | 8.67 | 12.20 | 22.80       | -10.52      | -6.99       | 5.29         | 28.80         | -23.51       |
| 5 _  | 5690       | 138     | AVG      | 484T  | 10.22 | 9.71  | 12.98 | 9.45  | 8.87 | 12.18 | 22.80       | -9.82       | -6.86       | 6.12         | 28.80         | -22.68       |
|      | 5775       | 155     | AVG      | 484T  | 9.45  | 10.32 | 12.92 | 9.23  | 9.33 | 12.29 | 30.00       | -17.08      | -6.86       | 6.06         | -             | -            |

Table 7-49. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

### MIMO Conducted Output Power Measurements (996 Tones)

|                   |            |         |          |       |       | RU Index |       | Conducted   | Conducted   | Directional | Max e.i.r.p. | Max e.i.r.p.  | e.i.r.p.      |
|-------------------|------------|---------|----------|-------|-------|----------|-------|-------------|-------------|-------------|--------------|---------------|---------------|
| N                 | Freq [MHz] | Channel | Detector | Tones |       | 67       |       | Power Limit | Power       | Ant. Gain   | IdBml        | Limit [dBm]   |               |
| <b>₹</b>          |            |         |          |       | ANT1  | ANT2     | MIMO  | [dBm]       | Margin [dB] | [dBi]       | [ubiii]      | Liniit [abin] | war girr [GD] |
| ᅙᅙ                | 5210       | 42      | AVG      | 996T  | 9.61  | 8.85     | 12.26 | 23.98       | -11.72      | -6.45       | 5.81         | 22.39         | -16.58        |
| <u>®</u> <u>≥</u> | 5290       | 58      | AVG      | 996T  | 10.45 | 8.59     | 12.63 | 23.47       | -10.84      | -6.55       | 6.08         | 29.47         | -23.39        |
| 무                 | 5530       | 106     | AVG      | 996T  | 9.83  | 9.07     | 12.48 | 22.80       | -10.32      | -6.99       | 5.49         | 28.80         | -23.31        |
| 5G                | 5610       | 122     | AVG      | 996T  | 9.67  | 9.02     | 12.37 | 22.80       | -10.43      | -6.99       | 5.38         | 28.80         | -23.42        |
| 5                 | 5690       | 138     | AVG      | 996T  | 9.06  | 9.24     | 12.16 | 22.80       | -10.64      | -6.86       | 5.30         | 28.80         | -23.50        |
|                   | 5775       | 155     | AVG      | 996T  | 8.87  | 9.67     | 12.30 | 30.00       | -17.70      | -6.86       | 5.44         | -             | -             |

Table 7-50. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

#### Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G<sub>N</sub> is the gain of the nth antenna and N<sub>ANT</sub>, the total number of antennas used.

Directional gain = 
$$10 \log[(10^{G_1/20} + 10^{G_2/20} + ... + 10^{G_N/20})^2 / N_{ANT}] dBi$$

#### **Sample MIMO Calculation:**

At 5180MHz in 802.11n (20MHz BW) mode, the average conducted output power was measured to be 15.93 dBm for Antenna-1 and 16.16 dBm for Antenna-2.

$$(15.93 \text{ dBm} + 16.16 \text{ dBm}) = (39.17 \text{ mW} + 41.30 \text{ mW}) = 80.48 \text{ mW} = 19.06 \text{ dBm}$$

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 63 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 63 01 265               |



#### Maximum Power Spectral Density – 802.11ax OFDMA 7.5

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

#### **Test Overview and Limit**

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

#### **Test Procedure Used**

ANSI C63.10-2013 - Section 12.3.2.2 KDB 789033 D02 v02r01 - Section F ANSI C63.10-2013 - Section 14.3.2.2 Measure-and-Sum Technique KDB 662911 v02r01 - Section E)2) Measure-and-Sum Technique

#### **Test Settings**

- Analyzer was set to the center frequency of the UNII channel under investigation
- 2. Span was set to encompass the entire emission bandwidth of the signal
- 3. RBW = 1MHz
- 4. VBW = 3MHz
- 5. Number of sweep points  $\geq 2 \times (\text{span/RBW})$
- 6. Sweep time = auto
- 7. Detector = power averaging (RMS)
- 8. Trigger was set to free run for all modes
- 9. Trace was averaged over 100 sweeps
- 10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

#### **Test Notes**

The power spectral density for each channel was measured with the RU index showing the highest conducted power

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 64 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 64 of 265                  |




## SISO Antenna-1 Power Spectral Density Measurements (26 Tones)

|         | Frequency<br>[MHz] | Channel<br>No. | 802.11 <b>M</b> ode | Tones | Data Rate<br>[Mbps] | Measured Power<br>Density [dBm] | Max Power<br>Density<br>[dBm/MHz] | Margin<br>[dB] |
|---------|--------------------|----------------|---------------------|-------|---------------------|---------------------------------|-----------------------------------|----------------|
|         | 5180               | 36             | ax (20MHz)          | 26T   | MCS0                | 7.03                            | 11.0                              | -3.97          |
|         | 5200               | 40             | ax (20MHz)          | 26T   | MCS0                | 7.40                            | 11.0                              | -3.60          |
| Band 1  | 5240               | 48             | ax (20MHz)          | 26T   | MCS0                | 7.06                            | 11.0                              | -3.94          |
| Bar     | 5190               | 38             | ax (40MHz)          | 26T   | MCS0                | 8.67                            | 11.0                              | -2.33          |
|         | 5230               | 46             | ax (40MHz)          | 26T   | MCS0                | 8.41                            | 11.0                              | -2.59          |
|         | 5210               | 42             | ax (80MHz)          | 26T   | MCS0                | 8.57                            | 11.0                              | -2.43          |
|         | 5260               | 52             | ax (20MHz)          | 26T   | MCS0                | 6.89                            | 11.0                              | -4.11          |
| ∢       | 5280               | 56             | ax (20MHz)          | 26T   | MCS0                | 6.54                            | 11.0                              | -4.46          |
| d 2,    | 5320               | 64             | ax (20MHz)          | 26T   | MCS0                | 7.04                            | 11.0                              | -3.96          |
| Band 2A | 5270               | 54             | ax (40MHz)          | 26T   | MCS0                | 8.38                            | 11.0                              | -2.62          |
| ш       | 5310               | 62             | ax (40MHz)          | 26T   | MCS0                | 8.76                            | 11.0                              | -2.24          |
|         | 5290               | 58             | ax (80MHz)          | 26T   | MCS0                | 8.11                            | 11.0                              | -2.89          |
|         | 5500               | 100            | ax (20MHz)          | 26T   | MCS0                | 6.76                            | 11.0                              | -4.24          |
|         | 5600               | 120            | ax (20MHz)          | 26T   | MCS0                | 6.01                            | 11.0                              | -4.99          |
|         | 5720               | 144            | ax (20MHz)          | 26T   | MCS0                | 6.78                            | 11.0                              | -4.22          |
| 2       | 5510               | 102            | ax (40MHz)          | 26T   | MCS0                | 8.52                            | 11.0                              | -2.48          |
| Band 2C | 5590               | 118            | ax (40MHz)          | 26T   | MCS0                | 8.43                            | 11.0                              | -2.57          |
| Ва      | 5710               | 142            | ax (40MHz)          | 26T   | MCS0                | 8.98                            | 11.0                              | -2.02          |
|         | 5530               | 106            | ax (80MHz)          | 26T   | MCS0                | 7.80                            | 11.0                              | -3.20          |
|         | 5610               | 122            | ax (80MHz)          | 26T   | MCS0                | 8.23                            | 11.0                              | -2.77          |
|         | 5690               | 138            | ax (80MHz)          | 26T   | MCS0                | 4.86                            | 11.0                              | -6.14          |


Table 7-51. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by:<br>Quality Manager |
|---------------------|---------------------|------------------------------------|---------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 65 of 265                  |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | rage 65 01 265                  |



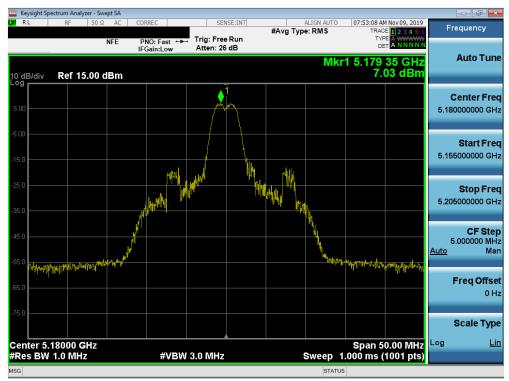


Plot 7-55. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)

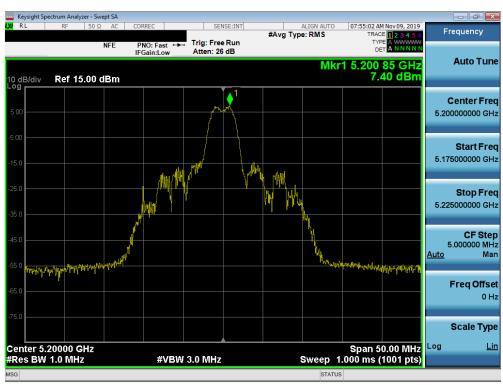

Plot 7-56. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Daga CC of OCE               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 66 of 265               |



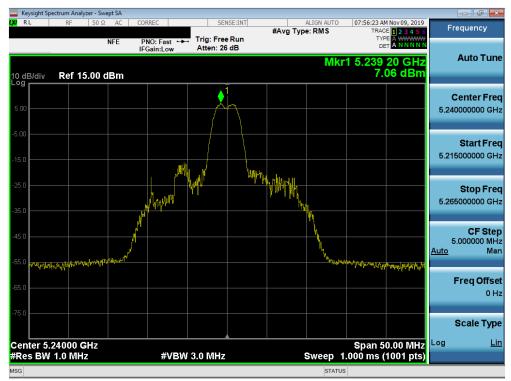

Plot 7-57. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)



Plot 7-58. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 38)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Page 67 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | raye 07 01 200               |






Plot 7-59. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)




Plot 7-60. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 42)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 68 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | rage to til 205              |



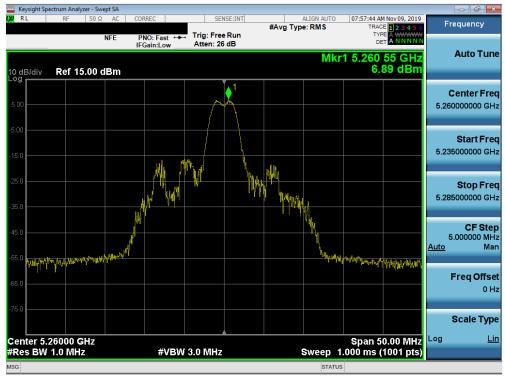

Plot 7-61. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 52)

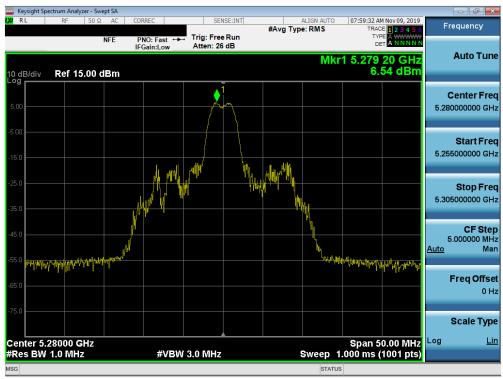


Plot 7-62. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 56)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dags 60 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 69 of 265               |

© 2020 PCTEST Engineering Laboratory, Inc.



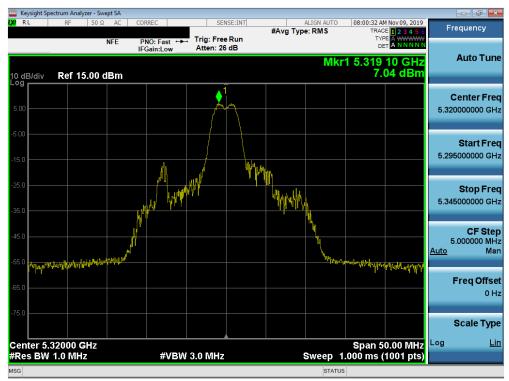

Plot 7-63. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 64)



Plot 7-64. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 54)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 70 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 70 of 265               |






Plot 7-65. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 62)




Plot 7-66. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2A) - Ch. 58)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 71 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 71 01 205               |



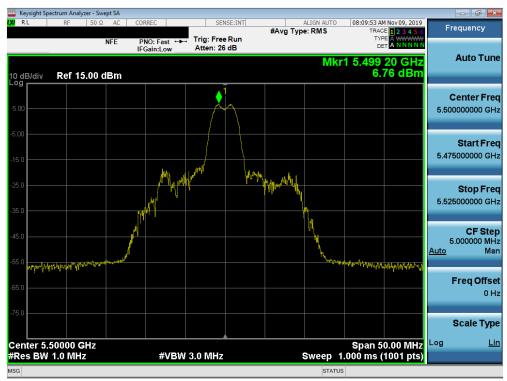


Plot 7-67. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 100)

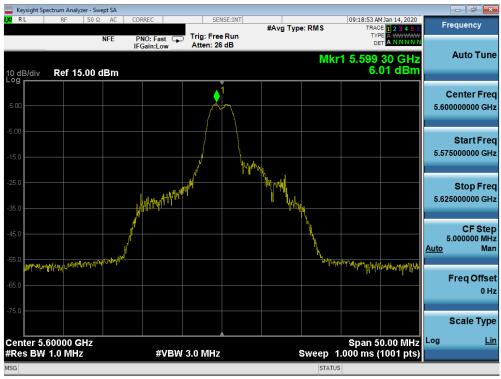

Plot 7-68. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 120)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 70 of 005               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 72 of 265               |



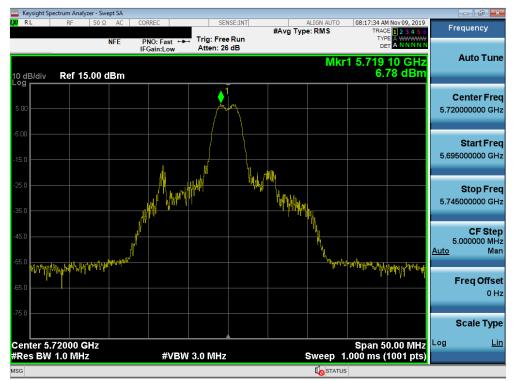

Plot 7-69. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 144)



Plot 7-70. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 102)

| FCC ID: A3LSMG986U  | PCTEST SINGLES LABORATORS. INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                     | EUT Type:                          | Page 73 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20             | Portable Handset                   | Fage 73 01 203               |





Plot 7-71. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 118)



Plot 7-72. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 142)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 74 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 74 01 203               |






Plot 7-73. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 106)



Plot 7-74. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 122)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 75 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 75 01 265               |



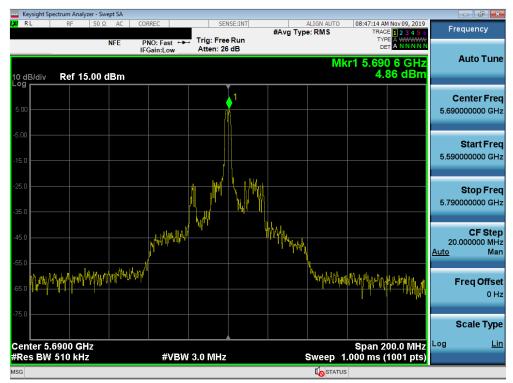

Plot 7-75. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 2C) - Ch. 138)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 76 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 76 01 265               |




|      | Frequency<br>[MHz] | Channel<br>No. | 802.11 Mode | Tones | Data Rate<br>[Mbps] | Measured Power<br>Density [dBm] | Max Permissible Power Density | Margin<br>[dB] |
|------|--------------------|----------------|-------------|-------|---------------------|---------------------------------|-------------------------------|----------------|
|      | 5745               | 149            | ax (20MHz)  | 26T   | MCS0                | 5.97                            | 30.00                         | -24.03         |
| m    | 5785               | 157            | ax (20MHz)  | 26T   | MCS0                | 4.59                            | 30.00                         | -25.41         |
|      | 5825               | 165            | ax (20MHz)  | 26T   | MCS0                | 5.40                            | 30.00                         | -24.60         |
| Band | 5755               | 151            | ax (40MHz)  | 26T   | MCS0                | 5.58                            | 30.00                         | -24.42         |
|      | 5795               | 159            | ax (40MHz)  | 26T   | MCS0                | 5.14                            | 30.00                         | -24.86         |
|      | 5775               | 155            | ax (80MHz)  | 26T   | MCS0                | 7.08                            | 30.00                         | -22.92         |


Table 7-52. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dago 77 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 77 of 265               |



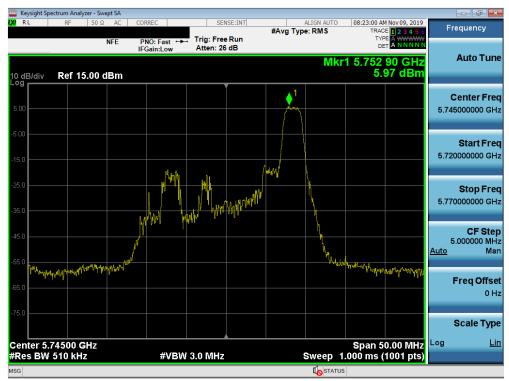


Plot 7-76. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 149)

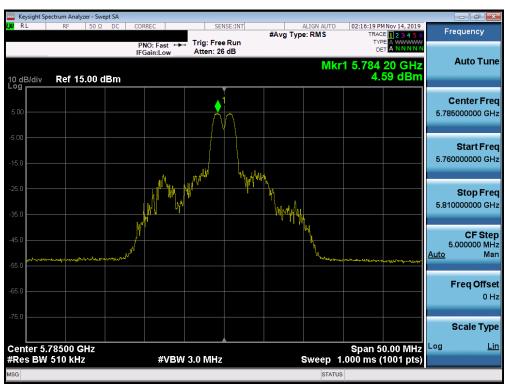

Plot 7-77. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 157)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 78 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 76 01 265               |



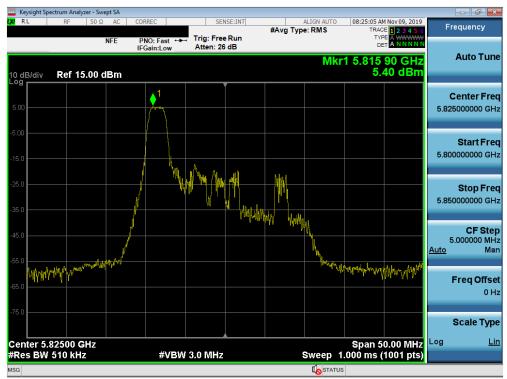


Plot 7-78. Power Spectral Density Plot SISO ANT1 (20 MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 165)



Plot 7-79. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 151)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Daga 70 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 79 of 265               |



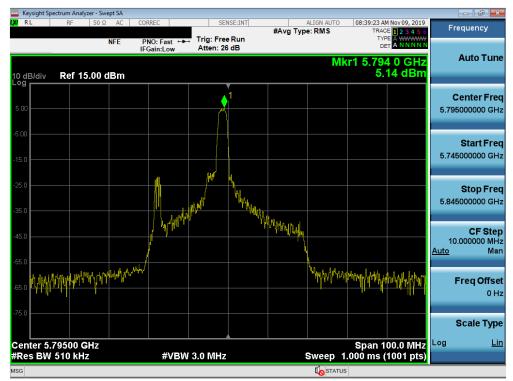

Plot 7-80. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 159)



Plot 7-81. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - 26 Tones (UNII Band 3) - Ch. 155)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 80 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | rage ou ul 200               |



## SISO Antenna-1 Power Spectral Density Measurements (Full Tones)

|         | Frequency<br>[MHz] | Channel<br>No. | 802.11 <b>M</b> ode | Tones | Data Rate<br>[Mbps] | Measured Power<br>Density [dBm] | Max Power<br>Density<br>[dBm/MHz] | Margin<br>[dB] |
|---------|--------------------|----------------|---------------------|-------|---------------------|---------------------------------|-----------------------------------|----------------|
|         | 5180               | 36             | ax (20MHz)          | 242T  | MCS0                | 3.85                            | 11.0                              | -7.15          |
| _       | 5200               | 40             | ax (20MHz)          | 242T  | MCS0                | 3.89                            | 11.0                              | -7.11          |
| Band 1  | 5240               | 48             | ax (20MHz)          | 242T  | MCS0                | 3.74                            | 11.0                              | -7.26          |
| Bar     | 5190               | 38             | ax (40MHz)          | 242T  | MCS0                | -1.43                           | 11.0                              | -12.43         |
| _       | 5230               | 46             | ax (40MHz)          | 242T  | MCS0                | -1.39                           | 11.0                              | -12.39         |
|         | 5210               | 42             | ax (80MHz)          | 242T  | MCS0                | -5.00                           | 11.0                              | -16.00         |
|         | 5260               | 52             | ax (20MHz)          | 242T  | MCS0                | 3.28                            | 11.0                              | -7.72          |
| ∢       | 5280               | 56             | ax (20MHz)          | 242T  | MCS0                | 3.37                            | 11.0                              | -7.63          |
| Band 2A | 5320               | 64             | ax (20MHz)          | 242T  | MCS0                | 3.63                            | 11.0                              | -7.37          |
| gan     | 5270               | 54             | ax (40MHz)          | 242T  | MCS0                | -1.49                           | 11.0                              | -12.49         |
| ш       | 5310               | 62             | ax (40MHz)          | 242T  | MCS0                | -0.72                           | 11.0                              | -11.72         |
|         | 5290               | 58             | ax (80MHz)          | 242T  | MCS0                | -4.72                           | 11.0                              | -15.72         |
|         | 5500               | 100            | ax (20MHz)          | 242T  | MCS0                | 3.19                            | 11.0                              | -7.81          |
|         | 5600               | 120            | ax (20MHz)          | 242T  | MCS0                | 3.18                            | 11.0                              | -7.82          |
|         | 5720               | 144            | ax (20MHz)          | 242T  | MCS0                | 3.34                            | 11.0                              | -7.66          |
| 2C      | 5510               | 102            | ax (40MHz)          | 242T  | MCS0                | -1.73                           | 11.0                              | -12.73         |
| Band 2C | 5590               | 118            | ax (40MHz)          | 242T  | MCS0                | -1.53                           | 11.0                              | -12.53         |
| Ba      | 5710               | 142            | ax (40MHz)          | 242T  | MCS0                | -1.30                           | 11.0                              | -12.30         |
|         | 5530               | 106            | ax (80MHz)          | 242T  | MCS0                | -5.27                           | 11.0                              | -16.27         |
|         | 5610               | 122            | ax (80MHz)          | 242T  | MCS0                | -5.20                           | 11.0                              | -16.20         |
|         | 5690               | 138            | ax (80MHz)          | 242T  | MCS0                | -7.62                           | 11.0                              | -18.62         |


Table 7-53. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (Full Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 91 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 81 of 265               |






Plot 7-82. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 36)

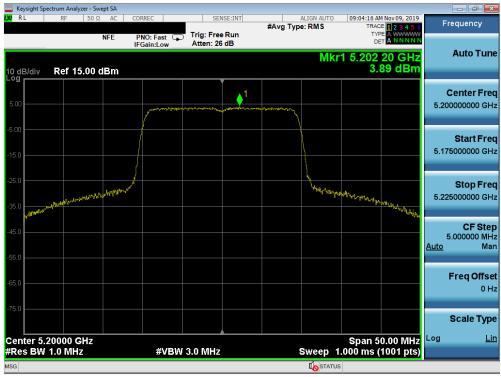

Plot 7-83. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 40)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 82 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 62 01 265               |



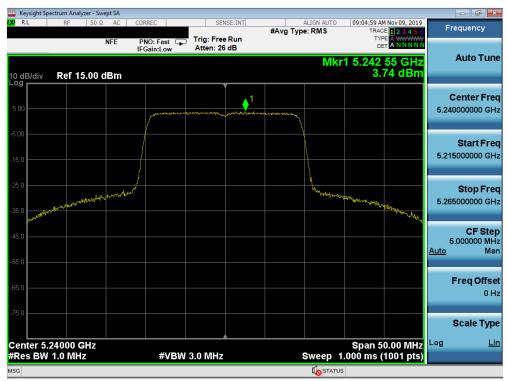

Plot 7-84. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 48)



Plot 7-85. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 38)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 92 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 83 of 265               |






Plot 7-86. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 46)




Plot 7-87. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 1) - Ch. 42)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 84 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 84 01 205               |



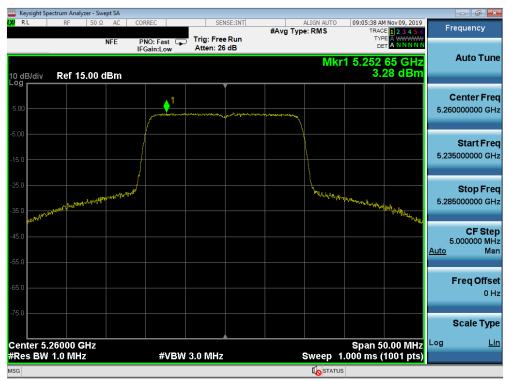


Plot 7-88. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 52)

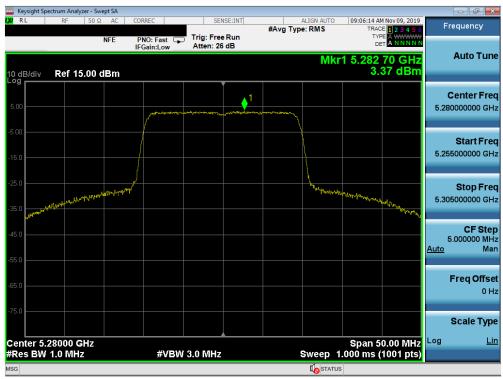

Plot 7-89. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 56)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dog 05 of 005                |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 85 of 265               |



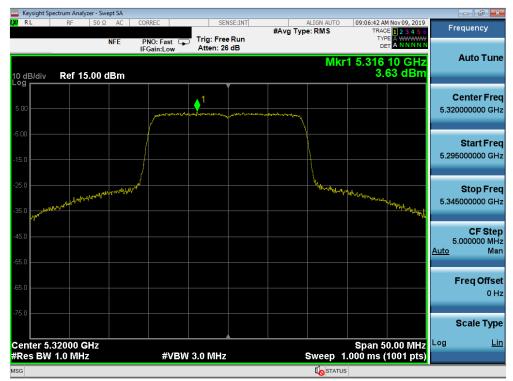

Plot 7-90. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 64)



Plot 7-91. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 54)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 96 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 86 of 265               |






Plot 7-92. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 62)



Plot 7-93. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2A) - Ch. 58)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 87 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 07 UI 205               |



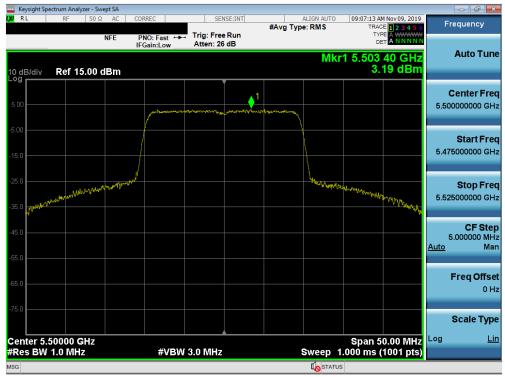


Plot 7-94. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 100)



Plot 7-95. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 120)

| FCC ID: A3LSMG986U  | PCTEST SINGLES LABORATORS. INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                     | EUT Type:                          | Page 88 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20             | Portable Handset                   | Fage 88 01 265               |



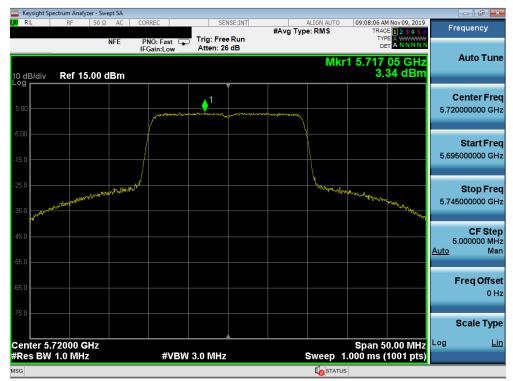

Plot 7-96. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 144)



Plot 7-97. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 102)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 90 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 89 of 265               |





Plot 7-98. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 118)



Plot 7-99. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 142)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 90 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 90 01 265               |





Plot 7-100. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 106)



Plot 7-101. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 122)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dago 01 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 91 of 265               |





Plot 7-102. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 2C) - Ch. 138)

| FCC ID: A3LSMG986U  | PETEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 02 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 92 of 265               |



|      | Frequency<br>[MHz] | Channel<br>No. | 802.11 <b>M</b> ode | Tones | Data Rate<br>[Mbps] | Measured Power<br>Density [dBm] | Max Permissible Power Density | Margin<br>[dB] |
|------|--------------------|----------------|---------------------|-------|---------------------|---------------------------------|-------------------------------|----------------|
|      | 5745               | 149            | ax (20MHz)          | 242T  | MCS0                | 1.16                            | 30.00                         | -28.84         |
|      | 5785               | 157            | ax (20MHz)          | 242T  | MCS0                | 1.02                            | 30.00                         | -28.98         |
| 2 pt | 5825               | 165            | ax (20MHz)          | 242T  | MCS0                | 1.22                            | 30.00                         | -28.78         |
| Band | 5755               | 151            | ax (40MHz)          | 242T  | MCS0                | -3.97                           | 30.00                         | -33.97         |
|      | 5795               | 159            | ax (40MHz)          | 242T  | MCS0                | -3.90                           | 30.00                         | -33.90         |
|      | 5775               | 155            | ax (80MHz)          | 242T  | MCS0                | -4.92                           | 30.00                         | -34.92         |

Table 7-54. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (Full Tones)

| FCC ID: A3LSMG986U  | PCTEST*             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo 02 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 93 of 265               |





Plot 7-103. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 149)



Plot 7-104. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 157)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogg 04 of 205               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 94 of 265               |





Plot 7-105. Power Spectral Density Plot SISO ANT1 (20 MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 165)



Plot 7-106. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 151)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogo OF of OCE               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 95 of 265               |





Plot 7-107. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 159)



Plot 7-108. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax - Full Tones (UNII Band 3) - Ch. 155)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Dogg 06 of 065               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Page 96 of 265               |



## SISO Antenna-2 Power Spectral Density Measurements (26 Tones)

|           | Frequency<br>[MHz] | Channel<br>No. | 802.11 Mode | Tones | Data Rate<br>[Mbps] | Measured Power<br>Density [dBm] | Max Power<br>Density<br>[dBm/MHz] | Margin<br>[dB] |
|-----------|--------------------|----------------|-------------|-------|---------------------|---------------------------------|-----------------------------------|----------------|
|           | 5180               | 36             | ax (20MHz)  | 26T   | MCS0                | 8.30                            | 11.0                              | -2.70          |
| _         | 5200               | 40             | ax (20MHz)  | 26T   | MCS0                | 8.02                            | 11.0                              | -2.98          |
| <u> 5</u> | 5240               | 48             | ax (20MHz)  | 26T   | MCS0                | 8.69                            | 11.0                              | -2.31          |
| Band 1    | 5190               | 38             | ax (40MHz)  | 26T   | MCS0                | 9.25                            | 11.0                              | -1.75          |
|           | 5230               | 46             | ax (40MHz)  | 26T   | MCS0                | 9.49                            | 11.0                              | -1.51          |
|           | 5210               | 42             | ax (80MHz)  | 26T   | MCS0                | 7.48                            | 11.0                              | -3.52          |
|           | 5260               | 52             | ax (20MHz)  | 26T   | MCS0                | 8.31                            | 11.0                              | -2.69          |
| <b>⋖</b>  | 5280               | 56             | ax (20MHz)  | 26T   | MCS0                | 8.27                            | 11.0                              | -2.73          |
| d 2,      | 5320               | 64             | ax (20MHz)  | 26T   | MCS0                | 8.21                            | 11.0                              | -2.79          |
| Band 2A   | 5270               | 54             | ax (40MHz)  | 26T   | MCS0                | 8.68                            | 11.0                              | -2.32          |
| ш         | 5310               | 62             | ax (40MHz)  | 26T   | MCS0                | 8.11                            | 11.0                              | -2.89          |
|           | 5290               | 58             | ax (80MHz)  | 26T   | MCS0                | 8.99                            | 11.0                              | -2.01          |
|           | 5500               | 100            | ax (20MHz)  | 26T   | MCS0                | 8.13                            | 11.0                              | -2.87          |
|           | 5600               | 120            | ax (20MHz)  | 26T   | MCS0                | 8.23                            | 11.0                              | -2.77          |
|           | 5720               | 144            | ax (20MHz)  | 26T   | MCS0                | 8.10                            | 11.0                              | -2.90          |
| 2C        | 5510               | 102            | ax (40MHz)  | 26T   | MCS0                | 8.43                            | 11.0                              | -2.57          |
| Band 2C   | 5590               | 118            | ax (40MHz)  | 26T   | MCS0                | 8.50                            | 11.0                              | -2.50          |
| Ba        | 5710               | 142            | ax (40MHz)  | 26T   | MCS0                | 8.65                            | 11.0                              | -2.35          |
|           | 5530               | 106            | ax (80MHz)  | 26T   | MCS0                | 8.83                            | 11.0                              | -2.17          |
|           | 5610               | 122            | ax (80MHz)  | 26T   | MCS0                | 8.55                            | 11.0                              | -2.45          |
|           | 5690               | 138            | ax (80MHz)  | 26T   | MCS0                | 6.48                            | 11.0                              | -4.52          |

Table 7-55. Conducted Power Spectral Density Measurements SISO ANT2 (26 Tones)

| FCC ID: A3LSMG986U  | INGINISHINA LARDRATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Quality Manager |
|---------------------|------------------------------|------------------------------------|---------|------------------------------|
| Test Report S/N:    | Test Dates:                  | EUT Type:                          |         | Dogo 07 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20          | Portable Handset                   |         | Page 97 of 265               |






Plot 7-109. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 36)



Plot 7-110. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 40)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 09 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 98 of 265               |



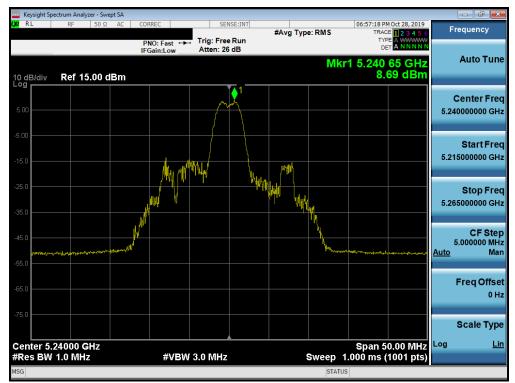

Plot 7-111. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 48)



Plot 7-112. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 38)

| FCC ID: A3LSMG986U  | PETEST'             | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|---------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:         | EUT Type:                          | Page 99 of 265               |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20 | Portable Handset                   | Fage 99 01 205               |





Plot 7-113. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 46)



Plot 7-114. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ax - 26 Tones (UNII Band 1) - Ch. 42)

| FCC ID: A3LSMG986U  | PETEST (HIGHELINE LABORATORS, INC. | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
|---------------------|------------------------------------|------------------------------------|------------------------------|
| Test Report S/N:    | Test Dates:                        | EUT Type:                          | Dogo 100 of 265              |
| 1M1910220166-09.A3L | 10/11/19 - 01/15/20                | Portable Handset                   | Page 100 of 265              |